




2 A91

1. REFER TO A171 AND A339 FOR FINISH SCHEDULES AND LEGENDS.
2. EXTEND FLOOR FINISH AND BASE MATERIAL INTO KNEE SPACES AND UNDER COUNTERS - TYPICAL.
3. OTHER BASE SHALL URUP ALL THE WAY AROUND BASE CABINETS AND VINTL BASE SHALL URUP ALL THE WAY AROUND BASE MILLWORK.
4. PROVIDE TRANSITION BETWEEN VCT, CARPET, CARPET AND CONCRETE, CARPET AND RUBBER ANTILO FLOORINGS.
5. NOT USED.


- | | |
|-----|---|
| 6. | SELECT COLORS, TILE PATTERNS, PLASTIC LAMINATES ETC. TO BE EXTRACTED FROM MANUFACTURERS STANDARD COLORS UNLESS NOT OTHERWISE. |
| 7. | PROVIDE HANDLE THRESHOLD AT TRANSITION BETWEEN CERAMIC TILE AND OTHER FLOOR FINISHES UNLESS NOT OTHERWISE. |
| 8. | INTERIOR WALLS OF ALL DETENTION SECURED AREAS SHALL BE EXPOSED AND PAINTED. |
| 9. | PAINT DETENTION CORSE OF JOI TO MATCH HOLLOW METAL IN ALL DETENTION SECURED AREAS. |
| 10. | ALL INTERIOR FINISHES SHALL MEET THE REQUIREMENTS OF NFPA 701 LIFE SAFETY CODE 2009 EDITION CHAPTER 723.3 INTERIOR FINISHES. |

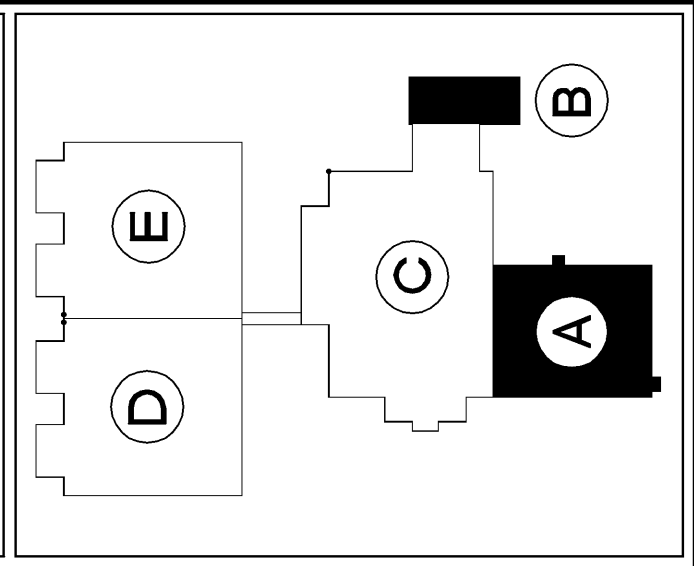


A9.1

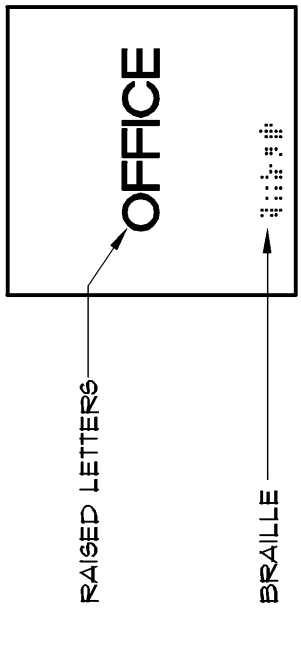

- ROOMS SHALL HAVE SIGNAGE MOUNTED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR, AND SHALL MEET ADA GUIDELINES.
 - MOUNT 60" AFF. TO CENTERLINE OF SIGN.
 - SIGNS SHALL BE 8" X 8".
 - SIGN SHALL BE GRAY WITH WHITE GRAPHICS.
 - PREPARE A SIGN SCHEDULE FOR OWNER APPROVAL PRIOR TO ORDERING.
- NOTE: SIGNS ARE REQUIRED AT AREAS "A", "B", ALL PUBLIC RESTROOMS.

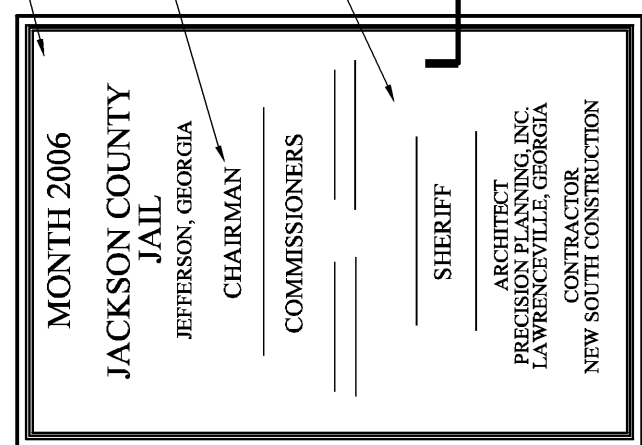

- MONTH 2006
JACKSON COUNTY

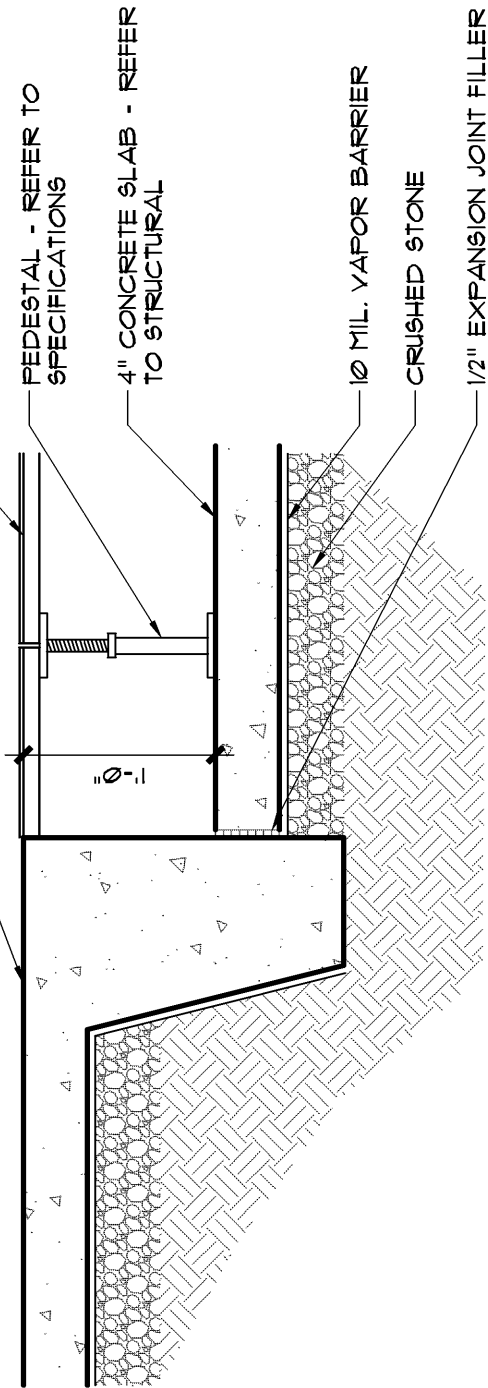

4 A9.1