

DATE		NO	DESCRIPTION
10/31/07			D.C. / PLUMBING BID PACKAGE RELEASE
12/21/07			MECHANICAL/ELECTRICAL BID PACKAGE RELEASE
03/28/08			BALANCE OF REMAINING BID PACKAGES

SECURITY		
ELECTRONICS		
RISER DIAGRAM		
DESIGN	DRAWN	LOGD
CHECKED		LOGD
SHEET TITLE		


JACKSON COUNTY JAIL
555 GENERAL JACOBSON DRIVE
JEFFERSON, GEORGIA 30549

Precision Planning, Inc.
planners, engineers, architects & surveyors

P.O. Box 2210
400 Pike Boulevard
Lawrenceville, GA 30046-2210
(770) 962-8000 or (770) 962-8000
(Fax) (770) 822-5990



1. EACH FIELD DEVICE REQUIRES SPECIFIED WIRE QUANTITY.
2. FIELD DEVICE WIRING SHOWN FOR EACH DEVICE TO BE HOME RUN. WIRING FOR LINE DEVICES MAY BE RUN IN THE SAME CONDUIT.
3. WP = WEST PENN. MAY SUBSTITUTE IF CONDUITS ARE ROUTED UNDER SLAB, CABLES SHALL BE NET-LOCATED LISTED.
4. WIRE TYPES ARE TYPICAL, DW16 TO MEET ALL ELECTRICAL CODES AND SPECIFICATION MINIMUMS.
5. THE WEST PENN. 439 CABLE NEEDS TO BE TERMINATED AT A SINGLE GANG BACKBOX NEAR THE TOUCHSCREEN.
6. ⚡ INDICATES UPS POWER REQUIRED UPS BY DIV. 16
—G INDICATES EMERGENCY POWER REQUIRED BY DIV. 16
7. REFER TO DIV. 16 FOR CONDUIT REQUIREMENTS.
8. ALL UTILITIES AND OTHER SYSTEMS INTERFACES CONTROLLED BY DRY CONTACT INTERFACE.
9. ALL MILLWORK TO BE PROVIDED BY OTHERS.
10. RISER DIAGRAM IS DIAGRAMMATIC IN NATURE. PROVIDE FINISHED FLOOR FINISH, WALL, CEILING, EQUIPMENT LAYOUTS, RACK SIZING, ETC.
11. DIV. 16 AND DIV. 17 TO COORDINATE WITH STRUCTURED CABLE CONTRACTOR.
12. DIV. 16 AND DIV. 17 TO COORDINATE WITH OWNER IN REGARDS TO TERMINATION LOCATION.
13. NUMBER OF RACKS SHOWN BELOW IS NOT REPRESENTATIVE OF THE ACTUAL NUMBER OF RACKS WITH SUBMITTAL DRAWINGS.
14. CONSOLE / MILLWORK AT THIS LOCATION TO BE PROVIDED BY OTHERS.

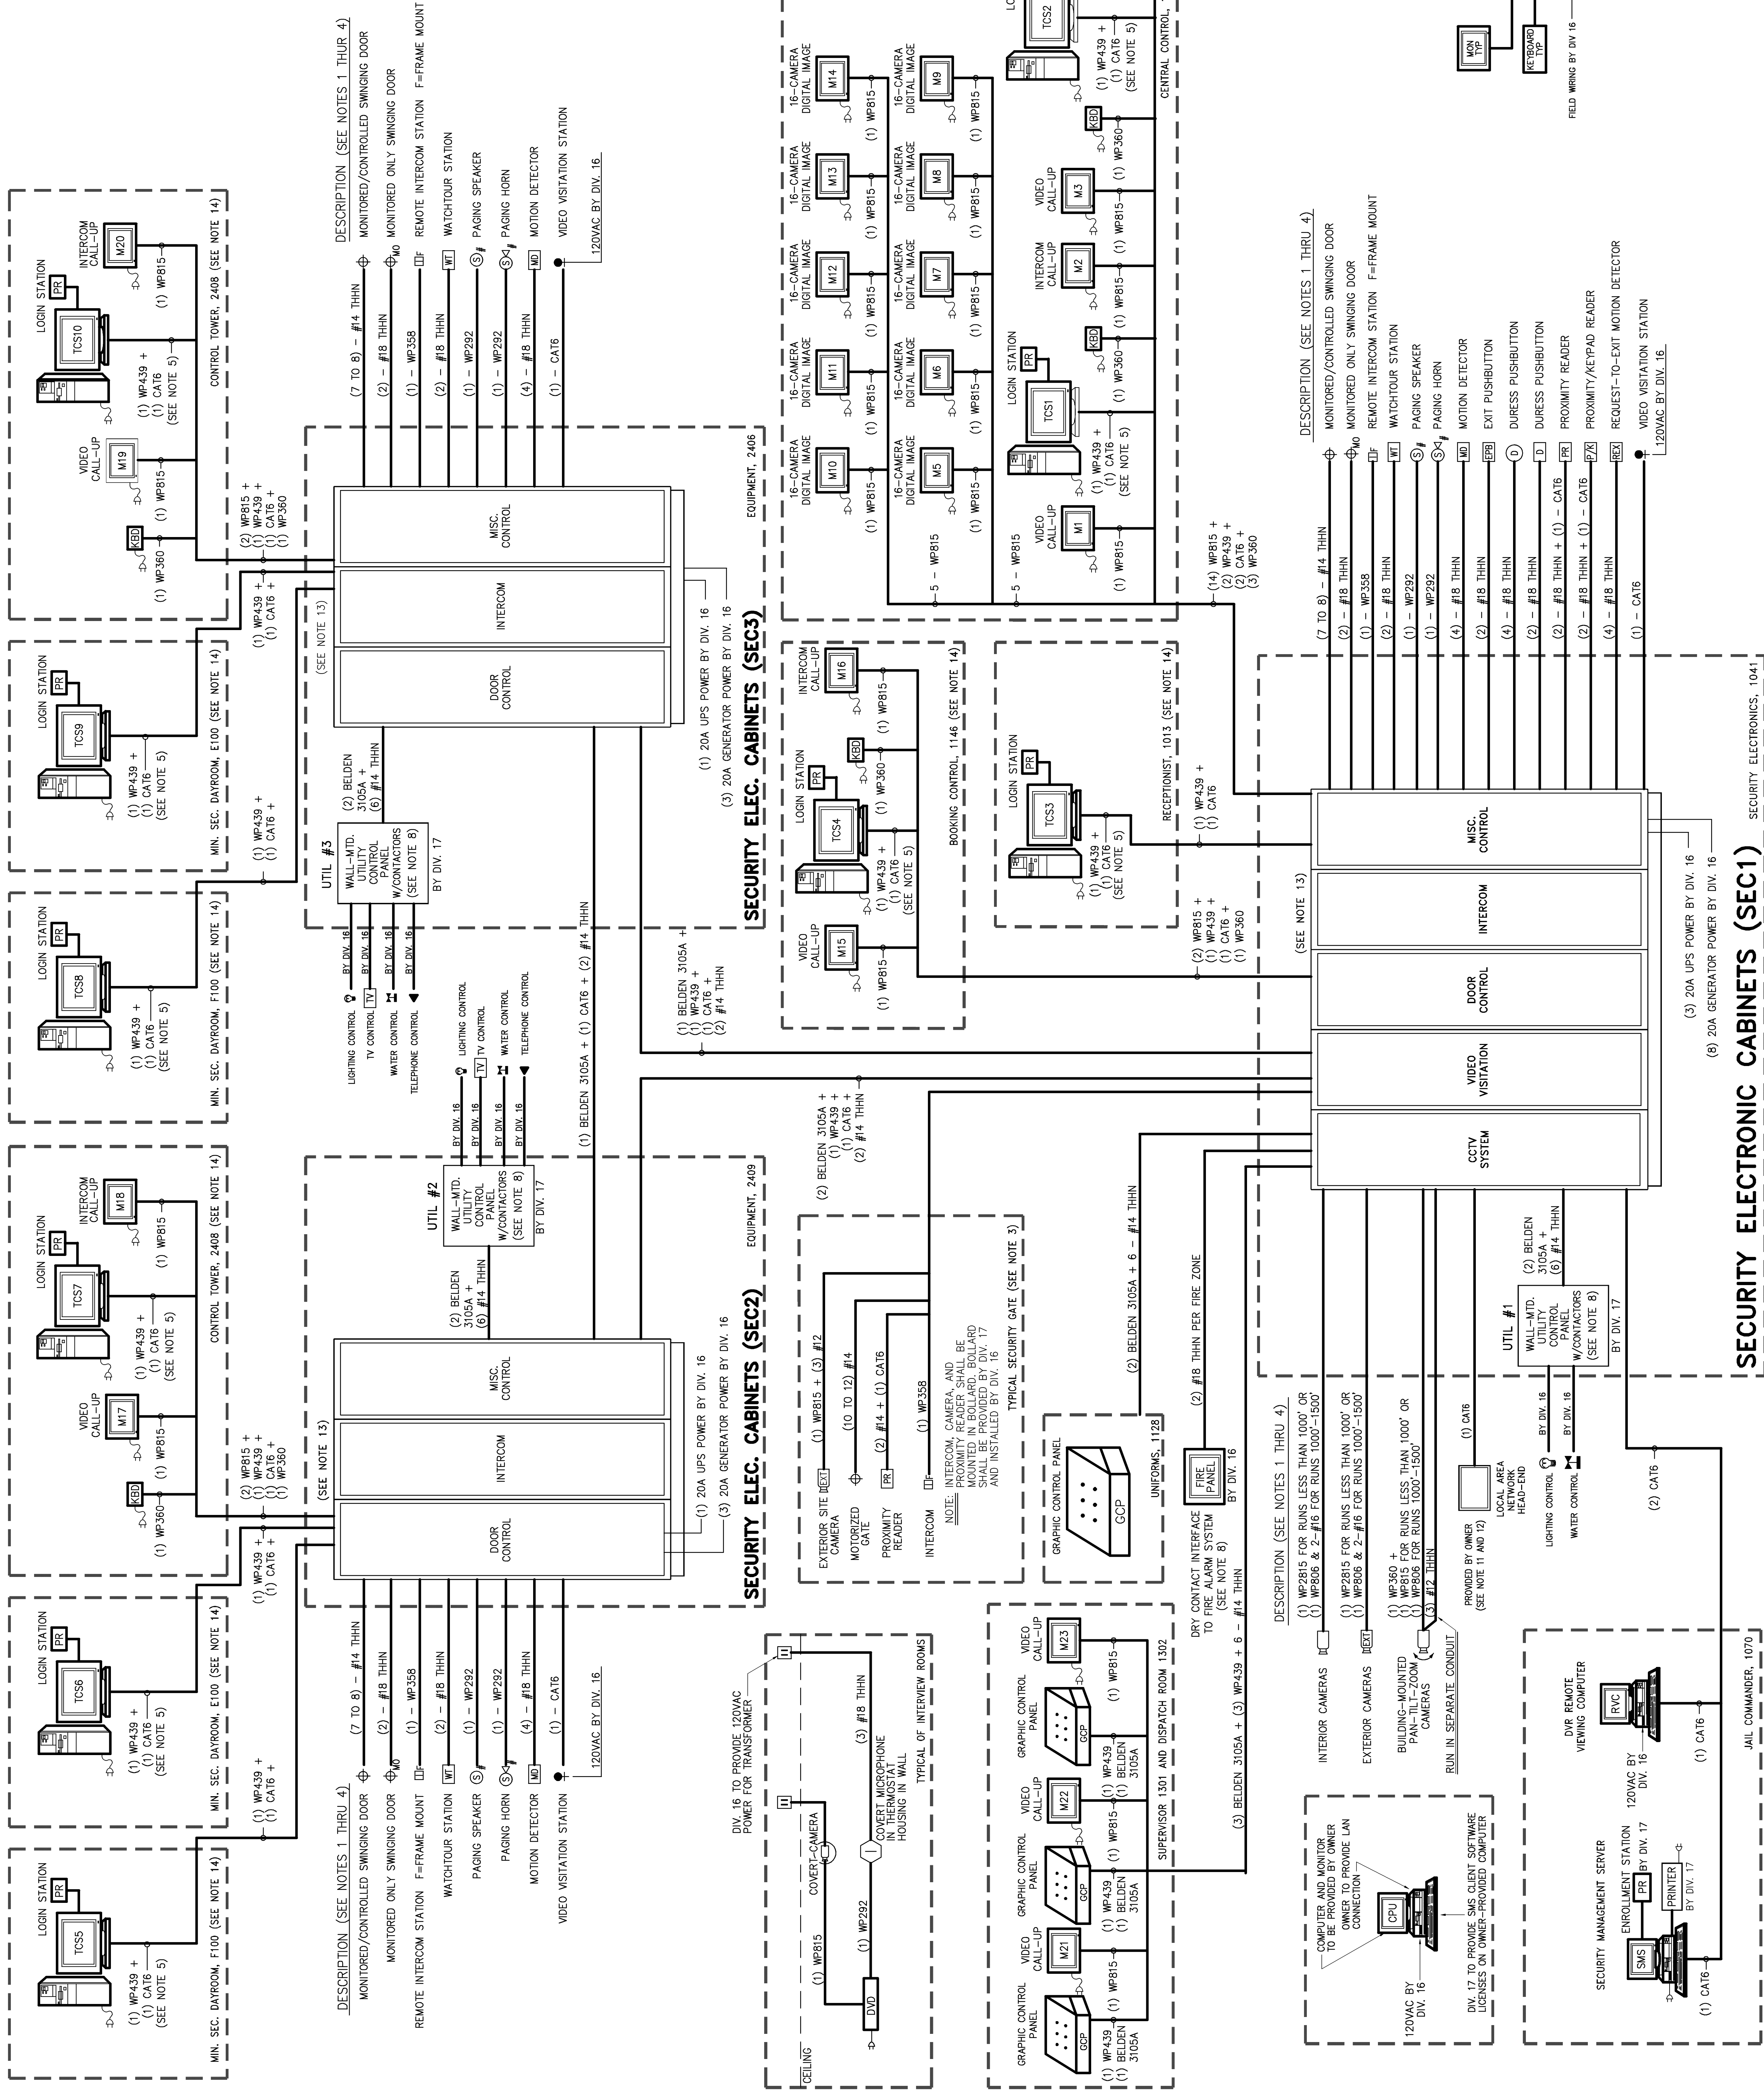

(SEE TABLES & DRAWINGS FOR DEVICE COUNTS)