AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

1. CONTRACT ID CODE	PAGE	OF	PAGES
	1		2

2. AMENDMENT/MODIFICATION NUMBER	3. EFFECTIVE DATE	4. REQUISITION/PURCHASE REQUISITION NUMBER	5. PROJECT NUMBER *(If applicable)*
0002	06/24/2026		

6. ISSUED BY CODE R20

Bureau of Reclamation
Mid-Pacific Region
Regional Office
Division of Acquisition Services
2800 Cottage Way, Room E-1815
Sacramento CA 95825-1898

7.ADMINISTERED BY *(If other than Item 6)* CODE

8. NAME AND ADDRESS OF CONTRACTOR *(Number, street, county, State and ZIP Code)*

CODE FACILITY CODE

(X) 9A. AMENDMENT OF SOLICITATION NUMBER
140R2026Q0079

☒ 9B. DATED *(SEE ITEM 11)*
06/02/2026

10A. MODIFICATION OF CONTRACT/ORDER NUMBER

☐ 10B. DATED *(SEE ITEM 13)*

11. THIS ITEM ONLY APPLIES TO AMENDMENTS OF SOLICITATIONS

☒ The above numbered solicitation is amended as set forth in Item 14. The hour and date specified for receipt of Offers ☐ is extended. ☒ is not extended.

Offers must acknowledge receipt of this amendment prior to the hour and date specified in the solicitation or as amended, by one of the following methods: (a) By completing items 8 and 15, and returning 1 copies of the amendment; (b) By acknowledging receipt of this amendment on each copy of the offer submitted; or (c) By separate letter or electronic communication which includes a reference to the solicitation and amendment numbers. FAILURE OF YOUR ACKNOWLEDGMENT TO BE RECEIVED AT THE PLACE DESIGNATED FOR THE RECEIPT OF OFFERS PRIOR TO THE HOUR AND DATE SPECIFIED MAY RESULT IN REJECTION OF YOUR OFFER. If by virtue of this amendment you desire to change an offer already submitted, such change may be made by letter or electronic communication, provided each letter or electronic communication makes reference to the solicitation and this amendment, and is received prior to the opening hour and date specified.

12. ACCOUNTING AND APPROPRIATION DATA *(If required)*

13. THIS ITEM APPLIES ONLY TO MODIFICATIONS OF CONTRACTS/ORDERS. IT MODIFIES THE CONTRACT/ORDER NUMBER AS DESCRIBED IN ITEM 14.

CHECK ONE

☐ A. THIS CHANGE ORDER IS ISSUED PURSUANT TO: *(Specify authority)* THE CHANGES SET FORTH IN ITEM 14 ARE MADE IN THE CONTRACT ORDER NUMBER IN ITEM 10A.

☐ B. THE ABOVE NUMBERED CONTRACT/ORDER IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES *(such as changes in paying office, appropriation data, etc.)* SET FORTH IN ITEM 14, PURSUANT TO THE AUTHORITY OF FAR 43.103(b).

☐ C. THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF:

☐ D. OTHER *(Specify type of modification and authority)*

E. IMPORTANT: Contractor ☐ is not ☐ is required to sign this document and return _____ copies to the issuing office.

14. DESCRIPTION OF AMENDMENT/MODIFICATION (*Organized by UCF section headings, including solicitation/contract subject matter where feasible.)*

See continuation page

Except as provided herein, all terms and conditions of the document referenced in Item 9A or 10A, as heretofore changed, remains unchanged and in full force and effect.

15A. NAME AND TITLE OF SIGNER *(Type or print)*		16A. NAME AND TITLE OF CONTRACTING OFFICER *(Type or print)*	
		Rosana Yousefgoarji	
15B. CONTRACTOR/OFFEROR	15C. DATE SIGNED	16B. UNITED STATES OF AMERICA	16C. DATE SIGNED
(Signature of person authorized to sign)		*(Signature of Contracting Officer)*	

Previous edition unusable

STANDARD FORM 30 (REV. 11/2016)
Prescribed by GSA FAR (48 CFR) 53.243

NAME OF OFFEROR OR CONTRACTOR

ITEM NO. (A)	SUPPLIES/SERVICES (B)	QUANTITY (C)	UNIT (D)	UNIT PRICE (E)	AMOUNT (F)
	The Solicitation cited in block 9A above, Lake Berryessa East Side Road Fence Repairs is hereby amended. Purpose: The purpose of this amendment is to incorporate the attached revised Statement of Work. The date and time for receipt of offers is hereby UNCHANGED and remains July 2, 2026, at 12:00 p.m. The offeror must acknowledge this amendment by submitting a signed copy of this SF30 along with their proposal.				

Statement of Work

Lake Berryessa East Side Road Fence Repairs

1.0 Introduction

The Lake Berryessa Field Office has successfully applied for BIL-BAR 5-10 year Post Fire Recovery Funding in FY 25 and would like to use this funding to complete repairs of fence lines damaged in the 2020 fires. The fencing will aid in the definition of grazing plots and the recovery of riparian areas by implementing recommendations from a July 2008 Lake Berryessa East Side Grazing Management Plan.

2.0 Background

The Bureau of Reclamation created the reservoir of Lake Berryessa in the 1950's as part of the Solano Project, authorized by the Reclamation Project Act of 1939 (53 Stat. 1187). Solano Irrigation District operates the Solano Project under an agreement with Reclamation, although the reservoir and surrounding land are federal lands managed by Reclamation. At capacity, Lake Berryessa stores 1.6 million acre-feet (af) of water and is one of the largest bodies of fresh water in California. The lake is 23 miles long by 3 miles wide and has 165 miles of shoreline.

In August of 2020, a series of spot fires ignited and converged to form the LNU Lightning Complex Fire which burned the northern-most, 400 acres of the former Lake Berryessa Wildlife Area as well as 60% of the Solano Project Lands around Lake Berryessa. The recovery resulted in several time-consuming employee and public safety projects. This workload, when combined with a sharp decline in field office staff post-pandemic and post-fire, meant that a project to address the rise in invasive plants, including black mustard, along the eastern shore of Lake Berryessa could not be addressed until now.

3.0 Scope

Contractor will repair or replace damaged fence sections to match the existing configuration, whether 4-strand or 5-strand. Repairs and replacements must restore the fence to the number of strands currently present at each location.

Contractor will maintain repair 13 vehicular access points by re-hanging gates and re-stringing wire where needed.

Contractor will repair one pedestrian chicane.

Contractor will replace failing or burned posts, corners (40) and braces (20) with fire-resistant materials.

Contractor will correct repair gaps in approximately 20 existing stream-crossings.

Contractor will repair and replace all remaining wood posts in seven miles of the barbed wire fence forming the northeastern boundary of the management parcels.

Contractor will clear vegetation as necessary to safely access the fence line and conduct repairs.

Contractor will install signage every quarter mile noting the U.S. Government property line. Every gate will feature a sign reminding guests of prohibited activities.

All work and materials will be covered by a 1 year warranty.

4.0 Applicable Documents

- Paddock Map
- 382A – Fence (standard wire), Conservation Practice Joh Sheet, NRCS

382ajs.doc (live.com)

- Accessible Gates Chicanes, USFS, G:\REV-STD-Standard Trail Plan Drawings\pdfsetup\STD_942-50-01_Accessible_Chicanes Model (1) (usda.gov)

5.0 Tasks

5.1 ***Fence Repair and Replacement***: Using NRCS standards or better, Contractor shall ~~maintain~~ ***repair*** existing ***4-strand and 5-strand***, barbed-wire fencing with fire resistant materials. ***It is estimated that the vendor will need to supply approximately 1850 posts and 185,000 feet of wire***. NRCS standards include:

Steel Posts: Steele line posts shall be the “T”, “U”, or “Y” type with welded or riveted anchor plate near the bottom (minimum 18 inches square area) and have suitable corrugations, knobs, studs or grooves for fastening the wire. Line posts shall weigh at least 1.33 pounds per linear foot of length and shall be a minimum of 5.5 feet long.

Steel Pipe Posts: Steel pipe corner, gate, or brace posts shall be a minimum diameter of 2 inches, Schedule 40 (3.375-inch O.D.) and at least 7 feet long. Bracing shall be a minimum of 1-1/2 inch nominal diameter, Schedule 40 pipe. Brace fittings and clamps shall be galvanized.

Barbed Wire: Barbed wire shall be a single steel wire of 9-guage or heavier, two wrapped strands of 12.5-guage or heavier wire or 12.5-guage or heavier hi-tensile wire. Wire shall have a minimum tensile strength of 45,000 psi.

Stays: Wire stays shall be 9.5-guage or heavier, zinc coated, twisted wire. The length shall be at least two inches longer than the distance between the top and the bottom strands of the fence.

Post Depth: Line steel posts shall be set at a minimum depth of 1.5 feet ***and a maximum depth of 3 feet.*** Gate, corner, and brace posts shall be set to a ~~minimum~~ ***maximum*** depth of 3 feet, ~~unless otherwise specified~~. Steel pipe and angle section posts shall be embedded in a 12-inch circular or square concrete pier, except when set in firm rock.

Post Spacing: The maximum post spacing interval shall be 20 feet.

Line Bracing: Line brace assemblies shall be located at all corners, gates, and abrupt changes in vertical topography (generally considered 15 degrees). On straight reaches of fencing line braces shall be installed at a spacing of no more than 1300 feet.

Wire Spacing: When measured from the groundline, a 5-strand fence will locate wires at 5 inches, 12 inches, 20 inches, 30 inches, and between 42-45 inches. ***Where existing fencing is 4-strand, wire spacing must follow the existing layout and conform to NRCS standards for 4-strand designs.***

Wire Fasteners: Fasteners on steel posts shall be snug enough to prevent vertical movement of the wire on the post.

5.2 Drainageways: In crossing drainageways or depressions, a weight or

deadman anchor shall be fastened to the fence to maintain the required spacing interval or additional wires shall be added to maintain the required minimum wire height from the ground.

c) 5-Barbed Wire or Smooth Wire Fence Details

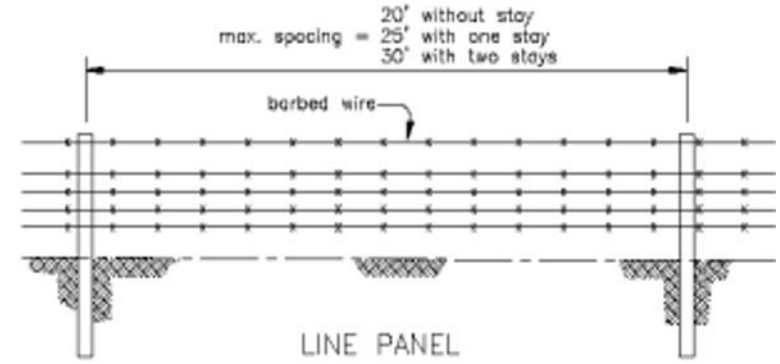

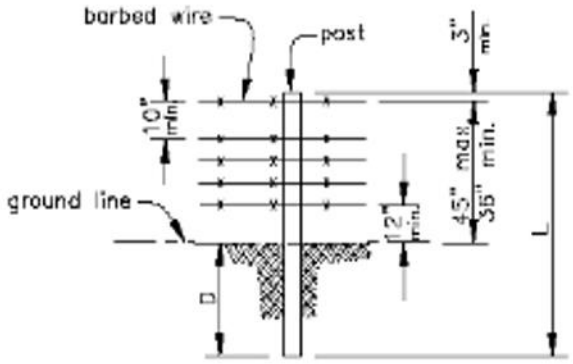

BARBED WIRE DETAIL

5.3 ***Replacement of Wooden Structural Posts*** ~~As wood corner, gate, or brace pipes burn or rot in the existing fence line,~~ Contractor shall replace ***wooden structural posts (corners, gates, or brace pipes)*** with steel pipes meeting the NRCS standards specified above.

5.4 ***Gate Repair***: Contractor shall repair 13 vehicular access gates so that all gates swing freely and there are no gaps in in the adjacent fencing.

5.5 ***Pedestrian Access Chicane***: Contractor shall repair a pedestrian access point with an accessible “U” chicanes using non-combustible materials adjacent to gate E1.

5.6 ***Contractor shall clear vegetation as necessary to safely access the fenceline and conduct repairs. Vegetation removal must comply with NEPA requirements for minimal ground disturbance, with grass cut just above the***

ground level and limited soil disturbance permitted.

6.0 Environmental Protection Requirements

This contract will need to enact conservation measures to protect the California red-legged frog (FRLF). Temporary ground disturbance could crush or injure individuals if CRLF occupies upland refugia or moist areas along fencelines. Increased worker presence and equipment movement could temporarily displace frogs from movement corridors. Installing or repairing fence lines presents potential for direct effects to CRLF may include injury or death by being struck by equipment or entombed in burrows from soil disturbance. Most fenceline work would occur in upland areas less frequently used by CRLF except during wet season dispersal. Project implementation would occur during dry season conditions to reduce the likelihood that CRLF will be present in the Project area.

Minimal ground disturbance (surface-level vegetation cutting; no soil disturbance except post holes).

6.1 Worker Environmental Awareness Training (WEAT)

Worker Environmental Awareness Training: Prior to the commencement of Project work, all Project personnel will attend an environmental awareness training ***coordinated and given by Reclamation staff.*** It will include; species descriptions and habitat needs, species status and protection under the Endangered Species Act, definition of take, reporting requirements, conservation measures to reduce project impacts, and instructions for encountering California Red-legged Frog (CRLF) and Keck's checker-mallow in areas where take could occur.

Employees will sign a form stating that they received and understand the training. Reclamation will maintain a list of personnel receiving the training.

6.2 Pre-Construction Biological Surveys

Prior to any ground disturbing activities, pre-construction biological surveys will be conducted by ***a Reclamation*** biologist in the action area for CRLF and Keck's checker-mallow. Surveys will be conducted by a qualified biologist within 14 days prior to commencement of the work.

6.3 Wildlife Protection During Work

To reduce the potential for Project vehicles striking CRLF, a 10-mile-per-hour speed limit will be enforced at the site.

No work will occur during or 24-hours following a rain event. A rain event is to be considered precipitation of ¼-inch or more within a 24-hour period.

All Project personnel will be informed of the Action Area boundaries for Project activities. If necessary, flagging and/or staking may be used to define the Project area limits.

6.4 Vehicle and Equipment Decontamination

To prevent spread of invasive species, disease, or contaminants:

All equipment and vehicles shall be fully decontaminated prior to arriving on site. Decontamination steps must be approved by Reclamation personnel.

7.0 Government Furnished Equipment

The Government will supply a copy of a padlock key so that the contractor may access the paddocks along East Side Road and Eticuera Day Use Area during the duration of the contract.

The Contractor will purchase the supplies needed to complete the work.

Contractor will supply all tools and transportation needed to complete the work.

8.0 Period of Performance

Period of Performance is 90 days from issuance of notice to proceed. All work is to be performed during the work week Monday through Friday exclusive of holidays.

9.0 Place of Performance

Contract is scheduled to occur at:

Lake Berryessa Field Office
5520 Berryessa Knoxville Road
Napa, CA 94558

The contractor may stage equipment and supplies on the hardened surfaces of:

Eticuera Day Use Area
8600 Berryessa Knoxville Road
Napa, CA 94558

The work will take place along six miles of East Side Road from its intersection with Berryessa Knoxville Road just north of Eticuera Day Use Area extending south to the southern extent of the 2020 LNU Lightning Complex Fire Burn Scar (38.632185835028, -122.23397247869522).