PERFORMANCE WORK STATEMENT
Building 854 – Blinds and Drapes Installation

1.0 DESCRIPTION OF SERVICES. The Contractor shall provide all management, tools, supplies, equipment, and labor necessary to procure, deliver, and upload all purchased government furnishings and appliances listed under supplies to supply the 74 resident rooms, 1 common area kitchen, 3 dayrooms, and 1 Dorm Leader office in Building 854 on Little Rock AFB, AR 72099:

2.0 HOURS OF OPERATION. The Contractor shall perform the services required under this contract during Normal Hours of Operation, Monday through Friday 0800 to 1600 excluding weekends and Federal Holidays unless otherwise approved by the Contracting Officer.

3.0 PROPERTY CONTROL. Upon completion of the delivery and upload of all furnishings associated with this requirement the contractor shall ensure that all job-related debris and trash will be removed from the property and taken to be disposed of in accordance with all state, local, and federal laws.

4.0 SUPPLIES. The Contractor shall procure and install all blinds and drapery into 74 resident rooms, common areas dayrooms, common area kitchen, and 1 Dorm Leader office of Building 854 on Little Rock AFB, AR 72099. The purchased items shall meet the minimum characteristics listed in Section 4.1:

4.1. BLINDS & DRAPERY

4.2. SALIENT CHARATERISTICS.

All purchased blinds and drapery shall meet the characteristics listed below.

4.2.1. BLDG 854 Window Sizing. Total count of all windows is 85. All window sizing is as follows:

4.2.1.1. Resident Room Windows:

Blackout Roller Shade - 35”W x 58”H
Drapery – 38”W x 78”H
Qty: 78 (4 spare to retain as benchstock)

4.2.1.2. Common Area 1st/2nd/3rd:

Blackout Roller Shade – 77”W x 56”H
Drapery – 77”W x 78”H
Qty: 6 (2 windows per floor)

4.2.1.3. Entryway Window:

Blackout Roller Shade – 23”W x 88”H
Drapery – 23”W x 88”H
Qty: 1

4.2.2. Blinds Characteristics – Blackout roller, blackout color, continuous cord loop, standard roll single, 3” fascia valance w/bottom square hem bar, mounting hardware.

4.2.3. Drapery Characteristics – Decorative Side Panels – Sandstone or Moonstone in color – Rod and mounting hardware included.

All doors and windows are framed as a single door and window insert; therefore, all roller shades will need to be mounted inside the window indent, and drapery will be mounted outside the window indent. Blocking exists for this purpose; the contractor will not be allowed to drill into the steel frame of the door/window assembly.

Final measurements of windows must be conducted by the contractor prior to procurement to ensure necessary specs. Please find attached Door and Window Schedule. The door and window schedule may be used as a baseline for estimates, but a pre-measurement before procurement is necessary.

4.3 SERVICES. The Contractor shall procure and install the window treatments in the following buildings with the following quantities:

4.3.1. The Contractor shall procure 85 blinds sets with the specifications listed in Section 4.2.

4.3.2. The Contractor shall procure 85 drapery sets with the specifications listed in Section 4.2.

4.3.3. The contract shall install all blinds and drapery into 74 resident rooms, all common areas, day rooms, and offices in Bldg 854.

4.3.4. Removal of all job-related trash and debris.

4.4. MILESTONES. The Contractor shall meet the appropriate milestones during this contract’s execution.

4.4.1. MILESTONE 1: The contractor shall notify the CO and the requirement owner when final measurements of the windows in 854 have been completed.

4.4.2. MILESTONE 2: The contractor shall notify the CO and the requirement owner when procurement of the blinds and drapery has begun.

4.4.3. MILESTONE 3: The contractor shall notify the CO and the requirement owner when the procurement of the blinds and drapery has reached 50 percent completion.

4.4.4. MILESTONE 4: The contractor shall notify the CO and the requirement owner when the procurement of the blinds and drapery has been fully completed.

4.4.5. MILESTONE 5: The contractor shall notify the CO and the requirement owner when the installation process has reached 50 percent completion.

4.4.6. MILESTONE 6: The contractor shall notify the CO and the requirement owner when the installation process has been fully completed.

4.5. The government will notify the contractor as expediently as possible if any delays to the renovation of 854 occur which may affect the requirement timeline.

5.0. GOVERNMENT-FURNISHED PROPERTY AND SERVICES. Government shall provide and maintain, without cost, the facility space. The government shall provide access to the facility prior to the delivery date of assets if requested for the purpose of allowing the contractor to become familiar with the space and layout of the building. However, such access shall not interfere with any contractor work currently going on in the facility.

5.1. UTILITIES. Government will provide all power in all facilities for the delivery and upload of all appliances and furnishings.

6.0. STORAGE. The contractor shall provide adequate storage for all furnishing items when maintaining the items prior to delivery to the Government. The furnishings shall be stored in a closed, climate-controlled facility in a manner consistent with all local, state, and federal guidelines. All furnishing items will be retained in this storage facility in original packaging until such a period that delivery to the requirements owner is made.

7.0. SECURITY REQUIREMENTS. The Contractor shall obtain from the Government an AF Form 75, Personal Identification Card, for each employee working at Little Rock AFB, and AF Form 533, Vehicle Registration Certificate, for personal vehicles requiring access to Little Rock AFB. These passes and certificates are at no cost to the Contractor.

7.1. CONTRACTOR EMPLOYEES. The Contractor shall not dispatch any illegal immigrants or otherwise unauthorized personnel that will be unable to access the installation for the purposes of delivering and uploading the furnishings and appliances listed.

8.0. SAFETY INFORMATION. The Contractor is solely responsible for compliance with OSHA standards for the protection of their employees. The Air Force is not responsible for ensuring that Contractors comply with “personal” safety requirements that do not present the potential to damage government resources.

9.0 REGULATIONS. The Contractor shall comply with all Federal, State and local environmental pollution standards and regulations. All furnishings and appliances shall be installed in accordance with all safety and security measures.

Door Schedule

Door Number	Door Width	Door Height	Door Thickness	Frame Type	Frame Material	DOOR TYPE	Material	Fire Rating	Hardware	STC RATING	Comments
100	3' - 0"	7' - 0"	1 3/4"	C	HOLLOW METAL PAINTED	8	HOLLOW METAL DOOR		1		
101	3' - 0"	7' - 0"	1 3/4"	C	HOLLOW METAL PAINTED	8	HOLLOW METAL DOOR		1		
102	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
103	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
105	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
105a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
105b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
106	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
106a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
106b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
107	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
107a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
107b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
108	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
108a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
108b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
109	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
109a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
109b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
110	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
110a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
110b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
111	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
111a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
111b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
112	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
112a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
112b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
113	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		6		
114	6' - 0"	7' - 0"	1 3/4"	B	HOLLOW METAL PAINTED	7	INSULATED METAL DOOR		12		
115a	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	8	INSULATED METAL DOOR		6	50	
115b	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	4	SOILD CORE WOOD	20 MIN	6		
116	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	6	INSULATED METAL DOOR		9		
117	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	HOLLOW METAL DOOR		4		
118	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
118a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
118b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
119	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
119a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
119b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
120	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
120a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
120b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
121	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
121a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
121b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
122	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
122a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
122b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
123	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
123a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
123b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
124	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
124a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
124b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
125	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
125a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
125b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
126	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
126a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
126b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
127	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
127a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
127b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
128	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
128a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
128b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
129	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
129a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		3		
129b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		4		
130	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	4	SOILD CORE WOOD		7		
131	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		5		
132a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
132b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
134a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
134b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
200	3' - 0 1/4"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	8	HOLLOW METAL DOOR		1		
201	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	4	SOILD CORE WOOD		4		
202	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
204	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
204a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
204b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
205	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
205a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
205b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
206	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
206a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
206b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
207	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
207a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
207b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
208	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
208a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
208b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
209	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
209a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
209b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
210	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
210a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
210b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
211	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
211a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
211b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
212	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
212a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
212b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
213	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
213a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
213b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		

Door Schedule

Door Number	Door Width	Door Height	Door Thickness	Frame Type	Frame Material	DOOR TYPE	Material	Fire Rating	Hardware	STC RATING	Comments
214	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
214a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
214b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
215	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
215a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
215b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
216	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
216a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
216b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
217	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
217a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
217b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
218	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	8	INSULATED METAL DOOR		6	50	
218b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD	20 MIN	4		
219	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	6	INSULATED METAL DOOR		9		
220	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
221	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
221a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
221b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
222	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
222a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
222b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
223	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
223a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
223b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
224	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
224a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
224b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
225	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
225a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
225b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
226	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
226a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
226b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
227	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
227a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
227b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
228	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
228a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
228b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
229	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
229a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
229b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
230	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
230a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
230b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
231	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
231a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
231b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
232	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
232a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
232b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
233	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		7		
234a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
234b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
236a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
236b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
300	3' - 0 1/4"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	8	HOLLOW METAL DOOR		1		
301	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	4	SOILD CORE WOOD		11		
302	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
304	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
304a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
304b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
305	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
305a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
305b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
306	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
306a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
306b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
307	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
307a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
307b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
308	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
308a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
308b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
309	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
309a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
309b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
310	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
310a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
310b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
311	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
311a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
311b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
312	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
312a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
312b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
313	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
313a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
313b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
314	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
314a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
314b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
315	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
315a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
315b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
316	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
316a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
316b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
317	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
317a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
317b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
318a	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	8	INSULATED METAL DOOR		6	50	
318b	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	4	SOILD CORE WOOD	20 MIN	10		
319	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	6	INSULATED METAL DOOR		9		
320	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	HOLLOW METAL DOOR		10		
321	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
321a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
321b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		

AIR MOBILITY COMMAND

Little Rock A.F.B
Arkansas

ALESSI KEYES CONSTRUCTION
10623 Maumelle Blvd
North Little Rock, AR 72113
501.225.6699
www.alessikeyes.com

LOCKEBY & ASSOCIATES.
ARCHITECTS / ENGINEERS · PLANNING · MANAGEMENT
113 N. Rodney Parham, Suite 310 Little Rock, AR 72212
Office 501.228.9600 / Fax 501.228.9663
www.lockeby.com

Door Schedule

Door Number	Door Width	Door Height	Door Thickness	Frame Type	Frame Material	DOOR TYPE	Material	Fire Rating	Hardware	STC RATING	Comments
322	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
322a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
322b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
323	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
323a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
323b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
324	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
324a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
324b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
325	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
325a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
325b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
326	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
326a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
326b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
327	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
327a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
327b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
328	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
328a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
328b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
329	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
329a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
329b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
330	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
330a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
330b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
331	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
331a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
331b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
332	3' - 0"	7' - 0"	1 3/4"	A	HOLLOW METAL PAINTED	5	INSULATED METAL DOOR		2	50	
332a	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		4		
332b	2' - 6"	7' - 0"	1 3/4"	D	HOLLOW METAL PAINTED	3	SOILD CORE WOOD		3		
333	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	4	SOILD CORE WOOD		7		
334a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
334b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		
336a	3' - 0"	7' - 0"	1 3/4"	F	HOLLOW METAL PAINTED	1	INSULATED METAL DOOR		8		
336b	3' - 0"	7' - 0"	1 3/4"	E	HOLLOW METAL PAINTED	2	SOILD CORE WOOD		10		

HARDWARE 1

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
1	CLOSER	LCN	4020N	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
1	PANIC AND LEVER	VON PUPRIN	CD9948L	US32D
1	VERTICAL ROD DEVICE	VON PUPRIN	99 CONC.	US32D
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	
1	DOOR BOTTOM SWEEP	HAGER	770S/B	US32D

HARDWARE 2

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
1	LEVER SET PASSAGE	BEST	9K7N15DSTK	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	

HARDWARE 3

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	LEVER SET CLOSET	BEST	9K7R15DSTK	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	

HARDWARE 4

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	LEVER SET PRIVACY LOCK	BEST	9K7P15DSTK	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	

HARDWARE 5

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	MORTISE LOCK AND LEVER	BEST	45H0AB15HVIBEO	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	

HARDWARE 6

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
1	CLOSER	LCN	4020N	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
2	PUSH - PULL	ROCKWOOD	110 X 70	US32D
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	
1	DOOR BOTTOM SWEEP	HAGER	770S/B	US32D
1	RAINDRIP	PEMKO	346	US32D

HARDWARE 7

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
1	CLOSER	LCN	4020N	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
2	PUSH - PULL	ROCKWOOD	110 X 70	US32D

HARDWARE 8

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
2	PUSH - PULLS	ROCKWOOD	110 X 70	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	

HARDWARE 9

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
2	PUSH - PULL	ROCKWOOD	110 X 70	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	
1	RAIN DRIP	PEMKO	346	US32D

HARDWARE 10

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
1	CLOSER	LCN	4020N	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	
2	PUSH - PULL	ROCKWOOD	110 X 70	US32D

HARDWARE 11

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
3	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	LEVER SET OFFICE	BEST	9K7UA15DSTK	US32D
3	SILENCERS (RUBBER)	TELL	DT100030	

HARDWARE 12

QUANTITY	DESCRIPTION	MANUF.	MODEL	FINISH
6	BUTTS (4 1/2" X 4 1/2") BALL BEARING	HAGER	BB1199	US32D
1	DEADBOLT	BEST	8T3	US32D
4	PUSH - PULL	ROCKWOOD	110 X 70	US32D
6	SILENCERS (RUBBER)	TELL	DT100030	
1	METAL THRESHOLD	HAGER	417S	US32D
1	WEATHER STRIPING	HAGER	863S	
1	RAIN DRIP	PEMKO	346	US32D

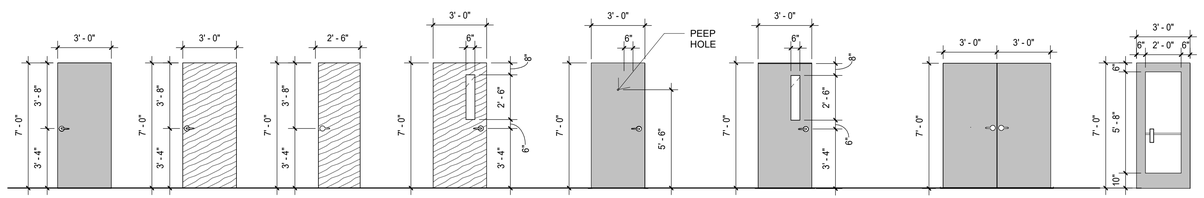

1 HOLLOW METAL DOOR PAINTED
2 SOLID CORE BIRCH FACE STAIN GRADE WOOD DOOR
3 SOLID CORE BIRCH FACE STAIN GRADE WOOD DOOR
4 SOLID CORE BIRCH FACE STAIN GRADE WOOD DOOR
5 HOLLOW METAL DOOR PAINTED
6 HOLLOW METAL DOOR PAINTED
7 HOLLOW METAL DOOR PAINTED
8 HOLLOW METAL DOOR PAINTED

DOOR ELEVATION

NTS

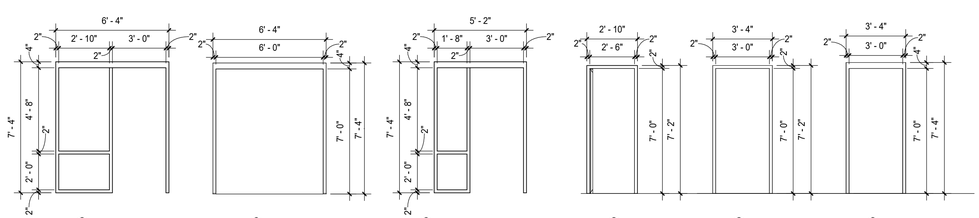

A HOLLOW METAL DOOR AND FRAME PAINTED
B HOLLOW METAL DOOR AND FRAME PAINTED
C HOLLOW METAL DOOR AND FRAME PAINTED
D HOLLOW METAL DOOR AND FRAME PAINTED
E HOLLOW METAL DOOR AND FRAME PAINTED
F HOLLOW METAL DOOR AND FRAME PAINTED

DOOR FRAME ELEVATIONS

NTS



A HOLLOW METAL WINDOW THERMAL BROKEN

WINDOW ELEVATIONS

NTS

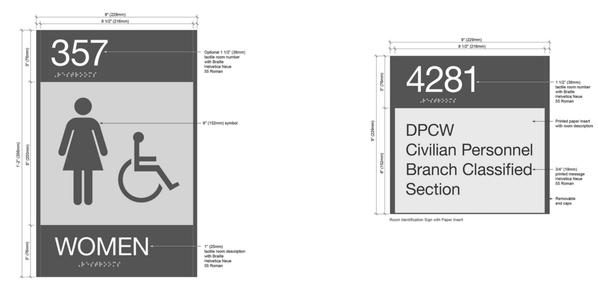

1 2

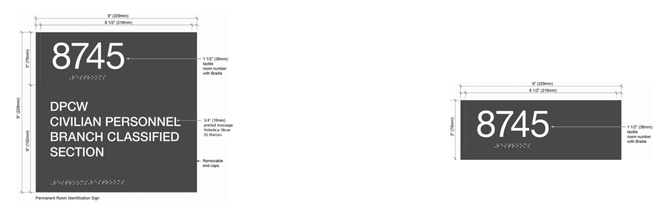

3 4

NOTES:
1. REFER TO ROOM FINISH SCHEDULE FOR SIGN TYPE REQUIRED AT EACH ROOM
2. ATTACHED SIGNS MECHANICALLY WITH PROPER ANCHOR AT EACH CORNER

SIGN TYPE ASSIGNMENT

NTS

Little Rock A.F.B
Arkansas

ALESSI KEYES CONSTRUCTION
10623 Maumelle Blvd
North Little Rock, AR 72113
501.225.6699
www.alessikeyes.com

LOCKEBY & ASSOCIATES.
ARCHITECTS / ENGINEERS · PLANNING · MANAGEMENT
113 N. Rodney Parham, Suite 310 Little Rock, AR 72212
Office 501.228.9600 / Fax 501.228.9663
www.lockeby.com

CERTIFICATE OF AUTHORIZATION — LOCKEBY & ASSOCIATES, INC. — No. C256 — ARKANSAS ARCHITECT

CIVIL ENGINEER:	CIVIL ENGINEER:
CHIEF OF OPERATIONS:	BIO ENVIRONMENTAL:
FIRE CHIEF:	SAFETY:
ENVIRONMENTAL:	CONSTRUCTION MANAGER:
PROGRAM MANAGER:	USING AGENCY:

MARK	DESCRIPTION	DATE	BY	APP'D

PROJECT TITLE: **LITTLE ROCK AIR FORCE BASE REPAIR (R & M) AIRMEN DORM B860**

SHEET TITLE: DOOR AND WINDOW SCHEDULE

DRAWN BY: Author	LEAD DESIGNER: Designer
REVIEWER: Checker	PROJECT NUMBER: NKAK 23-1001
BY: KGK	A602
DATE: 10 Sept 2025	
SCALE: As indicated	59 of 106

9/9/2025 3:10:59 PM X:\ALL PROJECTS\2024 Projects\24-37 A-K NKAK 23-1001 B860 Architecture\01 - Design\03 - Drawings\04 - 95% Resubmittal\04 ARCHINKAK 23-1001-26.rvt

ROOM SCHEDULE

Room Number	Name	FLOOR CARPET TILE	FLOOR TILE	FLOOR SEALED CONC	BASE RUBBER BASE	BASE TILE BASE	WALL NORTH WALL	WALL SOUTH WALL	WALL EAST WALL	WALL WEST WALL	WALL SOLID SURFACE	CEILING GYP BD PNT	CEILING MRMS. GYP BD EPX PNT	CEILING ACT 1	CEILING EXISTING EXPOSED	SIGN TYPE	Comments
100	VESTIBULE		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
101	ENTRY		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		N/A	
102	JANITOR			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	EPOXY PAINT WALLS
103	STORAGE			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
104	ELECTRICAL			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
105	UNIT 1	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
105a	BATH 1		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
105b	CL 1	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
106	UNIT 2	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
106a	BATH 2		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
106b	CL 2	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
107	UNIT 3 ADA	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
107a	BATH 3		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
107b	CL 3	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
108	UNIT 4 ADA	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
108a	BATH 4		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
108b	CL 4	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
109	UNIT 5 ADA	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
109a	BATH 5		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
109b	CL 5	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
110	UNIT 6 ADA	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
110a	BATH 6		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
110b	CL 6	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
111	UNIT 7	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
111a	BATH 7		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
111b	CL 7	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
112	UNIT 8	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
112a	BATH 8		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
112b	CL 8	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
113	MECH ROOM			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
114	MECH ROOM			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
115	LAUNDRY		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	EPOXY PAINT WALLS
116	RISER RM			SC	RB-1		P-1	P-1	P-1	P-1					P6	N/A	
117	COMS			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
118	UNIT 9	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
118a	BATH 9		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
118b	CL 9	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
119	UNIT 10	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
119a	BATH 10		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
119b	CL 10	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
120	UNIT 11	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
120a	BATH 11		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
120b	CL 11	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
121	UNIT 12	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
121a	BATH 12		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
121b	CL 12	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
122	UNIT 13	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
122a	BATH 13		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
122b	CL 13	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
123	UNIT 14	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
123a	BATH 14		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
123b	CL 14	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
124	UNIT 15	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
124a	BATH 15		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
124b	CL 15	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
125	UNIT 16	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
125a	BATH 16		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
125b	CL 16	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
126	UNIT 17	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
126a	BATH 17		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
126b	CL 17	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
127	UNIT 18	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
127a	BATH 18		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
127b	CL 18	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
128	UNIT 19	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
128a	BATH 19		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
128b	CL 19	CP-1	CT-2A		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
129	UNIT 20	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
129a	BATH 20		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
129b	CL 20	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-1		P5				N/A	
130	MULTI-PURPOSE RM		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
131	TOILET		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C				ACT-1		2	
132	UTILITY CORRIDOR 1			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
133	PUBLIC CORRIDOR		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
134	UTILITY CORRIDOR 2			SC	RB-1		P-1	P-1	P-1	P-1						3	
200	ENTRY 2nd LEVEL		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
201	KITCHEN		CT-1			CT-1	P-1	P-1	P-1	P-1	SS-1			ACT-1		3	
202	JANITOR			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	EPOXY PAINT WALLS
203	ELECTRICAL			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
204	UNIT 21	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
204	BATH 21		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
204b	CL 21	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
205	UNIT 22	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
205a	BATH 22		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
205b	CL 22	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
206	UNIT 23	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
206a	BATH 23		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
206b	CL 23	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
207	UNIT 24	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
207a	BATH 24		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
207b	CL 24	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
208	UNIT 25	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
208a	BATH 25		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
208b	CL 25	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
209	UNIT 26	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
209a	BATH 26		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
209b	CL 26	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
210	UNIT 27	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
210a	BATH 27		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
210b	CL 27	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
211	UNIT 28	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
211a	BATH 28		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
211b	CL 28	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
212	UNIT 29	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
212a	BATH 29		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
212b	CL 29	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	

ROOM SCHEDULE

Room Number	Name	FLOOR CARPET TILE	FLOOR TILE	FLOOR SEALED CONC	BASE RUBBER BASE	BASE TILE BASE	WALL NORTH WALL	WALL SOUTH WALL	WALL EAST WALL	WALL WEST WALL	WALL SOLID SURFACE	CEILING GYP BD PNT	CEILING MRMS. GYP BD EPX PNT	CEILING ACT 1	CEILING EXISTING EXPOSED	SIGN TYPE	Comments
213	UNIT 30	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
213a	BATH 30		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
213b	CL 30	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
214	UNIT 31	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
214a	BATH 31		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
214b	CL 31	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
215	UNIT 32	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
215A	BATH 32		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
215b	CL 32	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
216	UNIT 33	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
216a	BATH 33		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
216b	CL 33	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
217	UNIT 34	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
217a	BATH34		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
217b	CL 34	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
218	LAUNDRY 2nd LEVEL		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	EPOXY PAINT WALLS
219	STORAGE			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
220	COMS			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
221	UNIT 35	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
221a	BATH 35		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
221b	CL 35	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
222	UNIT 36	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
222a	BATH 36		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
222b	CL 36	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
223	UNIT 37	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
223a	BATH 38		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
223b	CL 38	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
224	UNIT 39	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
224a	BATH 39		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
224b	CL 39	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
225	UNIT 40	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
225a	BATH 40		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
225b	CL 40	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
226	UNIT 41	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
226a	BATH 41		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
226b	CL 41	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
227	UNIT 42	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
227a	BATH 42		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
227b	CL 42	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
228	UNIT 43	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
228a	BATH 43		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
228b	CL 43	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
229	UNIT 44	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
229a	BATH 44		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
229b	CL 44	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
230	UNIT 45	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
230a	BATH 45		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
230b	CL 45	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
231	UNIT 46	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		CC				4	
231a	BATH 46		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
231b	CL 46	CP-1			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
232	UNIT 47	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
232a	BATH 47		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2	CC	P5			N/A	
232b	CL 47	CP-2			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
233	MULTI-PURPOSE RM		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
234	UTILITY CORRIDOR 1			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
235	PUBLIC CORRIDOR		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
236	UTILITY CORRIDOR 1			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
300	ENTRY 3rd LEVEL		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
301	MANAGERS OFFICE		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		2	
302	JANITOR			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	EPOXY PAINT WALLS
303	ELECTRICAL			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
304	UNIT 48	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
304a	BATH 48		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
304b	CL 48	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
305	UNIT 49	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
305a	BATH 49		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
305b	CL 49	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
306	UNIT 50	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
306a	BATH 50		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	

FLOOR FINISH
CP-1 CARPET TILE - TARKETT, BLOCKADE, CAMELBACK (68203), 36x18, ASHLAR PATTERN INSTALL
CP-2 CARPET TILE - TARKETT, BLOCKADE, CEDAR DECK (54603, 36x18, ASHLAR PATTERN INSTALL
CT-1 CERAMIC TILE - ANATOLIA, ASPEN, PAPER BIRCH, 6 x 36
CT-2A CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, WET CLAY (BCX33) 12 x 12
CT-2B CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, BLUE SUEDE SHOES (BCX13) 12 x 12
SC SEALED CONCRETE
BASE FINISH
CT-1 CERAMIC TILE - ANATOLIA, ASPEN, PAPER BIRCH, 6 x 36
CT-2A CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, WET CLAY (BCX33) 6" COVE BASE
CT-2B CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, BLUE SUEDE SHOES (BCX13) 6" COVE BASE
CT-MULTI CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, COORDINATE COLOR WITH WALL COLOR AND PATTERN SEE DRAWINGS FOR TRANSITION.
RB-1 RUBBER - JOHNSONITY 4" TRADITIONAL WALL BASE, PEPPERCORN TB1
WALL FINISH
CG-1 CORNER GUARD - DOROGARD, SEASHELL (OZ)
CT-3A CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, EDGE OF SEVENTEEN GLOSS (WT17)
CT-3B CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, NINE LIVES LOST GLOOS (WT09)
CT-3C CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, 1812 OVERTURE GLOSS (WT18)
P-1 PAINT - SHERWIN WILLIAMS, SW6147 PANDA WHITE
P-2 PAINT - SHERWIN WILLIAMS, SW7633 TAUPE TONE
P-3 PAINT - SHERWIN WILLIAMS, SW9141 WATERLOO

CMU CLAY MASONRY UNIT
CEILING FINISH
ACT-1 ACOUSTIC TILE - ARMSTRONG, CORTEGA, TEGULAR, 24x24 WHITE
P-5 PAINT - SHERWIN WILLIAMS, SW6147 PANDA WHITE
P-6 PAINT - EXISTING CONCRETE
MILLWORK FINISH
SS-1 SOLID SURFACE - DURASEIN, HARMONY (DM5011)
SS-2 SOLID SURFACE - DURASEIN, NATURAL WHITE (DM 1002)
WD-1 WOOD STAIN MINWAX, NAVY (MW471)
WD-2 WOOD STAIN MINWAX, WILLOWBEND (MW431)
WP-1 WOOD PAINT SHERWIN WILLIAMS, SW6147 PANDA WHITE

ETR EXISTING TO REMAIN

AIR MOBILITY COMMAND

Little Rock A.F.B
Arkansas

ALESSI KEYES CONSTRUCTION
10623 Maumelle Blvd
North Little Rock, AR 72113
501.225.6699
www.alessikeyes.com

LOCKEBY & ASSOCIATES
ARCHITECTS / ENGINEERS · PLANNING · MANAGEMENT
113 N. Rodney Parham, Suite 310 Little Rock, AR 72212
Office 501.228.9800 / Fax 501.228.9663
www.lockeby.com

CERTIFICATE OF AUTHORIZATION
LOCKEBY & ASSOCIATES, INC.
No. C256
ARKANSAS ARCHITECT
Not for Construction

CIVIL ENGINEER:	CIVIL ENGINEER:
CHIEF OF OPERATIONS:	BIO ENVIRONMENTAL:
FIRE CHIEF:	SAFETY:
ENVIRONMENTAL:	CONSTRUCTION MANAGER:
PROGRAM MANAGER:	USING AGENCY:

MARK	DESCRIPTION	DATE	BY	APP'D

PROJECT TITLE: **LITTLE ROCK AIR FORCE BASE REPAIR (R & M) AIRMEN DORM B860**

SHEET TITLE: FINISH SCHEDULE

DRAWN BY: Author	LEAD DESIGNER: Designer
REVIEWER: Checker	PROJECT NUMBER: NKAK 23-1001
BY: KGK	A603
DATE: 10 Sept 2025	
SCALE:	56 of 106

X:\ALL PROJECTS\2024 Projects\24-37 A-K NKAK 23-1001 B860 Architecture\01 - Design\03 - Drawings\04 - 95% Resubmittal\04 ARCHINKAK 23-1001-26.rvt
9/9/2025 3:11:00 PM

ROOM SCHEDULE

Room Number	Name	FLOOR			BASE		WALL					CEILING		CEILING		SIGN TYPE	Comments
		CARPET TILE	TILE	SEALED CONC	RUBBER BASE	TILE BASE	NORTH WALL	SOUTH WALL	EAST WALL	WEST WALL	SOLID SURFACE	GYP BD PNT	MRMS. GYP BD EPX PNT	ACT 1	EXISTING EXPOSED		
306b	CL 50	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
307	UNIT 51	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
307a	BATH 51		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
307b	CL 51	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
308	UNIT 52	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
308a	BATH 52		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
308b	CL 52	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
309	UNIT 53	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
309a	BATH 53		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
309b	CL 53	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
310	UNIT 54	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
310a	BATH 54		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
310b	CL 54	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
311	UNIT 55	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
311a	BATH 55		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
311b	CL 55	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
312	UNIT 56	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
312a	BATH 56		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
312b	CL 56	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
313	UNIT 57	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
313a	BATH 57		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
313b	CL 57	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
314	UNIT 58	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
314a	BATH 58		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
314b	CL 58	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
315	UNIT 59	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
315a	BATH 59		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
315b	CL 59	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
316	UNIT 60	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
316a	BATH 60		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
316b	CL 60	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
317	UNIT 61	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
317a	BATH 61		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
317b	CL 61	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
318	LAUNDRY 3rd LEVEL		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	EPOXY PAINT WALLS
319	STOARGE			SC	RB-1		P-1	P-1	P-1	P-1				ACT-1	P6	3	
320	COMS			SC	RB-1		P-1	P-1	P-1	P-1				ACT-1	P6	3	
321	UNIT 62	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
321a	BATH 62		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
321b	CL 62	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
322	UNIT 63	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
322a	BATH 63		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
322b	CL 63	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
323	UNIT 64	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
323a	BATH 64		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
323b	CL 64	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
324	UNIT 65	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
324a	BATH 65		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
324b	CL 65	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
325	UNIT 66	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
325a	BATH 66		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
325b	CL 66	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
326	UNIT 67	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
326a	BATH 67		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
326b	CL 67	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
327	UNIT 68	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
327a	BATH 68		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
327b	CL 68	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
328	UNIT 69	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
328a	BATH 69		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
328b	CL 69	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
329	UNIT 70	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
329a	BATH 70		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
329b	CL 70	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
330	UNIT 71	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
330a	BATH 71		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
330b	CL 71	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
331	UNIT 72	CP-1	CT-2A		RB-1		P-1	P-1	P-2	P-1		P5				4	
331a	BATH 72		CT-2A			CT-2A	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
331b	CL 72	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
332	UNIT 73	CP-2	CT-2B		RB-1		P-1	P-1	P-1	P-3		P5				4	
332a	BATH 73		CT-2B			CT-2B	CT-3C	CT-3C	CT-3C	CT-3C	SS-2		P5			N/A	
332b	CL 73	CP			RB-1		P-1	P-1	P-1	P-1		P5				N/A	
333	MULTI-PURPOSE RM		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
334	UTILITY CORRIDOR 1			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	
335	PUBLIC CORRIDOR		CT-1			CT-1	P-1	P-1	P-1	P-1				ACT-1		3	
336	UTILITY CORRIDOR 2			SC	RB-1		P-1	P-1	P-1	P-1					P6	3	

FLOOR FINISH
CP-1 CARPET TILE - TARKETT, BLOCKADE, CAMELBACK (68203), 36x18, ASHLAR PATTERN INSTALL
CP-2 CARPET TILE - TARKETT, BLOCKADE, CEDAR DECK (54603, 36x18, ASHLAR PATTERN INSTALL
CT-1 CERAMIC TILE - ANATOLIA, ASPEN, PAPER BIRCH, 6 x 36
CT-2A CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, WET CLAY (BCX33) 12 x 12
CT-2B CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, BLUE SUEDE SHOES (BCX13) 12 x 12
SC SEALED CONCRETE
BASE FINISH
CT-1 CERAMIC TILE - ANATOLIA, ASPEN, PAPER BIRCH, 6 x 36
CT-2A CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, WET CLAY (BCX33) 6" COVE BASE
CT-2B CERAMIC TILE - CROSSVILLE, COLOR BLOX 2.0, BLUE SUEDE SHOES (BCX13) 6" COVE BASE
CT-MULTI CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, COORDINATE COLOR WITH WALL COLOR AND PATTERN SEE DRAWINGS FOR TRANSITION.
RB-1 RUBBER - JOHNSONITY 4" TRADITIONAL WALL BASE, PEPPERCORN TB1
WALL FINISH
CG-1 CORNER GUARD - DOROGARD, SEASHELL (OZ)
CT-3A CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, EDGE OF SEVENTEEN GLOSS (WT17)
CT-3B CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, NINE LIVES LOST GLOOS (WT09)
CT-3C CERAMIC TILE - CROSSVILLE, COLOR BY NUMBERS, 1812 OVERTURE GLOSS (WT18)
P-1 PAINT - SHERWIN WILLIAMS, SW6147 PANDA WHITE
P-2 PAINT - SHERWIN WILLIAMS, SW7633 TAUPE TONE
P-3 PAINT - SHERWIN WILLIAMS, SW9141 WATERLOO

CMU CLAY MASONRY UNIT
CEILING FINISH
ACT-1 ACOUSTIC TILE - ARMSTRONG, CORTEGA, TEGULAR, 24x24 WHITE
P-5 PAINT - SHERWIN WILLIAMS, SW6147 PANDA WHITE
P-6 PAINT - EXISTING CONCRETE
MILLWORK FINISH
SS-1 SOLID SURFACE - DURASEIN, HARMONY (DM5011)
SS-2 SOLID SURFACE - DURASEIN, NATURAL WHITE (DM 1002)
WD-1 WOOD STAIN MINWAX, NAVY (MW471)
WD-2 WOOD STAIN MINWAX, WILLOWBEND (MW431)
WP-1 WOOD PAINT SHERWIN WILLIAMS, SW6147 PANDA WHITE

ETR EXISTING TO REMAIN

Little Rock A.F.B
Arkansas

ALESSI KEYES CONSTRUCTION
10623 Maumelle Blvd
North Little Rock, AR 72113
501.225.6699
www.alessikeyes.com

LOCKEBY & ASSOCIATES.
ARCHITECTS / ENGINEERS · PLANNING · MANAGEMENT
113 N. Rodney Parham, Suite 310 Little Rock, AR 72212
Office 501.228.9600 / Fax 501.228.9663
www.lockeby.com

CERTIFICATE OF AUTHORIZATION
LOCKEBY & ASSOCIATES, INC.
No. C256
ARKANSAS ARCHITECT
10/03/2025

CIVIL ENGINEER:	CIVIL ENGINEER:
CHIEF OF OPERATIONS:	BIO ENVIRONMENTAL:
FIRE CHIEF:	SAFETY:
ENVIRONMENTAL:	CONSTRUCTION MANAGER:
PROGRAM MANAGER:	USING AGENCY:

MARK	DESCRIPTION	DATE	BY	APP'D

PROJECT TITLE: **LITTLE ROCK AIR FORCE BASE REPAIR (R & M) AIRMEN DORM B860**

SHEET TITLE: FINISH SCHEDULE

DRAWN BY: Author
LEAD DESIGNER: Designer
REVIEWER: Checker
PROJECT NUMBER: NKAK 23-1001
BY: KGK
DATE: 10 Sept 2025
SCALE:

A604

9/9/2025 3:11:01 PM X:\ALL PROJECTS\2024 Projects\24-37 A-K NKAK 23-1001 B860 Architecture\01 - Design\03 - Drawings\04 - 95% Resubmittal\04 ARCHINKAK 23-1001-26.rvt