

LAV SIDE VIEW



WC SIDE VIEW



FRONT VIEW

TYPICAL ADA MOUNTING HEIGHTS

DOOR & OPENING SCHEDULE											
MARK	ROOM	WIDTH	HEIGHT	THICKNESS	DOOR			FRAME			HDW	REMARK
					TYPE	MATL	FINISH	ELEV	MATL	FINISH		
101	MEN'S RESTROOM	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	STN	1	HM	PT	1	
102	WOMEN'S RESTROOM	3' - 0"	7' - 0"	0' - 1 3/4"	F	SCWD	STN	1	HM	PT	1	

OPENINGS SCHEDULE ABBREVIATIONS					
AL/GL	ALUMINUM/GLASS	HM	HOLLOW METAL	PTD	PAINTED
SCWD	SOLID CORE WOOD	ALUM	ALUMINUM	PTD SG	PAINTED SEMI GLOSS
F	FLUSH	FAC	FACTORY FINISH		

DOOR TYPES:

1. ALL DOOR FRAMES SHALL BE FLUSH W/ MAS WALL CONSTR UNLESS MAS WALL CONSTR EXCEEDS 8"(IF WALL EXCEEDS 8" USE 7 3/4" FRAME DEPTH UNO).
2. GROUT ALL HM FRAMES SOLID WHEN IN CONTACT W/ MASONRY CONSTRUCTION.

HARDWARE LEGEND:

SET#1:

1-1/2	PAIR HINGES
1	CLOSER
1	PRIVACY LEVER LATCH
1	DOOR STOP
	SILENCERS

TOILET ROOM ACCESSORY SCHEDULE			
MARK	DESCRIPTION	MANUFACTURER/ MODEL NO.	COLOR
SD	SOAP DISPENSER	DEB WHB1LDS	BLACK
MIRR	MIRROR	5' x 4' MIRROR	STAINLESS STEEL
GB-1	42" GRAB BAR	BOBRICK MODEL B-6806 x 42	STAINLESS STEEL
GB-2	36" GRAB BAR	BOBRICK MODEL B-6806 x 36	STAINLESS STEEL
SND	SANITARY NAPKIN DISPENSER	BOBRICK B-270	STAINLESS STEEL
TTD	TOILET TISSUE DISPENSER		STAINLESS STEEL
PTD/TR	COMBINATION PAPER TOWEL DISPENSER / TRASH RECEPTACLE	BOBRICK CONTURA B-43944 SEMI RECESSED	STAINLESS STEEL
TSCD	TOILET SEAT COVER DISPENSER	BOBRICK B-221	STAINLESS STEEL

DOOR FRAME TYPES:



ROOM FINISH SCHEDULE											
RM	SCHEDULED NAME	FLOOR		BASE		WALLS		CLG	HT	NOTES
		MAT.	FIN.	MAT.	FIN.	MAT.	FIN.	MAT.		
101	MEN'S TOILET ROOM	CONC	CT-1	GWB/CMU	CT-2	GWB/CMU	CT- 3, 4/PT	ACT-1	7'-10"	
102	WOMEN'S TOILET ROOM	CONC	CT-1	GWB/CMU	CT-2	GWB/CMU	CT- 3, 4/PT	ACT-1	7'-10"	

FINISH MATERIAL SCHEDULE					
FLOORING & BASE					
CODE	MATERIAL	MANUFACTURER PRODUCT NAME	COLOR NAME & NO.	FINISH	REMARKS
CEILING					
ACT	ACOUSTICAL CEILING	ARMSTRONG 2120	TBD	WHITE	2X2 TILES 15/16" GRID WHITE
PAINT					
PT-1	PAINT	SHERWIN WILLIAMS	VERSATILE GRAY SW6072	SEMI-GLOSS	
WALL TILE					
CT-1	CERAMIC TILE	CABO	COAST	-	13X13
CT-2	CERAMIC TILE	CABO BULL NOSE	COAST	-	3X13
CTB	CERAMIC TILE	PIETRE DEL NORD MAINE MATTE COVE BASE	MAINE	-	6X12
TOILET PARTITIONS					
TP-1	TOILET PARTITIONS	SCRANTON PRODUCTS	MOCHA	ORANGE PEEL	MEN'S ROOM
TP-2	TOILET PARTITIONS	SCRANTON PRODUCTS	FOSSIL	ORANGE PEEL	WOMEN'S ROOM

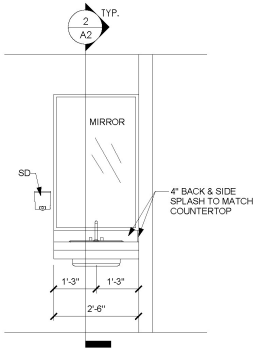

1 A2 TYPICAL SINK ELEVATION
1/2" = 1'-0"



2 A2 TYPICAL SINK SECTION
1/2" = 1'-0"

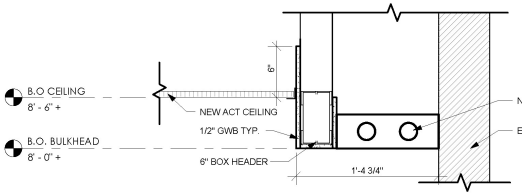

3 A2 TYPICAL BULKHEAD W/ LIGHT DETAIL
1-1/2" = 1'-0"

FWA JOB NUMBER
2191153.00

WARNING: Distribution author
Govt. agencies & their U.S. con
Reason: Administrative/Operati
2 December 1996. Other reque
this document shall be referred
Cdr, USAG, ATTN: AMSS
APG, MD 21005-5001.
DESTRUCTION NOTICE:
Destroy by any method that will
disclosure of contents or recons
of the document.

BERING STRAITS Technical Services
A Bering Straits Company

FWA
ARCHITECTS
ENGINEERS
PLANNERS
SURVEYORS
410-838-7900
www.frederickward.com
FREDERICK WARD ASSOCIATES
P.O. Box 727, 5 South Main Street Bel Air Maryland 21014

ORIGINAL SIZE
0 1" 2" 3" 4"
1/ 8 3/ 8 1/ 2 1/ 10

NO.	DATE	REVISION DESCRIPTION

DIO
DIRECTORATE OF INSTALLATION OPERATIONS
ENGINEERING & CONSTRUCTION DIVISION
ABERDEEN PROVING GROUND, MARYLAND

DESIGNED FWA
DRAWN CG
CHECKED MAS
DATE 06/17/20
SPEC. NO.
BLDG. NO. 4504
SCALE AS NOTED

TOILET ROOM RENOVATIONS
FOR
APG BUILDING 4504
ABERDEEN PROVING GROUND, ABERDEEN MARYLAND

ELEVATIONS, SCHEDULES & DETAILS

A2
DRAWIN
SHE
3 OF

AS-
MF#