

YELLOW PANEL TRAP SPECIFICATIONS

General:

- 1) Construct trap from 24-point paper board stock, with a polyethylene coating on both sides for water resistance. Paper stock should be non-glossy so as to allow writing on it using a Sharpie-type marker without smearing.
- 2) The trap dimensions will be 9" x 11" with four additional appendages, two on the top and two lateral, as depicted in the attached diagram. Pre-punch, one quarter inch holes in top appendages, as shown.
- 3) Crease and perforate trap at the midline (see attached diagram)
- 4) Apply "**Stikem Special™**" adhesive evenly to trap's yellow surface. Maintain a 1/2" adhesive-free border on the trap's yellow surface, including middle perforated borders. Total volume of Stikem Special™ applied will be 7-to- 8 grams per trap. Do not over-apply Stikem Special™ to the trap.
- 5) Package 200 traps per cardboard shipping container. Traps must be packaged so that the weight of the traps does not cause the Stikem Special™ to ooze beyond the adhesive-free border as described in #4. Print trap volume on the outside of the box.
- 6) Boxes of traps must be stacked and palletized to prevent boxes from being crushed. Damaged boxes of traps will not be accepted. The vendor will be responsible for freight charges for boxes of traps that are not accepted.
- 7) Freight is to be FOB destination.

SIDE A (Interior, non-stick side)


- 1) Entire interior surface of trap is to be white in color.
- 2) Print, ("Trap No. _____") in 1/4" black lettering, with an adjoining 2-1/2" black line.
- 3) Print ("Date _____") one-inch below "Trap No." in 1/4" black lettering, with an adjoining 2-1/2" black line.
- 4) Do not apply Stikem Special™ to Side A.

SIDE B (exterior, sticky side)

- 1) Trap surface to have (except appendages) 1" to 1.2" grid in thin-lined black ink covering entire surface (see attached drawing). Alpha numeric lettering on the axis is desirable, but not required.
- 2) The four appendages will be white in color.
- 3) Yellow surface to be colored Pantone Matching System (PMS) #102 yellow. The yellow color is an attractant for insects, therefore the trap must maintain its yellow color for at least one month while hanging in a tree.
- 4) Print "GOVERNMENT INSECT TRAP – DO NOT DISTURB" in ¼" **gray** lettering on each half of trap.
- 5) Print manufacturer logo (if desired) in black lettering on top two, non-sticky, white appendages or interior of trap. Do not print logo on exterior, sticky, yellow surface of trap.
- 6) Apply Stikem Special™ evenly to Side B (yellow, exterior surface of trap). Total Stikem Special™ to be applied is 7-8 grams per trap with a ½" adhesive free border, including middle perforations. Do not over-apply Stikem Special™ to the trap.



Yellow Panel Trap Specification-Side B (exterior, sticky side)

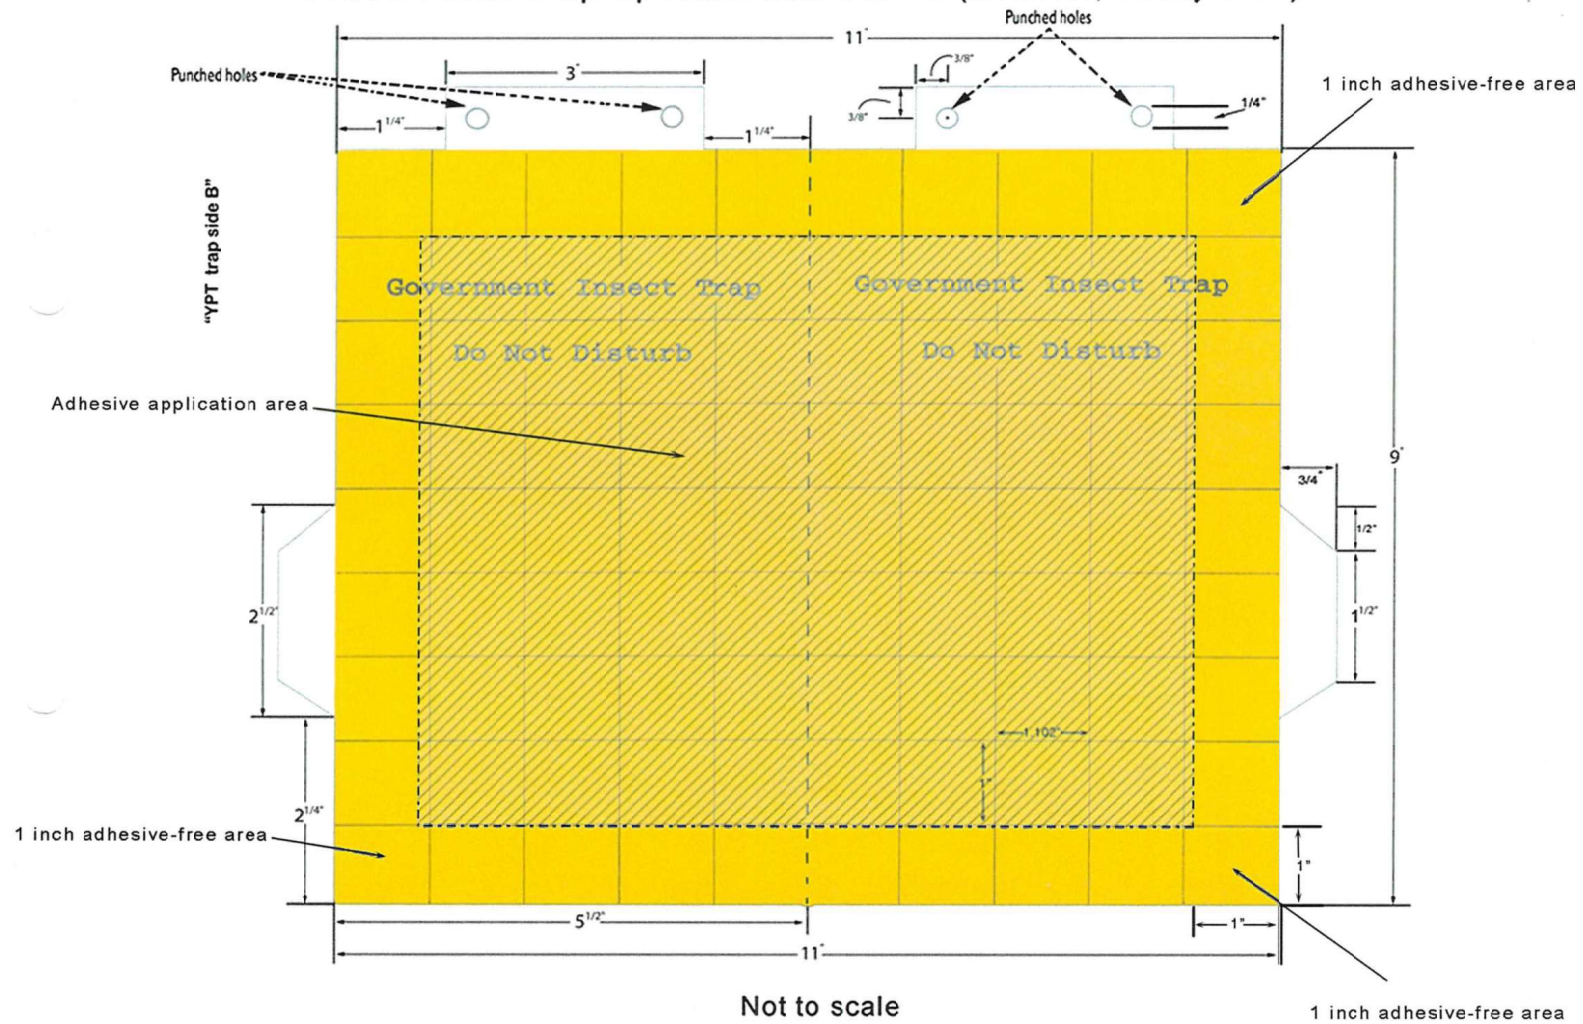

Yellow Panel Trap Specifications - Side A (non-sticky side)

