SECTION 00 01 13
SIGNATURE PAGE

Architecture: LACHIN Architects

Sections covered by this seal include:
04 05 13, 04 20 00, 06 10 00, 07 21 13,
07 22 00, 07 27 26, 07 54 23, 07 71 00,
07 92 00,08 11 13, 08 33 00, 08 71 00,
09 91 00, 10 44 13

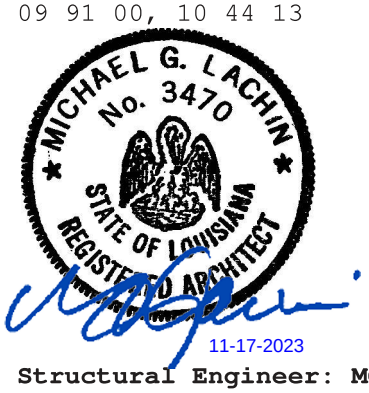

11-17-2023

Structural Engineer: MCA Engineering LLC

Sections covered by this seal include:
05 12 00, 05 21 00, 05 31 00, 05 50 00

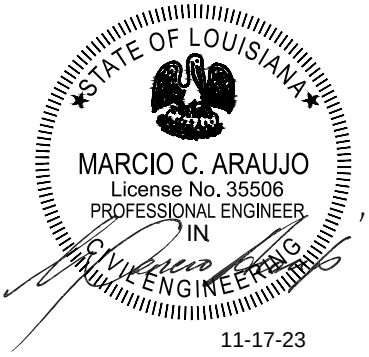

11-17-23

Structural Engineering: DRGeosciences, LLC

Sections covered by this seal include:
13 50 00

11-17-23

Civil Engineer: KSA Engineers

Sections covered by this seal include:
00 01 15, 01 00 00, 01 32 16.01, 01 32 16.15,
01 33 23, 01 35 26, 01 42 19, 01 45 00,
01 45 29, 01 45 35, 01 57 19, 01 74 19,
01 81 13, 01 81 13.02, 01 81 13.21, 01 91 00,
01 91 00.01, 02 21 13, 03 30 00, 03 30 53,
05 50 00, 11 22 00, 22 12 17, 31 20 00,
31 23 19, 31 23 23.33, 31 32 23, 31 63 16,
32 05 23, 32 12 16, 32 17 23, 32 31 13,
32 31 40, 32 90 00, 33 08 00, 33 30 00,
33 40 00, 34 71 13

Plumbing Engineer: MCA, LLC

Sections covered by this seal include:
22 05 11, 22 05 23, 22 08 00, 22 13 00,
22 40 00, 25 10 10, 33 10 00

Mechanical Engineer: MCA

Sections covered by this seal include:
23 05 11, 23 05 93, 23 81 00

Electrical Engineer: MCA

Sections covered by this seal include:
26 05 11, 26 05 19, 26 05 26, 26 05 33,
26 05 41, 26 08 00, 26 09 23, 26 22 00,
26 24 16, 26 27 26, 26 29 21, 26 41 00,
26 43 13, 26 51 00, 26 56 00

11-17-23

DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 15	List of Drawing Sheets	05-20
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	11-21
01 32 16.01	Architectural and Engineering CPM Schedules	03-20
01 32 16.15	Project Schedules (Small Projects – Design/Bid/Build	11-21
01 33 23	Shop Drawings, Product Data, and Samples	06-21
01 35 26	Safety Requirements	08-22
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 29	Testing Laboratory Services	11-18
01 45 35	Special Inspections	06-21
01 57 19	Temporary Environmental Controls	01-21
01 74 19	Construction Waste Management	04-22
01 81 13	Sustainable Construction Requirements	10-17
01 81 13.02	Sustainability Certification Requirements – LEED NC V4	01-21
01 81 13.21	Sustainability Certification Requirements – GREEN GLOBES	01-21
01 91 00	General Commissioning Requirements	04-22
01 91 00.01	DVA/USACE Projects General Commissioning Requirements	08-19
	DIVISION 02 – EXISTING CONDITIONS	
02 21 13	Site Surveys	01-21
	DIVISION 03 – CONCRETE	
03 30 00	Cast-in-Place Concrete	01-21
03 30 53	(Short-Form) Cast-in-Place Concrete	01-21
	DIVISION 04 – MASONRY	
04 05 13	Masonry Mortaring	10-17
04 20 00	Unit Masonry	08-17
	DIVISION 05 – METALS	
05 12 00	Structural Steel Framing (MARCIO – MISSING)	11-18
05 21 00	Steel Joist Framing (MARCIO – MISSING)	11-18
05 31 00	Steel Decking (MARCIO – MISSING)	01-21
05 50 00	Metal Fabrications	08-18

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 06 – WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 21 13	Thermal Insulation	01-21
07 22 00	Roof and Deck Insulation	01-21
07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	01-21
07 54 23	Thermoplastic Polyolefin (TPO) Roofing	01-21
07 71 00	Roof Specialties	01-21
07 92 00	Joint Sealants	04-22
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	01-21
08 33 00	Coiling Doors and Grilles	01-21
08 71 00	Door Hardware	05-22
	DIVISION 09 – FINISHES	
09 91 00	Painting	01-21
	DIVISION 10 – SPECIALTIES	
10 44 13	Fire Extinguisher Cabinets	08-18
	DIVISION 11 – EQUIPMENT	
11 22 00	Drinking Water Master Specification Submersible Mixer	06-23
	DIVISION 12 – FURNISHINGS	
	Not Required	
	DIVISION 13 - SPECIAL CONSTRUCTION	
13 50 00	Permanent Mechanically Stabilized Earth Wall w/ Welded Wire Form Facing	06-23
	DIVISION 14– CONVEYING EQUIPEMENT	
	Not Required	
	DIVISION 21- FIRE SUPPRESSION	
	Not Required	
	DIVISION 22 – PLUMBING	
22 05 11	Common Work Results for Plumbing	09-20

SECTION NO.	DIVISION AND SECTION TITLES	DATE
22 05 23	General-Duty Valves for Plumbing Piping	09-20
22 08 00	Commissioning of Plumbing Systems	11-16
22 12 17	Type III Prestressed Concrete Water Storage Tank	06-23
22 13 00	Facility Sanitary and Vent Piping	09-20
22 40 00	Plumbing Fixtures	09-15
	DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	04-22
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20
23 81 00	Decentralized Unitary HVAC Equipment	03-20
	DIVISION 25 – INTEGRATED AUTOMATION	
25 10 10	Advanced Utility Metering System	02-10
	DIVISION 26 – ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 41	Underground Electrical Construction	01-17
26 08 00	Commissioning of Electrical Systems	11-16
26 09 23	Lighting Controls	01-18
26 22 00	Low-Voltage Transformers	01-18
26 24 16	Panelboards	01-18
26 27 26	Wiring Devices	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 41 00	Facility Lightning Protection	01-17
26 43 13	Surge Protective Devices	01-17
26 51 00	Interior Lighting	01-18
26 56 00	Exterior Lighting	01-18
	DIVISION 27 – COMMUNICATIONS	
	Not Required	
	DIVISION 28 – ELECTRONIC SAFETY AND SECURITY	
	Not Required	09-11
	DIVISION 31 – EARTHWORK	
31 20 00	Earthwork	07-16
31 23 19	Dewatering	10-12
31 23 23.33	Flowable Fill	10-12
31 32 23	Pressure Grouting Soil Stabilization	10-12
31 63 16	Auger Cast Grout Piles	10-12

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 32 – EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	08-16
32 12 16	Asphalt Paving	09-15
32 17 23	Pavement Markings	08-16
32 31 13	Chain Link Fences and Gates	06-18
32 31 40	High Security Fences and Gates	08-16
32 90 00	Planting	08-16
	DIVISION 33 – UTILITIES	
33 08 00	Commissioning of Site Utility Systems	11-16
33 10 00	Water Utilities	03-17
33 30 00	Sanitary Sewer Utilities	06-13
33 40 00	Storm Sewer Utilities	12-17
	DIVISION 34 – TRANSPORTATION	
34 71 13	Passive Vehicle Barriers	04-18
	DIVISION 48 – Electrical Power Generation	
	Not Required	

LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of the contract.

Drawing No.	Title
	GENERAL INFORMATION
001	COVER SHEET
	CIVIL
CS 001	EXISTING SITE CONDITIONS
CS 002	DEMOLITION PLAN
CS 003	PROPOSED SITE PLAN
CS 004	PROPOSED GRADING PLAN
CS 005	EROSION CONTROL PLAN
CS 006	SITE ACCESS AND TRAFFIC CONTROL PLAN
CS 007	TANK PLANS AND SECTIONS
CS 008	ROOF, WALL, AND FOOTING
CS 009	TANK PIPING
CS 010	TANK LADDERS AND HATCHES
CS 011	MISCELLANEOUS APPURTENANCES
CS 012	CIVIL DETAILS
	STRUCTURAL
S 000	DRAWING INDEX & GENERAL NOTES
S 001	ANALYZER BUILDING FOUNDATION PLAN SECTIONS & DETAILS
S 002	ANALYZER BUILDING FOUNDATION DETAILS
S 003	ANALYZER BUILDING ROOF PLAN & SECTIONS
S 004	ANALYZER BUILDING SECTIONS & DETAILS
S 005	TITLE SHEET
S 006	CONSTRUCTION NOTES
S 007	WALL LOCATION PLAN VIEW(S)
S 008	ELEVATION VIEW(S)
S 009	CROSS SECTION(S)
S 010	CONSTRUCTION DETAILS

ARCHITECTURAL

A 101	PLANS, ELEVATIONS AND BUILDING SECTIONS
A 102	DETAIL, OPENING ELEVATIONS

PLUMBING

PL 001	SITE PLAN
PL 002	LINE TIE-IN DETAILS
PL 003	ANALYZER BUILDING PIPING AND PLUMBING PLAN
PL 004	WATER FLOW DIAGRAM
PL 005	PIPING ELEVATIONS
PL 006	PIPING ELEVATIONS
PL 007	DETAILS
PL 008	WATER TIE-IN PROCEDURE
PL 302	TANK ISOLATION VALVE REPLACEMENT PHASING PLAN 2

MECHANICAL

M 001	ANALYZER BUILDING MECHANICAL PLAN AND SCHEDULES

ELECTRICAL

E 001	SYMBOL AND ABBREVIATIONS
E 002	FEEDER DIAGRAM AND SCHEDULES
E 101	SITE PLAN - ELECTRICAL
E 102	ANALYZER BUILDING – ELECTRICAL
E 201	ELECTRICAL SCHEDULES

- - - END - - -

DIVISION 01 - GENERAL REQUIREMENTS

SECTION 01 00 00
GENERAL REQUIREMENTS

GENERAL

1.1 SAFETY REQUIREMENTS

A. Refer to section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements.

1.2 GENERAL INTENTION

A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for construction of the Above Ground Potable Water Tank System as required by drawings and specifications.

B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.

C. Offices of KSA Engineers, Inc., Marrero, Couvillon and Associates LLC, Lachin Architects, AIA, DRGeoES LLC, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

D. Before placement and installation of work subject to tests by testing laboratory retained by Department of Veterans Affairs, the Contractor shall notify the COR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three workdays unless otherwise designated by the COR.

E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission

of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.3 STATEMENT OF BID ITEM(S)

A. ITEM I, GENERAL CONSTRUCTION: BASE BID _Above Ground Potable Storage Tank System_: Work includes general construction, alterations, roads, walks, grading, drainage, necessary removal of existing structures and construction and certain other items.

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractor's expense.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor’s employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. Before starting work the General Contractor shall give one week’s notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.

3. No photography of VA premises is allowed without written permission of the Contracting Officer. Patients and staff are not to be photographed at any time.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting officers representative (COR) for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall install all permanent cores at completion of the work turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

D. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.

4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
   a) Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
   b) "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions
1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. Contractor parking is limited to laydown area, offsite, or VA overflow parking on Stoner Avenue. Contractor to coordinate with VA Medical Center Facility Manager.

1.6 OPERATIONS AND STORAGE AREAS (FAR 52.236-10)

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from

liability of any nature occasioned by the Contractor's performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

D. Working space and space available for storing materials shall be as shown on the drawings and/or as determined by the COR.

E. Workers are subject to rules of Medical Center applicable to their conduct.

F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.

G. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing

equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
2. Provide unobstructed access to Medical Center areas required to remain in operation.
3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.

H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR . All such actions shall be coordinated with the COR or Utility Company involved:

1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

I. Phasing:

1. The Medical Center must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service must be scheduled and coordinated with the COR to ensure that no lapses in operation occur. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be

used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks. The work to be outlined shall include, but not be limited to:

2. To ensure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to ensure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, COR and Contractor, as follows:

Phase I:

1. Remove fencing, site obstructions, and trees on VA property within proposed site location.
2. Construct temporary construction entrance and traffic control devices along Clyde Fant parkway.
3. Install silt fencing and other necessary storm water pollution prevention measures.
4. Clearing and grubbing on City of Shreveport property adjacent to MSE retaining wall.
5. Construct MSE retaining wall including underdrains, backfilling of retaining wall, and install 18" drainage pipe through MSE wall.
6. Grade the face of the MSE retaining wall and stabilize the disturbed side slopes including the face of the MSE retaining wall and along the downhill drainage path by installing grouted riprap.
7. Install new boundary fencing, drainage catch basin, and grade the site behind MSE retaining wall up to tank site.

Phase II:

1. Relocate utilities to facilitate Above Ground Tank System site improvements.
2. Construct concrete retaining wall.
3. Install deep foundation systems for Above Ground Tank System and analyzer building.

4. Construct Above Ground Tank System and analyzer building including new water mains and appurtenances.
5. Install concrete drive and sidewalk.
6. Finish grading the remainder of the site.
7. Site restoration including final grading and reseeding of site.
8. Install fencing behind the concrete retaining wall.

J. Building(s) No.(s) _42_ will be occupied during performance of work.

1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
2. Immediate areas of alterations not mentioned in preceding Subparagraph 1 will be temporarily vacated while alterations are performed.

K. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum

375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.

L. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:
   1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
   2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

M. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.
   1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR [Chief Engineer] [Chief of Facilities Management]. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director’s prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR

ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY for additional requirements.

2. Contractor shall submit a request to interrupt any such services to COR, in writing, 7 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COR.
5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

N. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, shall be removed back to their source. Those which are indicated to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas,

or within walls or partitions; so that they are completely behind the finished surfaces.

O. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
   1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times with approval.
   2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.

P. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR and a representative of VA Supply Service, of buildings areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by all three, to the Contracting Officer. This report shall list by rooms and spaces:
   1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building. buildings.
   2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.

3. Shall note any discrepancies between drawings and existing conditions at site.
4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COR.

B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR and/or Supply Representative, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4).

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workers in executing work of this contract.

D. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.

2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
   1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.
   2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
   3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS (FAR 52.236-9)

A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

D. Refer to FAR clause 52.236-7, "Permits and Responsibilities," which is included in General Conditions. A National Pollutant Discharge Elimination System (NPDES) permit is required for this project. The Contractor is considered an "operator" under the

permit and has extensive responsibility for compliance with permit requirements. VA will make the permit application available at the (appropriate medical center) office. The apparent low bidder, contractor and affected subcontractors shall furnish all information and certifications that are required to comply with the permit process and permit requirements. Many of the permit requirements will be satisfied by completing construction as shown and specified. Some requirements involve the Contractor's method of operations and operations planning and the Contractor is responsible for employing best management practices. The affected activities often include, but are not limited to the following:

1. Designating areas for equipment maintenance and repair;
2. Providing waste receptacles at convenient locations and provide regular collection of wastes;
3. Locating equipment wash down areas on site, and provide appropriate control of wash-waters;
4. Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
5. Providing adequately maintained sanitary facilities.

1.10 RESTORATION

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workers to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.

D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.11 PHYSICAL DATA – SOIL CONDITIONS

A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

1. The indications of physical conditions on the drawings and in the specifications are the result of site investigations by DRGeoES, LLC.

(FAR 52.236-4)

B. Subsurface conditions have been developed by core borings and test pits. Logs of subsurface exploration are shown diagrammatically on drawings.

C. A copy of the soil report will be made available for inspection by bidders upon request to the Engineering Officer at the VA Medical Center and shall be considered part of the contract documents.

D. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by explorations. Bidders are expected to examine site of work and logs of borings; and, after investigation, decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

1.12 PROFESSIONAL SURVEYING SERVICES

A. A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other specification sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land surveyor or civil engineer has no financial interest in this contract.

1.13 LAYOUT OF WORK

A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If

such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

(FAR 52.236-17)

B. Establish and plainly mark center lines for each building and corner of column lines and/or addition to each existing building, and such other lines and grades that are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, roads, are in accordance with lines and elevations shown on contract drawings.

C. Following completion of general mass excavation and before any other permanent work is performed, establish and plainly mark (through use of appropriate batter boards or other means) sufficient additional survey control points or system of points as may be necessary to assure proper alignment, orientation, and grade of all major features of work. Survey shall include, but not be limited to, location of lines and grades of footings, exterior walls, center lines of columns in both directions, major utilities and elevations of floor slabs:

1. Such additional survey control points or system of points thus established shall be checked and certified by a registered land surveyor or registered civil engineer. Furnish such certification to the COR before any work (such as footings, floor slabs, columns, walls, utilities and other major controlling features) is placed.

D. During progress of work, Contractor shall have line grades and plumbness of all major form work checked and certified by a registered land surveyor or registered civil engineer as meeting requirements of contract drawings. Furnish such certification to the COR before any major items of concrete work are placed. In

addition, Contractor shall also furnish to the COR certificates from a registered land surveyor or registered civil engineer that the following work is complete in every respect as required by contract drawings.

1. Lines of each building and/or addition.
2. Elevations of bottoms of footings and tops of floors of each building and/or addition.
3. Lines and elevations of sewers and of all outside distribution systems.
4. Lines of elevations of all swales and interment areas.
5. Lines and elevations of roads, streets

E. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to COR.

F. Upon completion of the work, the Contractor shall furnish the COR one electronic copy and reproducible drawings at the scale of the contract drawings, showing the finished grade on the grid developed for constructing the work, including burial monuments and fifty foot stationing along new road centerlines. These drawings shall bear the seal of the registered land surveyor or registered civil engineer.

G. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".

1.14 AS-BUILT DRAWINGS

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings

shall be made available for the COR review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR [Chief Engineer][Chief of Facilities Management] within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.15 WARRANTY MANAGEMENT

A. Warranty Management Plan: Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction in at least 30 days before the planned pre-warranty conference, submit one electronic copy and two hard copy sets of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesman, or of engineering background, not necessarily familiar with this contract. The term "status" as indicated below must include due date and whether item has been submitted or was approved. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly invoice for payment. Assemble approved information in a binder and turn over to the Government upon acceptance of the work. The construction warranty period will begin on the date of the project acceptance and continue for the product warranty period. A joint 4 month and 9 month warranty inspection will be conducted, measured from time of acceptance, by the Contactor and the Contracting Officer. Include in the warranty management plan, but not limited to, the following:

1. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the company of the Contractor, subcontractors, manufacturers or suppliers involved.
2. Furnish with each warranty the name, address and telephone number of each of the guarantor’s representatives nearest project location.
3. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers and for all commissioned systems such as fire protection and alarm systems, sprinkler systems and lightning protection systems, etc.
4. A list for each warranted equipment item, feature of construction or system indicating:
   a. Name of item.
   b. Model and serial numbers.
   c. Location where installed.
   d. Name and phone numbers of manufacturers and suppliers.
   e. Name and phone numbers of manufacturers or suppliers.
   f. Names, addresses and phone numbers of sources of spare parts.
   g. Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
   h. Starting point and duration of warranty period.
   i. Summary of maintenance procedures required to continue the warranty in force.
   j. Cross-reference to specific pertinent Operation and Maintenance manuals.
   k. Organizations, names and phone numbers of persons to call for warranty service.

l. Typical response time and repair time expected for various warranted equipment.

5. The plans for attendance at the 4 and 9-month post construction warranty inspections conducted by the government.
6. Procedure and status of tagging of all equipment covered by extended warranties.
7. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.

1. Performance & Payment Bonds: The Performance & Payment Bonds must remain effective throughout the construction period. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
2. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the contractor’s expenses, the Contracting Officer will have the right to recoup expenses from the bonding company.
3. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.

B. Pre-Warranty Conference: Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the

type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/ reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contract will be located within the local service area of the warranted construction, be continuously available and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in conjunction with other portions of this provision.

C. Contractor's Response to Construction Warranty Service Requirements:

D. Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. Submit a report on any warranty item that has been repaired during the warranty period. Include within the report the cause of the problem, date reported, corrective action taken, and when the repair was completed. If the Contractor does not perform the construction warranty within the timeframe specified, the Government will perform the work and back charge the construction warranty payment item established.

1. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
2. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours,

initiate work within 24 hours and work continuously to completion or relief.

3. Third Priority Code 3. All other work to be initiated within 3 work days and work continuously to completion or relief.
4. The "Construction Warranty Service Priority List" is as follows:

a) Code 1-Life Safety Systems
   1) Fire suppression systems.
   2) Fire alarm system(s).

b) Code 1-Air Conditioning Systems
   1) Air conditioning leak in part of the building, if causing damage.
   2) Air conditioning system not cooling properly.

c) Code 1 Doors
   1) Overhead doors not operational, causing a security, fire or safety problem.
   1) Interior, exterior personnel doors or hardware, not functioning properly, causing security, fire or safety problem.

d) Code 3-Doors
   1) Overhead doors not operational.
   2) Interior/exterior personnel doors or hardware not functioning properly.

e) Code 1-Electrical
   1) Power failure (entire area or any building operational after 1600 hours).
   2) Security lights.
   3) Smoke detectors.

f) Code 2-Electrical
   1) Power failure (no power to a room or part of building). Receptacle and lights not operational (in a room or part of building).

g) Code 3-Electrical

1) Exterior lights not operational.

h) Code 1-Gas

1) Leaks and pipeline breaks.

i) Code 1-Heat

1) Power failure affecting heat.

j) Code 1-Plumbing

1) Hot water heater failure.

2) Leaking water supply pipes

k) Code 2-Plumbing

1) Flush valves not operating properly

2) Fixture drain, supply line or any water pipe leaking.

3) Toilet leaking at base.

l) Code 3- Plumbing

1) Leaky faucets.

m) Code 3-Interior

1) Floors damaged.

2) Paint chipping or peeling.

3) Casework damaged.

n) Code 1-Roof Leaks

1) Damage to property is occurring.

o) Code 2-Water (Exterior)

1) No water to facility.

p) Code 2-Water (Hot)

1) No hot water in portion of building listed.

q) Code 3

1) All work not listed above.

E. Warranty Tags: At the time of installation, tag each warranted item with a durable, oil and water-resistant tag approved by the Contracting Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also submit one electronic file and two record copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature

must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Warranty Tags
Type of product/material
Model number
Serial number
Contract number
Warranty period from/to
Inspector’s signature
Construction Contractor
Address
Telephone number
Warranty Contact
Address
Telephone number
Warranty response time priority code

1.16 USE OF ROADWAYS

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

B. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

1.17 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:

1. Permission to use each unit or system must be given by COR in writing. If the equipment is not installed and maintained in accordance with the written agreement and following provisions, the COR will withdraw permission for use of the equipment.
2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2014 Edition), Article 590, *Temporary Installations.* Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements

shall be replaced at completion of construction and prior to testing and balancing of system.

6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.

B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor’s expense.

1.18 TEMPORARY TOILETS

A. Provide where directed, (for use of all Contractor's workers) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by COR, provide suitable dry closets where directed. Keep such places clean and free from flies and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.19 AVAILABILITY AND USE OF UTILITY SERVICES

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.

B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia and repair restore the infrastructure as required.

C. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. Electricity for all other uses is available at no cost to the Contractor.

D. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR discretion) of use of water from Medical Center's system.

E. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the Government. Fuel required for prolonged boiler-burner setup, adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished and paid by the Contractor at Contractor's expense.

1.20 TESTS

A. As per specification section 23 05 93 the contractor shall provide a written testing and commissioning plan complete with component level, equipment level, sub-system level and system level breakdowns. The plan will provide a schedule and a written sequence of what will be tested, how and what the expected outcome will be. This document will be submitted for approval prior to commencing work. The contractor shall document the results of the approved plan and submit for approval with the as built documentation.

B. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.

C. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.

D. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire system which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a system which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

E. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably period of time during which operating and environmental conditions remain reasonably constant and are typical of the design conditions.

F. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.21 INSTRUCTIONS

A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing

equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.22 CONSTRUCTION SIGN

A. Provide a Construction Sign where directed by the COR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and

on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.

C. Maintain sign and remove it when directed by the COR.

1.23 DETAIL DRAWING OF CONSTRUCTION SIGN SHOWING REQUIRED LEGEND AND OTHER CHARACTERISTICS OF SIGN IS ATTACHED HERETO AND MADE A PART OF THIS SPECIFICATION. SAFETY SIGN

A. Provide a Safety Sign where directed by COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.

B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.

C. Maintain sign and remove it when directed by COR.

D. Drawing details in VA Signage Design Manual, Section 11 Specialty Signs (found on VA TIL) show required legend and other characteristics of sign and are attached hereto and is made a part of this specification.

E. Post the number of accident free days on a daily basis.

1.24 PHOTOGRAPHIC DOCUMENTATION

A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. The commercial photographer or the subcontractor used for this work shall meet the following qualifications:
   1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.
   2. Demonstrable ability to service projects throughout North America, which shall be demonstrated by a representative portfolio of active projects of similar type, size, duration and complexity as the Project.

B. Photographic documentation elements:
   1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.
   2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.
   3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture

actual conditions throughout construction and at critical milestones. Documentation shall be accessible on-line through use of an internet connection. Documentation shall allow for secure multiple-user access, simultaneously, on-line.

4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.
5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning when stud work commences and continuing until Project completion.
6. As-built condition of pre-foundation utilities and site utilities shall be documented prior to pouring footers, placing concrete and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.

7. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
8. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the COR in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
9. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the COR. Overlapping photographic techniques shall be used to ensure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
10. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently, shall be dated, labeled and inserted into a Section in the navigation structure entitled "Slideshows," allowing this information to be stored in the same "place" as the formal scope.
11. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and

navigation accomplished through interactive architectural plans.

12. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photo path.
13. Weekly (21 Max) Site Progressions - Photographic documentation capturing the project at different stages of construction. These progressions shall capture underground utilities, excavation, grading, backfill, landscaping and road construction throughout the duration of the project.
14. Regular (8 max) interior progressions of all walls of the entire project to begin at time of substantial framed or as directed by the COR through to completion.
15. Detailed Exact-Built of all Slabs for all project slab pours just prior to placing concrete or as directed by the COR.
16. Detailed Interior exact built overlapping photos of the entire building to include documentation of all mechanical, electrical and plumbing systems in every wall and ceiling, to be conducted after rough-ins are complete, just prior to insulation and or drywall, or as directed by COR.
17. Finished detailed Interior exact built overlapping photos of all walls, ceilings, and floors to be scheduled by COR prior to occupancy.
18. In event a greater or lesser number of images than specified above are required by the COR, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4).

C. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.

D. Coordination of photo shoots is accomplished through COR. Contractor shall also attend construction team meetings as necessary. Contractor's operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Builts viewable on-line and anticipated future shoot dates.

E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.

F. Contractor shall provide technical support related to using the system or service.

G. Upon completion of the project, final copies of the documentation (the "Permanent Record") with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

1.25 FINAL ELEVATION DIGITAL IMAGES

A. A minimum of four (4) images of each elevation shall be taken with a minimum 6 MP camera, by a professional photographer with different settings to allow the COR to select the image to be printed. All images are provided to the RE on a CD.

B. Photographs shall be taken upon completion, including landscaping. They shall be taken on a clear sunny day to obtain sufficient detail to show depth and to provide clear, sharp pictures. Pictures shall be 400 mm x 500 mm (16 by 20 inches), printed on regular weight paper, matte finish archival grade photographic paper and produced by a RA4 process from the digital image with a minimum 300 PPI. Identifying data shall be carried on label affixed to back of photograph without damage to photograph and shall be similar to that provided for final construction photographs.

1.26 HISTORIC PRESERVATION

A. Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up.

- - - E N D - - -

SECTION 01 32 16.01
ARCHITECTURAL AND ENGINEERING CPM SCHEDULES

PART 1- GENERAL

1.1 DESCRIPTION:

The Architect/Engineer of Record (A/E) shall develop a Critical Path Method (CPM Schedule) plan and schedule demonstrating fulfillment of the contract requirements as designated in VA PG 18-15, shall keep the CPM up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract. Conventional Critical Path Method (CPM) Precedence Diagramming Method (PDM) technique will be utilized to satisfy both time and cost applications. All schedule data and reports required under this specification section shall be based upon regular total float, not relative total float schedules.

1.2 A/E'S REPRESENTATIVE:

A. The A/E shall designate an authorized representative in the firm who will be responsible for the preparation of the CPM Schedule, review and report progress of the project with and to the Project Manager and the Contracting Officer.

B. The A/E's representative shall have direct project control and complete authority to act on behalf of the A/E in fulfilling the requirements of this specification section and such authority shall not be interrupted throughout the duration of the project.

1.3 A/E'S SCHEDULE PREPARATION:

A. To prepare the CPM Schedule, and subsequent periodic updates, which reflects the A/E's project plan, the A/E shall either designate a qualified individual within their firm or engage an independent CPM consultant (CPM Developer) who is skilled in the time and cost application of scheduling using (PDM) network techniques for Design projects, the cost of which is included in the A/E's bid.

B. Within 10 calendar days after award of the contract, the A/E shall submit to the Contracting Officer:

1. The name of the CPM Developer.
2. The Computer Software to be utilized.
3. Sufficient information to show that the CPM Developer has the qualifications to meet the requirements specified in the preceding paragraph.

C. The Contracting Officer has the right to approve or disapprove the designated CPM developer, and will notify the A/E of the VA decision within seven calendar days from receipt of information. In case of disapproval, the A/E shall resubmit another CPM Developer within 10 calendar days for renewed consideration. The A/E must have their CPM Developer approved prior to submitting the Initial CPM Schedule

1.4 COMPUTER PRODUCED SCHEDULES

A. The A/E shall provide to the VA Project Manager, Contracting Officer and CPM Schedule Analyst, monthly computer processing of all computer-produced time/cost schedules and reports generated from monthly project updates. A hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data. These reports shall be submitted with and substantively support the A/E's monthly payment request. The Project Manager shall identify the different report formats that the A/E shall provide based upon the monthly schedule updates.

B. The A/E is responsible for the correctness and timeliness of the computer-produced reports. The A/E is also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA shall report errors in computer-produced reports to the A/E's representative within ten calendar days from receipt of reports. The A/E will reprocess the computer-produced reports and associated compact disk(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE CPM SCHEDULE SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the A/E shall submit for the Project Manager and Contracting Officer's review; three blue line copies of the complete CPM Schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file, (PDM) format. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, duration, predecessor and successor relationships, area code, description, budget amount, early start date,

early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start and start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The A/E shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the CPM Schedule. The Contracting Officer's separate approval of the CPM Schedule shall not excuse the A/E of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working CPM Schedule shall reflect the A/E's approach to scheduling the complete project. **The final CPM Schedule in its original form shall contain no contract modifications or changes which may have been incurred during the final CPM Schedule development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final CPM Schedule has been approved. The A/E should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

B. Within 30 calendar days after receipt of the complete project CPM Schedule, the Project Manager of Contracting Officer will do one or both of the following:
   1. Notify the A/E concerning his actions, opinions, and objections.
   2. A meeting with the A/E at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the A/E shall revise and shall submit three blue line copies of the revised CPM Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

C. The approved baseline CPM Schedule and the corresponding computer-produced schedule(s) shall constitute the approved baseline schedule

until subsequently revised in accordance with the requirements of this section.

1.6 WORK ACTIVITY/EVENT COST DATA

The A/E shall cost load all work activities. The cost loading shall reflect the appropriate level of effort of the work activities/events. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The A/E shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. In the event of disapproval, the A/E shall revise and resubmit in accordance with Article, THE COMPLETE PROJECT CPM SCHEDULE SUBMITTAL. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

1.7 CPM SCHEDULE REQUIREMENTS

A. Show on the CPM Schedule the sequence and interdependence of work activities/events required for complete performance of all items of work. In preparing the CPM Schedule, the A/E shall:
   1. Exercise sufficient care to produce a clear, legible and accurate CPM Schedule.
   2. Show the following on each work activity/event:
      a. Activity/Event ID number.
      b. Concise description of the work represented by the activity/event. (35 characters or less including spaces preferred).
      c. Performance responsibility.
      d. Duration (in work days.)
      e. Cost (in accordance with Article, ACTIVITY/EVENT COST DATA of this section and less than $99,999 per activity).
      f. Manpower required (average number of men per day).
   3. Show activities/events as:
      a. A/E's time required for submittal of drawings.
      b. VA review and approval of drawings, equipment schedules, samples, template, or similar items.

c. Interruption of VA Medical Center utilities, delivery of Government furnished equipment, project phasing and any other specification requirements.

4. Show activities/events for work for each discipline.
5. Break up the work into activities/events of duration no longer than 20 work days each, except for which the Project Manager and/or the Contracting Officer may approve the showing of a longer duration.
6. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
7. Uniquely number each activity/event with numbers ranging from 1 to 99998 only. The CPM Schedule should be generally numbered in such a way to reflect disciplines, phase or location of the work.

B. Submit the following supporting data in addition to the CPM Schedule, activity/event ID schedule and electronic file (s). Failure of the A/E to include this data will delay the review of the submittal until the Contracting Officer is in receipt of the missing data:
1. The proposed number of working days per week.
2. The holidays to be observed during the life of the contract (by day, month, and year).

C. To the extent that the CPM Schedule or any revised CPM Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the Contracting Officer. Failure to include any element of work required for the performance of this contract shall not excuse the A/E from completing all work required within any applicable completion date of each phase regardless of the Contracting Officer's approval of the CPM Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA (Project Manager and CPM Schedule Analyst) an electronic file(s) containing one file of the data required.

1.8 PAYMENT TO THE A/E:

A. Monthly, the A/E shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data. The A/E is entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated computer-produced calendar-dated schedule unless, in special

situations, the Contracting Officer permits an exception to this requirement.

B. When the A/E fails or refuses to furnish to the Contracting Officer the information, which, in the sole judgment of the Contracting Officer, is necessary for processing the monthly progress payment, the A/E shall not be deemed to have provided an estimate and supporting schedule data upon which progress payment may be made.

1.9 PAYMENT AND PROGRESS REPORTING

A. Monthly progress meetings shall be held on dates mutually agreed to by the Project Manager and/or Contracting Officer and the A/E. The A/E shall update the project schedule and all other data required by this section shall be accurately filled in and completed prior to the monthly progress meeting. The A/E shall provide this information to VA three work days in advance of the progress meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration, required to complete each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the CPM Schedule and computer-produced schedules. Changes in activity/event sequence and duration which have been made pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
4. Percentage for completed and partially completed activities/events.
5. Logic and duration revisions required by this section of the specifications.
6. Activity/event duration and percent complete shall be updated independently.

B. The A/E shall submit a narrative report as a part of his monthly review and update, in a form agreed upon by the A/E and the Contracting Officer. The narrative report shall include a description of problem areas; current and anticipated delaying factors and their estimated impact on performance of other activities/events and completion dates; and an explanation of corrective action taken or proposed.

C. After completion of the joint review and the Contracting Officer's approval of all entries, the A/E shall generate an updated computer-

produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

D. After completing the monthly schedule update, the A/E's scheduling person shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the A/E and Project Manager for the contract change(s). When there is a disagreement on logic and/or durations, the CPM Schedule update shall use the schedule logic and/or durations provided and approved by the Project Manager. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the resident engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final CPM Schedule is approved, the A/E must recreate all manual progress payment updates on this approved CPM Schedule and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

E. After VA acceptance and approval of the final CPM Schedule, and after each monthly update, the A/E shall submit to the Contracting Officer three blue line copies of a revised complete CPM Schedule showing all completed and partially completed activities/events, contract changes and logic changes made on the intervening updates or at the first update on the final diagram. The Contracting Officer may elect to have the A/E do this on a less frequent basis, but it shall be done on a quarterly basis as a minimum.

1.10 RESPONSIBILITY FOR COMPLETION

A. Whenever it becomes apparent from the current monthly progress review meeting or the monthly schedule that phasing or contract completion

dates will not be met, the A/E shall execute some or all of the following remedial actions:

1. Increase manpower in such quantities and discipline as necessary to eliminate the backlog of work.
2. Increase the number of working hours to eliminate the backlog of work.
3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the A/E shall notify and obtain approval from the Project Manager and/or the Contracting Officer for the proposed schedule changes. If such actions are approved, the CPM revisions shall be incorporated by the A/E into the CPM Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO CPM SCHEDULE AND SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated computer-produced schedule, the A/E will submit a revised CPM Schedule

B. Contracting Officer's approval for the revised CPM Schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the CPM Schedule resulting from contract changes will be included in the proposal for changes in work as specified in Article, FAR 52.243 -4 (CHANGES), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the CPM Schedule not resulting from contract changes is the responsibility of the A/E .

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the A/E shall be supported with a justification, CPM data and supporting evidence as the Contracting Officer may deem necessary for determination as to whether or not the A/E is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the

A/E has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the A/E in writing of the Contracting Officer's decision.

C. The A/E shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under Article, FAR 52.243 -4 (CHANGES). The A/E shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved CPM Schedule.

D. All delays due to non-work activities/events such as RFI’s, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

1.13 PROJECT DESIGN SCHEDULE RISK ANALYSIS/MITIGATION PLAN

A. Schedule Risk Analysis – The A/E shall conduct the statistical schedule risk analysis based on the above detailed construction activities in the Day 1 approved diagram, identifying major schedule risk areas and recommended risk mitigation plans as outlined below.

B. The risk analysis shall be conducted by a person or firm skilled in the statistical method of schedule risk analysis based on the (PDM) CPM Schedule techniques for major projects, preferably in the major health care related projects. The cost of this service shall be included in the A/E's proposal.

C. The Contracting Officer has the right to approve or disapprove the Person or firm designated to perform the risk analysis.

1.14 RISK ANALYSIS FORMAT / REQUIREMENTS / SUBMITALS

A. Risk Analysis Software / Format - Within 45 calendar days after receipt of Notice to Proceed, the A/E shall submit for the Contracting Officer's review; a Risk Analysis software to be utilized, the method of performing the analysis, the format of presenting the data and the reports for VA approval.

B. Conduct Risk Analysis **/ Submittals - Based on the approved software / format, the consultant shall** perform statistical risk analysis on the detailed approved Day 1 diagram. The A/E shall review and utilize any previous Risk analysis based on the "semi-detailed" schedule logic and schedule to ensure the continuity of previous schedule risk analysis. The A/E's project manager shall identify the major schedule risk areas and possible risk mitigation strategy/plan and record it in a narrative format, with **electronic file submission** to VA. **The risk analysis exercise shall be performed or updated at least on a quarterly basis or as directed by the VA Contracting officer.**

C. The submittal shall include three copies of a computer-produced risk analysis results, predicting the various meaningful probability curves of achieving the contract schedules. It shall also include a detailed narrative list of all major and minor potential and specific schedule and cost risk areas, and a A/E 's recommendations of mitigating the identified risks which must be addressed by the VA Project and Resident engineer teams to maintain the contract schedule.

- - - E N D - - -

SECTION 01 32 16.15
PROJECT SCHEDULES

PART 1- GENERAL

1.1 DESCRIPTION:

A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COTR).

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.

C. The Contractor’s representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

A. The Contractor shall submit a qualification proposal to the COTR, within 10 days of bid acceptance. The qualification proposal shall include:

1. The name and address of the proposed consultant.
2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision

within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor’s monthly payment request and the signed look ahead report. The COTR shall identify the five different report formats that the contractor shall provide.

B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA will report errors in computer-produced reports to the Contractor’s representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer’s representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost.

Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised

computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

D. The Complete Project Schedule shall contain work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 –Article 70 Without NAS-CPMfor (PAYMENTS UNDER FIXED PRICE CONSTRUCTION).

C. In accordance with FAR 52.236 – 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 – 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:
   a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
   b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
   c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
   d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
   e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COTR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled

"start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.

5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:

1. The appropriate project calendar including working days and holidays.
2. The planned number of shifts per day.
3. The number of hours per shift.

Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COTR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COTR's approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

A. Monthly, the contractor shall submit an application and certificate for payment using VA Form 10-6001a or the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 – //Article 70 Without NAS-CPM// //Article 71 Including NAS-CPM//for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon

project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

A. Monthly schedule update meetings will be held on dates mutually agreed to by the COTR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COTR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
5. Completion percentage for all completed and partially completed activities/events.
6. Logic and duration revisions required by this section of the specifications.
7. Activity/event duration and percent complete shall be updated independently.

B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s).

When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the COR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the COR within fourteen (14) calendar days of completing the regular schedule update. Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.

D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:

1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COTR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
3. The schedule does not represent the actual prosecution and progress of the project.
4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 – 4 (Changes, and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COTR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 – 4 (Changes). The Contractor

shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 – GENERAL

1.1 DESCRIPTION

A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.

B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.

C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor’s expense.

1.2 DEFINITIONS

A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.

B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.

C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.

E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.

F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.

H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.

I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.

J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.

K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not

be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.

B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.

C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.

ENG_FORM_4288-R.pdf

D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.

E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.

B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.

C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.

D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options,

and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.

C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.

D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned without review.

E. Provide a transmittal form for each submittal with the following information:

1. Project title, location and number.
2. Construction contract number.
3. Date of the drawings and revisions.
4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
7. Product identification and location in project.

F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.

G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

CONTRACTOR
(Firm Name)
_____Approved
_____Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

1.6 SUBMITTAL FORMAT AND TRANSMISSION

A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.

B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.

C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.

D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.

E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.

F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

A. Submit two sets of physical samples showing range of variation, for each required item.

B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.

C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.

D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.

E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.

F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.

B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

COR may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.

C. Period of review for each resubmittal is the same as for initial submittal.

D. VA review period is 15 business days for submittals.

E. VA review period is 10 business days for RFIs.

F. The VA will return submittals to the Contractor with the following notations:

1. "Approved": authorizes the Contractor to proceed with the work covered.
2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.

B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

SECTION 01 35 26
SAFETY REQUIREMENTS

TABLE OF CONTENTS

1.1 APPLICABLE PUBLICATIONS 2
1.2 DEFINITIONS 3
1.3 REGULATORY REQUIREMENTS 5
1.4 ACCIDENT PREVENTION PLAN (APP) 5
1.5 ACTIVITY HAZARD ANALYSES (AHAs) 10
1.6 PRECONSTRUCTION CONFERENCE 12
1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) 13
1.8 TRAINING 14
1.9 INSPECTIONS 15
1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS 16
1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE) 17
1.12 INFECTION CONTROL 18
1.13 TUBERCULOSIS SCREENING 21
1.14 FIRE SAFETY 22
1.15 ELECTRICAL 24
1.16 FALL PROTECTION 25
1.17 SCAFFOLDS AND OTHER WORK PLATFORMS 26
1.18 EXCAVATION AND TRENCHES 27
1.19 CRANES 29
1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT) 30
1.21 CONFINED SPACE ENTRY 30
1.22 WELDING AND CUTTING 31
1.23 LADDERS 31
1.24 FLOOR & WALL OPENINGS 31

SECTION 01 35 26
SAFETY REQUIREMENTS

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health Planning

A10.34-2012.....Protection of the Public on or Adjacent to Construction Sites

A10.38-2013.....Basic Elements of an Employer’s Program to Provide a Safe and Healthful Work Environment American National Standard Construction and Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2019.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

70-2020.....National Electrical Code

70B-2019.....Recommended Practice for Electrical Equipment Maintenance

70E-2018 .....Standard for Electrical Safety in the Workplace

99-2018.....Health Care Facilities Code

241-2019.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

F. The Joint Commission (TJC)

TJC Manual .....Comprehensive Accreditation and Certification Manual

G. U.S. Nuclear Regulatory Commission

10 CFR 20 .....Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1910 .....Safety and Health Regulations for General Industry

29 CFR 1926 .....Safety and Health Regulations for Construction Industry

I. VHA Directive 2005-007

1.2 DEFINITIONS:

A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane’s maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.

B. OSHA “Competent Person” (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).

C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to

solve or resolve problems relating to the subject matter, the work, or the project.

D. High Visibility Accident. Any mishap which may generate publicity or high visibility.

E. Accident/Incident Criticality Categories:

1. No impact – near miss incidents that should be investigated but are not required to be reported to the VA;

2. Minor incident/impact – incidents that require first aid or result in minor equipment damage (less than $5000). These incidents must be investigated but are not required to be reported to the VA;

3. Moderate incident/impact – Any work-related injury or illness that results in:

a. Days away from work (any time lost after day of injury/illness onset);

b. Restricted work;

c. Transfer to another job;

d. Medical treatment beyond first aid;

e. Loss of consciousness;

4. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,

5. Any incident that leads to major equipment damage (greater than $5000).

F. These incidents must be investigated and are required to be reported to the VA;

1 Major incident/impact – Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than $20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are

required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

G. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

1.3 REGULATORY REQUIREMENTS:

A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer Representative or Government Designated Authority.

1.4 ACCIDENT PREVENTION PLAN (APP):

A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards

pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.

2. Address both the Prime Contractors and the subcontractors work operations.

3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.

4. Address all the elements/sub-elements and in order as follows:

   a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:

      1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);

      2) Plan approver (company/corporate officers authorized to obligate the company);

      3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).

   b. **BACKGROUND INFORMATION.** List the following:

      1) Contractor;

      2) Contract number;

      3) Project name;

      4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).

   c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor’s written safety program goals,

objectives, and accident experience goals for this contract should be provided.

d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:

1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;

2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.

3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;

4) Requirements that no work shall be performed unless a designated competent person is present on the job site;

5) Requirements for pre-task Activity Hazard Analysis (AHAs);

6) Lines of authority;

7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

e. SUBCONTRACTORS AND SUPPLIERS. If applicable, provide procedures for coordinating SOH activities with other employers on the job site:

1) Identification of subcontractors and suppliers (if known);

2) Safety responsibilities of subcontractors and suppliers.

f. **TRAINING.**

1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.

2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical

lockout/NFPA 70E, machine/equipment lockout, confined space, etc…) and any requirements for periodic retraining/recertification are required.

3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.

4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. SAFETY AND HEALTH INSPECTIONS.

1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.

2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING. The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the Contracting Officer Representative or Government Designated Authority:

1) Exposure data (man-hours worked);

2) Accident investigation reports;

3) Project site injury and illness logs.

i. PLANS (PROGRAMS, PROCEDURES) REQUIRED. Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall

include but are not be limited to procedures for addressing the risks associates with the following:

1) Emergency response;

2) Contingency for severe weather;

3) Fire Prevention;

4) Medical Support;

5) Posting of emergency telephone numbers;

6) Prevention of alcohol and drug abuse;

7) Site sanitation(housekeeping, drinking water, toilets);

8) Night operations and lighting;

9) Hazard communication program;

10) Welding/Cutting "Hot" work;

11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);

12) General Electrical Safety;

13) Hazardous energy control (Machine LOTO);

14) Site-Specific Fall Protection & Prevention;

15) Excavation/trenching;

16) Asbestos abatement;

17) Lead abatement;

18) Crane Critical lift;

19) Respiratory protection;

20) Health hazard control program;

21) Radiation Safety Program;

22) Abrasive blasting;

23) Heat/Cold Stress Monitoring;

24) Crystalline Silica Monitoring (Assessment);

25) Demolition plan (to include engineering survey);

26) Formwork and shoring erection and removal;

27) PreCast Concrete;

28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

C. Submit the APP to the Contracting Officer Representative or Government Designated Authority for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.

D. Once accepted by the Contracting Officer Representative or Government Designated Authority, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.

E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the project overall designated OSHA Competent Person, and Contracting Officer Representative Government Designated Authority. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAS):

A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)

B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.

C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer Representative or Government Designated Authority and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.

2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).

   a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.

   b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.

3. Submit AHAs to the Contracting Officer Representative or Government Designated Authority for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as

amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.

4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.

5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the Contracting Officer Representative or Government Designated Authority.

1.6 PRECONSTRUCTION CONFERENCE:

A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.

B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.

C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within 14 calendar days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):

A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.

B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.

E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING:

A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.

C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented “repeat” deficiencies in the execution of safety requirements will require retaking the requisite formal course.

D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.

E. Submit training records associated with the above training requirements to the Contracting Officer Representative or Government Designated Authority for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance.

F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours,

locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the Contracting Officer Representative that individuals have undergone contractor's safety briefing.

G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.9 INSPECTIONS:

A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of the their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative or Government Designated Authority.

B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.

2. The Contracting Officer Representative or Government Designated Authority will be notified immediately prior to start of the inspection and invited to accompany the inspection.

3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.

4. A report of the inspection findings with status of abatement will be provided to Contracting Officer Representative or Government Designated Authority within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify the Contracting Officer Representative or Government Designated Authority as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incidents, High Visibility Incidents, , or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Contracting Officer Representative or Government Designated Authority determine whether a government investigation will be conducted.

B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least $20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent) , and provide the report to the or Contracting Officer Representative or Government Designated Authority within 5 calendar days of the accident. The Contracting Officer Representative or Government Designated Authority will provide copies of any required or special forms.

C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the Contracting Officer Representative or Government Designated Authority monthly.

D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the Contracting Officer Representative or Government Designated Authority monthly. The contractor and associated sub-contractors’ OSHA 300 logs will be made available to the

Contracting Officer Representative or Government Designated Authority as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE):

A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats – unless written authorization is given by the Contracting Officer Representative or Government Designated Authority in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.

2. Safety glasses - unless written authorization is given by the Contracting Officer Representative or Government Designated Authority in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.

3. Appropriate Safety Shoes – based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the Contracting Officer Representative or Government Designated Authority in circumstances of no foot hazards.

4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.

B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the Contracting Officer Representative or Government Designated Authority before beginning any construction work. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the Project Engineer. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class [__I__}**, however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:

1. Class I requirements:

   a. During Construction Work:

      1) Notify the Contracting Officer Representative or Government Designated Authority

      2) Execute work by methods to minimize raising dust from construction operations.

   b. Upon Completion:

1) Clean work area upon completion of task

2) Notify the // Project Manager // and Facility Safety // Manager // Officer // or Contracting Officer Representative // or Government Designated Authority //

C. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

D. A dust control program will be established and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to Project Engineer and Facility CSC for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

E. Medical center Infection Control personnel will monitor for airborne disease (e.g. aspergillosis) during construction. A baseline of conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.

H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.

2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.

3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center

area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.

4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.

5. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

I. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.

2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.

3. All new air ducts shall be cleaned prior to final inspection.

J. Exterior Construction

1. Contractor shall verify that dust will not be introduced into the medical center through intake vents, or building openings. HEPA filtration on intake vents is required where dust may be introduced.

2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary

3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

1.13 TUBERCULOSIS SCREENING

A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.

1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.

2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.

3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

1.14 FIRE SAFETY

A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Facility Safety Manager and Contracting Officer Representative or Government Designated Authority for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.

B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

DTemporary Construction Partitions:

F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Contracting Officer Representative or Government Designated Authority.

G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Contracting Officer Representative or Government Designated Authority.

H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Contracting Officer Representative or Government Designated Authority. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.

M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Contracting Officer Representative or Government Designated Authority.

N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Facility Safety Office. Obtain permits from facility Safety Manager at least 48____ hours in advance . Designate contractor's responsible project-site fire prevention program manager to permit hot work.

O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representativeor Government Designated Authority.

P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

R. If required, submit documentation to theFacility Safety Office COR or other Government Designated Authority that personnel have been trained

in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.15 ELECTRICAL

A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J – General Environmental Controls, 29 CFR Part 1910 Subpart S – Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.

B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The Contracting Officer Representative or Government Designated Authority with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.

2. Verification of the absence of voltage after de-energization and lockout/tagout is considered “energized electrical work” (live work)

under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.

3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the The Contracting Officer Representative or Government Designated Authority.

D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alterative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer Representative or Government Designated Authority and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C)(2)..

1.16 FALL PROTECTION

A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.

1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.

2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.

3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.

4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.17 SCAFFOLDS AND OTHER WORK PLATFORMS

A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.

B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.

C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.

2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.

3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.

4. Emergency descent devices shall not be used as working platforms.

D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible,

made of materials that will withstand the environment in which they are used, be legible and shall include:

1. The Competent Person's name and signature;

2. Dates of initial and last inspections.

E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.18 EXCAVATION AND TRENCHES

A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the contractor's "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeing, laying in, or stooping within the excavation is required.

B. All excavations and trenches 24 inches in depth or greater shall require a written trenching and excavation permit (NOTE – some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater than 5 feet in depth. Each section of the permit shall be provided to the Project Manager and/or Facility Safety Manager and/or other Government Designated Authority prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the Project Manager and/or Facility Safety Manager and/or other Government Designated Authority. The permit shall be maintained onsite and the first section of the permit shall include the following:

1. Estimated start time & stop time2. Specific location and nature of the work.

2. Indication of the contractor's "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the contractor's CP.

3. Indication of whether soil or concrete removal to an offsite location is necessary.

4. Indication of whether soil samples are required to determined soil contamination.

5. Indication of coordination with local authority (i.e. "One Call") or contractor's effort to determine utility location with search and survey equipment.

6. Indication of review of site drawings for proximity of utilities to digging/drilling.

C. The second section of the permit for excavations greater than five feet in depth shall include the following:

1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetronmeter will be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT2 – Type C, 0.5 Tons/FT2 to 1.5 Tons/FT2 – Type B, greater than 1.5 Tons/FT2 – Type A without condition to reduce to Type B).

2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as "Type A" or "Solid Rock", only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.

3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.

4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine

equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs, providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.

D As required by OSHA 29 CFR 1926.651(b)(1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.

1. The planned dig site will be outlined/marked in white prior to locating the utilities.

2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.

3. 811 will be called two business days before digging on all local or State lands and public Right-of Ways.

4. Digging will not commence until all known utilities are marked.

5. Utility markings will be maintained

E. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.

F. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

1.19 CRANES

A. All crane work shall comply with 29 CFR 1926 Subpart CC.

B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no “Phase In” date.

C. A detailed lift plan for all lifts shall be submitted to the Project Manager and/or Facility Safety Manager and/or other Government

Designated Authority 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.

D. Crane operators shall not carry loads

1. over the general public or VAMC personnel

2. over any occupied building unless

a. the top two floors are vacated

b. or overhead protection with a design live load of 300 psf is provided

1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].

B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the Project Manager and/or Facility Safety Manager and/or other Government Designated Authority.

1.22 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Project Manager and/or Facility Safety Manager and/or other Government Designated Authority. Obtain permits from Project Manager and/or Facility Safety Manager and/or other Government Designated Authority at least 24____ hours in advance . Designate contractor's responsible project-site fire prevention program manager to permit hot work.

1.23 LADDERS

A. All Ladder use shall comply with 29 CFR 1926 Subpart X.

B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.

C. Manufacturer safety labels shall be in place on ladders

D. Step Ladders shall not be used in the closed position

E. Top steps or cap of step ladders shall not be used as a step

F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.

1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.

2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.

G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.

B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.

C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.

1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.

2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.

3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.

4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.

5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to – GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:
DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.
http://www.aluminum.org

AABC Associated Air Balance Council
https://www.aabc.com

AAMA American Architectural Manufacturer's Association
http://www.aamanet.org

AASHTO American Association of State Highway and Transportation Officials
http://www.aashto.org

AATCC American Association of Textile Chemists and Colorists
http://www.aatcc.org

ACGIH American Conference of Governmental Industrial Hygienists
http://www.acgih.org

ACI American Concrete Institute
http://www.aci-int.net

ACPA American Concrete Pipe Association
http://www.concrete-pipe.org

ACPPA American Concrete Pressure Pipe Association
http://www.acppa.org

ADC Air Diffusion Council
http://flexibleduct.org

AGA American Gas Association
http://www.aga.org

AGC Associated General Contractors of America
http://www.agc.org

AGMA American Gear Manufacturers Association, Inc.
http://www.agma.org

AH American Hort
https://www.americanhort.org

AHAM Association of Home Appliance Manufacturers
http://www.aham.org

AIA American Institute of Architects

http://www.aia.org

AISC American Institute of Steel Construction
http://www.aisc.org

AISI American Iron and Steel Institute
http://www.steel.org

AITC American Institute of Timber Construction
https://aitc-glulam.org

AMCA Air Movement and Control Association, Inc.
http://www.amca.org

ANSI American National Standards Institute, Inc.
http://www.ansi.org

APA The Engineered Wood Association
http://www.apawood.org

ARI Air-Conditioning and Refrigeration Institute
http://www.ari.org

ARPM Association for Rubber Product Manufacturers
https://arpm.com

ASABE American Society of Agricultural and Biological Engineers
https://www.asabe.org

ASCE American Society of Civil Engineers
http://www.asce.org

ASHRAE American Society of Heating, Refrigerating, and Air-Conditioning Engineers
http://www.ashrae.org

ASME American Society of Mechanical Engineers
http://www.asme.org

ASSE American Society of Sanitary Engineering International
http://www.asse-plumbing.org

ASTM American Society for Testing and Materials International
http://www.astm.org

AWI Architectural Woodwork Institute
https://www.awinet.org

AWS American Welding Society
https://www.aws.org

AWWA American Water Works Association
https://www.awwa.org

BHMA Builders Hardware Manufacturers Association
https://www.buildershardware.com

BIA The Brick Industry Association
http://www.gobrick.com

CAGI Compressed Air and Gas Institute
https://www.cagi.org

CGA Compressed Gas Association, Inc.
https://www.cganet.com

CI The Chlorine Institute, Inc.
https://www.chlorineinstitute.org

CISCA Ceilings and Interior Systems Construction Association
https://www.cisca.org

CISPI Cast Iron Soil Pipe Institute
https://www.cispi.org

CLFMI Chain Link Fence Manufacturers Institute
https://www.chainlinkinfo.org

CPA Composite Panel Association
https://www.compositepanel.org

CPMB Concrete Plant Manufacturers Bureau
https://www.cpmb.org

CRA California Redwood Association
http://www.calredwood.org

CRSI Concrete Reinforcing Steel Institute
https://www.crsi.org

CTI Cooling Technology Institute
https://www.cti.org

DHA Decorative Hardwoods Association
https://www.decorativehardwoods.org

DHI Door and Hardware Institute
https://www.dhi.org

EGSA Electrical Generating Systems Association
http://www.egsa.org

EEI Edison Electric Institute
https://www.eei.org

EPA United States Environmental Protection Agency
https://www.epa.gov

ETL	ETL Testing Services http://www.intertek.com
FAA	Federal Aviation Administration https://www.faa.gov
FCC	Federal Communications Commission https://www.fcc.gov
FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org\
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry http://msshq.org
NAAMM	National Association of Architectural Metal Manufacturers https://www.naamm.org

PHCC Plumbing-Heating-Cooling Contractors Association
https://www.phccweb.org

NBS National Bureau of Standards
See - NIST

NBBI The National Board of Boiler and Pressure Vessel Inspectors
https://www.nationalboard.org

NEC National Electric Code
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
https://www.nema.org

NFPA National Fire Protection Association
https://www.nfpa.org

NHLA National Hardwood Lumber Association
https://www.nhla.com

NIH National Institute of Health
https://www.nih.gov

NIST National Institute of Standards and Technology
https://www.nist.gov

NELMA Northeastern Lumber Manufacturers Association, Inc.
http://www.nelma.org

NPA National Particleboard Association
(See CPA, Composite Panel Association)

NSF National Sanitation Foundation
http://www.nsf.org

OSHA Occupational Safety and Health Administration
Department of Labor
https://www.osha.gov

PCA Portland Cement Association
https://www.cement.org

PCI Precast Prestressed Concrete Institute
https://www.pci.org

PPI Plastics Pipe Institute
https://www.plasticpipe.org

PEI Porcelain Enamel Institute
http://www.porcelainenamel.com

PTI Post-Tensioning Institute
http://www.post-tensioning.org

RFCI	Resilient Floor Covering Institute https://www.rfci.com
RIS	Redwood Inspection Service (See Western Wood Products Association) https://www.wwpa.org
SCMA	Southern Cypress Manufacturers Association http://www.cypressinfo.org
SDI	Steel Door Institute http://www.steeldoor.org
SJI	Steel Joist Institute https://www.steeljoist.org
SMACNA	Sheet Metal & Air-Conditioning Contractors' National Association https://www.smacna.org
SSPC	The Society for Protective Coatings https://www.sspc.org
STI	Steel Tank Institute https://www.steeltank.com
SWI	Steel Window Institute https://www.steelwindows.com
TCNA	Tile Council of North America https://www.tcnatile.com
TEMA	Tubular Exchanger Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute https://www.tpinst.org
UBC	The Uniform Building Code (See ICC)
UL	Underwriters' Laboratories Incorporated https://www.ul.com
ULC	Underwriters' Laboratories of Canada https://www.ulc.ca
WCLB	West Coast Lumber Inspection Bureau http://www.wclib.org
WDMA	Window and Door Manufacturers Association https://www.wdma.com

WRCLA Western Red Cedar Lumber Association
https://www.realcedar.com

WWPA Western Wood Products Association
http://www.wwpa.org

- - - E N D - - -

SECTION 01 45 00
QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies requirements for Contractor Quality Control (CQC) for Design-Bid-Build (DBB) or Design-Build (DB) construction projects. This section can be used for both project types.

1.2 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

B. ASTM International (ASTM)

1. D3740 - (2012a) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
2. E329 - (2014a) Standard Specification for Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

1.3 SUBMITTALS

Government approval is required for all submittals. CQC inspection reports shall be submitted under this Specification section and follow the [Applicable CQC Control Phase (Preparatory, Initial, or Follow-Up)]: [Applicable Specification section] naming convention.

1. Preconstruction Submittals
    a. Interim CQC Plan
    b. CQC Plan
    c. Additional Requirements for Design Quality Control (DQC) Plan
2. Design Data
    a. Discipline-Specific Checklists
    b. Design Quality Control
3. Test Reports
    a. Verification Statement

PART 2 PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

Establish and maintain an effective quality control (QC) system. that complies with the FAR Clause 52.246.12 titled "Inspection of Construction". QC consists of plans, procedures, and organization necessary to produce an end product which complies with the Contract requirements. The QC system covers all design and construction operations, both onsite and offsite, and be keyed to the proposed design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Office or Authorized designee for non-compliance with the quality requirements specified in the Contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent maintains a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer.

3.2 CQC PLAN:

A. Submit the CQC Plan no later than 60 days after receipt of Notice to Proceed (NTP) proposed to implement the requirements of the FAR Clause 52.246.12 titled "Inspection of Construction". The Government will consider an Interim CQC Plan for the first 60 days of operation, which must be accepted within 20 business days of NTP. Design and/or construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an Interim plan applicable to the particular feature of work to be started. Work outside of the accepted Interim CQC Plan will not be permitted to begin until acceptance of a CQC Plan or another Interim CQC Plan containing the additional work scope is accepted.

B. Content of the CQC Plan: Include, as a minimum, the following to cover all design and construction operations, both onsite and offsite, including work by subcontractors, designers of record consultants,

architects/engineers (A/E), fabricators, suppliers, and purchasing agents:

1. A description of the QC organization, including a chart showing lines of authority and acknowledgement that the CQC staff will implement the three phase control system for all aspects of the work specified. Include a CQC System Manager that reports to the project superintendent.
2. The name, qualifications (in resume format) duties, responsibilities, and authorities of each person assigned a CQC function.
3. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the Contract. Letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities will be issued by the CQC System Manager. Furnish copies of these letters to the Contracting Officer or Authorized designee.
4. Procedures for scheduling, reviewing, certifying, and managing submittals including those of subcontractors, designers of record, consultants, A/E's offsite fabricators, suppliers and purchasing agents. These procedures must be in accordance with Section 01 33 23 Shop Drawings, Product Data, and Samples.
5. Control, verification, and acceptance of testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the Contracting Officer or Authorized designee are required to be used)
6. Procedures for tracking Preparatory, Initial, and Follow-Up control phases and control, verification, and acceptance tests including documentation.
7. Procedures for tracking design and construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected.

8. Reporting procedures, including proposed reporting formats.
9. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks has separate control requirements, and is identified by different trades or disciplines, or it is work by the same trade in a different environment. Although each section of specifications can generally be considered as a definable feature of work, there are frequently more than one definable feature under a particular section. This list will be agreed upon during the Coordination meeting.
10. Coordinate schedule work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections and Schedule of Special Inspections. Where the applicable Code issue by the International Code Council (ICC) calls for inspections by the Building Official, the Contractor must include the inspections in the CQC Plan and must perform the inspections required by the applicable ICC. The Contractor must perform these inspections using independent qualified inspectors. Include the Special Inspection Plan requirements in the CQC Plan.

C. Additional Requirements for Design Quality Control (DQC) Plan: The following additional requirements apply to the DQC Plan for DB projects only and not DBB projects:

1. Submit and maintain a DQC Plan as an effective QC program which assures that all services required by this contract are performed and provided in a manner that meets professional architectural and engineering quality standards. As a minimum, all documents must be technically reviewed by competent, independent reviewers identified in the DQC Plan. The same element that produced the product may not perform the independent technical review (ITR). Correct errors and deficiencies in the design documents prior to submitting them to the Government.
2. Include the design schedule in the master project schedule, showing the sequence of events involved in carrying out the project design tasks within the specific Contract period. This should be at a detailed level of scheduling sufficient to identify all major design tasks, including those that control the flow of work. Include review and correction periods associated with each item. This should be a forward planning as well as a project monitoring tool. The schedule

reflects calendar days and not dates for each activity. If the schedule is changed, submit a revised schedule reflecting the change within 7 calendar days. Include in the DQC Plan the discipline-specific checklists to be used during the design and quality control of each submittal. Submit at each design phase as part of the project documentation these completed discipline-specific checklists.

3. Implement the DQC Plan by a DQC Manager who has the responsibility of being cognizant of and assuring that all documents on the project have been coordinated. This individual must be a person who has verifiable engineering or architectural design experience and is a Professional Engineer or Registered Architect within the state of Construction location. Notify the Contracting Officer or Authorized designee, in writing, of the name of the individual, and the name of an alternate person assigned to the position.

D. Acceptance of Plan: Acceptance of the Contractor’s plan is required prior to the start of design and construction. Acceptance is conditional and will be predicated on satisfactory performance during the design and construction. The Government reserves the right to require the Contractor to make changes in the CQC Plan and operations including removal of personnel as necessary, to obtain the quality specified.

E. Notification of Changes: After acceptance of the CQC Plan, notify the Contracting Officer or Authorized designee in writing of any proposed change. Proposed changes are subject to acceptance by the Government prior to implementation by the Contractor.

3.3 COORDINATION MEETING:

After the Preconstruction Conference Post-award Conference before start of design or construction, and prior to acceptance by the Government of the CQC Plan, meet with the Contracting Officer or Authorized designee to discuss the Contractor’s quality control system. Submit the CQC Plan a minimum of 5 business days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CC operations, design activities (if applicable), control activities, testing, administration

of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting will be prepared by the Government, signed by both the Contractor and Contracting Officer or Authorized designee and will become a part of the contract file. There can be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

3.4 QUALITY CONTROL ORGANIZATION:

A. Personnel Requirements: The requirements for the CQC organization are a Safety and Health Manager, CQC System Manager, a Design Quality Manager (if applicable), and sufficient number of additional qualified personnel to ensure safety and Contract compliance. The Safety and Health Manager shall satisfy the requirements of Specification 01 35 26 Safety Requirements and reports directly to a senior project (or corporate) official independent from the CQC System Manager. The Safety and Health Manager will also serve as a member of the CQC Staff. Personnel identified in the technical provisions as requiring specialized skills to assure the required work is being performed properly will also be included as part of the CQC organization. The Contractor's CQC staff maintains a presence at the site at all times during progress of the work and have complete authority and responsibility to take any action necessary to ensure Contract compliance. The CQC staff will be subject to acceptance by the Contracting Officer or Authorized designee. Provide adequate office space, filing systems, and other resources as necessary to maintain an effective and fully functional CQC organization. Promptly complete and furnish all letters, material submittals, shop drawings submittals, schedules and all other project documentation to the CQC organization. The CQC organization is responsible to maintain these documents and records at the site at all times, except as otherwise acceptable to the Government.

B. CQC System Manager: Identify as CQC System Manager an individual within the onsite work organization that is responsible for overall management of CQC and has the authority to act in all CQC matters for the

Contractor. The CQC system Manager is required to be a graduate engineer, graduate architect, or a graduate of construction management, with a minimum of PM or SRE to determine qualifications based on project complexity at construction review 5 years construction experience on construction similar to the scope of this Contract. This CQC System manager is on the site at all times during construction and is employed by the General Contractor. Identify in the plan an alternate to serve in the event of the CDQC System Manager's absence. The requirements for the alternate are the same as the CQC System Manager.

C. CQC Personnel: In addition to CQC personnel specified elsewhere in the contract, provide as part of the CQC organization specialized personnel to assist in the CQC System Manager for the following areas, as applicable: electrical, mechanical, civil, structural, environmental, architectural, materials technician submittals clerk, Commissioning Agent/LEED specialist, and low voltage systems. These individuals or specified technical companies are directly employed by the General Contractor and cannot be employed by a supplier or subcontractor on this project; be responsible to the CQC System Manager; be physically present at the construction site during work on the specialized personnel's areas of responsibility; have the necessary education or experience in accordance with the Experience Matrix listed herein. These individuals can perform other duties but need to be allowed sufficient time to perform the specialized personnel's assigned quality controls duties as described in the CQC Plan. A single person can cover more than one area provided that the single person is qualified to perform QC activities in each designated and that workload allows.

EXPERIENCE MATRIX

Area	Qualifications
Civil	Graduate Civil Engineer or Construction Manager with 2 years experience in the type of work being performed on this project or technician with 5 years related experience.

Area	Qualifications
Mechanical	Graduate Mechanical Engineer with 2 years experience or construction professional with 5 years of experience supervising mechanical features of work in the field with a construction company.
Electrical	Graduate Electrical Engineer with 2 years related experience or construction professional with 5 years of experience supervising electrical features of work in the field with a construction company.
Structural	Graduate Civil Engineer (with Structural Track or Focus), Structural Engineer, or Construction Manager with 2 years experience or construction professional with 5 years experience supervising structural features of work in the field with a construction company.
Architectural	Graduate Architect with 2 years experience or construction professional with 5 years of related experience.
Environmental	Graduate Environmental Engineer with 3 years experience.
Submittals	Submittal Clerk with 1 year experience.
Concrete, Pavement, and Soils	Materials Technician with 2 years experience for the appropriate area.
Testing, Adjusting, and Balancing (TAB)	Specialist must be a member of AABC or an experienced technician of the firm certified by the NEBB.
Design Quality Control Manager	Registered Architect or Professional Engineer

D. Additional Requirements: In addition to the above experience and education requirements, the CQC System Manager and Alternate CQC System Manager are required to have completed the Construction Quality Management (CQM) for Construction course. If the CQC System Manager does not have a current specification, obtain the CQM for Contractors course identification within 90 days of award. This course is periodically offered by the Naval Facilities Engineering Command and the Army Corps of Engineers. Contact the Contracting Officer or Authorized designee for information on the next scheduled class.

E. Organizational Changes: Maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer or Authorized designee for acceptance.

3.5 **SUBMITTALS AND DELIVERABLES:** Submittals have to comply with the requirements in Section 01 33 23 Shop Drawings, Product Data, and Samples. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements. When Section 01 91 00 General Commissioning Requirements is included in the contract, the submittals required by the section have to be coordinated with the Section 01 33 23 Shop Drawings, Product Data, and Samples to ensure adequate time is allowed for each type of submittal required.

3.6 CONTROL:

A. CQC is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control are required to be conducted by the CQC System Manager for each definable feature of the construction work as follows:

1. Preparatory Phase: This phase is performed prior to beginning work on each definable feature of work after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase includes:
   a. A review of each paragraph of applicable specifications, references codes, and standards. Make available during the preparatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.
   b. Review of the Contract drawings.
   c. Check to assure that all materials and equipment have been tested, submitted, and approved.
   d. Review of provisions that have been made to provide required control inspection and testing.

e. Review Special Inspections required by Section 01 45 35 Special Inspections, that Statement of Special Inspections and the Schedule of Specials Inspections.

f. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the Contract.

g. Examination of required materials, equipment, and sample work to assure that they are on hand conform to approved shop drawings or submitted data, and are properly stored.

h. Review of the appropriate Activity Hazard Analysis (AHA) to assure safety requirements are met.

i. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards – contract defined or industry standard if not contract defined - for that feature of work.

j. Check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.

k. Discussion of the initial control phase.

l. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the Preparatory control phase. Include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. Document the results of the Preparatory phase actions by separate minutes prepared by the CQC System Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

B. Initial Phase: This phase is accomplished at the beginning of a definable feature of work. Accomplish the following:

1. Check work to ensure that it is in full compliance with contract requirements. Review minutes of the Preparatory meeting.

2. Verify adequacy of controls to ensure full contract compliance. Verify the required control inspection and testing is in compliance with the contract.

3. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
4. Resolve all differences.
5. Check safety to include compliance with an upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
6. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the initial phase for definable features of work. Prepare separate minutes of this phase by the CQC System Manager and attach to the daily CQC report. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with Follow-Up phases.
7. The initial phase for each definable feature of work is repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.
8. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections.

C. Follow-Up Phase: Perform daily checks to assure control activities, including control testing, are providing continued compliance with contract requirements until the completion of the particular feature of work. Record the checks in the CQC documentation. Conduct final Follow-Up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work. Do not build upon nor conceal non-conforming work. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections

D. Additional Preparatory and Initial Phases on the same definable features of work if: the quality ongoing work is unacceptable; if there are changes in the applicable CQC staff, onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity, or if other problems develop.

3.7 TESTS

A. Testing Procedure: Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and acceptance test when specified. Procure the services of a Department of Veteran Affairs approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:

1. Verify that testing procedures comply with contract requirements.
2. Verify that facilities and testing equipment are available and comply with testing standards.
3. Check test instrument calibration data against certified standards.
4. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
5. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the unique sequential control number identifying the test. If approved by the Contracting Officer or Authorized designee, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the Contracting Officer or Authorized designee. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this Contract.

B. Testing Laboratories: All testing laboratories must be validated through the procedures contained in Specification section 01 45 29 Testing Laboratory Services.

1. Capability Check: The Government reserves the right to check laboratory equipment in the proposed laboratory for compliance with the standards set forth in the contract specifications and to check the laboratory technician’s testing procedures and techniques. Laboratories utilized for testing soils, concrete, asphalt and steel is required to meet criteria detailed in ASTM D3740 and ASTM E329.

2. Capability Recheck: If the selected laboratory fails the capability check, the Contractor will be assessed a charge equal to value of recheck to reimburse the Government for each succeeding recheck of the laboratory or the checking of a subsequently selected laboratory. Such costs will be deducted from the Contract amount due the Contractor.

C. Onsite Laboratory: The Government reserves the right to utilize the Contractor's control testing laboratory and equipment to make assurance tests, and to check the Contractor's testing procedures, techniques, and test results at no additional cost to the Government.

3.8 COMPLETION INSPECTION

A. Punch-Out Inspection: Conduct an inspection of the work by the CQC system Manager near the end of the work, or any increment of the work established by the specifications. Prepare and include in the CQC documentation a punch list of items which do not conform to the approved drawings and specifications. Include within the list of deficiencies the estimated date by which the deficiencies will be corrected. Make a second inspection the CQC System Manager or staff to ascertain that all deficiencies have been corrected. Once this is accomplished, notify the Government that the facility is ready for the Government Pre-Final Inspection.

B. Pre-Final Inspection: The Government will perform the Pre-Final Inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. Ensure that all items on this list have been corrected before notifying the Government, so that a Final Acceptance Inspection with the customer can be scheduled. Correct any items noted on the Pre-Final Inspection in a timely manner. These inspections and any deficiency corrections required by this paragraph need to be accomplished within the time slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate construction completion dates.

C. Final Acceptance Inspection: The Contractor's QC Inspection personnel, plus the superintendent or other primary management person, and the Contracting Officer's Authorized designee is required to be in attendance at the Final Acceptance Inspection. Additional Government

personnel can also be in attendance. The Final Acceptance Inspection will be formally scheduled by the Contracting Officer's or Authorized designee based upon results of the Pre-Final Inspection. Notify the Contracting Officer through the Resident Engineer office at least 14 days prior to the Final Acceptance Inspection and include the Contractor's assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date schedule for the Final Acceptance Inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with FAR Clause 52.246-12 titled "Inspection of Construction".

3.9 DOCUMENTATION

A. Quality Control Activities: Maintain current records providing factual evidence that required QC activities and tests have been performed. Include in these records the work of subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:

1. The name and area of responsibility of the Contractor/Subcontractor
2. Operating plant/equipment with hours worked, idle, or down for repair.
3. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
4. Test and control activities performed with results and references to specification/drawing requirements. Identify the Control Phase (Preparatory, Initial, and/or Follow-Up). List deficiencies noted, along with corrective action.
5. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specification/drawing requirements.
6. Submittals and deliverables reviewed, with Contract reference, by whom, and action taken.
7. Offsite surveillance activities, including actions taken.

8. Job safety evaluations stating what was checked, results, and instructions or corrective actions.
9. Instructions given/received and conflicts in plans and specifications.
10. Provide documentation of design quality control activities. For independent design reviews, provide, as a minimum, identification of the Independent Technical Reviewer (ITR) team, the ITR review comments, responses, and the record of resolution of the comments.

B. Verification Statement: Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the Contract. Furnish the original and one copy of these records in report form to the Government daily with 1 week after the date covered by the report, except that reports need not be submitted for days on which no work is performed. As a minimum, prepare and submit on report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the CQC System Manager. Include copies of test reports and copies of reports prepared by all subordinate QC personnel within the CQC System Manager Report.

3.10 SAMPLE FORMS

Templates of various quality control reports can be found on the Whole Building Design Guide website at https://www.wbdg.org/FFC/NAVGRAPH/01%2045%2000.00%2020_quality_control_reports.pdf

3.11 **NOTIFICATION OF NONCOMPLIANCE:** The Contracting Officer or Authorized designee will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor should take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site will be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer can issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made

the subject of claim for extension of time or for excess costs or damages by the Contractor.

--- End of Section ---

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the Department of Veterans Affairs.

1.2 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates

T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine

T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop

T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate

T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop

T191-02(R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method

T310-13.....Standard Method of Test for In-place Density and Moisture Content of Soil and Soil-aggregate by Nuclear Methods (Shallow Depth)

C. American Concrete Institute (ACI):

506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

D. American Society for Testing and Materials (ASTM):

A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

C140-12.....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength of Masonry Prisms

D422-63(2007).....Standard Test Method for Particle-Size Analysis of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort

D1140-00(2006).....Standard Test Methods for Amount of Material in Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000ft lbf/ft3 (2,700 KNm/m3))

D2166-06.....Standard Test Method for Unconfined Compressive Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2216-10.....Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as used in Engineering Design and Construction

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)
E94-04(2010).....Standard Guide for Radiographic Examination
E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments
E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing
E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members
E709-08.....Standard Guide for Magnetic Particle Examination
E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers
F3125/F3125M-15.....Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

E. American Welding Society (AWS):
D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory’s scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the “Corporate Office.”

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by Resident Engineer. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of Resident Engineer to such failure.

C. Written Reports: Testing laboratory shall submit test reports to Resident Engineer, Contractor, unless other arrangements are agreed to in writing by the Resident Engineer. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to Resident Engineer immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:

1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the Resident Engineer regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to Resident Engineer extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
2. Provide part time observation of fill placement and compaction and field density testing in building areas and provide part time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698 and/or ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556 or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the Resident Engineer before the tests are conducted.
   a. Building Slab Subgrade: At least one test of subgrade for every 185 m^2 (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test for every 185 m^2 (2000 square feet) of overlaying building slab, but in no case fewer than three tests.
   b. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
   c. Pavement Subgrade: One test for each 335 m^2 (400 square yards), but in no case fewer than two tests.
   d. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
   e. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
   f. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to Resident Engineer. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.

C. Fill and Backfill Material Gradation: One test per 1,000 yards stockpiled or in-place source material. Gradation of fill and backfill

material shall be determined in accordance with ASTM C136, ASTM D422, or ASTM D1140.

D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.

E. Testing Materials: Test suitability of on-site and off-site borrow as directed by Resident Engineer.

3.2 FOUNDATION PILES:

A. Witness load test procedure for conformance with ASTM D1143 and interpret test data to verify geotechnical recommendations for pile capacity. Submit load test report in accordance with ASTM D1143.

B. Review Contractor's equipment, methods, and procedures prior to starting any work on site. Provide continuous inspection of pile installation. Maintain a record of all pertinent phases of operation for submittal to Resident Engineer.

C. Auger-Placed Piles: Take and test samples of grout in accordance with ASTM C109 for conformance with specified strength requirements. Not less than six cubes shall be made for each day of casting. Test three cubes at 7 days and three at 28 days. //

//D. Cast-in-Place Concrete Piles: Test concrete including materials for concrete as required in Article CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced. //

3.3 FOUNDATION CAISSONS:

A. Concrete Testing: Test concrete including materials for concrete as required in Article, CONCRETE of this section, except make two test cylinders for each day's placement of concrete.

B. Maintain a record of concrete used in each caisson. Compare records with calculated volumes.

C. Inspect percussion hole in bottom of each caisson to determine that material is capable of supporting design load.

D. Inspect sides and bottom of each caisson for compliance with contract documents.

E. Submit a certified “Caisson Field Record” for each caisson, recording actual elevation at bottom of shaft; final center line location of top; variation of shaft from plumb; results of all tests performed; actual allowable bearing capacity of bottom; depth of socket into rock; levelness of bottom; seepage of water; still water level (if allowed to

flood); variation of shaft (from dimensions shown); location and size of reinforcement, and evidence of seams, voids, or channels below the bottom. Verify the actual bearing capacity of the rock strata by the use of a calibrated penetrometer or other acceptable method.

F. Caissons Bearing on Hardpan: Take undisturbed samples, suitable for tests required, from caisson bottom. Make auger probe to a depth of 2.5 meters (8 feet) below bottom and visually inspect and classify soil. Verify continuity of strata and thickness.

1. Conduct the following test on each sample, and report results and evaluations to the Resident Engineer:
   a. Unconfined Compression Test (ASTM D2166).
   b. Moisture Content (ASTM D2216).
   c. Density.

3.4 LANDSCAPING:

A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.

1. Test for organic material by using ASTM D2974.
2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.

B. Submit laboratory test report of topsoil to Resident Engineer.

3.5 ASPHALT CONCRETE PAVING:

A. Aggregate Base Course:

1. Determine maximum density and optimum moisture content for aggregate base material in accordance with ASTM D1557, Method D
2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with ASTM D1556.
3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.

B. Asphalt Concrete:

1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.

3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

3.6 SITE WORK CONCRETE:

Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.7 POST-TENSIONING OF CONCRETE:

A. Inspection Prior to Concreting: Inspect tendons, drape of tendons, and anchorage components for compliance prior to concreting.

B. Concrete Testing: As required in Article, CONCRETE of this section except make three test cylinders representing each area to be tensioned and cylinders shall be cured in same manner as concrete they represent. Make compression test prior to determining minimum specified strength required for post-tensioning.

C. Post-tensioning: Witness post-tensioning operation and record actual gauge pressures and elongations applied to each tendon.

D. Submit reports in quadruplicate of the following:

1. Inspection of placement and post-tensioning of all tendons.
2. Size, number, location, and drape of tendons.
3. Calculated elongations, based upon the length, modulus of elasticity, and cross-sectional area of the tendons used.
4. Actual field elongations. Check elongation of tendons within ranges established by manufacturer.
5. Calculated gauge pressure and jacking force applied to each tendon.
6. Actual gauge pressures and jacking force applied to each tendon.
7. Required concrete strength at time of jacking.
8. Actual concrete strength at time of jacking.
9. Do not cut or cover the tendon ends until the Contractor receives the Resident Engineer’s written approval of the post-tensioning records.

3.8 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of Resident Engineer with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by Resident Engineer.

2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to Resident Engineer.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:
1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor’s expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m^3 (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. // After good concrete quality control has been established and maintained as determined by Resident Engineer make three cylinders for each 80 m^3 (100 cubic yards) or less of each concrete type, and at least three cylinders from any one day's pour for each concrete type. // Label each cylinder with an identification number. Resident Engineer may require additional cylinders to be molded and cured under job conditions.

4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m^3 (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m^3 (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
    a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
    b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.

12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
    a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
    b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
    a. Monitor and record amount of water added at project site.
    b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
    a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
    b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
    c. Provide the Contractor and the Resident Engineer with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
    a. Grouting under base plates.
    b. Grouting anchor bolts and reinforcing steel in hardened concrete.

C. Laboratory Tests of Field Samples:
    1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by Resident Engineer. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling,

molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.

2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to Resident Engineer. In test report, indicate the following information:
   a. Cylinder identification number and date cast.
   b. Specific location at which test samples were taken.
   c. Type of concrete, slump, and percent air.
   d. Compressive strength of concrete in MPa (psi).
   e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
   f. Weather conditions during placing.
   g. Temperature of concrete in each test cylinder when test cylinder was molded.
   h. Maximum and minimum ambient temperature during placing.
   i. Ambient temperature when concrete sample in test cylinder was taken.
   j. Date delivered to laboratory and date tested.

3.9 REINFORCEMENT:

A. Review mill test reports furnished by Contractor.

B. Make one tensile and one bend test in accordance with ASTM A370 from each pair of samples obtained.

C. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.

D. Perform tension tests of mechanical and welded splices in accordance with ASTM A370.

3.10 SHOTCRETE:

A. Inspection and Material Testing:
   1. Provide field inspection and testing service as required by Resident Engineer to certify that shotcrete has been applied in accordance with contract documents.
   2. Periodically inspect and test proportioning equipment for accuracy and report deficiencies to Resident Engineer.
   3. Sample and test mix ingredients as necessary to insure compliance with specifications.

4. Sample and test aggregates daily and as necessary for moisture content. Report instances of excessive moisture to Resident Engineer.
5. Certify, in duplicate, that ingredients and proportions and amounts of ingredients in shotcrete conform to approved trial mixes.
6. Provide field inspection of the proper size and placement of the reinforcement in the shotcrete.

B. Shotcrete Sampling:
1. Provide a technician at site of placement to perform shotcrete sampling.
2. Take cores in accordance with ACI 506.
3. Insure maintenance of water-cement ratio established by approved trial mix.
4. Verify specified mixing has been accomplished.

C. Laboratory Tests of Field Sample Panels:
1. Compression test core for strength in accordance with ACI 506. For each test series of three cores, test one core at 7 days and one core at 28 days. Use remaining core as a spare to be tested at either 7 or 28 days as required. Compile laboratory test reports as follows: Compressive strength test shall be result of one core, except when one core shows evidence of improper sampling or testing, in which case it shall be discarded and strength of spare core shall be used.
2. Submit certified compression test reports (duplicate) to Resident Engineer. On test report, indicate following information:
   a. Core identification number and date cast.
   b. Specific location at which test samples were taken.
   c. Compressive strength of shotcrete in MPa (psi).
   d. Weather conditions during placing.
   e. Temperature of shotcrete in each test core when test core was taken.
   f. Maximum and minimum ambient temperature during placing.
   g. Ambient temperature when shotcrete sample was taken.
   h. Date delivered to laboratory and date tested.

D. Submit inspection reports certification and instances of noncompliance to Resident Engineer.

3.11 PRESTRESSED CONCRETE:

A. Inspection at Plant: Forms, placement and concrete cover of reinforcing steel and tendons, placement and finishing of concrete, and tensioning of tendons.

B. Concrete Testing: Test concrete including materials for concrete required in Article, CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced.

C. Test tendons for conformance with ASTM A416 and furnish report to Resident Engineer.

D. Inspect members to insure that specification requirements for curing and finishes have been met.

3.12 ARCHITECTURAL PRECAST CONCRETE:

A. Inspection at Plant: Forms, placement of reinforcing steel, concrete cover, and placement and finishing of concrete.

B. Concrete Testing: Test concrete including materials for concrete as required in Article CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced.

C. Inspect members to insure specification requirements for curing and finishes have been met.

3.13 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:
   a. Comply with ASTM C780.
   b. Obtain samples during or immediately after discharge from batch mixer.
   c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
   d. Test one sample at 7 days and 2 samples at 28 days.
2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
   a. Comply with ASTM C1019.
   b. Test one sample at 7 days and 2 samples at 28 days.
   c. Perform test for each 230 m^2 (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
   a. Comply with ASTM C140.
   b. Test 3 samples for each 460 m^2 (5000 square feet) of wall area.

D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m^2 (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.14 STRUCTURAL STEEL:

A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:
   1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
   2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
   3. Approve welder qualifications by certification or retesting.
   4. Approve procedure for control of distortion and shrinkage stresses.
   5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:
   1. Weld Inspection:
      a. Inspect welding equipment for capacity, maintenance and working condition.
      b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
      c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
      d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
      e. Measure 25 percent of fillet welds.
      f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
         1) 20 percent of all shear plate fillet welds at random, final pass only.
         2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.

3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.

g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
h. Welding Radiographic Testing: Test in accordance with ASTM E94, and AWS D1.1 for 5 percent of all full penetration welds at random.
i. Verify that correction of rejected welds are made in accordance with AWS D1.1.
j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.

2. Bolt Inspection:
a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.

e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.

f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.

D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to Resident Engineer.

3.15 STEEL DECKING:

A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.

B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."

C. Submit inspection reports, certification, and instances of noncompliance to Resident Engineer.

3.16 SHEAR CONNECTOR STUDS:

A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.

B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.

C. Submit inspection reports, certification, and instances of noncompliance to Resident Engineer.

3.17 SPRAYED-ON FIREPROOFING:

A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.

B. Obtain a copy of approved submittals from Resident Engineer.

C. Use approved installation in test areas as criteria for inspection of work.

D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.

1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.

E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
2. Density: Take density determinations from each floor, or one test from each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to Resident Engineer.

3.18 TYPE OF TEST:

Approximate Number of Tests Required

A. Earthwork:

Laboratory Compaction Test, Soils:
//(AASHTO T180)//(AASHTO T99)//(ASTM D1557)//(ASTM D698)// _____
Field Density, Soils (AASHTO T191, T205, or T310) _____
Penetration Test, Soils _____

B. Landscaping:

Topsoil Test _____

C. Aggregate Base:

Laboratory Compaction, // (AASHTO T180)// //(ASTM D1557)// _____
Field Density,//(AASHTO T191)// //(ASTM D1556)// _____
Aggregate, Base Course Gradation (AASHTO T27) _____
Wear (AASHTO T96) _____
Soundness (AASHTO T104) _____

D. Asphalt Concrete:

Field Density, (AASHTO T230)//ASTM D1188// _____
Aggregate, Asphalt Concrete Gradation (AASHTO T27) _____
Wear (AASHTO T96) _____
Soundness (AASHTO T104) _____

E. Concrete:

Making and Curing Concrete Test Cylinders (ASTM C31) _____
Compressive Strength, Test Cylinders (ASTM C39) _____
Concrete Slump Test (ASTM C143) _____
Concrete Air Content Test (ASTM C173) _____
Unit Weight, Lightweight Concrete (ASTM C567) _____
Aggregate, Normal Weight: Gradation (ASTM C33) _____
Deleterious Substances (ASTM C33) _____
Soundness (ASTM C33) _____
Abrasion (ASTM C33) _____
Aggregate, Lightweight Gradation (ASTM C330) _____
Deleterious Substances (ASTM C330) _____
Unit Weight (ASTM C330) _____
Flatness and Levelness Readings (ASTM E1155) (number of days) _____

F. Reinforcing Steel:
Tensile Test (ASTM A370) _____
Bend Test (ASTM A370) _____
Mechanical Splice (ASTM A370) _____
Welded Splice Test (ASTM A370) _____

G. Shotcrete:
Taking and Curing Test Cores (ACI 506) _____
Compressive Strength, Test Cores (ACI 506) _____

H. Prestressed Concrete:
Testing Strands (ASTM A416) _____

I. Masonry:
Making and Curing Test Cubes (ASTM C109) _____
Compressive Strength, Test Cubes (ASTM C109) _____
Sampling and Testing Mortar, Comp. Strength (ASTM C780) _____
Sampling and Testing Grout, Comp. Strength (ASTM C1019) _____
Masonry Unit, Compressive Strength (ASTM C140) _____
Prism Tests (ASTM C1314) _____

J. Structural Steel:
Ultrasonic Testing of Welds (ASTM E164) _____
Magnetic Particle Testing of Welds (ASTM E709) _____

Radiographic Testing of Welds (ASTM E94) _____

K. Sprayed-On Fireproofing:

Thickness and Density Tests (ASTM E605) _____

//L. Inspection:

Technical Personnel (Man-days) _____//

//L. Technical Personnel: (Minimum _____ months)

1. Technicians to perform tests and inspection listed above. Laboratory will be equipped with concrete cylinder storage facilities, compression machine, cube molds, proctor molds, balances, scales, moisture ovens, slump cones, air meter, and all necessary equipment for compaction control. //

- - - E N D - - -

SECTION 01 45 35
SPECIAL INSPECTIONS

PART 1 - GENERAL

1.1 **DESCRIPTION**

A. This guide specification will be applicable to both new buildings and existing building rehabilitations/renovations. In addition to the Special Inspection and testing specified requirements, a registered design professional must perform structural observations during construction. All observed deficiencies will be immediately reported to the Contracting Officer. The registered design professional performing these observations will be a representative of the Designer of Record (DOR) for the building being constructed.

B. Structural observations are required for the following project conditions per IBC Chapter 17:

1. Seismic Design Category D, E or F; and assigned to Risk Cat III, IV or V.
2. Seismic Design Category D, E or F; and with a height greater than 22860 mm 75 ft.
3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two stories above grade plane.
4. Nominal design wind speed in excess of 49 m/sec 110 mph; and assigned to Risk Cat III, IV or V.
5. Nominal design wind speed in excess of 49 m/sec 110 mph; and with a height greater than 23 m 75 ft.

1.2 **APPLICABLE PUBLICATIONS**

A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

B. American Society of Civil Engineers (ASCE)

1. ASCE 7 - (2010; Errata 2011; Supp 2 2013) Minimum Design Loads for Buildings and Other Structures

C. International Code Council (ICC)

2. ICC IBC - (2015) International Building Code

1.3 **GENERAL REQUIREMENTS**

A. Perform Special Inspections in accordance with the Statement of Special Inspections, Schedule of Special Inspections and Chapter 17 of ICC IBC. The Statement of Special Inspections and Schedule of Special Inspections are included as an attachment to this specification. Special Inspections are to be performed by an independent third party and are intended to ensure that the work of the prime contractor is in accordance with the Contract Documents and applicable building codes. Special inspections do not take the place of the three phases of control inspections performed by the Contractor's QC Manager or any testing and inspections required by other sections of the specifications.

1.4 **DEFINITIONS**

A. Continuous Special Inspections – The constant monitoring of specific tasks by a special inspector. These inspections must be carried out continuously over the duration of the particular tasks.

B. Periodic Special Inspections – Special Inspections by the special inspector who is intermittently present where the work to be inspected has been or is being performed. Specific time interval on a specific Special Inspection should be indicated on the Schedule of Special Inspections.

C. Perform – Perform these Special Inspections tasks for each welded joint or member.

D. Observe – Observe these Special Inspections items on a random daily basis. Operations need not be delayed pending these inspections.

E. Special Inspector (SI) – A qualified person retained by the contractor and approved by the Contracting Officer as having the competence necessary to inspect a particular type of construction requiring Special Inspections. The SI must be an independent third party hired directly by the Prime Contractor.

F. Associate Special Inspector (ASI) – A qualified person who assists the SI in performing Special Inspections but must perform inspection under the direct supervision of the SI and cannot perform inspections without the SI on site.

G. Third Party – A third party inspector must not be company employee of the Contractor or any Sub-Contractor performing the work to be inspected.

H. Special Inspector of Record (SIOR) – SIOR must be an independent third party hired directly by the Prime Contractor and is required for the following project conditions:
   1. Seismic Design Category D, E, or F; and assigned to Risk Category III, IV, or V.
   2. Seismic Design Category D, E, or F; and with a height greater than 22860mm 75 ft.
   3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two (2) stories above grade plane.
   4. Nominal design wind speed in excess o f49 m/sec 100 mph; and assigned to Risk Category III, IV, or V.
   5. Nominal design wind speed in excess of 49 mm/sec 100mph; and with a height greater than 23m 75ft.
   6. In addition to these conditions, the DOR is encouraged to consider using an SIOR on large magnitude or critical projects where this additional level of quality control is affordable.

I. Contracting Officer – The Government official having overall authority for administrative contracting actions. Certain contracting actions may be delegated to the Contracting Officer's Representative (COR).

J. Contractor’s Quality Control (QC) Manager – An individual retained by the prime contractor and qualified in accordance with the Section 01 45 00.00 10 QUALITY CONTROL having the overall responsibility for the contractor's QC organization.

K. Designer of Record (DOR) – A registered design professional is contracted by the Government as an A/E responsible for the overall design and review of submittal documents prepared by others. The DOR is registered or licensed to practice their respective design profession as defined by the statutory requirements of the professional registration laws in state in which the design professional works. The DOR is also referred to as the Engineer of Record (EOR) in design code documents.

L. Statement of Special Inspections (SSI) – A document developed by the DOR identifying the material, systems, components and work required to have Special Inspections and covering the following:
   1. List of the Architectural Designated Seismic Systems – these components are in or attached to a Risk Category IV or V structure

and are needed for continued operation of the facility or their failure could impair the continued operation of the facility.

2. List of the Mechanical Designated Seismic Systems
   a. For Seismic Design Category C or Risk V, list the following:
      1) Heating, ventilation, and air-conditioning (HVAC) ductwork containing hazardous materials and anchorage of such ductwork
      2) Piping systems and mechanical units containing flammable, combustible, or highly toxic materials.
   b. For Seismic Design Category D, E, or F or Risk Category V list mechanical system that meet one of the following:
      1) Life safety component required to function after an earthquake
      2) Component that contains hazardous content,
      3) All components in an essential facility needed for continued operation after an earthquake.
3. List of the Electrical Designated Systems
   a. For Seismic Design Category C or Risk V, list the anchorage of electrical equipment used for emergency or standby power systems.
   b. For Seismic Design Category D, E or F list electrical system that meet one of the following:
      1) Life safety component required to function after an earthquake
      2) Component that contains hazardous content,
      3) All components in an essential facility needed for continued operation after an earthquake.
4. List of elements that are part of the progressive collapse resistance system.
   a. Provide a description of the following as they apply:
      1) Elements of the tie force system consisting of internal longitudinal and transverse, vertical, and peripheral tie.
      2) Elements of the alternate path system.
      3) Elements having enhanced local resistance. The Statement of Special Inspections and the Schedule of Special Inspections will be included as an attachment to this specification
         a) Schedule of Special Inspections – A schedule which lists each of the required Special Inspections, the extent to

which each Special Inspections is to be performed, and the required frequency for each in accordance with ICC IBC Chapter 17. Template found here:

SECTION 01 45 35
Schedule of SI Temp

SECTION 01 45 35
Statement of SI Tem

b) Designated Seismic System – Those nonstructural components that require design in accordance with ASCE 7 Chapter 13 and for which the component importance factor, Ip, is greater than 1.0. This designation applies to systems that are required to be operational following the Design Earthquake for RC I - IV structures and following the MCER for RC V structures. All systems in RC V facilities designated as MC-1 in accordance with UFC 3-310-04 are considered part of the Designated Seismic Systems. // Designated Seismic Systems will be identified by Owner and will have an Importance Factor Ip = 1.5 //

M. Submittals: Government approval is required for all submittals. CQC Special Inspection reports shall be submitted under this Specification section and follow the [Special Inspection]: [Applicable Specification section or description] naming convention. Submit the following:

1. SD-01 Preconstruction Submittals;
2. SIOR Letter of Acceptance;
3. Special Inspections Project Manual;
4. Special Inspections Agency's Written Practices
5. NDT Procedures and Equipment' Calibration Records;
6. SD-06 Test Reports;
7. Special Inspections
8. Daily Reports;
9. Special Inspections; Biweekly Reports;
10. SD-07 Certificates;
11. Fabrication Plant
12. Steel Truss Plant;
13. Wood Truss Plant;
14. AC472 Accreditation;
15. Steel Joist Institute Membership;

16. Precast Concrete Institute (PCI) Certified Plant;
17. Certificate of Compliance;
18. Special Inspector of Record Qualifications;
19. Special Inspector Qualifications;
20. Qualification Records for NDT technicians;
21. SD-11 Closeout Submittals;
22. Interim Final Report of Special Inspections;
23. Comprehensive Final Report of Special Inspections;

N. Special Inspector Qualifications: Submit qualifications for each SI, ASI, and the SIOR from the following certifying associations: Associated Air Balance Council (AABC); American Concrete Institute (ACI); Association of the Wall and Ceiling Industry (AWCI); American Welding Society (AWS); Factory Mutual (FM); International Code Council (ICC); Nondestructive Testing (NDT); National Institute for Certification in Engineering Technologies (NICET); Precast/Prestressed Concrete Institute (PCI); Post-Tensioning Institute (PTI); Underwriters Laboratories (UL). Qualifications should be in accordance with the following minimums // ; PM or SRE can restrict qualifications to the higher standards shown if multiple options are shown for a role based on complexity of project //.

QUALIFICATIONS

Area	Special Inspector	Associated Special Inspector	SIOR
Steel Construction and High Strength Bolting	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	

Area	Special Inspector	Associated Special Inspector	SIOR
Welding Structural Steel (For highly complex steel use only AWS Certified Welding Inspectors)	ICC Welding Special Inspector certificate with one year of related experience or AWS Certified Welding Inspector	AWS Certified Associate Welding Inspector	
Nondestructive Testing of Welds	NDT Level II Certificate	NDT Level II Certificate plus one year of related experience	
Cold Formed Steel Framing	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or ICC Commercial Building Inspector with one year of experience; or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	
Concrete Construction	ICC Reinforced Concrete Special Inspector Certificate with one year of related experience, or ACI Concrete Construction Special Inspector, or NICET Concrete Technician Level III Certificate in Construction Materials Testing, or, Registered Professional Engineer with related experience	ACI Concrete Construction Special Inspector in Training, or Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Prestressed Concrete Construction	ICC Pre-stressed Special Inspector Certificate with one year of related experience, or PCI Quality Control Technician/ Inspector Level II Certificate with one year of related experience, or Registered Professional Engineer with related experience.	PCI Quality Control Technician/ Inspector Level I Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Post-Tensioned Concrete Construction	PTI Level 2 Unbonded PT Inspector Certificate, or Registered Professional Engineer with related experience	PTI Level 1 Unbonded PT Inspector Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Masonry Construction	ICC Structural Masonry Special Inspector Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Wood	ICC Commercial Building Inspector Certificate with one year of related experience, or ICC Residential Building Inspector with on year of experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Verification of Site Soil Condition, Fill Placement, and Load-Bearing Requirements	ICC Soils Special Inspector Certificate with one year of related experience, or NICET Soils Technician Level II Certificate in Construction Material Testing, or NICET Geotechnical Engineering Technician Level II Construction or Generalist Certificate, or Geologist-In-Training with one year of related experience, or Registered Professional Engineer with related experience	NICET Soils Technician Level I Certificate in Construction Material Testing with one year of related experience, or NICET Geotechnical Engineering Technician Level I Construction, or Generalist Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Deep Foundations	NICET Soils Technician Level II Certificate in Construction Material Testing, or NICET Geotechnical Engineering Technician Level II Construction or Generalist Certificate, or Geologist-In-Training with one year of related experience, or Registered Professional Engineer with related experience	NICET Soils Technician Level I Certificate in Construction Material Testing with one year of related experience, or NICET Geotechnical Engineering Technician Level I Construction or Generalist Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	

Area	Special Inspector	Associated Special Inspector	SIOR
Sprayed Fire Resistant Manual	ICC Spray-applied Fireproofing Special Inspector Certificate, or ICC Fire Inspector I Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Mastic and Intumescent Fire Resistant Coatings	ICC Spray-applied Fireproofing Special Inspector Certificate, or ICC Fire Inspector I Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
Exterior Insulation and Finish Systems (EIFS)	AWCI EIFS Inspector Certificate, or Exterior Design Institute Certificate, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	
Fire-Resistant Penetrations and Joints	Passed the UL Firestop Exam with one year of related experience, or Passed the FM Firestop Exam with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	

Area	Special Inspector	Associated Special Inspector	SIOR
Smoke Control	AABC Technician Certification with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
SIOR			Registered Professional Engineer

PART 2 - PRODUCTS

2.1 FABRICATORS SPECIAL INSPECTION

A. Special Inspections of fabricator's work performed in the fabricator's shop is required to be inspected in accordance with the Statement of Special Inspections and the Schedule of Special Inspections unless the fabricator is certified by the approved agency to perform such work without Special Inspections. Submit the applicable certification(s) from the following list to the Contracting Officer for information to allow work performed in the fabricator's shop to not be subjected to Special Inspections.

B. The following certifications meet the requirements for fabricator approval in accordance with paragraph 1704.2.5.2 of IBC:

1. American Institute of Steel Construction (AISC) Certified Fabrication Plant, Category STD.
2. Truss Plate Institute (TPI) steel truss plate quality assurance program certification.
3. Truss Plate Institute (TPI) wood truss plate quality assurance program certification.
4. International Accreditation Service, AC472 Accreditation Steel Joist Institute Membership
5. Precast Concrete Institute (PCI) Certified Plant, Group C

C. At the completion of fabrication, submit a certificate of compliance, to be included with the comprehensive final report of Special

Inspections, stating that the materials supplied and work performed by the fabricator are in accordance the construction documents.

PART 3 - EXECUTION

3.1 RESPONSIBILIES MATRIX

Inspector	Responsibility	Condition
SIOR	a. Supervise all Special Inspectors required by the contract documents and the IBC. b. Submit a SIOR Letter of Acceptance to the Contracting Officer attesting to acceptance of the duties of SIOR, signed and sealed by the SIOR. c. Verify the qualifications of all of the Special Inspectors. d. Verify the qualifications of fabricators.	Applicable when SIOR is required
	e. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. f. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.	Applicable when SIOR is required and when the structural design is required to follow AISC341 for seismic design of steel structures
	g. Prepare a Special Inspections Project Manual, which will cover the following: 1. Roles and responsibilities of the following individuals during Special Inspections: SIOR, SI, General Contractor, Subcontractors, QC Manager, and DOR. 2. Organizational chart and/or communication plan, indicating lines of communication 3. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. Contractor's internal plan for scheduling inspections. Address	Applicable when SIOR is required

Inspector	Responsibility	Condition
	items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. 4. Indicate the government reporting procedures. 5. Propose forms or templates to be used by SI and SIOR to document inspections. 6. Indicate procedures for tracking nonconforming work and verification that corrective work is complete. 7. Indicate how the SIOR and/or SI will participate in weekly QC meetings. 8. Indicate how Special Inspections of shop fabricated items will be handled when the fabricator's shop is not certified per paragraph FABRICATOR SPECIAL INSPECTIONS. 9. Include a section in the manual that covers each specific item requiring Special Inspections that is indicated on the Schedule of Special Inspections. Provide names and qualifications of each special inspector who will be performing the Special Inspections for each specific item. Provide detail on how the Special Inspections are to be carried out for each item so that the expectations are clear for the General Contractor and the Subcontractor performing the work. Make a copy of the Special Inspections Project Manual available on the job site during construction. Submit a copy of the Special Inspections Project Manual for approval. h. Attend coordination and mutual understanding meeting where the information in the Special Inspections Project Manual will be reviewed to verify that all parties have a clear understanding of the Special Inspections provisions and the individual duties and responsibilities of each party. i. Maintain a 3- ring binder for the Special Inspector's daily and biweekly reports and the Special Inspections Project Manual. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR. j. Submit a copy of the Special Inspector's daily reports to the QC Manager. k. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not	

Inspector	Responsibility	Condition
	corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report. l. Submit a biweekly Special Inspections report until all work requiring Special Inspections is complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame. 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems, that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test results including nondestructive testing reports. //m. For large, complex projects, at the completion of each Definable Feature of Work (DFOW) requiring Special Inspections, submit an interim final report of Special Inspections that documents the Special Inspections completed for that DFOW and corrections of all discrepancies noted in the daily reports. The interim final report of Special Inspections must be signed, dated and bear the seal of the SIOR.]. //	
QC Manager	a. If there is no SIOR, QC Manager must Supervise all Special Inspectors required by the contract documents and the IBC; Verify the qualifications of all of the Special Inspectors; Verify the qualifications of fabricators; Maintain a 3-ring binder for the Special Inspector's daily and biweekly reports. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR.	Applicable when SIOR is not required
	b. Maintain a rework items list that includes discrepancies noted on the Special Inspectors daily report.	n/a
Special Inspectors	a. Inspect all elements of the project for which the special inspector is qualified to inspect	

Inspector	Responsibility	Condition
	and are identified in the Schedule of Special Inspections. b. Attend preparatory phase meetings related to the Definable Feature of Work (DFOW) for which the special inspector is qualified to inspect.	
	c. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. d. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. e. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.]	Applicable when SIOR is NOT required and when the structural design is required to follow AISC 341 for seismic design of steel structures
	f. Submit a copy of the daily reports to the QC Manager. g. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report. h. Submit a biweekly Special Inspection Report until all inspections are complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following: 1. A brief summary of the work performed during the reporting time frame 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution.	Applicable when SIOR is not required

Inspector	Responsibility	Condition
	5. All applicable test result including nondestructive testing reports. //i. For large, complex projects, at the completion of each Definable Feature of Work (DFOW) requiring Special Inspections, submit an interim final report of Special Inspections that documents the Special Inspections completed for that DFOW and corrections of all discrepancies noted in the daily reports. The interim final report of Special Inspections must be signed, dated and bear the seal of the SIOR.]. // j. At the completion of the project submit a comprehensive final report of Special Inspections that documents the Special Inspections completed for the project and corrections of all discrepancies noted in the daily reports. The comprehensive final report of Special Inspections must be signed, dated and indicate the certification of the special inspector qualifying them to conduct the inspection.	
	k. Submit daily reports to the SIOR	Applicable when SIOR is required

3.2 DEFECTIVE WORK

Check work as it progresses, but failure to detect any defective work or materials must in no way prevent later rejection if defective work or materials are discovered, nor obligate the Government to accept such work.

-- End of Section –

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.

B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:

1. Adversely effect human health or welfare,
2. Unfavorably alter ecological balances of importance to human life,
3. Effect other species of importance to humankind, or;
4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.

C. Definitions of Pollutants:

1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.

6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
7. Sanitary Wastes:
   a. Sewage: Domestic sanitary sewage and human and animal waste.
   b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

A. Establish and maintain quality control for the environmental protection of all items set forth herein.

B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. U.S. National Archives and Records Administration (NARA):

33 CFR 328.....Definitions

1.4 SUBMITTALS

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer’s Representative (COR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Contracting Officer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
   a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
   b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
   c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.

d. Description of the Contractor's environmental protection personnel training program.
e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
h. Permits, licenses, and the location of the solid waste disposal area.
i. Drawings showing locations of any proposed material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
l. Inclusion of “best management practices” and methodologies.

B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period

of this contract. Confine activities to areas defined by the specifications and drawings.

B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
   a. Box and protect from damage existing trees and shrubs to remain on the construction site.
   b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
   c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.

a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 25 (design year) storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
b. Reuse or conserve the collected topsoil sediment as directed by the COR. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.

5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features shown. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on and off Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
7. Manage and control spoil areas on and off Government property to limit spoil to areas shownand prevent erosion of soil or sediment from entering nearby water courses or lakes.
8. Protect adjacent areas from despoilment by temporary excavations and embankments.
9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.

11. Handle discarded materials other than those included in the solid waste category as directed by the COR.

C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
   1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
   2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
   3. Monitor water areas affected by construction.

D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.

E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Louisiana State Air Pollution Statue, Rule, or Regulation and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
   1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
   2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the

project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.

3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.

F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00p.m unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75

TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75		
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

b. Use shields or other physical barriers to restrict noise transmission.
c. Provide soundproof housings or enclosures for noise-producing machinery.
d. Use efficient silencers on equipment air intakes.
e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
f. Line hoppers and storage bins with sound deadening material.
g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.

3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.

G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and

materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

D. Waste Management Plan development and implementation.

E. Techniques to minimize waste generation.

F. Sorting and separating of waste materials.

G. Salvage of existing materials and items for reuse or resale.

H. Recycling of materials that cannot be reused or sold.

I. At a minimum the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc).
6. Metal products (eg, steel, wire, beverage containers, copper, etc).
7. Sheathings
8. Cardboard, paper and packaging.
9. Bitumen roofing materials.
10. Plastics (eg, ABS, PVC).
11. Carpet and/or pad.
12. Gypsum board.
13. Insulation.
14. Paint.
15. Fluorescent lamps.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:

1. Excess or unusable construction materials.
2. Packaging used for construction products.
3. Poor planning and/or layout.
4. Construction error.
5. Over ordering.
6. Weather damage.
7. Contamination.
8. Mishandling.
9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling – Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
2. Off-site Recycling – Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

B. Prepare and submit to the CORa written demolition debris management plan. The plan shall include, but not be limited to, the following information:
   1. Procedures to be used for debris management.
   2. Techniques to be used to minimize waste generation.
   3. Analysis of the estimated job site waste to be generated:
      a. List of each material and quantity to be salvaged, reused, recycled.
      b. List of each material and quantity proposed to be taken to a landfill.
   4. Detailed description of the Means/Methods to be used for material handling.
      a. On site: Material separation, storage, protection where applicable.
      b. Off site: Transportation means and destination. Include list of materials.
         1) Description of materials to be site-separated and self-hauled to designated facilities.
         2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
            a) The names and locations of mixed debris reuse and recycling facilities or sites.
            b) The names and locations of trash disposal landfill facilities or sites.
            c) Documentation that the facilities or sites are approved to receive the materials.
C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
E. Target waste diversion rate by material and an overall diversion rate.
F. Final report documenting the results of implementation of the preconstruction waste management plan.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC): LEED Green Building Rating System for New Construction

1. Green Building Initiative (GBI): Green Globes for New Construction 2019

1.7 RECORDS

A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template

PART 2 - PRODUCTS

2.1 MATERIALS

A. List of each material and quantity to be salvaged, recycled, reused.

B. List of each material and quantity proposed to be taken to a landfill.

C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.

C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 01 81 13
SUSTAINABLE CONSTRUCTION REQUIREMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section describes general requirements and procedures to comply with federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable construction.

B. The Design Professional has selected materials and utilized integrated design processes that achieve the Government's objectives. Contractor is responsible to maintain and support these objectives in developing means and methods for performing work and in proposing product substitutions or changes to specified processes. Obtain approval from Contracting Officer for all changes and substitutions to materials or processes. Proposed changes must meet, or exceed, materials or processes specified.

1.2 RELATED WORK

A. Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.

B. Section 01 74 19 CONSTRUCTION WASTE MANANGEMENT.

C. Section 01 81 13.02 SUSTAINABILITY CERTIFICATION REQUIREMENTS

1.3 DEFINITIONS

A. Recycled Content: Recycled content of materials is defined according to Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260). Recycled content value of a material assembly is determined by weight. Recycled fraction of assembly is multiplied by cost of assembly to determine recycled content value.

1. "Post-Consumer" material is defined as waste material generated by households or by commercial, industrial, and institutional facilities in their role as end users of the product, which can no longer be used for its intended purpose.
2. "Pre-Consumer" material is defined as material diverted from waste stream during the manufacturing process. Excluded is reutilization of materials such as rework, regrind, or scrap generated in a process and capable of being reclaimed within the same process that generated it.

B. Biobased Products: Biobased products are derived from plants and other renewable agricultural, marine, and forestry materials and provide an alternative to conventional petroleum derived products. Biobased

products include diverse categories such as lubricants, cleaning products, inks, fertilizers, and bioplastics.

C. Low Pollutant-Emitting Materials: Materials and products which are minimally odorous, irritating, or harmful to comfort and well-being of installers and occupants.

D. Volatile Organic Compounds (VOC): Chemicals that are emitted as gases from certain solids or liquids. VOCs include a variety of chemicals, some of which may have short- and long-term adverse health effects.

1.4 REFERENCE STANDARDS

A. Carpet and Rug Institute Green Label Plus program.

B. U.S. Department of Agriculture BioPreferred program (USDA BioPreferred).

C. U.S. Environmental Protection Agency Comprehensive Procurement Guidelines (CPG).

D. U.S. Environmental Protection Agency WaterSense Program (WaterSense).

E. U.S. Environmental Protection Agency ENERGY STAR Program (ENERGY STAR).

F. U. S. Department of Energy Federal Energy Management Program (FEMP).

G. Green Electronic Council EPEAT Program (EPEAT).

1.5 SUBMITTALS

A. All submittals to be provided by contractor to COR.

B. Sustainability Action Plan:

1. Submit documentation as required by this section; provide additional copies of typical submittals required under technical sections when sustainable construction requires copies of record submittals.
2. Within 30 days after Preconstruction Meeting provide a narrative plan for complying with requirements stipulated within this section.
3. Sustainability Action Plan must:
   a. Make reference to sustainable construction submittals defined by this section.
   b. Address all items listed under PERFORMANCE CRITERIA.
   c. Indicate individual(s) responsible for implementing the plan.

C. Low Pollutant-Emitting Materials Tracking Spreadsheet: Within 30 days after Preconstruction Meeting provide a preliminary Low Pollutant-Emitting Materials Tracking Spreadsheet. The Low Pollutant-Emitting Materials Tracking Spreadsheet must be an electronic file and include all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.

D. Construction Indoor Air Quality (IAQ) Management Plan:

1. Not more than 30 days after Preconstruction Meeting provide a Construction IAQ Management Plan as an electronic file including descriptions of the following:
   a. Instruction procedures for meeting or exceeding minimum requirements of ANSI/SMACNA 008-2008, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling.
   b. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage.
   c. Schedule of submission of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials.
   d. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille.
   e. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit.
   f. Instruction procedures and schedule for implementing building flush-out.

E. Product Submittals:

1. Recycled Content: Submit product data from manufacturer indicating percentages by weight of post-consumer and pre-consumer recycled content for products having recycled content (excluding MEP systems equipment and components).
2. Biobased Content: Submit product data for products to be installed or used which are included in any of the USDA BioPreferred program's product categories. Data to include percentage of biobased content and source of biobased material.
3. Low Pollutant-Emitting Materials: Submit product data confirming compliance with relevant requirements for all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.

4. For applicable products and equipment, submit product documentation confirming ENERGY STAR label, FEMP certification, WaterSense, and/or EPEAT certification.

F. Sustainable Construction Progress Reports: Concurrent with each Application for Payment, submit a Sustainable Construction Progress Report to confirm adherence with Sustainability Action Plan.
   1. Include narratives of revised strategies for bringing work progress into compliance with plan and product submittal data.
   2. Include updated and current Low Pollutant-Emitting Materials Tracking Spreadsheet.
   3. Include construction waste tracking, in tons or cubic yards, including waste description, whether diverted or landfilled, hauler, and percent diverted for comingled quantities; and excluding land-clearing debris and soil. Provide haul receipts and documentation of diverted percentages for comingled wastes.

G. Closeout Submittals: Within 14 days after Substantial Completion provide the following:
   1. Final version of Low Pollutant-Emitting Materials Tracking Spreadsheet.
   2. Manufacturer’s cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed air handling units are used during construction.
   3. Manufacturer’s cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for final filtration media in air handling units.
   4. Minimum 18 construction photographs including six photographs taken on three different occasions during construction of ANSI/SMACNA 008-2008, Chapter 3 approaches employed, along with a brief description of each approach, documenting implementation of IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
   5. Flush-out Documentation:
      a. Product data for filtration media used during flush-out.
      b. Product data for filtration media installed immediately prior to occupancy.

c. Signed statement describing building air flush-out procedures including dates when flush-out was begun and completed and statement that filtration media was replaced after flush-out.

1.6 QUALITY ASSURANCE

A. Preconstruction Meeting: After award of Contract and prior to commencement of Work, schedule and conduct meeting with COR/Resident Engineer and Architect to discuss the Project Sustainable Action Plan content as it applies to submittals, project delivery, required Construction Indoor Air Quality (IAQ) Management Plan, and other Sustainable Construction Requirements. The purpose of this meeting is to develop a mutual understanding of the Sustainable Construction Requirements and coordination of contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.

B. Construction Job Conferences: Status of compliance with Sustainable Construction Requirements of these specifications will be an agenda item at regular job meetings conducted during the course of work at the site.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.

B. Green Seal Standard GS-11, Paints, 1st Edition, May 20, 1993.

C. Green Seal Standard GC-03, Anti-Corrosive Paints, 2nd Edition, January 7, 1997.

D. Green Seal Standard GC-36, Commercial Adhesives, October 19, 2000.

E. South Coast Air Quality Management District (SCAQMD) Rule 1113, Architectural Coatings, rules in effect on January 1, 2004.

F. South Coast Air Quality Management District (SCAQMD) Rule 1168, July 1, 2005 and rule amendment date of January 7, 2005.

G. Sheet Metal and Air Conditioning National Contractors' Association (SMACNA) IAQ Guidelines for Occupied Buildings under Construction, 2nd Edition (ANSI/SMACNA 008-2008), Chapter 3.

H. California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor

Sources Using Environmental Chambers, Version 1.1, Emission Testing method for California Specification 01350 (CDPH Standard Method V1.1-2010).

I. Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260).

J. ASHRAE Standard 52.2-2007.

PART 2 – PRODUCTS

2.1 PERFORMANCE CRITERIA

A. Construction waste diversion from landfill disposal must comprise at least 50 percent of total construction waste, excluding land clearing debris and soil. Alternative daily cover (ADC) does not qualify as material diverted from disposal.

B. Low Pollutant-Emitting Materials:

1. Adhesives, sealants and sealant primers applied on site within the weatherproofing membrane must comply with VOC limits of SCAQMD Rule 1168:

a. Flooring Adhesives and Sealants:

1) Indoor carpet adhesives: 50 g/L.
2) Wood Flooring Adhesive: 100 g/L.
3) Rubber Floor Adhesives: 60 g/L.
4) Subfloor Adhesives: 50 g/L.
5) Ceramic Tile Adhesives and Grout: 65 g/L.
6) Cove Base Adhesives: 50 g/L.
7) Multipurpose Construction Adhesives: 70 g/L.
8) Porous Material (Except Wood) Substrate: 50 g/L.
9) Wood Substrate: 30 g/L.
10) Architectural Non-Porous Sealant Primer: 250 g/L.
11) Architectural Porous Sealant Primer: 775 g/L.
12) Other Sealant Primer: 750 g/L.
13) Structural Wood Member Adhesive: 140 g/L.
14) Sheet-Applied Rubber Lining Operations: 850 g/L.
15) Top and Trim Adhesive: 250 g/L.
16) Architectural Sealant: 250 g/L.
17) Other Sealant: 420 g/L.

b. Non-Flooring Adhesives and Sealants:

1) Drywall and Panel Adhesives: 50 g/L.
2) Multipurpose Construction Adhesives: 70 g/L.

3) Structural Glazing Adhesives: 100 g/L.
4) Metal-to-Metal Substrate Adhesives: 30 g/L.
5) Plastic Foam Substrate Adhesive: 50 g/L.
6) Porous Material (Except Wood) Substrate Adhesive: 50 g/L.
7) Wood Substrate Adhesive: 30 g/L.
8) Fiberglass Substrate Adhesive: 80 g/L.
9) Architectural Non-Porous Sealant Primer: 250 g/L.
10) Architectural Porous Sealant Primer: 775 g/L.
11) Other Sealant Primer: 750 g/L.
12) PVC Welding Adhesives: 510 g/L.
13) CPVC Welding Adhesives: 490 g/L.
14) ABS Welding Adhesives: 325 g/L.
15) Plastic Cement Welding Adhesives: 250 g/L.
16) Adhesive Primer for Plastic: 550 g/L.
17) Contact Adhesive: 80 g/L.
18) Special Purpose Contact Adhesive: 250 g/L.
19) Structural Wood Member Adhesive: 140 g/L.
20) Sheet Applied Rubber Lining Operations: 850 g/L.
21) Top and Trim Adhesive: 250 g/L.
22) Architectural Sealants: 250 g/L.
23) Other Sealants: 420 g/L.

2. Aerosol adhesives applied on site within the weatherproofing membrane must comply with the following Green Seal GS-36.
   a. Aerosol Adhesive, General-Purpose Mist Spray: 65 percent VOCs by weight.
   b. Aerosol Adhesive, General-Purpose Web Spray: 55 percent VOCs by weight.
   c. Special-Purpose Aerosol Adhesive (All Types): 70 percent VOCs by weight.
3. Paints and coatings applied on site within the weatherproofing membrane must comply with the following criteria:
   a. VOC content limits for paints and coatings established in Green Seal Standard GS-11.
   b. VOC content limit for anti-corrosive and anti-rust paints applied to interior ferrous metal substrates of 250 g/L established in Green Seal GC-03.

c. Clear wood finishes, floor coatings, stains, primers, sealers, and shellacs applied to interior elements must not exceed VOC content limits established in SCAQMD Rule 1113.

d. Comply with the following VOC content limits:

1) Anti-Corrosive/Antirust Paints: 250 g/L.
2) Clear Wood Finish, Lacquer: 550 g/L.
3) Clear Wood Finish, Sanding Sealer: 350 g/L.
4) Clear Wood Finish, Varnish: 350 g/L.
5) Floor Coating: 100 g/L.
6) Interior Flat Paint, Coating or Primer: 50 g/L.
7) Interior Non-Flat Paint, Coating or Primer: 150 g/L.
8) Sealers and Undercoaters: 200 g/L.
9) Shellac, Clear: 730 g/L.
10) Shellac, Pigmented: 550 g/L.
11) Stain: 250 g/L.
12) Clear Brushing Lacquer: 680 g/L.
13) Concrete Curing Compounds: 350 g/L.
14) Japans/Faux Finishing Coatings: 350 g/L.
15) Magnesite Cement Coatings: 450 g/L.
16) Pigmented Lacquer: 550 g/L.
17) Waterproofing Sealers: 250 g/L.
18) Wood Preservatives: 350 g/L.
19) Low-Solids Coatings: 120 g/L.

4. Carpet installed in building interior must comply with one of the following:

a. Meet testing and product requirements of the Carpet and Rug Institute Green Label Plus program.

b. Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at the 14 day time point.

5. Each non-carpet flooring element installed in building interior which is not inherently non-emitting (stone, ceramic, powder-coated metals, plated or anodized metal, glass, concrete, clay brick, and unfinished or untreated solid wood flooring) must comply with one of the following:

a. Meet requirements of the FloorScore standard as shown with testing by an independent third-party.

b. Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at 14 day time point.

6. Composite wood and agrifiber products used within the weatherproofing membrane must contain no added urea-formaldehyde resins.

7. Laminating adhesives used to fabricate on-site and shop-applied composite wood and agrifiber assemblies must not contain added urea-formaldehyde.

C. Recycled Content:

1. Any products being installed or used that are listed on EPA Comprehensive Procurement Guidelines designated product list must meet or exceed the EPA's recycled content recommendations. The EPA Comprehensive Procurement Guidelines categories include:

a. Building insulation.
b. Cement and concrete.
c. Consolidated and reprocessed latex paint.
d. Floor tiles.
e. Flowable fill.
f. Laminated paperboard.
g. Modular threshold ramps.
h. Nonpressure pipe.
i. Patio blocks.
j. Railroad grade crossing surfaces.
k. Roofing materials.
l. Shower and restroom dividers/partitions.
m. Structural fiberboard.
n. Nylon carpet and nylon carpet backing.
o. Compost and fertilizer made from recovered organic materials.
p. Hydraulic mulch.
q. Lawn and garden edging.
r. Plastic lumber landscaping timbers and posts.
s. Park benches and picnic tables.
t. Plastic fencing.
u. Playground equipment.
v. Playground surfaces.
w. Bike racks.

D. Biobased Content:

1. Materials and equipment being installed or used that are listed on the USDA BioPreferred program product category list must meet or exceed USDA's minimum biobased content threshold. Refer to individual specification sections for detailed requirements applicable to that section.
   a. USDA BioPreferred program categories include:
      1) Cleaners.
      2) Composite Panels.
      3) Corrosion Preventatives.
      4) Erosion Control Materials.
      5) Dust Suppressants.
      6) Fertilizers.
      7) Floor Cleaners and Protectors.
      8) Floor Coverings (Non-Carpet).
      9) Glass Cleaners.
      10) Hydraulic Fluids.
      11) Industrial Cleaners.
      12) Interior Paints and Coatings.
      13) Mulch and Compost Materials.
      14) Multipurpose Cleaners.
      15) Multipurpose Lubricants.
      16) Packaging Films.
      17) Paint Removers.
      18) Plastic Insulating Foam.
      19) Pneumatic Equipment Lubricants.
      20) Roof Coatings.
      21) Wastewater Systems Coatings.
      22) Water Tank Coatings.
      23) Wood and Concrete Sealers.
      24) Wood and Concrete Stains.

E. Materials, products, and equipment being installed which fall into a category covered by the WaterSense program must be WaterSense-labeled or meet or exceed WaterSense program performance requirements, unless disallowed for infection control reasons.
   1. WaterSense categories include:
      a. Bathroom Faucets
      b. Commercial Toilets

c. Irrigation Controllers
d. Pre-Rinse Spray Valves
e. Residential Toilets
f. Showerheads
g. Spray Sprinkler Bodies
h. Urinals

F. Materials, products, and equipment being installed which fall into any of the following product categories must be Energy Star-labeled.

1. Applicable Energy Star product categories as of 09/14/2017 include:

a. Appliances:

1) Air Purifiers and Cleaners.
2) Clothes Dryers (Residential).
3) Clothes Washers (Commercial & Residential).
4) Dehumidifiers.
5) Dishwashers (Residential).
6) Freezers (Residential).
7) Refrigerators (Residential).

b. Electronics and Information Technology:

1) Audio/Video Equipment.
2) Computers.
3) Data Center Storage.
4) Digital Media Player.
5) Enterprise Servers.
6) Imaging Equipment.
7) Monitors.
8) Professional Displays.
9) Set-Top and Cable Boxes.
10) Telephones.
11) Televisions.
12) Uninterruptible Power Supplies.
13) Voice over Internet Protocol (VoIP) Phones.

c. Food Service Equipment (Commercial):

1) Dishwashers.
2) Fryers.
3) Griddles.
4) Hot Food Holding Cabinets.
5) Ice Makers.

6) Ovens.
7) Refrigerators and Freezers.
8) Steam Cookers.
9) Vending Machines.

d. Heating and Cooling Equipment:
1) Air-Source Heat Pumps (Residential).
2) Boilers.
3) Ceiling Fans (Residential).
4) Central Air Conditioners (Residential).
5) Ductless Heating and Cooling (Residential).
6) Furnaces (Residential).
7) Water Heaters.
8) Geothermal Heat Pumps (Residential).
9) Light Commercial Heating and Cooling Equipment.
10) Room Air Conditioners (Residential).
11) Ventilation Fans (Residential).

e. Other:
1) Decorative Light Strings.
2) Electric Vehicle Supply Equipment.
3) Laboratory-Grade Refrigerators and Freezers.
4) Light Bulbs.
5) Light Fixtures.
6) Pool Pumps.
7) Roof Products.
8) Water Coolers.
9) Windows, Doors, and Skylights.

G. Materials, products, and equipment being installed which fall into any of the following categories must be FEMP-designated. FEMP-designated product categories as of 09/14/2017 include:
1. Boilers (Commercial).
2. Dishwashers (Commercial).
3. Electric Chillers, Air-Cooled (Commercial).
4. Electric Chillers, Water-Cooled (Commercial).
5. Exterior Lighting.
6. Fluorescent Ballasts.
7. Fluorescent Lamps, General Service.
8. Ice Machines, Water-Cooled.

9. Industrial Lighting (High/Low Bay).
10. Light Emitting Diode (LED) Luminaires.

H. Electronic products and equipment being installed which fall into any of the following categories shall be EPEAT registered. Electronic products and equipment covered by EPEAT program as of 09/14/2017 include:
1. Computers.
2. Displays.
3. Imaging Equipment.
4. Televisions.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

A. Construction Indoor Air Quality Management:
1. During construction, meet or exceed recommended control measures of ANSI/SMACNA 008-2008, Chapter 3.
2. Protect stored on-site and installed absorptive materials from moisture damage.
3. If permanently installed air handlers are used during construction, filtration media with a minimum efficiency reporting value (MERV) of 8 must be used at each return air grille, as determined by ASHRAE Standard 52.2-1999 (with errata but without addenda). Replace all filtration media immediately prior to occupancy.
4. Perform building flush-out as follows:
a. After construction ends, prior to occupancy and with interior finishes installed, perform a building flush-out by supplying a total volume of 14000 cu. ft. of outdoor air per sq. ft. of floor area while maintaining an internal temperature of at least 60 degrees Fahrenheit and a relative humidity no higher than 60 percent. OR
b. If occupancy is desired prior to flush-out completion, the space may be occupied following delivery of a minimum of 3500 cu. ft. of outdoor air per sq. ft. of floor area to the space. Once a space is occupied, it must be ventilated at a minimum rate of 0.30 cfm per sq. ft. of outside air or design minimum outside air rate determined until a total of 14000 cu. ft./sq. ft. of outside air has been delivered to the space. During each day of flush-out

period, ventilation must begin a minimum of three hours prior to occupancy and continue during occupancy.

-----END----

SECTION 01 81 13.02
SUSTAINABILITY CERTIFICATION REQUIREMENTS – LEED NC V4

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes requirements and procedures which are additive to and compatible with 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS, and necessary to contribute to sustainability certification under the LEED v4 for New Construction and Major Renovations rating system (LEED NC v4).

B. Refer to the 'Guiding Principles Checklist LEED v4 for New Construction and Major Renovations' for mandatory credits.

C. A copy of the LEED NC v4 Project Checklist is attached at the end of this section.

1.2 RELATED WORK

A. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS.

1.3 DEFINITIONS

A. Chain-of-Custody Certificates: Certificates signed by manufacturers certifying that wood used to make products was obtained from forests certified by an FSC-accredited certification body to comply with FSC STD-40-004 v3.0, "FSC Principles and Criteria for Forest Stewardship." Certificates must include evidence that manufacturer is certified for chain of custody by an FSC-accredited certification body.

B. Regional Materials: Materials that have been extracted, harvested, or recovered, as well as manufactured, within 100 miles (160 km) of project site. If only a fraction of a product or material is extracted or harvested or recovered and manufactured locally, then only that percentage (by weight) must contribute to regional value. The purchase location, distribution and all points of manufacture are now included in the definition of regional materials.

C. Biobased Material: Products which meet the Sustainable Agriculture Network's Sustainable Agriculture Standard. Biobased raw materials must be tested using ASTM Test Method D6866 and be legally harvested, as defined by the exporting and receiving country. Exclude hide products, such as leather and other animal skin material.

D. Salvaged or reused materials: Construction materials recovered from existing buildings or construction sites and reused. Common salvaged

materials include structural beams and post, flooring, doors, cabinetry, brick, and decorative items.

E. Refurbished materials: Products that could have been disposed of as solid waste. These products have completed their life cycle as consumer items and are then refurbished for reuse without substantial alteration of their form. Refurbishing includes renovating, repairing, restoring or generally improving appearance, performance, quality, functionality, or value of a product.

F. Environmental Product Declaration (EPD): A compliant EPD is a third-party declaration with external verification; is product-specific (not industry-wide); conforms to ISO 14025, 14040, 14044, and EN 15804 or ISO 21930; and has at least a cradle-to-gate scope.

G. Health Product Declaration (HPD): A compliant HPD provides full disclosure of known hazards and demonstrates chemical inventory of the product to at least 0.1 percent (1000 ppm).

H. Extended producer responsibility: An environmental policy approach in which a producer’s responsibility for a product is extended to the postconsumer stage of the product’s lifecycle. An extended producer responsibility policy shifts responsibility (physically and/or economically, fully or partially) upstream toward the producer and away from municipalities; and creates incentives for producers to take into account environmental considerations when designing their products.

1.4 SUBMITTALS

A. Additional Sustainability Action Plan requirements.

B. Additional inclusions in Sustainable Construction Progress Reports:

1. Inspection report or date-stamped photos confirming compliance with the Erosion and Sedimentation Control Plan
2. Provide updated information submittal using LEED Online forms and USGBC-provided spreadsheets for the following LEED Credits sought for Project.

C. Cut sheets for all plumbing fixtures used in the project

D.

E. Additional Product Submittals to be provided with manufacturer documentation:

1. Life-cycle assessment conforming to ISO 14044 with cradle to gate scope.
2. Environmental Product Declaration.

3. Corporate Sustainability Report.
4. Evidence of manufacturer participation in an extended producer responsibility program.
5. Health Product Declaration.
   Regional Materials: Indicate location and distance from project site of material manufacturer and point of extraction, harvest, or recovery for each raw material. Include statement indicating cost for each regional material and fraction by weight that is considered regional. Show the purchase location, distribution and all points of manufacture.
6. Biobased Materials: Indicate percent of biobased content. Include statement indicating cost of each relevant product and fraction by weight that is considered biobased material.
7. Provide chain-of-custody certificates for products containing certified wood. Include statement indicating cost for each product with certified wood and fraction by weight that is certified wood.
8. Construction and Waste management Calculator tracking recycling for the project. Provide documentation for all activities.
9. Calculator, product information showing product information, MSDS, third party certifications, testing reports for low emitting materials.
10. For paints and coatings applied on site within the weatherproofing membrane provide documentation of compliance with low-emitting materials requirements:
    a. The manufacturer or third-party certification must state the exposure scenario used to determine compliance. Claims of compliance for wet-applied products must state the amount applied in mass per surface area.
    b. Manufacturers' claims of compliance with the California Department of Public Health (CDPH) Standard Method v1.1-2010 must also state range of total VOCs after 14 days (336 hours), measured as specified in the CDPH Standard Manual v1.1: 0.5 mg/cubic meter or less; between 0.5 and 5.0 mg/cubic meter; or 5.0 mg/cubic meter or more.
    c. VOC content for each product.

11. For adhesives and sealants applied on site within the weatherproofing membrane provide documentation of compliance with low-emitting material requirements:
    a. The manufacturer or third-party certification must state the exposure scenario used to determine compliance. Claims of compliance for wet-applied products must state the amount applied in mass per surface area.
    b. Manufacturers' claims of compliance with the California Department of Public Health (CDPH) Standard Method v1.1-2010 must also state the range of total VOCs after 14 days (336 hours), measured as specified in the CDPH Standard Manual v1.1: 0.5 mg/cubic meter or less; between 0.5 and 5.0 mg/cubic meter; or 5.0 mg/cubic meter or more.
    c. VOC content for each product.
12. For flooring installed on site within the weatherproofing membrane provide documentation of compliance with low-emitting material requirements:
    a. Manufacturers' claims or third-party certification of compliance with the California Department of Public Health (CDPH) Standard Method v1.1-2010 which states the exposure scenario used to determine compliance.
13. Composite wood products: manufacturer documentation which confirms low formaldehyde emissions that meet the California Air Resources Board Composite Wood Products Airborne Toxic Control Measures (ATCM) for formaldehyde requirements for ultra-low-emitting formaldehyde (ULEF) resins or no added formaldehyde resins (NAUF).
14. Ceiling, wall, thermal and acoustic insulation products:
    a. Manufacturers' claims or third-party certification of compliance with the California Department of Public Health (CDPH) Standard Method v1.1-2010 which states the exposure scenario used to determine compliance.
    b. Confirmation of modeling scenario used.
15. Exterior applied adhesives, sealants, coatings, roofing, and waterproofing materials applied on site:
    a. Manufacturer documentation demonstrating compliance with VOC limits of California Air Resources Board (CARB) 2007 Suggested Control Measure (SCM) for Architectural Coatings and South Coast

Air Quality Management District (SCAQMD) Rule 1168, effective July 1, 2005.

b. A statement confirming that roofing installations did not use hot-mopped asphalt installation techniques.

c. A statement confirming that parking lots and other paved surfaces did not use coal tar sealants.

F. Additional Closeout Submittals

1. LEED Online: Final completed LEED Online forms and associated required documentation uploaded to LEED Online for the following prerequisites and credits:

a. Construction activity pollution prevention.

b. Construction and demolition waste management planning.

c. Building product disclosure and optimization – environmental product declaration.

d. Building product disclosure and optimization – sourcing of raw materials.

e. Building product disclosure and optimization – material ingredients.

f. Construction and demolition waste management.

g. Low-emitting materials.

h. Construction indoor air quality management plan.

i. Indoor air quality assessment.

1.5 APPLICABLE PUBLICATIONS

A. LEED v4 for New Construction and Major Renovations Rating System.

B. LEED Reference Guide for Building Design and Construction, 2013 Edition.

C. Forest Stewardship Council Principles and Criteria for Forest Stewardship (FSC STD-40-004 v3.0).

D. Sustainable Agriculture Network’s Sustainable Agriculture Standard.

E. 2012 EPA Construction General Permit.

F. California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, Emission Testing method for California Specification 01350 (CDPH Standard Method V1.1-2010).

G. California Air Resources Board Composite Wood Products Airborne Toxic Control Measures (ATCM).

H. California Air Resources Board (CARB) 2007 Suggested Control Measure (SCM) for Architectural Coatings.

I. ANSI/BIFMA Standard Method M7.1-2011.

J. ANSI/BIFMA e3-2011 Furniture Sustainability Standard, Sections 7.6.1 and 7.6.2.

K. South Coast Air Quality Management District (SCAQMD) Rule 1168, July 1, 2005 and rule amendment date of January 7, 2005.

L. Global Reporting Initiative (GRI) Sustainability Report.

M. Organization for Economic Co-operation and Development (OECD) Guidelines for Multinational Enterprises.

N. U.N. Global Compact: Communication of Progress.

O. ISO 26000: 2010 Guidance on Social Responsibility.

P. Chemical Abstract Service Registration Number (CASRN).

Q. Health Product Declaration open Standard.

R. Cradle to Cradle Certified.

S. GreenScreen v1.2 Benchmark.

T. GreenScreen List Translator.

U. REACH Optimization.

V. EPA's "Compendium of Methods for the Determination of Air Pollutants in Indoor Air".

PART 2 - PRODUCTS

2.1 PERFORMANCE CRITERIA

PART 3 - EXECUTION

3.1 SPECIAL REQUIREMENTS

3.2 ATTACHMENTS

A. LEED NC v4 Project Checklist

-----END----

SECTION 01 81 13.21

SUSTAINABILITY CERTIFICATION REQUIREMENTS - GREEN GLOBES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes general requirements and procedures to comply with the Green Building Initiative's (GBI) Green Globes for New Construction, NC 2013 and NC 2019. These requirements are additional and compatible requirements to objectives of Section 08 11 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Refer to 'Guiding Principles Checklist for Green Globes New Construction' for mandatory credits.

1. Green Globes for New Construction 2013 Green Globes for New Construction 2013 (NC 2013) includes criteria from *ANSI/GBI 01-2010: Green Building Assessment Protocol for Commercial Buildings*.

C. A copy of Green Globes Project Checklist is attached at end of this Section for information only.

1.2 RELATED WORK

A. General sustainable requirements: Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Construction waste management and disposal: Section 01 74 19 CONSTRUCTION WASTE MANANGEMENT.

1.3 DEFINITIONS

A. Green Globes: Green Building Initiative's (GBI) Green Globes for New Construction, NC 2013 and NC 2019.

B. Definitions that are a part of Green Globes apply to this Section.

C. Recommended Exposure Limit (REL): Recommended Exposure Limit as defined by U.S. National Institute of Occupational Safety and Health (NIOSH) to define the standard for protecting worker safety and health over a working lifetime.

1.4 SUBMITTALS

A. Provide submittals to COR and Architect; provide additional copies of typical submittals required under technical section, when sustainability certification requires copies of record submittals.

B. Sustainable Construction Documentation Submittals: Sustainable construction documentation submittals are in addition to other submittals and must be differentiated from items submitted to comply with other requirements, such as Product Data and Certificates.

1. Sustainability Action Plan: Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
2. Verify compliance with indicated certification requirements and required documentation, for each product identified within the Sustainability Action Plan or indicated for certification submittal within specifications.
3. Documentation of action items listed under PERFORMANCE REQUIREMENTS of this section.
4. Responses to questions and requests from Architect about Green Globes requirements that are the responsibility of contractor.
5. Documentation to GBI-authorized Assessor and respond to questions and requests from GBI-authorized Assessor about Green Globes credits that are the responsibility of contractor.
6. Environmental management system documents.
7. Environmental product declarations.
8. Third-party certifications based on multiple attribute standards.
9. Third-party-certified life-cycle product assessments.
10. Documentation complying with Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
11. Product Data and laboratory test reports for adhesives and sealants indicating VOC content and compliance with requirements for low-emitting materials.
12. Certificates for carpet and under-carpet adhesives indicating compliance with CRI's Green Label Plus testing program.
13. Product Data and laboratory test reports for paints indicating VOC content and compliance with requirements for low-emitting materials.
14. Laboratory test reports for flooring, insulation, acoustical ceilings, and wall coverings, indicating compliance with requirements for low-emitting materials.

C. Qualification Data: For Green Globes Coordinator described in this specification section.

D. Project Materials Cost Data: Provide statement indicating total cost for materials used for Project. Costs exclude labor, overhead, and profit. Include breakout of costs for following categories of items:
1. Plumbing.
2. Mechanical.
3. Electrical.

4. Specialty items such as elevators and equipment.
5. Wood-based construction materials.

E. Closeout Submittals:

1. Operations and Maintenance Manuals as indicated by Green Globes 3.3.3.1, in addition to requirements specified within construction documents.
2. Energy Reporting Plan as prescribed by Green Globes Section 3.3.3.1, including measurement, verification and metering information. Reporting Plan must include comparisons to anticipated energy demand and consumption values created for Green Globes Section 3.1.1 Energy Performance.

1.5 PRE-INSTALLATION MEETING

A. Pre-installation Conference: Conduct conference at project site. Review Green Globes requirements and action plans for compliance with requirements.

1.6 ADMINISTRATIVE REQUIREMENTS

A. Respond to questions and requests from Architect regarding Green Globes requirements that are the responsibility of contractor, depend on product selection or product qualities, or depend on contractor's procedures. Document responses as Sustainable Design Documentation submittals.

1.7 QUALITY ASSURANCE

A. Green Globes Coordinator: Engage an experienced coordinator to coordinate Green Globes requirements.

1. Green Globes coordinator may also serve as waste management coordinator.
2. Green Globes coordinator shall have previously coordinated at least one Green Globes project.

1.8 APPLICABLE PUBLICATIONS

A. Green Globes for New Construction, Technical Reference Manual.

1. Green Globes for New Construction 2013.
2. Green Globes for New Construction 2019.
3. https://thegbi.org/green-globes-certification/how-to-certify/new-construction/

B. *ANSI/GBI 01-2019: Green Globes Assessment Protocol for Commercial Building,*

C. *Implementing Instructions for Executive Order 13834 Efficient Federal Operations*.

1.9 DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle organic building materials capable of absorbing moisture, to prevent deterioration or damage due to moisture, temperature changes, contaminants, or corrosion.

B. Protect stored material from organic matter including leaves, soil, or insects.

C. Do not deliver or install organic materials or materials capable of absorbing moisture until concrete has cured and wet work including painting or similar operations have been completed.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Provide products and procedures necessary to comply with Green Globes requirements referenced in this section. Although specifications include requirements that contribute to referenced Green Globes requirements, contractor determines additional materials and procedures necessary to comply with Green Globes requirements indicated.

2.2 PRODUCT TRANSPARENCY

PART 3 - EXECUTION

3.1 CERTIFICATION ACTION ITEMS

A. Document the Environmental Management System (EMS) by incorporating the key elements listed in Green Globes Section 3.1.2.1 Environmental Management during Construction as follows:

1. Organizational principles.
2. Regulatory compliance and training.
3. Environmental risk assessment.
4. Environmental risk management strategies.
5. Environmental management roles, responsibilities and reporting structure.
6. Site and work instructions for on-site personnel, outlining environmental procedures.
7. Environmental inspection checklists.
8. Records of compliance.
9. Emergency response plan.

3.2 NONSMOKING BUILDING

A. Smoking is not permitted within the building or within 7.6 M (25 feet) of entrances, operable windows, or outdoor-air intakes.

3.3 ECOLOGICAL IMPACTS

A. Ensure full implementation the erosion and sedimentation control plan for project.

B. Tree Protection: Document and implement tree protection procedures compliant with Green Globes Section 2.3.3.1.

3.4 INSPECTIONS

A. Inspect project site on a periodic basis and produce a report that includes date-stamped electronic photograph files demonstrating construction activity pollution prevention.

3.5 CLOSEOUT ACTIVITIES

A. Schedule walk-through by GBI-authorized Assessor to assess compliance with requirements; provide advance notice to GBI to assign assessor to project. Contractor is responsible party for timely walk-through without delay to Final Inspection and project closeout.

B. Cooperate with GBI-authorized Assessor and provide access to work and incidental labor and facilities necessary to perform inspections.

3.6 ATTACHMENTS

A. Green Globes Project Checklist

-----END----

SECTION 01 91 00
GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.

B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.

C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.

D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.

E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA’s operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup,

control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contact documents and according to the manufacturer's recommendations.
2. Verify and document proper integrated performance of equipment and systems.
3. Verify that Operations & Maintenance documentation is complete.
4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
5. Verify that the VA's operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the Resident Engineer as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.

B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA Resident Engineer and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the Resident Engineer and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the Resident Engineer.

C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and Resident Engineer. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
2. Commissioning Issues identified by the Commissioning Agent will be delivered to the Resident Engineer and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
3. In the event that any Commissioning Issues and suggested resolutions are deemed by the Resident Engineer to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or Resident Engineer will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the Resident Engineer of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or Resident

Engineer, with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

1.3 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.
B. Section 01 32.16.15 PROJECT SCHEDULES (SMALL PROJECTS – DESIGN/BID/BUILD)
C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
D. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS
E. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
F. Section 26 08 00 COMMISSIONING OF ELECTRICAL SYSTEMS.
G. Section 33 08 00 COMMISSIONING OF SITE UTILITIES.

1.4 SUMMARY

A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
C. The commissioning activities have been developed to support the United States Green Building Council's (USGBC) LEED ™ rating program and to support delivery of project performance in accordance with the VA requirements developed for the project to support the following credits:
   1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" and the prerequisite of "Fundamental Building Systems Commissioning."
   2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
   3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.
D. The commissioning activities have been developed to support the Green Buildings Initiative's Green Globes rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer's Representative (see also VA-RE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner's Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance

List of Acronyms	
Acronym	Meaning
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager
VA-RE	VA Resident Engineer
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer’s Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner’s Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building’s energy usage to other similar buildings and to the building itself.. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems

Commissioning (BSC): NEBB acronym used to designate its commissioning program.

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (http://www.wbdg.org/resources/cobie.php)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner’s Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner’s project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems’ sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

Commissioning Issue: A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also – Commissioning Observation).

Commissioning Manager (CxM): A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

Commissioning Observation: An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers' recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See "Commissioning Issue".

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns – and

their resolution – that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment. Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

Owner's Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners operators to operate the systems.

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC)

systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA. Validation: The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner's Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase

Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	**Description**

Systems To Be Commissioned	
System	**Description**
Plumbing	
Domestic Water Distribution	Booster pumps, backflow preventers, water softeners, potable water storage tanks
HVAC	

Systems To Be Commissioned	
System	**Description**
Unitary Heat Pump Systems**	Water-source heat pumps, controls, interface with facility DDC
Electrical	
Grounding & Bonding Systems	Witness 3rd party testing, review reports
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, switchboards, distribution panels, panelboards, verify breaker testing results (injection current, etc)
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls

Systems To Be Commissioned	
System	**Description**
Lightning Protection System	Witness 3rd party testing, review reports
Site Utilities	
Water Utilities	City Water Service Entrance, Backflow Prevention, Pressure Control, Booster Pumps, Irrigation Systems
Sanitary Sewerage Utilities	City Sanitary Connection, Waste Treatment Systems
Storm Drainage Utilities	City Storm Water Connection, Site Storm Water Distribution

Systems To Be Commissioned	
System	**Description**
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite.	

1.8 COMMISSIONING TEAM

A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.

B. Members Appointed by Contractor:

1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

C. Members Appointed by VA:

1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
2. User: Representatives of the facility user and operation and maintenance personnel.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 VA'S COMMISSIONING RESPONSIBILITIES

A. Appoint an individual, company or firm to act as the Commissioning Agent.

B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:

1. Coordination meetings.
2. Training in operation and maintenance of systems, subsystems, and equipment.
3. Testing meetings.
4. Witness and assist in Systems Functional Performance Testing.
5. Demonstration of operation of systems, subsystems, and equipment.

C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.

B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.

C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:

1. Participate in commissioning coordination meetings.
2. Conduct operation and maintenance training sessions in accordance with approved training plans.
3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with

entity responsible for system and equipment installation, recommend corrective action.

5. Review and comment on commissioning documentation.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the Commissioning Agent for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

1.11 COMMISSIONING AGENT'S RESPONSIBILITIES

A. Organize and lead the commissioning team.

B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.

C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.

E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying

participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.

F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.

G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.

H. Coordinate Systems Functional Performance Testing schedule with the Contractor.

I. Witness selected systems startups.

J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.

K. Witness and document Systems Functional Performance Testing.

L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.

Spec Writer's Note: Coordinate the specification reference in Para J below with the specific project spec section dealing with O&M Data requirements.

M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.

N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.

O. Prepare commissioning Field Observation Reports.

P. Prepare the Final Commissioning Report.

Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may

come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

1.12 COMMISSIONING DOCUMENTATION

A. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:

1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
3. Identification of systems and equipment to be commissioned.
4. Schedule of Commissioning Coordination meetings.
5. Identification of items that must be completed before the next operation can proceed.
6. Description of responsibilities of commissioning team members.
7. Description of observations to be made.
8. Description of requirements for operation and maintenance training.
9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
12. Preliminary Systems Functional Performance Test procedures.

B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and

interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
2. Test number.
3. Time and date of test.
4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
5. Dated signatures of the person performing test and of the witness, if applicable.
6. Individuals present for test.
7. Observations and Issues.
8. Issue number, if any, generated as the result of test.

C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.

D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.

F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.

1. Creating an Commissioning Issues Log Entry:
   a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
   b. Assign a descriptive title for the issue.
   c. Identify date and time of the issue.
   d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
   e. Identify system, subsystem, and equipment to which the issue applies.
   f. Identify location of system, subsystem, and equipment.
   g. Include information that may be helpful in diagnosing or evaluating the issue.
   h. Note recommended corrective action.
   i. Identify commissioning team member responsible for corrective action.
   j. Identify expected date of correction.
   k. Identify person that identified the issue.
2. Documenting Issue Resolution:
   a. Log date correction is completed or the issue is resolved.

b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
c. Identify changes to the Contract Documents that may require action.
d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
e. Identify person(s) who corrected or resolved the issue.
f. Identify person(s) verifying the issue resolution.

G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:
1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
2. Commissioning plan.
3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.
4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
5, Commissioning Issues Log.
6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.

H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems,

subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:

1. Documentation of deferred and off season test(s) results.
2. Completed Systems Functional Performance Test Procedures for off season test(s).
3. Documentation that unresolved system performance issues have been resolved.
4. Updated Commissioning Issues Log, including status of unresolved issues.
5. Identification of potential Warranty Claims to be corrected by the Contractor.

I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:

1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
2. Reference to Final Commissioning Plan.
3. Reference to Final Commissioning Report.
4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on

Systems Performance Testing, including information on testing sample size (where authorized by the VA).

3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.

B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor's project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.

C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.

D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.

E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.

F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA Resident Engineer with copies to the Contractor and Architect.

G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.

H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.

I. Data for Commissioning:

1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

1.14 COMMISSIONING PROCESS

A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

B. Within 14 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and

communications for all commissioning related services by the Contractor.

C. Within 14 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.

B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner

in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.

C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.

D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.

E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.

B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5

°C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

PART 3 - EXECUTION

3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Spec Writer's Notes: Edit the following tables to describe the roles and responsibilities for each commissioning team member for each of the commissioning tasks as appropriate for the project.

Construction Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A	
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O	

Construction Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	TAB Plan Review	L	A	R	R	O	
	Submittal and Shop Drawing Review	R	A	R	L	O	
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A	
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A	
Site Observations	Witness Factory Testing	P	A	P	L	O	
	Construction Observation Site Visits	L	A	R	R	O	
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O	
	Final Functional Performance Test Protocols	L	A	R	R	O	

Construction Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Pre-Test Coordination Meeting	L	A	P	P	O	
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	

Acceptance Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	

Acceptance Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					P = Participate A = Approve R = Review O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase		CxA = Commissioning Agent					L = Lead
Commissioning Roles & Responsibilities		RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					P = Participate A = Approve R = Review O = Optional
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
   a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
   b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
   a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
   b. The full startup plan shall at a minimum consist of the following items:
      1) The Pre-Functional Checklists.
      2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
      3) The manufacturer's normally used field checkout sheets.

c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.
d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.

3. Sensor and Actuator Calibration
   a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
   b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup

   a. Fourweeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
   b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
   c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
   d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.

B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.

C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.

B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers – Critical, Priority, and Maintenance.

1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
2. Priority level alarms are to be printed to a printer which is connected to the Operator’s Work Station located within the engineer’s office. Additionally Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.
3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report

automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the Resident Engineer and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:

1. Pre-testing, Testing, and Post-testing – Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the Resident Engineer. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the Resident Engineer, prior to the execution of Systems Functional Performance Testing.
2. Dynamic plotting – The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted

and plotted at durations listed in the Systems Functional Performance Test Procedure.

3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

2-Pipe Fan Coil Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5˚F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5˚F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the Resident Engineer and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.

3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	**Calibration Frequency**	**O&M Calibration Procedure Reference**
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.

B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process,

areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:

1. System and equipment or component name(s)
2. Equipment location and ID number

3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
4. Date
5. Project name
6. Participating parties
7. A copy of the specification section describing the test requirements
8. A copy of the specific sequence of operations or other specified parameters being verified
9. Formulas used in any calculations
10. Required pretest field measurements
11. Instructions for setting up the test.
12. Special cautions, alarm limits, etc.
13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
15. A section for comments.
16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.

E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.
1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be

erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.

3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.

F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to

perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.

H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.

J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.

K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

A. Documentation: The Commissioning Agent will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to

the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.

B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.
   1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
   2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
   3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
   4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
      a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of noncompliance and the Contractor’s response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
      b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.

5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:
   a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor's response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.
   b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.
   c. The Commissioning Agent will document the resolution process.
   d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:
   1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings.

The findings shall be provided to the VA within two weeks of the original notice.

2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.

E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

3.8 DEFERRED TESTING

A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.

B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's Resident Engineer, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.

B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:

1. Review the Contract Documents.
2. Review installed systems, subsystems, and equipment.
3. Review instructor qualifications.
4. Review instructional methods and procedures.
5. Review training module outlines and contents.
6. Review course materials (including operation and maintenance manuals).
7. Review and discuss locations and other facilities required for instruction.
8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.

9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:
   1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
   2. Qualification Data: Submit qualifications for facilitator and/or instructor.
   3. Attendance Record: For each training module, submit list of participants and length of instruction time.
   4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
   5. Demonstration and Training Recording:
      a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
      b. Video Format: Provide high quality color DVD color on standard size DVD disks.
      c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
      d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
      e. Submit two copies within seven days of end of each training module.

6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. Quality Assurance:
   1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
   2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
   3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. Training Coordination:
   1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.
   2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
   3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:
   1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
      a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
      b. Intrusion detection systems.
      c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
      d. Medical equipment, including medical gas equipment and piping.

e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
i. HVAC instrumentation and controls.
j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
l. Lighting equipment and controls.
m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.

G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:
1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
a. System, subsystem, and equipment descriptions.
b. Performance and design criteria if Contractor is delegated design responsibility.
c. Operating standards.
d. Regulatory requirements.
e. Equipment function.
f. Operating characteristics.
g. Limiting conditions.
H, Performance curves.

2. Documentation: Review the following items in detail:
   a. Emergency manuals.
   b. Operations manuals.
   c. Maintenance manuals.
   d. Project Record Documents.
   e. Identification systems.
   f. Warranties and bonds.
   g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
   a. Instructions on meaning of warnings, trouble indications, and error messages.
   b. Instructions on stopping.
   c. Shutdown instructions for each type of emergency.
   d. Operating instructions for conditions outside of normal operating limits.
   e. Sequences for electric or electronic systems.
   f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
   a. Startup procedures.
   b. Equipment or system break-in procedures.
   c. Routine and normal operating instructions.
   d. Regulation and control procedures.
   e. Control sequences.
   f. Safety procedures.
   g. Instructions on stopping.
   h. Normal shutdown instructions.
   i. Operating procedures for emergencies.
   j. Operating procedures for system, subsystem, or equipment failure.
   k. Seasonal and weekend operating instructions.
   l. Required sequences for electric or electronic systems.
   m. Special operating instructions and procedures.
5. Adjustments: Include the following:
   a. Alignments.
   b. Checking adjustments.
   c. Noise and vibration adjustments.
   d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:
   a. Diagnostic instructions.
   b. Test and inspection procedures.
7. Maintenance: Include the following:
   a. Inspection procedures.
   b. Types of cleaning agents to be used and methods of cleaning.
   c. List of cleaning agents and methods of cleaning detrimental to product.
   d. Procedures for routine cleaning
   e. Procedures for preventive maintenance.
   f. Procedures for routine maintenance.
   g. Instruction on use of special tools.
8. Repairs: Include the following:
   a. Diagnosis instructions.
   b. Repair instructions.
   c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
   d. Instructions for identifying parts and components.
   e. Review of spare parts needed for operation and maintenance.

H. Training Execution:
1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.
2. Instruction:
   a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.
   b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
      1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.

2) The VA will furnish an instructor to describe VA's operational philosophy.
3) The VA will furnish the Contractor with names and positions of participants.

3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.
4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.
5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:
1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

SECTION 01 91 00.01

DVA/USACE PROJECTS GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

A. This Section 01 91 00.01 DVA/USACE PROJECTS GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures for VA projects with USACE as the Design and/or Construction agent. The Commissioning Agent (CxA) and Contractor's Commissioning Manager (CxM) shall add, modify, and refine the commissioning procedures, as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table and as approved by the Contracting Officer's Representative (COR), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.

B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.

C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the COR and the CxA to be indexed for future reference.

D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.

E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA's operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup, control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:
   1. Verify that the applicable equipment and systems are installed in accordance with the contact documents and according to the manufacturer's recommendations.
   2. Verify and document proper integrated performance of equipment and systems.
   3. Verify that Operations & Maintenance documentation is complete.
   4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
   5. Verify that the VA's operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
   6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

A. For this construction project, the Government contracts with a Contractor to provide construction services. The contracts are administered by the Contracting Officer and the COR as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.

B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to COR and the Contractor. Communications between by other parties to the contracts (Subcontractors and Vendors) must be conducted through the COR and Contractor. Communications between the Contractor and other

parties of the project (Commissioning Agent and Architect/Engineer) must be conducted through the COR.

C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent (CxA) and Commissioning Manager (CxM) must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and COR. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the CxA or CxM shall be deemed to constitute direction that modifies the terms of any contract between the Government and the Contractor.
2. Commissioning Issues identified by the CxA and CxM will be delivered to the COR and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the CxA and CxM and as suggestions for resolution.
3. In the event that any Commissioning Issues and suggested resolutions are deemed by the COR to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or COR will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the COR of any issues that they deem to constitute a potential contract change prior to acting on these issues.

5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or COR, with appropriate technical guidance from the Architect/Engineer, CxA and/or CxM.

1.3 RELATED WORK

A. UFGS Section 01 30 00 ADMINISTRATIVE REQUIREMENTS
B. UFGS Section 01 32 01.10 PROJECT SCHEDULE
C. UFGS Section 01 33 00 SUBMITTAL PROCEDURES
D. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS
E. Section 07 08 00.01 DVA/USACE PROJECTS FACILITY EXTERIOR CLOSURE COMMISSIONING.
F. Section 21 08 00 .01 DVA/USACE PROJECTS COMMISSIONING OF FIRE PROTECTION SYSTEMS.
G. Section 22 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF PLUMBING SYSTEMS.
H. Section 23 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF HVAC SYSTEMS.
I. Section 26 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF ELECTRICAL SYSTEMS.
J. Section 27 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF COMMUNICATIONS SYSTEMS.
K. Section 28 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.
L. Section 33 08 00.01 DVA/USACE PROJECTS COMMISSIONING OF SITE UTILITIES.

1.4 SUMMARY

A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
B. The commissioning activities have been developed to support the Government requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
C. The commissioning activities have been developed to support the United States Green Building Council’s (USGBC) LEED™ rating program and to support delivery of project performance in accordance with the Government requirements developed for the project to support the following credits:

1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" and the prerequisite of "Fundamental Building Systems Commissioning."
2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.

D. The commissioning activities have been developed to support the Green Buildings Initiative's Green Globes rating program and to support delivery of project performance in accordance with the Government requirements developed for the project.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning
CD	Construction Documents
A	Approve
ASI	Architect's Supplemental Instruction
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (USACE)
COR	Contracting Officer's Representative (USACE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative

List of Acronyms	
Acronym	Meaning
D-B	Design-Build
D-B-B	Design-Bid-Build
DD	Design Development
DID	Design Intent Document
DPC	Design Phase Commissioning
DVA	Department of Veterans Affairs
FPT	Functional Performance Test
L	Lead
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O	Optional
O&M	Operations & Maintenance
OPR	Owner’s Project Requirements
P	Participate
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
R	Review
RFI	Request For Information
RFP	Request For Proposal
RE	VA Resident Engineer
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
USACE	United States Army Corps of Engineers
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager

List of Acronyms	
Acronym	Meaning
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (http://www.wbdg.org/resources/cobie.php)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): A qualified and independent Commissioning Professional with professional engineering registration (PE), active commissioning certification from a nationally recognized commissioning organization, and proven hands-on and verifiable experience in the commissioning of projects with equivalent scope. The CxA is employed by a nationally recognized, certified, and qualified commissioning firm, hired directly by government under a separate contract, who leads and administers the Cx process by managing the Cx team and overseeing the Commissioning Process, except as otherwise noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table in this document. Both the commissioning firm and the CxA are certified commissioning providers with experience and expertise in the commissioning of facilities of comparable scope and complexity. The CxA is responsible for government oversight of the commissioning process throughout all phases of the project. Where CxA is used in this document it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. The CxA is collaborated by the CxM during construction period. (Note: Commissioning certification by a nationally recognized organization is required. Certifications from AABC Commissioning Group (ACG), Building Commissioning Association (BCA), or other equivalent commissioning authority would be deemed as acceptable.)

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all

phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

Commissioning Issue: A condition identified by the CxA, CxM, or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also – Commissioning Observation).

Commissioning Manager (CxM): A qualified individual with professional engineering registration (PE) and active commissioning certification from a nationally recognized commissioning organization, and proven hands-on and verifiable experience in the commissioning of projects with equivalent scope, appointed by the Construction General Contractor to manage the commissioning process on behalf of the Contractor. The CxM is employed by a nationally recognized, certified, and qualified commissioning firm, responsible for managing, scheduling, executing, and documenting commissioning activities during the construction period as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table in this document. The CxM is regularly employed in commissioning of total building systems and is an employee of a commissioning firm hired by the construction contractor. The commissioning firm is a first-tier subcontractor to the Prime Contractor. The CxM is supported by commissioning specialists employed by the commissioning firm. (Note: Commissioning certification by a nationally recognized organization is required. Certifications from AABC Commissioning Group (ACG), Building Commissioning Association (BCA), or other equivalent commissioning authority would be deemed as acceptable).

Commissioning Observation: An issue identified by the CxA, CxM, or other member of the Commissioning Team that does not conform to the

project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and

dimension manufacturers' recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See "Commissioning Issue".

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns – and their resolution – that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

LEAD: The "LEAD" Roles & Responsibilities designation represents the overall leadership and administration of the Cx process by managing the Cx team and overseeing and managing the Commissioning Process. The LEAD party responsibilities shall also include participation and review responsibilities as applicable.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment.

Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

Owner's Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

PARTICIPATE: The "PARTICIPATE" Roles & Responsibilities designation represents an active participation in the Cx process and its development by working closely and directly with the party designated as the LEAD, as well as review responsibility as applicable.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners operators to operate the systems.

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the DVA/USACE. Validation: The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner’s Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	**Description**
Building Exterior Closure	
Foundations (excluding structural)	Standard, special, slab-on-grade, vapor barriers, air barriers
Basements	Basement walls, crawl spaces, waterproofing, drainage
Superstructure	Floor construction, roof construction, sunshades, connections to adjacent structures
Exterior Closure	Exterior walls, exterior windows, exterior doors, louvers, grilles and sunscreens,
Roofing	Roof system (including parapet), roof openings (skylights, pipe chases, ducts, equipment curbs, etc.)
Note:	The emphasis on commissioning the above building envelope systems is on control of air flow, heat flow, noise, infrared, ultraviolet, rain penetration, moisture, durability, security, reliability, constructability, maintainability, and sustainability.
Specialties	

Systems To Be Commissioned	
System	**Description**
Patient Bed Service Walls	Medical gas certification and cross check, electrical connections
Patient Lifts	Patient lifts support, controls, certification of compliance
Equipment	
Parking Control Equipment	Barriers
Laboratory Fume Hoods	Fume Hood Certification
Biological Safety Cabinets	Cabinet Certification
Packaged Incinerators	Combustion Testing, Cycle Certification
Conveying Equipment	
Electric Dumbwaiters	Interface with other systems (Fire Alarm, etc.) [ASTM testing and certification by others]
Elevators	Interface with other systems (fire alarm, etc.) [ASTM testing and certification by others]
Escalators	Interface with other systems (fire alarm, etc.) [ASTM testing and certification by others]
Material Delivery Systems	Interface with other systems (fire alarm, elevators, etc.)
Pneumatic Tube Systems	Interface with other systems (fire alarm, etc.)
Fire Suppression	
Fire Pump	Fire Pump, jockey pump, fire pump controller/ATS
Fire Sprinkler Systems	Wet pipe system, dry pipe system, pre-action system, special agent systems
Plumbing	
Domestic Water Distribution	Booster pumps, backflow preventers, water softeners, potable water storage tanks

Systems To Be Commissioned	
System	**Description**
Domestic Hot Water Systems	Water heaters**, heat exchangers, circulation pumps, point-of-use water heaters*
Sewerage Pump Systems	Sewage ejectors
Wastewater Pump Systems	Sump pumps
Sanitary Waste Interceptors	Grease interceptors, acid neutralizers
General Service Air Systems	Packaged compressor systems, air dryers, filtration
Medical Air Systems	Packaged medical air compressor units. Outlet certification, cross-connection verification
Medical Vacuum Systems	Packaged medical vacuum units, outlet certification, cross-connection verification
Dental Air Systems	Packaged dental air compressor units, outlet certification, cross-connect verification
Dental Evacuation and Vacuum Systems	Packaged Dental Evacuation units, packaged dental vacuum units, outlet certification, cross-connection verification
Waste Anesthesia Gas Systems	Packaged Waste Anesthesia Gas units, outlet certification, cross-connection verification
Medical Gas Systems (other than Medical Air Systems)	Medical gas (oxygen, nitrogen, nitrous oxide, etc.) tank/manifold systems, outlet certification, cross-connection verification
Chemical Waste Systems	Chemical storage tanks, neutralization systems, ventilation, process control
Reverse-Osmosis Systems	Packaged Reverse-Osmosis systems
Water De-Alkalizing Systems	Package Water De-Alkalizing systems
HVAC	

Systems To Be Commissioned	
System	**Description**
Noise and Vibration Control	Noise and vibration levels for critical equipment such as Air Handlers, Chillers, Cooling Towers, Boilers, Generators, etc. will be commissioned as part of the system commissioning
Direct Digital Control System**	Operator Interface Computer, Operator Work Station (including graphics, point mapping, trends, alarms), Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
Chilled Water System**	Chillers (centrifugal, rotary screw, air-cooled), pumps (primary, secondary, variable primary), VFDs associated with chilled water system components, DDC Control Panels (including integration with Building Control System)
Condenser Water System**	Cooling Towers, Fluid Coolers, heat exchangers/economizers, pumps, VFDs associated with condenser water system components, DDC control panels.
Steam/Heating Hot Water System**	Boilers, boiler feed water system, economizers/heat recovery equipment, condensate recovery, water treatment, boiler fuel system, controls, interface with facility DDC system.
HVAC Air Handling Systems**	Air handling Units, packaged rooftop AHU, Outdoor Air conditioning units, humidifiers, DDC control panels
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust, laboratory exhaust, isolation exhaust, room pressurization control systems
HVAC Energy Recovery Systems**	Heat Wheels, Heat Recovery Loops, AHU Integrated Heat Recovery

Systems To Be Commissioned	
System	**Description**
HVAC Terminal Unit Systems**	VAV Terminal Units, CAV terminal units, fan coil units, fin-tube radiation, unit heaters
Decentralized Unitary HVAC Systems*	Split-system HVAC systems, controls, interface with facility DDC
Unitary Heat Pump Systems**	Water-source heat pumps, controls, interface with facility DDC
Humidity Control Systems	Humidifiers, de-humidifiers, controls, interface with facility DDC
Hydronic Distribution Systems	Pumps, DDC control panels, heat exchangers,
Facility Fuel Systems	Boiler fuel system, generator fuel system
Geothermal Energy Direct Use Heating **	Geothermal well, ground heat exchanger, geothermal pumps, heat exchanger, valves, instrumentation
Solar Energy Heating Systems **	Solar collectors, heat exchangers, storage tanks, solar-boosted domestic hot water heater, pumps, valves, instrumentation
Facility Fuel Gas Systems	Witness Natural gas piping pressure testing, natural gas compressors and storage, propane storage
Smoke Evacuation System	Atrium smoke evacuation, other smoke evacuation and smoke management systems, controls, interface with other systems (fire alarm), emergency operation.
Electrical	
Medium-Voltage Electrical Distribution Systems	Medium-Voltage Switchgear, Medium-Voltage Switches, Underground ductbank and distribution, Pad-Mount Transformers, Medium-Voltage Load Interrupter Switches,
Grounding & Bonding Systems	Witness 3rd party testing, review reports
Electric Power Monitoring Systems	Metering, sub-metering, power monitoring systems, PLC control systems

Systems To Be Commissioned	
System	**Description**
Electrical System Protective Device Study	Review reports, verify field settings consistent with Study
Secondary Unit Substations	Medium-voltage components, transformers, low-voltage distribution, verify breaker testing results (injection current, etc)
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, switchboards, distribution panels, panelboards, verify breaker testing results (injection current, etc)
Emergency Power Generation Systems	Generators, Generator paralleling switchgear, automatic transfer switches, PLC and other control systems
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls
Cathodic Protection Systems	Review 3rd party testing results.
Lightning Protection System	Witness 3rd party testing, review reports
Communications	
Grounding & Bonding System	Witness 3rd party testing, review reports
Structured Cabling System	Witness 3rd party testing, review reports
Master Antenna Television System	Witness 3rd party testing, review reports
Public Address & Mass Notification Systems	Witness 3rd party testing, review reports

Systems To Be Commissioned	
System	**Description**
Intercom & Program Systems	Witness 3rd party testing, review reports
Nurse Call & Code Blue Systems	Witness 3rd party testing, review reports
Security Emergency Call Systems	Witness 3rd party testing, review reports
Duress Alarm Systems	Witness 3rd party testing, review reports
Electronic Safety and Security	
Grounding & Bonding	Witness 3rd party testing, review reports
Physical Access Control Systems	Witness 3rd party testing, review reports
Access Control Systems	Witness 3rd party testing, review reports
Security Access Detection Systems	Witness 3rd party testing, review reports
Video Surveillance System	Witness 3rd party testing, review reports
Electronic Personal Protection System	Witness 3rd party testing, review reports
Fire Detection and Alarm System	100% device acceptance testing, battery draw-down test, verify system monitoring, verify interface with other systems.
Renewable Energy Sources	
Geothermal Energy Electrical Generation Systems **	Geothermal well, DC-AC Inverters, storage batteries, turbine generator modules, switchgear, combiner boxes, instrumentation, monitoring and control systems
Solar Energy Electrical Power Generation Systems **	Solar collector modules, DC-AC inverter, storage batteries, combiners, Switchgear, instrumentation, monitoring and control systems
Wind Energy Electrical Power Generation Systems **	Wind Turbines, DC-AC inverter, storage batteries, combiners, switchgear, instrumentation, monitoring and control systems

Systems To Be Commissioned	
System	**Description**
Site Utilities	
Water Utilities	City Water Service Entrance, Backflow Prevention, Pressure Control, Booster Pumps, Irrigation Systems
Sanitary Sewerage Utilities	City Sanitary Connection, Waste Treatment Systems
Storm Drainage Utilities	City Storm Water Connection, Site Storm Water Distribution
Energy Distribution Utilities	Connection to Third Party Energy (Steam, High Temp Hot Water, Chilled Water) Supply Systems, Metering, Pressure Control
Transportation	
Active Traffic Barrier Systems	Witness 3rd party testing
Integrated Systems Tests	
Loss of Power Response	Loss of power to building, loss of power to campus, restoration of power to building, restoration of power to campus.
Fire Alarm Response	Integrated System Response to Fire Alarm Condition and Return to Normal
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite.	

1.8 COMMISSIONING TEAM

A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Government, CxA, and CxM.

B. Members Appointed by Contractor:

1. Contractor’s Commissioning Manager (CxM, See the CxM definition above): The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the

construction team. See the Roles & Responsibilities table below for more detailed responsibilities.

2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

C. Members Appointed by the Government:

1. Commissioning Agent (CxA, See the CxA definition above): The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The Government will engage the CxA under a separate contract.
2. User: Representatives of the facility user and operation and maintenance personnel. See the Roles & Responsibilities table below for more detailed responsibilities.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 GOVERNMENT'S COMMISSIONING RESPONSIBILITIES

A. Appoint an individual, company or firm to act as the Commissioning Agent. See the Roles & Responsibilities table for details.

B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:

1. Coordination meetings.
2. Training in operation and maintenance of systems, subsystems, and equipment.
3. Testing meetings.
4. Witness and assist in Systems Functional Performance Testing.
5. Demonstration of operation of systems, subsystems, and equipment.

C. Provide the Construction Documents, prepared by Architect and approved by the Government, to the CxA and CxM, and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

A. The Contractor shall assign a qualified Commissioning Manager (CxM, See the CxM definition above) to manage commissioning activities of the

team, Contractor, and subcontractors, as indicated in the Roles & Responsibilities table.

B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.

C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:

1. Participate in commissioning coordination meetings.
2. Conduct operation and maintenance training sessions in accordance with approved training plans.
3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
5. Review and comment on commissioning documentation.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the CxA and CxM for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

1.11 COMMISSIONING AGENT'S (CXA) RESPONSIBILITIES

A. Organize and lead the commissioning team. See the Roles & Responsibilities table below for more detailed responsibilities.

B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.

C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

D. At the beginning of the construction phase, coordinate with CxM for and participate in an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.

E. Refer to the Roles & Responsibilities table for meetings that are expected to be coordinated and led by the CxA throughout the entire project. For meetings that CxA is not indicated to be the Lead, the CxA shall proactively and collaboratively participate and support the Lead individual, including but not limited to, coordination with CxM in preparation of and careful review of the meeting agenda and minutes prior to distribution. For meetings that CxA is identified as the Lead, the CxA shall convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.

F. Observe construction and report progress, observations and issues to the CxM for distribution. This is not intended to substitute the CxM's own construction observation and progress reporting. Observe systems and equipment installation for adequate accessibility for maintenance

and component replacement or repair, and for general conformance with the Construction Documents.

G. Coordinate with the CxM in preparation of the Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.

H. Collaborate with the CxM for the coordination of the Systems Functional Performance Testing schedule with the Contractor.

I. Witness selected systems startups.

J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.

K. Witness Systems Functional Performance Testing and ensure it is properly documented.

L. Coordinate with and support the CxM to ensure test data, inspection reports, and certificates are properly compiled and are included in the systems manual and commissioning report.

Spec Writer's Note: Coordinate the specification reference in Para M below with the specific project spec section dealing with O&M Data requirements. Also, coordinate with USACE PM for O&M Data requirements.

M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for commissioning impact and compliance with the Contract Documents.

N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.

O. Coordinate with and support the CxM to ensure commissioning Field Observation Reports are prepared and documented.

P. Coordinate with and support the CxM in preparation of the Final Commissioning Report.

Q. Return to the site at 10 months into the 12 month warranty period and review with the CxM and facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also join the CxM in interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for

improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Collaborate with the CxM and assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

R. Coordinate with and support the CxM in assembling the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

1.12 COMMISSIONING DOCUMENTATION

A. Commissioning Plan: A document, prepared by the CxA during the pre-design and design phases, and tailored for the project and finalized by the CxM during the construction phase with close collaboration with and agreement by the CxA (Note: The changes to the plan by the CxM shall be considered to be minor and limited to ONLY those necessary for fine tuning the document to better align with the contractor activities such as coordination with the subcontractors and vendors), that outlines the preliminary schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:

1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
3. Identification of systems and equipment to be commissioned.
4. Schedule of Commissioning Coordination meetings.
5. Identification of items that must be completed before the next operation can proceed.
6. Description of responsibilities of commissioning team members.
7. Description of observations to be made.
8. Description of requirements for operation and maintenance training.

9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
12. Preliminary Systems Functional Performance Test procedures.

B. Systems Functional Performance Test Procedures: The CxA will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the COR, CxM, Architect/Engineer, and Contractor for review and comment. During the construction phase and with close collaboration with the CxA, the CxM will finalize the Systems Functional Performance Test Procedures. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
2. Test number.
3. Time and date of test.
4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
5. Dated signatures of the person performing test and of the witness, if applicable.
6. Individuals present for test.
7. Observations and Issues.
8. Issue number, if any, generated as the result of test.

C. Pre-Functional Checklists: The CxA will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be finalized by the CxM during the construction phase and completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The CxA and CxM will spot

check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.

D. Test and Inspection Reports: The CxM will record test data, observations, and measurements on Systems Functional Performance Test Procedure, while the CxA will participate and assist the CxM in the entire effort. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. The CxM will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

E. Corrective Action Documents: The CxM will document corrective action taken for systems and equipment that fail tests. The documentation will include any recommended and/or completed corrective actions to systems and equipment and/or revisions to test procedures, if any. The CxA will witness and collaborate with the CxM to ensure that any retesting of systems and/or equipment requiring corrective action, as well as the retest results are properly documented.

F. Commissioning Issues Log: The CxM will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. The CxA will participate by reviewing the Commissioning Issues Log to ensure it is up to date and accurate. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.

1. Creating a Commissioning Issues Log Entry:
   a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
   b. Assign a descriptive title for the issue.
   c. Identify date and time of the issue.
   d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.

e. Identify system, subsystem, and equipment to which the issue applies.
f. Identify location of system, subsystem, and equipment.
g. Include information that may be helpful in diagnosing or evaluating the issue.
h. Note recommended corrective action.
i. Identify commissioning team member responsible for corrective action.
j. Identify expected date of correction.
k. Identify person that identified the issue.

2. Documenting Issue Resolution:
a. Log date correction is completed or the issue is resolved.
b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
c. Identify changes to the Contract Documents that may require action.
d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
e. Identify person(s) who corrected or resolved the issue.
f. Identify person(s) verifying the issue resolution.

G. Final Commissioning Report: The CxM will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The CxA will participate and assist the CxM in the entire effort. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Government when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:

1. Lists and explanations of substitutions, compromises, variances with the Contract Documents, record of conditions; and, if appropriate,

recommendations for resolution. Design Narrative documentation maintained by the AE, with input from the CxA and CxM.

2. Commissioning plan.
3. Pre-Functional Checklists completed by the Contractor, with annotation of the CxA and CxM review and spot check.
4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
5, Commissioning Issues Log.
6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.

H. Addendum to Final Commissioning Report: The CxM will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The CxA will participate and assist the CxM in the entire effort. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:

1. Documentation of deferred and off season test(s) results.
2. Completed Systems Functional Performance Test Procedures for off season test(s).
3. Documentation that unresolved system performance issues have been resolved.
4. Updated Commissioning Issues Log, including status of unresolved issues.
5. Identification of potential Warranty Claims to be corrected by the Contractor.

I. Systems Manual: The CxM will gather required information and compile the Systems Manual. The CxA will participate by reviewing the content and completeness. The Systems Manual will include, but is not limited to, the following:

1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
2. Reference to Final Commissioning Plan.
3. Reference to Final Commissioning Report.
4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

A. Preliminary Commissioning Plan Submittal: The CxA has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the Government).
3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including but not limited to the following:
   a. Submission and approval of the Commissioning Firm and Commissioning Specialists such as CxM and CxR.
   b. Submission and approval of the Testing, Adjusting, and Balancing (TAB) Firm and TAB Specialist.
   c. Submission of the Design Review Reports.
   d. Submission and approval of the Construction Phase Commissioning Plan.
   e. Installation of permanent utilities (gas, water, electric, etc.).
   f. Building Envelope Construction.
   g. Submission and approval of the Building Envelope Inspection Checklists.
   h. Air Barrier Pressure Tests.
   i. Drainage and Vent, Building Sewers, Water Supply Systems and Backflow Prevention Assembly Tests.

j. Factory Acceptance Testing for each of the systems to be commissioned as required.
k. Manufacturer's Equipment Start-Up for each of the systems to be commissioned.
l. Potable Water System Flushing.
m. Operational Tests of the plumbing system.
n. Potable Water System Disinfection.
o. Submission and approval of the TAB Schematic Drawings, Report Forms, and Procedures.
p. Submission and approval of Duct Air Leakage Test Procedures.
q. Duct Air Leakage Test Execution.
r. Submission and approval of the Final Duct Air Leakage Test Report.
s. Testing, Adjusting, and Balancing (TAB) Field Work.
t. Submission and approval of the TAB Report.
u. TAB Field Acceptance Testing.
v. Submission and approval of the Start-Up Testing Report for HVAC Controls and Instrumentation.
w. Submission and approval of the Performance Verification Test Procedures for HVAC Controls and Instrumentation.
x. Performance Verification Tests for HVAC Controls and Instrumentation.
y. Performance Verification Test Report for HVAC Controls and Instrumentation.
z. Pre-Functional Checklist Submittal.
aa. Functional Performance Testing for each system to be commissioned, the expected duration and predecessors for the activity.
bb. Integrated Systems Tests.
cc. Post-Test Deficiency Correction for each system to be commissioned.
dd. Re-Testing.
ee. Endurance Tests.
ff. Training for each of the systems to be commissioned.
gg. [Systems Manual][Computerized Maintenance Management System Manual], Maintenance Plan, and Service Life Plan submission and approval.

hh. Seasonal Testing.

ii. Phasing.

6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned provide guidance on the level of detailed information the Contractor shall include on the final submission.
7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.

B. Commissioning and Final Commissioning Plans Submittals: Based on the Final Construction Documents, the CxA will prepare the Commissioning Plan as described in this section. The CxA will submit four hard copies and four sets of electronic files of the Commissioning Plan. During the construction phase, the CxM shall review and finalize the Commissioning Plan. The changes to the plan shall be minimal in nature as needed to tailor the plan for better alignment with the Contractor activities. All changes made to the Commissioning Plan by the CxM shall be reviewed by the CxA and approved by the COR. The CxM will submit three hard copies and three sets of electronic files of the Final Commissioning Plan.

C. Systems Functional Performance Test Procedure: The CxA will submit preliminary Systems Functional Performance Test Procedures to the CxM, and the COR for review and comment. The CxM shall return review comments to the COR and the CxA. The COR will also return review comments to the CxA. The CxA will incorporate review comments and re-issue the revised preliminary Systems Functional Performance Test Procedures. Based on the revised preliminary Systems Functional Performance Test Procedures, the CxM in close collaboration with the CxA will prepare and issue the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing. This document shall be reviewed by all parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table, and approved by COR.

D. Pre-Functional Checklists: Similarly, the CxA will submit preliminary Pre-Functional Checklists to be reviewed and finalized by the CxM, after collection and incorporation of the review comments from all parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table and with approval from COR.

E. Test and Inspection Reports: The CxM will submit test and inspection reports to the DVA/USACE with copies to the CxA and other parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table.

F. Corrective Action Documents: The CxM will submit corrective action documents to the COR with copies to the CxA and other parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table.

G. Preliminary Commissioning Report Submittal: The CxM will submit four electronic copies of the preliminary commissioning report. One electronic copy and four hard copies, with consolidated review comments, will be prepared by the CxM for redistribution amongst the parties, and preparation of the final submittal.

H. Final Commissioning Report Submittal: The CxM will submit four sets of electronically formatted information of the final commissioning report to the COR. The final submittal will incorporate comments as directed by the COR.

I. Data for Commissioning:

1. The CxA, through coordination with COR and CxM, will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
2. The CxA, through coordination with COR and CxM, shall request further documentation as is necessary for the commissioning process or to support other Government data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

1.14 COMMISSIONING PROCESS

A. During the Pre-Design and Design Phases, the CxA will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the Government and the other parties outside of this contract as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table. During the Construction and Warranty Phases, the CxM, in close coordination and

collaboration with CxA, has the overall management of the commissioning process as well as coordinating and scheduling of commissioning tasks with the Government and the other parties outside of this contract as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table. The CxA is responsible for government oversight of the commissioning process throughout all phases of the project. As directed by the COR, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

B. Within //XX// days of contract award, the Contractor shall provide a certified commissioning professional through an independent commissioning firm, see the CxM definition above, to act as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor. The credentials of the commissioning firm and CxM shall be reviewed and approved by the COR.

C. Within //XX// days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.

B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test

instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

A. Management: The CxM will coordinate the commissioning activities with the COR, CxA and Contractor. The CxM will submit commissioning documents and information to the COR, CxA and other parties as noted in COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

B. Scheduling: The Contractor shall work with the CxM, CxA and COR to incorporate the commissioning activities into the construction schedule. The CxM, with close coordination with CxA, will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction Schedule as directed by the COR.

C. Initial Schedule of Commissioning Events: The CxA will provide the initial schedule of primary commissioning events in the Preliminary Commissioning Plan. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the CxM and other parties.

D. Commissioning Coordinating Meetings: The CxM will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.

E. Pretesting Meetings: The CxM will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid

necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the CxM.

B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

PART 3 - EXECUTION

3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Pre-Design Phase (D-B-B) and RFP Development Phase (D-B):

Spec Writer's Notes: Edit the following tables to describe the roles and responsibilities for each commissioning team member for each of the commissioning tasks as appropriate for the project.

Pre-Design Phase (D-B-B)/RFP Development Phase(D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
Meetings	Pre-Design Kick-Off Meeting	P	P	L	N/A	P	
	Owner's Project Requirements (OPR) Meeting	P	P	L	N/A	P	
	Commissioning Planning Meetings	L	P	P	N/A	O	
Coordination	Coordinate with [A/E, COR, AHJ, Vendors, etc.] to ensure that Cx is incorporated into project planning and documents.	L	P	P	N/A	O	
Cx Plan & Spec	Draft Commissioning Plan	L	A	R	N/A	R	
Schedules	Preliminary Commissioning Schedule	L	A	R	N/A	N/A	

Pre-Design Phase (D-B-B)/RFP Development Phase(D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
OPR and BOD	Prepare OPR	P	A	L	N/A	P	
	Prepare BOD	P	A	L	N/A	R	
Commissioning Documents	Identify systems to be commissioned.	L	P	P	N/A	R	
	Preliminary Acceptance Criteria	L	P	P	N/A	R	
	Commissioning Documents Preliminary Templates	L	P	P	N/A	R	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Bid Phase (D-B):

Bid Phase (D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
Pre-Bid Meeting	Organize, schedule and conduct meeting	P	L	P	N/A	O	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Design Phase (D-B-B):

Design Phase (D-B-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
Meetings	Design Review Meetings	P	P	L	N/A	P	
	Controls Meeting	L	P	P	N/A	P	
Coordination	Coordinate with [A/E, COR, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD	L	P	P	N/A	O	
Cx Plan & Spec	Commissioning Plan	L	A	R	N/A	R	
	Cx Specifications	L	A	R	N/A	R	
Schedules	Design Phase Preliminary Commissioning schedule	L	A	R	N/A	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	P	A	L	N/A	P	
	Review BOD vs. OPR	L	A	P	N/A	P	
	Maintain BOD on behalf of Owner	P	A	L	N/A	R	
Reviews	Focused Schematic (Concept)Designs (SDs)	P	L	P	N/A	P	

Design Phase (D-B-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
	Focused Schematic(Concept) Designs (SDs)Comments Resolution	P	L	P	N/A	P	
	Focused Design Developments (DDs)	P	L	P	N/A	P	
	Focused Design Developments (DDs)Comments Resolution	P	L	P	N/A	P	
	Focused Construction Documents (CDs)	P	L	P	N/A	P	
	Focused Construction Documents (CDs)Comments Resolution	P	L	P	N/A	P	
	Focused Pre-Final Construction Document	P	L	P	N/A	P	
	Focused Pre-Final Construction Document Comments Resolution	P	L	P	N/A	P	
	Focused Final Construction Document	P	L	P	N/A	P	
	Final Construction Document Comments Backcheck	P	L	P	N/A	P	
Functional Test Protocols	Draft Pre-Functional Checklists (PFCs)	L	A	R	N/A	R	
	Draft System Functional Performance Tests (FPTs)	L	A	R	N/A	R	

D. The following table outlines the roles and responsibilities for the Commissioning Team members during the Design Phase (D-B):

Design Phase (D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
Meetings	Design Review Meetings	P	P	L	p	P	
	Controls Meeting	L	P	P	p	P	
Coordination	Coordinate with [Contractor, A/E, COR, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD	L	P	P	p	O	
Cx Plan & Spec	Commissioning Plan	L	A	R	R	R	
	Cx Specifications	L	A	R	R	R	
Schedules	Design Phase Preliminary Commissioning Schedule	L	A	R	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	P	A	L	P	P	
	Review BOD vs. OPR	L	A	P	P	P	
	Maintain BOD on behalf of Owner	P	A	L	P	R	
Reviews	Focused Schematic (Concept)Designs (SDs)	P	L	P	P	P	
	Focused Schematic(Concept) Designs (SDs)Comments	P	L	P	P	P	
	Focused Design Developments (DDs)	P	L	P	P	P	
	Focused Design Developments (DDs)Comments	P	L	P	P	P	
	Focused Construction Documents (CDs)	P	L	P	P	P	

Design Phase (D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	CxM	O&M	Notes
	Focused Construction Documents (CDs)Comments	P	L	P	P	P	
	Focused Pre-Final Construction Document	P	L	P	P	P	
	Focused Pre-Final Construction Document Comments	P	L	P	P	P	
	Focused Final Construction Document	P	L	P	P	P	
	Final Construction Document Comments Backcheck	P	L	P	P	P	
Functional Test Protocols	Draft Pre-Functional Checklists (PFCs)	L	A	R	R	R	
	Draft System Functional Performance Tests (FPTs)	L	A	R	R	R	

E. The following table outlines the roles and responsibilities for the Commissioning Team members during the Bid and Pre-Construction Phase (D-B-B):

Bid and Pre-Construction Phase (D-B-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Pre-Bid Meeting	Organize, schedule and conduct meeting	P	L	P	P	P	O	
Pre-Construction Meeting	Organize, schedule and conduct meeting	P	L	P	P	P	O	

F. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase(D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	p	p	P	L	P	P	
	Commissioning Meetings	P	P	P	L	P	O	

Construction Phase(D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
	Project Progress Meetings	P	P	P	L	P	O	
	Controls Meeting	P	P	P	L	P	P	
Coordination	Coordinate with [Contractor, A/E, COR, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD	P	P	P	L	P	P	
Cx Plan	Final Commissioning Plan	P	A	R	L	R	R	See Note 1
Schedules	Duration Schedule for Commissioning Activities	P	A	R	L	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	R	O	
	Maintain BOD/DID on behalf of Owner	P	A	L	P	R	O	
Document Reviews	TAB Plan Review	P	A	R	L	R	O	
	Submittal and Shop Drawing Review	P	A	R	L	R	O	
	Review Contractor Equipment Startup Checklists	P	A	O	L	R	O	

Construction Phase(D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
	Review Change Orders, ASIs, and RFIs	P	A	R	L	R	O	
Site Observations	Witness Factory Testing	P	A	O	L	O	O	
	Construction Observation Site Visits	P	A	O	L	P	P	
Functional Test Protocols	Finalize Pre-Functional Checklists	P	A	R	L	R	O	
	Finalize Functional Performance Test Protocols	P	A	R	L	R	O	
Technical Activities	Issues Resolution Meetings	P	A	P	L	P	O	
Reports and Logs	Status Reports	P	A	R	L	R	O	
	Maintain Commissioning Issues Log	P	A	R	L	R	O	

Notes:

1. Finalizing the project Cx Plan which was developed during the design phase by the CxA, shall be limited to minor tailoring for better alignment with the construction activities such as testing and scheduling. Any modification to the Cx Plan shall be in close coordination with and oversight by the CxA.

G. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase (D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Meetings	Commissioning Meetings	P	P	P	L	P	P	
	Project Progress Meetings	P	P	P	L	P	P	
	Pre-Test Coordination Meeting	P	P	P	L	P	P	
	Lessons Learned and Commissioning Report Review Meetings	P	P	P	L	P	P	
Coordination	Coordinate with [Contractor, A/E, COR, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	P	P	P	L	P	P	
Cx Plan	Maintain/Update Commissioning Plan	P	A	R	L	R	R	
Schedules	Prepare Functional Test Schedule	P	A	R	L	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	R	O	
	Maintain BOD/DID on behalf of Owner	P	A	L	P	R	O	

Acceptance Phase (D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Document Reviews	Review Completed Pre-Functional Checklists	P	A	R	L	R	O	
	Pre-Functional Checklist Verification	P	A	R	L	R	O	
	Review Operations & Maintenance Systems Manuals	P	A	R	L	R	P	
	Training Plan Review	P	A	R	L	R	P	
	Warranty Review	R	P	R	L	R	P	
	Review TAB Report	R	A	R	L	R	P	
Site Observations	Construction Observation Site Visits	P	P	P	L	P	P	
	Witness Selected Equipment Startup	P	P	P	L	P	P	
Functional Test Protocols	TAB Verification	P	A	R	L	R	O	
	Systems Functional Performance Testing	P	A	P	L	P	P	
	Retesting	P	A	P	L	P	P	
Technical Activities	Issues Resolution Meetings	P	P	P	L	P	P	
	Systems Training	P	A	R	L	R	P	

Acceptance Phase (D-B-B & D-B)		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Reports and Logs	Status Reports	R	A	R	L	R	O	
	Maintain Commissioning Issues Log	P	A	R	L	R	O	
	Final Commissioning Report	P	A	R	L	R	R	
	Prepare Systems Manuals	P	A	R	L	R	R	

H. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase **(D-B-B & D-B)**		CxA = Commissioning Agent COR = Contracting Off. Rep RE = VA Resident Engineer A/E = Design Arch/Engineer CxM = Commissioning Manager O&M = VA Facility O&M						L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities								
Category	Task Description	CxA	COR	A/E	CxM	RE	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	P	P	O	L	P	P	
Document Reviews	Systems Monitoring Trended Data	P	A	O	L	R	P	
	Systems Manual Update	P	A	O	L	R	R	
Site Observations	Periodic Warranty Site Visits (4 & 9 Month)	P	P	O	L	P	P	
Functional Test Protocols	Deferred and/or seasonal Testing	P	P	O	L	P	P	
Technical Activities	Commissioning/Issues Resolution/Lessons Learned Meetings	P	P	O	L	P	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	P	P	O	L	P	P	
Reports and Logs	Final Commissioning Report Amendment	P	A	R	L	R	R	
	Status Reports	R	A	R	L	R	O	
	Issues Logs Closure Report	P	A	R	L	R	O	

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
   a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
   b. The CxM will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques. The CxA and other parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table will also review the completed Pre-Functional Checklists for accuracy.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
   a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
   b. The full startup plan shall at a minimum consist of the following items:
      1) The Pre-Functional Checklists.
      2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.

3) The manufacturer's normally used field checkout sheets.

c. The CxM will submit the full startup plan to the COR, CxA, Contractor, and other parties as noted in the COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES table for review. Final approval will be by the DVA/USACE.

d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.

3. Sensor and Actuator Calibration

a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.

b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.

4. Execution of Equipment Startup

a. //Four// //insert number// weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the COR and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.

b. The CxM will observe the startup procedures for selected pieces of primary equipment. The CxA and other Government representative(s) may choose to participate in some or all of the startup procedures as observers.

c. The Contractor shall execute startup and provide the COR, CxM and CxA with a signed and dated copy of the completed startup checklists, and contractor tests.

d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed

successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the CxM, CxA and Government within two days of completion.

B. The CxM and CxA will review the report and submit comments to the COR. The CxM will work with the Contractor to correct and verify deficiencies or uncompleted items. The CxM will involve the CxA, COR and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the COR, CxM and CxA as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the CxM in collaboration with CxA will recommend approval of the checklists and startup of each system to the COR.

C. The Contractor shall be responsible for resolution of deficiencies as directed the COR.

3.4 PHASED COMMISSIONING

A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the COR, CxM, CxA, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.

B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers – Critical, Priority, and Maintenance.

1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
2. Priority level alarms are to be printed to a printer which is connected to the Operator’s Work Station located within the engineer’s office. Additionally, Priority level alarms shall be

able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.

3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the COR, CxM and CxA for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:

1. Pre-testing, Testing, and Post-testing – Trend reports of trend logs and graphical trend plots are required as defined by the CxA and CxM. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the CxA and CxM. At any time during the Commissioning Process the CxA and CxM may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the COR. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved

by the Contractor, as directed by the COR, prior to the execution of Systems Functional Performance Testing.

2. Dynamic plotting – The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.
3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
OA Temperature	AI	15 Min	24 hours	3 days	N/A		

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
RA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min
Mixed Air Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
RA Pre-Filter Status	AI	None	None	None	N/A		
OA Pre-Filter Status	AI	None	None	None	N/A		
After Filter Status	AI	None	None	None	N/A		
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
OA Supply Temp	AI	15 Min	24 hours	3 days	P	±5°F from SP	10 min
RA Supply Temp	AI	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
Initial UVC Intensity (%)	AI	None	None	None	N/A		
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	6 min
CO2 Level	AI	15 Min	24 hours	3 days	P	±10% from SP	10 min

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 1	DI	COV	24 hours	3 days	C	True	10 min
Freeze Stat Level 2	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #2 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #3 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
OA Alarm	DI	COV	24 hours	3 days	C	True	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
UVC Emitter Alarm	DI	COV	24 hours	3 days	P	True	10 min
CO2 Alarm	DI	COV	24 hours	3 days	P	True	10 min
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
Supply Fan Speed	AO	15 Min	24 hours	3 days	N/A		

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Return Fan Speed	AO	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 days	N/A	N/A		

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

2-Pipe Fan Coil Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Unit Heater Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Heating Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Unit Heater ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Steam and Condensate Pumps Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Steam Flow (LB/HR)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Pump Run Hours	AI	15 Minutes	12 hours	3 days	N/A		
Water Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Electric Meter (KW/H)	AI	15 Minutes	12 hours	3 days	N/A		
Irrigation Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Chilled Water Flow (TONS)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Flow (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
High Water Level Alarm	DI	COV	12 hours	3 days	C	True	5 Min
Condensate Pump Start/Stop	DO	COV	12 hours	3 days	P	Status <> Command	10 min

Domestic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Domestic HW Setpoint WH-1	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Setpoint WH-2	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	C	> 135 oF	10 Min
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	P	±5°F from SP	10 Min

Domestic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Dom. Circ. Pump #1 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #2 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Dom. Circ. Pump #2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Domestic HW Start/Stop	DO	COV	12 Hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
System HWS Temperature	AI	15 min	12 hours	3 days	C	±5°F from SP	10 Min
System HWR Temperature	AI	15 min	12 hours	3 days	M	±15°F from SP	300 Min
HX-1 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Leaving Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
System Flow (GPM)	AI	15 min	12 hours	3 days	N/A		
System Differential Pressure	AI	15 min	12 hours	3 days	P	±10% from SP	8 Min
				3 days			

Hydronic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
HW Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 1 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 2 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station Bypass Valve Position	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HW Pump 2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HWR #1 Valve	DO	COV	12 Hours	3 days	N/A		
HWR #2 Valve	DO	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 1 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 1 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 2 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Decoupler Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Secondary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Secondary Loop Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Primary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Chiller 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 2 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Detector	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Exhaust Fan Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Emergency Shutdown	DI	COV	12 Hours	3 days	P	True	1 Min
Primary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Refrigerant Exhaust Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 1 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Cooling Tower 2 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Condenser Water Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Condenser Water Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Outdoor Air Wet Bulb	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 1 Basin Heat	DI	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Cooling Tower 1 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 2 Basin Heat	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 2 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 1 Condenser Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser By-Pass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Cooling Tower 1 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

Steam Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Boiler 1 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 2 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
System Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min

Steam Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 2 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 2 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Combustion Damper Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Condensate Recovery Pump Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Boiler 1 Feed Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		
Boiler 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Combustion Damper Command	DO	COV	12 Hours	3 days	N/A		

Steam Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Condensate Recovery Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Outside Air Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Hot Water Supply Temperature	AI	15 Minutes	12 Hours	3 days	P	±5 oF from SP	10 Min
Hot Water Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	C	±5% from SP	10 Min
Lead Boiler	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 1 Isolation Valve	DI	COV	12 Hours	3 days	N/A		
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Isolation Valve	DI	COV	12 Hours	3 days	N/A		
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Combustion Dampers Open	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Secondary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Secondary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Primary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Hot Water System Enable	DO	COV	12 Hours	3 days	N/A		
Combustion Dampers Command	DO	COV	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the COR, CxM and CxA.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.
3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	**Calibration Frequency**	**O&M Calibration Procedure Reference**
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.

B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to

the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the CxM will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the CxM in developing the Systems Functional Performance Test procedures as requested by the CxM i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the CxM will provide a copy of the Systems Functional Performance Test procedures to the COR, CxA, Architect/Engineer, and Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the CxM will include, but not be limited to, the following information:

1. System and equipment or component name(s)

2. Equipment location and ID number
3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
4. Date
5. Project name
6. Participating parties
7. A copy of the specification section describing the test requirements
8. A copy of the specific sequence of operations or other specified parameters being verified
9. Formulas used in any calculations
10. Required pretest field measurements
11. Instructions for setting up the test.
12. Special cautions, alarm limits, etc.
13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
15. A section for comments.
16. Signatures and date block for the CxM. A place for the Contractor to initial to signify attendance at the test.

E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor, CxM and CxA shall determine which method is most appropriate for tests that do not have a method specified.
1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a

system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.

3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.

F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The CxM and CxA will jointly determine the sampling rate. Functional Performance Testing must be performed on 100% of all plant equipment (chillers, cooling towers, exchangers,

primary and secondary pumps, emergency generators, boilers and associated ancillary equipment, fuel delivery system, etc.), central vacuum pumps and air compressors, renewable energy systems (as applicable), and critical terminal equipment (isolation exhaust), and 20% of all terminal equipment (VAVs, fan coils, non-critical exhaust fans, etc.) If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the CxM and/or CxA may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.

H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the CxM, CxA, and the COR regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The CxM will schedule Systems Functional Performance Tests with the Contractor, CxA and COR. The CxM will witness and document the Systems Functional Performance Testing of systems. The CxA and other Government representative(s) may choose to participate in some or all of the Systems Functional Performance Testing. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.

J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the CxM, CxA, and the COR before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.

K. Problem Solving: The CxM and CxA will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

A. Documentation: The CxM will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the CxA and CxM for that purpose. Prior to testing, the CxM will provide these forms to the CxA, COR and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.

B. Nonconformance: The CxM will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the COR and CxA on Commissioning Field Reports and/or the Commissioning Master Issues Log.

1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the CxM and CxA shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the COR.
3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the CxM shall discuss the issue with the Contractor, CxA and the COR.
4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
   a. The CxM will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the CxM will submit a Commissioning Field Report to the CxA and COR. The CxM will also note items of noncompliance and the Contractor’s response in the

Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the COR, CxM and CxA.

b. The need for retesting will be evaluated by the CxM and CxA. The COR will make the final determination for retesting based on input from CxM and CxA. If retesting is required, the CxM and the Contractor shall reschedule the test and the test shall be repeated.

5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:

a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor’s response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.

b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with COR.

c. The CxM will document the resolution process.

d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the DVA/USCAE, CxM and CxA. The requirement for retesting will be determined by the CxM and CxA. If retesting is required, the CxM and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

Spec Writer’s Note: Verify that the paragraph and subparagraphs below do not conflict with other general or specific contract documents regarding manufacturer’s defects. Retain, delete, or modify the paragraphs accordingly.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the COR. In such case, the Contractor shall provide the COR with the following:
   1. Within one week of notification from the COR, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.
   2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
   3. The COR shall determine whether a replacement of all identical units or a repair is acceptable.
   4. Two examples of the proposed solution shall be installed by the Contractor and the Government shall be allowed to test the installations for up to one week, upon which the COR will decide whether to accept the solution.
   5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.
   6. After replacement of all identical items, commissioning of these replaced items shall be restarted to include verification of startup, field testing, pre-functional checklists, and functional performance tests.

E. Approval: The CxM will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the CxM, CxA, and by the COR. The CxM will evaluate each test and report to the CxA and COR using a

standard form. The COR will give final approval on each test using the same form, and provide signed copies to the CxM, CxA and the Contractor.

3.8 DEFERRED TESTING

A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the COR. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible.

B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The CxM and CxA will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The COR will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the CxM. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

A. Training Preparation Conference: Before operation and maintenance training, the CxM will convene a training preparation conference to include COR, VA's Resident Engineer, VA’s Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.

B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:

1. Review the Contract Documents.
2. Review installed systems, subsystems, and equipment.
3. Review instructor qualifications.

4. Review instructional methods and procedures.
5. Review training module outlines and contents.
6. Review course materials (including operation and maintenance manuals).
7. Review and discuss locations and other facilities required for instruction.
8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.
9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the CxM, CxA and COR:
   1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
   2. Qualification Data: Submit qualifications for facilitator and/or instructor.
   3. Attendance Record: For each training module, submit list of participants and length of instruction time.
   4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
   5. Demonstration and Training Recording:
      a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
      b. Video Format: Provide high quality color DVD color on standard size DVD disks.

c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.

d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

e. Submit two copies within seven days of end of each training module.

6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. Quality Assurance:

1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.

2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.

3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. Training Coordination:

1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.

2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the COR.

F. Instruction Program:

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
   a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
   b. Intrusion detection systems.
   c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
   d. Medical equipment, including medical gas equipment and piping.
   e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
   f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
   g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
   h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
   i. HVAC instrumentation and controls.
   j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
   k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
   l. Lighting equipment and controls.
   m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
   n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.

G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
   a. System, subsystem, and equipment descriptions.
   b. Performance and design criteria if Contractor is delegated design responsibility.
   c. Operating standards.
   d. Regulatory requirements.
   e. Equipment function.
   f. Operating characteristics.
   g. Limiting conditions.
   H, Performance curves.
2. Documentation: Review the following items in detail:
   a. Emergency manuals.
   b. Operations manuals.
   c. Maintenance manuals.
   d. Project Record Documents.
   e. Identification systems.
   f. Warranties and bonds.
   g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:
   a. Instructions on meaning of warnings, trouble indications, and error messages.
   b. Instructions on stopping.
   c. Shutdown instructions for each type of emergency.
   d. Operating instructions for conditions outside of normal operating limits.
   e. Sequences for electric or electronic systems.
   f. Special operating instructions and procedures.
4. Operations: Include the following, as applicable:
   a. Startup procedures.
   b. Equipment or system break-in procedures.
   c. Routine and normal operating instructions.
   d. Regulation and control procedures.
   e. Control sequences.
   f. Safety procedures.
   g. Instructions on stopping.

h. Normal shutdown instructions.

i. Operating procedures for emergencies.

j. Operating procedures for system, subsystem, or equipment failure.

k. Seasonal and weekend operating instructions.

l. Required sequences for electric or electronic systems.

m. Special operating instructions and procedures.

5. Adjustments: Include the following:

a. Alignments.

b. Checking adjustments.

c. Noise and vibration adjustments.

d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:

a. Diagnostic instructions.

b. Test and inspection procedures.

7. Maintenance: Include the following:

a. Inspection procedures.

b. Types of cleaning agents to be used and methods of cleaning.

c. List of cleaning agents and methods of cleaning detrimental to product.

d. Procedures for routine cleaning

e. Procedures for preventive maintenance.

f. Procedures for routine maintenance.

g. Instruction on use of special tools.

8. Repairs: Include the following:

a. Diagnosis instructions.

b. Repair instructions.

c. Disassembly; component removal, repair, and replacement; and reassembly instructions.

d. Instructions for identifying parts and components.

e. Review of spare parts needed for operation and maintenance.

H. Training Execution:

1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.

2. Instruction:

a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and COR for number of participants, instruction times, and location.
b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
   1) The CxM will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
   2) The Government may furnish an instructor to describe VA's operational philosophy.
   3) The COR will furnish the Contractor with names and positions of participants.

3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the COR, CxA and the CxM with at least seven days' advance notice.
4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.
5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.

4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

DIVISION 02 - EXISTING CONDITIONS

SECTION 02 21 13
SITE SURVEYS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Researching and collecting documents informing surveys.
2. Performing topographic surveyand utility survey.
3. Creating survey drawings.

1.2 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Land Title Association and American Congress on Surveying and Mapping (ALTA-ACSM):

1. Accuracy Standards for ALTA-ACSM Land Title Surveys.

C. Federal Geographic Data Committee (FGDC):

1. STD-007.03-98 - Geospatial Positioning Accuracy Standards Part 3: National Standard for Spatial Data Accuracy.
2. STD-007.04-02 - Geospatial Positioning Accuracy Standards Part 4: Standards for Architecture, Engineering, Construction (A/E/C) and Facility Management.

1.3 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Survey Drawings:

1. Prints: Two sets of black line, full size prints of each drawing.
2. Electronic Files: Consistent with computer-aided design (CAD) Standards described at www.cfm.va.gov/til/projReq.asp.

1.4 QUALITY ASSURANCE

A. Land Surveyor: One of the following:

1. Experienced professional land surveyor licensed in state in which project is located.
2. Experienced professional civil engineer licensed in state in which project is located and authorized to practice land surveying as civil engineer.

PART 2 - PRODUCTS

2.1 ACCESSORIES

A. Monuments: Iron pin, with driven 16 mm (5/8 inch) diameter, minimum 600 mm (24 inches) long to prevent displacement.

B. Stakes: Hardwood.

C. Flagging: Plastic, roll form, highly visible, solid color.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Research public and VA facility records for deeds, maps, monuments, plats, surveys, title certificates or abstracts, rights-of-way, easements, section line, other boundary line locations, and other documents pertaining to project site.

B. Research public and VA facility utility records for aerial, surface, and subgrade structures and utility service lines and easements.

3.2 PREPARATION

A. Coordinate with Contracting Officer's Representative for site access.

B. Coordinate with adjacent property owners when access to adjoining properties is required.

1. Notify Contracting Officer's Representative when access is denied.

3.3 SURVEYS

A. Perform survey on ground according to Accuracy Standards for ALTA-ACSM Land Title Surveys and FGDC STD-007.3 and FGDC STD-007.4.

1. Provide topo contours at 1’ intervals

B. Topographic Survey:

1. Vertical Control: National Geodetic Survey or existing VA Medical Center benchmark.
2. Establish minimum three permanent benchmarks.
3. Determine project site contours at maximum 300 mm (1 foot) interval.
4. Determine spot elevations at specified locations.

C. Utility Survey:

1. Locate piped utilities and utility structures. Identify service type, sizes, depths, and pressures. Establish inverts in and out on gravity sewer manholes. If depth is critical and manholes are not available identify depth with ground-penetrating radar (GPR).
2. Locate fire hydrants.

3. Locate wired utilities and utility structures. Identify service type, rated capacities, and elevations above and below grade.
4. Identify each utility authority including contact person and phone number.

D. Locate permanent structures within survey boundary by perpendicular dimension to property lines.
1. Determine structure plan dimensions, heights, and vertical offsets.
2. Determine projections and overhangs beyond structure perimeter at grade.
3. Determine number of stories and primary building materials.

3.4 SURVEY DRAWING REQUIREMENTS

A. Consult Contracting Officer's Representative to confirm required survey scale and drawing size.
1. Drawing Size: Maximum 760 by 1070 mm (30 by 42 inches).
2. Boundary Survey Scale: Maximum 1 to 35 (1 inch equals 30 feet).
3. Enlarged Detail Areas: Scale as required to present dimensional data and survey information clearly. Maintain orientation aligned with smaller scale view.
4. Plan Orientation: North at top of drawing sheet.

B. Drawing Notations:
1. Land Surveyor: Name, address, telephone number, signature, seal, and registration number.
2. Survey Dates: Date survey was initially completed and subsequent revision dates.
3. Certification: Certify each drawing adjacent to land surveyor's seal:
a. "I hereby certify that all information indicated on this drawing was obtained or verified by actual measurements in the field and that every effort has been made to provide complete and accurate information."
b. Title, number, and total number of drawings on each drawing.
c. Scale in metric and imperial measurement.
d. Graphic scale in metric and imperial measurement.
e. Graphic symbol and abbreviation legends.
f. North arrow for plan view drawings.
g. Benchmark locations.
h. Horizontal and vertical control datum.
i. Adjacent property owner names.

j. Zoning classifications.

k. Building street numbers.

4. Evidence of Possession: Indicate character and location of evidence of possession affecting project site. Notation absence signifies no observable evidence of possession.

C. Vicinity Map: Indicate project site and nearby roadways and intersections.

D. Record Documents Forming Survey Basis: Indicate titles, source, and recording data of documents relied upon to complete survey.

E. Legal Description: Recorded title boundaries.

F. Land Area: Report in hectares (acres) as defined by the boundaries of the legal description of the surveyed premises, including legal description of the land.

1. Accuracy: 0.005 hectares (0.001 acres).

G. Boundary Lines: Show point of beginning, length and bearing for straight lines, and angle, radius, point of curvature, point of tangency, and length of curved lines.

1. Include bearing basis and data necessary to mathematically close survey.

2. When recorded and measured bearings, angles, and distances differ, indicate both recorded and measured data.

a. Indicate when recorded description does not mathematically close survey.

3. Indicate found and installed monuments establishing basis of survey.

4. Contiguity, Gores, and Overlaps: Identify discrepancies within and along survey boundary.

H. Lots and Parcels: Indicate entire lots and parcels included within and intersected by survey boundary.

I. Roadways: Indicate names and widths of rights-of-way and roadways within and abutting survey boundary.

1. Indicate changes in rights-of-way lines either completed or proposed.

2. Indicate accesses to roadways.

3. Indicate abandoned roadways.

4. Indicated unopened dedicated roadways.

J. Setbacks: Indicate recorded setback and building restriction lines.

K. Structures and Site Improvements: Indicate buildings, walls, fences, signs, and other visible improvements.
   1. Indicate each building dimensioned to property lines and other structures.
   2. Indicate exterior dimensions of buildings at ground level. Show area of building footprint and gross floor area of entire building.
   3. Indicate maximum measured height of buildings above grade, point of measurement, and number of stories.
   4. Indicate spot elevations at building entrances, first floor, service docks, corners, steps, ramps, and grade slabs.
   5. Indicate structures and site improvements within 1500 mm (5 feet) of survey boundary.
   6. Indicate encroachments on project site, adjoining property, easements, rights-of-way, and setback lines from fire escapes, bay windows, windows and doors opening out, flue pipes, stoops, eaves, cornices, areaways, stoops, other building projections, and site improvements.
   7. Identify setback, height, and floor space area restrictions set by applicable zoning and building codes and recorded subdivision maps. Indicate if no restrictions exist.

L. Easements:
   1. Indicate easements evidenced by recorded documents.
      a. Indicate when easements cannot be located.
   2. Indicate observable easements created by roadways, rights-of-ways, water courses, drains, telephone, telegraph, electric and other wiring, water, sewer, oil, gas, and other pipelines within project site and on adjoining properties when potentially affecting project site.
   3. Indicate observable surface improvements of underground easements.

M. Pavements:
   1. Indicate location, alignment, and dimensions for vehicular and pedestrian pavements.
   2. Indicate pavement encroachments from adjacent properties onto project site and onto adjacent properties from project site.
      a. Dimension encroachments from survey boundary.
   3. Indicate roadway centerlines with true bearings and lengths by 15 m (50 feet) stationing.

a. Describe curves by designating points of curvature and tangency. Include curve data and location of radius and vertex points.
b. Indicate elevations at station points along roadway centerlines, roadway edges, and top and bottom of curbs.

4. Indicate parking areas, parking striping, and total parking spaces.
a. Identify accessible parking spaces.
5. Indicate curb cuts, driveways, and other accesses to public ways.

N. Waterways:
1. Indicate boundaries of ponds, lakes, springs, and rivers bordering on or running through project site. Note date of measurement and that boundary is subject to change due to natural causes.
2. Indicate flood plain location and elevation.
3. Indicate watershed extent affecting project site.

O. Indicate topographic contours.

P. Flood Zone: Indicate applicable flood zone from Federal Flood Insurance Rate Maps, by scaled map location and graphic plotting.

Q. Public and Private Utilities:
1. Indicate information source and operating authority for each utility.
2. Indicate utilities existing on or serving project site.
3. Indicate fire hydrants on project site and within 150 m (500 feet) of survey boundary.
4. Indicate manholes, catch basins, inlets, vaults, and other surface indications of subgrade services.
5. Indicate depths or invert elevations, sizes, materials, and pressures of utility pipes.
6. Indicate wires and cables serving, crossing, and adjacent to project site.
7. Indicate exterior lighting, traffic control facilities, security, and communications systems.
8. Indicate utility poles on project site and within 3 m (10 feet) of survey boundary.
9. Indicate dimensions of cross-wires or overhangs affecting project site.

R. Observable Evidence:
1. Indicate in-progress and recently completed earth moving work, building construction, and building additions.

2. Indicate in-progress and recently completed pavement construction and repairs.
3. Indicate areas used as solid waste dump, sump, and sanitary landfill.

S. Trees:

1. Indicate individual trees with minimum 150 mm (6 inches) diameter measured at 400 mm (48 inches) above grade.
2. Indicate wooded area perimeter outline and description of predominant vegetation.

- - - E N D - - -

DIVISION 03 - CONCRETE

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK

A. Section 01 45 29, TESTING LABORATORY SERVICES: Materials testing and inspection during construction.

B. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS

C. Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS: Concrete roads, walks, and similar exterior site work.

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN

A. Testing agency for the trial concrete mix design retained and reimbursed by the Contractor and approved by COR. For all other testing, refer to Section 01 45 29 Testing Laboratory Services.

B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.

C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES

A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).

B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.

C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).

D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:

1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.
2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).
3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

1.5 REGULATORY REQUIREMENTS

A. ACI SP-66 – ACI Detailing Manual.

B. ACI 318 - Building Code Requirements for Reinforced Concrete.

C. ACI 301 – Standard Specifications for Structural Concrete.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES. All items indicated below are required submittals requiring Contracting Officer’s Representative (COR) review and approval.

B. Shop Drawings: Reinforcing steel: Complete shop drawings

C. Mill Test Reports:
   1. Reinforcing Steel.
   2. Cement.

D. Manufacturer's Certificates:
   1. Abrasive aggregate.
   2. Lightweight aggregate for structural concrete.
   3. Air-entraining admixture.
   4. Chemical admixtures, including chloride ion content.
   5. Waterproof paper for curing concrete.
   6. Liquid membrane-forming compounds for curing concrete.
   7. Non-shrinking grout.
   8. Liquid hardener.
   9. Waterstops.
   10. Expansion joint filler.
   11. Adhesive binder.

E. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology

F. Test Report for Concrete Mix Designs: Trial mixes including water-cement fly ash ratio curves, concrete mix ingredients, and admixtures. Submit test results for aggregates in accordance with ASTM C33/C33M, and ASTM C1293 or ASTM C1567 as required in the paragraph titled ALKALI-AGGREGATE REACTION.

G. Shoring and Reshoring Sequence: Submit for approval a shoring and reshoring sequence for flat slab/flat plate portions, prepared by a registered Professional Engineer. As a minimum, include timing of form stripping, reshoring, number of floors to be re-shored and timing of re-shore removal to serve as an initial outline of procedures subject to modification as construction progresses. Submit revisions to sequence, whether initiated by COR (see FORMWORK) or Contractor.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.

B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.

C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 PRE-CONCRETE CONFERENCE

A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.

B. Agenda: Includes but is not limited to:

1. Submittals.
2. Coordination of work.
3. Availability of material.
4. Concrete mix design including admixtures.
5. Methods of placing, finishing, and curing.
6. Finish criteria required to obtain required flatness and levelness.
7. Timing of floor finish measurements.
8. Material inspection and testing.

C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; lightweight aggregate manufacturer; admixture manufacturers; COR; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.

D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

1.9 MOCK-UP

A. In addition to the other specified samples and tests, construct a mock-up using the materials, reinforcing, forming system and construction methods proposed for use in exposed architectural concrete.

B. Construct the mock-up with at least a 2.5 m by 2.5 m (8 feet by 8 feet) exposed surface and suitable foundations. Include the following where applicable: Control joints, reglets, recesses or other typical architectural details.

C. Before casting the mock-up, submit full detailed Shop Drawings of the mock-up formwork for review by the Architect. Perform all necessary preliminary tests to ensure that concrete used for the mock-up will exactly match the approved sample in color and texture.

D. Perform the surface treatment proposed for use on one or more areas not less than 300 mm by 300 mm (1 foot by 1 foot) on the back side of the mock-up to establish the texture of finish required by the Architect. Repeat as required until a sample satisfactory to the Architect has been obtained.

E. Treat the finished front surface of the mock-up to produce a uniform appearance similar in every respect to the approved sample area.

F. The completed mock-up shall be inspected by the Architect. Failure of the mock-up to match the approved sample will require the construction of further mock-ups until approval is obtained. Remove rejected mock-ups immediately.

G. Maintain the approved mock-ups in good condition at the job site until all architectural concrete surfaces have been completed and approved by the Architect. Remove the mock-up from the site after completion of the above.

1.10 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):

117-10.....Specifications for Tolerances for Concrete Construction and Materials and Commentary

211.1-91(R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete

211.2-98(R2004).....Standard Practice for Selecting Proportions for Structural Lightweight Concrete

214R-11(R2019).....Guide to Evaluation of Strength Test Results of Concrete

301-16.....Specifications for Structural Concrete

303.1-97.....Standard Specification for Cast-In-Place Architectural Concrete

304R-00(R2009).....Guide for Measuring, Mixing, Transporting, and Placing Concrete

305.1-14.....Specification for Hot Weather Concreting

306.1-90(R2002).....Standard Specification for Cold Weather Concreting

308.1-11.....Specification for Curing Concrete

309R-05.....Guide for Consolidation of Concrete

318/318-19.....Building Code Requirements for Structural Concrete and Commentary

347R-14.....Guide to Formwork for Concrete

SP-66-04.....ACI Detailing Manual

C. American National Standards Institute and American Hardboard Association (ANSI/AHA):

A135.4-2012.....Basic Hardboard

D. ASTM International (ASTM):

A615/A615M-20.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement

A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process

A706/A706M-16.....Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement

A767/A767M-19.....Standard Specification for Zinc Coated (Galvanized) Steel Bars for Concrete Reinforcement

A775/A775M-19.....Standard Specification for Epoxy Coated Steel Reinforcing Bars

A820/820M-16.....Standard Specification for Steel Fibers for Fiber Reinforced Concrete

A996/A996M-16.....Standard Specification for Rail Steel and Axle Steel Deformed Bars for Concrete Reinforcement

A1064/A1064M-18a.....Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete

C31/C31M-19a.....Standard Practice for Making and Curing Concrete Test Specimens in the field

C33/C33M-18.....Standard Specification for Concrete Aggregates

C39/C39M-20.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C94/C94M-19a.....Standard Specification for Ready Mixed Concrete

C143/C143M-20.....Standard Test Method for Slump of Hydraulic Cement Concrete

C150C150M-20.....Standard Specification for Portland Cement

C171-16.....Standard Specification for Sheet Materials for Curing Concrete

C172C172M-17.....Standard Practice for Sampling Freshly Mixed Concrete

C173/C173M-16.....Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method

C192/C192M-19.....Standard Practice for Making and Curing Concrete Test Specimens in the Laboratory

C231/C231M-17a.....Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method

C260/C260M-10a(2016)....Standard Specification for Air Entraining Admixtures for Concrete

C309-19.....Standard Specification for Liquid Membrane Forming Compounds for Curing Concrete

C330/C330M-17a.....Standard Specification for Lightweight Aggregates for Structural Concrete

C494/C494M-19.....Standard Specification for Chemical Admixtures for Concrete

C618-19.....Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete

C666/C666M-15.....Standard Test Method for Resistance of Concrete to Rapid Freezing and Thawing

C881/C881M-20.....Standard Specification for Epoxy Resin Base Bonding Systems for Concrete

C1107/1107M-20.....Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)

C1260.....Standard Test Method for Potential Alkali Reactivity of Aggregates (Mortar-Bar Method)

C1293.....Standard Test Method for Determination of Length Change of Concrete Due to Alkali-Silica ReactionC1315-19 Standard Specification for Liquid Membrane Forming Compounds Having Special Properties for Curing and Sealing Concrete

C1567.....Standard Test Method for Potential Alkali-Silica Reactivity Combinations of Cementitious Materials and Aggregate (Accelerated Mortar-Bar Method)C1778 Standard Guide for Reducing the Risk of Deleterious Alkali-Aggregate Reaction in Concrete

D6/D6M-95(2018).....Standard Test Method for Loss on Heating of Oil and Asphaltic Compounds

D297-15(2019).....Standard Test Methods for Rubber Products Chemical Analysis

D412—16.....Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension

D1751-18.....Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types)

D4263-83(2018).....Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method.

E1155-20.....Standard Test Method for Determining F_F Floor Flatness and F_L Floor Levelness Numbers
F1249-20.....Standard Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared SensorF1869-16a Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride.

E. American Welding Society (AWS):
D1.4/D1.4M-18.....Structural Welding Code – Steel Reinforcing Bars

F. Concrete Reinforcing Steel Institute (CRSI):
Handbook 2008

G. National Cooperative Highway Research Program (NCHRP):
Report On.....Concrete Sealers for the Protection of Bridge Structures

H. U. S. Department of Commerce Product Standard (PS):
PS 1-07.....Structural Plywood
PS 20-20.....American Softwood Lumber Standard

I. U. S. Army Corps of Engineers Handbook for Concrete and Cement:
CRD C513.....Rubber Waterstops
CRD C572.....Polyvinyl Chloride Waterstops

PART 2 – PRODUCTS

2.1 FORMS

A. Wood: PS 20 free from loose knots and suitable to facilitate finishing concrete surface specified; tongue and grooved.

B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.

C. Metal for Concrete Rib-Type Construction: Steel (removal type) of suitable weight and form to provide required rigidity.

D. Permanent Steel Form for Concrete Slabs: Corrugated, ASTM A653, Grade E, and Galvanized, ASTM A653, G90. Provide venting where insulating concrete fill is used.

E. Corrugated Fiberboard Void Boxes: Double faced, completely impregnated with paraffin and laminated with moisture resistant adhesive, size as

shown. Design forms to support not less than 48 KPa (1000 psf) and not lose more than 15 percent of their original strength after being completely submerged in water for 24 hours and then air dried.

F. Form Lining:

1. 1. Hardboard: ANSI/AHA A135.4, Class 2 with one (S1S) smooth side)
2. 2. Plywood: Grade B-B Exterior (concrete-form) not less than 6 mm (1/4 inch) thick.
3. 3. Plastic, fiberglass, or elastomeric capable of reproducing the desired pattern or texture.

G. Concrete products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Concrete Penetrating Liquid	79 percent biobased material
Concrete form Release Agent	87 percent biobased material
Concrete Sealer	11 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material.

H. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

2.2 MATERIALS

A. Portland Cement: ASTM C150 Type I or II.

B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalies, and loss on ignition (LOI) not to exceed 5 percent. Do not exceed more than 25 percent total cementitious content by weight.

C. Coarse Aggregate: ASTM C33.

1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
2. Coarse aggregate for interior slabs on grade shall conform to the following:

a. Dense or well graded aggregate.

1) Percent retained on each sieve below the top size and above the No. 100 sieve:
   a) 8 to 18 percent for 1-1/2 inches (38 mm)top size.
   b) 8 to 22 percent for 3/4 or 1 inch (19 or 25 mm) top size.
2) The above requirements may be deviated from based on locally available material.
   a) One or two non-adjacent sieves sizes may fall outside of the limits set above.
   b) Percent retained on two adjacent sieves sizes shall not be less than 5 percent of the above required.
   c) Percent retained on three adjacent sieve sizes shall not be less than 8 percent of the above required.
   d) When the percent retained on each of two adjacent sieve sizes is less than 8 percent the total percent retained on either of these sieves and the adjacent outside sieve should be at least 13 percent (for example, if both the No. 4 and No. 8 (4.75 and 2.36 mm)sieves have 6 percent retained on each item then: 1. the total retained on the 3/8 inch and No. 4 (9.5 and 4.75 mm) sieves should be at least 13 percent, and 2. the total retained on the No. 8 and No. 16 (2.36 and 1.18 mm) sieves should be at least 13 percent.

3. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
4. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.

D. Lightweight Aggregates for Structural Concrete: ASTM C330, Table 1. Maximum size of aggregate not larger than one-fifth of narrowest dimension between forms, nor three-fourth of minimum clear distance between reinforcing bars. Contractor to furnish certified report to verify that aggregate is sound and durable, and has a durability factor of not less than 80 based on 300 cycles of freezing and thawing when tested in accordance with ASTM C666.

E. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 µm (No. 100) sieve.

F. Mixing Water: Fresh, clean, and potable; free from injurious amounts of oils, acids, alkalis, salts, organic materials, or other substances deleterious to concrete.

G. Admixtures:

1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water. Use of superplasticizer requires COR approval.
4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
5. Air Entraining Admixture: ASTM C260.

6. Microsilica: Use only with prior review and acceptance of the COR. Use only in conjunction with high range water reducer.
7. Calcium Nitrite corrosion inhibitor: ASTM C494 Type C.
8. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
9. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.

H. Vapor Barrier: ASTM F1249, 0.25 mm (10 mil) WVT 0.012 foot/hr.

I. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.

J. Welded Wire Fabric: ASTM A185.

K. Reinforcing Bars to be Welded: ASTM A706.

L. Galvanized Reinforcing Bars: ASTM A767.

M. Epoxy Coated Reinforcing Bars: ASTM A775.

N. Cold Drawn Steel Wire: ASTM A1064.

O. Reinforcement for Concrete Fireproofing: 100 mm x 100 mm x 3.4 mm diameter (4 x 4-W1.4 x W1.4) welded wire fabric, secured in place to hold mesh 20 mm (3/4 inch) away from steel. Mesh at steel columns shall be wired to No. 10 (No. 3) vertical corner steel bars.

P. Reinforcement for Metal Pan Stair Fill: 50 mm (2 inch) wire mesh, either hexagonal mesh at .8Kg/m^2 (1.5 pounds per square yard), or square mesh at .6Kg/m^2 (1.17 pounds per square yard).

Q. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.

R. Expansion Joint Filler: ASTM D1751.

S. Sheet Materials for Curing Concrete: ASTM C171.

T. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye, and shall meet the requirements of ASTM C1315.Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.

U. Abrasive Aggregate: Aluminum oxide grains or emery grits.

V. Liquid Hardener and Dustproofer: Fluosilicate solution of magnesium fluosilicate or zinc fluosilicate. Magnesium and zinc may be used separately or in combination as recommended by manufacturer. Use only on exposed slab. Do not use where floor is covered with resilient flooring, paint or other finish coating.

W. Moisture Vapor Emissions & Alkalinity Control Sealer: 100 percent active colorless aqueous siliconate solution concrete surface.

1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34 percent solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.
2. MVE 15-Year Warranty:
   a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer’s instruction, sealer manufacturer shall warrant the floor covering

system against failure due to moisture vapor migration or moisture-born contaminates for a period of fifteen (15) years from the date of original installation. The warranty shall cover all labor and materials needed to replace all floor covering that fails due to moisture vapor emission & moisture born contaminates.

X. Penetrating Sealer: For use on parking garage ramps and decks. High penetration silane sealer providing minimum 95 percent screening per National Cooperative Highway Research Program (NCHRP) No. 244 standards for chloride ion penetration resistance. Requires moist (non-membrane) curing of slab.

Y. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.

Z. Adhesive Binder: ASTM C881.

AA. Waterstops:

1. Rubber Waterstops: CRD C513.
2.

BB. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).

CC. Fibers:

1. Synthetic Fibers: Monofilament or fibrillated polypropylene fibers for secondary reinforcing of concrete members. Use appropriate length and 0.9 kg/m^3 (1.5 lb. per cubic yard). Product shall have a UL rating.
2. Steel Fibers: ASTM A820, Type I cold drawn, high tensile steel wire for use as primary reinforcing in slab-on-grade. Minimum dosage rate 18 kg/m^3 (30 lb. per cubic yard).

DD. Epoxy Joint Filler: Two component, 100 percent solids compound, with a minimum shore D hardness of 50.

EE. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.

FF. Architectural Concrete: For areas designated as architectural concrete on the Contract Documents, use colored cements and specially selected aggregates as necessary to produce a concrete of a color and finish which exactly matches the designated sample panel.

2.3 CONCRETE MIXES

A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.

1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m^3 (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement -fly ash ratio, and consistency of each cylinder in terms of slump. Include dry unit weight of lightweight structural concrete.
3. Prepare a curve showing relationship between water-cement -fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
4. If the field experience method is used, submit complete standard deviation analysis.

B. Fly Ash Testing: Submit certificate verifying conformance with ASTM 618 initially with mix design and for each truck load of fly ash delivered from source. Submit test results performed within 6 months of submittal date. Notify the COR immediately when change in source is anticipated.

1. Testing Laboratory used for fly ash certification/testing shall participate in the Cement and Concrete Reference Laboratory (CCRL) program. Submit most recent CCRL inspection report.

C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of the COR or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients

used in making test cylinders are the same. The COR may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.

D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with maximum of 25 percent replacement by weight in all structural work. Increase this replacement to 40 percent for mass concrete, and reduce it to 10 percent for drilled piers and caissons. Fly ash shall not be used in high-early mix design.

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air-Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m3 (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m3 (lbs/c. yd)	Max. Water Cement Ratio
35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
25 (3000)1,2	300 (500)	See 4 below	310 (520)	See 4 below

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.
2. Lightweight Structural Concrete. Pump mixes may require higher cement values.
3. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
4. Determined by Laboratory in accordance with ACI 211.1 for normal concrete or ACI 211.2 for lightweight structural concrete.

E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES)

Type of Construction	Normal Weight Concrete	Lightweight Structural Concrete
Reinforced Footings and Substructure Walls	75mm (3 inches)	75 mm (3 inches)
Slabs, Beams, Reinforced Walls, and Building Columns	100 mm (4 inches)	100 mm (4 inches)

F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches), and 75 mm to 100 mm (3 inches to 4 inches) for lightweight concrete. This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.

G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Air-entrainment of lightweight structural concrete shall conform with Table IV. Determine air content by either ASTM C173 or ASTM C231.

TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

TABLE IV
AIR CONTENT OF LIGHTWEIGHT STRUCTURAL CONCRETE

Nominal Maximum size of Total Air Content	Coarse Aggregate, mm's (Inches) Percentage by Volume
Greater than 10 mm (3/8 in) 4 to 8	10 mm (3/8 in) or less 5 to 9

H. Alkali-Aggregate Reaction: Do not use aggregate susceptible to alkali-carbonate reaction (ACR). Use one of the three options below for qualifying concrete mixtures to reduce the potential of alkali-silica reaction (ASR):

1. For each aggregate used in concrete, the expansion result determined in accordance with ASTM C1293 must not exceed 0.04 percent at one year.
2. For each aggregate used in concrete, the expansion result of the aggregate and cementitious materials combination determined in accordance with ASTM C1567 must not exceed 0.10 percent at an age of 16 days.
3. Alkali content in concrete (LBA) must not exceed 4 pounds per cubic yard for moderately reactive aggregate or 3 pounds per cubic yard for highly reactive aggregate. Reactivity must be determined by testing in accordance with ASTM C1293 and categorized in accordance with ASTM C1778. Alkali content is calculated as follows:

   LBA = (cement content, pounds per cubic yard) x (equivalent alkali content of Portland cement in percent/100 percent)

I. High early strength concrete, made with Type III cement or Type I cement plus non-corrosive accelerator, shall have a 7-day compressive strength equal to specified minimum 28-day compressive strength for concrete type specified made with standard Portland cement.

J. Lightweight structural concrete shall not weigh more than air-dry unit weight shown. Air-dry unit weight determined on 150 mm by 300 mm (6 inch by 12 inch) test cylinders after seven days standard moist curing followed by 21 days drying at 23 degrees C ± 1.7 degrees C (73.4 ± 3 degrees Fahrenheit), and 50 (plus or minus 7) percent relative humidity. Use wet unit weight of fresh concrete as basis of control in field.

K. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, synthetic fiber concrete, architectural concrete, concrete required to be watertight, and concrete with a water/cement ratio below 0.50 use high-range water-reducing admixture (superplasticizer).

L. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. For air content requirements see Table III or Table IV.

M. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any

three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, the COR may require any one or any combination of the following corrective actions, at no additional cost to the Government:

1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
2. Require additional curing and protection.
3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, the COR may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, the COR may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the COR.

2.4 BATCHING AND MIXING

A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by the COR. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38 degrees C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the COR for consultation during batching, mixing, and placing operations of lightweight structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural lightweight aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise the COR.

PART 3 – EXECUTION

3.1 FORMWORK

A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.
   1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and the COR approves their reuse.
   2. Provide forms for concrete footings unless the COR determines forms are not necessary.
   3. Corrugated fiberboard forms: Place forms on a smooth firm bed, set tight, with no buckled cartons to prevent horizontal displacement, and in a dry condition when concrete is placed.

B. Treating and Wetting: Treat or wet contact forms as follows:
   1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
   2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
   3. Use sealer on reused plywood forms as specified for new material.

C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than 1/270 of free span of member.

D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all

vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.

E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.

F. Architectural Liner: Attach liner as recommended by the manufacturer with tight joints to prevent leakage.

G. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6 inches) above each construction joint. Space through-ties adjacent to horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.

H. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.

1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.
2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical

services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.

3. Do not install sleeves in beams, joists or columns except where shown or permitted by the COR. Install sleeves in beams, joists, or columns that are not shown, but are permitted by the COR, and require no structural changes, at no additional cost to the Government.
4. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
5. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

I. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 PLACING REINFORCEMENT

A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.

B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.

1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Use epoxy-coated tie wire with epoxy-coated reinforcing. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number,

and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.

2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
3. Splice column steel at no points other than at footings and floor levels unless otherwise shown.

C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.

D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:

1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
2. Welded splices: Splicing by butt-welding of reinforcement permitted providing the weld develops in tension at least 125 percent of the yield strength (fy) for the bars. Welding conform to the requirements of AWS D1.4. Welded reinforcing steel conform to the chemical analysis requirements of AWS D1.4.
   a. Submit test reports indicating the chemical analysis to establish weldability of reinforcing steel.
   b. Submit a field quality control procedure to insure proper inspection, materials and welding procedure for welded splices.
   c. Department of Veterans Affairs retained testing agency shall test a minimum of three splices, for compliance, locations selected by the COR.
3. Mechanical Splices: Develop in tension and compression at least 125 percent of the yield strength (fy) of the bars. Stresses of transition splices between two reinforcing bar sizes based on area of smaller bar. Provide mechanical splices at locations indicated. Use approved exothermic, tapered threaded coupling, or swaged and threaded sleeve. Exposed threads and swaging in the field not permitted.

a. Initial qualification: In the presence of the COR, make three test mechanical splices of each bar size proposed to be spliced. Department of Veterans Affairs retained testing laboratory will perform load test.

b. During installation: Furnish, at no additional cost to the Government, one companion (sister) splice for every 50 splices for load testing. Department of Veterans Affairs retained testing laboratory will perform the load test.

E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by the COR.

F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.

G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

3.3 VAPOR BARRIER

A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.

1. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
2. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
3. Patch punctures and tears.

3.4 SLABS RECEIVING RESILIENT COVERING

A. Slab shall be allowed to cure for 6 weeks minimum prior to placing resilient covering. After curing, slab shall be tested by the Contractor for moisture in accordance with ASTM D4263 or ASTM F1869. Moisture content shall be less than 3 pounds per 1000 sf prior to placing covering.

B. In lieu of curing for 6 weeks, Contractor has the option, at his own cost, to utilize the Moisture Vapor Emissions & Alkalinity Control Sealer as follows:

1. Sealer is applied on the day of the concrete pour or as soon as harsh weather permits, prior to any other chemical treatments for concrete slabs either on grade, below grade or above grade receiving resilient flooring, such as, sheet vinyl, vinyl composition tile, rubber, wood flooring, epoxy coatings and overlays.

2. Manufacturer’s representative will be on the site the day of concrete pour to install or train its application and document. He shall return on every application thereafter to verify that proper procedures are followed.
   a. Apply Sealer to concrete slabs as soon as final finishing operations are complete and the concrete has hardened sufficiently to sustain floor traffic without damage.
   b. Spray apply Sealer at the rate of 20 m^2 (200 square feet) per gallon. Lightly broom product evenly over the substrate and product has completely penetrated the surface.
   c. If within two (2) hours after initial application areas are subjected to heavy rainfall and puddling occurs, reapply Sealer product to these areas as soon as weather condition permits.

3.5 CONSTRUCTION JOINTS

A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by the COR.

B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.

C. Place concrete for columns slowly and in one operation between joints. Install joints in concrete columns at underside of deepest beam or girder framing into column.

D. Allow 2 hours to elapse after column is cast before concrete of supported beam, girder or slab is placed. Place girders, beams, grade beams, column capitals, brackets, and haunches at the same time as slab unless otherwise shown.

E. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.6 EXPANSION JOINTS AND CONTRACTION JOINTS

A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.

B. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

C. Provide contraction (control) joints in floor slabs as indicated on the contract drawings. Joints shall be either formed or saw cut, to the indicated depth after the surface has been finished. Complete saw joints within 4 to 12 hours after concrete placement. Protect joints from intrusion of foreign matter.

1.11 3.7 PLACING CONCRETE

A. Preparation:

1. Remove hardened concrete, wood chips, shavings and other debris from forms.
2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
3. Have forms and reinforcement inspected and approved by the COR before depositing concrete.
4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.

B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.

1. Preparing surface for applied topping:
   a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
   b. Broom clean and keep base slab wet for at least four hours before topping is applied.
   c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.

C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete is subject to approval of the COR.

D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
   1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.
   2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
   3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
   4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
   5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after its initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
   6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.
   7. Concrete on metal deck:
      a. Concrete on metal deck shall be minimum thickness shown. Allow for deflection of steel beams and metal deck under the weight of wet concrete in calculating concrete quantities for slab.
         1) The Contractor shall become familiar with deflection characteristics of structural frame to include proper amount of additional concrete due to beam/deck deflection.

E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of

forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.8 HOT WEATHER

A. Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by the COR.

3.9 COLD WEATHER

A. Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyantes or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by the COR.

3.10 PROTECTION AND CURING

A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure

exposed concrete surfaces as described below. Other curing methods may be used if approved by the COR.

1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m^2/L (400 square feet per gallon) on steel troweled surfaces and 7.5m^2/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.11 REMOVAL OF FORMS

A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
   1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
   2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.

B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. For post-tensioned systems supporting forms and shoring not removed until stressing is completed. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

C. Reshoring: Reshoring is required if superimposed load plus dead load of the floor exceeds the capacity of the floor at the time of loading. In addition, for flat slab/plate, reshoring is required immediately after stripping operations are complete and not later than the end of the same day. Reshoring accomplished in accordance with ACI 347 at no additional cost to the Government.

3.12 CONCRETE SURFACE PREPARATION

A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.

B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.

C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.13 CONCRETE FINISHES

A. Vertical and Overhead Surface Finishes:

1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by the COR, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
   a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
   b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 µm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
   c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
   d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.
4. Textured: Finish as specified. Maximum quantity of patched area 0.2 m^2 (2 square feet) in each 93 m^2 (1000 square feet) of textured surface.

B. Slab Finishes:

1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Monitor elevations of structural steel in key locations before and after concrete placement to establish typical deflection patterns for the structural steel.

Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to the COR and floor consultant for evaluation and recommendations for subsequent placements.

2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless the COR determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.
3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
7. Scratch Finish: Finish base slab to receive a bonded applied cementitious application as indicated above, except that bull floats and darbys may be used. Thoroughly coarse wire broom within two

hours after placing to roughen slab surface to insure a permanent bond between base slab and applied materials.

8. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
9. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, future floor roof slabs, applied toppings, and other interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.
10. Broom Finish: Finish exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by the COR from sample panel.
11. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
    a. Areas covered with carpeting, or not specified otherwise in b. below:
        1) Slab on Grade:
            a) Specified overall value F_F 25/F_L 20
            b) Minimum local value F_F 17/F_L 15
        2) Level suspended slabs (shored until after testing) and topping slabs:
            a) Specified overall value FF 25/FL 20
            b) Minimum local value FF 17/FL 15
        3) Unshored suspended slabs:
            a) Specified overall value FF 25
            b) Minimum local value FF 17

4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.

b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:

1) Slab on grade:

a) Specified overall value	FF 36/FL 20
b) Minimum local value	FF 24/FL 15

2) Level suspended slabs (shored until after testing) and topping slabs

a) Specified overall value	FF 30/FL 20
b) Minimum local value	FF 24/FL 15

3) Unshored suspended slabs:

a) Specified overall value	FF 30
b) Minimum local value	FF 24

4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.

c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.

d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.

12. Measurements

a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by the COR, to verify compliance with FF, FL, and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor

shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.

b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.

13. Acceptance/ Rejection:

a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.

b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.

14. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by the COR, until a slab finish constructed within specified tolerances is accepted.

3.14 SURFACE TREATMENTS:

A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.

B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.

C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8 percent per 1/10th m^2 (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

3.15 APPLIED TOPPING

A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.

B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

3.16 RESURFACING FLOORS

A. Remove existing flooring areas to receive resurfacing to expose existing structural slab and extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by roughening, broom cleaning, and dampening. Apply specified bonding grout. Place topping while the bonding grout is still tacky.

3.17 RETAINING WALLS

A. Use air-entrained concrete.

B. Expansion and contraction joints, waterstops, weep holes, reinforcement and railing sleeves installed and constructed as shown.

C. Exposed surfaces finished to match adjacent concrete surfaces, new or existing.

D. Place porous backfill as shown.

3.18 PRECAST CONCRETE ITEMS

A. Precast concrete items, not specified elsewhere. Cast using 25 MPa (3000 psi) air-entrained concrete to shapes and dimensions shown. Finish to match corresponding adjacent concrete surfaces. Reinforce with steel for safe handling and erection.

SECTION 03 30 53
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Cast-in-place structural concrete.
2. Slab on grade infill.
3. Suspended slab infill on metal deck.
4. Foundation wall infill.
5. Concrete for metal pan stair fill.
6. Footings.
7. Equipment pads.
8. Preparation of existing surfaces to receive concrete.
9. Preparation of existing surface to received concrete topping.

1.2 RELATED WORK

A. Section 01 45 29, TESTING LABORATORY SERVICES: Materials Testing and Inspection During Construction.
B. Section 07 11 13, BITUMINOUS DAMPPROOFING: Bituminous Dampproofing.
C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS
D. Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS: Concrete Roads, Walks, and Similar Exterior Site Work.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.
B. American Concrete Institute (ACI):

117-10(R2015).....Specification for Tolerances for Concrete Construction and Materials and Commentary
211.1-91(R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete.
211.2-98(R2004).....Standard Practice for Selecting Proportions for Structural Lightweight Concrete.
301/301M-16.....Specifications for Structural Concrete.
305.1-14 - .....Hot Weather Concreting.
306.1-90(R2002).....Cold Weather Concreting.
318/318M-19.....Building Code Requirements for Structural Concrete and Commentary
347R-14 - .....Guide to Formwork for Concrete.

SP-66-04-.....ACI Detailing Manual.

C. ASTM International(ASTM):

A615/A615M-20.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement

A996/A996M-16.....Standard Specification for Rail Steel and Axle Steel Deformed Bars for Concrete Reinforcement

A1064/A1064M-18a.....Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete

C33/C33M-18.....Standard Specification for Concrete Aggregates.

C39/C39M-20.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens.

C94/C94M-20.....Standard Specification for Ready-Mixed Concrete.

C143/C143M-20.....Standard Test Method for Slump of Hydraulic Cement Concrete.

C150/C150M-20.....Standard Specification for Portland Cement.

C171-16.....Standard Specification for Sheet Materials for Curing Concrete.

C192/C192M-19.....Standard practice for Making and Curing Concrete Test Specimens in the Laboratory.

C219-20a.....Standard Terminology Relating to Hydraulic and Other Inorganic Cements.

C260/C260M-10a(2016)....Standard Specification for Air-Entraining Admixtures for Concrete.

C330/C330M-17a.....Standard Specification for Lightweight Aggregates for Structural Concrete.

C494/C494M-19.....Standard Specification for Chemical Admixtures for Concrete.

C618-19 .....Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.

C881/C881M-20 .....Standard Specification for Epoxy-Resin-Base Bonding Systems for Concrete.

C989/C989M-18a .....Standard Specification for Slag Cement for Use in Concrete and Mortars.

C1240-20 .....Standard Specification for Silica Fume Used in Cementitious Mixtures.

D1751-18 .....Standard Specification for Preformed Expansion Joint Fillers for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types).

E1155-20.....Determining FF Floor Flatness and FL Floor Levelness Numbers.

E1745-17 .....Standard Specification for Water Vapor Retarders Used in Contact with Soil or Granular Fill under Concrete Slabs.

D. International Concrete Repair Institute:

310.2R-2013 -.....Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair.

1.4 SUBMITTALS

A. Submittal Procedures: Refer to Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer’s Representative (COR) review and approval.

B. Submittal Drawings:

1. Submit large scale drawings of reinforcing steel, including all reinforcing bend diagrams and reinforcing details, to the COR for review and approval.

C. Manufacturer's Literature and Data:

1. Concrete Mix Design.
2. Air-entraining admixture, chemical admixtures, and curing compounds.
3. Indicate manufacturer's recommendation for each application.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Certificates: Certify products comply with specifications.

1. Each ready mix concrete batch delivered to site.

1.5 DELIVERY

A. Deliver each ready-mixed concrete batch with mix certification in duplicate according to ASTM International(ASTM) C94/C94M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.

B. Pozzolans:
   1. Fly Ash: ASTM International(ASTM) C618, Class C or F including supplementary optional physical requirements. Pozzolans shall not exceed 25 percent of total cementitious materials by weight.
   2. Slag: ASTM International(ASTM) C989/C989M; Grade 80, Grade 100 or Grade 120 .
   3. Silica Fume: ASTM International(ASTM) C1240.

C. Coarse Aggregate: ASTM International(ASTM) C33/C33M.
   1. Size 467 for footings and walls over 300 mm (12 inches) thick.
   2. Size 7 for coarse aggregate for applied topping and metal pan stair fill.
   3. Size 67 for other applications.

D. Fine Aggregate: ASTM International(ASTM) C33/C33M.

E. Lightweight Aggregate for Structural Concrete:
ASTM International(ASTM) C330/C330M, Table 1.

F. Mixing Water: Fresh, clean, and potable.

G. Air-Entraining Admixture: ASTM International(ASTM) C260/C260M.

H. Chemical Admixtures: ASTM International(ASTM) C494/C494M.

I. Vapor Barrier: ASTM International(ASTM) E1745, Class A with a minimum puncture resistance of 2200 g (3000 pounds); minimum 0.38 mm (15 mil) thick.

SLAG

J. Reinforcing Steel: ASTM International(ASTM) A615/A615M or ASTM International(ASTM) A996/A996M, deformed. See Structural Drawings for grade.

K. Forms: Wood, plywood, metal, or other materials, approved by Contracting Officer, of grade or type suitable to obtain type of finish specified.

1. Plywood: Exterior grade, free of defects and patches on contact surface.
2. Lumber: Sound, grade-marked, S4S stress graded softwood.
3. Form coating: As recommended by Contractor.

L. Welded Wire Fabric: ASTM International(ASTM) A1064/A1064M, plain; deformed; Grade 56; Grade 65; Grade 70; Grade 75; Grade 80; sized as indicated.

M. Expansion Joint Filler: ASTM International(ASTM) D1751.

N. Sheet Materials for Curing Concrete: ASTM International(ASTM) C171.

O. Abrasive Aggregates: Aluminum oxide grains or emery grits.

P. Liquid Densifier/Sealer: 100 percent active colorless aqueous siliconate solution.

Q. Grout, Non-Shrinking: Premixed ferrous or non-ferrous. Grout to show no settlement or vertical drying shrinkage at 3 days. Compressive strength for grout, at least 18 MPa (2500 psi) at 3 days and 35 MPa (5000 psi) at 28 days.

2.2 ACCESSORIES

A. Bonding Agent: ASTM International (ASTM) C 1059/C 1059M, Type II.

B. Structural Adhesive: ASTM International (ASTM) C881, 2-component material suitable for use on dry or damp surfaces. Provide material Type, Grade, and Class to suit Project requirements.

C. Water Stops: Rubber base with self-healing properties. Expanding clay based products not acceptable.

D. Weeps: Geotextile type as recommended by Contractor and approved by the COR.

2.3 CONCRETE MIXES

A. Design concrete mixes according to ASTM International (ASTM) C94/C94M, Option C.

B. Compressive strength at 28 days: 30 MPa (4,000 psi) .

C. Submit mix design and results of compression tests to the Contracting Officer for his evaluation. Identify all materials, including admixtures, making-up the concrete.

D. Maximum Slump for Vibrated Concrete: 100 mm (4 inches) tested according to ASTM International (ASTM) C143.

E. Cement and Water Factor (See Table I):

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE				
Concrete: Strength	Non-Air-Entrained		Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
25 (3000)1,2	300 (500)	See 4 Below	310 (520)	See 4 Below

Notes:

1. If trial mixes are used, achieve a compressive strength 8.3 MPa (1 200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve a compressive strength 9.7 MPa (1,400 psi) in excess of f'c.
2. Lightweight Structural Concrete: Pump mixes may require higher cement values as specified in ACI 318/318M.
3. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.
4. Laboratory Determined according to ACI 211.1 for normal weight concrete or ACI 211.2 for lightweight structural concrete.

F. Air-entrainment as specified, and conform with the following for air content table:

TABLE II - TOTAL AIR CONTENT FOR VARIOUS SIZES OF COARSE AGGREGATES	
Nominal Maximum Size of Coarse Aggregate	Total Air Content, percent
10 mm (3/8 inches)	6 Moderate exposure; 7.5 severe exposure
13 mm (1/2 inches)	5.5 Moderate exposure; 7 severe exposure
19 mm (3/4 inches)	5 Moderate exposure; 6 severe exposure
25 mm (1 inches)	4.5 Moderate exposure; 6 severe exposure
40 mm (1 1/2 inches)	4.5 Moderate exposure; 5.5 severe exposure

2.4 BATCHING AND MIXING

A. Store, batch, and mix materials according to ASTM C94/C94M.

1. Job-Mixed: Batch mix concrete in stationary mixers as specified in ASTM International(ASTM) C94/C94M.

2. Ready-Mixed Concrete: Comply with ASTM International(ASTM) C94/C94M, except use of non-agitating equipment for transporting concrete to Site is not acceptable.
3. EXECUTION Mixing Structural Lightweight Concrete: Charge mixer with 2/3 of total mixing water and total aggregate for each batch. Mix ingredients minimum 30 seconds in stationary mixer or minimum 10 revolutions at mixing speed in truck mixer. Add remaining mixing water and other ingredients and continue mixing. Above procedure may be modified as recommended by aggregate producer.
4. When aggregate producer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

PART 3 - EXECUTION

3.1 FORMWORK

A. Installation: Conform to ACI 347. Construct forms to obtain concrete of the shapes, dimensions and profiles indicated, with tight joints.
B. Design and construct forms to prevent bowing-out of forms between supports and to be removable without prying against or otherwise damaging fresh concrete.
C. When patching formed concrete, seal form edges against existing surface to prevent leakage; set forms so that patch is flush with adjacent surfaces.
D. Treating and Wetting: Treat or wet concrete contact surfaces:
   1. Coat plywood and lumber forms with non-staining form sealer.
   2. Wet wood forms thoroughly when they are not treated with form release agent.
   3. Prevent water from accumulating and remaining within forms.
   4. Clean and coat removable metal forms with light form oil before reinforcement is placed.
   5. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
   6. Prevent water from accumulating and remaining within forms.
E. Inserts, Sleeves, and Similar Items: Install flashing reglets, masonry ties, anchors, inserts, wires, hangers, sleeves, boxes for floor hinges, and other cast-in items specified in other Sections. Place where indicated, square, flush and secured to formwork.

F. Construction Tolerances - General: Install and maintain concrete formwork to assure completion of work within specified tolerances.

G. Adjust or replace completed work exceeding specified tolerances before placing concrete.

3.2 REINFORCEMENT

A. Install concrete reinforcement according to ACI 318 and ACI SP-66.

B. Support and securely tie reinforcing steel to prevent displacement during placing of concrete.

C. Drilling for Dowels in Existing Concrete: Use sharp bits, drill hole slightly oversize, fill with epoxy grout, inset the dowel, and remove excess epoxy.

3.3 VAPOR BARRIER

A. Except where membrane waterproofing is required, place interior concrete slabs on a continuous vapor barrier.

B. Lap joints 150 mm (6 inches) and seal with a compatible pressure-sensitive tape.

C. Patch punctures and tears.

3.4 PLACING CONCRETE

A. Remove water from excavations before concrete is placed. Remove hardened concrete, debris and other foreign materials from interior of forms, and from inside of mixing and conveying equipment. Obtain approval from Contracting Officer's Representative before placing concrete.

B. Install screeds at required elevations for concrete slabs.

C. Roughen and clean free from laitance, foreign matter, and loose particles before placing new concrete on existing concrete.

1. Blow-out areas with compressed air and immediately coat contact areas with adhesive in compliance with manufacturer's instructions.

D. Place structural concrete according to ACI 301 and ACI 318.

E. Convey concrete from mixer to final place of deposit by method that will prevent segregation or loss of ingredients. Do not deposit, in Work, concrete that has attained its initial set or has contained its water or cement more than 1 1/2 hours. Do not allow concrete to drop freely more than 1500 mm (5 feet) in unexposed work nor more than 900 mm (3 feet) in exposed work.

F. Place and consolidate concrete in horizontal layers not exceeding 300 mm (12 inches) in thickness. Consolidate concrete by spading,

rodding, and mechanical vibrator. Do not secure vibrator to forms or reinforcement. Continuously vibrate during placement of concrete.

G. Concrete Fill in Stair Tread and Landing Pans: Coat steel with bonding agent and fill pans with concrete. Reinforce with 2 inch by 2 inch by 1.6 mm (0.06 inch) welded wire mesh at midpoint.

H. Hot Weather Concrete Placement: As recommended by ACI 305.1 to prevent adversely affecting properties and serviceability of hardened concrete.

I. Cold Weather Concrete Placement: As recommended by ACI 306.1, to prevent freezing of thin sections less than 300 mm (12 inches) and to permit concrete to gain strength properly.

1. Do not use calcium chloride without written approval from Contracting Officer's Representative.

3.5 TOLERANCES

A. Slab on Grade Finish Tolerance: Comply with ACI 117, FF-number and FL-number method.

1. Paragraph 4.8.3, Class A 3 mm (1/8 inches) for offset in form-work.
2. Table R4.8.4, "Flat" 6 mm (1/4 inch) in 3 m (10 feet) for slabs.

3.6 PROTECTION AND CURING

A. Protect exposed surfaces of concrete from premature drying, wash by rain or running water, wind, mechanical damage, and excessive hot or cold temperatures.

B. Curing Methods: Cure concrete with curing compound using wet method with sheets.

C. Formed Concrete Curing: Wet the tops and exposed portions of formed concrete and keep moist until forms are removed.

1. If forms are removed before 14 days after concrete is cast, install sheet curing materials as specified above.

D. Concrete Flatwork Curing:

1. Install sheet materials according to the manufacturer's instructions.
   a. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.7 FORM REMOVAL

A. Maintain forms in place until concrete is self-supporting, with construction operation loads.

B. Remove fins, laitance and loose material from concrete surfaces when forms are removed. Repair honeycombs, rock pockets, sand runs, spalls, or otherwise damaged surfaces by patching with the same mix as concrete minus the coarse aggregates.

C. Finish to match adjacent surfaces.

3.8 FINISHES

A. Vertical and Overhead Surface Finishes:

1. Surfaces Concealed in Completed Construction: As-cast; no additional finishing required.

2. Surfaces Exposed in Unfinished Areas: As-cast; no additional finishing required.
   a. Mechanical rooms.
   b. Electrical rooms.

3. Surfaces Exposed to View Scheduled for Paint Finish: Remove fins, burrs and similar projections by mechanical means approved by Contracting Officer's Representative flush with adjacent surface. Lightly rub with fine abrasive stone or hone. Use ample amount of water during rubbing without working up a lather of mortar or changing texture of concrete.

4. Surfaces Exposed to View in Finished Areas: Grout finish, unless otherwise shown, for uniform color and smooth finish treated.
   a. Remove laitance, fins and burrs.
   b. Scrub concrete with wire brushes. Clean stained concrete surfaces with hone or stone.
   c. Apply grout composed of 1 part Portland cement and 1 part clean, fine sand (smaller than 600 micro-m (No. 30) sieve). Work grout into surface of concrete with cork floats or fiber brushes until pits and honeycomb are filled.
   d. After grout has hardened, but is still plastic, remove surplus grout with sponge rubber float and by rubbing with clean burlap.
   e. In hot, dry weather fog spray surfaces with water to keep grout wet during setting period. Complete finished areas in same day. Confine limits of finished areas to natural breaks in wall surface. Do not leave grout on concrete surface overnight.

B. Slab Finishes:

1. Allow bleed water to evaporate before surface is finished. Do not sprinkle dry cement on surface to absorb water.
2. Scratch Finish: Rake or wire broom after partial setting slab surfaces to received bonded applied cementitious application, within 2 hours after placing, to roughen surface and provide permanent bond between base slab and applied cementitious materials.

3. Float Finish: Interior and exterior ramps, interior stair treads, and platforms, both equipment pads, and slabs to receive non-cementitious materials, except as specified.
   a. Screen and float to smooth dense finish.
   b. After first floating, while surface is still soft, check surfaces for alignment using straightedge or template. Correct high spots by cutting down with trowel or similar tool. Correct low spots by filling in with material same composition as floor finish. Remove any surface projections on floated finish by rubbing or dry grinding. Refloat slab to uniform sandy texture.
4. Steel Trowel Finish: Applied toppings, concrete surfaces to receive resilient floor covering or carpet, future floor roof and other monolithic concrete floor slabs exposed to view without other finish indicated or specified.
   a. Delay final steel troweling to secure smooth, dense surface, usually when surface can no longer be dented by fingers. During final troweling, tilt steel trowel at slight angle and exert heavy pressure on trowel to compact cement paste and form dense, smooth surface.
   b. Finished surface: Free from trowel marks. Uniform in texture and appearance.

5. Broom Finish: Finish exterior slabs, ramps, and stair treads with bristle brush moistened with clear water after surfaces have been floated.
6. Finished Slab Flatness (FF) and Levelness (FL):
   a. Slab on Grade: Specified overall value FF 25/FL 20. Minimum local value FF 17/FL 15.
   b. Test flatness and levelness according to ASTM E1155.

3.9 SURFACE TREATMENTS

A. Mix and apply the following surface treatments according to manufacturer's instructions.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Liquid Densifier/Sealer: Use for exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish .

C. Slip Resistant Finish:
   1. Except where safety nosing and tread coverings are shown, apply abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms.
      a. Broadcast aggregate uniformly over concrete surface. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water sufficiently to slightly expose abrasive aggregate.

3.10 APPLIED TOPPING

A. Install concrete topping with thickness and strength shown with only enough water to ensure stiff, workable, plastic mix.

B. Continuously place applied topping until entire area is complete, struck off with straightedge, compact by rolling or tamping, float and steel trowel to hard smooth finish.

3.11 RESURFACING FLOORS

A. Remove existing flooring by abrasive blasting or grinding, in areas to receive resurfacing, to expose existing structural slab. Achieve a surface profile of 2 to 4 according to ICRI 310.2R for the condition found at Site.

B. Prepare exposed structural slab surface by cleaning, wetting, and applying adhesive according to manufacturer's instructions as specified in the flooring section.

3.12 FOUNDATION WALL INFILL

A. Install air-entrained concrete at foundation wall infill, as indicated.

B. Install expansion and contraction joints, waterstops, weep holes, reinforcement and railing sleeves, as indicated.

C. Finish exposed surfaces to match adjacent concrete surfaces, new or existing.

D. Place porous backfill, as indicated on Drawings.

- - E N D - -

DIVISION 04 - MASONRY

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Masonry mortar installed by other // concrete and // masonry // sections.

1.2 RELATED REQUIREMENTS

A. Mortar used in Section:

1. Section 03 45 00, PRECAST ARCHITECTURAL CONCRETE.
2. Section 04 01 00, MAINTENANCE OF MASONRY.
3. Section 04 05 16, MASONRY GROUTING.
4. Section 04 20 00, UNIT MASONRY.
5. Section 04 72 00, CAST STONE MASONRY.

B. Mortar Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
2. C91/C91M-12 - Masonry Cement.
3. C144-11 -Aggregate for Masonry Mortar.
4. C150/C150M-15 - Portland Cement.
5. C207-06(2011) - Hydrated Lime for Masonry Purposes.
6. C270-14a - Mortar of Unit Masonry.
7. C595/C595M-15e1 - Blended Hydraulic Cements.
8. C780-15 - Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
9. C979/C979M-10 - Pigments for Integrally Colored Concrete.
10. C1329/C1329M-15 - Mortar Cement.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Mortar.

2. Admixtures.

D. Certificates: Certify each product complies with specifications.

1. Portland cement.
2. Masonry cement.
3. Mortar cement.
4. Hydrated lime.
5. Fine aggregate.
6. Color admixture.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Testing laboratory.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:

1. Engage independent testing laboratory to tests and submit reports.
   a. Deliver samples to laboratory in number and quantity required for testing.
2. Test mortar and materials specified.
3. Mortar:
   a. Test for compressive strength and water retention according to ASTM C270.
   b. Minimum Mortar compressive strengths 28 days:
      1) Type M: 17.2 MPa (2,500 psi).
      2) Type S: 12.4 MPa (1,800 psi).
      3) Type N: 5.1 MPa (750 psi).
4. Non Staining Cement: Test for water soluble alkali.
   a. Water Soluble Alkali: Maximum 0.03 percent.
5. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, // color, // production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store masonry materials under waterproof covers on planking clear of ground.

1. Protect loose, bulk materials from contamination.

B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Hydrated Lime: ASTM C207, Type S.

B. Aggregate for Masonry Mortar: ASTM C144 and as follows:

1. Light colored sand for mortar for laying face brick.
2. White plastering sand meeting sieve analysis for mortar joints for pointing // and laying of structural facing tile units // except that 100 percent passes No. 8 sieve, and maximum 5 percent retained on No. 16 sieve.
3. Test sand for color value according to ASTM C40/C40M. Sand producing color darker than specified standard is unacceptable.

C. Blended Hydraulic Cement: ASTM C595/C595M, Type IS, IP.

D. Masonry Cement: ASTM C91/C91M. Type N, S, Or M.

1. Use white masonry cement whenever white mortar is specified.

E. Mortar Cement: ASTM C1329/C1329M, Type N, S or M.

F. Portland Cement: ASTM C150/C150M, Type I.

1. Use white Portland cement wherever white mortar is specified.

G. Pigments: ASTM C979/C979M; inorganic, inert, mineral pigments only, unaffected by atmospheric conditions, nonfading, alkali resistant, and water insoluble.

H. Water: Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer // and from one production run //.

2.3 MIXES

A. Pointing Mortar for New Work:

1. For Cast Stone or Precast Concrete: Proportion by volume; one part white Portland cement, two parts white sand, and 1/5 part hydrated lime.
2. Pointing Mortar for Glazed Structural Facing Tile:
   a. Proportion by volume: One part white Portland cement, two parts of graded white sand passing Number 50 sieve, and 1/8 part hydrated lime.

B. Tuck Pointing Mortar for Repair Work: Tuck pointing mortar specified in Section 04 01 00, MAINTENANCE OF MASONRY.

C. Masonry Mortar: ASTM C270.
1. Admixtures:
   a. Do not use mortar admixtures, and color admixtures unless approved by Contracting Officer's Representative.
   b. Do not use antifreeze compounds.

D. Colored Mortar:
1. Maintain uniform mortar color for exposed work, throughout.
2. Match mortar color in approved sample // or sample panel specified in Section 04 20 00, UNIT MASONRY. //
3. Alteration Work Mortar Color: Match existing mortar unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

E. Color Admixtures:
1. Proportion as specified by manufacturer.
2. For color, see Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.2 MIXING

A. Measure ingredients by volume using known capacity container.

B. Mix for 3 to 5 minutes in a mechanically operated mortar mixer.

C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.

D. Mortar Stiffened Because of Water Loss Through Evaporation:
1. Re-temper by adding water to restore to proper consistency and workability.

2. Discard mortar reaching initial set or unused within two hours of mixing.

E. Pointing Mortar:

1. Mix dry ingredients with enough water to produce damp mixture of workable consistency retaining shape when formed into ball.
2. Allow mortar to stand in dampened condition for 60 to 90 minutes.
3. Add water to bring mortar to a workable consistency before use.

3.3 MORTARING

A. Type M Mortar: Use for // precast concrete panels, // and // parging below grade //.

B. Type S Mortar: Use for // masonry containing vertical reinforcing bars (non-engineered) // masonry below grade // masonry solar screens // and // setting cast stone // and // engineered reinforced unit masonry work //.

C. Brick Veneer Over Frame Back Up Walls: Use Type S Portland cement-lime mortar.

D. Type N Mortar: Use for other masonry work.

E. Type N Mortar: Use for pointing items and tuck pointing specified.

3.4 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

1. Take and test samples during progress of work according to ASTM C780.

- - E N D - -

SECTION 04 20 00
UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Concrete masonry unit (CMU) assemblies for:
   1. Exterior walls.
   2. Interiorwalls .

1.2 RELATED REQUIREMENTS

A. Sealants and Sealant Installation: Section 07 92 00, JOINT SEALANTS.
B. Color and Texture of Masonry Units: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Concrete Institute (ACI):
   1. 315-99 - Details and Detailing of Concrete Reinforcement.
   2. 530.1/ASCE 6/TMS 602-13 - Specification for Masonry Structures.
C. ASTM International (ASTM):
   1. A615/A615M-15ae1 - Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
   2. A951/A951M-14 - Steel Wire for Masonry Joint Reinforcement.
   3. A1064/A1064M-15 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
   4. C34-13 - Structural Clay Load-Bearing Wall tile.
   5. C55-14a - Concrete Building Brick.
   6. C56-13 - Structural Clay Nonloadbearing Tile.
   7. C62-13a - Building Brick (Solid Masonry Units Made from Clay or Shale).
   8. C67-14 - Sampling and Testing Brick and Structural Clay Tile.
   9. C90-14 - Load-Bearing Concrete Masonry Units.
   10. C126-15 - Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units.
   11. C216-15 - Facing Brick (Solid Masonry Units Made From Clay or Shale).
   12. C612-14 - Mineral Fiber Block and Board Thermal Insulation.
   13. C744-14 - Prefaced Concrete and Calcium Silicate Masonry Units.
   14. D1056-14 - Flexible Cellular Materials - Sponge or Expanded Rubber.

15. D2240-05(2010) - Rubber Property-Durometer Hardness.
16. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.

D. American Welding Society (AWS):
1. D1.4/D1.4M-11 - Structural Welding Code - Reinforcing Steel.

E. Brick Industry Association (BIA):
1. TN 11B-88 - Guide Specifications for Brick Masonry, Part 3.

F. Federal Specifications (Fed. Spec.):
1. FF-S-107C(2) - Screws, Tapping and Drive.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies.
2. Special masonry shapes, profiles, and placement.
3. Masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Installation instructions.

D. Samples:
1. Face brick: Sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
2. Concrete masonry units, when exposed in finish work.
3. Anchors and Ties: Each type.
4. Joint Reinforcing: 1200 mm (48 inches) long each type.
5. Face brick.
6. Solid and load-bearing concrete masonry units, including fire-resistant rated units.

1.5 QUALITY ASSURANCE

A. Welders and Welding Procedures Qualifications: AWS D1.4/D1.4M.

SPEC WRITER NOTE: For small projects verify use of following paragraph with the project manager.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products above grade, protected from contamination.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Hot and Cold Weather Requirements: Comply with ACI 530.1/ASCE 6/TMS 602.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer and from one production run .

2.2 UNIT MASONRY PRODUCTS

A. Brick:

1. Face Brick:

a. ASTM C216, Grade SW, Type FBS.

b. Brick when tested according to ASTM C67: Classified slightly efflorescent or better.

c. Size:

1) Modular.

2) .

B. Concrete Masonry Units (CMU):

1. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.

2. Unit Weight: Medium weight izes: Modular, 200 mm by 400 mm (8 inches by 16 inches) nominal face dimension; thickness as indicated on drawings.

.

2.3 ANCHORS, TIES, AND REINFORCEMENT

A. Steel Reinforcing Bars: ASTM A615/A615M; Grade 60, deformed bars.

B. Joint Reinforcement:

1. Form from wire complying with ASTM A951/A951M.
2. Hot dipped galvanized after fabrication.
3. Width of joint reinforcement 40 mm (1.6 inches) less than nominal thickness of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement minimum 3000 mm (10 feet) long, factory cut.
6. Joint reinforcement with crimp formed drip is not acceptable.
7. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
8. Ladder Design:
   a. Longitudinal wires deformed 4 mm (0.16 inch).
   b. Cross wires 4 mm (0.16 inch) diameter
9. Trussed Design:
   a. Longitudinal and cross wires minimum 4 mm (0.16 inch nominal) diameter.
   b. Longitudinal wires deformed.
10. Multiple Wythes and Cavity Wall Ties:
   a. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
   b. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe minimum 75 mm (3 inches) spaced 400 mm on center (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).

C. Adjustable Veneer Anchor for Framed Walls:

1. Two piece, adjustable anchor and tie.
2. Anchor and tie may be either loop or angle type; provide only one type throughout.

3. Loop Type:
   a. Anchor: Screw-on galvanized steel anchor strap 2.75 mm (0.11 inch) by 19 mm (3/4 inch) wide by 225 mm (9 inches) long, with 9 mm (0.35 inch) offset and 100 mm (4 inch) adjustment. Provide 5 mm (0.20 inch) hole at each end for fasteners.
   b. Ties: Triangular tie, fabricated of 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Ties long enough to engage anchor and be embedded minimum 50 mm (2 inches) into bed joint of masonry veneer.
4. Angle Type:
   a.
5. Adjustable Cavity Wall Ties:
   a. Adjustable wall ties may be furnished at Contractor's option.
   b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.
   c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
   d. Form one piece to rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into bed joint 50 mm (2 inches).
   e. Form other piece to 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having 75 mm (3 inch) long bent section for engaging 105 mm (4-1/8 inch) wide piece to form adjustable connection.

2.4 ACCESSORIES

A. Weeps:
   1. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
   2. Weep Tubing: Round, polyethylene, 9 mm (3/8 inch) diameter, 100 mm (4 inches) long.
   3. Weep Hole: Flexible PVC louvered configuration with rectangular closure strip at top.

B. Cavity Drain Material: Open mesh polyester sheets or strips to prevent mortar droppings from clogging the cavity.

C. Masonry Cleaner:
   1. Detergent type cleaner selected for each type masonry.
   2. Acid cleaners are not acceptable.
   3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.

D. Fasteners:

1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.

E. Welding Materials: AWS D1.4/D1.4M, type to suit application.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Keep finish work free from mortar smears or spatters, and leave neat and clean.

C. Wall Openings:
   1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
   2. When items are not available when walls are built, prepare openings for subsequent installation.

D. Tooling Joints:
   1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
   2. Tool while mortar is soft enough to be compressed into joints and not raked out.
   3. Finish joints in exterior face masonry work with jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
   4. Tool Exposed interior joints in finish work concave unless specified otherwise.

E. Partition Height:
   1. Extend partitions minimum 100 mm (4 inches) above suspended ceiling or to overhead construction where no ceiling occurs.
   2. Extend following partitions to overhead construction.
      a. Full height partitions, and fire partitions and smoke partitions indicated on drawings.
      b. Both walls at expansion joints.

c. Corridor walls.
d. Walls at stairway and stair halls, elevators, dumbwaiters, trash and laundry chute shafts, and other vertical shafts.
e. Walls at refrigerator space.
f. Reinforced masonry partitions.

3. Extend finished masonry partitions minimum 100 mm (4 inches) above suspended ceiling and continue with concrete masonry units or structural clay tile to overhead construction:

F. Lintels:

1. Openings 1025 mm (41 inches) wide to 1600 m (63 inches) wide without structural steel lintel or frames, require lintel formed of concrete masonry lintel or bond beam units filled with grout and reinforced with one No. 16 (No. 5) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.
2. Use steel lintels, for openings greater than 1600 m (63 inches) wide, brick masonry openings, and elevator openings unless shown otherwise.
3. Doors having overhead concealed door closers require steel lintel, and pocket for closer box.
4. Lintel Bearing Length: Minimum 100 mm (4 inches) at both ends.

G. Wall, Furring, and Partition Units:

1. Lay out field units to provide one-half running bond, unless indicated otherwise.
2. Align head joints of alternate vertical courses.
3. At sides of openings, balance head joints in each course on vertical center lines of openings.
4. Minimum Masonry Unit Length: 100 mm (4 inches).
5. On interior partitions provide 6 mm (1/4 inch) open joint for caulking between // existing construction, // exterior walls, // concrete work, // and abutting masonry partitions.
6. Use minimum 100 mm (4 inches) nominal thick masonry for free standing furring, unless indicated otherwise.
7. Do not abut existing plastered surfaces except suspended ceilings with new masonry partitions.

H. Use minimum 100 mm (4 inches) nominal thick masonry for fireproofing steel columns unless indicated otherwise.

I. Before connecting new masonry with previously laid masonry, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.

J. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.

K. Construct formwork to conform to shape, line and dimensions indicated on drawings. Make sufficiently tight to prevent mortar, grout, or concrete leakage. Brace, tie and support formwork as required to maintain position and shape during construction and curing of reinforced masonry.

L. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and other reasonable temporary construction loads.

M. Minimum Curing Times Before Removing Shores and Forms:

1. Girders and Beams: 10 days.
2. Slabs: 7 days.
3. Reinforced Masonry Soffits: 7 days.

3.2 INSTALLATION - ANCHORAGE

1. .

B. Masonry Facing to Backup and Cavity Wall Ties:

1. Use individual ties for new work.
2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 400 mm (16 inches) horizontally.
3. At openings, provide additional ties spaced maximum 900 mm (36 inches) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
4. Anchor new masonry facing to existing masonry with adjustable cavity wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.
5. Option: Install joint reinforcing for multiple wythes and cavity wall ties spaced maximum 400 mm (16 inches) vertically.
6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals maximum 400 mm (16 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

C. Masonry Furring:
   1. Anchor masonry furring less than 100 mm (4 inches) nominal thick to masonry walls or to concrete with adjustable wall ties or dovetail anchors.
   2. Space at maximum 400 mm (16 inches) on center in both directions.

D. Anchorage to Steel Beams or Columns:
   1. Use adjustable beam anchors on each flange.

3.3 INSTALLATION - REINFORCEMENT

A. Joint Reinforcement:
   1. Install joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
   2. Reinforcing is acceptable in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
   3. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
   4. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry.
   5. Wherever brick masonry is backed up with stacked bond masonry, install multiple wythe joint reinforcement in every two courses of CMU backup, and in corresponding joint of facing brick.

B. Steel Reinforcing Bars:
   1. Install reinforcing bars in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for horizontal reinforcement. Install in wall cavities of reinforced masonry walls where indicated on drawings.
   2. Bond Beams:
      a. Form Bond beams of load-bearing concrete masonry units filled with grout and reinforced with two No. 15m (No. 5) reinforcing bars unless shown otherwise. Do not cut reinforcement.
      b. Brake bond beams only at expansion joints and at control joints, if shown.
   3. Stack Bond:
      a. Locate additional joint reinforcement in vertical and horizontal joints as indicated on drawings.

b. Anchor vertical reinforcement into foundation or wall or bond beam below.
c. Provide temporary bracing for walls over 8 feet tall until permanent horizontal bracing is completed.

3.4 INSTALLATION - BRICK EXPANSION AND CMU CONTROL JOINTS

A. Provide brick expansion joint (EJ) and CMU control joints (CJ) where indicated on drawings.
B. Keep joint free of mortar and other debris.
C. Joints Occur In Masonry Walls:
   1. Install preformed compressible joint filler in brick wythe.
   2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on both sides of shear key.
D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.
E. Interrupt joint reinforcement at expansion and control joints.
F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.5 INSTALLATION - BUILDING EXPANSION AND SEISMIC JOINTS

A. Keep expansion and seismic joints open and free of mortar. Remove mortar and other debris.
B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.
C. Fill opening in exposed face of expansion and seismic joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.6 INSTALLATION - ISOLATION JOINT

A. Where full height walls and partitions lie parallel or perpendicular to and under structural beams and shelf angles, provide minimum 9 mm (3/8 inch) separation between walls and partitions and bottom of beams and shelf angles.
B. Insert continuous full width strip of non-combustible type compressible joint filler.
C. Fill opening in exposed face of isolation joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.7 INSTALLATION - BRICKWORK

A. Lay clay brick according to BIA TN 11B.

B. Laying:

1. Lay brick in one-half running bond with bonded corners, unless indicated otherwise.
2. Maintain bond pattern throughout.
3. Do not use brick smaller than half-brick at any angle, corner, break, and jamb.
4. Where length of cut brick is greater than one half length, maintain vertical joint location.
5. Lay exposed brickwork joints symmetrical about center lines of openings.
6. Do not structurally bond multi-wythe brick walls, unless indicated on drawings.
7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
8. Lay brick for sills with wash and drip.
9. Build solid brickwork as required for anchorage of items.

C. Joints:

1. Exterior And Interior Joint Widths: Lay for three equal joints in 200 mm (8 inches) vertically, unless shown otherwise.
2. Rake joints for pointing with colored mortar when colored mortar is not full depth.

D. Weep Holes:

1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in wall.
2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.
4. Coordinate with building insulation for thickness of insulation and allowance of air space behind exterior wythe.
5. In locations where hurricane driven rains are expected, install bituminous dampproofing on cavity side of inner wythe.

E. Cavity Walls:

1. Keep air space clean of mortar accumulations and debris.
2. Lay the interior wythe of the masonry wall full height where dampproofing is required on cavity face. Coordinate to install dampproofing before laying outer wythe.
3. Insulated Cavity Type Exterior Walls:
   a. Install insulation against cavity face of inner masonry wythe.
   b. Place insulation between rows of ties or joint reinforcing. Adhere insulation to masonry surface with a bonding agent as recommended by insulation manufacturer.
   c. Lay outer masonry wythe up with air space between insulation and masonry units.
4. Veneer Framed Walls:
   a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.
   b. Keep air space clean of mortar accumulations and debris.

3.8 INSTALLATION - CONCRETE MASONRY UNITS

A. Types and Uses:
1. Provide special concrete masonry shapes as required, // including lintel and bond beam units, sash units, and corner units //. Provide solid concrete masonry units, where full units cannot be installed, or where needed for anchorage of accessories.
2. Provide solid load-bearing concrete masonry units or grout cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Do not install brick jambs in exposed finish work.
5. Install concrete building brick only as filler in backup material where not exposed.
6. Construct fire resistance in fire rated partitions meeting fire ratings indicated on drawings.

B. Laying:
1. Lay concrete masonry units with 9 mm (3/8 inch) joints, with a bond overlap of minimum 1/4 of unit length, except where stack bond is indicated on drawings.
2. Do not wet concrete masonry units before laying.

3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill voids with mortar or grout.
7. Provide 6 mm (1/4 inch) open joint for sealant between exterior walls, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings minimum 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge masonry against steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes indicated on drawings.
12. At time of placement, ensure steel reinforcement is free of loose rust, mud, oil, and other contamination capable of affecting bond.
13. Place steel reinforcement at spacing indicated on drawings before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place vertically by centering clips, caging devices, tie wire, or other approved methods.
16. Support vertical bars near each end and at maximum 192 bar diameter on center.
17. Splice reinforcement or attach reinforcement to dowels by placing in contact and securing with wire ties.
18. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
19. Grout cells of concrete masonry units, containing reinforcing bars, solid as specified.
20. Install cavity and joint reinforcement as masonry work progresses.
21. Rake joints 6 to 10 mm (1/4 to 3/8 inch) deep for pointing with colored mortar when colored mortar is not full depth.

3.9 GROUTING

A. Preparation:

1. Clean grout space of mortar droppings before placing grout.
2. Close cleanouts.
3. Install vertical solid masonry dams across grout space for full height of wall at intervals of maximum 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
4. Verify reinforcing bars are installed as indicated on drawings.

B. Placing:
1. Place grout in grout space in lifts as specified.
2. Consolidate each grout lift after free water has disappeared but before plasticity is lost.
3. Do not slush with mortar or use mortar with grout.
4. Interruptions:
   a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inches) below top of last masonry course.
   b. Grout from dam to dam on high lift method.
   c. Longitudinal run of masonry may be stopped off only by raking back one-half masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:
1. Consolidate by puddling with grout stick during and immediately after placing.
2. Grout cores of concrete masonry units containing reinforcing bars solid as masonry work progresses.

D. Low Lift Method:
1. Construct masonry to 1.5 m (5 feet) maximum height before grouting.
2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:
1. Do not pour grout until masonry wall has cured minimum of 4 hours.
2. Place grout in 1.5 m (5 feet) maximum lifts.
3. Exception:
   a. Where following conditions are met, place grout in 3.86 m (12.67 feet) maximum lifts.
   b. Masonry has cured minimum of 4 hours.
   c. Grout slump is maintained between 250 and 275 mm (10 and 11 inches).

d. No intermediate reinforced bond beams are placed between top and bottom of grout lift.

4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into preceding lift.

3.10 PLACING REINFORCEMENT

A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on drawings or approved submittal drawings, or bars with reduced cross-section due to excessive rusting or other causes.

B. Position reinforcement accurately at spacing indicated on drawings. Support and secure vertical bars against displacement. Install horizontal reinforcement as masonry work progresses. Where vertical bars are shown in close proximity, provide clear distance between bars of minimum one bar diameter or 25 mm (1 inch), whichever is greater.

For columns, piers and pilasters, maintain clear distance between vertical bars as indicated on drawings, minimum 1.5 bar diameters or 38 mm (1-1/2 inches), whichever is greater. Provide lateral ties as indicated on drawings.

C. Splice reinforcement bars only where indicated on drawings, unless approved by Contracting Officer's Representative. Provide lapped splices. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.

D. Provide minimum lap as indicated on approved submittal drawings, or if not indicated, minimum 48 bar diameters.

E. Low-Lift Grouting:

1. Use Low-Lift grouting technique with fine grout for the following:
   a. Two-wythe walls with grout space of 50 mm (2 inch) or less in width.
   b. Multi-wythe walls.
   c. Columns, piers or pilasters where masonry units are shown in core areas enclosed by exterior masonry units.
2. At Contractor’s option, low-lift grouting technique is acceptable for reinforced masonry construction with grout spaces wider than

50 mm (2 inches), except use coarse grout and place in lifts maximum 200 mm (8 inches) in height.

3. Construct low-lift masonry by placing reinforcement, laying masonry units and pouring grout as work progresses.
4. Place vertical reinforcement bars and supports before laying of masonry units. Extend above elevation of maximum pour height as required to allow for splicing. Horizontal reinforcement bars may be placed progressively with laying of masonry units.
5. Limit grout pours as required to prevent displacement of masonry by grout pressures (blowout), but do not exceed 1200 mm (4 feet) pour height.
6. Lay masonry units before each grout pour, but do not construct more than 300 mm (12 inches) above maximum grout pour height in exterior wythe and 100 mm (4 inches) above in other exterior wythe. Provide metal wall ties if required to prevent blowouts.
7. Consolidate immediately by rodding or puddling; do not use trowels. Place grout continuously; do not interrupt pouring of grout for more than one hour. If poured in lifts, place from center-to-center of masonry courses. Terminate pour 38 mm (1 1/2 inches) below top of highest course in pour.

8. Walls: Omit every other masonry unit in first course of one wythe to provide cleanout holes. Tie wythes together with metal ties as indicated on drawings or as required by code, but provide minimum 3.8 mm diameter (9 gage) wire ties spaced maximum 600 mm (24 inches) on center horizontally and 400 mm (16 inches) on center vertically for running pattern bond or 300 mm (12 inches) on center vertically for stack bond (if any).
9. Columns, Piers and Pilasters: Omit every other masonry unit around perimeter of member to provide cleanout holes. Provide reinforcing bands placed in bed joints as the masonry work progresses. Provide bands of the size and vertical spacing show, or as required by code, but minimum 3.8 mm diameter (9 gage) wire spaced 300 mm (12 inches) on center vertically.

10. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dirt, dust, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper positioning. Clean top surface of structural members supporting masonry to ensure bond. After cleaning and inspection, close cleanout holes with matching masonry units and brace closures to resist grout pressures.
11. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist grout pressure, but minimum 3 days curing time. Install shores and bracing, if required, before starting grouting operations.
12. Place grout by pumping into grout spaces, unless alternate methods are acceptable to Contracting Officer's Representative.
13. Install coarse grout. Rod or vibrate each grout lift during placing and after excess moisture has been absorbed, but before plasticity is lost. Do not penetrate or damage grout placed in previous lifts or pours.
14. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Limit pours so as not to exceed the capacity of masonry to resist displacement or loss of mortar bond due to grout pressures.
15. Do not exceed 3600 mm (12 feet) pour height.
16. Do not exceed 7600 mm (25 feet) horizontal pour dimension.
17. Where pour height exceeds 1200 mm (4 feet), place grout in series of lifts not exceeding 1200 mm (4 feet) height. Place each lift as continuous pouring operation. Allow minimum 30 minutes and maximum one hour between lifts of given pour.
18. When more than one pour is required to complete each section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, remove temporary dams, and lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence, if more pours are required.

3.11 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

SPEC WRITER NOTE: If applicable, revise below to allow moistening in hot, dry desert areas.

A. Do not wet concrete masonry units (CMU).

B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to distance behind face equal to thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed 9 mm (3/8 inch) joint widths.

C. Where solid CMU units are shown, lay with full mortar head and bed joints.

D. Walls:

1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontally reinforced beams (bond beams) are indicated on drawings, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Columns, Piers and Pilasters:

1. Use CMU units of size, shape and number of vertical core spaces shown. If not shown, use units which provide minimum clearances and grout coverage for number and size of vertical reinforcement bars shown.
2. Provide pattern bond shown, or if not shown, alternate head joints in vertical alignment.

3. Where bonded pilaster construction is shown, lay wall and pilaster units together to maximum grout pour height specified.

F. Grouting:

1. Use fine grout for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use coarse grout for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At Contractor’s option, use either low-lift or high-lift grouting techniques.

G. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 sq. mm (8 sq. inches) in vertical cores to be grouted.
2. Place vertical reinforcement before grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).
3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 feet) height, or if bond beam occurs below 1.5 m (5 feet) height, stop pour 38 mm (1-1/2 inches) below top of bond beam.
4. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.
5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as indicated on drawings. Place grout in bond beam course before filling vertical cores above bond beam.

SPEC WRITER NOTE: Consult NCMA and ACI publications and revise paragraph below if required.

6. Limit grout lifts to maximum height of 1.5 m (5 feet) and grout pour to maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
7. Place vertical reinforcement before grouting. Place before or after laying masonry units, to suit application. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).

8. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosen before mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.
9. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
10. Place horizontal beam reinforcement as masonry units are laid.
11. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
12. Where lateral ties are shown in contact with vertical reinforcement bars, embed additional lateral tie reinforcement in mortar joints. Place as indicated on drawings, or if not shown, provide as required to prevent grout blowout or rupture of CMU face shells, but provide minimum 4.1 mm diameter (0.16 inch) wire ties spaced 400 mm (16 inches) on center for members with 500 mm (20 inches) or less side dimensions, and 200 mm (8 inches) on center for members with side dimensions exceeding 500 mm (20 inches).
13. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.
14. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
15. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow minimum 30 minutes and maximum one hour between lifts. Mechanically consolidate each lift.
16. Place grout in lintels or beams over openings in one continuous pour.

17. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.
18. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

3.12 CONSTRUCTION TOLERANCES

A. Lay masonry units plumb, level and true to line within tolerances according to ACI 530.1/ASCE 6/TMS 602 and as follows:

B. Maximum variation from plumb:
   1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
   2. In 6000 mm (20 feet) - 9 mm (3/8 inch).
   3. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).

C. Maximum variation from level:
   1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
   2. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).

D. Maximum variation from linear building lines:
   1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
   2. In 12,000 mm (40 feet) or more - 19 mm (3/4 inch).

E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
   1. Minus 6 mm (1/4 inch).
   2. Plus 13 mm (1/2 inch).

F. Maximum variation in prepared opening dimensions:
   1. Accurate to minus 0 mm (0 inch).
   2. Plus 6 mm (1/4 inch).

3.13 CLEANING AND REPAIR

A. General:
   1. Clean exposed masonry surfaces on completion.
   2. Protect adjoining construction materials and landscaping during cleaning operations.
   3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.

4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:

1. First wet surfaces with clean water, then wash down with detergent solution. Do not use muriatic acid.
2. Brush with stiff fiber brushes while washing, and immediately wash with clean water.
3. Remove traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:

1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
2. Allow mud to dry before brushing.

3.14 FIELD QUALITY CONTROL

- - E N D - -

DIVISION 05 - METALS

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel shapes, plates, and bars.
2. Structural pipe.
3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

A. Steel Joist: Section 05 21 00, STEEL JOIST FRAMING.

B. Steel Decking: Section 05 31 00, STEEL DECKING.

C. Composite Steel Deck: Section 05 36 00, COMPOSITE METAL DECKING.

D. Steel Framing: Section 13 34 19, METAL BUILDING SYSTEMS .

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Institute of Steel Construction (AISC):

1. AISC Manual - Steel Construction Manual, 14th Ed.
2. 303-10 - Code of Structural Steel Buildings and Bridges.
3. 360-10: Specification for Structural Steel Buildings.

C. The American Society of Mechanical Engineers (ASME):

1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.

D. American Welding Society (AWS):

1. D1.1/D1.1M-15 - Structural Welding Code - Steel.

E. ASTM International (ASTM):

1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
2. A36/A36M-14 - Carbon Structural Steel.
3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
5. A242/A242M-13 - High-Strength Low-Alloy Structural Steel.
6. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.

7. A307-14 - Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
8. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
9. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
10. A572/A572M-15 - High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
11. A992/A992M-15 - Structural Shapes.
12. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
13. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

F. Master Painters Institute (MPI):
1. No. 18 - Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):
1. MIL-P-21035 - Paint, High Zinc Dust Content, Galvanizing, Repair.

H. Occupational Safety and Health Administration (OSHA):
1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.

I. Research Council on Structural Connections (RCSC) of The Engineering Foundation:
1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.

C. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

D. Test Reports: Certify products comply with specifications.
1. Welders' qualifying tests.

E. Certificates: Certify each product complies with specifications.
   1. Structural steel.
   2. Steel connections.
   3. Welding materials.
   4. Shop coat primer paint.

F. Qualifications: Substantiate qualifications comply with specifications.
   1. Fabricator.
   2. Installer.
   3. Welders and welding procedures.

G. Delegated Design Drawings and Calculations: Signed and sealed by responsible Architect/Engineer.
   1. Connection calculations.
   2.

H. Record Surveys: Signed and sealed by responsible surveyor or engineer.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: AISC Quality Certification participant designated as AISC Certified Plant, Category STD.
   1. Regularly fabricates specified products.
   2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.

B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC-Certified Erector, Category ACSE.
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.

C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.

D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where project is located.

B. Design structural steel framing connections complying with specified performance:

1. Load Capacity: Account for connection and member loads and eccentricities.
    a. Request additional design criteria when necessary to complete connection design.
2. Configuration: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with details shown on drawings, supplementing where necessary. The details shown on drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the Contracting Officer Representative of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the Contracting Officer's Representative. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

2.2 MATERIALS

A. W-Shapes:

1. ASTM A992/A992M.
2. ASTM A572/A572M; Grade 50.
3. ASTM A529; Grade 50.
4.

B. Channel and Angles:

1. ASTM A36/A36M.
2. ASTM A572/A572M; Grade 50.

3. ASTM A529; Grade 50.

C. Plates and Bars:

1. ASTM A36/A36M.
2. ASTM A572/A572M; Grade 50.
3. ASTM A529; Grade 50.

D. Hollow Structural Sections:

1. ASTM A500/A500M.
2. ASTM A501/A501M.

E. Structural Pipe: ASTM A53/A53M, Grade B.

F. Bolts, Nuts and Washers: Galvanized for galvanized framing.

1. High-strength bolts, including nuts and washers: ASTM F3125.
2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.

G. Welding Materials: AWS D1.1, type to suit application.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

2.4 FABRICATION

A. Fabricate structural steel according to Chapter M, AISC 360.

B. Shop and Field Connections:

1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
2. High-Strength Bolts: High-strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

2.5 FINISHES

A. Shop Priming:

1. Prime paint structural steel according to AISC 303, Section 6.
   a. Interstitial Space Structural Steel: Prime paint, unless indicated to receive sprayed on fireproofing.

B. Shop Finish Painting: Apply primer and finish paint as specified in Section 09 91 00, PAINTING.

C. Do not paint:

1. Surfaces within 50 mm (2 inches) of field welded joints.
2. Surfaces indicated to be encased in concrete.
3. Surfaces receiving sprayed on fireproofing.
4. Beam top flanges receiving shear connector studs applied.

D. Structural Steel Galvanizing: ASTM A123/A123M, hot dipped, after fabrication. Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

1. Galvanize structural steel framing installed at exterior locations.

E. Bolts, Nuts, and Washers Galvanizing: ASTM F2329, hot-dipped.

2.6 ACCESSORIES

A. General: Shop paint steel according to AISC 303, Section 6.

B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.

C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

A. Erect structural steel according to AISC 303 and AISC 360.

B. Set structural steel accurately at locations and elevations indicated on drawings.

C. Maintain erection tolerances of structural steel within AISC 303 requirements.

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

A. After welding, clean and prime weld areas to match adjacent finish.

B. Touch-up primer damaged by construction operations.

C. Apply galvanizing repair paint to galvanized coatings damaged by construction operations.

D. Finish Painting: As specified in Section 09 91 00, PAINTING.

3.3 FIELD QUALITY CONTROL

A. Record Survey:

1. Engage registered land surveyor or registered civil engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS to perform survey.
2. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.
3. Identify deviations from allowable tolerances specified in AISC Manual.

- - E N D - -

SECTION 05 21 00
STEEL JOIST FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies open web, longspan, and deep longspan steel joists.

1.2 RELATED WORK:

A. Structural Steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.

B. Finish Painting: Section 09 91 00, PAINTING.

1.3 DESIGN REQUIREMENTS:

Design all elements with the latest published version of applicable Codes.

1.3 TOLERANCES:

Deviation from a straight line between ends of any installed joist shall not exceed 10 mm in 3 m (3/8 inch in 10 feet).

1.4 REGULATORY REQUIREMENTS:

STEEL JOIST INSTITUTE: Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders, (Latest Edition).

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop and Erection Drawings: Complete.

1. Fabrication drawings including details and schedules for the fabrication and assembly of each joist.
2. Erection drawings showing the size and location of each joist, bridging, cross bracing, bearing details, connections, welds, bolts and bearing plates.

C. Certificates: STEEL JOIST INSTITUTE compliance.

D. Design Calculations: If requested by the Resident Engineer, submit complete calculations covering the design of all members and connections. Calculations must be specifically applicable to the joists supplied.

1.6 QUALITY ASSURANCE:

Provide documentation that the joist manufacturer is a member of the Steel Joist Institute and has satisfactorily completed work of a similar scope and nature.

1.7 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Institute of Steel Construction (AISC):

1. Specification for Structural Steel Buildings – Allowable Stress Design and Plastic Design (Latest Edition).
2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Latest Edition).

C. American Society for Testing and Materials (ASTM):

A307-07.....Carbon Steel Bolts and Studs, 400 MPa (60,000 psi) Tensile Strength

F3125/F3125M-15.....Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

D. American Welding Society (AWS):

D1.1-08.....Structural Welding Code – Steel

E. SSPC: The Society for Protective Coatings:

Steel Structures Painting Manual, Volumes 1 and 2

F. Steel Joist Institute (STEEL JOIST INSTITUTE):

Standard Specifications, Load Tables and Weight Tables for Steel Joists and Joist Girders (Latest Edition).

G. U.S. Army Corps of Engineers:

CRD-C-621.....Specification for Non-Shrink Grout

PART 2 - PRODUCTS

2.1 OPEN WEB STEEL JOISTS:

K-Series conforming to STEEL JOIST INSTITUTE standard specifications.

2.2 ACCESSORIES – FITTINGS:

A. Accessories and fittings, including end supports and bridging, in accordance with standard STEEL JOIST INSTITUTE specification under which joists were designed.

B. Unfinished Threaded Fasteners: ASTM A307, Grade A, regular hexagon type, low carbon steel.

C. High-strength bolts, including nuts and washers: ASTM F3125 heavy hexagon structural bolts.

2.3 BEDDING MORTAR:

A. For joist ends bearing on concrete or masonry, provide bedding mortar as follows:

1. Portland cement and sand, mixed at a ratio of 1 part cement to 3 parts sand, by volume, with enough water for placement and hydration.
2. Non-metallic, shrinkage-resistant mortar; premixed, non-corrosive, non-staining product containing selected silica sands, portland cement, shrinkage compensating agents, plasticizing and water reducing agents, complying with CRD-C-621.

PART 3 - EXECUTION

3.1 FABRICATION:

A. Fabrication and assembly in accordance with applicable standard STEEL JOIST INSTITUTE specification:

1. Make chord splices with full penetration welds capable of developing the ultimate strength in tension of the parent material. Make no allowance for the strength of back-up bars or other material incidental to welding.
2. Provide shop-welded connection plates at panel points to receive supplemental framing.
3. Holes in Chord Members: Provide holes in chord members where shown for securing other work to steel joists; however, deduct area of holes from the area of chord when calculating strength of member.
4. Extended Ends: Provide extended ends on joists where shown, complying with manufacturer’s standards and requirements of applicable STEEL JOIST INSTITUTE specifications.
5. Ceiling Extensions: Provide ceiling extension in areas having ceilings attached directly to joist bottom chord. Provide either an extended bottom chord element or a separate unit, to suit manufacturer’s standards, of sufficient strength to support ceiling construction. Extend ends to within 12 mm (1/2 inch) of finished wall surface unless otherwise indicated.
6. Bridging: Provide horizontal or diagonal type bridging for joists and joist girders, complying with STEEL JOIST INSTITUTE specifications. Provide bridging anchors for ends of bridging lines

terminating at walls or beams. Provide bridging adequate to resist the loads indicated on the Contract Documents.

7. End Anchorage: Provide end anchorages, including bearing plates, to secure joists to adjacent construction, complying with STEEL JOIST INSTITUTE specifications, unless otherwise indicated. Design all end anchorages to resist a minimum net uplift of 1.6 kPa (35 pounds per square foot) of supported area.

8. Header Units: Provide header units to support all joists at openings in floor or roof system not framed with steel shapes.
9. Provide supplemental steel support framing for metal deck where normal deck bearing is precluded by other framing members and minor openings.

3.2 SHOP PAINTING:

A. Shop painting in accordance with applicable STEEL JOIST INSTITUTE standard specification.

B. Shop paint joists and accessories with a rust-inhibiting primer paint. For joists which will be finish painted, limit paint to a primer which is compatible with specified finish paint. In high humidity areas, shop paint joists with a zinc-rich primer to receive top coats per the paint system manufacturer’s recommendations.

3.3 ERECTION:

A. Installation of joists in accordance with applicable STEEL JOIST INSTITUTE standard specification.

B. Handle joists in a manner to avoid damaging of joists. Remove damaged joists from site, except when field repair is approved and such repairs are satisfactorily made in accordance with manufacturer's recommendations.

C. Accurately set joists and end anchorage in accordance with the applicable STEEL JOIST INSTITUTE standard specification. Secure joists resting on masonry or concrete bearing surfaces by welding or bolting to the steel bearing plates as indicated on the Contract Documents. Secure bridging and anchoring in place prior to application of any construction loads. Distribute any temporary loads so that carrying capacity of any joist is not exceeded. Loads shall not be applied to bridging where joist lengths are 12 m (40 feet) and longer. Where joist lengths are 12 m (40 feet) and longer, install a center row of bolted

diagonal bridging to provide lateral stability before slackening of hoisting lines.

3.4 FIELD PAINTING:

A. Clean abraded, corroded, and field welded areas and touch up with same type of paint used in shop painting.

B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

- - - E N D - - -

SECTION 05 31 00
STEEL DECKING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Single pan fluted metal form deck supporting concrete fill as roof substrate.
2. Corrugated metal form deck supporting concrete fill as roof substrate.
3. Single pan fluted metal roof deck as roof substrate.
4. Acoustic metal roof deck as roof substrate.

1.2 RELATED WORK

A. Section 01 81 13. SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Section 05 21 00, STRUCTURAL STEEL FRAMING: Structural Steel Shapes.

C. Section 09 06 00, SCHEDULE FOR FINISHES: Color.

D. Section 09 91 00, PAINTING: Finish Painting.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. AISI - American Iron and Steel Institute.

S100-16.....Specification for the Design of Cold-formed Steel Structural Members.

C. American Welding Society (AWS):

D1.1/D1.1M-20.....Structural Welding Code - Steel.

1.3/D1.3M-18..... Structural Welding Code - Sheet Steel.

D. ASTM International (ASTM):

A36/A36M-19.....Standard Specification for Carbon Structural Steel.

A653/A653M-20.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

A1008/A1008M-20.....Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with

Improved Formability, Solution Hardened, and Baked Hardenable.

C423-17.....Standard Test Method for Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.

E119-20.....Standard Test Methods for Fire Tests of Building Construction and Materials.

E. FM Global (FM):

1-28-15.....Wind Design.

Factory Mutual Research Approval Guide.

F. Master Painters Institute (MPI):

No. 18.....Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):

MIL-P-21035B..... Paint, High Zinc Dust Content, Galvanizing Repair.

H. Steel Deck Institute (SDI):

No. 31-07.....Design Manual for Composite Deck, Form Decks, and Roof Decks.

I. UL LLC (UL):

Listed Online Certifications Directory.

580.....Tests for Uplift Resistance of Roof Assemblies.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer’s Representative (COR) review and approval.

B. Submittal Drawings:

1. Show layout, connections to supporting members, anchorage, sump pans, accessories, deck openings and reinforcements.
2. Show similar information necessary for completing installation as shown and specified, including supplementary framing, ridge and valley plates, cant strips, cut openings, special jointing or other accessories.
3. Show welding, side lap, closure, deck reinforcing and closure reinforcing details.

4. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Show steel decking section properties and structural characteristics.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Certificates: Certify each product complies with specifications.
1. Fire Resistance Product Listing: For each metal deck type and thickness supporting concrete slab or fill.

2. Show steel decking is UL Listed for specified application.

3. Show noise reduction coefficient test results.

F. Qualifications: Substantiate qualifications comply with specifications.
1. Welders and welding procedures.

G. Insurance Certification: Assist the Government in preparation and submittal of roof installation acceptance certification as may be necessary in connection with fire and extended coverage insurance.

1.5 QUALITY ASSURANCE

A. FM Listing: Provide metal roof deck units which have been evaluated by Factory Mutual Global and are listed in “Factory Mutual Research Approval Guide” for “Class 1” fire rated construction.

B. Welders and Welding Procedures Qualifications: AWS D1.3/D1.3M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design steel decking and accessories according to AISI S100.

1. Wind Uplift Resistance and Corner Conditions:
   a. Eave Overhang: 2.1 kPa (45 per square foot), minimum.
   b. Other Roof Areas: 1.4 kPa (30 per square foot), minimum.
2. Wind Uplift Resistance and Corner Conditions: UL 580, Class 90 or higher UL Class required by wind loading in the location of the project.
3. Wind Uplift Resistance and Corner Conditions: FM 1-28; Class 1-90 or higher UL Class required by wind loading in the location of the project.
4. Fire Resistance: ASTM E119; as component of 2 hour rated roof assembly.

5. Noise Reduction Coefficient (NRC): Minimum 0.90 when tested according to ASTM C423.
6. Design side and end closures and attachment to supporting steel to safely support wet weight of concrete and construction loads.
7. Cantilever Closure Deflection: 3 mm (1/8 inch), maximum.

2.2 MATERIALS

A. Galvanized Steel Sheet: ASTM A653/A653M; G90 coating.

B. Painted Steel Sheet: ASTM A1008/A1008M, Grade C or D, shop primed.

C. Primer for Shop Painted Sheets: Manufacturer's standard primer (2 coats). When finish painting of steel decking is specified in Section 09 91 00, PAINTING primer coating shall be compatible with specified finish painting.

D. Steel Shapes: ASTM A36/A36M.

E. Acoustic Deck: Cellular deck profile, SDI Publication No. 31.

SPEC WRITER NOTE: Delete paragraph below if acoustical deck is not required.

F. Acoustic Insulation: Manufacturer’s standard mineral fiber type, profile matching deck flute profile.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.

2.4 METAL ROOF DECK

A. Metal Roof Deck: FM Global approved as metal roof deck panels.
   1. Steel decking of the type, depth, thickness, and section properties as shown.

B. Metal Form Deck - Type 1: Single pan fluted units as permanent form for reinforced concrete slabs.
   1. Depth and Thickness: As indicated on drawings.
   2. Material: Galvanized sheet steel.

C. Metal Form Deck - Type 2: Corrugated deck units as permanent form for reinforced concrete slabs.
   1. Depth and Thickness: As indicated on drawings.
   2. Material: Galvanized sheet steel.

D. Metal Roof Deck: Single pan fluted units with flat horizontal top surfaces as permanent support for superimposed loads.
   1. Deck Style:
      a. Wide Rib (Type B) deck.
      b. Intermediate Rib (Type F) deck.
      c. Narrow Rib (Type A) deck.
      d. Deep Rib (Type N) deck.
   2. Depth and Thickness: As indicated on drawings.
   3. Material: Galvanized sheet steel.

E. Acoustic Metal Roof Deck Units: Single-pan fluted units with perforated vertical webs.
   1. Depth and Thickness: As indicated on drawings.
   2. Material: Galvanized sheet steel.
   3. Provide acoustical insulation to fill roof deck flutes.

F. Do not use steel deck for hanging supports of building components including suspended ceilings, electrical light fixtures, plumbing, heating, or air conditioning pipes or ducts or electrical conduits.

G. Include integral system for steel decking units used for interstitial levels.

1. Provide system suitable for simple point of attachment for light duty hanger devices.
2. Provide system suitable to allow for flexibility for attaching hangers for support of suspended ceilings, electrical, plumbing, heating, or air conditioning items, weight not to exceed 50 kg/m2 (10 psf).
3. Provide a minimum spacing pattern of 300 mm (12 inches) on centers longitudinally and 600 mm (24 inches) on centers transversely.
4. Maximum allowable load suspended from any hanger: 23 kg (50 pounds).
5. System consisting of fold-down type hanger tabs or lip hanger is acceptable.

2.5 FABRICATION

A. Fabricate steel decking in sufficient lengths to extend over 3 or more supports, except for interstitial levels.
   1. Cut metal deck units to proper length in shop.
B. Fabricate accessories required to complete installation of steel decking.
   1. Exposed to View: Fabricate from sheet steel matching metal decking.
   2. Concealed from View: Fabricate from galvanized sheet steel.
C. Sheet Metal Accessories:
   1. Metal Cover Plates: For end-abutting decking, to close gaps at changes in deck direction, columns, walls and openings.
      a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
   2. Continuous Sheet Metal Edging: At openings, concrete slab edges and roof deck edges.
      a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
   3. Metal Closure Strips: For openings between decking and other construction. Form to configurations required to provide tight-fitting closures at open ends of flutes and sides of decking.
      a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
   4. Ridge and Valley Plates: Minimum 100 mm (4 inch) wide ridge and valley plates where roof slope exceeds 1/24 (1/2 inch per foot).
      a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
   5. Cant Strips: Provide bent metal 45 degree leg cant strips where indicated on the drawings. Fabricate cant strips with minimum 125 mm (5 inch) face width.
      a. Sheet Steel: Minimum 0.8 mm (0.03 inch) thick.

6. Seat Angles for Deck: Provide where beam does not frame into column.
7. Sump Pans for Roof Drains: Fabricated from single piece galvanized sheet steel with level bottoms and sloping sides to direct water flow to drain. Provide sump pans of adequate size to receive roof drains and with bearing flanges minimum 75 mm (3 inches) wide. Recess pans minimum 38 mm (1-1/2 inches) below roof deck surface, unless otherwise shown or required by deck configuration. Drain holes will be field cut.
   a. Sheet Steel: Minimum 1.7 mm (0.06 inch) thick.

2.6 FINISHES

A. Shop prime painted sheet steel with two coats of primer.

2.7 ACCESSORIES

A. Primer: Manufacturer's standard primer compatible with finish painting specified in Section 09 91 00, PAINTING.
B. Welding Materials: AWS D1.1, type to suit application.
C. Galvanizing Repair Paint: MPI No. 18.
D. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Remove contaminates from structural steel surfaces where steel decking will be welded.
D. Verify structural steel framing installation is completed, plumbed, and aligned with temporary bracing installed where required.
E. Coordinate with structural steel erector to prevent overloading of structural members when placing steel decking for installation.

3.2 ERECTION

A. Do not use roof deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace deck units that become damaged after erection and before casting concrete at no cost additional to the Government.
B. Place steel decking at right angles to supporting members with ends located over supports.
C. Lap end joints 50 mm (2 inches), minimum.

D. Fluted Form Deck Fastening:

1. Fasten form deck to steel supporting members by welding.
   a. Welds: 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength.
   b. Weld Spacing: Maximum 300 mm (12 inches) on center with minimum two welds per unit at each support.
   c. Where two units abut, fasten each unit individually to supporting steel framework.
2. End Closure Fastening: Tack weld or self-tapping No. 8 or larger machine screws at 900 mm (3 feet) on center.
   a. Longitudinal End Closure Fastening: Tack weld only.
3. Weld side laps of adjacent decking units.
   a. Fastener Locations: Mid-span and maximum 900 mm (3 feet) on center.

E. Corrugated Form Deck Fastening:

1. Weld end laps of corrugated form deck units in valley of side lap and at middle of sheet.
   a. Weld Spacing: Maximum 380 mm (15 inches) on center.
2. Weld corrugated deck to intermediate supports in X-pattern. Weld in valley of side laps on every other support and in valley of center corrugation on remaining support.
   a. Weld Spacing: Maximum 760 mm (30 inches) on center.

F. Roof Deck Fastening:

1. Fasten decking to steel supporting members by welding.
   a. Welds: 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength.
   b. Weld Spacing: Maximum 300 mm (12 inches) on center at every support. Use closer spacing where required for lateral force resistance by diaphragm action.
2. Fasten split or partial decking panels to structure in every valley.
3. Fasten decking to each supporting member at ribs where side laps occur.
   a. Power driven fasteners is acceptable in lieu of welding if strength equivalent to welding specified above is provided. Submit test data and design calculations verifying equivalent design strength.

4. Mechanically fasten decking side laps with self-tapping No. 8 or larger machine screws.
   a. Fastener Locations: Mid-span and maximum 900 mm (3 feet) on center.
5. Provide additional fastening necessary to comply with FM Approval for specified performance.

G. Cutting and Fitting:
1. Field cut steel decking to accommodate columns and other penetrating items.
2. Cut openings located and dimensioned on Structural Drawings.
3. Coordinate openings for other penetrations shown on approved submittal drawings but not shown on Structural Drawings.
   a. Cut and reinforce required opening.
4. Make cuts neat and trim using metal saw, drill or punch-out device. Cutting with torches is prohibited.
5. Do not make cuts in the metal deck that are not shown on the approved metal decking submittal drawings.
   a. When additional openings are required, submit scaled drawing, locating required opening and other openings and supports in immediate area.
   b. Do not cut the opening until drawing is approved by Contracting Officer's Representative.
   c. Provide additional reinforcing and framing required for opening.
   d. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected steel decking.
6. Opening Reinforcement: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking, and support of other work.

H. Touch up damaged factory finishes.
1. Apply galvanizing repair paint to damaged galvanized surfaces.
2. Apply touch up paint to damaged shop painted surfaces.

- - E N D - -

SECTION 05 50 00
METAL FABRICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.

B. Items specified.

1. Support for Wall and Ceiling Mounted Items: (SD055000-01, SD055000-02, SD102113-01, SD102600-01, SD123100-01 & SD123100-02)
2. Frames:
3. Guards
4. Covers and Frames for Pits and Trenches.
5. Gratings
6. Loose Lintels
7. Shelf Angles
8. Gas Racks
9. Plate Door Sill
10. Safety Nosings
11. Ladders
12. Railings:
13. Catwalks and Platforms
14. Trap Doors with Ceiling Hatch
15. Sidewalk Access Doors
16. Screened Access Doors
17. Steel Counter or Bench Top Frame and Leg
18. Steel Pipe Bollards

1.2 RELATED WORK

A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS.

B. Colors, finishes, and textures: Section 09 06 00, SCHEDULE FOR FINISHES.

C. Prime and finish painting: Section 09 91 00, PAINTING.

D. Stainless steel corner guards: Section 10 26 00, WALL AND DOOR PROTECTION.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

Grating, each type	Floor plate
Trap door	Wheel guards
Ceiling hatch	Sidewalk Access door
Manhole Covers	Safety nosing

C. Shop Drawings:
   1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
   2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
   3. Provide templates and rough-in measurements as required.

D. Manufacturer's Certificates:
   1. Anodized finish as specified.
   2. Live load designs as specified.

E. Design Calculations for specified live loads including dead loads.

F. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.4 QUALITY ASSURANCE

A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.

B. Each product type shall be the same and be made by the same manufacturer.

C. Assembled product to the greatest extent possible before delivery to the site.

D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

B18.6.1-97.....Wood Screws

B18.2.2-87(R2010).....Square and Hex Nuts

C. American Society for Testing and Materials (ASTM):

A36/A36M-14.....Structural Steel

A47-99(R2014).....Malleable Iron Castings

A48-03(R2012).....Gray Iron Castings

A53-12.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated Welded and Seamless

A123-15.....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A240/A240M-15.....Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.

A269-15.....Seamless and Welded Austenitic Stainless Steel Tubing for General Service

A307-14.....Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength

A391/A391M-07(R2015)....Grade 80 Alloy Steel Chain

A786/A786M-15.....Rolled Steel Floor Plate

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B456-11.....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium

B632-08.....Aluminum-Alloy Rolled Tread Plate

C1107-13.....Packaged Dry, Hydraulic-Cement Grout (Nonshrink)

D3656-13.....Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns

F436-16.....Hardened Steel Washers

F468-06(R2015).....Nonferrous Bolts, Hex Cap Screws, Socket Head Cap Screws and Studs for General Use

F593-13.....Stainless Steel Bolts, Hex Cap Screws, and Studs

F1667-15.....Driven Fasteners: Nails, Spikes and Staples

D. American Welding Society (AWS):

D1.1-15.....Structural Welding Code Steel

D1.2-14.....Structural Welding Code Aluminum

D1.3-18.....Structural Welding Code Sheet Steel

E. National Association of Architectural Metal Manufacturers (NAAMM)

AMP 521-01(R2012).....Pipe Railing Manual

AMP 500-06.....Metal Finishes Manual

MBG 531-09(R2017).....Metal Bar Grating Manual

MBG 532-09.....Heavy Duty Metal Bar Grating Manual

F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:

SP 1-15.....No. 1, Solvent Cleaning

SP 2-04.....No. 2, Hand Tool Cleaning

SP 3-04.....No. 3, Power Tool Cleaning

G. Federal Specifications (Fed. Spec):

RR-T-650E.....Treads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA

A. In addition to the dead loads, design fabrications to support the following live loads unless otherwise specified.

B. Ladders and Rungs: 120 kg (250 pounds) at any point.

C. Railings and Handrails: 900 N (200 pounds) in any direction at any point.

E. Manhole Covers: 1200 kg/m^2 (250 pounds per square foot).

2.2 MATERIALS

A. Structural Steel: ASTM A36.

B. Stainless Steel: ASTM A240, Type 302 or 304.

C. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.

D. Floor Plate:

1. Steel ASTM A786.

2. Aluminum: ASTM B632.

E. Steel Pipe (Bollard): ASTM A53.

1. Galvanized for exterior locations.

2. Type S, Grade A unless specified otherwise.

3. NPS (inside diameter) as shown.

F. Cast-Iron: ASTM A48, Class 30, commercial pattern.

G. Malleable Iron Castings: A47.

H. Primer Paint: As specified in Section 09 91 00, PAINTING.

I. Stainless Steel Tubing: ASTM A269, type 302 or 304.

J. Modular Channel Units:

1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
2. Form channel within turned pyramid shaped clamping ridges on each side.
3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.

K. Grout: ASTM C1107, pourable type.

L. Insect Screening: ASTM D3656.

2.3 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:
   a. ASME B18.2.2.
   b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
   c. ASTM F468 for nonferrous bolts.
   d. ASTM F593 for stainless steel.
2. Screws: ASME B18.6.1.

3. Washers: ASTM F436, type to suit material and anchorage.
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material
   1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
   2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:
   1. Size and thickness of members as shown.
   2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections
   1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
   2. Field riveting will not be approved.
   3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
   4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
   5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
   6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
   7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors
   1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
   2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation

of the members or causing failure of the anchor or fastener, and suit the sequence of installation.

3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self drilling and tapping screws or bolts.

E. Workmanship

1. General:
   a. Fabricate items to design shown.
   b. Furnish members in longest lengths commercially available within the limits shown and specified.
   c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
   d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
   e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
   f. Prepare members for the installation and fitting of hardware.
   g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
   h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.
2. Welding:
   a. Weld in accordance with AWS.
   b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
   c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and

protruding welds finished smooth and flush with adjacent surfaces.

d. Finish welded joints to match finish of adjacent surface.

3. Joining:
   a. Miter or butt members at corners.
   b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
4. Anchors:
   a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
   b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
5. Cutting and Fitting:
   a. Accurately cut, machine and fit joints, corners, copes, and miters.
   b. Fit removable members to be easily removed.
   c. Design and construct field connections in the most practical place for appearance and ease of installation.
   d. Fit pieces together as required.
   e. Fabricate connections for ease of assembly and disassembly without use of special tools.
   f. Joints firm when assembled.
   g. Conceal joining, fitting and welding on exposed work as far as practical.
   h. Do not show rivets and screws prominently on the exposed face.
   i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:
1. Finish exposed surfaces in accordance with NAAMM AMP 500 Metal Finishes Manual.
2. Aluminum: NAAMM AMP 501.

a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.
b. Clear anodic coating, AA-C22A41, chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.
c. Colored anodic coating, AA-C22A42, chemically etched medium matte with Architectural Class 1, 0.7 mils or thicker.
d. Painted: AA-C22R10.

3. Steel and Iron: NAAMM AMP 504.
   a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
   b. Surfaces exposed in the finished work:
      1) Finish smooth rough surfaces and remove projections.
      2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
   c. Shop Prime Painting:
      1) Surfaces of Ferrous metal:
         a) Items not specified to have other coatings.
         b) Galvanized surfaces specified to have prime paint.
         c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
         d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
         e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
      2) Non ferrous metals: Comply with MAAMM-500 series.
4. Stainless Steel: NAAMM AMP-504 Finish No. 4.
5. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.

G. Protection:
1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.
2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.5 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes as shown.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Ceiling Hung Toilet Stall:

1. Use a continuous steel channel above pilasters with hangers centered over pilasters.
2. Make provision for installation of stud bolts in lower flange of channel.
3. Provide a continuous steel angle at wall and channel braces spaced as shown.
4. Use threaded rod hangers.
5. Provide diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.

C. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flatted for anchorage to stud.
5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

D. For Trapeze Bars:

1. Construct assembly above ceilings as shown and design to support not less than a 340 kg (750 pound) working load at any point.
2. Fabricate trapeze supports as shown, with all exposed members, including screws, nuts, bolts and washers, fabricated of stainless steel.
3. Fabricate concealed components of structural steel shapes unless shown otherwise.

4. Stainless steel ceiling plate drilled for eye bolt.
5. Continuously weld connections where welds shown.
6. Use modular channel where shown with manufacturers bolts and fittings.
   a. Weld ends of steel angle braces to steel plates and secure to modular channel units as shown. Drill plates for anchor bolts.
   b. Fabricate eye bolt, special clamp bolt, and plate closure full length of modular channel at ceiling line and secure to modular channel unit with manufacturers standard fittings.

E. For Intravenous Track and Cubical Curtain Track:
1. Fabricate assembly of steel angle as shown.
2. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.
3. Provide pipe sleeve welded to angle.

F. Supports at Ceiling for Radiographic (x-ray) Equipment:
1. Fabricate hangers braces, and track of modular channel units assembly as shown.
2. Fabricate steel plates for anchor to structure above.
3. Drill bent plates for bolting at mid height at concrete beams.

G. For Operating Room Light:
1. Fabricate as shown to suit equipment furnished.
2. Drill leveling plate for light fixture bolts.

H. Supports in Orthopedic Brace Shop:
1. Fabricate from 25 mm (one inch) steel pipe, fasten to steel angles above and extend to a point 150 mm (6 inches) below finished ceiling.
2. Lower end of the pipe shall have a standard pipe thread.
3. Provide an escutcheon plate at ceiling.

I. Supports for Accordion Partition Tracks, Exercise Equipment, and Items at Various Conditions at Suspended Ceilings:
1. Fabricate of structural steel shapes as shown.
2. Drill for anchor bolts of suspended item.

J. Supports for Communion Rail Posts in Chapel:
1. Fabricate one steel plate support for each post as shown.
2. Drill for fasteners.

2.6 FRAMES

A. Elevator Entrance Wall Opening.

1. Fabricate of channel shapes, plates, and angles as shown.
2. Weld or bolt head to jamb as shown.
3. Weld clip angles to bottom of frame and top of jamb members extended to structure above for framed construction.
   a. Provide holes for anchors.
   b. Weld head to jamb members.

B. Channel Door Frames:

1. Fabricate of structural steel channels of size shown.
2. Miter and weld frames at corners.
3. Where anchored to masonry or embedded in concrete, weld to back of frame at each jamb, 5 mm (3/16 inch) thick by 44 mm (1-3/4 inch) wide steel strap anchors with ends turned 50 mm (2 inches), and of sufficient length to extend at least 300 mm (12 inches) into wall. Space anchors 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb. Weld clip angles to bottom of jambs and provide holes for expansion bolts.
4. Where anchored to concrete or masonry in prepared openings, drill holes at jambs for anchoring with expansion bolts. Weld clip angles to bottom of frame and provide holes for expansion bolt anchors as shown. Drill holes starting 600 mm (24 inches) above bottom of frame and 600 mm (24 inches) o.c. to top of jamb and at top of jamb. Provide pipe spacers at holes welded to channel.
5. Where closure plates are shown, continuously weld them to the channel flanges.
6. Weld continuous 19 x 19 x 3 mm (3/4 x 3/4 x 1/8 inch) thick steel angles to the interior side of each channel leg at the head and jambs to form a caulking groove.
7. Prepare frame for installation of hardware specified in Section 08 71 00, DOOR HARDWARE.
   a. Cut a slot in the lock jamb to receive the lock bolt.
   b. Where shown use continuous solid steel bar stops at perimeter of frame, weld or secure with countersunk machine screws at not more than 450 mm (18 inches) on center.

C. Frames for Breech Opening:

1. Fabricate from steel channels, or combination of steel plates and angles to size and contour shown.

2. Weld strap anchors on back of frame at not over 600 mm (2 feet) on centers for concrete or masonry openings.

D. Frames for Lead Lined Doors:

1. Obtain accurate dimensions and templates from suppliers of lead lined doors, finish hardware, and hollow steel door frames.
2. Fabricate as shown for use in connection with lead lined doors.
3. Deliver assembled frames with removable shipping spreaders at top and bottom.
4. Extend angles at jambs from floor to structural slab above. At floors of interstitial spaces, terminate jamb sections and provide anchors as shown.
5. Continuously weld plates and reinforcements to frame members and head members of angle frames between jambs.
6. Weld strap anchors, not over 600 mm (24 inches) on centers, to the back of angles for embedment in masonry or concrete unless shown otherwise.
7. Type 15 Door Frames:
   a. Structural steel angle frames with plate or bar full height to heads. Extend reinforcing at hinge cutouts two inches beyond cutout.
   b. Fabricate top anchorage to beam side at mid height.
   c. Weld clip angles to both legs of angle at top and bottom.
   d. Drill clips and plates, at top and bottom for anchoring jamb angles with two 9 mm (3/8 inch) expansion bolts at each location.
   e. Cut rabbet for pivot hinges and lock strike.

2.7 GUARDS

A. Wall Corner Guards:

1. Fabricate from steel angles and furnish with anchors as shown.
2. Continuously weld anchor to angle.

B. Guard Angles for Overhead Doors:

1. Cut away top portion of outstanding leg of angle and extend remaining portion of angle up wall.
2. Weld filler piece across head of opening to jamb angles.
3. Make provisions for fasteners and anchorage.

C. Channel Guard at Loading Platform:

1. Fabricate from steel channel of size shown.

2. Weld anchors to channels as shown.
3. Drill channel for bumper anchor bolts.

D. Edge Guard Angles for Openings in slabs.
1. Fabricate from steel angles of sizes and with anchorage shown.
2. Where size of angle is not shown, provide 50 x 50 x 6 mm (2 x 2 x 1/4 inch) steel angle with 32 x 5 mm (1-1/4 x 3/16 inch) strap anchors, welded to back.
3. Miter or butt angles at corners and weld.
4. Use one anchor near end and three feet on centers between end anchors.

E. Wheel Guards:
1. Construct wheel guards of not less than 16 mm (5/8 inch) thick cast iron.
2. Provide corner type, with flanges for bolting to walls.

2.8 COVERS AND FRAMES FOR PITS AND TRENCHES

A. Fabricate covers to support live loads specified.

B. Galvanized steel members after fabrication in accordance with ASTM A123, G-90 coating.

C. Steel Covers:
1. Use 6 mm (1/4 inch) thick floor plate for covers unless otherwise shown. Use gratings where shown as specified in paragraph GRATINGS. Use smooth floor plate unless noted otherwise.
2. Provide clearance at all sides to permit easy removal of covers.
3. Make cutouts within 6 mm (1/4 inch) of penetration for passage of pipes and ducts.
4. Drill covers for flat head countersunk screws.
5. Make cover sections not to exceed 2.3 m^2 (25 square feet) in area and 90 kg (200 pounds) in weight.
6. Fabricate trench cover sections not be over 900 mm (3 feet) long and if width of trench is more than 900 mm (3 feet)or over, equip one end of each section with an angle or "T" bar stiffener to support adjoining plate.
7. Use two, 13 mm (1/2 inch) diameter steel bar flush drop handles for each cover section.

D. Cast Iron Covers
1. Fabricate covers to support live loads specified.

2. Fabricate from ASTM A48, cast-iron, 13 mm (1/2 inch) minimum metal thickness, cast with stiffeners as required.
3. Fabricate as flush type with frame, reasonably watertight and be equipped with flush type lifting rings. Provide seals where watertight covers noted.
4. Make covers in sections not over 90 kg (200 pounds) except round covers.

E. Steel Frames:

1. Form frame from structural steel angles as shown. Where not shown use 63 x 63 x 6 mm (2-1/2 x 2-1/2 x 1/4 inch) angles for frame openings over 1200 mm (4 feet) long and 50 x 50 x 6 mm (2 ix 2 x 1/4 inch) for frame openings less than 1200 mm (4 feet).
2. Fabricate intermediate supporting members from steel "T's" or angles; located to support cover section edges.
3. Where covers are required use steel border bars at frames so that top of cover will be flush with frame and finish floor.
4. Weld steel strap anchors to frame. Space straps not over 600 mm (24 inches) o.c., not shown otherwise between end anchors. Use 6 x 25 x 200 mm (1/4 x 1 x 8 inches) with 50 mm (2 inch) bent ends strap anchors unless shown otherwise.
5. Drill and tap frames for screw anchors where plate covers occur.

F. Cast Iron Frames:

1. Fabricate from ASTM A48 cast iron to shape shown.
2. Provide anchors for embedding in concrete, spaced near ends and not over 600 mm (24 inches) apart.

2.9 GRATINGS

A. Fabricate gratings to support live loads specified and a concentrated load as specified.
B. Provide clearance at all sides to permit easy removal of grating.
C. Make cutouts in gratings with 6 mm (1/4 inch) minimum to 25 mm (one inch) maximum clearance for penetrations or passage of pipes and ducts. Edge band cutouts.
D. Fabricate in sections not to exceed 2.3 m^2 (25 square feet) in area and 90 kg (200 pounds) in weight.
E. Fabricate sections of grating with end-banding bars.

F. Fabricate angle frames and supports, including anchorage as shown.
   1. Fabricate intermediate supporting members from "T's" or angles.
   2. Locate intermediate supports to support grating section edges.
   3. Fabricate frame to finish flush with top of grating.
   4. Locate anchors at ends and not over 600 mm (24 inches) o.c.
   5. Butt or miter, and weld angle frame at corners.

G. Steel Bar Gratings:
   1. Fabricate grating using steel bars, frames, supports and other members shown in accordance with Metal Bar Grating Manual.
   2. Galvanize steel members after fabrication in accordance with ASTM A123, G-90 for exterior gratings, gratings in concrete floors, and interior grating where specified.
   3. Interior gratings: Prime paint unless specified galvanized.

H. Aluminum Bar Gratings:
   1. Fabricate grating and frame assembly from aluminum as shown in accordance with Metal Bar Grating Manual.
   2. Use 25 x 5 mm (1 x 3/16 inch) minimum size bearing bars.
   3. Mill finish unless specified otherwise.

I. Plank Gratings:
   1. Conform to Fed. Spec. RR-G-1602.
   2. Manufacturers standard widths, lengths and side channels to meet live load requirements.
   3. Galvanize exterior steel gratings ASTM A123, G-90 after fabrication.
   4. Fabricate interior steel gratings from galvanized steel sheet, ASTM A525, where bearing on concrete or masonry.
   5. Fabricate other interior grating from steel sheet and finish with shop prime paint. Prime painted galvanized sheet may be used.

J. Cast Iron Gratings:
   1. Fabricate gratings to support a live load of 23940 Pa (500 pounds per square foot).
   2. Fabricate gratings and frames for gutter type drains from cast-iron conforming to ASTM A48.

3. Fabricate gratings in section not longer than 1200 mm (4 feet) or over 90 kg (200 pounds) and fit so as to be readily removable.

2.10 LOOSE LINTELS

A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.

B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.

C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.

1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).

D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).

E. Provide bearing plates for lintels where shown.

F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.

G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.

H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.

I. Elevator Entrance:

1. Fabricate lintel from plate bent to channel shape, and provide a minimum of 100 mm (4 inch) bearing each end.
2. Cut away the front leg of the channel at each end to allow for concealment behind elevator hoistway entrance frame.

2.11 SHELF ANGLES

A. Fabricate from steel angles of size shown.

B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.

C. Provide adjustable malleable iron inserts for embedded in concrete framing.

2.12 PLATE DOOR SILL

A. Fabricate of checkered plate as detailed.
   1. Aluminum Plate: ASTM B632, 3 mm (0.125 inch) thick.
   2. Steel Plate: ASTM A786, 3 mm (0.125 inch thick), galvanized G90.

B. Fabricate for anchorage with flat head countersunk bolts at each end and not over 300 mm (12 inches), o.c.

2.13 SAFETY NOSINGS

A. Fed. Spec. RR-T-650, Type C.
   1. Aluminum: Class 2, Style 2.
   2. Cast iron: Class 4.

B. Fabricate nosings for exterior use from cast aluminum, and nosings for interior use from either cast aluminum or cast iron. Use one Class throughout.

C. Fabricate nosings approximately 100 mm (4 inches) wide with not more than 9 mm (3/8 inch) nose.

D. Provide nosings with integral type anchors spaced not more than 100 mm (4 inches) from each end and intermediate anchors spaced approximately 375 mm (15 inches) on center.

E. Fabricate nosings to extend within 100 mm (4 inches) of ends of concrete stair treads except where shown to extend full width.

F. Fabricate nosings to extend full width between stringers of metal stairs and full width of door openings.

G. On curved steps fabricate to terminate at point of curvature of steps having short radius curved ends.

2.14 LADDERS

A. Steel Ladders:
   1. Fixed-rail type with steel rungs shouldered and headed into and welded to rails.
   2. Fabricate angle brackets of 50 mm (2 inch) wide by 13 mm (1/2 inch) thick steel; brackets spaced maximum of 1200 mm (4 feet) apart and of length to hold ladder 175 mm (7 inches) from wall to center of rungs. Provide turned ends or clips for anchoring.
   3. Provide holes for anchoring with expansion bolts through turned ends and brackets.
   4. Where shown, fabricate side rails curved, twisted and formed into a gooseneck.

5. Galvanize exterior ladders after fabrication, ASTM A123, G-90.

B. Aluminum Ladders:
   1. Fixed-rail type, constructed of structural aluminum, with mill finish.
   2. Fabricate side rails and rungs of size and design shown, with the rungs shouldered and headed into and welded to the rails.
   3. Where shown fabrication side rails curved, twisted and formed into gooseneck.
   4. Fabricate angle brackets at top and bottom and intermediate brackets where shown. Drill for bolting.

C. Ladder Rungs:
   1. Fabricate from 25 mm (one inch) diameter steel bars.
   2. Fabricate so that rungs will extend at least 100 mm (4 inches) into wall with ends turned 50 mm (2 inches), project out from wall 175 mm (7 inches), be 400 mm (16 inches) wide and be designed so that foot cannot slide off end.
   3. Galvanized after fabrication, ASTM A123, G-90 rungs for exterior use and for access to pits.

2.15 RAILINGS

A. In addition to the dead load design railing assembly to support live load specified.

B. Fabrication General:
   1. Provide continuous welded joints, dressed smooth and flush.
   2. Standard flush fittings, designed to be welded, may be used.
   3. Exposed threads will not be approved.
   4. Form handrail brackets to size and design shown.
   5. Exterior Post Anchors.
      a. Fabricate tube or pipe sleeves with closed ends or plates as shown.
      b. Where inserts interfere with reinforcing bars, provide flanged fittings welded or threaded to posts for securing to concrete with expansion bolts.
      c. Provide heavy pattern sliding flange base plate with set screws at base of pipe or tube posts.
   6. Interior Post Anchors:

a. Provide flanged fittings for securing fixed posts to floor with expansion bolts, unless shown otherwise.
b. Weld or thread flanged fitting to posts at base.
c. For securing removable posts to floor, provide close fitting sleeve insert or inverted flange base plate with stud bolts or rivets concrete anchor welded to the base plate.
d. Provide sliding flange base plate on posts secured with set screws.
e. Weld flange base plate to removable posts set in sleeves.

C. Handrails:
1. Close free ends of rail with flush metal caps welded in place except where flanges for securing to walls with bolts are shown.
2. Make provisions for attaching handrail brackets to wall, posts, and handrail as shown.

D. Steel Pipe Railings:
1. Fabricate of steel pipe with welded joints.
2. Number and space of rails as shown.
3. Space posts for railings not over 1800 mm (6 feet) on centers between end posts.
4. Form handrail brackets from malleable iron.
5. Fabricate removable sections with posts at end of section.
6. Removable Rails:
a. Provide "U" shape brackets at each end to hold removable rail as shown. Use for top and bottom horizontal rail when rails are joined together with vertical members.
b. Secure rail to brackets with 9 mm (3/8 inch) stainless steel through bolts and nuts at top rail only when rails joined with vertical members.
c. Continuously weld brackets to post.
d. Provide slotted bolt holes in rail bracket.
e. Weld bolt heads flush with top of rail.
f. Weld flanged fitting to post where posts are installed in sleeves.
7. Opening Guard Rails:
a. Fabricate rails with flanged fitting at each end to fit between wall opening jambs.

b. Design flange fittings for fastening with machine screws to steel plate anchored to jambs.

c. Fabricate rails for floor openings for anchorage in sleeves.

8. Gates:

a. Fabricate from steel pipe as specified for railings.

b. Fabricate gate fittings from either malleable iron or wrought steel.

c. Hang each gate on suitable spring hinges of clamp on or through bolted type. Use bronze hinges for exterior gates.

d. Provide suitable stops, so that gate will swing as shown.

9. Chains:

a. Chains: ASTM A391, Grade 63, straight link style, normal size chain bar 8 mm (5/16 inch) diameter, eight links per 25 mm (foot) and with boat type snap hook on one end, and through type eye bolt on other end.

b. Fabricate eye bolt for attaching chain to pipe posts, size not less than 9 mm (3/8 inch) diameter.

c. Fabricate anchor at walls, for engagement of snap hook of either a 9 mm (3/8 inch) diameter eye bolt or punched angle.

d. Galvanize chain and bolts after fabrication.

E. Aluminum Railings:

1. Fabricate from extruded aluminum.
2. Use tubular posts not less than 3 mm (0.125 inch) wall thickness for exterior railings.
3. Punch intermediate rails and bottom of top rails for passage of posts and machine to a close fit.
4. Where shown use extruded channel sections for top rail with 13 mm (1/2 inch) thick top cover plates and closed ends.
5. Fabricate brackets of extruded or wrought aluminum as shown.
6. Fabricate stainless pipe sleeves with closed bottom at least six inches deep having internal dimensions at least 13 mm (1/2 inch) greater than external dimensions of posts where set in concrete.

F. Stainless Steel Railings:

1. Fabricate from 38 mm (1-1/2 inches) outside diameter stainless steel tubing, ASTM A269, having a wall thickness of 1.6 mm (0.065 inch).
2. Join sections by an internal connector to form hairline joints where field assembled.

3. Fabricate with continuous welded connections.
4. Fabricate brackets of stainless steel to design shown.
5. Fabricate stainless steel sleeves at least 150 mm (6 inches) deep having internal dimensions at least 13 mm (1/2 inch) greater than external dimensions of post.

2.16 CATWALKS

A. Fabricate catwalks including platforms, railings, ladders, supports and hangers, and arrangement of members as shown on drawings.
B. Fabricate stairs as specified in Section 05 51 00, METAL STAIRS.
C. Fabricate steel ladders as specified under paragraph LADDERS unless shown otherwise.
D. Fabricate steel pipe railings as specified under paragraph RAILINGS.
E. Catwalk and platforms floor surfaces as shown.
   1. Steel gratings as specified under paragraph gratings, either bar or plank type.
   2. Steel floor plate.
   3. Aluminum floor plate.
F. Prime paint catwalk system.

2.17 TRAP DOOR AND FRAMES WITH CEILING HATCH

A. Design to support a live load as specified.
B. Frames:
   1. Fabricate steel angle frame to set in concrete slabs and design to set flush with finished concrete slab or curb. If not shown use 63 x 63 x 6 mm (2-1/2 x 2-1/2 x 1/4 inch) angles.
   2. Miter steel angles at corners and weld together.
   3. Weld steel bar stops to vertical leg of frame, to support doors flush with the top of the frame.
   4. Weld steel strap anchors on each side not over 600 mm (24 inches) on center to the backs of the frames. If not shown use 6 x 50 x 200 mm (1/4 x 2 x 8 inch) long straps with 50 mm (2 inch bent) ends.
   5. Form frames from steel angles with welded corners for reinforcing and bracing of well lining and support of ceiling hatch.
C. Covers:
   1. Use 6 mm (1/4 inch) thick steel floor plate.
   2. Where double leaf covers are shown, reinforce at meeting edges.
   3. Use wrought steel hinges with fixed brass pins.

a. Weld to cover.

b. Secure to frame with machine screws.

4. Where ladders occur, install hinges on the side opposite the ladder.
5. Provide two bar type drop handles, flush with cover when closed for each leaf.

D. Well Lining:

1. Fabricate well linings, for access through concrete floor slabs and suspended ceilings, from hatch to ceiling hatch or ceiling openings.
2. Use steel sheet and shapes of size and thickness as shown. If not shown use 1.5 mm (0.0598 inch) thick steel sheet.
3. If not shown use 50 x 50 x 6 mm (2 x 2 x 1/4 inch) angle braces from ceiling level on each side angled at 45 degrees to structure above.
4. Use 25 x 25 x 3 mm (1 x 1 x 1/8 inch) angle bottom flange trim welded to well lining where no ceiling hatch occurs.

E. Ceiling Hatch:

1. Construct hatch with "T" or angle frame designed to support edge of ceiling and hatch, weld to well lining.
2. Form hatch panels of 3 mm (1/8 inch) steel, 5 mm (3/16 inch) aluminum or 1 mm (0.0359 inch) thick steel of pan type construction with 25 mm (one inch) of mineral fiber insulation between.
3. Use counter balance device, hinges, latch, hangers and other accessories required for installation and operation of hatch with not over 90 N (20 pounds) of force.
4. Fabricate panels flush and reinforced to remain flat.
5. Locate hatch panel flush with frame.

F. Finish with baked on prime coat.

2.18 SIDEWALK DOOR

A. Use flush, watertight, gutter type design.

B. Cover fabricate of 6 mm (1/4 inch) thick, diamond pattern floor plate.

C. Use automatic lock hold open feature and be hung on two flush type heavy bronze hinges capable of 90 degree swing on each door leaf.

D. Equip with locking and latching device and lifting devices; operable and accessible from both sides of doors.

E. Doors removable without disturbing frame.

F. Provide gutters at all joints for drainage of water.

2.19 SCREENED ACCESS DOORS AND FRAMES

A. Galvanized ASTM A123, G-90 after fabrication.

B. Wall frame:

1. Fabricate frame from steel angles or channels as shown.
2. Continuously weld 38 x 13 mm (1-1/2 x 1/2 inch) steel channel door stop to angle frame. Cut out lock strike opening in channel.
3. Miter and weld channel frame at corners. Reinforce corner with 3 mm (1/8 inch) plate angle.
4. Reinforce channel frame with 3 x 150 mm (1/8 x 6 inch) long steel plate at channel back to cutout for latch. Cutout lock strike opening in channel face. Drill and tap for hinge anchorage.
5. Drill jambs for 6 mm (1/4 inch) bolt anchors at top and bottom and not over 450 mm (18 inches) between top and bottom.
6. Fabricate frame for door to sit flush with face of frame.

C. Doors

1. Fabricate door using steel channel frame with 3 mm (1/8 inch) angle plate reinforcing at corners.
2. Miter and weld corners.
3. Fabricate lock box of 1.6 mm (1/16 inch) plate and weld to channel surround.
4. Provide wire mesh constructed of 3.5 mm (0.135 inch) diameter galvanized steel wire crimped and woven into 38 mm (1-1/2 inch) diamond mesh pattern. Fasten the wire mesh to door frames by bending the ends of each strand of wire over through channel clinched and welded to channel door frame.
5. Weld steel plate back-bands to channel door frame at hinge stiles only.
6. Screen on doors in exterior walls.
   a. Fabricate rewirable frame for screen from either extruded or tubular aluminum.
   b. Design to allow for removing or replacement frame and screening or adjoining items without damage.
   c. Use aluminum insect screening specified.
   d. Use stainless steel fasteners for securing screen to door.

D. Hardware:

1. Install hinged door to fixed frame with two 63 mm (2-1/2 inch) brass or bronze hinges.

2. Install lock or latch specified in Section 08 71 00, DOOR HARDWARE in lockbox.

2.20 STEEL COUNTER OR BENCH TOP FRAME AND LEGS

A. Fabricate channel or angle frame with mitered and welded corners as shown.

B. Drill top of frame with 6 mm (1/4inch) holes spaced 200 mm (8 inches) on center for securing countertop.

C. Fabricate legs of angle or pipe shapes and continuously weld to frame.

D. Finish frame with backed on enamel prime coat.

2.21 STEEL PIPE BOLLARD

Provide bollard in accordance with ASTM A53 with dimensions as shown in standard detail SD320523-04. Anchor posts in concrete and fill solidly with concrete with a minimum compressive strength of 17 MPa 2500psi.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.

B. Items set into concrete or masonry.

1. Provide temporary bracing for such items until concrete or masonry is set.
2. Place in accordance with setting drawings and instructions.
3. Build strap anchors, into masonry as work progresses.

C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.

D. Field weld in accordance with AWS.

1. Design and finish as specified for shop welding.
2. Use continuous weld unless specified otherwise.

E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.

F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.

G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.

H. Secure escutcheon plate with set screw.

3.2 INSTALLATION OF SUPPORTS

A. Anchorage to structure.

1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
2. Secure supports to concrete inserts by bolting or continuous welding as shown.
3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
4. Secure steel plate or hat channels to studs as detailed.

B. Ceiling Hung Toilet Stalls:

1. Securely anchor hangers of continuous steel channel above pilasters to structure above.
2. Bolt continuous steel angle at wall to masonry or weld to face of each metal stud.
3. Secure brace for steel channels over toilet stall pilasters to wall angle supports with bolts at each end spaced as shown.
4. Install diagonal angle brace where the suspended ceiling over toilet stalls does not extend to side wall of room.
5. Install stud bolts in lower flange of channel before installing furred down ceiling over toilet stalls.
6. Install support for ceiling hung pilasters at entrance screen to toilet room similar to toilet stall pilasters.

C. Supports for Wall Mounted items:

1. Locate center of support at anchorage point of supported item.
2. Locate support at top and bottom of wall hung cabinets.
3. Locate support at top of floor cabinets and shelving installed against walls.
4. Locate supports where required for items shown.

D. Support at Ceiling for X-ray Tube Stand and Radiographic Equipment:

1. Bolt modular steel channel frames to hangers as shown, anchored to structure above.

2. Fasten frames with modular channel manufacturers fittings, bolts, and nuts. Space modular channel supports and hangers as shown and as required to suit equipment furnished.
3. Install closure plates in channels at ceiling where channel opening is visible. Coordinate and cut plates to fit tight against equipment anchors after equipment anchors are installed.

E. Ceiling Support for Operating Light:
1. Anchor support to structure above as shown.
2. Set leveling plate as shown level with ceiling.
3. Secure operating light to leveling plate in accordance with light manufacturer's requirements.

F. Supports for intravenous (IV) Track and Cubicle Curtain Track:
1. Install assembly where shown after ceiling suspension grid is installed.
2. Drill angle for bolt and weld nut to angle prior to installation of tile.

G. Support for cantilever grab bars:
1. Locate channels or tube in partition for support as shown, and extend full height from floor to underside of structural slab above.
2. Anchor at top and bottom with angle clips bolted to channels or tube with two, 9 mm (3/8 inch) diameter bolts.
3. Anchor to floors and overhead construction with two 9 mm (3/8 inch) diameter bolts.
4. Fasten clips to concrete with expansion bolts, and to steel with machine bolts or welds.

H. Supports for Trapeze Bars:
1. Secure plates to overhead construction with fasteners as shown.
2. Secure angle brace assembly to overhead construction with fasteners as shown and bolt plate to braces.
3. Fit modular channel unit flush with finish ceiling, and secure to plate with modular channel unit manufacturer's standard fittings through steel shims or spreaders as shown.
   a. Install closure plates in channel between eye bolts.
   b. Install eyebolts in channel.

I. Support for Communion Rail Posts:
1. Anchor steel plate supports for posts as shown.
2. Use four bolts per plate, locate two at top and two at bottom.

3. Use lag bolts.

3.3 COVERS AND FRAMES FOR PITS AND TRENCHES

A. Set frame and cover flush with finish floor.

B. Secure plates to frame with flat head countersunk screws.

C. Set gratings loose in drainage trenches or over pits unless shown anchored.

3.4 FRAMES FOR LEAD LINED DOORS

A. Secure jamb angle clips and plates, at top and bottom with two, 9 mm (3/8 inch) expansion bolts to concrete.

B. Secure 150 x 90 x 13 mm (6 x 3-1/2 x 1/2 inch) angle to steel framing for anchorage when expansion bolts to concrete is not possible.

C. Secure clips by welding to steel.

D. At interstitial spaces, anchor jamb angles as shown.

3.5 DOOR FRAMES

A. Secure clip angles at bottom of frames to concrete slab with expansion bolts as shown.

B. Level and plumb frame; brace in position required.

C. At masonry, set frames in walls so anchors are built-in as the work progresses unless shown otherwise.

D. Set frames in formwork for frames cast into concrete.

E. Where frames are set in prepared openings, bolt to wall with spacers and expansion bolts.

3.6 OTHER FRAMES

A. Set frame flush with surface unless shown otherwise.

B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.

C. Set in formwork before concrete is placed.

3.7 GUARDS

A. Steel Angle Corner Guards:

1. Build into masonry as the work progress.
2. Set into formwork before concrete is placed.
3. Set angles flush with edge of opening and finish floor or wall or as shown.
4. At existing construction fasten angle and filler piece to adjoining construction with 16 mm (5/8 inch) diameter by 75 mm (3 inch) long expansion bolts 450 mm (18 inches) on center.
5. Install Guard Angles at Edges of Overhead Doors where shown.

B. Channel Guard at Top Edge of Concrete Platforms:
   1. Install in formwork before concrete is placed.
   2. Set channel flush with top of the platform.
C. Wheel Guards:
   1. Set flanges of wheel guard at least 50 mm (2 inches) into pavement.
   2. Anchor to walls as shown, expansion bolt if not shown.

3.8 GRATINGS

A. Set grating flush with finish floor; top of curb, or areaway wall. Set frame so that horizontal leg of angle frame is flush with face of wall except when frame is installed on face of wall.
B. Set frame in formwork before concrete is placed.
C. Where grating terminates at a wall bolt frame to concrete or masonry with expansion bolts unless shown otherwise.
D. Secure removable supporting members in place with stainless steel bolts.
E. Bolt gratings to supports.

3.9 STEEL LINTELS

A. Use lintel sizes and combinations shown or specified.
B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.10 SHELF ANGLES

A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.
B. Provide expansion space at end of members.

3.11 PLATE DOOR SILL

A. Install after roofing base flashing and counter flashing work is completed.
B. Set in sealant and bolt to curb.

3.12 SAFETY NOSINGS

A. Except as specified and where preformed rubber treads are shown or specified install safety nosings at the following:
   1. Exterior concrete steps.
   2. Door sills of areaway entrances curbs.

3. Exposed edges of curbs of door sills at transformer and service rooms.
4. Interior concrete steps, including concrete filled treads of metal stairs of service stairs.

B. Install flush with horizontal and vertical surfaces.

C. Install nosing to within 100 mm (4 inches) of ends of concrete stair treads, except where shown to extend full width.

D. Extend nosings full width of door openings.

E. Extend nosings, full width between stringers of metal stairs, and terminate at point of curvature of steps having short radius curved ends.

3.13 LADDERS

A. Anchor ladders to walls and floors with expansion bolts through turned lugs or angle clips or brackets.

B. In elevator pits, set ladders to clear all elevator equipment where shown on the drawings.
1. Where ladders are interrupted by division beams, anchor ladders to beams by welding, and to floors with expansion bolts.
2. Where ladders are adjacent to division beams, anchor ladders to beams with bent steel plates, and to floor with expansion bolts.

C. Ladder Rungs:
1. Set ladder rungs into formwork before concrete is placed. Build ladder rungs into masonry as the work progresses.
2. Set step portion of rung 150 mm (6 inches) from wall.
3. Space rungs approximately 300 mm (12 inches) on centers.
4. Where only one rung is required, locate it 400 mm (16 inches) above the floor.

3.14 RAILINGS

A. Steel Posts:
1. Secure fixed posts to concrete with expansion bolts through flanged fittings except where sleeves are shown with pourable grout.
2. Install sleeves in concrete formwork.
3. Set post in sleeve and pour grout to surface. Apply beveled bead of urethane sealant at perimeter of post or under flange fitting as specified in Section 07 92 00, JOINT SEALANTS—on exterior posts.
4. Secure removable posts to concrete with either machine screws through flanged fittings which are secured to inverted flanges

embedded in and set flush with finished floor, or set posts in close fitting pipe sleeves without grout.

5. Secure sliding flanged fittings to posts at base with set screws.
6. Secure fixed flanged fittings to concrete with expansion bolts.
7. Secure posts to steel with welds.

B. Aluminum Railing, Stainless Steel Railing, and Ornamental Railing Posts:

1. Install pipe sleeves in concrete formwork.
2. Set posts in sleeve and pour grout to surface on exterior locations and to within 6 mm (1/4 inch) of surface for interior locations except to where posts are required to be removable.
3. Apply beveled bead of urethane sealant over sleeve at post perimeter for exterior posts and flush with surface for interior posts as specified in Section 07 92 00, JOINT SEALANTS.

C. Anchor to Walls:

1. Anchor rails to concrete or solid masonry with machine screws through flanged fitting to steel plate.
   a. Anchor steel plate to concrete or solid masonry with expansion bolts.
   b. Anchor steel plate to hollow masonry with toggle bolts.
2. Anchor flanged fitting with toggle bolt to steel support in frame walls.

D. Removable Rails:

1. Rest rails in brackets at each end and secure to bracket with stainless steel bolts and nuts where part of a continuous railing.
2. Rest rail posts in sleeves where not part of a continuous railing. Do not grout posts.

E. Gates:

1. Hang gate to swing as shown.
2. Bolt gate hinges to jamb post with clamp on or through bolts.

F. Chains:

1. Eye bolt chains to pipe posts.
2. Eye bolt anchoring at walls.
   a. Expansion bolt to concrete or solid masonry.
   b. Toggle bolt to hollow masonry of frame wall installed support.

G. Handrails:

1. Anchor brackets for metal handrails as detailed.
2. Install brackets within 300 mm (12 inches) of return of walls, and at evenly spaced intermediate points not exceeding 1200 mm (4 feet) on centers unless shown otherwise.
3. Expansion bolt to concrete or solid masonry.
4. Toggle bolt to installed supporting frame wall and to hollow masonry unless shown otherwise.

3.15 CATWALK AND PLATFORMS

A. Expansion bolt members to concrete unless shown otherwise.
B. Bolt or weld structural components together including ladders and stairs to support system.
C. Weld railings to structural framing.
D. Bolt or weld walk surface to structural framing.
E. Smooth field welds and spot prime damaged prime paint surface.
F. Fasten removable members with stainless steel fasteners.

3.16 SIDEWALK DOOR, TRAP DOORS, AND FRAMES

A. Set frame flush with finished concrete slab or curb.
B. Secure well linings to structure with expansion bolts unless shown otherwise.
C. Bolt ceiling hatch to well lining angle brace and to angle iron frames near corners and 300 mm (12 inches) on centers with not less than 9 mm (3/8 inch) roundhead machine screws.
D. Coordinate sidewalk door drain connections with plumbing work.

3.17 SCREENED ACCESS DOOR

A. Set frame in opening so that clearance at jambs is equal and secure with expansion bolts.
B. Use shims at bolts to prevent deformation of frame members in prepared openings.
C. Set frame in mortar bed and build in anchors as the masonry work progresses.
D. Grout jambs solid with mortar.
E. Secure insect screen to inside of door with stainless steel fasteners on doors in exterior walls.

3.18 STEEL COMPONENTS FOR MILLWORK ITEMS

Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.19 INSTALLATION OF STEEL PIPE BOLLARD

Set bollards vertically in concrete piers. Compressive strength of concrete piers shall be 21MPa 3000psi. For dimensions of concrete piers See standard detail SD320523-04.

3.20 CLEAN AND ADJUSTING

A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.

B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

DIVISION 06 -
WOOD, PLASTICS, AND COMPOSITES

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

D. Manufacturer’s Literature and Data:

1. Submit data for lumber, panels, hardware and adhesives.
2. Submit data for wood-preservative treatment from chemical treatment manufacturer and certification from treating plants that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
3. Submit data for fire retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
4. For products receiving a waterborne treatment, submit statement that moisture content of treated materials was reduced to levels specified before shipment to project site.

E. Manufacturer’s certificate for unmarked lumber.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

A. Protect lumber and other products from dampness both during and after delivery at site.

B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

C. Stack plywood and other board products so as to prevent warping.

D. Locate stacks on well drained areas, supported at least 152 mm (6 inches) above grade and cover with well-ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 QUALITY ASSURANCE:

A. Installer: A firm with a minimum of three (3) years' experience in the type of work required by this section.

1.6 GRADING AND MARKINGS:

A. Any unmarked lumber or plywood panel for its grade and species will not be allowed on VA Construction sites for lumber and material not normally grade marked, provide manufacturer's certificates (approved by an American Lumber Standards approved agency) attesting that lumber and material meet the specified the specified requirements.

1.7 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Forest and Paper Association (AFPA):

NDS-15.....National Design Specification for Wood Construction

WCD1-01.....Details for Conventional Wood Frame Construction

C. American Institute of Timber Construction (AITC):

A190.1-07.....Structural Glued Laminated Timber

D. American Society of Mechanical Engineers (ASME):

B18.2.1-12(R2013).....Square and Hex Bolts and Screws

B18.2.2-10.....Square and Hex Nuts

B18.6.1-81(R2008).....Wood Screws

E. American Plywood Association (APA):

E30-11.....Engineered Wood Construction Guide

F. ASTM International (ASTM):

A653/A653M-13.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

C954-11.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness

C1002-14.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs

D198-14.....Test Methods of Static Tests of Lumber in Structural Sizes

D2344/D2344M-13.....Test Method for Short-Beam Strength of Polymer Matrix Composite Materials and Their Laminates

D2559-12a.....Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions

D3498-03(R2011).....Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems

D6108-13.....Test Method for Compressive Properties of Plastic Lumber and Shapes

D6109-13.....Test Methods for Flexural Properties of Unreinforced and Reinforced Plastic Lumber and Related Products

D6111-13a.....Test Method for Bulk Density and Specific Gravity of Plastic Lumber and Shapes by Displacement

D6112-13.....Test Methods for Compressive and Flexural Creep and Creep-Rupture of Plastic Lumber and Shapes

F844-07a(R2013).....Washers, Steel, Plan (Flat) Unhardened for General Use

F1667-13.....Nails, Spikes, and Staples

G. American Wood Protection Association (AWPA):

AWPA Book of Standards

H. Commercial Item Description (CID):

A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)

I. Forest Stewardship Council (FSC):

FSC-STD-01-001(Ver. 4-0)FSC Principles and Criteria for Forest Stewardship

J. Military Specification (Mil. Spec.):

MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated

K. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

L. Truss Plate Institute (TPI):

TPI-85.....Metal Plate Connected Wood Trusses

M. U.S. Department of Commerce Product Standard (PS)

PS 1-95.....Construction and Industrial Plywood

PS 20-10.....American Softwood Lumber Standard

N. ICC Evaluation Service (ICC ES):

AC09.....Quality Control of Wood Shakes and Shingles

AC174.....Deck Board Span Ratings and Guardrail Systems (Guards and Handrails)

PART 2 - PRODUCTS

2.1 LUMBER:

A. Unless otherwise specified, each piece of lumber must bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.

1. Identifying marks are to be in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.

B. Structural Members: Species and grade as listed in the AFPA NDS having design stresses as shown.

C. Lumber Other Than Structural:

1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
2. Framing lumber: Minimum extreme fiber stress in bending of 7584 kPa (1100 PSI).
3. Furring, blocking, nailers and similar items 101 mm (4 inches) and narrower Standard Grade; and, members 152 mm (6 inches) and wider, Number 2 Grade.
4. Board Sub-flooring: Shiplap edge, 25 mm (1 inch) thick, not less than 203 mm (8 inches) wide.

D. Sizes:

1. Conforming to PS 20.
2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

E. Moisture Content:
   1. Maximum moisture content of wood products is to be as follows at the time of delivery to site.
      a. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
      b. Lumber over 50 mm (2 inches) thick: 25 percent or less.

F. Fire Retardant Treatment:
   1. Comply with Mil Spec. MIL-L-19140.
   2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

G. Preservative Treatment:
   1. Do not treat Heart Redwood and Western Red Cedar.
   2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 610 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members provided in connection with roofing and flashing materials.
   3. Treat other members specified as preservative treated (PT).
   4. Preservative treat by the pressure method complying with AWPA Book use category system standards U1 and T1, except any process involving the use of Chromated Copper Arsenate (CCA) or other agents classified as carcinogenic for pressure treating wood is not permitted.

2.5 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:
   1. ASME B18.2.1 and ASME B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
   2. Extend at least 203 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).

B. Miscellaneous Bolts: Expansion Bolts: C1D A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Provide 13 mm (1/2 inch) bolt unless shown otherwise.

C. Washers
   1. ASTM F844.

2. Provide zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:

1. Wood to Wood: ASME B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Provide aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
   a. Common: Type I, Style 10.
   b. Concrete: Type I, Style 11.
   c. Barbed: Type I, Style 26.
   d. Underlayment: Type I, Style 25.
   e. Masonry: Type I, Style 27.
   f. Provide special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

F.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

1. AFPA NDS for timber connectors.
2. AITC A190.1 Timber Construction Manual for heavy timber construction.
3. AFPA WCD1 for nailing and framing unless specified otherwise.
4. APA for installation of plywood or structural use panels.
5. TPI for metal plate connected wood trusses.

B. Fasteners:

1. Nails.
   a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA WCD1 where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
   b.

d. Use 8d or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
e. Use 16d or larger nails for nailing through 50 mm (2 inch) thick lumber.
f. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.
g.
10) Doubled top plates, face nails 16d at 406 mm (16 inches) on center.
11) Top plates, laps, and intersections, face nail two (2) 16d.
18) Built-up girders and beams 20d at 812 mm (32 inches) on center along each edge.

2. Bolts:
a. Fit bolt heads and nuts bearing on wood with washers.
b. Countersink bolt heads flush with the surface of nailers.
c. Embed in concrete and solid masonry or provide expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
d. Provide toggle bolts to hollow masonry or sheet metal.
e. Provide bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 610 mm (24 inch) intervals between end bolts. Provide clips to beam flanges.
3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
b. ASTM C954 for steel over 0.84 mm (0.033 inch) thick.
4. Power actuated drive pins may be provided where practical to anchor to solid masonry, concrete, or steel.
5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Provide metal plugs, inserts or similar fastening.
6. Screws to Join Wood:
a. Where shown or option to nails.
b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
c. Spaced same as nails.
7. Installation of Timber Connectors:

a. Conform to applicable requirements of the AFPA NDS.
b. Fit wood to connectors and drill holes for fasteners so wood is not split.

C. Set sills or plates level in full bed of mortar on masonry or concrete walls.
1. Space anchor bolts 1219 mm (4 feet) on centers between ends and within 152 mm (6 inches) of end. Stagger bolts from side to side on plates over 178 mm (7 inches) in width.
2. Provide shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.
3. Closely fit, and set to required lines.

D. Cut notch, or bore in accordance with AFPA WCD1 passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.

E. Blocking Nailers, and Furring:
1. Install furring, blocking, nailers, and grounds where shown.
2. Provide longest lengths practicable.
3. Provide fire retardant treated wood blocking where shown at openings and where shown or specified.
4. Layers of Blocking or Plates:
a. Stagger end joints between upper and lower pieces.
b. Nail at ends and not over 610 mm (24 inches) between ends.
c. Stagger nails from side to side of wood member over 127 mm (5 inches) in width.

- - - E N D - - -

DIVISION 07
THERMAL AND MOISTURE PROTECTION

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermal insulation.
   a. Batt or blanket insulation at exterior // framed // and furred // walls.
   b. Board or block insulation at masonry cavity walls.

1.2 RELATED WORK

A. Section 04 20 00, UNIT MASONRY: Insulation for Cavity Face of Masonry.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

C516-19.....Vermiculite Loose Fill Thermal Insulation.
C549-18.....Perlite Loose Fill Insulation.
C552-17e1 .....Cellular Glass Thermal Insulation.
C553-13(2019).....Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.
C591-20.....Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
C612-14(2019).....Mineral Fiber Block and Board Thermal Insulation.
C665-17.....Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
C728-17a.....Perlite Thermal Insulation Board.
C954-18.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness.
C1002-18.....Steel Self-Piercing Tapping Screws for Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.
D312/D312M-16a.....Asphalt Used in Roofing.

E84-20.....Surface Burning Characteristics of Building Materials.

F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show insulation type, thickness, and R-value for each location.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Adhesive indicating manufacturer recommendation for each application.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

C. Protect foam plastic insulation from UV exposure.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL

A. Insulation Thickness:

1. Provide thickness required by R-value shown on drawings.
2. Provide thickness indicated when R-value is not shown on drawings.

B. Insulation Types:

1. Provide one insulation type for each application.
2. Insulation Recycled Content:
   a. Polyisocyanurate/polyurethane rigid foam: 9 percent recovered material.

b. Polyisocyanurate/polyurethane foam-in-place: 5 percent recovered material.

2.2 THERMAL INSULATION

A. Masonry Cavity Wall Insulation:

1. Polyisocyanurate Board: ASTM C591, Type I, with vapor retarder facing; maximum permeance 29 ng/Pa/s/sq. m (0.5 perms).
2. Polystyrene Board: ASTM C578, Type X.

B. Masonry Fill Insulation:

1. Vermiculite Insulation: ASTM C516, Type II.
2. Perlite Insulation: ASTM C549, Type IV.

2.3 ACCESSORIES

A. Insulation Adhesive: Nonflammable type recommended by insulation manufacturer to suit application.

B. Tape: Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.

C. Install board insulation with joints close and flush, in regular courses, and with end joints staggered.

D. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 THERMAL INSULATION

A. Masonry Cavity Wall Insulation:

1. Install insulation on exterior faces of concrete and masonry inner wythes of cavity walls.

2. Bond polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive.
3. Fill insulation joints with same material used for bonding.

3.4 CLEANING

A. Remove excess adhesive before adhesive sets.

3.5 PROTECTION

A. Protect insulation from construction operations.

B. Repair damage.

- - E N D - -

SECTION 07 22 00
ROOF AND DECK INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

B. Roof and deck insulation, vapor retarder, and cover board on new concrete and metal deck substrates ready to receive roofing or waterproofing membrane.

1.2 RELATED WORK

A. Section 06 10 00, ROUGH CARPENTRY: Wood Cants, Blocking, and Edge Strips.

1.3 APPLICABLE PUBLICATIONS

A. American Society of Civil Engineers

ASCE 7-16.....Minimum Design Loads and Associated Criteria for Buildings and Other Structures

B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):

Standard 90.1-13.....Energy Standard for Buildings Except Low-Rise Residential Buildings.

C. ASTM International (ASTM):

C208-12(2017)e2.....Cellulosic Fiber Insulating Board.

C552-17e1.....Cellular Glass Thermal Insulation.

C726-17.....Mineral Fiber Roof Insulation Board.

C728-17a.....Perlite Thermal Insulation Board.

C1177/C1177M-17.....Glass Mat Gypsum Substrate for Use as Sheathing.

C1278/C1278M-17.....Fiber-Reinforced Gypsum Panel.

C1289-19.....Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.

C1396/C1396M-17.....Gypsum Board.

D41/D41M-11 (2016).....Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing.

D312/D312M-16a.....Asphalt Used in Roofing.

D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.

D2178/D2178M-15a.....Asphalt Glass Felt Used in Roofing and Waterproofing.
D2822/D2822M-05(2011)e1.Asphalt Roof Cement, Asbestos Containing.
D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos-Free.
E84-20.....Surface Burning Characteristics of Building Materials.
F1667-18a.....Driven Fasteners: Nails, Spikes, and Staples.

D. National Roofing Contractors Association (NRCA):
Manual-15.....The NRCA Roofing Manual: Membrane Roof Systems-2019.

E. UL LLC (UL):
Listed Online Certifications Directory.

F. U.S. Department of Agriculture (USDA):
USDA BioPreferred Program Catalog.

G. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
DOC PS 1-19.....Structural Plywood.
DOC PS 2-18.....Performance Standard for Wood-Based Structural-Use Panels.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and installation details.
a. Nailers, cants, and terminations.
b. Layout of insulation showing slopes, tapers, penetrations, and edge conditions.

C. Manufacturer's Literature and Data:
1. Description of each product.

D. Samples:
1. Roof insulation, each type.
2. Fasteners, each type.

E. Qualifications: Substantiate qualifications meet specifications.
1. Installer.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Same installer as Division 07 roofing section installer.

1.6 DELIVERY

A. Comply with recommendations of NRCA Manual.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Comply with recommendations of NRCA Manual.

B. Store products indoors in dry, weathertight facility.

C. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment: Install products when existing and forecasted weather permit installation according to manufacturer's instructions.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant substrate board, vapor retarder, insulation, and cover board against material and manufacturing defects as part of Division 07 roofing system warranty.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Insulation Thermal Performance:

1. Overall Average R-Value: RSI-57 (R-33), minimum.
2. Any Location R-Value: RSI-17 (R-10), minimum.

B. Fire and Wind Uplift Resistance: Provide roof insulation complying with requirements specified in Division 07 roofing section.

C. Insulation on Combustible Metal Decking: UL labeled indicating compliance with one of the following:

1. UL Listed.
2. Insulation Surface Burning Characteristics: When tested according to ASTM E84.
   a. Flame Spread Rating: 75 maximum.
   b. Smoke Developed Rating: 150 maximum.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

2.3 ADHESIVES

A. Primer: ASTM D41/D41M.

B. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

C. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

2.4 ROOF AND DECK INSULATION

A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer.

B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, faced with glass fiber reinforced cellulosic felt facers on both major surfaces of the core foam.

2.5 INSULATION ACCESSORIES

A. Glass (Felt): ASTM D2178/D2178M, Type VI, heavy duty ply sheet.

B. Cants and Tapered Edge Strips:

1. Wood Cant Strips: Refer to Section 06 10 00, ROUGH CARPENTRY.
2. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
3. Tapered Edge Strips: 1/12 (1 inch per 12 inches), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
   a. Cellulosic Fiberboard: ASTM C208.
   b. Mineral Fiberboard: ASTM C726.
   c. Perlite Board: ASTM C728.

C. Vapor Retarder:

1. Glass-Fiber Felts: ASTM D2178/D2178M, Type IV, asphalt impregnated.
2. Self-Adhering Sheet Vapor Retarder: ASTM D1970/D1970M, minimum 1.0 mm (40 mils) thick membrane of HDPE film fully coated with asphalt adhesive, or 0.76 to 1.0 mm (30 to 40 mils) thick membrane of butyl rubber based adhesive backed by a layer of high density cross-laminated polyethylene; maximum permeance rating of 6 ng/Pa/s/sq. m (0.1 perms).

D. Substrate Board:

1. Gypsum Board: ASTM C1396/C1396M, 16 mm (5/8 inch) thick, Type X.

2. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, Type X, 16 mm (5/8 inch) // thick, factory primed.

E. Cover Board:

1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 13 mm (1/2 inch) thick, factory primed.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Comply with requirements of Division 07 roofing section.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Comply with requirements of UL for insulated steel roof deck.

C. Attach substrate board and other products to meet requirements of Division 07 roofing section.

3.4 SUBSTRATE BOARD INSTALLATION

A. Fasten substrate board to top flanges of steel decking to resist uplift pressures according requirements for specified roofing system.

1. Locate the long dimension edge joints solidly bearing on top of decking ribs.

3.5 VAPOR RETARDER INSTALLATION

A. Vapor Retarder Installation, General:

1. Install continuous vapor retarder on roof decks where indicated.
2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
3. Seal penetrations through vapor retarder with roof cement to prevent moisture entry from below.

3.6 INSULATION INSTALLATION

A. Insulation Installation, General:

1. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate before installation of insulation.

2. Cant Strips: Install preformed insulation cant strips at junctures of roofing system with vertical construction.

B. Insulation Thickness:
1. Thickness of roof insulation shown on drawings is nominal. Provide thickness required to comply with specified thermal performance.
2. When actual insulation thickness differs from drawings, coordinate alignment and location of roof drains, flashing, gravel stops, fascias and similar items.
3. Use minimum two layers of insulation when required thickness is 68 mm (2.7 inch) or greater.

C. Lay insulating units with close joints, in regular courses and with end joints staggered.
1. Stagger joints between layers minimum 150 mm (6 inches).

D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.

E. Seal cut edges at penetrations and at edges against blocking with bitumen or roof cement.

F. Cut to fit tightly against blocking or penetrations.

G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.

H. Installation Method:
1. Adhered Insulation:
a. Prime substrate as required.
b. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.

3.7 COVER BOARD INSTALLATION

A. Install cover boards over insulation with long joints in continuous straight lines with staggered end joints.

B. Offset cover board joints from insulation joints 150 mm (6 inches), minimum.

C. Secure cover boards according to "Adhered Insulation" requirements.

- - E N D - -

SECTION 07 27 26
FLUID-APPLIED MEMBRANE AIR BARRIERS, VAPOR PERMEABLE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fluid-applied vapor-permeable air barrier at exterior above grade wall assemblies.
2. Connection to adjacent air barrier components providing a durable, continuous, full building air barrier.

1.2 RELATED WORK

A. Section 01 45 29 TESTING LABORATORY SERVICES: General Quality Assurance and Quality Control Requirements.

B. Section 04 20 00 UNIT MASONRY: Masonry Unit Air Barrier Substrates.

C. Section 07 60 00 FLASHING AND SHEET METAL: Metal Flashing Requiring Air Barrier Transitions.

D. Section 07 92 00, JOINT SEALANTS: Joint Sealants.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Air Barrier Association of America (ABAA):
Quality Assurance Program.

C. ASTM International (ASTM):

C920-18.....Elastomeric Joint Sealants.
C1193-16.....Use of Joint Sealants.
D412-16.....Vulcanized Rubber and Thermoplastic Elastomers-Tension.
E96/E96M-16.....Water Vapor Transmission of Materials.
E162-16.....Surface Flammability of Materials Using a Radiant Heat Energy Source.
E783-02(2018).....Field Measurement of Air Leakage Through Installed Exterior Windows and Doors.
E1186-17.....Air Leakage Site Detection in Building Envelopes and Air Barrier Systems.
E2178-13.....Air Permanence of Building Materials.
E2357-18.....Determining Air Leakage of Air Barrier Assemblies.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
   1. Show size, configuration, and fabrication and installation details.
B. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.
C. Test reports:
   1. Submit field inspection and test reports.
D. Certificates: Certify each product complies with specifications.
   1. Compatibility: Certify products are compatible with adjacent materials.
E. Qualifications: Substantiate qualifications comply with specifications.
   1. Manufacturer with project experience list.
   2. Installer with project experience list.
      a. Include personnel qualifications.
      b. Field supervisor qualifications.
      c. Certify installer approval by air barrier manufacturer.
F. Installation Audit:
   1. Submit audit report.

1.5 QUALITY ASSURANCE

A. Coordinate work with adjacent and related work to provide continuous, unbroken, durable air barrier system.
B. Manufacturer Qualifications:
   1. Regularly and presently manufactures specified products.
   2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
   3. Accreditation by ABAA.
C. Installer Qualifications:
   1. Regularly and presently installs specified products.
   2. Approved by manufacturer.
   3. Accredited by ABAA.
   4. Applicators certified according to ABAA Quality Assurance Program.
   5. Applicators trained and certified by manufacturer of air barrier system.
   6. Field Supervisor: Holds Sealant, Waterproofing, and Restoration Institute (SWRI) Wall Coating Validation Program Certificate, or

similar qualification acceptable to Contracting Officer’s Representative.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight, conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Work Area Ambient Temperature Range: 4 to 32 degrees C (40 to 90 degrees F) continuously, beginning 48 hours before installation.
2. Surface Requirements: visibly dry, and complying with manufacturer's instructions.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Air-Barrier Assembly Air Leakage: Maximum 0.2 L/s/square meter (0.04 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure when tested according to ASTM E2357.

B. Provide full system of compatible materials under conditions of service and application required. Compatibility based on testing by material manufacturer.

C. Perform as continuous vapor permeable air barrier and moisture drainage plane.

D. Transition to adjacent flashings and discharge water to building exterior.

E. Accommodate substrate movement and seal expansion and control joints, construction material transitions, opening transitions, penetrations, and perimeter conditions without moisture deterioration and air leakage exceeding performance requirements.

2.2 PRODUCTS - GENERAL

A. Provide air barrier system components from one manufacturer.

2.3 AIR BARRIER

A. Fluid-Applied, Vapor-Permeable Membrane Air Barrier:
   1. Elastomeric, modified bituminous or synthetic polymer membrane.
   2. Air Permeance: ASTM E2178: 0.02 L/s/square meter (0.004 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure.
   3. Vapor Permeance: ASTM E96/E96M: Minimum 580 ng/Pa/s/square meter (10 perms).
   4. Elongation: Ultimate, ASTM D412, Die C: 200 percent, minimum.
   5. Thickness: Minimum 1.0 mm (40 mils) dry film thickness, applied in single continuous coat.
   6. Surface Burning Characteristics: When tested according to ASTM E84.
      a. Flame Spread Rating: 25 maximum.
      b. Smoke Developed Rating: 450 maximum.

2.4 ACCESSORIES

A. Primer: Waterborne primer complying with VOC requirements, recommended air barrier manufacturer to suit application.

B. Counterflashing Sheet: Modified bituminous, minimum 1.0 mm (40 mils) thick, self-adhering composite sheet consisting of minimum 0.8 mm (33 mils) of rubberized asphalt laminated to polyethylene film.

C. Substrate Patching Material: Manufacturer's standard trowel-grade filler material.

D. Sprayed Polyurethane Foam Sealant: Foamed-in-place, 24 to 32 kg/cu. m (1.5 to 2.0 pcf) density, with maximum flame-spread index of 25 when tested according to ASTM E84.

E. Joint Sealant: ASTM C920, single-component, neutral-curing silicone; Class 100/50 (low modulus), Grade NS, Use NT related to exposure, approved by membrane air barrier manufacturer for adhesion and compatibility with membrane air barrier and accessories.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Correct substrate deficiencies:

1. Remove projections and excess materials and fill voids with substrate patching material.
2. Remove contaminants capable of affecting subsequently installed product's performance.

D. Prepare and treat substrate joints and cracks according to ASTM C1193 and membrane air barrier manufacturer's instructions.

3.2 INSTALLATION - AIR BARRIER

A. Install products according to manufacturer's instructions.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Apply primer.

C. Install transition strips and accessory materials.

D. Seal air barrier to adjacent components of building air barrier system.

E. At penetrations, seal transition strips around penetrating objects with termination mastic.
1. Fill gaps at perimeter of penetrations with sprayed polyurethane foam sealant.

F. At top of through-wall flashings, seal with continuous transition strip of manufacturer's recommended material to suit application.

G. Apply air barrier in full contact with substrate to produce continuous seal with transitions.

H. Apply fluid membrane in thickness recommended by manufacturer, and minimum specified thickness.

I. Leave air barrier exposed until tested and inspected and approved by Contracting Officer’s Representative.

3.3 FIELD QUALITY CONTROL

A. Field Inspections and Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
1. Perform inspections and tests before concealing air barrier with subsequent work.

B. Inspections:
1. Compatibility of materials within air barrier system and adjacent materials.
2. Suitability of substrate and support for air barrier.
3. Suitability of conditions under which air barrier is applied.
4. Adequacy of substrate priming.

5. Application and treatment of joints and edges of transition strips, flexible opening transitions, and accessory materials.
6. Continuity and gap-free installation of air barrier, transition strips, and accessory materials.

C. Defective Work:

1. Correct deficiencies, make necessary repairs, and retest as required to demonstrate compliance with specified requirements.

3.4 CLEANING

A. Remove masking materials.

B. Clean spills and overspray using cleaning agents recommended by manufacturers of affected construction.

3.5 PROTECTION

A. Protect air barrier from construction operations.

B. Protect air barrier from exposure to UV light exposure exceeding manufacturer's recommendation.

C. Replace overexposed materials and retest.

- - E N D - -

SECTION 07 54 23
THERMOPLASTIC POLYOLEFIN (TPO) ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermoplastic Polyolefin (TPO) sheet roofing adhered to roof deck.

1.2 RELATED WORK

A. Section 07 22 00, ROOF AND DECK INSULATION: Roof Insulation.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):

FX-1-16.....Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.

C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):

7-16.....Minimum Design Loads for Buildings and Other Structures.

D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):

90.1-13.....Energy Standard for Buildings Except Low-Rise Residential Buildings.

E. ASTM International (ASTM):

C67-20.....Sampling and Testing Brick and Structural Clay Tile.

C140/C140M-20a.....Sampling and Testing Concrete Masonry Units and Related Units.

C1371-15.....Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers.

C1549-16.....Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer.

D1876-08(2015)e1.....Peel Resistance of Adhesives (T-Peel Test).

D4263-83(2018).....Indicating Moisture in Concrete by the Plastic Sheet Method.

D4434/D4434M-15.....Poly(Vinyl Chloride) Sheet Roofing.

D6878/D6878M-13.....Thermoplastic Polyolefin Based Sheet Roofing.

E408-13.....Total Normal Emittance of Surfaces Using Inspection-Meter Techniques.

E1918-16.....Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.

E1980-11(2019).....Calculating Solar Reflectance Index of Horizontal and Low-Sloped Opaque Surfaces.

F. Cool Roof Rating Council (CRRC):

1-20.....Product Rating Program.

G. National Roofing Contractors Association (NRCA):

Manual-19.....The NRCA Roofing Manual: Membrane Roofing Systems.

H. U.S. Department of Agriculture (USDA):

BioPreferred® Program Catalog.

I. UL LLC (UL):

580-06.....Tests for Uplift Resistance of Roof Assemblies.

1897-20.....Uplift Tests for Roof Covering Systems.

J. U.S. Department of Commerce National Institute of Standards and Technology (NIST):

DOC PS 1-19.....Structural Plywood.

DOC PS 2-18.....Performance Standard for Wood-Based Structural-Use Panels.

K. U.S. Environmental Protection Agency (EPA):

Energy Star.....ENERGY STAR Program Requirements for Roof Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

A. Conduct pre-installation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Contractor.
   c. Installer.
   d. Manufacturer's field representative.
   e. Other installers responsible for adjacent and intersecting work, including roof deck, flashings, roof penetrations, roof accessories, utility penetrations, rooftop curbs and equipment
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

a. Installation schedule.
b. Installation sequence.
c. Preparatory work.
d. Protection before, during, and after installation.
e. Installation.
f. Terminations.
g. Transitions and connections to other work.
h. Inspecting and testing.
i. Other items affecting successful completion.
j. Pullout test of fasteners.
k. Material storage, including roof deck load limitations.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Roof membrane layout.
2. Roofing membrane seaming and joint details.
3. Roof membrane penetration details.
4. Base flashing and termination details.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Minimum fastener pullout resistance.
3. Installation instructions.
4. Warranty.

D. Samples:
1. Roofing Membrane: 150 mm (6 inch) square.
2. Base Flashing: 150 mm (6 inch) square.
3. Fasteners: Each type.
4. Roofing Membrane Seam: 300 mm (12 inches) square.

E. Certificates: Certify products comply with specifications.

F. Qualifications: Substantiate qualifications comply with specifications.
1. Installer, including supervisors with project experience list.
2. Manufacturer's field representative with project experience list.

G. Field quality control reports.

H. Operation and Maintenance Data:

1. Maintenance instructions.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
   2. Regularly installs specified products.
   3. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.
   4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer's Representative and installer's personnel.

B. Manufacturer's Field Representative:
   1. Manufacturer's full-time technical employee or independent roofing inspector.
   2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Comply with NRCA Manual storage and handling requirements.
B. Store products indoors in dry, weathertight facility.
C. Store adhesives according to manufacturer's instructions.
D. Protect products from damage during handling and construction operations.
E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

A. Environment:
   1. Product Temperature: Minimum 4 degrees C (40 degrees F) for minimum 48 hours before installation.

2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant roofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.

1. Warranty Period: 20 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Roofing System: Thermoplastic Polyolefin (TPO) sheet roofing adhered to roof deck.

2.2 SYSTEM PERFORMANCE

A. Design roofing system complying with specified performance:

1. Load Resistance: ASCE/SEI 7; Design criteria:

a. //Uplift Pressures:

1) Corner Uplift Pressure: // _____ // kPa/square meter (// _____ // per square foot).

2) Perimeter Uplift Pressure: // _____ // kPa/square meter (// _____ // per square foot).

3) Field-of-Roof Uplift Pressure: 24 lbs/sf.

b. Three-Year Aged Performance: Minimum 0.55 solar reflectance tested in according to ASTM C1549 or ASTM E1918, and minimum 0.75 thermal emittance tested in according to ASTM C1371 or ASTM E408.

2.3 PRODUCTS - GENERAL

A. Provide roof system components from one manufacturer.

B. Sustainable Construction Requirements:

1. Solar Reflectance Index: 78 minimum.

2.4 TPO ROOFING MEMBRANE

1. TPO Sheet: ASTM D6878/D6878M, internally fabric or scrim reinforced, 1.5 mm (60 mils) thick, with no backing

2.5 MEMBRANE ACCESSORY MATERIALS

A. Sheet Flashing: Manufacturer's standard sheet flashing of same material, type, reinforcement, thickness, and color as TPO sheet membrane.

B. Factory Formed Flashings: Inside and outside corners, pipe boots, and other special flashing shapes to minimize field fabrication.

C. Bonding Adhesive: Manufacturer's standard, water based.

D. Metal Termination Bars: Manufacturer's standard, stainless-steel or aluminum, 25 mm wide by 3 mm thick (1-inch wide by 1/8 inch thick) factory drilled for fasteners.

E. Battens: Manufacturer's standard, galvannealed or galvanized steel sheet, 25 mm wide by 1.3 mm thick (1-inch wide by 0.05 inch thick), factory punched for fasteners.

F. Fasteners: Manufacturer's standard coated steel with metal or plastic plates, to suit application.

G. Primers, Sealers, T-Joint Covers, Lap Sealants, and Termination Reglets: As specified by roof membrane manufacturer.

H. Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.

2.6 ACCESSORIES

A. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine and verify substrate suitability with roofing Installer and roofing inspector present.

1. Verify roof penetrations are complete, secured against movement, .
2. Verify roof deck is adequately secured to resist wind uplift.
3. Verify roof deck is clean, dry, and in-plane ready to receive roofing system.

B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

A. Complete roof deck construction before beginning roofing work:

1. Curbs, blocking, edge strips, nailers, cants, and other components to which insulation, roofing, and base flashing is attached in place ready to receive insulation and roofing.

2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of work day.

B. Dry out surfaces that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.

C. Broom clean roof decks. Remove dust, dirt and debris.

D. Remove projections capable of damaging roofing materials.

E. Concrete Decks, except Insulating Concrete:
1. Test concrete decks for moisture according to ASTM D4263 before installing roofing materials.
2. Prime concrete decks. Keep primer back 100 mm (4 inches) from precast concrete deck joints.
3. Allow primer to dry before application of bitumen.

3.3 TEMPORARY PROTECTION

A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.

B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.

C. Temporarily seal exposed insulation surfaces within roofing membrane.
1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.
2. Direct water away from work. Provide drainage, preventing water accumulation.
3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.

D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.
   1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.
E. Remove sandbags and store for reuse.

3.4 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Comply with NRCA Manual installation requirements.
C. Comply with UL 580 for uplift resistance.
D. Do not allow membrane and flashing to contact surfaces contaminated with asphalt, coal tar, oil, grease, or other substances incompatible with TPO.

3.5 ROOFING INSTALLATION

A. Install the membrane so the sheets run perpendicular to the long dimension of the insulation boards.
B. Begin installation at the low point of the roof and work towards the high point. Lap membrane shingled in water flow direction.
C. Position the membrane free of buckles and wrinkles.
D. Roll membrane out; inspect for defects as membrane is unrolled. Remove defective areas:
   1. Lap edges and ends of sheets 50 mm (2 inches) or more as recommended by the manufacturer.
   2. Heat weld laps. Apply pressure as required. Seam strength of laps as required by ASTM D4434/D4434M.
   3. Check seams to ensure continuous adhesion and correct defects.
   4. Finish seam edges with beveled bead of lap sealant.
   5. Finish seams same day as membrane is installed.
   6. Anchor membrane perimeter to roof deck or parapet wall as indicated on drawings.
   7. Repair areas of welded seams where samples have been taken or marginal welds, bond voids, or skips occurs.
   8. Repair fishmouths and wrinkles by cutting to lay flat and installing patch over cut area extending 100 mm (4 inches) beyond cut.
E. Membrane Perimeter Anchorage:

1. Install batten at perimeter of each roof area, curb flashing, expansion joints and similar penetrations on top of roof membrane as indicated on drawings.
   a. At roof edges turn roofing membrane down over front edge of the blocking, cant, or nailer. Secure roofing membrane to vertical portion of nailer; or, if required by the membrane manufacturer, with fasteners spaced maximum 150 mm (6 inches) on centers.
   b.

F. Adhered System:
   1. Apply bonding adhesive in quantities required by roof membrane manufacturer.
   2. Fold sheet back on itself, clean and coat the bottom side of the membrane and the top of substrate with adhesive. Do not coat the lap joint area.
   3. After adhesive has set according to adhesive manufacturer's instruction, roll roofing membrane into adhesive minimizing voids and wrinkles.
   4. Repeat for other half of sheet.

3.6 FLASHING INSTALLATION

A. Install flashings same day as roofing membrane is installed. When flashing cannot be completely installed in one day, complete installation until flashing is watertight and provide temporary covers or seals.

B. Installing Base Flashing and Pipe Flashing:
   1. Install flashing sheet to pipes, wall or curbs to minimum200 mm (8 inches) above roof surfaces and extending roofing manufacturer's standard lap dimension onto roofing membranes.
      a. Adhere flashing with bonding adhesive.
      b. Form inside and outside corners of flashing sheet according to NRCA manual. Form pipe flashing according to NRCA manual.
      c. Lap ends roofing manufacturer's standard dimension.
      d. Heat weld flashing membranes together and flashing membranes to roofing membranes. Finish exposed edges with lap sealant.
      e. Install flashing membranes according to NRCA manual.
   2. Anchor top of flashing to walls and curbs with fasteners spaced maximum150 mm (6 inches) on center. Use surface mounted fastening

strip with sealant on ducts. Use pipe clamps on pipes or other round penetrations.

3. Apply sealant to top edge of flashing.

C. Repairs to Membrane and Flashings:

1. Remove sections of roofing membrane or flashing that are creased, wrinkled, or fishmouthed.
2. Cover removed areas, cuts and damaged areas with a patch extending 100 mm (4 inches) beyond damaged, cut, or removed area. Heat weld to roofing membrane or flashing sheet. Finish edge of lap with lap sealant.

3.7 FIELD QUALITY CONTROL

A. Manufacturer Services:

1. Inspect initial installation, installation in progress, and completed work.
2. Issue supplemental installation instructions necessitated by field conditions.
3. Prepare and submit inspection reports.
4. Certify completed installation complies with manufacturer's instructions and warranty requirements.

3.8 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed roofing surfaces. Remove contaminants and stains.

3.9 PROTECTION

A. Protect roofing system from traffic and construction operations.

1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.

B. Loose lay temporary insulation board overlaid with plywood or OSB.

1. Weight boards to secure against wind uplift.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

SECTION 07 71 00
ROOF SPECIALTIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies copings, gravel stops, fascias, and expansion joints.

1.2 RELATED WORK

A. Section 07 21 13, THERMAL INSULATION: General Insulation.

B. Section 07 22 00, ROOF AND DECK INSULATION: Rigid Insulations for Roofing.

C. Section 07 92 00, JOINT SEALANTS: Sealant Material and Installation.

D. Section 09 06 00, SCHEDULE FOR FINISHES: Color and Texture of Finish

1.3 QUALITY CONTROL

A. Provide roof accessories that products of manufacturers regularly engaged in producing the kinds of products specified.

B. For each accessory type provide products made by the same manufacturer.

C. Assemble each accessory to the greatest extent possible before delivery to the site.

D. Provide each accessory with FM approval listing for class specified.

1.4 PERFORMANCE REQUIREMENTS

A. Provide roof accessories that withstand exposure to weather and resist thermal movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, or installation.

B. Provide roof accessories listed in FM Approvals “RoofNav” and approved for windstorm classification. Identify materials with FM Approval markings.

C. Manufacture and install roof accessories to allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects.

1. Provide clips that resist rotation and avoid shear stress as a result of thermal movements.

2. For design purposes, base provisions for thermal movement on assumed ambient temperature (range) from minus 18 degrees C (0 degrees F), ambient to 82 degrees C (180 degrees F).

1.5 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples: Representative sample panel of color-anodized aluminum not less than 101 x 101 mm (4 x 4 inches), except extrusions are to be of a width not less than section to be used. Submit sample that shows coating with integral color and texture. Include manufacturer's identifying label.

C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.

D. Manufacturer's Literature and Data: Each item specified.

E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar

B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate

B209M-14.....Aluminum and Aluminum Alloy-Sheet and Plate (Metric)

B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B221M-13.....Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)

B32-08(2014).....Solder Metal

B370-12(2019).....Copper Sheet and Strip for Building Construction
B882-10(2018).....Pre-Patinated Copper for Architectural Applications
C612-14(2019).....Mineral Fiber Block and Board Thermal Insulation
D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal
D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection
D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
D4869/D4969M-16a.....Asphalt-Saturated Organic Felt Underlayment Used In Steep Slope Roofing

C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

D. American Architectural Manufacturers Association (AAMA):
2605-11.....High Performance Organic Coatings on Architectural Extrusions and Panels.
611-14.....Anodized Architectural Aluminum

E. FM Global (FM):
RoofNav.....Approved Roofing Assemblies and Products

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum, Extruded: ASTM B221M (B221).

B. Aluminum Sheet: ASTM B209M (B209).

C. Galvanized Sheet Steel: ASTM A653/A653M; G-90 coating.

D. Stainless-Steel Sheet: ASTM A240/A240M or ASTM A666, Type 304.

E. Copper Sheet: ASTM B370, cold-rolled copper sheet, H00 or H01 temper.

F. Insulation: ASTM C612, Class 1 or 2.

G. Asphalt Coating: ASTM D1187, Type I, quick setting.

2.2 UNDERLAYMENT

A. Self-Adhering Modified Bitumen Underlayment:

1. Provide self-adhering modified bitumen membrane underlayment material in compliance with ASTM D1970/D1970M, suitable for use as underlayment for metal copings and fascias.
2. Provide membrane resistant to cyclical elevated temperatures for extended period of time in high heat service conditions (stable after testing at 116 degrees C (240 degrees F)).
3. Provide membrane with integral non-tacking top surface of polyethylene film or other surface material to serve as separator between bituminous material and metal products to be applied above.
4. Provide primer.

B. Slip Sheet: Provide 0.24 kg per square meter (5 pounds per 100 sf) rosin sized unsaturated building paper for slip sheet.

2.3 //SOLDER

A. Copper Solder conforming to ASTM B32, //lead-free solder// //Grade Sn50, 50 percent tin and 50 percent lead//.

2.4 COPINGS

A. Fabricate of aluminum sheet not less than 0.08
B. Turn outer edges down each face of wall as shown on construction documents.
C. Maximum lengths of 3.05 M (10 feet).
D. Shop fabricate external and internal corners as one-piece assemblies with not less than 305 mm (12 inch) leg lengths.
E. Provide 101 mm (4 inch) wide thick watertight joint covers.
F. Provide anchor gutter bar of 0.81 mm (0.032 inch) thick with anchor holes formed for underside of joint.
G. Provide concealed guttered splice plate of 0.81 mm (0.032 inch) thick with butyl or other resilient seal strips anchored to splice plate for underside of joint. Use galvanized steel anchor plate providing compression spring anchoring of coping cover.

Finish: Three-coat fluoropolymer Color selected from manufacturer’s standard finishes.

2.5 FINISH:

A. //Fluoropolymer Finishes: High performance organic coating. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.

1. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in both color coat and top color coat.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Examine substrates, areas, and conditions, to verify actual locations, dimensions, and other conditions affecting performance of the Work.

B. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.

C. Underlayment Installation:

1. Self-Adhering Sheet Underlayment:

a. Apply primer as required by manufacturer.

b. Comply with temperature restrictions of underlayment manufacturer for installation.

c. Apply wrinkle free, in shingle fashion to shed water, and with end laps of not less than 152 mm (6 inches) staggered 610 mm (24 inches) between courses.

d. Overlap side edges not less than 89 mm (3-1/2 inches). Roll laps with roller.

e. Cover underlayment within 14 days.

f. Apply continuously under copings and roof-edge fascias and gravel stops.

g. Coordinate application of self-adhering sheet underlayment under roof specialties with requirements for continuity with adjacent air barrier materials.

D. Install roof accessories where indicated in construction documents.

E. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise. Provide fasteners suitable for application, for metal types being secured and designed to meet performance requirements.

F. Where soldered joints are required, clean surfaces to be soldered, removing oils and foreign matter.

1. Pre-tin edges of sheets to be soldered to a width of 38 mm (1-1/2 inches).
2. Reduce pre-tinning where pre-tinned surface would show in completed work.
3. Do not use torches for soldering.
4. Heat surfaces to receive solder and flow solder into joint.
5. Fill joint completely.
6. Completely remove flux and spatter from exposed surfaces.

G. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.

H. Comply with section 07 92 00, JOINT SEALANTS to install sealants where required by manufactures installation instructions.

I. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.

J. Gravel Stops and Fascias:
1. Install gravel stops and fascia with butt joints with approximately 6 mm (1/4 inch) space for expansion.
2. Over each joint provide cover plates of sheet aluminum, complete with concealed sheet aluminum flashing, centered under each joint.
3. Provide lap cover plates and concealed flashing over the gravel stop and fascia not less than 101 mm (4 inches).
4. Extend concealed flashing over built-up roofing, embed in roof cement and turn down over face of blocking at roof edge.

K. Aluminum Coping:
1. Install sections of coping with approximately 6 mm (1/4-inch) space between ends of sections.
2. Center joint gutter bar and covers at joints and lock in place.
3. When snap-on system is installed ensure front and back edges are locked in place.

3.2 PROTECTION OF ALUMINUM

A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on one (1) side.

B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two (2) coats of asphalt coating.

3.3 ADJUSTING

A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION

A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

//C. Masonry Control and Expansion Joint: Section 04 20 00, UNIT MASONRY. //

1.3 QUALITY ASSURANCE:

A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.

B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.

C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.

1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.

D. Lab Tests: Submit samples of materials that will be in contact or affect joint sealants to joint sealant manufacturers for tests as follows:

1. Adhesion Testing: Before installing elastomeric sealants, test their adhesion to protect joint substrates according to the method in ASTM C794 to determine if primer or other specific joint preparation techniques are required.
2. Compatibility Testing: Before installing elastomeric sealants, determine compatibility when in contact with glazing and gasket materials.

3. Stain Testing: Perform testing per ASTM C1248 on interior and exterior sealants to determine if sealants or primers will stain adjacent surfaces. No sealant work is to start until results of these tests have been submitted to the Contracting Officer Representative (COR) and the COR has given written approval to proceed with the work.

F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections and to demonstrate aesthetic effects and qualities of materials and execution:Masonry control joints

1.4 CERTIFICATION:

A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Installer qualifications.

D. Contractor certification.

E. Manufacturer's installation instructions for each product used.

F. Cured samples of exposed sealants for each color.

G. Manufacturer's Literature and Data:

1. Primers
2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

H. Manufacturer warranty.

1.6 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
   a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
   b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.7 DELIVERY, HANDLING, AND STORAGE:

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.8 DEFINITIONS:

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Backing Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

1.9 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.10 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material

C612-14.....Mineral Fiber Block and Board Thermal Insulation

C717-14a.....Standard Terminology of Building Seals and Sealants

C734-06(R2012).....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
C794-10.....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
C919-12.....Use of Sealants in Acoustical Applications.
C920-14a.....Elastomeric Joint Sealants.
C1021-08(R2014).....Laboratories Engaged in Testing of Building Sealants
C1193-13.....Standard Guide for Use of Joint Sealants.
C1248-08(R2012).....Test Method for Staining of Porous Substrate by Joint Sealants
C1330-02(R2013).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
C1521-13.....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
D217-10.....Test Methods for Cone Penetration of Lubricating Grease
D1056-14.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber
E84-09.....Surface Burning Characteristics of Building Materials

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

D. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. Exterior Sealants:

1.Vertical surfaces, provide non-staining ASTM C920, Type S or M, Grade NS, Class 25, Use NT.

3. Provide location(s) of exterior sealant as follows:

a. Joints formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Provide sealant at exterior surfaces of exterior wall penetrations.

b. Metal to metal.

c. Masonry to masonry or stone.

f. Masonry expansion and control joints.

g. Wood to masonry.

h. Masonry joints where shelf angles occur.

i. Voids where items penetrate exterior walls.

C. Interior Sealants:

1.

2. //S-#// Vertical and Horizontal Surfaces: ASTM C920, Type S or M, Grade NS, Class 25, Use NT.

4. Provide location(s) of interior sealant as follows:

a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.

b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.

c. Interior surfaces of exterior wall penetrations.

d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.

e.

i. Behind escutcheon plates at valve pipe penetrations.

2.2 COLOR:

A. Sealants used with exposed masonry are to match color of mortar joints.

B. Sealants used with unpainted concrete are to match color of adjacent concrete.

C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:

1. Type C: Closed-cell material with a surface skin.

C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509),

nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 WEEPS:

A. Weep/Vent Products: Provide the following unless otherwise indicated or approved.

1. Round Plastic Tubing: Medium-density polyethylene, 10 mm (3/8-inch) OD by thickness of stone or masonry veneer.

2.6 PRIMER:

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

2.7 CLEANERS-NON POROUS SURFACES:

A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals’ Guide).

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer

paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:
   a. Metal.
   b. Glass.
   c. Porcelain enamel.
   d. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
   1. Do not leave gaps between ends of sealant backings.
   2. Do not stretch, twist, puncture, or tear sealant backings.
   3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.
   1. Apply primer prior to installation of back-up rod or bond breaker tape.
   2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.

B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.

C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.

D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.

E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to “skin” over. Remove any excess

sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.

8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
11. Replace sealant which is damaged during construction process.

B. Weeps: Place weep holes and vents in joints where moisture may accumulate, including at base of cavity walls, above shelf angles, at all flashing, and as indicated on construction documents.

1. Use round plastic tubing to form weep holes.
2. Space weep holes formed from plastic tubing not more than 406 mm (24 inches) o.c.
3. Trim tubing material used in weep holes flush with exterior wall face after sealant has set.

C. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.

D. 3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.

4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements.

3.7 CLEANING:

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.

B. Leave adjacent surfaces in a clean and unstained condition.

- - - E N D - - -

DIVISION 08 - OPENINGS

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hollow metal doors hung in hollow metal frames at exterior locations.

1.2 RELATED WORK

A. Section 05 50 00, METAL FABRICATIONS: Frames fabricated of structural steel.

B.

C.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standard Institute (ANSI):

A250.8-2014.....Standard Steel Doors and Frames

C. ASTM International (ASTM):

A240/A240M-15b.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

A653/A653M-15.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip

A1008/A1008M-15.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability, Solution Hardened, and Bake Hardenable

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)

D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns

E90-09.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

D. Federal Specifications (Fed. Spec.):

L-S-125B.....Screening, Insect, Nonmetallic

E. Master Painters Institute (MPI):

No. 18.....Primer, Zinc Rich, Organic

F. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

G. National Fire Protection Association (NFPA):

80-16.....Fire Doors and Other Opening Protectives

H. UL LLC (UL):

10C-09.....Positive Pressure Fire Tests of Door Assemblies

1784-15.....Air Leakage Tests of Door Assemblies and Other Opening Protectives

I. Department of Veterans Affairs

VA Physical Security and Resiliency Design Manual October 1, 2020

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Include schedule showing each door and frame requirements for openings.
3. Installation instructions.

D. Test reports: Certify products comply with specifications.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer .

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: ASTM A240/A240M; // Type 304 // Type 316 //.

B. Sheet Steel: ASTM A1008/A1008M, cold-rolled.

C. Galvanized Sheet Steel: ASTM A653.

2.2 PRODUCTS - GENERAL

A. Provide hollow metal doors and frames from one manufacturer.

2.3 HOLLOW METAL DOORS

A. Hollow Metal Doors: ANSI A250.8; 44 mm (1-3/4 inches) thick. See drawings for sizes and designs.

1. Exterior Doors: Level 3 and Physical Performance Level A, extra-heavy duty; Model 2, seamless // at // _____ // locations //.

B. Door Faces:

1. Galvanized

2. Exterior Doors: Galvanized sheet steel minimum Z180 or ZF180 (G60 or A60) coating.

C. Door Cores:

1. Exterior Doors: Polystyrene orpolyurethane.

2.4 HOLLOW METAL FRAMES

A. Hollow Metal Frames: ANSI A250.8; face welded. See drawings for sizes and designs.

a. Exterior Frames:

1) Level 3Hollow Metal Doors: 1.3 mm (0.053 inch) thick.

B. Frame Materials:

1. Exterior Frames: Stainless steel Galvanized sheet steel minimum Z180 or ZF180 (G60 or A60) coating.

2.5 FABRICATION

A. Hollow Metal Door Fabrication:

1. Close top edge of exterior doors flush and seal to prevent water intrusion.
2. Fill spaces between vertical steel stiffeners with insulation.

B. Hollow Metal Frame Fabrication:

1. Fasten mortar guards to back of hardware reinforcements, except on lead-lined frames.
2. Terminated Stops: ANSI A250.8.
3. Frame Anchors:

a. Floor anchors:

1) Provide extension type floor anchors to compensate for depth of floor fills.
2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.
3) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.
4) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
a) Space floor bolts50 mm (24 inches) on center.

b. Jamb anchors:

1) Place anchors on jambs:
a) Near top and bottom of each frame.
b) At intermediate points at maximum 600 mm (24 inches) spacing.
2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.
3) Anchors set in masonry: Provide adjustable anchors designed for friction fit against frame and extended into masonry minimum 250 mm (10 inches). Provide one of following types:
a) Wire Loop Type: 5 mm (3/16 inch) diameter wire.
b) T-Shape type.

c) Strap and stirrup type: Corrugated or perforated sheet steel.

2.6 FINISHES

A. Steel and Galvanized Steel: ANSI A250.8; shop primed.

B. Finish exposed surfaces after fabrication.

2.7 ACCESSORIES

A. Primers: ANSI A250.8.

B. Barrier Coating: ASTM D1187/D1187M.

C. Welding Materials: AWS D1.1/D1.1M, type to suit application.

D. Clips Connecting Members and Sleeves: Match door faces.

E. Fasteners: Galvanized steel.

1. Metal Framing: Steel drill screws.
2. Masonry and Concrete: Expansion bolts and power actuated drive pins.

F. Anchors: Galvanized steel.

G. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 FRAME INSTALLATION

A. Apply barrier coating to concealed surfaces of frames built into masonry.

B. Plumb, align, and brace frames until permanent anchors are set.

1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
2. Use wood spreaders at bottom of frame when shipping spreader is removed.

3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
4. Remove wood spreaders and braces when walls are built and jamb anchors are secured.

C. Floor Anchors:
1. Anchor frame jambs to floor with two expansion bolts.
a. Lead Lined Frames: Use 9 mm (3/8 inch) diameter bolts.
b. Other Frames: Use 6 mm (1/4 inch) diameter bolts.
2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.

D. Jamb Anchors:
1. Masonry Walls:
a. Embed anchors in mortar.
b. Fill space between frame and masonry with grout or mortar as walls are built.
2. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
3. Prepared Masonry and Concrete Openings:
a. Direct Securement: 6 mm (1/4 inch) diameter expansion bolts through spacers.
b. Subframe or Rough Buck Securement:
1) 6 mm (1/4 inch) diameter expansion bolts on 600 mm (24 inch) centers.
2) Power activated drive pins on 600 mm (24 inches) centers.
c. Secure two-piece frames to subframe or rough buck with machine screws on both faces.

E. Touch up damaged factory finishes.
1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

3.4 DOOR INSTALLATION

A. Install doors plumb and level.

B. Adjust doors for smooth operation.

C. Touch up damaged factory finishes.
1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

3.5 CLEANING

A. Clean exposed door and frame surfaces. Remove contaminants and stains.

3.6 PROTECTION

A. Protect doors and frames from // traffic and // construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

- - - E N D - - -

SECTION 08 33 00
COILING DOORS AND GRILLES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Coiling doors.
2. Coiling door and grille combination.

1.2 RELATED WORK

A. Section 08 71 00, DOOR HARDWARE: Lock Cylinders for Cylindrical Locks.

B. Section 09 06 00, SCHEDULE FOR FINISHES: Coiling Door // and // Grille // Color.

C. DIVISION 26, ELECTRICAL: Electric Devices and Wiring.

D. DIVISION 28, ELECTRONIC SAFETY AND SECURITY: Electric Devices and Wiring.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International(ASTM):

A36/A36M-19.....Carbon Structural Steel.

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.

A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric).

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).

D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal.

C. Master Painters Institute (MPI):

No. 18.....Primer, Zinc Rich, Organic.

No. 76.....Primer, Alkyd, Quick Dry, for Metal.

D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual.

E. National Electrical Manufacturers Association (NEMA):
ICS 1-2000(R2015).....Industrial Control and Systems General Requirements.
ICS 2-2000(R2005).....Controllers, Contactors and Overload Relays Rated 600 V.
ICS 6-93(R2016).....Industrial Control and Systems Enclosures.
ST 20-2014.....Dry Type Transformers for General Applications.

F. National Fire Protection Association (NFPA):
70-20 .....National Electrical Code.
80-19.....Fire Doors and Other Opening Protectives.

G. Underwriters Laboratories (UL)
UL 325.....Standard for Door, Drapery, Gate, Louver, and Window Operators and Systems

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.
2. Wiring diagrams for motors and controls, including wiring diagram for door, showing electrical interlock of motor with manually operated dead lock, electrical rough-in.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Installation instructions.

D. Certificates: Indicate each product complies with specifications.
1. Indicate oversize fire doors and hardware that are identical in design, material, and construction to doors complying with specified performance.

E. Operation and Maintenance Data:
1. Care instructions for each exposed finish product.
2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.
3. Parts list.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting overhead coiling door fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant coiling doors against material and manufacturing defects.

1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Coiling doors spring counter balanced, overhead type, inside face mounted with guides at jambs set back at adequate distance to provide clear opening.

2.2 SYSTEM PERFORMANCE

1.

B. Design coiling doors complying with specified performance:

1. Operation Cycles: 20,000 minimum.

2.3 MATERIALS

A. Sheet Steel: A653/A653M; G90 galvanized coating.

B. Structural Steel: ASTM A36/A36M.

C. Stainless Steel: ASTM A240/A240M, Type 302 or 304.

D. Aluminum, Plate and Sheet: ASTM B209M (ASTM B209).

E. Aluminum, Extrusions: ASTM B221M (ASTM B221), alloy 6063-T5.

2.4 PRODUCTS - GENERAL

A. Provide coiling doors // and grilles // from one manufacturer.

2.5 COILING DOORS AND GRILLES

A. Doors: Interlocking slats of galvanized steel in manufacturer's standard profile, except exterior door slat profile to be flat.
   1. Slat Thickness: As required to resist specified loads.
      a. Galvanized Steel: Minimum thickness:
         1) Doors less than 4500 mm (15 feet) wide: 0.75 mm (0.030 inch).
         2) Doors from 4530 mm (15 feet 1 inch) to 6300 mm (21 feet) wide: 0.90 mm (0.036 inch).
   2. Bottom Rail: Two continuous angles of galvanized steel, , // minimum 3 mm (0.125 inch) thick, to receive safety device.

B. Hoods: Formed to fit contour of end brackets.
   1. Material:
   2. Sheet Steel: Minimum 0.6 mm (0.0239 inch) thick.
      a. Aluminum Sheet: Minimum 1 mm (0.040 inch) thick.
   3. Reinforce at top and bottom edges with rolled beads, rods or angles. Provide intermediate supporting brackets for hoods greater than 3600 mm (12 feet) long.
   4. Fasten hood to brackets with screws or bolts and provide for fastening to wall with bolts.

C. Counterbalance Assembly:
   1. Design door to coil on barrel supported at end of opening on brackets, counterbalanced by helical springs. Counterbalance minimum 80 percent of door weight at any position.
   2. Barrel: Steel pipe or commercial welded steel tubing of proper diameter and thickness for door size, to limit deflection with door rolled up, not to exceed 1 in 400 (0.03 inch per foot) of span. Close barrel ends with cast iron plugs, machined to fit the opening.
   3. Spring: Oil-tempered, helically wound spring rotating on grease-sealed ball bearing or roller bearing units, capable of producing sufficient torque to ensure easy operation of door from any position, and adjustable from exterior of counterbalance assembly without removing hood or motor operator.

D. Brackets: Steel plate forming end closure and support for hood and end of barrel assembly.
   1. Screw end of barrel or shaft into bracket hubs fabricated of cast iron or steel. Equip bracket hubs or barrel plugs with pre-lubricated ball bearings, shielded or sealed.

E. Guides: Standard formed sections or angles of steel.
   1. Thickness: Minimum 5 mm (3/16 inch).
   2. Profile: Channel of sufficient depth to retain door in place under the horizontal pressure specified, and prevent ends of door from slipping out of guides. Flare guides at top to facilitate door // and grille // installation.
   3. Provide stops to limit door // and grille // travel above top of guides.
   4. Provide guides with replaceable wear strips to prevent metal to metal contact.
   5. Provide mounting brackets for closure between guides and jambs.

F. Locking:
   1. Cylinder Locks: Accept standard screw in cylinders furnished under.
   2. Provide manufacturer's standard cylinder dead locking device on the inside at each door by turn knob.
   3. Electrically Operated Doors: Provide manufacturer's standard cylinder dead locking device on inside, key operated from both sides, interlocked with motor to prevent motor from operating when locks are activated.

2.6 ELECTRIC MOTOR OPERATORS

A. Provide operators complete with electric motor, machine cut reduction gears, steel chain and sprockets, magnetic brake, overload protection, brackets, push button controls, limit switches, magnetic reversing contactor, and other accessories necessary for proper operation including emergency manual operator.

B. Design:
   1. Design operator so motor can be removed without disturbing limit-switch timing and without affecting emergency manual operators.

2. Make provision for emergency manual operation by chain-gear mechanism.
3. Arrange emergency manual operating mechanism so it can be immediately put into and out of operation from floor with electrical or mechanical device to disconnect motor from operating mechanism when emergency manual operating mechanism is engaged without affecting limit switch timing, in case of electrical power failure.
4. Provide interlock with motor to prevent motor from operating when manual locks are activated.

C. Motors: NEMA MG1; TENV open drip-proof, maximum 3600 rpm.
1. Power Characteristics: as indicated on drawings.
2. Single-phase motors: Maximum one starting contact without commutation.
3. High starting torque, reversible type, of sufficient horsepower and torque output to operate door in both directions from any position, and produce door /travel speed of 200 mm/second (8 inches/second), minimum, and 300 mm/s (12 inches/sec.), maximum, without exceeding rated capacity.

D. Controls: NEMA ICS 1 and NEMA ICS 2.
1. Enclosures: NEMA ICS 6, Type 12 or Type 4, except contractor enclosures may be Type 1.
2. Provide each motor with an enclosed, across-the-line type, magnetic reversing contactor, thermal overload protection, solenoid operated brake, limit switches, and remote control switches at locations shown.
3. Provide key activated switches on exterior requiring constant pressure to operate.
4. Provide three-button type, push button switch on interior, unless noted to be key activated, with buttons marked, OPEN, CLOSE, and STOP.
   a. Type: Fully guarded to prevent accidental operation.
   b. OPEN and STOP Buttons: Momentary contact type.
   c. CLOSE Button: Constant contact type.
   d. When the door is in motion, pressing STOP button causes door to stop instantly and remain in stop position. From stop position, pressing OPEN or CLOSE buttons will operate door.

5. Provide field adjustable, limit switches to automatically stop doors at fully open and closed positions. Locate limit switches to be readily accessible for adjustment.
6. Safety device:
   a. Provide UL 325, noncontact sensors for garage door operators with photoelectric sensors in opening of electrically operated doors to disrupt the door’s operation when an object lies in the field of view and safety switches that reverse the door to an open position when extra current is used by the motor when encountering an obstruction.
   b. Upon safety device and control system failure, immediately stop, reverse, and fully open doorsand lock out electrical controls. Permit continued manual operation until electrical controls are repaired.
   c. Do not use safety device as limit switch.
7. Transformer: NEMA ST 20.
   a. Control transformer in power circuits as required to reduce Voltage on control circuits to 120 Volts or less.
8. Electrical Components: Comply with NFPA 70.
   a. Hazardous Locations: UL Listed for specific hazard indicated on drawings.

2.7 MANUAL OPERATORS

A. Hand Chain Operation:
   1. Galvanized, endless chain operating over sprocket and extending to within 900 mm (3 feet) of floor.
   2. Obtain reduction through permanently lubricated gearing connected by roller chain and sprocket drive.
   3. Opening and Closing Force: Maximum 111 N (25 pound force).

2.8 FINISHES

A. Steel:
   1. Clean steel surfaces of scale, rust, oil, and grease.
   2. Apply light colored shop prime paint after fabrication.
      a. Non-Galvanized Steel: Treat to ensure maximum paint adhesion, and apply corrosion inhibitive primer.
      b. Galvanized Steel: Apply phosphate treatment and corrosion inhibitive primer.

2.9 ACCESSORIES

A. Galvanizing Repair Paint: MPI No. 18.

B. Alkyd Metal Primer: MPI No. 76.

C. Barrier Coating: ASTM D1187/1187M.

D. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings under direct supervision of manufacturer's representative or trained personnel.

1. Install fire-rated doors to comply with NFPA 80.

3.3 COILING DOOR INSTALLATION

A. Locate anchors and inserts for guides, brackets, motors, switches, hardware, and other accessories accurately.

B. Securely attach guides to adjoining construction with minimum 9 mm (3/8 inch) diameter bolts, spaced maximum 600 mm (24 inches) on center.

C. Locate control switches where shown.

1. Locate control switches minimum 1500 mm (5 feet) above floor line, so operating personnel have complete view of door.

D. Install electric devices and wiring as specified in DIVISION 26, ELECTRICAL and DIVISION 28, ELECTRONIC SAFETY AND SECURITY.

E. Isolate aluminum in contact with dissimilar metal, concrete and masonry by painting with coat of bituminous paint.

F. Paint aluminum in contact with wood or other absorptive materials with barrier coating.

G. Touch up damaged factory finishes.

H. Lubricate and adjust units to operate freely.

I. Touch up damaged factory finishes.

1. Galvanized Surfaces: Apply galvanizing repair paint.

2. Primed Surfaces: Apply touch up paint.

3.4 FIELD QUALITY CONTROL

A. Field Tests: Test fire-rated door closing and reset device after test is successfully completed.

3.5 CLEANING

A. Clean exposed doors surfaces. Remove contaminants and stains.

B. Polish exposed stainless steel surfaces.

3.6 PROTECTION

A. Protect coiling doors from construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

- - E N D - -

SECTION 08 71 00
DOOR HARDWARE

PART 1 - GENERAL

1.1 DESCRIPTION

A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

A. Caulking: Section 07 92 00 JOINT SEALANTS.

B. Application of Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES Section 08 33 00, COILING DOORS AND GRILLES

1.3 GENERAL

A. All hardware shall comply with ABAAS, (Architectural Barriers Act Accessibility Standard) unless specified otherwise.

B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).

C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.

D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.

E. The following items shall be of the same manufacturer, except as otherwise specified:

1. Mortise locksets.
2. Hinges for hollow metal and wood doors.
3. Surface applied overhead door closers.
4. Exit devices.
5. Floor closers.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:

1. Locks, latchsets, and panic hardware: 5 years.
2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).

B. Hardware Schedule: AHC certified hardware consultant to prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer’s Representative. Review the following:

1. Inspection of door hardware.
2. Job and surface readiness.
3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

1.9 INSTRUCTIONS

A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.

B. Keying: All cylinders shall be keyed into existing Grand Master Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Keying information shall be furnished at a later date by the COR.

1. Keying information will be furnished to the Contractor by the COR.

2. Supply information regarding key control of cylinder locks to manufacturers of equipment having cylinder type locks. Notify COR immediately when and to whom keys or keying information is supplied. Return all such keys to the COR.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. ASTM International(ASTM):

F883-13.....Padlocks

E2180-18.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

A156.2-03.....Bored and Pre-assembled Locks and Latches

A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts

A156.4-08.....Door Controls (Closers)

A156.5-14.....Cylinders and Input Devices for Locks.

A156.6-05.....Architectural Door Trim

A156.8-05.....Door Controls-Overhead Stops and Holders

A156.11-14.....Cabinet Locks

A156.12-05 .....Interconnected Locks and Latches

A156.13-05.....Mortise Locks and Latches Series 1000

A156.14-07 .....Sliding and Folding Door Hardware

A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical

A156.16-08.....Auxiliary Hardware

A156.17-04 .....Self-Closing Hinges and Pivots

A156.18-06.....Materials and Finishes

A156.20-06 .....Strap and Tee Hinges, and Hasps

A156.21-09.....Thresholds

A156.22-05.....Door Gasketing and Edge Seal Systems

A156.23-04.....Electromagnetic Locks

A156.24-03.....Delayed Egress Locking Systems

A156.25-07 .....Electrified Locking Devices

A156.26-06.....Continuous Hinges

A156.28-07 .....Master Keying Systems

A156.29-07 .....Exit Locks and Alarms

A156.30-03 .....High Security Cylinders

A156.31-07 .....Electric Strikes and Frame Mounted Actuators

A156.36-10.....Auxiliary Locks

A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Other Opening Protectives

101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 CONTINUOUS HINGES

A. ANSI/BHMA A156.26, Grade 1-600.

1. Listed under Category N in BHMA's "Certified Product Directory."

B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete

C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.

1. Base Metal for Exterior Hinges: Stainless steel.
2. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
3. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
4. Provide with manufacturer’s cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
5. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.

6. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

2.2 DOOR CLOSING DEVICES

A. Closing devices shall be products of one manufacturer for each type specified.

2.3 OVERHEAD CLOSERS

A. Conform to ANSI A156.4, Grade 1.

B. Closers shall conform to the following:

1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
2. Where specified, closer shall have hold-open feature.
3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
4. Material of closer body shall be forged or cast.
5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.

10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½″ (38mm) minimum piston diameter.

2.4 DOOR STOPS

A. Conform to ANSI A156.16.

B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use expansion shields for mounting door stops.

C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.

D. Provide floor stops (Type L02141 or L02161) in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.

E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.

F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.

G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.

H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.

I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.

J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.

K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.

L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.5 OVERHEAD DOOR STOPS AND HOLDERS

A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.6 FLOOR DOOR HOLDERS

A. Conform to ANSI Standard A156.16. Provide extension strikes for Types L01301 and L01311 holders where necessary.

2.7 LOCKS AND LATCHES

A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer’s fire label. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.

B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health)

areas, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching [_____]. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.

2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match design selected by Architect or to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.36.
4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.

2.8 KEYS

A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	**Quantity**
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way

Locks/Keys	Quantity
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

B. Psychiatric keys shall be cut so that first two bittings closest to the key shoulder are shallow to provide greater strength at point of greatest torque.

2.9 KEY CABINET

A. ANSI Standard A156.11. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent. Provide minimum number of multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.

B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."

C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.

D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the COR.

2.10 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

A. Conform to ANSI Standard A156.6.

B. Provide protective plates as specified below:

1. Kick plates, mop plates and armor plates of metal, Type J100 series.
2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
3. Kick plates and/or mop plates are not required on following door sides:
   a. Armor plate side of doors;
   b. Exterior side of exterior doors;
   c. Closet side of closet doors;
   d. Both sides of aluminum entrance doors.
4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of

bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.11 EXIT DEVICES

A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.

C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.

D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.

E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.

F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.12 FLUSH BOLTS (LEVER EXTENSION)

A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.

B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.

C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).

D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.

E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

2.13 FLUSH BOLTS (AUTOMATIC)

A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).

B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.

2.14 DOOR PULLS WITH PLATES

A. Conform to ANSI A156.6. Pull Type J401, 152 mm CTC (6 inches CTC) length by 19 mm (3/4 inches) diameter minimum with plate Type J302, 90 mm by 381 mm (3-1/2 inches by 15 inches), unless otherwise specified. Provide pull with projection of 57.2 mm (2 1/4 inches) minimum and a clearance of 38.1 mm (1 1/2 inches) minimum. Cut plates of door pull plate for cylinders, or turn pieces where required.

2.15 PUSH PLATES

A. Conform to ANSI A156.6. Metal, Type J302, 203 mm (8 inches) wide by 406.4 mm (16 inches) high. Provide metal Type J302 plates 102 mm (4 inches) wide by 406.4 mm (16 inches) high where push plates are specified for doors with stiles less than 203 mm (8 inches) wide. Cut plates for cylinders, and turn pieces where required.

2.16 COMBINATION PUSH AND PULL PLATES

A. Conform to ANSI 156.6. Type J303, stainless steel 3 mm (1/8 inch) thick, 80 mm (3-1/3 inches) wide by 800 mm (16 inches) high), top and bottom edges shall be rounded. Secure plates to wood doors with 38 mm (1-1/2 inch) long No. 12 wood screws. Cut plates for turn pieces, and cylinders where required. Pull shall be mounted down.

2.17 COORDINATORS

A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door.

Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

2.18 THRESHOLDS

A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.

B. For thresholds at elevators entrances see other sections of specifications.

C. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.

D. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) beyond face of frame.

2.19 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS

A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.20 WEATHERSTRIPS (FOR EXTERIOR DOORS)

A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length (0.000774m^3/s/m).

2.21 MISCELLANEOUS HARDWARE

A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E07213, conforming to ANSI A156.11. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.

B. Cylinders for Various Partitions and Doors: Key cylinders same as entrance doors of area in which partitions and door occur, // except as

otherwise specified //. Provide cylinders to operate locking devices where specified for following partitions and doors:

1. Folding doors and partitions.
2. Wicket door (in roll-up door assemblies).
3. Slide-up doors.
4. Swing-up doors.
5. Fire-rated access doors-Engineer's key set.
6. Doors from corridor to electromagnetic shielded room.
7. Day gate on vault door.

C. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

2.22 FINISHES

A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.

B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.

C. Miscellaneous Finishes:

1. Hinges --exterior doors: 626 or 630.
2. Hinges --interior doors: 652 or 630.
3. Pivots: Match door trim.
4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
5. Thresholds: Mill finish aluminum.
6. Cover plates for floor hinges and pivots: 630.
7. Other primed steel hardware: 600.

D. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.

2.23 BASE METALS

A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

A. For new buildings locate hardware on doors at heights specified below, with all hand-operated hardware centered within 864 mm (34 inches) to 1200 mm (48 inches), unless otherwise noted:

B. Hardware Heights from Finished Floor:

1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
3. Deadlocks centerline of strike 1219 mm (48 inches).
4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
5. Centerline of door pulls to be 1016 mm (40 inches).
6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with hex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

Door Thickness	**Door Width**	**Hinge Height**
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

Door Description	**Number butts**
Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical

Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:

1. Re-adjust hardware.
2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
3. Identify items that have deteriorated or failed.
4. Submit written report identifying problems.

3.4 DEMONSTRATION

A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

HW-7

Each Motorized Roll-up Door to Have:	NON-RATED
1 Key Cylinder (for keyswitch)	TYPE AS REQUIRED

BALANCE OF HARDWARE BY SECTION 08 33 00, COILING DOORS AND GRILLES

C. **EXTERIOR SINGLE DOORS**

HW-E1

Each Door to Have:	NON-RATED
1 Continuous Hinge	
1 Entry Lock	F11
1 Latch Protector (outswing dr)	
1 Closer	C02011/C02021
1 Kick Plate	J102
1 Floor Stop	L02121 x 3 FASTNERS
1 Threshold (outswing door)	J32120 x SILICONE GASKET
1 Threshold (inswing door)	ALUMINUM, PER ARCHITECTURAL DETAIL
1 Door Sweep	R0Y416
1 Set Frame Seals	R0Y164
1 Drip	R0Y976

- - - E N D - - -

DIVISION 09 - FINISHES

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 **DESCRIPTION**

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting interior concrete block exposed to view.
7. Painting gypsum drywall exposed to view.
8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 **RELATED WORK**

A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.

B. Division 05 METALS: Shop prime painting of steel and ferrous metals.

C. Section 09 06 00, SCHEDULE FOR FINISHES: Type of Finish, Color, and Gloss Level of Finish Coat.

D. Section 09 94 19, MULTICOLOR INTERIOR FINISHING: Multi-color Textured Wall Finish.

E. Division 26 ELECTRICAL: Shop prime painting of steel and ferrous metals.

1.3 **SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Painter qualifications.

C. Manufacturer's Literature and Data:

1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

D. Sample Panels:

1. After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified.
2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
   a. Federal Specification Number or manufacturers name and product number of paints used.

b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
c. Product type and color.
d. Name of project.

5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

E. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.

1.4 **DELIVERY AND STORAGE**

A. Deliver materials to site in manufacturer's sealed container marked to show following:

1. Name of manufacturer.
2. Product type.
3. Batch number.
4. Instructions for use.
5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:

1. Federal Specification Number, where applicable, and name of material.
2. Surface upon which material is to be applied.
3. Specify Coat Types: Prime; body; finish; etc.

C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 **QUALITY ASSURANCE**

A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.

B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total

coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 **REGULATORY REQUIREMENTS**

A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
2. Lead-Base Paint:
   a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
   b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
   c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
   d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
3. Asbestos: Provide materials that do not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints.

1.7 **SAFETY AND HEALTH**

A. Apply paint materials using safety methods and equipment in accordance with the following:

1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard

Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.

C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

1. The applicable manufacturer’s Material Safety Data Sheets (MSDS) or local regulation.
2. 29 CFR 1910.1000.
3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.8 **APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):

ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)

ACGIH TLV-DOC-2012......Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

C. ASME International (ASME):

A13.1-07(R2013).........Scheme for the Identification of Piping Systems

D. Code of Federal Regulation (CFR):

40 CFR 59...............Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Commercial Item Description (CID):

A-A-1272A...............Plaster Gypsum (Spackling Compound)

F. Federal Specifications (Fed Spec):

TT-P-1411A..............Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Master Painters Institute (MPI):

1.......................Aluminum Paint

3.......................Primer, Alkali Resistant, Water Based

4.......................Interior/ Exterior Latex Block Filler

5.....Exterior Alkyd Wood Primer
6.....Exterior, Latex for Exterior Wood Primer
7.....Exterior Oil Wood Primer
8.....Exterior Alkyd, Flat MPI Gloss Level 1
9.....Exterior Alkyd Enamel MPI Gloss Level 6
10.....Exterior Latex, Flat
11.....Exterior Latex, Semi-Gloss
15.....Exterior Latex, Low Sheen (MPI Gloss Level 3-4)
17.....Primer, Bonding, Waterbased
18.....Organic Zinc Rich Primer
22.....Aluminum Paint, High Heat (up to 590% - 1100F)
23.....Primer, Metal, Surface Tolerant

27.....Exterior / Interior Alkyd Floor Enamel, Gloss
31.....Polyurethane, Moisture Cured, Clear Gloss
36.....Knot Sealer
39.....Primer, Latex, for Interior Wood
40.....Exterior, Latex High Build
42.....Textured Coating, Latex, Flat
43.....Interior Satin Latex, MPI Gloss Level 4
44.....Interior Low Sheen Latex, MPI Gloss Level 2
45.....Interior Primer Sealer
46.....Interior Enamel Undercoat
47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
48.....Interior Alkyd, Gloss, MPI Gloss Level 6
50.....Interior Latex Primer Sealer
51.....Interior Alkyd, Eggshell, MPI Gloss Level 3
52.....Interior Latex, MPI Gloss Level 3
53.....Interior Latex, Flat, MPI Gloss Level 1
54.....Interior Latex, Semi-Gloss, MPI Gloss Level 5
59.....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss
60.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
66.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved)

67.....Interior Latex Fire Retardant, Top-Coat (ULC Approved)
68.....Interior/ Exterior Latex Porch & Floor Paint, Gloss
71.....Polyurethane, Moisture Cured, Clear, Flat
77.....Epoxy Cold Cured, Gloss
79.....Marine Alkyd Metal Primer
90.....Interior Wood Stain, Semi-Transparent
91.....Wood Filler Paste
94.....Exterior Alkyd, Semi-Gloss
95.....Fast Drying Metal Primer
98.....High Build Epoxy Coating
99.....Sealer, Water-based, for Concrete Floors
101.....Epoxy Anti-Corrosive Metal Primer
107.....Primer, Rust-Inhibitive, Water-based

108.....High Build Epoxy Coating, Low Gloss
113.....Elastomeric, Pigmented, Exterior, Water-based, Flat
114.....Interior Latex, Gloss
115.....Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)
118.....Dry Fall, Latex Flat
119.....Exterior Latex, High Gloss (acrylic)
134.....Galvanized Water Based Primer
135.....Non-Cementitious Galvanized Primer
138.....Interior High Performance Latex, MPI Gloss Level 2
139.....Interior High Performance Latex, MPI Gloss Level 3
140.....Interior High Performance Latex, MPI Gloss Level 4
141.....Interior High Performance Latex (SG) MPI Gloss Level 5
144.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 2)
145.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 3)
146.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 4)

151.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 3)

153.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 4)

163.....Exterior Water Based Semi-Gloss Light Industrial Coating, MPI Gloss Level 5

164.....Exterior, Water Based, Gloss, Light Industrial Coating, MPI Gloss Level 6

H. Society for Protective Coatings (SSPC):

SSPC SP 1-82(R2004).....Solvent Cleaning

SSPC SP 2-82(R2004).....Hand Tool Cleaning

SSPC SP 3-28(R2004).....Power Tool Cleaning

SSPC SP 10/NACE No.2....Near-White Blast Cleaning

SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. Maple Flooring Manufacturer’s Association (MFMA):

J. U.S. National Archives and Records Administration (NARA):

29 CFR 1910.1000.....Air Contaminants

K. Underwriter’s Laboratory (UL)

PART 2 - PRODUCTS

2.1 **MATERIALS:**

A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer’s technical data sheets for specified coatings and solvents.

2.2 **PAINT PROPERTIES:**

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.

D. //VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:

1. Flat Paints and Coatings: 50 gram/liter.

2. Non-flat Paints and Coatings: 150 gram/liter.
3. Dry-Fog Coatings: 400 gram/liter.
4. Primers, Sealers, and Undercoaters: 200 gram/liter.
5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 gram/liter.
6. Zinc-Rich Industrial Maintenance Primers: 340 gram/liter.
7. Pretreatment Wash Primers: 420 gram/liter.
8. Shellacs, Clear: 730 gram/liter.
9. Shellacs, Pigmented: 550 gram/liter. //

E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 **BIOBASED CONTENT**

A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer- Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer- Penetrating Liquid	79 percent biobased content

B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION

3.1 **JOB CONDITIONS:**

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day’s work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
   a. Less than 3 degrees C (5 degrees F) above dew point.
   b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
   c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer’s printed instructions.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will warm.
5. Apply only on clean, dry and frost-free surfaces except as follows:
   a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
   b. Concrete and masonry when permitted by manufacturer’s recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
   a. Apply in clean areas and in still air.
   b. Before varnishing vacuum and dust area.
   c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 **INSPECTION:**

A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 **GENERAL WORKMANSHIP REQUIREMENTS:**

A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.

B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.

C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.

D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.

E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.

F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.

G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.

H. All coats are to be dry to manufacturer’s recommendations before applying succeeding coats.

I. All suction spots or “hot spots” in plaster after the application of the first coat are to be touched up before applying the second coat.

J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

3.4 **SURFACE PREPARATION:**

A. General:

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
2. See other sections of specifications for specified surface conditions and prime coat.
3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer’s instructions and as herein specified, for each particular substrate condition.
4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
   a. Concrete: 12 percent.
   b. Fiber-Cement Board: 12 percent.
   c. Masonry (Clay and CMU’s): 12 percent.
   d. Wood: 15 percent.
   e. Gypsum Board: 12 percent.
   f. Plaster: 12 percent.

B. Wood:

1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
   a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
   b. Apply two coats of MPI 36 (Knot Sealer) over large knots.

5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
   a. Thin filler in accordance with manufacturer's instructions for application.
   b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

C. Ferrous Metals:
1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning).
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
   a. Fill flat head countersunk screws used for permanent anchors.
   b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Zinc-Coated (Galvanized) Metal Surfaces Specified Painted:
1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).

2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

E. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:
1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING Section 04 05 16, MASONRY GROUTING . Do not fill weep holes. Finish to match adjacent surfaces.
5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three (3) days and brush thoroughly free of crystals.
6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in Division 03, CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

F. Gypsum Plaster and Gypsum Board:
1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 **PAINT PREPARATION:**

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.

C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.

D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.

E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 **APPLICATION:**

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.

B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.

C. Apply each coat evenly and cover substrate completely.

D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.

E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.

1. Apply painting materials specifically required by manufacturer to be applied by spraying.
2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in “Building and Structural Work Field Painting”; “Work not Painted”; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.

F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 **PRIME PAINTING:**

A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.

B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.

D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.

E. Wood and Wood Particleboard:

1. Use same kind of primer specified for exposed face surface.
   a. Exterior wood: MPI 7 (Exterior Oil Wood Primer) for new construction and MPI 5(Exterior Alkyd Wood Primer) for repainting bare wood primer except where MPI 90 (Interior Wood Stain, Semi-Transparent) is scheduled.
   b. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.
   c. Transparent finishes as specified under “Transparent Finishes on Wood Except Floors Article” // and “Finish for Wood Floors Article” //.
2. Apply two (2) coats of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
3. Apply one (1) coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
5. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (UL Approved) to wood for fire retardant finish.

F. Metals except boilers, incinerator stacks, and engine exhaust pipes:

1. Steel and iron: .Use MPI 101 (Cold Curing Epoxy Primer)where (High Build Epoxy Coating finish is specified.
2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer)

G. Concrete Masonry Units except glazed or integrally colored and decorative units:
   1. MPI 4 (Block Filler) on interior surfaces.
   2. Prime exterior surface as specified for exterior finishes.

3.8 **EXTERIOR FINISHES:**

A. Apply following finish coats where specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Wood:
   1. Do not apply finish coats on surfaces concealed after installation, top and bottom edges of wood doors and sash, or on edges of wood framed insect screens.

C. Steel and Ferrous Metal:
   1. Two (2) coats of MPI 8 (Exterior Alkyd, Flat) on exposed surfaces, except on surfaces over 94 degrees C (201 degrees F).

D. Concrete Masonry Units:
   1. General:
      a. Where specified in Section 09 06 00, SCHEDULE FOR FINISHES or shown.
      b. Mix as specified in manufacturer's printed directions.
      c. Do not mix more paint than can be used within four (4) hours after mixing. Discard paint that has started to set.
      d. Dampen warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.
      e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.
   2. Use two (2) coats of TT-P-1411 (Paint, Co-polymer-Resin, Cementitious), unless specified otherwise.

3.9 **INTERIOR FINISHES:**

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Metal Work:
   1. Apply to exposed surfaces.
   2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
   3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:

a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) unless specified otherwise.

4.

C. Masonry and Concrete Walls:

1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
2. Two (2) coats of // MPI 53 (Interior Latex, Flat, MPI Gloss Level 1) (Interior Latex, Gloss).

3.10 **PAINT COLOR:**

A. Color and gloss of finish coats is to be selected by Owner.

B. Coat Colors:

1. Color of priming coat: Lighter than body coat.
2. Color of body coat: Lighter than finish coat.
3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

C. Painting, Caulking, Closures, and Fillers Adjacent to Casework:

1. Paint to match color of casework where casework has a paint finish.
2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.11 **MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE:**

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.

B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified below.

C. Paint various systems specified in Division 02 – EXISTING CONDITIONS, Division 21 – FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 – HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 – ELECTRONIC SAFETY AND SECURITY.

D. Paint after tests have been completed.

E. Omit prime coat from factory prime-coated items.

F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in “BUILDING AND STRUCTURAL WORK FIELD PAINTING”; “Building and Structural Work not Painted”.

H. Color:

1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.
2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:

.

a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
d. Federal Safety Red: Exposed fire protection piping, hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
e. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.
f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.

I. Apply paint systems on properly prepared and primed surface as follows:

1. Exterior Locations:
   a. Apply two (2) coats of MPI 94 (Exterior Alkyd, Semi-gloss) to the following ferrous metal items:
      Vent and exhaust pipes with temperatures under 94 degrees C(201 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
   b. Apply two (2) coats of MPI 10 (Exterior Latex, Flat) to galvanized and zinc-copper alloy metal.

2. Interior Locations:
   a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) to following items:
      Metal under 94 degrees C (201 degrees F) of items such as bare piping, fittings, hangers and supports.
      Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
      Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

3.12 **BUILDING AND STRUCTURAL WORK FIELD PAINTING:**

A. Painting and finishing of interior and exterior work except as specified here-in-after.
   1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
   2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
   3. Painting of ferrous metal and galvanized metal.
   4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
   5. Identity painting and safety painting.

B. Building and Structural Work not Painted:
   1. Prefinished items:
      a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
      b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
   2. Finished surfaces:
      a. Hardware except ferrous metal.
      b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
      c. Signs, fixtures, and other similar items integrally finished.
   3. Concealed surfaces:

a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
b. Inside walls or other spaces behind access doors or panels.
c. Surfaces concealed behind permanently installed casework and equipment.

4. Moving and operating parts:
   a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
   b. Tracks for overhead or coiling doors, shutters, and grilles.
5. Labels:
   a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
   b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Galvanized metal:
   a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
   b. Gas Storage Racks.
   c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.
8. Gaskets.
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.
15. Wood Shingles.

3.13 **IDENTITY PAINTING SCHEDULE:**

A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.

3.14 **LEGEND MAY BE IDENTIFIED USING SNAP-ON COIL PLASTIC MARKERS OR BY PAINT STENCIL APPLICATIONS.**

3.15 **APPLY LEGENDS ADJACENT TO CHANGES IN DIRECTION, ON BRANCHES, WHERE PIPES PASS THROUGH WALLS OR FLOORS, ADJACENT TO OPERATING ACCESSORIES SUCH AS VALVES, REGULATORS, STRAINERS AND CLEANOUTS A MINIMUM OF 12.2 M (40 FEET) APART ON STRAIGHT RUNS OF PIPING. IDENTIFICATION NEXT TO PLUMBING FIXTURES IS NOT REQUIRED.**

3.16 **LOCATE LEGENDS CLEARLY VISIBLE FROM OPERATING POSITION.**

3.17 **USE ARROW TO INDICATE DIRECTION OF FLOW USING BLACK STENCIL PAINT.**

3.18 **LEGEND NAME IN FULL OR IN ABBREVIATED FORM AS FOLLOWS:**

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
COLD WATER (DOMESTIC)	WHITE	GREEN	WHITE	C.W. DOM

3.19

3.20 **PROTECTION CLEAN UP, AND TOUCH-UP:**

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.

B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.

C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

DIVISION 10 - SPECIALTIES

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

SPEC WRITER NOTE:

PART 1 - GENERAL

1.1 DESCRIPTION

This section covers recessed fire extinguisher cabinets.

1.2 RELATED WORK

A. Acrylic glazing: Section 08 80 00, GLAZING.

B. Field Painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.4 APPLICATION PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Testing and Materials (ASTM):

D4802-15.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

Recessed type with flat trim of size and design shown.

2.2 FABRICATION

A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.

B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.

1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
2. Design doors to open 180 degrees.
3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

A. Finish interior of cabinet body with baked-on semigloss white enamel.

B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

PART 3 - EXECUTION

A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

B. Install cabinet so that the extinguisher height within meets the requirements of NFPA 10

- - - E N D - - -

DIVISION 11 - EQUIPMENT

SECTION 11 22 00

DRINKING WATER MASTER SPECIFICATION
SUBMERSIBLE MIXER

PART 1 – GENERAL

1. SCOPE
   A. This section covers submersible tank mixing systems up to 0.5 HP in size intended for continuous use while submersed in potable water storage tanks. Each mixer shall have the ability to function continuously on a year-round basis, regardless of drain and fill cycles. Each mixer shall consist of a water-filled submersible motor, an impeller and a non-submersible control center that houses all control electronics.

1.2 THE REQUIREMENT
   A. CONTRACTOR shall furnish a PWM150 PAX Mixer with SCADA Interface or PCC155 PAX Control Center and install submersible mixing system together with controls and accessories necessary for a complete and operable system.
   B. CONTRACTOR shall furnish electrical conduit with 208VAC Single Phase voltage and a Safety disconnect switch. Depending on the configured the following needs to be installed:
      1. A 20 Amp non-GFCI circuit breaker up to the point of installation of the mixing system utilizing a PAX control center.
   C. CONTRACTOR shall also provide conduit from control center or Safety disconnect to tank penetration for submersible motor cable and penetration through tank for same cable.

1.3 REFERENCE SPECIFICATIONS, CODES AND STANDARDS
   A. Comply with the applicable reference specifications as specified in the General Requirements
   B. Occupational Safety and Health Administration, OSHA
   C. NSF/ ANSI Standard 61
   D. Underwriters Laboratories Inc., UL 508

1.4 CONTRACTOR SUBMITTALS
   A. NSF Certification
      1. Copies of the NSF-61 certified listing for all material being placed inside the tank and headspace, including the motor and power cable.
   B. Installation, Operations, and Maintenance Manuals shall be obtained from the equipment manufacturer and submitted. The following sections shall be included:
      1. General equipment specifications and data sheets
      2. Installation, start-up, operation, and maintenance instructions
      3. Factory-recommended maintenance schedule
      4. Wiring diagrams specifying what electrical wiring needs to be done onsite during and prior to the installation, and by which responsible party
      5. List of equipment or tooling necessary for diagnostics, trouble-shooting, repair or general maintenance

1.5 QUALITY ASSURANCE
   A. Each mixing system shall be tested prior to deployment according to standard engineering practices at the factory testing facilities.

1.6 WARRANTY

   A. For the period of time beginning with shipment to Buyer and ending on the time periods listed below, the Product is warranted to be substantially free from defects in material and workmanship and to conform to Seller's specifications applicable to the Product –
      1. Three (3) years on all supplied parts
      2. Twelve (12) months

PART 2 – PRODUCTS

2.1 PERFORMANCE

A. Mixing system shall completely mix reservoir according to the following minimum performance requirements. These requirements can be measured and validated after installation by operators with readily-available tools such as temperature probes and total chlorine grab samplers.

1. Temperature Uniformity

For tanks up to 750,000 gallons in volume: All temperatures shall converge to within 0.50°C within 24 hours after mixer is installed and activated.

2. Disinfectant Residual Uniformity

For tanks up to 750,000 gallons in volume: Disinfectant residual within top five feet of tank and bottom five feet of tank will converge to within 0.20 ppm within 24 hours after mixer is installed and activated. During continuous operation of the mixer, disinfectant residual will converge to within 0.20 ppm at least once every 24 hours.

2.2 GENERAL

A. Mixing system consists of a spiral-shaped nozzle mounted in a submersible stainless steel casing. System is lowered to the tank floor and creates a vortical flow pattern inside the tank. Devices with an externally mounted pump shall not be acceptable. Mixer operation shall be independent of tank drain and fill cycles to ensure constant mixing. Mixer shall weigh less than 45 pounds (~20 kg) and be able to be hoisted, installed, and/or removed by on-site personnel without additional equipment needed, and so that there is no crush hazard or entanglement hazard present, and so that weight of mixer on tank floor does not cause damage to interior coating.

B. Mixing system inlet shall be elevated at a minimum of 6 inches above tank floor to avoid disturbing accumulated tank sediment or entraining particles and causing accelerated wear of moving parts.

C. Mixers using submersible pump with slit or “water sheet” or horizontal motor mounting designs are not acceptable.

D. Power source for mixer shall be 208VAC single phase power to allow unit to continue 24/7 operation.

2.3 CONSTRUCTION

A. Components – wet-side: shall be NSF/ANSI Standard 61 certified.

Equipment entering tank shall not adhere to, scratch or otherwise cause damage to internal tank coating or put undue stress on the materials of the tank construction. Equipment shall fit through a standard hatch of size 18” x18” or larger. CONTRACTOR shall verify location of penetration into tank to allow motor cable entry into the tank and protection against freezing/ice damage.

Each submersible mixer shall consist of the following components, regardless of the power source selected:

1. Nozzle

AISI Type 316 Stainless Steel
Electropolished to minimize surface corrosion

2. Nozzle housing

AISI Type 316 Stainless Steel
Brush finish to minimize surface corrosion
Buoyancy mechanism to keep nozzle pointing upright no matter the angle of the tank floor
Chlorine/chloramine resistant rubber foot pad to avoid scratching tank floor
Integrated power cable and lowering mechanism for simplicity

3. Motor

Stainless Steel 304 body
Chlorine/Chloramine resistant rubber seals
Fully submersible

B. Single Phase 115VAC or 230VAC configurations: Component – On/Off Safety Disconnect Switch with indicator light and SCADA Interface.

1. Enclosure
   Type 4X
   Lockable
   Weather Resistant
   Indicator light showing Mixer run status
   Manual On/Off Switch
   SCADA Interface: Digital output indicating motor running (Output contacts are SPDT, UL/CUR File E44211 Approved Contact Ratings)

2.4 CONTROLS

A. Each unit shall be equipped with all necessary controls, inter-wired, to provide the following minimum functions:
   1. On/Off switch to control power to mixer.
   2. Any other controls shown on electrical and instrumentation drawings

2.5 ACCEPTABLE MANUFACTURERS:

A. PAX Water Technologies (Richmond, California) or pre-approved alternate.
B. Acceptable alternates must be able to demonstrate meeting performance output and be approved (in-writing) by Engineer at least ten (10) days prior to bid opening.

PART 3 – EXECUTION

3.1 INSTALLATION

A. The CONTRACTOR shall furnish services of a factory-trained installation contractor or crew having experience with installation procedures and operation and maintenance requirements for the type of equipment installed under these specifications. Mixer must be able to be installed through an 18x18 inch hatch. Mixer must be able to be installed without draining tank or taking tank out of service. Wet-side of Mixer shall weigh less than 45 pounds (~20 kg) and dry-side shall weigh less than 50 pounds (~22 kg). Both wet-side and dry-side shall able to be hoisted, installed, and/or removed by on-site personnel without additional equipment needed, and so that there is no crush hazard or entanglement hazard present, and so that weight of mixer on tank floor does not cause damage to interior coating.

B. Tank penetration is recommended to be above tank water line, typically through the hatch side-wall.
   1. Fitting will prevent moisture intrusion into tank and ideally be horizontally oriented.
   2. Fitting shall be 1 inch diameter fitting to allow cable to pass through.
   3. Strain relief for power cable shall be part of the contractor-supplied fitting.

C. Installation of the in-tank (“wet-side”) components may be performed in any of the following ways
   1. Installation below a hatch opening in a full tank utilizing the Mixer power cord.
   2. Installation by personnel with confined space training while the tank is drained and empty.
   3. Installation by tank manufacturer personnel during tank manufacture.

D. Installation of the outside-of-tank (“dry-side”) components may be performed by:
   1. CONTRACTOR according to the manual provided.

E. The mixer and optional SCADA interface or control center shall be installed in accordance with approved procedures submitted and as shown, unless otherwise approved in writing from the Factory.

3.2 TRAINING

A. PAX Water Technologies staff (or their representatives) will instruct designated UTILITY personnel in the safe and proper operation of the PAX Water Mixer. This training will reference the operations manual provided with equipment, and show how to check for proper functioning of the equipment.

DIVISION 13 - SPECIAL CONSTRUCTION

SECTION 13 50 00

PERMANENT MECHANICALLY STABILIZED EARTH WALL WITH WELDED-WIRE FORM FACING

PART 1 GENERAL

1.1 SECTION INCLUDES

A. Permanent Mechanically Stabilized Earth (MSE) Wall with geogrid reinforcement and welded-wire form facing. Wall batter shall be greater than 70 degrees as measured from horizontal plane.

B. Face Fill and Reinforced Backfill.

C. Welded-Wire Facing Form

D. Geotextile, Drainage Composite, Drainage Pipe, Drainage Fill, and miscellaneous materials to construct the System.

1.2 RELATED SECTIONS

A. Document - Information Available to Bidders: Geotechnical Report; Bore hole locations and findings of subsurface materials.

B. Section 01 45 29 - Testing and Inspection Services.

C. Section 31 20 00 - Site Preparation.

D. Section 31 20 00 - Earthwork; Excavation and subgrade preparation.

E. Section 32 20 00 - Grading.

F. Section 31 20 00 - Excavation.

G. Section 31 20 00 - Fill and Backfill.

H. Section 31 20 00 - Lawns and Grasses; Ground cover at finished grade.

1.3 REFERENCES

A. American Association of State Highway and Transportation Officials (AASHTO)
   1. AASHTO M288 - Standard Specification for Geotextiles.
   2. AASHTO M252 – Standard Specification for Polyethylene Drainage Pipe.
   3. AASHTO M294 – Standard Specification for Polyethylene Drainage Pipe.
   4. AASHTO T267 – Standard Method of Test for Determination of Organic Content in Soils by Loss on Ignition.
   5. AASHTO T288 – Standard Method for Determinizing Minimum Laboratory Soil Resistivity.
   6. AASHTO T289 – Standard Method of Test for Determining pH of Soil for Use in Corrosion Testing.

B. ASTM, International
   1. ASTM A 82 – Standard Specification for Steel Wire.

2. ASTM A 123 – Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
3. ASTM A 185 – Standard Specification for Steel Welded.
4. ASTM A 641 – Standard Specification for Zinc-Coated (Galvanized) Carbon Steel Wire.
5. ASTM A 740 - Standard Specification for Hardware Cloth (Woven or Welded Galvanized Steel Wire Fabric).
6. ASTM D 422 – Gradation of Soils.
7. ASTM D 424 – Atterberg Limits of Soils.
8. ASTM D 698 - Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort.
9. ASTM D1556 - Standard Test Method for Density of Soil in Place by the Sand-Cone Method.
10. ASTM D 2167 - Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method.
11. ASTM D 2487 - Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System).
12. ASTM D 2922 - Standard Test Method for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth).
13. ASTM D 3017 - Standard Test Method for Water Content of Soil and Rock in Place by Nuclear Methods (Shallow Depth).
14. ASTM D 3034 – Standard Specification for PVC Pipe and Fittings.
15. ASTM D3080 - Standard Test Method for Direct Shear Test of Soils Under Consolidated Drained Conditions.
16. ASTM D 4327 – Standard Test Method for Anions in Water by Suppressed Ion Chromatography.
17. ASTM D 4354 - Standard Practice of Sampling Geosynthetics for Testing.
18. ASTM D 4595 - Standard Test Method of Tensile Properties of Geotextiles by the Wide Width Strip Method.
19. ASTM D4603 - Standard Test Method for Determining Inherent Viscosity of Poly(Ethylene Terephthalate) (PET) by Glass Capillary Viscometer.
20. ASTM D 4716 - Standard Test Method for Constant Head Hydraulic Transmissivity (In-Plane Flow) of Geotextiles and Geotextile Related Products.
21. ASTM D 4759 - Standard Practice for Determining the Specification Conformance of Geosynthetics.
22. ASTM D 4767 - Standard Test Method for Consolidated Undrained Triaxial Compression Test for Cohesive Soils.
23. ASTM D 4972 - Standard Test Method for pH of Soils.
24. ASTM D 5262 - Standard Test Method for Evaluating the Unconfined Tension Creep Behavior of Geosynthetics.
25. ASTM D 5818 - Standard Practice for Obtaining Samples of Geosynthetics from a Test Section for Assessment of Installation Damage.
26. ASTM D 6637 – Determining Tensile Properties of Geogrids by the Single or Multi-Rib Test Method.
27. ASTM D 6706 – Standard Test Method for Measuring Geosynthetic Pullout Resistance in Soil.
28. ASTM D 6992 – Standard Test Method for Accelerated Tensile Creep and Creep-Rupture of Geosynthetic Materials Based on Time -Temperature Superposition using the Stepped Isothermal Method.
29. ASTM D7409 - Standard Test Method for Carboxyl End Group Content of Polyethylene Terephthalate (PET) Yarns.

C. Geosynthetic Research Institute (GRI)
1. GRI-GG7 - Carboxyl End Group Content of PET Yarns.

2. GRI-GG8 - Determination of the Number Average Molecular Weight of PET Yarns Based on a Relative Viscosity Value.

D. National Highway Institute (NHI) / Federal Highway Administration
1. NHI-00-024 and NHI-00-025 – Mechanically Stabilized Earth Walls and Reinforced Soil Slopes Design and Construction Guidelines.

1.4 Design Requirements

A. Design Requirements: Design reinforced soil wall with welded-wire form facing system in conformance with the design guidelines of NHI-00-024 and NHI-00-025.

B. Design shall be prepared by a professional engineer registered in the state in which the project is located.

1.5 SUBMITTALS

A. Submit under provisions of Section 01300.

B. Manufacturer's certification that the system components meet the requirements of this specification.

C. Certification from the geogrid manufacturer certifying the polyester molecular weight exceeds 25,000 g/m when determined in accordance with GRI-GG7, and carboxyl end group count less than 30 when tested in accordance with GRI-GG8.

D. A set of detailed design plans sealed by a registered professional engineer licensed in the state of the project. The plans shall include plan and elevation views of each structure, cross sections, details, and dimensions necessary for construction.

E. Samples: Two samples of each component including:
1. Geogrid: Nominal 6 inch by 10 inch (150 mm by 250 mm) of each type required.
2. Geotextile, Erosion Control Blanket, and Drainage Composite: 4 inch by 6 inch (100 mm by 150 mm) pieces.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications: System components manufactured by licensees or by companies approved and authorized by the component supplier.

B. Installer Qualifications: Firm with documented experience of at least five projects of similar construction and scope. Include brief description of each project and name and phone number of owner's representative knowledgeable in each listed project.

C. MSE Wall Engineer: Firm with documented experience of at least five projects of similar construction and scope. Include brief description of each project and name and phone number of owner's representative knowledgeable in each listed project.

D. Owner shall provide soil testing and quality assurance inspection during earthwork and slope construction operations. Installer shall provide any quality control testing or inspection not provided by the Owner. Owner's quality assurance program does not relieve the installer of responsibility for quality control and wall performance.

E. Pre-Construction Meeting: Prior to construction of reinforced soil wall, conduct a meeting with the material suppliers, reinforced soil wall installer, and the Contractor to review the reinforced soil wall requirements. Notify the Owner and the Architect at least 3 days in advance of the time of the meeting.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store products in manufacturer's unopened packaging until ready for installation.

B. Prevent excessive mud, fluid concrete, epoxy, or other deleterious materials from contaminating system components.

C. Polymeric Materials: During storage, geosynthetic rolls shall be elevated off the ground and adequately covered to protect them from the following: site construction damage, precipitation, extended ultraviolet radiation including sunlight, chemicals that are strong acids or strong bases, flames including welding sparks, excess temperatures, and any other environmental conditions that may damage the physical property values of the geosynthetic.

D. Store and dispose of solvent-based materials, and materials used with solvent-based materials, in accordance with requirements of local authorities having jurisdiction.

1.8 PROJECT CONDITIONS

A. Do not place or compact fill material during wet or freezing weather that prevents achievement of specified compaction requirements.

PART 2 PRODUCTS

2.1 MANUFACTURERS

A. Geogrid shall be ERS soil reinforcement supplied Earth Retention, 231 Rope Mill Parkway, Woodstock, GA 30188..

B. Substitutions: Not permitted.

2.2 MATERIALS

A. System Description: MSE Wall with Welded-Wire Form Facing consists of a mechanically stabilized engineered backfill reinforced with polyester soil reinforcement products and wire form facing.

B. Primary/Structural geogrid shall be ERS 5 and ERS 8 as specified in the approved shop drawings.
   1. Long-term Allowable tensile strength shall be calculated as follows:
      a. Allowable Tensile Strength (T_a) shall be defined as T_{ult} / RF. Where RF = RF_{CR} x RF_D x RF_{ID}. Reduction Factor for Creep (RF_{CR}), Reduction Factor for Durability (RF_D), and Reduction Factor for Installation Damage (RF_{ID}).
      b. Ultimate Tensile Strength (T_{ult}) shall be the minimum average roll value (MARV) as tested per ASTM D 6637.
      c. Reduction Factor for Creep (RF_{CR}) shall be based on 75-year design life determined in accordance with ASTM D 5262 or ASTM D 6992. Reduction Factor for Creep (RF_{CR}) shall not be less than 1.5.

d. Reduction Factor for Installation Damage (RF_{ID}) shall be based on reinforced backfill type designated above or reinforced backfill gradation as indicated in the approved shop drawings or specifications. Installation damage testing and material sampling shall be in conformance with ASTM D 6637 and ASTM D 5818. Reduction Factor for Installation Damage (RF_{ID}) shall not be less than 1.05.

e. Reduction Factor for Durability (RF_D) shall be based on polyester fiber testing. Polyester fiber shall have a molecular weight ≥ 25,000 g/m per GRI-GG8 and a carboxyl end group (CEG) number ≤ 30 per GRI- GG7. Reduction Factor for Durability (RF_D) shall not be less than 1.10.

2. Soil Interaction Coefficient (C_i) value shall be determined from short-term effective stress pullout tests per ASTM D 6706 over the range of normal stresses encountered. The minimum C_i value shall not be less than 0.7, determined as follows:

$$C_i = \frac{F}{2L_{SN}\tan(f)}$$

a. F = Pullout force per ASTM D 6706, lb/ft (kN/m).
b. L = Geosynthetic embedment length during test, ft (m).
c. $_{SN}$ = Effective normal stress, psf (kPa).
d. f = Effective soil friction angle, degrees.

C. Intermediate or Slope Face Wrap Geogrid shall be ERS P11, as indicated in the approved shop drawings.

D. Drainage Fill: Free-draining, coarse-grained soil placed within subsurface drainage systems.
1. 100 percent passing a 1.5-inch (38 mm) sieve.
2. 95 to 100 percent passing a 1-inch (25 mm) sieve.
3. 25 to 60 percent passing a 1/2-inch (12mm) sieve.
4. 0 to 10 percent passing a No. 4 (4.25 mm) sieve.
5. 0 to 5 percent passing a No. 8 (2.36mm) sieve.

E. Stone Facing Fill: Free draining, uniformly graded, crushed stone placed behind wire-form facing system. Stone facing fill selection shall be consistent with openings in wire form facing, geogrid face wrap, or wire cloth to ensure fill retention.
1. 100 percent passing a 4-inch (100 mm) sieve
2. 0 – 3% percent passing a 1.5-inch (38 mm) sieve
3. Electrochemical Properties
   a. Resistivity > 3000 ohm-cm (AASHTO T 288)
   b. pH >5 and <10 (AASHTO T 289)
   c. Chlorides < 100 PPM (ASTM D 4327)
   d. Sulfates < 200 PPM (ASTM D 4327)
   e. Organic Content, 1% max. (AASHTO T 267)

F. Reinforced Backfill: Granular fill with a pH range of 3 to 9, when tested in accordance with AASHTO T 289 and graded as follows:
1. 100 percent passing a 3-inch (75 mm) sieve.
2. 100 to 75 percent passing a 3/4-inch (19 mm) sieve.
3. 100 to 20 percent passing a No. 4 sieve (4.75 mm).
4. 0 to 60 percent passing a No. 40 sieve (0.425 mm).
5. 0 to 35 percent passing a No. 200 sieve (0.075 mm).
6. PI ≤ 6
7. LL ≤ 30

G. Geotextile:
   1. Non-woven geotextile for drainage structures - AASHTO M288, Class 2 – 46 oz/sy minimum.
   2. Non-woven geotextile separator placed between reinforced backfill and stone facing fill at wall face – AASHTO M288, Class 2 – 6.0 oz/sy minimum.

H. Solid and Perforated or Slotted Drainage Pipe, where indicated in the approved shop drawings, shall be PVC meeting ASTM D3034 or polyethylene pipe meeting ASTM M252.

I. Welded-Wire Facing Forms for Permanent Retaining Wall: Steel welded wire mesh facing form, bent 90 degrees at long center line to form "L" shaped unit; vertical section as face to retain fill, and horizontal leg extending into fill; diagonal steel struts supporting top edge of vertical leg. Facing forms and struts shall be galvanized or as indicated in the approved shop drawings.
   1. Galvanized Steel Forms – 4.0 inches by 4.0 inches (100 mm by 100 mm)
      a. Wire Mesh Facing Unit: Galvanized, in accordance with ASTM A 82, ASTM A 185, and ASTM A 123.
      b. Wire Strut Type: Galvanized, in accordance with ASTM A 82 and ASTM A 641.
      c. Wire Mesh Spacing: 4 inches by 4 inches (100 mm by 100 mm) (horizontal x vertical wires) unless otherwise indicated on the Drawings.
      d. Wire Mesh Size: W4.0 minimum.
      e. Wire Strut Size: W4.0 minimum.
   2. Tie wire or cable ties to connect vertical wires of adjacent facing units.
   3. Where backfill is in direct contact wire form, the electrochemical properties of the backfill shall meet the requirements of Section 2.2.E.3.

J. Wire Form Hardware Backing Cloth: Where required or as indicated in the approved shop drawings. Wire form hardware backing shall be in accordance with ASTM A 740 and shall be placed directly behind the welded-wire facing form to retain soil. Openings shall not exceed ¼ inch (6.4mm). When indicated on the approved shop drawings, hardware cloth shall be galvanized in accordance with ASTM A 123 and PVC coated.

PART 3 EXECUTION

3.1 PREPARATION

A. Do not begin installation until excavation, foundation preparation and leveling pad have been completed, properly prepared, and inspected per project specifications.

B. If subgrade preparation is the responsibility of another installer, notify Architect / Owner's Geotechnical Engineer of unsatisfactory preparation. Do not begin work until unsatisfactory conditions have been rectified as directed by the Owner's Geotechnical Engineer.

C. Excavation:
   1. Excavate the subgrade vertically to the plan elevation and horizontally to the extent of the geogrid lengths.
   2. Remove soils not meeting required strength and replace with approved materials by the Owner's Geotechnical Engineer.
   3. Protect excavated materials to be used for backfilling the reinforcement zone from the weather.

D. Foundation Preparation:

1. In absence of specified ground improvement requirements in the plans and contract documents, the foundation for the reinforced fill and retained backfill shall be graded level for the entire area of the base of such backfills, plus an additional 12 inches on all sides, or to the limits shown in the shop drawings.
2. If structure is to be positioned on native soils, the top one (1) foot of native soil shall meet the requirements of the reinforced backfill material.
3. The contractor shall perform proof-rolling to evaluate the subgrade soils on which the structure will be constructed. Proof rolling shall be performed on the entire areas at the following locations:
   a. At the bottom of over excavation and recompaction/replacement zones.
   b. At the base of all structures.
   c. At the top of native soils that have been scarified, moisture-conditioned, and recompacted (if different from the bottom of over excavation and recompaction/replacement zones).
4. Proof-rolling shall be done immediately after subgrade compaction while the moisture content of the subgrade is at the moisture content that was used to achieve the required compaction.
   a. Proof-rolling shall be performed with a pneumatic-tired tandem axle roller with at least three wheels on each axle, a gross weight of 25 tons (50 kips), a minimum tire pressure of 75 pounds per square inch, and a minimum rolling width of 75 inches. A Caterpillar PS-300B (or PF-300B), Ingersoll-Rand PT-240R, BOMAG BW24R, Dynapac CP271, or equipment with equivalent capabilities shall be used for proof-rolling.
   b. Proof-rolling equipment shall be operated at a speed between 1.5 and 3 miles per hour, or slower as required by the Engineer to permit measurements of deformations, ruts and/or pumping.
   c. Proof-rolling shall be carried out in two directions at right angles to each other with no more than 24 inches (600mm) between tire tracks of adjacent passes. Operate proof-roller in a pattern that readily allows recording of deformation data and complete coverage of the subgrade.
   d. The following actions shall be taken based on results of proof-rolling, or as directed by the Engineer:
      1) Rutting less than ¼-inch – Acceptable.
      2) Rutting greater than ¼-inch and less than 1 ½ inches – Scarify and recompact.
      3) Rutting greater than 1 ½ inches – The compacted area shall be removed and reconstructed.
      4) Pumping (deformation that rebounds, or materials that are squeezed out of a wheel's path) greater than one (1) inch – Area shall be remediated as directed by the Engineer.
5. Over-excavated areas of the subgrade shall be filled in maximum loose lifts of 10 inches (250 mm) and shall be compacted to a minimum of 95 percent Standard Proctor Dry Density with -1% to +2% of optimum moisture content in accordance with ASTM D 698, or more stringent criteria if directed by the Engineer.
6. Owner's Geotechnical Engineer will inspect the subgrade soil for the reinforced fill and retained backfill zone to ensure proper bearing strength in accordance with the specified Field Quality Control provisions.
7. The contractor shall be responsible for maintaining the condition of approved proof-rolled soils throughout the duration of the structure construction. Construction shall not commence until the foundation/subgrade has been approved by the Engineer.

3.2 CONSTRUCTION

A. Construct reinforced soil system in accordance with the approved shop drawings and Construction and Quality Control Manual supplied by the manufacturer.

B. Welded-Wire Facing Form Installation:
1. Place the first course of wire mesh facing forms with the horizontal legs resting on the foundation material.
2. Verify that the first row of facing forms is level from end to end and from front-to-back.
3. Overlap or butt the adjacent facing units, as indicated in the approved shop drawings. Tie together vertical wires of adjacent facing units as required to maintain alignment and prevent escape of backfill material.
4. Use a string line or equivalent to align straight sections.
5. Place subsequent courses of facing forms on previous courses, at a setback, if any, as shown on shop drawings.
6. Align subsequent courses of facing forms using a string line or other suitable method that is independent of the final position of the underlying course of facing forms.

C. Geogrid placement:
1. Geogrid shall be buried (or covered) within one (1) week of placement.
2. Unroll the geogrid and cut to the length indicated in the approved shop drawings.
3. Place geogrid on level and compacted reinforced fill at locations indicated in the approved shop drawings.
4. Primary strength direction of the structural geogrid shall be placed perpendicular to the wall.
5. Unroll and place face wrap geogrid or geotextile parallel to the wall face unless otherwise shown on shop drawings. Face wrap may be cut to the required width prior to unrolling.
6. Wrap the backfill as indicated on the approved shop drawings.
7. Place the structural geogrid over the horizontal leg of the facing units and face wrap materials. The edge of structural geogrids shall be positioned immediately behind vertical face of the unit.
8. After placement of geogrid and any required face wrap, place six (minimum) wire support struts on approximately 24-inch (600mm) centers connecting the upper horizontal wire on the face of facing form to the transverse wire at the rear of the facing form. Place one of the support struts at each end of the facing unit between the outer two vertical wires.
9. Prior to fill placement, pull the structural geogrid taut to remove slack. Stake or pin the geogrid near the end to maintain alignment and to prevent development of slack during backfill placement.
10. The top portion of the face wrap geogrid shall be pulled taut and secured (stake or pin) prior to placement of next wire form and backfill. Face wrap geogrid shall be taut without wrinkles or slack.
11. Place and compact the face fill and reinforced backfill in accordance with the project specifications and approved shop drawings.
12. Adjacent embedment lengths of structural geogrid shall abut to provide 100% coverage at elevations requiring geogrid reinforcement, as indicated in the approved shop drawings.
13. Overlap ends of adjacent sections of wall face wrap geogrid a minimum of 3 inches (75 mm). No fill is required between 3-inch (75-mm) overlap of wall face wrap geogrid.
14. Place a minimum of 3 inches (75 mm) of fill between overlapping layers of structural geogrid where overlapping occurs behind curves and corners of a wall.
15. Construction vehicles shall not be operated directly on the geogrid. A minimum of 6 inches (150 mm) of fill cover over the geogrid is required for operation of construction vehicles in the reinforced zone.
16. Turning of vehicles should be avoided to prevent dislocation or damage to the geogrid and the facing units.

17. Geogrid may not be overlapped or connected mechanically to form splices in the primary strength direction.

D. Reinforced backfill:
   1. Place the reinforced backfill material in maximum compacted lifts of 9 inches (226 mm) and compact to a minimum Standard Proctor Dry Density of 95 percent within -1 to +2 percent of optimum moisture content, per ASTM D 698.
   2. Use only walk-behind compaction equipment within 3 feet (1 meter) of the facing units. Use a minimum of 3 passes to compact this zone. Compact to 95% minimum density as determined by ASTM D698 or acceptable method.
   3. Required level of compaction shall be achieved throughout the entire reinforced backfill zone, as measured from the back of the facing unit to the end of geogrid reinforcement. Reinforced fill zone limits shall be as indicated on the approved shop drawings.
   4. Smooth and level the backfill as indicated so that the geogrid lays flat. Grade shall not slope towards facing units.
   5. Separate reinforced fill from the adjacent soil with geotextile, as indicated in the approved shop drawings

3.3 FIELD QUALITY CONTROL

A. Quality Assurance: Testing and Inspection will be provided by the Owners Testing Agency as specified in Section 01400 Testing and Inspection Services. Notify the Architect / Owner's Geotechnical Engineer 72 hours in advance of testing.

B. Quality Control: Testing and Inspection shall be provided by an independent laboratory provided by the Contractor and acceptable to the Architect / Owner's Geotechnical Engineer.

C. The reinforced backfill shall be sampled and tested by the Contractor for acceptance and quality control in accordance with the following:
   1. Gradation Test – ASTM D 422
      a. One test per 2,000 cubic yards at job site
      b. Change in appearance or behavior of backfill
      c. Change in borrow source
   2. Plasticity Index – ASTM D 424
      a. One test per 2,000 cubic yards at job site
      b. Change in appearance or behavior of backfill
      c. Change in borrow source
   3. Soil pH – ASTM D 4972
      a. One test per 2,000 cubic yards at job site
      b. Change in appearance or behavior of backfill
      c. Change in borrow source
   4. Field Density Testes – ASTM D 1556, D 2167, or D 2922 as appropriate for material tested and Moisture Test – ASTM D 3017
      a. Compaction control testing of the reinforced backfill should be performed on a regular basis during the entire construction project. Conduct compaction control test (Density and Moisture) at a minimum rate of
         1) One test within the reinforced backfill zone per every 5 ft (1.5 m) of vertical height for every 100 ft (30 m) of length, approximately every 500 square feet (45 square meters) of vertical face area.
         2) One test per 2,000 cubic yards at job site
         3) The higher frequency of testing shall be required.
   5. Internal effective friction angle – ASTM D 3080
      a. One test per material change

b. One test per change in borrow source
c. New test shall be required for each source regardless of whether the USCS designation changes or not.

6. Proctor and Optimum Moisture by ASTM D 698
   a. One test per material change
   b. One test per change in borrow source
   c. New test shall be required for each source regardless of whether the USCS designation changes or not.

D. The retained backfill shall be sampled and tested by the Contractor for acceptance and quality control in accordance with the following:
   1. Gradation Test – ASTM D 422
      a. One test per 5,000 cubic yards at job site
      b. Change in appearance or behavior of backfill
      c. Change in borrow source
   2. Plasticity Index – ASTM D 424
      a. One test per 5,000 cubic yards at job site
      b. Change in appearance or behavior of backfill
      c. Change in borrow source
   3. Field Density Testes – ASTM D 1556, D 2167, or D 2922 as appropriate for material tested and Moisture Test – ASTM D 3017
      a. Compaction control testing of the reinforced backfill should be performed on a regular basis during the entire construction project. Conduct compaction control test (Density and Moisture) at a minimum rate of
         1) One test within the reinforced backfill zone per every 7 ft (2.1 m) of vertical height for every 150 ft (45.7 m) of length, approximately every 1050 square feet (97.5 square meters) of vertical face area.
         2) One test per 5,000 cubic yards at job site
         3) The higher frequency of testing shall be required.
   4. Internal effective friction angle – ASTM D 3080
      a. One test per material change
      b. One test per change in borrow source
      c. New test shall be required for each source regardless of whether the USCS designation changes or not.
   5. Proctor and Optimum Moisture by ASTM D 698
      a. One test per material change
      b. One test per change in borrow source
      c. New test shall be required for each source regardless of whether the USCS designation changes or not.

E. Minimum Frequency of Test for leveling pad and subgrade (foundation) soils, or as stated in the contract documents:
   1. Leveling Pad Trench: A minimum rate of one test per 100 feet (30 m) of trench.
   2. Subgrade Soil: A minimum rate of one test per 50 feet (15 m) length of structure.

END OF SECTION

DIVISION 22 - PLUMBING

SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section shall apply to all sections of Division 22.

B. Definitions:

1. Exposed: Piping and equipment exposed to view in finished rooms.
2. Exterior: Piping and equipment exposed to weather be it temperature, humidity, precipitation, wind or solar radiation.

C. Abbreviations/Acronyms:

1. ABS: Acrylonitrile Butadiene Styrene
2. AC: Alternating Current
3. ACR: Air Conditioning and Refrigeration
4. A/E: Architect/Engineer
5. AFF: Above Finish Floor
6. AFG: Above Finish Grade
7. AI: Analog Input
8. AISI: American Iron and Steel Institute
9. AO: Analog Output
10. ASHRAE: American Society of Heating Refrigeration, Air Conditioning Engineers
11. ASJ: All Service Jacket
12. ASME: American Society of Mechanical Engineers
13. ASPE: American Society of Plumbing Engineers
14. AWG: American Wire Gauge
15. BACnet: Building Automation and Control Network
16. BAg: Silver-Copper-Zinc Brazing Alloy
17. BAS: Building Automation System
18. BCuP: Silver-Copper-Phosphorus Brazing Alloy
19. bhp: Brake Horsepower
20. Btu: British Thermal Unit
21. Btu/h: British Thermal Unit per Hour
22. BSG: Borosilicate Glass Pipe
23. C: Celsius
24. CA: Compressed Air
25. CD: Compact Disk

26. CDA: Copper Development Association
27. CGA: Compressed Gas Association
28. CFM: Cubic Feet per Minute
29. CI: Cast Iron
30. CLR: Color
31. CO: Contracting Officer
32. COR: Contracting Officer’s Representative
33. CPVC: Chlorinated Polyvinyl Chloride
34. CR: Chloroprene
35. CRS: Corrosion Resistant Steel
36. CWP: Cold Working Pressure
37. CxA: Commissioning Agent
38. dB: Decibels
39. db(A): Decibels (A weighted)
40. DCW: Domestic Cold Water
41. DDC: Direct Digital Control
42. DFU: Drainage Fixture Units
43. DHW: Domestic Hot Water
44. DHWR: Domestic Hot Water Return
45. DHWS: Domestic How Water Supply
46. DI: Digital Input
47. DI: Deionized Water
48. DISS: Diameter Index Safety System
49. DN: Diameter Nominal
50. DO: Digital Output
51. DOE: Department of Energy
52. DVD: Digital Video Disc
53. DWG: Drawing
54. DWH: Domestic Water Heater
55. DWS: Domestic Water Supply
56. DWV: Drainage, Waste and Vent
57. ECC: Engineering Control Center
58. EL: Elevation
59. EMCS: Energy Monitoring and Control System
60. EPA: Environmental Protection Agency
61. EPACT: Energy Policy Act
62. EPDM: Ethylene Propylene Diene Monomer

63. EPT: Ethylene Propylene Terpolymer
64. ETO: Ethylene Oxide
65. F: Fahrenheit
66. FAR: Federal Acquisition Regulations
67. FD: Floor Drain
68. FDC: Fire Department (Hose) Connection
69. FED: Federal
70. FG: Fiberglass
71. FNPT: Female National Pipe Thread
72. FOR: Fuel Oil Return
73. FOS: Fuel Oil Supply
74. FOV: Fuel Oil Vent
75. FPM: Fluoroelastomer Polymer
76. FSK: Foil-Scrim-Kraft Facing
77. FSS: VA Construction & Facilities Management, Facility Standards Service
78. FU: Fixture Units
79. GAL: Gallon
80. GCO: Grade Cleanouts
81. GPD: Gallons per Day
82. GPH: Gallons per Hour
83. GPM: Gallons per Minute
84. HDPE: High Density Polyethylene
85. HEFP: Healthcare Environment and Facilities Program (replacement for OCAMES)
86. HEX: Heat Exchanger
87. Hg: Mercury
88. HOA: Hands-Off-Automatic
89. HP: Horsepower
90. HVE: High Volume Evacuation
91. Hz: Hertz
92. ID: Inside Diameter
93. IE: Invert Elevation
94. INV: Invert
95. IPC: International Plumbing Code
96. IPS: Iron Pipe Size
97. IW: Indirect Waste

98. IWH: Instantaneous Water Heater
99. Kg: Kilogram
100. kPa: Kilopascal
101. KW: Kilowatt
102. KWH: Kilowatt Hour
103. lb: Pound
104. lbs/hr: Pounds per Hour
105. LNG: Liquid Natural Gas
106. L/min: Liters per Minute
107. LOX: Liquid Oxygen
108. L/s: Liters per Second
109. m: Meter
110. MA: Medical Air
111. MAWP: Maximum Allowable Working Pressure
112. MAX: Maximum
113. MBH: 1000 Btu per Hour
114. MED: Medical
115. MER: Mechanical Equipment Room
116. MFG: Manufacturer
117. mg: Milligram
118. mg/L: Milligrams per Liter
119. ml: Milliliter
120. mm: Millimeter
121. MIN: Minimum
122. MV: Medical Vacuum
123. N2: Nitrogen
124. N20: Nitrogen Oxide
125. NC: Normally Closed
126. NF: Oil Free Dry (Nitrogen)
127. NG: Natural Gas
128. NIC: Not in Contract
129. NO: Normally Open
130. NOM: Nominal
131. NPTF: National Pipe Thread Female
132. NPS: Nominal Pipe Size
133. NPT: Nominal Pipe Thread
134. NTS: Not to Scale

135. O2: Oxygen
136. OC: On Center
137. OD: Outside Diameter
138. OSD: Open Sight Drain
139. OS&Y: Outside Stem and Yoke
140. PA: Pascal
141. PBPU: Prefabricated Bedside Patient Units
142. PD: Pressure Drop or Difference
143. PDI: Plumbing and Drainage Institute
144. PH: Power of Hydrogen
145. PID: Proportional-Integral-Differential
146. PLC: Programmable Logic Controllers
147. PP: Polypropylene
148. ppb: Parts per Billion
149. ppm: Parts per Million
150. PSI: Pounds per Square Inch
151. PSIA: Pounds per Square Inch Atmosphere
152. PSIG: Pounds per Square Inch Gauge
153. PTFE: Polytetrafluoroethylene
154. PVC: Polyvinyl Chloride
155. PVDF: Polyvinylidene Fluoride
156. RAD: Radians
157. RO: Reverse Osmosis
158. RPM: Revolutions Per Minute
159. RTD: Resistance Temperature Detectors
160. RTRP: Reinforced Thermosetting Resin Pipe
161. SAN: Sanitary Sewer
162. SCFM: Standard Cubic Feet per Minute
163. SDI: Silt Density Index
164. SMACNA: Sheet Metal and Air Conditioning Contractors National Association
165. SPEC: Specification
166. SPS: Sterile Processing Services
167. SQFT/SF: Square Feet
168. SS: Stainless Steel
169. STD: Standard
170. SUS: Saybolt Universal Second

171. SWP: Steam Working Pressure
172. TD: Temperature Difference
173. TDH: Total Dynamic Head
174. TEFC: Totally Enclosed Fan-Cooled
175. TEMP: Temperature
176. TFE: Tetrafluoroethylene
177. THERM: 100,000 Btu
178. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
179. THWN: Thermoplastic Heat & Water Resistant Nylon Coated Wire
180. TIL: Technical Information Library
     http//www.cfm.va.gov/til/indes.asp
181. T/P: Temperature and Pressure
182. TYP: Typical
183. USDA: U.S. Department of Agriculture
184. V: Vent
185. V: Volt
186. VA: Veterans Administration
187. VA CFM: VA Construction & Facilities Management
188. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
189. VAC: Vacuum
190. VAC: Voltage in Alternating Current
191. VAMC: Veterans Administration Medical Center
192. VHA OCAMES: This has been replaced by HEFP.
193. VSD: Variable Speed Drive
194. VTR: Vent through Roof
195. W: Waste
196. WAGD: Waste Anesthesia Gas Disposal
197. WC: Water Closet
198. WG: Water Gauge
199. WOG: Water, Oil, Gas
200. WPD: Water Pressure Drop
201. WSFU: Water Supply Fixture Units

SPEC WRITER NOTE: See standard details SD220511-02.DWG, SD220511-03.DWG, and SD220511-04.DWG available at http://www.cfm.va.gov/til/sDetail.asp.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

E. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout.

F. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.

G. Section 07 92 00, JOINT SEALANTS.

H. Section 09 91 00, PAINTING.

I. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

J. Section 23 09 24, WATER QUALITY MONITORING.

K. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

L. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

M. Section 31 20 00, EARTH MOVING: Excavation and Backfill.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

B31.1-2013.....Power Piping

ASME Boiler and Pressure Vessel Code -

BPVC Section IX-2019.... Welding, Brazing, and Fusing Qualifications

C. American Society for Testing and Materials (ASTM):

A36/A36M-2019.....Standard Specification for Carbon Structural Steel

A575-96(2013)e1.....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

E84-2013a.....Standard Test Method for Surface Burning Characteristics of Building Materials

E119-2012a.....Standard Test Methods for Fire Tests of Building Construction and Materials

D. International Code Council, (ICC):

IBC-2018.....International Building Code

IPC-2018.....International Plumbing Code

E. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:

SP-58-2018.....Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application and Installation

F. Military Specifications (MIL):

P-21035B.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

G. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

H. National Fire Protection Association (NFPA):

51B-2019.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

54-2018.....National Fuel Gas Code

70-2020.....National Electrical Code (NEC)

99-2018.....Healthcare Facilities Code

I. NSF International (NSF):

5-2019.....Water Heaters, Hot Water Supply Boilers, and Heat Recovery Equipment

14-2019.....Plastic Piping System Components and Related Materials

61-2019.....Drinking Water System Components – Health Effects

372-2016.....Drinking Water System Components – Lead Content

J. Department of Veterans Affairs (VA):

PG-18-102014(R18).....Plumbing Design Manual

PG-18-13-2017(R18).....Barrier Free Design Guide

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular

maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor’s responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor’s responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient installation. Final review and approvals will be made only by groups.

G. Manufacturer's Literature and Data including: Manufacturer’s literature shall be submitted under the pertinent section rather than under this section.

1. Electric motor data and variable speed drive data shall be submitted with the driven equipment.
2. Equipment and materials identification.
3. Firestopping materials.

4. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
5. Wall, floor, and ceiling plates.

H. Coordination/Shop Drawings:

1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to 1 foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.
3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for plumbing systems, provide details of the following:
   a. Mechanical equipment rooms.
   b. Hangers, inserts, supports, and bracing.
   c. Pipe sleeves.
   d. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

I. Plumbing Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   a. Include complete list indicating all components of the systems.
   b. Include complete diagrams of the internal wiring for each item of equipment.

c. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

J. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS.

K. Submit training plans, trainer qualifications and instructor qualifications in accordance with the requirements of Section 22 08 00 COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical, and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional plumbing.

B. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture, supply and servicing of the specified products for at least 5 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least 5 years.

2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and

e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.

3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Contracting Officers Representative (COR).
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos is prohibited.
9. Bio-Based Materials: For products designated by the USDA’s bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

C. Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
   1. Qualify welding processes and operators for piping according to ASME BPVC, Section IX, "Welding and Brazing Qualifications". Provide proof of current certification to CO.
   2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
   3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
   4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the association code.

D. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

E. Execution (Installation, Construction) Quality:
   1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract documents shall be referred to the COR for resolution. Printed copies or electronic files of manufacturer’s installation instructions shall be provided to the COR at least 10 working days prior to commencing installation of any item.
   2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include but are not limited to: all types of valves, filters and strainers, transmitters, and control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to COR for resolution. Failure of the Contractor to resolve or call attention to any discrepancies or

deficiencies to the COR will result in the Contractor correcting at no additional cost or time to the Government.

3. Installer Qualifications: Installer shall be licensed and shall provide evidence of the successful completion of at least five projects of equal or greater size and complexity. Provide tradesmen skilled in the appropriate trade.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

F. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

G. Guaranty: Warranty of Construction, FAR clause 52.246-21.

H. Plumbing Systems: IPC, International Plumbing Code. Unless otherwise required herein, perform plumbing work in accordance with the latest version of the IPC. For IPC codes referenced in the contract documents, advisory provisions shall be considered mandatory, the word “should” shall be interpreted as “shall”. Reference to the “code official” or “owner” shall be interpreted to mean the COR.

I. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC). All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not

the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.

2. Damaged equipment shall be replaced with an identical unit as determined and directed by the COR. Such replacement shall be at no additional cost or additional time to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
5. Protect plastic piping and tanks from ultraviolet light (sunlight) while in pre-construction. Plastic piping and tanks shall not be installed exposed to sunlight without metal jacketing to block ultraviolet rays.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three—ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or

any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.
2. As-built drawings are to be provided, with a copy of them on AutoCAD version 2023 provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.(Preferred option)

D. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics_), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

PART 2 - PRODUCTS

2.1 MATERIALS FOR VARIOUS SERVICES

A. Non-pressure PVC pipe shall contain a minimum of 25 percent recycled content. Steel pipe shall contain a minimum of 25 percent recycled content.

B. Plastic pipe, fittings and solvent cement shall meet NSF 14 and shall bear the NSF seal "NSF-PW". Polypropylene pipe and fittings shall comply with NSF 14 and NSF 61. Solder or flux containing lead shall not be used with copper pipe.

C. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption and shall be certified in accordance with NSF 61 or NSF 372.

D. In-line devices such as water meters, building valves, check valves, stops, valves, fittings, tanks and backflow preventers shall comply with NSF 61 and NSF 372.

E. End point devices such as drinking fountains, lavatory faucets, kitchen and bar faucets, ice makers supply stops, and end-point control valves used to dispense drinking water must meet requirements of NSF 61 and NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements.

B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly at no additional cost or time to the Government.

C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

2.3 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.4 ELECTRIC MOTORS, MOTOR CONTROL, CONTROL WIRING

A. All material and equipment furnished and installation methods used shall conform to the requirements of Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. All electrical wiring, conduit, and devices necessary for the proper connection, protection and

2.5 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown in the drawings, or shown in the maintenance manuals. Coordinate equipment and valve identification with local VAMC shops. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.

B. Control Items: All temperature, pressure, and controllers shall be labeled and the component’s function identified. Identify and label each item as they appear on the control diagrams.

C. Valve Tags and Lists:

1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19 gauge, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic-coated valve list card(s), sized 215 mm (8-1/2 inches) by 275 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. An additional copy of the valve list shall be mounted in picture frames for mounting to a wall. COR shall instruct Contractor where frames shall be mounted.
4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided in the 3-ring binder notebook.

2.6 PIPE PENETRATIONS

A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.

B. Pipe penetration sleeve materials shall comply with all firestopping requirements for each penetration.

C. To prevent accidental liquid spills from passing to a lower level, provide the following:

1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

D. Penetrations are prohibited through beams or ribs, but may be installed in concrete beam flanges, with structural engineer prior approval. Any deviation from these requirements must receive prior approval of COR.

E. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

F. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.

G. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel sleeve shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.

H. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with firestopping material and sealant to prevent the spread of fire, smoke, water and gases.

I. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

2.7 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch) pipe, 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.8 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping and shall be located clear of windows, doors, openings, light outlets, and other services and utilities.

B. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance, testing and operation of all devices including, but not limited to: all equipment items, valves, backflow preventers, filters, strainers, transmitters, sensors, meters and control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown in the drawings shall not be changed nor reduced.

C. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.

D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

E. Cutting Holes:

1. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.

2. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
3. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COR where working area space is limited.

F. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other services are not shown but must be provided.

G. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced at no additional cost or time to the Government.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

H. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, shall be used for all pad or floor mounted equipment.

I. Gauges, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gauges shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

J. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control

devices, control and instrumentation panels, alarms, instruments and computer workstations. Comply with NFPA 70.

K. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or additional time to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 PIPE AND EQUIPMENT SUPPORTS

A. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC) and these specifications.

B. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.

3.3 PLUMBING SYSTEMS DEMOLITION

A. Rigging access, other than indicated in the drawings, shall be provided after approval for structural integrity by the COR. Such access shall be provided at no additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to

the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards including NFPA 51B. Inspections will be made by personnel of the VAMC, and the Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

D. All valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate. Coordinate with the COR and Infection Control.

3.4 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:
   1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
   2. The following Material and Equipment shall NOT be painted:
      a. Motors, controllers, control switches, and safety switches.
      b. Control and interlock devices.
      c. Regulators.
      d. Pressure reducing valves.
      e. Control valves and thermostatic elements.
      f. Copper, brass, aluminum, stainless steel and bronze surfaces.
      g. Valve stems and rotating shafts.
      h. Pressure gauges and thermometers.
      i. Name plates.
   3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint type and color obtained from manufacturer or computer matched.

3.5 IDENTIFICATION SIGNS

A. Laminated plastic signs, with engraved lettering not less than 7 mm (3/16 inch) high, shall be provided that designates equipment function, for all switches, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.6 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.

C. When completion of certain work or systems occurs at a time when final control settings and adjustments cannot be properly made to make

performance tests, then conduct such performance tests and finalize control settings during the first actual seasonal use of the respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

D. Perform tests as required for commissioning provisions in accordance with Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS and Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

3.7 OPERATION AND MAINTENANCE MANUALS

A. All new equipment and all elements of each assembly shall be included.

B. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.

C. Manufacturer’s installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.

D. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.

E. Set points of all interlock devices shall be listed.

F. Trouble-shooting guide for the control system troubleshooting shall be inserted into the Operations and Maintenance Manual.

G. The control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.

H. Emergency procedures for shutdown and startup of equipment and systems.

3.8 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.9 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the requirements for general-duty valves for domestic water and sewer systems.

B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

E. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

F. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):
A112.14.1-2003.....Backwater Valves

C. American Society of Sanitary Engineering (ASSE):
1001-2017.....Performance Requirements for Atmospheric Type Vacuum Breakers
1003-2009.....Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems
1011-2017.....Performance Requirements for Hose Connection Vacuum Breakers
1020-2004.....Performance Requirements for Pressure Vacuum Breaker Assembly

D. American Society for Testing and Materials (ASTM):
A126-2004(R2019).....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

A276/A276M-2017.....Standard Specification for Stainless Steel Bars and Shapes
A536-1984(R2019e).....Standard Specification for Ductile Iron Castings
B62-2017.....Standard Specification for Composition Bronze or Ounce Metal Castings
B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

E. International Code Council (ICC):
IPC-2018.....International Plumbing Code

F. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):
SP-25-2018.....Standard Marking Systems for Valves, Fittings, Flanges and Unions
SP-67-2017.....Butterfly Valves
SP-70-2011.....Gray Iron Gate Valves, Flanged and Threaded Ends
SP-71-2018.....Gray Iron Swing Check Valves, Flanged and Threaded Ends
SP-80-2019.....Bronze Gate, Globe, Angle, and Check Valves
SP-85-2011.....Gray Iron Globe & Angle Valves, Flanged and Threaded Ends
SP-110-2010.....Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

G. National Environmental Balancing Bureau (NEBB):
8th Edition 2015 Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

H. NSF International (NSF):
61-2019.....Drinking Water System Components – Health Effects
372-2016.....Drinking Water System Components – Lead Content

I. University of Southern California Foundation for Cross Connection Control and Hydraulic Research (USC FCCCHR):
10th Edition.....Manual of Cross-Connection Control

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING”, with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Ball Valves.
2. Gate Valves.
3. Check Valves.
4. Water Pressure Reducing Valves and Connections.

D. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts and troubleshooting guide:

1. Include complete list indicating all components of the systems.
2. Include complete diagrams of the internal wiring for each item of equipment.
3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.
4. Piping diagrams of thermostatic mixing valves to be installed.

E. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Valves shall be prepared for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, grooves, and weld ends.
3. Set angle, gate, and globe valves closed to prevent rattling.

4. Set ball and plug valves open to minimize exposure of functional surfaces.
5. Set butterfly valves closed or slightly open.
6. Block check valves in either closed or open position.

B. Valves shall be prepared for storage as follows:
1. Maintain valve end protection.
2. Store valves indoors and maintain at higher than ambient dew point temperature.

C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

1.6 AS BUILT DOCUMENTATION

A. Comply with requirements in Paragraph “AS-BUILT DOCUMENTATION” of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS

2.1 VALVES, GENERAL

A. Asbestos packing and gaskets are prohibited.

B. Bronze valves shall be made with dezincification resistant materials. Bronze valves made with copper alloy (brass) containing greater than 15 percent zinc shall not be permitted.

C. Valves in insulated piping shall have 50 mm or DN50 (2 inch) stem extensions and extended handles of non-thermal conductive material that allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.

D. Exposed Valves over 65 mm or DN65 (2-1/2 inches) installed at an elevation over 3.6 m (12 feet) shall have a chain-wheel attachment to valve hand-wheel, stem, or other actuator.

E. All valves used to supply potable water shall meet the requirements of NSF 61 and NSF 372.

F. Bio-Based Materials: For products designated by the USDA’s bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

G. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

2.2 SHUT-OFF VALVES

A. Cold Water:

1. 50 mm or DN50 (2 inches) and smaller: Ball, MSS SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 1035 kPa (150 psig) and a CWP rating of 4138 kPa (600 psig). The body material shall be Bronze ASTM B584. The ends shall be non-lead solder.
2. Less than 100 mm DN100 (4 inches): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 1380 kPa (200 psig). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A536, ductile iron.
3. 100 mm DN100 (4 inches) and greater:
   a. Class 125, OS&Y, Cast Iron Gate Valve. The gate valve shall meet MSS SP-70 type I standard. The gate valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall meet ASTM A126, grey iron with bolted bonnet, flanged ends, bronze trim, and positive-seal resilient solid wedge disc. The gate valve shall be gear operated for sizes under 200 mm or DN200 (8 inches) and crank operated for sizes 200 mm or DN200 (8 inches) and greater.
   b. Single flange, ductile iron butterfly valves: The single flanged butterfly valve shall meet the MSS SP-67 standard. The butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The butterfly valve shall be lug type, suitable for bidirectional dead-end service at rated pressure without use of downstream flange. The body material shall comply with ASTM A536 ductile iron. The seat shall be EPDM with stainless steel disc and stem.
   c. Grooved end, ductile iron butterfly valves. The grooved butterfly valve shall meet the MSS SP-67 standard. The grooved butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall be epoxy coated ductile iron conforming to ASTM A536 with two-piece stainless-steel stem, EPDM encapsulated

ductile iron disc, and EPDM seal. The butterfly valve shall be gear operated.

2.3 CHECK VALVES

A. 75 mm or DN75 (3 inches) and smaller shall be Class 125, bronze swing check valves with non-metallic disc suitable for type of service. The check valve shall meet MSS SP-80 Type 4 standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B62, solder joints, and PTFE or TFE disc.

B. 100 mm or DN100 (4 inches) and greater:

1. Check valves shall be Class 125, iron swing check valve with lever and weight closure control. The check valve shall meet MSS SP-71 Type I standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a clear or full waterway body design with gray iron body material conforming to ASTM A126, bolted bonnet, flanged ends, bronze trim.
2. All check valves on the discharge side of submersible sump pumps shall have factory installed exterior level and weight with sufficient weight to prevent the check valve from hammering against the seat when the sump pump stops.

2.4 WATER PRESSURE REDUCING VALVE AND CONNECTIONS

A. 75 mm or DN75 (3 inches) or smaller: The pressure reducing valve shall consist of a bronze body and bell housing, a separate access cover for the plunger, and a bolt to adjust the downstream pressure. The pressure reducing valve shall meet ASSE 1003. The bronze bell housing and access cap shall be threaded to the body and shall not require the use of ferrous screws. The assembly shall be of the balanced piston design and shall reduce pressure in both flow and no flow conditions. The assembly shall be accessible for maintenance without having to remove the body from the line.

B. DN100 (4 inches) and greater: The pressure reducing valve shall consist of a flanged cast iron body and rated to 1380 kPa (200 psig). The valve shall have a large elastomer diaphragm for sensitive response. The pressure reducing valve shall meet ASSE 1003.

C. The regulator shall have a tap for pressure gauge.

D. The regulator shall have a temperature rating of 100 degrees C (212 degrees F) for hot water or hot water return service. Pressure regulators shall have accurate pressure regulation to 6.9 kPa (+/- 1 psig).

E. Setting: Entering water pressure, discharge pressure, capacity, size, and related measurements shall be as shown on the drawings.

F. Connections Valves and Strainers: Shut off valves shall be installed on each side of reducing valve and a bypass line equal in size to the regulator inlet pipe shall be installed with a normally closed globe valve. A strainer shall be installed on inlet side of, and same size as pressure reducing valve. A pressure gauge shall be installed on the inlet and outlet of the valve.

2.5

PART 3 - EXECUTION

3.1 EXAMINATION

A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed, such as blocks, used to prevent disc movement during shipping and handling.

B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.

C. Threads on valve and mating pipe shall be examined for form and cleanliness.

D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its material composition is suitable for service and free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.

C. Valves shall be installed in horizontal piping with stem at or above center of pipe.
D. Valves shall be installed in a position to allow full stem movement.
E. Check valves shall be installed for proper direction of flow and as follows:
   1. Swing Check Valves: In horizontal position with hinge pin level and on top of valve.
F. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.
G. Install thermostatic balancing valves with inlet strainer and inlet and outlet isolation valves.

3.3 LABELING AND IDENTIFYING

A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:
   1. Calibrated balancing valves.
   2. Master, thermostatic, water mixing valves.
   3. Manifold, thermostatic, water-mixing-valve assemblies.
B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.

3.4 ADJUSTING

A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting and balancing. Valves shall be replaced if persistent leaking occurs.
B. Set field-adjustable flow set points of balancing valves and record data. Ensure recorded data represents actual measured or observed conditions. Permanently mark settings of valves and other adjustment devices allowing settings to be restored. Set and lock memory stops. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.
C. Testing and adjusting of balancing valves shall be performed by an independent NEBB Accredited Test and Balance Contractor. A final settings and flow report shall be submitted to the VA Contracting Officer’s Representative (COR).

3.5 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and CxA. Provide a minimum notice of 10 working days prior to startup and testing.

3.6 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.7 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

s- - E N D - - -

SECTION 22 08 00

COMMISSIONING OF PLUMBING SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 22.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the Department of Veterans Affairs will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning plumbing systems, subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more specifics regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 22 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 22, is required in cooperation with the VA and the Commissioning Agent.

B. The Plumbing systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of the Building Plumbing Systems will require inspection of individual elements of the Plumbing construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning Plan to schedule inspections as required to support the commissioning process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the

Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 22 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. . All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be

scheduled in coordination with the Resident Engineer after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 22 Sections for additional Contractor training requirements.

----- END -----

SECTION 22 12 17
TYPE III PRESTRESSED CONCRETE WATER STORAGE TANK

PART 1 - GENERAL

1. **Scope.** This section specifies the design qualifications for the Tank Contractor and requirements for the construction of a tank with an AWWA D110 Type III wire or strand wound, prestressed, concrete circular core wall; including all site work, excavation, reinforcing, concrete work, appurtenances, disinfection, testing, and backfill directly related to the tank unless otherwise specified.

   In the event of discrepancy between this section of the Specifications and any other section of the Specifications, this section shall govern.

   The Tank Contractor shall furnish all labor, materials, tools, and equipment necessary to construct, disinfect and test the wire or strand wound, prestressed concrete tank and appurtenances as indicated on the drawings, and as specified. If Special Inspections and Observations are required the Owner shall provide these services.

2. **Description of System.** The tank shall consist of a cast-in-place reinforced concrete floor, a wire or strand wound precast prestressed concrete wall, and a precast or cast-in-place prestressed clear span concrete dome.

PART 2 - QUALITY ASSURANCE

1. Qualifications and Experience

A. Singular Responsibility: It is the intent of this specification to require single party responsibility for the design and the construction of the tank. The tank design and construction shall be performed by an established Tank Contractor of recognized ability, having at least ten years of experience in the design and construction of tanks with an AWWA D110 Type III wire or strand wound prestressed concrete core wall as specified herein. The design and construction of all aspects of the foundation, floor slab, wall, prestressing, shotcrete and dome roof of the wire or strand wound circular prestressed tank shall be performed by the Tank Contractor. The Tank Contractor may subcontract labor for reinforcing steel installation and for concrete slab placement under the Tank Contractor’s direct supervision.

B. All tank work shall be performed by a company that specializes in the design and construction of wire or strand wound prestressed concrete tanks using the method of circumferential prestress reinforcing and with proven capability of meeting all the requirements of these specifications. No company is considered qualified unless it has designed and built in its own name or under one of its divisions at least twenty AWWA D110 prestressed concrete tanks with a Type III core wall in the last ten years. Experience in the design and construction of tanks with a Type I, II or IV core wall is not acceptable.

C. The Tank Contractor shall have in its employ a licensed or registered design professional engineer with a minimum of ten years’ experience. The design engineer shall have been the engineer of record for a minimum of ten tanks with an AWWA D110 Type III core wall.

D. The Tank Contractor shall have in its employ for this project a team consisting of a tank superintendent, project manager, certified shotcrete foreman, prestressing foreman, and precast erection foreman, each of whom shall have constructed a

minimum of three tanks with an AWWA D110 Type III core wall and a capacity of 0.5 MG or greater.

E. Experience in the design and construction of tanks with an AWWA D110 Type I, Type II or Type IV core wall, tanks having a fixed wall base, mild-steel reinforced tank core wall or tank core wall incorporating internal stressing systems is not acceptable.

2. Prequalification

A. All tank contractors are required to be prequalified. The bidder is required to state on the face of his sealed proposal the name of the prequalified tank contractor. Sealed proposals which do not state the name of the prequalified tank contractor will be returned to the bidder unopened.

B. DN Tanks, Inc., Delaware (Natgun Corporation, Massachusetts, and DYK Incorporated, California, Divisions of DN Tanks) and Preload, LLC are prequalified for the design and construction of wire or strand wound precast prestressed concrete tanks. Additional Tank Contractors seeking prequalification shall make a complete submittal to the Engineer for review and approval per the Instructions to Bidders. The submittal shall include detailed design drawings and calculations meeting the requirements of these specifications, the company's record of previous experience in the design and construction of AWWA D110 circular, wire or strand wound prestressed concrete tanks constructed in their own name, with a Type III core wall, including the experience of the design engineer meeting the requirements of this specifications and a project team meeting the requirements of this specification.

C. Experience in the design and construction of tanks with an AWWA D110 Type I, Type II or Type IV core wall, tanks having a fixed wall base, mild-steel reinforced tank core wall or tank core wall incorporating internal stressing systems is not acceptable.

D. All Tank Contractors not prequalified will not be considered.

3. Codes & Standards

All Codes shall be considered the most current version of that code unless noted otherwise.

1. ACI 301 Specifications for Structural Concrete

2. ACI 305 Hot Weather Concreting

3. ACI 306 Cold Weather Concreting

4. ACI 309R Guide for Consolidation of Concrete

5. ACI 318 Building Code Requirements for Reinforced Concrete and Commentary

6. ACI 350 Code Requirements for Environmental Engineering Concrete Structures and Commentary

7. ACI 350.3 Seismic Design of Liquid Containing Concrete Structures and Commentary

8. ACI 372R Design and Construction of Circular Wire- and Strand Wrapped Prestressed Concrete Structures

9. ACI 506R Guide to Shotcrete

10. ASTM A123/A123M Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

11. ASTM A185 Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete

12. ASTM A416 Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

13. ASTM A421/A421M Standard Specification for Uncoated Stress-Relieved Steel Wire for Prestressed Concrete

14. ASTM A475 Standard Specification for Zinc-Coated Steel Wire Strand

15. ASTM A615/A615M Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

16. ASTM A653/A653M Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

17. ASTM A706/A706M Standard Specification for Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement

18. ASTM A821 Standard Specification for Steel Wire, Hard Drawn for Prestressing Concrete Tanks

19. ASTM A1008/A1008M Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable

20. ASTM C31 Standard Practice for Making and Curing Concrete Test Specimens in the Field

21. ASTM C33 Standard Specification for Concrete Aggregates

22. ASTM C39 Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

23. ASTM C231 Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method

24. ASTM C618, Type F Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete

25. ASTM D698 Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 Ft. – lbf/ft3) 600 KN-M/M3)

26. ASTM C920 Specification for Elastomeric Joint Sealants

27. ASTM D1056 Standard Specification for Flexible Cellular Materials – Sponge or Expanded Rubber

28. ASTM C1116/C1116M Standard Specification for Fiber-Reinforced Concrete and Shotcrete

29. ASTM D1556 Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

30. ASTM D1557 Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 Ft. – lbf/ft^3) 2700 KN-M/M^3)

31. ASTM D2000 Classification System for Rubber Products in Automotive Applications

32. ASCE Standard 7 Minimum Design Loads for Buildings and Other Structures

33. AWWA C652 Standard for Disinfection of Water-Storage Facilities

34. AWWA D110 Wire and Strand Wound, Circular, Prestressed Concrete Water Tanks

35. TID-7024, Dynamic Pressure on Fluid Containers of Nuclear Reactors and Earthquakes

36. US Army Corps of Engineers Specification CRD-C-572, Specification for PVC Waterstop

4. Design Criteria

A. The prestressed concrete tank shall be designed and constructed in accordance with the provisions of AWWA D110 Standard for Wire or Strand Wound Circular Prestressed-Concrete Water Tanks, Type III core wall, ACI 350, ACI 350.3, ASCE 7 and IBC.

B. Horizontal prestressing shall be continuous. Discontinuous prestressing tendons or strands will not be allowed.

C. The Tank Contractor shall use the following loadings and requirements in the design calculation:

a. Capacity: 300,000-gallon tank

b. Diameter: 41 feet (Interior Nominal)
Water Depth: 30 feet

c. Dead Load: shall be the estimated weight of all permanent imposed loads. Unit weight of concrete 150 pounds per cubic foot; steel 490 pounds per cubic foot.

d. Live Load: shall be the weight of all the liquid when the reservoir is filled to overflowing. Unit weight of liquid 62.4 pounds per cubic foot.

e. Total Roof Live Load: 60 psf or 250 lb point load.

f. Backfill Pressure: earth loads shall be determined by rational methods of soil mechanics. Backfill pressure shall not be used to reduce the amount of required prestressing.

g. Foundation Loads: the tank foundation shall be proportioned so that soil pressure shall be less than the soil bearing capacity. The allowable gross soil bearing capacity shall be as shown in the Geotech Report attached to Item 1046.

h. Seismic Criteria:

i. Seismic Design Criteria: Seismic design shall be based on the applicable sections of AWWA D110-04, ACI 350.3, ASCE 7, TID 7024 and the local jurisdictional building code. The comparative value of 80% as specified in ASCE 7, Section 15.4.1 paragraph 6 shall be used to determine the total base shear from ASCE 7. Impulsive and convective forces, as well as, fluid spectral velocity shall be calculated utilizing each code and the maximum value of each component shall be used to calculate the total base shear.

ii. Sloshing Height: The sloshing height shall be calculated using AWWA D110, but need not exceed the fluid displacement calculation when determined using ACI 350.3, TID 7024 or ASCE 7. The effects of the “sloshing wave” shall be accounted for by increasing the freeboard between the normal operating surface and the underside of the roof, or a roof capable of resisting the uplift of such a wave designed. A minimum freeboard height of 11 inches above the design liquid level shall be utilized. Any confined portion of the convective (sloshing) mass shall be calculated and applied as an additional impulsive mass.

iii. Dynamic Effects of Backfill: Seismic design shall consider the additive effects of the dynamic backfill loading.

iv. Base Restraint Cable Design:

1. When allowable shear resistance of the bearing pad is less than the total base shear obtained from the maximum values of impulsive and convective components and the dynamic effects of backfill, base restraint cables shall be utilized. The allowable cable stress is 0.75 fpu

2. For the total base shear obtained from the loading conditions of ASCE 7 that incorporate an overstrength factor (Omega Factor), the allowable bearing pad shear or seismic cable stress (if required by design) shall be increased by 20%. The Omega factor shall be incorporated in accordance with ASCE 7 for all loading cases.

i. Wind Loads: shall be as required by ASCE 7

j. Vent Capacity Requirements:

i. Maximum Fill Rate: 1500 cfm.

ii. Maximum Draw Down Rate: 1500 cfm.

k. Overflow Design Capacity: 2.16 MGD.

D. The Tank Contractor shall design the composite concrete wall with steel diaphragm and closure steel slot plate in combination with vertical mild steel reinforcement based on the following design criteria and requirements:

a. The prestressed tank wall shall be considered as a cylindrical shell with partial edge restraint.

b. The prestressed tank wall shall be reinforced vertically by deformed steel reinforcing bars. The steel diaphragm can be taken as effective vertical reinforcing.

c. The prestressed tank wall shall be of precast construction. The minimum core wall thickness shall be 4 inches. The core wall is that area of the wall interior to all circumferential prestressing. Shotcrete or cast-in-place concrete core walls are not permitted.

d. For wire wound tanks, a stress plate shall be required at all above grade locations where prestress wires are displaced 24 inches or greater. The stress plate shall be designed to transfer stress across the opening.

e. No reduction in ring compression or tension in the wall will be taken due to restraint at the bottom.

f. The long-term prestressing losses caused by shrinkage, creep, and relaxation in the prestressed reinforcement of the tank walls shall not be assumed less than 25,000 psi.

g. Lateral soil pressures shall not be considered in resisting seismically generated shear forces between the wall footing and the wall.

E. Floor Slab

a. The floor slab shall be designed as a membrane floor not less than 4 inches thick. Construction joints will only be allowed as shown on the shop drawings and as approved by the Engineer. Construction joints shall incorporate a horizontal PVC waterstop.

b. Wall footings may be constructed above or below floor grade. If required, the floor shall have thickened regions to facilitate transitions from under slab concrete pipe encasements into the floor, appurtenance loadings and temporary bracing requirements.

c. Minimum cross sectional area ratio of floor reinforcement to concrete shall be in accordance with the following paragraph:

i. For tanks with diameters less than 100 feet, provide 0.5%.
ii. For tanks with diameters 100 to 150 feet, provide 0.6%.
iii. For tanks with diameters greater than 150 feet, provide 0.8%
iv. For tanks with diameters larger than 100 feet, when shrinkage reducing admixtures are utilized, provide 0.5%.

d. Poly-propylene or cellulose fibers may be used at the Tank Contractor’s discretion.

F. The dome roof shall have a rise to span ratio within the range of 1:8 to 1:14. The dome shall be fixed to the tank wall. Columns or interior supports will not be allowed. Dome design shall be based on elastic spherical shell analysis. The dome roof shall be of precast or cast-in-place construction. The precast dome shall have continuous reinforcement at circumferential slots and radial reinforcement throughout the precast dome panels and lapped within the circumferential slots. The cast-in-place dome roof shall have continuous reinforcement in both the radial and circumferential direction. The dome thickness shall be no less than 4 inches. The minimum cross sectional area ratio of dome reinforcement to concrete shall be 0.25% in both the circumferential and radial directions. In the dome edge region two layers of non-prestressed reinforcing shall be provided in the meridional direction.

PART 3 - SUBMITTALS

1. **Prequalification Submittals**

A. Tank Contractors not previously prequalified shall submit preliminary design drawings and calculations showing the dimensions of the tank, details of the type of construction, wire or strand wound prestressing methods, and sizes of principal members. The drawings and calculations shall be of sufficient detail to show compliance with the specification and all required standards and shall be signed and sealed by an Engineer registered in the state the tank is to be constructed. The registered Engineer shall certify the design is in conformance with AWWA D110, having a Type III core wall.

B. Tank Contractors not previously prequalified shall submit a complete experience record for the tanks they have designed and built in their own name. The record shall include the Tank Contractor's experience in the design and construction of wire or strand wound, prestressed concrete tanks conforming to AWWA D110, having a Type III core wall. The record shall also indicate the size of the tank, the name and address of the Owner, the year of construction, and the name of the Engineer for each project.

C. Tank Contractors not previously prequalified shall submit the name of the tank designer, currently in its employ, and his/her experience as the designer of record for tanks with an AWWA D110 Type III core wall, meeting the requirements of Section 1.02.A.3, including the size of the tank, seismic zone, the name and address of the Owner, the year of construction and the name of the Engineer.

D. Tank Contractors not previously prequalified shall submit the resumes for each member of the project team including the tank superintendent, project manager, shotcrete foreman, wire or strand winding foreman, and precast erection foreman that will be used for this project, meeting the requirements of this Item.

E. Experience in the design and construction of tanks with an AWWA D110 Type I, Type II, or Type IV core wall, tanks having a fixed wall base, mild-steel reinforced tank core wall or tank core wall incorporating internal stressing systems is not acceptable.

2. **Design Submittal after Execution of Contract**

A. Design calculations and drawings showing details and procedures of construction, shall be submitted to the Engineer for approval after execution of the Contract. After approval by the Engineer, one set of the drawings and calculations will be returned to the Tank Contractor, and any changes found necessary by the Engineer shall be made by the Tank Contractor.

B. Approval by the Engineer of the drawings and calculations submitted by the Tank Contractor will not in any way relieve the Tank Contractor of full responsibility for the accuracy and completeness of the drawings and calculations.

C. Design calculations and drawings shall be stamped by a professional engineer experienced in the design of AWWA D110, Type III wire or strand wound prestressed concrete tanks and registered in the state the tank is to be constructed.

3. Construction Submittals for Review Prior to Use

A. Design proportions for all concrete and shotcrete. Concrete strengths of trial mixes.

B. Admixtures to be used in the concrete or shotcrete and their purpose.

C. Reinforcing steel shop drawings showing fabrication and placement.

D. Catalog cuts or shop drawings of all appurtenances, i.e. hatch, vent, ladders, waterstops.

PART 4 - GUARANTEE

The Tank Contractor shall guarantee the structure against defective materials or workmanship for a period of five years from the date of completion. If any materials or workmanship prove to be defective within the warranty period, they shall be replaced or repaired by the Tank Contractor at the Tank Contractor's expense.

PART 5 – MATERIAL

1. CONCRETE

A. Concrete shall conform to ACI 301.

B. Cement shall be Portland cement Type I or Type II.

C. Admixtures, other than air-entraining, superplasticizers, shrinkage reducing and water reducing admixtures will not be permitted unless approved by the Engineer.

D. Concrete for tank wall and dome construction shall have a minimum compressive strength of 4,000 psi at twenty-eight days and a maximum water to cementitious ratio of 0.42. All precast wall and dome concrete shall be air-entrained.

E. Concrete for the tank floor, footings, pipe encasement, and all other work shall have a minimum compressive strength of 4,000 psi at twenty-eight days, shall not be air-entrained, unless exposed to freeze thaw conditions, and have a maximum water to cementitious ratio of 0.42. The coarse and fine aggregate shall meet the requirements of ASTM C33. Coarse aggregate shall be No. 467 with 100% passing the 1½ inch sieve. Superplasticizers, water-reducing, and shrinkage reducing (if applicable) admixtures shall be incorporated into the floor concrete. If fibers are used, they shall be virgin poly-propylene or cellulose fibers, Microfiber by Grace, Fibermesh 150 by Propex, UltraFiber 500 by Buckeye, or equal. Fiber lengths shall be a maximum of ¾ inches. The amount of fibers added to the concrete mix shall conform to the Manufacturer's recommendations.

F. Proportioning for concrete shall be in accordance with ACI 301.

G. All concrete shall have a maximum water soluble chloride ion concentration of 0.06% by weight of cementitious material.

2. SHOTCRETE

A. Shotcrete shall conform to ACI Standard 506, except as modified herein.

B. The wet mix process shall be employed for shotcreting.

C. Shotcrete used for covering prestressed wire or strand shall consist of not more than three parts sand to one part Portland cement by weight. Additional coats of shotcrete shall consist of not more than four parts sand to one part Portland cement by weight. Polypropylene fibers shall be included in the shotcrete used for the finish cover coat. Fibers shall be Fibercast 500 by Propex, Fibermesh or equal. Fibers shall be virgin polypropylene and comply with ASTM C-1116 performance level I. Fiber length shall be ¼ inch. The amount of the fibers added to the shotcrete used for the finish cover coat shall conform to the Manufacturer's recommendations. Fly ash may be incorporated into the finish cover coat. Fly ash shall conform to ASTM C618, Type F. Shotcrete shall have a minimum strength of 4,500 psi at twenty-eight days and have a maximum water to cementitious ratio of 0.42.

D. Rebound material shall not be reused in any form for shotcrete.

E. If used by the Tank Contractor, the total volumetric air content of the shotcrete before placement shall not exceed 7% (±1%) as determined by ASTM C-173 or ASTM C-231.

F. Fine Aggregates:

1. The fineness modulus shall be between 2.7 and 3.0. A well-graded coarse sand shall be used for all shotcrete applications.

2. The gradation for the fine aggregates shall adhere to the "Grading No. 1" requirements listed in "Table 1.1 – Grading Limits for Combined Aggregates" of ACI 506.

G. All shotcrete shall have a maximum water soluble chloride ion concentration of 0.06% by weight of cementitious material.

3. MORTAR FILL AND NON-SHRINK GROUT

A. Mortar fill and non-shrink grout shall have a minimum compressive strength of 4,000 psi at twenty-eight days, have a maximum water to cementitious ratio of 0.42 and meet all requirements for concrete contained in this specification.

B. Portland cement grout will not be accepted.

4. REINFORCING STEEL

A. Reinforcing steel shall be new billet steel Grade 60, as shown on the Drawings, meeting the requirements of ASTM A615. Welded wire fabric and weldable reinforcing steel shall conform to ASTM A185 and ASTM A706, respectively.

B. Reinforcing steel shall be accurately fabricated and shall be free from loose rust, scale, and contaminants, which reduce bond.

C. Reinforcing steel shall be accurately positioned on supports, spacers, hangers, or other reinforcements and shall be secured in place with wire ties or suitable clips. Rebar chair supports may be either steel with plastic tips, turned up legs or plastic.

D. Continuous reinforcing is required through floor and cast in place dome construction joints, where applicable.

5. BASE RESTRAINT CABLES

A. Where required by design, the tank designer shall use base restraint cables to resist earthquake and/or wind loads. Base restraint cables shall be hot-dipped galvanized seven-wire strand and shall be manufactured in accordance with ASTM A416 prior to galvanizing, and ASTM A475 after galvanizing. Only seven-wire strand will be allowed.

B. Hot-dipped galvanized seven-wire strand shall have a nominal strand diameter of 0.375 in, 0.50 in or 0.60 in. 0.375 inch diameter strand shall have an MUS after galvanization of 21.36 kips and a min. yield at 1% extension of 15.60 ksi. 0.50 inch diameter strand shall have an MUS after galvanization of 38.25 kips and a min. yield at 1% extension of 28.00 ksi. 0.60 inch diameter strand shall have an MUS after galvanization of 54.20 kips and a min. yield at 1% extension of 40.70 ksi. All strands shall have a minimum of weight of Zinc Coating of 0.85 oz/sq-ft.

C. Neoprene sleeves for base restraint cables shall be closed-cell conforming to ASTM D1056, Type 2, Class A, and Grade 3. The sleeves shall have a compression deflection limited to 25% at 9 to 13 psi, hardness of 60 to 80 durometer, a minimum tensile strength of 175 psi, a minimum elongation of 180%, and a maximum compressive set of 35%.

6. STEEL DIAPHRAGM

A. The steel diaphragm shall conform to ASTM A1008 and shall be a minimum thickness of 26 gauge. It shall be vertically ribbed with reentrant angles. The back of the channels shall be wider than the front, providing a mechanical keyway anchorage with the concrete and shotcrete encasement.

B. The steel diaphragm shall extend to within 1 inch of the full height of the wall panel with no horizontal joints. Vertical joints within a wall panel shall be roll seamed or otherwise fastened in a fashion that results in a firm mechanical lock. Joints between wall panels that are not roll seamed shall be edge sealed with polysulfide or polyurethane sealant.

C. No punctures will be permitted in the diaphragm except those required for pipe sleeves, temporary construction openings, or special appurtenances. The Engineer shall approve details of the openings. All openings shall be completely edge sealed with polysulfide or polyurethane sealant.

D. Diaphragm steel may be considered as contributing to the vertical reinforcement of the wall.

E. Steel closure plates shall be used at wall slots between precast wall panels on the exterior face to create a continuous steel diaphragm.

7. CIRCUMFERENTIAL PRESTRESSING STEEL

A. Steel for prestressing shall either be cold drawn, high carbon wire or galvanized seven wire strand.

B. The wire shall meet the requirements of ASTM A821 and have a minimum ultimate tensile strength of 210,000 psi.

C. Galvanized strand shall meet the requirements of ASTM A416 prior to galvanizing with zinc coating for galvanizing meeting the requirements of ASTM A641/641M or ASTM A475. Each wire shall be individually hot-dipped galvanized before being stranded. The minimum weight of zinc coating per unit area of uncoated wire surface area shall be no less than 0.85 ounces per square foot.

D. Splices for horizontal prestressed reinforcement shall be ferrous material compatible with the reinforcement and shall develop the full strength of the wire or strand. Wire or strand splice and anchorage accessories shall not nick or otherwise damage the prestressing.

8. ELASTOMERIC MATERIALS

A. A waterstop with centerbulb shall be polyvinyl chloride meeting the requirements of the Corps of Engineers Specification CRD-C 572. Splices shall be made in accordance with the Manufacturer's recommendations subject to the approval of the Engineer. Waterstop shall be manufactured by Greenstreak Plastic Products Company, Inc., or equal.

B. Bearing pads shall be natural rubber or neoprene.

1. Natural rubber bearing pads shall contain only virgin natural polyisoprene as the raw polymer and the physical properties shall comply with ASTM D2000 Line Call-Out M 4 AA 414 A1 3.

2. Neoprene bearing pads shall have a hardness of 40 to 50 durometer, a minimum tensile strength of 1,500 psi, a minimum elongation of 500%, and a maximum compressive set of 50%. Pads shall meet the requirements of ASTM D2000 Line Call-Out M 2 BC 410 A1 4 B14 or M 2 BC 414 A14 C12 F17 for 40 durometer material.

C. Sponge filler shall be closed-cell neoprene or rubber conforming to ASTM D1056, Type 2, Class A, and Grade 1 or 3. Compression deflection limited to 25% at 2 to 5 psi.

D. Polysulfide or polyurethane sealant will be a two or three component elastomeric compound meeting the requirements of ASTM C920. Sealants shall have permanent characteristics of bond to metal surfaces, flexibility, and resistance to extrusion due to hydrostatic pressure. Air cured sealants shall not be used.

9. EXTERIOR COATINGS

A. A decorative coating shall be applied to the exterior dome surface using one coat of a cementitious based damp-proofing product such as "Tamoseal" or equal, and one coat of a non-cementitious, high build, 100% acrylic resin polymer such as "Tammscoat Smooth" textured protective coating, "Tnemec Envirocrete 156" or equal. A decorative coating shall be applied to the above grade exterior wall surfaces using two coats of a non-cementitious, high build, 100% acrylic resin polymer such as "Tammscoat Smooth" textured protective coating, "Tnemec Envirocrete 156" or equal.

10. APPURTENANCES

A. The Tank Contractor shall provide and install all appurtenances as shown on the drawings. Appurtenances shall include the following:

1. Inlet-Outlet Piping.

2. Overflow Piping and Weir.

3. Roof Hatch: A 42 inch square aluminum hatch with lockable, hinged cover and curb frame. The hatch shall have a lift handle, padlock tab, padlock and a cover hold open mechanism. All hardware shall be aluminum or stainless steel. Locate hatch as shown on drawings.

4. Roof Ventilator: Fiberglass or Aluminum, with stainless steel insect 24 x 24 screen, minimum diameter 2 feet.

5. Interior Ladder: The ladder shall extend from the floor to the hatch. The ladder shall be made out of fiberglass and have an OSHA-approved Stainless Steel fall prevention device (if required) consisting of a sliding, locking mechanism and safety belt. Location as shown on the drawings.

6. Exterior Ladder: The ladder shall extend from 8 feet above the final grade to the tank roof. The ladder shall be made out of 6061-T6 Aluminum and have an OSHA-approved Stainless Steel fall prevention device (if required) consisting of a sliding, locking mechanism and safety belt. Location as shown on the drawings.

7. Access Manway: A circular 30 inch diameter Type 304 stainless steel wall manway with a hinged cover. A Type 304 stainless steel grab bar and an aluminum ladder shall be installed at the manway location. Locate access manway as shown on drawings.

8. Floor Sump: If shown on drawings, a minimum of one 2 feet square x 6 inch deep sump shall be provided in the tank floor. The sump may be at a drain pipe, outlet pipe or separate from the floor piping. Location of the sump as shown on the drawings.

9. Dome Handrail: Handrails shall be located as shown on contract plans. As a minimum handrails shall be provided for a distance of 10 feet to each side of the exterior ladder. All posts and rails shall be 6061-T6 or 6005-T6, Schedule 80, anodized aluminum pipe. All fittings shall be Hollaender Speed-Rail system or equal. Beveled toe board shall be installed at the front edge of handrail only and shall be attached using Hollaender clips or equal.

10. Dome Safety Tie-Off Anchors: Provide three (3) permanent, OSHA compliant, anchorage connectors for a single employee to tie-off to shall be installed. The anchorages shall be located on the dome surface within 1.5 feet of the exterior ladder egress point, within 1 foot of the dome hatch and within 2 feet of the dome vent. Anchorages shall be Model 417 SS D-Bolt Anchors by Miller Fall Protection or approved equal. D-Bolts to be anchored to concrete using 316 SS high strength threaded rods, 316 SS Hex head nuts and suitable epoxy adhesive.

PART 6 – CONSTRUCTION

1. SAFETY

   A. Every precaution shall be taken to keep personnel and visitors outside the prestressing area.

B. At no time shall anyone stand in the line of stressed wire or strand.

C. No personnel is allowed outside of the tank, other than the prestressing crew, within 100 feet from the wrapping operation. Additional precautions shall be taken by Tank Contractor should specified clearance not be available.

D. Where access to the site by unauthorized persons is outside the Tank Contractor's control, while prestressing work is in progress, Tank Contractor shall erect protective fencing.

E. Tank Contractor to conform and enforce all Local and Federal OSHA safety rules and regulations.

2. CLEARING, GRUBBING, AND STRIPPING

A. All trees, shrubs, brush, stumps, roots, and other unsuitable material shall be removed to a minimum distance of 12 feet outside the edge of the tank foundation, plus additional areas necessary for the tank construction. The limits of clearing shall be as shown on the drawings and/or as approved by the Engineer.

B. No burning will be allowed unless approved by the Engineer and local authorities. All trees and vegetation shall be disposed of off-site, unless approved otherwise by the Engineer.

C. All topsoil shall be stripped from the proposed construction work area and stockpiled on site.

3. EXCAVATION AND BACKFILL

A. The Tank Contractor shall excavate to such depths and widths to provide adequate room for tank construction. A minimum working area of 10 feet beyond the circumference of the tank foundation at an elevation 6 inches below the top of the tank foundation shall be provided. Excavated material may be used as suitable backfill material and stockpiled on site as required.

B. The excavation shall be dewatered as required during construction. The dewatering method used shall prevent disturbance of the tank foundation soils.

C. The Tank Contractor shall excavate rock, if encountered, to the lines and grades indicated on the drawings, or as directed by the Engineer. Rock excavation shall be measured separately. The pay limit for rock in the area of the tank shall be carried out to ten feet beyond the circumference of the tank foundation and at an elevation of 12 inches below the tank foundation.

D. In the event the subgrade material is disturbed or over excavated by the Tank Contractor during excavation, it shall be removed and replaced with compacted select fill, at the Tank Contractor's expense.

E. If, in the opinion of the Engineer, the subgrade is unsuitable for the foundation, the Engineer shall direct that it be removed by the Tank Contractor and replaced with compacted select fill.

F. After excavation is complete, the bottom of the excavation shall be proof rolled and leveled as directed by the Engineer before the compacted select fill is placed. The Engineer shall inspect the subgrade for conformance with the original geotechnical report and its suitability

for the tank foundation. Before any select fill is to be placed against rock surfaces, the rock shall be relatively free of all vegetation, dirt, clay, boulders, scale, excessively cracked rock, loose fragments, ice, snow, and other objectionable substances. All free water left on the surface of the rock shall be removed.

G. A leveling base material consisting of a minimum 6 inch thick layer of compacted select fill shall be placed beneath the entire tank foundation. A non-woven geotextile fabric such as Mirafi 1100N, Propex 4545, or equal, shall be placed between the subgrade and leveling base material as shown on the drawings or directed by the tank builder. Select fill shall consist of a clean, well graded angular or subangular material having not more than 8% by weight passing the No. 200 sieve. The maximum size stone shall be 1½ inch. Select fill shall be placed in layers not exceeding 12 inches and compacted to a minimum density equal to 95% of the maximum laboratory density in accordance with ASTM D1557. Field testing for density achieved shall be in accordance with ASTM D1556 or D2922. If directed by the tank builder, a uniformly graded ¾ inch minus crushed stone shall be used as the leveling base material. The crushed stone shall be ¾ inch sieve size with 100% passing the 1 inch. If uniformly graded crushed stone is used for the leveling base material, compaction performance criteria shall be used to gauge the degree of compaction. Crushed stone shall be placed in layers not exceeding 9 inches and compacted with at least two passes in each direction with vibratory roller compaction equipment. Compaction shall be inspected and verification of compaction effort shall be documented by an approved testing laboratory.

H. The surface elevation of the leveling base shall be fine graded to a tolerance of plus zero inches to minus ½ inch over the entire foundation areas. Fine grading tolerances for floor pipe encasements shall be plus zero inches to minus 6 inches.

I. The tank shall be backfilled and rough graded to the contours shown on the drawings. Unless other material is specified by the Engineer, materials used for backfilling shall be suitable on site material.

J. Frozen material shall not be used for backfill nor shall fill material be placed on snow, ice, or frozen material. Rock or concrete spoils (greater than 6 inches) shall not be used in backfill within 2 feet of the tank wall.

K. Crushed stone material shall consist of clean, hard, durable, crushed particles or fragments of stone or ledge rock of uniform quality reasonably free of thin or elongated pieces. The materials shall be free from ice, snow, rubbish, sods, roots, and other deleterious or organic materials and shall conform to the following gradation requirements meeting ASTM C 33 stone size No. 67.

SIEVE SIZE	PERCENT PASSING BY WEIGHT
1 inch	100%
3/4 inch	90% - 100%
3/8 inch	20% - 55%
No. 4	0% - 10%
No. 8	0% - 5%

L. Compacted granular fill should consist of sandy gravel or gravelly sand free of ice, snow, rubbish, sods, roots and other deleterious or organic materials and should be well graded within the following limits.

SIEVE SIZE	PERCENT FINER BY WEIGHT
1.5 inch	100%
No. 4	30% - 90%
No. 40	10% - 50%
No. 200	0% - 8%

4. FLOOR

A. The floor and wall footings shall be constructed to the dimensions shown on the Approved Shop Drawings.

B. Prior to placement of the floor reinforcing, a 6 mil polyethylene moisture barrier shall be placed over the leveling base material. Joints in the polyethylene shall be overlapped a minimum of 6 inches.

C. Prior to placement of the floor concrete, all piping that penetrates the floor shall be set and encased in concrete.

D. The vertical waterstop shall be placed and supported so that the bottom of the center bulb is at the elevation of the top of the footing. The waterstop shall be supported without puncturing any portion of the waterstop other than pre-manufactured holes, grommets or hog rings for tying at 12 inches o.c. The waterstop shall be spliced using a thermostatically controlled sealing iron and each splice shall be successfully spark tested prior to encasement in concrete.

E. Floors over 20,000 sq. ft. in surface area, at the option of the Tank Contractor, may have one or more construction joints. Such construction joints shall be approved by the Engineer prior to placement and shall include a continuous waterstop and reinforcement through the joint.

F. The floor shall be cured by applying one coat of curing compound, curing blankets and/or flooding with water, and shall remain saturated for a minimum of seven days.

5. PRECAST WALL PANEL CONSTRUCTION AND ERECTION

A. The precast wall panel shall be constructed with a continuous waterproof steel diaphragm embedded in the exterior of the precast panel. Horizontal joints in the diaphragm will not be allowed.

B. No holes for form ties, nails, or other punctures will be permitted in the wall.

C. Temporary wall openings may be provided for access and removal of construction materials from the tank interior subject to the approval of the Engineer.

D. Wall beds shall be constructed to provide finished panels with the proper curvature of the tank.

E. Polyethylene sheeting shall be placed between successive pours to provide a high moisture environment and a long slow cure for the concrete.

F. The erecting crane and lifting equipment shall be capable of lifting and placing the precast panels to their proper location without causing damage to the panel.

G. The precast panels shall be erected to the correct vertical and circumferential alignment. The edges of adjoining panels shall not vary inwardly or outwardly by more than 3/8 inch and shall be placed to the tank radius within ± 3/8 inch.

H. Joints between precast wall panels shall be bridged with a 10 gauge steel plate edge sealed with polysulfide or polyurethane and filled with mortar as shown on the drawings. No through-wall ties will be permitted.

6. PRECAST DOME PANEL CONSTRUCTION AND ERECTION

A. Dome panel casting beds shall be constructed to provide finished dome panels with the proper dome curvature.

B. Polyethylene sheeting shall be placed between successive pours to provide a high moisture environment and a long slow cure for the concrete.

C. The erecting crane and lifting equipment shall be capable of lifting and placing the precast dome panels to their proper location without causing damage to the dome panel.

D. The precast dome panels shall be erected to the correct radial and circumferential alignment as indicated in the Approved Shop Drawings. Adjacent dome panel offsets shall be constructed to a tolerance of +/- 3/8 inch.

7. CAST-IN-PLACE DOME CONSTRUCTION

A. The dome shall be constructed to the dimensions and curvature provided on the Approved Shop Drawings.

B. Dome roof decking shall not vary from level, or the curvature shown, more than ¼ inch in 10 feet or ½ inch maximum in 20 feet or more.

C. The dome shall be constructed to the thickness shown on the Approved Shop Drawings. Screed rails shall be provided to insure proper curvature and reinforcing cover.

D. A curing compound which is compatible with the decorative coating systems shall be applied to the dome in accordance with the Manufacturer's recommendations. Water curing may be used in conjunction with the curing compound.

8. CONCRETE

A. All concrete shall be conveyed, placed, finished, and cured as required by pertinent ACI standards.

B. **Weather Limitations**

1. Unless specifically authorized in writing by the Engineer, concrete shall not be placed without special protection during cold weather when the ambient temperature is below 35 degrees Fahrenheit and when the concrete is likely to be subjected to freezing temperatures before initial set has occurred and the concrete strength has reached 500 psi. Concrete shall be protected in accordance with ACI 306. The temperature of the concrete shall be maintained in accordance with the

requirements of ACI 301 and ACI 306. All methods and equipment for heating and for protecting concrete in place shall be subject to the approval of the Engineer.

2. During hot weather, concreting shall be in accordance with the requirements of ACI 305.

3. Placement of concrete during periods of low humidity (below 50%) shall be avoided when feasible and economically possible, particularly when large surface areas are to be finished. In any event, surfaces exposed to drying wind shall be covered with polyethylene sheets immediately after finishing, or flooded with water, or shall be water cured continuously from the time the concrete has taken initial set. Curing compounds may be used in conjunction with water curing, provided they are compatible with coatings that may later be applied, or they are degradable.

C. Finishes

The tank shall be given the following finishes:

The floor slab shall receive a bull float finish or Fresno finish. The top of the wall footing, exterior to the waterstop, shall receive a steel trowel or magnesium trowel finish.

The interior of the precast wall panels shall receive a light broom finish.

The exterior of the dome shall receive a light broom finish. The interior of the dome shall receive a form finish.

Exterior shotcrete shall receive a natural gun / nozzle finish.

D. Curing

Concrete shall be cured using water methods, sealing materials, or curing compounds. Curing compounds shall not be used on surfaces to which decorative coatings, mortar, or shotcrete is to be applied. Curing compounds used within the tank shall be suitable for use with potable water.

E. Testing

1. For concrete placed in precast panels or wall slots, a set of three cylinders shall be made for each truck load of concrete placed. For concrete placed in the floor, dome ring, or dome slots, two sets of five cylinders for the first 50 cubic yards, and one set of five cylinders for every 100 cubic yards thereafter placed in the same day. Two cylinders shall be tested at seven days, two at twenty-eight days, and one held as a spare.

2. Slump, air content and temperature testing shall be performed on each truck where cylinders are taken.

3. All concrete testing shall be in accordance with ASTM C31 and C39 and shall be conducted by an independent testing agency approved by the Engineer.

9. SHOTCRETING

A. **Weather Limitations**

1. Shotcrete shall not be placed in freezing weather without provisions for protection against freezing. Shotcrete placement can start without special protection when the temperature is 35 degrees Fahrenheit and rising, and shall be suspended when the temperature is 40 degrees Fahrenheit and falling. The surface to which the shotcrete is applied shall be free from frost. Cold weather shotcreting shall be in accordance with ACI 506, ACI 301 and ACI 306.

2. Hot weather shotcreting shall be in accordance with the requirements of ACI 506, ACI 301 and ACI 305.

B. Coating of Steel Diaphragm

1. The steel diaphragm shall be covered with a layer of shotcrete at least ½ inch thick prior to prestressing.

2. Total minimum coating over the steel diaphragm shall be 1½ inches including diaphragm cover, wire or strand cover, and finish cover coat.

C. Coating Over Prestressing Wire or Strand

1. Each prestress wire or strand shall be individually encased in shotcrete. Shotcrete thickness shall be sufficient to provide a clear cover over the wire and strand of at least ¼ inch and 3/8 inch, respectively.

2. Finish cover coat shotcrete shall be applied as soon as practical after the last application of wire or strand coat.

3. The minimum final shotcrete cover over the outermost prestressing wire or strand layer shall be 1 inch.

D. Placement of Shotcrete

1. Shotcrete shall be applied by an ACI 506 certified nozzleman.

2. Manually applied shotcrete shall be applied with the nozzle held at a small upward angle not exceeding five degrees and constantly moving during application in a smooth motion with the nozzle pointing in a radial direction toward the center of the tank. The nozzle distance from the prestressing shall be such that shotcrete does not build up or cover the front face of the wire or strand until the spaces behind and between the prestressing elements are filled.

3. Unless applied by an automated shotcrete process, total cover coat thickness shall be controlled by shooting guide wires. Vertical wires shall be installed under tension and spaced no more than two feet apart to establish uniform and correct coating thickness. Monofilament line (100 lb. test) or 18 or 20 gauge high tensile strength steel wire shall be used. Guide wires shall be removed after placement of the cover coat.

4. Shotcrete applied by an automated shotcrete process shall be applied using the wet mix only. Nozzles shall be kept mounted on power driven machinery enabling the nozzle to travel parallel to the surface to be sprayed at a uniform linear or bi-directional speed. The nozzle shall be kept at a uniform constant distance from the surface, always insuring a right angle spray of the material to the surface. The high velocity impact shall be developed pneumatically by injecting compressed air at the nozzle.

E. Curing

1. Shotcrete shall be cured using water curing methods, sealing materials or curing compounds at the option of the Tank Contractor. Curing compounds shall not be used on surfaces to which decorative coatings, mortar or shotcrete is to be applied. Curing compounds used within the tank wall shall be suitable for use with potable water. Intermediate layers of shotcrete shall be kept damp by water curing or other means no sooner than twelve hours after the shotcrete has been applied.

2. Water curing is not required should additional shotcrete be applied on the entire wall surface within the following twelve hours.

3. Indiscriminate use of continuous water cure for intermediate layers shall be avoided.

4. Complete shotcrete surfaces, which do not receive any additional coatings, may be water cured for a period of at least seven days by encapsulating the shotcrete inside of plastic sheeting.

F. Testing

1. Testing of shotcrete shall be in accordance with ACI 506, except as specified herein. One test panel shall be made for each of the following operations: core wall, wire or strand cover, and cover coat. Test panels shall be made from the shotcrete as it is being placed, and shall, as nearly as possible, represent the material being applied. The method of making a test sample shall be as follows: A frame of wire fabric (1 foot square, 3 inches in depth) shall be secured to a plywood panel and hung or placed in the location where shotcrete is being placed. This form shall be filled in layers simultaneously with the nearby application. After twenty-four hours, the fabric and plywood backup shall be removed and the sample slab placed in a safe location at the site.

2. The sample slab shall be moist cured in a manner identical with the regular surface application. The sample slab shall be sent to the testing laboratory. Nine 3 inch cubes shall be cut from the sample slab and subjected to compression tests in accordance with current ASTM Standards. Three cubes shall be tested at the age of seven days, three shall be tested at the age of twenty-eight days, and three shall be retained as spares. Testing shall be by an independent testing laboratory, approved by the Engineer.

3. At the Tank Contractor’s option testing of shotcrete applied with an automated process shall be in accordance with ACI 301 and conform to Section 3.07.E “Concrete Testing” of these specifications in lieu of that indicated in Section 3.09.F.1.

10. CIRCUMFERENTIAL PRESTRESSING

A. Prestressing shall be performed utilizing continuous wire or strand. Prestressing wire/strand will be placed on the wall with a machine capable of consistently producing a stress in the wire/strand within a range of minus 7% to plus 7% of the stress required by the design. No circumferential movement of the prestressing along the tank wall will be permitted during or after stressing. Stressing may be accomplished by drawing the wire

through a die or by another process that results in uninterrupted elongation, thus assuring uniform stress throughout its length and over the periphery of the tank.

B. Each coil of prestressing shall be temporarily anchored at sufficient intervals to minimize the loss of prestress in case a wire/strand breaks during wrapping.

C. Minimum clear space between prestressing wires is 5/16 inch or 1.5 wire diameters, whichever is greater. Minimum clear distance between prestressing strands is 3/8 inch or 1.5 strand diameters, whichever is greater. Any wires or strands not meeting the spacing requirements shall be respaced. Prestressing shall be placed no closer than 2 inches from the top of the wall, edges of openings, or inserts, nor closer than 3 inches from the base of walls or floors where radial movement may occur.

D. The band of prestressing normally required over the height of an opening shall be displaced into circumferential bands immediately above and below the opening to maintain the required prestressing force. Bundling of the prestressing steel shall be prohibited.

E. For wire wound tanks, a stress plate shall be used at all permanent wall penetrations above grade that results in displacement of wire/strand equal to or greater than 24 inches in height. The stress plate shall accommodate a portion of the prestressing normally required for the height of the opening. The remaining prestressing normally required shall be displaced into circumferential bands immediately above and below the penetration. The effect of banded prestressing shall be taken into account in the design.

F. Ends of individual coils shall be joined by suitable steel splicing devices capable of developing the full strength of the prestressing wire/strand.

G. The Tank Contractor shall furnish a calibrated stress recording device, which can be recalibrated, to be used in determining wire/strand stress levels on the wall during and after the prestressing process. At least one stress reading per vertical foot or one stress reading for every roll of prestressing, whichever is greater, shall be taken immediately after the wire or strand has been applied on the wall. Readings shall be recorded and shall refer to the applicable height and layer of the prestressing for which the stress is being taken. The Tank Contractor shall keep a written record of stress readings. All stress readings shall be made on straight lengths of wire/strand. If applied stresses fall below the design stress in the steel, additional wire or strand will be provided to bring the force on the core wall up to the required design force. If the stress in the steel is more than 7% over the required design stress, the wrapping operation should be discontinued, and satisfactory adjustment made to the stressing equipment before proceeding.

H. When a mechanical stressing system is utilized a continuous electronically (or substantial equivalent) monitored permanent recording of the applied force shall be made during the entire circumferential prestressing application. All such recordings shall be based on a continuous sensing of the applied force on the wire/strand between the tensioning system and the wall when, and as, the strand is being wrapped and laid on the wall.

11. DECORATIVE COATINGS

A. All exposed exterior dome surfaces shall be given a two-coat finish consisting of one coat of damp-proofing product such as “Tamoseal with AKKRO-7T” or equal, and one coat of “Tammscoat Smooth” or equal. If required in the Owner’s drawings, all exterior exposed wall surfaces shall be given a two-coat finish of a non-cementitious 100% acrylic such as “Tammscoat Smooth”, Tnemec Envirocrete 156 or equal. Work shall be performed by workmen skilled in the application of these types of products. The Manufacturer’s application instructions shall be submitted to the Engineer for approval. The Tank

Contractor shall confer with the Manufacturer's representatives regarding application techniques and shall follow the Manufacturer's instructions implicitly.

B. The concrete surface to be coated shall be clean, free of all laitance, dirt, grease, or other foreign materials. All defective surfaces shall be filled and/or repaired. Application shall be in full accordance with the Manufacturer's instructions or as amended by the Engineer.

C. The Owner shall select the color.

12. DISINFECTION

A. The Tank Contractor shall, at the completion of tank construction, thoroughly clean the interior of the tank.

B. The Tank Contractor shall notify the Engineer prior to disinfecting the tank. Disinfection shall meet with the approval of the Engineer, AWWA C652, and the appropriate state agency.

C. The tank floor and interior of the wall shall be disinfected by using a solution of chlorine and water per Method 3 of AWWA C652.

D. Prior to placing the tank in service, a bacteriological test shall be taken, and successful results received. Testing shall be by an independent testing laboratory.

13. WATERTIGHTNESS TEST

A. Upon completion, the tank shall be tested to determine watertightness. The tank shall be filled with potable water to the maximum level. Water will be furnished to the tank by the owner. The test shall consist of measuring the liquid level over the next twenty-four hours to determine if any change has occurred. If a change is observed and exceeds the maximum allowance, the test shall be extended to a total of five days. If at the end of five days the average daily change has not exceeded the maximum allowance, the test shall be considered satisfactory.

B. The liquid volume loss for a period of twenty-four hours shall not exceed $1/20^{th}$ of 1% of the tank capacity, 0.0005 x tank volume. If the liquid volume loss exceeds this amount, it shall be considered excessive, and the tank shall be repaired and retested.

C. Damp spots will not be permitted at any location on the tank wall. Damp spots are defined as spots where moisture can be picked up on a dry hand. All such areas shall be repaired as necessary.

D. Damp spots or standing water on the footing may occur upon tank filling and are permissible within the allowable volume loss. Measurable flow in this area is not permissible and shall be corrected.

14. CLEAN-UP

The premises shall be kept clean and orderly at all times during the work. Upon completion of construction, the Tank Contractor shall remove or otherwise dispose of all rubbish and other materials caused by the construction operation. The Tank Contractor shall leave the premises in as good a condition as it was found.

SECTION 22 13 00
FACILITY SANITARY AND VENT PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section pertains to sanitary sewer and vent systems, including piping, equipment and all necessary accessories as designated in this section.

B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

E. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.

F. Section 22 07 11, PLUMBING INSULATION.

G. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS

H. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

I. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

A13.1-2007.....Identification of Piping Systems

A112.36.2M-1991.....Cleanouts

A112.6.3-2019.....Floor and Trench Drains

B1.20.1-2013.....Pipe Threads, General Purpose (Inch)

B16.1-2015.....Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250

B16.4-2016.....Grey Iron Threaded Fittings Classes 125 and 250 150, 250, and 300

B18.2.1-2012.....Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)

C. American Society of Sanitary Engineers (ASSE):

1018-2001.....Performance Requirements for Trap Seal Primer Valves – Potable Water Supplied

1044-2015.....Performance Requirements for Trap Seal Primer Devices – Drainage Types and Electronic Design Types

D. American Society for Testing and Materials (ASTM):

A74-2017.....Standard Specification for Cast Iron Soil Pipe and Fittings

A888-2018a.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

C564-2014.....Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings

D2321-2018.....Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2564-2012(R3018).....Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems

D2665-2014.....Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings

D2855-2015.....Standard Practice for Two-Step (Primer and Solvent Cement) Method of Joining Poly(Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) CPVCP Pipe and Piping Components with Tapered Sockets

D5926-2015.....Standard Specification for Poly(Vinyl Chloride) (PVC) Gaskets for Drain, Waste, and Vent (DWV), Sewer, Sanitary, and Storm Plumbing Systems

F402-2018.....Standard Practice for Safe Handling of Solvent Cements, Primers, and Cleaners Used for Joining Thermoplastic Pipe and Fittings

F477-2014.....Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe

E. Cast Iron Soil Pipe Institute (CISPI):

2006.....Cast Iron Soil Pipe and Fittings Handbook

301-2012.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

310-2012.....Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

F. International Code Council (ICC):

IPC-2018.....International Plumbing Code

G. National Fire Protection Association (NFPA):

70-2020.....National Electrical Code (NEC)

H. Underwriters' Laboratories, Inc. (UL):

508-99 (R2013).....Standard For Industrial Control Equipment

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION 22 13 00, FACILITY SANITARY AND VENT PIPING”, with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
   1. Piping.
   2. Floor Drains.
   3. Cleanouts.
   4. Trap Seal Protection.
   5. Pipe Fittings.
   6. Traps.
   7. Exposed Piping and Fittings.

D. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane or the floor drain.

E. Completed System Readiness Checklist provided by the CXA and completed by the Contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

A. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

1.6 AS-BUILT DOCUMENTATION

A. Comply with requirements in Paragraph “AS-BUILT DOCUMENTATION” of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS

2.1 SANITARY WASTE, DRAIN, AND VENT PIPING

A. Polyvinyl Chloride (PVC)
   1. Polyvinyl chloride (PVC) pipe and fittings are permitted where the waste temperature is less than 60 degrees C (140 degrees F).
   2. PVC piping and fittings shall NOT be used for the following applications:
      a. Waste collected from steam condensate drains.
      b. Spaces such as mechanical equipment rooms, kitchens, Sterile Processing Services, sterilizer areas, and areas designated for sleep.

c. Vertical waste and soil stacks serving more than two floors.

d. Exposed in mechanical equipment rooms.

e. Exposed inside of ceiling return plenums.

3. Polyvinyl chloride sanitary waste, drain, and vent pipe and fittings shall be solid core sewer piping conforming to ASTM D2665, sewer and drain series with ends for solvent cemented joints.

4. Fittings: PVC fittings shall be solvent welded socket type using solvent cement conforming to ASTM D2564.

2.2

2.3 SPECIALTY PIPE FITTINGS

A. Transition pipe couplings shall join piping with small differences in outside diameters or different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear and corrosion resistant metal, tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:

1. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F477 or ASTM D5926.

2. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.

2.4 CLEANOUTS

A. Cleanouts shall be the same size as the pipe, up to 4 inches; and not less than 4 inches for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. Minimum clearance of 24 inches shall be provided for clearing a clogged sanitary line.

B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall

be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated in the contract document and at every building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty type.

C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 24 inches above the floor. If there are no fixtures installed on the lowest floor, the cleanout shall be installed at the base of the stack. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel-bronze square frame and stainless steel cover with minimum opening of 6 by 6 inches shall be furnished at each wall cleanout. Where the piping is concealed, a fixture trap or a fixture with integral trap, readily removable without disturbing concealed pipe, shall be accepted as a cleanout equivalent providing the opening to be used as a cleanout opening is the size required.

D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/hubless cast iron ferrule. Plain end (hubless) piping in interstitial space or above ceiling may use plain end (hubless) blind plug and clamp.

2.5 FLOOR DRAINS

A. General Data: floor drain shall comply with ASME A112.6.3. A caulking flange, inside gasket, or hubless connection shall be provided for connection to cast iron pipe, screwed or no hub outlets for connection to steel pipe. The drain connection shall be bottom outlet. A membrane clamp and extensions shall be provided, if required, where installed in connection with waterproof membrane. Puncturing membrane other than for drain opening shall not be permitted. Double drainage pattern floor drains shall have integral seepage pan for embedding into floor construction, and weep holes to provide adequate drainage from pan to drain pipe. For drains not installed in connection with a waterproof membrane, a .45 kg (16-ounce) soft copper, 1.1 to 1.8 Kg (2.5 to 4 lbs.) flashing membrane, 600 mm (24 inches) square or another approved waterproof membrane shall be provided.

B. Type B (FD-B) medium duty (non-traffic) floor drain shall comply with ASME A112.6.3. The type B floor drain shall be constructed of galvanized cast iron with medium duty nickel bronze grate, double

drainage pattern, clamping device, without sediment bucket but with secondary strainer in bottom for large debris. The grate shall be 7 inches minimum.

.

2.6 TRAPS

A. Traps shall be provided on all sanitary branch waste connections from fixtures or equipment not provided with traps. Exposed brass shall be polished brass chromium plated with nipple and set screw escutcheons. Concealed traps may be rough cast brass or same material as the piping they are connected to. Slip joints are prohibited on sewer side of trap. Traps shall correspond to fittings on cast iron soil pipe or steel pipe respectively, and size shall be as required by connected service or fixture.

2.7 PRIMER VALVES AND TRAP SEAL PRIMER SYSTEMS

A. Trap Primer (TP-2): The trap seal primer valve shall be hydraulic, supply type with a pressure rating of 861 kPa (125 psig) and conforming to standard ASSE 1018.

1. The inlet and outlet connections shall be 15 mm or DN15 (NPS 1/2 inch)
2. The trap seal primer valve shall be fully automatic with an all brass or bronze body.
3. The trap seal primer valve shall be activated by a drop in building water pressure, no adjustment required.
4. The trap seal primer valve shall include a manifold when serving two, three, or four traps.
5. The manifold shall be omitted when serving only one trap.

SPEC WRITER NOTE: See standard detail SD220511-01.DWG available at http://www.cfm.va.gov/til/sDetail.asp.

2.8 PENETRATION SLEEVES

A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that shall extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting

that shall extend through the floor slab. A waterproof caulked joint shall be provided at the top hub.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

A. The pipe installation shall comply with the requirements of the International Plumbing Code (IPC) and these specifications.

B. Branch piping shall be installed for waste from the respective piping systems and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.

C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.

D. All pipe runs shall be laid out to avoid interference with other work.

E. The piping shall be installed above accessible ceilings where possible.

F. The piping shall be installed to permit valve servicing or operation.

G. The piping shall be installed free of sags and bends.

H. Seismic restraint shall be installed where required by code.

I. Changes in direction for soil and waste drainage and vent piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep quarter bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and eighth bend fittings shall be used if two fixtures are installed back to back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow greater than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

J. Buried soil and waste drainage and vent piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer’s written instruction for use of lubricants, cements, and other installation requirements.

K. Aboveground PVC piping shall be installed according to ASTM D2665. Underground PVC piping shall be installed according to ASTM D2321.

L. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 JOINT CONSTRUCTION

A. For PVC piping, solvent cement joints shall be used for joints. All surfaces shall be cleaned and dry prior to applying the primer and solvent cement. Installation practices shall comply with ASTM F402. The joint shall conform to ASTM D2855 and ASTM D2665 appendices.

3.3 PIPE HANGERS, SUPPORTS AND ACCESSORIES

A. All piping shall be supported according to the International Plumbing Code (IPC), Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications. Where conflicts arise between these the code and Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING the most restrictive or the requirement that specifies supports with highest loading or shortest spacing shall apply.

B. Hangers, supports, rods, inserts and accessories used for pipe supports shall be painted according to Section 09 91 00, PAINTING. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.

C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.

D. The maximum spacing for plastic pipe shall be 1.22 m (4 feet).

E. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.6 m (15 feet).

1. See Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, for requirements on insulated pipe protective shields at hanger supports.

F. Miscellaneous materials shall be provided as specified, required, directed or as noted in the contract documents for proper installation of hangers, supports and accessories. All necessary auxiliary steel shall be provided to provide that support.

G. Cast escutcheon with set screw shall be provided at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.

H. Penetrations:

1. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

I. Exhaust vents shall be extended separately through roof. Sanitary vents shall not connect to exhaust vents.

3.4 TESTS

A. Sanitary waste and drain systems shall be tested either in its entirety or in sections.

B. Waste System tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.

1. If entire system is tested for a water test, tightly close all openings in pipes except highest opening, and fill system with water to point of overflow. If the waste system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 10 foot head of water. In testing successive sections, test at least upper 10 feet of next preceding section so that each joint or pipe except upper most 10 feet of system has been submitted to a test of at least a 10 foot head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
2. For an air test, an air pressure of 5 psig gauge shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gauge shall be used for the air test.
3. After installing all fixtures and equipment, open water supply so that all p-traps can be observed. For 15 minutes of operation, all p-traps shall be inspected for leaks and any leaks found shall be corrected.
4. Final Tests: Either one of the following tests may be used.
   a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1 inch of water with a smoke machine. Chemical smoke is prohibited.
   b. Peppermint Test: Introduce 2 ounces of peppermint into each line or stack.

3.5 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

B. Components provided under this section of the specification shall be tested as part of a larger system.

3.6 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

SECTION 22 40 00
PLUMBING FIXTURES

PART 1 - GENERAL

1.1 DESCRIPTION

A. Plumbing fixtures, associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

E. Section 07 92 00, JOINT SEALANTS: Sealing between fixtures and other finish surfaces.

F.

.

H. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

I. Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS: Requirements for commissioning, systems readiness checklist, and training.

J. 22 13 00, FACILITY SANITARY AND VENT PIPING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. The American Society of Mechanical Engineers (ASME):

A112.6.1M-1997 (R2012)..Supports for Off-the-Floor Plumbing Fixtures for Public Use

A112.19.1-2013.....Enameled Cast Iron and Enameled Steel Plumbing Fixtures

A112.19.3-2008.....Stainless Steel Plumbing Fixtures

C. American Society for Testing and Materials (ASTM):

A276-2013a.....Standard Specification for Stainless Steel Bars and Shapes

D. CSA Group:

B45.4-2008 (R2013)......Stainless Steel Plumbing Fixtures

E. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-2006.....Metal Finishes Manual

G. NSF International (NSF):
14-2013.....Plastics Piping System Components and Related Materials
61-2013.....Drinking Water System Components – Health Effects
372-2011.....Drinking Water System Components – Lead Content

H. American with Disabilities Act (A.D.A)

I. International Code Council (ICC):
IPC-2015.....International Plumbing Code

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION 22 40 00, PLUMBING FIXTURES”, with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, connections, and capacity.

D. Operating Instructions: Comply with requirements in Section 01 00 00, GENERAL REQUIREMENTS.

E. Completed System Readiness Checklist provided by the CxA and completed by the Contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

F. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA’s Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more

information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in AutoCAD version 2023 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead is prohibited in any potable water system intended

for human consumption, and shall be certified in accordance with NSF 61 or NSF 372. Endpoint devices used to dispense water for drinking shall meet the requirements of NSF 61.

B. Plastic pipe, fittings, and solvent cement shall meet NSF 14 and shall be NSF listed for the service intended.

2.2

2.3 STOPS

A. Provide lock-shield loose key or screw driver pattern angle stops, straight stops or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in solid-surface, wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.

B. Furnish keys for lock shield stops to the COR.

C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.

D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e. red brass pipe nipple, chrome plated where exposed.

E. Mental Health Area: Provide stainless steel drain guard for all lavatories not installed in casework.

2.4 ESCUTCHEONS

A. Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling and floor penetrations in exposed finished locations and within cabinets and millwork.

2.5 LAMINAR FLOW CONTROL DEVICE

A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing. **Aerators are prohibited.**

2.6 CARRIERS

2.11 TROUGHS

A. Dimensions for troughs are specified, length by width (distance from wall) and depth.

2.15 HYDRANT, HOSE BIBB AND MISCELLANEOUS DEVICES

A. (P-801) Wall Hydrant: Cast bronze non-freeze hydrant with detachable T-handle. Brass operating rod within casing of bronze pipe of sufficient length to extend through wall and place valve inside building. Brass valve with coupling and union elbow having metal-to-metal seat. Valve rod and seat washer removable through face of hydrant; 3/4 inch hose thread on spout; 3/4 inch pipe thread on inlet. Finish may be rough; exposed surfaces shall be chrome plated. Set not less than 18 inches nor more than 36 inches above grade. On porches and platforms, set approximately 30 inches) above finished floor. Provide integral vacuum breaker which automatically drains when shut off.

2.16

PART 3 - EXECUTION

3.1 INSTALLATION

A. Fixture Setting: Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

B. Supports and Fastening: Secure all fixtures, equipment and trimmings to partitions, walls and related finish surfaces. Exposed heads of bolts and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.

C. Toggle Bolts: For hollow masonry units, finished or unfinished.

D. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 1/4 inch diameter bolts, and to extend at least 76 mm (3 inches) into masonry and be fitted with loose tubing or sleeves extending into masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.

E. Power Set Fasteners: May be used for concrete walls, shall be 6 mm (1/4 inch) threaded studs, and shall extend at least 32 mm (1 1/4 inches) into wall.

F. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.

G. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no cost or additional time to the Government.

3.2 CLEANING

A. At completion of all work, fixtures, exposed materials and equipment

3.4 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA Personnel in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 22 08 00, COMMISSIONING OF PLUMBING SYSTEMS.

- - - E N D - - -

DIVISION 23
HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. Definitions:

1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
2. Exterior: Piping, ductwork, and equipment exposed to weather be it temperature, humidity, precipitation, wind, or solar radiation.

C. Abbreviations/Acronyms:

1. ac: Alternating Current
2. AC: Air Conditioning
3. ACU: Air Conditioning Unit
4. ACR: Air Conditioning and Refrigeration
5. AI: Analog Input
6. AISI: American Iron and Steel Institute
7. AO: Analog Output
8. ASJ: All Service Jacket
9. AWG: American Wire Gauge
10. BACnet: Building Automation and Control Networking Protocol
11. BAg: Silver-Copper-Zinc Brazing Alloy
12. BAS: Building Automation System
13. BCuP: Silver-Copper-Phosphorus Brazing Alloy
14. bhp: Brake Horsepower
15. Btu: British Thermal Unit
16. Btu/h: British Thermal Unit Per Hour
17. CDA: Copper Development Association
18. C: Celsius
19. CD: Compact Disk
20. CFM: Cubic Foot Per Minute
21. CH: Chilled Water Supply
22. CHR: Chilled Water Return
23. CLR: Color
24. CO: Carbon Monoxide
25. COR: Contracting Officer’s Representative
26. CPD: Condensate Pump Discharge

27. CPM: Cycles Per Minute
28. CPVC: Chlorinated Polyvinyl Chloride
29. CRS: Corrosion Resistant Steel
30. CTPD: Condensate Transfer Pump Discharge
31. CTPS: Condensate Transfer Pump Suction
32. CW: Cold Water
33. CWP: Cold Working Pressure
34. CxA: Commissioning Agent
35. dB: Decibels
36. dB(A): Decibels (A weighted)
37. DDC: Direct Digital Control
38. DI: Digital Input
39. DO: Digital Output
40. DVD: Digital Video Disc
41. DN: Diameter Nominal
42. DWV: Drainage, Waste and Vent
43. EPDM: Ethylene Propylene Diene Monomer
44. EPT: Ethylene Propylene Terpolymer
45. ETO: Ethylene Oxide
46. F: Fahrenheit
47. FAR: Federal Acquisition Regulations
48. FD: Floor Drain
49. FED: Federal
50. FG: Fiberglass
51. FGR: Flue Gas Recirculation
52. FOS: Fuel Oil Supply
53. FOR: Fuel Oil Return
54. FSK: Foil-Scrim-Kraft facing
55. FWPD: Feedwater Pump Discharge
56. FWPS: Feedwater Pump Suction
57. GC: Chilled Glycol Water Supply
58. GCR: Chilled Glycol Water Return
59. GH: Hot Glycol Water Heating Supply
60. GHR: Hot Glycol Water Heating Return
61. gpm: Gallons Per Minute
62. HDPE: High Density Polyethylene
63. Hg: Mercury

64. HOA: Hands-Off-Automatic
65. hp: Horsepower
66. HPS: High Pressure Steam (414 kPa (60 psig) and above)
67. HPR: High Pressure Steam Condensate Return
68. HW: Hot Water
69. HWH: Hot Water Heating Supply
70. HWHR: Hot Water Heating Return
71. Hz: Hertz
72. ID: Inside Diameter
73. IPS: Iron Pipe Size
74. kg: Kilogram
75. klb: 1000 lb
76. kPa: Kilopascal
77. lb: Pound
78. lb/hr: Pounds Per Hour
79. L/s: Liters Per Second
80. L/min: Liters Per Minute
81. LPS: Low Pressure Steam (103 kPa (15 psig) and below)
82. LPR: Low Pressure Steam Condensate Gravity Return
83. MAWP: Maximum Allowable Working Pressure
84. MAX: Maximum
85. MBtu/h: 1000 Btu/h
86. MBtu: 1000 Btu
87. MED: Medical
88. m: Meter
89. MFG: Manufacturer
90. mg: Milligram
91. mg/L: Milligrams Per Liter
92. MIN: Minimum
93. MJ: Megajoules
94. ml: Milliliter
95. mm: Millimeter
96. MPS: Medium Pressure Steam (110 kPa (16 psig) through 414 kPa (60 psig))
97. MPR: Medium Pressure Steam Condensate Return
98. MW: Megawatt
99. NC: Normally Closed

100. NF: Oil Free Dry (Nitrogen)
101. Nm: Newton Meter
102. NO: Normally Open
103. NOx: Nitrous Oxide
104. NPT: National Pipe Thread
105. NPS: Nominal Pipe Size
106. OD: Outside Diameter
107. OSD: Open Sight Drain
108. OS&Y: Outside Stem and Yoke
109. PC: Pumped Condensate
110. PID: Proportional-Integral-Differential
111. PLC: Programmable Logic Controllers
112. PP: Polypropylene
113. PPE: Personal Protection Equipment
114. ppb: Parts Per Billion
115. ppm: Parts Per Million
116. PRV: Pressure Reducing Valve \
117. PSIA: Pounds Per Square Inch Absolute
118. psig: Pounds Per Square Inch Gauge
119. PTFE: Polytetrafluoroethylene
120. PVC: Polyvinyl Chloride
121. PVDC: Polyvinylidene Chloride Vapor Retarder Jacketing, White
122. PVDF: Polyvinylidene Fluoride
123. rad: Radians
124. RH: Relative Humidity
125. RO: Reverse Osmosis
126. rms: Root Mean Square
127. RPM: Revolutions Per Minute
128. RS: Refrigerant Suction
129. RTD: Resistance Temperature Detectors
130. RTRF: Reinforced Thermosetting Resin Fittings
131. RTRP: Reinforced Thermosetting Resin Pipe
132. SCFM: Standard Cubic Feet Per Minute
133. SPEC: Specification
134. SPS: Sterile Processing Services
135. STD: Standard
136. SDR: Standard Dimension Ratio

137. SUS: Saybolt Universal Second
138. SW: Soft water
139. SWP: Steam Working Pressure
140. TAB: Testing, Adjusting, and Balancing
141. TDH: Total Dynamic Head
142. TEFC: Totally Enclosed Fan-Cooled
143. TFE: Tetrafluoroethylene
144. THERM: 100,000 Btu
145. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
146. THWN: Thermoplastic Heat & Water-Resistant Nylon Coated Wire
147. T/P: Temperature and Pressure
148. USDA: U.S. Department of Agriculture
149. V: Volt
150. VAC: Vacuum
151. VA: Veterans Administration
152. VAC: Voltage in Alternating Current
153. VA CFM: VA Construction & Facilities Management
154. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
155. VAMC: Veterans Administration Medical Center
156. VHA OCAMES: Veterans Health Administration – Office of Capital Asset Management Engineering and Support
157. VR: Vacuum condensate return
158. WCB: Wrought Carbon Steel, Grade B
159. WG: Water Gauge or Water Column
160. WOG: Water, Oil, Gas

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.
B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
D. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.
E. Section 05 50 00, METAL FABRICATIONS.
F. Section 07 92 00, JOINT SEALANTS.
G. Section 09 91 00, PAINTING.
H. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
I. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
J. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. Air Movement and Control Association (AMCA):

410-1996.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

C. American Society of Mechanical Engineers (ASME):

B31.1-2018.....Power Piping

D. American Society for Testing and Materials (ASTM):

A36/A36M-2014.....Standard Specification for Carbon Structural Steel

A575-1996(R2018).....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

E. Association for Rubber Products Manufacturers (ARPM):

IP-20-2015.....Specifications for Drives Using Classical V-Belts and Sheaves

IP-24-2016.....Specifications for Drives Using Synchronous Belts

IP-27-2015.....Specifications for Drives Using Curvilinear Toothed Synchronous Belts

F. Military Specifications (MIL):

MIL-P-21035B-2013.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

G. National Fire Protection Association (NFPA):

70-2017.....National Electrical Code (NEC)

101-2018.....Life Safety Code

H. Department of Veterans Affairs (VA):

PG-18-10-2016.....Physical Security and Resiliency Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION 23 05 11, COMMON WORK RESULTS FOR HVAC”, with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor’s responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor’s responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed contract documents, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together. Coordinate and properly integrate materials and equipment to provide a completely compatible and efficient installation.

G. Coordination/Shop Drawings:

1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify

and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.

3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for HVAC systems, provide details of the following:
   a. Mechanical equipment rooms.
   b. Hangers, inserts, supports, and bracing.
   c. Pipe sleeves.
   d. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

H. Manufacturer's Literature and Data: Include full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity. Submit under the pertinent section rather than under this section.
   1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COR.
   2. Submit electric motor data and variable speed drive data with the driven equipment.
   3. Equipment and materials identification.

I. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan shall include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

J. HVAC Maintenance Data and Operating Instructions:
   1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.

2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   a. Include complete list indicating all components of the systems.
   b. Include complete diagrams of the internal wiring for each item of equipment.
   c. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.
3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

K. Provide copies of approved HVAC equipment submittals to the TAB Subcontractor.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC.

B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

C. Products Criteria:
   1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other

specification sections for any exceptions and/or additional requirements.

2. Refer to all other sections for quality assurance requirements for systems and equipment specified therein.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 23 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.
5. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
6. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
7. Use of asbestos products or equipment or materials containing asbestos is prohibited.

D. HVAC Equipment Service Providers: Service providers shall be authorized and trained by the manufacturers of the equipment supplied. These providers shall be capable of responding onsite and provide acceptable service to restore equipment operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shutdown of equipment; or within 24 hours in a non-emergency. Submit names, mail and e-mail addresses and phone numbers of service personnel and companies providing service under these conditions for (as applicable to the project): fans and air handling unit.

E. HVAC Mechanical Systems Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:

1. Qualify welding processes and operators for piping according to ASME BPVC Section IX. Provide proof of current certification.

2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the associated code.

F. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR with submittals. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material and removal by the Contractor and no additional cost or time to the Government.

G. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract documents to the COR for resolution. Provide written hard copies and computer files on CD or DVD of manufacturer’s installation instructions to the COR with submittals prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received and approved by the VA. Failure to furnish these recommendations is a cause for rejection of the material.
2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to, all types of valves, filters and strainers, transmitters, control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to the COR for resolution. Failure of the Contractor to resolve, or point out any issues will result in the Contractor correcting at no additional cost or time to the Government.

3. Complete coordination/shop drawings shall be required in accordance with Article, SUBMITTALS. Construction work shall not start on any system until the coordination/shop drawings have been approved by VA.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

H. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

I. Guaranty: Warranty of Construction, FAR Clause 52.246-21.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Large equipment such as fans and air handling units if shipped on open trailer trucks shall be covered with shrink on plastics or water proof tarpaulins that provide protection from exposure to rain, road salts and other transit hazards. Protection shall be kept in place until equipment is moved into a building or installed as designed.
3. Repair damaged equipment in first class, new operating condition and appearance; or, replace same as determined and directed by the COR. Such repair or replacement shall be at no additional cost or time to the Government.
4. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.

2. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the ‘third party testing company’ requirement. Provide record drawings as follows:

1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment to include breaker location and numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures

followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics_), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Provide maximum standardization of components to reduce spare part requirements.

B. Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

C. Equipment and components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a nameplate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions must be approved by the VA, but may be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the

result will be a complete and fully operational plant that conforms to contract requirements.

2.3 LIFTING ATTACHMENTS

A. Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.4 ELECTRIC MOTORS

A. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.5 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents and shown in the maintenance manuals.

B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 5 mm (3/16 inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.

C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 5 mm (3/16 inch) high riveted or bolted to the equipment.

D. Control Items: Label all instrumentation, temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

2.6 GALVANIZED REPAIR COMPOUND

A. Mil-P-21035B, paint form.

2.7 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

2.8 SPECIAL TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.

D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the COR.

E. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.9 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. The coordination/shop drawings shall be submitted for review. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Equipment coordination/shop drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Follow manufacturer's published recommendations for installation methods not otherwise specified.

B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy

access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the contract documents.

C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.

D. Cutting Holes:

1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill is prohibited, except as permitted by COR where working area space is limited.
2. Locate holes to avoid interference with structural members such as slabs, columns, ribs, beams or reinforcing. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
3. Do not penetrate membrane waterproofing.

E. Electrical Interconnection of Instrumentation or Controls: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Devices shall be located so they are easily accessible for testing, maintenance, calibration, etc. The COR has the final determination on what is accessible and what is not. Comply with NFPA 70.

F. Protection and Cleaning:

1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means

of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

G. Concrete and Grout: Use concrete and non-shrink grout 20 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

H. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance or inspections, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or time to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to motors, fans, pumps, belt guards, transformers, high voltage lines, conduit and raceways, piping, hot surfaces, and ductwork. The COR has final determination on whether an installation meets this requirement or not.

3.3 RIGGING

A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service requirements as well as structural integrity of the building.

C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.

E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Follow approved rigging plan.

G. Restore building to original condition upon completion of rigging work.

3.4 PIPE AND EQUIPMENT SUPPORTS

A. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.

3.5 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.

2. The following material and equipment shall not be painted:

a. Motors, controllers, control switches, and safety switches.

b. Control and interlock devices.

c. Lubrication devices and grease fittings.

d. Copper, brass, aluminum, stainless steel and bronze surfaces.

e. Pressure gauges and thermometers.

f. Glass.

g. Nameplates.

3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.

4. Pumps, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.

5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats. This may include painting exposed metals where hangers were removed or where equipment was moved or removed.
6. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.
7. Lead based paints are prohibited.

3.6 IDENTIFICATION SIGNS

A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16 inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.7 MOTOR AND DRIVES

A. Alignment of Direct-Connect Drives: Securely mount motor in accurate alignment so that shafts are per coupling manufacturer’s tolerances when both motor and driven machine are operating at normal temperatures.

3.8 LUBRICATION

A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. Field-check all devices for proper lubrication.

B. All devices and equipment shall be equipped with required lubrication fittings or devices. A minimum of 0.95 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COR in unopened containers that are properly identified as to application.

C. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

D. All lubrication points shall be extended to one side of the equipment.

3.9 STARTUP, TEMPORARY OPERATION AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. Startup of equipment shall be performed as described in equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS Article, TESTS, and in individual Division 23 specification sections and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost or time to the Government.

C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

D. No adjustments may be made during the acceptance inspection. All adjustments shall have been made by this point.

3.11 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

- - - E N D - - -

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection Report.
5. Systems Readiness Report.
6. Adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.

C. Definitions:

1. Basic TAB used in this Section: Chapter 39, "Testing, Adjusting and Balancing" of ASHRAE Handbook "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. TABB: Testing Adjusting and Balancing Bureau.
6. SMACNA: Sheet Metal and Air Conditioning Contractors’ National Association.
8. Air Systems: Includes all outside air, supply air and return air systems.
9. Flow Rate Tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

F. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 APPLICABLE PUBLICATIONS

A. The following publications form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standards will govern.

B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):

2019.....ASHRAE Handbook – HVAC Applications, Chapter 39, Testing, Adjusting, and Balancing and Chapter 49, Noise and Vibration Control

C. Associated Air Balance Council (AABC):

2016.....National Standards for Total System Balance, 7th Edition

D. National Environmental Balancing Bureau (NEBB):

2019.....Procedural Standard for Testing, Adjusting, and Balancing of Environmental Systems, 9th Edition

2015.....Procedural Standard for the Measurement of Sound and Vibration, 2nd Edition

S110-2019.....Whole Building Technical Commissioning of New Construction, 2nd Edition

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

2002.....HVAC Systems Testing, Adjusting and Balancing, 3rd Edition

2003.....TAB Procedural Guide 1st Edition

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION XX XX XX, SECTION TITLE”, with applicable paragraph identification.

C. Submit names and qualifications of TAB agency and TAB Specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.

D. For use by the COR staff, submit one complete set of applicable AABC, NEBB or TABB publications that will be the basis of TAB work.

E. Submit the following for review and approval:
   1. Design Review Report within 90 days for conventional design projects after the system layout on air and water side is completed by the Contractor.
   2. Systems inspection report on equipment and installation for conformance with design.
   4. Systems Readiness Report.
   5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
   6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.

F. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area with noted critical paths.

1.5 QUALITY ASSURANCE

A. Refer to paragraphs QUALITY ASSURANCE and SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Qualifications:
   1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
   2. The TAB agency shall be either a certified member of AABC, NEBB, or TABB to perform TAB service for HVAC of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another qualified TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC, TABB or NEBB within the five (5) years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency’s review shows unsatisfactory work performed by the predecessor agency.

3. TAB Specialist: The TAB Specialist shall be either a member of AABC or TABB or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five (5) years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB Specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and shall be performed by an approved successor.
4. TAB Specialist shall be identified by the General Contractor within sixty (60) days after the Notice to Proceed. The TAB Specialist will be coordinating, scheduling, and reporting all TAB work and related activities and will provide necessary information as required by the COR. The responsibilities shall specifically include:
   a. Directly supervising all TAB work.
   b. Sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC, TABB or NEBB.
   c. Following all TAB work through its satisfactory completion.
   d. Providing final markings of settings of all HVAC adjustment devices.
5. All TAB technicians performing actual TAB work shall be experienced and shall have done satisfactory work on a minimum of three (3) projects comparable in size and complexity to this project. Qualifications shall be certified by the TAB agency in writing. The lead technician shall be certified by AABC, TABB or NEBB.

C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards, TABB/SMACNA International Standards, or by NEBB Procedural Standard for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose. All equipment

shall remain in calibration, or be re-calibrated if certification expires, during the TAB procedures.

D. TAB Criteria:

1. One or more of the applicable AABC, NEBB, TABB or SMACNA publications, supplemented by Chapter 39, "Testing, Adjusting and Balancing" of ASHRAE Handbook "HVAC Applications" and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow Rate Tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow Chapter 39, "Testing, Adjusting and Balancing" of ASHRAE Handbook "HVAC Applications" as a guideline. Air Filter resistance during tests, artificially imposed, if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
   a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 5 percent to plus l0 percent.
   d. Minimum Outside Air: 0 percent to plus 10 percent.
3. Systems shall be adjusted for energy efficient operation as described in PART 3.

PART 3 - EXECUTION

3.1 GENERAL

A. Refer to TAB Criteria in Paragraph QUALITY ASSURANCE.

B. Obtain applicable contract documents and copies of approved submittals for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

A. The TAB Specialist shall review the contract documents and advise the COR of any design deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

A. Inspect equipment and installation for conformance with design.

B. The inspection and report shall be done after air distribution equipment is onsite and installation has begun, but well in advance of

performance testing and balancing work. The purpose of the inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.

C. Reports: Follow checklist format developed by AABC, NEBB or SMACNA (TABB), supplemented by narrative comments, with emphasis on air-handling units and fans. Check for conformance with submittals.

3.5 SYSTEM READINESS REPORT

B. Inspect each system to ensure that it is complete including installation and operation of controls. Submit report to COR in standard format.

C. Verify that all items that are required for TAB are installed. Provide a report to the COR.

3.6 TAB REPORTS

B. The TAB Contractor shall provide raw data immediately in writing to the COR if there is a problem in achieving intended results before submitting a formal report.

3.7 TAB PROCEDURES

A. TAB shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC, TABB or NEBB. Balancing shall be done proportionally to all applicable systems.

B. General: During TAB all related system components shall be in full operation. Fan rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB.

D. Allow 7 days’ time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.

E. Air Balance and Equipment Test: Include fan coil units.

1. Artificially load air filters by partial blanking to produce static air pressure drop of manufacturer’s recommended pressure drop.
2. Adjust fan speeds to provide design air flow.
3. Test and balance systems in all specified modes of operation, including economizer and fire emergency modes. Verify that dampers and other HVAC controls function properly.
5. Record final measurements for air handling equipment performance data sheets.

- - E N D - -

SECTION 23 81 00
DECENTRALIZED UNITARY HVAC EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies self-contained, , through-the-wall packaged terminal air conditioners.

B. Definitions:

1. Energy Efficiency Ratio (EER): The ratio of net cooling capacity is Btu/h to total rate of electricity input in watts under designated operating conditions (Btu hour/Watt).
2. Seasonal Energy Efficiency Ratio (EER): The ratio of the total cooling output of an air conditioner during its normal annual usage period for cooling in Btu/h divided by total electric energy input in watts during the same period (Btu hour/Watt).
3. Unitary: A Unitary Air Conditioner consists of one or more factory-made assemblies which normally include an evaporator or cooling coil, a compressor and condenser combination, and may include a heating function as well.
4. Where such equipment is provided in more than one assembly the separated assemblies are to be designed to be used together and the requirements of rating are based upon use of matched assemblies.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

D. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.//

1.3 QUALITY ASSURANCE

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Safety Standards: ASHRAE Standard 15, Safety Code for Mechanical Refrigeration.

1.4 SUBMITTALS

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

B. Manufacturer’s literature and data:

1. Sufficient information, including capacities, pressure drops, and piping connections clearly presented, shall be included to determine compliance with drawings and specifications for units noted below:
   a. Unitary air conditioners:
      1) Self-contained units
   b. Through-the-wall packaged terminal air conditioning units
2. Unit Dimensions required clearances, operating weights accessories and start-up instructions.
3. Electrical requirements, wiring diagrams, interlocking and control wiring showing factory installed and portions to be field installed.
4. Mounting and flashing of the roof curb to the roofing structure with coordinating requirements for the roof membrane system.

C. Certification: Submit proof of specified ARI Certification.

D. Performance Rating: Submit catalog selection data showing equipment ratings and compliance with required sensible-to-heat-ratio, energy efficiency ratio (EER), and coefficient of performance (COP).

E. Operating and Maintenance Manual: Submit three copies of Operating and Maintenance manual to Resident Engineer three weeks prior to final inspection.

F. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI):

210/240-2017.....Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment

270-2015.....Sound Rating of Outdoor Unitary Equipment

310/380-2017.....Standard for Packaged Terminal Air-Conditioners and Heat Pumps (CSA-C744-04)

340/360-2015.....Performance Rating of Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment

520-2004.....Performance Rating of Positive Displacement Condensing Units

C. Air Movement and Control Association (AMCA):

210-2016.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating (ANSI)

410-1996.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

D. American National Standards Institute (ANSI):

S12.51-2017.....Acoustics - Determination of Sound Power Levels of Noise Sources Using Sound Pressure - Precision Method for Reverberation Rooms (same as ISO 3741:1999)

E. American Society of Civil Engineers (ASCE)

ASCE 7-2017.....Minimum Design Loads for Buildings and Other Structures

F. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):

Handbook 2016.....HVAC Systems and Equipment

15-2019.....Safety Standard for Refrigeration Systems (ANSI)

62.1-2016.....Ventilation for Acceptable Indoor Air Quality (ANSI)

G. American Society of Testing and Materials (ASTM):

B117-2018.....Standard Practice for Operating Salt Spray (Fog) Apparatus

H. Federal Specifications (Fed. Spec.):

A-A-50502-2009..... Air conditioner (Unitary Heat Pump) Air to Air (3000-300,000 Btu)

I. Military Specifications (Mil. Specs.):

MIL-PRF-26915D.....Primer Coating, for Steel Surfaces

J. National Electrical Manufacturer's Association (NEMA):

ICS 1-2005.....Industrial Controls and Systems: General Requirements

MG 1-2019.....Motors and Generators (ANSI)

K. National Fire Protection Association (NFPA) Publications:

90A-2018.....Standard for the Installation of Air-Conditioning and Ventilating Systems

PART 2 - PRODUCTS

2.1 UNITARY AIR CONDITIONERS - GENERAL

A. Applicable ARI Standards:

1. Cooling Capacity Less Than 39.6 kW (135,000 Btu/h): AHRI 210/240. Units shall be listed in the ARI Directory of Certified Unitary Air-Conditioners.

B. Performance Rating: Cooling capacity of units shall meet the sensible heat and total heat requirements shown in the contract documents. In selecting unit size, make true allowance for "sensible to total heat ratio" to satisfy required sensible cooling capacity.

C. Machinery Guards: Provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor. Drive guards may be excluded where motors and drives are inside factory fabricated casings.

D. Corrosion Prevention: Unless specified otherwise, equipment fabricated from ferrous metals that do not have a zinc coating or a duplex coating of zinc and paint shall be treated for prevention of rust with a factory coating or paint system that will withstand 125 hours in a salt-spray fog test, except that equipment located outdoors shall be tested for 500 hours. The salt-spray fog test shall be in accordance with ASTM B117 using a 20 percent sodium chloride solution. Immediately after completion of the test, the coating shall show no signs of blistering, wrinkling or cracking, no loss of adhesion, and the specimen shall show no signs of rust beyond 3 mm (1/8-inch) on both sides from the scratch mark.

2.2 SELF-CONTAINED AIR CONDITIONERS

A. Description: Factory assembled and wired consisting of the following:

1. Cabinet.
2. Compressor.
3. Evaporator fan.
4. Evaporator coil,
5. Air-cooled condenser.
7. Air filters.
8. Controls.
9. Full charge of refrigerant and oil.

B. Cabinet Frame and Panels: Structural-steel frame with galvanized-steel panels with baked-enamel finish in color selected by Architect, and with access doors or panels.
   1. Insulation: Minimum 25-mm (1-inch) thick, aluminum foil faced, glass fiber duct liner on cabinet interior and control panel.
   2. Drain Pan: Galvanized steel with corrosion-resistant coating or Stainless steel, insulated complying with ASHRAE 62.1-2007.
   3. Airstream Surfaces: Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1.

C. Evaporator Fan: Galvanized steel, double-width, double-inlet, forward-curved centrifugal fan; statically and dynamically balanced. Direct drive, with fan mounted on permanently lubricated bearings and having cast-iron or steel sheaves, dynamically balanced, bored to fit shafts and keyed. Motor sheaves shall be variable and adjustable pitch selected so required rpm are obtained when set at middle position. Fan and motor shall be resiliently mounted with ratings as recommended by the manufacturer with a minimum of one and one-half times nameplate rating of motor. Bearings shall be grease lubricated with grease lines extended to exterior of unit. Variable-air volume units shall have variable frequency drives with adjustable, static-pressure controller responding to a static-pressure sensor and variable-frequency motor controller.

D. Fan Motors: Shall be multi-speed, PSC type, totally enclosed fan cooled.

E. Isolation: Mount fan and motor on common sub-base and mount assembly on spring isolators with minimum static deflection of 25 mm (1 inch) unless otherwise indicated.

F. Compressor hermetically sealed, scroll, 3600 rpm maximum, and resiliently mounted with positive lubrication and internal motor protection.

G. Coil: Direct-Expansion Coil: Seamless copper tubes expanded into aluminum fins:
   1. Corrosion-Resistant Treatment: Phenolic coating applied with multiple dips and baked.

H. Integral Air-Cooled Condenser for Units 52.8 kW (15 tons) and Smaller. Factory assembled and tested; consisting of condenser coil, fans and motors, and cabinet:
   1. Condenser Coil: Aluminum-fin copper tube with integral sub cooler; leak tested to 2930 kPa (425 psig).
   2. Condenser Fans: Direct-drive propeller type with permanently lubricated motor with built-in thermal-overload protection.
   3. Low Ambient Control: Cycles fans to permit operation down to minus 18 deg C (0 deg F).

I. Refrigeration System: Factory assembled and tested, and charged with refrigerant; and consisting of piping and accessories connecting compressor, evaporator coil, and condenser coil, and including the following:
   1. For heat pump units, a four-way reversing valve and suction-line accumulator.
   2. Expansion valve with replaceable thermostatic element.
   3. Refrigerant dryer.
   4. High-pressure switch.
   5. Low-pressure switch.
   6. Thermostat for coil freeze-up protection during low-ambient temperature operation or loss of air.
   7. Low-ambient switch.
   8. Brass service valves installed in discharge and liquid lines.
   9. R-410A refrigerant unless otherwise indicated.

J. Low Ambient Control: //Cycle fans to permit operation down to 7 deg C (45 deg F).

H. Coil Guard: Painted galvanized steel with louvered grilles.

I. Corrosion-Resistant Treatment: Phenolic coating applied in multiple dips and baked. See paragraph 2.1.D above.

J. Air Filters:
   1. Disposable Filters: 50 mm (2 inch) thick, pleated MERV 8 panel filters.
   2. Filter Efficiency: MERV rating as specified above according to ASHRAE 52.2.
   3. Air-Pressure Switch: Indicates dirty filters.

K. Controls:

1. Control Package: Factory wired, including contactor, high- and low-pressure cutouts, internal-winding thermostat for compressor, control-circuit transformer, and noncycling reset relay.
2. Time-Delay Relay: Five-minute delay to prevent compressor cycling.
3. Adjustable Thermostat: Remote to control the supply fan, compressor, condenser.
4. System Selector Switch: Off-heat-auto-cool.
5. Fan Control Switch: Auto-on.

L. Ventilation Options for Units 52.8 kW (15 tons) and Smaller:
1. Barometric Outside-Air Damper: Adjustable-blade damper allowing induction of up to 25 percent outside air when evaporator fan is running.

PART 3 EXECUTION

3.1 INSTALLATION

A. Install units level and plumb maintaining manufacturer’s recommended clearances and tolerances.
B. Install wall sleeves in finished wall assembly and weatherproof. Install and anchor wall sleeves to withstand, without damage seismic forces as required by code.

3.2 CONNECTIONS

A. Verify condensate drainage requirements.
B. Install condensate drain, minimum connection size, with trap and indirect connection to nearest area drain.
C. Ground equipment and install power wiring, switches, and controls for self contained and split systems.

3.3 FIELD QUALITY CONTROL

A. Perform tests and inspections and prepare test reports.
B. Tests and Inspections: After installing units and after electrical circuitry has been energized, test units for compliance with requirements. Inspect for and remove shipping bolts, blocks, and tie-down straps. After electrical circuitry has been energized, start units to confirm proper motor rotation and unit operation. Test and adjust controls and safeties. Replace damaged and malfunctioning controls and equipment. Remove and replace malfunctioning units and retest as specified above.

3.4 STARTUP AND TESTING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

---END---

DIVISION 25 - INTEGRATED AUTOMATION

SECTION 25 10 10
ADVANCED UTILITY METERING SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section includes the following for the advanced metering of the systems of the facility. The metered systems include the electrical power, natural gas distribution, fuel gas and fuel oil, steam, steam condensate, chilled water, heating water, domestic water, recovered water and makeup water systems. The metering systems in each facility are part of a Corporate-Wide utility metering system, rendering the VA accurate and automated metering of its facilities' energy and water flows. Metering systems are comprised of:

1. PC-based workstation(s) or server(s) and software.
2. Communication network and interface modules for 4-20 milli amp signal to BAS.
3. Electric meters.
4. Volumetric flowmeters, temperature sensors and pressure transducers.
5. Mass flowmeters.

1.2 RELATED WORK

A. Section 22 05 19 METERS AND GAGES FOR PLUMBING PIPING: meters and gages.

B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION: General mechanical requirements, common to more than one section in mechanical.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

F. Section 33 10 00 WATER UTILITIES: references meters.

1.3 DEFINITIONS

A. AMR: Automatic meter reading is the technology of automatically collecting consumption, diagnostic, and status data from water and energy metering devices (water, gas, electric, steam) and transferring

that data to a central database for billing, troubleshooting, and analyzing.

B. AUMS: Advanced Utility Metering System: the system described by this Section.

C BACnet: BACnet is a Data Communications Protocol for Building Automation and Control Networks. It is defined by ASHRAE/ANSI Standard 135 (ISO 16484-5) standard protocol.

D. Data Over Cable Service Interface Specification (DOCSIS): an international standard defining communications and operation support interface requirements for a data over cable system, by the Cable Television Laboratories, Inc. consortium

E. Data Head (on meters): converts analog and pulse signals to digital signals for transmission to the Site Data Aggregation Device. Also provides for limited storage of the digital signals.

F. Device Accuracy: accuracy in this section is based on actual flow, not full scale or full range. Device accuracy measures the conversion of flow information to analog or pulse signals.

G. Ethernet: Local area network, based on IEEE 802.3 standards.

H. Firmware: Software (programs or data) that has been written onto read-only memory (ROM). Firmware is a combination of software and hardware. Storage media with ROMs that have data or programs recorded on them are firmware.

I. Gateway: Bi-directional protocol translator connecting control systems that use different communication protocols.

J. GB: gigabyte. When used to describe data storage, "GB" represents 1024 megabytes.

K. HTML: Hypertext markup language.

L. I/O: Input/output.

M. KB: Short for kilobyte. When used to describe data storage, "KB" represents 1024 bytes.

N. KY Pulse: A term used by the metering industry to describe a method of measuring consumption of electricity that is based on a relay changing status in response to the rotation of the disk in the meter.

O. LAN: Local area network. Sometimes plural as "LANs."

P. LCD: Liquid crystal display.

Q. LonMark: An association comprising of suppliers and installers of LonTalk products. The Association provides guidelines for the

implementation of the LonTalk protocol to ensure interoperability through Standard implementation.

R. LonTalk: An open standard protocol developed by the Echelon Corporation that uses a “Neuron Chip” for communication.

S. LonWorks: Network technology developed by the Echelon Corporation.

T. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less that 50 V or remote-control, signaling and power-limited circuits.

U. MB: megabyte. When used to describe data storage, "MB" represents 1024 kilobytes.

V. Mbps: Megabytes per second, equal to 8 megabits per second

W. Modbus TCP/IP: An open protocol for exchange of process data.

X. Monitoring: Acquisition, processing, communication, and display of equipment status data, metered electrical parameter values, power quality evaluation data, event and alarm signals, tabulated reports, and event logs.

Y. OTDR: Optical Time Domain Reflectometer. A test instrument that analyzes the light loss in an optical fiber. Used to find faults, splices and bends in the line, it works by sending out a light pulse and measuring its reflection. Such devices can measure fiber lines that are longer than 150 miles

Z. PC: Personal computer

AA. PICS, Protocol Implementation Conformance Statement: A written document that identifies the particular options specified by BACnet that are implemented in a device.

BB. REO: Resident Engineer Office: the VA office administering the construction contract.

CC. Reporting Accuracy: this is the root-mean-square sum of all of the metering devices’ inaccuracies: measurement inaccuracy, mechanical inaccuracy, analog-to-digital or pulse integration inaccuracy, etc., up to the meter’s data head.

DD. rms: Root-mean-square value of alternating voltage, which is the square root of the mean value of the square of the voltage values during a complete cycle.

EE. Router: A device that connects two or more networks at the network layer.

FF. RS-232: A Telecommunications Industry Association standard for asynchronous serial data communications between terminal devices.

GG. RS-485: A Telecommunications Industry Association standard for multipoint communications using two twisted-pairs.

HH. TB: terrabyte. When used to describe data storage, "TB" represents 1024 gigabytes.

II. TCP/IP: Transport control protocol/internet protocol.

JJ. Turn-down: the maximum flow divided by the minimum flow through a meter; used along with accuracy requirements. For example, a meter shall be accurate to within 2% of actual flow with throughout a 20:1 turndown

KK. THD: Total harmonic distortion.

LL. UPS: Uninterruptible power supply; used both in singular and plural context.

MM. UTP: Unshielded twisted pair cabling, used to limit crosstalk and electromagnetic interference from the environment

NN. WAN: Wide area network.

1.4 QUALITY ASSURANCE

A. Installer Qualifications: Manufacturer's authorized representative who is trained and approved for installation of units required for this Project.

B. Manufacturer Qualifications: A firm experienced at least three years in manufacturing and installing power monitoring and control equipment similar to that indicated for this Project and with a record of successful in-service performance.

C. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency, and marked for intended use.

D. System Modifications: Make recommendations for system modification in writing to the VA. No system modifications shall be made without prior written approval of the VA. Any modifications made to the system shall be incorporated into the Operations and Maintenance Instructions, and other documentation affected. Provide to the VA software updates for all software furnished under this specification during this contract’s construction and verification periods and for the first two years after government acceptance. All updated software shall be verified as part of this contract.

1.5 PERFORMANCE

A. The advanced utility metering system shall conform to the following:

1. Site Data Aggregation Device Graphic Display: The system shall display up to 4 graphics on a single screen with a minimum of (20) dynamic points per graphic. All current data shall be displayed within (10) seconds of the request.
2. Site Data Aggregation Device Graphic Refresh: The system shall update all dynamic points with current data within ten seconds. Data refresh shall be automatic, without operator intervention.
3. Meter Scan: All changes of metered values shall be transmitted over the high-speed network such that any data used or displayed at a controller or Site Data Aggregation Device will be current, within the prior ten seconds.
4. Reporting Accuracy: Listed below are minimum acceptable reporting accuracies for all values within the below minimum turn-down envelope reported by the meters:

Measured Variable	**Units Measured**	**Minimum Turn-Down of Meter**	**Reporting Accuracy (Note 1)**
Domestic Water flow	GPH	20:1	±2%
Water Level	ft	n/a	±2”

Table 1.5: Meter Performance Criteria

Table Notes:

1. This table shows reporting accuracy, not merely the meter’s accuracy. Reporting accuracy includes meter accuracy and data conversion accuracy. See Article 1.3 in this Section for definition. Accuracy is shown against the measured value, not against the full range of the meter.

   GPH: gallons per hour

1.6 WARRANTY

A. Labor and materials for advanced utility metering systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.

B. Advance utility metering system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and metering devices.

1.7 SUBMITTALS

A. Product Data: for each type of product indicated, Attach copies of approved Product Data submittals for products (such as flowmeters, temperature sensors and pressure transmitters, switchboards and switchgear) that describe advance utility metering features to illustrate coordination among related equipment and utility metering and control.

B. Shop Drawings: include plans, elevations, sections, details, and attachments to other work.

1. Outline Drawings: Indicate arrangement of meters, components and clearance and access requirements. Clearly identify system components, internal connections, and all field connections.
2. Block Diagram: Show interconnections between components specified in this Section and devices furnished with power distribution system components. Indicate data communication paths and identify networks, data buses, data gateways, concentrators, and other devices to be used. Describe characteristics of network and other data communication lines.
3. Wiring Diagrams: Power, signal, and communications wiring. Coordinate nomenclature and presentation with a block diagram. Show all communications network components and include a communications single-line diagram indicating device interconnection and addressing information for all system devices. Identify terminal blocks used for interconnections and wire type to be used.

C. Software and Firmware Operational Documentation:

1. Self-study guide describing the process for setting equipment's network address; setting Owner's options; procedures to ensure data access from any PC on the network, using a standard Web browser; and recommended firewall setup.
2. Software operating and upgrade manuals.
3. Software Backup: On a compact disc, complete with Owner-selected options.
4. Device address list and the set point of each device and operator option, as set in applications software.
5. Graphic file and printout of graphic screens and related icons, with legend.

6. "Quick-Start" guide to describe a simple, three-step commissioning process for setting the equipment's Ethernet address, and ensuring trouble-free data access from any PC on the network, using a standard web browser.

D. Software Upgrade Kit: For Owner to use in modifying software to suit future utility metering system revisions.

E. Firmware Upgrade Kit: For Owner to use in modifying firmware to suit future power system revisions or advanced utility metering system revisions. Firmware updates, and necessary software tools for firmware updates, shall be downloadable from the internet. VA shall be able to update firmware, in equipment, without removing device from the equipment. VA shall be capable of updating firmware over the utility metering communication network or through local communication ports on the device.

F. Software licenses and upgrades required by and installed for operating and programming digital and analog devices.

G. Qualification Data: For installer and manufacturer

H. Other Informational Submittals:

1. System installation and setup guides, with data forms to plan and record options and setup decisions.

I. Revise and update the Contract Drawings to include details of the system design. Drawings shall be on 17 by 11 inches sheets. Details to be shown on the Design Drawing include:

1. Details on logical structure of the network. This includes logical location of all network hardware.
2. Manufacturer and model number for each piece of computer and network hardware.
3. Physical location for each piece of network or computer hardware.
4. Physical routing of LAN cabling.
5. Physical and qualitative descriptions of connectivities.

1.8 CLOSEOUT SUBMITTALS

A. Operation and Maintenance Data: For advanced utility metering system components and meters, to include in emergency, operation, and maintenance manuals. Include the following:

1. Operating and applications software documentation.
2. Software licenses.
3. Software service agreement.

4. PC installation and operating documentation, manuals, and software for the PC and all installed peripherals. Software shall include system restore, emergency boot compact disks, and drivers for all installed hardware. Provide separately for each PC.
5. Hard copies of manufacturer's specification sheets, operating specifications, design guides, user's guides for software and hardware, and PDF files on CD-ROM of the hard-copy submittal.
6. In addition to the copies required by 01 00 00, provide 5 bound paper copies of the Operation and Maintenance Data and two compact disks (CD), with all Instructions as Acrobat PDF files. The pdf files shall identical to the paper copies and shall Acrobat navigation tools including Bookmarks for each Chapter.
7. The advanced utility metering system Operation and Maintenance Instructions shall include:
   a. Procedures for the AUMS system start-up, operation and shut-down.
   b. Final As-Built drawings, including actual LAN cabling routing shown on architectural backgrounds.
      1) IP address(es) as applicable for each piece of network hardware.
      2) IP address for each computer server, workstation and networked printer.
      3) Network identifier (name) for each printer, computer server and computer workstation.
      4) CEA-709.1B address (domain, subnet, node address) for each CEA-709.1B TP/FT-10 to IP Router.
   c. Routine maintenance checklist, rendered in a Microsoft Excel format. The routine maintenance checklist shall be arranged in a columnar format. The first column shall list all installed devices, the second column shall list each device’s node identifier/address, the third column shall describe each device’s physical location, the fourth column shall state the maintenance activity or state no maintenance required, the fifth column shall state the frequency of the maintenance activity, frequency of calibration and the sixth column for additional comments or reference.
   d. Qualified service organization list.

e. In addition to the requirements in Section 01 33 23, the submittal shall include manufacturer Installation Requirements.

f. Include complete instructions for calibration of each meter type and model.

g. Start-Up and Start-Up Testing Report.

h. Performance verification test procedures and reports.

i. Preventive Maintenance Work Plan.

j. In addition to factory-trained manufacturers' representatives requirements in 01 00 00, provide signed letter by factory-trained manufacturers' representatives stating that the system and components are installed in strict accordance with the manufacturers' recommendations.

B. Field quality-control test reports.

1.9 LICENSING AGREEMENT

A. Licenses procured as part of this work become the property of the government upon acceptance of the work. Licenses shall have no expiration.

B. Technical Support: Beginning with Government Acceptance, provide software support for 5 years.

C. Upgrade Service: Update software to latest version at Project completion. Install and program software upgrades that become available within two years from date of Government Acceptance. Upgrading software shall include the operating systems. Upgrade shall include new or revised licenses for use of software.

1. Provide 30-day notice to Owner to allow scheduling and access to system and to allow Owner to upgrade computer equipment if necessary.

1.10 MAINTENANCE AND SERVICE

A. Preventive Maintenance Requirements: provide a preventative maintenance plan with attached procedures indicated by meter and component manufacturers. Perform maintenance procedures for a period of 1 year after government acceptance, at frequencies and using procedures required by the meter and component manufacturers. At a minimum and if the manufacturer is silent on its preventative maintenance requirements, frequencies, deliverables and activities shall comply with the following:

1. Preventive Maintenance Work Plan: prepare a Preventive Maintenance Work Plan to schedule all required preventive maintenance. VA approval of the Work Plan shall be obtained. Adhere to the approved work plan to facilitate VA verification of work. If the Contractor finds it necessary to reschedule maintenance, a written request shall be made to the VA detailing the reasons for the proposed change at least five days prior to the originally scheduled date. Scheduled dates shall be changed only with the prior written approval of the REO.
2. Semiannual Maintenance: perform the following Semiannual Maintenance as specified:
   a. Perform data backups on all Server Hardware.
   b. Run system diagnostics and correct diagnosed problems.
   c. Perform fan checks and filter changes for AUMS hardware.
   d. Perform all necessary adjustments on printers.
   e. Resolve all outstanding problems.
   f. Install new ribbons, ink cartridges and toner cartridges into printers, and ensure that there is at least one spare ribbon or cartridge located at each printer.
3. Maintenance Procedures
   a. Maintenance Coordination: Any scheduled maintenance event by Contractor that will result in component downtime shall be coordinated with the VA as follows. Time periods shall be measured as actual elapsed time from beginning of equipment off-line period, including working and non-working hours.
      1) For non-redundant computer server hardware, provide 14 days notice, components shall be off-line for no more than 8 hours.
      2) For redundant computer server hardware, provide 7 days notice, components shall be off-line for no more than 36 hours.
      3) For active (powered) network hardware, provide 14 days notice, components shall be off-line for no more than 6 hours.
      4) For cabling and other passive network hardware, provide 21 days notice, components shall be off-line for no more than 12 hours.
   b. Software/Firmware: Software/firmware maintenance shall include operating systems, application programs, and files required for the proper operation of the advanced utility metering system

regardless of storage medium. User- (project site-) developed software is not covered by this contract, except that the advanced utility metering system software/firmware shall be maintained to allow user creation, modification, deletion, and proper execution of such user-developed software as specified. Perform diagnostics and corrective reprogramming as required to maintain total advanced utility metering system operations as specified. Back up software before performing any computer hardware and software maintenance. Do not modify any parameters without approval from the VA. Any approved changes and additions shall be properly documented, and the appropriate manuals shall be updated.

c. Network: Network maintenance shall include testing transmission media and equipment to verify signal levels, system data rates, errors and overall system performance.

B. Service Call Reception

1. A VA representative will advise the Contractor by phone or in person of all maintenance and service requests, as well as the classification of each based on the definitions specified. A description of the problem or requested work, date and time notified, location, classification, and other appropriate information will be placed on a Service Call Work Authorization Form by the VA.
2. The Contractor shall have procedures for receiving and responding to service calls during regular working hours. A single telephone number shall be provided for receipt of service calls during regular working hours. Service calls shall be considered received by the Contractor at the time and date the telephone call is placed by the VA.
3. Separately record each service call request, as received on the Service Call Work Authorization form.Complete the Service Call Work Authorization form for each service call. The completed form shall include the serial number identifying the component involved, its location, date and time the call was received, nature of trouble, names of the service personnel assigned to the task, instructions describing what has to be done, the amount and nature of the

materials to be used, the time and date work started, and the time and date of completion.

4. Respond to each service call request within two working hours. The status of any item of work must be provided within four hours of the inquiry during regular working hours, and within sixteen hours after regular working hours or as needed to repair equipment.

1.11 SPARE PARTS

A. Furnish spare parts described below that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.

1. Addressable Relays: One for every ten installed. Furnish at least one of each type.
2. Data Line Surge Suppressors: One for every ten of each type installed. Furnish at least one of each type.

B. Furnish spare parts shall not be used for any warranty-required remediation.

1.12 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced, unless otherwise noted. Publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

B16.1-1998.....Cast Iron Pipe Flanges and Flanged Fittings
B31.9-2008.....Building Services Piping
B40.100-1998.....Pressure Gauges and Gauge Attachments

C. American Society of Heating, Refrigerating and Air-Conditioning Engineers

ASHRAE 135-2008.....A Data Communication Protocol for Building Automation and Control Networks (ANSI)

D. American Society for Testing and Materials (ASTM)

A53-2006.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
A106-2006.....Seamless Carbon Steel Pipe for High Temperature Service

E. Consumer Electronics Association (CEA)

709.1B-2002.....Control Network Protocol Specification

709.3-1999.....Free-Topology Twisted-Pair Channel Specification

852-A-2004.....Tunneling Component Network Protocols Over Internet Protocol Channels

F. Federal Communications Commission (FCC)

EMC-2002.....FCC Electromagnetic Compliance Requirements

G. Institute of Electrical and Electronics Engineers, Inc. (IEEE)

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

100-2000.....The Authoritative Dictionary of IEEE Standards Terms

802.1D-2004.....Media Access Control Bridges

802.2-2003.....Standards for Local Area Networks: Logical Link Control

802.3-2005.....Information Technology - Telecommunications and Information Exchange between Systems. Local and Metropolitan Area Networks - Specific Requirements - Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access Method and Physical Layer Specifications (ANSI)

1100-2005.....Recommended Practice for Powering and Grounding Electronic Equipment (ANSI)

C37.90.1-2002.....Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus

C57.13-2008.....Standard Requirements for Instrument Transformers

C62.41.1-2002.....Guide on the Surges Environment in Low-Voltage(1000 V and Less) AC Power Circuits

C62.41.2-2002.....Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

H. International Electrotechnical Commission (IEC)

IEC 61000-2005.....Electromagnetic Compatibility (EMC)- Part 4-5: Testing and Measurement Techniques; Surge Immunity Test

I. National Electrical Contractors Association

NECA 1-2006.....Good Workmanship in Electrical Construction

J. National Electrical Manufacturers Association (NEMA)

250-2008.....Enclosures for Electrical Equipment (1000 Volts Maximum)

ICS 1-2008.....Standard for Industrial Control and Systems General Requirements

K. National Institute of Standards and Technology (NIST)

800, Part 39-2008.....[DRAFT] Managing Risk from Information Systems: An Organizational Perspective

800, Part 46-2009.....Guide to Enterprise Telework and Remote Access Security

800, Part 52-2009.....Recommended Security Controls for Federal Information Systems and Organizations

(FIPS) 200-2006.....Minimum Security Requirements for Federal Information and Information Systems

L. National Fire Protection Association (NFPA)

70-2008.....National Electrical Code (NEC)

101-06.....Life Safety Code

262-2007.....Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces

M. NSF International

14-03.....Plastics Piping Components and Related Materials

61-02.....Drinking Water System Components-Health Effects (Sections 1-9)

N. Telecommunications Industry Association, (TIA/EIA)

H-088C3.....Pathway Design Handbook

232-F-2002.....Interface Between Data Terminal Equipment and Data Circuit-Terminating Equipment Employing Serial Binary Data Interchange

485-A-2003.....Electrical Characteristics of Generators and Receivers for Use in Balanced Digital Multipoint System

568-C.1-2009.....Commercial Building Telecommunications Cabling Standard

606-A-2002.....Administration Standard for the Telecommunications Infrastructure

607-A-2002.....Commercial Building Grounding (Earthing) and Bonding Requirements for Telecommunications

O. Underwriters Laboratories, Inc. (UL):

916-2007.....Energy Management Equipment

5085-3-2007.....UL Standard for Safety Standard Low Voltage

1244-2000.....Electrical and Electronic Measuring and Testing Equipment

1581-2006.....Electrical Wires, Cables, and Flexible Cords

PART 2 - PRODUCTS

2.1 ADVANCED UTILITY METERING SYSTEM

A. Functional Description

1. Meter and record load profiles. Chart energy and water consumption patterns.

a. Measure and record metering data for the following:

1) Domestic water.

B. Communications Components and Networks

1. Site Data Aggregation Device and its networked meters shall communicate using BACNet protocol. Backbone shall communicate using ISO 8802-3 (Ethernet) Data Link/Physical layer protocol and BACnet/IP addressing as specified in ASHRAE/ANSI 135-2008, BACnet Annex J.

a. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135-2008, BACnet.

b. Each controller shall have a communication port for connection to an operator interface.

2.2 SITE DATA AGGREGATION DEVICE - PERSONAL COMPUTER WORKSTATION

A. Hardware

Meter to interface with existing BAS system.

2.3 CABLE SYSTEMS

A. General:

1. All metallic cable sheaths, etc. (i.e.: risers, underground, station wiring, etc. shall be grounded. All cabling between flow sensor, transmitter, and BAS supervisory node shall be in accordance with manufacturer's specifications.

2.4 GROUNDING

A. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with VA 27 05 26 Grounding and Bonding for Electrical Systems.

2.5 METER COMMUNICATION

A. Provide a transmitter compatible with the flow sensor and BAS Supervisory node.

2.6 WATER METER DEVICES

A. Water, meter applications:
   1. Potable (Domestic) Water: provide a magnetic flowmeter in new installations.
      Pressure sensors.

B. Magnetic flowmeters.
   1. Meter shall have an all-welded flanged 316 stainless steel engineered flow tube with no seals. No sensor parts shall be exposed to the flow stream. Design meter for mating with Schedule 40 piping.
      a. Meter shall be suitable for 25% warmer than the fluid operating temperature and for 25% higher than either the fluid’s operating pressure or 25% higher than the piping system’s safety valve set pressure, whichever is higher.
      b. Meter flanges shall be Class 150.
      c. Meter shall be suitable for installation in ambient conditions ranging from -29 to 60 degrees C (-20 to 140 degrees F).
   2. Provide meter data head.
      a. Meters shall have digital readout of pressure-compensated flow rate and totalization located at transmitter and transmit flow rate to BAS Supervisory node.
      b. Provide programmable microprocessor electronics with on-board programming. Output signals shall be immune to ambient temperature swings. Processor shall include continuous self-

diagnostic routines that identify electronics problems and provide a warning. Electronics shall be replaceable in the field without affecting metering accuracy. Provide power supply as recommended by meter manufacturer. Mount electronics in a NEMA 4 enclosure separate from meter body in position accessible from platform or floor without the use of a portable ladder.

1) Power supply to meter and transmitter shall be 120V/60hz. Provide a Class 2 control voltage transformer for 24VDC power to meter as needed.

3. Performance:
   a. Transmitted signal from flowmeter and its transmitter shall have a total (rms) accuracy plus or minus 1.5% of flow rate.
   b. Flowmeter accuracy shall be no more than plus or minus 1.5% of actual flow rate for gasses and plus or minus 1% of actual flow rate for liquids. Flowmeter repeatability shall be no more than 0.2% of actual flow rate. Meter shall be designed to minimize vibration effect and to provide elimination of this effect.
   c. Minimum turndown ratio shall be 20:1 for gasses and liquids. Maximum fluid pressure drop shall be as scheduled.

PART 3 - EXECUTION

3.1 INSTALLATION REQUIREMENTS

A. Cabling
   1. All cabling between flow sensor, transmitter, and BAS supervisory node shall be in accordance with manufacturer's specifications.

B. Labeling
   1. Labels: Provide labeling in accordance with TIA/EIA-606-A. Handwritten labeling is unacceptable. Stenciled lettering for all circuits shall be provided using laser printer.
   2. Cables: Cables shall be labeled using color labels on both ends with identifiers in accordance with TIA/EIA-606-A.

C. Grounding: ground exposed, non-current-carrying metallic parts of electrical equipment, metallic raceway systems, grounding conductor in metallic and nonmetallic raceways, telecommunications system grounds, and grounding conductor of nonmetallic sheathed cables, as well as equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with VA 27 05 26 GROUNDING AND BONDING FOR COMMUNICATIONS

SYSTEMS and with VA 26 05 26 GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

D. Surge Protection
   1. Provide surge protective devices on all metallic cables entering and leaving an interior environment to an exterior environment or vice versa, i.e. surge protective device at each interior location of a penetration to the exterior environment.

E. Network Hardware
   1. System components and appurtenances shall be installed in accordance with the manufacturer's instructions and as shown. Necessary interconnections, services, and adjustments required for a complete and operable wired or wireless data transmission system shall be provided and shall be fully integrated with the configured network chosen for the project.

3.2 ADJUSTING AND IDENTIFICATION

A. Install a permanent wire marker on each wire at each termination.

B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

C. Wire markers shall retain their markings after cleaning.

3.3 ACCEPTANCE TESTING

A. Develop testing procedures to address all specified functions and components of the Water Flow Meter. Testing shall demonstrate proper and anticipated responses to normal and abnormal operating conditions.
   1. Provide skilled technicians to start and operate equipment.
   2. Coordinate with equipment manufacturers to determine specific requirements to maintain the validity of the warranty.
   3. Correct deficiencies and make necessary adjustments to O&M manuals and as-built drawings for issues identified in testing.
   4. Provide all tools to start, check-out and functionally test equipment and systems.
   5. Correct deficiencies and make necessary adjustments to O&M manuals and as-built drawings for issues identified in any testing
   6. Review test procedures, testing and results with Government.

B. Testing checklists: Develop project-specific checklists to document the systems and all components are installed in accordance with the manufacturers recommendation and the Contract Documents.

C. Before testing, the following prerequisite items must be completed.

1. All related equipment has been started and start-up reports and checklists submitted and approved as ready for testing:
2. All associated system functions for all interlocking systems are programmed and operable per contract documents.
3. The test procedures reviewed and approved.
4. Safeties and operating ranges reviewed.

D. The following testing shall be included:

1. Demonstrate reporting of data and alarm conditions for each point and ensure that alarms are received at the assigned location, including Site Data Collection Device.
2. Demonstrate ability of software program to function for the intended application.
3. Demonstrate via graphed trends to show the reports are executed in correct manner.
4. Demonstrate that the meter readings are accurate using portable NIST traceable portable devices and calibrated valves in the piping system
5. Demonstrate that the systems perform during power loss and resumption of power.

3.5 DEMONSTRATION AND INSTRUCTION

A. Furnish the services of a factory-trained engineer or technician to instruct designated Facility personnel.

B. Before the System can be accepted by the VA, this training must be provided and executed. Training will be scheduled at the convenience of the Facilities Contracting Officer and Chief of Engineering Service.

C. Before the system is accepted by the VA, the contractor shall walk-through the installation with the VA's representative and the design engineer to verify proper installation. The contractor may be requested to open enclosures and terminal compartments to verify cable labeling and/or installation compliance.

D. As-built drawings shall be provided noting the exact cable path and cable labeling information.

----- END -----

DIVISION 26 - ELECTRICAL

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section applies to all sections of Division 26.

B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, conductors and cable, switchboards, switchgear, panelboards, motor control centers, generators, automatic transfer switches, and other items and arrangements for the specified items are shown on the drawings.

C. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.

B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

1.3 TEST STANDARDS

A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.

B. Definitions:

1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified: Materials and equipment which:
   a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
   b. Are periodically inspected by a NRTL.
   c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

A. Manufacturer’s Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.

B. Product Qualification:
   1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
   2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render

satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.

B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

1.6 MANUFACTURED PRODUCTS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.

B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Tests are specified, Factory Tests shall be performed in the factory by the equipment manufacturer, and witnessed by the contractor. In addition, the following requirements shall be complied with:

1. The Government shall have the option of witnessing factory tests. The Contractor shall notify the Government through the COR a minimum of thirty (30) days prior to the manufacturer’s performing of the factory tests.

2. When factory tests are successful, contractor shall furnish four (4) copies of the equipment manufacturer’s certified test reports to the COR fourteen (14) days prior to shipment of the equipment, and not more than ninety (90) days after completion of the factory tests.
3. When factory tests are not successful, factory tests shall be repeated in the factory by the equipment manufacturer, and witnessed by the Contractor. The Contractor shall be liable for all additional expenses for the Government to witness factory re-testing.

1.7 VARIATIONS FROM CONTRACT REQUIREMENTS

A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 MATERIALS AND EQUIPMENT PROTECTION

A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold, freeze and rain.
1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
3. Damaged equipment shall be repaired or replaced, as determined by the COR.
4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, NFPA 780, OSHA Part 1910 subpart J – General Environmental Controls, OSHA Part 1910 subpart

K – Medical and First Aid, and OSHA Part 1910 subpart S – Electrical, in addition to other references required by contract.

B. Job site safety and worker safety is the responsibility of the Contractor.

C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. However, energized electrical work may be performed only for the non-destructive and non-invasive diagnostic testing(s), or when scheduled outage poses an imminent hazard to patient care, safety, or physical security. In such case, all aspects of energized electrical work, such as the availability of appropriate/correct personal protective equipment (PPE) and the use of PPE, shall comply with the latest NFPA 70E, as well as the following requirements:

1. Only Qualified Person(s) shall perform energized electrical work. Supervisor of Qualified Person(s) shall witness the work of its entirety to ensure compliance with safety requirements and approved work plan.
2. At least two weeks before initiating any energized electrical work, the Contractor and the Qualified Person(s) who is designated to perform the work shall visually inspect, verify and confirm that the work area and electrical equipment can safely accommodate the work involved.
3. At least two weeks before initiating any energized electrical work, the Contractor shall develop and submit a job specific work plan, and energized electrical work request to the COR, and Medical Center’s Chief Engineer or his/her designee. At the minimum, the work plan must include relevant information such as proposed work schedule, area of work, description of work, name(s) of Supervisor and Qualified Person(s) performing the work, equipment to be used, procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.
4. Energized electrical work shall begin only after the Contractor has obtained written approval of the work plan, and the energized electrical work request from the COR, and Medical Center’s Chief Engineer or his/her designee. The Contractor shall make these

approved documents present and available at the time and place of energized electrical work.

5. Energized electrical work shall begin only after the Contractor has invited and received acknowledgment from the COR, and Medical Center’s Chief Engineer or his/her designee to witness the work.

D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

F. Coordinate location of equipment and conduit with other trades to minimize interference.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Equipment location shall be as close as practical to locations shown on the drawings.

B. Working spaces or working clearances shall comply with NEC’s requirements, at a minimum.

C. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.

2. "Readily accessible” is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers, fused and non-fused safety switches, generators, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards,

switchgear and motor control assemblies, control devices and other significant equipment.

B. Identification signs for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Identification signs for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 12 mm (1/2 inch) high. Identification signs shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

C. Install adhesive arc flash warning labels on all equipment as required by the latest NFPA 70E. Label shall show specific and correct information for specific equipment based on its arc flash calculations. Label shall show the followings:

1. Nominal system voltage.
2. Equipment/bus name, date prepared, and manufacturer name and address.
3. Arc flash boundary.
4. Available arc flash incident energy and the corresponding working distance.
5. Minimum arc rating of clothing.
6. Site-specific level of PPE.

1.12 SUBMITTALS

A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.

C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
   1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
   2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
   3. Submit each section separately.

E. The submittals shall include the following:
   1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
   2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
   3. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.

F. Maintenance and Operation Manuals:
   1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
   2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
   3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
   4. The manuals shall include:
      a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
      b. A control sequence describing start-up, operation, and shutdown.

c. Description of the function of each principal item of equipment.
d. Installation instructions.
e. Safety precautions for operation and maintenance.
f. Diagrams and illustrations.
g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
h. Performance data.
i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.
j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.
H. After approval and prior to installation, furnish the COR with one sample of each of the following:
1. A minimum 300 mm (12 inches) length of each type and size of wire and cable along with the tag from the coils or reels from which the sample was taken. The length of the sample shall be sufficient to show all markings provided by the manufacturer.
2. Each type of conduit coupling, bushing, and termination fitting.
3. Conduit hangers, clamps, and supports.
4. Duct sealing compound.
5. Each type of receptacle, toggle switch, lighting control sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.14 ACCEPTANCE CHECKS AND TESTS

A. The Contractor shall furnish the instruments, materials, and labor for tests.

B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the installation, testing, and adjustment of all components between various manufacturer’s representatives and technicians so that a complete, functional, and operational system is delivered to the Government.

C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment, and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

1.15 WARRANTY

A. All work performed and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer for the Government.

1.16 INSTRUCTION

A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.

B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety requirements. Instructors shall be thoroughly familiar with all aspects of the installation, and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.

C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.

E. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Installation of conductors and cables in manholes and ducts.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings and insulation type for each conductor and cable.
      2) Splicing materials and pulling lubricant.
2. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

B. American Society of Testing Material (ASTM):

D2301-10.....Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

D2304-18.....Test Method for Thermal Endurance of Rigid Electrical Insulating Materials

D3005-17.....Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

C. National Electrical Manufacturers Association (NEMA):

WC 70-21.....Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

D. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-18.....Thermoset-Insulated Wires and Cables

83-17.....Thermoplastic-Insulated Wires and Cables

467-13.....Grounding and Bonding Equipment

486A-486B-18.....Wire Connectors

486C-18.....Splicing Wire Connectors

486D-15.....Sealed Wire Connector Systems

486E-15.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-18.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables

514B-12.....Conduit, Tubing, and Cable Fittings

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.

B. Conductors shall be copper.

C. Single Conductor:

1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
2. No. 8 AWG and larger: Stranded.
3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

E. Conductor Color Code:

1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
   a. Solid color insulation or solid color coating.
   b. Stripes, bands, or hash marks of color specified.
   c. Color using 19 mm (0.75 inches) wide tape.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
5. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

6. Lighting circuit “switch legs”, and 3-way and 4-way switch “traveling wires,” shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COR.

7. Color code for isolated power system wiring shall be in accordance with the NEC.

2.2 SPLICES

A. Splices shall be in accordance with NEC and UL.

B. Above Ground Splices for No. 10 AWG and Smaller:
   1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper and aluminum conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped conductors.
   3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

C. Above Ground Splices for No. 8 AWG to No. 4/0 AWG:
   1. Compression, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
   2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
   3. Splice and insulation shall be product of the same manufacturer.
   4. All bolts, nuts, and washers used with splices shall be zinc-plated steel.

D. Above Ground Splices for 250 kcmil and Larger:
   1. Long barrel “butt-splice” or “sleeve” type compression connectors, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.
   2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
   3. Splice and insulation shall be product of the same manufacturer.

E. Underground Splices for No. 10 AWG and Smaller:
   1. Solderless, screw-on, reusable pressure cable type, with integral insulation. Listed for wet locations, and approved for copper and aluminum conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped conductors.

3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

F. Underground Splices for No. 8 AWG and Larger:
1. Mechanical type, of high conductivity and corrosion-resistant material. Listed for wet locations, and approved for copper and aluminum conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.

G. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

2.3 CONNECTORS AND TERMINATIONS

A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.

B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.

C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated steel.

2.4 CONTROL WIRING

A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG, or as required by the control wiring equipment manufacturer.

B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.5 WIRE LUBRICATING COMPOUND

A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

B. Shall not be used on conductors for isolated power systems.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Install conductors in raceway systems.

C. Splice conductors only in outlet boxes, junction boxes, pullboxes, manholes, or handholes.

D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.

E. For conductors installed in vertical raceways, provide conductor support (also known as cable support), to counter gravity pull on conductor weight. Conductor support shall be split-wedge conductor support type. Prior to installing the conductor support plug, remove all pulling compound from conductors where they pass through the conductor support body. After installing the conductor support plug, tap the conductor support plug firmly in the conductor support body.

F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic “zip” ties.

G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.

H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.

I. Conductor Pulling:

1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
2. Use nonmetallic pull ropes.
3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.
4. All conductors in a single conduit shall be pulled simultaneously.
5. Do not exceed manufacturer’s recommended maximum pulling tensions and sidewall pressure values.

J. Number of conductors for branch circuits shall not exceed more than three branch circuits in any one conduit.

K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

3.2 INSTALLATION IN MANHOLES

A. Train the conductors around the manhole walls, but do not bend to a radius less than six times the overall conductor diameter.

3.3 SPLICE AND TERMINATION INSTALLATION

A. Splices and terminations shall be mechanically and electrically secure, and tightened to manufacturer’s published torque values using a torque screwdriver or wrench.

B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

3.4 CONDUCTOR IDENTIFICATION

A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where markings are covered by tape, apply tags to conductors, stating size and insulation type.

3.5 FEEDER CONDUCTOR IDENTIFICATION

A. In each interior pullbox and each underground manhole and handhole, install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

3.6 EXISTING CONDUCTORS

A. Unless specifically indicated on the plans, existing conductors shall not be reused.

3.7 CONTROL WIRING INSTALLATION

A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.

B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

3.8 CONTROL WIRING IDENTIFICATION

A. Install a permanent wire marker on each wire at each termination.

B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

C. Wire markers shall retain their markings after cleaning.

D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

3.9 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests: Inspect physical condition.
2. Electrical tests:
   a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
   b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
   c. Perform phase rotation test on all three-phase circuits.

---END---

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.

B. “Grounding electrode system” refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.

C. The terms “connect” and “bond” are used interchangeably in this section and have the same meaning.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

D. Section 26 22 00, LOW-VOLTAGE TRANSFORMERS: Low-voltage transformers.

E. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.

G. Section 26 41 00, FACILITY LIGHTNING PROTECTION: Lightning protection.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit plans showing the location of system grounding electrodes and connections, and the routing of aboveground and underground grounding electrode conductors.
2. Test Reports:

a. Two weeks prior to the final inspection, submit ground resistance field test reports to the COR.

3. Certifications:

a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-13.....Standard Specification for Hard-Drawn Copper Wire

B3-13(R2018).....Standard Specification for Soft or Annealed Copper Wire

B8-11(R2017).....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-12.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1: Normal Measurements

D. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

70E-21.....National Electrical Safety Code

99-21.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-18 .....Thermoset-Insulated Wires and Cables

83-17 .....Thermoplastic-Insulated Wires and Cables

467-13 .....Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be insulated stranded copper, except that sizes No. 10 AWG and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG and larger shall be identified per NEC.

B. Bonding conductors shall be bare stranded copper, except that sizes No. 10 AWG and smaller shall be bare solid copper. Bonding conductors shall be stranded for final connection to motors, transformers, and vibrating equipment.

C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

D. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

2.2 GROUND RODS

A. Copper clad steel, 19 mm (0.75 inch) diameter by 3 M (10 feet) long.

B. Quantity of rods shall be as shown on the drawings, and as required to obtain the specified ground resistance.

2.3 CONCRETE ENCASED ELECTRODE

A. Concrete encased electrode shall be No. 4 AWG bare copper wire, installed per NEC.

2.4 GROUND CONNECTIONS

A. Below Grade and Inaccessible Locations: Exothermic-welded type connectors.

B. Above Grade:

1. Bonding Jumpers: Listed for use with aluminum and copper conductors. For wire sizes No. 8 AWG and larger, use compression-type connectors. For wire sizes smaller than No. 8 AWG, use mechanical type lugs. Connectors or lugs shall use zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Connection to Grounding Bus Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
4. Connection to Equipment Rack and Cabinet Ground Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.5 EQUIPMENT RACK AND CABINET GROUND BARS

A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks. Ground bars shall have

minimum dimensions of 6.3 mm (0.25 inch) thick x 19 mm (0.75 inch) wide, with length as required or as shown on the drawings. Provide insulators and mounting brackets.

2.6 GROUND TERMINAL BLOCKS

A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.7 GROUNDING BUS BAR

A. Pre-drilled rectangular copper bar with stand-off insulators, minimum 6.3 mm (0.25 inch) thick x 100 mm (4 inches) high in cross-section, length as shown on the drawings, with hole size, quantity, and spacing per detail shown on the drawings. Provide insulators and mounting brackets.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. System Grounding:

1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformer.
2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic piping, building structural steel, electrical enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are normally buried or otherwise inaccessible, by exothermic weld.

3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.

B. Metallic Piping, Building Structural Steel, and Supplemental Electrode(s):

1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems,

building structural steel, and supplemental or made electrodes. Provide jumpers across insulating joints in the metallic piping.

2. Provide a supplemental ground electrode as shown on the drawings and bond to the grounding electrode system.

C. Switchgear, Switchboards, Unit Substations, Panelboards, Motor Control Centers, Engine-Generators, Automatic Transfer Switches, and other electrical equipment:

1. Connect the equipment grounding conductors to the ground bus.
2. Connect metallic conduits by grounding bushings and equipment grounding conductor to the equipment ground bus.

D. Transformers:

1. Exterior: Exterior transformers supplying interior service equipment shall have the neutral grounded at the transformer secondary. Provide a grounding electrode at the transformer.
2. Separately derived systems (transformers downstream from service equipment): Ground the secondary neutral at the transformer. Provide a grounding electrode conductor from the transformer to the nearest component of the grounding electrode system.

3.4 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Metallic conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and all branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Wireway Systems:
1. Bond the metallic structures of wireway to provide electrical continuity throughout the wireway system, by connecting a No. 6 AWG bonding jumper at all intermediate metallic enclosures and across all section junctions.
2. Install insulated No. 6 AWG bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 16 M (50 feet).
3. Use insulated No. 6 AWG bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.
4. Use insulated No. 6 AWG bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 M (49 feet).

E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.

F. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.

G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.

H. Raised Floors: Provide bonding for all raised floor components as shown on the drawings.

I. Panelboard Bonding in Patient Care Areas: The equipment grounding terminal buses of the normal and essential branch circuit panel boards serving the same individual patient vicinity shall be bonded together with an insulated continuous copper conductor not less than No. 10 AWG, installed in rigid metal conduit.

3.5 CORROSION INHIBITORS

A. When making grounding and bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.6 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

B. In operating rooms and at intensive care and coronary care type beds, bond the medical gas piping and medical vacuum piping at the outlets directly to the patient ground bus.

3.7 LIGHTNING PROTECTION SYSTEM

A. Bond the lightning protection system to the electrical grounding electrode system.

3.8 MAIN ELECTRICAL ROOM GROUNDING

A. Provide ground bus bar and mounting hardware at each main electrical room where incoming feeders are terminated, as shown on the drawings. Connect to pigtail extensions of the building grounding ring, as shown on the drawings.

3.9 EXTERIOR LIGHT POLES

A. Provide No. 6 AWG bare copper from ground stud in pole and routed to Copper clad steel, 19 mm (0.75 inch) diameter by 3 M (10 feet) long driven ground rod at each location.

3.12 GROUND RESISTANCE

A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

3.13 GROUND ROD INSTALLATION

A. For outdoor installations, drive each rod vertically in the earth, until top of rod is 610 mm (24 inches) below final grade.

B. For indoor installations, leave 100 mm (4 inches) of each rod exposed.

C. Where buried or permanently concealed ground connections are required, make the connections by the exothermic process, to form solid metal joints. Make accessible ground connections with mechanical pressure-type ground connectors.

D. Where rock or impenetrable soil prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified ground resistance.

3.14 ACCEPTANCE CHECKS AND TESTS

A. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized or connected to the electric utility company ground system, and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall.

B. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

C. Below-grade connections shall be visually inspected by the COR prior to backfilling. The Contractor shall notify the COR 24 hours before the connections are ready for inspection.

---END---

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A.

B. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.

C. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.

D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

E. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.

F. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

H. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Underground conduits.

I. Section 31 20 00, EARTHWORK: Bedding of conduits.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Size and location of main feeders.
   b. Size and location of panels and pull-boxes.
   c. Layout of required conduit penetrations through structural elements.
   d. Submit the following data for approval:
      1) Raceway types and sizes.
      2) Conduit bodies, connectors and fittings.
      3) Junction and pull boxes, types and sizes.
2. Certifications: Two weeks prior to final inspection, submit the following:
   a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Iron and Steel Institute (AISI):

S100-16.....North American Specification for the Design of Cold-Formed Steel Structural Members

C. National Electrical Manufacturers Association (NEMA):

C80.1-20.....Electrical Rigid Steel Conduit

C80.3-20.....Steel Electrical Metal Tubing

C80.6-18.....Electrical Intermediate Metal Conduit

FB1-14.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

FB2.10-21.....Selection and Installation Guidelines for Fittings for use with Non-Flexible Conduit or Tubing (Rigid Metal Conduit, Intermediate Metallic Conduit, and Electrical Metallic Tubing)

FB2.20-21.....Selection and Installation Guidelines for Fittings for use with Flexible Electrical Conduit and Cable

TC-2-20.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit

TC-3-21.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

D. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-16.....Surface Metal Raceway and Fittings

6-07.....Electrical Rigid Metal Conduit - Steel

50-15.....Enclosures for Electrical Equipment

360-13.....Liquid-Tight Flexible Steel Conduit

467-13.....Grounding and Bonding Equipment

514A-13.....Metallic Outlet Boxes

514B-12.....Conduit, Tubing, and Cable Fittings

514C-14.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

651-11.....Schedule 40 and 80 Rigid PVC Conduit and Fittings

651A-11.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

1242-06.....Electrical Intermediate Metal Conduit - Steel

PART 2 - PRODUCTS

2.1 MATERIAL

A. Conduit Size: In accordance with the NEC, but not less than 13 mm (0.5-inch) unless otherwise shown. Where permitted by the NEC, 13 mm (0.5-inch) flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:

1. Size: In accordance with the NEC, but not less than 13 mm (0.5-inch).
2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and NEMA C80.1.
3. Rigid Intermediate Steel Conduit (IMC): Shall conform to UL 1242 and NEMA C80.6.
4. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and NEMA C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.
5. Flexible Metal Conduit: Shall conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Shall conform to UL 360.
7. Direct Burial Plastic Conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
8. Surface Metal Raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid Steel and Intermediate Metallic Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
   f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with

blank cover plates having the same finishes as that of other electrical plates in the room.

2. Electrical Metallic Tubing Fittings:
   a. Fittings and conduit bodies shall meet the requirements of UL 514B, NEMA C80.3, and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Compression Couplings and Connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
   d. Indent-type connectors or couplings are prohibited.
   e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible Metal Conduit Fittings:
   a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
   b. Clamp-type, with insulated throat.
4. Liquid-tight Flexible Metal Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
5. Direct Burial Plastic Conduit Fittings: Fittings shall meet the requirements of UL 514C and NEMA TC3.
6. Surface Metal Raceway Fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
7. Expansion and Deflection Couplings:
   a. Conform to UL 467 and UL 514B.
   b. Accommodate a 19 mm (0.75-inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
   c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.

d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.

D. Conduit Supports:

1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:

1. Comply with UL-50 and UL-514A.
2. Rustproof cast metal where required by the NEC or shown on drawings.
3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.

F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COR prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by the COR where working space is limited.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the

spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. In accordance with NEC, NEMA, UL, as shown on drawings, and as specified herein.

B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.

C. Install conduit as follows:

1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be surface mounted on walls and ceilings.
3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
5. Cut conduits square, ream, remove burrs, and draw up tight.
6. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
7. Do not use suspended ceilings, suspended ceiling supporting members, lighting fixtures, other conduits, cable tray, boxes, piping, or ducts to support conduits and conduit runs.
8. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
9. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
10. Conduit installations under fume and vent hoods are prohibited.
11. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.

12. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
13. Conduit bodies shall only be used for changes in direction, and shall not contain splices.

D. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:
1. Conduit: Rigid steelor SCH 40 PVC.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
a. Where shown on the structural drawings.
b. As approved by the COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (0.75-inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:

2. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 1.8 M (6 feet) of flexible metal conduit extending from a junction box to the fixture.
5. For conduits running through metal studs, limit field cut holes to no more than 70% of web depth. Spacing between holes shall be at least 457 mm (18 inches). Cuts or notches in flanges or return lips shall not be permitted.

3.4 EXPOSED WORK INSTALLATION

A.

B.

C. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT on interior, Rigid Steel or SCH 80 PVC on exterior, or as specifically noted on the drawings. .

D. Align and run conduit parallel or perpendicular to the building lines.

E. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

F. Support horizontal or vertical runs as required by NEC.

G. Surface Metal Raceways: Use only where shown on drawings.

H. Painting:

1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

3.5 DIRECT BURIAL INSTALLATION

Refer to Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.

3.6 HAZARDOUS LOCATIONS

A. Use rigid steel conduit only.

B. Install UL approved sealing fittings that prevent passage of explosive vapors in hazardous areas equipped with explosion-proof lighting fixtures, switches, and receptacles, as required by the NEC.

3.7 WET OR DAMP LOCATIONS

A. Use rigid steel or IMC conduits unless as shown on drawings.

B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.

C. Use rigid steel or IMC conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer and locknut. Conduits shall be attached to steel channel with conduit clamps.

3.8 MOTORS AND VIBRATING EQUIPMENT

A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.

B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.

C. Provide a green equipment grounding conductor with flexible and liquid-tight flexible metal conduit.

3.9 EXPANSION JOINTS

A. Conduits 75 mm (3 inch) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inch) with junction boxes on both sides of the expansion joint. Connect flexible metal conduits to junction boxes with sufficient slack to produce a 125 mm (5 inch)

vertical drop midway between the ends of the flexible metal conduit. Flexible metal conduit shall have a green insulated copper bonding jumper installed. In lieu of this flexible metal conduit, expansion and deflection couplings as specified above are acceptable.

C. Install expansion and deflection couplings where shown.

3.10 CONDUIT SUPPORTS

A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
   b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).
   c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.11 BOX INSTALLATION

A. Boxes for Concealed Conduits:
   1. Flush-mounted.
   2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90 degree bends are necessary.

C. Locate pullboxes so that covers are accessible and easily removed. Coordinate locations with piping and ductwork where installed above ceilings.

D. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

E. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 inch) center-to-center lateral spacing shall be maintained between boxes.

F. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

G. Minimum size of outlet boxes for ground fault circuit interrupter (GFCI) receptacles is 100 mm (4 inches) square x 55 mm (2.125 inches) deep, with device covers for the wall material and thickness involved.

H. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "ELECTRICAL PB No. 1."

I. On all branch circuit junction box covers, identify the circuits with black marker.

- - - E N D - - -

SECTION 26 05 41
UNDERGROUND ELECTRICAL CONSTRUCTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of underground ducts and raceways, and precast manholes and pullboxes to form a complete underground electrical raceway system.

B. The terms “duct” and “conduit” are used interchangeably in this section.

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS: Sealing of conduit penetrations.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. //Section 31 20 00, EARTH MOVING// //Section 31 20 11, EARTH MOVING (SHORT FORM)//: Trenching, backfill, and compaction.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Coordinate layout and installation of ducts, manholes, and pullboxes with final arrangement of other utilities, site grading, and surface features.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit information on manholes, pullboxes, ducts, and hardware. Submit manhole plan and elevation drawings, showing openings, pulling irons, cable supports, cover, ladder, sump, and other accessories.

c. Proposed deviations from the drawings shall be clearly marked on the submittals. If it is necessary to locate manholes, pullboxes, or duct banks at locations other than shown on the drawings, show the proposed locations accurately on scaled site drawings, and submit to the COR for approval prior to construction.

2. Certifications: Two weeks prior to the final inspection, submit the following.

a. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Concrete Institute (ACI):
Building Code Requirements for Structural Concrete
318-19/318M-19.....Building Code Requirements for Structural Concrete & Commentary
MNL-66-20.....ACI Detailing Manual

C. American National Standards Institute (ANSI):
77-17.....Underground Enclosure Integrity

D. American Society for Testing and Materials (ASTM):
C478/C478M-20.....Standard Specification for Precast Reinforced Concrete Manhole Sections
C858-19.....Underground Precast Concrete Utility Structures
C990/C990M-09.....Joints for Concrete Pipe, Manholes and Precast Box Sections Using Preformed Flexible Joint Sealants.

E. National Electrical Manufacturers Association (NEMA):
TC 2-20.....Electrical Polyvinyl Chloride (PVC) Conduit
TC 3-21.....Polyvinyl Chloride (PVC) Fittings for Use With Rigid PVC Conduit And Tubing
TC 6 & 8-20.....Polyvinyl Chloride (PVC) Plastic Utilities Duct For Underground Installations

TC 9-20.....Fittings For Polyvinyl Chloride (PVC) Plastic Utilities Duct For Underground Installation

F. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

70E-21.....National Electrical Safety Code

G. Underwriters Laboratories, Inc. (UL):

6-07.....Electrical Rigid Metal Conduit-Steel

467-13.....Grounding and Bonding Equipment

651-11.....Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings

651A-11.....Schedule 40 and 80 High Density Polyethylene (HDPE) Conduit

PART 2 - PRODUCTS

2.1 PULLBOXES

A. General: Size as indicated on the drawings. Provide pullboxes with weatherproof, non-skid covers with recessed hook eyes, secured with corrosion- and tamper-resistant hardware.. Covers shall have molded lettering, ELECTRIC, as applicable. Pullboxes shall comply with the requirements of ANSI Tier 15 loading. Provide pulling irons, 22 mm (0.875 inch) diameter galvanized steel bar with exposed triangular-shaped opening.

B. Polymer Concrete Pullboxes: Shall be molded of sand, aggregate, and polymer resin, and reinforced with steel, fiberglass, or both. Pullbox shall have open bottom.

C. Pre-cast Concrete Pullboxes: Factory-fabricated, reinforced-concrete, monolithically poured walls and bottom unless open-bottom enclosures are indicated. Frame and cover shall form top of enclosure and shall have load rating consistent with that of handhole or box. Comply with ASTM C 858 for design and manufacturing processes. Frame and Cover shall be weatherproof cast-iron frame, with cast-iron cover with recessed cover hook eyes and tamper-resistant, captive, cover-securing bolts.

2.2 DUCTS

A. Number and sizes shall be as shown on the drawings.

B. Ducts (concrete-encased):

1. Plastic Duct:

a. UL 651 and 651A Schedule 40 PVC conduit.

b. Duct shall be suitable for use with 90° C (194° F) rated conductors.

2. Conduit Spacers: Prefabricated plastic.

C. Ducts (direct-burial):

1. Plastic duct:

a. Schedule 80 PVC or HDPE conduit.

b. Duct shall be suitable for use with 75° C (167° F) rated conductors.

2.3 GROUNDING

A. Ground Rods and Ground Wire: Per Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

2.4 WARNING TAPE

A. 4-mil polyethylene 75 mm (3 inches) wide detectable tape, red with black letters, imprinted with “CAUTION - BURIED ELECTRIC CABLE BELOW” or similar.

2.5 PULL ROPE FOR SPARE DUCTS

A. Plastic with 890 N (200 lb) minimum tensile strength.

PART 3 - EXECUTION

3.1 MANHOLE AND PULLBOX INSTALLATION

A. Assembly and installation shall be per the requirements of the manufacturer.

1. Install manholes and pullboxes level and plumb.

2. Units shall be installed on a 300 mm (12 inches) thick level bed of 90% compacted granular fill, well-graded from the 25 mm (1 inch) sieve to the No. 4 sieve. Granular fill shall be compacted with a minimum of four passes with a plate compactor.

B. Access: Ensure the top of frames and covers are flush with finished grade.

3.2 TRENCHING

A. Refer to //Section 31 20 00, EARTH MOVING// //Section 31 20 11 EARTH MOVING (SHORT FORM)// for trenching, backfilling, and compaction.

B. Before performing trenching work at existing facilities, a Ground Penetrating Radar Survey shall be carefully performed by a certified technician to reveal all existing underground ducts, conduits, cables, and other utility systems.

C. Work with extreme care near existing ducts, conduits, and other utilities to avoid damaging them.

D. Cut the trenches neatly and uniformly.

E. For Concrete-Encased Ducts:

1. After excavation of the trench, stakes shall be driven in the bottom of the trench at 1.2 M (4 feet) intervals to establish the grade and route of the duct bank.
2. Pitch the trenches uniformly toward manholes or both ways from high points between manholes for the required duct line drainage. Avoid pitching the ducts toward buildings wherever possible.
3. The walls of the trench may be used to form the side walls of the duct bank, provided that the soil is self-supporting and that the concrete envelope can be poured without soil inclusions. Forms are required where the soil is not self-supporting.
4. After the concrete-encased duct has sufficiently cured, the trench shall be backfilled to grade with earth, and appropriate warning tape installed.

F. Individual conduits to be installed under existing paved areas and roads that cannot be disturbed shall be jacked into place using rigid metal conduit, or bored using plastic utilities duct or HDPE conduit, as approved by the COR.

3.3 DUCT INSTALLATION

A. General Requirements:

1. Ducts shall be in accordance with the NEC, as shown on the drawings, and as specified.
2. Join and terminate ducts with fittings recommended by the manufacturer.
3. Slope ducts to drain towards manholes and pullboxes, and away from building and equipment entrances. Pitch not less than 100 mm (4 inches) in 30 M (100 feet).
4. Underground conduit stub-ups and sweeps to equipment inside of buildings shall be galvanized rigid metal conduit half-lap wrapped with PVC tape, and shall extend a minimum of 1.5 M (5 feet) outside the building foundation. Tops of conduits below building slab shall be minimum 610 mm (24 inches) below bottom of slab.
5. Stub-ups and sweeps to equipment mounted on outdoor concrete slabs shall be galvanized rigid metal conduit half-lap wrapped with PVC tape, and shall extend a minimum of 1.5 M (5 feet) away from the edge of slab.

6. Install insulated grounding bushings on the conduit terminations.
7. Radius for sweeps shall be sufficient to accomplish pulls without damage. Minimum radius shall be six times conduit diameter.
8. All multiple conduit runs shall have conduit spacers. Spacers shall securely support and maintain uniform spacing of the duct assembly a minimum of 75 mm (3 inches) above the bottom of the trench during the concrete pour. Spacer spacing shall not exceed 1.5 M (5 feet). Secure spacers to ducts and earth to prevent floating during concrete pour. Provide nonferrous tie wires to prevent displacement of the ducts during concrete pour. Tie wires shall not act as substitute for spacers.
9. Duct lines shall be installed no less than 300 mm (12 inches) from other utility systems, such as water, sewer, chilled water.
10. Clearances between individual ducts:
    a. For similar services, not less than 75 mm (3 inches).
    b. For power and signal services, not less than 150 mm (6 inches).
11. Duct lines shall terminate at window openings in manhole walls as shown on the drawings. All ducts shall be fitted with end bells.
12. Couple the ducts with proper couplings. Stagger couplings in rows and layers to ensure maximum strength and rigidity of the duct bank.
13. Keep ducts clean of earth, sand, or gravel, and seal with tapered plugs upon completion of each portion of the work.
14. Spare Ducts: Where spare ducts are shown, they shall have a nylon pull rope installed. They shall be capped at each end and labeled as to location of the other end.
15. Duct Identification: Place continuous strip of warning tape approximately 300 mm (12 inches) above ducts before backfilling trenches. Warning tape shall be preprinted with proper identification.
16. Duct Sealing: Seal ducts, including spare ducts, at building entrances and at outdoor terminations for equipment, with a suitable non-hardening compound to prevent the entrance of foreign objects and material, moisture, and gases.
17. Use plastic ties to secure cables to insulators on cable arms. Use minimum two ties per cable per insulator.

B. Concrete-Encased Ducts:

1. Install concrete-encased ducts for medium-voltage systems, low-voltage systems, and signal systems, unless otherwise shown on the drawings.
2. Duct banks shall be single or multiple duct assemblies encased in concrete. Ducts shall be uniform in size and material throughout the installation.
3. Tops of concrete-encased ducts shall be:
   a. Not less than 600 mm (24 inches) and not less than shown on the drawings, below finished grade.
   b. Not less than 750 mm (30 inches) and not less than shown on the drawings, below roads and other paved surfaces.
   c. Additional burial depth shall be required in order to accomplish NEC-required minimum bend radius of ducts.
   d. Conduits crossing under grade slab construction joints shall be installed a minimum of 1.2 M (4 feet) below slab.
4. Extend the concrete envelope encasing the ducts not less than 75 mm (3 inches) beyond the outside walls of the outer ducts.
5. Within 3 M (10 feet} of building and manhole wall penetrations, install reinforcing steel bars at the top and bottom of each concrete envelope to provide protection against vertical shearing.
6. Install reinforcing steel bars at the top and bottom of each concrete envelope of all ducts underneath roadways and parking areas.
7. Where new ducts and concrete envelopes are to be joined to existing manholes, pullboxes, ducts, and concrete envelopes, make the joints with the proper fittings and fabricate the concrete envelopes to ensure smooth durable transitions.
8. Duct joints in concrete may be placed side by side horizontally, but shall be staggered at least 150 mm (6 inches) vertically.
9. Pour each run of concrete envelope between manholes or other terminations in one continuous pour. If more than one pour is necessary, terminate each pour in a vertical plane and install 19 mm (0.75 inch) reinforcing rod dowels extending 450 mm (18 inches) into concrete on both sides of joint near corners of envelope.
10. Pour concrete so that open spaces are uniformly filled. Do not agitate with power equipment unless approved by COR.

C. Direct-Burial Ducts:

1. Install direct-burial ducts only where shown on the drawings. Provide direct-burial ducts only for low-voltage power and lighting branch circuits.
2. Tops of ducts shall be:
   a. Not less than 600 mm (24 inches) and not less than shown on the drawings, below finished grade.
   b. Not less than 750 mm (30 inches) and not less than shown on the drawings, below roads and other paved surfaces.
   c. Additional burial depth shall be required in order to accomplish NEC-required minimum bend radius of ducts.
3. Do not kink the ducts. Compaction shall not deform the ducts.

D. Connections to Existing Ducts: Where connections to existing ducts are indicated, excavate around the ducts as necessary. Cut off the ducts and remove loose concrete from inside before installing new ducts. Provide a reinforced-concrete collar, poured monolithically with the new ducts, to take the shear at the joint of the duct banks.

E. Partially-Completed Ducts: During construction, wherever a construction joint is necessary in a duct bank, prevent debris such as mud and dirt from entering ducts by providing suitable plugs. Fit concrete envelope of a partially completed ducts with reinforcing steel extending a minimum of 600 mm (2 feet) back into the envelope and a minimum of 600 mm (2 feet) beyond the end of the envelope. Provide one No. 4 bar in each corner, 75 mm (3 inches) from the edge of the envelope. Secure corner bars with two No. 3 ties, spaced approximately 300 mm (12 inches) apart. Restrain reinforcing assembly from moving during pouring of concrete.

3.4 ACCEPTANCE CHECKS AND TESTS

A. Duct Testing and Cleaning:
1. Upon completion of the duct installation, a standard flexible mandrel shall be pulled through each duct to loosen particles of earth, sand, or foreign material left in the duct, and to test for out-of-round conditions.
2. The mandrel shall be not less than 300 mm (12 inches) long, and shall have a diameter not less than 13 mm (0.5 inch) less than the inside diameter of the duct. A brush with stiff bristles shall then be pulled through each duct to remove the loosened particles. The

diameter of the brush shall be the same as, or slightly larger than, the diameter of the duct.

3. If testing reveals obstructions or out-of-round conditions, the Contractor shall replace affected section(s) of duct and retest to the satisfaction of the COR.
4. Mandrel pulls shall be witnessed by the COR.

---END---

SECTION 26 08 00

COMMISSIONING OF ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 26.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning the Facility electrical systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 26 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 26, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility electrical systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of Electrical systems will require inspection of individual elements of the electrical systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule electrical systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the

type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 26 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the VA Resident Engineer after submission and approval of formal training plans. Refer to Section 01

91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 26 Sections for additional Contractor training requirements.

----- END -----

SECTION 26 09 23
LIGHTING CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of the lighting controls.

1.2 RELATED WORK

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.

C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

E. Section 26 24 16, PANELBOARDS: Panelboard enclosure and interior bussing used for lighting control panels.

F. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

G. Section 26 51 00, INTERIOR LIGHTING: Luminaire ballast and drivers used in control of lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit the following information for each type of lighting controls.
   b. Material and construction details.
   c. Physical dimensions and description.
   d. Wiring schematic and connection diagram.
   e. Installation details.
2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the lighting control systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturer's Association (NEMA):

C136.10-17.....American National Standard for Roadway and Area Lighting Equipment—Locking-Type Photocontrol Devices and Mating Receptacles—Physical and Electrical Interchangeability and Testing

ICS-1-00(R2015).....Standard for Industrial Control and Systems General Requirements

ICS-2-00(R2020).....Standard for Industrial Control and Systems Controllers, Contractors, and Overload Relays Rated 600 Volts

ICS-6-93(R2016).....Standard for Industrial Controls and Systems Enclosures

C. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

20-18.....Standard for General-Use Snap Switches

98-16.....Enclosed and Dead-Front Switches

773-16.....Standard for Plug-In Locking Type Photocontrols for Use with Area Lighting

773A-16.....Nonindustrial Photoelectric Switches for Lighting Control

916-15.....Standard for Energy Management Equipment

917-06.....Clock Operated Switches

924-16.....Emergency Lighting and Power Equipment

PART 2 - PRODUCTS

2.1 TIMER SWITCHES

A. Digital switches with backlit LCD display, 120/277 volt rated, fitting as a replacement for standard wall switches.

1. Compatibility: Compatible with all ballasts.
2. Warning: Audible warning to sound during the last minute of “on” operation.
3. Time-out: Adjustable from 5 minutes to 12 hours.
4. Faceplate: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

2.2 INDOOR OCCUPANCY SENSORS

A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.

1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.
2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.
3. Relay Unit: Dry contacts rated for 20A ballast load at 120 volt and 277 volt, for 13A tungsten at 120 volt, and for 1 hp at 120 volt.
4. Mounting:
   a. Sensor: Suitable for mounting in any position on a standard outlet box.
   b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
6. Bypass Switch: Override the on function in case of sensor failure.
7. Manual/automatic selector switch.
8. Automatic Light-Level Sensor: Adjustable from 21.5 to 2152 lx (2 to 200 fc); keep lighting off when selected lighting level is present.

9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
   1. Sensitivity Adjustment: Separate for each sensing technology.
   2. Detector Sensitivity: Detect occurrences of 150 mm (6-inch) minimum movement of any portion of a human body that presents a target of not less than 232 sq. cm (36 sq. in), and detect a person of average size and weight moving not less than 305 mm (12 inches) in either a horizontal or a vertical manner at an approximate speed of 305 mm/s (12 inches/s).

C. Detection Coverage: Shall be sufficient to provide coverage as required by sensor locations shown on drawing.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, as shown on the drawings, and as specified.

B. Aim outdoor photoelectric sensor according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle turn-on.

C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer’s recommendations.

D. Set occupancy sensor "on" duration to 15 minutes.

E. Locate photoelectric sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the available light level at the typical work plane for that area.

F. Label time switches and contactors with a unique designation.

G. Program lighting control panels per schedule on drawings.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations.

B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.

C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.

D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.

E. Upon completion of the installation, the system shall be commissioned by the manufacturer’s factory-authorized technician who will verify all adjustments and sensor placements.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function in the presence of COR.

3.4 INSTRUCTION

A. Furnish the services of a factory-trained technician for one 8-hour training period for instructing personnel in the maintenance and operation of the lighting control system on the dates requested by the COR.

B. Contractor shall submit written instructions on training and maintenance as reviewed in training session.

- - - E N D - - -

SECTION 26 22 00
LOW-VOLTAGE TRANSFORMERS

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of low-voltage dry-type general-purpose transformers, indicated as transformers in this section.

1.2 RELATED WORK

A. Section 03 30 00, CAST-IN-PLACE CONCRETE: Requirements for concrete equipment pads.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

D. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

F. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, temperature rise, wiring and connection diagrams, plan, front, side, and rear elevations, accessories, and device nameplate data.

2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets and wiring diagrams.

1) Schematic signal and control diagrams, with all terminals identified, matching terminal identification in the transformers.
2) Include information for testing, repair, troubleshooting, assembly, disassembly, and factory recommended/required periodic maintenance procedures and frequency.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the transformers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the transformers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
IBC-21.....International Building Code

C. National Fire Protection Association (NFPA):
70-23.....National Electrical Code (NEC)

D. National Electrical Manufacturers Association (NEMA):
TR 1-19.....Transformers, Step Voltage Regulators and Reactors
ST 20-14.....Dry Type Transformers for General Applications

E. Underwriters Laboratories, Inc. (UL):
UL 506-17.....Standard for Safety - Specialty Transformers
UL 1561-11.....Standard for Safety - Dry-Type General Purpose and Power Transformers

F. United States Department of Energy:
10 CFR Part 431.....Energy Efficiency Program for Certain Commercial and Industrial Equipment

SPEC WRITER NOTE: Delete between // ---- // if not applicable to project. Delete any other item or paragraph not

applicable to the section and renumber the paragraphs.

PART 2 - PRODUCTS

2.1 TRANSFORMERS

A. Unless otherwise specified, transformers shall be in accordance with NEMA, NFPA, UL and as shown on the drawings.

B. Transformers shall have the following features:

1. Self-cooled by natural convection, isolating windings, indoordry-type. Autotransformers will not be accepted, except as specifically allowed for buck-boost applications.
2. Rating and winding connections shall be as shown on the drawings.
3. Ratings shown on the drawings are for continuous duty without the use of cooling fans.
4. Copper windings.
5. Insulation systems:
   a. Transformers 30 kVA and larger: UL rated 220 °C (428 °F) system with an average maximum rise by resistance of 150 °C (302 °F) in a maximum ambient of 40 °C (104 °F).
   b. Transformers below 30 kVA: Same as for 30 kVA and larger or UL rated 185 °C (365 °F) system with an average maximum rise by resistance of 115 °C (239 °F) in a maximum ambient of 40 °C (104 °F).
6. Core and coil assemblies:
   a. Rigidly braced to withstand the stresses caused by short-circuit currents and rough handling during shipment.
   b. Cores shall be grain-oriented, non-aging, and silicon steel.
   c. Coils shall be continuous windings without splices except for taps.
   d. Coil loss and core loss shall be minimized for efficient operation.
   e. Primary and secondary tap connections shall be brazed or pressure type.
   f. Coil windings shall have end filters or tie-downs for maximum strength.
7. Average audible sound levels shall comply with NEMA.
8. If not shown on drawings, nominal impedance shall be as permitted by NEMA.

9. Single phase transformers rated 15 kVA through 25 kVA shall have two 5% full capacity taps below normal rated primary voltage. All transformers rated 30 kVA and larger shall have two 2.5% full capacity taps above, and four 2.5% full capacity taps below normal rated primary voltage.
10. Core assemblies shall be grounded to their enclosures with adequate flexible ground straps.
11. Enclosures:
    a. Comprised of not less than code gauge steel.
    b. Outdoor enclosures shall be NEMA 3R.
    c. Temperature rise at hottest spot shall conform to NEMA Standards, and shall not bake and peel off the enclosure paint after the transformer has been placed in service.
    d. Ventilation openings shall prevent accidental access to live components.
    e. The enclosure at the factory shall be thoroughly cleaned and painted with manufacturer's prime coat and standard finish.
12. Standard NEMA features and accessories, including ground pad, lifting provisions, and nameplate with the wiring diagram and sound level indicated.
13. Dimensions and configurations shall conform to the spaces designated for their installations.
14. Transformers shall meet the energy conservation standards for transformers per the United States Department of Energy’s 10 CFR Part 431.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation of transformers shall be in accordance with the NEC, as recommended by the equipment manufacturer and as shown on the drawings.

B. Anchor transformers with rustproof bolts, nuts, and washers, in accordance with manufacturer’s instructions, and as shown on drawings.

E. Install transformers with manufacturer's recommended clearance from wall and adjacent equipment for air circulation. Minimum clearance shall be 150 mm (6 inches).

F. Install transformers on vibration pads designed to suppress transformer noise and vibrations.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform tests in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:
   a. Compare equipment nameplate data with specifications and approved shop drawings.
   b. Inspect physical and mechanical condition.
   c. Inspect all field-installed bolted electrical connections, using the calibrated torque-wrench method to verify tightness of accessible bolted electrical connections.
   d. Perform specific inspections and mechanical tests as recommended by manufacturer.
   e. Verify correct equipment grounding.
   f. Verify proper secondary phase-to-phase and phase-to-neutral voltage after energization and prior to connection to loads.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the transformers are in good operating condition, and properly performing the intended function.

---END---

SECTION 26 24 16
PANELBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

A. Section 09 91 00, PAINTING: Painting of panelboards.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

F. Section 26 09 23, LIGHTING CONTROLS: Lighting controls integral to panelboards.

G. Section 26 43 13, SURGE PROTECTIVE DEVICES: Surge protective devices integral to panelboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
    a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    b. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, circuit breakers, wiring and connection diagrams, accessories, and nameplate data.
2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering circuit breakers and replacement parts.
   1) Include schematic diagrams, with all terminals identified, matching terminal identification in the panelboards.
   2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the panelboards conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the panelboards have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
IBC-21.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
PB 1-11.....Panelboards
250-20.....Enclosures for Electrical Equipment (1,000V Maximum)

D. National Fire Protection Association (NFPA):
70-23.....National Electrical Code (NEC)
70E-21.....Standard for Electrical Safety in the Workplace

E. Underwriters Laboratories, Inc. (UL):
50-15.....Enclosures for Electrical Equipment
67-09.....Panelboards
489-16.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Panelboards shall be in accordance with NEC, NEMA, UL, as specified, and as shown on the drawings.

B. Panelboards shall have main breaker or main lugs, bus size, voltage, phases, number of circuit breaker mounting spaces, top or bottom feed, flush or surface mounting, branch circuit breakers, and accessories as shown on the drawings.

C. Panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories as shown on the drawings or specified herein.

D. Non-reduced size copper bus bars, rigidly supported on molded insulators, and fabricated for bolt-on type circuit breakers.

E. Bus bar connections to the branch circuit breakers shall be the “distributed phase” or “phase sequence” type.

F. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys listed for use with the conductors to which they will be connected.

G. Neutral bus shall be 100% rated, mounted on insulated supports.

H. Grounding bus bar shall be equipped with screws or lugs for the connection of equipment grounding conductors.

I. Bus bars shall be braced for the available short-circuit current as shown on the drawings, but not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards, and 14,000 A symmetrical for 277/480 V panelboards.

J. In two-section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have field-installed cable connections to the second section as shown on the drawings. Panelboard sections with tapped bus or crossover bus are not acceptable.

K. Series-rated panelboards are not permitted.

2.2 ENCLOSURES AND TRIMS

A. Enclosures:

1. Provide galvanized steel enclosures, with NEMA rating as shown on the drawings or as required for the environmental conditions in which installed.

2. Enclosures shall not have ventilating openings.
3. Enclosures may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.
4. Provide manufacturer’s standard option for prepunched knockouts on top and bottom endwalls.
5. Include removable inner dead front cover, independent of the panelboard cover.

B. Trims:
1. Hinged “door-in-door” type.
2. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
3. Outer hinged door shall be securely mounted to the panelboard enclosure with factory bolts, screws, clips, or other fasteners, requiring a key or tool for entry. Hand-operated latches are not acceptable.
4. Inner and outer doors shall open left to right.
5. Trims shall be flush or surface type as shown on the drawings.

2.3 MOLDED CASE CIRCUIT BREAKERS

A. Circuit breakers shall be per UL, NEC, as shown on the drawings, and as specified.
B. Circuit breakers shall be bolt-on type.
C. Circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:
1. 120/208 V Panelboard: 10,000 A symmetrical.
2. 120/240 V Panelboard: 10,000 A symmetrical.
3. 277/480 V Panelboard: 14,000 A symmetrical.
D. Circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for less than 400 A frame. Circuit breakers with 400 A frames and above shall have magnetic trip, adjustable from 5x to 10x. Breaker magnetic trip setting shall be set to maximum, unless otherwise noted.
E. Circuit breaker features shall be as follows:
1. A rugged, integral housing of molded insulating material.
2. Silver alloy contacts.
3. Arc quenchers and phase barriers for each pole.
4. Quick-make, quick-break, operating mechanisms.

5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
6. Electrically and mechanically trip free.
7. An operating handle which indicates closed, tripped, and open positions.
8. An overload on one pole of a multi-pole breaker shall automatically cause all the poles of the breaker to open.
9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where shown on the drawings.
10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

2.4 SURGE PROTECTIVE DEVICES

A. Where shown on the drawings, furnish panelboards with integral surge protective devices. Refer to Section 26 43 13, SURGE PROTECTIVE DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the manufacturer’s instructions, the NEC, as shown on the drawings, and as specified.
B. Locate panelboards so that the present and future conduits can be conveniently connected.
C. Install a printed schedule of circuits in each panelboard after approval by the COR. Schedules shall reflect final load descriptions, room numbers, and room names connected to each circuit breaker. Schedules shall be printed on the panelboard directory cards and be installed in the appropriate panelboards
D. Mount panelboards such that the maximum height of the top circuit breaker above the finished floor shall not exceed 1980 mm (78 inches).
E. Provide blank cover for each unused circuit breaker mounting space.
F. Rust and scale shall be removed from the inside of existing enclosures where new interior components are to be installed. Paint inside of enclosures with rust-preventive paint before the new interior

components are installed. Provide new trim. Trim shall fit tight to the enclosure.

G. Panelboard enclosures shall not be used for conductors feeding through, spliced, or tapping off to other enclosures or devices.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify appropriate anchorage and required area clearances.

d. Verify that circuit breaker sizes and types correspond to approved shop drawings.

e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.

f. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

---END---

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

E. Section 26 51 00, INTERIOR LIGHTING: Fluorescent ballasts and LED drivers for use with manual dimming controls.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. National Electrical Manufacturers Association (NEMA):

WD 1-99(R2020).....General Color Requirements for Wiring Devices
WD 6-16 .....Wiring Devices – Dimensional Specifications

C. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)
99-21.....Health Care Facilities

D. Underwriter’s Laboratories, Inc. (UL):

5-16.....Surface Metal Raceways and Fittings
20-18.....General-Use Snap Switches
231-16.....Power Outlets
467-13.....Grounding and Bonding Equipment
498-17.....Attachment Plugs and Receptacles
943-16.....Ground-Fault Circuit-Interrupters
1449-21.....Surge Protective Devices
1472-15.....Solid State Dimming Controls

PART 2 - PRODUCTS

2.1 RECEPTACLES

A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.

1. Mounting straps shall be nickel plated brass, brass, nickel plated steel or galvanize steel with break-off plaster ears, and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.

2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.

B. Duplex Receptacles - Hospital-grade: shall be listed for hospital grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.

1. Bodies shall be ivory in color.
2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The lower receptacle shall be unswitched.
3. Duplex Receptacles on Emergency Circuit:
   a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
4. Ground Fault Current Interrupter (GFCI) Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box, with end-of-life indication and provisions to isolate the face due to improper wiring. GFCI receptacles shall be self-test receptacles in accordance with UL 943.
   a. Ground fault interrupter shall consist of a differential current transformer, self-test, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of 4-6 milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or – 1 milliampere) on the load side of the device. Device shall have a minimum nominal tripping time of 0.025 second.
   b. Self-test function shall be automatically initiated within 5 seconds after power is activated to the receptacles. Self-test function shall be periodically and automatically performed every 3 hours or less.
   c. End-of-life indicator light shall be a persistent flashing or blinking light to indicate that the GFCI receptacle is no longer in service.
5. Tamper-Resistant Duplex Receptacles:
   a. Bodies shall be gray in color.
      1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.

2) Screws exposed while the wall plates are in place shall be the tamperproof type.

C. Duplex Receptacles – Non-hospital Grade: shall be the same as duplex receptacles – hospital grade in accordance with sections 2.1A and 2.1B of this specification, except for the hospital grade listing.
   1. Bodies shall be brown nylon.

D. Receptacles - 20, 30, and 50 ampere, 250 Volts: Shall be complete with appropriate cord grip plug.

E. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.

F. Surge Protective Receptacles shall have integral surge suppression in line to ground, line to neutral, and neutral to ground modes.
   1. Surge Protective Components: Multiple metal-oxide varistors; with a nominal clamp-level rating of 400 Volts, and minimum single transient pulse energy dissipation of 210 Joules.
   2. Active Surge Protective Indication: LED, visible in face of device to indicate device is active or no longer in service.

2.2 TOGGLE SWITCHES

A. Toggle switches shall be totally enclosed tumbler type with nylon bodies. Handles shall be ivory in color unless otherwise specified or shown on the drawings.
   1. Switches installed in hazardous areas shall be explosion-proof type in accordance with the NEC and as shown on the drawings.
   2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plasters ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
   3. Switches shall be rated 20 amperes at 120-277 Volts AC.

2.3 MANUAL DIMMING CONTROL

A. Electronic full-wave manual slide dimmer with on/off switch and audible frequency and EMI/RFI suppression filters.

B. Manual dimming controls shall be fully compatible with LED dimming driver and be approved by the driver manufacturer, shall operate over full specified dimming range, and shall not degrade the performance or rated life of the electronic dimming ballast and lamp.
C. Provide single-pole, three-way or four-way, as shown on the drawings.
D. Manual dimming control and faceplates shall be ivory in color unless otherwise specified.

2.4 WALL PLATES

A. Wall plates for switches and receptacles shall be type 302 stainless steel. Oversize plates are not acceptable. Surface mounted devices shall have matching galvanized plates to backbox.
B. Color shall be ivory unless otherwise specified.
C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
D. Duplex Receptacles on Emergency Circuit: Wall plates shall be red nylon with the word "EMERGENCY" engraved in 6 mm (1/4 inch) white letters.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC and as shown as on the drawings.
B. Install wiring devices after wall construction and painting is complete.
C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the branch circuit equipment grounding conductor.
D. Outlet boxes for toggle switches and manual dimming controls shall be mounted on the strike side of doors.
E. Provide barriers in multi-gang outlet boxes to comply with the NEC.
F. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.
G. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and

equipment, the Contractor shall coordinate exact field location of the above items with other trades.

H. Install wall switches 1.2 M (48 inches) above floor, with the toggle OFF position down.

I. Install wall dimmers 1.2 M (48 inches) above floor.

J. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.

K. Install horizontally mounted receptacles with the ground pin to the right.

L. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.

M. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform manufacturer’s required field checks in accordance with the manufacturer's recommendations, and the latest NFPA 99. In addition, include the following:

1. Visual Inspection and Tests:
   a. Inspect physical and electrical conditions.
   b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
   c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
   d. Test GFCI receptacles.
2. Receptacle testing in the Patient Care Spaces, such as retention force of the grounding blade of each receptacle, shall comply with the latest NFPA 99.

---END---

SECTION 26 29 21
ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of fused and unfused disconnect switches (indicated as switches in this section), and separately-enclosed circuit breakers for use in electrical systems rated 600 V and below.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

E. Section 26 24 16, PANELBOARDS: Molded-case circuit breakers.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, fuses, circuit breakers, wiring and connection diagrams, accessories, and device nameplate data.
2. Manuals:

a. Submit complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering fuses, circuit breakers, and replacement parts.
   1) Include schematic diagrams, with all terminals identified, matching terminal identification in the enclosed switches and circuit breakers.
   2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the enclosed switches and circuit breakers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the enclosed switches and circuit breakers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
IBC-21.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
FU l-12.....Low Voltage Cartridge Fuses
KS l-13.....Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum)

D. National Fire Protection Association (NFPA):
70-23.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):
98-16.....Enclosed and Dead-Front Switches
248 1-11.....Low Voltage Fuses
489-16.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 FUSED SWITCHES RATED 600 AMPERES AND LESS

A. Switches shall be in accordance with NEMA, NEC, UL, as specified, and as shown on the drawings.

B. Shall be NEMA classified General Duty (GD) for 240 V switches, and NEMA classified Heavy Duty (HD) for 480 V switches.

C. Shall be horsepower (HP) rated.

D. Shall have the following features:

1. Switch mechanism shall be the quick-make, quick-break type.
2. Copper blades, visible in the open position.
3. An arc chute for each pole.
4. External operating handle shall indicate open and closed positions, and have lock-open padlocking provisions.
5. Mechanical interlock shall permit opening of the door only when the switch is in the open position, defeatable to permit inspection.
6. Fuse holders for the sizes and types of fuses specified.
7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
8. Ground lugs for each ground conductor.
9. Enclosures:
   a. Shall be the NEMA types shown on the drawings.
   b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions.
   c. Shall be finished with manufacturer’s standard gray baked enamel paint over pretreated steel.

2.2 UNFUSED SWITCHES RATED 600 AMPERES AND LESS

A. Shall be the same as fused switches, but without provisions for fuses.

2.3 FUSED SWITCHES RATED OVER 600 AMPERES TO 1200 AMPERES

A. Shall be the same as fused switches, and shall be NEMA classified Heavy Duty (HD).

2.4 MOTOR RATED TOGGLE SWITCHES

A. Type 1, general purpose for single-phase motors rated up to 1 horsepower.

B. Quick-make, quick-break toggle switch with external reset button and thermal overload protection matched to nameplate full-load current of actual protected motor.

2.5 CARTRIDGE FUSES

SPEC WRITE NOTE: Edit the paragraph below to conform to project requirements.

A. Shall be in accordance with NEMA FU 1.

C. Feeders: Class L, time delay.

D. Motor Branch Circuits: Class RK5, time delay.

E. Other Branch Circuits: Class RK5, time delay.

F. Control Circuits: Class CC, fast acting.

2.6 SEPARATELY-ENCLOSED CIRCUIT BREAKERS

A. Provide circuit breakers in accordance with the applicable requirements in Section 26 24 16, PANELBOARDS.

B. Enclosures shall be the NEMA types shown on the drawings. Where the types are not shown, they shall be the NEMA type most suitable for the ambient environmental conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Fused switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuses.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method.

d. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 SPARE PARTS

A. Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fused disconnect switch installed on the project. Deliver the spare fuses to the COR.

---END---

SECTION 26 41 00
FACILITY LIGHTNING PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing and installation of a complete UL master labeled lightning protection system.

1.2 RELATED WORK

A. Section 07 60 00, FLASHING AND SHEET METAL: Penetrations through the roof.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground faults.

E. Section 26 43 13, SURGE PROTECTIVE DEVICES: Surge protective device installed at the electrical service entrance.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Show locations of air terminals, connections to required metal surfaces, down conductors, and grounding means.
   c. Show the mounting hardware and materials used to attach air terminals and conductors to the structure.
2. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the lightning protection system conforms to the requirements of the drawings and specifications.

b. Certification by the Contractor that the lightning protection system has been properly installed and inspected.

c. Certification that the lightning protection system has been inspected by a UL representative and has been approved by UL without variation.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

780-23.....Standard for the Installation of Lightning Protection Systems

C. Underwriters Laboratories, Inc. (UL):

96-16.....Lightning Protection Components

96A-16.....Installation Requirements for Lightning Protection Systems

467-22.....Standard for Grounding and Bonding Equipment

PART 2 – PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Lightning protection components shall conform to NFPA 780 and UL 96, for use on Class I structures. Copper materials are required.

1. Class I conductors: Copper for water tanks, aluminum for equipment building.
2. Class I air terminals: Solid copper for water tanks, aluminum for equipment building, 460 mm (18 inches) long, not less than 9.5 mm (3/8 inch) diameter, with sharp points.
4. Ground rods: Copper-clad steel, 0.75 in (19 mm) diameter by 3 m (10 feet) long.
5. Ground plates: Solid copper, not less than 20 gauge.
6. Bonding plates: Bronze, 50 square cm (8 square inches).
7. Through roof connectors: Solid riser bar, copper for water tanks, aluminum for equipment building, length and type as required to accommodate roof structure and flashing requirements.
8. Down conductor guards: Stiff copper or brass.

9. Anchors and fasteners: Bronze bolt and clamp type shall be used for all applications except for membrane roof. Adhesive type are allowed only for attachment to membrane roof materials, using adhesive that is compatible with the membrane material.
10. Connectors: Bronze clamp-type connectors shall be used for roof conductor splices, and the connection of the roof conductor to air terminals and bonding plates. Crimp-type connectors are not allowed.
11. Exothermic welds: Exothermic welds shall be used for splicing the roof conductor to the down conductors, splices of the down conductors, and for connection of the down conductors to ground rods, ground plates, and the ground ring.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.
B. Coordinate installation with the roofing manufacturer and roofing installer.
C. Install the conductors as inconspicuously as practical.
D. Install the down conductors within the concealed cavity of exterior walls where practical. Run the down conductors to the exterior at elevations below the finished grade.
E. Where down conductors are subject to damage or are accessible near grade, protect with down conductor guards to 2.4 m (8 feet) above grade. Bond down conductors guards to down conductor at both ends.
F. Make connections of dissimilar metal with bimetallic type fittings to prevent electrolytic action.
G. Install ground rods and ground plates not less than 600 mm (2 feet) deep and a distance not less than 900 mm (3 feet) nor more than 2.5 m (8 feet) from the nearest point of the structure. Exothermically weld the down conductors to ground rods and ground plates in the presence of the COR.
H. Bond down conductors to metal main water piping where applicable.
I. Bond down conductors to building structural steel.
J. Connect roof conductors to all metallic projections and equipment above the roof as indicated on the drawings.

K. Connect exterior metal surfaces, located within 900 mm (3 feet) of the conductors, to the conductors to prevent flashovers.

L. Maintain horizontal or downward coursing of main conductor and insure that all bends have at least an 200 mm (8 inches) radius and do not exceed 90 degrees.

M. Conductors shall be rigidly fastened every 900 mm (3 feet) along the roof and down to the building to ground.

N. Air terminals shall be secured against overturning either by attachment to the object to be protected or by means of a substantial tripod or other braces permanently and rigidly attached to the building or structure.

O. Install air terminal bases, cable holders and other roof-system supporting means without piercing membrane or metal roofs.

P. Use through-roof connectors for penetration of the roof system. Flashing shall be provided by roofing contractor in accordance with Section 07 60 00, FLASHING AND SHEET METAL.

Q. Down conductors coursed on or in reinforced concrete columns or on structural steel columns shall be connected to the reinforcing steel or the structural steel member at its upper and lower extremities. In the case of long vertical members an additional connection shall be made at intervals not exceeding 30 M (100 feet).

R. A counterpoise or ground ring, where shown, shall be of No. 1/0 copper cable having suitable resistance to corrosion and shall be laid around the perimeter of the structure in a trench not less than 600 mm (2 feet) deep at a distance not less than 900 mm (3 feet) nor more than 2.5 M (8 feet) from the nearest point of the structure.

S. On construction utilizing post tensioning systems to secure precast concrete sections, the post tension rods shall not be used as a path for lightning to ground.

T. Where shown, use the structural steel framework or reinforcing steel as the down conductor.

1. Weld or bond the non-electrically-continuous sections together and make them electrically continuous.
2. Verify the electrical continuity by measuring the ground resistances to earth at the ground level, at the top of the building or stack, and at intermediate points with a sensitive ohmmeter. Compare the resistance readings.

3. Connect the air terminals together with an exterior conductor connected to the structural steel framework at not more than 18 M (60 feet) intervals.
4. Install ground connections to earth at not more than 18 M (60 feet) intervals around the perimeter of the building.
5. Weld or braze bonding plates to cleaned sections of the steel and connect the conductors to the plates.
6. Do not pierce the structural steel in any manner. Connections to the structural steel shall conform to UL 96A.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Test the ground resistance to earth by standard methods, and conform to the ground resistance requirements specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

B. A UL representative shall inspect the lightning protection system. Obtain and install a UL numbered master label for each of the lightning protection systems at the location directed by the UL representative and the COR.

---END---

SECTION 26 43 13
SURGE PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of Type 2 Surge Protective Devices, as defined in NFPA 70, and indicated as SPD in this section.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 24 16, PANELBOARDS: For factory-installed or external SPD.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings and device nameplate data.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering replacement parts.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the SPD conforms to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the SPD has been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplement and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. Institute of Engineering and Electronic Engineers (IEEE):

IEEE C62.41.2-02.....Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

IEEE C62.45-08.....Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits

C. National Fire Protection Association (NFPA):

70-23.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

UL 1283-17.....Electromagnetic Interference Filters

UL 1449-21.....Surge Protective Devices

PART 2 - PRODUCTS

2.2 PANELBOARD SPD

A. General Requirements:

1. Comply with UL 1449 and IEEE C62.41.2.
2. Modular design with field-replaceable modules, or non-modular design.
3. Fuses, rated at 200 kA interrupting capacity.
4. Bolted compression lugs for internal wiring.
5. Integral disconnect switch.
6. Redundant suppression circuits.
7. LED indicator lights for power and protection status.
8. Audible alarm, with silencing switch, to indicate when protection has failed.
9. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device.
10. Four-digit transient-event counter.

B. Surge Current per Phase: Minimum 120kA per phase.

2.3 ENCLOSURES

A. Enclosures: NEMA 1.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Factory-installed SPD: Switchgear, switchboard, or panelboard manufacturer shall install SPD at the factory.

C. Field-installed SPD: Contractor shall install SPD with conductors or buses between SPD and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.

1. Provide a circuit breaker as a dedicated disconnecting means for TVSS as shown on drawings.

D. Do not perform insulation resistance tests on switchgear, switchboards, panelboards, or feeders with the SPD connected. Disconnect SPD before conducting insulation resistance tests, and reconnect SPD immediately after insulation resistance tests are complete.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify that disconnecting means and feeder size and maximum length to SPD corresponds to approved shop drawings.

d. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.

e. Vacuum-clean enclosure interior. Clean enclosure exterior.

f. Verify the correct operation of all sensing devices, alarms, and indicating devices.

3.3 FOLLOW-UP VERIFICATION

A. After completion of acceptance checks and tests, the Contractor shall show by demonstration in service that SPD are in good operating condition and properly performing the intended function.

3.4 INSTRUCTION

A. Provide the services of a factory-trained technician for one 2-hour training period for instructing personnel in the maintenance and operation of the SPD, on the date requested by the COR.

`---END---

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the furnishing, installation, and connection of the interior lighting systems. The terms “lighting fixture,” “fixture,” and “luminaire” are used interchangeably.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.

b. Material and construction details, include information on housing and optics system.

c. Physical dimensions and description.

d. Wiring schematic and connection diagram.

e. Installation details.

f. Energy efficiency data.

g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.

h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).

j. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.

2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the interior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

C635/C635M-22.....Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings

C. Environmental Protection Agency (EPA):

40 CFR 261-21.....Identification and Listing of Hazardous Waste

D. Federal Communications Commission (FCC):

CFR Title 47, Part 15...Radio Frequency Devices

CFR Title 47, Part 18...Industrial, Scientific, and Medical Equipment

E. Illuminating Engineering Society of North America (IESNA):

LM-79-19.....Electrical and Photometric Measurements of Solid-State Lighting Products

LM-80-21.....Measuring Lumen Maintenance of LED Light Sources

LM-82-19.....Characterization of LED Light Engines and LED Lamps for Electrical and Photometric Properties as a Function of Temperature

F. Institute of Electrical and Electronic Engineers (IEEE):
C62.41-91(R1995).....Surge Voltages in Low Voltage AC Power Circuits

G. International Code Council (ICC):
IBC-21.....International Building Code

H. National Electrical Manufacturer's Association (NEMA):
SSL 1-16.....Electronic Drivers for LED Devices, Arrays, or Systems

I. National Fire Protection Association (NFPA):
70-23.....National Electrical Code (NEC)
101-21.....Life Safety Code

J. Underwriters Laboratories, Inc. (UL):
924-16.....Emergency Lighting and Power Equipment
1598-21.....Standard for Safety Luminaires
8750-15.....Standard for Safety Light Emitting Diode (LED) Light Sources for Use in Lighting Products

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES

A. Shall be in accordance with NFPA, UL, as shown on drawings, and as specified.

B. Sheet Metal:
   1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved), and parallel to each other as designed.
   2. Wireways and fittings shall be free of burrs and sharp edges, and shall accommodate internal and branch circuit wiring without damage to the wiring.
   3. When installed, any exposed fixture housing surface, trim frame, door frame, and lens frame shall be free of light leaks.
   4. Hinged door frames shall operate smoothly without binding. Latches shall function easily by finger action without the use of tools.

C. Internal components shall be serviceable while the fixture is in its normally installed position. Drivers shall not be mounted to removable reflectors or wireway covers unless so specified.

D. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.

E. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, aircraft cable, captive hinges, or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

F. Metal Finishes:

1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion-resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
2. Interior light reflecting finishes shall be white with not less than 85 percent reflectance, except where otherwise shown on the drawing.
3. Exterior finishes shall be as shown on the drawings.

G. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

2.2 EMERGENCY LIGHTING UNIT

A. Complete, self-contained unit with batteries, battery charger, one or more local or remote lamp heads with lamps, under-voltage relay, and test switch.

1. Enclosure: Shall be impact-resistant thermoplastic. Enclosure shall be suitable for the environmental conditions in which installed.
2. Lamp Heads: Horizontally and vertically adjustable, mounted on the face of the unit, except where otherwise indicated.
3. Lamps: Shall be LED with wattage as specified on the drawings.
4. Battery: Shall be maintenance-free nickel-cadmium. Minimum normal life shall be minimum of 10 years.
5. Battery Charger: Dry-type full-wave rectifier with charging rates to maintain the battery in fully-charged condition during normal operation, and to automatically recharge the battery within 12 hours following a 1-1/2 hour continuous discharge.

6. Integral Self-Test: Automatically initiates test of unit emergency operation.

2.3 LED EXIT LIGHT FIXTURES

A. Exit light fixtures shall meet applicable requirements of NFPA and UL.

B. Housing and door shall be die-cast aluminum.

C. For general purpose exit light fixtures, door frame shall be hinged, with latch. For vandal-resistant exit light fixtures, door frame shall be secured with tamper-resistant screws.

D. Finish shall be satin or fine-grain brushed aluminum.

E. There shall be no radioactive material used in the fixtures.

F. Fixtures:

1. Inscription panels shall be cast or stamped aluminum a minimum of 2.25 mm (0.090 inch) thick, stenciled with 150 mm (6 inch) high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass.
2. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
3. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltage: Multi-voltage (120 – 277V).

2.10 LED LIGHT FIXTURES

A. General:

1. LED light fixtures shall be in accordance with IES, NFPA, UL, as shown on the drawings, and as specified.
2. LED light fixtures shall be Reduction of Hazardous Substances (RoHS)-compliant.
3. LED drivers shall include the following features unless otherwise indicated:
   a. Minimum efficiency: 85% at full load.
   b. Minimum Operating Ambient Temperature: -20° C. (-4° F.)
   c. Input Voltage: 120 - 277V (±10%) at 60 Hz.
   d. Integral short circuit, open circuit, and overload protection.
   e. Power Factor: ≥ 0.95.
   f. Total Harmonic Distortion: ≤ 20%.

g. Comply with FCC 47 CFR Part 15.

4. LED modules shall include the following features unless otherwise indicated:
   a. Comply with IES LM-79 and LM-80 requirements.
   b. Minimum CRI: 80 or higher. Minimum Color Fidelity Index (IES Rf): 80 or higher.
   c. Color temperature between 3500° - 5000°K and as specified in the drawings' LIGHTING FIXTURE SCHEDULE.
   d. Minimum Rated Life: 50,000 hours per IES L70.
   e. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, and as shown on the drawings or specified.

B. Align, mount, and level the lighting fixtures uniformly.

C. Wall-mounted fixtures shall be attached to the studs in the walls, or to a 20 gauge metal backing plate that is attached to the studs in the walls. Lighting fixtures shall not be attached directly to gypsum board.

D. Lighting Fixture Supports:
   1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
   2. Shall maintain the fixture positions after cleaning and relamping.
   3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
   4. Surface mounted lighting fixtures:
      a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 6 mm (1/4 inch) bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety hangers.

Studs or bolts securing fixtures weighing in excess of 25 kg (56 pounds) shall be supported directly from the building structure.

b. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.

c. Fixtures less than 6.8 kg (15 pounds) in weight and occupying less than 3715 sq cm (two square feet) of ceiling area may, when designed for the purpose, be supported directly from the outlet box when all the following conditions are met.

1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.

2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.

3) The outlet box is supported vertically from the building structure.

d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.

5. Single or double pendant-mounted lighting fixtures:

a. Each stem shall be supported by an approved outlet box mounted swivel joint and canopy which holds the stem captive and provides spring load (or approved equivalent) dampening of fixture oscillations. Outlet box shall be supported vertically from the building structure.

6. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.//

E. The electrical and ceiling trades shall coordinate to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges, etc.), to match the ceiling system being installed.

F. Bond lighting fixtures to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

G. At completion of project, replace all defective components of the lighting fixtures at no cost to the Government.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform the following:

1. Visual Inspection:

a. Verify proper operation by operating the lighting controls.

b. Visually inspect for damage to fixtures, lenses, reflectors, diffusers, and louvers. Clean fixtures, lenses, reflectors, diffusers, and louvers that have accumulated dust, dirt, or fingerprints during construction.

2. Electrical tests:

a. Exercise dimming components of the lighting fixtures over full range of dimming capability by operating the control devices(s) in the presence of the COTR. Observe for visually detectable flicker over full dimming range, and replace defective components at no cost to the Government.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting systems are in good operating condition and properly performing the intended function.

---END---

SECTION 26 56 00
EXTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of exterior fixtures, poles, and supports. The terms “lighting fixtures”, “fixture” and “luminaire” are used interchangeably.

1.2 RELATED WORK

A. Section 03 30 00, CAST-IN-PLACE CONCRETE.

B. Section 09 06 00, SCHEDULE FOR FINISHES: Finishes for exterior light poles and luminaires.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

D. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage power and lighting wiring.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

F. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits, fittings, and boxes for raceway systems.

G. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Underground handholes and conduits.

H. Section 26 09 23, LIGHTING CONTROLS: Controls for exterior lighting.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.

b. Material and construction details, include information on housing and optics system.
c. Physical dimensions and description.
d. Wiring schematic and connection diagram.
e. Installation details.
f. Energy efficiency data.
g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.
h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).
i. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts, and total harmonic distortion (THD).
j. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.
k. Submit site plan showing all exterior lighting fixtures with fixture tags consistent with Lighting Fixture Schedule as shown on drawings. Site plan shall show computer generated point–by-point illumination calculations. Include lamp lumen and light loss factors used in calculations.

2. Manuals:
a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
a. Certification by the Contractor that the exterior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the

extent referenced. Publications are referenced in the text by designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

LRFDLTS-17.....Structural Supports for Highway Signs, Luminaires and Traffic Signals

C. American Concrete Institute (ACI):

318-19 .....Building Code Requirements for Structural Concrete

D. American National Standards Institute (ANSI):

H35.1/H35 1M-17.....American National Standard Alloy and Temper Designation Systems for Aluminum

E. American Society for Testing and Materials (ASTM):

A123/A123M-17 .....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A153/A153M-16.....Zinc Coating (Hot-Dip) on Iron and Steel Hardware

B108/B108M-19 .....Aluminum-Alloy Permanent Mold Castings

C1089-19 .....Spun Cast Prestressed Concrete Poles

F. Federal Aviation Administration (FAA):

AC 70/7460-IL-20.....Obstruction Marking and Lighting

AC 150/5345-43J-19.....Specification for Obstruction Lighting Equipment

G. Illuminating Engineering Society of North America (IESNA):

RP-8-21.....Roadway Lighting

LM-72-20.....Directional Positioning of Photometric Data

LM-79-19.....Approved Method for the Electrical and Photometric Measurements of Solid-Sate Lighting Products

LM-80-21.....Approved Method for Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules

TM-15-20.....Luminaire Classification System for Outdoor Luminaires

H. National Electrical Manufacturers Association (NEMA):

C78.41-16.....Electric Lamps – Guidelines for Low-Pressure Sodium Lamps

C78.42-09(R2016) .....Electric Lamps – Guidelines for High-Pressure Sodium Lamps
C78.43-17 .....Electric Lamps – Single-Ended Metal-Halide Lamps
C78.1381-98.....Electric Lamps – 70-Watt M85 Double-Ended Metal-Halide Lamps
C81.61-19 .....Electrical Lamp Bases – Specifications for Bases (Caps) for Electric Lamps
C82.4-17 .....Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps (Multiple-Supply Type)
C136.3-20 .....For Roadway and Area Lighting Equipment – Luminaire Attachments
C136.17-05(S2017) .....Roadway and Area Lighting Equipment – Enclosed Side-Mounted Luminaires for Horizontal-Burning High-Intensity-Discharge Lamps – Mechanical Interchangeability of Refractors
ICS 2-00(R2020) .....Controllers, Contactors and Overload Relays Rated 600 Volts
ICS 6-93(R2016) .....Enclosures

I. National Fire Protection Association (NFPA):

70-23 .....National Electrical Code (NEC)
101-21.....Life Safety Code

J. Underwriters Laboratories, Inc. (UL):

496-17 .....Lampholders
773-16.....Plug-In, Locking Type Photocontrols for Use with Area Lighting
773A-16 .....Nonindustrial Photoelectric Switches for Lighting Control
1029-94.....High-Intensity-Discharge Lamp Ballasts
1598-21 .....Luminaires
8750-15.....Light Emitting Diode (LED) Equipment for Use in Lighting Products

1.6 DELIVERY, STORAGE, AND HANDLING

Provide manufacturer’s standard provisions for protecting pole finishes during transport, storage, and installation. Do not store poles on ground. Store poles so they are at least 305 mm (12 inches) above

ground level and growing vegetation. Do not remove factory-applied pole wrappings until just before installing pole.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

Luminaires, materials and equipment shall be in accordance with NEC, UL, ANSI, and as shown on the drawings and specified.

2.2 POLES

A. General:

1. Poles shall be as shown on the drawings, and as specified. Finish shall be as specified on the drawings.
2. The pole and arm assembly shall be designed for wind loading of 161 km/hr (100 mph) minimum, as required by wind loading conditions at project site, with an additional 30% gust factor and supporting luminaire(s) and accessories such as shields, banner arms, and banners that have the effective projected areas indicated. The effective projected area of the pole shall be applied at the height of the pole base, as shown on the drawings.
3. Poles shall be anchor-bolt type designed for use with underground supply conductors. Poles shall have handhole having a minimum clear opening of 65 x 125 mm (2.5 x 5 inches). Handhole covers shall be secured by stainless steel captive screws.
4. Provide a steel-grounding stud opposite handhole openings, designed to prevent electrolysis when used with copper wire.
5. Provide a base cover that matches the pole in material and color to conceal the mounting hardware pole-base welds and anchor bolts.
6. Hardware and Accessories: All necessary hardware and specified accessories shall be the product of the pole manufacturer.
7. Provide manufacturer's standard finish, as scheduled on the drawings. Where indicated on drawings, provide finishes as indicated in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Types:

//2. Steel: Provide square, steel poles having minimum 11-gauge steel with minimum yield/strength of 48,000 psi and factory finish.

2.3 FOUNDATIONS FOR POLES

A. Foundations shall be cast-in-place concrete, having 3000 psi minimum 28-day compressive strength.

B. Foundations shall support the effective projected area of the specified pole, arm(s), luminaire(s), and accessories, such as shields, banner arms, and banners, under wind conditions previously specified in this section.

C. Place concrete in spirally-wrapped treated paper forms for round foundations, and construct forms for square foundations.

D. Rub-finish and round all above-grade concrete edges to approximately 6 mm (0.25-inch) radius.

E. Anchor bolt assemblies and reinforcing of concrete foundations shall be as shown on the drawings. Anchor bolts shall be in a welded cage or properly positioned by the tiewire to stirrups.

F. Prior to concrete pour, install electrode per Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

2.4 LUMINAIRES

A. Luminaires shall be weatherproof, heavy duty, outdoor types designed for efficient light utilization, adequate dissipation of lamp and ballast heat, and safe cleaning and relamping.

B. Illumination distribution patterns, BUG ratings and cutoff types as defined by the IESNA shall be as shown on the drawings.

C. Incorporate ballasts in the luminaire housing, except where otherwise shown on the drawings.

D. Lenses shall be frame-mounted, heat-resistant, borosilicate glass, with prismatic refractors, unless otherwise shown on the drawings. Attach the frame to the luminaire housing by hinges or chain. Use heat and aging-resistant, resilient gaskets to seal and cushion lenses and refractors in luminaire doors.

F. Pre-wire internal components to terminal strips at the factory.

G. Bracket-mounted luminaires shall have leveling provisions and clamp-type adjustable slip-fitters with locking screws.

H. Materials shall be rustproof. Latches and fittings shall be non-ferrous metal.

I. Provide manufacturer's standard finish, as scheduled on the drawings. Where indicated on drawings, match finish process and color of pole or support materials. Where indicated on drawings, provide finishes as indicated in Section 09 06 00, SCHEDULE FOR FINISHES.

J. Luminaires shall carry factory labels, showing complete, specific lamp and ballast information.

2.5 LAMPS

F. LED sources shall meet the following requirements:

1. Operating temperature rating shall be between -40 degrees C (-40 degrees F) and 50 degrees C (120 degrees F).
2. Correlated Color Temperature (CCT): 4000K.
3. Color Rendering Index (CRI): ≥ 80.
4. The manufacturer shall have performed reliability tests on the LEDs luminaires complying with Illuminating Engineering Society (IES) LM79 for photometric performance and LM80 for lumen maintenance and L70 life.

G. Mercury vapor lamps shall not be used.

2.9 LED DRIVERS

A. LED drivers shall meet the following requirements:

1. Drivers shall have a minimum efficiency of 85%.
2. Starting Temperature: -40 degrees C (-40 degrees F).
3. Input Voltage: 120 to 480 (±10%) volt.
4. Power Supplies: Class I or II output.
5. Surge Protection: The system must survive 250 repetitive strikes of “C Low” (C Low: 6kV/1.2 x 50 µs, 10kA/8 x 20 µs) waveforms at 1-minute intervals with less than 10% degradation in clamping voltage. “C Low” waveforms are as defined in IEEE/ASNI C62.41.2-2002, Scenario 1 Location Category C.
6. Power Factor (PF): ≥ 0.90.
7. Total Harmonic Distortion (THD): ≤ 20%.
8. Comply with FCC Title 47 CFR Part 18 Non-consumer RFI/EMI Standards.
9. Drivers shall be reduction of hazardous substances (ROHS)-compliant.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install lighting in accordance with the NEC, as shown on the drawings, and in accordance with manufacturer’s recommendations.

B. Pole Foundations:

1. Excavate only as necessary to provide sufficient working clearance for installation of forms and proper use of tamper to the full depth of the excavation. Prevent surface water from flowing into the excavation. Thoroughly compact backfill with compacting arranged to prevent pressure between conductor, jacket, or sheath, and the end of conduit.

2. Set anchor bolts according to anchor-bolt templates furnished by the pole manufacturer.
3. Install poles as necessary to provide a permanent vertical position with the bracket arm in proper position for luminaire location.
4. After the poles have been installed, shimmed, and plumbed, grout the spaces between the pole bases and the concrete base with non-shrink concrete grout material. Provide a plastic or copper tube, of not less than 9 mm (0.375-inch) inside diameter through the grout, tight to the top of the concrete base to prevent moisture weeping from the interior of the pole.

C. Install lamps in each luminaire.

D. Adjust luminaires that require field adjustment or aiming.

3.2 GROUNDING

Ground noncurrent-carrying parts of equipment, including metal poles, luminaires, mounting arms, brackets, and metallic enclosures, as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS. Where copper grounding conductor is connected to a metal other than copper, provide specially-treated or lined connectors suitable and listed for this purpose.

3.3 ACCEPTANCE CHECKS AND TESTS

Verify operation after installing luminaires and energizing circuits.

- - - E N D - - -

DIVISION 31 - EARTHWORK

SECTION 31 20 00
EARTHWORK

PART 1 - GENERAL

1.1 DESCRIPTION OF WORK:

A. This section specifies the requirements for furnishing all equipment, materials, labor, tools, and techniques for earthwork including, but not limited to, the following:

1. Site preparation.
2. Excavation.
3. Underpinning.
4. Filling and backfilling.
5. Grading.
6. Soil Disposal.
7. Clean Up.

1.2 DEFINITIONS:

A. Unsuitable Materials:

1. Fills: Topsoil; frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic material, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable and any material with a liquid limit and plasticity index exceeding 40 and 15 respectively. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction, as defined by ASTM D698.
2. Existing Subgrade (Except Footing Subgrade): Same materials as 1.2.A.1, that are not capable of direct support of slabs, pavement, and similar items with possible exception of improvement by compaction, proofrolling, or similar methods.
3. Existing Subgrade (Footings Only): Same as paragraph 1, but no fill or backfill. If materials differ from reference borings and design requirements, excavate to acceptable strata subject to Resident Engineer's approval.

B. Building Earthwork: Earthwork operations required in area enclosed by a line located 1500 mm (5 feet) outside of principal building perimeter. It also includes earthwork required for auxiliary structures and buildings.

C. Trench Earthwork: Trenchwork required for utility lines.

D. Site Earthwork: Earthwork operations required in area outside of a line located 1500 mm (5 feet) outside of principal building perimeter and within new construction area with exceptions noted above.

E. Degree of compaction: Degree of compaction is expressed as a percentage of maximum density obtained by laboratory test procedure. This percentage of maximum density is obtained through use of data provided from results of field test procedures presented in ASTM D1556, ASTM D2167, and ASTM D6938.

F. Fill: Satisfactory soil materials used to raise existing grades. In the Construction Documents, the term "fill" means fill or backfill as appropriate.

G. Backfill: Soil materials or controlled low strength material used to fill an excavation.

H. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or indicated lines and dimensions without written authorization by the Resident Engineer. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.

I. Authorized additional excavation: Removal of additional material authorized by the Resident Engineer based on the determination by the Government's soils testing agency that unsuitable bearing materials are encountered at required sub-grade elevations. Removal of unsuitable material and its replacement as directed will be paid on basis of Conditions of the Contract relative to changes in work.

J. Subgrade: The undisturbed earth or the compacted soil layer immediately below granular sub-base, drainage fill, or topsoil materials.

K. Structure: Buildings, foundations, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.

L. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.

M. Drainage course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.

N. Bedding course: Layer placed over the excavated sub-grade in a trench before laying pipe. Bedding course shall extend up to the springline of the pipe.

O. Sub-base Course: Layer placed between the sub-grade and base course for asphalt paving or layer placed between the sub-grade and a concrete pavement or walk.

P. Utilities include on-site underground pipes, conduits, ducts, and cables as well as underground services within buildings.

Q. Debris: Debris includes all materials located within the designated work area not covered in the other definitions and shall include but not be limited to items like vehicles, equipment, appliances, building materials or remains thereof, tires, any solid or liquid chemicals or products stored or found in containers or spilled on the ground.

R. Contaminated soils: Soil that contains contaminates as defined and determined by the Resident Engineer or the Government's testing agency.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety requirements: Section 00 72 00, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.

C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

E. Erosion Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, and Section 32 90 00, PLANTING.

F. Site preparation: Section 31 23 19, DEWATERING, and Section 02 41 00, DEMOLITION.

G. Foundation system requirements: Section 31 62 00, DRIVEN PILES, Section 31 63 16, AUGER CAST GROUT PILES, Section 31 63 26, DRILLED CAISSONS, Section 31 23 23.33, FLOWABLE FILL.

H. Paving sub-grade requirements: Section 32 12 16, ASPHALT PAVING.

1.4 CLASSIFICATION OF EXCAVATION:

A. Unclassified Excavation: Removal and disposal of pavements and other man-made obstructions visible on surface; utilities, and other items including underground structures indicated to be demolished and removed; together with any type of materials regardless of character of material and obstructions encountered.

B. Classified Excavation: Removal and disposal of all material not defined as Rock.

C. Rock Excavation:

1. Trenches and Pits: Removal and disposal of solid, homogenous, interlocking crystalline material with firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be excavated with a late-model, track-mounted hydraulic excavator; equipped with a 1050 mm (42 inch) wide, short-tip-radius rock bucket; rated at not less than 103 kW (138 hp) flywheel power with bucket-curling force of not less than 125 kN (28,090 lbf) and stick-crowd force of not less than 84.5 kN (19,000 lbf); measured according to SAE J-1179. Trenches in excess of 3000 mm (10 feet) wide and pits in excess of 9000 mm (30 feet) in either length or width are classified as open excavation.
2. Open Excavation: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be dislodged and excavated with a late-model, track-mounted loader; rated at not less than 157 kW (210 hp) flywheel power and developing a minimum of 216 kN (48,510 lbf) breakout force; measured according to SAE J-732.
3. Other types of materials classified as rock are unstratified masses, conglomerated deposits and boulders of rock material exceeding 0.76 m3 (1 cubic yard) for open excavation, or 0.57 m3 (3/4 cubic yard) for footing and trench excavation that cannot be removed by rock excavating equipment equivalent to the above in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted.
4. Blasting: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be removed with conventional methods may not be performed by blasting.
5. Definitions of rock and guidelines for equipment are presented for general information purposes only. The Contractor is expected to use the information presented in the Geotechnical Engineering Report to evaluate the extent and competency of the rock and to determine both quantity estimations and removal equipment and efforts.

1.5 MEASUREMENT AND PAYMENT FOR EXCAVATION:

A. Measurement: The unit of measurement for excavation and borrow will be the cubic yard, computed by the average end area method from cross sections taken before and after the excavation and borrow operations, including the excavation for ditches, gutters, and channel changes, when the material is acceptably utilized or disposed of as herein specified. Quantities should be computed by a Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS. The measurement will include authorized excavation of satisfactory subgrade soil, and the volume of loose, scattered rocks and boulders collected within the limits of the work; allowance will be made on the same basis for selected backfill ordered as replacement. The measurement will not include the volume of subgrade material or other material used for purposes other than directed. The volume of overburden stripped from borrow pits and the volume of excavation for ditches to drain borrow its, unless used as borrow material, will not be measured for payment. The measurement will not include the volume of any excavation performed prior to taking of elevations and measurements of the undisturbed grade.

1.6 MEASUREMENT AND PAYMENT FOR ROCK EXCAVATION:

A. Measurement: Cross section and measure uncovered and separated materials, and compute quantities by Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS. Do not measure quantities beyond the following limits:

1. 600 mm (24 inches) from outside face of concrete work for which forms are required, except for footings.
2. 300 mm (12 inches) from outside of perimeter of formed footings.
3. 150 mm (6 inches) below bottom of pipe and not more than pipe diameter plus 600 mm (24 inches) in width for pipe trenches.
4. From outside dimensions of concrete work for which no forms are required (trenches, conduits, and similar items not requiring forms).

1.7 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Rock Excavation Report:

1. Certification of rock quantities excavated.
2. Excavation method.
3. Labor.
4. Equipment.
5. Land Surveyor's or Civil Engineer's name and official registration stamp.
6. Plot plan showing elevation.

C. Furnish to Resident Engineer:

1. Contactor shall furnish resumes with all personnel involved in the project including Project Manager, Superintendent, and on-site Engineer. Project Manager and Superintendent should have at least 3 years of experience on projects of similar size.
2. Soil samples.
   a. Classification in accordance with ASTM D2487 for each on-site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
   b. Laboratory compaction curve in accordance with ASTM D698 for each on site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
   c. Test reports for compliance with ASTM D2940 requirements for subbase material.
   d. Pre-excavation photographs and videotape in the vicinity of the existing structures to document existing site features, including surfaces finishes, cracks, or other structural blemishes that might be misconstrued as damage caused by earthwork operations.
   e. The Contractor shall submit a scale plan daily that defines the location, limits, and depths of the area excavated.
3. Contractor shall submit procedure and location for disposal of unused satisfactory material. Proposed source of borrow material. Notification of encountering rock in the project. Advance notice on the opening of excavation or borrow areas. Advance notice on shoulder construction for rigid pavements.

1.8 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop

T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb) Rammer and a 457 mm (18 inch) Drop

C. American Society for Testing and Materials (ASTM):

C33-03.....Concrete Aggregate

D448-08.....Standard Classification for Sizes of Aggregate for Road and Bridge Construction

D698-07e1.....Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft. lbf/ft^3 (600 kN m/m^3))

D1140-00.....Amount of Material in Soils Finer than the No. 200 (75-micrometer) Sieve

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft^3 (2700 kN m/m^3))

D2167-08.....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2487-11.....Standard Classification of Soils for Engineering Purposes (Unified Soil Classification System)

D2940-09.....Standard Specifications for Graded Aggregate Material for Bases or Subbases for Highways or Airports

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth

D. Society of Automotive Engineers (SAE):

J732-07.....Specification Definitions - Loaders

J1179-08.....Hydraulic Excavator and Backhoe Digging Forces

PART 2 - PRODUCTS

2.1 MATERIALS:

A. General: Provide borrow soil material when sufficient satisfactory soil materials are not available from excavations.

B. Fills: Material in compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and CL, or any combination of these groups; free of rock or gravel larger than 75 mm (3 inches) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter. Material approved from on site or off site sources having a minimum dry density of 1760 kg/m3 (110 pcf), a maximum Plasticity Index of 5 to 20, and a maximum Liquid Limit of 40. Refer to Geotechnical Report.

C. Engineered Fill: Naturally or artificially graded mixture of compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, CL or any combination of these groups, or as approved by the Engineer or material approved from on site or off site sources having a minimum dry density of 1760 kg/m3 (110 pcf), a maximum Plasticity Index of 5 to 20, and a maximum Liquid Limit of 40. Refer to Geotechnical Report.

D. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 15 percent passing a 75-µm (No. 200) sieve.

E. Drainage Fill: Washed, narrowly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size 57; with 100 percent passing a 37.5 mm (1 1/2-inch) sieve and 0 to 5 percent passing a 2.36 mm (No. 8) sieve.

F. Granular Fill:

1. Under concrete slab, - Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 15 percent passing a 75-µm (No. 200) sieve.
2. Bedding for sanitary and storm sewer pipe, Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 15 percent passing a 75-µm (No. 200) sieve.

G. Requirements for Offsite Soils: Offsite soils brought in for use as backfill shall be tested for TPH, BTEX and full TCLP including ignitability, corrosivity and reactivity. Backfill shall contain less than 100 parts per million (ppm) of total hydrocarbons (TPH) and less than 10 ppm of the sum of Benzene, Toleune, Ethyl Benzene, and Xylene (BTEX) and shall not fail the TCLP test. TPH concentrations shall be determined by using EPA 600/4-79/020 Method 418.1. BTEX concentrations shall be determined by using EPA SW-846.3-3a Method 5030/8020. TCLP shall be performed in accordance with EPA SW-846.3-3a Method 1311. Provide Borrow Site Testing for TPH, BTEX and TCLP from a composite sample of material from the borrow site, with at least one test from each borrow site.

H. Buried Warning and Identification Tape: Polyethylene plastic and metallic core or metallic-faced, acid- and alkali-resistant polyethylene plastic warning tape manufactured specifically for warning and identification of buried utility lines. Provide tape on rolls, 3 inch minimum width, color coded as specific below for the intended utility with warning and identification imprinted in bold black letters continuously over the entire tape length. Warning and identification to read, "CAUTION, BURIED (intended service) LINE BELOW" or similar wording. Color and printing shall be permanent, Unaffected by moisture or soil. Warning tape color codes:

Red: Electric
Orange: Telephone and Other Communications
Blue: Water Systems
Green: Sewer Systems
Gray: Compressed Air

I. Warning Tape for Metallic Piping: Acid and alkali-resistant polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of tape shall be 0.076 mm (0.003 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi) lengthwise, and 8.6 MPa (1250 psi) crosswise, with a maximum 350 percent elongation.

J. Detectable Warning Tape for Non-Metallic Piping: Polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of the tape shall be 0.102 mm (0.004 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi)

lengthwise and 8.6 MPa (1250 psi) crosswise. Tape shall be manufactured with integral wires, foil backing, or other means of enabling detection by a metal detector when tape is buried up to 0.9 m (3 feet) deep. Encase metallic element of the tape in a protective jacket or provide with other means of corrosion protection.

K. Detection Wire For Non-Metallic Piping: Detection wire shall be Insulated single strand, solid copper with a minimum of 12 AWG.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

A. Clearing: Clear within limits of earthwork operations as shown. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash, and other obstructions. Remove materials from Medical Center.

B. Grubbing: Remove stumps and roots 75 mm (3 inch) and larger diameter. Undisturbed sound stumps, roots up to 75 mm (3 inch) diameter, and nonperishable solid objects a minimum of 900 mm (3 feet) below subgrade or finished embankment may be left.

C. Trees and Shrubs: Trees and shrubs, not shown for removal, may be removed from areas within 4500 mm (15 feet) of new construction and 2250 mm (7.5 feet) of utility lines when removal is approved in advance by Resident Engineer. Remove materials from Medical Center. Box, and otherwise protect from damage, existing trees and shrubs which are not shown to be removed in construction area. Immediately repair damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Do not store building materials closer to trees and shrubs, that are to remain, than farthest extension of their limbs.

D. Stripping Topsoil: Strip topsoil from within limits of earthwork operations as specified. Topsoil shall be a fertile, friable, natural topsoil of loamy character and characteristic of locality. Topsoil shall be capable of growing healthy horticultural crops of grasses. Stockpile topsoil and protect as directed by Resident Engineer. Eliminate foreign materials, such as weeds, roots, stones, subsoil, frozen clods, and similar foreign materials larger than 0.014 m3 (1/2 cubic foot) in volume, from soil as it is stockpiled. Retain topsoil on station. Remove foreign materials larger than 50 mm (2 inches) in any

dimension from topsoil used in final grading. Topsoil work, such as stripping, stockpiling, and similar topsoil work shall not, under any circumstances, be carried out when soil is wet so that the composition of the soil will be destroyed.

E. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of trench excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from Medical Center.

F. Lines and Grades: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and grades.

1. Grades shall conform to elevations indicated on plans within the tolerances herein specified. Generally grades shall be established to provide a smooth surface, free from irregular surface changes. Grading shall comply with compaction requirements and grade cross sections, lines, and elevations indicated. Where spot grades are indicated the grade shall be established based on interpolation of the elevations between the spot grades while maintaining appropriate transition at structures and paving and uninterrupted drainage flow into inlets.
2. Locations of existing and proposed elevations indicated on plans are approximate from a site survey that measured spot elevations and subsequently generated existing contours and spot elevations. Contractor is responsible to notify Resident Engineer of any differences between existing elevations shown on plans and those encountered on site by Surveyor/Engineer described above. Notify Resident Engineer of any differences between existing or constructed grades, as compared to those shown on the plans.
3. Subsequent to establishment of lines and grades, Contractor will be responsible for any additional cut and/or fill required to ensure that site is graded to conform to elevations indicated on plans.
4. Finish grading is specified in Section 32 90 00, PLANTING.

G. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all

removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

A. Shoring, Sheeting and Bracing: Shore, brace, or slope, its angle of repose or to an angle considered acceptable by the Resident Engineer, banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities.

1. Design of the temporary support of excavation system is the responsibility of the Contractor. The Contractor shall submit a Shoring and Sheeting plan for approval 15 days prior to starting work. Submit drawings and calculations, certified by a registered professional engineer, describing the methods for shoring and sheeting of excavations. Shoring, including sheet piling, shall be furnished and installed as necessary to protect workmen, banks, adjacent paving, structures, and utilities. Shoring, bracing, and sheeting shall be removed as excavations are backfilled, in a manner to prevent caving.
2. Construction of the support of excavation system shall not interfere with the permanent structure and may begin only after a review by the Resident Engineer.
3. Extend shoring and bracing to a minimum of 1500 mm (5 feet) below the bottom of excavation. Shore excavations that are carried below elevations of adjacent existing foundations.
4. If bearing material of any foundation is disturbed by excavating, improper shoring or removal of existing or temporary shoring, placing of backfill, and similar operations, the Contractor shall underpin the existing foundation, per Section 3.3, under disturbed foundations, as directed by Resident Engineer, at no additional cost to the Government. Do not remove shoring until permanent work in excavation has been inspected and approved by Resident Engineer.
5. The Contractor is required to hire a Professional Geotechnical Engineer to provide inspection of excavations and soil/groundwater conditions throughout construction. The Geotechnical Engineer shall be responsible for performing pre-construction and periodic site visits throughout construction to assess site conditions. The Geotechnical Engineer shall update the excavation, sheeting and dewatering plans as construction progresses to reflect changing

conditions and shall submit an updated plan if necessary. A written report shall be submitted, at least monthly, informing the Contractor and Resident Engineer of the status of the plan and an accounting of the Contractor's adherence to the plan addressing any present or potential problems. The Geotechnical Engineer shall be available to meet with the Resident Engineer at any time throughout the contract duration.

B. Excavation Drainage: Operate pumping equipment, and/or provide other materials, means and equipment as required to keep excavation free of water and subgrade dry, firm, and undisturbed until approval of permanent work has been received from Resident Engineer. Approval by the Resident Engineer is also required before placement of the permanent work on all subgrades. Groundwater flowing toward or into excavations shall be controlled to prevent sloughing of excavation slopes and walls, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches will not be permitted within 0.9 m (3 feet) of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Control measures shall be taken by the time the excavation reaches the water level in order to maintain the integrity of the in situ material. While the excavation is open, the water level shall be maintained continuously, at least 3 feet below the working level. Operate dewatering system continuously until construction work below existing water levels is complete. Submit performance records weekly. Measure and record performance of dewatering system at same time each day by use of observation wells or piezometers installed in conjunction with the dewatering system. Relieve hydrostatic head in pervious zones below subgrade elevation in layered soils to prevent uplift.

C. Subgrade Protection: Protect subgrades from softening, undermining, washout, or damage by rain or water accumulation. Reroute surface water runoff from excavated areas and not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches. When subgrade for foundations has been disturbed by water, remove disturbed material to firm undisturbed material after water is

brought under control. Replace disturbed subgrade in trenches with concrete or material approved by the Resident Engineer.

E. Proofrolling:

1. After rough grade has been established in cut areas and prior to placement of fill in fill areas under building and pavements, proofroll exposed subgrade with a fully loaded dump truck to check for pockets of soft material.
2. Proof rolling shall be done on an exposed subgrade free of surface water (wet conditions resulting from rainfall) which would promote degradation of an otherwise acceptable subgrade. After stripping, proof roll the existing subgrade of the footprint of the structure with six passes of a 13.6 meter tons (15 ton), pneumatic-tired roller. Operate the roller in a systematic manner to ensure the number of passes over all areas, and at speeds between 4 to 5.5 km/hour (2 1/2 to 3 1/2 mph). When proof rolling, one-half of the passes made with the roller shall be in a direction perpendicular to the other passes. Notify the Resident Engineer a minimum of 3 days prior to proof rolling. Proof rolling shall be performed in the presence of the Resident Engineer. Rutting or pumping of material shall be undercut to a depth of 12 to 18” inches and replaced with select fill material and recheck for suitability. Bids shall be based on replacing approximately 3 square yards, with an average depth of 12 to 18 inches at various locations. Maintain subgrade until succeeding operation has been accomplished.

F. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.
2. Excavate foundation excavations to solid undisturbed subgrade.
3. Remove loose or soft materials to a solid bottom.
4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete poured separately from the footings.
5. Do not tamp earth for backfilling in footing bottoms, except as specified.
6. Slope grades to direct water away from excavations and to prevent ponding.
7. Capillary water barrier (granular fill) under concrete floor and area-way slabs on grade shall be placed directly on the subgrade and

shall be compacted with a minimum of two passes of a hand-operated plate-type vibratory compactor.

8. Ensure that footing subgrades have been inspected and approved by the Resident Engineer prior to concrete placement. Excavate to bottom of pile cap prior to placing or driving piles, unless authorized otherwise by the Resident Engineer. Backfill and compact over excavations and changes in grade due to pile driving operations to 95 percent of ASTM D698 maximum density.

G. Trench Earthwork:

1. Utility trenches (except sanitary and storm sewer):
   a. Excavate to a width as necessary for sheeting and bracing and proper performance of the work.
   b. Grade bottom of trenches with bell holes scooped out to provide a uniform bearing.
   c. Support piping on suitable undisturbed earth unless a mechanical support is shown. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm (6 inches) loose thickness.
   d. Length of open trench in advance of piping laying shall not be greater than is authorized by Resident Engineer.
   e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade
   f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

g. Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D 698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

1) Clean, coarsely graded natural gravel, crushed stone or a combination thereof identified as Stone in accordance with Section 1003.03.1 of the 2016 edition of the LADOTD Standard Specifications for Roads and Bridges.

2. Sanitary and storm sewer trenches:

a. Trench width below a point 150 mm (6 inches) above top of pipe shall be 600 mm (24 inches) maximum for pipe up to and including 300 mm (12 inches) diameter, and four-thirds diameter of pipe plus 200 mm (8 inches) for pipe larger than 300 mm (12 inches). Width of trench above that level shall be as necessary for sheeting and bracing and proper performance of the work.

1) Bed bottom quadrant of pipe on suitable undisturbed soil or granular fill. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm (6 inches) loose thickness.1) Undisturbed: Bell holes shall be no larger than necessary for jointing. Backfill up to a point 300 mm (12 inches) above top of pipe shall be clean earth placed and tamped by hand.

2) Granular Fill: Depth of fill shall be a minimum of 75 mm (3 inches) plus one sixth of pipe diameter below pipe to 300 mm (12 inches) above top of pipe. Place and tamp fill material by hand.

c. Place and compact as specified remainder of backfill using acceptable excavated materials. Do not use unsuitable materials.

d. Use granular fill for bedding where rock or rocky materials are excavated.

e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade

f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

g. Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

   1) Clean, coarsely graded natural gravel, crushed stone or a combination thereof identified as Stone in accordance with Section 1003.03.1 of the 2016 edition of the LADOTD Standard Specifications for Roads and Bridges.

H. Site Earthwork: Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation.

Excavation shall be accomplished as required by drawings and specifications. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 25 mm (1 inch). Extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, complying with OSHA requirements, and for inspections. Remove subgrade materials that are determined by Resident Engineer as unsuitable, and replace with acceptable material. If there is a question as to whether material is unsuitable or not, the contractor shall obtain samples of the material, under the direction of the Resident Engineer, and the materials shall be examined by an independent testing laboratory for soil classification to determine whether it is unsuitable or not. When unsuitable material is encountered and removed, contract price and time will be adjusted in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable. Adjustments to be based on volume in cut section only.

1. Site Grading:
   a. Provide a smooth transition between adjacent existing grades and new grades.
   b. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
   c. Slope grades to direct water away from buildings and to prevent ponds from forming where not designed. Finish subgrades to required elevations within the following tolerances:
      1) Lawn or Unpaved Areas: Plus or minus 25 mm (1 inch).
      2) Walks: Plus or minus 25 mm (1 inch).
      3) Pavements: Plus or minus 13 mm (1 inch).
   d. Grading Inside Building Lines: Finish subgrade to a tolerance of 13 mm (1/2 inch) when tested with a 3000 mm (10 foot) straightedge.

3.3 UNDERPINNING:

A. Design of the underpinning system is the responsibility of the Contractor and should be designed by a registered professional engineer and is subject to review and approval by the Resident Engineer. Underpinning of existing building foundations, as indicated on structural drawings, or where excavation undermines existing foundations, shall be accomplished in the following manner:

1. Make general excavation for new construction, where new foundations are to be below existing foundations, to elevation of new foundations (or sized stone subbase), maintaining a 45 degree sloped berm.
2. For underpinning pits, underpin existing wall foundations by excavating 1200 mm (4 feet) wide pits to depth shown on drawings skipping 3 sections at any one time so as to maintain support for wall at all times.
3. Underpin intervening sections one at a time; no adjacent sections shall be underpinned until concrete in adjacent sections shall have reached 20 MPa (2500 psi) strength and have been dry packed with non-shrink grout to obtain positive bearing. Sheet and brace underpinning pits if soil will not stand on a vertical cut during this operation, or as required for safety of workmen. Repack any voids behind sheeting to prevent sloughing which could cause settlement of existing foundations. Contractor performing this portion of work shall have been prequalified by Resident Engineer as having previously performed successfully this type of work or will demonstrate his capability for successfully performing this work. It shall be sole responsibility of the Contractor to guard against objectionable movement or settlement and to preserve integrity of existing structures.
4. The tip elevation of the underpinning pits shall be a minimum of 900 mm (3 feet) below the adjacent excavation elevation.
5. Subgrades at the tip of the underpinning pit shall be clean, dry, and free of debris and shall be observed by the Resident Engineer prior to concrete placement.
6. Concrete shall not be free fall greater than 3000 mm (10 feet) into the pit.

3.4 FILLING AND BACKFILLING:

A. General: Do not fill or backfill until all debris, water, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from excavation. For fill and backfill, use excavated materials and borrow meeting the criteria specified herein, as applicable. Borrow will be supplied at no additional cost to the Government. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately

braced, waterproofing or dampproofing applied, foundation drainage, and pipes coming in contact with backfill have been installed and work inspected and approved by Resident Engineer.

B. Placing: Place materials in horizontal layers not exceeding 200 mm (8 inches) in loose depth for material compacted by heavy compaction equipment, and not more than 100 mm (4 inches) in loose depth for material compacted by hand-operated tampers and then compacted. Place backfill and fill materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure. Place no material on surfaces that are muddy, frozen, or contain frost.

C. Compaction: Compact with approved tamping rollers, sheepsfoot rollers, pneumatic tired rollers, steel wheeled rollers, vibrator compactors, or other approved equipment (hand or mechanized) well suited to soil being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without prior approval of Resident Engineer. Moisten or aerate material as necessary to provide moisture content that will readily facilitate obtaining specified compaction with equipment used. Backfill adjacent to any and all types of structures shall be placed and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials to prevent wedging action or eccentric loading upon or against the structure. Compact soil to not less than the following percentages of maximum dry density, according to ASTM D698 or ASTM D1557 as specified below:

1. Fills, Embankments, and Backfill
   a. Under proposed structures, building slabs, steps, and paved areas, scarify and recompact top 300 mm (12 inches) of existing subgrade and each layer of backfill or fill material in accordance with ASTM D698 95 percent.
   b. Curbs, curbs and gutters, ASTM D698 95 percent.
   c. Under Sidewalks, scarify and recompact top 150 mm (6 inches) below subgrade and compact each layer of backfill or fill material in accordance with ASTM D698 95 percent.
   d. Landscaped areas, top 400 mm (16 inches), ASTM D698 85 percent.

e. Landscaped areas, below 400 mm (16 inches) of finished grade, ASTM D698 90 percent.

2. Natural Ground (Cut or Existing)

a. Under building slabs, steps and paved areas, top 150 mm (6 inches), /ASTM D698 95 percent.

b. Curbs, curbs and gutters, top 150 mm (6 inches), ASTM D698 95 percent.

c. Under sidewalks, top 150 mm (6 inches), ASTM D698 95 percent.

D. Borrow Material: Borrow material shall be selected to meet the requirements and conditions of the particular fill or embankment for which it is to be used. Borrow material shall be obtained from the borrow areas within the limits of the project site, selected by the Contractor or from approved private sources. Unless otherwise provided in the contract, the Contractor shall obtain from the owners the right to procure material, pay royalties and other charges involved, and bear the expense of developing the sources, including rights-of-way for hauling. Borrow material from approved sources on Government-controlled land may be obtained without payment of royalties. Unless specifically provided, no borrow shall be obtained within the limits of the project site without prior written approval. Necessary clearing, grubbing, and satisfactory drainage of borrow pits and the disposal of debris thereon shall be considered related operations to the borrow excavation.

E. Opening and Drainage of Excavation and Borrow Pits: The Contractor shall notify the Resident Engineer sufficiently in advance of the opening of any excavation or borrow pit to permit elevations and measurements of the undisturbed ground surface to be taken. Except as otherwise permitted, borrow pits and other excavation areas shall be excavated providing adequate drainage. Overburden and other spoil material shall be transported to designated spoil areas or otherwise disposed of as directed. Borrow pits shall be neatly trimmed and drained after the excavation is completed. The Contractor shall ensure that excavation of any area, operation of borrow pits, or dumping of spoil material results in minimum detrimental effects on natural environmental conditions.

3.5 GRADING:

A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.

B. Cut rough or sloping rock to level beds for foundations. In pipe spaces or other unfinished areas, fill low spots and level off with coarse sand or fine gravel.

C. Slope backfill outside building away from building walls for a minimum distance of 1800 mm (6 feet).

D. Finish grade earth floors in pipe basements as shown to a level, uniform slope and leave clean.

E. Finished grade shall be at least 150 mm (6 inches) below bottom line of window or other building wall openings unless greater depth is shown.

F. Place crushed stone or gravel fill under concrete slabs on grade, tamped, and leveled. Thickness of fill shall be 150 mm (6 inches) unless otherwise shown.

G. Finish subgrade in a condition acceptable to Resident Engineer at least one day in advance of paving operations. Maintain finished subgrade in a smooth and compacted condition until succeeding operation has been accomplished. Scarify, compact, and grade subgrade prior to further construction when approved compacted subgrade is disturbed by Contractor's subsequent operations or adverse weather.

H. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.6 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.

B. Disposal: Transport surplus satisfactory soil to designated storage areas on Medical Center property. Stockpile or spread soil as directed by Resident Engineer.

1. Remove waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.

C. Place excess excavated materials suitable for fill and/or backfill on site where directed.

D. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.

E. Segregate all excavated contaminated soil designated by the Resident Engineer from all other excavated soils, and stockpile on site on two 0.15 mm (6 mil) polyethylene sheets with a polyethylene cover. A designated area shall be selected for this purpose. Dispose of excavated contaminated material in accordance with State and Local requirements.

3.7 CLEAN UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove all debris, rubbish, and excess material from Medical Center Property.

----- E N D -----

SECTION 31 23 19
DEWATERING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies performance of dewatering required to lower and control ground water table levels and hydrostatic pressures to permit excavation, backfill, and construction to be performed in the dry. Control of surface water shall be considered as part of the work under this specification.

1.2 SUMMARY:

A. The work to be completed by the Contractor includes, but is not necessarily limited to the following:
   1. Implementation of the Erosion and Sedimentation Control Plan.
   2. Dewater excavations, including seepage and precipitation.
B. The Contractor shall be responsible for providing all materials, equipment, labor, and services necessary for care of water and erosion control. Excavation work shall not begin before the Erosion and Sedimentation Control Plan is in place.

1.3 REQUIREMENT:

A. Dewatering system shall be of sufficient size and capacity necessary to lower and maintain ground water table to an elevation at least 300 mm (1 foot) below lowest foundation subgrade or bottom of pipe trench and to allow material to be excavated, piles to be driven, and concrete placed, in a reasonably dry condition. Materials to be removed shall be sufficiently dry to permit excavation to grades shown and to stabilize excavation slopes where sheeting is not required. Operate dewatering system continuously until backfill work has been completed.
B. Reduce hydrostatic head below any excavation to the extent that water level in the construction area is a minimum of 300 mm (1 foot) below prevailing excavation surface.
C. Prevent loss of fines, seepage, boils, quick conditions or softening of foundation strata.
D. Maintain stability of sides and bottom of excavation.
E. Construction operations are performed in the dry.
F. Control of surface and subsurface water is part of dewatering requirements. Maintain adequate control so that:
   1. The stability of excavated and constructed slopes are not adversely affected by saturated soil, including water entering prepared

subbase and subgrades where underlying materials are not free draining or are subject to swelling or freeze-thaw action.

2. Erosion is controlled.
3. Flooding of excavations or damage to structures does not occur.
4. Surface water drains away from excavations.
5. Excavations are protected from becoming wet from surface water, or insure excavations are dry before additional work is undertaken.

G. Permitting Requirements: The contractor shall comply with and obtain the required State and County permits where the work is performed.

1.4 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
B. Safety Requirements: Section 01 35 26.
C. Submittal requirements as specified in Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
D. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.
E. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.11, PHYSICAL DATA.
F. Excavation, backfilling, site grade and utilities: Section 31 20 00, EARTH MOVING.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Drawings and Design Data:
   1. Submit drawings and data showing the method to be employed in dewatering excavated areas 30 days before commencement of excavation.
   2. Material shall include: location, depth and size of wellpoints, headers, sumps, ditches, size and location of discharge lines, capacities of pumps and standby units, and detailed description of dewatering methods to be employed to convey the water from site to adequate disposal.
   3. Include a written report outlining control procedures to be adopted if dewatering problem arises.
   4. Capacities of pumps, prime movers, and standby equipment.

5. Design calculations proving adequacy of system and selected equipment. The dewatering system shall be designed using accepted and professional methods of design and engineering consistent with the best modern practice. The dewatering system shall include the deep wells, wellpoints, and other equipment, appurtenances, and related earthwork necessary to perform the function.
6. Detailed description of dewatering procedure and maintenance method.
7. Materials submitted shall be in a format acceptable for inclusion in required permit applications to any and all regulatory agencies for which permits for discharge water from the dewatering system are required due to the discharge reaching regulated bodies of water.

C. Inspection Reports.

D. All required permits.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Install a dewatering system to lower and control ground surface water in order to permit excavation, construction of structure, and placement of backfill materials to be performed under dry conditions. Make the dewatering system adequate to pre-drain the water-bearing strata above and below the bottom of structure foundations, utilities and other excavations.

B. In addition, reduce hydrostatic pressure head in water-bearing strata below structure foundations, utility lines, and other excavations, to extent that water levels in construction area are a minimum of 300 mm (1 foot) below prevailing excavation surface at all times.

3.2 OPERATION:

A. Prior to any excavation below the ground water table, place system into operation to lower water table as required and operate it continuously 24 hours a day, 7 days a week until utilities and structures have been satisfactorily constructed, which includes the placement of backfill materials and dewatering is no longer required.

B. Place an adequate weight of backfill material to prevent buoyancy prior to discontinuing operation of the system.

3.3 WATER DISPOSAL:

A. Dispose of water removed from the excavations in such a manner as:

1. Will not endanger portions of work under construction or completed.

2. Will cause no inconvenience to Government or to others working near site.
3. Will comply with the stipulations of required permits for disposal of water.
4. Will Control Runoff: The Contractor shall be responsible for control of runoff in all work areas including but not limited to: excavations, access roads, parking areas, laydown, and staging areas. The Contractor shall provide, operate, and maintain all ditches, basins, sumps, culverts, site grading, and pumping facilities to divert, collect, and remove all water from the work areas. All water shall be removed from the immediate work areas and shall be disposed of in accordance with applicable permits.

B. Excavation Dewatering:
1. The Contractor shall be responsible for providing all facilities required to divert, collect, control, and remove water from all construction work areas and excavations.
2. Drainage features shall have sufficient capacity to avoid flooding of work areas.
3. Drainage features shall be so arranged and altered as required to avoid degradation of the final excavated surface(s).
4. The Contractor shall utilize all necessary erosion and sediment control measures as described herein to avoid construction related degradation of the natural water quality.

C. Dewatering equipment shall be provided to remove and dispose of all surface and ground water entering excavations, trenches, or other parts of the work during construction. Each excavation shall be kept dry during subgrade preparation and continually thereafter until the structure to be built, or the pipe to be installed therein, is completed to the extent that no damage from hydrostatic pressure, flotation, or other cause will result.

3.4 STANDBY EQUIPMENT:

Provide complete standby equipment, installed and available for immediate operation, as may be required to adequately maintain de-watering on a continuous basis and in the event that all or any part of the system may become inadequate or fail.

3.5 CORRECTIVE ACTION:

If dewatering requirements are not satisfied due to inadequacy or failure of the dewatering system (loosening of the foundation strata, or instability of slopes, or damage to foundations or structures), perform work necessary for reinstatement of foundation soil and damaged structure or damages to work in place resulting from such inadequacy or failure by Contractor, at no additional cost to Government.

3.6 DAMAGES:

Immediately repair damages to adjacent facilities caused by dewatering operations.

3.7 REMOVAL:

Insure compliance with all conditions of regulating permits and provide such information to the Resident Engineer. Obtain written approval from Resident Engineer before discontinuing operation of dewatering system.

----- E N D -----

SECTION 31 23 23.33
FLOWABLE FILL

PART 1 - GENERAL

1.1 INTRODUCTION:

A. Flowable fill refers to a cementitious slurry consisting of a mixture of fine aggregate or filler, water, and cementitious material(s), which is used as a fill or backfill in lieu of compacted earth. This mixture is capable of filling all voids in irregular excavations and hard to reach places (such as under undercuts of existing slabs), is self-leveling, and hardens in a matter of a few hours without the need for compaction in layers. Flowable fill is sometimes referred to as controlled density fill (CDF), controlled low strength material (CLSM), lean concrete slurry, and unshrinkable fill.

B. Flowable fill materials will be used as only as a structural fill replacement on VA projects. Unless otherwise noted, flowable fill installed as a substitution for structural earth fill, shall not be designed to be removed by the use of hand tools. The materials and mix design for the flowable fill should be designed to produce a comparable compressive strength to the surrounding soil after hardening, making excavation at a later time possible to produce the compressive strength indicated for the placed location, as determined by the Resident Engineer.

1.2 DESCRIPTION:

Furnish and place flowable fill in a fluid condition, that sets within the required time and, after curing, obtains the desired strength properties as evidenced by the laboratory testing of the specific mix design, at locations shown on the plans or as directed by the Resident Engineer, verbally or in writing. This section specifies flowable fill for use as structural fill to remain permanently.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Earthwork, excavation and backfill and compaction requirements: Section 31 20 00, EARTH MOVING.

1.4 DEFINITIONS:

A. Flowable fill - Ready-mix Controlled Low Strength Material used as an alternative to compacted soil, and is also known as controlled density fill, and several other names, some of which are trademark names of material suppliers. Flowable fill (Controlled Low Strength Material) differs from portland cement concrete as it contains a low cementitious content to reduce strength development for possible future removal. Unless specifically approved otherwise, by the Resident Engineer, flowable fill shall be designed as a permanent material, not designed for future removal. Design strength for this permanent type flowable fill shall be a compressive strength of 2.1 MPa (300 psi) minimum at 28 days. Chemical admixtures may also be used in flowable fill to modify performance properties of strength, flow, set and permeability.

B. Excavatable Flowable fill – flowable fill designed with a compressive strength that will allow excavation as either machine tool excavatable at compressive strength of 1.5 MPa (200 psi) maximum at 1 year, or hand tool excavatable at compressive strength of 0.7 MPa (100 psi) maximum at 1 year.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Flowable fill Mix Design: Provide flowable fill mix design containing cement and water. At the contractor’s option, it may also contain fly ash, aggregate, or chemical admixtures in any proportions such that the final product meets the strength and flow consistency, and shrinkage requirements included in this specifications. The mix design should state the sources and proportions of each of the flowable fill constituents. The coefficient of permeability of flowable fill shall be that of uniform fine sand, 4.0 X 10-1 cm/sec (0.16 in/sec) or as indicated to provide a backfill material with permeability equal to or greater than that of the surrounding soil.

1. Test and Performance - Submit the following data:
   a. Flowable fill shall have a minimum strength of 2.1 MPa (300 psi) according to ASTM C 39 at 28 days after placement.
   b. Flowable fill shall have minimal subsidence and bleed water shrinkage. Evaporation of bleed water shall not result in shrinkage of more than 10.4 mm per m (1/8 inch per ft.) of

flowable fill depth (for mixes containing high fly ash content). Measurement of a Final Bleeding shall be as measured in Section 10 of ASTM C 940 "Standard Test Method for Expansion and Bleeding of Freshly Mixed Grouts for Preplaced-Aggregate Concrete in the Laboratory.

c. Flowable fill shall have a unit weight of 1500 - 1900 kg/m3 (90 - 115 lbs/feet 3) measured at the point of placement after a 60 minute ready-mix truck ride.

C. Provide documentation that the admixture supplier has experience of at least one year, with the products being provided and any equipment required to obtain desired performance of the product.

D. Manufacturer's Certificates: Provide Resident Engineer with documentation issued by the State Agency responsible for approving materials for burial, indicating conformance with applicable rules and regulations. A certification that the materials incorporated in the flowable fill, following achievement of the required strength, do not represent a threat to groundwater quality.

1.6 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

D4832-10.....Standard Test Method for Preparation and Testing of Controlled Low Strength Material (CLSM) Test Cylinders.

C618-12.....Standard Specifications for Coal Fly Ash and Raw or Calcined Natural Pozzolan for use in Concrete. (Use Fly Ash conforming to the chemical and physical requirements for mineral admixture, Class F listed, including Table 2 (except for Footnote A). Waive the loss on ignition requirement.)

C403/C403M-08.....Standard Test Method for Time of Setting of Concrete Mixtures by Penetration Resistance.

C150/C150M-11.....Standard Specification for Portland Cement

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C94/C94M-12.....Standard Specification for Ready-Mixed Concrete

C494/C494M-11.....Standard Specification for Chemical Admixtures for Concrete
C685/C685M-11.....Standard Specification for Concrete Made by Volumetric Batching and Continuous Mixing
C940-10a.....Standard Specification for Expansion and Bleeding of Freshly Mixed Grouts for Preplaced – Aggregate Concrete in the Laboratory
D5971.....Sampling Freshly Mixed Controlled Low Strength Material
D6103.....Flow Consistency of Controlled Low Strength Material
D6023.....Unit Weight, Yield, Cement Content and Air Content (Gravimetric) of Controlled Low Strength Material

C. American Concrete Institute (ACI):
SP-150-94.....Controlled Low-Strength Materials

1.7 QUALITY ASSURANCE:

A. Manufacturer: Flowable fill shall be manufactured by a ready-mix concrete producer with a minimum of 1 year experience in the production of similar products.

B. Materials: For each type of material required for the work of this Section, provide primary materials that are the products of one manufacturer. If not otherwise specified here, materials shall comply with recommendations of ACI 229, “Controlled Low Strength Materials.”

C. Pre-Approval Procedures: The use of flowable fill during any part of the project shall be restricted to those incidences where, due to field conditions, the Contractor has made the Resident Engineer aware of the conditions for which he recommends the use of the flowable, and the Resident Engineer has confirmed those conditions and approved the use of the flowable fill, in advance. During the submittal process, the contractor shall prepare and submit various flowable fill mix designs corresponding to required conditions or if the contractor desires to use flowable fill due to economics. Approval for the strength of the flowable fill shall be obtained from the Resident Engineer when the contractor desires, or is required, to use flowable fill at specific location(s) within the project. Prior to commencement of field operations the contractor shall establish procedures to maintain

optimum working conditions and to coordinate this work with related and adjacent work.

D. Sampling and Acceptance: Flowable fill shall be samples and testing in the field in conformance with either ASTM C 94 or C 685. Samples for tests shall be taken for every 115 cubic meters (150 cubic yards) of material, or fraction thereof, for each day's placement. Tests shall include temperature reading and four compressive strength cylinders. Compressive strength sampling and testing shall conform to ASTM D 4832 with one specimen tested at 7 days, two at 28 days, and one held for each batch of four specimens. Sampling and testing shall be performed by a qualified, independent commercial testing laboratory. Test results should be submitted within 48 hours of completion of testing.

1.8 DELIVERY, STORAGE, AND HANDLING:

Deliver and handle all products and equipment required, in strict compliance with manufacturer's recommendations. Protect from damage due to weather, excessive temperatures, and construction operations.

1.9 PROJECT CONDITIONS:

Perform installation of flowable fill only when approved by the Resident Engineer, and when existing and forecasted weather conditions are within the limits established by the manufacturer of the materials and products used.

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Provide flowable fill containing, at a minimum, cementitious materials and water. Cementitious materials shall be portland cement, pozzolanic materials, or other self-cementing materials, or combinations thereof, at the contractor's option, and following approval by the Resident Engineer. The flowable fill mix design may also contain, fine aggregate or filler, and/or chemical admixtures in any proportions such that the final product meets the strength, flow consistency and shrinkage requirements included in this specification, as approved by the Resident Engineer.

B. Portland Cement: ASTM C150, Type 1 or Type 2 Meeting Louisiana State DOT standards.

C. Mixing Water: Fresh, clean, and potable. Meeting Louisiana State DOT standards for use as mix-water for cast-in-place concrete.

D. Air-Entraining Admixture: ASTM C260.

E. Chemical Admixtures: ASTM C494.

F. Aggregate: ASTM C33.

2.2 FLOWABLE FILL MIXTURE:

A. Mix design shall produce a consistency that will result in a flowable product at the time of placement which does not require manual means to move it into place.

B. Flowable fill shall have a minimum strength of 2.1 MPa (300 psi) according to ASTM C39 at 28 days after placement.

C. Flowable fill shall have minimal subsidence and bleed water shrinkage. Evaporation of bleed water shall not result in shrinkage of more than 10.4 mm per m (1/8 inch per foot) of flowable fill depth (for mixes containing high fly ash content). Measurement of a Final Bleeding shall be as measured in Section 10 of ASTM C 940 "Standard Test Method for Expansion and Bleeding of Freshly Mixed Grouts for Preplaced-Aggregate Concrete in the Laboratory.

D. Flowable fill shall have a unit weight of 1500 - 1900 kg/m3 (90 - 115 lbs/feet3) measured at the point of placement after a 60 minute ready-mix truck ride. In the absence of strength data the cementitious content shall be a maximum of 90 kg/m3 (150 lbs/cy).

E. Flowable fill shall have an in-place yield of at least 98% of design yield for permanent type.

F. Provide equipment as recommended by the Manufacturer and comply with manufacturer's recommendations for the addition of additives, whether at the production plant or prior to placement at the site.

PART 3 - EXECUTION

3.1 EXAMINATION:

Examine conditions of substrates and other conditions under which work is to be performed and notify Resident Engineer, in writing, of circumstances detrimental to the proper completion of the work. Do not proceed until unsatisfactory conditions are corrected.

3.2 APPLICATION OF FLOWABLE FILL:

Secure tanks, pipes and other members to be encased in flowable fill. Insure that there are no exposed metallic pipes, conduits, or other items that will be in contact with the flowable fill after placement. If so, replace with non-metallic materials or apply manufacturers recommended coating to protect metallic objects before placing the

flowable fill. Replacement or protection of metallic objects is subject to the approval of the Resident Engineer.

3.3 PROTECTION AND CURING:

Protect exposed surfaces of flowable fill from premature drying, wash by rain or running water, wind, mechanical injury, and excessively hot or cold temperature. Curing method shall be subject to approval by Resident Engineer.

- - - E N D - - -

SECTION 31 32 23
PRESSURE GROUTING SOIL STABILIZATION

PART 1 - GENERAL

1.1 DESCRIPTION

This section covers the application of lime slurry into the ground at specified intervals within 3000 mm (10 feet) on either side of the new road for the entire length of the new road.

1.2 EQUIPMENT

A. Equipment shall be suitable for the work, as approved by the testing lab. Equipment shall be constructed to provide a positive seal for preventing the slurry from flowing out onto the ground and shall have controls and gauges for setting of pressure and determination of pressure.

B. Packers of an acceptable type and length with a minimum diameter of 100 mm (4 in.) shall be utilized by the Contractor to prevent slurry from flowing out onto the ground surface.

C. Mixer tanks shall be approved by the testing lab and shall be continuously agitated to insure uniformity of mixture.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety requirements: Section 01 35 26.

C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. Texas Department of Transportation (TxDOT):
English Specifications Book, Item 264 (1993: Lime and Lime Slurry)

C. American Society for Testing and Materials (ASTM):
D1586.....Standard Test Method for Standard Penetration Test (SPT) and Split-Barrel Sampling of Soils.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Lime Slurry Mix Design: Provide the lime slurry mix design along with a Plan of work including equipment and methods to be used for approval by the Resident Engineer.

C. Certificates: Submit a letter certifying the subcontractor has been engaged in similar work for a minimum of 5 years.

PART 2 - PRODUCT

2.1 LIME SLURRY

A. The lime slurry shall be pumpable suspension of hydrated lime in water. The water or liquid portion of the slurry shall not contain dissolved material in sufficient quantity and/or nature injurious or objectionable for the purpose intended. The solids portion of the mixture, when considered on the basis of "solids contents", shall consist principally of hydrated lime of a quality and fineness sufficient to meet TxDOT Item 264, Type A as to chemical composition and residue.

B. Proportion lime slurry within the range of 300 to 350 kg/m^3 (2-1/2 to 3 pounds per gallon) water of hydrated lime. Check specific gravity of slurry with Ertco Hydrometer No. 2545 or equivalent. Specific gravity readings shall range from 1.14 to 1.16.

C. A surfactant (wetting agent) approved by the testing lab shall be used in the lime slurry, according to manufacturer's recommendations, but in no case shall proportion be less than one part per 5.7 m^3 (1500 gallons) of water.

PART 3 - EXECUTION

3.1 PROCEDURE

A. Shape the subgrade rough to designed grades and scarified or plowed so that excess slurry will be trapped within the specified limits.

B. Pre-drill holes to accommodate the Contractor's inflatable packers to 900 mm (3 feet). The spacing for injections shall not exceed 1500 mm (5 feet) on center in each direction, and extend a minimum of 3000 mm (10 feet) beyond the limits of the new asphalt road and concrete curb and gutter.

C. Set and inflate packer or seal holes.

D. Inject each hole through a packer at a minimum pressure of 350 kPa (50 psi) and a maximum of 1400 kPa (200 psi) pump pressure, adjusted to disperse the maximum possible volume of slurry, and continue to inject slurry to refusal, as defined by the testing lab.

E. Continuously agitate the lime slurry to insure uniformity of mixture. Specific gravity checks shall be made at both mixer tanks and at injectors no less than one test per four hours of agitation.

F. The Contractor shall insure that excess lime slurry is applied evenly across the scarified or plowed sub-grade during the stabilization process. The excess slurry ponded on the ground surface shall be scarified into the soil and the soil-lime mixture re-compacted to sub-grade specifications prior to placement of fill, if required.

3.2 INSPECTION AND CONTROL

A. The work shall be under the direct inspection of a representative of the testing lab who will measure the specific gravity of the mixture, determine suitable operation of the equipment used, and determine the point of injection refusal.

B. Acceptance of the soil stabilization shall be on the basis of continuous on site inspection and testing by a representative of the testing lab. At the testing labs discretion, on site testing may include before and after testing of the sub-grade soils to evaluate the stabilization process. After tests will typically be performed at seven days after injection to assure interaction with the lime and soil mixture. Typical tests may include standard penetration tests in accordance with ASTM D1586 or similar test as considered applicable by the testing laboratory. The Contractor may be required to inject portions of the site with lime slurry more than once to meet the approval of the testing lab.

C. The testing lab shall be provided weight certificates of all lime delivered to the site for use in stabilization.

- - - E N D - - -

SECTION 31 63 16
AUGER CAST GROUT PILES

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies excavation and concrete required for construction of auger-placed concrete piles.

1.2 DEFINITION

Auger-placed concrete pile (ACP): Pile formed by rotation of a continuous flight hollow-shaft pile augured into the ground to the indicated depth. Grout is injected through auger shaft as auger is being withdrawn in such a way as to exert removing pressure on withdrawing earth-filled auger as well as lateral pressure on soil surrounding hole.

1.3 RELATED WORK

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Concrete: Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. Subsurface investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

1.4 CONTRACT BASIS

A. Contract price for ACP’s will be based upon total length of piles shown on the Contract Documents and number of pile load tests indicated in the Contract Documents. Length of piles will be measured as shown.

1. Adjustment of contract price shall be based upon total length of piles placed, and not on length of individual piles placed. When total length of completed piles is greater or less than length shown, contract price adjustment will be made in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable.
2. Contract price and time will be adjusted in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable when artificial materials that are not shown are encountered.

1.5 CONTRACTOR QUALIFICATIONS

A. Approval by Contracting Officer is required of service of proposed Contractor and will be based upon submission by Contractor of certification that:

1. Contractor has technical qualifications, experience, trained personnel and facilities to install auger placed concrete piles as specified. Approval will not be given, however, where an experience record is one of unsatisfactory performance.
2. Contractor has installed ACP's on three installations similar and equivalent to this project for 5 years. Submit list of installations.

1.6 TOLERANCES

Locate piles where indicated. The maximum permissible variation of the center of each pile from the required locations is 50 mm (2 inches) at the ground surface. No pile shall be out of required axial alignment by more than 2 percent. Periodically check the required axial alignment of each pile during the drilling operation and after reaching the required tip elevation with not less than 1.5 m (5 feet) of the augerflight extending above the ground surface.

1.7 DESIGN MODIFICATIONS

A. Where piles are installed exceeding specified tolerances for plumb or location, the foundation design will be analyzed by the Resident Engineer and if necessary redesigned by Resident Engineer. Costs for analysis, redesign, and remediation shall be responsibility of Contractor.

B. Additional piles and pile cap modifications necessitated by redesign shall be furnished and installed, at no additional cost to the Government.

1.8 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Certification to Examination of Site and Records: Before proceeding with the Work, submit copy of certification in acceptable form signed by the Contractor, stating that careful examination has been made of the site, existing structures, and records of utility lines, test boring records, soil samples, and subsurface exploration reports by the Owner's Geotechnical Engineer, Drawings, and Specifications.

C. Shop Drawings and Miscellaneous Submittals:
   1. Description of pile drilling equipment.
   2. Description of grout pump and pressure gage calibration reports.
   3. Pile Installation Recorder (PIR) calibration reports.
   4. Complete description of method for ACP pile installation with a pile layout plan referenced to the structural plans, including a numbering system capable of identifying each individual pile, pile sizes, including pile length and tip elevations, reinforcing steel, and waterproofing details. In addition, furnish a detailed description of construction procedures, including steel shells, if used, and auguring methods.
   5. Steel Reinforcement Shop Drawings: Comply with ACI 315. Furnish shop drawings prepared by a Professional Engineer licensed in the state of installation that include placing drawings that detail fabrication, bending, and placement. Include bar sizes, lengths, material, grade, bar schedules, stirrup spacing, bent bar diagrams, bar arrangement, splices and laps, mechanical connections, tie spacing, hoop spacing, and supports for concrete reinforcement.
      a. Prior to fabrication: Indicate steel grades, sizes, bending details, protective coatings, spacing, placement and supports.
      b. Supplementary Product Literature: Furnish manufacturer's literature describing general properties of each product to be used in the Work.
      c. Certifications: Furnish manufacturer's certified reports of mill tests for reinforcing steel and anchorage devices, including physical and chemical analysis.
   6. Pile Installation records for all ACP’s.

D. Reports:
   1. Installation of each pile
   2. Pile location and plumbness
   3. Total quantity of grout placed
   4. Load Test

E. Product Data: Submit copies of manufacturers’ specifications for the following products, including copies of laboratory test reports and other data as may be required to show compliance with these specifications.

1. Fly Ash or Ground Granulated Blast Furnace Slag: ASTM C618, Class C or F and ASTM C989, Grade 100 or 120, respectively.
2. Plasticizing admixture: ASTM C1017/C1017M, Type II.
3. Grout Fluidifier: ASTM C937
4. Aggregate sieve analysis: ASTM C33.
5. Aggregate sodium sulfate soundness tests: ASTM C88.
6. Portland cement: ASTM C150, Type I, Test Piles Type III.
7. Reinforcing Steel: ASTM A615/A615M, Grade 60 ASTM A722/A722M, Type II, Thread Bar Type
8. Steel Casing: ASTM A572, Grade 50/Grade 60

F. Certificates: Contractor's qualifications as specified: Experienced specialty piling subcontractor having a minimum of 5 years successful experience installing Work of same type required for this project, and evidence of satisfactory completion of at least ten ACP installations comparable in scope of the Work and subsurface conditions. Employ only skilled tradesmen who are thoroughly experienced with the materials and equipment to be used in the Work.

G. Contractor’s Concrete Testing: Submit 3 copies of the laboratory testing reports to the Resident Engineer, the owner’s Geotechnical Consultant, and other pertinent parties.
   1. Submit report and certification of aggregate.
   2. Laboratory Test Reports: Submit for evaluation grout materials and mix designs.

H. Pile Load Testing:
   1. A schedule and sequencing plan for pile testing and installation.
   2. Pile Installation Recorder (PIR) details.
   3. Pile Installation Recorder (PIR) reports.
   4. Pile Load Test Work Plan:
      a. At least two weeks before commencing pile load testing work, the Contractor shall submit a pile load test work plan describing the equipment, apparatus, procedures, and schedule for testing ACP’s in accordance with ASTM D1143 // ASTM D3689 // ASTM D3966 and as specified herein, to verify the design pile capacity. The work plan shall also include the proposed instrumentation of the test pile indicating depth, location, and details of the pile.

b. As part of the Pile Load Test Work Plan, submit shop drawings and other information describing the loading and test monitoring arrangement for pile load tests, including the following:
   1) Structural design of the test load support/reaction frame.
   2) Details of equipment and apparatus to be used for the monitoring load and pile movements.
   3) Data on testing and measuring equipment including required jack, load cell and/or gauge calibrations.
   4) Sample field data recording sheets or examples of automated data acquisition records proposed for recording load test data.

I. Independent Testing and Inspection Agency: The Contractor shall retain an Independent Testing and Inspection Agency (Agency) to document, monitor, and observe load test, probe pile, test pile, and production pile work. This Agency shall submit field reports and test results required by Section 3.2 for pile load tests, pile installations, and grout testing and inspection. They shall submit a pile installation report for each pile no later than three days after the installation is complete.

J. Welding Certificates.

K. Qualification Data: For Installer, Land Surveyor, and Testing and Inspection Agency.

L. Upon completion of ACP installations, the Contractor shall submit five copies of drawings indicating actual in-place pile locations. The Contractor shall pay for all surveying costs. Drawings must be submitted prior to beginning any pile cap or mat installation. One electronic copy of the drawings shall be submitted in AutoCAD DWG format on CD-ROM.

M. Record drawings at Project closeout according to Division 01 Section "Closeout Procedures."

1.9 QUALITY CONTROL

A. Contractor’s Quality Control Responsibilities: Contractor is solely responsible for quality control of the Work.

B. A Quality Control Program shall be submitted by the Contractor at least two weeks prior to the commencement of work. The implementation of a Contractor Quality Control Program does not relieve the Contractor from

the responsibility to provide work in accordance with the Contract Documents, applicable codes, regulations, and Governing Authorities.

C. Contractor's Independent Testing and Inspection Agency (Agency): The Contractor shall retain at his own expense, the services of a qualified Independent Testing and Inspection Agency, licensed in the state of the project, to provide testing and inspection services during the installation of all foundation piling involved in this Work. This firm shall also provide consultation services to the Contractor if problems are encountered during the execution of the Work. The Agency shall be primarily concerned with the testing and construction methods which will result in finished foundation piling of the required quality and strength. The Agency shall also be concerned with preventing settlement and/or damage to surrounding structures, roads, utilities, embankments, etc., both within the property lines and on adjoining properties during the construction.

D. The Agency shall be experienced in the testing and installation of ACP foundations. It shall have been involved in at least 8 different ACP projects in the last 5 years, and shall have experience in recommending, testing, and specifying ACP’s for similar subsurface conditions.

E. Survey Work: The Contractor shall engage a qualified land surveyor or professional engineer to perform surveys, layouts, and measurements for ACP’s. The surveyor shall record actual measurements of each ACP’s location, shaft diameter, bottom and top elevations, deviations from specified tolerances, and other specified data.

F. Contractor's Grout Mix Designer: The Contractor shall employ, at his own expense, a testing laboratory to design grout mixes, conduct tests and submit reports for the design mixes. The Grout Mix Designer shall be qualified according to ASTM C1077 and ASTM E329 to perform material evaluation tests and to design concrete mixes.

G. Welding Standards: Qualify procedures and personnel according to the following:

1. AWS D1.1
2. AWS D1.4

H. Regulatory Requirements: Comply with applicable requirements of the laws, codes, ordinances and regulations of Federal, State and Municipal

authorities having jurisdiction. Obtain necessary approvals from all such authorities.

1.10 QUALITY ASSURANCE

A. The Owner shall retain the services of a Geotechnical Consultant (Consultant) to provide general observation of all pile operations and to provide technical advice to the Owner with regard to pile operations and performance.

B. The Consultant shall have been involved in at least 8 different ACP projects in the last 5 years, and shall have experience in recommending, testing, and specifying ACP's for similar subsurface conditions.

1.11 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A572/A572M-07.....Standard Specification for High Strength Low Alloy Columbium-Vanadium Structural Steel

A615/A615M-09-b.....Standard Specification for Deformed and Plain Carbon-Steel Bar for Concrete Reinforcement

A722/A722M-07.....Standard Specification for Uncoated High-Strength Steel Bar for Prestressing Concrete

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C88-05.....Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (using 2-in. or [50 mm] Cube Specimens)

C150-11.....Standard Specification for Portland Cement

C404-11.....Standard Specification for Aggregates for Masonry Grout

C618-12.....Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete

C937-10.....Standard Specification for Grout Fluidifier for Preplaced-Aggregate Concrete

C942-10.....Standard Test Method for Compressive Strength of Grouts for Preplaced-Aggregate Concrete in the Laboratory

C989/C989M-11.....Standard Specification for Ground Granulated Blast-Furnace Slag for Use in Concrete and Mortars

C1017/C1017M-07.....Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

D1143/D1143M-07.....Standard Test Methods for Deep Foundations Under Static Axial Compressive Load

D3689-07.....Standard Test Method for Deep Foundations Under Static Axial Tensile Load

D3966-07.....Standard Test Methods for Deep Foundations Under Lateral Loads

E329-11.....Standard Specification for Agencies Engaged in Construction Inspections, Testing, or Special Inspections

C. American Concrete Institute (ACI):

315-99.....Details and Detailing of Concrete Reinforcement

D. American Welding Society (AWS):

D1.1 (2010).....Structural Welding Code – Steel

D1.4 (2011).....Structural Welding Code – Reinforcing Steel

PART 2 - PRODUCTS

2.1 MATERIALS

A. Portland Cement: ASTM C150, Type I, Test piles Type III.

B. Grout Fluidifier: ASTM C937.

C. Plasticizing admixture: ASTM C1017/C1017M, Type II

D. Ash or Ground Granulated Blast Furnace Slag: ASTM C618, Class C or F and ASTM C989, Grade 100 or 120, respectively.

E. Water: Fresh, clean, and potable.

F. Aggregate: ASTM C404, Size No. 1 or Size No. 2.

G. Reinforcing Steel: ASTM A615, Grade 60.

H. Fine Aggregate: ASTM C33.

I. High Strength Reinforcing Steel: ASTM A722, Type II, Thread Bar Type.

J. Casings: ASTM A572, Grade 50 or 60.

K. Except for probe pile, pile load test and test pile purposes, no pile materials shall be ordered or delivered to the job site until the required load tests have been made and are acceptable to the Resident Engineer. Materials ordered or delivered to the project site prior to verification of the assumed pile length, will be at the Contractor's risk.

L. After pile lengths are verified by the pile load test program, deliver materials to the project site in such quantities and at such times to assure the continuity of pile augering operations to the project schedule.

M. Clearly mark pile leads in 300 mm (1 foot) increments.

2.2 MIXES

A. Concrete: The grout used shall consist of a mixture of portland cement, sand, fluidifier, and water so proportioned and mixed to be pumped and to fill all voids in the foundation material. Mixture shall be proportioned to provide a minimum compressive strength of ___Mpa (___psi) at 28 days.

B. Mix Design: Testing Laboratory, retained by Contractor, shall design a mix to produce concrete as specified and perform tests as required. Certified test reports (duplicate) shall be submitted. Reports shall include proportions of design mix.

C. Concrete-mix design adjustments may be considered if characteristics of materials, Project conditions, weather, test results, or other circumstances warrant. Resubmit and obtain approval from the Resident Engineer of proposed changes to concrete-mix design.

D. Improper Mix: Immediately notify the Concrete Testing Laboratory and the Resident Engineer if at any time during construction the accepted mix design proves to be unsatisfactory for any reason. The Contractor's Concrete Mix Designer shall modify the design, subject to the review of the Resident Engineer, until a satisfactory mix is obtained.

2.3 EQUIPMENT

A. Augering Equipment:

1. Equipment shall consist of a continuous-flight, hollow-shaft auger which shall be rotated into the ground to the required pile depth as established by the pile load tests. Advance the auger at a

continuous rate that prevents removal of excess soil. Stop advancement after reaching the required depth. The hole in the bottom of the auger shall be closed with a suitable plug while being advanced into the ground. The plug shall be removed by grout or with a reinforcing bar. At the start of pumping grout, raise the auger from 150 to 300 mm (6 to 12 inches) and after the grout pressure builds sufficiently, redrill the auger to the previously established tip elevation. Cement grout shall then be injected through the auger shaft as the auger is being withdrawn, in such a way as to exert removing pressure on the withdrawing earth filled auger flights as well as lateral pressure on the soil surrounding the grout-filled pile hole. Grout pumping pressures shall be measured and shall be maintained high enough at all times to offset hydrostatic and lateral earth pressures. The auger shall rotate in a positive direction and shall be withdrawn in a steady continuous motion.

2. The auger flighting shall be continuous from the auger head to the top of auger without gaps or other breaks. The auger flighting shall be uniform in diameter throughout its length and shall be the diameter specified for the piles less a maximum of 3 percent.
3. The hole through which the high-strength grout is pumped during the placement of the pile shall be located at the bottom of the auger head below the bar containing the cutting teeth.
4. Augers over 12000 mm (40 feet) in length shall contain a middle guide.
5. The piling leads should be prevented from rotating by a stabilizing arm or by firmly placing the bottom of the leads into the ground or by some other acceptable means. Leads shall be marked at 300 mm (1 foot) intervals to facilitate measurement of auger penetration.

B. Mixing and Pumping Equipment:

1. Only approved pumping and mixing equipment shall be used in the preparation and handling of the grout. A screen to remove over-size particles shall be placed at the pump inlet. All oil or other rust inhibitor shall be removed from mixing drums and grout pumps. All materials shall be such as to produce a homogeneous grout of the desired consistency.

a. The grout pump shall be a positive displacement piston type pump capable of developing displacing pressures at the pump not less than 2.5 Mpa (350 psi). The grout pump shall be provided with a pressure gauge in clear view of the equipment operator. The grout pump shall be calibrated at the beginning of the work to determine the volume of grout pumped per stroke. A positive method of counting grout pump strokes shall be provided by the Pile Contractor. Such methods may include digital or mechanical stroke counters or other acceptable methods.

C. Pile Installation Recorder (PIR):

1. The Contractor shall provide a PIR for ACP's for use by the Agency and the Consultant during pile installation. The PIR shall be used for each piling rig. The PIR shall record appropriate information during both the augering phase and during the grouting phase of the installation to assure minimum grout volume pumped per unit depth increment, and shall print results immediately upon completion of each pile.

PART 3 - EXECUTION

3.1 GENERAL

A. Survey: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and levels and stake pile locations.

B. Before installing piles adjacent to any existing utilities, the Contractor shall notify the utility owner to ensure that protective Work will be coordinated and performed in accordance with the requirements of the utility owner. If any existing service lines, utilities and utility structures to remain in service are uncovered or encountered during these operations, protect, from damage and provide support if necessary.

C. Should uncharted or incorrectly charted piping or other utilities be encountered during piling operations, immediately notify the Resident Engineer and the utility owner. Cooperate with the utility owner in keeping their respective services, utilities and facilities in operation.

D. After all ACP's are in place, the Surveyor shall make a field survey of completed piles and shall submit a drawing to the Resident Engineer

showing the plumbness of the piles and the actual pile locations with respect to planned pile locations.

E. Pile Record: Submit complete and accurate record of all auger-placed piles to the Resident Engineer. Record shall indicate the pile location, diameter, length, elevation of bottom and top of pile, and the quantity of grout used in each pile. Any unusual conditions encountered during pile installation shall also be noted.

F. Completion Certificate: The Contractor shall provide a written statement, stamped by a Professional Engineer registered in the State of the Work, verifying that the piles were installed per the Contract Documents, and that any piles not installed per the Contract Documents were installed in such a manner that they will not have an negative impact on the proposed structure.

3.2 ALLOWABLE LOAD ON PILES

A. Probe Piles:

1. A minimum of ten probe piles shall be installed prior to the installation of the production piles in manner utilizing identical equipment, methods, and materials for all piling.
2. probe piles shall be used by the Contractor to refine the operations of the equipment and shall not be installed at production pile locations.
3. The location of the probe piles shall be submitted to the Resident Engineer prior to their installation. If, in the opinion of Resident Engineer, the probe pile locations shown are not representative of the area, alternate locations will be provided by Resident Engineer.
4. Reaction piles for the load test pile may may not be used as probe piles.

B. Load test piles:

1. Load tests will be performed on a minimum of minimum of 2% of total production piles (minimum 4 piles). The data from the load test will be used to verify pile design load.
2. Contractor shall conduct load tests in accordance with ASTM D1143 // ASTM D3689 // ASTM D3966 standard loading procedure. These tests will be conducted at no additional cost to the Government. No additional piles shall be installed until test reports of test piles are received and approved by Resident Engineer.

3. Additional load tests or an increase in production pile length may be required if the test pile fails the load test.

3.3 INSTALLATION

A. The length and drilling criteria of production piles will be determined by the Resident Engineer from the installation of the probe piles, reaction piles, test piles, and the pile load tests. The installation shall be performed in an orderly sequence.

B. Advance the auger at a continuous rate that prevents removal of excess soil. Stop advancement after reaching the required depth or refusal criteria.

C. Auger refusal is defined as a rate of auger penetration of less than 300 mm (1 foot) per minute of drilling.

D. The hole in the bottom of the auger shall be closed while being advanced into the ground with a suitable plug. The plug shall be removed by grout pressure or with the reinforcing bar.

E. Place continuous center reinforcing through the hollow-stemmed auger prior to placement of grout. Tie top of reinforcing in place after removal of auger. Use bar spacers to center reinforcing bars.

F. At the start of pumping grout, raise the auger from 150 to 300 mm (6 to 12 inches) and after the grout pressure builds up sufficiently, redrill the auger to the previously established tip elevation.

G. Maintain at least 3000 mm (10 feet) of grout on the auger flighting above the injection point during raising of the auger. Positive rotation of the auger shall be maintained throughout placement of the grout. Rate of grout injection and rate of auger withdrawal from the soil shall be coordinated as to maintain at all times the minimum grout head and a positive pressure on the gauges. The total volume of grout shall be at least 115 percent of the theoretical volume for each pile, except, after grout is flowing at the ground surface from the auger flighting, the rate of grout injection and auger withdrawal shall be coordinated so that there is a constant grout flow at the surface. If pumping of grout is interrupted for any reason, the Contractor shall reinsert the auger at least 1500 mm (5 feet) into the pile and regrout.

H. Minimum volume of grout placed in hole shall be at least the nominal volume plus 15 percent of hole. Volume of grout per linear meter (linear foot) of pile shall be not less than volume of grout per meter

(volume of grout per foot) of the load test pile. Make volume measurements in the presence of Resident Engineer.

I. Auger hoisting equipment shall be provided that will enable the auger to be rotated while being withdrawn smoothly and steadily.

J. The spoil that accumulates around the auger during injection of the grout shall be promptly cleared away upon completion of the installation.

K. Provide OSHA protective caps on all projecting reinforcement.

L. Materials shall be accurately measured by volume or by weight as they are fed to the mixer. Order of placing the materials in mixer shall be as follows: (1) water, (2) fluidifier, and (3) other solids in order of increasing particle size. Provide grout injection equipment with a pressure gage in clear view of the equipment operator. A second pressure gauge shall be located near auger rig where it can be observed. Rate of injection and rate of auger withdrawal from soil shall be so coordinated as to maintain at all times a positive pressure on gage which will indicate existence of a removing pressure on bottom of auger flight. Magnitude of this pressure and performance of other augering and grouting procedures, such as rate of augering, rate of grout injection, and control of grout return around the auger flight, are dependent on soil conditions, and equipment capability shall be at option of Contractor, subject to approval of Resident Engineer. Equipment for pumping grout shall be positive displacement pump capable of developing a pressure at pump not less than 2.5 MPa (350 psi). Pump shall be calibrated by an approved method to verify accuracy of indicated discharge. Remove oil or other rust inhibitors from mixing drums and pumps. Auger hoisting equipment shall be capable of withdrawing auger smoothly and at a constant rate. If the auger jumps upward during withdrawal, it shall be reinserted, and rate of withdrawal decreased to prevent further jumping.

M. Locate piles as shown unless otherwise directed by Resident Engineer. Do not place piles closer than 1050 mm (3.5 feet) center to center until grout in adjacent piles has set for 24 hours. In locations where there are no concrete slabs or other means of distributing load of the equipment placing piles, the equipment shall be kept at least 3000 mm (10 feet) away from pile location, or upper 3000 mm (10 feet) of pile shall be cased.

N. Where pile top is near surface or above bottom of excavation, place metal sleeves of proper diameter around pile top.

O. Cut off the tops of piles, square with pile axis and at the elevations indicated by removing fresh grout from the top of the pile or by cutting off hardened grout down to final cutoff point at any time after initial set has occurred. Where the pile cut-off is near the surface or above the bottom of the excavation, sleeves or casing of the proper diameter and at least 457 mm (18 inches) in length shall be placed around the pile tops. (Special conditions may require metal sleeves of additional length).

P. Redrill the pile to the original depth at no additional cost to the Owner if any of the following occurs:
   1. The design pile reinforcement cannot be placed manually in the top of any pile following completion of grouting.
   2. The trap door at the bottom discharge outlet fails to open completely, effectively creating a side discharge condition.
   3. Loss of grout head occurs for any reason during pile installation.
   4. There is more than a twenty-minute delay during the grouting of any individual pile.
   5. There is a drop in grout level after completion of the pile, which exceeds the average for the remainder of the pile installations by more than 600 mm (2 feet).

Q. The Contractor shall install additional piles at no additional cost for damaged, misaligned and/or mislocated piles. Contractor shall also be responsible for costs of concrete and reinforcing for required modifications to pile caps/grade beams due to damaged piles and/or misaligned or mislocated piles.

R. If the grout level in any completed pile drops, the pile shall be rejected and replaced.

S. No pile shall be loaded until the grout has attained full design strength.

3.4 OBSTRUCTIONS:

A. The advancement of the augers through naturally occurring materials such as cobbles, boulders and rock ledges, as outlined in the Geotechnical Report, is the responsibility of the Contractor. The Contractor is responsible for providing the necessary means and methods of advancing the augers through this material. The length of short

piles terminated due to such foreseeable material will not be included in the total length of pile for payment at the unit price. Additional adjacent piles, as required by the Resident Engineer, will also not be included in the total length of piles for payment.

B. In the event that unforeseen non-augerable material is encountered, such as cobbles, boulders, rock ledge, metal timbers or debris which causes the rate of penetration to be reduced to less than 300 mm (1 foot) per minute above the desired tip elevation, or causes the pile to drift from its location, then the pile shall be completed to the depth of the non-augerable material in accordance with these specifications. The length of such short piles shall be included in the total length of pile for payment at the unit price. If required by the Resident Engineer, additional adjacent piles shall be placed and the length of these additional piles shall also be included in the total length of piles for payment.

3.5 QUALITY CONTROL AND ASSURANCE:

A. The Contractor shall retain the services of a qualified Independent Testing and Inspection Agency (Agency), licensed in the state of the project, to provide Quality Control through testing and inspection services during the installation of all foundation piling involved in this Work.

B. The Owner shall employ a Geotechnical Consultant (Consultant) to provide Quality Assurance through general observation and consultation of all pile operations.

C. The Contractor and their Agency shall cooperate with the Consultant and the Resident Engineer in the performance of the Work. The presence of Consultant shall in no way relieve the Contractor of his obligation to perform the pile installation in accordance with the Contract Documents and these Specifications.

D. Grout Mix: The grout mix shall be tested by making a minimum of nine, 50 mm (2 inches) cubes for each day during which piles are placed. A set of nine cubes shall consist of three cubes to be tested at seven days, and three cubes to be tested at 28 days and three cubes held in reserve. Test cubes shall be cured and tested in accordance with ASTM C109/C109M. Cube specimens may be restrained from expansion as described in ASTM C942.

E. Pile Acceptance: The Agency shall immediately notify the Consultant and the Resident Engineer if any pile is not in conformance with these Specifications. The volume of grout placed in each pile shall be a minimum of 115% of theoretical volume of the pile. The amount of grout placed in each 1500 mm (5 feet) increments of the pile shall be checked continuously during installation. The cost of removing and replacing Auger Cast Piles, which are not in conformance, shall be borne by the Pile Contractor.

F. Reports: The Agency shall maintain an installation record of each pile. The record shall note the project name and number, name of Contractors, pile location, design pile capacity, pile tip elevation, pile top elevation, depth of auger advancement, (total and continuous) quantity of grout placed, reinforcing steel placement, and any unusual occurrences during the pile installation. The grout quantity shall be determined by recording grout pump displacement or by other acceptable means. The Consultant shall also maintain a daily report, which summarizes all work performed by the Contractor.

3.6 CORRECTIONS OF DEFICIENCIES:

A. The contractor shall notify the Resident Engineer in writing, of the failure of a pile to meet any requirement of the Section. Such written notification shall include all information required for the evaluation of remedial measures, including all information required for redesign.

B. Based on the survey provided, if a pile fails to comply with the location or tolerance requirements of 1.6, or the design load requirements noted on the Contract Documents, the Resident Engineer will calculate the load capacity requirements of that pile or, if in a pile group, each pile in that pile group, based on the actual, "as-driven" locations and inclinations. If the calculation indicates that the loading on that pile or, if in a pile group, on any pile in that pile group, exceeds the design load, then the Contractor shall perform such remedial work as the Resident Engineer in his sole discretion may require including but not limited to furnishing and installing additional piles at locations approved by the Resident Engineer and modifying concrete or reinforcement steel. These corrective measures shall be performed solely at the Contractor's expense.

C. If a pile fails to comply with the requirements of this Section and the Resident Engineer of record determines that modification to concrete or

reinforcement steel, or the driving of additional piles is necessary, the Engineer of record will perform all required reanalysis, redesign and detailing. All reanalysis, redesign and redetailing costs will be the responsibility of the contractor and reimbursed as a change to the contract.

D. The Contractor, at his option and at any time that he determines that a pile will not satisfy the requirements of this Section for a reason other than encountering an unforeseen underground obstruction, may, subject to the provisions of this specification, abandon such pile and replace it with a new pile or piles rather than await direction or approval from the Resident Engineer. However, the Contractor, in exercising this option, assumes the risk that such replacement pile or piles will be acceptable to the Engineer.

E. Abandoned piles shall be cut off 300 mm (1 foot) below the elevation of the bottom of the pile cap or mat as shown on the Contract Drawings and will not be paid for.

3.7 CLEAN UP:

A. All debris from excavation of objectionable material, removal of obstructions, and any material not to remain as part of the construction are to be removed and disposed of by the subcontractor in a legal manner at no additional cost to the Owner.

B. The site shall be cleaned at frequent intervals and no material shall be stored on the site in a manner, which would obstruct the easy access of equipment and personnel.

- - - E N D - - -

DIVISION 32 - EXTERIOR IMPROVEMENTS

SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Subbase for concrete pavements.
   2. Curbs, gutters, and combination curbs and gutters.
   3. Pedestrian Pavement: Walks, grade slabs, lawn mower strips,.
   4. Vehicular Pavement: Driveways, and loading docks.

1.2 RELATED REQUIREMENTS

A. Field Testing: Section 01 45 29, TESTING LABORATORY SERVICES.
B. Step Nosings and Railings: Section 05 50 00, METAL FABRICATIONS.
C. Subgrade Preparation and Subbase Compaction: Section 31 20 00, EARTHWORK.
D. Concrete Materials, Quality, Mixing, Design and other Requirements: Section 03 30 53, Cast-In-Place Concrete.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Association of State Highway and Transportation Officials (AASHTO):
   1. M147-65-UL-04 - Materials for Aggregate and Soil-Aggregate Subbase, Base and Surface Courses.
   2. M233-86 - Boiled Linseed Oil Mixture for Treatment of Portland Cement Concrete.
C. American Concrete Institute (ACI):
   1. 305R-10 - Guide to Hot Weather Concreting.
   2. 306R-10 - Guide to Cold Weather Concreting.
D. American National Standards Institute (ANSI):
   1. B101.3 - Wet DOCF of Common Hard Surface Floor Materials (Including Action and Limit Thresholds for the Suitable Assessment of the Measured Values).
E. ASTM International (ASTM):
   1. A615/A615M-16 - Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
   2. A996/A996M-15 - Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.

3. A1064/A1064M-16 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
4. C33/C33M-16 - Concrete Aggregates.
5. C94/C94M-16 - Ready Mixed Concrete.
6. C143/C143M-15a - Slump of Hydraulic Cement Concrete.
7. C150/C150M-16 - Portland Cement.
8. C171-16 - Sheet Materials for Curing Concrete.
9. C260/C260M-10a - Air Entraining Admixtures for Concrete.
10. C309-11 - Liquid Membrane Forming Compounds for Curing Concrete.
11. C494/C494M-15a - Chemical Admixtures for Concrete.
12. C618-15 - Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
13. C979/C979M-16 - Pigments for Integrally Colored Concrete.
14. C989/C989M-14 - Slag Cement for Use in Concrete and Mortars.
15. C1240-15 - Silica Fume Used in Cementitious Mixtures.
16. D1751-04(2013)e1 - Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
17. D5893/D5893M-10 - Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements.
18. D6690-15 - Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Architect/Engineer. or Inspection and Testing Agency.
      c. Contractor.
      d. Installer.
      e. Other installers responsible for adjacent and intersecting work, including excavation, plantings, traffic markings, and tank installation.
   2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
      a. Installation schedule.
      b. Installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Installation.

f. Terminations.

g. Transitions and connections to other work.

h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.
2. Show reinforcing.
3. Include jointing plan for concrete pavements, curbs and gutters.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Samples:

1. Exposed Aggregate Concrete Panel: 0.4 sq. m by 50 mm (4 sq. ft. by 2 inches) thick, 2 required, each color and finish.
2. Colored Concrete Panel: As specified in Section 09 06 00, SCHEDULE FOR FINISHES, with mix data.

E. Test reports: Certify products comply with specifications.

1. Concrete materials.
2. Select subbase materials.
3. Field test reports.

F. Certificates: Certify products comply with specifications.

1. Expansion joint filler.
2. Reinforcement.
3. Curing materials.
4. Concrete protective coating.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list.
2. Land surveyor.

H. Concrete mix design.

I. Select subbase job-mix design.

J. Proposed hot and cold weather concreting methods.

K. Land surveyor's construction staking notes, before placing concrete.

1. Identify discrepancies between field conditions and Drawings.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.

2. Installed specified products with satisfactory service on five similar installations.

a. Project Experience List: Provide contact names and addresses for completed projects.

B. Land Surveyor: Professional land surveyor or engineer registered to provide land surveys in jurisdiction where project is located.

C. Preconstruction Testing:

1. Engage independent testing laboratory to perform tests and submit reports.

a. Deliver samples to laboratory in number and quantity required for testing.

2. Concrete mix design.

3. Select subbase job-mix design. Report the following:

a. Material sources.

b. Gradation.

c. Plasticity index.

d. Liquid limit.

e. Laboratory compaction curves indicating maximum density at optimum moisture content.

1.7 DELIVERY

A. Deliver steel reinforcement to prevent damage.

B. Before installation, return or dispose of distorted or damaged steel reinforcement.

C. Bulk Products: Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Hot Weather Concreting Procedures: ACI 305R.

B. Cold Weather Concreting Procedures: ACI 306R.

1. Use non-corrosive, non-chloride accelerator admixture.
2. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 CONCRETE MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.

B. Pozzolans:

1. Fly Ash: ASTM C618, Class C or F including supplementary optional physical requirements.
2. Slag: ASTM C989/C989M; Grade 80, Grade 100, or Grade 120.
3. Silica Fume: ASTM C1240.

C. Coarse Aggregate: ASTM C33/C33M; size No. 467 or No. 57 or as approved by the Engineer

D. Fine Aggregate: ASTM C33/C33M.

E. Mixing Water: Fresh, clean, and potable.

F. Air-Entraining Admixture: ASTM C260/C260M.

G. Chemical Admixtures: ASTM C494/C494M.

H. Reinforcing Steel: ASTM A615/A615M or ASTM A996/A996M, Grade 420 (60) deformed.

I. Welded Wire Fabric: ASTM A1064/A1064M, deformed; Grade 450 (65); sized as indicated.

J. Expansion Joint Filler: ASTM D1751.

K. Sheet Materials for Curing Concrete: ASTM C171.

L. Color Pigment: ASTM C979/C979M, colored and white powder pigments.

2.2 SELECT SUBBASE

A. Subbase: AASHTO M147; // Grade A // Grade B // Grade C // Grade D // Grade E // Grade F //.

1. Select granular material composed of sand, sand-gravel, crushed stone, crushed or granulated slag, with or without soil binder, or combinations of these materials.

SUBBASE GRADING REQUIREMENTS							
Sieve Size		Percentage Passing by Mass					
		Grades					
(mm)	(in)	A	B	C	D	E	F
50	2	100	100				
25	1		75-95	100	100	100	100
9.5	3/8	30-65	40-75	50-85	60-100		
4.47	No. 4	25-55	30-60	35-65	50-85	55-100	70-100
2.00	No. 10	15-40	20-45	25-50	40-70	40-100	55-100
0.425	No. 40	8-20	15-30	15-30	25-45	20-50	30-70
0.075	No. 200	2-8	5-20	5-15	5-20	6-20	8-25

B. Other Acceptable Gradations: Materials within three to five percent, plus or minus, of specified gradation, or as recommended by the geotechnical engineer and approved by the Contracting Officer's Representative.

2.3 FORMS

A. Forms: Wood, plywood, metal, or other materials, approved by Contracting Officer's Representative, of grade or type suitable to obtain type of finish specified.
   1. Plywood: Exterior grade, free of defects and patches on contact surface.
   2. Lumber: Sound, grade-marked, S4S stress graded softwood, minimum 50 mm (2 inches) thick, free from warp, twist, loose knots, splits, or other defects.
   3. Form Coating: As recommended by Architect/Engineer.

B. Provide forms suitable in cross-section, depth, and strength to resist springing during depositing and consolidating concrete.
   1. Do not use forms varying from straight line more than 3 mm in 3000 mm (1/8 inch in 10 feet), horizontally and vertically.

C. Provide flexible or curved forms for forming radii.

2.4 CONCRETE CURING MATERIALS

A. Concrete curing materials, conform to one of the following:

1. Burlap: Minimum 233 g/sq. m (7 ounces/sq. yd.) dry.
2. Sheet Materials for Curing Concrete: ASTM C171.
3. Curing Compound: ASTM C309, Type 1 clear; liquid membrane forming type, without paraffin or petroleum.

2.5 CONCRETE MIXES

A. Design concrete mixes according to ASTM C94/C94M, Option C.

B. Concrete Type: Air-entrained. See Table I.

TABLE I - CONCRETE TYPES

Concrete Type	Minimum 28 Day Compressive Strength f'c MPa (psi)	Non-Air-Entrained		Air-Entrained	
		Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
A	35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
B	30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
C	25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
D	25 (3000)1,2	300 (500)	*	310 (520)	*

Footnotes:

1. If trial mixes are used, achieve compressive strength 8.3 MPa (1,200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve compressive strength 9.7 MPa (1,400 psi) in excess of f'c.
2. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.
3. Laboratory Determined according to ACI 211.1 for normal weight concrete.

C. Maximum Slump: ASTM C143/C143M. See Table II.

TABLE II - MAXIMUM SLUMP

APPLICATION	MAXIMUM SLUMP
Curb & Gutter	75 mm (3 inches)
Pedestrian Pavement	75 mm (3 inches)
Vehicular Pavement	50 mm (2 inches) Machine Finished 100 mm (4 inches) Hand Finished
Equipment Pad	75 to 100 mm (3 to 4 inches)

2.6 ACCESSORIES

A. Equipment and Tools: Obtain Contracting Officer's Representative's, approval of equipment and tools needed for handling materials and performing work before work begins.

B. Maintain equipment and tools in satisfactory working condition.

C. Sealants:

1. Concrete Paving Expansion Joints: ASTM D5893/D5893M, Type SL, single component, self-leveling, silicone joint sealant.
2. Concrete Paving Joints: ASTM D6690, Type IV, hot-applied, single component joint sealant.

D. Concrete Protective Coating: AASHTO M233 linseed oil mixture.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Prepare, construct, and finish subgrade. See Section 31 20 00, EARTHWORK.

D. Maintain subgrade in smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE

A. Placing:

1. Place subbase material on prepared subgrade in uniform layer to required contour and grades, and to maximum 200 mm (8 inches) loose depth.
2. When required compacted thickness exceeds 150 mm (6 inches), place subbase material in equal thickness layers.
3. When subbase elevation is 13 mm (1/2 inch) or more below required grade, excavate subbase minimum 75 mm (3 inches) deep. Place and compact subbase to required grade.

B. Compaction:

1. Perform compaction with approved hand or mechanical equipment well suited to the material being compacted.
2. Maintain subbase at optimum moisture content for compaction.
3. Compact each subbase layer to minimum 95 percent or 100 percent of maximum density as specified in Section 31 20 00, EARTHWORK.

C. Subbase Tolerances:
   1. Variation from Indicated Grade: Maximum 9 mm (3/8 inch).
   2. Variation from Indicated Thickness: Maximum 13 mm (1/2 inch).

D. Protection:
   1. Protect subbase from damage until concrete is placed.
   2. Reconstruct damaged subbase before placing concrete.

3.3 SETTING FORMS

A. Form Substrate:
   1. Compact form substrate to uniformly support forms along entire length.
   2. Correct substrate imperfections and variations by cutting, filling, and compacting.

B. Form Setting:
   1. Set forms to indicated line and grade with tight joints. Rigidly brace forms preventing movement.
   2. Remove forms when removal will not damage concrete and when required for finishing.
   3. Clean and oil forms before each use.
   4. Correct forms, when required, immediately before placing concrete.

C. Land Surveyor: Establish control, alignment, and grade for forms and slip forming machine operations.
   1. Notify Contracting Officer's Representative immediately when discrepancies exist between field conditions and drawings.
   2. Correct discrepancies greater than 25 mm (1 inch) before placing concrete.

D. Form Tolerances:
   1. Variation from Indicated Line: Maximum 6 mm (1/4 inch).
   2. Variation from Indicated Grade: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).

3.4 PLACING REINFORCEMENT

A. Keep reinforcement clean from contamination preventing concrete bond.

B. Install reinforcement shown on drawings.

C. Support and securely tie reinforcing steel to prevent displacement during concrete placement.

D. Obtain Contracting Officer's Representative's reinforcement placement approval before placing concrete.

3.5 JOINTS - GENERAL

A. Place joints, where shown on approved submittal Drawings.
   1. Conform to details shown.
   2. Install joints perpendicular to finished concrete surface.
B. Make joints straight and continuous from edge to edge of pavement.

3.6 CONSTRUCTION JOINTS

A. Place transverse construction joints of type shown, where indicated, and whenever concrete placement is suspended for more than 30 minutes.
B. Provide butt-type joint with dowels in curb and gutter at planned joint locations.
C. Provide keyed joints with tie bars when joint occurs in middle third of planned curb and gutter joint interval.

3.7 CONTRACTION JOINTS

A. Tool or cut joints to width, depth, and radius edge shown on drawings using grooving tool, jointer, or saw.
B. Construct joints in curbs and gutters by inserting 3 mm (1/8 inch) steel plates conforming to curb and gutter cross sections.
   1. Keep plates in place until concrete can hold its shape.
C. Finish joint edges with edging tool.
D. Score pedestrian pavement with grooving tool or jointer.

3.8 EXPANSION JOINTS

A. Form expansion joints with expansion joint filler of thickness shown on drawings.
   1. Locate joints around perimeter of structures and features abutting site work concrete.
   2. Create complete, uniform separation between structure and site work concrete.
B. Extend expansion joint material full depth of concrete with top edge of joint filler below finished concrete surface where sealant is indicated on Drawings.
C. Cut and shape material matching cross section.
D. Anchor with approved devices to prevent displacing during placing and finishing operations.
E. Round joint edges with edging tool.

3.9 PLACING CONCRETE - GENERAL

A. Preparation before Placing Concrete:

1. Obtain Contracting Officer's Representative approval.
2. Remove debris and other foreign material.
3. Uniformly moisten substrate, without standing water.

B. Convey concrete from mixer to final location without segregation or loss of ingredients. Deposit concrete to minimize handling.

C. During placement, consolidate concrete by spading or vibrating to minimize voids, honeycomb, and rock pockets.
1. Vibrate concrete against forms and along joints.
2. Avoid excess vibration and handling causing segregation.

D. Place concrete continuously between joints without bulkheads.

E. Install construction joint in concrete placement suspended for more than 30 minutes.

F. Replace concrete with cracks, chips, bird baths, and other defects to nearest joints, approved by Contracting Officer's Representative.

3.10 PLACING CONCRETE FOR CURB AND GUTTER, PEDESTRIAN PAVEMENT, AND EQUIPMENT PADS

A. Place concrete in one layer conforming to cross section shown on Drawings after consolidating and finishing.

B. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

C. Strike concrete surface to proper section ready for consolidation.

D. Consolidate concrete by tamping and spading, or with approved mechanical finishing equipment.

E. Finish concrete surface with wood or metal float.

F. Construct concrete pads and pavements with sufficient slope to drain, preventing standing water.

3.11 PLACING CONCRETE FOR VEHICULAR PAVEMENT

A. Deposit concrete as close as possible to its final position.

B. Place concrete continuously between construction joints without cold joints.

C. Strike and consolidate concrete with finishing machine, vibrating screed, or by hand-finishing.

D. Finish concrete surface to elevation and crown shown on drawings.

E. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

F. Obtain Contracting Officer's Representative's approval before placing adjacent lanes.

G. Curb-Forming Machines: Curb-forming machines for constructing integral curbs and gutter will be approved based on trial use on the project. When equipment produces unsatisfactory results, discontinue use of the equipment at any time during construction and accomplish work by hand method construction. Remove unsatisfactory work and reconstruct full length between regularly scheduled joints. Dispose of removed portions off the project site.

3.12 FORM REMOVAL

A. Keep forms in place minimum 12 hours after concrete placement. Remove forms without damaging concrete.

B. Do not use bars or heavy tools against concrete to remove forms. Repair damage concrete found after form removal.

3.13 CONCRETE FINISHING - GENERAL

A. Follow operation sequence below, unless otherwise indicated on Drawings:

1. Consolidating, floating, striking, troweling, texturing, and joint edging.

B. Use edging tool with 6 mm (1/4 inch) radius.

C. Keep finishing equipment and tools clean and suitable for use.

3.14 CONCRETE FINISHING - PEDESTRIAN PAVEMENT

A. Walks, Grade Slabs,:

1. Finish concrete surfaces with metal float, troweled smooth, and finished with a broom moistened with clear water.
2. Finish slab edges and formed transverse joints with edger.
3. Broom surfaces transverse to traffic direction.
   a. Use brooming to eliminate flat surface produced by edger.
   b. Produce uniform corrugations, maximum 1.5 mm (1/16 inch) deep profile.
4. Provide surface uniform in color and free of surface blemishes, form marks, and tool marks.
5. Paving Tolerances:
   a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).
   b. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).
6. Replace paving within joint boundary when paving exceeds specified tolerances.

B. Step Treads, Risers and Sidewalls: Finish as specified for pedestrian pavement, except as follows:
   1. Remove riser forms sequentially, starting with top riser.
   2. Rub riser face with wood or concrete rubbing block and water. Remove blemishes, form marks, and tool marks. Use outside edger to round nosing; use inside edger to finish bottom of riser.
   3. Apply uniform brush finish to treads, risers, and sidewall.
      a. Apply stiff brush finish to treads to provide slip resistant surface complying with ANSI B101.3.
   4. Step Tolerance:
      a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).

3.15 CONCRETE FINISHING - VEHICULAR PAVEMENT

A. Align finish surfaces where new and existing pavements abut.
B. Longitudinally float pavement surface to profile and grade indicated on drawings.
C. Straighten surface removing irregularities and maintaining specified tolerances while concrete is plastic.
D. Finish pavement edges and joints with edging tool.
E. Broom finish concrete surface after bleed water dissipates and before concrete hardens.
   1. Broom surface transverse to traffic direction.
      a. Use brooming to eliminate flat surface produced by edger.
      b. Produce uniform corrugations, maximum 3 mm (1/8 inch) deep profile.
F. Pavement Tolerances:
   1. Variation from Indicated Plane: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet) tested parallel and perpendicular to traffic direction at maximum 1500 mm (5 feet) intervals.
   2. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).
G. Replace paving within joint boundary when paving exceeds specified tolerances.

3.16 CONCRETE FINISHING - CURBS AND GUTTERS

A. Round edges of gutter and top of curb with edging tool.
B. Gutter and Curb Top:
   1. Float surfaces and finish with smooth wood or metal float until true to grade and section and uniform color.

2. Finish surfaces, while still plastic, longitudinally with bristle brush.

C. Curb Face:

1. Remove curb form and immediately rub curb face with wood or concrete rubbing block removing blemishes, form marks, and tool marks and providing uniform color.
2. Brush curb face, while still plastic, matching gutter and curb top.

D. Curb and Gutter Tolerances:

1. Variation from Indicated Plane and Grade:
   a. Gutter: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).
   b. Curb Top and Face: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet).

E. Replace curbs and gutters within joint boundary when curbs and gutters exceed specified tolerances.

F. Correct depressions causing standing water.

3.17 CONCRETE FINISHING - EQUIPMENT PADS

A. Strike pad surface to elevation shown on Drawings.

B. Provide smooth, dense float finish, free from depressions or irregularities.

C. Finish pad edges with edger.

D. After removing forms, rub pad edge faces with wood or concrete rubbing block, removing blemishes, form marks, and tool marks and providing uniform color.

E. Pad Tolerances:

1. Variation from Indicated Plane: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).
2. Variation from Indicated Elevation: Maximum 6 mm (1/4 inch).
3. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).

F. Replace pads when pads exceed specified tolerances.

3.18 CONCRETE CURING

A. Concrete Protection:

1. Protect unhardened concrete from rain and flowing water.
2. Provide sufficient curing and protection materials available and ready for use before concrete placement begins.
3. Protect concrete to prevent pavement cracking from ambient temperature changes during curing period.

a. Replace pavement damaged by curing method allowing concrete cracking.
b. Employ another curing method as directed by Contracting Officer's Representative.

B. Cure concrete for minimum 7 days by one of the following methods appropriate to weather conditions preventing moisture loss and rapid temperature change:
1. Burlap Mat: Provide minimum two layers kept saturated with water during curing period. Overlap Mats at least 150 mm (6 inches).
2. Sheet Materials:
a. Wet exposed concrete surface with fine water spray and cover with sheet materials.
b. Overlap sheets minimum 300 mm (12 inches).
c. Securely anchor sheet materials preventing displacement.
3. Curing Compound:
a. Protect joints indicated to receive sealants preventing contamination from curing compound.
b. Insert moistened paper or fiber rope into joint or cover joint with waterproof paper.
c. Apply curing compound before concrete dries.
d. Apply curing compound in two coats at right angles to each other.
e. Application Rate: Maximum 5 sq. m/L (200 sq. ft./gallon), both coats.
f. Immediately reapply curing compound to surfaces damaged during curing period.

3.19 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
1. Compaction.
a. Pavement subgrade.
b. Curb, gutter, and sidewalk.
2. Concrete:
a. Delivery samples.
b. Field samples.
3. Slip Resistance: Steps and pedestrian paving.

3.20 CLEANING

A. After completing curing:

1. Remove burlap and sheet curing materials.
2. Sweep concrete clean, removing foreign matter from the joints.
3. Seal joints as specified.

3.21 PROTECTION

A. Protect exterior improvements from traffic and construction operations.

1. Prohibit traffic on paving for minimum seven days after placement, or longer as directed by Contracting Officer's Representative.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

1. Replace concrete containing excessive cracking, fractures, spalling, and other defects within joint boundary, when directed by Contracting Officer's Representative, and at no additional cost to the Government.

- - - E N D - - -

SECTION 32 12 16
ASPHALT PAVING

PART 1 - GENERAL

1.1 DESCRIPTION

This work shall cover the composition, mixing, construction upon the prepared subgrade, and the protection of hot asphalt concrete pavement. The hot asphalt concrete pavement shall consist of an aggregate or asphalt base course and asphalt surface course constructed in conformity with the lines, grades, thickness, and cross sections as shown. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course.

1.2 RELATED WORK

A. Laboratory and field testing requirements: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Subgrade Preparation: Paragraph 3.3 and Section 31 20 00, EARTH MOVING.

C. Pavement Markings: Section 32 17 23, PAVEMENT MARKINGS.

1.3 INSPECTION OF PLANT AND EQUIPMENT

The Resident Engineer shall have access at all times to all parts of the material producing plants for checking the mixing operations and materials and the adequacy of the equipment in use.

1.4 ALIGNMENT AND GRADE CONTROL

The Contractor’s Registered Professional Land Surveyor shall establish and control the pavement (aggregate or asphalt base course and asphalt surface course) alignments, grades, elevations, and cross sections as shown on the Drawings.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

B. Data and Test Reports:

1. Aggregate Base Course: Sources, gradation, liquid limit, plasticity index, percentage of wear, and other tests required by State Highway Department.

2. Asphalt Base/Surface Course: Aggregate source, gradation, soundness loss, percentage of wear, and other tests required by State Highway Department.
3. Job-mix formula.

C. Certifications:
1. Asphalt prime and tack coat material certificate of conformance to State Highway Department requirements.
2. Asphalt cement certificate of conformance to State Highway Department requirements.
3. Job-mix certification - Submit plant mix certification that mix equals or exceeds the State Highway Specification.

D. One copy of State Highway Department Specifications.

E. Provide MSDS (Material Safety Data Sheets) for all chemicals used on ground.

PART 2 - PRODUCTS

2.1 GENERAL

A. Aggregate base and asphalt concrete materials shall conform to the requirements of the following and other appropriate sections of the latest version of the State Highway Material Specifications, including amendments, addenda and errata. Where the term "Engineer" or "Commission" is referenced in the State Highway Specifications, it shall mean the VA Resident Engineer or VA Contracting Officer.

2.2 AGGREGATES

A. Provide aggregates consisting of crushed stone, gravel, sand, or other sound, durable mineral materials processed and blended, and naturally combined.

B. Subbase aggregate (where required) maximum size: 38mm(1-1/2").

C. Base aggregate maximum size:
1. Base course over 152mm(6") thick: 38mm(1-1/2");
2. Other base courses: 19mm(3/4").

D. Asphaltic base course:
1. Maximum particle size not to exceed 25.4mm(1”).
2. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

E. Aggregates for asphaltic concrete paving: Provide a mixture of sand, mineral aggregate, and liquid asphalt mixed in such proportions that the percentage by weight will be within:

Sieve Sizes	Percentage Passing
19mm(3/4")	100
9.5mm(3/8")	67 to 85
6.4mm(1/4")	50 to 65
2.4mm(No. 8 mesh)	37 to 50
600µm(No. 30 mesh)	15 to 25
75µm(No. 200 mesh)	3 to 8

plus 50/60 penetration liquid asphalt at 5 percent to 6-1/2 percent of the combined dry aggregates.

2.3 ASPHALTS

A. Comply with provisions of Asphalt Institute Specification SS2:
   1. Asphalt cement: Penetration grade 50/60
   2. Prime coat: Cut-back type, grade MC-250
   3. Tack coat: Uniformly emulsified, grade SS-1H

2.4 SEALER

A. Provide a sealer consisting of suitable fibrated chemical type asphalt base binders and fillers having a container consistency suitable for troweling after thorough stirring, and containing no clay or other deleterious substance.

B. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

PART 3 - EXECUTION

3.1 GENERAL

The Asphalt Concrete Paving equipment, weather limitations, job-mix formula, mixing, construction methods, compaction, finishing, tolerance, and protection shall conform to the requirements of the appropriate sections of the State Highway Specifications for the type of material specified.

3.2 MIXING ASPHALTIC CONCRETE MATERIALS

A. Provide hot plant-mixed asphaltic concrete paving materials.

1. Temperature leaving the plant: 143 degrees C(290 degrees F) minimum, 160 degrees C(320 degrees F) maximum.
2. Temperature at time of placing: 138 degrees C(280 degrees F) minimum.

3.3 SUBGRADE

A. Shape to line and grade and compact with self-propelled rollers.
B. All depressions that develop under rolling shall be filled with acceptable material and the area re-rolled.
C. Soft areas shall be removed and filled with acceptable materials and the area re-rolled.
D. Should the subgrade become rutted or displaced prior to the placing of the subbase, it shall be reworked to bring to line and grade.
E. Proof-roll the subgrade with maximum 45 tonne (50 ton) gross weight dump truck as directed by VA Resident Engineer or VA Contracting Officer. If pumping, pushing, or other movement is observed, rework the area to provide a stable and compacted subgrade.

3.4 BASE COURSES

A. Subbase (when required)
   1. Spread and compact to the thickness shown on the drawings.
   2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
   3. After completion of the subbase rolling there shall be no hauling over the subbase other than the delivery of material for the top course.
B. Base
   1. Spread and compact to the thickness shown on the drawings.
   2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
   3. After completion of the base rolling there shall be no hauling over the base other than the delivery of material for the top course.
C. Thickness tolerance: Provide the compacted thicknesses shown on the Drawings within a tolerance of minus 0.0mm (0.0") to plus 12.7mm (0.5").
D. Smoothness tolerance: Provide the lines and grades shown on the Drawings within a tolerance of 5mm in 3m (3/16 inch in ten feet).
E. Moisture content: Use only the amount of moisture needed to achieve the specified compaction.

3.5 PLACEMENT OF ASPHALTIC CONCRETE PAVING

A. Remove all loose materials from the compacted base.

B. Apply the specified prime coat, and tack coat where required, and allow to dry in accordance with the manufacturer's recommendations as approved by the Architect or Engineer.

C. Receipt of asphaltic concrete materials:

1. Do not accept material unless it is covered with a tarpaulin until unloaded, and unless the material has a temperature of not less than 130 degrees C(280 degrees F).
2. Do not commence placement of asphaltic concrete materials when the atmospheric temperature is below 10 degrees C (50 degrees F), not during fog, rain, or other unsuitable conditions.

D. Spreading:

1. Spread material in a manner that requires the least handling.
2. Where thickness of finished paving will be 76mm (3") or less, spread in one layer.

E. Rolling:

1. After the material has been spread to the proper depth, roll until the surface is hard, smooth, unyielding, and true to the thickness and elevations shown own the drawings.
2. Roll in at least two directions until no roller marks are visible.
3. Finished paving smoothness tolerance:
   a. No depressions which will retain standing water.
   b. No deviation greater than 3mm in 1.8m (1/8" in six feet).

3.6 APPLICATION OF SEAL COAT

A. Prepare the surfaces, mix the seal coat material, and apply in accordance with the manufacturer's recommendations as approved by the Architect or Engineer.

B. Achieve a finished surface seal which, when dry and thoroughly set, is smooth, tough, resilient, of uniform black color, and free from coarse textured areas, lap marks, ridges, and other surface irregularities.

C. When sealing new asphalt paving wait an entire year to allow for the expansion and contraction of a year's cycle of both warm and cool temperatures. This allows for the asphalt's oils to properly cure and begin oxidation before applying a seal coat.

D. When seal coating in less than a year apply two coats, spray applied. This application method is preferred for less than a year application

when there is still plenty of asphalt cement present for the seal coat to bond to.

3.7 PROTECTION

Protect the asphaltic concrete paved areas from traffic until the sealer is set and cured and does not pick up under foot or wheeled traffic.

3.8 FINAL CLEAN-UP

Remove all debris, rubbish, and excess material from the work area.

- - - E N D - - -

SECTION 32 17 23
PAVEMENT MARKINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Paint on pavement surfaces, in form of traffic lanes, parking bays, areas restricted to handicapped persons, crosswalks, and other detail pavement markings.

1.2 RELATED REQUIREMENTS

A. Paint VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Paint Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Federal Specifications (Fed. Spec.):

1. TT-B-1325D - Beads (Glass Spheres) Retro-Reflective.
2. TT-P-1952F - Paint, Traffic and Airfield Marking, Waterborne.

C. Master Painters Institute (MPI):

1. No. 97 - Traffic Marking Paint, Latex.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show pavement marking configuration and dimensions.
2. Show international symbol of accessibility at designated parking spaces.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Application instructions.

D. Samples:

1. Paint: 200 mm (8 inches) square, each type and color.

E. Certificates: Certify products comply with specifications.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Product Temperature: Minimum 13 degrees C (55 degrees F) for minimum 48 hours before installation.
      a. Surface to be painted and ambient temperature: Minimum 10 degrees C (50 degrees F) and maximum 35 degrees C (95 degrees F).

B. Field Measurements: Verify field conditions affecting traffic marking installation. Show field measurements on Submittal Drawings.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design paint complying with specified performance:
   1. Application: Fed. Spec. TT-P-1952.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer and from one production run.

1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
   a. Paints and coatings.

2.3 SANDBLASTING EQUIPMENT

A. Air compressor, hoses, and nozzles of proper size and capacity as required for cleaning painted surfaces. Compressor to provide minimum 0.08 cu. m/s (150 cfm) of air at pressure of minimum 625 kPa (90 psi) at each nozzle used.

2.4 PAINT APPLICATOR

A. Apply marking paint with approved mechanical equipment. Provide equipment with constant agitation of paint and travel at controlled speeds. Synchronize one or more paint "guns" to automatically begin and cut off paint flow in case of skip lines. Equipment to have manual control to apply continuous lines of varying length and marking widths as indicated on Drawings. Provide pneumatic spray guns for hand application of paint in areas where mobile paint applicator cannot be used.

2.5 PAINT

A. Paint: MPI No. 97. For obliterating existing markings comply with Fed. Spec. TT-P-1952. Provide minimum 18 L (5 gallons) containers.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Allow new pavement surfaces to cure for period of minimum 14 days before application of marking materials.
B. Protect existing construction and completed work from damage.
C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
   1. Remove dust, dirt, and other granular surface deposits by sweeping, blowing with compressed air, rinsing with water, or combination of these methods.
   2. Completely remove rubber deposits, existing paint markings, and other coatings adhering to pavement with scrapers, wire brushings,

sandblasting, mechanical abrasion, or approved chemicals as directed by Contracting Officer's Representative.

3. As an option, comply with Fed. Spec. TT-P-1952 for removal of existing paint markings on asphalt pavement. Apply black paint in as many coats as necessary to completely obliterate existing markings.
4. Scrub affected areas with several applications of trisodium phosphate solution or other approved detergent or degreaser, and rinse thoroughly after each application, Where oil or grease are present on old pavements to be marked, .
   a. After cleaning, seal oil-soaked areas with cut shellac to prevent bleeding through new paint.
5. Clean and dry surface before pavement marking. Do not begin any marking until Contracting Officer's Representative inspected surface and gives permission to proceed.

3.2 TEMPORARY PAVEMENT MARKING

A. Apply Temporary Pavement Markings of colors, widths and lengths shown on drawings or directed by Contracting Officer's Representative. After temporary marking has served its purpose and when so ordered by Contracting Officer's Representative, remove temporary marking by carefully controlled sandblasting, approved grinding equipment, or other approved method to prevent damage on applied surface.

B. As an option, provide approved preformed pressure sensitive, reflective, adhesive tape type of temporary pavement marking of required colors, widths and lengths in lieu of temporary painted and reflective marking. Continuous durability and effectiveness of such marking is required during period for which its use is required. Remove any unsatisfactory tape type marking and replace with painted and reflective markings.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.4 PAINT APPLICATION

A. Apply uniformly painted and reflective pavement marking of required colors, length, and width with true, sharp edges and ends on properly cured, prepared, and dried surfaces.

B. Comply with details as indicated on drawings and established control points.

C. Apply paint at wet film thickness of 0.4 mm (0.015 inch). Apply paint in one coat. When directed by Contracting Officer's Representative, apply additional coats at markings showing light spots. Comply with paint manufacturer's maximum drying time requirements to prevent undue softening of asphalt, and pick-up, displacement, or discoloration by tires of traffic.

D. When deficiency in marking drying occurs, discontinue paint operations until cause of slow drying is determined and corrected.

E. Remove and replace marking applied less than minimum material rates, deviates from true alignment, exceeds stipulated length and width tolerances, or shows light spots, smears, or other deficiencies or irregularities.

F. Remove marking by carefully controlled sandblasting, approved grinding equipment, or other approve method to prevent damage on applied surface.

3.5 DETAIL PAVEMENT MARKING APPLICATION

A. Apply Detail Pavement Markings, exclusive of actual traffic lane marking as follows:

1. At exit and entrance islands and turnouts.
2. On curbs.
3. At crosswalks.
4. At parking bays.
5. Other locations as indicated on drawings.

B. Apply International Handicapped Symbol at indicated parking spaces. Color as shown on drawings. Apply paint for symbol using suitable template that will provide pavement marking with true, sharp edges and ends.

C. Install detail pavement markings of colors, widths and lengths, and design pattern at locations indicated on drawings.

3.6 TOLERANCES

A. Length and Width of Lines: Plus or minus 75 mm (3 inches) and plus or minus 3 mm (1/8 inch), respectively, in case of skip markings.

B. Length of intervals exceeding line length tolerance are not acceptable.

3.7 CLEANING

A. Remove excess paint before paint sets.

3.8 PROTECTION

A. Protect pavement markings from traffic and construction operations.

1. Protect newly painted markings from vehicular traffic until paint is dry and track free.
2. Place warning signs at beginning of wet line, and at points well in advance of marking equipment for alerting approaching traffic from both directions.
3. Place small flags or other similarly effective small objects near freshly applied markings at frequent intervals to reduce crossing by traffic.

B. Repair damage.

- - - E N D - - -

SECTION 32 31 13
CHAIN LINK FENCES AND GATES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Chain link fence, gates and accessories.

1.2 RELATED REQUIREMENTS

A. Temporary Construction Fence: Section 01 00 00, GENERAL REQUIREMENTS.

B. Grounding: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

C. Security fences: Section 32 31 40, HIGH SECURITY FENCES AND GATES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. A121-13 - Metallic Coated Carbon Steel Barbed Wire.
2. A392-11a - Zinc-Coated Steel Chain-Link Fence Fabric.
3. A491-11 - Aluminum Coated Steel Chain Link Fence Fabric.
4. A817-12 - Metal-Coated Steel Wire for Chain-Link Fence Fabric and Marcelled Tension Wire.
5. B429 - Aluminum-Alloy Extruded Structural Pipe and Tube.
6. F567-14a - Installation of Chain-Link Fence.
7. F626-14 - Fence Fittings.
8. F668-11 - Polyvinyl Chloride (PVC) and Other Organic Polymer-Coated Steel Chain Link Fence Fabric.
9. F900-11 - Industrial and Commercial Swing Gates.
10. F1184-16 - Industrial and Commercial Horizontal Slide Gates.
11. F1664-08(2013) - Polyvinyl Chloride (PVC) and Other Conforming Organic Polymer Coated Steel Tension Wire used with Chain Link Fence.
12. F1665-08(2013) - Polyvinyl Chloride (PVC) and Other Conforming Organic Polymer Coated Steel Barbed Wire used with Chain Link Fence.
13. F2200-14 - Automated Vehicular Gate Construction.
14. F1043-16 - Strength and Protective Coatings on Steel Industrial Fence Framework.
15. F1083-16 - Pipe, Steel, Hot-Dipped Zinc-Coated (Galvanized) Welded, for Fence Structures.

C. Chain Link Fence Manufacturing Institute (CLFMI):
   1. Product Manual.
D. Federal Specifications (Fed. Spec.):
   1. FF-P-110J - Padlock, Changeable Combination.
E. Master Painters Institute (MPI):
   1. No. 18 - Primer, Zinc Rich, Organic.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.
D. Certificates: Certify products comply with specifications.
   1. Fence alignment.
   2. Zinc-coating.
E. Qualifications: Substantiate qualifications comply with specifications.
   1. Manufacturer with project experience list.
   2. Installer with project experience list.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:
   1. Regularly manufactures specified products.
   2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
      a.
B. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
C. Welders and Welding Procedures Qualifications: // AWS D1.1/D1.1M. // AWS D1.3/D1.3M. //

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Provide fences and gates from one manufacturer.

2.2 CHAIN-LINK FENCING AND GATES

A. General: Conform to CLFMI Product Manual.

B. Chain Link Fabric: 50 mm (2 inch) mesh, 3.76 mm(0.15 inches), 1.8 m (72 inches) high, top selvage and bottom selvage As indicated on Drawings .

1. Zinc-Coated Steel Fabric: ASTM A392, hot dipped galvanized before or after weaving.
   a. Class 2 - 610 g/sq. m (2.0 oz/sq. ft.).
2. Fabric Selvage: K&T, Knuckle finish at one end, twist at other.
   a. Fabric less than 1.8 m (72 inches) width, knuckle finish top and bottom.

C. Fence Framework:

1. Round Steel Pipe and Rail: ASTM F1043, Group IA Heavy Industrial Fence Framework, ASTM F1083 schedule 40 galvanized pipe.
   a. Line post: 60 mm (2.375 inch) diameter.
   b. End, Corner, Pull post: 60 mm (2.375 inch) diameter.
   c. Brace rails, top, bottom, and intermediate rails, 42 mm (1.660 inch) diameter, 3.38 kg/m (2.27 lb./ft.).

2.3 TENSION WIRE

A. Metallic Coated Steel Marcelled Tension Wire: ASTM A817, Type II, 4.5 mm (0.177 inches) marcelled wire.

2.4 BARBED WIRE

A. Metallic Coated Steel Barbed Wire: ASTM A121, Type Z, zinc-coated double 2.5 mm (0.10 inches) twisted strand wire, with 4

point 2.0 mm (0.080 inches) round barbs spaced 125 mm (5 inches) on center.

2.5 FITTINGS

A. General: ASTM F626.
B. Tension and Brace Bands: Galvanized pressed steel.
C. Terminal Post Caps, Line Post Loop Tops, Rail and Brace Ends, Boulevard Clamps, Rail Sleeves: Pressed steel galvanized.
D. Truss Rod Assembly: Steel truss rod with a pressed steel tightener.
E. Tension Bars: Galvanized steel one-piece length 50 mm (2 inches) less than the fabric height.
F. Barbed Wire Arms: Pressed steel galvanized after fabrication Type I - three strand 45 degree arm.
G. Polymer Coated Color Fittings: Polymer coating minimum thickness 0.15 mm (0.006 inches) fused and adhered to zinc coated fittings and match color to fence system.

2.6 TIE WIRE and HOG RINGS

A. Galvanized: Minimum zinc coating 366 g/sq. m (1.20 oz./sq. ft.); 3.76 mm (0.148 inch) diameter steel wire.
B. Polymer coated; match coating, class and color to that of the chain link fabric.

2.7 CONCRETE

A. Concrete: As specified in Section 03 30 00, Cast-in-Place Concrete.

2.8 ACCESSORIES

A. Primers:
B. Barrier Coating: ASTM D1187/D1187M.
C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
D. Galvanizing Repair Paint: MPI No. 18.
E. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Remove existing fences and gates to permit new installation.

D. Apply barrier coating to steel and aluminum surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION

A. Layout fence and locate position of post.

B. Installation:

1. General: Comply with ASTM F567.
2. Framework:
   a. Posts: Set plumb in concrete footings with 600 mm (24 inches) minimum depth.
      1) Minimum Footing Diameter: Four times largest cross section of post, up to 100 mm (4 inches) O.D. and three times largest cross section of post greater than 100 mm (4 inches). O.D.
      2) Provide larger footings for gate posts. Top of post concrete footing, at grade crowned to shed water away from the post.
      3) Space line posts not exceeding 3 m (10 ft.) on center.
   b. Top rail: Install 6.4 m (21 ft.) lengths of rail continuous thru line post or barb arm loop top. Splice rail using top rail sleeves minimum 150 mm (6 inches) long.
      1) Secure rail to terminal post by brace band and rail end.
      2) Field cut and secure bottom rail or intermediate rail to line posts with boulevard bands or rail ends and brace bands.
      3) Provide mid rail for fences 3.7 m (12 feet) high or higher.
   c. Terminal posts: Brace and truss end, corner, pull and gate posts for fence 1.8 m (6 ft.) and higher and for fences 1.5 m (5 ft.) in height without top rail.
   d. Tension wire: Install tension wire 100 mm (4 inches) up from bottom of fabric. Fences without top rail, install tension wire 100 mm (4 inches) down from the top of the fabric.
      1) Stretched taut tension wire independently, between terminal posts and secure with brace band.
      2) Secure tension wire to chain link fabric with 3.76 mm (0.15 inch) hog rings 450 mm (18 inches) on center and to each line post with tie wire.
      3) Install top tension wire through barb arm loop for fences with barbed wire and no top rail.

C. Chain Link Fabric:

1. Install fabric outside of the framework with ground clearance of 50 mm (2 inches) maximum.
2. Stretch fabric between terminal posts and secure with tension bar.
3. Wrap tie wire around the post or rail. Attached to fabric wire picket on both sides. Cut off and bend excess wire to prevent injury.

D. Barbed Wire: Stretched taut between terminal posts. Secure in slots provided on the line post barb arms. Attach each strand to the terminal post with a brace band. Indicate type of barb arm, Type I and direction /outward for installation of Type I arm.

E. Nuts and Bolts:

1. Bolts: Install carriage bolts with head on the secure side of the fence. Peened over all bolts shall be to prevent removal of the nut.

F. Electrical Grounding:

1. Grounding: Grounding, when required, as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

G. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

3.3 CLEANING

A. Clean exposed fence surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Protect fence from construction operations.

B. Repair damage.

- - - E N D - - -

SECTION 32 31 40
HIGH SECURITY FENCES AND GATES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. High security fences, gates and accessories.

1.2 RELATED REQUIREMENTS

A. Temporary Construction Fence: Section 01 00 00, GENERAL REQUIREMENTS.

B. Concrete Footings: Section 03 30 00, CAST-IN-PLACE CONCRETE.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc Alloy-Coated (Galvannealed) by Hot-Dip Process.
2. A924/A924M-14e1 - General Requirements for Steel Sheet, Metallic Coated by the Hot-dip Process.
3. D2794-93(2010) - Test Method for Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact).
4. F2408-16 - Ornamental Fences Employing Galvanized Steel Tubular Pickets.

C. Master Painters Institute (MPI):

1. No. 18 - Primer, Zinc Rich, Organic.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.

D. Certificates: Certify products comply with specifications.

1. Fence alignment.
2. Zinc-coating complies with specifications.
3. Structural characteristics comply with indicated and criteria on Drawings.
4. Connections comply with requirements indicated on Drawings.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.
2. Installer with project experience list.
3. Welders and welding procedures.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:
   1. Regularly manufactures specified products.
   2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

B. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.

C. Welders and Welding Procedures Qualifications: // AWS D1.1/D1.1M. // AWS D1.3/D1.3M. //

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoor in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting high security fence fabrication and installation. Show field measurements on Submittal Drawings.
   1. Coordinate field measurement and fabrication schedule to avoid delay.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. System components includes pickets, pales, mesh, fabric, rails, posts, gates and hardware required with following performance requirements:
   1. Steel Yield Strength: ASTM A924, minimum 344 MPa (50,000 psi).
   2. Impact Resistance: ASTM D2794, over 6.8 Nm (60 in-lb.) when using 0.625 ball forward impact.

B. Gates: Design to meet same forced entry and anti-climb characteristics as other portions of fence.

2.2 MATERIALS

A. Zinc-Coated Steel: ASTM A653, G90 coating designation.

B. Tubular Steel: ASTM F2408.

C. Concrete: As specified in Section 03 30 00, Cast-in-Place Concrete.

2.3 PRODUCTS - GENERAL

A. Provide fence components from one manufacturer.
   1. Steel Recycled Content: 30 percent total recycled content, minimum.

2.4 HIGH SECURITY FENCE

A. Pickets: Hot-dip galvanized steel, nominal 68.75 mm (2 3/4 inches) by 18.75 mm (3/4 inch) by 1.98 mm (0.078 inch) thick.

B. Rails: Hot-dip galvanized steel, nominal 50 mm (2 inch) square.

2.5 FABRICATION

A. Fabricate fence and gate to profile and dimensions indicated on Drawings.

B. Fabricate components with joints tightly fitted and secured.

2.6 ACCESSORIES

A. Accessories: Manufacturer's required accessories for complete installation.

B. Barrier Coating: ASTM D1187/D1187M.

C. Welding Materials: AWS D1.1/D1.1M, type to suit application.

D. Fasteners: Fasteners as recommended by manufacturer.

E. Gate Hardware: Fence manufacturers standard hardware for manually operated gates.

F. Galvanizing Repair Paint: MPI No. 18.

G. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Remove existing fence panels and gates to permit new installation.

1. Dispose of removed materials.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Excavate for concrete-embedded items.

C. Set posts in concrete foundation with a minimum depth of 914 mm (36 inches).

D. Attached fence panel to the line and end posts with manufacturer's standard fasteners.

E. Install gate to gate posts spaced as indicated on Drawings. Install required hardware and adjust for smooth operation.

F. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.

2. Repair painted surfaces with touch up primer.

3.3 CLEANING

A. Clean exposed high security fence and gate surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Protect high security fences and gates from construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

- - - E N D - - -

SECTION 32 90 00
PLANTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plants, soils, edging, turf, and landscape materials.

1.2 RELATED REQUIREMENTS

1.3 DEFINITIONS

A. Pesticide: Any substance or mixture of substances, including biological control agents, that may prevent, destroy, repel, or mitigate pests and is specifically labeled for use by U.S. Environmental Protection Agency (EPA). Also, any substance used as plant regulator, defoliant, disinfectant, or biocide.

B. Planter Bed: An area containing one or combination of following plant types: shrubs, vines, wildflowers, annuals, perennials, ground cover, and mulch topdressing excluding turf. Trees may also be found in planter beds.

C. Stand of Turf: 95 percent of established species.

1.4 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute (ANSI):

1. Z60.1-2014 - Nursery Stock.

C. American Society for Testing And Materials (ASTM):

1. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
2. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
3. C33/C33M-16-Concrete Aggregates.
4. C136/C136M-14 - Sieve Analysis of Fine and Coarse Aggregates.
5. C602-13a - Agricultural Liming Materials.
6. D977-13e1 - Emulsified Asphalt.
7. D5268-13 - Topsoil Used for Landscaping Purposes.

D. Hortus Third: Concise Dictionary of Plants Cultivated in United States and Canada.

E. Tree Care Industry Association (TCIA):

1. A300P1-2008 - Tree Care Operations - Trees, Shrubs and Other Woody Plant Maintenance Standard Practices (Pruning).
2. Z133.1-2012 - Arboricultural Operations - Safety Requirements.

F. Turfgrass Producers International (TPI):
1. 2006 Guideline Specifications to Turfgrass Sodding.

G. United States Department of Agriculture (USDA):
1. DOA SSIR 42-2014 - Soil Survey Laboratory Methods Manual.
2. Handbook No. 60 - Diagnosis and Improvement of Saline and Alkali Soils.

1.5 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
1. Required Participants:
a. Contracting Officer's Representative.
b. Architect/Engineer.
c. Contractor.
d. Installer.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
a. Inspection of planting materials.
b. Installation schedule.
c. Installation sequence.
d. Preparatory work.
e. Protection before, during, and after installation.
f. Installation.
g. Inspecting.
h. Environmental procedures.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.6 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
1. Description of each product.
2. Photographs: Color photographs of each plant species showing actual size and condition of plants to be provided with measuring device

included for scale. Where more than 20 plants are required of any species, submit minimum three photographs of average, best, and worst quality plant to be provided. Include on each photograph, plant full scientific name, size, and source nursery.

3. Installation instructions.
4. Warranty.

C. Samples:

1. Trees and Shrubs: Full sized of each variety and size. Deliver samples to project site and maintain samples for duration of construction period.
2. Organic and Compost Mulch: 0.5 L. (1 pint) sealed plastic bag of each required mulch, including label with percentage weight of each material and source representing material to be provided. Samples to match color, texture, and composition of installed material.
3. Mineral Mulch: 1.0 kg (2 lb.) sealed plastic bag of mulch, including label with source. Samples to match color, texture, and composition of installed material.
4. Filter Fabric: 300 by 300 mm (12 by 12 inches).
5. Edging Materials and Accessories: Manufacturer's standard sizes.
6. Tree Wrap: Width of panel by 300 mm (12 inches).

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
   a. Show type and quantity for each product.

E. Test reports: Certify products comply with specifications.

F. Certificates: Certify products comply with specifications.

1. Plant Materials: Department of Agriculture certification by State Nursery Inspector declaring material to be free from insects and disease.
2. Seed and Turf Materials: Notarized certificate of product analysis.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer, including supervisor with project experience list.

H. Operation and Maintenance Data:

1. Care instructions for each plant material.

1.7 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.
3. Member in good standing of either Professional Landcare Network or American Nursery and Landscape Association.

B. Licensed Arborist required to submit one copy of license to Contracting Officer's Representative.

C. Independent or university laboratory, recognized by State Department of Agriculture, with experience and capability to conduct testing indicated and that specializes in types of tests to be performed.

D. Measure plants according to ANSI Z60.1. Pruning to obtain required sizes will not be permitted.

E. Contracting Officer's Representative may review plant materials either at place of growth or project site before planting for compliance with requirements. Contracting Officer's Representative retains right to inspect trees and shrubs to determine if any unacceptable conditions exist and to reject any trees or shrubs at any time during Project. All rejected trees and shrubs must be immediately removed from Project site.
   1. Submit plant material source information to Contracting Officer's Representative seven days in advance of delivery to Project site.

F. Material Test Reports: For standardized ASTM D5268 topsoil // existing native surface topsoil // existing in-place surface soil // and // imported or manufactured topsoil //.
   1. For each unamended soil type, provide soil analysis and written report by qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation exchange capacity; // sodium absorption ratio; // deleterious material; pH; and mineral and plant-nutrient content of soil.
   2. Comply with USDA's Handbook No. 60 testing methods and written recommendations.
   3. Soil-testing laboratory to oversee soil sampling; with depth, location, and number of samples to be taken per instructions from Contracting Officer's Representative. Take minimum 3 representative

samples from varied locations for each soil to be used or amended for planting purposes.

4. Report suitability of tested soil for plant growth.
5. Based on test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 92.9 sq. m (1000 sq. ft.) or volume per 0.76 cu. m (1 cu. yd.) for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.
6. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.

1.8 DELIVERY

A. Deliver packaged products in manufacturer's original sealed packaging.

B. Bulk Products:

1. Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.
2. Install erosion control materials to prevent erosion or displacement of bulk products.

C. Apply antidesiccant to trees and shrubs according to manufacturer's instructions to protect during digging, handling, and transportation.

1. For deciduous trees or shrubs in full leaf, spray with antidesiccant at nursery before transporting and again two weeks after planting.

D. Wrap trees and shrubs with tree wrap according to manufacturer's instructions to protect from wind and other damage during digging, handling, and transportation.

E. Deliver bare-root stock plants freshly dug with root system packed in wet straw, hay, or similar material.

F. Deliver branched plants with branches tied and exposed branches covered with material that allows air circulation. Prevent damage to branches, trunks, root systems, and root balls and desiccation of leaves.

G. Use of equipment such as "tree spades" is permitted provided plant balls are sized according to ANSI Z60.1 and tops are protected from damage.

1.9 STORAGE AND HANDLING

A. Store bulbs, corms, and tubers in dry location at 16 to 18 degrees C (60 to 65 degrees F) until planting.

B. Store seeds and other packaged materials in dry locations away from contaminants.

C. Plant Storage and Protection: Store and protect plants not planted on day of arrival at Project site as follows:

1. Shade and protect plants in outdoor storage areas from wind and direct sunlight until planted.
2. Heel-in bare root plants.
3. Protect balled and burlapped plants from freezing or drying out by covering balls or roots with moist burlap, sawdust, wood chips, shredded bark, peat moss, or other approved material. Provide covering that allows air circulation.
4. Keep plants in moist condition until planted by watering with fine mist spray.
5. Do not store plant materials directly on concrete or bituminous surfaces.

D. Topsoil: Before stockpiling topsoil, eradicate on site undesirable growing vegetation. Clear and grub existing vegetation three to four weeks before stockpiling existing topsoil.

E. Root Control Barrier and Weed Control Fabric: Store materials in site in enclosures or under protective covering in dry location out of direct sunlight. Do not store materials directly on ground.

F. Handling: Do not drop or dump plants from vehicles. Avoid damaging plants being moved from nursery or storage area to planting site. Handle // boxed // balled and burlapped // bare root // balled and potted // container // plants carefully to avoid damaging or breaking earth ball or root structure. Do not handle plants by trunk or stem. // Puddle bare-root plants after removal from heeling-in bed to protect roots from drying out. // Remove damaged plants from Project site.

1.10 FIELD CONDITIONS

A. Environment:

1. Coordinate installation of planting materials during optimal planting seasons for each type of plant material required.
2. Restrictions: Do not plant when ground is frozen, muddy, or when air temperature exceed 32 degrees C (90 degrees F).

B. Weather Limitations: Install plantings only during current and forecasted weather conditions that comply with plant requirements. Apply associated products in compliance with manufacturers' instructions.

1.11 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant plantings and against material defects.

1. Warranty Period: Two years.
2. Plant and Turf Warranty Periods will begin from date of Government acceptance of project or phase for beneficial use and occupancy.
3. Contracting Officer's Representative will reinspect plants and turf at end of Warranty Period. Replace any dead, missing, or defective plant material and turf immediately. Warranty Period will end on date of this inspection provided Contractor has complied with warranty work required by this specification. Comply with following requirements:
   a. Replace any plants more than 25 percent dead, missing or defective plant material before final inspection.
   b. Only one replacement of each plant will be required except when losses or replacements are due to failure to comply with these requirements.
   c. Complete remedial measures directed by Contracting Officer’s Representative to ensure plant and turf survival.
   d. Repair damage caused while making plant or turf replacements.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Provide each product from one source or manufacturer.

B. Sustainable Construction Requirements:

1. Select products with recycled content to achieve overall Project recycled content requirement.
   a. Fertilizer.
   b. Weed control fabric.
   c. Root control barrier.
2. Steel Recycled Content: 30 percent total recycled content, minimum.

3. Aluminum Recycled Content: // 80 // 50 // percent total recycled content, minimum.
4. Biobased Content:
   a. Organic Mulch: 100 percent.
   b. Peat: 100 percent.

2.2 PLANT MATERIALS

A. Plant Materials: ANSI Z60.1, conforming to varieties specified and be true to scientific name as listed in Hortus Third. Well-branched, well-formed, sound, vigorous, healthy planting stock free from disease, sunscald, windburn, abrasion, and harmful insects or insect eggs and having healthy, normal, and undamaged root system.

1. Trees-Deciduous and Evergreen: Single trunked with single leader, unless otherwise indicated; symmetrically developed deciduous trees and shrubs of uniform habit of growth; straight boles or stems; free from objectionable disfigurements; evergreen trees and shrubs with well-developed symmetrical tops, with typical spread of branches for each particular species or variety. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed between two branches or between branch and trunk; crossing trunks; cut-off limbs more than 19 mm (3/4 inch) in diameter; or with stem girdling roots will be rejected.
2. Ground Cover and Vine Plants: Provide number and length of runners for size specified on drawings, together with proper age for grade of plants specified. Provide vines and ground cover plants well established in removable containers, integral containers, or formed homogeneous soil sections. Provide plants grown under climatic conditions similar to those in locality of project. Spray all plants budding into leaf or having soft growth with an anti-desiccant at nursery before digging.
3. Provide plants of sizes indicated, measured before pruning with branches in normal position. Plants larger in size than specified is acceptable with approval of Contracting Officer’s Representative, with no change in contract price. When larger plants are used, increase ball of earth or spread of roots according to ANSI Z60.1.
4. Provide nursery grown plant material conforming to requirements and recommendations of ANSI Z60.1. Dig and prepare plants for shipment

in manner that will not cause damage to branches, shape, and future development after planting.

5. Balled and burlapped (B&B) plant ball sizes and ratios will conform to ANSI Z60.1, consisting of firm, natural balls of soil wrapped firmly with burlap or strong cloth and tied.
6. Bare root (BR) plants to have root system substantially intact, but with earth carefully removed. Cover roots with thick coating of mud by "puddling" after plants are dug.
7. Container grown plants to have sufficient root growth to hold earth intact when removed from containers, but not be root bound.
8. Make substitutions only when plant (or alternates as specified) is not obtainable and Contracting Officer's Representative authorizes change order providing for use of nearest equivalent obtainable size or variety of plant with same essential characteristics and an equitable adjustment of contract price.
9. Existing plants to be relocated: Ball sizes to conform to requirements for collected plants in ANSI Z60.1, and plants dug, handled, and replanted according to applicable articles of this Section.
10. Only plants grown in nursery are permitted.

B. Label plants with durable, waterproof labels in weather-resistant ink. Provide labels stating correct botanical and common plant name and variety and size as specified in list of required plants. Groups of plants may be labels by tagging one plant. Labels to be legible for minimum 60 days after delivery to planting site.

2.3 SOD

A. Sod: Nursery grown, certified and classified in TPI's "Guideline Specifications to Turfgrass Sodding" as GSS. Machine cut sod at uniform thickness of 19 mm (3/4 inch) within tolerance of 6 mm (1/4 inch), excluding top growth and thatch. Each individual sod piece to be strong enough to support its own weight when lifted by ends. Broken pads, irregularly shaped pieces, and torn or uneven ends will not be permitted.

B. Sod Species: Genetically pure, free of weeds, pests, and disease.
   1. Full Sun: // Insert species //, minimum of 3 cultivars.
   2. Sun and Partial Shade: Proportion grass species as follows:
      a. // 50 // Insert number // percent // Insert species //.

b. // 30 // Insert number // percent // Insert species //.
c. // 10 // Insert number // percent // Insert species //.
d. // 10 // Insert number // percent // Insert species //.

3. Shade: Proportion grass species as follows:
a. // 50 // Insert number // percent // Insert species //.
b. // 35 // Insert number // percent // Insert species //.
c. // 15 // Insert number // percent // Insert species //.

2.4 SEED

A. Grass Seed: State-approved seed of latest season's crop delivered in original sealed packages, bearing producer's guaranteed analysis for percentages of mixtures, purity, germination, weed seed content, and inert material. Label in conformance with AMS Seed Act and applicable state seed laws. Wet, moldy, or otherwise damaged seed will not be acceptable. Field mixes will be acceptable when field mix is performed on site in presence of Contracting Officer's Representative.

B. Seed Mixtures: Proportion seed mixtures by weight.

1. February 1st – August 30th: Proportioned grass species as follows:
a. 50 percent Hulled Bermuda.
b. 50 percent Pensacola Bahia.

2. September 1st – January 31st: Proportioned grass species as follows:
a. 75 percent Alta or Kentucky 31 Fescue.
b. 25 percent Dixie Crimson Clover.

2.5 TURF SELECTIONS

A. Grasses for Cool Regions:

1. Bentgrasses: Redtop (Agrostis alba) and Colonial (Agrostis tenuis).
2. Bluegrasses: Kentucky (Popratensis), Rough-stalked (Potrivialis) and Canada(Poa compressa).
3. Fescue: Red (Festucrubra), Meadow (Festucpratensis) and Tall (Festucarundinacea).
4. Ryegrasses: Perennial (Lolium perenne).

B. Grasses for Warm Regions:

1. Bermuda grass (Cynodon dactylon).
2. Carpetgrass (Axonopus affinis).
3. Centipedegrass (Eremochloophiuroides).
4. St. Augustinegrass (Stenotaphrum secundatum).
5. Zoysiagrass (Zoysimatrella).

2.6 SPRIGS

A. Sod Sprigs: Healthy living stems, stolons, or rhizomes and attached roots of locally adapted grass without adhering soil, including two to three nodes and from 100 to 150 mm (4 to 6 inches) long. Obtain from heavy, dense certified sod classified as TPI GSS. // Obtain sprigs from designated area on project site. // Provide sprigs grown under climatic conditions similar to those of project site. Coordinate harvesting and planting to prevent sun exposure for more than 30 minutes before covering and moistening. Sprigs containing weeds or other detrimental material or that are heat damaged will be rejected.

2.7 PLUGS

A. Plugs: Nursery grown sod, certified and classified in TPI's "Guideline Specifications to Turfgrass Sodding" as GSS.

B. Square or round sections with deep, mature root system.

1. Species to match adjacent sod.
2. Plug Size: // 50 mm (2 inches) // 75 mm (3 inches) // 100 mm (4 inches) // by 50 mm (2 inches).

2.8 PLANTING SOILS

A. Planting Soil: Evaluate soil for use as topsoil according to ASTM D5268. From 5 to 10 percent organic matter as determined by topsoil composition tests of Organic Carbon, 6A, Chemical Analysis Method described in USDA DOA SSIR 42. Maximum particle size, 19 mm (3/4 inch), with maximum 3 percent retained on 6 mm (1/4 inch) screen. Mix topsoil with following soil amendments // and fertilizers // as recommended by soils analysis.

B. Existing Planting Soil: Existing, native surface topsoil formed under natural conditions retained during excavation process // and stockpiled on-site //. Verify suitability of native surface topsoil to produce viable planting soil. Clean soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.

1. Supplement with // another specified // planting soil when quantities are insufficient.
2. Mix existing, native surface topsoil with soil amendments // and fertilizers // as recommended by soils analysis.

C. Imported Planting Soil: Imported topsoil or manufactured topsoil from off-site sources are acceptable if sufficient topsoil is not available

on site to meet specified depth. At least 10 days before topsoil delivery, notify Contracting Officer's Representative of topsoil sources. Obtain imported topsoil displaced from naturally well-drained construction or mining sites where topsoil is at least 100 mm (4 inches) deep. Topsoil from // agricultural land, // bogs, or marshes will be rejected.

2.9 INORGANIC SOIL AMENDMENTS

A. Lime: Commercial grade // hydrated // or // burnt // limestone containing calcium carbonate equivalent (CCE) specified in ASTM C602 of minimum 80 percent.

B. Sulfur: 100 percent elemental.

C. Iron Sulfate: 100 percent elemental.

D. Aluminum Sulfate: Commercial grade.

E. Perlite: Horticultural grade.

F. Agricultural Gypsum: Coarsely ground from recycled scrap gypsum board comprised of calcium sulfate dehydrate 91 percent, calcium 22 percent, sulfur 17 percent, minimum 96 percent passing through 850 micrometers 20 mesh screen, 100 percent passing through 970 micrometers 16 mesh screen.

G. Coarse Sand: ASTM C33/C33M, clean and free of materials harmful to plants.

H. Vermiculite: Horticultural grade for planters.

I. Diatomaceous Earth: Calcined, 90 percent silica, with approximately 140 percent water absorption capacity by weight.

J. Zeolites: Mineral clinoptilolite with at least 60 percent water absorption by weight.

2.10 ORGANIC SOIL AMENDMENTS

A. Organic Matter: Commercially prepared compost. Free of substances toxic to plantings and as follows:

1. Organic Matter Content: // Wood cellulose fiber // wood chips // ground or shredded bark // shredded hardwood // bark peelings // pine straw mulch // pine needles // from project site when available. Biobased content 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting factors, dyed with non-toxic, biodegradable dye to appropriate color to facilitate visual metering of materials application.

2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.

B. Peat: Natural product of // sphagnum moss peat // peat moss // hypnum moss // peat reed sedge peat // peat humus // derived from fresh-water site, conforming to // ASTM D4427 // ASTM D5539 // and containing no invasive species, including seeds. Shred and granulate peat to pass 12.5 mm (1/2 inch) mesh screen and condition in storage pile for minimum 6 months after excavation. Biobased content minimum 100 percent.

C. Composted Derivatives: Ground bark, nitolized sawdust, humus, or other green wood waste material free of stones, sticks, invasive species, including seeds, and soil stabilized with nitrogen and having following properties:

1. Particle Size: Minimum percent by weight passing:
   a. 4.75 mm (No. 4) mesh screen: 95.
   b. 2.36 mm (No. 8) mesh screen: 80.
2. Nitrogen Content: Minimum percent based on dry weight:
   a. Fir sawdust: 0.7.
   b. Fir or pine bark: 1.0.
3. Biobased Content: 100 percent.

D. Manure: Well-rotted, horse or cattle manure containing maximum 25 percent by volume of straw, sawdust, or other bedding materials; free of seeds, stones, sticks, soil, and other invasive species.

2.11 PLANT FERTILIZERS

A. Soil Test: Evaluate existing soil conditions and requirements before fertilizer selection and application to minimize use of all fertilizers and chemical products. Obtain approval of Contracting Officer’s Representative for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable weather and site conditions according to manufacturer's instructions and warranty requirements. Fertilizers to be registered and approved by EPA, acceptable to authorities having jurisdiction, and of type recommended by manufacturer applicable to specific areas as required for Project conditions and application. Provide commercial grade plant

and turf fertilizers, free flowing, uniform in composition and conforms to applicable state and federal regulations.

B. Fertilizer for groundcover, wildflowers, and grasses is not acceptable. Provide fertilizer for trees, plants, and shrubs as recommended by plant supplier, except synthetic chemical fertilizers are not acceptable. Fertilizers containing petrochemical additives or that have been treated with pesticides or herbicides are not acceptable.

C. Granular Fertilizer: Organic, granular controlled release fertilizer containing minimum percentages, by weight, of plant food nutrients.

1. Composition: Nitrogen, phosphorous, potassium, sulfur, and iron in amounts recommended in soil reports from qualified soil-testing laboratory.

D. Fertilizer Tablets: Organic plant tablets composed of tightly compressed fertilizer chips, insoluble in water, to provide continuous release of nutrients for minimum 24 months and containing following minimum percentages, by weight, of plant food nutrients:

1. Nutrient Composition: 20 percent available nitrogen, 20 percent available phosphorous, and 5 percent available potassium.

2.12 WEED CONTROL FABRIC

A. Roll Type Polypropylene or Polyester Mats: Woven, needle punched, or non-woven fabric treated for protection against deterioration due to ultraviolet radiation. Minimum 99 percent opaque to prevent photosynthesis and seed germination, fabric allows air, water, and nutrients to pass through to plant roots.

1. Minimum weight: 0.11 kg per square meter (5 ounces per square yard).
2. Minimum thickness: 0.50 mm (20 mils).

2.13 MULCH

A. Organic Mulch:

1. // Wood cellulose fiber // wood chops // ground or shredded bark // shredded hardwood // bark peelings // pine straw mulch // pine needles // for project site when available. Biobased content minimum 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting factors, dyed with non-toxic, biodegradable dye to an appropriate color to facilitate visual metering of application.

a. Straw for Lawn Seed Bed Mulch: Stalks from oats, wheat, rye, barley, or rice free of noxious weeds, mold or other objectionable material. Air dried and suitable for placing with blower equipment.

b. Wood cellulose fiber for hydraulic application of grass seed and fertilizer: Specially prepared wood cellulose fiber, processed to contain no growth or germination inhibiting factors, and dyed an appropriate color to facilitate visual metering of application of materials. Maximum 12 percent moisture dry weight, plus or minus 3 percent at time of manufacture. pH range from 3.5 to 5.0. Manufacturer wood cellulose fiber for application as follows:

1) After addition and agitation in slurry tanks with fertilizers, grass seeds, water, and other approved additives, fibers will become uniformly suspended to form a homogeneous slurry.

2) When hydraulically sprayed, material will form blotter-like cover impregnated uniformly with grass seed.

3) Cover will allow absorption of moisture and allow rainfall or applied water to percolate to underlying soil.

2. Color: Natural.

B. Compost Mulch: Decomposed organic matter with low carbon to nitrogen ratio.

C. Mineral Mulch: Coarse, clean stone of following type, size, and color:

1. Type: // Decomposed granite // crushed volcanic rock // pea gravel //.

2. Size: ASTM C136/C136M, 65 mm (2-1/2 inches) maximum and 25 mm (1 inch) minimum.

3. Color: Acceptable to Contracting Officer’s Representative.

2.14 EDGING

A. Steel Edging: Commercial-grade steel product with rolled edge, in standard lengths, with steel loops for installation with stakes.

1. Edging Size: // 4.8 mm (3/16 inch) wide by 100 mm (4 inches) deep // 6.4 mm (1/4 inch) wide by 125 mm (5 inches) deep // 6.4 mm (1/4 inch) wide by 100 mm (4 inches) deep // 3.2 mm (1/8 inch) wide by 100 mm (4 inches) deep // 3.2 mm (1/8 inch) wide by 150 mm (6 inches) deep // 25 mm (1 inch) wide by 100 mm (4 inches) deep //.

2. Stakes: Steel to match edging, tapered, minimum // 300 mm (12 inches) // 380 mm (15 inches) // long.
3. Accessories: End pieces, end stakes, corner stakes, and splicing stakes.
4. Finish: // Painted // Galvanized // Unpainted //.
5. Paint Color: // Green // Brown // Black //.

B. Aluminum Edging: ASTM B221M (ASTM B221), manufactured from extruded aluminum alloy 6063-T6, in interlocking sections with punch-outs fabricated in each section for installation with stakes.
1. Edging Size: // 4.8 mm (3/16 inch) wide by 140 mm (5-1/2 inches) deep // 4.8 mm (3/16 inch) wide by 100 mm (4 inches) deep // 3.2 mm (1/8 inch) wide by 140 mm (5-1/2 inches) deep // 3.2 mm (1/8 inch) wide by 100 mm (4 inches) deep //.
2. Stakes: Aluminum to match edging, minimum 300 mm (12 inches) long by 38 mm (1-1/2 inches) wide.
3. Finish: // Paint // Mill (natural aluminum) // Black anodized //.
4. Paint Color: // Green // Brown // Bronze // Black //.

C. Natural Cut Edging: Edge plant beds with an excavated 'V' cut to provide clear division between plant bed and adjacent turf. Artificial or manufactured products to form plant bed edges will not be permitted.

2.15 ANTIDESICCANT

A. Antidesiccant: An emulsion specifically manufactured for agricultural use that will provide protective film over plant surfaces permeable enough to permit transpiration.

2.16 EROSION CONTROL

A. Erosion Control Blankets: // 100 percent agricultural straw // 70 percent agricultural straw and 30 percent coconut fiber matrix // stitched with degradable nettings, designed to degrade within // 12 months // 18 months //.

B. Erosion Control Fabric: Knitted construction of polypropylene yarn with uniform mesh openings 19 to 25 mm (3/4 to 1 inch) square with strips of biodegradable paper. Minimum filler paper strip life of six months.

C. Erosion Control Net: Heavy, twisted jute mesh weighing approximately 605 grams per meter (1.22 pounds per linear yard) and 1200 mm (4 feet) wide with mesh openings approximately 25 mm (1 inch) square.

D. Erosion Control Material Anchors: As recommended by erosion control material manufacturer.

2.17 ROOT CONTROL BARRIER

A. Root Control Barrier: Flexible and permeable geotextile fabric with permanently attached time-release nodules. Pre-formed // round, tapered cylinder // linear // barrier with integral vertical root deflecting ribs constructed of ultraviolet resistant polypropylene material.

2.18 BIOSTIMULANTS

A. Biostimulants: Formulation containing soil conditioners, VAM fungi, and endomycorrhizal and ectomycorrhizal fungi spores and soil bacteria appropriate for existing soil conditions.

2.19 STAKING AND GUYING MATERIALS

A. Staking Material:
   1. Tree Support Stakes: Rough sawn hardwood free of knots, rot, cross grain, bark, long slivers, or other defects that impair strength. Minimum // 50 mm (2 inches) square // 64 mm (2-1/2 inches) diameter // by 2.4 m (8 feet) long, pointed at one end.
   2. Ground Stakes: 50 mm (2 inches) square by 0.91 m (3 feet) long wood or plastic, pointed at one end.

B. Guying Material:
   1. Guying Wire: ASTM A580/A580M, galvanized steel wire.
   2. Guying Cable: Minimum five-strand, 5 mm (3/16 inch) galvanized steel cable.

C. Hose Chafing Guards: New or used 2 ply 19 mm (3/4 inch) reinforced rubber or plastic hose, black or dark green, all of same color.

D. Flags: White surveyor's plastic tape 150 mm (6 inches) long, fastened to guying wires or cables.

E. Turnbuckles: Galvanized or cadmium-plated steel with minimum 75 mm (3 inch) long openings fitted with screw eyes and galvanized or cadmium-plated steel eye bolts with 25 mm (1 inch) diameter eyes and 38 mm (1-1/2 inches) minimum screw length.

2.20 TREE WRAP

A. Crinkled Paper Tree Wrap: Two thicknesses of crinkled paper cemented together with layer of bituminous material. Minimum 100 mm (4 inches) wide with stretch factor of 33 1/3 percent. Tie with lightly tarred medium or coarse sisal yarn twine.

B. Tree Shelters: Extruded, translucent, twin walled polypropylene protection board sheets,3 mm (1/8 inch) thick, 1800 mm (6 feet) long, utilized for short trunk trees 75 mm (3 inch) caliper or less.

C. Synthetic Fabric Tree Wrap: White, breathable polypropylene fabric in 75 mm (3 inch) wide rolls.

D. Tape: Bio-degradable tape suitable for nursery use to secure tree wrap which degrades in sunlight maximum 2 years after installation.

2.21 TACKIFIERS AND ADHESIVES

A. Nonasphalt Tackifier: Colloidal liquid fixative recommended by fiber mulch manufacturer for hydroseeding.

B. Asphalt emulsion: ASTM D977, Grade SS-1.

2.22 WATER

A. Water: Source approved by Contracting Officer's Representative and suitable quality for irrigation, containing no elements toxic to plant life, including acids, alkalis, salts, chemical pollutants, and organic matter. Use collected storm water or graywater when available.

2.23 PESTICIDES

A. Consider IPM (Integrated Pest Management) practices to minimize use of all pesticides and chemical products. Obtain Contracting Officer's Representative's approval for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable weather and site conditions according to manufacturer's instructions and warranty requirements.

2.24 FINISHES

A. Steel Paint Finish:

1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of following:
   a. One coat primer.
   b. One coat thermosetting topcoat.
   c. Dry-film Thickness: 0.05 mm (2 mils) minimum.
   d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

B. Aluminum Anodized Finish: NAAMM AMP 500.

1. Color Anodized Finish: AA-C22A32 or AA-C22A34; Class II Architectural, 0.01 mm (0.4 mil) thick.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas to receive plants for compliance with requirements and conditions affecting installation and performance.
   1. Verify that no materials that would inhibit plant growth are present in planting area. If such materials are present, remove soil and contaminants ad directed by Contracting Officer's Representative and provide new planting soil.
   2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
   3. Suspend soil spreading, grading, and tilling operations if soil moisture becomes excessive. Resume soil preparations when moisture content returns to acceptable level.
   4. If soil is excessively dry, not workable, and too dusty, moisten uniformly.
   5. Special conditions may exist that warrant variance in specified planting dates or conditions. Submit written request to Contracting Officer’s Representative stating special conditions and proposed variance.

B. Proceed with planting operations only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Protect existing and proposed landscape features, elements, and site construction and completed work from damage. Protect trees, vegetation, and other designated features by erecting high-visibility, reusable construction fencing. Locate fence no closer to trees than drip line. Plan equipment and vehicle access to minimize and confine soil disturbance and compaction to areas indicated on drawings.

B. Install erosion control materials at all areas inside or outside limits of construction that are disturbed by planting operations. Provide erosion control and seeding with native plant species to protect slopes.

C. Stake out approved plant material locations and planter bed outlines on project site before digging plant pits or beds. Contracting Officer’s Representative reserves right to adjust plant material locations to meet field conditions. Do not plant closer than // 300 // 600 //

900 // mm (// 12 // 24 // 36 // inches) to // building wall // pavement edge // fence or wall edge // and // other similar structures //. Provide on-site locations for excavated rock, soil, and vegetation.

3.3 PLANT BED PREPARATION

A. Verify location of underground utilities before excavation. Protect existing adjacent turf before excavations are made. Do not disturb topsoil and vegetation in areas outside those indicated on Drawings. Where planting beds occur in existing turf areas, remove turf to depth that will ensure removal of entire roof system. Measure depth of plant pits from finished grade. Provide depth of plant pit excavation and relation of top of root ball and finish grade as indicated on drawings. Install plant materials as specified in Article 3.8. Do not plant trees within 3 m (10 feet) of any utility lines or building walls.

B. For newly graded subgrades, loosen subgrade to minimum // 100 mm (4 inches) // 150 mm (6 inches) // 200 mm (8 inches) // deep. Remove stones larger than // 25 mm (1 inch) // 38 mm (1-1/2 inches) // 50 mm (2 inches) // in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Government's property.

1. Apply // fertilizer // lime // and soil amendments // directly to subgrade before loosening, at rates recommended by soils analysis.
2. Spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly blend planting soil.
3. Spread planting soil // 100 mm (4 inches) // 150 mm (6 inches) // 200 mm (8 inches) // deep but minimum required to meet finish grades after light rolling and natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
   a. Spread approximately 1/2 thickness of planting soil over loosened subgrade. Mix thoroughly into top // 50 mm (2 inches) // 100 mm (4 inches) // of subgrade. Spread remainder of planting soil.
   b. Reduce elevation of planting soil to allow for soil thickness of sod.

C. Finish grade planting areas to smooth, uniform surface plane with loose, uniformly fine texture. Grade to within plus or minus 13 mm (1/2 inch) of finish elevation. Roll and rake, remove ridges, and fill

depressions to meet finish grades. Limit finish grading to areas that can be planted in immediate future.

3.4 GROUND COVER AND PLANT INSTALLATION

A. Place ground cover and plants, not including trees, shrubs, and vines, // 225 mm (9 inches) apart // 300 mm (12 inches) apart // 450 mm (18 inches) apart // 600 mm (24 inches) apart // as indicated on drawings // in even rows and with triangular spacing.

B. Use prepared soil mixture for backfill.

C. Place so roots are in natural position.

D. Do not remove plants from flats or containers until immediately before planting. Plat at depth to sufficiently cover all roots. Start watering areas planted as required by temperature and wind conditions. Water plants at sufficient rate to ensure thorough wetting of soil to 150 mm (6 inches) deep without runoff or puddling. Smooth planting areas after planting to provide even, smooth finish.

E. Plant ground cover in areas to receive erosion control materials through material after erosion control materials are in place.

3.5 TREE, SHRUB, AND VINE PLANTING

A. Move plant materials only by supporting // root ball // container //. Set plants on hand compacted layer of prepared backfill soil mixture 150 mm (6 inches) thick and hold plumb in center of pit until soil has been tamped firmly around root ball.

B. Set plant materials in relation to surrounding finish grade 25 to 50 mm (1 to 2 inches) above depth at which they were grown in nursery, collecting field, or container. Replace plant material whose root balls are cracked or damaged either before or during planting process.

C. Place backfill soil mixture on previously scarified subsoil to completely surround root balls and bring to smooth and even surface, blending into existing areas.

D. Balled and Burlapped Stock: Backfill with // prepared soil mixture // topsoil // to approximately half ball depth then tamp and water. Carefully remove or fold back excess burlap and tying materials from top to minimum 1/3 depth from top of root ball. Tamp and complete backfill, place mulch topdressing, and water. Remove wires and non-biodegradable materials from plant pit before backfilling.

3.6 MECHANIZED TREE SPADE PLANTING

A. At designated locations and with approved equipment, trees may be planted by mechanized tree spade. Tree spade is not acceptable for moving trees that are larger than maximum size of similar field-grown, balled-and-burlapped root-ball diameter recommended by ANSI Z60.1, or that are larger than manufacturer's recommended maximum size for tree spade to be used, whichever is smaller.

B. For tree extraction, center trunk in tree spade and move tree and solid root ball.

C. Cut any exposed roots with sharp instruments.

D. Excavate planting hole with same tree spade used to extract and move tree.

E. If possible, place trees with same orientation as at location from which they were extracted.

3.7 TREE WRAP

A. Wrap deciduous tree trunks immediately after planting. Wrap tree trunks 40 mm (1-1/2 inches) or greater in caliper with specified material beginning at base and extending to lowest branches. Remove tree wrap after one year. Securely tie crinkled paper wrap with twine at top and bottom and at maximum 450 mm (18 inch) intervals.

3.8 TREE AND SHRUB PRUNING

A. Pruning: Performed by trained and experience personnel according to TCIA A300P1.

B. Remove dead and broken branches. Prune only to correct structural defects.

C. Retain typical growth shape of individual plants with as much height and spread as practical. Do not central leader on trees. Make cuts with sharp instruments. Do not flush cut with trunk or adjacent branches. Collars to remain in place.

D. Do not apply tree wound dressing to cuts.

3.9 STAKING AND GUYING

A. Staking: Stake plants with number of stakes indicated on drawings with double strand of guy wire. Attach guy wire at half tree trunk height but maximum 1.5 m (5 feet) high. Drive stakes to depth of 0.80 to 0.91 m (2-1/2 to 3 feet) into the ground outside plant pit. Do not

injure root ball. Install hose chafer guards where wire is in contact with tree trunk.

B. Guying: Guy plants as indicated on drawings. Attach // two strands of guy wire // guying cable // around tree trunk at 0.785 rad (45 degrees) at half tree trunk height. Install hose chafer guards where // wire // cable // is in contact with tree trunk. Anchor guys to ground stakes. Fasten flags to each guying // wire // cable // at 2/3 of the distance above ground level. // Provide turnbuckles as indicated on drawings. //

3.10 ROOT CONTROL BARRIER INSTALLATION

A. At trees planted within // 1500 mm (60 inches) // 1200 mm (48 inches) // of paving, walls, curbs, and walkways, install root control barrier, unless otherwise shown on Drawings.

B. Install geotextile fabric in soil for // vertical // horizontal // and // surrounding // application with appropriate holding device to ensure fabric position. For vertical and horizontal application, provide minimum 50 mm (2 inch) soil cover over top // surface // edge //. Extend fabric minimum 450 mm (18 inches) beyond structure area to be protected to prevent root growth around fabric edges.

C. Install // cylindrical // linear // polypropylene barrier minimum 25 mm (1 inch) above finished grade to prevent root growth over barrier. Backfill outside barrier with 19 to 25 mm (3/4 to 1 inch) of gravel for minimum 50 mm (2 inches). For linear application, use device recommended by barrier manufacturer to connect two pieces.

3.11 MULCH INSTALLATION

A. Provide specified mulch over entire planting bed surfaces and individual plant surfaces, including earth mount watering basin around plants, to 75 mm (3 inches) depth after plant installation and before watering. Do not place mulch in crowns of shrubs. Place mulch minimum 50 to 75 mm (2 to 3 inches) away from tree or shrub trunks. Place mulch on all weed control fabric.

3.12 EDGING INSTALLATION

A. Uniformly edge beds of plants to provide clear cut division line between planted area and adjacent lawn. Construct bed shapes as indicated on drawings.

B. Metal Edging: Install // steel // aluminum // edging material according to manufacturer's instructions. // Install edging material in perfect

1.22 m (4 foot) diameter circle inside 1.37 m (4-1/2 foot) watering basin, around specimen trees and shrubs not planted in close group. // Install edging with minimum 25 mm (1 inch) visible above ground level.

C. Natural Cut Edging: Provide uniform 'V' cut with one vertical side adjacent to turf areas 125 mm (5 inches) deep and second side angled 250 mm (10 inches) toward center of plant bed for clear cut division line between plant bed and adjacent lawn.

3.13 SODDING

A. Place sod maximum 36 hours after initial harvesting according to TPI GSS, except as modified herein.

B. For slopes 2 to 1 and greater, lay sod with long edge perpendicular to contour. For V-ditches and flat bottomed ditches, lay sod with long edge perpendicular to water flow. // Anchor each piece of sod with wood pegs or wire staples maximum 600 mm (24 inches) on center. // On sloped areas, start sodding at bottom of slope.

C. Finishing: After sodding, blend edges of sodded area smoothly into surrounding area. Eliminate air pockets and provide true and even surface. Trim frayed areas and patch holes and missing areas with sod.

D. Rolling: Immediately after sodding, firm entire area, except slopes in excess of 3: 1, with roller maximum 134 kg (90 lbs.) for each foot of roller width.

E. Watering: Start watering sodded areas as required by daily temperature and wind conditions. Water at rate sufficient to ensure thorough wetting of soil to minimum 150 mm (6 inches) deep. Prevent run-off, puddling, and wilting. Do not drive watering trucks over turf areas, unless otherwise directed. Prevent watering of other adjacent areas or plant materials.

3.14 SPRIGGING

A. Plant sod sprigs after finish grade is properly prepared and thoroughly soaked day in advance. Plant sprigs in rows spaced maximum 300 mm (12 inches) apart with springs placed in rows at maximum 150 mm (6 inches) apart. Firm entire area with roller not exceeding 130 kg/m (90 lb./ft.)of roller width. Do not roll slopes over maximum 3: 1. Water thoroughly and keep soil moist. Weed by hand or hoe. Do not treat sprig area with herbicide.

3.15 PLUGGING

A. Plant fresh sod plugs after finish grade is properly prepared. Plant plugs in rows, spaced // 300 mm (12 inches) // 450 mm (18 inches) // apart in both directions. On slopes, contour rows to near level. Water thoroughly and keep soil moist. Weed by hand or hoe. Do not treat plug area with herbicide.

3.16 SEEDING

A. Broadcast and Drop Seeding: Uniformly broadcast seed at rate of // _____ // kilograms per hectare (// _____ // pounds per 1000 square feet). Use broadcast or drop seeders. Sow one-half seed in one direction and sow remainder at right angles to first sowing. Cover seed uniformly to maximum 6 mm (1/4 inch) deep in clay soils and 13 mm (1/2 inch) deep in sandy soils by means of spike-tooth harrow, cultipacker, raking, or other approved device.

B. Drill Seeding: Drill seed at rate of // _____ // kilograms per hectare (// _____ // pounds per 1000 sq. ft.). Use // cultipacker // grass seed drills //. Drill seed uniformly to 13 mm (1/2 inch) deep.

C. Rolling: Immediately after seeding, firm entire area, except for slopes in excess of 3 to 1, with roller not exceeding 130 kg/m (90 lb./ft.) of roller width. // Eliminate rolling if seeding is done with cultipacker type seeder. //

3.17 HYDROSEEDING

A. Mix water with wood cellulose fiber, paper fiber, or recycled paper at rate of 11.2 kg per 100 square meters (1,000 lb. per acre) dry weight. Add seed and fertilizer to fiber and water and mix to produce homogeneous slurry.

1. Broadcast seed mixture at rate of 34 kilograms per hectare (0.7 pounds per 1000 square feet).
2. Hydraulically spray slurry to form uniformly impregnated grass seed cover. Spread with one application with no second application of mulch.

3.18 TURF RENOVATION

A. General: Restore to original condition existing turf areas damaged during turf installation and construction operations. Keep at least one paved pedestrian access route and one paved vehicular access route to

each building clean at all times. Clean other paving when work in adjacent areas is complete.

B. Aeration: Eradicate weeds and, with Contracting Officer's Representative's approval to proceed, aerate turf areas with approved device. Core, by pulling soil plugs to minimum // _____ // mm (// _____ // inches) deep. // Leave all soil plugs that are produced, in turf area. // // After aeration operations are complete, topdress entire area // 6.35 mm (1/4 inch) // 12.7 mm (1/2 inch) // deep. Blend all parts of topdressing mixture to uniform consistency. // Clean all soil plugs off of other paving when work is complete.

C. Vertical Mowing: At completion of aerating and, with Contracting Officer's Representative's approval to proceed, vertical mow turf areas indicated on drawings with approved device to // 6 mm (1/4 inch) // 13 mm (1/2 inch) // deep above existing soil level to reduce thatch build-up, grain, and surface compaction. Remove all debris generated during this operation off site.

D. Dethatching: At completion of aerating and, with Contracting Officer's Representative's approval to proceed, dethatch turf areas indicated on drawings with approved device to // 6 mm (1/4 inch) // 13 mm (1/2 inch) // deep below existing soil level to reduce thatch build-up, grain, and surface compaction. Remove all debris generated during this operation off site.

E. Overseeding: Apply seed according to applicable portions of "Seed Application Method" at rates specified in "Seed Composition."

3.19 PLANT MAINTENANCE

A. Frequency: Begin maintenance immediately after plants have been installed. Inspect plants at least once week and perform required maintenance promptly.

B. Promotion of Plant Growth and Vigor: Water, prune, fertilize, mulch, eradicate weeds, and perform other operations necessary to promote plant growth and vigor.

C. Planter Beds: Weed, fertilize, and irrigate planter beds and keep pest free, pruned, and mulch levels maintained. Do not permit planter beds encroach into turf areas. Maintain edging breaks between turf areas and planter beds. Fertilize plant materials to promote healthy growth without encouraging excessive top foliar growth. Remove noxious weeds common to area from planter beds by mechanical means.

D. Shrubs: In addition to planter bed maintenance requirements, selectively prune and shape shrubs for health and safety when following conditions exist:
   1. Remove growth in front of windows, over entrance ways or walks, and any growth which will obstruct vision at street intersections or of security personnel.
   2. Remove dead, damaged, or diseased branches or limbs where shrub growth obstructs pedestrian walkways, where shrub growth is growing against or over structures, and where shrub growth permits concealment of unauthorized persons.
   3. Properly dispose of all pruning debris.

E. Trees: Adjust stakes, ties, guy supports // and turnbuckles // and water, fertilize, control pests, mulch, and prune for health and safety // and provide fall leaf cleanup //.
   1. Fertilize trees to promote healthy plant growth without encouraging excessive top foliar growth. Inspect and adjust stakes, ties, guy supports // and turnbuckles // to avoid girdling and promote natural development.
   2. Selectively prune all trees within project boundaries, regardless of caliper, for safety and health reasons, including, but not limited to, removal of dead and broken branches and correction of structural defects. Prune trees according to their natural growth characteristics leaving trees well shaped and balanced.
   3. All pruning, including palm tree pruning, must be by or in presence of certified member of International Society of Arboriculture and according to TCIA Z133.1.
   4. Properly dispose of all pruning debris.

3.20 SLOPE EROSION CONTROL MAINTENANCE

A. Provide slope erosion control maintenance to prevent undermining of all slopes in // newly landscaped // and // natural growth // areas. Maintenance tasks include immediate repairs to weak spots in sloped areas // and maintaining clean, clear culverts // and graded // berms // and // terraces // to intercept and direct water flow to prevent development of large gullies and slope erosion // and securing irrigation systems during periods of extended rainfall //.
   1. Fill eroded areas with amended topsoil and replant with same plant species.

2. // Reinstall erosion control materials damaged due to slope erosion. //

3.21 REMOVAL OF DYING OR DEAD PLANTS

A. Remove dead and dying plants and provide new plants immediately upon commencement of specified planting season and replace // stakes, // guys, // mulch, and eroded earth mound water basins. No additional correction period will be required for replacement plants beyond original warranty period. Plants will be considered dead or dying as follows:
   1. Tree: Main leader died back or minimum 20 percent of crown died.
   2. Shrub and Ground Cover: Minimum 20 percent of plant died.
   3. Determination: Scrape on maximum 2 mm (1/16 inch) square branch area to determine dying plant material cause and provide recommendations for replacement.

3.22 TURF MAINTENANCE

A. Mow turf to uniform finished height measured from soil. Perform mowing in manner that prevents scalping, rutting, bruising, uneven and rough cutting. Before mowing, remove and dispose of all rubbish, debris, trash, leaves, rocks, paper, and limbs or branches on turf areas. Sweep or vacuum clean adjacent paved areas.

B. Apply fertilizer in manner that promotes health, growth, vigor, color and appearance of cultivated turf areas. Determine method of application, fertilizer type and frequencies by results of laboratory soil analysis. // Provide organic fertilizer. If organic fertilizer does not produce desired effect, contact Contracting Officer's Representative for approval before applying synthetic fertilizer. // Apply fertilizer by approved methods and according to manufacturer's instructions.

C. Watering: Perform irrigation in manner that promotes health, growth, color, and appearance of cultivated vegetation, complying with Federal, State, and local water agency and authority directives. Prevent overwatering, water run-off, erosion, and ponding due to excessive quantities or rate of application.

D. Aeration: Eradicate weeds and, with Contracting Officer's Representative's approval to proceed, aerate turf areas with approved device. Core, by pulling soil plugs to minimum // _____ // mm

(// _____ // inches) deep. // Leave all soil plugs that are produced, in turf area. // // After aeration operations are complete, topdress entire are // 6.35 mm (1/4 inch) // 12.7 mm (1/2 inch) // deep. Blend all parts of topdressing mixture to uniform consistency. // Clean all soil plugs off of other paving when work is complete.

3.23 CLEANING

A. Remove and legally dispose of all excess soil and planting debris.

3.24 PROTECTION

A. Protect plants from traffic and construction operations.

B. Provide temporary fences or enclosures and signage, at planted areas. Maintain fences and enclosures during maintenance period.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

DIVISION 33 - UTILITIES

SECTION 33 08 00

COMMISSIONING OF SITE UTILITY SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 31.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning the Facility site utilities systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 31 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 31, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility site utilities systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of Site Utility systems will require inspection of individual elements of the site utility systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule site utility systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the

type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 31 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the VA Resident Engineer after submission and approval of formal training plans. Refer to Section 01

91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 31 Sections for additional Contractor training requirements.

----- END -----

SECTION 33 10 00
WATER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and procedures for construction of underground water distribution for domestic and/or fire supply systems outside the building that are complete and ready for operation. This includes piping, structures, appurtenances and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. Concrete: Section 03 30 00, CAST IN-PLACE CONCRETE.

C. General plumbing: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

D. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

E. Metering: Section 25 10 10, ADVANCED UTILITY METERING SYSTEM.

F. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

A. Water distribution system: Pipelines and appurtenances which are part of the distribution system outside the building for potable water and fire supply.

B. Water service line: Pipeline from main line to 5 feet outside of building.

1.4 ABBREVIATIONS

A. PVC: Polyvinyl chloride plastic.

B. DI: Ductile iron pipe.

C. WOG: Water, Oil and Gas.

1.5 DELIVERY, STORAGE AND HANDLING

A. Ensure that valves are dry and internally protected against rust and corrosion. Protect valves against damage to threaded ends and flange faces.

B. Use a sling to handle valves and fire hydrants if size requires handling by crane or lift. Rig valves to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

C. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.

D. Protect stored piping from moisture and dirt by elevating above grade. Protect flanges, fittings, and specialties from moisture and dirt.

E. Store plastic piping protected from direct sunlight and support to prevent sagging and bending.

F. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.

1.6 COORDINATION

A. Coordinate water service lines with building contractor.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

B. Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least three years. Digital electronic devices, software and systems such as controls, instruments or computer work stations shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years.

C. Regulatory requirements:

1. Comply with the rules and regulations of the public utility company having jurisdiction over the connection to public

water lines and the extension and/or modifications to public utility systems.

2. Comply with the rules and regulations of the Department of Environmental Quality having jurisdiction for potable water-service.
3. Comply with rules and regulations of State and Local authorities having jurisdiction for fire-suppression water-service piping including materials, hose threads, installation and testing.

D. Provide certification of factory hydrostatic testing of not less than 500 psi (3.5 MPa) in accordance with AWWA C151. Piping materials shall bear the label, stamp or other markings of the specified testing agency.

E. Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:

1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the American Welding Society.

F. Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation.

G. Applicable codes:

1. Plumbing Systems: IPC, International Plumbing Code.
2. Electrical components, devices and accessories shall be listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction and marked for intended use.
3. Fire-service main products shall be listed in the FM Global “Approval Guide” or Underwriters Laboratories (UL) “Fire Protection Equipment Directory”.

1.8 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI):

MSS SP-60-2004 .....Connecting Flange Joint Between Tapping Sleeves and Tapping Valves

MSS SP-108-2002.....Resilient-Seated Cast Iron, Eccentric Plug Valves

MSS SP-123-1998(R2006)..Non-Ferrous Threaded and Solder-Joint Unions for Use With Copper Water Tube

C. American Society of Mechanical Engineers (ASME):

A112.1.2-2004.....Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors))

A112.6.3-2001.....Floor Drains

B16.1-2010.....Gray Iron Pipe Flanges and Flanged Fittings, Class 25, 125, 250

B16.18-2001.....Cast Copper Alloy Solder Joint Pressure Fittings

B16.22-2001.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings

B16.24-2006.....Cast Copper Alloy Pipe Flanges and Flanged Fittings; Classes 150, 300, 600, 900, 1500 and 2500

B31.....Code for Pressure Piping Standards

D. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Carbon Structural Steel

A48/A48M-08(2008).....Gray Iron Castings

A536-84(2009).....Ductile Iron Castings

A674-10.....Polyethylene Encasement for Ductile Iron Pipe for Water or Other Liquids

B61-08.....Steam or Valve Bronze Castings

B62-09.....Composition Bronze or Ounce Metal Castings

B88/B88M-09.....Seamless Copper Water Tube

C651-05.....Disinfecting Water Mains

C858-10e1.....Underground Precast Utility Structures

D1785-06.....Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120

D2239-03.....Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter

D2464-06.....Threaded Poly (Vinyl Chloride) PVC Pipe Fittings, Schedule 80

D2466-06.....Poly (Vinyl Chloride) (PVC) Pipe Fittings, Schedule 40

D2467-06.....Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80

D2609-02(2008).....Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe

D3350-10a.....Polyethylene Plastics Pipe and Fittings Materials

F714-10.....Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter

F1267-07.....Metal, Expanded, Steel

E. American Water Works Association (AWWA):

B300-10.....Hypochlorites

B301-10.....Liquid Chlorine

C104-08.....Cement–Mortar Lining for Ductile Iron Pipe and Fittings

C105/A21.5-10.....Polyethylene Encasement for Ductile Iron Pipe Systems

C110-08.....Ductile Iron and Gray-Iron Fittings

C111/A21.11-07.....Rubber-Gasket Joints for Ductile Iron Pressure Pipe and Fittings

C115/A21.11-11.....Flanged Ductile Iron Pipe with Ductile Iron or Gray-Iron Threaded Flanges

C151/A21.51-09.....Ductile Iron Pipe, Centrifugally Cast

C153/A21.53-11.....Ductile Iron Compact Fittings for Water Service

C502-05.....Dry-Barrel Fire Hydrants

C503-05.....Wet-Barrel Fire Hydrants

C504-10.....Rubber-Seated Butterfly Valves

C508-09.....Swing-Check Valves for Waterworks Service, 2-In. Through 24-In. (50-mm Through 600-mm) NPS

C509-09.....Resilient-Seated Gate Valves for Water Supply Service

C510-07.....Double Check Valve Backflow Prevention Assembly

C511-07.....Reduced-Pressure Principle Backflow Prevention Assembly

C512-07.....Air Release, Air/Vacuum and Combination Air Valves

C550-05.....Protective Interior Coatings for Valves and Hydrants

C600-10.....Installation of Ductile Iron Mains and Their Appurtenances

C605-11.....Underground Installation of Polyvinyl Chloride (PVC) Pressure Pipe and Fittings for Water

C606-11.....Grooved and Shouldered Joints

C651-05.....Disinfecting Water Mains

C700-09.....Cold-Water Meters, “Displacement Type,” Bronze Main Case

C800-05.....Underground Service Line Valves and Fittings

C900-09.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

C906-07.....Polyethylene (PE) Pressure Pipe and Fittings, 4 In. (100 mm) Through 64 In. (1,600 mm), for Water Distribution and Transmission

C907-04.....Injection-Molded PVC Pressure Fittings, 4 Inch through 12 Inch (100 mm through 300 mm), for Water Distribution

M23-2nd Ed.....PVC Pipe, Design and Installation

M44-2nd Ed.....Distribution Valves: Selection, Installation, Field Testing and Maintenance

F. National Fire Protection Association (NFPA):

NFPA 24-2010 Ed.....Installation of Private Fire Service Mains and Their Appurtenances

NFPA 1963-2009 Ed.....Fire Hose Connections

G. NSF International (NSF):

NSF/ANSI 14 (2013).....Plastics Piping System Components and Related Materials

NSF/ANSI 61-2012.....Drinking Water System Components - Health Effects

NSF/ANSI 372-2011.....Drinking Water System Components – Lead Content

H. American Welding Society (AWS):

A5.8/A5.8M-2004 .....Filler Metals for Brazing and Braze Welding

I. American Society of Safety Engineers (ASSE):

1003-2009 .....Water Pressure Reducing Valves

1015-2009.....Double Check Backflow Prevention Assemblies and Double Check Fire Protection Backflow Prevention Assemblies

1020-2004.....Pressure Vacuum Breaker Assembly

1047-2009.....Performance Requirements for Reduced Pressure Detector Fire Protection Backflow Prevention Assemblies

1048-2009.....Performance Requirements for Double Check Detector Fire Protection Backflow Prevention Assemblies

1060-2006.....Performance Requirements for Outdoor Enclosures for Fluid Conveying Components

J. Underwriters' Laboratories (UL):

246.....Hydrants for Fire-Protection Service

262.....Gate Valves for Fire-Protection Service

312.....Check Valves for Fire-Protection Service

405.....Fire Department Connection Devices

753.....Alarm Accessories for Automatic Water-Supply Control Valves for Fire Protection Service

789.....Indicator Posts for Fire-Protection Service

1091.....Butterfly Valves for Fire-Protection Service

1285.....Pipe and Couplings, Polyvinyl Chloride (PVC), and Oriented Polyvinyl Chloride (PVCO) for Underground Fire Service

1.9 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will furnish all manufacturers’ and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended

for human consumption, and shall be certified in accordance with NSF/ANSI 61 or NSF 372.

B. Plastic pipe, fittings, and solvent cement shall meet NSF/ANSI 14 and shall be NSF listed for the service intended.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements. The contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.3 LIFTING ATTACHMENTS

A. Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.4 DUCTILE IRON PIPE AND FITTINGS

A. Mechanical-Joint, Ductile-Iron Pipe: AWWA C151, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated, 350 psi (2400 kPa).

1. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
2. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.

B. Grooved-Joint, Ductile-Iron Pipe: AWWA C151, with cut, round-grooved ends.

1. Grooved-End, Ductile-Iron Pipe Appurtenances: ASTM A47, malleable-iron castings or ASTM A536, ductile-iron castings with dimensions matching pipe, 350 psi (3400 kPa).
2. Grooved-End, Ductile-Iron-Piping Couplings: AWWA C606, for ductile-iron-pipe dimensions, Include ferrous housing sections, gasket suitable for water, and bolts and nuts.
3. Gaskets: AWWA C111.

C. Flanged Ductile Iron Pipe: AWWA C115/A21.11, with factory applied screwed long hub flanges.

1. Flanges: ASME B16.1 for 125 psi (850 kPa) or 250 psi (1725 kPa) pressure ratings, as necessary.

2. Wall Sleeve Castings, size and types shown on the drawings, shall be hot dipped galvanized per ASTM A123.
3. Pipe and fittings exposed to view in the finished work are to be painted in accordance with Section 09 91 00, PAINTING. Pipe shall be shop primed with one coat of rust inhibitive primer. Final paint color shall match the final wall color.

D. Cement Mortar Internal Lining: Cement mortar lining and bituminous seal coat as per AWWA C104.

E. Exterior Pipe Coating: The exterior of pipe shall have the standard asphaltic coating.

2.5 PE PIPE AND FITTINGS

A. PE, ASTM Pipe: ASTM D2239, SIDR No. 5.3, 7, or 9; with PE compound number required to give pressure rating not less than 160 psi (1100 kPa).
1. Insert Fittings for PE Pipe: ASTM D2609, made of PA, PP, or PVC with serrated male insert ends matching inside of pipe. Include bands or crimp rings.
2. Molded PE Fittings: ASTM D3350, PE resin, socket- or butt-fusion type, made to match PE pipe dimensions and class.

B. PE, AWWA Pipe: AWWA C906, DR No. 7.3, 9, or 9.3; with PE compound number required to give pressure rating not less than 160 psi (1100 kPa) /.
1. PE, AWWA Fittings: AWWA C906, socket- or butt-fusion type, with DR number matching pipe and PE compound number required to give pressure rating not less than 160 psi (1100 kPa).
2. Mechanical Joints: Ductile iron housing with Grade EF EPDM gaskets to match or exceed pressure rating of piping. Victaulic joint or equal, model 905 for joining PE pipe
3. Select correct model when joining dissimilar types of pipe. Consult with manufacturer.

C. PE, Fire-Service Pipe: ASTM F714, AWWA C906, or equivalent for PE water pipe; FMG approved, with minimum thickness equivalent to FMG Class 150 and Class 200.
1. Molded PE Fittings: ASTM D3350, PE resin, socket-or butt-fusion type, made to match PE pipe dimensions and class.

2.6 VALVES

A. Gate Valves: AWWA C509, Non-rising Stem, Resilient Seat, 200 psi (1380 kPa).

1. Valves 3 inches (75 mm) and larger: Resilient seat valve with gray- or ductile iron body and bonnet; cast iron or bronze double-disc gate; bronze gate rings; non-rising bronze stem and stem nut.
2. Interior and exterior coating: AWWA C550, thermo-setting or fusion epoxy.
3. Underground valve nut: Furnish valves with 2 inch (50 mm) nut for socket wrench operation.
4. Aboveground and pit operation: Furnish valves with hand wheels.
5. End connections shall match main line pipe.

B. Gate Valve Accessories and Specialties

1. Tapping-Sleeve Assembly: ANSI MSS SP-60; sleeve and valve to be compatible with the drilling matching.

a. Tapping Sleeve:, two-piece bolted sleeve. Sleeve to match the size and type of pipe material being tapped.

b. Valve shall include one raised face flange mating tapping-sleeve flange.

2. Valve Boxes: AWWA M44 with top section, adjustable extension of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over valve and with a barrel.
3. Operating Wrenches: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and socket matching valve operating nut. (Provide two wrenches for Project.)
4. Indicator Posts: UL 789, FMG approved, vertical-type, cast iron body with operating wrench, extension rod, and adjustable cast iron barrel of length required for depth of burial of valve.

C. Swing Check Valves:

1. Valves smaller than 2 inches (25 mm): ASTM B61, resilient seat, bronze body and bonnet, pressure rating of 200 psi (1380 kPa). Ends to match main line piping.

2. Valves 2 inches (25 mm) or larger: AWWA 508, resilient seat valve with iron body and bonnet, pressure rating of 200 psi (1380 kPa).
3. Coating: AWWA C550, fusion epoxy coated.

D. Post-Indicator: NFPA 24 and be fully compatible with the valve and supervisory switches.

E. Water Meter: See SECTION 25 10 10, ADVANCED UTILITY METERING SYSTEM.

F. Pressure Reducing Valves

1. Pressure reducing valve: ASSE 1003 with pressure of 150 psi (1035 kPa).

a. Size: 1/3 Flow: 1-1/2″, 2/3 Flow: 2-1/2″
b. Design flow rate: 1/3 Flow: 120 GPM; 2/3 Flow: 240 GPM
c. Design inlet pressure: 70 psi (kPa)
d. Design outlet pressure setting: (Pending) psi

2. Body: Bronze with chrome-plated finish for NPS 2 and smaller.
3. Body: Cast iron with interior lining complying with AWWA C550 or other that is FDA approved for NPS 2-1/2 and NPS 3
4. End connections: Threaded for NPS 2 (DN 50) and smaller.
5. End connections: Flanged for NPS 2-1/2 and NPS 3 (DN 65 and DN 80).

G. Water Control Valves

1. Valve to be Motor operated, pressure rating should be 150 psi minimum. Valve to be operated by a level controller.

a. Size: 6″ NPS
b. Pattern: Gate or Ball-valve design
c. Trim: Stainless steel
d. Design flow rate: 800 gpm
e. Design inlet pressure: 60 psi
f. Design outlet pressure setting: NA

2. Body shall be cast or ductile iron with AWWA C550 epoxy coating or stainless steel.
3. End connections: Flanged for NPS 2-1/2 and NPS 3 (DN 65 and DN 80).
4. Interior coating: AWWA C550.

2.7 DISINFECTION CHLORINE

A. Liquid chlorine: AWWA B301.

B. Sodium Hypochlorite: AWWA B300 with 5 percent to 15 percent available chlorine.

C. Calcium hypochlorite: AWWA B300 supplied in granular form of 5 g. tablets, and shall contain 65 percent chlorine by weight.

2.8 WARNING TAPE

A. Warning tape shall be standard, 4 mil. Polyethylene, 3 inch (76 mm) wide tape, detectable type, blue with black letters and imprinted with “CAUTION BURIED WATER LINE BELOW”.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Use pipe, fittings, and joining methods for piping systems according to the following applications.

1. Transition couplings and special fittings with pressure ratings at least equal to piping pressure rating may be used, unless otherwise indicated.
2. Do not use flanges or unions for underground piping.
3. Flanges, unions, grooved-end-pipe couplings, and special fittings may be used, instead of joints indicated, on aboveground piping and piping in vaults.

B. Underground water-service piping NPS 3/4 to NPS 3 (DN 20 to DN 80) shall be any of the following:

1. PE, ASTM pipe; insert fittings for PE pipe; and clamped joints.

C. Underground water-service piping NPS 4 to NPS 10 shall be any of the following:

1. Ductile iron, mechanical-joint pipe; ductile iron, mechanical-joint fittings; and mechanical grooved-end pipe; ductile iron-pipe appurtenances; and grooved joints.
2. PE, AWWA pipe; PE, AWWA fittings; and and mechanical joints.

D. Aboveground Water-Service Piping shall be the following:

1. Hard copper tube with wrought-copper, solder-joint fittings; and brazed joints.

E. Aboveground water-service piping NPS 1-1/2 to NPS 8 (DN shall be the following:
   1. Ductile iron, grooved-end pipe; ductile iron, grooved-end appurtenances; and grooved joints.

F. Underground Fire-Service-Main Piping NPS 4 to NPS 12 (DN 100 to DN 300) to match existing and shall be any of the following:
   1. Ductile iron, mechanical-joint pipe; ductile iron, mechanical-joint fittings; and mechanical grooved-end pipe; ductile iron-pipe appurtenances; and grooved joints.
   2. PE, Class 150 or 200, fire-service pipe; molded PE fittings; and heat-fusion joints.
   3. PVC, AWWA Class 150 or 200 pipe listed for fire-protection service; PVC Class 150 fabricated or molded fittings; and gasketed joints.

3.2 VALVE APPLICATIONS

A. Use mechanical-joint-end valves for NPS 3 (DN 80) and larger underground installation. Use threaded- or flanged-end valves for installation in vaults. Use UL/FMG, non-rising-stem gate valves for installation with indicator posts. Use corporation valves and curb valves with ends compatible with piping, for NPS 2 (DN 50) and smaller installation.

B. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following
   a. Gate Valves, NPS 2 (DN 50) and Smaller: Bronze, rising stem.
   b. Gate Valves, NPS 3 (DN 80) and Larger: AWWA, cast iron, OS&Y rising stem, metal seated UL/FMG, cast iron, OS&Y rising stem .

3.3 DUCTILE IRON PIPE

A. Install Ductile Iron, water-service piping according to AWWA C600 and AWWA M41-3rd Edition.

B. Pipe shall be sound and clean before laying. When laying is not in progress, the open ends of the pipe shall be closed by watertight plug or other approved means.

C. When cutting pipe is required, the cutting shall be done by machine, leaving a smooth cut at right angles to the axis of the pipe. Bevel cut ends of pipe to be used with push-on bell to conform to the manufactured spigot end. Cement lining shall be undamaged.

D. Mechanical joints shall be made in strict accordance with the manufacturer’s instruction. Pipe shall be laid with bell ends looking ahead.

3.4 ANCHORAGE INSTALLATION

A. Install water-distribution piping with restrained joints. Anchorages and restrained-joint types that may be used include: concrete thrust blocks, locking mechanical joints, bolted flanged joints, pipe clamps and tie rods,

B. Install anchorages for tees, plugs and caps, bends, crosses, valves, and hydrant branches. Include anchorages for the following piping systems:

1. Gasketed-Joint, Ductile Iron, Water-Service Piping: According to AWWA C600.
2. Gasketed-Joint, PVC Water-Service Piping: According to AWWA M23.
3. Fire-Service-Main Piping: According to NFPA 24.
4. Gravity flow piping will not require anchorage

C. Apply full coat of asphalt or other acceptable corrosion-resistant material to surfaces of installed ferrous anchorage devices.

3.5 VALVE INSTALLATION

A. UL/FMG, Valves: Install each underground valve and valves in vaults with stem pointing up and with vertical cast iron indicator post.

B. Pressure-Reducing Valves: Install in vault or aboveground between shutoff valves. Install full-size valved bypass.

C. Raise or lower existing valve and curb stop boxes and fire hydrants to finish grade in areas being graded.

3.6 WATER METER INSTALLATION

A. Install water meters, piping, and specialties according to utility company's written instructions.

B. Install turbine -type water meters, NPS 3 (DN 80) and larger, in meter vaults. Include shutoff valves on water meter inlets and outlets and valved bypass around meters. Support meters, valves, and piping on brick or concrete piers.

3.7 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties. Install water service lines to a point of connection within approximately 5 feet (1500 mm) outside of building(s) to which service is to be connected and make connections thereto. If building services

have not been installed provide temporary caps and mark for future connection.

3.8 FIELD QUALITY CONTROL

A. Conduct piping tests before joints are covered and after concrete thrust blocks have hardened sufficiently. Fill pipeline 24 hours before testing and apply test pressure to stabilize system. Use only potable water.

B. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.

C. Perform hydrostatic tests at not less than one-and-one-half times working pressure for two hours.

1. Increase pressure in 50-psi (350-kPa) increments and inspect each joint between increments. Hold at test pressure for 1 hour; decrease to 0 psi (0 kPa). Slowly increase again to test pressure and hold for 1 more hour. Maximum allowable leakage is 2 quarts (1.89 L) per hour per 100 joints. Remake leaking joints with new materials and repeat test until leakage is within allowed limits.

D. Prepare reports of testing activities.

3.9 IDENTIFICATION

A. Install continuous underground warning tape 12 inches (300 mm) directly over piping.

3.10 CLEANING

A. Purge new water-distribution piping systems and parts of existing systems that have been altered, extended, or repaired before use.

B. Use purging and disinfecting procedure prescribed by local utility provider or other authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in AWWA C651 or do as follows:

1. Fill the water system with a water/chlorine solution containing at least 50 ppm of chlorine; isolate and allow to stand for 24 hours.
2. Drain the system of the previous solution and refill with water/chlorine solution containing at least 200 ppm of chlorine; isolate and allow system to stand for 3 hours.
3. After standing time, flush system with clean, potable water until no chlorine remains in water coming from system.

4. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows evidence of contamination.

C. Prepare reports of purging and disinfecting activities.

--- E N D ---

SECTION 33 30 00

SANITARY SEWER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and procedures for construction of outside, underground sanitary sewer systems that are complete and ready for operation. This includes piping, structures and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. General plumbing, protection of Materials and Equipment, and quality assurance: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

C. Fabrication of Steel Ladders: Section 05 50 00, METAL FABRICATION.

D. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

E. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

1.4 ABBREVIATIONS

A. PVC: Polyvinyl chloride plastic

B. DI: Ductile iron pipe

1.5 DELIVERY, STORAGE AND HANDLING

A. Store plastic piping protected from direct sunlight and support to prevent sagging and bending. Protect stored piping from moisture and dirt by elevating above grade. Protect flanges, fittings, and specialties from moisture and dirt.

B. Handle manholes according to manufacturer's written rigging instructions.

1.6 COORDINATION

A. Contractor to obtain approval from the Public Agency that the existing sanitary sewer systems have the capacity to handle the discharge from the facility.

B. Coordinate exterior utility lines and connections to building lines up to 5 feet of building wall.

C. Coordinate connection to public sewer system with Public Utility Company.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

B. Comply with the rules and regulations of the Public Utility having jurisdiction over the connection to Public Sanitary Sewer lines and the extension, and/or modifications to Public Utility Systems.

1.8 SUBMITTALS:

A. Manufacturers' Literature and Data shall be submitted for the following as one package:

1. Pipe, Fittings, and, Appurtenances.
2. Jointing Material.
3. Manhole and Structure Material.
4. Frames and Covers.
5. Steps and Ladders.
6. Gate Valves.
7. Valve Boxes.
8. Check Valves.

1.9 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A74-09.....Cast Iron Soil Pipe and Fittings

A185/A185M-07.....Steel Welded Wire Reinforcement, Plain, for Concrete

A615/A615M-09b.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

A746-99.....Ductile-Iron Gravity Sewer Pipe

C478-09.....Precast Reinforced Concrete Manhole Sections

C857-11.....Minimum Structural Design Loading for Underground Precast Concrete Utility Structures

C890-11.....Minimum Structural Design Loading for Monolithic or Sectional Precast Concrete Water and Wastewater Structures

C913-08.....Precast Concrete Water and Wastewater Structures

C923-08.....Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes, and Laterals

C924-02(2009).....Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method

C990-09.....Joints for Concrete Pipe, Manholes, and precast Box Sections using Preformed Flexible Joint Sealants

C1173-10.....Flexible Transition Couplings for Underground Piping Systems

C1440-08.....Thermoplastic Elastomeric (TPE) Gasket Materials for Drain, Waste and Vent (DWV), Sewer, Sanitary and Storm Plumbing Systems

C1460-08.....Shielded Transition Couplings for Use With Dissimilar DWV Pipe and Fittings Above Ground

C1461-08.....Mechanical Couplings Using Thermoplastic Elastomeric (TPE) Gaskets for Joining Drain, Waste and Vent (DWV), Sewer, Sanitary and Storm Plumbing systems for Above and below Ground Use

D2321-11.....Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D3034-08.....Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

F477-10.....Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F679-08.....Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings

F891-10.....Coextruded Poly(vinyl Chloride) (PVC) Plastic Pipe With a Cellular Core

F949-10.....Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings

F1417-11.....Standard Test Method for Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air

F1668-08.....Construction Procedures for Buried Plastic Pipe

C. American Water Works Association (AWWA):

C105/A21.5-10.....Polyethylene Encasement for Ductile-Iron Pipe Systems

C110-08.....Ductile-Iron and Gray-Iron Fittings

C111/A21.11-06.....Rubber Gasket Joints for Ductile Iron Pressure Pipe and Fittings

C151/A21.51-09.....Ductile Iron Pipe, Centrifugally Cast

C153/A21.53-06.....Ductile Iron Compact Fittings for Water Service

C219-11.....Bolted, Sleeve-Type Couplings for Plain-End Pipe

C512-07.....Air Release, Air/Vacuum and Combination Air Valves for Water Works Service

C600-10.....Installation of Ductile-Iron Mains and Their Appurtenances

C900-07.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

D. American Society of Mechanical Engineers:

A112.14.1-2003.....Backwater Valves

A112.36.2M-1991.....Cleanouts

1.10 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will provide all manufacturers' and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements.

B. All pipe and fittings used in the construction of force mains shall be rated to meet the system maximum operating pressure with a minimum of 150 psi (1035 kPa).

C. The Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.2 DUCTILE-IRON PIPE AND FITTINGS

A. Mechanical Joint Piping

1. Pipe and Fittings: AWWA C151, thickness Class 250 unless otherwise shown or specified.
2. Compact Fittings: AWWA C153.
3. Gaskets: AWWA C111.
4. Exterior coating: AWWA C151.
5. Interior lining shall be as per ASTM A746.
6. Pipe and fittings shall be polyethylene encased as per AWWA C105.

B. Push-on-Joint Piping:

1. Pipe: AWWA C151, thickness Class 250, with bolt holes in bell.
2. Standard Fittings: AWWA C110.
3. Compact Fittings: AWWA C153.
4. Gaskets: AWWA C111.
5. Exterior coating: AWWA C151.
6. Interior lining: AWWA C151.

7. Pipe and fittings shall be polyethylene encased as per AWWA C105.

2.3 PVC, GRAVITY SEWER PIPE AND FITTINGS

A. PVC Gravity Sewer Piping:
   1. Pipe and Fittings shall conform to ASTM D3034 or ASTM F679, SDR 26.
   2. Gaskets: ASTM F477.

B. PVC Cellular-Core Sewer Piping:
   1. Pipe and Fittings: ASTM F891, Sewer and Drain Series, PS 50 minimum stiffness, PVC cellular-core pipe with plain ends for solvent-cemented joints.
   2. Fittings: ASTM D3034 or ASTM F679 SDR 26.

C. PVC Corrugated Sewer Piping:
   1. Pipe: ASTM F949, corrugated pipe with bell and spigot ends.
   2. Fittings: ASTM F949.
   3. Gaskets: ASTM F477.

D. PVC Type PSM Sewer Piping:
   1. Pipe shall conform to ASTM D3034 or ASTM F679, SDR 26.
   2. Fittings: ASTM D3034.
   3. Gaskets: ASTM F477.

2.4 PVC, PRESSURE PIPE AND FITTINGS

A. PVC:
   1. Pipe: AWWA C900, // Class 100 // Class 150 // and // Class 200// PVC pipe with bell-and-spigot ends for gasketed joints.
   2. Fittings: AWWA C900, // Class 100 // Class 150 // and // Class 200//.
   3. Gaskets: ASTM F477.

2.5 GRAVITY FLOW LINES WITH SECONDARY CONTAINMENT (ENCASEMENT)

A. Piping systems conveying hazardous materials shall be constructed with a watertight primary (carrier) pipe completely enclosed within a watertight secondary (containment) pipe.

B. Piping and fittings shall be as per ASTM D3034, AWWA C105.

C. The carrier pipe shall be installed with manufactured spacers to maintain a minimum interstitial space of 0.75 inch (19 mm) between the carrier pipe and the containment pipe.

D. The encasement piping shall be equipped with // adequate monitoring ports // and // vents // to detect the presence of fluids within the containment pipe and for the extraction of fluids from the containment pipe.

E. Encasement pipe shall be bell and spigot with adhesive bond.

2.6 PVC PRESSURE (FORCE) MAIN:

A. Joints shall be fully restrained with mechanical joints, capable of restraining 50 percent above all loads acting on the joint, but not less than 150 psi (1035 kPa). Thrust blocks shall not be permitted.

B. Ductile iron pipe and fittings: AWWA C151.

1. Push-on joints shall be restrained by a mechanical restraint and prevent the opening of the joint.

C. Polyvinyl Chloride (PVC) Pipe and Fittings:

1. Pipe: ASTM D3034, SDR 35.
2. Gaskets: ASTM F477.

2.7 NONPRESSURE-TYPE TRANSITION COUPLINGS

A. Comply with ASTM C1173, elastomeric, sleeve type, reducing or transition coupling, for joining underground nonpressure piping. Include ends to match same sizes of main line piping and install corrosion-resistant metal tension bands and tightening mechanism on each end.

B. Sleeve Materials:

1. For Plastic Pipes: ASTM F477, elastomeric seal.
2. For Dissimilar Pipes: PVC or other material compatible with pipe materials being joined.

C. Unshielded, Flexible Couplings:

1. Couplings shall be elastomeric sleeve with stainless steel shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.

D. Shielded, Flexible Couplings:

1. Couplings shall meet ASTM C1460 with elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield with corrosion-resistant-metal tension band and tightening mechanism on each end.

E. Ring-Type, Flexible Couplings:

1. Couplings shall be elastomeric compression seal with dimensions to fit inside bell of larger mainline pipe and for spigot of smaller main line pipe to fit inside ring.

F. Nonpressure-Type, Rigid Couplings:

1. Coupling shall be ASTM C1461, transition-type mechanical coupling, molded from ASTM C1440, TPE material; with corrosion-resistant-metal tension band and tightening mechanism on each end.

2.8 PRESSURE-TYPE PIPE COUPLINGS

A. Tubular-Sleeve Couplings:

1. Couplings shall meet AWWA C219, with center sleeve, gaskets, end rings, and bolt fasteners.

B. Metal, bolted, sleeve-type, reducing or transition couplings for joining underground pressure piping:
   1. Couplings shall meet a // 150-psi (1035-kPa)// 200-psi (1380-kPa) // minimum pressure rating and ends of same sizes of the main line piping.

C. Center-Sleeve Material:
   1. Sleeve shall be // Manufacturer's standard // Carbon steel // Stainless steel // Ductile iron // Malleable iron //.

D. Gasket material: Gaskets shall be natural or synthetic rubber.

E. Metal component finish: Finish shall be a corrosion-resistant material or coating.

2.9 EXPANSION JOINTS AND DEFLECTION FITTINGS

A. Ductile-Iron, Flexible Expansion Joints:
   1. Compound fittings: Fittings shall have a combination of flanged and mechanical-joint ends complying with AWWA C110 or AWWA C153. Include two gasketed ball-joint sections and one gasketed sleeve section, rated for 250-psi (1725-kPa) minimum working pressure and for offset and expansion indicated.

B. Ductile-Iron Expansion Joints:
   1. Jointing Material: Joints shall be a three-piece assembly of telescoping sleeve with gaskets and restrained-type, ductile iron, bell-and-spigot end sections complying with AWWA C110 or AWWA C153. Include rating for 250-psi (1725-kPa) minimum working pressure and for expansion indicated.

C. Ductile-Iron Deflection Fittings:
   1. Jointing Material: Compound coupling fittings with ball joint, flexing section, gaskets, and restrained-joint ends shall comply with AWWA C110 or AWWA C153. Include rating for 250-psi (1725-kPa) minimum working pressure and for up to 15 deg of deflection.

2.10 BACKWATER VALVES

A. Cast-Iron Backwater Valves:
   1. Valve Material: Valve shall be as per ASME A112.14.1, gray-iron body and bolted cover, with bronze seat.
   2. Horizontal type: Horizontal valve will include a swing check valve and hub-and-spigot ends.

3. Combination horizontal and manual gate-valve type: Valve will include a swing check valve, integral gate valve, and hub-and-spigot ends.
4. Terminal type: Valve will include a bronze seat, swing check valve, and hub inlet.

B. PVC Backwater Valves:
1. PVC valve shall be a horizontal type; with PVC body, PVC removable cover, and PVC swing check valve.

2.11 CLEANOUTS

A. Cast-Iron Cleanouts:
1. Cleanouts shall be as per ASME A112.36.2M, round, gray-iron housing with clamping device and round, secured, scoriated, gray-iron cover. Include gray-iron ferrule with inside calk or spigot connection and countersunk, tapered-thread, brass closure plug.
2. Top-Loading Classification(s): Valve loadings shall be designed for Heavy Duty.
3. Cleanout Riser: Sewer pipe fitting on main line pipe and riser shall be as per ASTM A74, service class.

B. PVC Cleanouts:
1. PVC body with PVC threaded plug: Cleanout shall be as per ASTM D3034. PVC sewer pipe fitting and riser to cleanout.
2. Cleanout Riser: Sewer pipe fitting on main line sewer and riser shall match main line piping.

2.12 MANHOLES

A. Standard precast concrete manholes and vaults shall be constructed of precast concrete segmental blocks, precast reinforced concrete rings, precast reinforced sections or cast-in-place concrete.
1. Precast Concrete Manholes: Material shall be as per ASTM C478, precast, reinforced concrete, of depth indicated, with sealed joints.
2. Concrete Base: Concrete for base of manhole shall have a minimum compressive strength of 5000 psi (35 MPa) at 28 days. Thickness to be 8 inches (200 mm), minimum.
3. Riser Section: 4 inch (100 mm) minimum thickness, of lengths to provide the total depth of manhole.
4. Top Section: Eccentric-cone type unless otherwise indicated. Top section to match adjustment ring configurations.
5. Joint Sealant: ASTM C990.
6. Resilient Pipe Connectors: ASTM C923.

7. Steps: If over 60 inches (1500 mm) in depth, individual FRP steps or ladder ASTM A615 deformed, 1/2 inch (13 mm) steel reinforcing rods encased in precast concrete sections, with 16 inch (400 mm) minimum width, 12 to 16 inches (300 to 400 mm) center-to-center from top to bottom.
8. Adjusting Rings: Reinforced-concrete rings; 6 to 9 inch (150 to 225 mm) total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.

B. Designed Concrete Manholes:
1. Description: ASTM C913; designed according to ASTM C890 for AASHTO HS20-44, heavy-traffic, structural loading; of depth, shape, and dimensions indicated, with provision for sealant joints.
2. Ballast: Increase thickness of one or more precast concrete sections or add concrete to manhole as required to prevent flotation.
3. Joint Sealant: ASTM C990, bitumen or butyl rubber.
4. Resilient Pipe Connectors: ASTM C923, cast or fitted into manhole walls, for each pipe connection.
5. Steps: If over 60 inches (1500 mm) in depth, individual FRP steps, FRP ladder, or ASTM A615, deformed, 1/2 inch (13 mm) steel reinforcing rods; width 16 inches (400 mm) minimum, 12 to 16 inches (300 to 400 mm) center-to-center from top to bottom.
6. Adjusting Rings: Reinforced-concrete rings; 6 to 9 inch (150 to 225 mm) total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.

C. Manhole Base Channels: Manhole channels shall be main line pipe material. Lay main pipe through manhole and cut top of pipe out to be three-fourths of pipe diameter. Slope through manhole to match run slopes of the main pipe.

2.13 CONCRETE

A. Cast-in-place concrete shall be 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio.

B. Reinforcement
1. Reinforcing fabric shall be ASTM A185, steel, welded wire fabric, plain.

2. Reinforcing bars shall be ASTM A615, Grade 60 (420 MPa) deformed steel.

C. Benches shall be concrete, sloped to drain into the channel. Provide 6 inches (150 mm) from the cut section of top of pipe to edge of manhole.

D. Ballast and Pipe Supports shall be Portland cement design mix, 3000 psi (20.7 MPa) minimum, with 0.58 maximum water/cementitious materials ratio.

2.14 WET WELL

A. Fiberglass wet well. Tank shall be a single wall fiberglass reinforced plastic (FRP) UL labeled underground storage tanks as shown on the drawings. Size and fittings shall be as shown on drawings.

B. Concrete Wet Well:

1. Concrete wet well shall be a circular precast vault conforming to ASTM C857.
2. Vault Material: The vault shall have a poured concrete base with precast walls, and top poured in place structure.
3. Concrete: Concrete shall be 5000 psi (35 MPa) concrete at 28 days.
4. Design Load: The vault shall be rated for AASHTO HS20-44 loading and 30 percent impact loads.
5. Joints: Joints in the vault shall be tongue and groove. Flexible sealing compound, as recommended by the manufacturer, shall be placed in all joints to form a watertight structure.
6. Interior Coating: Concrete coating for the interior of wet wells shall consist of an epoxy blended filler sealer, and a cross linked epoxy phenolic cured, resistant protective coating.

C. Tank Design Criteria:

1. Internal Load: Tank shall withstand without leakage a 5 psi (34.5 kpa) air pressure test with 5 to 1 safety factor. Contractor shall test prior to installation as this is to test for leakage.
2. Vacuum Test: The tank shall be tested to 11.5 inches (292 mm) of mercury vacuum by the tank manufacturer to assure structural integrity. Contractor shall submit vacuum test certificate if test conducted by manufacturer at plant.
3. Surface Loading: Tank shall withstand surface AASHTO HS20-44 axle loads.

4. External Hydrostatic Pressure: Tank shall withstand 7 feet (2.1 m) of overburden with the hole fully flooded with a 3 to 1 safety factor against leaking.
5. Threaded fittings shall be of a material consistent with the requirements of the UL label and be of the sizes and locations shown on the drawings.
6. Tanks shall have nominal capacity as shown on drawings with a minimum of a 36 inch square (900 mm) ID manway riser, a complete cast iron frame and lid at finish grade, steps, and lid that is spring loaded.

2.15 ACID NEUTRALIZATION TANKS

A. Acid neutralization tanks shall be constructed of 1/4 inch (6 mm) plate, mild carbon steel suitable for rubber type lining with all welds double butt, continuous full welded, non porous and ground smooth and having no crevices, offsets or sharpened edges. The bottom and side walls shall be lined with 1/4 inch (6 mm) thermoplastic sheet lining fused directly to white ceramic lining 2 inches (50 mm) thick laid in Permamite acid and alkali proof mortar. The tank shall include 42 inch (1050 mm) ID manway riser constructed of steel shell with an interior corrosion resistant coating and complete cast iron frame and lid at the finish grade. Neutralizing charge shall be limestone, 3 inches (75 mm) in size.

2.16 OIL AND GREASE INTERCEPTOR AND GREASE REMOVAL PIT

A. Pit shall be constructed of reinforced precast concrete or cast-in-place concrete of the shape and configuration indicated on the plans. Precast vaults shall be constructed in accordance with ASTM C857 and be rated for AASHTO HS20-44 loading. The concrete shall have a minimum compressive strength of 5000 psi (35 MPa) at 28 days, and reinforcement shall comply with ASTM A615, Grade 60. Access to the pit shall be through 24 inches (600 mm) diameter manhole frame and cover or through hinged aluminum access manways.

B. Baffles shall be constructed of 1/4 inch (6 mm) mild carbon steel with 1/4 inch (6 mm) thermoplastic coating.

2.17 AIR RELEASE VALVE FOR FORCE MAINS

A. Valves shall be combination air release and vacuum valve with a single body. The valves shall be rated for 150 psi (1025 kPa) working pressure, and conform to AWWA C512. Valve shall be provided with threaded connections, and be mounted on a full opening ball valve to isolate the air release valve from the system.

2.18 WARNING TAPE

A. Warning tape shall be standard, 4 mil (0.1 mm) polyethylene 3 inch (76 mm) wide tape // detectable // non-detectable // type, green with black letters and imprinted with "CAUTION BURIED SEWER LINE BELOW".

PART 3 - EXECUTION

3.1 PIPING INSTALLATION

A. Drawing plans and details indicate the general location and arrangement of underground sanitary sewer piping. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.

B. Install piping beginning at the low point, true to grades and alignment indicated on the drawings, with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for using lubricants, cements, and other installation requirements.

C. Do not lay pipe on unstable material, in wet trench or when trench and weather conditions are unsuitable for the work.

D. Support pipe on compacted bedding material. Excavate bell holes only large enough to properly make the joint.

E. Inspect pipes and fittings for defects before installation. Defective materials shall be plainly marked and removed from the site. Cut pipe shall have smooth regular ends at right angles to axis of pipe.

F. Lower pipe into trench carefully and bring to proper line, grade, and joint. After jointing, interior of each pipe shall be thoroughly wiped or swabbed to remove any dirt, trash or excess jointing materials.

G. Do not walk on pipe in trenches until covered by layers of bedding or backfill material to a depth of 12 inches (300 mm) over the crown of the pipe.

H. Warning tape shall be continuously placed 12 inches (300 mm) above sewer pipe

I. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.

J. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.

K. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process or microtunneling.

L. Install gravity-flow, non-pressure, drainage piping according to the following:

1. Install piping pitched down in direction of flow, at minimum slope of 1 percent unless otherwise indicated.
2. Install piping with 36 inch (915 mm) minimum cover as shown on Drawings.
3. Install ductile iron, gravity sewer piping according to AWWA C600.
4. Install PVC cellular-core, PVC corrugated sewer, PSM sewer and PVC gravity sewer according to ASTM D2321 and ASTM F1668.

M. Install force-main, pressure piping according to the following:

1. Install piping with restrained joints at tee fittings and at horizontal and vertical changes in direction. Use corrosion-resistant rods, pipe or fittings, or cast-in-place-concrete supports or anchors. Pressure (force) mains shall have the bells facing the direction of flow.
2. Sections of piping listed on the drawings shall be fully restrained. For devices with twist off nuts, the twist off nuts shall be placed on top of the fitting for the Resident Engineer’s inspection. The Contractor shall torque test all bolts, set screws, identified by the Resident Engineer.
3. Thrust blocks shall not be permitted.

N. Clear interior of piping and manholes of dirt and superfluous material as work progresses. Maintain swab or drag in piping, and pull past each joint as it is completed. Place plug in end of incomplete piping at end of day and when work stops.

O. Gravity Flow Lines with Secondary Containment (Encasement Pipe):

1. Install per manufacturer’s recommendations. Install all pipe centering devices to maintain an interstitial space below the invert of the carrier pipe. Both the carrier and containment pipe shall be tested for leaks.

3.2 PIPE JOINT CONSTRUCTION

A. Join gravity-flow, non-pressure, drainage piping according to the following:

1. Join ductile iron, gravity sewer piping according to AWWA C600 for push-on joints.

2. Join PVC piping according to ASTM D2321.
3. Join dissimilar pipe materials with nonpressure-type, flexible or rigid // couplings.

B. Join force-main, pressure piping according to the following:
1. Join ductile iron pressure piping according to AWWA C600 for push-on joints.
2. Join PVC pressure piping according to manufacturer’s recommendations.
3. Join dissimilar pipe materials with pressure-type couplings.

C. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
1. Use non-pressure flexible couplings where required to join gravity-flow, non-pressure sewer piping unless otherwise indicated.
a. Flexible or Rigid couplings for pipes of same or slightly different OD.
b. Unshielded, increaser/reducer-pattern, flexible or rigid couplings for pipes with different OD.
c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.
2. Use pressure pipe couplings for force-main joints.

3.3 SEWER AND MANHOLE SUPPORTS, CONCRETE CRADLES WITHIN VAULTS

A. Install reinforced concrete as detailed on the drawings. The concrete shall not restrict access for future maintenance of the joints within the piping system.

3.4 BUILDING SERVICE LINES

A. Install sanitary sewer service lines to point of connection within approximately 5 feet (1500 mm) outside of building(s) where service is required and make connections. Coordinate the invert and location of the service line with the Contractor installing the building lines.

3.5 MANHOLE INSTALLATION

A. Install manholes complete with appurtenances and accessories indicated.
1. Precast concrete segmental blocks shall lay true and plumb. All horizontal and vertical joints shall be completely filled with mortar. Parge interior and exterior of structure with 1/2 inch (15 mm) or cement mortar applied with a trowel and finished to an even glazed surface.

2. Precast reinforced concrete rings shall be installed true and plumb. The joints between rings and between rings and the base and top, shall be sealed as per manufacturer's recommendations. Adjust the length of the rings so that the top section will be at the required elevation. Cutting the top section is not acceptable.
3. Concrete manhole risers and tops: Install as specified.

B. Designed Concrete Structures:
1. Concrete structures shall be installed in accordance with Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. Do not build structures when air temperature is 32 deg F (0 deg C), or below.

D. The wall that supports access rungs or ladder shall be 90 deg vertical from the floor of structure to manhole cover.

E. Install steps and ladders per the manufacturer's recommendations. Steps and ladders shall not move or flex when used. All loose steps and ladders shall be replaced by the Contractor.

F. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. In unpaved areas, the rim elevation shall be 2 inches (50 mm) above the adjacent finish grade.

G. Install manhole frames and covers on a mortar bed, such that frames and covers shall not move when subject to vehicular traffic. Install a concrete collar around the frame to protect the frame from moving until the adjacent pavement is placed. Install an 8 inches (200 mm) thick, by 12 inches (300 mm) wide concrete collar around the perimeter of the frame. Slope the top of the collar away from the frame.

3.6 BACKWATER VALVE INSTALLATION

A. Install horizontal-type backwater valves in piping manholes or pits.

B. Install combination horizontal and manual gate valves in piping and in manholes.

C. Install terminal-type backwater valves on end of piping and in manholes. Secure units to sidewalls.

3.7 CLEANOUT INSTALLATION

A. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Cleanouts should be 6 inches (150 mm) in diameter and consist of a ductile iron 45 degree fitting on end of run, or combination Y fitting and 1/8 bend in the run with ductile iron pipe extension, water tight

plug or cap and cast frame and cover flush with finished grade. Install piping so cleanouts open in direction of flow in sewer pipe.

1. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
2. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
3. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
4. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.

B. Set cleanout frames and covers in earth in cast-in-place-concrete, 18 by 18 by 12 inches (450 by 450 by 300 mm) 1 inch (25 mm) above surrounding grade.

C. Where cleanout is in force main, provide a blind flange top connection. The center of the flange shall be equipped with a 2 inches (50 mm) base valve to allow the pressure in the line to be relieved prior to removal of the blind flange. Frames and covers for pressure (force) mains shall be 24 inches (600 mm) in diameter.

D. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

E. The top of the cleanout assembly shall be 2 inches (50 mm) below the bottom of the cover to prevent loads being transferred from the frame and cover to the piping.

3.8 CONNECTIONS

A. Make connections to existing piping and underground manholes by coring and installing the pipe at the design invert. Install an elastomeric gasket around the pipe, and grout the interstitial space between the pipe and the core.

B. Connection to an existing manhole: The bench of the manhole shall be cleaned and reshaped to provide a smooth flowline for all new pipes connected to the manhole.

C. Use commercially manufactured wye fittings for piping branch connections. Encase entire wye fitting plus 6-inch (150-mm) overlap with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

1. Make branch connections from the side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500), by removing a section of the existing pipe.

2. Make branch connections from the side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes by cutting an opening into existing unit large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe or manhole wall, encase entering connection in concrete to provide additional support of collar from connection to undisturbed ground.
3. Protect existing piping and manholes to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

3.9 REGRADING

A. Raise or lower existing manholes and structures frames and covers, cleanout frames and covers and valve boxes in regraded areas to finish grade. Carefully remove, clean and salvage cast iron frames and covers. Adjust the elevation of the top of the manhole or structure as detailed on the drawings. Adjust the elevation of the cleanout pipe riser, and reinstall the cap or plug. Reset cast iron frame and cover, grouting below and around the frame. Install concrete collar around reset frame and cover as specified for new construction.
B. During periods when work is progressing on adjusting manholes or structures cover elevations, the Contractor shall install a temporary cover above the bench of the structure or manhole. The temporary cover shall be installed above the high flow elevation within the structure, and shall prevent debris from entering the wastewater stream.

3.10 CLOSING ABANDONED SANITARY SEWER SYSTEMS

A. Close open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed.
   1. Piping under and within 5 feet (1500 mm) of building areas shall be completely removed.
   2. Piping outside of building areas shall // be completely removed // plugged with concrete, and abandoned in-place //.
B. Excavate around manholes as required and use either procedure below:
   1. Manholes and structures outside of building areas: Remove frame and cover, cut and remove the top of an elevation of 2 feet (600 mm)

below finished grade. Fill the remaining portion with compacted gravel or crushed rock or concrete.

2. Manholes and structures with building areas: Remove frame and cover and remove the entire structure and the base.

C. Backfill to grade according to Division 31 Section 31 20 00, EARTH MOVING.

D. When the limit of the abandonment terminates in an existing manhole to remain, the flow line in the bench of the manhole to the abandoned line shall be filled with concrete and shaped to maintain the flowline of the lines to remain.

3.11 PIPE SEPARATION

A. Horizontal Separation - Water Mains and Sewers:

1. Existing and proposed water mains shall be at least 10 feet (3 m) horizontally from any proposed gravity flow and pressure (force main) sanitary sewer or sewer service connection.

2. Gravity flow mains and pressure (force) mains may be located closer than 10 feet (3 m) but not closer than 6 feet (1.8 m) to a water main when:

a. Local conditions prevent a lateral separation of 10 feet (3 m); and

b. The water main invert is at least 18 inches (450 mm) above the crown of the gravity sewer or 24 inches (600 mm) above the crown of the pressure (force) main; and the water main is in a separate trench separated by undisturbed earth.

3. When it is impossible to meet (1) or (2) above, both the water main and sanitary sewer main shall be constructed of push-on or mechanical joint ductile iron pipe.

B. Vertical Separation - Water Mains and Sewers at Crossings:

1. Water mains shall be separated from sewer mains so that the invert of the water main is a minimum of 24 inches (600 mm) above the crown of gravity flow sewer or 48 inches (1200 mm) above the crown of pressure (force) mains. The vertical separation shall be maintained within 10 feet (3 m) horizontally of the sewer and water crossing. When these vertical separations are met, no additional protection is required.

2. In no case shall pressure (force) sanitary main cross above, or within 24 inches (600 mm) of water lines.

3. When it is impossible to meet (1) above, the gravity flow sewer may be installed 18 inches (450 mm) above or 12 inches (300 mm) below the water main, provided that both the water main and sewer shall be constructed of push-on or mechanical ductile pipe. Pressure (Force) sewers may be installed 24 inches (600 mm) below the water line provided both the water line and sewer line are constructed of ductile iron pipe.
4. The required vertical separation between the sewer and the water main shall extend on each side of the crossing until the perpendicular distance from the water main to the sewer line is at least 10 feet (3 m).

3.12 IDENTIFICATION

A. Install green warning tape directly over piping and at outside edges of underground manholes.

3.13 FIELD QUALITY CONTROL

A. All systems shall be inspected and obtain the Resident Engineer's approval. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.
B. To inspect, thoroughly flush out the lines and manholes before inspection. Lamp test between structures and show full bore indicating sewer is true to line and grade. Lips at joints on the inside of gravity sewer lines are not acceptable.
   1. Submit separate report for each system inspection.
   2. Defects requiring correction include the following:
      a. Alignment: Less than full diameter of inside of pipe is visible between structures.
      b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
      c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
      d. Infiltration: Water leakage into piping.
      e. Exfiltration: Water leakage from or around piping.
   3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
   4. Re-inspect and repeat procedure until results are satisfactory.

C. Air Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction and the following:
   1. Test plastic gravity sewer piping according to ASTM F1417.
   2. Test concrete gravity sewer piping according to ASTM C924.
   3. Clean and isolate the section of sewer line to be tested. Plug or cap the ends of all branches, laterals, tees, wyes, and stubs to be included in the test to prevent air leakage. The line shall be pressurized to 4 psi (28 kPa) and allowed to stabilize. After pressure stabilization, the pressure shall be dropped to 3.5 psi (24 kPa) greater than the average back-pressure of any groundwater above the sewer.
   4. For force mains, perform testing after supports and anchors are installed. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psi (1035 kPa).
   5. Testing of Fiberglass Sewage Holding Tanks shall show no leakage during a 5 psi (35 kPa) air pressure test with 5:1 safety factor.
   6. Testing of Concrete Wet Well shall show no leakage with the wet well completely filled with water for a duration of 4 hours.

3.14 CLEANING

A. Clean dirt and superfluous material from interior of piping.

--- E N D ---

SECTION 33 40 00

STORM SEWER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies materials and procedures for construction of outside, underground storm sewer systems that are complete and ready for operation. This includes piping, structures and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. Concrete Work, Reinforcing, Placement and Finishing: Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. General plumbing, protection of Materials and Equipment, and quality assurance: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

D. Fabrication of Steel Ladders: Section 05 50 00, METAL FABRICATIONS.

E. Materials and Testing Report Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

F. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 ABBREVIATIONS

A. HDPE: High-density polyethylene

B. PE: Polyethylene

1.4 DELIVERY, STORAGE, AND HANDLING

A. Do not store plastic manholes, pipe, and fittings in direct sunlight.

B. Handle catch basins and stormwater inlets according to manufacturer's written rigging instructions.

1.5 COORDINATION

A. Coordinate connection to storm sewer main with the Public Agency providing storm sewer off-site drainage.

B. Coordinate exterior utility lines and connections to building services up to the actual extent of building wall.

1.6 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

1.7 SUBMITTALS

A. Manufacturers' Literature and Data shall be submitted, as one package, for pipes, fittings and appurtenances, including jointing materials, hydrants, valves and other miscellaneous items.

1.8 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A185/A185M-07.....Steel Welded Wire Reinforcement, Plain, for Concrete

A242/A242M-04(2009).....High-Strength Low-Alloy Structural Steel

A615/A615M-09b.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

C33/C33M-08.....Concrete Aggregates

C76-11.....Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

C139-10.....Concrete Masonry Units for Construction of Catch Basins and Manholes

C150/C150M-11.....Portland Cement

C443-10.....Joints for Concrete Pipe and Manholes, Using Rubber Gaskets

C857-07.....Minimum Structural Design Loading for Underground Precast Concrete Utility Structures

C891-09.....Installation of Underground Precast Concrete Utility Structures

C913-08.....Precast Concrete Water and Wastewater Structures

C923-08.....Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes, and Laterals

C924-02(2009).....Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method

C990-09.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants

C1103-03(2009).....Joint Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines

C1173-08.....Flexible Transition Couplings for Underground Piping Systems

C1433-10.....Precast Reinforced Concrete Monolithic Box Sections for Culverts, Storm Drains, and Sewers

C1479-10.....Installation of Precast Concrete Sewer, Storm Drain, and Culvert Pipe Using Standard Installations

D448-08.....Sizes of Aggregate for Road and Bridge Construction

D698-07e1.....Laboratory Compaction Characteristics of Soil Using Standard Effort (12 400 ft-lbf/ft3 (600 kN-m/m3))

D1056-07.....Flexible Cellular Materials—Sponge or Expanded Rubber

D1785-06.....Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120

D2321-11.....Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2751-05.....Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings

D2774-08.....Underground Installation of Thermoplastic Pressure Piping

D3034-08.....Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

D3350-10.....Polyethylene Plastics Pipe and Fittings Materials

D4101-11.....Polypropylene Injection and Extrusion Materials

D5926-09.....Poly (Vinyl Chloride) (PVC) Gaskets for Drain, Waste, and Vent (DWV), Sewer, Sanitary, and Storm Plumbing Systems

F477-10.....Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F679-08.....Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings

F714-10.....Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter

F794-03(2009).....Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter

F891-10.....Coextruded Poly(Vinyl Chloride) (PVC) Plastic Pipe With a Cellular Core

F894-07.....Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe

F949-10.....Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings

F1417-11.....Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air

F1668-08.....Construction Procedures for Buried Plastic Pipe

C. American Association of State Highway and Transportation Officials (AASHTO):

M198-10.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants

M252-09.....Corrugated Polyethylene Drainage Pipe

M294-10.....Corrugated Polyethylene Pipe, 12 to 60 In. (300 to 1500 mm) Diameter

D. American Water Works Association(AWWA):

C110-08.....Ductile-Iron and Gray-Iron Fittings

C219-11.....Bolted, Sleeve-Type Couplings for Plain-End Pipe

C900-07.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

M23-2nd ed.....PVC Pipe ”Design And Installation”

E. American Society of Mechanical Engineers (ASME):

A112.6.3-2001.....Floor and Trench Drains

A112.14.1-2003.....Backwater Valves

A112.36.2M-1991.....Cleanouts

F. American Concrete Institute (ACI):

318-05.....Structural Commentary and Commentary

350/350M-06.....Environmental Engineering Concrete Structures and Commentary

G. National Stone, Sand and Gravel Association (NSSGA): Quarried Stone for Erosion and Sediment Control

1.9 WARRANTY

The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will furnish all manufacturers’ and suppliers’ written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements. The Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.2 CONCRETE PIPE AND FITTINGS

A. Reinforced-Concrete sewer pipe and fittings shall be ASTM C76 or ASTM C655.
   1. Bell-and-spigot ends and gasketed joints with ASTM C443, rubber gaskets.
   2. Class III: Wall A

2.3 NONPRESSURE TRANSITION COUPLINGS

A. Comply with ASTM C1173, elastomeric, sleeve-type, reducing or transition coupling, for joining underground non-pressure piping. Include ends of same sizes as piping to be joined, and corrosion-resistant-metal tension band and tightening mechanism on each end.

B. Sleeve Materials
   1. For concrete pipes: ASTM C443, rubber.
   2. For plastic pipes: ASTM F477, elastomeric seal or ASTM D5926, PVC.
   3. For dissimilar pipes: ASTM D5926, PVC or other material compatible with pipe materials being joined.

C. Unshielded, Flexible Couplings: Couplings shall be an elastomeric sleeve with stainless-steel shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.

D. Shielded, flexible couplings shall be elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.

E. Ring-Type, flexible couplings shall be elastomeric compression seal with dimensions to fit inside bell of larger pipe and for spigot of smaller pipe to fit inside ring.

2.4 CLEANOUTS

A. Cast-Iron Cleanouts: ASME A112.36.2M, round, gray-iron housing with clamping device and round, secured, scoriated, gray-iron cover. Include gray-iron ferrule with inside calk or spigot connection and countersunk, tapered-thread, brass closure plug.

1. Top-Loading Classification(s): Heavy Duty
2. Pipe fitting and riser to cleanout shall be same material as main pipe line.

B. Plastic Cleanouts shall have PVC body with PVC threaded plug. Pipe fitting and riser to cleanout shall be of same material as main line pipe.

2.5 DRAINS

A. Cast-Iron Area Drains: ASME A112.6.3, gray-iron round body with anchor flange and round grate. Include bottom outlet with inside calk or spigot connection, of sizes indicated.
   1. Top-Loading Classification(s): Heavy Duty

B. Grate openings shall be 3/8 by 3 inch (9.5 by 76 mm) slots.

2.6 ENCASEMENT FOR PIPING

A. Material: AWWA C105 High-density, cross-laminated polyethylene film of 0.004 inch (0.10 mm) minimum thickness.

B. Form: Sheet

C. Color: Black

2.7 CATCH BASINS

A. Standard Precast Concrete Manholes:
   1. Description: ASTM C478 (ASTM C478M), precast, reinforced concrete, of depth indicated, with provision for sealant joints.
   2. Diameter: 48 inches (1200 mm) minimum unless otherwise indicated.
   3. Ballast: Increase thickness of precast concrete sections or add concrete to base section as required to prevent flotation.
   4. Base Section: 6 inch (150 mm) minimum thickness for floor slab and 4-inch (102 mm) minimum thickness for walls and base riser section, and separate base slab or base section with integral floor.
   5. Riser Sections: 4 inch (102 mm) minimum thickness, and lengths to provide depth indicated.
   6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated, and top of cone of size that matches grade rings.
   7. Joint Sealant: ASTM C990 (ASTM C990M), bitumen or butyl rubber.
   8. Resilient Pipe Connectors: ASTM C923 (ASTM C923M), cast or fitted into manhole walls, for each pipe connection.
   9. Steps: If total depth from floor of manhole to finished grade is greater than 60 inches (1500 mm). Individual FRP steps or FRP ladder;

or ASTM A615, deformed, 1/2 inch (13 mm) steel reinforcing rods encased in ASTM D4101, PP, width of 16 inches (400 mm) minimum, spaced at 12 to 16 inch (300 to 400 mm) intervals.

10. Adjusting Rings: Reinforced-concrete rings, 6 to 9 inch (150 to 225 mm) total thickness, to match diameter of manhole frame and cover, and height as required to adjust manhole frame and cover to indicated elevation and slope.

B. Designed Precast Concrete Manholes:

1. Description: ASTM C913; designed for A-16 (AASHTO HS20-44), heavy-traffic, structural loading; of depth, shape, and dimensions indicated, with provision for sealant joints.
2. Ballast: Increase thickness of one or more precast concrete sections or add concrete to manhole as required to prevent flotation.
3. Joint Sealant: ASTM C990 (ASTM C990M), bitumen or butyl rubber.
4. Resilient Pipe Connectors: ASTM C923 (ASTM C923M), cast or fitted into manhole walls, for each pipe connection.
5. Steps: If total depth from floor of manhole to finished grade is greater than 60 inches (1500 mm). Individual FRP steps or FRP ladder or ASTM A615 deformed, 1/2 inch (13 mm) steel reinforcing rods encased in ASTM D 4101, PP, width of 16 inches (400 mm) minimum, spaced at 12 to 16 inch (300 to 400 mm) intervals.
6. Adjusting Rings: Reinforced-concrete rings, 6 to 9 inch (150 to 225 mm) total thickness, to match diameter of manhole frame and cover, and height as required to adjust manhole frame and cover to indicated elevation and slope.

C. Manhole Frames and Covers:

1. Description: Ferrous; 24 inch (610 mm) ID by 7 to 9 inch (175 to 225 mm) riser with 4 inch (102 mm) minimum width flange and 26-inch (600 mm) diameter cover. Include indented top design with lettering cast into cover, using wording equivalent to "STORM SEWER."
2. Material: ASTM A48/A48M, Class 35 gray iron unless otherwise indicated.

2.8 CONCRETE FOR MANHOLES AND CATCH BASINS

A. General: Cast-in-place concrete according to ACI 318, ACI 350/350R, and the following:

1. Cement: ASTM C150, Type II.
2. Fine Aggregate: ASTM C33, sand.

3. Coarse Aggregate: ASTM C33, crushed gravel.
4. Water: Potable.

B. Concrete Design Mix: 4000 psi (27.6 MPa) minimum, compressive strength in 28 days.
1. Reinforcing Fabric: ASTM A185, steel, welded wire fabric, plain.
2. Reinforcing Bars: ASTM A615, Grade 60 (420 MPa) deformed steel.

C. Manhole Channels and Benches: Channels shall be the main line pipe material. Include benches in all manholes and catch basins.
1. Channels: Main line pipe material or concrete invert. Height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope. Invert Slope: Same slope as the main line pipe. Bench to be concrete, sloped to drain into channel. Minimum of 6 inch slope from main line pipe to wall sides.

2.9 PIPE OUTLETS

A. Head walls: Cast in-place reinforced concrete, with apron and tapered sides.

B. Riprap basins: Broken, irregularly sized and shaped, graded stone according to NSSGA's "Quarried Stone for Erosion and Sediment Control."
1. Average Size: NSSGA No. R-3, screen opening 2 inches (51 mm).
2. Average Size: NSSGA No. R-4, screen opening 3 inches (76 mm).
3. Average Size: NSSGA No. R-5, screen opening 5 inches (127 mm).

C. Filter Stone: NSSGA's "Quarried Stone for Erosion and Sediment Control," No. FS-2, No. 4 screen opening, average-size graded stone.

D. Energy Dissipaters: To be as per NSSGA's "Quarried Stone for Erosion and Sediment Control," No. A-1, 3-ton (2721-kg) average weight armor stone, unless otherwise indicated.

2.10 STORMWATER DISPOSAL SYSTEMS

A. Pipe Systems: Perforated manifold, header, and lateral piping complying with AASHTO M252 for NPS 10 (DN 250) and smaller, AASHTO M294 for NPS 12 to NPS 60 (DN 300 to DN 1500). Include fittings, couplings, seals, and filter fabric.

2.11 HEADWALLS

A. Headwalls: Cast in-place concrete with a minimum compressive strength of 3000 psi (20 MPa) at 28 days.

2.12 FLARED END SECTIONS

A. Flared End Sections: Sections shall be of standard design fabricated from zinc-coated steel sheets conforming to requirements of ASTM A929.

2.13 PRECAST REINFORCED CONCRETE BOX CULVERT

A. Precast Reinforced Concrete Box Culvert: Designed for highway loadings with 2 feet (600 mm) of cover or more subjected to dead load only, conforming to ASTM C1433. For less than 2 feet (600 mm) of cover, subjected to highway loading, conform to ASTM C1433.

2.14 WARNING TAPE

A. Standard, 4-Mil polyethylene 3 inch (76 mm) wide tape detectable type, green with black letters, and imprinted with "CAUTION BURIED STORM DRAIN LINE BELOW".

PART 3 - EXECUTION

3.1 PIPE BEDDING

A. The bedding surface of the pipe shall provide a firm foundation of uniform density throughout the entire length of pipe. Concrete pipe requirements are such that when no bedding class is specified, concrete pipe shall be bedded in a soil foundation accurately shaped and rounded to conform with the lowest one-fourth of the outside portion of circular pipe. When necessary, the bedding shall be tamped. Bell holes and depressions for joints shall not be more than the length, depth, and width required for properly making the particular type of joint. Plastic pipe bedding requirements shall meet the requirements of ASTM D2321. Bedding, haunching and initial backfill shall be either Class IB or Class II material. Corrugated metal pipe bedding requirements shall conform to ASTM A798.

3.2 PIPING INSTALLATION

A. Drawing plans and details indicate general location and arrangement of underground storm drainage piping. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.

B. Install piping with 36 inch (915 mm) minimum cover as shown on the Drawings.

C. Install piping beginning at low point, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings

according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.

1. Do not lay pipe on unstable material, in wet trench or when trench and weather conditions are unsuitable for the work.
2. Support pipe on compacted bedding material. Excavate bell holes only large enough to properly make the joint.
3. Inspect pipes and fittings, for defects before installation. Defective materials shall be plainly marked and removed from the site. Cut pipe shall have smooth regular ends at right angles to axis of pipe.
4. Clean interior of all pipe thoroughly before installation. When work is not in progress, open ends of pipe shall be closed securely to prevent entrance of storm water, dirt or other substances.
5. Lower pipe into trench carefully and bring to proper line, grade, and joint. After jointing, interior of each pipe shall be thoroughly wiped or swabbed to remove any dirt, trash or excess jointing materials.
6. Do not walk on pipe in trenches until covered by layers of shading to a depth of 12 inches (300 mm) over the crown of the pipe.
7. Warning tape shall be continuously placed 12 inches (300 mm) above storm sewer piping.

D. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.

E. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.

F. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of microtunneling.

G. Install gravity-flow, nonpressure drainage piping according to the following:

1. Install piping pitched down in direction of flow.
2. Install piping with restrained joints at tee fittings and at changes in direction. Use corrosion-resistant rods, pipe or fittings; or cast in-place concrete supports or anchors.
3. Install hub-and-spigot, cast iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook."

4. Install ductile iron piping and special fittings according to AWWA C600.
5. Install corrugated steel piping according to ASTM A798.
6. Install corrugated aluminum piping according to ASTM B788.
7. Install ABS sewer piping according to ASTM D2321 and ASTM F1668.
8. Install PE corrugated sewer piping according to ASTM D2321 with gasketed joints.
9. Install PVC cellular-core piping, PVC sewer piping, and PVC profile gravity sewer piping, according to ASTM D2321 and ASTM F1668.
10. Install reinforced concrete sewer piping according to ASTM C1479.
11. Install force-main pressure piping according to the following:
    a. Install piping with restrained joints at tee fittings and at horizontal and vertical changes in direction. Use corrosion-resistant rods, pipe or fittings; or cast in-place concrete supports or anchors.
    b. Install ductile iron pressure piping and special fittings according to AWWA C600.
    c. Install PVC pressure piping according to AWWA M23, or ASTM D2774 and ASTM F1668.
    d. Install corrosion-protection piping encasement over the following underground metal piping according to AWWA C105/A21.5.
        1) Hub-and-spigot, cast iron soil pipe and fittings.
        2) Hubless cast iron soil pipe and fittings.
        3) Ductile iron pipe and fittings.
        4) Expansion joints and deflection fittings.

3.3 REGRADING

A. Raise or lower existing manholes and structures frames and covers in regraded areas to finish grade. Carefully remove, clean and salvage cast iron frames and covers. Adjust the elevation of the top of the manhole or structure as detailed on the drawings. Reset cast iron frame and cover, grouting below and around the frame. Install concrete collar around reset frame and cover as specified for new construction.

B. During periods when work is progressing on adjusting manholes or structures cover elevations, the Contractor shall install a temporary cover above the bench of the structure or manhole. The temporary cover shall be installed above the high flow elevation within the structure, and shall prevent debris from entering the wastewater stream.

3.4 CONNECTIONS TO EXISTING VA-OWNED MANHOLES

A. Make pipe connections and alterations to existing manholes so that finished work will conform as nearly as practicable to the applicable requirements specified for new manholes, including concrete and masonry work, cutting, and shaping.

3.5 CONNECTIONS TO EXISTING PUBLIC UTILITY MANHOLES

A. Comply with all rules and regulations of the public utility.

B. Backwater Valve Installation

1. Install combination horizontal and manual gate-valve in piping where indicated.

C. Cleanout Installation

1. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Use cast iron soil pipe fittings in sewer pipes at branches for cleanouts and cast iron soil pipe for riser extensions to cleanouts. Install piping so cleanouts open in direction of flow in sewer pipe.
   a. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
   b. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
   c. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
   d. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.
2. Set cleanout frames and covers in earth in cast in-place concrete block, 24 by 24 by 12 inches (600 by 600 by 300 mm) deep. Set with tops 1 inch (25 mm) above surrounding earth grade.

D. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

3.6 DRAIN INSTALLATION

A. Install type of drains in locations indicated.

1. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
2. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
3. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.

4. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.

B. Embed drains in 4 inch (102 mm) minimum concrete around bottom and sides.

C. Set drain frames and covers with tops flush with pavement surface.

D. Assemble trench sections with flanged joints and embed trench sections in 4 inch (102 mm) minimum concrete around bottom and sides.

3.7 MANHOLE INSTALLATION

A. Install manholes, complete with appurtenances and accessories indicated. Install precast concrete manhole sections with sealants according to ASTM C891.

B. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops 3 inches (76 mm) above finished surface elsewhere unless otherwise indicated.

C. Circular Structures:

1. Precast concrete segmental blocks shall lay true and plumb. All horizontal and vertical joints shall be completely filled with mortar. Parge interior and exterior of structure with 1/2 inch (15 mm) or cement mortar applied with a trowel and finished to an even glazed surface.

2. Precast reinforced concrete rings shall be installed true and plumb. The joints between rings and between rings and the base and top shall be sealed with a preform flexible gasket material specifically manufactured for this type of application. Adjust the length of the rings so that the eccentric conical top section will be at the required elevation. Cutting the conical top section is not acceptable.

3. Precast reinforced concrete manhole risers and tops. Install as specified for precast reinforced concrete rings.

D. Rectangular Structures:

1. Precast concrete structures shall be placed on a 8 inch (200 mm) reinforced concrete pad, or be provided with a precast concrete base section. Structures provided with a base section shall be set on an 8 inch (200 mm) thick aggregate base course compacted to a minimum of 95 percent of the maximum density as determined by ASTM D698. Set precast section true and plumb. Seal all joints with preform flexible gasket material.

2. Do not build structures when air temperature is 32 deg F (0 deg C), or below.
3. Invert channels shall be smooth and semicircular in shape conforming to inside of adjacent sewer section. Make changes in direction of flow with a smooth curve of as large a radius as size of structure will permit. Make changes in size and grade of channels gradually and evenly. Construct invert channels by one of the listed methods:
   a. Forming directly in concrete base of structure.
   b. Building up with brick and mortar.
4. Floor of structure outside the channels shall be smooth and slope toward channels not less than 1 to 12 or more than 1 to 6. Bottom slab and benches shall be concrete.
5. The wall that supports access rungs or ladder shall be 90 deg vertical from the floor of structure to manhole cover.
6. Install steps and ladders per the manufacturer's recommendations. Steps and ladders shall not move or flex when used. All loose steps and ladders shall be replaced by the Contractor.
7. Install manhole frames and covers on a mortar bed, and flush with the finish pavement. Frames and covers shall not move when subject to vehicular traffic. Install a concrete collar around the frame to protect the frame from moving until the adjacent pavement is placed. In unpaved areas, the rim elevation shall be 2 inches (50 mm) above the adjacent finish grade. Install an 8 inch (203 mm) thick, by 12 inch (300 mm) concrete collar around the perimeter of the frame. Slope the top of the collar away from the frame.

3.8 CATCH BASIN INSTALLATION

A. Construct catch basins to sizes and shapes indicated.
B. Set frames and grates to elevations indicated.

3.9 STORMWATER INLET AND OUTLET INSTALLATION

A. Construct inlet head walls, aprons, and sides of reinforced concrete.
B. Construct riprap of broken stone.
C. Install outlets that spill onto grade, anchored with concrete.
D. Install outlets that spill onto grade, with flared end sections that match pipe.
E. Construct energy dissipaters at outlets.

3.10 STORMWATER DISPOSAL SYSTEM INSTALLATION

A. Piping Systems: Excavate trenches of width and depth, and install piping system, filter fabric, and backfill, according to piping manufacturer's written instructions.

3.11 CONNECTIONS

A. Connect non pressure, gravity-flow drainage piping in building's storm building drains specified in Division 22 Section FACILITY STORM DRAINAGE PIPING.

B. Encase entire connection fitting, plus 6 inch (150 mm) overlap, with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

C. Make connections to existing piping and underground manholes.

1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe; install wye fitting into existing piping.
2. Make branch connections from side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500). Remove section of existing pipe, install wye fitting into existing piping.
3. Make branch connections from side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes and structures by cutting into existing unit and creating an opening large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe, manhole, or structure wall, use epoxy-bonding compound as interface between new and existing concrete and piping materials.
4. Protect existing piping, manholes, and structures to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

D. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.

1. Use non pressure-type flexible couplings where required to join gravity-flow, non pressure sewer piping unless otherwise indicated.
   a. Unshielded flexible couplings for same or minor difference OD pipes.

b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.
c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.

2. Use pressure-type pipe couplings for force-main joints.

3.12 IDENTIFICATION

A. Install green warning tape directly over piping and at outside edge of underground structures.

3.13 FIELD QUALITY CONTROL

A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.
1. Submit separate reports for each system inspection.
2. Defects requiring correction include the following:
a. Alignment: Less than full diameter of inside of pipe is visible between structures.
b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
d. Infiltration: Water leakage into piping.
e. Exfiltration: Water leakage from or around piping.
3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
4. Reinspect and repeat procedure until results are satisfactory.

3.14 TESTING OF STORM SEWERS:

A. Submit separate report for each test.
B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.
1. Do not enclose, cover, or put into service before inspection and approval.
2. Test completed piping systems according to requirements of authorities having jurisdiction.
3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours advance notice.

4. Submit separate report for each test.
5. Air test gravity sewers. Concrete Pipes conform to ASTM C924, Plastic Pipes conform to ASTM F1417, all other pipe material conform to ASTM C828 or C924, after consulting with pipe manufacturer. Testing of individual joints shall conform to ASTM C1103.
6. Test force-main storm drainage piping. Perform hydrostatic test after thrust blocks, supports, and anchors have hardened. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psi (1035 kPa).
   a. Ductile iron Piping: Test according to AWWA C600, "Hydraulic Testing" Section.
   b. PVC Piping: Test according to AWWA M23, "Testing and Maintenance" Chapter.

C. Leaks and loss in test pressure constitute defects that must be repaired. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

3.15 CLEANING

A. Clean interior of piping of dirt and superfluous materials. Flush with potable water.

--- E N D ---

DIVISION 34 - TRANSPORTATION

SECTION 34 71 13
PASSIVE VEHICLE BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Stationary anti-ram rated vehicle barriers at building entrances.

1.2 RELATED REQUIREMENTS

A. Concrete Site Walls, Islands, and Curbs: Section 03 30 00, CAST-IN-PLACE CONCRETE Section 03 30 53, (SHORT FORM) CAST-IN-PLACE CONCRETE.

B. Masonry Site Walls: Section 04 20 00, UNIT MASONRY.

C. Pipe Bollards: Section 05 50 00, METAL FABRICATIONS.

D. Concrete Driveway and Approach Paving: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

E. Asphalt Driveway and Approach Paving: Section 32 12 16, ASPHALT PAVING.

F. Perimeter Security Fences: Section 32 31 53, PERIMETER SECURITY FENCES AND GATES.

G. Deployable Vehicle Barriers: Section 34 75 13.13, ACTIVE VEHICLE BARRIERS.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. F2656/F2656M-15 - Crash Testing of Vehicle Security Barriers.

C. United States Department of State (DS):

1. SD-STD02.01-Revision A - Vehicle Crash Testing of Perimeter Barriers and Gates.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.
2. Show dimensions and clearances between barriers and other adjacent permanent construction.
3. Include setting drawings and templates for anchors, sleeves, and other items embedded into concrete foundations.

C. Delegated Design Drawings and Calculations: Signed and sealed by responsible design professional.

1.5 QUALITY ASSURANCE

1. Test mockups verifying compliance with specified performance.

B. Mockups: Construct full sized bollard array mockup at location directed by Contracting Officer's Representative.

1.6 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting vehicle barrier fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Structural Vehicle Barriers:

1. Bollards: Steel pipe, concrete filled. See Section 05 50 00, METAL FABRICATIONS.
2. Foundations: Permanent concrete as indicated on drawings.

2.2 SYSTEM PERFORMANCE

A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where work is located.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify foundation suitability for product installation.

B. Coordinate delivery and installation of anchors, sleeves, and other items embedded in concrete foundations.

C. Coordinate barrier system layout and installation with perimeter security system and vehicle control facilities including:

1. Driveway and approach paving. See Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
2. Perimeter security fences. See Section 32 31 53, PERIMETER SECURITY FENCES AND GATES.

3.2 INSTALLATION

1. Bollard Installation: See Section 05 50 00, METAL FABRICATIONS.

- - - E N D - - -