Construction Documents – 100% CD Submittal: Specifications

Volume 4 – Division 27-33 and Appendix

Reissued February 18th, 2026

Department of Veterans Health Administration

Electronic Health Record Modernization (EHRM) Infrastructure Upgrades – Togus, ME

Project No. 402-22-700

Contract No. 36C77623C0002

Togus VA Medical Center

1 VA Center, Augusta, ME 04330

US Department of Veterans Affairs

Program Contracting Activity Central (PCAC)

6150 Oak Tree Blvd., Suite 490

Independence, OH 44131

Prepared by:

GDM-AE, Inc.

GDM ARCHITECTS • ENGINEERS

1308 NE 134th St Suite A
Vancouver, WA 98685

SECTION 00 01 00
TABLE OF CONTENTS – 100% CONSTRUCTION DOCUMENTS

The following listed documents comprise the Project Manual for Electronic Health Record Modernization (EHRM) Infrastructure Upgrades at the Togus VA Medical Center in Augusta, Maine. Numbering of Divisions conforms to CSI Format for Building Specifications; Divisions and Sections not appearing are not applicable.

The following listed documents comprise the Project Manual for Electronic Health Record Modernization (EHRM) Infrastructure Upgrades at the Togus VA Medical Center in Augusta, Maine. Numbering of Divisions conforms to CSI Format for Building Specifications; Divisions and Sections not appearing are not applicable.

VOLUME ONE
00 01 00 Table of Contents

DIVISION 00 – PROCUREMENT AND CONTRACTING REQUIREMENTS
00 01 15 List of Drawing Sheets

DIVISION 01 - GENERAL REQUIREMENTS
01 00 00 General Requirements
01 14 00 Project Phasing
01 32 16.15 Project Schedule
01 33 23 Shop Drawings, Product Data, and Samples
01 35 26 Safety Requirements
01 42 19 Reference Standards
01 45 00 Quality Control
01 45 29 Testing Laboratory Services
01 56 00 Temporary Barriers and Enclosures
01 57 19 Temporary Environmental Controls
01 74 19 Construction Waste Management
01 81 11 Sustainable Construction Requirements
01 91 00 General Commissioning Requirements

END VOLUME ONE

VOLUME TWO
00 01 00 Table of Contents

DIVISION 02 – EXISTING CONDITIONS
02 41 19 Selective Demolition
02 81 00 Transportation and Disposal of Hazardous Materials
02 82 00 Asbestos Remediation
02 83 00 Lead Remediation

DIVISION 03 – CONCRETE
03 30 00 Cast-In-Place Concrete

DIVISION 04 – MASONRY
04 20 00 Unit Masonry
04 26 13 Masonry Veneer
04 72 00 Cast Stone Masonry

DIVISION 05 – METALS
05 12 00 Structural Steel Framing
05 21 00 Steel Joist Framing
05 31 00 Steel Decking
05 40 00 Cold-Formed Metal Framing

05 50 00 Metal Fabrications
05 52 13 PIPE AND TUBE RAILINGS

DIVISION 06 – WOOD, PLASTICS, AND COMPOSITES
06 10 53 Miscellaneous Rough Carpentry
06 16 00 Sheathing
06 41 16 Plastic-Laminate-Clad Architectural Cabinets
06 64 00 Plastic Paneling

DIVISION 07 – THERMAL AND MOISTURE PROTECTION
07 13 26 Self-Adhering Sheet Waterproofing
07 19 00 Water Repellents
07 21 00 Thermal Insulation
07 21 19 Foamed-In-Place Insulation
07 26 50 Underslab Vapor Barrier
07 27 26 Fluid-Applied Membrane Air Barriers
07 42 93 Soffit Panels
07 52 00 Modified Bitumen Membrane Roofing
07 62 00 Sheet Metal Flashing And Trim
07 72 00 Roof Accessories
07 84 00 Firestopping General Requirements
07 84 43 Joint Firestopping
07 92 00 Joint Sealants
07 92 19 Acoustic Joint Sealants

DIVISION 08 – OPENINGS
08 11 13 Hollow Metal Doors And Frames
08 31 13 Access Doors And Frames
08 33 23 Overhead Coiling Doors
08 34 00 Hot Aisle Containment System
08 41 13 Aluminum-Framed Entrances And Storefronts
08 41 23 Fire-Rated Aluminum Framed Entrances And Storefronts
08 71 00 Door Hardware
08 71 00A Door Hardware Groups
08 80 00 Glazing
08 88 13 Fire-Rated Glass
08 90 00 Louvers And Vents

DIVISION 09 – FINISHES
09 22 16 Non-Structural Metal Framing
09 29 00 Gypsum Board
09 30 13 Ceramic Tiling
09 51 13 Acoustic Panel Ceilings
09 65 13 Resilient Base And Accessories
09 65 36 Static-Control Resilient Flooring
09 68 13 Tile Carpeting
09 91 14 Exterior Painting
09 91 24 Interior Painting

DIVISION 10 – SPECIALTIES
10 26 00 Wall And Door Protection
10 28 00 Toilet, Bath And Laundry Accessories
10 44 13 Fire Protection Cabinets
10 44 19 Fire Extinguishers

DIVISION 11 – EQUIPMENT
11 13 19 Stationary Loading Dock Equipment

DIVISION 12 – FURNISHINGS
12 36 23.13 Plastic-Laminate-Clad Countertops

DIVISION 13 – SPECIAL CONSTRUCTION
13 05 41 Seismic Restraint Requirements For Non-Structural Components

DIVISION 14 – CONVEYING EQUIPMENT - NA
END OF VOLUME TWO

VOLUME THREE
00 01 00 Table Of Contents

DIVISION 21 – FIRE SUPPRESSION
21 08 00 Commissioning Of Fire Suppression Systems
21 13 13 Wet-Pipe Sprinkler Systems
21 13 45 Sprinkler Guards
21 22 00 Clean Agent Fire Suppression Systems

DIVISION 22 – PLUMBING
22 05 11 Common Work Results For Plumbing
22 05 12 General Motor Requirements For Plumbing Equipment
22 05 19 Meters And Gages For Plumbing Piping
22 05 23 General-Duty Valves For Plumbing Piping
22 05 33 Heat Tracing For Plumbing Piping
22 07 11 Plumbing Insulation
22 08 00 Commissioning Of Plumbing Systems
22 11 00 Facility Water Distribution
22 11 23 Domestic Water Pumps
22 13 00 Facility Sanitary And Vent Piping
22 14 00 Facility Storm Drainage
22 40 00 Plumbing Fixtures
22 62 00 Vacuum Systems For Laboratory And Healthcare Facilities
22 63 00 Gas Systems For Laboratory And Healthcare Facilities

DIVISION 23 - HEATING, VENTILATING, AND AIR-CONDITIONING (HVAC)
23 05 11 Common Work Results For Hvac
23 05 12 General Motor Requirements For Hvac And Steam Generation Equipment
23 05 41 Noise And Vibration Control For Hvac Piping And Equipment
23 05 93 Testing, Adjusting, And Balancing For Hvac
23 07 11 Hvac And Boiler Plant Insulation
23 08 00 Commissioning Of Hvac Systems
23 09 23 Direct-Digital Control System For Hvac
23 09 27 Data Center Cooling Optimization System
23 10 00 Facility Fuel Oil Systems
23 21 13 Hydronic Piping
23 22 13 Steam And Condensate Heating Piping
23 23 00 Refrigerant Piping
23 25 00 Hvac Water Treatment
23 31 00 Hvac Ducts And Casings
23 34 00 Hvac Fans
23 37 00 Air Outlets And Inlets
23 81 00 Decentralized Unitary Hvac Equipment
23 81 23 Computer-Room Air-Conditioners
23 81 45 Variable Refrigerant Flow Systems
23 82 00 Convection Heating And Cooling Units
23 85 00 Radon Mitigation Systems

DIVISION 26 – ELECTRICAL
26 05 11 - Requirements for Electrical Installations
26 05 13 - Medium-Voltage Cables
26 05 19 - Low-Voltage Electrical Power Conductors and Cables
26 05 26 - Grounding and Bonding for Electrical Systems
26 05 33 - Raceways and Boxes for Electrical Systems
26 05 41 - Underground Electrical Construction
26 05 73 - Overcurrent Protective Device Coordination Study
26 08 00 - Commissioning of Electrical Systems

26 09 23 - Lighting Controls
26 12 19 - Pad-Mounted Liquid-Filled Medium-Voltage Transformers
26 13 16 - Medium-Voltage Fusible Interrupter Switches
26 22 00 - Low-Voltage Transformers
26 24 13 - Distribution Switchboards
26 24 16 - Panelboards
26 27 26 - Wiring Devices
26 29 21 - Enclosed Switches and Circuit Breakers
26 32 13 - Engine Generators
26 33 53 - Static Uninterruptible Power Supply
26 36 23 - Automatic Transfer Switches
26 41 00 - Facility Lightning Protection
26 43 13 - Surge Protective Devices
26 51 00 - Interior Lighting
26 56 00 - Exterior Lighting

VOLUME FOUR
DIVISION 27 – COMMUNICATIONS
270511 - Requirements for Communications Installations
270526 - Grounding and Bonding for Communications Systems
270533 - Conduits and Backboxes for Communications Systems
270536 - Cable Trays for Communications Systems
270553 - Identification for Communications Systems
270800 - Commissioning of Communications Systems
271000 - Structured Cabling
271116 - Communications Cabinets, Racks, Frames, and Enclosures
271119 - Communications Termination Blocks and Patch Panels
271126 - Communications Rack Mounted Power Protection and Power Strips
271313 - Communications Copper Backbone Cabling
271313.13 - Communications Copper Cable Splicing and Terminations
271323 - Communications Optical Fiber Backbone Cabling
271323.13 - Communications Optical Fiber Cable Splicing and Terminations
271513 - Communications Copper Horizontal Cabling
271619 - Communications Patch Cords, Station Cords, and Cross Connect Wire
275116 - Public Address and Mass Notification Systems

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY
280500 - Common Work Results for Electronic Safety and Security
280513 - Conductors and Cables for Electronic Safety and Security
280526 - Grounding and Bonding for Electronic Safety and Security
280528.33 - Conduits and Backboxes for Electronic Safety and Security
280800 - Commissioning of Electronic Safety and Security Systems
281300 - Physical Access Control System
281353 - Security Access Detection
281600 - Intrusion Detection System
282300 - Video Surveillance
28 31 00 - Fire Detection And Alarm

DIVISION 31 – EARTHWORK
31 20 00 Earthwork
31 23 19 Dewatering
31 32 19 Mechanically Stabilized Earth (MSE) Segmental Retaining Wall

DIVISION 32 – EXTERIOR IMPROVEMENTS
32 05 23 Cement And Concrete For Exterior Improvements
32 12 16 Asphalt Paving
32 17 13 Pavement Markings
32 90 00 Planting

DIVISION 33 – SITE UTILITIES
33 08 00 Commissioning Of Site Utilities
33 10 00 Water Utilities
33 30 00 Sanitary Sewer Utilities

33 40 00 Storm Sewer Utilities

APPENDIX
40 00 00 Geotechnical Engineering Report

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes common requirements to communications installations and applies to all sections of Division 27 /and Division 28.

B. Provide completely functioning communications systems.

C. Comply with VAAR 852.236.91 and FAR clause 52.236-21 in circumstance of a need for additional detail or conflict between drawings, specifications, reference standards or code.

1.2 REFERENCES

A. Abbreviations and Acronyms

1. Refer to http://www.cfm.va.gov/til/sdetail.asp for Division 00, ARCHITECTURAL ABBREVIATIONS.
2. Additional Abbreviations and Acronyms:

A	Ampere
AC	Alternating Current
AE	Architect and Engineer
AFF	Above Finished Floor
AHJ	Authority Having Jurisdiction
ANSI	American National Standards Institute
AWG	American Wire Gauge (refer to STP and UTP)
AWS	Advanced Wireless Services
BCT	Bonding Conductor for Telecommunications (also Telecommunications Bonding Conductor (TBC))
BDA	Bi-Directional Amplifier
BICSI	Building Industry Consulting Service International
BIM	Building Information Modeling
BOM	Bill of Materials
BTU	British Thermal Units
BUCR	Back-up Computer Room
BTS	Base Transceiver Station
CAD	AutoCAD
CBOPC	Community Based Out Patient Clinic

CBC	Coupled Bonding Conductor
CBOC	Community Based Out Patient Clinic (refer to CBOPC, OPC, VAMC)
CCS	TIP's Cross Connection System (refer to VCCS and HCCS)
CFE	Contractor Furnished Equipment
CFM	US Department of Veterans Affairs Office of Construction and Facilities Management
CFR	Consolidated Federal Regulations
CIO	Communication Information Officer (Facility, VISN or Region)
cm	Centimeters
CO	Central Office
COR	Contracting Officer Representative
CPU	Central Processing Unit
CSU	Customer Service Unit
CUP	Conditional Use Permit(s) – Federal/GSA for VA
dB	Decibel
dBm	Decibel Measured
dBmV	Decibel per milli-Volt
DC	Direct Current
DEA	United States Drug Enforcement Administration
DSU	Data Service Unit
EBC	Equipment Bonding Conductor
ECC	Engineering Control Center (refer to DCR, EMCR)
EDGE	Enhanced Data (Rates) for GSM Evolution
EDM	Electrical Design Manual
EMCR	Emergency Management Control Room (refer to DCR, ECC)
EMI	Electromagnetic Interference (refer to RFI)
EMS	Emergency Medical Service
EMT	Electrical Metallic Tubing or thin wall conduit
ENTR	Utilities Entrance Location (refer to DEMARC, POTS, LEC)

EPBX	Electronic Digital Private Branch Exchange
ESR	Vendor’s Engineering Service Report
FA	Fire Alarm
FAR	Federal Acquisition Regulations in Chapter 1 of Title 48 of Code of Federal Regulations
FMS	VA’s Headquarters or Medical Center Facility’s Management Service
FR	Frequency (refer to RF)
FTS	Federal Telephone Service
GFE	Government Furnished Equipment
GPS	Global Positioning System
GRC	Galvanized Rigid Metal Conduit
GSM	Global System (Station) for Mobile
HCCS	TIP’s Horizontal Cross Connection System (refer to CCS & VCCS)
HDPE	High Density Polyethylene Conduit
HDTV	Advanced Television Standards Committee High-Definition Digital Television
HEC	Head End Cabinets(refer to HEIC, PA)
HEIC	Head End Interface Cabinets(refer to HEC, PA)
HF	High Frequency (Radio Band; Re FR, RF, VHF & UHF)
HSPA	High Speed Packet Access
HZ	Hertz
IBT	Intersystem Bonding Termination (NEC 250.94)
IC	Intercom
ICRA	Infectious Control Risk Assessment
IDEN	Integrated Digital Enhanced Network
IDC	Insulation Displacement Contact
IDF	Intermediate Distribution Frame
ILSM	Interim Life Safety Measures
IMC	Rigid Intermediate Steel Conduit
IRM	Department of Veterans Affairs Office of Information Resources Management

ISDN	Integrated Services Digital Network
ISM	Industrial, Scientific, Medical
IWS	Intra-Building Wireless System
LAN	Local Area Network
LBS	Location Based Services, Leased Based Systems
LEC	Local Exchange Carrier (refer to DEMARC, PBX & POTS)
LED	Light Emitting Diode
LMR	Land Mobile Radio
LTE	Long Term Evolution, or 4G Standard for Wireless Data Communications Technology
M	Meter
MAS	Medical Administration Service
MATV	Master Antenna Television
MCR	Main Computer Room
MCOR	Main Computer Operators Room
MDF	Main Distribution Frame
MH	Manholes or Maintenance Holes
MHz	Megahertz (10^6 Hz)
mm	Millimeter
MOU	Memorandum of Understanding
MW	Microwave (RF Band, Equipment or Services)
NID	Network Interface Device (refer to DEMARC)
NEC	National Electric Code
NOR	Network Operations Room
NRTL	OSHA Nationally Recognized Testing Laboratory
NS	Nurse Stations
NTIA	U.S. Department of Commerce National Telecommunications and Information Administration
OEM	Original Equipment Manufacturer
OI&T	Office of Information and Technology
OPC	VA’s Outpatient Clinic (refer to CBOC, VAMC)
OSH	Department of Veterans Affairs Office of Occupational Safety and Health

OSHA	United States Department of Labor Occupational Safety and Health Administration
OTDR	Optical Time-Domain Reflectometer
PA	Public Address System (refer to HE, HEIC, RPEC)
PBX	Private Branch Exchange (refer to DEMARC, LEC, POTS)
PCR	Police Control Room (refer to SPCC, could be designated SCC)
PCS	Personal Communications Service (refer to UPCS)
PE	Professional Engineer
PM	Project Manager
PoE	Power over Ethernet
POTS	Plain Old Telephone Service (refer to DEMARC, LEC, PBX)
PSTN	Public Switched Telephone Network
PSRAS	Public Safety Radio Amplification Systems
PTS	Pay Telephone Station
PVC	Poly-Vinyl Chloride
PWR	Power (in Watts)
RAN	Radio Access Network
RBB	Rack Bonding Busbar
RE	Resident Engineer or Senior Resident Engineer
RF	Radio Frequency (refer to FR)
RFI	Radio Frequency Interference (refer to EMI)
RFID	RF Identification (Equipment, System or Personnel)
RMC	Rigid Metal Conduit
RMU	Rack Mounting Unit
RPEC	Radio Paging Equipment Cabinets(refer to HEC, HEIC, PA)
RTLS	Real Time Location Service or System
RUS	Rural Utilities Service
SCC	Security Control Console (refer to PCR, SPCC)
SMCS	Spectrum Management and Communications Security (COMSEC)

SFO	Solicitation for Offers
SME	Subject Matter Experts (refer to AHJ)
SMR	Specialized Mobile Radio
SMS	Security Management System
SNMP	Simple Network Management Protocol
SPCC	Security Police Control Center (refer to PCR, SMS)
STP	Shielded Balanced Twisted Pair (refer to UTP)
STR	Stacked Telecommunications Room
TAC	VA's Technology Acquisition Center, Austin, Texas
TCO	Telecommunications Outlet
TER	Telephone Equipment Room
TGB	Telecommunications Grounding Busbar (also Secondary Bonding Busbar (SBB))
TIP	Telecommunications Infrastructure Plant
TMGB	Telecommunications Main Grounding Busbar (also Primary Bonding Busbar (PBB))
TMS	Traffic Management System
TOR	Telephone Operators Room
TP	Balanced Twisted Pair (refer to STP and UTP)
TR	Telecommunications Room (refer to STR)
TWP	Twisted Pair
UHF	Ultra High Frequency (Radio)
UMTS	Universal Mobile Telecommunications System
UPCS	Unlicensed Personal Communications Service (refer to PCS)
UPS	Uninterruptible Power Supply
USC	United States Code
UTP	Unshielded Balanced Twisted Pair (refer to TP and STP)
UV	Ultraviolet
V	Volts
VAAR	Veterans Affairs Acquisition Regulation
VACO	Veterans Affairs Central Office

VAMC	VA Medical Center (refer to CBOC, OPC, VACO)
VCCS	TIP's Vertical Cross Connection System (refer to CCS and HCCS)
VHF	Very High Frequency (Radio)
VISN	Veterans Integrated Services Network (refers to geographical region)
VSWR	Voltage Standing Wave Radio
W	Watts
WEB	World Electronic Broadcast
WiMAX	Worldwide Interoperability (for MW Access)
WI-FI	Wireless Fidelity
WMTS	Wireless Medical Telemetry Service
WSP	Wireless Service Providers

B. Definitions:

1. Access Floor: Pathway system of removable floor panels supported on adjustable pedestals to allow cable placement in area below.
2. BNC Connector (BNC): United States Military Standard MIL-C-39012/21 bayonet-type coaxial connector with quick twist mating/unmating, and two lugs preventing accidental disconnection from pulling forces on cable.
3. Bond: Permanent joining of metallic parts to form an electrically conductive path to ensure electrical continuity and capacity to safely conduct any currents likely to be imposed to earth ground.
4. Bundled Microducts: All forms of jacketed microducts.
5. Conduit: Includes all raceway types specified.
6. Conveniently Accessible: Capable of being reached without use of ladders, or without climbing or crawling under or over obstacles such as, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
7. Distributed (in house) Antenna System (DAS): An Emergency Radio Communications System installed for Emergency Responder (or first responders and Government personnel) use while inside facility to maintain contact with each respective control point; refer to Section 27 53 19, DISTRIBUTED RADIO ANTENNA (WITHIN BUILDING) EQUIPMENT AND SYSTEMS.

8. DEMARC, Extended DMARC or ENTR: Service provider's main point of demarcation owned by LEC or service provider and establishes a physical point where service provider's responsibilities for service and maintenance end. This point is called NID, in data networks.
9. Effectively Grounded: Intentionally bonded to earth through connections of low impedance having current carrying capacity to prevent buildup of currents and voltages resulting in hazard to equipment or persons.
10. Electrical Supervision: Analyzing a system’s function and components (i.e. cable breaks / shorts, inoperative stations, lights, LEDs and states of change, from primary to backup) on a 24/7/365 basis; provide aural and visual emergency notification signals to minimum two remote designated or accepted monitoring stations.
11. Electrostatic Interference (ESI) or Electrostatic Discharge Interference: Refer to EMI and RFI.
12. Emergency Call Systems: Wall units (in parking garages and stairwells) and pedestal mounts (in parking lots) typically provided with a strobe, camera and two-way audio communication functions.
13. Project 25 (2014) (P25 (TIA-102 Series)): Set of standards for local, state and Federal public safety organizations and agencies digital LMR services. P25 is applicable to LMR equipment authorized or licensed under the US Department of Commerce National Telecommunications and Information Administration or FCC rules and regulations, and is a required standard capability for all LMR equipment and systems.
14. Grounding Electrode Conductor: (GEC) Conductor connected to earth grounding electrode.
15. Grounding Electrode System: Electrodes through which an effective connection to earth is established, including supplementary, communications system grounding electrodes and GEC.
16. Grounding Equalizer or Backbone Bonding Conductor (BBC): Conductor that interconnects elements of telecommunications grounding infrastructure.
17. Head End (HE): Equipment, hardware and software, or a master facility at originating point in a communications system designed for centralized communications control, signal processing, and distribution that acts as a common point of connection between equipment and devices connected to a network of interconnected

equipment, possessing greatest authority for allowing information to be exchanged, with whom other equipment is subordinate.

18. Microducts: All forms of air blown fiber pathways.
19. Ohm: A unit of restive measurement.
20. Received Signal Strength Indication (RSSI): A measurement of power present in a received RF signal.
21. Service Provider Demarcation Point (SPDP): Not owned by LEC or service provider, but designated by Government as point within facility considered the DEMARC.
22. Sound (SND): Changing air pressure to audible signals over given time span.
23. System: Specific hardware, firmware, and software, functioning together as a unit, performing task for which it was designed.
24. Telecommunications Bonding Backbone (TBB): Conductors of appropriate size (minimum 53.49 mm2 [1/0 AWG]) stranded copper wire, that connect to Grounding Electrode System and route to telecommunications main grounding busbar (TMGB) and circulate to interconnect various TGBs and other locations shown on drawings.
25. Voice over Internet Protocol (VoIP): A telephone system in which voice signals are converted to packets and transmitted over LAN network using Transmission Control Protocol (TCP)/Internet Protocol (IP). VA'S VoIP is not listed or coded for life and public safety, critical, emergency or other protection functions. When VoIP system or equipment is provided instead of PBX system or equipment, each TR (STR) and DEMARC requires increased AC power provided to compensate for loss of PBX's telephone instrument line power; and, to compensate for absence of PBX's UPS capability.
26. Wide Area Network (WAN): A digital network that transcends localized LANs within a given geographic location. VA'S WAN/LAN is not nationally listed or coded for life and public safety, critical, emergency or other safety functions.

1.3 APPLICABLE PUBLICATIONS

A. Applicability of Standards: Unless documents include more stringent requirements, applicable construction industry standards have same force and effect as if bound or copied directly into the documents to extent referenced. Such standards are made a part of these documents by reference.

1. Each entity engaged in construction must be familiar with industry standards applicable to its construction activity.
2. Obtain standards directly from publication source, where copies of standards are needed to perform a required construction activity.

B. Government Codes, Standards and Executive Orders: Refer to http://www.cfm.va.gov/TIL/cPro.asp:

1. Federal Communications Commission, (FCC) CFR, Title 47:

Part 15	Restrictions of use for Part 15 listed RF Equipment in Safety of Life Emergency Functions and Equipment Locations
Part 47	Chapter A, Paragraphs 6.1-6.23, Access to Telecommunications Service, Telecommunications Equipment and Customer Premises Equipment
Part 58	Television Broadcast Service
Part 73	Radio and Television Broadcast Rules
Part 90	Rules and Regulations, Appendix C
Form 854	Antenna Structure Registration
Chapter XXIII	National Telecommunications and Information Administration (NTIA, P/O Commerce, Chapter XXIII) the 'Red Book'- Chapters 7, 8 & 9 compliments CFR, Title 47, FCC Part 15, RF Restriction of Use and Compliance in "Safety of Life" Functions & Locations

2. US Department of Agriculture, (Title 7, USC, Chapter 55, Sections 2201, 2202 & 2203:RUS 1755 Telecommunications Standards and Specifications for Materials, Equipment and Construction:

RUS Bull 1751F-630	Design of Aerial Cable Plants
RUS Bull 1751F-640	Design of Buried Cable Plant, Physical Considerations
RUS Bull 1751F-643	Underground Plant Design
RUS Bull 1751F-815	Electrical Protection of Outside Plants,
RUS Bull 1753F-201	Acceptance Tests of Telecommunications Plants (PC-4)
RUS Bull 1753F-401	Splicing Copper and Fiber Optic Cables (PC-2)
RUS Bull 345-50	Trunk Carrier Systems (PE-60)
RUS Bull 345-65	Shield Bonding Connectors (PE-65)
RUS Bull 345-72	Filled Splice Closures (PE-74)
RUS Bull 345-83	Gas Tube Surge Arrestors (PE-80)

3. US Department of Commerce/National Institute of Standards Technology,(NIST):

FIPS PUB 1-1	Telecommunications Information Exchange
FIPS PUB 100/1	Interface between Data Terminal Equipment (DTE) Circuit Terminating Equipment for operation with Packet Switched Networks, or Between Two DTEs, by Dedicated Circuit
FIPS PUB 140/2	Telecommunications Information Security Algorithms
FIPS PUB 143	General Purpose 37 Position Interface between DTE and Data Circuit Terminating Equipment
FIPS 160/2	Electronic Data Interchange (EDI),
FIPS 175	Federal Building Standard for Telecommunications Pathway and Spaces
FIPS 191	Guideline for the Analysis of Local Area Network Security
FIPS 197	Advanced Encryption Standard (AES)
FIPS 199	Standards for Security Categorization of Federal Information and Information Systems

4. US Department of Defense, (DoD):

MIL-STD-188-110	Interoperability and Performance Standards for Data Modems
MIL-STD-188-114	Electrical Characteristics of Digital Interface Circuits
MIL-STD-188-115	Communications Timing and Synchronizations Subsystems
MIL-C-28883	Advanced Narrowband Digital Voice Terminals
MIL-C-39012/21	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series BNC (Uncabled), Socket Contact, Jam Nut Mounted, Class 2)

5. US Department of Health and Human Services:
   The Health Insurance Portability and Accountability Act of 1996 (HIPAA) Privacy, Security and Breach Notification Rules
6. US Department of Justice:
   2010 Americans with Disabilities Act Standards for Accessible Design (ADAAD).

7. US Department of Labor, (DoL) - Public Law 426-62 – CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standards):

Subpart 7	Approved NRTLs; obtain a copy at https://www.osha.gov/dts/otpca/nrtl/nrtllist.html
Subpart 35	Compliance with NFPA 101, Life Safety Code
Subpart 36	Design and Construction Requirements for Exit Routes
Subpart 268	Telecommunications
Subpart 305	Wiring Methods, Components, and Equipment for General Use
Subpart 508	Americans with Disabilities Act Accessibility Guidelines; technical requirement for accessibility to buildings and facilities by individuals with disabilities

8. US Department of Transportation, (DoT):
   a. Public Law 85-625, CFR, Title 49, Part 1, Subpart C – Federal Aviation Administration (FAA):AC 110/460-ID & AC 707 / 460-2E – Advisory Circulars Standards for Construction of Antenna Towers, and 7450 and 7460-2 – Antenna Construction Registration Forms.
9. US Department of Veterans Affairs (VA): Office of Telecommunications (OI&T), MP-6, PART VIII, TELECOMMUNICATIONS, CHAPTER 5, AUDIO, RADIO AND TELEVISION (and COMSEC) COMMUNICATIONS SYSTEMS: Spectrum Management and COMSEC Service (SMCS), AHJ for:
   a. CoG, “Continuance of Government” communications guidelines and compliance.
   b. COMSEC,“VA wide coordination and control of security classified communication assets.”
   c. COOP, “Continuance of Operations” emergency communications guidelines and compliance.
   d. FAA, FCC, and US Department of Commerce National Telecommunications and Information Administration, “VA wide RF Co-ordination, Compliance and Licensing.”
   e. Handbook 6100 – Telecommunications: Cyber and Information Security Office of Cyber and Information Security, and Handbook 6500 – Information Security Program.

f. Low Voltage Special Communications Systems "Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance and Life Safety Certifications for CFM and VA Facility Low Voltage Special Communications Projects (except Fire Alarm, Telephone and Data Systems)."

g. SATCOM, "Satellite Communications" guidelines and compliance, and Security and Law Enforcement Systems – "Coordinates the Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance, DEA and Public Safety Certification(s) for CFM and VA Facility Security Low Voltage Special Communications and Physical Security Projects.

h. VHA's National Center for Patient Safety – Veterans Health Administration (VHA) Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.

i. VA's CEOSH, concurrence with warning identified in VA Directive 7700.

j. Wireless and Handheld Devices, "Guidelines and Compliance,"

k. Office of Security and Law Enforcement: VA Directive 0730 and Health Special Presidential Directive (HSPD)-12.

C. NRTL Standards: Refer to https://www.osha.gov/laws-regs/regulations/standardnumber/1926

1. Canadian Standards Association (CSA); same tests as presented by UL
2. Communications Certifications Laboratory (CEL); same tests as presented by UL.
3. Intertek Testing Services NA, Inc., (ITSNA), formerly Edison Testing Laboratory (ETL) same tests as presented by UL).
4. Underwriters Laboratory (UL):

1-2005	Flexible Metal Conduit
5-2011	Surface Metal Raceway and Fittings
6-2007	Rigid Metal Conduit
44-010	Thermoset-Insulated Wires and Cables
50-1995	Enclosures for Electrical Equipment
65-2010	Wired Cabinets
83-2008	Thermoplastic-Insulated Wires and Cables
96-2005	Lightning Protection Components

96A-2007	Installation Requirements for Lightning Protection Systems
360-2013	Liquid-Tight Flexible Steel Conduit
444-2008	Communications Cables
467-2013	Grounding and Bonding Equipment
486A-486B-2013	Wire Connectors
486C-2013	Splicing Wire Connectors
486D-2005	Sealed Wire Connector Systems
486E-2009	Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-2007	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
497/497A/497B/497C	
497D/497E	Protectors for Paired Conductors/Communications Circuits/Data Communications and Fire Alarm Circuits/coaxial circuits/voltage protections/Antenna Lead In
510-2005	Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
514A-2013	Metallic Outlet Boxes
514B-2012	Fittings for Cable and Conduit
514C-1996	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-2011	Schedule 40 and 80 Rigid PVC Conduit
651A-2011	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-2007	Electrical Metallic Tubing
884-2011	Underfloor Raceways and Fittings
1069-2007	Hospital Signaling and Nurse Call Equipment
1242-2006	Intermediate Metal Conduit
1449-2006	Standard for Transient Voltage Surge Suppressors
1479-2003	Fire Tests of Through-Penetration Fire Stops
1480-2003	Speaker Standards for Fire Alarm, Emergency, Commercial and Professional use
1666-2007	Standard for Wire/Cable Vertical (Riser) Tray Flame Tests

1685-2007	Vertical Tray Fire Protection and Smoke Release Test for Electrical and Fiber Optic Cables
1861-2012	Communication Circuit Accessories
1863-2013	Standard for Safety, communications Circuits Accessories
1865-2007	Standard for Safety for Vertical-Tray Fire Protection and Smoke-Release Test for Electrical and Optical-Fiber Cables
2024-2011	Standard for Optical Fiber Raceways
2024-2014	Standard for Cable Routing Assemblies and Communications Raceways
2196-2001	Standard for Test of Fire Resistive Cable
60950-1 ed. 2-2014	Information Technology Equipment Safety

D. Industry Standards:

1. Advanced Television Systems Committee (ATSC):

A/53 Part 1: 2013	ATSC Digital Television Standard, Part 1, Digital Television System
A/53 Part 2: 2011	ATSC Digital Television Standard, Part 2, RF/Transmission System Characteristics
A/53 Part 3: 2013	ATSC Digital Television Standard, Part 3, Service Multiplex and Transport System Characteristics
A/53 Part 4: 2009	ATSC Digital Television Standard, Part 4, MPEG-2 Video System Characteristics
A/53 Part 5: 2014	ATSC Digital Television Standard, Part 5, AC-3 Audio System Characteristics
A/53 Part 6: 2014	ATSC digital Television Standard, Part 6, Enhanced AC-3 Audio System Characteristics

2. American Institute of Architects (AIA): 2006 Guidelines for Design & Construction of Health Care Facilities.
3. American Society of Mechanical Engineers (ASME):

A17.1 (2013)	Safety Code for Elevators and Escalators Includes Requirements for Elevators, Escalators, Dumbwaiters, Moving Walks, Material Lifts, and Dumbwaiters with Automatic Transfer Devices
17.3 (2011)	Safety Code for Existing Elevators and Escalators

17.4 (2009)	Guide for Emergency Personnel
17.5 (2011)	Elevator and Escalator Electrical Equipment

4. American Society for Testing and Materials (ASTM):

B1 (2001)	Standard Specification for Hard-Drawn Copper Wire
B8 (2004)	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
D1557 (2012)	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort 56,000 ft-lbf/ft3 (2,700 kN-m/m3)
D2301 (2004)	Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape
B258-02 (2008)	Standard Specification for Standard Nominal Diameters and Cross-Sectional Areas of AWG Sizes of Solid Round Wires Used as Electrical Conductors
D709-01(2007)	Standard Specification for Laminated Thermosetting Materials
D4566 (2008)	Standard Test Methods for Electrical Performance Properties of Insulations and Jackets for Telecommunications Wire and Cable

5. American Telephone and Telegraph Corporation (AT&T) - Obtain following AT&T Publications at https://ebiznet.sbc.com/sbcnebs/

ATT-TP-76200 (2013)	Network Equipment and Power Grounding, Environmental, and Physical Design Requirements
ATT-TP-76300(2012)	Merged AT&T Affiliate Companies Installation Requirements
ATT-TP-76305 (2013)	Common Systems Cable and Wire Installation and Removal Requirements - Cable Racks and Raceways
ATT-TP-76306 (2009)	Electrostatic Discharge Control
ATT-TP-76400 (2012)	Detail Engineering Requirements
ATT-TP-76402 (2013)	AT&T Raised Access Floor Engineering and Installation Requirements
ATT-TP-76405 (2011)	Technical Requirements for Supplemental Cooling Systems in Network Equipment Environments

ATT-TP-76416 (2011) Grounding and Bonding Requirements for Network Facilities

ATT-TP-76440 (2005) Ethernet Specification

ATT-TP-76450 (2013) Common Systems Equipment Interconnection Standards for AT&T Network Equipment Spaces

ATT-TP-76461 (2008) Fiber Optic Cleaning

ATT-TP-76900 (2010) AT&T Installation Testing Requirement

ATT-TP-76911 (1999) AT&T LEC Technical Publication Notice

6. British Standards Institution (BSI):

BS EN 50109-2 Hand Crimping Tools - Tools for The Crimp Termination of Electric Cables and Wires for Low Frequency and Radio Frequency Applications – All Parts & Sections. October 1997

7. Building Industry Consulting Service International(BICSI):

ANSI/BICSI 002-2011 Data Center Design and Implementation Best Practices

ANSI/BICSI 004-2012 Information Technology Systems Design and Implementation Best Practices for Healthcare Institutions and Facilities

ANSI/NECA/BICSI 568-2006 Standard for Installing Commercial Building Telecommunications Cabling

NECA/BICSI 607-2011 Standard for Telecommunications Bonding and Grounding Planning and Installation Methods for Commercial Buildings

ANSI/BICSI 005-2013 Electronic Safety and Security (ESS) System Design and Implementation Best Practices

8. Electronic Components Assemblies and Materials Association,(ECA).

ECA EIA/RS-270 (1973) Tools, Crimping, Solderless Wiring Devices – Recommended Procedures for User Certification

EIA/ECA 310-E (2005) Cabinets, and Associated Equipment

9. Facility Guidelines Institute: 2010 Guidelines for Design and Construction of Health Care Facilities.

10. Insulated Cable Engineers Association (ICEA):

ANSI/ICEA S-80-576-2002 Category 1 & 2 Individually Unshielded Twisted-Pair Indoor Cables for Use in Communications Wiring Systems

ANSI/ICEA S-84-608-2010	Telecommunications Cable, Filled Polyolefin Insulated Copper Conductor, S-87-640(2011) Optical Fiber Outside Plant Communications Cable
ANSI/ICEA S-90-661-2012	Category 3, 5, & 5e Individually Unshielded Twisted-Pair Indoor Cable for Use in General Purpose and LAN Communication Wiring Systems
S-98-688 (2012)	Broadband Twisted Pair Cable Aircore, Polyolefin Insulated, Copper Conductors
S-99-689 (2012)	Broadband Twisted Pair Cable Filled, Polyolefin Insulated, Copper Conductors
ICEA S-102-700 (2004)	Category 6 Individually Unshielded Twisted Pair Indoor Cables (With or Without an Overall Shield) for use in Communications Wiring Systems Technical Requirements

11. Institute of Electrical and Electronics Engineers (IEEE):

ISSN 0739-5175	March-April 2008 Engineering in Medicine and Biology Magazine, IEEE (Volume: 27, Issue:2) Medical Grade-Mission Critical-Wireless Networks
IEEE C2-2012	National Electrical Safety Code (NESC)
C62.41.2-2002/ Cor 1-2012 IEEE	Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits 4)
C62.45-2002	IEEE Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits
81-2012 IEEE	Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System
100-1992	IEEE the New IEEE Standards Dictionary of Electrical and Electronics Terms
602-2007	IEEE Recommended Practice for Electric Systems in Health Care Facilities

1100-2005	IEEE Recommended Practice for Powering and Grounding Electronic Equipment

12. International Code Council:

AC193 (2014)	Mechanical Anchors in Concrete Elements

13. International Organization for Standardization (ISO):

ISO/TR 21730 (2007)	Use of Mobile Wireless Communication and Computing Technology in Healthcare Facilities - Recommendations for Electromagnetic Compatibility (Management of Unintentional Electromagnetic Interference) with Medical Devices

14. National Electrical Manufacturers Association (NEMA):

NEMA 250 (2008)	Enclosures for Electrical Equipment (1,000V Maximum)
ANSI C62.61 (1993)	American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuits
ANSI/NEMA FB 1 (2012)	Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing EMT) and Cable
ANSI/NEMA OS 1 (2009)	Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
NEMA SB 19 (R2007)	NEMA Installation Guide for Nurse Call Systems
TC 3 (2004)	Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing
NEMA VE 2 (2006)	Cable Tray Installation Guidelines

15. National Fire Protection Association (NFPA):

70E-2015	Standard for Electrical Safety in the Workplace
70-2014	National Electrical Code (NEC)
72-2013	National Fire Alarm Code
75-2013	Standard for the Fire Protection of Information Technological Equipment
76-2012	Recommended Practice for the Fire Protection of Telecommunications Facilities
77-2014	Recommended Practice on Static Electricity
90A-2015	Standard for the Installation of Air Conditioning and Ventilating Systems
99-2015	Health Care Facilities Code
101-2015	Life Safety Code

241	Safeguarding construction, alternation and Demolition Operations
255-2006	Standard Method of Test of Surface Burning Characteristics of Building Materials
262 - 2011	Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces
780-2014	Standard for the Installation of Lightning Protection Systems
1221-2013	Standard for the Installation, Maintenance, and Use of Emergency Services Communications Systems
5000-2015	Building Construction and Safety Code

16. Society for Protective Coatings (SSPC):
    SSPC SP 6/NACE No.3 (2007) Commercial Blast Cleaning
17. Society of Cable Telecommunications Engineers (SCTE):

ANSI/SCTE 15 2006	Specification for Trunk, Feeder and Distribution Coaxial Cable

18. Telecommunications Industry Association (TIA):

TIA-120 Series	Telecommunications Land Mobile communications (APCO/Project 25) (January 2014)
TIA TSB-140	Additional Guidelines for Field-Testing Length, Loss and Polarity of Optical Fiber Cabling Systems (2004)
TIA-155	Guidelines for the Assessment and Mitigation of Installed Category 6 Cabling to Support 10GBASE-T (2010)
TIA TSB-162-A	Telecommunications Cabling Guidelines for Wireless Access Points (2013)
TIA-222-G	Structural Standard for Antenna Supporting Structures and Antennas (2014)
TIA/EIA-423-B	Electrical Characteristics of Unbalanced Voltage Digital Interface Circuits (2012)
TIA-455-C	General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014)

TIA-455-53-A	FOTP-53 Attenuation by Substitution Measurements for Multimode Graded-Index Optical Fibers in Fiber Assemblies (Long Length) (September 2001)
TIA-455-61-A	FOTP-61 Measurement of Fiber of Cable Attenuation Using an OTDR (July 2003)
TIA-472D000-B	Fiber Optic Communications Cable for Outside Plant Use (July 2007)
ANSI/TIA-492-B	62.5-µ Core Diameter/125-um Cladding Diameter Class 1a Graded-Index Multimode Optical Fibers (November 2009)
ANSI/TIA-492AAAB-A	50-um Core Diameter/125-um Cladding Diameter Class IA Graded-Index Multimode Optically Optimized American Standard Fibers (November 2009
TIA-492CAAA	Detail Specification for Class IVa Dispersion-Unshifted Single-Mode Optical Fibers (September 2002)
TIA-492E000	Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1,550 nm Window (September 2002)
TIA-526-7-B	Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant – OFSTP-7 (December 2008)
TIA-526.14-A	Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant – SFSTP-14 (August 1998)
TIA-568	Revision/Edition: C Commercial Building Telecommunications Cabling Standard Set: (TIA-568-C.0-2 Generic Telecommunications Cabling for Customer Premises (2012), TIA-568-C.1-1 Commercial Building Telecommunications Cabling Standard Part 1: General Requirements (2012), TIA-568-C.2 Commercial Building Telecommunications Cabling Standard—Part 2: Balanced Twisted Pair Cabling Components (2009), TIA-568-C.3-1 Optical Fiber Cabling Components Standard, (2011) AND TIA-568-C.4

	Broadband Coaxial Cabling and Components Standard (2011) with addendums and erratas
TIA-569	Revision/Edition C Telecommunications Pathways and Spaces (March 2013)
TIA-574	Position Non-Synchronous Interface between Data Terminal equipment and Data Circuit Terminating Equipment Employing Serial Binary Interchange (May 2003)
TIA/EIA-590-A	Standard for Physical Location and Protection of Below Ground Fiber Optic Cable Plant (July 2001)
TIA-598-D	Optical Fiber Cable Color Coding (January 2005)
TIA-604-10-B	Fiber Optic Connector Intermateablility Standard (August 2008)
ANSI/TIA-606-B	Administration Standard for Telecommunications Infrastructure (2012)
TIA-607-B	Generic Telecommunications Bonding and Grounding (Earthing) For Customer Premises (January 2013)
TIA-613	High Speed Serial Interface for Data Terminal Equipment and Data Circuit Terminal Equipment (September 2005)
ANSI/TIA-758-B	Customer-owned Outside Plant Telecommunications Infrastructure Standard (April 2012)
ANSI/TIA-854	A Full Duplex Ethernet Specification for 1000 Mb/s (1000BASE-TX) Operating over Category 6 Balanced Twisted-Pair Cabling (2001)
ANSI/TIA-862-A	Building Automation Systems Cabling Standard (April 2011)
TIA-942-A	Telecommunications Infrastructure Standard for Data Centers (March 2014)
TIA-1152	Requirements for Field Testing Instruments and Measurements for Balanced Twisted Pair Cabling (September 2009)
TIA-1179	Healthcare Facility Telecommunications Infrastructure Standard (July 2010)

1.4 SINGULAR NUMBER

A. Where any device or part of equipment is referred in singular number (such as " rack"), reference applies to as many such devices as are required to complete installation.

1.5 RELATED WORK

A. Specification Order of Precedence: FAR Clause 52.236-21, VAAR Clause 852.236-71.

1. Field Cutting and Patching: Section 09 91 24, INTERIOR PAINTING.
2. Additional submittal requirements: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
3. Availability and source of references and standards specified in applicable publications: Section 01 42 19, REFERENCE STANDARDS.
4. Control of environmental pollution and damage for air, water, and land resources: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
5. Requirements for non-hazardous building construction and demolition waste: Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
6. General requirements and procedures to comply with various federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable design: Section 01 81 11,SUSTAINABLE CONSTRUCTION REQUIREMENTS.
7. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction: Section 07 84 00, JOINT FIRESTOPPING.
8. Sealant and caulking materials and their application: Section 07 92 00, JOINT SEALANTS.
9. General electrical requirements that are common to more than one section of Division 26: Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
10. Electrical conductors and cables in electrical systems rated 600 V and below: Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
11. Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
12. Conduit and boxes: Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS.
13. Wiring devices: Section 26 27 26, WIRING DEVICES.

14. Underground ducts, raceways, precast manholes and pull boxes: Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.
15. Lightning protection: Section 26 41 00, FACILITY LIGHTNING PROTECTION.
16. General requirements common to more than one section in Division 28: Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
17. Conductors and cables for electronic safety and security systems: Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY.
18. Low impedance path to ground for electronic safety and security system ground fault currents: Section 28 05 26, GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY.
19. Conduits and partitioned telecommunications raceways for Electronic Safety and Security systems: Section 28 05 28.33, CONDUITS AND BACK BOXES FOR ELECTRONIC SAFETY AND SECURITY.
20. Physical Access Control System field-installed controllers connected by data transmission network: Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.
21. Detection and screening systems: Section 28 13 53, SECURITY ACCESS DETECTION.
22. Intrusion sensors and detection devices, and communication links to perform monitoring, alarm, and control functions: Section 28 16 00, INTRUSION DETECTION SYSTEM.
23. Video surveillance system cameras, data transmission wiring, and control stations with associated equipment: Section 28 23 00, VIDEO SURVEILLANCE.
24. Alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring: Section 28 31 00, FIRE DETECTION AND ALARM.

1.6 ADMINISTRATIVE REQUIREMENTS

A. Assign a single communications project manager to serve as point of contact for Government, contractor, and design professional.

B. Be proactive in scheduling work.

1. Use of premises is restricted at times directed by COR.
2. Movement of materials: Unload materials and equipment delivered to site. Pay costs for rigging, hoisting, lowering and moving equipment on and around site, in building or on roof.

3. Coordinate installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
4. Sequence, coordinate, and integrate installations of materials and equipment for efficient flow of Work. Plan for large equipment requiring positioning prior to closing in building.
5. Coordinate connection of materials, equipment, and systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and controlling agencies; provide required connection for each service.
6. Initiate and maintain discussion regarding schedule for ceiling construction and install cables to meet that schedule.

C. Contact the Office of Telecommunications, Special Communications Team (005OP2H3) (202)461-5310 to have a Government-accepted Telecommunications COR assigned to project for telecommunications review, equipment and system approval and coordination with other VA personnel.

D. Communications Project Manager Responsibilities:
1. Assume responsibility for overall telecommunications system integration and coordination of work among trades, subcontractors, and authorized system installers.
2. Coordinate with related work indicated on drawings or specified.
3. Manage work related to telecommunications system installation in a manner approved by manufacturer.

1.7 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Provide parts list including quantity of spare parts.

C. Provide manufacturer product information. Government reserves the right to require a list of installations where products have been in operation.

D. Provide Source Quality Control Submittal:
1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of warranty maintenance are authorized representatives of OEM. Include individual's legal name, contact information and OEM credentials in certification.

2. Submit written certification from OEM that wiring and connection diagrams meet Government Life Safety Guidelines, NFPA, NEC, NRTL, these specifications, and Joint Commission requirements and instructions, requirements, recommendations, and guidance set forth by OEM for the proper performance of system.
3. Pre-acceptance Certification: Certification in accordance with procedure outlined in Section 01 00 00, GENERAL REQUIREMENTS and specific Division 27 qualification documentation.

E. Installer Qualifications: Submit three installations of similar size and complexity furnished and installed by installer; include:
1. Installation location and name.
2. Owner’s name and contact information including address, telephone and email.
3. Date of project start and date of final acceptance.
4. System project number.
5. Three paragraph description of each system related to this project; include function, operation, and installation.

F. Provide delegated design submittals (e.g. seismic support design).

G. Submittals are required for all equipment anchors and supports. Include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or conduit. Anchors and supports to resist seismic load based on seismic design categories per section 4.0 of VA seismic design requirements H-18-8 dated August, 2013.

H. Test Equipment List:
1. Supply test equipment of accuracy better than parameters to be tested.
2. Submit test equipment list including make and model number:
   a. ANSI/TIA-1152 Level IIIe IV twisted pair cabling test instrument.
   b. Fiber optic insertion loss power meter with light source.
   c. Optical time domain reflectometer (OTDR).
   d. Volt-Ohm meter.
   e. Digital camera.
   f. Bit Error Test Set (BERT).
   g. Signal level meter.
   h. Time domain reflectometer (TDR) with strip chart recorder (Data and Optical Measuring).

i. Spectrum analyzer.

j. Color video monitor with audio capability.

k. Video waveform monitor.

l. Video vector scope.

m. 100 MHz oscilloscope with video adapters.

3. Supply only test equipment with a calibration tag from Government-accepted calibration service dated not more than 12 months prior to test.

4. Provide sample test and evaluation reports.

I. Submittal Drawings:

1. Telecommunications Space Plans/Elevations: Provide enlarged floor plans of telecommunication spaces indicating layout of equipment and devices, including receptacles and grounding provisions. Submit detailed plan views and elevations of telecommunication spaces showing racks, termination blocks, and cable paths. Include following rooms:

a. Telecommunications rooms.

b. Building Entrance Facility/Demarcation rooms.

c. Server rooms/Data Center.

d. Equipment rooms.

e. Antenna Head End rooms.

2. Logical Drawings: Provide logical riser or schematic drawings for all systems.

a. Provide riser diagrams systems and interconnection drawings for equipment assemblies; show termination points and identify wiring connections.

3. Access Panel Schedule on Submittal Drawings: Coordinate and prepare a location, size, and function schedule of access panels required to fully service equipment.

J. Provide sustainable design submittals.

K. Furnish electronic certified test reports to COR prior to final inspection and not more than 90 days after completion of tests.

1.8 CLOSEOUT SUBMITTALS

A. Provide following closeout submittals prior to project closeout date:

1. Warranty certificate.

2. Evidence of compliance with requirements such as low voltage certificate of inspection.

3. Project record documents.

4. Instruction manuals and software that are a part of system.

B. Maintenance and Operation Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Prepare a manual for each system and equipment specified.
2. Furnish on portable storage drive in PDF format or equivalent accepted by COR.
3. Furnish complete manual as specified in specification section, fifteen days prior to performance of systems or equipment test.
4. Furnish remaining manuals prior to final completion.
5. Identify storage drive "MAINTENANCE AND OPERATION MANUAL" and system name.
6. Include name, contact information and emergency service numbers of each subcontractor installing system or equipment and local representatives for system or equipment.
7. Provide a Table of Contents and assemble files to conform to Table of Contents.
8. Operation and Maintenance Data includes:
   a. Approved shop drawing for each item of equipment.
   b. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of equipment.
   c. A control sequence describing start-up, operation, and shutdown.
   d. Description of function of each principal item of equipment.
   e. Installation and maintenance instructions.
   f. Safety precautions.
   g. Diagrams and illustrations.
   h. Test Results and testing methods.
   i. Performance data.
   j. Pictorial "exploded" parts list with part numbers. Emphasis to be placed on use of special tools and instruments. Indicate sources of supply, recommended spare parts, and name of servicing organization.
   k. Warranty documentation indicating end date and equipment protected under warranty.
   l. Appendix; list qualified permanent servicing organizations for support of equipment, including addresses and certified personnel qualifications.

C. Record Wiring Diagrams:

1. Red Line Drawings: Keep one E size 91.44 cm x 121.92 cm (36 inches x 48 inches) set of floor plans, on site during work hours, showing installation progress marked and backbone cable labels noted. Make these drawings available for examination during construction meetings or field inspections.
2. General Drawing Specifications: Detail and elevation drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). ER, TR and other enlarged detail floor plan drawings to be D size 61 cm x 91.44 cm (24” x 36”) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). Building composite floor plan drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 3.175 mm = 30.48 cm (1/8 inch = 1’ 0 inch).
3. Building Composite Floor Plans: Provide building floor plans showing work area outlet locations and configuration, types of jacks, distance for each cable, and cable routing locations.
4. Floor plans to include:
   a. Final room numbers and actual backbone cabling and pathway locations and labeling.
   b. Inputs and outputs of equipment identified according to labels installed on cables and equipment
   c. Device locations with labels.
   d. Conduit.
   e. Head-end equipment.
   f. Wiring diagram.
   g. Labeling and administration documentation.
5. Submit Record Wiring Diagrams within five business days after final cable testing.
6. Deliver Record Wiring Diagrams as CAD files in formats as determined by COR.
7. Deliver four complete sets of electronic record wiring diagrams to COR on portable storage drive.

D. Service Qualifications: Submit name and contact information of service organizations providing service to this installation within eight hours of receipt of notification service is needed.

1.9 MAINTENANCE MATERIAL SUBMITTALS

A. After approval and prior to installation, furnish COR with the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with tag from coils of reels from which samples were taken.
2. One coupling, bushing and termination fitting for each type of conduit.
3. Samples of each hanger, clamp and supports for conduit and pathways.
4. Duct sealing compound.

1.10 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Manufacturer must produce, as a principal product, the equipment and material specified for this project, and have manufactured item for at least three years.

B. Product and System Qualification:
   1. OEM must have three installations of equipment submitted presently in operation of similar size and type as this project, that have continuously operated for a minimum of three years.
   2. Government reserves the right to require a list of installations where products have been in operation before approval.
   3. Authorized representative of OEM must be responsible for design, satisfactory operation of installed system, and certification.

C. Trade Contractor Qualifications: Trade contractor must have completed three or more installations of similar systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identify these installations as a part of submittal.

D. System Supplier Qualifications: System supplier must be authorized by OEM to warranty installed equipment.

E. Telecommunications technicians assigned to system must be trained, and certified by OEM on installation and testing of system; provide written evidence of current OEM certifications for installers.

F. Manufactured Products:
   1. Comply with FAR clause 52.236-5 for material and workmanship.
   2. When more than one unit of same class of equipment is required, units must be product of a single manufacturer.
   3. Equipment Assemblies and Components:
      a. Components of an assembled unit need not be products of same manufacturer.
      b. Manufacturers of equipment assemblies to assume complete responsibility for final assembled unit.
      c. Provide compatible components for assembly and intended service.

d. Constituent parts which are similar must be product of a single manufacturer.

4. Identify factory wiring on equipment being furnished and on wiring diagrams.

G. Testing Agencies: Government reserves the option of witnessing factory tests. Notify COR minimum 15 working days prior to manufacturer performing the factory tests.

1. When equipment fails to meet factory test and re-inspection is required, contractor is liable for additional expenses, including expenses of Government.

1.11 DELIVERY, STORAGE, AND HANDLING

A. Delivery and Acceptance Requirements:

1. Government's approval of submittals must be obtained for equipment and material before delivery to job site.

2. Deliver and store materials to job site in OEM's original unopened containers, clearly labeled with OEM's name and equipment catalog numbers, model and serial identification numbers for COR to inventory cable, patch panels, and related equipment.

B. Storage and Handling Requirements:

1. Equipment and materials must be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

a. Store and protect equipment in a manner that precludes damage or loss, including theft.

b. Protect painted surfaces with factory installed removable heavy kraft paper, sheet vinyl or equivalent.

c. Protect enclosures, equipment, controls, controllers, circuit protective devices, and other like items, against entry of foreign matter during installation; vacuum clean both inside and outside before testing and operating.

C. Coordinate storage.

1.12 FIELD CONDITIONS

A. Where variations from documents are requested in accordance with GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, connecting work and related components must include additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. A contract adjustment or additional time will not be granted because of field conditions pursuant to FAR 52.236-2 and FAR 52.236-3; a contract

adjustment or additional time will not be granted for additional work required for complete and usable construction and systems pursuant to FAR 52.246-12.

1.13 WARRANTY

A. Comply with FAR clause 52.246-21, except as follows:
   1. Warranty material and equipment to be free from defects, workmanship, and remain so for a period of one year for Emergency Systems from date of final acceptance of system by Government; provide OEM's equipment warranty document to COR.
   2. Government maintenance personnel must have ability to contact OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time; contractor and OEM must provide this capability.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

A. Provide communications spaces and pathways conforming to TIA 569, at a minimum.

B. In cases of renovations in historic or otherwise restrictive buildings, where it has been determined as impossible to follow above stated guidelines, exceptions must not modify maximum distances set forth in TIA 568 and 569; and exceptions must not in any way effect performance of entire TIP system.

C. Modification to administrative issues requires written approvals from COR with concurrence from SMCS 005OP2H3, OEM, contractor, and local authorities.

2.2 EQUIPMENT IDENTIFICATION

A. Provide laminated black phenolic resin with a white core nameplates with minimum 6 mm (1/4 inch) high engraved lettering.

B. Nameplates furnished by manufacturer as standard catalog items, unless other method of identification is indicated.

2.3 UNDERGROUND WARNING TAPE

A. Underground Warning: Standard 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type; red with black letters imprinted with "CAUTION BURIED ELECTRIC LINE BELOW", orange with black letters imprinted with "CAUTION BURIED TELEPHONE LINE BELOW" or orange with black letters imprinted with "CAUTION BURIED FIBER OPTIC LINE BELOW", as applicable.

2.4 WIRE LUBRICATING COMPOUND

A. Provide non-hardening or forming adhesive coating cable lubricants suitable for cable jacket material and raceway.

2.5 FIREPROOFING TAPE

A. Provide flexible, conformable fabric tape of organic composition and coated one side with flame-retardant elastomer.

B. Tape must be self-extinguishing and cannot support combustion; arc-proof and fireproof.

C. Tape cannot deteriorate when subjected to water, gases, salt water, sewage, or fungus; and tape must be resistant to sunlight and ultraviolet light.

D. Application must withstand a 200-ampere arc for minimum 30 seconds.

E. Securing Tape: Glass cloth electrical tape minimum 0.18 mm (7 mils) thick and 19 mm (3/4 inch) wide.

2.6 UNDERGROUND CABLES

A. Provide buried closure suitable for enclosing a straight, butt, and branch splice in a container into which can be poured an encapsulating compound.

B. Provide closure of adequate strength to protect splice and maintain cable shield electrical continuity in buried environment.

C. Provide re-enterable encapsulating compound maintaining chemical stability of closure.

D. Provide filled splice cases in accordance with RUS Bull 345-72.

E. Provide gel filled cable meeting requirements of ICEA S-99-689 and RUS 1755.390.

F. In Vault or Manhole:

1. Provide underground closure suitable to house a straight, butt, and branch splice in a protective housing into which can be poured an encapsulating compound

2. Closure must be suitable thermoplastic, thermo-set, or stainless steel material supplying structural strength to pass mechanical and electrical requirements in a vault or maintenance hole (manhole) environment.

G. Re-Enterable Encapsulating Compound: Product maintaining chemical stability of closure.

H. Provide gel-filled splice cases in accordance with RUS Bull 345-72.

2.7 AERIAL (ABOVEGROUND) ENCLOSURES

A. Provide aboveground enclosures constructed of minimum 2.108 mm (14 gauge) steel mounting in accordance with RUS 1755.

B. Size enclosures and install marker.

C. Secure covers to prevent unauthorized entry.

D. Provide gel filled cable meeting requirements of ICEA S-99-689, and RUS 1755.390; except, Figure 8 distribution wire suitable for aerial installation with:

1. 26,700 N (6,000 pound); or
2. 6,000 pound Class A galvanized steel; or
3. 26,700 N (6,000 pound) aluminum-clad steel strand.

2.8 TEMPORARY TIP PATHS (OVERHEAD TRACKS, ROAD/PATH BRIDGES, ETC.)

A. Provide for copper, fiber optic, RF, coaxial and designated electronic system cables to maintain facility communications service during construction and install so as to not present a pedestrian and traffic (including construction) safety hazard.

B. TIP temporary cable installations are not required to meet industry standards; but each must be reviewed and accepted, in writing, by COR with concurrences from SMCS 005OP2H3, OI&T and facility safety officer, prior to installation.

1. Be responsible for work associated with each temporary TIP path installation, required by system design and its removal when determined no longer necessary.
2. Survey outside TIP locations usually encountered, including roads, driveways, marked paths, high traffic passage ways or personnel walkways, and provide COR with a plan for temporary paths.

2.9 ACCESS PANELS

A. Panels: 304 mm x 304 mm (12 inches by 12 inches), or size allowed by location to provide optimum access to equipment for maintenance and service.

B. Provide access panels and doors as required to allow service of materials and equipment that require inspection, replacement, repair or service.

C. Provide access panels where items installed require access and are concealed in floor, wall, furred space or above ceiling; ceilings consisting of lay-in or removable splined tiles do not require access panels.

D. Provide access panels with same fire rating classification as surface penetrated.

PART 3 - EXECUTION

3.1 PREPARATION

A. Penetrations and Sleeves:

1. Lay out penetration and sleeve openings in advance, to permit provision in work.
2. Set sleeves in forms before concrete is poured.
3. Set sleeves prior to installation of structure for passage of pipes, conduit, ducts, etc.
4. Provide sleeves and packing materials at penetrations of foundations, walls, slabs, partitions, and floors.
5. Make sleeves that penetrate outside walls, basement slabs, footings, and beams waterproof.
6. Fill slots, sleeves and other openings in floors or walls if not used.
   a. Fill spaces in openings after installation of conduit or cable.
   b. Provide fill for floor penetrations to prevent passage of water, smoke, fire, and fumes.
   c. Provide fire resistant fill in rated floors and walls, to prevent passage of air, smoke and fumes.
7. Install sleeves through floors watertight and extend minimum 50.8 mm (2 inches) above floor surface.
8. Match and set sleeves flush with adjoining floor, ceiling, and wall finishes where raceways passing through openings are exposed in finished rooms.
9. Annular space between conduit and sleeve must be minimum 6 mm (1/4 inch).
10. Do not provide sleeves for slabs-on-grade, unless specified or indicated otherwise.
11. Comply with requirements for firestopping, for sleeves through rated fire walls and smoke partitions.
12. Do not support piping risers or conduit on sleeves.
13. Identify unused sleeves and slots for future installation.
14. Provide core drilling if walls are poured or otherwise constructed without sleeves and wall penetration is required; do not penetrate structural members.

B. Core Drilling:

1. Avoid core drilling whenever possible.
2. Coordinate openings with other trades and utilities, and prevent damage to structural reinforcement.
3. Investigate existing conditions in vicinity of required opening prior to coring, including an x-ray of floor if determined necessary by competent person or COR.
4. Protect areas from damage.

C. Verification of In-Place Conditions:
1. Verify location, use and status of all material, equipment, and utilities that are specified, indicated, or determined necessary for removal.
   a. Verify materials, equipment, and utilities to be removed are inactive, not required, or in use after completion of project.
   b. Replace with equivalent any material, equipment and utilities that were removed by contractor that are required to be left in place.
2. Existing Utilities: Do not interrupt utilities serving facilities occupied by Government or others unless permitted under following conditions and then only after arranging to provide temporary utility services, according to requirements indicated:
   a. Notify COR in writing at least 14 days in advance of proposed utility interruptions.
   b. Do not proceed with utility interruptions without Government’s written permission.

D. Provide suspended platforms, strap hangers, brackets, shelves, stands or legs for floor, wall and ceiling mounting of equipment as required.

E. Provide steel supports and hardware for installation of hangers, anchors, guides, and other support hardware.

F. Obtain and analyze catalog data, weights, and other pertinent data required for coordination of equipment support provisions and installation.

G. Verify site conditions and dimensions of equipment to ensure access for proper installation of equipment without disassembly that would void warranty.

3.2 INSTALLATION - GENERAL

A. Coordinate systems, equipment, and materials installation with other building components.

B. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings.

C. Conform to VAAR 852.236.91 arrangements indicated, recognizing that work may be shown in diagrammatic form or have been impracticable to detail all items because of variances in manufacturers' methods of achieving specified results.

D. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components, where installed in both exposed and un-exposed spaces.

E. Install equipment according to manufacturers' written instructions.

F. Install wiring and cabling between equipment and related devices.

G. Install cabling, wiring, and equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. Connect equipment for ease of disconnecting, with minimum interference of adjacent other installations.

H. Provide access panel or doors where units are concealed behind finished surfaces.

I. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for wiring, cabling, and equipment installations.

J. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide maximum headroom and access for service and maintenance as possible.

K. Install systems, materials, and equipment giving priority to systems required to be installed at a specified slope.

L. Avoid interference with structure and with work or other trades, preserving adequate headroom and clearing doors and passageways to satisfaction of COR and code requirements.

M. Install equipment and cabling to distribute equipment loads on building structural members provided for equipment support under other sections; install and support roof-mounted equipment on structural steel or roof curbs as appropriate.

N. Provide supplementary or miscellaneous items, appurtenances, devices and materials for a complete installation.

3.3 EQUIPMENT INSTALLATION

A. Locate equipment as close as practical to locations shown on drawings.

B. Note locations of equipment requiring access on record drawings.

C. Access and Access Panels: Verify access panel locations and construction with COR.

D. Inaccessible Equipment:

1. Where Government determines that contractor has installed equipment not conveniently accessible for operation and maintenance, equipment must be removed and reinstalled as directed and without additional cost to Government.
2. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for communication equipment cabinet assembly.
3. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for equipment labeling.

3.4 EQUIPMENT IDENTIFICATION

A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.

B. Secure identification signs with screws.

3.5 CUTTING AND PATCHING

A. Perform cutting and patching according to contract general requirements and as follows:

1. Remove samples of installed work as specified for testing.
2. Perform cutting, fitting, and patching of equipment and materials required to uncover existing infrastructure in order to provide access for correction of improperly installed existing or new work.
3. Remove and replace defective work.
4. Remove and replace non-conforming work.

B. Cut, remove, and legally dispose of selected equipment, components, and materials, including removal of material, equipment, devices, and other items indicated to be removed and items made obsolete by new work.

C. Provide and maintain temporary partitions or dust barriers adequate to prevent spread of dust and dirt to adjacent areas.

D. Protect adjacent installations during cutting and patching operations.

E. Protect structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.

F. Patch finished surfaces and building components using new materials specified for original installation and experienced installers.

3.6 FIELD QUALITY CONTROL

A. Provide work according to VAAR 852.236.91 and FAR clause 52.236-5.

B. Provide minimum clearances and work required for compliance with NFPA 70, National Electrical Code (NEC), and manufacturers' instructions;

comply with additional requirements indicated for access and clearances.

C. Verify all field conditions and dimensions that affect selection and provision of materials and equipment, and provide any disassembly, reassembly, relocation, demolition, cutting and patching required to provide work specified or indicated, including relocation and reinstallation of existing wiring and equipment.
   1. Protect facility, equipment, and wiring from damage.

D. Submit written notice that:
   1. Project has been inspected for compliance with documents.
   2. Work has been completed in accordance with documents.

E. Non-Conforming Work: Conduct project acceptance inspections, final completion inspections, substantial completion inspections, and acceptance testing and demonstrations after verification of system operation and completeness by Contractor.

F. For project acceptance inspections, final completion inspections, substantial completion inspections, and testing/demonstrations that require more than one site visit by COR or design professional to verify project compliance for same material or equipment, Government reserves right to obtain compensation from contractor to defray cost of additional site visits that result from project construction or testing deficiencies and incompleteness, incorrect information, or non-compliance with project provisions.
   1. COR will notify contractor, of hourly rates and travel expenses for additional site visits, and will issue an invoice to Contractor for additional site visits.
   2. Contractor is not eligible for extensions of project schedule or additional charges resulting from additional site visits that result from project construction or testing deficiencies/incompleteness, incorrect information, or non-compliance with Project provisions.

G. Tests:
   1. Interim inspection is required at approximately 50 percent of installation.
   2. Request inspection ten working days prior to interim inspection start date by notifying COR in writing; this inspection must verify equipment and system being provided adheres to installation, mechanical and technical requirements of construction documents.

3. Inspection to be conducted by OEM and factory-certified contractor representative, and witnessed by COR, facility and SMCS 0050P2H3 representatives.
4. Check each item of installed equipment to ensure appropriate NRTL listing labels and markings are fixed in place.
5. Verify cabling terminations in DEMARC, MCR, TER, SCC, ECC, TRs and head end rooms, workstation locations and TCO adhere to color code for T568B pin assignments and cabling connections are in compliance with TIA standards.
6. Visually confirm minimum Category 6A cable marking at TCOs, CCSs locations, patch cords and origination locations for all new work.
7. Review entire communications circulating ground system, each TGB and grounding connection, grounding electrode and outside lightning protection system.
8. Review cable tray, conduit and path/wire way installation practice.
9. OEM and contractor to perform:
   a. Fiber optical cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.
   b. Coaxial cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.
   c. Baseband cable field inspection tests via attenuation measurements on factory reels and provide results along with OEM certification for factory reel tests.
10. Relocate failed cable reels to a secured location for inventory, as directed by COR, and then remove from project site within two working days; provide COR with written confirmation of defective cable reels removal from project site.
11. Provide results of interim inspections to COR.
12. If major or multiple deficiencies are discovered, additional interim inspections could be required until deficiencies are corrected, before permitting further system installation.
    a. Additional inspections are scheduled at direction of COR.
    b. Re-inspection of deficiencies noted during interim inspections must be part of system’s Final Acceptance Proof of Performance Test.

c. The interim inspection cannot affect the system's completion date unless directed by COR.

13. Facility COR will ensure test documents become a part of system's official documentation package.

H. Pretesting: Re-align, re-balance, sweep, re-adjust and clean entire system and leave system working for a "break-in" period, upon completing installation of system and prior to Final Acceptance Proof of Performance Test. System RF transmitting equipment must not be connected to keying or control lines during "break-in" period.

1. Pretesting Procedure:

a. Verify systems are fully operational and meet performance requirements, utilizing accepted test equipment and spectrum analyzer.

b. Pretest and verify system functions and performance requirements conform to construction documents and, that no unwanted physical, aural and electronic effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise are present.

2. Measure and record signal, aural and control carrier levels of each DAS RF, voice and data channel, at each of the following minimum points in system:

a. Utility provider entrance.

b. Buried conduit duct locations.

c. Maintenance Holes (Manholes) and hand holes.

d. ENTR or DEMARC.

e. PBX interconnections.

f. MCR interconnections.

g. MCOR interconnections.

h. TER interconnections.

i. TOR interconnections.

j. Control room interconnections.

k. TR interconnections.

l. System interfaces in locations listed herein.

m. HE interconnections.

n. Antenna (outside and inside) interconnections.

o. System and lightning ground interconnections.

p. Communications circulating ground system.

q. UPS areas.

r. Emergency generator interconnections.

s. Each general floor areas.

t. Others as required by AHJ (SMCS 005OP2H3).

3. Provide recorded system pretest measurements and certification that the system is ready for formal acceptance test to COR.

I. Acceptance Test:

1. Schedule an acceptance test date after system has been pretested, and pretest results and certification submitted to COR.
2. Give COR fifteen working days written notice prior to date test is expected to begin; include expected duration of time for test in notification.
3. Test in the presence of the following:
   a. COR.
   b. OEM representatives.
   c. VACO:
      1) CFM representative.
      2) AHJ-SMCS 005OP2H3, (202)461-5310.
   d. VISN-CIO, Network Officer and VISN representatives.
   e. Facility:
      1) FMS Service Chief, Bio-Medical Engineering and facility representatives.
      2) OI&T Service Chief and OI&T representatives.
      3) Safety Officer, Police Chief and facility safety representatives.
   f. Local Community Safety Personnel:
      1) Fire Marshal representative.
      2) Disaster Coordinator representative.
      3) EMS Representatives: Police, Sherriff, City, County or State representatives.
4. Test system utilizing accepted test equipment to certify proof of performance and Life and Public Safety compliance, FCC, NRTL, NFPA and OSHA compliance.
   a. Rate system as acceptable or unacceptable at conclusion of test; make only minor adjustments and connections required to show proof of performance.
      1) Demonstrate and verify that system complies with performance requirements under operating conditions.

2) Failure of any part of system that precludes completion of system testing, and which cannot be repaired within four hours, terminates acceptance test of that portion of system.
3) Repeated failures that result in a cumulative time of eight hours to affect repairs is cause for entire system to be declared unacceptable.
4) If system is declared unacceptable, retesting must be rescheduled at convenience of Government and costs borne by the contractor.

J. Acceptance Test Procedure:
1. Physical and Mechanical Inspection: The test team representatives must tour major areas to determine system and sub-systems are completely and properly installed and are ready for acceptance testing.
2. A system inventory including available spare parts must be taken at this time.
3. Each item of installed equipment must be re-checked to ensure appropriate NRTL (i.e. UL) certification listing labels are affixed.
4. Confirm that deficiencies reported during Interim Inspections and Pretesting are corrected prior to start of Acceptance Test.
5. Inventory system diagrams, record drawings, equipment manuals, pretest results.
6. Failure of system to meet installation requirements of specifications is grounds for terminating testing and to schedule re-testing.

K. Operational Test:
1. Individual Item Test: VACO AHJ representative (SMCS 005OP2H3) may select individual items of equipment for detailed proof of performance testing until 100 percent of system has been tested and found to meet requirements of the construction documents.
2. Government’s Condition of Acceptance of System Language:
   a. Without Acceptance: Until system fully meets conditions of construction documents, system’s ownership, use, operation and warranty commences at Government’s final acceptance date.
   b. With Conditional Acceptance: Stating conditions that need to be addressed by contractor or OEM and stating system’s use and operation to commence immediately while its warranty commences only at Government’s agreed final extended acceptance date.

c. With Full Acceptance: Stating system’s ownership, use, operation and warranty to immediately commence at Government’s agreed to date of final acceptance.

L. Acceptance Test Conclusion: Reschedule testing on deficiencies and shortages with COR, after COR and SMCS AHJ jointly agree to results of the test, using the generated punch list or discrepancy list. Perform retesting to comply with these specifications at contractor's expense.

M. Proof of Performance Certification:

1. If system is declared acceptable, AHJ (SMCS 005OP2H3) provides COR notice stating system processes to required operating standards and functions and is Government accepted for use by facility.
2. Validate items with COR needing to be provided to complete project contract (i.e. charts & diagrams, manuals, spare parts, system warranty documents executed, etc.). Once items have been provided, COR contacts FMS service chief to turn over system from CFM oversight for beneficial use by facility.
3. If system is declared unacceptable without conditions, rescheduled testing expenses are to be borne by contractor.

3.7 CLEANING

A. Remove debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from project site and clean work area, prior to final inspection and acceptance of work.

B. Put building and premises in neat and clean condition.

C. Remove debris on a daily basis.

D. Remove unused material, during progress of work.

E. Perform cleaning and washing required to provide acceptable appearance and operation of equipment to satisfaction of COR.

F. Clean exterior surface of all equipment, including concrete residue, dirt, and paint residue, after completion of project.

G. Perform final cleaning prior to project acceptance by COR.

H. Remove paint splatters and other spots, dirt, and debris; touch up scratches and mars of finish to match original finish.

I. Clean devices internally using methods and materials recommended by manufacturer.

J. Tighten wiring connectors, terminals, bus joints, and mountings, to include lugs, screws and bolts according to equipment manufacturer’s published torque tightening values for equipment connectors. In absence

of published connection or terminal torque values, comply with torque values specified in UL 486A-486B.

3.8 TRAINING

A. Provide training in accordance with subsection, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

B. Provide training for equipment or system as required in each associated specification.

C. Develop and submit training schedule for approval by COR, at least 30 days prior to planned training.

3.9 PROTECTION

A. Protection of Fireproofing:

1. Install clips, hangers, clamps, supports and other attachments to surfaces to be fireproofed, if possible, prior to start of spray fireproofing work.
2. Install conduits and other items that would interfere with proper application of fireproofing after completion of spray fire proofing work.
3. Patch and repair fireproofing damaged due to cutting or course of work must be performed by installer of fireproofing and paid for by trade responsible for damage.

B. Maintain equipment and systems until final acceptance.

C. Ensure adequate protection of equipment and material during installation and shutdown and during delays pending final test of systems and equipment because of seasonal conditions.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 05 26
GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies grounding and bonding requirements of communications installations based on the requirements of NFPA 70 NEC Article 250, Grounding and Bonding and ANSI/TIA-607-D, Telecommunications Bonding and Grounding (Earthing) for Customer Premises. Work covered by this Section shall consist of furnishing supplies, labor, materials, equipment, labeling, and tools. Testing is required unless otherwise specified. An operable grounding and bonding infrastructure is required as described on the Drawings and/or required by these specifications. All materials shall be listed by a nationally recognized testing laboratory (NRTL).

1.2 SUMMARY

Section Includes:

A. Required Bonding Busbars.

B. Supplemental Bonding Networks.

C. Telecommunications Bonding Conductors.

D. Joining Requirements.

E. Overvoltage Surge Protectors.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

B. ANSI/TIA-607-D, Telecommunications Bonding and Grounding (Earthing) for Customer Premises.

C. NFPA 70, National Electrical Code, Article 250 (NEC).

D. International Annealed Copper Standard (IACS).

E. BICSI Information Technology Systems Installation Methods Manual (ITSIMM), Recommended Testing Procedures and Criteria.

F. UL 497 & UL 497A, UL Standards for Primary & Secondary Safety Protectors for Paired-Conductor Communications Circuits.

1.4 RELATED WORK

A. Facility grounding and bonding requirements: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

B. Information Technology equipment enclosures: Section 27 11 16, COMMUNICATION CABINETS, RACKS, FRAMES, AND ENCLOSURES.

C. Cable trays: Section 27 05 36, CABLE TRAYS FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Provide riser diagram indicating location of communications grounding system connections indicating routing of grounding conductors.

C. Closeout Submittals: Provide test reports of ground resistance to each primary or secondary bonding busbar (PBB/SBB) located in each telecommunications space impacted by the work.

PART 2 – PRODUCTS

2.1 BONDING BUSBARS.

Bonding busbars are located in each telecommunications space and in each network rack/cabinet. Bonding busbars provide common locations in the telecommunications space for the connection of the telecommunications bonding conductors.

A. Common Requirements.

1. Provided with holes for use with correctly-matched UL Listed two-hole lugs and hardware.
2. Constructed of copper or copper alloy with a minimum of 95% conductivity when annealed.
3. Annealed as specified by the International Annealed Copper Standard (IACS).
4. Installation resulting in a maximum 4.0Ω to ground resistance measured from any point in the system.
5. Installation is insulated from the mounting surface through the use of appropriate insulators.
6. UL Listed.

B. Primary Bonding Busbar (PBB). The PBB is a dedicated extension of the building grounding electrode system for the telecommunications infrastructure. The PBB also serves as the central attachment point for Secondary Bonding Busbars (SBB) via Telecommunications Bonding Backbone (TBB).

1. Pre-drilled copper with holes to accommodate lug mounting holes.
2. Sized for current applications and future growth.
3. Insulated from its supports.
4. Electro-tin plated is acceptable.
5. Maintain a 2” min clearance between busbar and finished wall.
6. Size must be 0.25” thick by 4” wide by 20” length.

7. Stainless steel mounting hardware sized to fit the pre-drilled holes.

C. Secondary Bonding Busbar (SBB). The SBB is a common point of connection for telecommunications system and equipment bonding to a ground located in each Telecommunications Room.
   1. Pre-drilled holes to accommodate dual-lug mounting holes.
   2. 0.25” thick x 2” wide with varying length to be sized for current applications and future growth.
   3. Maintain a 2” min clearance between the finished wall and busbar.
   4. Copper or tin annealed copper.

D. Rack Bonding Busbar (RBB). The RBB is a busbar located in a cabinet, rack, or frame.
   1. Mounting. Horizontal mounting to an EIA-310-D 19” equipment rack is specified.
   2. Capacity: 10 Double-hole lugs.
   3. Size & material 0.75” wide x 19” length x 0.25” thick - Copper or tin annealed copper.

2.2 SUPPLEMENTAL BONDING NETWORKS.

Also known as Signal Reference Grids (SRGs), Mesh Bonding Networks (Mesh-BN), or Isolated Bonding Networks (IBNs), the requirements for supplemental bonding networks are not specified in this document. Supplemental bonding networks may not be used to replace a standards-compliant bonding infrastructure.

2.3 TELECOMMUNICATIONS BONDING BACKBONE (TBB).

The TBB bonds the facility Primary Bonding Busbar (PBB) to telecommunications space Secondary Bonding Busbars (SBBs).

A. Material. Stranded copper wire with a green jacket (or per NEC depending on size), run as a continuous conductor.

B. Size. The TBB shall be sized to meet the requirements of ANSI/TIA-607-D and will be as straight as practicable avoiding bends.

C. Bonding the TBB to the PBB and each SBB will require a UL Listed irreversible compression (crimp) dual-lug connector.

2.4 BONDING CONDUCTORS.

A. Telecommunications Equipment Bonding Conductor (TEBC). The TEBC connects the cabinets and racks in the telecommunications space to the space’s bonding busbar (PBB or SBB).
   1. Material. Stranded copper wire with a green jacket (or per NEC depending on size), run as a continuous conductor.

2. Size. The TBB shall be sized to meet the requirements of ANSI/TIA-607-D. The minimum size for the TEBC shall be AWG 6.

3. Bonding. Bonded to the telecommunications space bonding busbar (PBB or SBB) via a UL Listed two-hole compression lug. Rack Bonding Conductors (RBCs) are connected to the TEBC using UL Listed irreversible compression (crimp) connectors.

B. Rack Bonding Conductor (RBC). The RBC is a bonding conductor from the cabinet or Rack Bonding Busbar (RBB) to the Telecommunications Equipment Bonding Conductor (TEBC).

1. Material. Stranded copper wire with a green jacket run as a continuous conductor.

2. Size. The minimum size for the RBC shall be AWG 6.

3. Bonding. Bonded to the Telecommunications Equipment Bonding Conductor (TEBC) using UL Listed irreversible compression (crimp) connectors.

a. Where connected to a server cabinet, the RBC extends to the bottom of the server cabinet allowing Equipment Bonding Conductors to be attached at any point in the cabinet.

b. Where connected to a network rack/cabinet, the Rack Bonding Conductor (RBC) is bonded to the Rack Bonding Busbar (RBB) via a UL Listed two-hole compression lug.

C. Equipment/Unit Bonding Conductor (EBC/UBC). The Equipment/Unit Bonding Conductor connects individual equipment in a cabinet or rack to the Rack Bonding Conductor (RBC) or Rack Bonding Busbar (RBB). Equipment Bonding conductors are also used as cable tray bonding conductors to bond cable tray sections to the Telecommunications Equipment Bonding Conductor (TEBC).

1. Material. Stranded copper wire with a green jacket run as a continuous conductor.

2. Size. The minimum size for the RBC shall be AWG 6.

3. Bonding.

a. Where used in a server cabinet, bonded to the Rack Bonding Connector (RBC) using UL Listed irreversible compression (crimp) connectors and to IT equipment via a UL Listed two-hole compression lug. (Some IT equipment may require one-hole lugs.)

b. Where used in a network cabinet/rack, bonded to the Rack Bonding Busbar (RBB) via a UL Listed two-hole compression lug and

to IT equipment via a UL Listed two-hole compression lug. (Some IT equipment may require one-hole lugs.)

c. Where used as a cable tray bonding conductor connecting cable tray sections, bonded to each adjoining section of the cable tray using UL Listed two-hole compression lugs.

d. Where used as a cable basket bonding conductor connecting cable tray sections, bonded to each adjoining section of the cable tray using UL Listed split bolt grounding connector.

e. Where used as a cable tray bonding conductor connecting cable tray sections to the Telecommunications Equipment Bonding Conductor (TEBC), bonded to the TEBC using UL Listed irreversible compression (crimp) connectors and to the cable tray via a UL Listed two-hole compression lug.

f. Where used as a cable tray bonding conductor connecting cable tray sections to the Telecommunications Equipment Bonding Conductor (TEBC), bonded to the TEBC using UL Listed irreversible compression (crimp) connectors and to the cable basket via a UL Listed split bolt grounding connector.

4. Contractor shall furnish a minimum of ten (10) EBCs for each RBB. Five (5) EBCs shall be outfitted as described here and shall be six (6) feet in length. Five (5) EBCs shall be outfitted as decried here and shall be nine (9) feet in length. Contractor shall use field measurements to determine EBC cable length when directed by VA project managers.

2.5 OVERVOLTAGE SURGE PROTECTORS.

A. Protectors are voltage-limiting devices intended to protect equipment, wiring, and personnel against the effects of excessive potentials and currents in communications lines caused by lightning, contacts with power conductors, power induction, and rises in ground potential.

1. Compliance. Protectors shall be compliant with UL 497 and/or UL 497A, as applicable.

2. Performance. Protectors shall be rated to support copper UTP performance Category 5e at 100MHz.

3. Protection. Voltage suppression shall be via low capacitance solid state protectors only, rated at 18V for copper backbone applications or 65V for VOIP or PoE applications.

4. Construction. Provide protection for each pair.

5. Termination shall be insulation-displacement contact.

6. Mounting. Protectors shall be wall-mounted.

PART 3 - EXECUTION

3.1 IMPLEMENTATION

A. Components of the telecommunications bonding system will be installed and connected using materials and techniques required by ANSI/TIA-607-D. The use of antioxidant joint compound is required for all connections excluding protector 110 block connections.

B. Testing.

1. Perform tests per BICSI Information Technology Systems Installation Methods Manual (ITSIMM), Recommended Testing Procedures and Criteria.
2. Perform two-point bond test using trained installers qualified to use test equipment.
3. Conduct continuity tests to verify that metallic pathways in telecommunications spaces are bonded to PBB or SBB.
4. Conduct electrical continuity test to verify that PBB is effectively bonded to the facility grounding electrode conductor.
5. Perform resistance tests to ensure rack and cabinet bonding connection resistance measures less than 4Ω to PBB or SBB.

- - - E N D - - -

SECTION 27 05 33
CONDUITS AND BACKBOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies conduit, fittings, and boxes to form raceway systems for communications cabling.

1.2 RELATED WORK

A. Bedding of conduits: Section 31 20 11, EARTHWORK.

B. Sealing around penetrations to maintain integrity of fire rated construction: Section 07 84 00, JOINT FIRESTOPPING.

C. Fabrications for deflection of water away from building envelope at penetrations: Section 07 62 00, SHEET METAL FLASHING AND TRIM.

D. Sealing around conduit penetrations through building envelope to prevent moisture migration into building: Section 07 92 00, JOINT SEALANTS.

E. Identification and painting of conduit and other devices: Section 09 91 24, INTERIOR PAINTING.

F. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit the following:

1. Size and location of cabinets, splice boxes, and pull boxes.
2. Layout of required conduit penetrations through structural elements.
3. Catalog cuts marked with specific item proposed and area of application identified.

B. Certification: Provide letter prior to final inspection, certifying material is in accordance with construction documents and properly installed.

PART 2 - PRODUCTS

2.1 MATERIAL

A. Minimum Conduit Size: 19 mm (3/4 inch).

B. Conduit:

1. Rigid Galvanized Steel: Conform to UL 6, ANSI C80.1.
2. Rigid Aluminum: Conform to UL 6A, ANSI C80.5.

3. Rigid Intermediate Steel Conduit (IMC): Conform to UL 1242, ANSI C80.6.
4. Electrical Metallic Tubing (EMT):
   a. Maximum Size: 105 mm (4 inches).
   b. Install only for cable rated 600 volts or less.
   c. Conform to UL 797, ANSI C80.3.
5. Flexible Galvanized Steel Conduit: Conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Conform to UL 360.
7. Direct Burial Plastic Conduit: Conform to UL 651 and UL 651A, heavy wall PVC, or high density polyethylene (HDPE).
8. Surface Metal Raceway: Conform to UL 5.

C. Conduit Fittings:
1. Rigid Galvanized Steel and Rigid Intermediate Steel Conduit Fittings:
   a. Provide fittings meeting requirements of UL 514B and ANSI/ NEMA FB 1.
   b. Sealing: Provide threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water and vapor. In concealed work, install sealing fittings in flush steel boxes with blank cover plates having same finishes as other electrical plates in room.
   c. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   d. Locknuts: Bonding type with sharp edges for digging into metal wall of an enclosure.
   e. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into metallic body of fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   f. Erickson (union-type) and Set Screw Type Couplings:
      1) Couplings listed for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete.
      2) Use set screws of case hardened steel with hex head and cup point to seat in conduit wall for positive ground.
   g. Provide OEM approved fittings.
2. Rigid Aluminum Conduit Fittings:
   a. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Malleable iron, steel or aluminum alloy materials; Zinc or

cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are not permitted.

b. Locknuts and Bushings: As specified for rigid steel and IMC conduit.

c. Set Screw Fittings: Not permitted for use with aluminum conduit.

3. Electrical Metallic Tubing Fittings:

a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.

b. Couplings and Connectors: Concrete tight and rain tight, with connectors having insulated throats.

1) Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller.

2) Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches).

3) Use set screws of case-hardened steel with hex head and cup point to seat in wall of conduit for positive grounding.

c. Indent type connectors or couplings are not permitted.

d. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are not permitted.

e. Provide OEM approved fittings.

4. Flexible Steel Conduit Fittings:

a. Conform to UL 514B; only steel or malleable iron materials are acceptable.

b. Provide clamp type, with insulated throat.

c. Provide OEM approved fittings.

5. Liquid-tight Flexible Metal Conduit Fittings:

a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.

b. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening.

c. Provide connectors with insulated throats to prevent damage to cable jacket.

d. Provide OEM approved fittings.

6. Direct Burial Plastic Conduit Fittings: Provide fittings meeting requirements of UL 514C and NEMA TC3, and as recommended by conduit manufacturer.

7. Expansion and Deflection Couplings:

a. Conform to UL 467 and UL 514B.

b. Accommodate 19 mm (3/4 inch) deflection, expansion, or contraction in any direction, and allow 30-degree angular deflections.
c. Include internal flexible metal braid sized to ensure conduit ground continuity and fault currents in accordance with UL 467, and NEC code tables for ground conductors.
d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

8. Rigid Aluminum Fittings:
a. Provide malleable iron, steel or aluminum alloy materials; zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.
b. Locknuts and Bushings: As specified for rigid steel and IMC conduit.
c. Set Screw Fittings: Not permitted for use with aluminum conduit.
d. Indent type connectors or couplings are prohibited.
e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of “pot metal” are not permitted.
f. Provide OEM approved fittings.

D. Conduit Supports:
1. Parts and Hardware: Provide zinc-coat or equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Minimum 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 2.78 mm (12 gage) steel, cold formed, lipped channels; with minimum 9 mm (3/8 inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Splice, and Pull Boxes:
1. Conform to UL-50 and UL-514A.
2. Cast metal where required by NEC or shown, and equipped with rustproof boxes.
3. Sheet Metal Boxes: Galvanized steel, except where otherwise shown.
4. Install flush mounted wall or ceiling boxes with raised covers so that front face of raised cover is flush with wall.

5. Install surface mounted wall or ceiling boxes with surface style flat or raised covers.

F. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with "CAUTION BURIED COMMUNICATIONS CABLE BELOW".

G. Flexible Nonmetallic Communications Raceway (Innerduct) and Fittings:

1. General: Provide UL 910 listed plenum, riser, and general purpose corrugated pliable communications raceway.
2. Provide Communications Raceway with a factory installed 567 kg (1250 lb.) tensile pre-lubricated pull tape.
3. Use only metallic straps, hangers and fittings to support raceway from building structure. Cable ties are not permitted for securing raceway to building structure.
4. Provide fittings to be installed in spaces used for environmental air made of materials that do not exceed flammability, smoke generation, ignitibility, and toxicity requirements of environmental air space.
5. Size: Metric Designator 53 (trade size 2) or smaller.
6. Outside Plant: Plenum-rated where each innerduct is 75 mm (3 inches) and larger.
7. Inside Plant: Listed and marked for installation in plenum airspaces and minimum 25 mm (1 inch) inside diameter.
8. Plenum: Non-metallic communications raceway.
   a. Constructed of low smoke emission, flame retardant PVC with corrugated construction.
   b. UL 94 V-O rating for flame spreading limitation.
9. Provide innerduct reel lengths as necessary to ensure ducts are continuous.
10. Provide pulling accessories used for innerduct including but not limited to, inner duct lubricants, spreaders, applicators, grips, swivels, harnesses, and line missiles (blown air) compatible with materials being pulled.

H. Outlet Boxes:

1. Flush wall mounted 12.7 cm (5 inches) square x 7.3 cm (2-7/8 inches); deep pressed galvanized steel.
2. 2-Gang Tile Box:
   a. Flush backbox type for installation in block walls.
   b. Minimum 92 mm (3-5/8 inches) deep.

I. Weatherproof Outlet Boxes: Surface mount two gang, 67 mm (2-5/8 inches) deep weatherproof cast aluminum with powder coated finish internal threads on hubs 19 mm (3/4 inch) minimum.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Raceways typically required for cabling systems unless otherwise indicated:

System	Specification Section	Installed Method
Grounding	27 05 26	Conduit Not Required
Control, Communication and Signal Wiring	27 15 01	Complete Conduit Allowed in Non-Partitioned Cable Tray or Cable Ladders
Master Antenna Television Equipment and Systems	27 41 31	Conduit to Cable Tray, Partitioned Cable Tray
Public Address and Mass Notification Systems	27 51 16	Complete conduit
Intercommunications and Program systems	27 51 23	Conduit to Cable Tray, Partitioned Cable Tray
Nurse Call	27 52 23	Complete Conduit
Miscellaneous Medical Systems	27 52 41	Complete Conduit
Distributed Radio Antenna Equipment and System	27 53 19	Conduit to Cable Tray, Partitioned Cable Tray
Grounding and Bonding for Electronic Safety and Security	28 05 26	Conduit Not Required Unless Required by Code
Physical Access Control System	28 13 00	Conduit to Cable Tray Partitioned Cable Tray
Physical Access Control System and Database Management	28 13 16	Conduit to Cable Tray Partitioned Cable Tray
Security Access Detection	28 13 53	Complete Conduit
Intrusion Detection System	28 16 00	Conduit to Cable Tray, Partitioned Cable Tray
Video Surveillance	28 23 00	Complete Conduit
Electronic Personal Protection System	28 26 00	Conduit to Cable Tray, Partitioned Cable Tray
Fire Detection and Alarm	28 31 00	Complete Conduit

B. Penetrations:

1. Cutting or Holes:

a. Locate holes in advance of installation. Where proposed in structural sections, obtain approval of structural engineer and COR prior to drilling through structural sections.

b. Make holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not permitted; COR may grant limited permission by request, in condition of limited working space.

c. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

1) Fill and seal clearances between raceways and openings with fire stop material.

2) Install only retrofittable, non-hardening, and reusable firestop material that can be removed and reinstalled to seal around cables inside conduits.

d. Waterproofing at Floor, Exterior Wall, and Roof Conduit Penetrations: Seal clearances around conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS or directed by waterproofing manufacturer.

C. Conduit Installation:

1. Minimum conduit size of 19 mm (3/4 inch), but not less than size required for 40 percent fill.

2. Install insulated bushings on all conduit ends.

3. Install pull boxes after every 180 degrees of bends (two 90-degree bends) or every 100ft. Size boxes per TIA 569.

4. Extend vertical conduits/sleeves through floors minimum 75 mm (3 inches) above floor and minimum 75 mm (3 inches) below ceiling of floor below.

5. Terminate conduit runs to and from a backboard in a TR or interstitial space at top or bottom of backboard. Install conduits to enter telecommunication rooms next to wall and flush with backboard.

6. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections.
7. Seal empty conduits located in telecommunications rooms or on backboards to prevent entrance of moisture and gases and to meet fire resistance requirements.
8. Provide pull wire in all empty conduits; sleeves through floor are exceptions.
9. Complete each entire conduit run installation before pulling in cables.
10. Flattened, dented, or deformed conduit is not permitted.
11. Ensure conduit installation does not encroach into ceiling height head room, walkways, or doorways.
12. Cut conduit square with a hacksaw, ream, remove burrs, and draw tight.
13. Install conduit mechanically continuous.
14. Independently support conduit at 2.44 m (8 feet) on center; do not use other supports (i.e., suspended ceilings, suspended ceiling supporting members, luminaires, conduits, mechanical piping, or mechanical ducts).
15. Support conduit within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
16. Close ends of empty conduit with plugs or caps to prevent entry of debris, until cables are pulled in.
17. Conduit installations under fume and vent hoods are prohibited.
18. Attach conduits to cabinets, splice cases, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on inside of enclosure, made up wrench tight. Do not make conduit connections to box covers.
19. Do not use aluminum conduits in wet locations.
20. Unless otherwise indicated on drawings or specified herein, conceal conduits within finished walls, floors and ceilings.
21. Conduit Bends:
    a. Make bends with standard conduit bending machines; observe minimum bend radius for cable type and outside diameter.
    b. Conduit hickey is permitted only for slight offsets, and for straightening stubbed conduits.
    c. Bending of conduits with a pipe tee or vise is not permitted.
    d. Minimum radius of communication conduit bends:

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
3/4	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

22. Layout and Homeruns - Deviations: Make only where necessary to avoid interferences and only after drawings showing proposed deviations have been submitted and approved by COR.

D. Concealed Work Installation:

1. In Concrete:
   a. Conduit: Rigid steel or IMC.
   b. Align and run conduit in direct lines.
   c. Install conduit through concrete beams only when the following occurs:
      1) Where shown on structural drawings.
      2) As accepted by COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
   d. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
      1) Conduit outside diameter larger than 1/3 of slab thickness is prohibited.
      2) Space between Conduits in Slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
      3) Install conduits approximately in center of slab to ensure a minimum of 19 mm (3/4 inch) of concrete around conduits.
   e. Make couplings and connections watertight. Use thread compounds that are NRTL listed conductive type to ensure low resistance

ground continuity through conduits. Tightening set screws with pliers is not permitted.

E. Furred or Suspended Ceilings and in Walls:
   1. Rigid steel, IMC or rigid aluminum. Different type conduits mixed indiscriminately in same system is not permitted.
   2. Align and run conduit parallel or perpendicular to building lines.
   3. Tightening set screws with pliers is not permitted.

F. Exposed Work Installation:
   1. Unless otherwise indicated on drawings, exposed conduit is only permitted in telecommunications rooms.
      a. Provide rigid steel, IMC or rigid aluminum.
      b. Different type of conduits mixed indiscriminately in system is not permitted.
   2. Align and run conduit parallel or perpendicular to building lines.
   3. Install horizontal runs close to ceiling or beams and secure with conduit straps.
   4. Support horizontal or vertical runs at not over 2400 mm (96 inches) intervals.
   5. Painting:
      a. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
      b. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color.
      c. Provide labels where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

G. Expansion Joints:
   1. Conduits 75 mm (3 inches) and larger, that are secured to building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install couplings in accordance with manufacturer's recommendations.
   2. Provide conduits smaller than 75 mm (3 inches) with pull boxes on both sides of expansion joint. Connect conduits to expansion and deflection couplings as specified.
   3. Install expansion and deflection couplings where shown.

H. Seismic Areas:
   1. In seismic areas, follow H-18-8 Seismic Design Requirements.
   2. Rigidly secure conduit to building structure on opposite sides of a building expansion joint with pull boxes on both sides of joint.

3. Connect conduits to pull boxes with 375 mm (15 inches) of slack flexible conduit.
4. Install green copper wire minimum #6 AWG in flexible conduit for bonding jumper.

I. Conduit Supports, Installation:

1. Select AC193 code listed mechanical anchors or fastening devices with safe working load not to exceed 1/4 of proof test load.
2. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
3. Support multiple conduit runs with trapeze hangers. Use trapeze hangers designed to support a load equal or greater than sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other accepted fasteners.
4. Support conduit independent of pull boxes, luminaires, suspended ceiling components, angle supports, duct work, and similar items.
5. Fastenings and Supports in Solid Masonry and Concrete:
   a. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing concrete.
   b. Existing Construction:
      1) Code AC193 listed wedge type steel expansion anchors minimum 6 mm (1/4 inch) bolt size and minimum 28 mm (1-1/8 inch) embedment.
      2) Power set fasteners minimum 6 mm (1/4 inch) diameter with depth of penetration minimum 75 mm (3 inches).
      3) Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
6. Fastening to Hollow Masonry: Toggle bolts are permitted.
7. Fastening to Metal Structures: Use machine screw fasteners or other devices designed and accepted for application.
8. Bolts supported only by plaster or gypsum wallboard are not acceptable.
9. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
10. Do not support conduit from chain, wire, or perforated strap.

11. Spring steel type supports or fasteners are not permitted except horizontal and vertical supports/fasteners within walls.
12. Vertical Supports:
    a. Install riser clamps and supports for vertical conduit runs in accordance with NEC.
    b. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

J. Box Installation:
1. Boxes for Concealed Conduits:
    a. Flush mounted.
    b. Provide raised covers for boxes to suit wall or ceiling, construction and finish. In spaces not controlled by VA (i.e., common hallways) covers must be lockable.
2. In addition to boxes shown, install additional boxes where needed to prevent damage to cables during pulling.
3. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
4. Stencil or install phenolic nameplates on covers of boxes identified on riser diagrams; for example "SIG-FA JB No. 1".
5. Outlet boxes mounted back-to-back in same wall are not permitted. A minimum 600 mm (24 inches) center-to-center lateral spacing must be maintained between boxes.

K. Flexible Nonmetallic Communications Raceway (Innerduct), Installation:
1. Install Innerduct in cable tray or a J-hook pathway. Install supports fromm building structure for horizontal runs at intervals not to exceed 900 mm (3 feet) and at each end. Install supports from building structure for vertical runs at intervals not to exceed 1.2 m (4 feet) and at each side of joints.
2. Install only in accessible spaces not subject to physical damage or corrosive influences.
3. Make bends manually to assure internal diameter of tubing is not effectively reduced.
4. Extend each segment of innerduct minimum 300 mm (12 inches) beyond end of service conduit tie or cable tray. Restrain innerduct ends with wall mount clamps and seal when cable is installed.

3.2 TESTING

A. Examine fittings and locknuts for secureness.

B. Test RMC, IMC and EMT systems for electrical continuity and resistance to ground.

- - - E N D - - -

SECTION 27 05 36
CABLE TRAYS FOR COMMUNICATIONS SYSTEMS

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications cabling cable tray and raceway equipment.

1.2 SUMMARY

Section Includes:

A. Cable Tray.

B. Fiber Optic Cable Raceway.

C. Ladder Rack.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Grounding and bonding: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

2.1 CABLE TRAY.

A. Design. Wire basket with tray insert. Maximum 2” x 4” wire mesh construction. Constructed of round, smooth wire with continuous top side to minimize cable sheath damage.

B. Finish. Coated to prevent rust.

C. Size. Cable tray shall be sized to hold the maximum expected cable load at not more than 40% fill and not more than 6” maximum cable depth.

D. Accessories. Provide and install the following components and accessories as necessary to achieve the design:

1. Overhead mounting equipment (thread-rod, unistrut, nuts, washers, etc.) suitable for the supporting structural elements.

2. Tray section splicing hardware.

3. Tray insert.

4. Cable waterfalls.

5. Ground strap kits.

6. Bend radius limiters.

2.2 FIBER OPTIC CABLE RACEWAY.

A. Design. Raceway system shall be a modular system of channels, fittings, and brackets, able to be assembled with couplers. Fittings for cable spillout shall maintain a minimum 2” bend radius.

B. Materials. Raceway shall be constructed of rigid PVC and ABS plastics.

C. Size. Raceway shall be nominally sized 4”x4”.

D. Accessories. Provide and install the following components and accessories as necessary to achieve the design:

1. Overhead mounting equipment (thread-rod, unistrut, nuts, washers, etc.) suitable for the supporting structural elements.

2. Hinged channel covers.

3. Raceway section couplers.

4. Channel corners and intersections.

5. Spillway fittings.

2.3 LADDER RACK.

A. Design. Ladder rack system shall be a modular system of ladder, turns, splices, supports, and accessories able to be assembled with couplers.

B. Finish. Coated to prevent rust.

C. Materials. Ladder rack shall be manufactured from tubular steel and extruded aluminum. Stringers will be 3/8” by 1-1/2” tubular steel. Cross members will be 1” x 1/2" T-shaped. Steel elements shall have a minimum 0.065” wall thickness.

D. Size. Ladder rack shall be nominally sized 12” width.

E. Accessories. Provide and install the following components and accessories as necessary to achieve the design:

1. Overhead mounting equipment (thread-rod, unistrut, nuts, washers, etc.) suitable for the supporting structural elements.

2. Ladder rack section couplers (splices).

3. Ladder rack radius bends.

4. Ground strap kits.

PART 3 – EXECUTION

3.1 IMPLEMENTION:

A. Cable tray shall be used in horizontal applications. Ladder rack is used in vertical applications.

B. Cable tray and ladder rack sections shall be bonded together with bonding conductors and the system bonded to the bonding busbar in the space.

C. Support horizontal cable tray not less than every 5’ (shorter spans if recommended by the equipment manufacturer).

– – – E N D – – –

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 05 53
IDENTIFICATION FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies labeling and identification requirements for information technology (IT) equipment cabinets, racks, and cabling.

1.2 SUMMARY

Section Includes:

A. Equipment and component labels.

B. Labeling implementation requirements.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Server cabinets and network racks: Section 27 11 16, COMMUNICATIONS CABINETS, RACKS, FRAMES, AND ENCLOSURES.

B. Cable management equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

C. Copper UTP cabling: Section 27 13 13, COMMUNICATIONS COPPER BACKBONE CABLING.

D. Fiber optic cabling: Section 27 13 23, COMMUNICATIONS OPTICAL FIBER BACKBONE CABLING.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND COMPONENT LABELS.

A. Materials. Materials used for labeling equipment, components, and telecommunications cabling shall be appropriate for the installation environment, durable and permanent, and heat-resistant if necessary for labeling in high-temperature environments.

PART 3 - EXECUTION

3.1 IMPLEMENTION:

A. Governing Standard. Labeling and identification of equipment, components, and telecommunications cabling shall be based on ANSI/TIA-606-C, Administration Standard for Telecommunications Infrastructure,

and NFPA 70, National Electrical Code, as modified by guidance in the VA Infrastructure Standard for Telecommunications Spaces.

B. All passive infrastructure equipment, components, and telecommunications cabling installed shall be labeled at the time of installation.

C. Telecommunications cable labeling shall include delivery of complete and accurate connection documentation (where each cable terminates at each end) matching the installed labels.

D. Label locations shall be as specified in the VA Infrastructure Standard for Telecommunications Spaces.

- - - E N D - - -

SECTION 27 08 00
COMMISSIONING OF COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes requirements for commissioning facility communications systems, related subsystems and related equipment. This Section supplements general requirements specified in Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

B. Complete list of equipment and systems to be commissioned is specified in Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS and Specification 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

C. Commissioned Systems:

1. Commissioning of systems specified in Division 27 is part of project’s construction process including documentation and proof of performance testing of these systems, as well as training of VA’s Operation and Maintenance personnel in accordance with requirements of Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS and Division 27, in cooperation with Government and Commissioning Agent.
2. The facility exterior closure systems commissioning includes communications systems listed in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS and 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

1.2 RELATED WORK

A. System tests: Section 01 00 00, GENERAL REQUIREMENTS.

B. Commissioning process requires review of selected submittals that pertain to systems to be commissioned: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

C. Construction phase commissioning process and procedures including roles and responsibilities of commissioning team members and user training: Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

1.3 COORDINATION

A. Commissioning Agent will provide a list of submittals that must be reviewed by Commissioning Agent simultaneously with engineering review; do not proceed with work of sections identified without engineering and Commissioning Agent’s review completed.

B. Commissioning of communications systems require inspection of individual elements of communications system construction throughout construction period. Coordinate with Commissioning Agent in accordance

with Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS and commissioning plan to schedule communications systems inspections as required to support the commissioning process.

1.4 CLOSEOUT SUBMITTALS

A. Refer to Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for pre-functional checklists, equipment startup reports, and other commissioning documents.

B. Pre-Functional Checklists:

1. Complete pre-functional checklists provided by commissioning agent to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing.
2. Submit completed checklists to COR and to Commissioning Agent. Commissioning Agent can spot check a sample of completed checklists. If Commissioning Agent determines that information provided on the checklist is not accurate, Commissioning Agent then returns the marked-up checklist to Contractor for correction and resubmission.
3. If Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, Commissioning Agent can select a broader sample of checklists for review.
4. If Commissioning Agent determines that a significant number of broader sample of checklists is also inaccurate, all checklists for the type of equipment will be returned to Contractor for correction and resubmission.

C. Submit training agendas and trainer resumes in accordance with requirements of Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS - NOT USED

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

A. Contractor's Tests:

1. Scheduled tests required by other sections of Division 27 must be documented in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
2. Incorporate all testing into project schedule. Provide minimum seven calendar days' notice of testing for Commissioning Agent to witness selected Contractor tests at sole discretion of Commissioning Agent.

3. Complete tests prior to scheduling Systems Functional Performance Testing.

B. Systems Functional Performance Testing:

1. Commissioning process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions.
2. Commissioning Agent prepares detailed Systems Functional Performance Test procedures for review and acceptance by COR.
3. Provide required labor, materials, and test equipment identified in test procedure to perform tests.
4. Commissioning Agent must witness and document the testing.
   a. Provide test reports to Commissioning Agent. Commissioning Agent will sign test reports to verify tests were performed.

3.2 TRAINING

A. Training of Government's operation and maintenance personnel is required in cooperation with COR and Commissioning Agent.

B. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning location, operation, and troubleshooting of installed systems.

C. Schedule instruction in coordination with COR after submission and approval of formal training plans.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 10 00
STRUCTURED CABLING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications structured cabling systems.

1.2 SUMMARY

Section Includes:

A. Computer Room Backbone Structured Cabling.

B. Computer Room Horizontal Structured Cabling.

C. Facility Backbone Structured Cabling.

D. Facility Horizontal Structured Cabling.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Cabling labeling and identification: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

B. Cable termination locations and equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

PART 2 - PRODUCTS

2.1 COMPUTER ROOM BACKBONE STRUCTURED CABLING.

Backbone structured cabling in the computer room environment (first level backbone) connects the Main Distribution Areas (MDAs) to the Horizontal Distribution Areas (HDAs).

A. Install first level backbone structured cabling in overhead or underfloor cable tray and fiber raceway systems following diverse path routing.

B. All cabling used shall be pre-terminated and procured to the specific length required by the design (horizontal and vertical paths) with no more than 1 meter of excess length on each end.

C. Terminate first level backbone structured cabling in the top RU positions of each network rack or cabinet, working downward, with patch panel equipment mounted on the front rails.

D. Mirror distribution on the A-side and B-side MDA and HDA elements.

1. In MDA network racks or cabinets:
   a. Install angled UTP patch panel(s) for each backbone UTP patch panel in the same-side HDA in the computer room beginning in RU45.
   b. Install an angled panel cover on the lowest UTP patch panel.
   c. Install a blanking panel in the RU below the UTP patch panels.
   d. Install fiber optic distribution cabinets to support the backbone fiber distribution from each HDA.
   e. Install a blanking panel in the RU below the fiber optic distribution cabinet(s).
2. In HDA network racks or cabinets:
   a. Install fiber optic distribution cabinet(s) and populate with fiber optic distribution cassettes starting in RU45.
   b. Install a blanking panel in the RU below the last fiber cabinet.
   c. Install UTP patch panel(s) below the blanking panel.
   d. Install a blanking panel in the RU below the last UTP patch panel.

E. Install UTP cables between the same-side MDAs and HDAs.

F. Install 12- or 24-strand multimode fiber optic cables between each fiber cassette in the HDA to either the same-side MDA or the opposite side MDA as appropriate.

2.2 COMPUTER ROOM HORIZONTAL STRUCTURED CABLING.

Horizontal structured cabling in the computer room environment connects the Equipment Distributors (EDs) in the server cabinets to each supported Horizontal Distribution Area (HDA).

A. Install horizontal structured cabling in overhead cable tray and fiber raceway systems following diverse path routing.

B. All cabling used shall be pre-terminated and procured to the specific length required by the design (horizontal and vertical paths) with no more than 1 meter of excess length on each end.

C. In the server cabinets, terminate horizontal structured cabling in EDs located in the top 5U of each cabinet, with patch panel equipment mounted on the rear rails.
   1. Install fiber optic distribution cabinet(s) starting in RU45 and populate with fiber optic distribution cassettes to support the requirement.

2. Install a blanking panel in the RU below the last fiber cabinet.
3. Install copper UTP patch panel(s) below the blanking panel.

D. In the HDAs, terminate horizontal structured cabling in the RU positions immediately below the first level backbone structured cabling equipment of each network rack r cabinet, working downward, with patch panel equipment mounted on the front rails.
   1. Install fiber optic distribution cabinet(s) and populate with fiber optic distribution cassettes to support each server cabinet.
   2. Install a blanking panel in the RU below the fiber optic distribution cabinet(s).

E. Install 12- or 24-strand multimode fiber optic cables between the server cabinet ED and both HDAs.

F. Install UTP cables between the server cabinet ED and both HDAs.

2.3 FACILITY BACKBONE STRUCTURED CABLING.

Backbone structured cabling (inter-building and intra-building first level backbone) connects the Entrance Rooms to the Main Distribution Areas (MDAs) in the computer room, and connects the Main Distribution Areas to each Telecommunications Room (TR). This specification describes facility backbone structured cabling when the Entrance Rooms and computer room are in the same building, connected entirely by environmentally conditioned pathways (no outside plant pathways are transited).

A. Interior to each telecommunications space, install facility backbone structured cabling in overhead cable tray and fiber raceway systems.

B. All facility backbone structured cabling shall be redundant and follow diverse path routing.

C. Facility backbone cabling shall be field-terminated (fusion spliced).

D. In the Entrance Room, MDA, and TR network racks or cabinets designated for facility backbone distribution, install fiber optic distribution cabinets as required for the quantity of fibers installed.

E. Between each Entrance Room and the computer room:
   1. Provide 2 diversely routed paths of backbone cabling from each Entrance Room. One path will terminate on the A-side MDA and one path will terminate on the B-side MDA.
   2. Install a minimum of 24 strands of multimode fiber optic cabling and 12 strands of single-mode fiber optic cabling per path.

3. Populate the fiber optic distribution cabinets on each end with a sufficient quantity of multimode OM4 and single-mode OS1 fiber optic splice cassettes per path.

F. Between each MDA and each TR:

1. No zone/intermediate distribution areas (ZDAs/IDAs) intermediate cross-connects (ICCs) shall be used. All facility backbone cabling between the MDAs and TRs shall be run directly and continuously.
2. Provide 2 diversely routed paths of backbone cabling, one from the A-side MDA and one from the B-side MDA.
3. Where the TR is located in the same building as the computer room MDAs (does not transit outside plant pathways) and the path distance is less than 400 meters, install a minimum of 24 strands of multimode fiber optic cabling and 12 strands of single-mode fiber optic cabling per path.
   a. Populate the fiber optic distribution cabinets on each end with a sufficient quantity of multimode OM4 and single-mode OS1 fiber optic splice cassettes per path.
4. Where the TR is located in a different building as the computer room (transits outside plant pathways) or the path distance is greater than 400m, install a minimum of 24 strands of single-mode fiber optic cabling per path.
   a. Populate the fiber optic distribution cabinets on each end with a sufficient quantity of single-mode OS2 fiber optic splice cassettes per path.

2.4 FACILITY HORIZONTAL STRUCTURED CABLING.

Facility horizontal structured cabling (horizontal distribution) connects the Telecommunications Room (TR) to each end-user Work Area Outlet (WAO).

A. Interior to each TR, install horizontal distribution structured cabling in overhead cable tray systems.
B. All horizontal distribution structured cabling shall have a minimum of 2 cables per WAO.
C. Horizontal distribution structured cabling may be field-terminated.
D. In each TR install sufficient UTP patch panels to support the quantity of WAOs in the TR’s serving zone.
   1. Plan network racks such that patch panels and horizontal cable managers are located in the top 1/3 (RU31-45), switching

equipment in the middle 1/3 (RU16-30), and power distribution and other services in the bottom 1/3 (RU1-15).

E. Install a minimum of 2 UTP cables between the TR UTP patch panels and each work area faceplate.

F. Contractor to include in their proposal all the materials, labor and administrative costs to install and update as-built drawings adding 10% above the shown new WAO standard locations on the drawings to the overall scope of this project. Assume a 260’ average length, patch panel to WAO faceplate. Locations of these WAOs to be identified by the COR before and during the construction of this project.

G. Each typical end-user receptacle shall be constructed of a single-gang workbox with one connector chassis, a minimum of two non-proprietary Category 6A 8P8C media interface connectors (RJ-45), and a four-position keystone faceplate.

1. Modular plug terminated links (MPTL) are permitted to service wireless access points (WAPs), cameras, and other Power over Ethernet (PoE) devices where mating will be very infrequent.

PART 3 - EXECUTION

3.1 IMPLEMENTION:

A. 100% construction drawing sets shall include drawings detailing the computer room and facility/campus structured cabling systems, including:

1. Cable media performance categories for each type of run.
2. Cabling and equipment quantities.
3. Elevation drawings showing equipment placement in individual enclosures.
4. Full interconnection diagram for all structured cabling.
5. Port map and cable label matrices.

B. All cabling and equipment shall be labeled per the requirements of the VA Infrastructure Standard for Telecommunications Spaces.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 11 16
COMMUNICATIONS CABINETS, RACKS, FRAMES, AND ENCLOSURES

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies Information Technology (IT) equipment enclosures for use in VA telecommunications spaces.

1.2 SUMMARY

Section Includes:

A. Server Cabinets.

B. Network Channel Racks.

C. Network Cabinets.

D. Telecommunications Enclosures.

E. Pathway Racks.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Cabling termination equipment, rack-mounted: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Cable management equipment: Section 27 11 23, COMMUNICATIONS CABLE MANAGEMENT AND LADDER RACK.

C. Power distribution equipment: Section 27 11 26, COMMUNICATIONS RACK MOUNTED POWER PROTECTION AND POWER STRIPS.

D. Grounding and bonding equipment: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

E. Labeling and identification requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

F. Seismic bracing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

2.1 SERVER CABINETS.

A. Height. Cabinets shall provide 45 standard rack units (RU) of space (45U) for mounting equipment.

B. Dimensions. Nominal dimensions for server cabinets are 84” (2134mm) tall, 23.6” (600mm) wide, and 48” (1220mm) deep, including side panels and doors. Minimum depth is 46” (1168mm). Maximum width is 24” 610mm).

C. Doors and Panels.

1. Front Door. Provide a single locking, latched, hinged metal front door for the server cabinet with minimum 75% open perforated design for airflow.

2. Rear Door. Provide a double locking, latched, hinged metal rear door for the server cabinet.

a. If a vertical exhaust duct (VED, “chimney”) is specified for the server cabinet, the rear door shall be solid.

b. If no VED is specified, the rear door shall be perforated with a minimum of 75% open design for airflow.

3. Side Panels. Provide removable, locking solid metal side panels. Side panels shall have cable pass-through cut-outs protected with brushed grommets on each side, aligned on each side to allow Rack PDU cables to pass between enclosures to Zone PDUs.

D. Locks. All locks on a server cabinet shall be keyed the same. Provide two keys per cabinet.

E. Color. The cabinet and all components shall be white in color.

F. Equipment Mounting Rack. The cabinet shall provide an EIA-310-E compliant 19” racking system with front and rear rails using standard 3/8” x 3/8” square hole mounting.

1. Rear Rails. Position rear rails with a minimum of 6” of clearance between the rails and the rear doors to accommodate rear-mounted angled patch panels and up to four (4) vertical rack PDUs.

G. Components. The cabinet shall be supplied with the following standard equipment:

a. Air dams for left and right of the front rails.

b. Finger cable managers.

c. Bottom panel with brushed grommets.

d. Top panel with brushed grommets.

e. Toolless mounting brackets for vertical Rack PDUs.

f. 45U of 1RU blanking panels.

H. As a basis of design, Server Cabinets (Equipment Distributer - ED) shall be CPI ZetaFrame cabinets as called out on MCR sheets, or approved equal.

2.2 NETWORK CHANNEL RACKS.

A. Height. Racks shall provide 45 standard rack units (RU) of space (44U) for mounting equipment.

B. Dimensions. Nominal dimensions for network racks are 84” (2134mm) tall, 236” (915mm) wide, and 48” (1220mm) deep, including [2] side cars, side panels and doors.

C. Side Panels. The rack shall have integral metal side panels (a “channel” rack) constructed with a cable management pattern of staggered

shapes (circles, hexagons, etc.) to allow for connection points for cable management accessories.

1. Front Door. Provide a single locking, latched, hinged metal front door for the server cabinet with minimum 75% open perforated design for airflow.

2. Rear Door. Provide a double locking, latched, hinged metal rear door for the server cabinet. The rear door shall be perforated with a minimum of 75% open design for airflow.

3. Side Panels. Provide removable, locking solid metal side panels outside face of sidecars.

D. Security Doors. Provide locking, latched, hinged metal doors and mounting hardware for the network rack. Doors shall be perforated with a minimum of 50% open design for airflow.

1. Locks. All locks on a network rack shall be keyed the same. Provide two keys per cabinet.

E. Color. The rack and all components shall be white in color.

F. Equipment Mounting Rack. The cabinet shall provide an EIA-310-E compliant 19” racking system with front and rear rails using standard 3/8” x 3/8” square hole mounting.

1. Front Rails. Position front rails with a minimum of 5” of clearance between the rails and the front door to accommodate angled patch panel and bend radius of patch cords. Contractor responsible for assuring proper clearance for rail depth as conditions require.

2.Rear Rails. Position rear rails with a minimum of 6” of clearance between the rails and the rear doors to accommodate up to four (4) vertical rack PDUs.

G. Components. The cabinet shall be supplied with the following standard equipment:

a. Air dams for left and right of the front rails.

b. Bottom panel with brushed grommets.

c. Top panel with brushed grommets.

d. Toolless mounting brackets for vertical Rack PDUs.

e. 1RU blanking panels sufficient in number to cover all unused cabinet RU spaces.

f. Cable management accessories as necessary to maintain cable bend radii, uniformity, and neatness (e.g. d-rings, spools, bend radius limiters, finger cable managers, waterfalls, etc.).

2.3 NETWORK CABINETS.

A. Height. Cabinets shall provide 45 standard rack units (RU) of space (45U) for mounting equipment.

B. Dimensions. Nominal dimensions for server cabinets are 84” (2134mm) tall, 31.5” (800mm)40” (1016mm) wide, and 48” (1220mm) deep, including side panels and doors. Minimum depth is 46” (1168mm). Maximum width is 24” (610mm).

C. Doors and Panels.

1. Front Door. Provide a single locking, latched, hinged metal front door for the server cabinet with minimum 75% open perforated design for airflow.

2. Rear Door. Provide a double locking, latched, hinged metal rear door for the server cabinet.

a. If a vertical exhaust duct (VED, "chimney") is specified for the server cabinet, the rear door shall be solid.

b. If no VED is specified, the rear door shall be perforated with a minimum of 75% open design for airflow.

3. Side Panels. Provide removable, locking solid metal side panels. Side panels shall have cable pass-through cut-outs protected with brushed grommets on each side, aligned on each side to allow Rack PDU and communications cables to pass between enclosures to Zone PDUs.

D. Locks. All locks on a server cabinet shall be keyed the same. Provide two keys per cabinet.

E. Color. The cabinet and all components shall be white in color.

F. Equipment Mounting Rack. The cabinet shall provide an EIA-310-E compliant 19" racking system with front and rear rails using standard 3/8" x 3/8" square hole mounting.

G. Components. The cabinet shall be supplied with the following standard equipment:

a. Air dams for left and right of the front rails.

b. Bottom panel with brushed grommets.

c. Top panel with brushed grommets.

d. Toolless mounting brackets for vertical Rack PDUs.

e. 45U of 1RU blanking panels.

f. Cable management accessories as necessary to maintain cable bend radii, uniformity, and neatness (e.g. d-rings, spools, bend radius limiters, finger cable managers, waterfalls, etc.).

2.4 TELECOMMUNICATIONS ENCLOSURES (TE).

Telecommunications Enclosures (TEs) are swing-out wall-mounted enclosures.

A. Height. TEs shall provide 12 or 26 standard rack units (RU) of space for mounting equipment.

B. Dimensions. Nominal dimensions for TEs are 48" (1220mm) tall, 24" (610mm) wide, and 30" (760mm) deep.

C. Doors and Panels.

1. Front Door. TEs shall have a single locking, latched, hinged metal front door with a tempered glass front.

2. Rear Panel. TEs shall have a latched, hinged metal rear door that mounts to the wall, allowing the body of the TE to be swung open for rear equipment access. If latched exterior to the body of the TE, the latch shall be locking.

a. Cabling Cutouts. The top and bottom surfaces of the rear panel shall have cabling cutouts to accommodate telecommunications cabling

entering the TE. Edge-protection grommets for the cabling cutouts shall be provided.

b. Power Cutout. The rear panel shall have a cutout on the rear mounting surface allowing power to be installed internal to the TE.

3. Locks. All locks on a TE shall be keyed the same. Provide two keys per TE.

D. Load Rating. The TE shall support 300lb (136kg) of total weight.

E. Color. The cabinet and all components shall be white in color.

F. Equipment Mounting Rack. The cabinet shall provide an EIA-310-E compliant 19” racking system with front and rear rails using standard threaded #12-24 hole mounting.

G. Components. The cabinet shall be supplied with the following standard equipment:

a. 1U shelf (two per TE).

b. Vertical cable management kits (one per each full 12U of TE height).

c. Fan kit to evacuate heat generated by active equipment (two per TE).

d. Filter kit for fans (two per TE).

2.5 PATHWAY RACKS.

A. Height. Pathway racks shall provide a minimum of 5 standard rack units (RU) of space (5U) for mounting Equipment Distributor equipment.

B. Dimensions. Nominal dimensions for pathway racks are 12.6” tall, 23.6” wide, and 9” deep.

C. Mounting. Pathway racks shall mount to standard basket-style cable tray.

E. Color. Pathway racks shall be white in color.

F. Equipment Mounting Rack. The cabinet shall provide an EIA-310-E compliant 19” racking system with rails using standard 3/8” x 3/8” square hole mounting EIA-tapped 10-32 holes.

PART 3 – EXECUTION

3.1 INSTALLATION:

A. Where to be installed in structures assigned to Seismic Design Category C, D, E, or F, seismic bracing equivalent to that for other storage racks per VA Master Specification 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS section 3.7 (“Install… to withstand earthquake forces and anchored to the floor or laterally braced from the top to the structural elements”) is required.

B. Casters on floor-mounted enclosures shall be retracted and the enclosures leveled and stabilized.

– – – E N D – –

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 11 19
COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies cable termination and management equipment to be mounted in information technology (IT) equipment cabinets and racks.

1.2 SUMMARY

Section Includes:

A. Copper UTP Patch Panels.

B. Fiber Optic Distribution Cabinets.

C. Fiber Optic Distribution Cassettes.

D. Fiber Optic Splice Cassettes.

E. Horizontal Cable Managers.

F. Blanking Panels.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Server cabinets and network racks: Section 27 11 16, COMMUNICATIONS CABINETS, RACKS, FRAMES, AND ENCLOSURES.

B. Cable management equipment: Section 27 11 23, COMMUNICATIONS CABLE MANAGEMENT AND LADDER RACK.

C. Grounding and bonding equipment: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

D. Labeling and identification requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

E. Copper UTP cabling: Section 27 13 13, COMMUNICATIONS COPPER BACKBONE CABLING.

F. Copper UTP cabling termination: Section 27 13 13.13, COMMUNICATIONS COPPER CABLE SPLICING AND TERMINATIONS.

G. Fiber optic cabling: Section 27 13 23, COMMUNICATIONS OPTICAL FIBER BACKBONE CABLING.

H. Fiber optic cabling termination: Section 27 13 23.13, COMMUNICATIONS OPTICAL FIBER SPLICING AND TERMINATIONS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

2.1 COPPER (UTP) PATCH PANELS.

A. Form Factor. 1U, 19” high density, rack-mountable. Default form factor for patch panels shall be angled to extend not less than 4” (104mm) forward from the mounting rail.

B. Capacity. 48 copper 8P8C ports.

C. Interface. Copper (UTP) patch panels shall accept pre-terminated single 8P8C keystone jacks.

D. Accessories. Provide each patch panel installation with the following accessories.

1. Angled panel cover. Specify angled panel covers at the top and bottom of each stack of angled patch panels. Covers shall mount to the same RU rail positions as the top and bottom patch panels.

2. Rear cable manager. Specify one rear cable manager per patch panel. Managers shall mount to the same RU rail positions as the patch panel.

2.2 FIBER OPTIC DISTRIBUTION CABINETS.

A. Form Factor. 1U, 19” rack-mountable, angled to extend not less than 4” (104mm) forward from the mounting rail.

B. Capacity. 144 fibers in a variety of distribution and/or splice cassettes.

C. Door. Cabinets shall be supplied with a locking front cover.

D. Accessories. Provide each distribution cabinet with the following accessories.

1. Rear cable manager. Specify one rear cable manager with fiber storage rings per distribution cabinet. Trays shall mount to the same RU rail positions as the distribution cabinet.

2. 0RU patch cord managers. Specify one pair of patch cord managers per distribution cabinet. Managers shall mount to the same RU rail positions as the distribution cabinet and rear cable manager.

2.3 FIBER OPTIC DISTRIBUTION CASSETTES.

Fiber optic distribution cassettes are used in structured cabling in the computer room to connect Main Distribution Areas (MDAs), Horizontal

Distribution Areas (HDAs), and Equipment Distributors (EDs) where pre-terminated cable is used.

A. Form Factor. Designed to install in rack-mounted fiber optic distribution cabinet.

B. Connections. The rear connection shall accept 12-strand multi-fiber push-on (MPO) connectors 24-strand multi-fiber push-on (MPO) connectors. Adapters on the front of the cassette shall accept 6 duplex Lucent connector (LC) fiber pairs 3 sets of 8-strand multi-fiber push-on (MPO) connectors.

C. Polarity. Provide type B universal polarity cassettes.

2.4 FIBER OPTIC SPLICE CASSETTES.

Fiber optic splice cassettes are used in backbone structured cabling connecting the Entrance Rooms to the Main Distribution Areas (MDAs) in the computer room, and the MDAs to Telecommunications Rooms (TRs) where field-terminated (fusion spliced) cable is used.

A. Form Factor. Designed to install in rack-mounted fiber optic distribution cabinet.

B. Connections. Adapters on the front of the cassette shall accept 6 duplex Lucent connector (LC) fiber pairs 3 sets of 8-strand multi-fiber push-on (MPO) connectors.

C. Design. Splice cassette modules shall be self-contained to integrate fiber adapter bulkhead and splice holders. No additional splice trays shall be necessary. Each module shall provide 12 or 24 fiber splice connections.

D. Fiber Type. Provide multimode OM4 and single-mode OS2 splice cassettes as required by the quantity of each type of fiber installed.

2.5 HORIZONTAL CABLE MANAGERS.

A. Form Factor. 1U, 19” rack-mountable.

B. Door. Horizontal cable managers shall have a double-hinged front cover to protect installed cables.

C. Fingers. 6-port spacing (five fingers).

2.6 BLANKING PANELS.

A. Form Factor. 1U, 19” rack-mountable, flat angled to extend 4” (104mm) forward from the mounting rail.

B. Transition. Blanking panel shall have a transition cover from angled front to flat front.

C. Quantity. Provide blanking panels to fill 75% of all RUs in all server cabinets and network cabinets.

PART 3 – EXECUTION

3.1 INSTALLATION:

Not used.

- - - E N D - - -

SECTION 27 11 26
COMMUNICATIONS RACK MOUNTED POWER PROTECTION AND POWER STRIPS

PART 1 – GENERAL

1.1 DESCRIPTION

This section specifies power distribution equipment and interconnections supporting equipment deployed in telecommunications spaces (entrance rooms, computer rooms, and telecommunications rooms).

1.2 SUMMARY

Section Includes:

A. Zone Power Distribution Units (zPDUs).

B. Rack-Mounted Uninterruptible Power Supply (UPS) Units.

C. Rack Power Distribution Units (rPDUs).

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK

A. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. IT equipment enclosures: Section 27 11 16, COMMUNICATIONS CABINETS, RACKS, FRAMES, AND ENCLOSURES

C. Grounding and bonding equipment: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. For each type of product:

1. Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for rack-mounted power protection and power strips.
2. Include rated capacities, operating characteristics, electrical characteristics, and furnished specialties and accessories.

PART 2 – PRODUCTS

2.1 ZONE POWER DISTRIBUTION UNITS (ZONE PDU)

A. Provide components from a single manufacturer.

B. 60 Amp Zone PDU:

1. Description: Zone PDU with A/B redundant 3-phase 60A input circuits and three (3) pairs of A/B redundant L21-20R outlets allowing each supported Standard Density (5kW) enclosure to operate at full density rating.

2. Input Connection: Dual 60A three-phase 208V hard-wired, with junction box and five-wire (L+L+L+N+G) DIN copper terminal blocks accommodating 4AWG conductors. Power cord 10’ (3m) length.

3. Output Connection: Three (3) pairs of A/B (redundant) L21-20R outlets.

4. Power Capacity: 43.2kW (21.6kW redundant at full load); 5.7kW fully-rated at each L21-20R outlet.

5. Enclosure: Fully self-contained.

6. Mounting: 1” rack-mount.

C. 30 Amp Zone PDU:

1. Description: Zone PDU with A/B redundant 3-phase 30A input circuits and two (2) pairs of A/B redundant L21-20R outlets allowing each supported Standard Density (5kW) enclosure to operate at partial density rating.

2. Input Connection: Dual 30A three-phase 208V L21-30P. Power cord 10’ (3m) length.

3. Output Connection: Two (2) pairs of A/B (redundant) L21-20P outlets.

4. Power Capacity: 21.6kW (10.8kW redundant at full load); combined 8.6kW rated output through each A/B pair of L21-20R outlets.

5. Enclosure: Fully self-contained.

6. Mounting: 1” rack-mount.

2.2 RACK-MOUNTED UNINTERRUPTIBLE POWER SUPPLY (UPS) UNITS

A. Provide components from a single manufacturer.

B. Description: 5kW three-phase 208V 20A rack-mounted UPS with L21-20 input and output connections.

C. Input Connection: Single input NEMA L21-20P plug (twistlock three-phase five wire L+L+L+N+G). Power cord minimum 3’ (1m)

length.

D. Output Connection: Single output NEMA L21-20R receptacle.

E. Power Capacity: 5kW

F. Enclosure: Fully self-contained.

G. Mounting: 19” rack mount with 4-Post rail kit.

H. Battery Capacity: Ten minutes at 70% load (3.5kW).

I. Cooling: Fan-cooled, front air entry, rear exhaust.

2.3 RACK POWER DISTRIBUTION UNITS (RACK PDUS)

A. Provide components from a single manufacturer.

B. Description: Metered/monitored three-phase 208V 20A vertical Rack Power Distribution Unit (Rack PDU), 5.7kW, with IEC60320 outlets.

C. Input Connection: Single input NEMA L21-20P plug (twistlock three-phase five wire L+L+L+N+G). Power cord 10’ (3m) length.

D. Output Connections.

1. For Computer Room applications: Minimum 30 each C13 and 6 each C19. Outlets grouped in phase-grouping banks (A-B, B-C, C-A) or alternating to assist with phase balancing. Outlets labelled with associated phase-grouping bank.

2. For Telecommunications Room (TR) and entrance room applications: Minimum 30 each C13, 6 each C19, 2 each L5-20. Outlets grouped in phase-grouping banks (A-B, B-C, C-A) or alternating to assist with phase balancing. Outlets labelled with associated phase-grouping bank.

E. Power Capacity: 5.7kW rated.

F. Enclosure: Fully self-contained.

G. Mounting: Toolless mounting, orientation vertical at rear of enclosure, taking up zero RU spaces. Up to two Rack PDUs must be able to be installed on each side for High Density (10kW) enclosures.

H. Mounting Hardware: As required to connect to the specific enclosure make/model.

I. Number of RPDUs: 2 for Standard Density (up to 5kW) enclosures, 4 for High Density (10kW) enclosures.

J. Metering: Local display provides input line currents (Amperage). Additional metering items (voltage, power, energy, power factor) across the unit or at individual outlets, is acceptable.

K. Monitoring: RJ45 Ethernet port allows connection to an external monitoring system. Supports SNMP v3 with SSL Encryption.

PART 3 – EXECUTION

3.1 INSTALLATION

A. DEFINITION: Sides (left/right) of the enclosure are as when viewed from the rear (hot aisle) of the enclosure for the purposes of this section.

B. Zone PDUs.

1. Install Zone PDUs only in enclosures that require them.
2. Zone PDUs shall not be installed in enclosures supported by busbar power distribution.
3. Install Zone PDUs beginning in RU position 1 or the first open RU position above any rack-mounted UPS unit, at the bottom of the 19” rack, on the rear rails of the enclosure.
4. Connect the Zone PDU power cords to the upstream branch circuit supporting the enclosures.

C. Rack-Mounted UPS Units.

1. Install rack-mounted UPS units only in enclosures that require them. Rack-mounted UPS units shall not be installed downstream of another UPS system (cascaded).
2. Where non-redundant UPS power is required to support the enclosure, install the rack-mounted UPS unit in the A side power distribution.
3. Install rack-mounted UPS units beginning in RU position 1, at the bottom of the 19” rack, with the exhaust ports facing the rear of the enclosure. No other equipment should be installed below the rack-mounted UPS units.
4. Connect the rack-mounted UPS unit power cord to the appropriate (A side) power receptacle on the upstream Zone PDU.

D. Rack PDUs.

1. Install Rack PDUs in matched A/B pairs only.
2. Install A side Rack PDUs on the left side of the enclosure and B side Rack PDUs on the right side of the enclosure, interior to the rear enclosure door.
3. Connect the Rack PDU power cord to the upstream rack-mounted UPS unit (where present) or the appropriate power receptacle on the upstream Zone PDU.

– – – E N D – – –

SECTION 27 13 13
COMMUNICATIONS COPPER BACKBONE CABLING

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications copper (UTP) backbone and horizontal cabling in structured cabling systems in computer rooms.

1.2 SUMMARY

Section Includes:

A. Copper (UTP) Backbone Cables.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Computer room structured cabling: Section 27 10 00, STRUCTURED CABLING.

B. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Cable labeling requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

2.1 COPPER (UTP) BACKBONE CABLES.

Copper (UTP) backbone and horizontal cables are used in computer room structured cabling to connect Main Distribution Areas (MDAs), Horizontal Distribution Areas (HDAs), and server cabinet Equipment Distributors (EDs).

A. Performance Category. Copper (UTP) backbone cables shall meet the Category 6A performance requirements. Category 6A connectors are required.

B. Performance Specifications. Meets or exceeds TIA-EIA-568-C.2-10 and TSB-155.

C. Limited Power (LP) Certification. UL Listed as x-LP (0.5A).

D. Termination. Factory pre-terminated TIA 568B.

E. Testing. Factory certified to meet performance category requirements per TIA 568-C.2.

F. Conductor Size. 22-24AWG.

G. Jacket Rating. Communications Multipurpose Cable, Plenum (CMP) shall be specified if any portion of the cable passes through an NEC-defined plenum. Communications Multipurpose Cable, Riser (CMR) shall be specified for all other applications. CMP may be used as a substitute for CMR.

H. Bundling and Construction. Copper (UTP) backbone cables shall be provided in 6-cable bundles with individual 8P8C media interface connectors (RJ-45 'jacks') or 6-jack cassettes designed to fit in copper (UTP) patch panels.

I. Color. A-side 8P8C media interface connectors (RJ-45) shall be blue. B-side 8P8C connectors shall be yellow.

J. Length. Backbone cabling used shall be procured to the specific length required by the design (horizontal and vertical paths) with no more than 2 feet of excess length.

PART 3 - EXECUTION

3.1 IMPLEMENTATION.

A. A. All cabling and equipment shall be labeled per the requirements of the VA Infrastructure Standard for Telecommunications Spaces.

B. Install first level backbone and horizontal structured cabling in the computer room in cable tray and fiber raceway systems following diverse path routing.

- - - E N D - - -

SECTION 27 13 13.13
COMMUNICATIONS COPPER CABLE SPLICING AND TERMINATIONS

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies requirements for terminations of copper (UTP) cabling.

1.2 SUMMARY

Section Includes:

A. Termination Requirements.

B. Splicing.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Copper (UTP) cabling requirements: Section 27 13 13, COMMUNICATIONS COPPER BACKBONE CABLING.

C. Copper (UTP) cabling requirements: Section 27 15 13, COMMUNICATIONS COPPER HORIZONTAL CABLING.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

Not used.

PART 3 – EXECUTION

3.1 TERMINATION REQUIREMENTS.

A. Terminate copper (UTP) cabling used for data communications per TIA 568B.

B. Connections shall be made to equipment certified to performance category 6a.

C. Pre-terminated connections are preferred for computer room structured cabling applications. Field termination for non-computer room applications is acceptable.

3.2 SPLICING.

Splicing of copper (UTP) cabling is prohibited.

- - - E N D - - -

SECTION 27 13 23
COMMUNICATIONS OPTICAL FIBER BACKBONE CABLING

PART 1 – GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications optical fiber backbone cabling.

1.2 SUMMARY

Section Includes:

A. Multimode Optical Fiber Backbone Cables.

B. Single Mode Optical Fiber Backbone Cables.

C. Hybrid Optical Fiber Backbone Cables.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Computer room structured cabling: Section 27 10 00, STRUCTURED CABLING.

B. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Cable labeling requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

C. Grounding and bonding equipment: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

PART 2 – PRODUCTS

2.1 MULTIMODE OPTICAL FIBER BACKBONE CABLES.

Multimode fiber optic backbone cables are specified for inside plant use, for data center backbone use as well as for intrabuilding campus backbone.

A. Performance Category. Laser-optimized OM4 or OM5 cables are specified.

B. Testing. All fiber optic backbone cabling shall include manufacturers Tier 2 OTDR factory reel test results to be submitted with installers test results. All fiber optic backbone media shall pass all Tier 1 requirements (attenuation with an Optical Loss Test Set or OLTS, verification of cable length and polarity, and shall be performed in compliance with TIA-526.14-

A, Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant - SFSTP-14 (August 1998) and all Tier 2 requirements (characterization by an Optical Time Domain Reflectometer or OTDR resulting in indication of the uniformity of cable attenuation and connector insertion loss). All testing shall be performed in compliance with TIA-455-C, General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014). All test equipment shall have been factory calibrated within one calendar year of the test results date. All test results shall be submitted in both the native tester software format and PDF file format.

C. Termination. For computer room first level backbone usage, factory pre-terminated cables with MPO connectors are required. Fiber will be field terminated (fusion spliced) when used to connect the computer room to Telecommunications Rooms (TRs) and other telecommunications spaces.

1. Polarity. For pre-terminated MPO-MPO cables, the polarity of the cables shall be matched to the type of fiber optic distribution cassettes specified.

D. Jacket Color.

1. OM4. Aqua.

2. OM5. Lime.

E. Jacket Rating. Communications Multipurpose Cable, Plenum (CMP) shall be specified if any portion of the cable passes through an NEC-defined plenum. Communications Multipurpose Cable, Riser (CMR) shall be specified for all other applications. CMP may be used as a substitute for CMR.

F. Bundling and Construction. Bundles consisting of multiples of sub-bundles (subunits)12 strands of fiber are specified. Cables shall be dielectric and tight-buffered. Any fiber optic cable with interlocking armored construction shall be properly grounded and bonded at each end of the cable. Construction shall match the rear entry requirements of the fiber optic distribution or splice cassette such that the sub-bundle (subunit) remains jacketed into the cassette.

G. Length. Backbone cabling for computer room first level backbone use (pre-terminated) shall be procured to the specific length required by

the design (horizontal and vertical paths) with no more than 1 meter of excess length on each end.

2.2 SINGLE MODE OPTICAL FIBER BACKBONE CABLES.

Single mode fiber optic backbone cables are specified for inside and outside plant use, for campus backbone (interbuilding and intrabuilding) use.

A. Performance Category. OS1 is specified for inside plant applications. Inside/outside rated OS2 is specified for applications where the pathway transits an outside plant path.

B. Testing. All fiber optic backbone cabling shall include manufacturers Tier 2 OTDR factory reel test results to be submitted with installers test results. All fiber optic backbone media shall pass all Tier 1 requirements (attenuation with an Optical Loss Test Set or OLTS, verification of cable length and polarity), and shall be performed in compliance with Measurement of Opti TIA-526-7-B cal Power Loss of Installed Single-Mode Fiber Cable Plant - OFSTP-7 (December 2008)TIA-526-7-B, and all Tier 2 requirements (characterization by an Optical Time Domain Reflectometer or OTDR resulting in indication of the uniformity of cable attenuation and connector insertion loss). All testing shall be performed in compliance with TIA-455-C, General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014). All test equipment shall have been factory calibrated within one calendar year of the test results date. All test results shall be submitted in both the native tester software format and PDF file format.

C. Termination. Fiber will be field terminated (fusion spliced) when used to connect the computer room to Telecommunications Rooms (TRs) and other telecommunications spaces.

D. Jacket Color. Yellow.

E. Jacket Rating. Communications Multipurpose Cable, Plenum (CMP) shall be specified if any portion of the cable passes through an NEC-defined plenum. Communications Multipurpose Cable, Riser (CMR) shall be specified for all other applications. CMP may be used as a substitute for CMR.

F. Bundling and Construction. Bundles consisting of multiples of sub-bundles (subunits)12 strands of fiber are specified. Cables shall be dielectric and tight-buffered for OS1, and loose-tube gel-filled for OS2.

Any fiber optic cable with interlocking armored construction shall be properly grounded and bonded at each end of the cable.

2.3 HYBRID OPTICAL FIBER BACKBONE CABLES.

Hybrid cables containing multiple 12-strand bundles (subunits) of multimode and/or single mode fiber are acceptable.

PART 3 - EXECUTION

3.1 IMPLEMENTATION.

A. A. All cabling and equipment shall be labeled per the requirements of the VA Infrastructure Standard for Telecommunications Spaces.

B. Interior to telecommunications spaces, install fiber optic backbone cabling in overhead cable tray and fiber raceway systems.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 13 23.13
COMMUNICATIONS OPTICAL FIBER SPLICING AND TERMINATIONS

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies requirements for terminations of fiber optic cabling.

1.2 SUMMARY

Section Includes:

A. Termination Requirements.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Fiber optic cabling requirements: Section 27 13 23, COMMUNICATIONS OPTICAL FIBER BACKBONE CABLING.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

PART 2 - PRODUCTS

Not used.

PART 3 - EXECUTION

3.1 TERMINATION REQUIREMENTS.

A. Terminate fiber optic cabling with duplex Lucent connector (LC) adapters 12-fiber multi-fiber push on (MPO) connectors 24-fiber multi-fiber push on (MPO) connectors as required for the application.

B. Pre-terminated connections are preferred for computer room structured cabling applications. Field termination (fusion splicing) for non-computer room applications where cable lengths cannot be determined in advance is acceptable.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 27 15 13
COMMUNICATIONS COPPER HORIZONTAL CABLING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications copper (UTP) horizontal distribution cabling outside of the computer room. For copper (UTP) horizontal cabling in structured cabling systems in the computer room, see Section 27 13 13 Communications Copper Backbone Cabling.

1.2 SUMMARY

Section Includes:

A. Copper (UTP) Horizontal Cables.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Computer room structured cabling: Section 27 10 00, STRUCTURED CABLING.

B. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Cable labeling requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

PART 2 - PRODUCTS

2.1 COPPER (UTP) HORIZONTAL CABLES.

Copper (UTP) horizontal cables connect the Telecommunications Room (TR) to each end-user Work Area Outlet (WAO) (horizontal distribution).

A. Performance Category. Copper (UTP) horizontal cables shall meet the Category 6A performance requirements. Category 6A connectors are required.

B. Performance Specifications. Meets or exceeds TIA-EIA-568-C.2-10 and TSB-155.

C. Limited Power (LP) Certification. UL Listed as x-LP (0.5A).

D. Termination. Field terminated TIA 568B.

E. Testing. Following installation, each cable shall be field certified to meet performance category requirements per TIA 568-C.2.

F. Conductor Size. 22-24AWG.

G. Jacket Rating. Communications Multipurpose Cable, Plenum (CMP) shall be specified if any portion of the cable passes through an NEC-defined plenum. Communications Multipurpose Cable, Riser (CMR) shall be specified for all other applications. CMP may be used as a substitute for CMR.

H. Construction. Copper Clad Aluminum (CCA) cable is not permitted.

J. Length. The maximum distance for UTP horizontal cables is limited to 295 feet.

PART 3 - EXECUTION

3.1 IMPLEMENTATION.

A. A. All cabling and equipment shall be labeled per the requirements of the VA Infrastructure Standard for Telecommunications Spaces.

B. Interior to the TR, install horizontal copper (UTP) structured cabling in overhead cable tray.

- - - E N D - - -

SECTION 27 16 19
COMMUNICATIONS PATCH CORDS, STATION CORDS, AND CROSS CONNECT WIRE

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies requirements for telecommunications patch cords.

1.2 SUMMARY

Section Includes:

A. Copper (UTP) Patch Cables.

B. Fiber Optic Patch Cables.

1.3 REFERENCES

A. VA Infrastructure Standard for Telecommunications Spaces.

1.4 RELATED WORK:

A. Termination equipment: Section 27 11 19, COMMUNICATIONS TERMINATION BLOCKS AND PATCH PANELS.

B. Cable labeling requirements: Section 27 05 53, IDENTIFICATION FOR COMMUNICATIONS SYSTEMS.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,AND SAMPLES.

PART 2 - PRODUCTS

2.1 COPPER (UTP) PATCH CABLES.

A. Performance Category. Patch cables shall meet the Category 6A performance requirements. Category 6A connectors are required.

B. Termination Method. Factory pre-terminated TIA 568B.

C. Conductor Size. 22-28AWG. Where 28AWG patch cords are specified, the overall horizontal channel distance is reduced.

D. Length. Patch cords of the shortest appropriate length shall be used.

E. Provide [1] 7’ patch cable for each work area outlet. Provide [1] 14’ patch cable for 50% of work area outlets.

F. Provide 50% of patch panel ports with 3’ patch cables, 25% with 5’, 10% with 7’

2.2 FIBER OPTIC PATCH CABLES.

A. Construction. Fiber patch cords shall be constructed of pairs (2-strands) of LC multimode laser-enhanced 50/125µm LC single mode laser-optimized 9/125µm fiber.

B. Performance Category. Multimode patch cords shall meet the OM4 performance requirements.

C. Connectors. Duplex Lucent connector (LC) connectors are required. Where polarity requirements are not known, reversible polarity duplex LC connectors are specified on one end.

D. Termination Method. Factory pre-terminated.

E. Length. Patch cords of the shortest appropriate length shall be used.

F. Provide total quantity of single mode and multi-mode fiber patch cables equal to the number strands installed.

PART 3 - EXECUTION

3.1 IMPLEMENTATION.

A. Patch cords shall not be used to connect equipment in different server cabinets.

B. Patch cords shall be neatly installed using cable management equipment and following cable management principles.

C. Upon installation patch cords shall be labeled in accordance with the requirements of the VA Infrastructure Standard for Telecommunications Spaces.

- - - E N D - - -

SECTION 27 51 16
PUBLIC ADDRESS AND MASS NOTIFICATION SYSTEMS

PART 1 - GENERAL

1.1 SECTION SUMMARY

A. Work covered by this document includes design, engineering, labor, material and products, equipment warranty and system warranty, training and services for, and incidental to, the complete installation of new and fully operating National Fire Protection Association (NFPA) – Life Safety Code 101.3-2 (a) Labeled and (b) Listed Emergency Service Public Address System (PAS) and associated equipment (here-in-after referred to as the System) in approved locations indicated on the contract drawings. These items shall be tested and certified capable of receiving, distributing, interconnecting and supporting PAS communications signals generated local and remotely as detailed herein.

B. Work shall be complete, Occupational Safety and Health Administration (OSHA), National Recognized Testing Laboratory (NRTL – i.e. Underwriters Laboratory [UL]) Listed and Labeled; and VA Central Office (VACO), Telecommunications Voice Engineering (TVE 005OP3B) tested, certified and ready for operation.

C. The System shall be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, engineered and installed for ease of operation, maintenance, and testing.

D. The term "provide", as used herein, shall be defined as: designed, engineered, furnished, installed, certified, and tested, by the Contractor.

E. Specification Order of Precedence: In the event of a conflict between the text of this document and the Project's Contract Drawings outlined and/or cited herein; THE TEXT OF THIS DOCUMENT TAKES PRECEDENCE. *HOWEVER, NOTHING IN THIS DOCUMENT WILL SUPERSEDE APPLICABLE EMERGENCY LAWS AND REGULATIONS,* SPECIFICALLY NATIONAL AND/OR LOCAL LIFE AND PUBLIC SAFETY CODES. The Local Fire Marshall and/or VA Public Safety Officer are the only authorities that may modify this document's EMERGENCY CODE COMPLIANCE REQUIREMENTS, on a case by case basis, in writing and confirmed by VA's PM, RE and TVE-005OP3B. *The VA PM is the only approving authority* for other amendments to this document that may be granted, on a case by case basis, in writhing with technical concurrencies by VA's RE, TVE-005OP3B and identified Facility Project Personnel.

F. The Original Equipment Manufacturer (OEM) and Contractor shall ensure ***that all*** management, sales, engineering and installation personnel have read and understand the requirements of this specification ***before*** the system is designed, engineered, delivered and provided. The Contractor shall furnish a written statement attesting this requirement as a part of the technical submittal that includes each name and certification, including the OEMs.

1.2 RELATED SECTIONS

A. 01 33 23 – Shop Drawings, Product Data and Samples.

B. 07 84 00 – Joint Firestopping.

C. 26 05 19 – Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).

D. 26 41 00 – Facility Lightning Protection.

E. 27 05 11 – Requirements for Communications Installations.

F. 27 05 26 – Grounding and Bonding for Communications Systems.

G. 27 05 33 – Conduits and Backboxes for Communications Systems.

H. 27 10 00 – Structured Cabling.

1.3 DEFINITIONS

A. Provide: Design, engineer, furnish, install, connect complete, test, certify and warranty.

B. Work: Materials furnished and completely installed.

C. Review of contract drawings: A service by the engineer to reduce the possibility of materials being ordered which do not comply with contract documents. The engineer's review shall not relieve the Contractor of responsibility for dimensions or compliance with the contract documents. The reviewer's failure to detect an error does not constitute permission for the Contractor to proceed in error.

D. Headquarters Technical Review, for National and VA communications and security, codes, frequency licensing, standards, guidelines compliance:

Office of Telecommunications
Special Communications Team (005OP2B)
1335 East West Highway – 3rd Floor
Silver Spring, Maryland 20910
(O) 301-734-0350, (F) 301-734-0360

E. Engineer:

F. Owner:

G. General Contractor (GC):

H. Contractor: successful bidder

1.4 REFERENCES

A. The installation shall comply fully with all governing authorities, laws and ordinances, regulations, codes and standards, including, but not limited to:

1. United States Federal Law:

a. Departments of:

1) Commerce, Consolidated Federal Regulations (CFR), Title 15 – Under the Information Technology Management Reform Act (Public Law 104-106), the Secretary of Commerce approves standards and guidelines that are developed by the:

a) Chapter II, National Institute of Standards Technology (NIST – formerly the National Bureau of Standards). Under Section 5131 of the Information Technology Management Reform Act of 1996 and the Federal Information Security Management Act of 2002 (Public Law 107-347), NIST develops – Federal Information Processing Standards Publication (FIPS) 140-2—Security Requirements for Cryptographic Modules.

b) Chapter XXIII, National Telecommunications and Information Administration (NTIA – aka 'Red Book') Chapter 7.8 / 9; CFR, Title 47 Federal communications Commission (FCC) Part 15, Radio Frequency Restriction of Use and Compliance in "Safety of Life" Functions & Locations

2) FCC - Communications Act of 1934, as amended, CFR, Title 47 – Telecommunications, in addition to Part 15 – Restrictions of use for Part 15 listed Radio Equipment in Safety of Life / Emergency Functions / Equipment/ Locations (also see CFR, Title 15 – Department of Commerce, Chapter XXIII – NTIA):

a) Part 15 – Restrictions of use for Part 15 listed Radio Equipment in Safety of Life / Emergency Functions / Equipment/Locations.

b) Part 58 – Television Broadcast Service.

c) Part 90 – Rules and Regulations, Appendix C.

d) Form 854 – Antenna Structure Registration.

3) Health, (Public Law 96-88), CFR, Title 42, Chapter IV Health & Human Services, CFR, Title 46, Subpart 1395(a)(b) JCAHO "a hospital that meets JCAHO accreditation is deemed to meet the

Medicare conditions of Participation by meeting Federal Directives:"

a) All guidelines for Life, Personal and Public Safety; and, Essential and Emergency Communications.

4) Labor, CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standard:

a) Subpart 7 - Definition and requirements (for a NRTL – 15 c's, for complete list, contact (http://www.osha.gov/dts/otpca/nrtl/faq_nrtl.html):

1) UL:

a) 44-02 – Standard for Thermoset-Insulated Wires and Cables.

b) 65 – Standard for Wired Cabinets.

c) 83-03 – Standard for Thermoplastic-Insulated Wires and Cables.

d) 467-01 – Standard for Electrical Grounding and Bonding Equipment

e) 468 – Standard for Grounding and Bonding Equipment.

f) 486A-01 – Standard for Wire Connectors and Soldering Lugs for Use with Copper Conductors

g) 486C-02 – Standard for Splicing Wire Connectors.

h) 486D-02 – Standard for Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations.

i) 486E-00 – Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors.

j) 493-01 – Standard for Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable.

k) 514B-02 – Standard for Fittings for Cable and Conduit.

l) 1069 – Hospital Signaling and Nurse Call Equipment.

m) 1333 – Vertical (Riser) Fire Rating.

n) 1449 – Standard for Transient Voltage Surge Suppressors.

o) 1479-03 – Standard for Fire Tests of Through-Penetration Fire Stops.

p) 1863 – Standard for Safety, Communications Circuits Accessories.
q) 2024 – Standard for Optical Fiber Raceways.
r) 60950-1/2 – Information Technology Equipment – Safety.
2) Canadian Standards Association (CSA): same tests as for UL.
3) Communications Certifications Laboratory (CCL): same tests as for UL.
4) Intertek Testing Services NA, Inc. (ITSNA formerly Edison Testing Laboratory [ETL]): same tests as for UL.
b) Subpart 35 – Compliance with NFPA 101 – Life Safety Code.
c) Subpart 36 - Design and construction requirements for exit routes.
d) Subpart 268 - Telecommunications.
e) Subpart 305 - Wiring methods, components, and equipment for general use.
5) Department of Transportation, CFR, Title 49 (Public Law 89-670), Part 1, Subpart C – Federal Aviation Administration (FAA):
a) Standards AC 110/460-ID & AC 707 / 460-2E – Advisory Circulars for Construction of Antenna Towers.
b) Forms 7450 and 7460-2 – Antenna Construction Registration.
6) Veterans Affairs (Public Law No. 100-527), CFR, Title 38, Volumes I & II:
a) Office of Telecommunications:
1) Handbook 6100 – Telecommunications.
a) Spectrum Management FCC & NTIA Radio Frequency Compliance and Licensing Program.
b) Special Communications Proof of Performance Testing, VACO Compliance and Life Safety Certification(s).
b) Office of Cyber and Information Security (OCIS):
1) Handbook 6500 - Information Security Program.
2) Wireless and Handheld Device Security Guideline Version 3.2, August 15, 2005.
c) VA’s National Center for Patient Safety – Veterans Health Administration Warning System, Failure of Medical Alarm

Systems using Paging Technology to Notify Clinical Staff, July 2004.

d) VA's Center for Engineering Occupational Safety and Health, concurrence with warning identified in VA Directive 7700.

e) Office of Construction and Facilities Management (CFM):

1) Master Construction Specifications (PG-18-1).

2) Standard Detail and CAD Standards (PG-18-4).

3) Equipment Guide List (PG-18-5.

4) Electrical Design Manual for VA Facilities (PG 18-10), Articles 7 & 8.

5) Minimum Requirements of A/E Submissions (PG 18-15):

a) Volume B, Major New Facilities, Major Additions; and Major Renovations, Article VI, Paragraph B.

b) Volume C - Minor and NRM Projects, Article III, Paragraph S.

c) Volume E - Request for Proposals Design/Build Projects, Article II, Paragraph F.

6) Mission Critical Facilities Design Manual (Final Draft – 2007).

7) Life Safety Protected Design Manual (Final Draft – 2007).

8) Solicitation for Offerors (SFO) for Lease Based Clinics – (05-2009).

b. Federal Specifications (Fed. Specs.):

1) A-A-59544-00 - Cable and Wire, Electrical (Power, Fixed Installation).

2. United States National Codes:

a. American Institute of Architects (AIA): Guidelines for Healthcare Facilities.

b. American National Standards Institute/Electronic Industries Association/Telecommunications Industry Association (ANSI/EIA/TIA):

1) 568-B - Commercial Building Telecommunications Wiring Standards:

a) B-1 – General Requirements.

b) B-2 – Balanced twisted-pair cable systems.

c) B-3 - Fiber optic cable systems.

2) 569 - Commercial Building Standard for Telecommunications Pathways and Spaces.
3) 606 – Administration Standard for the Telecommunications Infrastructure of Communications Buildings.
4) 607 – Commercial Building Grounding and Bonding Requirements for Telecommunications.
5) REC 127-49 – Power Supplies.
6) RS 160-51 – Sound systems.
7) RS 270 – Tools, Crimping, Solderless Wiring Devices, Recommended Procedures for User Certification.
8) SE 101-A49 – Amplifier for Sound Equipment
9) SE 103-49 – Speakers for Sound Equipment

c. American Society of Mechanical Engineers (ASME):
1) Standard 17.4 – Guide for Emergency Personnel.
2) Standard 17.5 – Elevator & Escalator Equipment (prohibition of installing non-elevator equipment in Elevator Equipment Room / Mechanical Penthouse).

d. American Society of Testing Material (ASTM):
1) D2301-04 - Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape.

e. Building Industries Communications Services Installation (BICSI):
1) All standards for smart building wiring, connections and devices for commercial and medical facilities.
2) Structured Building Cable Topologies.
3) In consort with ANSI/EIA/TIA.

f. Institute of Electrical and Electronics Engineers (IEEE):
1) SO/TR 21730:2007 - Use of mobile wireless communication and computing technology in healthcare facilities - Recommendations for electromagnetic compatibility (management of unintentional electromagnetic interference) with medical devices.
2) 0739-5175/08/©2008 IEEE – Medical Grade – Mission Critical – Wireless Networks.
3) C62.41 – Surge Voltages in Low-Voltage AC Power Circuits.

g. NFPA:
1) 70 - National Electrical Code (current date of issue) – Articles 517, 645 & 800.

2) 75 - Standard for Protection of Electronic Computer Data-Processing Equipment.
3) 77 – Recommended Practice on Static Electricity.
4) 99 - Healthcare Facilities.
5) 101 - Life Safety Code.
6) 1600 – Disaster Management, Chapter 5.9 – Communications and Warning

3. State Hospital Code(s).
4. Local Town, City and/or County Codes.
5. Accreditation Organization(s):
   a. Joint Commission on Accreditation of Hospitals Organization (JCAHO) – Section VI, Part 3a – Operating Features.

1.5 QUALIFICATIONS

A. The OEM shall have had experience with three (3) or more installations of systems of comparable size and complexity with regards to type and design as specified herein. Each of these installations shall have performed satisfactorily for at least one (1) year after final acceptance by the user. Include the names, locations and point of contact for these installations as a part of the submittal.

B. The Contractor shall submit certified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of three (3) years. The Contractor shall be authorized by the OEM to pass thru the OEM’s warranty of the installed equipment to VA. In addition, the OEM and Contractor shall accept complete responsibility for the design, installation, certification, operation, and physical support for the System. This documentation, along with the System Contractor and OEM certifications must be provided in writing as part of the Contractor’s Technical submittal.

C. The Contractor’s Communications Technicians assigned to the System shall be fully trained, qualified, and certified by the OEM on the engineering, installation, operation, and testing of the System. The Contractor shall provide formal written evidence of current OEM certification(s) for the installer(s) as a part of the submittal or to the RE before being allowed to commence work on the System.

D. The Contractor shall display all applicable national, state and local licenses.

E. The Contractor shall submit copy (s) of Certificate of successful completion of OEM's installation/training school for installing technicians of the System's PA equipment being proposed.

1.6 CODES AND PERMITS

A. Provide all necessary permits and schedule all inspections as identified in the contract's milestone chart, so that the system is proof of performance tested and ready for operation on a date directed by the Owner.

B. The contractor is responsible to adhere to all codes described herein and associated contractual, state and local codes.

C. The Contractor shall display all applicable national, state and local licenses and permits.

1.7 SCHEDULING

A. After the award of contract, the Contractor shall prepare a detailed schedule (aka milestone chart) using "Microsoft Project" software or equivalent. The Contractor Project Schedule (CPS) shall indicate detailed activities for the projected life of the project. The CPS shall consist of detailed activities and their restraining relationships. It will also detail manpower usage throughout the project.

B. It is the responsibility of the Contractor to coordinate all work with the other trades for scheduling, rough-in, and finishing all work specified. The owner will not be liable for any additional costs due to missed dates or poor coordination of the supplying contractor with other trades.

1.8 REVIEW OF CONTRACT DRAWINGS AND EQUIPMENT DATA SUBMITTALS

(Note: The Contractor is encouraged, but not required, to submit separate technical submittal(s) outlining alternate technical approach(s) to the system requirements stated here-in as long as each alternate technical document(s) is complete, separate, and submitted in precisely the same manner as outlined herein. VA will review and rate each received alternate submittal, which follows this requirement, in exactly the same procedure as outlined herein. Partial, add-on, or addenda type alternates will not be accepted or reviewed.)

A. Submit at one time within 10 days of contract awarding, drawings and product data on all proposed equipment and system. Check for compliance with contract documents and certify compliance with Contractor's "APPROVED" stamp and signature.

B. Support all submittals with descriptive materials, i.e., catalog sheets, product data sheets, diagrams, and charts published by the manufacturer. These materials shall show conformance to specification and drawing requirements.

C. Where multiple products are listed on a single cut-sheet, circle or highlight the one that you propose to use. Provide a complete and through equipment list of equipment expected to be installed in the system, with spares, as a part of the submittal. Special Communications (TVE-005OP3B) will not review any submittal that does not have this list.

D. Provide four (4) copies to the PM for technical review. The PM will provide a copy to the offices identified in Paragraph 1.3.C & D, at a minimum for compliance review as described herein where each responsible individual(s) shall respond to the PM within 10 days of receipt of their acceptance or rejection of the submittal(s).

E. Provide interconnection methods, conduit (where not already installed), junction boxes (J-Boxes), cable, interface fixtures and equipment lists for the: ENR(s) (aka DMARC), TER, TCR, MCR, MCOR, PCR, ECR, Stacked Telecommunications Rooms (STR), Nurses Stations (NS), Head End Room (HER), Head End Cabinet (HEC), Head End Interface Cabinet (HEIC) and approved TCO locations Telecommunications Infrastructure Plant (TIP) interface distribution layout drawing, as they are to be installed and interconnected to teach other (REFER TO APPENDIX B – SUGGESTED TELECOMMUNI-CAITONS ONE LINE TOPOLOGY pull-out drawing).

F. Headend and each interface distribution cabinet layout drawing, as they are expected to be installed.

G. Equipment OEM technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.

H. Engineering drawings of the System, showing calculated of expected signal levels at the headend input and output, each input and output distribution point, and signal level at each telecommunications outlet.

I. Surveys Required as a Part of The Technical Submittal:

1. The Contractor shall provide the following System survey(s) that depict various system features and capacities required *in addition to* the on-site survey requirements described herein. Each survey shall be in writing and contain the following information (the formats are suggestions and may be used for the initial Technical Submittal Survey requirements), as a minimum:

a. PA Cable System Design Plan:

1) An OEM and contractor designed functioning PA System cable plan to populate the entire TIP empty conduit/pathway distribution systems provided as a part of Specification 27 11 00 shall be provided as a part of the technical proposal. A specific functioning PA: cable, interfaces, J-boxes and back boxes shall coincide with the total growth items as described herein. It is the Contractor's responsibility to provide the Systems' entire PA cable and accessory requirements and engineer a functioning PA distribution system and equipment requirement plan of the following paragraph(s), at a minimum:

2) The required PA Equipment Locations:

EQUIPPED ITEM	**CAPACITY**	**GROWTH**
Master Control Stations		
Telephone Operators Room		
Police Control Room		
Other		
Zone Amplifiers		
All Call (complete Zone 1)		
Admissions (Zone 2)		
Entrance (Zone 2a)		
Pharmacy Dispensing (Zone 2a)		
Agent Cashier (Zone 2a)		
Other (Zone 2a)		
Labs (Zone 3)		
Blood (Zone 3a)		
Dissecting (Zone 3a)		
Other (Zone 3a)		
Clinics (Zone 4)		
Dental (Zone 4a)		
Radiology (Zone 4a)		
Oncology (Zone 4a)		
Other (Zone 4a)		

EQUIPPED ITEM	CAPACITY	GROWTH
Supervisory Panel(s)		
Trouble Panel(s)		
Locations		
Speakers		
Overhead		
Locations		
Other		
Other		
Outside		
Locations		
Other		
Horn		
Locations		
Other		
Power Supply(s)		
Location		
Other		
UPS(s)		
Location		
Other		
Radio Paging Access **(when pre-approved by TVE-005OP3B)**		
Wireless Access **(when pre-approved by TVE-005OP3B)**		
Maintenance/Programming Console		
Location(s)		
Other		

3) The required PA Cable Plant/Connections:

The Contractor shall clearly and fully indicate this category for each item identified herein as a part of the technical submittal. For this purpose, the following definitions and sample connections are provided to detail the system's capability:

EQUIPPED ITEM	**CAPACITY**	**GROWTH**
Central Control Cabinet/Equipment		
Location		
Power Supply(s)		
UPS(s)		
Essential Electrical Power Panel(s)		
Other		
Cable Plant		
Supply to Locations Identified herein		
Speaker Locations		
Remote Locations		
Telephone Operator Room		
Police Control Room		
Other		
Maintenance/Program Console		
Location(s)		
Other		
LAN (Local Facility) Access/Equipment/Location **(when pre-approved by TVE-005OP3B)**		
Wireless Access/Equipment/Location **(when pre-approved by TVE-005OP3B)**		
Other		

1.9 PROJECT RECORD DOCUMENTS (AS BUILTS)

A. Throughout progress of the Work, maintain an accurate record of changes in Contract Documents. Upon completion of Work, transfer recorded changes to a set of Project Record Documents.

B. The floor plans shall be marked in pen to include the following:

1. All device locations with UL labels affixed.
2. Conduit locations.
3. Head-end equipment and specific location.

4. Each interface and equipment specific location.
5. Facility Entrance (aka DEMARC) Room(s) interface equipment and location(s).
6. Telephone Equipment Room (TER) interface equipment and specific location.
7. Main Computer Room (MCR) interface equipment and specific location.
8. Police Control Room (PCR) interface equipment and specific location.
9. Engineering Control Room (ECR) interface equipment and specific location
10. Telecommunication Outlet (s –TCO) equipment and specific location
11. TIP Wiring diagram(s).
12. Warranty certificate.
13. System test results.
14. System Completion Document(s) or MOU.

1.10 WARRANTIES / GUARANTY

A. The Contractor shall warrant the installation to be free from defect in material and workmanship for a period of two (2) years from the date of acceptance of the project by the owner. The Contractor shall agree to remedy covered defects within four (4) hours of notification of major failures or within twenty-four (24) hours of notification for individual station related problems.

B. The Contractor shall agree to grantee the system according to the guidelines outlined in Article 4 herein.

1.11 USE OF THE SITE

A. Use of the site shall be at the GC’s direction.

B. Coordinate with the GC for lay-down areas for product storage and administration areas.

C. Coordinate work with the GC and their sub-contractors.

D. Access to buildings wherein the work is performed shall be directed by the GC.

1.12 DELIVERY, STORAGE, AND HANDLING

A. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft.

B. Store products in original containers.

C. Coordinate with the GC for product storage. There may be little or no storage space available on site. Plan to potentially store materials off site.

D. Do not install damaged products. Remove damaged products from the site and replaced with new product at no cost to the Owner.

1.13 PROJECT CLOSE-OUT

A. Prior to final inspection and acceptance of the work, remove all debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from the project site and thoroughly clean your work area.

B. Before the project closeout date, the Contractor shall submit:
   1. Warranty certificate.
   2. Evidence of compliance with requirements of governing authorities such as the Low Voltage Certificate of Inspection.
   3. Project record documents.
   4. Instruction manuals and software that is a part of the system.

C. Contractor shall submit written notice that:
   1. Contract Documents have been reviewed.
   2. Project has been inspected for compliance with contract.
   3. Work has been completed in accordance with the contract.

PART 2 – PRODUCTS / FUNCTIONAL REQUIREMENTS

2.0 GENERAL REQUIREMENTS FOR EQUIPMENT AND MATERIALS

A. Furnish and install a complete and fully functional and operable Nurse Call System for each location shown on the contract drawings and TCOs **WHOSE EMPTY CONDUIT SYSTEM WAS PROVIDED AS A PART OF SPECIFICATION 27 11 00.**

B. The specific location for each PA: component is design build per NEC and local code.

C. Coordinate features and select interface components to form an integrated PA system. Match components and interconnections between the systems for optimum performance of specified functions.

D. Expansion Capability: The PA equipment interfaces and cables shall be able to increase number of enunciation points in the future by a minimum of 50 percent (%) above those indicated without adding any internal or external components or main trunk cable conductors.

E. Equipment: Active electronic type shall use solid-state components, fully rated for continuous duty unless otherwise indicated. Select equipment for normal operation on input power usually supplied between 110 to 130 VAC, 60 Hz.

F. Meet all FCC requirements regarding low radiation and/or interference of RF signal(s). The system shall be designed to prevent direct pickup of signals from within and outside the building structure.

G. Weather/Water Proof Equipment: Listed and labeled by an OSHA certified National Recognized Testing Laboratory (NRTL – i.e. UL) for duty outdoors or in damp locations.

H. Deliver a fully functioning and operable PA in the specific locations shown on the drawings.

2.1 SYSTEM DESCRIPTION

A. Furnish and install a complete and fully functional and operable HF Radio System. Provide additional require conduit(s) according to Specification 27 05 33.

B. The Contractor is responsible for interfacing the MATV, RED, Patient Bed Service Walls, and SSC Room systems with the System and shall be the interface points for connection of the radio interface cabling from the interface unit(s). The interface unit(s) shall be provided by the Contractor.

C. The Contractor shall continually employ interfacing methods that are approved by the OEM and VA. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection, but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The total PA system shall be configured and installed so that the combination of equipment actually employed does not produce any undesirable visual or aural effects such as signal distortions, noise pulses, glitches, hum, transients, images, etc. The interface points must adhere to all standards described herein for the full separation of Critical Care and Life Safety systems.

D. It is not acceptable to utilize the telephone cable system for the control of radio signals and equipment. The System Contractor shall connect the Telephone System Remote Control System to the Radio System Paging Control Unit ensuring that all NFPA and UL Critical Care and Life Safety Circuit and System separation guidelines are satisfied. The System Contractor is not allowed to make any connections to the Telephone System. The Owner shall arrange for the interconnection between the PA and Telephone Systems with the appropriate responsible parties.

E. System hardware shall consist of a ***standalone (separate)*** PA communications network comprised of amplifiers, mixers, speakers,

volume controls, test sets, telephone private branch exchange (PBX) interface equipment, equipment cabinets/racks, wiring and other options such as, sub zoning in addition to "all call" functions, computer interfaces, printer interfaces and wireless network interfaces, (**when specifically approved by 005OP3B and VA Headquarters Spectrum Management 005OP2B – herein after referred to as 005OP2B)** as shown on drawings. All necessary equipment required to meet the intent of these specifications, whether or not enumerated within these specifications, shall be supplied and installed to provide a complete and operating nurse/patient communications network.

F. Systems firmware shall be the product of a reputable firmware OEM of record with a proven history of product reliability and sole control over all source code. Manufacturer shall provide, free of charge, product firmware/software upgrades for a period of two (2) years from date of acceptance by VA for any product feature enhancements. System configuration programming changes shall not require any exchange of parts and shall be capable of being executed remotely via a modem connection (when specifically approved first by 005OP3B).

G. The PA Head End Equipment shall be located in Telecommunications **PBX/Telephone Room**. The PA shall cover floor(s). The PA shall provide zoned, one-way voice paging through distributed, ceiling mounted loudspeakers. Voice input into the PA shall be by zone using the telephone system. **The Nurse Call / Code Blue System may interface the PA system when specifically approved by VA Headquarters 005OP3B during the project approval process prior to contract bidding**.

H. The System shall utilize microprocessor components for all signaling and programming circuits and functions. Self-contained or on board system program memory shall be non-volatile and protected from erasure from power outages for a minimum of 24 hours.

I. Provide a backup battery or a UPS for the System (including each distribution cabinet/point, CRT, LCD and Monitor) to allow normal operation and function (as if there was no AC power failure) in the event of an AC power failure or during input power fluctuations for a minimum of two (2) Hours.

J. The System is defined as Emergency Service and the Code Blue functions is defined as Life Safety/Support by NFPA (re Part 1.1.A) and so evaluated by JCAHCO. **Therefore, the system shall have a minimum of two (2) additional remote enunciation points in order to satisfy NFPA's**

Life Safety Code 101 where each enunciation point shall fully function independent of the Facility's PBX.

1. These two (2) additional remote locations shall be fully manned:
   a. 24/7/365 for certified Hospital **Clinics other Servicing Facilities**.
   b. As long as other identified VA Medical / Servicing Facilities are open for servicing patients.
   c. The minimum remote enunciation locations shall be:
      1) The Telephone / PBX Operator Room.
      2) The Police Control / Operations Room.
      3) Other location(s) that is specifically approved by VA Headquarters TVE - 005OP3B DURING THE PROJECT DEVELOPMENT STAGES AND PRIOR TO EQUIPMENT PURCHASE.
   d. One (1) global (aka "all call") hard wired zone shall be provided that connects to every system speaker.
   e. There shall be **multiple** hard-wired sub-zones designated as follows:
      1) Department A.
      2) Department B.
      3) Department C.
      4) Department D.
      5) Department E.
      6) Each zone shall be capable of be programmed.
      7) The System shall have a minimum of three (3), unused zones.
2. The System shall allow voice pages to be made within a single zone, across programmed multiple zones or a global page (all zones) by using preset codes entered into the keypad of any telephone instrument attached to the PBX.

K. The System shall interface with the Facility's existing PAS so that a global page (aka "all call" page) is communicated to the existing PAS and the new System of this project. Arrangements for interconnection of the System and the telephone system(s) shall be coordinated with the owner and the PBX provider.

L. The system shall be designed to provide continuous electrical supervision of the complete and entire system (i.e. light bulbs, wires, contact switch connections, master control stations, wall stations, circuit boards, data, audio, and communication busses, main and UPS power, etc.). All alarm initiating and signaling circuits shall be

supervised for open circuits, short circuits, and system grounds. Main and UPS power circuits shall be supervised for a change in state (i.e. primary to backup, low battery, UPS on line, etc.). When an open, short or ground occurs in any system circuit, an audible and visual fault alarm signal shall be initiated at the main supervisory panel, nurse control station and all remote amplifier locations.

M. When the System is approved to connect to a separate communications system (i.e. LAN, WAN, Telephone, Nurse Call, radio raging, wireless systems, etc) the connection point shall be at one location and shall meet the following minimum requirements for each hard wired connection (note each wireless system connection MUST BE APPROVED PRIOR TO CONTRACT BID BY VA HEADQUARTERS 005OP3B AND 005OP2B):
   1. UL 60950-1/2.
   2. FIPS 142.
   3. FCC Part 15 Listed Radio Equipment is not allowed.

N. All passive distribution equipment shall meet or exceed -80 dB radiation shielding (aka RFI) shielding specifications and be provided with screw type audio connectors.

O. All equipment face plates utilized in the system shall be stainless steel, anodized aluminum or UL approved cycolac plastic for the areas where provided.

P. All trunk, branch, and interconnecting cables and unused equipment ports or taps shall be terminated with proper terminating resistors designed for RF, audio and digital cable systems without adapters.

Q. Noise filters and surge protectors shall be provided for each equipment interface cabinet, headend cabinet, control console and local and remote amplifier locations to insure protection from input primary AC power surges and to insure noise glitches are not induced into low voltage data circuits.

R. Plug-in connectors shall be provided to connect all equipment, except coaxial cables and RF transmission line interface points. Coaxial cable distribution points and RF transmission lines shall use coaxial cable connections recommended by the cable OEM and approved by the system OEM. Base band cable systems shall utilize barrier terminal screw type connectors, at a minimum. As an alternate, crimp type connectors installed with a ratchet type installation tool are acceptable provided the cable dress, pairs, shielding, grounding, connections and labeling are the same as the barrier terminal strip connectors. Tape of any

type, wire nuts or solder type connections are unacceptable and will not be approved.

S. Audio Level Processing: The control equipment shall consist of audio mixer(s), volume limiter(s) and/or compressor(s), and power amplifier(s) to process, adjust, equalize, isolate, filter, and amplify each audio channel for each sub-zone in the system and distribute them into the System's RF interfacing distribution trunks and amplification circuits. It is acceptable to use identified Telephone System cable pairs designated for Two-Way Radio interface and control use or identified as spare telephone cable pairs by the Facility's Telephone System Contractor. The use of telephone cable to distribute RF signals, carrying system or sub-system AC or DC voltage is not acceptable and will not be approved. Additionally, each control location shall be provided with the equipment required to insure the system can produce its designed audio channel capacity at each speaker identified on the contract drawings. The Contractor shall provide: a spare set of telephone paging modules as recommended by the OEM (as a minimum provide one spare module for each installed module); one spare audio power amplifier, one spare audio mixer, one spare audio volume limiter and/or compressor, and one spare audio automatic gain adjusting device, and minimum RF equipment recommended by the OEM.

T. Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating system. Unless otherwise noted in this Part, equipment quantities shall be as indicated on the drawings.

2.2 SYSTEM PRFORMANCE:

A. At a minimum, each distribution, interconnection, interface, terminating point and TCO shall be capable of supporting the Facility's PA system voice and data service as follows:

1. Shall be compliant with and not degrade the operating parameters of the Public Switched Telephone Network (PSTN) and the Federal Telecommunications System (FTS) at each PSTN and FTS interface, interconnection and terminating locations in the TERs.
2. Audio Input: The signal level of each audio input channel at each input point shall be a MINIMUM of zero decibels measured (dBm), +0.10 dBm across 150 Ohms, balanced.
3. Audio Output: The audio signal level at each speaker shall be a MINIMUM of +0.25 Watt (W) and a maximum of +20 W, 600 Ohms balanced

impedance, on a 70.7 V audio distribution line Contractor to determine and set each speaker's proper audio signal level (top) based on speaker location and the ambient noise level in speaker coverage area.

4. The system shall meet the following MINIMUM parameters at each speaker:
   a. Cross Modulation: -46 dB
   b. Hum Modulation: -55 dB
   c. Isolation (outlet-outlet): 24 dB
   d. Impedance:
      1) Distribution: 600 Ohm balanced @ 70.7 V audio line level.
      2) Speaker: Selectable, as required.
   e. Audio Gain: 10 dB minimum @ mid-range measured with a sound pressure level meter (SPL)
   f. Signal to noise (S/N) ratio: 35 dB, minimum

B. Audio Level Processing: The head-end equipment shall consist of audio mixer(s), volume limiter(s) and/or compressor(s), and power amplifier(s) to process, adjust, equalize, isolate, filter, and amplify each audio channel for each zone or sub-zone in the system and distribute them into the system's distribution trunks. It is acceptable to use identified telephone system cable pairs designated for PA use or identified as spare telephone cable pairs by the Facility's Telephone System Contractor.
   1. THE USE OF TELEPHONE CABLE TO DISTRIBUTE PA SIGNALS CARRYING AC OR DC VOLTAGE IS NOT ACCEPTABLE AND WILL NOT BE APPROVED.
   2. Additionally, each remote location shall be provided with the equipment required to ensure the system supervision and designed audio channel capacity at each speaker identified on the contract drawings.

2.3 MANUFACTURERS

A. The products specified shall be new, FCC and UL Listed, labeled and produced by OEM of record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
   1. Maintains a stock of replacement parts for the item submitted,
   2. Maintains engineering drawings, specifications, and operating manuals for the items submitted, and

3. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid (IFB).

B. Specifications contained herein as set forth in this document detail the salient operating and performance characteristics of equipment in order for VA to distinguish acceptable items of equipment from unacceptable items of equipment. When an item of equipment is offered or furnished for which there is a specification contained herein, the item of equipment offered or furnished shall meet or exceed the specification for that item of equipment.

C. Equipment Standards and Testing:

1. The System has been defined herein as connected to systems identified as an Emergency performing Public Safety Support Functions. Therefore, at a minimum, the system shall conform to all aforementioned National and/or Local Public and Life Safety Codes (which ever are the more stringent), NFPA, NEC, this specification, JCAHCO Life Safety Accreditation requirements, and the OEM recommendations, instructions, and guidelines.
2. All supplies and materials shall be listed, labeled or certified by UL or a nationally recognized testing laboratory (NRTL) where such standards have been established for the supplies, materials or equipment.
3. The provided equipment required by the System design and approved technical submittal must conform with each UL standard in effect for the equipment, as of the date of the technical submittal (or the date when the RE approved system equipment necessary to be replaced) was technically reviewed and approved by VA. Where a UL standard is in existence for equipment to be used in completion of this contract, the equipment must bear the approved UL seal.
4. Each item of electronic equipment to be provided under this contract must bear the approved UL seal or the seal of the testing laboratory that warrants the equipment has been tested in accordance with, and conforms to the specified standards. The placement of the UL Seal shall be a permanent part of the electronic equipment that is not capable of being transportable from one equipment item to another.

2.4 PRODUCTS

A. General.

1. Contractor is responsible for pricing all accessories and miscellaneous equipment required to form a complete and operating system. The equipment quantities provided herein shall be as indicated on the drawings with the exception of the indicated spare equipment.
2. Each cabinet shall be provided with internal and external items to maintain a neat and orderly system of equipment, wire, cable and conduit connections and routing.
3. Contractor Furnished Equipment List (CFEs):
   a. The Contractor is required to provide a list of the CFE equipment to be furnished. The quantity, make and model number of each item is required. Select the required equipment items quantities that will satisfy the needs of the system as described herein and with the OEM's concurrence applied to the list(s), in writing.
   b. The following equipment items are the minimum requirements of VA to provide an acceptable system described herein:

Item	Quantity	Unit
1.	As required	Interface Panel(s)
1.a	As required	Electrical Supervision Trouble Enunciator
1.a.1.	As required	Equipment Back Box(s)
1.a.2.	As required	Telephone Access Equipment
1.a.3.	As required	Radio Paging Access Equipment
1.a.3.a.	As required	Radio Pager Equipment
1.a.4.	As required	Wireless Access Equipment
1.a.5.	As required	Personal Communicator Equipment
2.	As required	Lightning Arrestor
3.	As required	Head End Equipment Locations
3.a	As required	Cabinet(s)
3.a.1.	As required	AC Power Conditioner & Filter
3.a.2.	As required	AC Power Strip
3.a.3.	As required	UPS
3.a.3.a	As required	Main Power Amplifiers
3.a.3.b	As required	Remote Power Amplifiers
3.a.3.c	As required	Distributed Amplifiers (When Approved)
3.a.4.	As required	Interconnecting wire Cable(s)
3.a.4.a	As required	Wire Cable Connector(s)
3.a.4.b	As required	Wire Cable Terminator(s)
3.a.4.c	As required	Wire Management System
3.b.	As required	Head End Function(s)
4.	As required	Distribution System(s)
4.a	As required	Equipment Back Box(s)
4.a.1.	As required	Speakers
4.a.1.a	As required	Overhead
4.a.1.b	As required	Horn

4.a.1.c	As required	Outside
4.a.1.d	As required	Speaker w/ Microphone
5.	2 (MIN)	Remote Station(s)
5.a.	As required	Spare Items
6.	As required	Mental Health Unit
6.a.	As required	Interface Panel(s)
6.b.	As required	Electrical Supervision Trouble Enunciator
6.c.	As required	Equipment Back Box(s)
6.d.	As required	Telephone Access Equipment
6.e.	As required	Radio Paging Access Equipment
6.e.1.	As required	Radio Pager Equipment
6.f.	As required	Wireless Access Equipment
6.g.	As required	Personal Communicator Equipment
6.h.	As required	Lightning Arrestor
6.i.	As required	Head End Equipment Location(s)
6.i.1.	As required	Cabinets
6.i.2.	As required	AC Power Conditioner & Filter
6.i.3.	As required	AC Power Strip
6.i.4.	As required	UPS
6.i.5.	As required	Main Power Amplifiers
6.j.	As required	Remote Power Amplifiers
6.k.	As required	Distributed Amplifiers (When Approved)
6.l.	As required	Interconnecting Wire Cable(s)
6.l.1.	As required	Wire Cable Connector(s)
6.l.2.	As required	Wire Cable Terminator(s)
6.l.3.	As required	Wire Management System
6.m.	As required	Head End Function(s)
6.n.	As required	Distribution System(s)
6.n.1	As required	Equipment Back Box(S)
6.n.2	As required	Speakers
6.n.2(a)	As required	Overhead
6.n.2(b)	As required	Horn
6.n.2(c)	As required	Outside
6.n.2(d)	As required	Speaker w/ Microphone
6.o	2 (MIN)	Remote Station(s)
6.p.	As required	Spare Items

B. ENT (aka DEMARC) Room(s):

Refer to CFM Physical Security Manual (07-2007) for VA Facilities, Chapters 9.3 & 1) and PG 18-10, EDM, Chapters 7- Table 7-1, 8 & Appendix B, Telecommunications One Line Topology for specific Room and TIP Connection Requirements.

C. TER, TCR, TR, SCC, PCR, STR, HER Rooms and Equipment:

Refer to CFM Physical Security Manual (07-2007) for VA Facilities, Chapters 9.3 & 1) and PG 18-10, EDM, Chapters 7- Table 7-1, 8 &

Appendix B, Telecommunications One Line Topology for specific Room and TIP Connection Requirements.

1. Interface Equipment:
   a. TER:
      1) Paging adaptor:
         a) The Contractor shall coordinate the installation of the paging adapter(s) designed for use with the Facility's telephone system with the Facility Telephone Contractor or local telephone company.
         b) The Contractor shall provide and install a paging adapter(s) for each zone and sub zone. The paging adapter(s) shall be accessible by dialing a telephone number provided by the Facility's Telephone Contractor. The Paging Adapter shall:
            1) Monitor each audio input and output on the unit.
            2) Be provided with an electrical supervision panel to provide both audio and visual trouble alarms.
            3) Be provided as part of the head end equipment and shall be located in the Telephone Switch Room
            4) Be provided with Executive (aka emergency) Paging Override of all routine paging calls in progress or being accessed to allow system "all call" (aka global) and radio paging calls designated as (Code One Blue) functions.
            5) Be capable of internal time out capability.
            6) Function completely with the interface module.
            7) Provide one spare adapter.
         c) Time Out Device: A time out device/capability shall be provided to prevent system "hang-up" due to an off-hook telephone. The device shall be able to be preset from 30 seconds to two (2) minutes. Its function shall not interfere with or override the required "all call" (aka global) operational capability.
            1) Central Processor Module:
            2) Controls system operations and holds all programmed parameters.
            3) Data link connection to additional CPU modules.

d) Power Module: Provides 12V DC @ 800mA to Central Processor Module.

e) Minimum three (3) Zone Module:

1) Provides a minimum of three (3) paging zone outputs at 70V audio sound level.

2) Background Music inhibit switch for each zone.

2) Audio Monitor Panel:

a) The panel shall be EIA/TIA standard for 483 mm (19”) cabinet mounting.

b) It shall be provided in the upper portion of the head-end equipment cabinet.

c) Provide one (1) spare panel.

3) Trouble Annunciator Panel:

a) A trouble annunciator panel shall be provided in the head-end cabinet, and at locations as designated on the contract drawings. The panel(s) shall be compatible with or generate electrical and/or electronic supervising signals to continuously monitor the operating condition for the System head-end audio power amplifier(s), remote power amplifier(s), microphone consoles and interconnecting trunks. The panels shall generate an audible and visual signal when the System’s supervising system detects an amplifier or trunk-line is malfunctioning.

b) Provide one (1) spare panel.

4) Head-End Equipment

a) Provide all required power supplies, communications hubs, network switches, intelligent controllers and other devices necessary to form a complete system listed herein. Head-end components may be rack mounted or wall mounted in a metal enclosure.

b) Provide the head end equipment in the closed telecommunications closet where the PA system is installed to include the minimum equipment listed herein.

c) Provide minimum of 30 minute battery back-up to system components.

5) Equipment Cabinet: Comply with TIA/EIA-310-D. Lockable, ventilated metal cabinet houses terminal strips, power supplies, amplifiers, system volume control, and other

switching and control devices required for conversation channels and control functions

a) Vertical Equipment Rack, Wall Mounted (to be included inside of the Equipment Cabinet):

b) 74” (48RU) rack space, Welded Steel construction, Minimum 20” usable depth, Adjustable front mounting rails.

1) Install the following products in rack provided by same manufacturer or as specified:

2) Security screws w/ nylon isolation bushings.

3) Textured blank panels.

4) Custom mounts for components without rack mount kits.

5) Security covers.

6) Copper Bus Bar.

7) Power Sequencer rack mounted power conditioner and (provide as needed) delayed sequencer(s) with two (2) in switched outlets each and contact closure control inputs.

8) Rack mounting: Provide rack mount kit.

6) Amplifier Equipment:

a) Paging (aka zone):

1) Inputs for 600-ohm balanced telephone line, LO-Z balanced microphone, and background music.

2) Input Sensitivity: Compatible with master stations and central equipment so amplifier delivers full rated output with sound-pressure level of less than 10 dynes/sq. cm impinging on master stations speaker microphones, or handset transmitters

3) Automatic Level Control (ALC) for pages, adjustable background music muting level during page, wall or rack mountable.

4) 16-ohm, 25V, 25V center tapped (CT), and 70V outputs. Amplifier quantity and size (output power) as needed. Continuous amplifier power rating shall exceed loudspeaker load on amplifier by at least 25%.

5) Output Power: 70-V balanced line. 80 percent of the sum of wattage settings of connected for each station and speaker connected in all-call mode of operation, plus an allowance for future stations.

6) Total Harmonic Distortion: Less than 5 percent at rated output power with load equivalent to quantity of stations connected in all-call mode of operation.
7) Minimum Signal-to-Noise Ratio: 45 dB, at rated output.
8) Frequency Response: Within plus or minus 3 dB from 70 to 12,000 Hz.

b) Output Regulation: Maintains output level within 2 dB from full to no load.
c) Amplifier Protection: Prevents damage from shorted or open output.
d) Be provided with electronic supervision function(s).
e) Provide one spare amplifier.

7) Wireless (when specifically approved by TVE 005OP3B):

a) Radio Paging Equipment / Systems:
1) The PA system shall have the ability to interface only with VA certified and licensed radio paging system (FCC Part 15 listed pagers and transmitters are not allowed for “Safety of Life” functions or installed in those specific areas – VA Headquarters TVE – 0050PB2 and SM – 0050PB2 are the only approving authorities for this function)and must have the following minimum system features:
a) Ability to pass-through location information (such as a room number) and call-type as well as other text messages simultaneously to shift supervisor identified staff members.
b) System shall allow the operator to select staff members by name and pager number and to select a message consisting of a room number and a condition code (aka priority level). Operator may also choose to type in a unique alpha-numeric text message (the text message shall meet or exceed all HIPA and VAOCIP Communications Security Guidelines for the transmission of Patient or Staff Specific information[aka PII] – VA Headquarters TVE – 0050P2B is the approving authority for this function) into the system to be read by the holder of the pager unit.

c) While a patient station is connected to the nurse's master station, the system shall allow the operator to automatically page the staff member assigned to the room. An alternate staff member maybe selected for paging purposes in place of the primary staff member. The system must allow an alternate staff member to be paged when the primary staff member is unable to respond to patient's needs within a specified period of time. The System must have the ability to assign any bed to any pager or pager group, and to assign an unlimited amount of pagers to any patient bed.

d) System shall have the ability to send all code blue calls to staff members by predetermined group (as required) automatically by simply pressing one "Code Blue" button. Pager shall indicate room number of code call, and state "Code Blue" in plain English format on pagers (FCC Part 15 listed pagers are not allowed to be used as "Safety of Life" functions or those specific locations – VA Headquarters TVE – 0050P2B is the approving authority for this requirement)

b) Personal Wireless Communicator: The PA system will only be allowed to connect to the personal wireless communications system, pass text data and provide a 2-way communication between the Telephone Interface and the personal wireless communicator as long as it is not a FCC Part 15 listed device(s), meets or exceeds UL 60950-1/2, meets OCIS Guide Lines for FIPS 140-2 certification and the using staff shows an extensive training program along with recertification(s) according to the Facility Emergency Plan concerning HIPA requirements.

c) Other Wireless Equipment / Systems: Each proposed wireless system and/or equipment to be connected to or be a part of the system, each shall meet the minimum requirements outlined herein.

b. TCR:

1) Microphone Paging Console:

a) A console shall be provided in the TCR and PCR's as shown on the drawings.

b) The console shall contain visual enunciators for each connection to the telephone system's Public Address Paging Adapter. The visual enunciators shall display all the System connections to the telephone system being used.

c) The console shall be fully independent of the Facility's telephone system so if the telephone system has a catastrophic failure (aka partial, multiple or total system failure) the microphone console will function normally as if the Facility's telephone system was operating normally. The restoration of the Facility's telephone system shall not affect the System.

d) Each microphone console shall:

1) Be Mounted: Flush unless otherwise indicated, and suitable for mounting conditions indicated.

2) Have a Faceplate: Stainless steel or anodized aluminum with tamperproof mounting screws.

3) Have a system interface Back Box: Minimum Two-gang galvanized steel with 2-1/2 inch minimum depth.

4) Have an Internal Speaker: 3 inches, 2.3 oz. minimum; permanent magnet.

5) Have a Call Switch: Mount on faceplate. Permits calls to The system.

6) When approved - in lieu of a standalone microphone, provide a Handset with Hook Switch: Have a Handset with Hook Switch: Telephone type with 24-inch-long, permanently coiled cord. Arrange to disconnect speaker when handset is lifted.

7) Be provided with an electrical supervision panel to provide both audio and visual trouble alarms to the Nurse Call /Code Blue electrical supervision system.

8) Be capable of internal time out capability.

0) Be completely compatible with the Telephone Interface unit(s)

2) Electrical Supervision Trouble Annunciator Panel:

a) The Electrical Supervision Trouble Annunciation Panel shall be located in the TCR and PCR's SCC.

b) The panel(s) shall be compatible with the generated electrical and/or electronic supervising signals to

continuously monitor the operating condition for the PA system head-end processing equipment, local/remote control consoles, audio power amplifier(s), UPS, power supplies, dome lights and interconnecting trunks. The panels shall generate an audible and visual signal when the System's supervising system detects a system trouble or trunk-line is malfunctioning.

c) TRs: Locate the PA floor distribution equipment within each TR as required by system design and OEM direction. Provide secured and lockable cabinet/rack(s) as required.

1) General Equipment: Provide all required power supplies, communications hubs, network switches, intelligent controllers and other devices necessary to form a complete system listed herein. Equipment components may be rack mounted or wall mounted in a metal enclosure.

2) Amplifiers:

a) Panging Amplifier Equipment:

b) Refer to the Amplifier characteristics described herein Paragraph 2.4.G.f.

c) Provide one (1) spare amplifier in addition to the spare Head End Amplifier.

3) Distributed Amplifier:

a) Provide the type and number of the amplifier(S) required to meet the system design. Provide this unit as complete and separate technical submittal during the IFB review portion of the project.

b) Provide one spare amplifier for each 20% (or portion thereof) of amplifiers used in the system.

4) Provide the equipment in the nearest TER where the System is installed to include the minimum equipment listed herein.

5) Provide minimum of 30 minute battery (UPS) back-up to system components.

6) Equipment Cabinet: Comply with cabinet requirements as aforementioned.

7) Trouble Annunciator Panel: Comply with the panel characteristics identified herein.

d. SCC, PCR, STR, HER: Refer to PG-18-10, Article 7 for specific required equipment and use minimum aforementioned specifications for population.

D. TIP DISTRIBUTION SYSTEM:

1. System Speakers:

a. Ceiling Cone-Type:

1) Minimum Axial Sensitivity: 91 dB at one meter, with 1-W input.

2) Frequency Response: Within plus or minus 3 dB from 70 to 15,000 Hz.

3) Minimum Dispersion Angle: 100 degrees.

4) Line Transformer: Maximum insertion loss of 0.5 dB, power rating equal to speaker's, and at least four level taps.

5) Enclosures: Steel housings or back boxes, acoustically dampened, with front face of at least 0.0478-inch steel and whole assembly rust proofed and factory primed; complete with mounting assembly and suitable for surface ceiling, flush ceiling, pendant or wall mounting; with relief of back pressure.

6) Baffle: For flush speakers, minimum thickness of 0.032-inch aluminum with textured white finish. Completely fill the baffle with fiberglass.

7) Vandal-Proof, High-Strength Baffle: For flush-mounted speakers, self-aging cast aluminum with tensile strength of 44,000 psi, 0.025-inch minimum thickness; countersunk heat-treated alloy mounting screws; and textured white epoxy finish.

8) Size: 8 inches with 1-inch voice coil and minimum 5-oz. ceramic magnet.

9) Have a minimum of two (2) safety wires installed to a solid surface or use a flexible conduit from ceiling / wall back box to the speaker back box.

10) The speakers and mounting shall be self-contained and wall mounted with flush back box at a minimum of 10 meter intervals and shall match (or contrast with, at the direction of the RE) the color of the adjacent surfaces.

11) Provide one spare speaker, mount, and back box for each 50 speakers or portion thereof.

b. Wall Mounted Horne-Type:

1) Each horn speaker shall be provided with a means of adjusting the output level over the rated horn speaker range to an appropriate audio level in the area installed.
2) Provide horn speakers in equipment rooms, mechanical room, supply warehouse areas, loading dock, entrance and exit areas, and at other areas as indicated on the drawings.
3) Speakers shall be all-metal, weatherproof construction; complete with universal mounting brackets.
4) Frequency Response: Within plus or minus 3 dB from 275 to 14,000 Hz.
5) Minimum Power Rating of Driver: 15 W, continuous.
6) Minimum Dispersion Angle: 110 degrees.
7) Line Transformer: Maximum insertion loss of 0.5 dB, power rating equal to speaker's, and at least four level taps.
8) Provide one spare speaker, mount, and back box for each 20 speakers or portion thereof.

c. System Cables: In addition to the TIP provided under Specification Section 27 15 00 – TIP Horizontal and Vertical Communications Cabling, provide the following additional TIP installation and testing requirements, provide the following minimum System TIP cables & interconnections:
1) Line Level Audio and Microphone Cable:
a) Line level audio and microphone cable for inside racks and conduit.
b) Shielded, twisted pair Minimum 22 American Wire Gauge (AWG), stranded conductors and 24 AWG drain wire with overall jacket.
2) Speaker Level (Audio 70.7Volt [V]) Cable, Riser Rated:
a) For use with 70.7 V audio speaker circuits.
b) 18 AWG stranded pair, minimum.
c) UL-1333 listed.
3) Speaker Level Audio Cable, Plenum Rated (70.7V):
a) For use with 70.7 V audio speaker circuits.
b) 18 AWG stranded pair, minimum.
4) All cabling shall be **plenum** rated.
5) Provide one (1) spare 1,000 foot roll of approved System (not microphone) cable only.

2. Raceways, Back Boxes and conduit:

a. Raceways:

1) In addition to the Raceways, Equipment Room Fittings provided under Specification Sections 27 15 00 TIP Communication Room Fittings and 27 15 00 – TIP Communications Horizontal and Vertical Cabling, provide the following additional TIP raceway and fittings:
2) Each raceway that is open top, shall be: UL certified for telecommunications systems, partitioned with metal partitions in order to comply with NEC Parts 517 & 800 to "mechanically separate telecommunications systems of different service, protect the installed cables from falling out when vertically mounted and allow junction boxes to be attached to the side to interface "drop" type conduit cable feeds.
3) Intercommunication System cable infrastructure: EMT above accessible ceilings, 24 inches on center.
4) Junction boxes shall be not less than 2-1/2 inches deep and 6 inches wide by 6 inches long.
5) Flexible metal conduit is prohibited unless specifically approved by 005OP3B.

b. System Conduit:

1) The PA system is NFPA listed as Emergency / Public Safety Communication System which requires the entire system to be installed in a separate conduit system.
2) The use of centralized mechanically partitioned wireways may be used to augment main distribution conduit on a case by case basis when specifically approved by VA Headquarters (005OP3B).
3) Conduit Sleeves:
   a) The AE has made a good effort to identify where conduit sleeves through full-height and fire rated walls on the drawings, and has instructed the electrician to provide the sleeves as shown on the drawings.
   b) The contractor is responsible for installing conduit sleeves and fire-proofing where necessary. It is often the case, that due to field conditions, the nurse-call cable may have to be installed through an alternate route. Any conduit sleeves required due to field conditions or those omitted by the engineer shall be provided by the cabling contractor.

3. Device Back Boxes:
   a. Furnish to the electrical contractor all back boxes required for the PA system devices.
   b. The electrical contractor shall install the back boxes as well as the system conduit. Coordinate the delivery of the back boxes with the construction schedule.
4. Telecommunication Outlets (TCO): Populate each TCO that is required to perform system operations in the locations that were provided and cabled as a part of Specifications Sections 27 11 00 and 27 15 00. Provide additional TCO equipment, interfaces and connections as required by System design. Provide secured pathway(s) and TCOs as required.
5. UPS:
   a. Provide a backup battery or a UPS for the System to allow normal operation and function (as if there was no AC power failure) in the event of an AC power failure or during input power fluctuations for a minimum of four (4) hours.
   b. As an alternate solution, the telephone system UPS may be utilized to meet this requirement at the headend location, as long as this function is specifically approved by the Telephone Contractor and the RE.
   c. The PA Contractor shall not make any attachments or connection to the telephone system until specifically directed to do so, in writing, by the RE.
   d. Provide UPS for all active system components including but not limited to:
      1) System Amplifiers.
      2) Microphone Consoles.
      3) Telephone Interface Units.
      4) TER, TR & Headend Equipment Rack(s).

E. Patient Bedside Prefabricated Units (PBPU):
1. Where PBPU’s exist in the Facility; the Contractor shall identify the “gang box” location on the PBPU designated for installation of the telephone jack. This location shall here-in-after be identified as the unit’s TCO. The Contractor shall be responsible for obtaining written approval and specific instructions from the PBPU OEM regarding the necessary disassembly and reassembly of each PBPU to the extent necessary to pull wire from above the TIP ceiling

junction box to the PBPU's reserved gang box for the unit's TCO. A Contractor provided stainless steel cover plate approved for use by the PBPU OEM and Facility IRM Chief shall finish out the jack installation.

2. Under no circumstances shall the Contractor proceed with the PBPU installations without the written approval of the PBPU OEM and the specific instructions regarding the attachment to or modifying of the PBPU. The RE shall be available to assist the Contractor in obtaining approvals and instructions in a timely manner as related to the project's time constraints.
3. It is the responsibility of the Contractor to maintain the UL integrity of each PBPU. If the Contractor violates that integrity, it shall be the responsibility of the Contractor to obtain on site UL re-certification of the violated PBPU at the direction of the RE and at the Contractor's expense.

F. Installation Kit:

1. General: The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. Turn over to the RE all unused and partially opened installation kit boxes, coaxial, fiberoptic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware. The following are the minimum required installation sub-kits:
2. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Coaxial Cable Shields.
      2) Control Cable Shields.
      3) Data Cable Shields.
      4) Equipment Racks.

5) Equipment Cabinets.
6) Conduits.
7) Duct.
8) Cable Trays.
9) Power Panels.
10) Connector Panels.
11) Grounding Blocks.

3. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
4. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
5. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
6. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
7. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each subsystem according to the OEM requirements, as-installed drawings, and this document.
8. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide the system documentation as required by this document and explained herein.

G. MENTAL HEALTH (aka PSYCHIATRIC) UNIT – when a Mental Health Unit is to be provided as a part of the project, contact TVE 005OP3B for specific system requirements.

H. BLIND REHABILITATION UNIT– when a Blind Rehabilitation Unit is to be provided as a part of the project, contact TVE 005OP3B for specific

system requirements and functions in this type of unit (aka brail, audible and like recognition).

PART 3 - EXECUTION

3.1 PROJECT MANAGEMENT

A. Assign a single project manager to this project who will serve as the point of contact for the Owner, the General Contractor, and the Engineer.

B. The Contractor shall be proactive in scheduling work at the hospital, specifically the Contractor will initiate and maintain discussion with the general contractor regarding the schedule for ceiling cover up and install cables to meet that schedule.

C. Contact the Office of Telecommunications, Special Communications Team (005OP3B) at (301) 734-0350 to have a VA Certified Telecommunications COR assigned to the project for telecommunications review, equipment and system approval and co-ordination with VA's Spectrum Management and OCIS Teams.

3.2 COORDINATION WITH OTHER TRADES

A. Coordinate with the cabling contractor the location of the PA system faceplate and the faceplate opening for the PA system back boxes.

B. Coordinate with the cabling contractor the location of TIP equipment in the **TER, TCR, PA, PCR, SCC, ECR, STRs, NSs, HER and TCOs in order to connect to the TIP cable network that was installed as a part of Section Specification 27 11 00. Contact the RE immediately, in writing, if additional location(s) are discovered to be activated that was not previously provided.**

C. Before beginning work, verify the location, quantity, size and access for the following:

1. Isolated ground AC power circuits provided for systems.
2. Junction boxes, wall boxes, wire troughs, conduit stubs and other related infrastructure for the systems.
3. Existing components.
4. Existing overhead supports and rigging.

D. Immediately notify the Owner, GC and Consultant(s) in writing of any discrepancies

3.3 NEEDS ASSESSMENT

Provide a one-on-one meeting with the particular manager of each unit affected by the installation of the new PA system. Review the floor plan drawing, educate the nursing manager with the functions of the

equipment that is being provided and gather details specific to the individual units; coverage and priorities of calls; staffing patterns; and other pertinent details that will affect system programming and training.

3.4 INSTALLATION

A. General

1. Execute work in accordance with National, State and local codes, regulations and ordinances.
2. Install work neatly, plumb and square and in a manner consistent with standard industry practice. Carefully protect work from dust, paint and moisture as dictated by site conditions. The Contractor will be fully responsible for protection of his work during the construction phase up until final acceptance by the Owner.
3. Install equipment according to OEM's recommendations. Provide any hardware, adaptors, brackets, rack mount kits or other accessories recommended by OEM for correct assembly and installation.
4. Secure equipment firmly in place, including receptacles, speakers, equipment racks, system cables, etc.
   a. All supports, mounts, fasteners, attachments and attachment points shall support their loads with a safety factor of at least 5:1.
   b. Do not impose the weight of equipment or fixtures on supports provided for other trades or systems.
   c. Any suspended equipment or associated hardware must be certified by the OEM for overhead suspension.
   d. The Contractor is responsible for means and methods in the design, fabrication, installation and certification of any supports, mounts, fasteners and attachments.
5. Locate overhead ceiling-mounted loudspeakers as shown on drawings, with minor changes not to exceed 12" in any direction.
   a. Mount transformers securely to speaker brackets or enclosures using screws. Adjust torsion springs as needed to securely support speaker assembly.
   b. Speaker back boxes shall be completely filled with fiberglass insulation.
   c. Seal cone speakers to their enclosures to prevent air passing from one side of the speaker to the other.

6. Finishes for any exposed work such as plates, racks, panels, speakers, etc. shall be approved by the Architect, Owner and 005OP3B.
7. Coordinate cover plates with field conditions. Size and install cover plates as necessary to hide joints between back boxes and surrounding wall. Where cover plates are not fitted with connectors, provide grommeted holes in size and quantity required. Do not allow cable to leave or enter boxes without cover plates installed.
8. Active electronic component equipment shall consist of solid state components, be rated for continuous duty service, comply with the requirements of FCC standards for telephone and data equipment, systems, and service.
9. Color code all distribution wiring to conform to the PA Industry Standard, EIA/TIA, and this document, whichever is the more stringent. At a minimum, all equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the provided record drawings, to facilitate installation and maintenance.
10. Connect the System’s primary input AC power to the Facility’ Critical Branch of the Emergency AC power distribution system as shown on the plans or if not shown on the plans consult with RE regarding a suitable circuit location prior to bidding.
11. Product Delivery, Storage and Handling:
    a. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name and equipment catalog numbers, model and serial identification numbers. The RE may inventory the cable, patch panels, and related equipment.
    b. Storage and Handling: Store and protect equipment in a manner, which will preclude damage as directed by the RE.
12. Where TCOs are installed adjacent to each other, install one outlet for each instrument.
13. Equipment installed outdoors shall be weatherproof or installed in weatherproof enclosures with hinged doors and locks with two keys.

B. Equipment Racks:
1. Fill unused equipment mounting spaces with blank panels or vent panels. Match color to equipment racks.

2. Provide security covers for all devices not requiring routine operator control.
3. Provide vent panels and cooling fans as required for the operation of equipment within the OEM' specified temperature limits. Provide adequate ventilation space between equipment for cooling. Follow manufacturer’s recommendations regarding ventilation space between amplifiers.
4. Provide insulated connections of the electrical raceway to equipment racks.
5. Provide continuous raceway/conduit with no more than 40% fill between wire troughs and equipment racks for all non-plenum-rated cable. Ensure each system is mechanically separated from each other in the wireway.
6. Ensure a minimum of 36 inches around each cabinet and/or rack to comply with OSHA Safety Standards. Cabinets and/or Racks installed side by side – the 36” rule applies to around the entire assembly

C. Distribution Frames.
1. A new stand-alone (i.e., self-supporting, free standing) PA rack/frame may be provided in each TR to interconnect the PA, TER, TCR, PCR, SCC, STRs & ECRs. Rack/frames shall be wired in accordance with industry standards and shall employ "latest state-of-the-art" modular cross-connect devices. The PA riser cable shall be sized to satisfy all voice/digital requirements plus not less than 50% spare (growth) capacity in each TR which includes a fiber optic backbone.
2. The frames/racks shall be connected to the TER/MCR system ground.

D. Wiring Practice - in addition to the MANDATORY infrastructure requirements outlined in VA Construction Specifications 27 10 00 – TIP Structured Communications Cabling, 27 11 00 – TIP Communications Rooms Fittings and 27 15 00 – TIP Horizontal and Vertical Communicators Cabling, the following additional practices shall be adhered too:
1. Comply with requirements for raceways and boxes specified in Division 26 Section "Raceway and Boxes for Electrical Systems."
2. Execute all wiring in strict adherence to the National Electrical Code, applicable local building codes and standard industry practices.
3. Wiring shall be classified according to the following low voltage signal types:

a. Balanced microphone level audio (below -20dBm) or Balanced line level audio (-20dBm to +30dBm)
b. 70V audio speaker level audio.
c. Low voltage DC control or power (less than 48VDC)

4. Where raceway is to be EMT (conduit), wiring of differing classifications shall be run in separate conduit. Where raceway is to be an enclosure (rack, tray, wire trough, utility box) wiring of differing classifications which share the same enclosure shall be mechanically partitioned and separated by at least four (4) inches. Where Wiring of differing classifications must cross, they shall cross perpendicular to one another.
5. Do not splice wiring anywhere along the entire length of the run. Make sure cables are fully insulated and shielded from each other and from the raceway for the entire length of the run.
6. Do not pull wire through any enclosure where a change of raceway alignment or direction occurs. Do not bend wires to less than radius recommended by manufacturer.
7. Replace the entire length of the run of any wire or cable that is damaged or abraided during installation. There are no acceptable methods of repairing damaged or abraided wiring.
8. Use wire pulling lubricants and pulling tensions as recommended by the OEM.
9. Use grommets around cut-outs and knock-outs where conduit or chase nipples are not installed.
10. Do not use tape-based or glue-based cable anchors.
11. Ground shields and drain wires to the Facility’s signal ground system as indicated by the drawings.
12. Field wiring entering equipment racks shall be terminated as follows:
    a. Provide ample service loops at harness break-outs and at plates, panels and equipment. Loops should be sufficient to allow plates, panels and equipment to be removed for service and inspection.
    b. Line level and speaker level wiring may be terminated inside the equipment rack using specified terminal blocks (see “Products.”) Provide 15% spare terminals inside each rack. Microphone level wiring may only be terminated at the equipment served.

c. If specified terminal blocks are not designed for rack mounting, utilize ¾" plywood or 1/8" thick aluminum plates/blank panels as a mounting surface. Do not mount on the bottom of the rack.
d. Employ permanent strain relief for any cable with an outside diameter of 1" or greater.

13. Use only balanced audio circuits unless noted otherwise
14. Make all connections as follows:
    a. Make all connections using rosin-core solder or mechanical connectors appropriate to the application.
    b. For crimp-type connections, use only tools that are specified by the manufacturer for the application.
    c. Use only insulated spade lugs on screw terminals. Spade lugs shall be sized to fit the wire gauge. Do not exceed two lugs per terminal.
    d. Wire nuts, electrical tape or "Scotch Lock" connections are not acceptable for any application.
15. Make all connections as follows:
    a. Make all connections using rosin-core solder or mechanical connectors appropriate to the application.
    b. For crimp-type connections, use only tools that are specified by the manufacturer for the application.
    c. Use only insulated spade lugs on screw terminals. Spade lugs shall be sized to fit the wire gauge. Do not exceed two lugs per terminal.
    d. Wire nuts, electrical tape or "Scotch Lock" connections are not acceptable for any application.
16. Noise filters and surge protectors shall be provided for each equipment interface cabinet, switch equipment cabinet, control console, local, and remote active equipment locations to ensure protection from input primary AC power surges and noise glitches are not induced into low Voltage data circuits.
17. Wires or cables **previously approved** to be installed outside of conduit, cable trays, wireways, cable duct, etc:
    a. Only when specifically authorized as described herein, will wires or cables be identified and approved to be installed outside of conduit. The wire or cable runs shall be UL rated plenum and OEM certified for use in air plenums.

b. Wires and cables shall be hidden, protected, fastened and tied at 600 mm (24 in.) intervals, maximum, as described herein to building structure.

c. Closer wire or cable fastening intervals may be required to prevents sagging, maintain clearance above suspended ceilings, remove unsightly wiring and cabling from view and discourage tampering and vandalism. Wire or cable runs, not provided in conduit, that penetrate outside building walls, supporting walls, and two hour fire barriers shall be sleeved and sealed with an approved fire retardant sealant.

d. Wire or cable runs to system components installed in walls (i.e.: volume attenuators, circuit controllers, signal, or data outlets, etc.) may, when specifically authorized by the RE, be fished through hollow spaces in walls and shall be certified for use in air plenum areas.

e. Completely test all of the cables after installation and replace any defective cables.

f. Wires or cables that are installed outside of buildings shall be in conduit, secured to solid building structures. If specifically approved, on a case by case basis, to be run outside of conduit, the wires or cables shall be installed, as described herein. The bundled wires or cables must: Be tied at not less than 460 mm (18 in.) intervals to a solid building structure; have ultra violet protection and be totally waterproof (including all connections). The laying of wires or cables directly on roof tops, ladders, drooping down walls, walkways, floors, etc. is not allowed and will not be approved.

E. Cable Installation - In addition to the ***MANDATORY*** infrastructure requirements outlined in VA Construction Specifications 27 10 00 – Structured TIP Communications Cabling, 27 11 00 – TIP Communications Rooms and Fittings and 27 15 00 – TIP Communications Horizontal and Vertical Cabling and the following additional practices shall be adhered too:

1. Support cable on maximum 2’-0” centers. Acceptable means of cable support are cable trays. Velcro wrap cable bundles loosely to the means of support with plenum rated Velcro straps. Plastic tie wraps are not acceptable as a means to bundle cables.
2. Run cables parallel to walls.

3. Install maximum of 10 cables in a single row. Provide necessary rows as required by the number of cables.
4. Do not lay cables on top of light fixtures, ceiling tiles, mechanical equipment, or ductwork. Maintain at least 2’-0” clearance from all shielded electrical apparatus.
5. All cables shall be tested after the total installation is fully complete. All test results are to be documented. All cables shall pass acceptable test requirements and levels. Contractor shall remedy any cabling problems or defects in order to pass or comply with testing. This includes the re-pull of new cable as required at no additional cost to the Owner.
6. Ends of cables shall be properly terminated on both ends per industry and OEM’s recommendations.
7. Provide proper temporary protection of cable after pulling is complete before final dressing and terminations are complete. Do not leave cable lying on floor. Bundle and tie wrap up off of the floor until you are ready to terminate.
8. Terminate all conductors; no cable shall contain unterminated elements. Make terminations only at outlets and terminals.
9. Splices, Taps, and Terminations: Arrange on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures. Cables may not be spliced.
10. Bundle, lace, and train conductors to terminal points without exceeding OEM's limitations on bending radii. Install lacing bars and distribution spools.
11. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used.
12. Cable shall not be run through structural members or be in contact with pipes, ducts, or other potentially damaging items.
13. Separation of Wires: (REFER TO RACEWAY INSTALLATION) Separate speaker-microphone, line-level, speaker-level, and power wiring runs. Install in separate raceways or, where exposed or in same enclosure, separate conductors at least 12 inches apart for speaker microphones and adjacent parallel power and telephone wiring. Separate other intercommunication equipment conductors as recommended by equipment manufacturer.
14. Serve all cables as follows:

a. Cover the end of the overall jacket with a 1” (minimum) length of transparent heat-shrink tubing. Cut unused insulated conductors 2” (minimum) past the heat-shrink, fold back over jacket and secure with cable-tie. Cut unused shield/drain wires 2” (minimum) past the Heatshrink and serve as indicated below.

b. Cover shield/drain wires with heat-shrink tubing extending back to the overall jacket. Extend tubing ¼” past the end of unused wires, fold back over jacket and secure with cable tie.

c. For each solder-type connection, cover the bare wire and solder connection with heat-shrink tubing.

F. Labeling: Provide labeling in accordance with ANSI/EIA/TIA-606-A. All lettering for PA circuits shall be stenciled using laser printers.

1. Cable and Wires (Hereinafter referred to as “Cable”): Cables shall be labeled at both ends in accordance with ANSI/EIA/TIA-606-A. Labels shall be permanent in contrasting colors. Cables shall be identified according to the System “Record Wiring Diagrams.”

2. Equipment: System equipment shall be permanently labeled with contrasting plastic laminate or Bakelite material. System equipment shall be labeled on the face of the unit corresponding to its source.

   a. Clearly, consistently, logically and permanently mark switches, connectors, jacks, relays, receptacles and electronic and other equipment.

   b. Engrave and paint fill all receptacle panels using 1/8” (minimum) high lettering and contrasting paint.

   c. For rack-mounted equipment, use engraved Lamacoid labels with white 1/8” (minimum) high lettering on black background. Label the front and back of all rack-mounted equipment.

3. Conduit, Cable Duct, and/or Cable Tray: The Contractor shall label all conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying it as the System. In addition, each enclosure shall be labeled according to this standard.

4. Termination Hardware: The Contractor shall label TCOs and patch panel connections using color coded labels with identifiers in accordance with ANSI/EIA/TIA-606-A and the “Record Wiring Diagrams.”

5. Where multiple pieces of equipment reside in the same rack group, clearly and logically label each indicating to which room, channel, receptacle location, etc. they correspond.
6. Permanently label cables at each end, including intra-rack connections. Labels shall be covered by the same, transparent heat-shrink tubing covering the end of the overall jacket. Alternatively, computer generated labels of the type which include a clear protective wrap may be used.
7. Contractor’s name shall appear no more than once on each continuous set of racks. The Contractor’s name shall not appear on wall plates or portable equipment.
8. Ensure each OEM supplied item of equipment has appropriate UL Labels / Marks for the service the equipment is performed permanently attached / marked. SYSTEM EQUIPMENT INSTALLED NOT BEARING THESE UL MARKS WILL NOT BE ALLOWED TO BE A PART OF THE SYSTEM. THE CONTRACTOR SHALL BEAR ALL COSTS REQUIRED TO PROVIDE REPLACEMENT EQUIPMENT WITH APPROVED UL MARKS.

G. Conduit and Signal Ducts: When the Contractor and/or OEM determines additional system conduits and/or signal ducts are required in order to meet the system minimum performance standards outlined herein, the contractor shall provide these items as follows:
1. Conduit:
   a. The Contractor shall employ the latest installation practices and materials. The Contractor shall provide conduit, junction boxes, connectors, sleeves, weather heads, pitch pockets, and associated sealing materials not specifically identified in this document as GFE. Conduit penetrations of walls, ceilings, floors, interstitial space, fire barriers, etc., shall be sleeved and sealed.
   b. All cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement to allow PA cables to be installed in partitioned cable tray with voice cables may be granted in writing by the RE if requested). Conduits shall be provided in accordance with Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and NEC Articles 517 for Critical Care and 800 for Communications systems, at a minimum.

c. When metal, plastic covered, etc., flexible cable protective armor or systems are specifically authorized to be provided for use in the System, their installation guidelines and standards shall be as specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
d. When ”interduct” flexible cable protective systems is specifically authorized to be provided for use in the System, it’s installation guidelines and standards shall be as the specified herein, Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS, and the NEC.
e. Conduit fill (including GFE approved to be used in the system) shall not exceed 40%. Each conduit end shall be equipped with a protective insulator or sleeve to cover the conduit end, connection nut or clamp, to protect the wire or cable during installation and remaining in the conduit. Electrical power conduit shall be installed in accordance with the NEC. AC power conduit shall be run separate from signal conduit.
f. Ensure that Critical Care PA Systems (as identified by NEC Section 517) are completely separated and protected from all other systems.

2. Signal Duct, Cable Duct, or Cable Tray:
   a. The Contractor shall use GFE signal duct, cable duct, and/or cable tray, when identified and approved by the RE.
   b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm (4 in. X 4 in.) inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides or barriers are required on all sharp corners, openings, anchors, bolts or screw ends, junction, interface and connection points.
   c. Approved cable tray shall be fully covered, mechanically and physically partitioned for multiple electronic circuit use, and be UL certified and labeled for use with telecommunication circuits and/or systems. The RE shall approve width and height dimensions.
   d. All cable junctions and taps shall be accessible. Provide an 8” X 8” X 4” (minimum) junction box attached to the cable duct or raceway for installation of distribution system passive equipment. Ensure all equipment and tap junctions are accessible

3.5 PROTECTION OF NETWORK DEVICES

Contractor shall protect network devices during unpacking and installation by wearing manufacturer approved electrostatic discharge (ESD) wrist straps tied to chassis ground. The wrist strap shall meet OSHA requirements for prevention of electrical shock, should technician come in contact with high voltage.

3.6 CUTTING, CLEANING AND PATCHING

A. It shall be the responsibility of the contractor to keep their work area clear of debris and clean area daily at completion of work.

B. It shall be the responsibility of the contractor to patch and paint any wall or surface that has been disturbed by the execution of this work.

C. The Contractor shall be responsible for providing any additional cutting, drilling, fitting or patching required to complete the Work or to make its parts fit together properly.

D. The Contractor shall not damage or endanger a portion of the Work or fully or partially completed construction of the Owner or separate contractors by cutting, patching or otherwise altering such construction, or by excavation. The Contractor shall not cut or otherwise alter such construction by the Owner or a separate contractor except with written consent of the Owner and of such separate contractor; such consent shall not be unreasonably withheld. The Contractor shall not unreasonably withhold from the Owner or a separate Contractor the Contractor’s consent to cutting or otherwise altering the Work.

E. Where coring of existing (previously installed) concrete is specified or required, including coring indicated under unit prices, the location of such coring shall be clearly identified in the field and the location shall be approved by the Project Manager prior to commencement of coring work.

3.7 FIREPROOFING

A. Where PA wires, cables and conduit penetrate fire rated walls, floors and ceilings, fireproof the opening.

B. Provide conduit sleeves (if not already provided by electrical contractor) for cables that penetrate fire rated walls and Telecommunications Rooms floors and ceilings. After the cabling installation is complete, install fire proofing material in and around all conduit sleeves and openings. Install fire proofing material thoroughly and neatly. Seal all floor and ceiling penetrations.

C. Use only materials and methods that preserve the integrity of the fire stopping system and its rating.

D. Install fireproofing where low voltage cables are installed in the same manholes with high voltage cables; also cover the low voltage cables with arc proof and fireproof tape.

E. Use approved fireproofing tape of the same type as used for the high voltage cables, and apply the tape in a single layer, one-half lapped or as recommended by the manufacturer. Install the tape with the coated side towards the cable and extend it not less than 25 mm (one inch) into each duct.

F. Secure the tape in place by a random wrap of glass cloth tape.

3.8 GROUNDING

A. Ground PA cable shields and equipment to eliminate shock hazard and to minimize ground loops, common mode returns, noise pickup, cross talk, and other impairments as specified in CFM Division 27, Section 27 05 26 – Grounding and Bonding for Communications Systems.

B. Facility Signal Ground Terminal: Locate at main room or area signal ground within the room (i.e. head end and telecommunications rooms) or area(s) and indicate each signal ground location on the drawings.

C. Extend the signal ground to inside each equipment cabinet and/or rack. Ensure each cabinet and/or rack installed item of equipment is connected to the extended signal ground. Isolate the signal ground from power and major equipment grounding systems.

D. When required, install grounding electrodes as specified in CFM Division 26, Section 26 05 26 –Grounding and Bonding for Electrical Systems.

E. Do not use "3rd or 4th" wire internal electrical system conductors for communications signal ground.

F. Do not connect the signal ground to the building's external lightning protection system.

G. Do Not "mix grounds" of different systems.

H. Insure grounds of different systems are installed as to not violate OSHA Safety and NEC installation requirements for protection of personnel.

PART 4 – TESTING / GUARANTY / TRAINING

4.0 SYSTEM LISTING

The PA System is NFPA listed as an "Emergency / Public Safety" Communications system. Where Code Blue signals are transmitted, that

listing is elevated to "Life Support/Safety." Therefore, the following testing and guaranty provisions are the minimum to be performed and provided by the contractor and OEM.

4.1 PROOF OF PERFORMANCE TESTING

A. Intermediate Testing:

1. After completion of 25 – 30% the installation of a head end cabinet(s) and equipment, one microphone console, local and remote enunciation stations, two (2) zones, two (2) sub zones prior to any further work, this portion of the system must be pretested, inspected, and certified. Each item of installed equipment shall be checked to ensure appropriate UL Listing and Certification Labels are affixed as required by NFPA -Life Safety Code 101-3.2 (a) & (b) and JCHCO evaluation guidelines, and proper installation practices are followed. The intermediate test shall include a full operational test.
2. All inspections and tests shall be conducted by an OEM-certified contractor representative and witnessed by TVE-005OP3B if there is no local Government Representative that processes OEM and VA approved Credentials to inspect and certify the system. The results of the inspection will be officially recorded by the Government Representative and maintained on file by the RE, until completion of the entire project. The results will be compared to the Acceptance Test results. An identical inspection may be conducted between the 65 - 75% of the system construction phase, at the direction of the RE.

B. Pretesting:

1. Upon completing installation of the PA System, the Contractor shall align, balance, and completely pretest the entire system under full operating conditions.
2. Pretesting Procedure:
   a. During the System Pretest the Contractor shall verify (utilizing approved test equipment) that the System is fully operational and meets all the System performance requirements of this standard.
   b. The Contractor shall pretest and verify that all PA System functions and specification requirements are met and operational, no unwanted aural effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise, etc. are present. At a

minimum, each of the following locations shall be fully pretested:

1) Central Control Cabinets.
2) Local Control Stations.
3) Zone Equipment/Systems.
4) Sub-Zone Equipment/Systems.
5) Remote Control Panels.
   a.) TCR.
   b.) PCR/SCC.
   c.) ECR.
6) All Networked locations.
7) System interface locations (i.e. TELCO, two way radio, etc.).
8) System trouble reporting.
9) System Electrical Supervision.
10) UPS operation.
11) STRs.
12) NSs
13) TCOs.

3. The Contractor shall provide four (4) copies of the recorded system pretest measurements and the written certification that the System is ready for the formal acceptance test shall be submitted to the RE.

C. Acceptance Test:

1. After the PA System has been pretested and the Contractor has submitted the pretest results and certification to the RE, then the Contractor shall schedule an acceptance test date and give the RE 30 day’s written notice prior to the date the acceptance test is expected to begin. The System shall be tested in the presence of TVE 005OP3B and an OEM certified representatives. The System shall be tested utilizing the approved test equipment to certify proof of performance and Emergency / Public Safety compliance. The tests shall verify that the total System meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.
2. The acceptance test shall be performed on a "go-no-go" basis. Only those operator adjustments required to show proof of performance shall be allowed. The test shall demonstrate and verify that the installed System does comply with all requirements of this

specification under operating conditions. The System shall be rated as either acceptable or unacceptable at the conclusion of the test. Failure of any part of the System that precludes completion of system testing, and which cannot be repaired in four (4) hours, shall be cause for terminating the acceptance test of the System. Repeated failures that result in a cumulative time of eight (8) hours to affect repairs shall cause the entire System to be declared unacceptable. Retesting of the entire System shall be rescheduled at the convenience of the Government.

3. Retesting of the entire System shall be rescheduled at the convenience of the Government and costs borne by the Contractor at the direction of the SRE.

D. Acceptance Test Procedure:

1. Physical and Mechanical Inspection:
   a. The TVE 005OP3B Representative will tour all areas where the PA system and all sub-systems are completely and properly installed to insure they are operationally ready for proof of performance testing. A system inventory including available spare parts will be taken at this time. Each item of installed equipment shall be checked to ensure appropriate UL certification labels are affixed.
   b. The System diagrams, record drawings, equipment manuals, TIP Auto CAD Disks, intermediate, and pretest results shall be formally inventoried and reviewed.
   c. Failure of the System to meet the installation requirements of this specification shall be grounds for terminating all testing.
2. Operational Test:
   a. After the Physical and Mechanical Inspection, the system head end equipment shall be checked to verify that it meets all performance requirements outlined herein. A spectrum analyzer and sound level meter may be utilized to accomplish this requirement.
   b. Following the head end equipment test, each speaker (or on board speaker) shall be inspected to ensure there are no signal distortions such as intermodulation, data noise, popping sounds, erratic system functions, on any function.
   c. The distribution system shall be checked at each interface, junction, and distribution point, first, middle, and last speaker

in each leg to verify the PA distribution system meets all system performance standards.

d. If the RED system is a part of the system, each volume stepper switches shall be checked to insure proper operation of the pillow speaker, the volume stepper and the RED system (if installed).

e. Additionally, each installed head end equipment, microphone console; amplifier, mixer, distributed speaker/amplifier, monitor speaker, telephone interface, power supply and remote amplifiers shall be checked insuring they meet the requirements of this specification.

f. Once these tests have been completed, each installed sub-system function shall be tested as a unified, functioning and fully operating system. The typical functions are: “all call,” three sub-zoned, minimum of 15 minutes of UPS operation, electrical supervision, trouble panel, corridor speakers and audio paging.

h. Individual Item Test: The TVE 005OP3B Representative will select individual items of equipment for detailed proof of performance testing until 100% of the System has been tested and found to meet the contents of this specification. Each item shall meet or exceed the minimum requirements of this document.

3. Test Conclusion:

a. At the conclusion of the Acceptance Test, using the generated punch list (or discrepancy list) the VA and the Contractor shall jointly agree to the results of the test, and reschedule testing on deficiencies and shortages with the RE. Any retesting to comply with these specifications will be done at the Contractor's expense.

b. If the System is declared unacceptable without conditions, all rescheduled testing expenses will be borne by the Contractor.

E. Acceptable Test Equipment: The test equipment shall furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:

1. Spectrum Analyzer.
2. Signal Level Meter.
3. Volt-Ohm Meter.

4. Sound Pressure Level (SPL) Meter.
5. Oscilloscope.
6. Random Noise Generator.
7. Audio Amplifier with External Speaker.

4.2 WARRANTY

A. Comply with FAR 52.246-21, except that warranty shall be as follows:

B. Contractor’s Responsibility:

1. The Contractor shall warranty that all provided material and equipment will be free from defects, workmanship and will remain so for a period of two (2) years from date of final acceptance of the System by the VA. The Contractor shall provide OEM’s equipment warranty documents, to the RE (or Facility Contracting Officer if the Facility has taken procession of the building), that certifies each item of equipment installed conforms to OEM published specifications.
2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. This contact capability shall be provided by the Contractor and OEM at no additional cost to the VA.
3. All Contractor maintenance and supervisor personnel shall be fully qualified by the OEM and must provide two (2) copies of current and qualified OEM training certificates and OEM certification upon request.
4. Additionally, the Contractor shall accomplish the following minimum requirements during the two year guaranty period:
   a. Response Time During the ***Two Year*** Guaranty Period:
      1) The RE (or Facility Contracting Officer if the system has been turned over to the Facility) is the Contractor’s ONLY OFFICIAL reporting and contact official for nurse call system trouble calls, during the guaranty period.
      2) A standard work week is considered 8:00 A.M. to 5:00 P.M. or as designated by the RE (or Facility Contracting Officer), Monday through Friday exclusive of Federal Holidays.
      3) The Contractor shall respond and correct on-site trouble calls, during the standard work week to:

a) A routine trouble call within one (1) working day of its report. A routine trouble is considered a trouble which causes a power supply; one (1) master System control station, microphone console or amplifier to be inoperable.

b) Routine trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as an emergency trouble call. The RE (or Facility Contracting Officer) shall notify the Contractor of this type of trouble call.

c) An emergency trouble call within four (4) hours of its report. An emergency trouble is considered a trouble which causes a sub-zone, zone, distribution point, terminal cabinet, or all call system to be inoperable at any time.

4) If a PA System component failure cannot be corrected within four (4) hours (exclusive of the standard work time limits), the Contractor shall be responsible for providing alternate System equipment. The alternate equipment/system shall be operational within a maximum of 12 hours after the four (4) hour trouble shooting time and restore the effected location operation to meet the System performance standards. If any sub-system or major system trouble cannot be corrected within one working day, the Contractor shall furnish and install compatible substitute equipment returning the System or sub-system to full operational capability, as described herein, until repairs are complete.

b. Required On-Site Visits During the ***Two Year*** Guaranty Period

1) The Contractor shall visit, on-site, for a minimum of eight (8) hours, once every 12 weeks, during the guaranty period, to perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the System according the descriptions identified in this document.

2) The Contractor shall arrange all Facility visits with the RE (or Facility Contracting Officer) prior to performing the required maintenance visits.

3) Preventive maintenance procedure(s)shall be performed by the Contractor in accordance with the OEM's recommended practice and service intervals during non-busy time agreed to by the RE (or Facility Contracting Officer) and Contractor.

4) The preventive maintenance schedule, functions and reports shall be provided to and approved by the RE (or Facility Contracting Officer).
5) The Contractor shall provide the RE (or Facility Contracting Officer) a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the RE with sample copies of these reports for review and approval at the beginning of the Acceptance Test. The following reports are the minimum required:
   a) The Contractor shall provide a monthly summary all equipment and sub-systems serviced during this warranty period to RE (or Facility Contracting Officer) by the fifth (5th) working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and systems for preventive and predictive maintenance.
   b) The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the System. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.
6) The RE (or Facility Contracting Officer) shall convey to the Facility Engineering Officer, two (2) copies of actual reports for evaluation.
   a) The RE (or Facility Contracting Officer) shall ensure a copy of these reports is entered into the System’s official acquisition documents.
   b) The Facility Chief Engineer shall ensure a copy of these reports is entered into the System’s official technical record documents.

C. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use; accidents; other vendor, contractor, or owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall

immediately notify the RE or Facility Contracting Officer in writing upon the discovery of these incidents. The RE or Facility Contracting Officer will investigate all reported incidents and render an official opinion in writing concerning the supplied information.

4.3 TRAINING

A. Provide thorough training of all biomed engineering and electronic technical staff assigned to those nursing units receiving new networked nurse/patient communications equipment. This training shall be developed and implemented to address two different types of staff. Floor nurses/staff shall receive training from their perspective, and likewise, unit secretaries (or any person whose specific responsibilities include answering patient calls and dispatching staff) shall receive operational training from their perspective. A separate training room will be set up that allows this type of individualized training utilizing in-service training unit, prior to cut over of the new system.

B. Provide the following minimum training times and durations:

1. **48** hours prior to opening for BME / Electronic Staff (in 8-hour increments) – split evenly over 3 weeks and day and night shifts. Coordinate schedule with Owner.
2. 32 hours during the opening week for Telephone Staff – both day and night shifts.
3. **24** hours for supervisors and system administrators.

- - - E N D - - -

SECTION 28 05 00
COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

PART 1 – GENERAL

1.1 DESCRIPTION

A. This Section, Common Work Results for Electronic Safety and Security (ESS), applies to all sections of Division 28.

B. Furnish and install fully functional electronic safety and security cabling system(s), equipment and approved accessories in accordance with the specification section(s), drawing(s), and referenced publications. Capacities and ratings of cable and other items and arrangements for the specified items are shown on each system's required Bill of Materials (BOM) and verified on the approved system drawing(s). If there is a conflict between contract's specification(s) and drawings(s), the contract's specification requirements shall prevail.

C. The Contractor shall provide a fully functional and operating ESS, programmed, configured, documented, and tested as required herein and the respective Safety and Security System Specification(s). The Contractor shall provide calculations and analysis to support design and engineering decisions as specified in submittals. The Contractor shall provide and pay all labor, materials, and equipment, sales and gross receipts and other taxes. The Contractor shall secure and pay for plan check fees, permits, other fees, and licenses necessary for the execution of work as applicable for the project. Give required notices; the Contractor will comply with codes, ordinances, regulations, and other legal requirements of public authorities, which bear on the performance of work.

D. The Contractor shall provide an ESS, installed, programmed, configured, documented, and tested. The security system shall include but not limited to: physical access control, intrusion detection, duress alarms, elevator control interface, video assessment and surveillance, video recording and storage, delayed egress, personal protection system, intercommunication system, fire alarm interface, equipment cabinetry, dedicated photo badging system and associated live camera, report printer, photo badge printer, and uninterruptible power supplies (UPS) interface. Operator training shall not be required as part of the Security Contractors scope and shall be provided by the Owner. The

Security Contractor shall still be required to provide necessary maintenance and troubleshooting manuals as well as submittals as identified herein. The work shall include the procurement and installation of electrical wire and cables, the installation and testing of all system components. Inspection, testing, demonstration, and acceptance of equipment, software, materials, installation, documentation, and workmanship, shall be as specified herein. The Contractor shall provide all associated installation support, including the provision of primary electrical input power circuits.

E. Repair Service Replacement Parts On-site service during the warranty period shall be provided as specified under "Emergency Service". The Contractor shall guarantee all parts and labor for a term of one (1) year, unless dictated otherwise in this specification from the acceptance date of the system as described in Part 5 of this Specification. The Contractor shall be responsible for all equipment, software, shipping, transportation charges, and expenses associated with the service of the system for one (1) year. The Contractor shall provide 24-hour telephone support for the software program at no additional charge to the owner. Software support shall include all software updates that occur during the warranty period.

F. Section Includes:
   1. Description of Work for Electronic Security Systems,
   2. Electronic security equipment coordination with relating Divisions,
   3. Submittal Requirements for Electronic Security,
   4. Miscellaneous Supporting equipment and materials for Electronic Security,
   5. Electronic security installation requirements.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
C. Section 08 11 73 - SLIDING METAL FIRE DOORS. Requirements for door installation.
D. Section 08 35 13.13 - ACCORDIAN FOLDING DOORS. Requirements for door installation.

E. Section 08 34 59 - VAULT DOORS AND DAY GATES. Requirements for door and gate installation.
F. Section 08 51 13 - ALUMINUM WINDOWS. Requirements for window installation.
G. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.
H. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
I. Section 14 21 00 - ELECTRIC TRACTION ELEVATORS. Requirements for elevators.
J. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
K. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
L. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
M. Section 26 05 33 - RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.
N. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.
O. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.
P. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
Q. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
R. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
S. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for Commissioning.
T. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). For physical access control integration.
U. Section 28 13 16 - PHYSICAL ACCESS CONTROL SYSTEM AND DATABASE MANAGEMENT. Requirements for control and operation of all security systems.
V. Section 28 13 53 - SECURITY ACCESS DETECTION. Requirements for screening of personnel and shipments.
W. Section 28 16 00 - INTRUSION DETECTION SYSTEM (IDS). Requirements for alarm systems.
X. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.

Y. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS). Requirements for emergency and interior communications.

Z. Section 32 31 13 - CHAIN LINK FENCES AND GATES. Requirements for fences.

1.3 DEFINITIONS

A. AGC: Automatic Gain Control.

B. Basket Cable Tray: A fabricated structure consisting of wire mesh bottom and side rails.

C. BICSI: Building Industry Consulting Service International.

D. CCD: Charge-coupled device.

E. Central Station: A PC with software designated as the main controlling PC of the security access system. Where this term is presented with initial capital letters, this definition applies.

F. Channel Cable Tray: A fabricated structure consisting of a one-piece, ventilated-bottom or solid-bottom channel section.

G. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

H. CPU: Central processing unit.

I. Credential: Data assigned to an entity and used to identify that entity.

J. DGP: Data Gathering Panel - component of the Physical Access Control System capable to communicate, store and process information received from readers, reader modules, input modules, output modules, and Security Management System.

K. DTS: Digital Termination Service: A microwave-based, line-of-sight communications provided directly to the end user.

L. EMI: Electromagnetic interference.

M. EMT: Electric Metallic Tubing.

N. ESS: Electronic Security System.

O. File Server: A PC in a network that stores the programs and data files shared by users.

P. GFI: Ground fault interrupter.

Q. IDC: Insulation displacement connector.

R. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of

identifying an individual. Where this term is presented with an initial capital letter, this definition applies.

S. I/O: Input/Output.

T. Intrusion Zone: A space or area for which an intrusion must be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.

U. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

V. LAN: Local area network.

W. LCD: Liquid-crystal display.

X. LED: Light-emitting diode.

Y. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

Z. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

AA. M-JPEG: Motion - Joint Photographic Experts Group.

BB. MPEG: Moving picture experts group.

CC. NEC: National Electric Code

DD. NEMA: National Electrical Manufacturers Association

EE. NFPA: National Fire Protection Association

FF. NTSC: National Television System Committee.

GG. NRTL: Nationally Recognized Testing Laboratory.

HH. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

II. PACS: Physical Access Control System; A system comprised of cards, readers, door controllers, servers and software to control the physical ingress and egress of people within a given space

JJ. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

KK. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

LL. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

MM. RCDD: Registered Communications Distribution Designer.

NN. RFI: Radio-frequency interference.

OO. RIGID: Rigid conduit is galvanized steel tubing, with a tubing wall that is thick enough to allow it to be threaded.

PP. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

QQ. RS-485: An TIA/EIA standard for multipoint communications.

RR. Solid-Bottom or Non-ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

SS. SMS: Security Management System - A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

TT. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

UU. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

VV. UPS: Uninterruptible Power Supply

WW. UTP: Unshielded Twisted Pair

XX. Workstation: A PC with software that is configured for specific limited security system functions.

1.4 QUALITY ASSURANCE

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.

2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.
2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.

3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

D. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 GENERAL ARANGEMENT OF CONTRACT DOCUMENTS

A. The Contract Documents supplement to this specification indicates approximate locations of equipment. The installation and/or locations of the equipment and devices shall be governed by the intent of the design; specification and Contract Documents, with due regard to actual site conditions, recommendations, ambient factors affecting the equipment and operations in the vicinity. The Contract Documents are diagrammatic and do not reveal all offsets, bends, elbows, components, materials, and other specific elements that may be required for proper installation. If any departure from the contract documents is deemed necessary, or in the event of conflicts, the Contractor shall submit details of such departures or conflicts in writing to the owner or owner’s representative for his or her comment and/or approval before initiating work.

B. Anything called for by one of the Contract Documents and not called for by the others shall be of like effect as if required or called by all, except if a provision clearly designed to negate or alter a provision contained in one or more of the other Contract Documents shall have the intended effect. In the event of conflicts among the Contract Documents, the Contract Documents shall take precedence in the following order: the Form of Agreement; the Supplemental General Conditions; the Special Conditions; the Specifications with attachments; and the drawings.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

D. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.

2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.
3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

E. Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall

be legible and clearly identify equipment being submitted. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - Design Submittal Procedures, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer’s information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for COR and Contractor review stamps.
5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards CAD Standard Application Guide, and VA BIM Guide. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the COR for approval before the initiation of work.
6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the

spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.

1) Where two (2) or more binders are necessary to accommodate data; correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and/or maintenance of the component or system.
2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.

b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.

c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.

d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20 pound white bond paper.

e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.

1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.
3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1) Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent.

Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.

2) Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.

3) The manuals shall include:

a) Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.

b) A control sequence describing start-up, operation, and shutdown.

c) Description of the function of each principal item of equipment.

d) Installation and maintenance instructions.

e) Safety precautions.

f) Diagrams and illustrations.

g) Testing methods.

h) Performance data.

i) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.

j) Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued.

Refer to Group I through V Technical Data Package Submittal requirements for required section content.

h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.

i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.

j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.

k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.

l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor’s manufacturer certifications.

7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer’s catalog numbers and conformance of submittal with requirements of contract documents. Return non-conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor’s stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.

8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.

9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract document section number, paragraph number, and the referenced standards for each listed product.

F. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization.

Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:
   a. General - Drawings shall conform to VA CAD Standards Guide. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings.
   b. Cover Sheet - Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
   c. General Information Sheets - General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
   d. Floor Plans - Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
      1) Security devices by symbol,
      2) The associated device point number (derived from the loading sheets),
      3) Wire & cable types and counts
      4) Conduit sizing and routing
      5) Conduit riser systems
      6) Device and area detail call outs
   e. Architectural details - Architectural details shall be produced for each device mounting type (door details for EECS and IDS, Intrusion Detection system (motion sensor, vibration, microwave Motion Sensor and Camera mounting,
   f. Riser Diagrams - Contractor shall provide a riser diagram indicating riser architecture and distribution of the SMS throughout the facility (or area in scope).
   g. Block Diagrams - Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., electronic entry control, intrusion detection, closed circuit television, intercom, and other associated subsystems)

integration; and data transmission and media conversion methodologies.

h. Interconnection Diagrams - Contractor shall provide interconnection diagram for each sensor, and device component. Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:

1) Panel Assembly Detail - For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.

2) Panel Details - Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.

3) Device Mounting Details - Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.

4) Details of connections to power supplies and grounding

5) Details of surge protection device installation

6) Sensor detection patterns - Each system sensor shall have associated detection patterns.

7) Equipment Rack Detail - For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCI wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include use vertical and horizontal latter rack system.

8) Security Control Room - The contractor shall provide a layout plan for the Security Control Room. The layout plan shall identify all equipment and details associated with the installation.

9) Operator Console - The contractor shall provide a layout plan for the Operator Console. The layout plan shall identify all

equipment and details associated with the installation. Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.

10) Equipment Room - Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and associated equipment and device placements both vertical and horizontally.

j. Electrical Panel Schedule - Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.

k. Door Schedule - A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:

1) Item Number
2) Door Number (Derived from A/E Drawings)
3) Floor Plan Sheet Number
4) Standard Detail Number
5) Door Description (Derived from Loading Sheets)
6) Data Gathering Panel Input Number
7) Door Position or Monitoring Device Type & Model Number
8) Lock Type, Model Number & Power Input/Draw (standby/active)
9) Card Reader Type & Model Number
10) Shunting Device Type & Model Number
11) Sounder Type & Model Number
12) Manufacturer
13) Misc. devices as required
    a) Delayed Egress Type & Model Number
    b) Intercom
    c) Camera
    d) Electric Transfer Hinge
    e) Electric Pass-through device
14) Remarks column indicating special notes or door configurations

2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the COR to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:
   a. Item Number
   b. Camera Number
   c. Naming Conventions
   d. Description of Camera Coverage
   e. Camera Location
   f. Floor Plan Sheet Number
   g. Camera Type
   h. Mounting Type
   i. Standard Detail Reference
   j. Power Input & Draw
   k. Power Panel Location
   l. Remarks Column for Camera
3. Section II - Data Gathering Panel Documentation Package
   a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.
   b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.
   c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm

inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.

d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.

e. The DGP spreadsheet shall include an entry section for the following information:

1) DGP number
2) First Reader Number
3) First Monitor Point Number
4) First Relay Number
5) DGP, input or output Location
6) DGP Chain Number
7) DGP Cabinet Tamper Input Number
8) DGP Power Fail Input Number
9) Number of Monitor Points Reserved For Expansion Boards
10) Number of Control Points (Relays) Reserved For Expansion Boards

f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:

1) System Numbers for Card Readers
2) System Numbers for Monitor Point Inputs
3) System Numbers for Control Points (Relays)
4) Next DGP or input module First Monitor Point Number
5) Next DGP or output module First Control Point Number

g. The DGP spreadsheet shall provide the following information for each card reader:

1) DGP Reader Number
2) System Reader Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
6) Description Field
7) DGP Input Location

8) Date Test
9) Date Passed
10) Cable Type
11) Camera Numbers (of cameras viewing the reader location)

h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
1) DGP Monitor Point Input Number
2) System Monitor Point Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
7) DGP or input module Input Location
8) Date Test
9) Date Passed
10) Cable Type
11) Camera Numbers (of associated alarm event preset call-ups)

i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
1) DGP Control Point (Relay) Number
2) System (Control Point) Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device: Lock Control, Local Sounder, etc.)
6) Description Field
7) DGP or OUTPUT MODULE Output Location
8) Date Test
9) Date Passed Cable Type
10) Camera Number (of associated alarm event preset call-ups)

j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
1) Header
a) DGP Input and Output Worksheet
b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
2) Footer
a) File Name

b) Date Printed

c) Page Number

4. Section III - Construction Mock-up: In areas with exposed EMT/Conduit Raceways, contractor shall conceal raceway as much as practical and unobtrusively. In addition, historic significance must be considered to determine installation means and methods for approval by the owner.
5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance requirements of this specification. The data package shall include the following:
   a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.
   b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.
   c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.
7. Section VI - Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

G. Group II Technical Data Package

1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the COR documenting changes to the site, particularly those conditions that affect performance of the system

to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the COR.

2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:
   a. Baseline configuration
   b. Access levels
   c. Schedules (intrusion detection, physical access control, holidays, etc.)
   d. Badge database
   e. System monitoring and reporting (unit level and central control)
   f. Naming conventions and descriptors

H. Group III Technical Data Package
1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and be customized to the contract requirements. The Contractor will deliver the test procedures to the COR for approval at least 60 calendar days prior to the requested test date.

I. Group IV Technical Data Package
1. Performance Verification Test
   a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the COR for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.
2. Training Documentation

a. New Facilities and Major Renovations: Familiarization training shall be provided for new equipment or systems. Training can include site familiarization training for VA technicians and administrative personnel. Training shall include general information on new system layout including closet locations, turnover of the completed system including all documentation, including manuals, software, key systems, and full system administration rights. Lesson plans and training manuals training shall be oriented to type of training to be provided.

b. New Unit Control Room:

1) Provide the security personnel with training in the use, operation, and maintenance of the entire control room system (Unit Control and Equipment Rooms). The training documentation must include the operation and maintenance. The first of the training sessions shall take place prior to system turnover and the second immediately after turnover. Coordinate the training sessions with the Owner. Completed classroom sessions will be witnessed and documented by the Architect/Engineer, and approved by the COR. Instruction is not to begin until the system is operational as designed.

2) The training documents will cover the operation and the maintenance manuals and the control console operators' manuals and service manuals in detail, stressing all important operational and service diagnostic information necessary for the maintenance and operations personnel to efficiently use and maintain all systems.

3) Provide an illustrated control console operator's manual and service manual. The operator's manual shall be written in laymen's language and printed so as to become a permanent reference document for the operators, describing all control panel switch operations, graphic symbol definitions and all indicating functions and a complete explanation of all software.

4) The service manual shall be written in laymen's language and printed so as to become a permanent reference document for maintenance personnel, describing how to run internal self diagnostic software programs, troubleshoot head end hardware and field devices with a complete scenario simulation of all

possible system malfunctions and the appropriate corrective measures.

5) Provide a professional color DVD instructional recording of all the operational procedures described in the operator's manual. All charts used in the training session shall be clearly presented on the video. Any DVD found to be inferior in recording or material content shall be reproduced at no cost until an acceptable DVD is submitted. Provide four copies of the training DVD, one to the architect/engineer and three to the owner.

3. System Configuration and Data Entry:

a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines.The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:

1) Physical Access control system components,
2) All intrusion detection system components,
3) Video surveillance, control and recording systems,
4) Intercom systems components,
5) All other security subsystems shown in the contract documents.

b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.

c. Refer to Part 3 for system programming requirements and planning guidelines.

4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm

points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor's field surveys, and all other pertinent information in the Contractor's possession to complete the graphics. The Contractor shall identify and request from the COR, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the COR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

J. Group V Technical Data Package:Final copies of the manuals shall be delivered to the COR as part of the acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or systems, as well as the nearest service representatives for each item of equipment for each system.The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on DVD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:

a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings; system schematics and layout drawings; alignment and calibration procedures; manufacturer’s repair list indicating sources of supply; and interface definition.

3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
   a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data formats, command characters, and a sample of each type of data transfer.
4. Operator’s Manual: The operator’s manual shall fully explain all procedures and instructions for the operation of the system, including:
   a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands’ alarm messages, and printing formats; and system access requirements.
5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the COR a complete list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.
7. Operation, Maintenance & Service Manuals: The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable

sets of manageable size. Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.

8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
   a. Equipment and/or system function.
   b. Operating characteristics.
   c. Limiting conditions.
   d. Performance curves.
   e. Engineering data and test.
   f. Complete nomenclature and number of replacement parts.
   g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
   h. Provide information detailing essential maintenance procedures including the following: routine operations, trouble shooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.
   i. Provide information on equipment and system operating procedures, including the following; start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.
   j. Manufacturer equipment and systems maintenance manuals are permissible.
9. Project Redlines: During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words 'Master Redlines' on the cover sheet and be maintained by the Contractor in the project office. The Contractor will provide access to redline documents anytime during the project for review and inspection by the COR or authorized Office of Protection Services representative. Master redlines shall be neatly maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in

strict accordance with the drawings shall be so noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the COR for review and approval of all changes or modifications to the documents. Each sheet shall have COR initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline documents daily. Field drawings shall not be considered "master redlines".

10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the COR. As with master relines, Contractor shall maintain record specifications for COR review and inspection at anytime.
11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later. Note related Change Orders and mark up of Record Construction Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the COR.
12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping

requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements resulting in miscellaneous records include a minimum of the following:

a. Certificates received instead of labels on bulk products.
b. Testing and qualification of tradesmen. ("Contractor's Qualifications")
c. Documented qualification of installation firms.
d. Load and performance testing.
e. Inspections and certifications.
f. Final inspection and correction procedures.
g. Project schedule

13. Record Construction Documents (Record As-Built)
    a. Upon project completion, the contractor shall submit the project master redlines to the COR prior to development of Record construction documents. The COR shall be given a minimum of a thirty (30) day review period to determine the adequacy of the master redlines. If the master redlines are found suitable by the COR, the COR will initial and date each sheet and turn redlines over to the contractor for as built development.
    b. The Contractor shall provide the COR a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on CD or DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number as applicable. All corrective notations made by the Contractor shall be legible when submitted to the COR. If, in the opinion of the COR, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover sheets with suitable titles, dates, and other identifications printed on the cover.The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.

c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the COR. The Contractor shall organize into bound and labeled sets for the COR's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown.All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).

K. FIPS 201 Compliance Certificates

1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
   a. Fingerprint Capture Station
   b. Card Readers
   c. Facial Image Capturing Camera
   d. PIV Middelware
   e. Template Matcher
   f. Electromagnetically Opaque Sleeve
   g. Certificate Management
      1) CAK Authentication System
      2) PIV Authentication System
      3) Certificate Validator
      4) Cryptographic Module
   h. <list devices and software>

L. Approvals will be based on complete submission of manuals together with shop drawings.

M. After approval and prior to installation, furnish the COR with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.

2. Each type of conduit and pathway coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.

N. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

O. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

CP-01-00.....Control Panel Standard-Features for False Alarm Reduction

PIR-01-00.....Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

D. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

E. American National Standards Institute (ANSI):

ANSI S3.2-99.....Method for measuring the Intelligibility of Speech over Communications Systems

F. American Society for Testing and Materials (ASTM)

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C1238-97 (R03).....Standard Guide for Installation of Walk-Through Metal Detectors

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

G. Architectural Barriers Act (ABA), 1968

H. Department of Justice: American Disability Act (ADA)

28 CFR Part 36-2010 ADA Standards for Accessible Design

I. Department of Veterans Affairs:

VHA National CAD Standard Application Guide, 2006

VA BIM Guide, V1.0 10

J. Federal Communications Commission (FCC):

(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

K. Federal Information Processing Standards (FIPS):

FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

L. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

M. Government Accountability Office (GAO):

GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

N. Homeland Security Presidential Directive (HSPD):

HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

O. Institute of Electrical and Electronics Engineers (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

802.3af-08.....Power over Ethernet Standard

802.3at-09 .....Power over Ethernet (PoE) Plus Standard

C2-07.....National Electrical Safety Code

C62.41-02.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

C95.1-05.....Standards for Safety Levels with Respect to Human Exposure in Radio Frequency Electromagnetic Fields

P. International Organization for Standardization (ISO):

7810.....Identification cards - Physical characteristics

7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics

7816-2.....Identification cards - Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts

7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols

7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods

7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange

14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards

Operating at 13.56 MHz in up to 5 inches distance

15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

19794.....Information technology - Biometric data interchange formats

Q. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

R. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

S. National Fire Protection Association (NFPA):

70-11..... National Electrical Code (NEC)

731-08.....Standards for the Installation of Electric Premises Security Systems

99-2005.....Health Care Facilities

T. National Institute of Justice (NIJ)

0601.02-03.....Standards for Walk-Through Metal Detectors for use in Weapons Detection

0602.02-03.....Hand-Held Metal Detectors for Use in Concealed Weapon and Contraband Detection

U. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-37.....Guide for Applying the Risk Management Framework to Federal Information Systems

Special Pub 800-63.....Electronic Authentication Guideline

Special Pub 800-73-3....Interfaces for Personal Identity Verification (4 Parts)

.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation

.....Pt. 2- PIV Card Application Card Command Interface

.....Pt. 3- PIV Client Application Programming Interface

.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification

Special Pub 800-76-1....Biometric Data Specification for Personal Identity Verification

Special Pub 800-78-2....Cryptographic Algorithms and Key Sizes for Personal Identity Verification

Special Pub 800-79-1....Guidelines for the Accreditation of Personal Identity Verification Card Issuers

Special Pub 800-85B-1...DRAFTPIV Data Model Test Guidelines

Special Pub 800-85A-2...PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-104A....Scheme for PIV Visual Card Topography

V. Occupational and Safety Health Administration (OSHA):

29 CFR 1910.97.....Nonionizing radiation

W. Section 508 of the Rehabilitation Act of 1973

X. Security Industry Association (SIA):

AG-01 .....Security CAD Symbols Standards

Y. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

44-05.....Thermoset-Insulated Wires and Cables

50-07.....Enclosures for Electrical Equipment

83-08.....Thermoplastic-Insulated Wires and Cables

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

360-09.....Liquid-Tight Flexible Steel Conduit

444-08.....Safety Communications Cables

464-09.....Audible Signal Appliances

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

51-05.....Schedule 40 and 80 Rigid PVC Conduit

609-96.....Local Burglar Alarm Units and Systems

634-07.....Standards for Connectors with Burglar-Alarm Systems

636-01.....Standard for Holdup Alarm Units and Systems

639-97.....Standard for Intrusion-Detection Units

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit

752-05.....Standard for Bullet-Resisting Equipment

797-07.....Electrical Metallic Tubing

827-08.....Central Station Alarm Services

1037-09.....Standard for Anti-theft Alarms and Devices

1635-10.....Digital Alarm Communicator System Units

1076-95.....Standards for Proprietary Burglar Alarm Units and Systems

1242-06.....Intermediate Metal Conduit

1479-03.....Fire Tests of Through-Penetration Fire Stops

1981-03.....Central Station Automation System

2058-05.....High Security Electronic Locks

60950.....Safety of Information Technology Equipment

60950-1.....Information Technology Equipment - Safety - Part 1: General Requirements

Z. Uniform Federal Accessibility Standards (UFAS) 1984

AA. United States Department of Commerce:

Special Pub 500-101 ....Care and Handling of Computer Magnetic Storage Media

1.8 COORDINATION

A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
   1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
   2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
   3. To allow right of way for piping and conduit installed at required slope.
   4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.9 MAINTENANCE & SERVICE

A. General Requirements
   1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work
   1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The COR shall be advised in writing of the name of the designated service representative, and of any change in personnel. The COR shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

1. The work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

E. System Inspections

1. These inspections shall include:
   a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.
      1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
      2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.

a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from arrival on site. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.

b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COR. Any modifications made

to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.10 MINIMUM REQUIREMENTS

A. References to industry and trade association standards and codes are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.11 DELIVERY, STORAGE, & HANDLING

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
2. Damaged equipment shall be, as determined by the COR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.

4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

B. Central Station, Workstations, and Controllers:

1. Store in temperature and humidity controlled environment in original manufacturer's sealed containers. Maintain ambient temperature between 10 to 30 deg C (50 to 85 deg F), and not more than 80 percent relative humidity, non-condensing.
2. Open each container; verify contents against packing list, and file copy of packing list, complete with container identification for inclusion in operation and maintenance data.
3. Mark packing list with designations which have been assigned to materials and equipment for recording in the system labeling schedules generated by cable and asset management system.
4. Save original manufacturer's containers and packing materials and deliver as directed under provisions covering extra materials.

1.12 PROJECT CONDITIONS

A. Environmental Conditions: System shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:

1. Interior, Controlled Environment: System components, except central-station control unit, installed in temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of 2 to 50 deg C (36 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 1 enclosure.
2. Interior, Uncontrolled Environment: System components installed in non-temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of -18 to 50 deg C (0 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 4X enclosures.
3. Exterior Environment: System components installed in locations exposed to weather shall be rated for continuous operation in ambient conditions of -34 to 50 deg C (-30 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, condensing. Rate for continuous operation where exposed to rain as specified in NEMA 250, winds up to 137 km/h (85 mph) and snow cover up to 610 mm (24 in) thick. NEMA 250, Type 4X enclosures.

4. Hazardous Environment: System components located in areas where fire or explosion hazards may exist because of flammable gases or vapors, flammable liquids, combustible dust, or ignitable fibers shall be rated, listed, and installed according to NFPA 70.
5. Corrosive Environment: For system components subjected to corrosive fumes, vapors, and wind-driven salt spray in coastal zones, provide NEMA 250, Type 4X enclosures.

B. Security Environment: Use vandal resistant enclosures in high-risk areas where equipment may be subject to damage.

C. Console: All console equipment shall, unless noted otherwise, be rated for continuous operation under ambient environmental conditions of 15.6 to 29.4 deg C (60 to 85 deg F) and a relative humidity of 20 to 80 percent.

1.13 EQUIPMENT AND MATERIALS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:
1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:
1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COR a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the COR prior to final inspection and not more than 90 days after completion of the tests.

3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.14 ELECTRICAL POWER

A. Electrical power of 120 Volts Alternating Current (VAC) shall be indicated on the Division 26 drawings. Additional locations requiring primary power required by the security system shall be shown as part of these contract documents. Primary power for the security system shall be configured to switch to emergency backup sources automatically if interrupted without degradation of any critical system function. Alarms shall not be generated as a result of power switching, however, an indication of power switching on (on-line source) shall be provided to the alarm monitor. The Security Contractor shall provide an interface (dry contact closure) between the PACS and the Uninterruptible Power Supply (UPS) system so the UPS trouble signals and main power fail appear on the PACS operator terminal as alarms.

B. Failure of any on-line battery shall be detected and reported as a fault condition. Battery backed-up power supplies shall be provided sized for 8 hours of operation at actual connected load. Requirements for additional power or locations shall be included with the contract to support equipment and systems offered. The following minimum requirements shall be provided for power sources and equipment.

1. Emergency Generator
   a. Report Printers: Unit Control Room
   b. Video Monitors: Unit Control Room
   c. Intercom Stations
   d. Radio System
   e. Lights: Unit Control Room, Equipment Rooms, & Security Offices
   f. Outlets: Security Outlets dedicated to security equipment racks or security enclosure assemblies.
   g. Security Device Power Supplies (DGP, VASS, Card Access, Lock Power, etc.) powered from the security closets or remotely: various locations
   h. Telephone/Radio Recording Equipment: Unit Control Room.
   i. VASS Camera Power Supplies: Security Closets
   j. VASS Pan/Tilt Units: Various Locations
   k. VASS Outdoor Housing Heaters and Blowers: Various Sites
   l. Intercom Master Control System

m. Fiber Optic Receivers/Transmitters

n. Security office Weapons Storage

o. Outlets that charge handheld radios

2. Uninterruptible Power Supply (UPS) on Emergency Power

a. The following 120VAC circuits shall be provided by electrical contractor. The Security Contractor shall coordinate exact locations with the Electrical Contractor:

1) Security System Monitors and Keyboards: Control Room

2) CPU: Control Equipment Room

3) Communications equipment: Control Equipment Room and various sites.

4) VASS Matrix Switcher: Control Equipment Room

5) VASS: Control Equipment Room

6) Digital Video Recorders, encoders & decoders: Control Room

7) All equipment Room racked equipment.

8) Network switches

1.15 TRANSIENT VOLTAGE SUPPRESSION, POWER SURGE SUPPLESION, & GROUNDING

A. Transient Voltage Surge Suppression: All cables and conductors extending beyond building façade, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage Surge Suppression (TVSS) protection. The TVSS device shall be UL listed in accordance with Standard TIA 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 914.4 mm (3 ft) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode to verify there is no interference.

1. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.

2. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.

3. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B.

4. Operating Temperature and Humidity: -40 to 85 deg C (-40 to 185 deg F), 0 to 95 percent relative humidity.

B. Grounding and Surge Suppression

1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. To ensure the operation of over current devices, such as fuses, circuit breakers, and relays, underground-fault conditions.
2. Security Contractor shall engineer and provide proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards referenced in this document.
3. Principal grounding components and features. Include main grounding buses and grounding and bonding connections to service equipment.
4. Details of interconnection with other grounding systems. The lightning protection system shall be provided by the Security Contractor.
5. Locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with the best practices of the trade and manufactures installation instructions.
8. Protection should be provided at both ends of cabling.

1.16 COMPONENT ENCLOSURES

A. Construction of Enclosures

1. Consoles, power supply enclosures, detector control and terminal cabinets, control units, wiring gutters, and other component housings, collectively referred to as enclosures, shall be so formed and assembled as to be sturdy and rigid.
2. Thickness of metal in-cast and sheet metal enclosures of all types shall not be less than those in Tables I and II, UL 611. Sheet steel used in fabrication of enclosures shall be not less than 14 gauge. Consoles shall be 16-gauge.
3. Doors and covers shall be flanged. Enclosures shall not have pre-punched knockouts. Where doors are mounted on hinges with exposed pins, the hinges shall be of the tight pin type or the ends of hinge pins shall be tack welded to prevent removal. Doors having a latch edge length of less than 609.6 mm (24 in) shall be provided with a single construction core. Where the latch edge of a hinged door is more than 609.6 mm (24 in) or more in length, the door shall be

provided with a three-point latching device with construction core; or alternatively with two, one located near each end.

4. Any ventilator openings in enclosures and cabinets shall conform to the requirements of UL 611. Unless otherwise indicated, sheet metal enclosures shall be designed for wall mounting with tip holes slotted. Mounting holes shall be in positions that remain accessible when all major operating components are in place and the door is open, but shall be in accessible when the door is closed.
5. Covers of pull and junction boxes provided to facilitate initial installation of the system shall be held in place by tamper proof Torx Center post security screws. Stenciled or painted labels shall be affixed to such boxes indicating they contain no connections. These labels shall not indicate the box is part of the Electronic Security System (ESS).

B. Consoles & Equipment Racks: All consoles and vertical equipment racks shall include a forced air-cooling system.

1. Vertical Equipment Racks:
   a. The forced air blowers shall be installed in the vented top of each cabinet and shall not reduce usable rack space.
   b. The forced air fan shall consist of one fan rated at 105 CFM per rack bay and noise level shall not exceed 55 decibels.
   c. d. Vertical equipment racks are to be provided with full sized clear plastic locking doors and vented top panels as shown on contract drawings.
2. Console racks:
   a. Forced air fans shall be installed in the top rear of each console bay. The forced air fan shall consist of one fan rated at 105 CFM mounted to a 133mm vented blank panel the noise level of each fan shall not exceed 55 decibels. The fans shall be installed so air is pulled from the bottom of the rack or cabinet and exhausted out the top.
   b. Console racks are to be provided with flush mounted hinged rear doors with recessed locking latch on the bottom and middle sections of the consoles. Provide code access to support wiring for devices located on the work surfaces.

C. Tamper Provisions and Tamper Switches:

1. Enclosures, cabinets, housings, boxes and fittings or every product description having hinged doors or removable covers and which

contain circuits, or the integrated security system and its power supplies shall be provided with cover operated, corrosion-resistant tamper switches.

2. Tamper switches shall be arranged to initiate an alarm signal that will report to the monitoring station when the door or cover is moved. Tamper switches shall be mechanically mounted to maximize the defeat time when enclosure covers are opened or removed. It shall take longer than 1 second to depress or defeat the tamper switch after opening or removing the cover. The enclosure and tamper switch shall function together in such a manner as to prohibit direct line of sign to any internal component before the switch activates.
3. Tamper switches shall be inaccessible until the switch is activated. Have mounting hardware concealed so the location of the switch cannot be observed from the exterior of the enclosure. Be connected to circuits which are under electrical supervision at all times, irrespective of the protection mode in which the circuit is operating. Be spring-loaded and held in the closed position by the door or cover and be wired so they break the circuit when the door cover is disturbed. Tamper circuits shall be adjustable type screw sets and shall be adjusted by the contractor to eliminate nuisance alarms associated with incorrectly mounted tamper device shall annunciate prior to the enclosure door opening (within 1/4 " tolerance. The tamper device or its components shall not be visible or accessing with common tools to bypass when the enclosure is in the secured mode.
4. The single gang junction boxes for the portrait alarming and pull boxes with less than 102 square mm will not require tamper switches.
5. All enclosures over 305 square mm shall be hinged with an enclosure lock.
6. Control Enclosures: Maintenance/Safety switches on control enclosures, which must be opened to make routing maintenance adjustments to the system and to service the power supplies, shall be push/pull-set automatic reset type.
7. Provide one (1) enclosure tamper switch for each 609 linear mm of enclosure lock side opening evenly spaced.
8. All security screws shall be Torx-Post Security Screws.

9. The contractor shall provide the owner with two (2) torx-post screwdrivers.

1.17 ELECTRONIC COMPONENTS

A. All electronic components of the system shall be of the solid-state type, mounted on printed circuit boards conforming to UL 796. Boards shall be plug-in, quick-disconnect type. Circuitry shall not be so densely placed as to impede maintenance. All power-dissipating components shall incorporate safety margins of not less than 25 percent with respect to dissipation ratings, maximum voltages, and current-carrying capacity.

1.18 SUBSTITUTE MATERIALS & EQUIPMENT

A. Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. In addition to this Section the Security Contractor shall also reference Section II, Products and associated divisions. The COR shall have final authority on the authorization or refusal of substitutions. If there are no proposed substitutions, a statement in writing from the Contractor shall be submitted to the COR stating same. In the preparation of a list of substitutions, the following information shall be included, as a minimum:

1. Identity of the material or devices specified for which there is a proposed substitution.
2. Description of the segment of the specification where the material or devices are referenced.
3. Identity of the proposed substitute by manufacturer, brand name, catalog or model number and the manufacturer’s product name.
4. A technical statement of all operational characteristic expressing equivalence to items to be substituted and comparison, feature-by-feature, between specification requirements and the material or devices called for in the specification; and Price differential.

C. Materials Not Listed: Furnish all necessary hardware, software, programming materials, and supporting equipment required to place the specified major subsystems in full operation. Note that some supporting equipment, materials, and hardware may not be described

herein. Depending on the manufacturers selected by the COR, some equipment, materials and hardware may not be contained in either the Contract Documents or these written specifications, but are required by the manufacturer for complete operation according to the intent of the design and these specifications. In such cases, the COR shall be given the opportunity to approve the additional equipment, hardware and materials that shall be fully identified in the bid and in the equipment list submittal. The COR shall be consulted in the event there is any question about which supporting equipment, materials, or hardware is intended to be included.

D. Response to Specification: The Contractor shall submit a point-by-point statement of compliance with each paragraph of the security specification. The statement of compliance shall list each paragraph by number and indicate "COMPLY" opposite the number for each paragraph where the Contractor fully complies with the specification. Where the proposed system cannot meet the requirements of the paragraph, and does not offer an equivalent solution, the offers shall indicate "DOES NOT COMPLY" opposite the paragraph number. Where the proposed system does not comply with the paragraph as written, but the bidder feels it will accomplish the intent of the paragraph in a manner different from that described, the offers shall indicate "COMPARABLE". The offers shall include a statement fully describing the "comparable" method of satisfying the requirement. Where a full and concise description is not provided, the offered system shall be considered as not complying with the specification. Any submission that does not include a point-by-point statement of compliance, as described above, shall be disqualified. Submittals for products shall be in precise order with the product section of the specification. Submittals not in proper sequence will be rejected.

1.19 LIKE ITEMS

A. Where two or more items of equipment performing the same function are required, they shall be exact duplicates produced by one manufacturer. All equipment provided shall be complete, new, and free of any defects.

1.20 WARRANTY

A. The Contractor shall, as a condition precedent to the final payment, execute a written guarantee (warranty) to the COR certifying all contract requirements have been completed according to the final specifications. Contract drawings and the warranty of all materials

and equipment furnished under this contract are to remain in satisfactory operating condition (ordinary wear and tear, abuse and causes beyond his control for this work accepted) for one (1) year from the date the Contactor received written notification of final acceptance from the COR. Demonstration and training shall be performed prior to system acceptance. All defects or damages due to faulty materials or workmanship shall be repaired or replaced without delay, to the COR's satisfaction, and at the Contractor's expense. The Contractor shall provide quarterly inspections during the warranty period. The contractor shall provide written documentation to the COR on conditions and findings of the system and device(s). In addition, the contractor shall provide written documentation of test results and stating what was done to correct any deficiencies. The first inspection shall occur 90 calendar days after the acceptance date. The last inspection shall occur 30 calendar days prior to the end of the warranty. The warranty period shall be extended until the last inspection and associated corrective actions are complete. When equipment and labor covered by the Contractor's warranty, or by a manufacturer's warranty, have been replaced or restored because of it’s failure during the warranty period, the warranty period for the replaced or repaired equipment or restored work shall be reinstated for a period equal to the original warranty period, and commencing with the date of completion of the replacement or restoration work. In the event any manufacturer customarily provides a warranty period greater than one (1) year, the Contractor's warranty shall be for the same duration for that component.

1.22 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

PART 2 – PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. All equipment associated within the Security Control Room, Security Console and Security Equipment Room shall be UL 827, UL 1981, and UL 60950 compliant and rated for continuous operation. Environmental

conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.

B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 8 hours of run time in the event of a loss of primary power to the facility.

C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All equipment and materials for the system will be compatible to ensure correct operation.

2.2 EQUIPMENT ITEMS

A. The Security Management System shall provide full interface with all components of the security subsystem as follows:

1. Shall allow for communication between the Physical Access Control System and Database Management and all subordinate work and monitoring stations, enrollment centers for badging and biometric devices as part of the PACS, local annunciation centers, the electronic Security Management System (SMS), and all other VA redundant or backup command center or other workstations locations.
2. Shall provide automatic continuous communication with all systems that are monitored by the SMS, and shall automatically annunciate any communication failures or system alarms to the SMS operator providing identification of the system, nature of the alarm, and location of the alarm.
3. Controlling devices shall be utilized to interface the SMS with all field devices.
4. The Security control room and security console will be supported by an uninterrupted power supply (UPS) or dedicated backup generator power circuit.
5. The Security Equipment room, Security Control Room, and Security Operator Console shall house the following equipment i.e. refer to individual master specifications for each security subsystem’s specific requirements:

   a. Security Console Bays and Equipment Racks

b. Security Network Server and Workstation
c. CCTV Monitoring, Controlling, and Recording Equipment
d. PACS Monitoring and Controlling Equipment
e. IDS Monitoring and Controlling Equipment
f. Security Access Detection Monitoring Equipment
g. EPPS Monitoring and Controlling Equipment
h. Main Panels for all Security Systems
i. Power Supply Units (PSU) for all field devices
j. Life safety and power monitoring equipment
k. All other building systems deemed necessary by the VA to include, but not limited to, heating, ventilation and air conditioning (HVAC), elevator control, portable radio, fire alarm monitoring, and other potential systems.
l. Police two-way radio control consoles/units.

B. Security Console Bays - shall be EIA 310D compliant and:
1. Utilize stand-up, sit-down, and vertical equipment racks in any combination to monitor and control the security subsystems.
2. Shall be wide enough for equipment that requires a minimum 19 inch (47.5 cm) mounting area.
3. Shall be made of metal, furnished with wire ways, a power strip, a thermostatic controlled bottom or top mounted fan units, a hinge mounted rear door, a hinge mounted front door made of Plexiglas, and a louvered top. When possible, pre-fabricated (standard off-the-shelf) security console equipment shall be used in place of customized designed consoles.
4. A wire management system shall be designed and installed so that all cables are mounted in a manner that they do not interfere with day-to-day operations, are labeled for quick identification, and so that high voltage power cables do not cause signal interference with low voltage and data carrying cables.
5. Shall be mounted on lockable casters.
6. Shall be ergonomically designed so that all devices requiring repetitive interaction with by the operator can be easily accessed, observed, and accomplished.
7. Controls and displays shall be located so that they are not obscured during normal operation. Control and display units installed with a work bench shall be a minimum of 3 in. (7.5 cm) from all edges of the work bench area.

8. All security subsystem controls shall be installed within the same operating console bay of their associated equipment.
9. Video monitors shall be mounted above all controls within a console bay and positioned in a manner that minimum strain is placed on the operator viewing them at the console.
10. At least one workbench for every three (3) console bays shall be provided free of control equipment to allow for appropriate operator workspace.
11. All console devices shall be labeled and marked with a minimum of quarter inch bold print.
12. All non-security related equipment that is required to be monitored shall be installed in a console bay separate from the security subsystem equipment and clearing be identified as such.
13. Console bays and related equipment shall be arranged in priority order and sequenced based upon their pre-defined security subsystem operations criticality established by the Contracting Officer.
14. The following minimum console technical characteristics shall be taken into consideration when designing for and installing the security console and equipment racks:

	Stand-Up	Sit-Down	Vertical Equipment Rack
Workstation Height	No Greater than 84 in. (210 cm)	No greater than 72 in. (150 cm)	No greater than 96 in. (240 cm)
Bench board Slope	21 in. (52.5 cm)	25 in. (62.5 cm)	N/A
Bench board Angle	15 degrees	15 degrees	N/A
Depth of Console	24 in. (60 cm)	24 in. (60 cm)	N/A
Leg and Feet Clearance	6 sq. ft. from center of Console Slope front	6 sq. ft. from center of Console Slope front	6 sq. ft. from center of Console Slope front
Distance Between Console Rows	96 in. (240 cm)	96 in. (240 cm)	96 in. (240 cm)
Distance Between Console and Wall	36 in. (90 cm) from the rear and/or side of console or rack	36 in. (90 cm) from the rear and/or side of console or rack	36 in. (90 cm) from the rear and/or side of console or rack

C. Security Console Configuration:

1. The size shall be defined by the number of console bays required to house and operate the security subsystems, as well as any other factors that may influence the overall design of the space. A small Access Control System and Database Management shall contain no more than four (4) security console bays. A large Access Control System and Database Management shall contain no less than five (5) and no more than eight (8) security console bays.
2. Shall meet the following minimum spacing requirements to ensure that a Access Control System and Database Management is provided to house existing and future security subsystems and other equipment listed in paragraph 2.3.C:
   a. 500 square feet for a large Access Control System and Database Management.
   b. 300 square feet for a small Access Control System and Database Management.
   c. If office, training room and conference space, is a processing area as well as holding cell space is to be located adjacent to the Access Control System and Database Management, these space requirements also need to be considered.
3. Shall be located in an area within, at a minimum, the first level/line of security defense defined by the VA. If the Access Control System and Database Management is to be located outside the first level of security, then the area shall be constructed or retrofit to meet or exceed those requirements outlined in associated VA Master Specifications.
4. Shall not be located within or near an area with little to no blast mitigation standoff space protection, adjacent to an outside wall exposed to vehicle parking and traffic, within a basement or potential flood zone area, in close approximately to major utility areas, or near an exposed air intake(s).
5. Access shall meet UFAS and ADA accessibility requirements.
6. Construction shall be slab to slab and free of windows, with the exception of a service window. All penetrations into the room shall be sealed with fire stopping materials. This material shall apply in accordance with Section 07 84 00, FIRESTOPPING.
7. A service window shall be installed in the wall next to the main entrance of the Access Control System and Database Management or

where it best can be monitored and accessed by the security console operator. The window shall meet all requirements set forth in UL 752, to include at a minimum, Class III ballistic level protection. The windows shall be set in a minimum or four (4) inches (100 mm) solid concrete units to ceiling height with either masonry or gypsum wall board to the underside of the slab above. It shall also contain a service tray constructed in a manner that only objects no larger than 3 inches (7.5 cm) in width may pass through it.

8. The walls making up or surrounding the Access Control System and Database Management shall be made of materials that at a minimum offer Class III ballistic level protection for the security console operator(s).
9. There will be a main power cut-off button/switch located inside the Access Control System and Database Management in the event of an electrical fire or related event occurs.
10. Shall have a fire alarm detection unit that is tied into the main building fire alarm system and have at least two fire extinguishers located within it.
11. Shall utilize a fire suppression system similar to that used by the VA's computer and telecommunications room operating areas.
12. The floor shall be raised a minimum of 4 inches (10 cm) from the concrete floor base. Wire ways shall be utilized under the raised floor for separation of signal and power wires and cables.
13. Access shall be monitored and controlled by the PACS via card reader and fixed camera that utilizes a wide angle lens. A 1 in. (2.5 cm) deadbolt shall be utilized as a mechanical override for the door in the event of electrical failure of the PACS, card reader, or locking mechanism.
14. There shall only be one point of ingress and egress to and from the Security Control Room. The door shall be made of solid core wood or better. If a window is required for the door, then the window shall be ballistic resistant with a Millar covering.
15. A two-way intercom shall be placed at the point of entry into the Security Control Room for access-communication control purposes.
16. A remote push-button door unlocking device shall not be installed for the electronic PACS locking mechanism providing access control into the Security Control Room.

17. All controlling equipment and power supplies that must be wall mounted shall be mounted in a manner that maximizes usability of the Security Control Room wall space. All equipment shall be mounted to three quarter inch fire retardant plywood. The plywood shall be fastened to the wall from slab to slab and fixed to the existing walls supports.

D. Security Control Room Ventilation

1. Shall meet or exceed all requirements laid out in VA Master Specification listed in Division 23, HEATING, VENTILATION, AND AIR CONDITIONING.
2. Controls shall be via a separate air handling system that provides an isolated supply and return system. The Security Control Room shall have a dedicated thermostat control unit and cut-off switch to be able to shut off ventilation to the control room in the event of a chemical, biological, or radiological (CBR) event or other related emergency.
3. There shall be a louver installed in the control room door to assist with ventilation of the room. The louver shall be exactly 12 x 12 inches (30 x 30 cm) and closeable.

E. Security Control Room and Security Console Lighting:

1. The following factors shall be taken into consideration for lighting of the Security Control Room and console area:
   a. Shadows: To reduce eye strain and fatigue, shadows shall be avoided.
   b. Glare: The readability of all display panels, labels, and equipment shall not be interfered with or create visibility problems.
2. The following table shall provide guidance on the amount of footcandles required per work area and type of task performed:

Work Area/Type of Task		Footcandles
Main Operating Panels		50
Secondary Display Panels		50
Seated Workstations		100
Reading	Handwriting	100
	Typed Documents	50
	Visual Display Units	10
Logbook Recording		100
Maintenance Area		50
Emergency/Back-up Lighting		10

F. Remote security console access: For facilities that have a remote, secondary back-up control console or workstation shall apply the following requirements:
   1. The secondary stations shall the requirements outlined in Sections 2.2.A-G.
   2. Installation of an intercom station or telephone line shall be installed and provide direct one touch call-up for communications between the primary Security Control Console and secondary Security Control Console.
   3. Secondary stations shall not have priority over a primary Security Control Console.
   4. The primary Access Control System and Database Management shall have the ability to shut off power and a signal to a secondary control station in the event the area has been compromised.

G. Wires and Cables:
   1. Shall meet or exceed the manufactures recommendation for power and signals.
   2. Shall be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
   3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
   4. All conduit, pull boxes, and junction boxes shall be marked with colored permanent tape or paint that will allow it to be distinguished from all other infrastructure conduit.
   5. Conduit fills shall not exceed 50 percent unless otherwise documented.
   6. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.
   7. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area.
   8. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security subsystems shall be any cable or sets of cables carrying 30 VDC/VAC or higher.

9. For all equipment that is carrying digital data between the Security Control Room, Security Equipment Room, Security Console, or at a remote monitoring station, it shall not be less that 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.

2.3 FIBER OPTIC EQUIPMENT

A. 8 Channel Fiber Optic Transcievers (Video&PTZ Control)

1. The field-located and central-located fiber optic transceivers shall utilize wave division multiplexing to transmit and receive video and data pan-tilt-zoom control signals over two standard 62.5/125 multimode fibers.
2. The units shall be capable of operating over a range of 2 km.
3. The units shall be NTSC color compatible.
4. The units shall support data rates up to 64 Kbps.
5. The units shall be surface or rack mountable.
6. The units shall be UL listed.
7. The units shall meet or exceed the following specifications:
   a. Video
      1) Input/Output: 1 volt pk-pk (75 ohms)
      2) Input/Output Channels: 8
      3) Bandwidth: 10 Hz - 6.5 MHZ per channel
      4) Differential Gain: <2%
      5) Differential Phase: <0.7°
      6) Tilt: <1%
      7) Signal to Noise Ratio: 60 dB
   b. Data (Control)
      1) Data Channels: 2
      2) Data Format: RS-232, RS-422, 2 wire or 4 wire RS-485 with Tri-State Manchester Bi-Phase and Sensornet
      3) Data Rate: DC - 100 kbps (NRZ)
      4) Bit Error Rate: < 1 in 10-9 @ Maximum Optical Loss Budget
      5) Operating Mode: Simplex or Full-Duplex
      6) Wavelength: 1310/1550 nm, Multimode or Singlemode
      7) Optical Emitter: Laser Diode
      8) Number of Fibers: 1
   c. Connectors

1) Optical: ST
2) Power and Data: Terminal Block with Screw Clamps
3) Video: BNC (Gold Plated Center-Pin)

d. Electrical and Mechanical
1) Power: 12 VDC @ 500 mA (stand-alone)
3) Current Protection: Automatic Resettable Solid-State Current Limiters

e. Environmental
1) MTBF: > 100,000 hours
2) Operating Temp: -40 to 74 deg C (-40 to 165 deg F)
3) Storage Temp: -40 to 85 deg C (-40 to 185 deg F)
4) Relative Humidity: 0% to 95% (non-condensing)

B. Fiber Optic Transmitters: The central-located fiber optic transmitters shall utilize wave division multiplexing to transmit video and signals over standard 62.5/125 multimode fibers.

1. The units shall be capable of operating over a range of 4.8 km.
2. The units shall be NTSC color compatible.
3. The units shall support data rates up to 64 Kbps.
4. The units shall be surface or rack mountable.
5. The units shall be UL listed.
6. The units shall meet or exceed the following specifications:

a. Video
1) Input: 1 volt pk-pk (75 ohms)
2) Bandwidth: 5H2 - 10 MHZ
3) Differential Gain: <5%
4) Tilt: <1%
5) Signal-Noise: 60db
6) Wavelength: 850nm
7) Number of Fibers: 1
8) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
9) Connectors:
a) Power: Female plug with screw clamps
b) Video: BNC
c) Optical: ST
10) Power: 12 VDC

C. Fiber Optic Receivers: The field-located fiber optic receivers shall utilize wave division multiplexing to receive video signals over standard 62.5/125 multimode fiber.

1. The units shall be capable of operating over a range of 4.8 km.
2. The units shall be NTSC color compatible.
3. The units shall support data rates up to 64 Kbps.
4. The units shall be surface or rack mountable.
5. The units shall be UL listed.
6. The units shall meet or exceed the following specifications:
   a. Video
      1) Output: 1 volt pk-pk (75 ohms)
      2) Bandwidth: 5H2 - 10 MHZ
      3) Differential Gain: <5%
      4) Tilt: <1%
      5) Signal-Noise: 60dB
      6) Wavelength: 850nm
      7) Number of Fibers: 1
      8) Surface Mount: 106.7 x 88.9 x 25.4 mm (4.2 x 3.5 x 1 in)
      9) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
      10) Connectors:
      11) Power: Female plug block with screw clamps
      12) Video: BNC
      13) Optical: ST
      14) Power: 12 VAC8 Channel Fiber Optic Transceivers (Video&PTZ Control)

D. Fiber Optic Sub Rack with Power Supply
   1. The Card Cage Rack shall provide high-density racking for fiber-optic modules. The unit shall be designed to mount in standard 483 mm (19 in) instrument racks and to accommodate the equivalent of 15 1-inch modules.
      a. Specifications
         1) Card Orientation: Vertical
         2) Construction: Aluminum
         3) Current Consumption: 0.99 A
         4) Humidity: 95.0 % RH
         5) Input Power: 100-240 VAC, 60/50 Hz
         6) Mounting: Mounts in standard 483 mm (19 in) rack using four (4) screws (optional wall brackets purchased separately)
         7) Number of Outputs: 1.0
         8) Number of Slots 15.0

9) Operating Temperature: -40 to +75 deg C (-40.0 to 167.0 deg F)
10) Ouput Voltage: 13.5 V
11) Output Current 6.0 A
12) Power Dissipation: 28.0 W
13) Power Factor: 48.0
14) Power Supply: (built-in)
15) Rack Units: 3RU
16) Redundant Capability: Yes
17) Weight: 2.43 kg (5.35 lb)
18) Width: 483 mm (19.0 in)

2.4 TRANSIENT VOLTAGE SURGE SUPPRESSION DEVICES (TVSS) AND SURGE SUPPRESION

A. Transient Voltage Surge Suppression

1. All cables and conductors extending beyond building perimeter, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage surge suppression protection (TVSS) UL listed in accordance with Standard 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 915 mm (36 in) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode using the following waveforms:
   a. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
   b. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
   c. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B or approved equivalent.
   d. Operating Temperature and Humidity: -40 to + 85 deg C (-40 to 185 deg F), and 0 to 95 percent relative humidity, non-condensing.

B. Physical Access Control Systems

1. Suppressors shall be installed on AC power at the point of service and shall meet the following criteria:
   a. UL1449 2nd Edition, 2007, listed
   b. UL1449 S.V.R. of 400 Volts or lower
   c. Status Indicator Light(s)
   d. Minimum Surge Current Capacity: 40,000 Amps (8 x 20 µsec)
   e. Maximum Continuous Current: 15 Amps
   f. MCOV: 125 VAC
   g. Service Voltage: 110-120 VAC
2. Suppressors shall be installed on the Low Voltage circuit at both the point of entrance and exit of the building. Suppressors shall meet the following criteria:
   a. UL 497B
   b. Minimum Surge Current Capacity: 2,000 Amps per pair
   c. Maximum Continuous Current: 5 Amps
   d. MCOV: 33 Volts
   e. Service Voltage: 24Volts
3. Suppressors shall be installed on the communication circuit between the access controller and card reader at both the entrance and exit of the building. Suppressors shall meet the following criteria:
   a. Conforms with UL497B standards (where applicable)
   b. Clamp level for 12 and 24V power: 18VDC / 38VDC
   c. Clamp level for Data/LED: 6.8VDC
   d. Service Voltage for Power: 12VDC/24VDC
   e. Service Voltage for Data/LED: <5VDC
   f. Clamp level - PoE Access Power: 72V
   g. Clamp level - PoE Access Data: 7.9V
   h. Service Voltage - PoE Access: 48VAC - 54VAC
   i. Service Voltage - PoE Data: <5VDC

C. Intercom Systems
1. Suppressors shall be installed on the AC power at the point of service and shall meet the following criteria:
   a. UL 1449 Listed
   b. UL 1449 S.V.R. of 400 Volts or lower
   c. Diagnostic Indicator Light(s)
   d. Integrated ground terminating post (where case/chassis ground exists)
   e. Minimum Surge Current Capacity of 13,000 Amps (8 x 20 µSec)

2. Suppressors shall be installed on incoming central office lines and shall meet the following criteria:
   a. UL 497A Listed
   b. Multi Stage protection design
   c. Auto-reset current protection not to exceed 2 Amps per pair
   d. Minimum Surge Current of 500 Amps per pair (8 x 20 µSec)
3. Suppressors shall be installed on all telephone/intercom circuits that enter or leave separate buildings and shall meet the following criteria:
   a. UL 497A Listed (where applicable)
   b. UL 497B Listed (horns, strobes, speakers or communication circuits over 300 feet)
   c. Multi Stage protection design
   d. Auto-reset over-current protection not to exceed 5 Amps per pair
   e. Minimum Surge Current of 1000 Amps per pair (8 x 20 µSec)

D. Intrusion Detection Systems
1. Suppressors shall be installed on AC at the point of service and shall meet the following criteria:
   a. UL 1449, 2nd Edition 2007, listed
   b. UL 1449 S.V.R. of 400 Volts or lower
   c. Status Indicator Lights
   d. Center screw for terminating Class II transformers
   e. Minimum Surge Current Capacity of 32,000 Amps (8 x 20 µSec)
2. Suppressors shall be installed on all Telephone Communication Interface circuits and shall meet the following criteria:
   a. UL 497A Listed
   b. Multi Stage protection design
   c. Surge Current Capacity: 9,000 Amps (8x20 µSec)
   d. Clamp Voltage: 130Vrms
   e. Auto reset current protection not to exceed 150 Milliamps
3. Suppressors shall be installed on all burglar alarm initiating and signaling loops and addressable circuits which enter or leave separate buildings. The following criteria shall be met:
   a. UL 497B for data communications or annunciation (powered loops)
   b. Fail-short/fail-safe mode.
   c. Surge Current Capacity: 9,000 Amps (8x20 µSec)
   d. Clamp Voltage: 15 Vrms

e. Joule Rating: 76 Joules per pair (10x1000 µSec)

f. Auto-reset current protection not to exceed 150 milliamps for UL 497A devices.

E. Video Surveillance System

1. Protectors shall be installed on coaxial cable systems on points of entry and exit from separate buildings. Suppressors shall be installed at each exterior camera location and include protection for 12 and/or 24 volt power, data signal and motor controls (for Pan, Tilt and Zoom systems). SPDs shall protect all modes herein mentioned and contain all modes in a single unit system. Protection for all systems mentioned above shall be incorporated at the head end equipment. Additionally a minimum 450VA battery backup shall be used to protect the DVR or VCR and monitor. Protectors shall meet the following criteria:

a. Head-End Power

1) UL 1778, cUL (Battery Back Up)

2) Minimum Surge Current Capacity: 65,000 Amps (8x20µsec)

3) Minimum of two (2) NEMA 5-15R Receptacles (one (1) AC power only, one (1) with UPS)

4) All modes protected (L-N, L-G, N-G)

5) EMI/RFI Filtering

6) Maximum Continuous Current: 12 Amps

b. Camera Power

1) Minimum Surge Current Capacity: 1,000 Amps (8X20µsec); 240 Amps for IP Video/PoE cameras

2) Screw Terminal Connection

3) All protection modes L-G (all Lines)

4) MCOV <40VAC

c. Video And Data

1) Surge Current Capacity 1,000 Amps per conductor

2) "BNC" Connection (Coax)

3) Protection modes: L-G (Data), Center Pin-G, Shield-G (Coax)

4) Band Pass 0-2GHz

5) Insertion Loss <0.3dB

F. Grounding and Surge Suppression

1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. This is to ensure the operation of over current

devices, such as fuses, circuit breakers, and relays, underground-fault conditions.

2. The Contractor shall engineer, provide, ad install proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards, referenced in this document.
3. Principal grounding components and features shall include: main grounding buses, grounding, and bonding connections to service equipment.
4. The Contractor shall provide detail drawings of interconnection with other grounding systems including lightning protection systems.
5. The Contractor shall provide details of locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with applicable codes, the best practices of the trade, and all manufactures' installation instructions.

G. 120 VAC Surge Suppression

1. Continuous Current: Unlimited (parallel connection)
2. Max Surge Current: 13,500 Amps
3. Protection Modes: L - N, L - G, N - G
4. Warranty: Ten Year Limited Warranty
5. Dimension: 73.7 x 41.1 x 52.1 mm (2.90 x 1.62 x 2.05 in)
6. Weight: 2.88 g (0.18 lbs)
7. Housing: ABS

2.5 INSTALLATION KIT

A. General:

1. The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware shall be turned

over to the Contracting Officer. The following sections outline the minimum required installation sub-kits to be used:

2. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Coaxial Cable Shields
      2) Control Cable Shields
      3) Data Cable Shields
      4) Equipment Racks
      5) Equipment Cabinets
      6) Conduits
      7) Cable Duct blocks
      8) Cable Trays
      9) Power Panels
      10) Grounding
      11) Connector Panels
3. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
4. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
5. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
6. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
7. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each

subsystem according to the OEM requirements, as-installed drawings, and this document.

8. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to provide the system documentation as required by this document and explained herein.

PART 3 - EXECUTION

3.1 COMMON REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATION

A. Comply with NECA 1.

B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.

C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.

D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electronic safety and security equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.

E. Right of Way: Give to piping systems installed at a required slope.

F. Equipment location shall be as close as practical to locations shown on the drawings.

G. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.

2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

3.2 FIRESTOPPING

A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electronic safety and security installations to restore original fire-resistance rating of assembly. Firestopping materials

and installation requirements are specified in Division 07 Section 07 84 00 "Firestopping."

3.3 COMMISIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 - COMMISIONIN OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.4 DEMONSTRATION AND TRAINING

A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

B. Training shall be provided for the particular equipment or system as required in each associated specification.

C. A training schedule shall be developed and submitted by the contractor and approved by the COR at least 30 days prior to the planned training.

D. Provide services of manufacturer’s technical representative for <insert hours> hours to instruct VA personnel in operation and maintenance of units.

E. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

3.5 WORK PERFORMANCE

A. Job site safety and worker safety is the responsibility of the contractor.

B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

D. Coordinate location of equipment and conduit with other trades to minimize interferences. See the GENERAL CONDITIONS.

3.6 SYSTEM PROGRAMMING

A. General Programming Requirements

1. This following section shall be used by the contractor to identify the anticipated level of effort (LOE) required setup, program, and configure the Electronic Security System (ESS). The contractor shall be responsible for providing all setup, configuration, and programming to include data entry for the Security Management System (SMS) and subsystems (e.g., video matrix switch, intercoms, digital video recorders, intrusion devices, including integration of subsystems to the SMS (e.g., camera call up, time synchronization, intercoms). System programming for existing or new SMS servers shall not be conducted at the project site.

B. Level of Effort for Programming

1. The Contractor shall perform and complete system programming (including all data entry) at an offsite location using the Contractor's own copy of the SMS software. The Contractor's copy of the SMS software shall be of the Owners current version. Once system programming has been completed, the Contractor shall deliver the data to the COR on data entry forms and an approved electronic medium, utilizing data from the contract documents. The completed forms shall be delivered to the COR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires it. The Contractor shall not upload system programming until the COR has provided written approval. The Contractor is responsible for backing up the system prior to uploading new programming data. Additional programming requirements are provided as follows:
   a. Programming for New SMS Server: The contractor shall provide all other system related programming. The contractor will be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, personnel photos, access schedules, personnel groupings) along with coordinating with COR for device configurations, standards, and groupings. VA shall provide database to support Contractor's data entry tasks. The contractor shall anticipate a weekly coordination meeting and working with COR to ensure data uploading is performed without incident of loss of function or data loss.
   b. Programming for Existing SMS Servers: The contractor shall perform all related system programming except for personnel data

as noted. The contractor will not be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, access schedules, personnel groupings). The contractor shall anticipate a weekly coordination meeting and working alongside of COR to ensure data uploading is performed without incident of loss of function or data loss. System programming for SMS servers shall be performed by using the Contractor’s own server and software. These servers shall not be connected to existing devices or systems at any time.

2. The Contractor shall identify and request from the COR, any additional data needed to provide a complete and operational system as described in the contract documents.
3. Contractor and COR coordination on programming requires a high level of coordination to ensure programming is performed in accordance with VA requirements and programming uploads do not disrupt existing systems functionality. The contractor shall anticipate a minimum a weekly coordination meeting. Contractor shall ensure data uploading is performed without incident of loss of function or data loss. The following Level of Effort Chart is provided to communicate the expected level of effort required by contractors on VA ESS projects. Calculations to determine actual levels of effort shall be confirmed by the contractor before project award.

	Description of Tasks						
Description of Systems	Develop System Loading Sheets	Coordination	Initial Set-up Configuration	Graphic Maps	System Programming	Final Checks	Level of Effort (Typical Tasks)

SMS Setup & Configuration	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., retrieve IP addresses, naming conventions, standard event descriptions, programming templates, coordinate special system needs	e.g., Load system Operating System and Application software, general system configurations	e.g., develop naming conventions, develop file folders, confirming accuracy of AutoCAD Floor Plans, convert file into jpeg file	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., check all system diagnostics (e.g., clients, panels)	Load and set-up 4-6 CDs and configure servers (to configure Loading and Configuring software Administrative account, audit log, Keystrokes, mouse clicks, multi-screen configuration

Electronic Entry Control Systems	e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., performing entry testing to confirm correct set-up and configuration	e.g., creating a door, door configuration, adding request to exit, door monitors and relays, door timers, door related events (e.g., access, access denied, forced open, held open), linkages, controlled areas, advanced door monitoring, time zones, sequence of operations

Intrusion Detection Systems	e.g., enter door groups & schedules, link devices – REX, lock, & graphics	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., enter door groups & schedules, link devices – REX, lock, & graphics	e.g., walk test, device position, and masking	e.g., setting up monitoring and control points (e.g., motion sensors, glassbreaks, vibration sensor, strobes, sounders) creating intrusion zones, creating arm/disarm panel, timed sequences, time zones, icon placements on graphic maps, clearance levels, events (e.g., armed, disarmed, zone violation, device alarm activations), LCD reader messages,

CCTV Systems	e.g., programming call-ups recording	e.g., confirming device configurations, naming conventions	e.g., enter data from loading sheets; camera naming convention, sequences, configure components)		e.g., programming call-ups recording	e.g., confirm area of coverage, call-up per event generated and recording rates	e.g., setting up cameras points, recording ratios (e.g., normal, alarm event) timed recording, linkages, maps placements, call-ups
Intercoms Systems	e.g., programming events & call-ups	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., programming events & call-ups	e.g., confirm operation, SMS event generation and camera call-up	e.g., setup linkages, events for activations, device troubles, land devices on graphic maps
Console Monitoring Components	N/A	per monitor	per monitor	per graphic map	N/A	per monitor	N/A
Note: Programming tasks are supported through the contractor's development of the Technical Data Package Submittals.							

Table 1 Contractor Level of Effort

3.7 TESTING AND ACCEPTANCE

A. Performance Requirements

1. General:

a. The Contractor shall perform contract field, performance verification, and endurance testing and make adjustments of the completed security system when permitted. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing. Written notification of planned testing shall be given to the COR at least 60 calendar days prior to the test and after the Contractor has received written approval of the specific test procedures.

b. The COR shall witness all testing and system adjustments during testing. Written permission shall be obtained from the COR before proceeding with the next phase of testing. Original copies of all data produced during performance verification and endurance testing shall be turned over to the COR at the conclusion of each phase of testing and prior to COR approval of the test.

2. Test Procedures and Reports: The test procedures, compliant w/ VA standard test procedures, shall explain in detail, step-by-step actions and expected results demonstrating compliance with the requirements of the specification. The test reports shall be used to document results of the tests. The reports shall be delivered to the COR within seven (7) calendar days after completion of each test.

B. Pre-Delivery Testing

1. The purpose of the pre-delivery test is to establish that a system is suitable for installation. As such, pre-delivery test shall be a mock-up of the system as planned in the contract documents. The Contractor shall assemble the Security Test System at the Contractors local project within 50-miles of the project site, and perform tests to demonstrate the performance of the system complies with the contract requirements in accordance with the approved pre-delivery test procedures. The tests shall take place during regular daytime working hours on weekdays. Model numbers of equipment tested shall be identical to those to be delivered to the site. Original copies of all data produced during pre-delivery testing, including results of each test procedure, shall be documented and

delivered to the COR at the conclusion of pre-delivery testing and prior to COR's approval of the test. The test report shall be arranged so all commands, stimuli, and responses are correlated to allow logical interpretation. For Existing System modifications, the contractor shall provide their own server with loaded applicable software to support PDT.

2. Test Setup: The pre-delivery test setup shall include the following:
   a. All console equipment.
      1) At least one of each type of data transmission media (DTM) and associated equipment to provide a fully integrated PACS.
      2) The number of local processors shall equal the amount required by the site design.
      3) Enough sensor simulators to provide alarm signal inputs to the system equal to the number of sensors required by the design. The alarm signals shall be manually or software generated.
      4) Contractor to prove to owner all systems are appropriately sized and configured as sized.
      5) Integration of VASS, intercom systems, other subsystems.
3. During the bidding process the contractor shall submit a request for information to the Owner to determine if a pre-delivery test will be required. If a pre-delivery test is not required, the contractor shall provide a written notification that the Pre-delivery Test is not required in their shop drawings submission.

C. Intermediate Testing
1. After completion of 30-50 percent of the installation of ESS cabinet(s) and equipment, one local and remote control stations and prior to any further work, this portion of the system must be pretested, inspected, and certified. Each item of installed equipment shall be checked to ensure appropriate FCC listing & UL certification labels are affixed, NFPA, Emergency, Safety, and JCAHCO guidelines are followed, and proper installation practices are followed. The intermediate test shall include a full operational test.

D. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a designated Government Representative and maintained on file by the COR

(RE), until completion of the entire project. The results will be compared to the Acceptance Test results.

E. Contractor's Field Testing (CFT)

1. The Contractor shall calibrate and test all equipment, verify DTM operation, place the integrated system in service, and test the integrated system. Ground rods installed by this Contractor within the base of camera poles shall be tested as specified in IEEE STD 142. The Contractor shall test all security systems and equipment, and provide written proof of a 100% operational system before a date is established for the system acceptance test. Documentation package for CFT shall include completed (fully annotated details of test details) for each device and system tested, and annotated loading sheets documenting complete testing to COR approval. CFT test documentation package shall conform to submittal requirements outlined in this Section.The Contractor's field testing procedures shall be identical to the COR's acceptance testing procedures. The Contractor shall provide the COR with a written listing of all equipment and software indicating all equipment and components have been tested and passed. The Contractor shall deliver a written report to theCOR stating the installed complete system has been calibrated, tested, and is ready to begin performance verification testing; describing the results of the functional tests, diagnostics, and calibrations; and the report shall also include a copy of the approved acceptance test procedure. Performance verification testing shall not take place until written notice by contractor is received certifying that a contractors field test was successful.

F. Performance Verification Test (PVT)

1. Test team:

a. After the system has been pretested and the Contractor has submitted the pretest results and certification to the COR, then the Contractor shall schedule an acceptance test to date and give the COR written, notice as described herein, prior to the date the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative, an OEM certified representative, representative of the Contractor and other approved by the COR. The system shall be tested utilizing the approved test equipment to certify proof of performance, FCC,

UL and Emergency Service compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The Contractor shall demonstrate the completed Physical Access Control System PACS complies with the contract requirements. In addition, the Contractor shall provide written certification that the system is 100% operational prior to establishing a date for starting PVT. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The PVT will be stopped and aborted as soon as 10 technical deficiencies are found requiring correction. The Contractor shall be responsible for all travel and lodging expenses incurred for out-of-town personnel required to be present for resumption of the PVT. If the acceptance test is aborted, the re-test will commence from the beginning with a retest of components previously tested and accepted.
3. The PVT, as specified, shall not begin until receipt of written certification that the Contractors Field Testing was successful. This shall include certification of successful completion of testing as specified in paragraph "Contractor's Field Testing", and upon successful completion of testing at any time when the system fails to perform as specified. Upon termination of testing by the COR or Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II.
4. Upon successful completion of the acceptance test, the Contractor shall deliver test reports and other documentation, as specified, to the COR prior to commencing the endurance test.
5. Additional Components of the PVT shall include:
   a. System Inventory
      1) All Device equipment
      2) All Software
      3) All Logon and Passwords
      4) All Cabling System Matrices
      5) All Cable Testing Documents
      6) All System and Cabinet Keys
   b. Inspection

1) Contractor shall record an inspection punch list noting all system deficiencies. The contractor shall prepare an inspection punch list format for CORs approval.
2) As a minimum the punch list shall include a listing of punch list items, punch list item location, description of item problem, date noted, date corrected, and details of how item was corrected.

6. Partial PVT - At the discretion of COR, the Performance Verification Test may be performed in part should a 100% compliant CFT be performed. In the event that a partial PVT will be performed instead of a complete PVT; the partial PVT shall be performed by testing 10% of the system. The contractor shall perform a test of each procedure on select devices or equipment.

G. Endurance Test

1. The Contractor shall demonstrate the specified probability of detection and false alarm rate requirements of the completed system. The endurance test shall be conducted in phases as specified below. The endurance test shall not be started until the COR notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. VA shall operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing. VA will maintain a log of all system deficiencies. The COR may terminate testing at any time the system fails to perform as specified. Upon termination of testing, the Contractor shall commence an assessment period as described for Phase II. During the last day of the test, the Contractor shall verify the appropriate operation of the system. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the COR prior to acceptance of the system.
2. Phase I (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COR. If the system experiences no failures, the Contractor may

proceed directly to Phase III testing after receiving written permission from the COR.

3. Phase II (Assessment):
   a. After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
   b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COR. The meeting shall not be scheduled earlier than five (5) business days after the COR receives the report. As part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor’s report and the test review meeting, the COR will provide a written determine of either the restart date or require Phase I be repeated.
4. Phase III (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COR.
5. Phase IV (Assessment):
   1. After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
   2. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COR. The meeting shall not be scheduled earlier than five (5) business days after receipt of the report by the COR. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions for the performance

verification test. Based on the review meeting the test should not be scheduled earlier than five (5) business days after the COR receives the report. As a part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the COR will provide a written determine of either the restart date or require Phase III be repeated. After the conclusion of any re-testing which the COR may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.

H. Exclusions

1. The Contractor will not be held responsible for failures in system performance resulting from the following:
   a. An outage of the main power in excess of the capability of any backup power source provided the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the PACS performed as specified.
   b. Failure of an Owner furnished equipment or communications link, provided the failure was not due to Contractor furnished equipment, installation, or software.
   c. Failure of existing Owner owned equipment, provided the failure was not due to Contractor furnished equipment, installation, or software.

- - - E N D - - -

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 28 05 13
CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification the conductors and cables required for a fully functional for electronic safety and security (ESS) system.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
B. Section 07 84 00 – JOINT FIRESTOPPING. Requirements for firestopping application and use.
C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
D. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
E. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SECURITY AND SAFETY. Requirements for infrastructure.
F. Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for commissioning.
G. Section 31 20 11 - EARTHWORK. For excavation and backfill for cables that are installed in conduit.

1.3 DEFINITIONS

A. BICSI: Building Industry Consulting Service International.
B. EMI: Electromagnetic interference.
C. IDC: Insulation displacement connector.
D. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).
E. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.
F. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).
G. RCDD: Registered Communications Distribution Designer.

H. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

I. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

J. UTP: Unshielded twisted pair.

1.4 QUALITY ASSURANCE

A. See section 28 05 00, Paragraph 1.4.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certificates: Two weeks prior to final inspection, deliver to the COR four copies of the certification that the material is in accordance with the drawings and specifications and diagrams for cable management system.
3. Shop Drawings: Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
   a. Vertical and horizontal offsets and transitions.
   b. Clearances for access above and to side of cable trays.
   c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
   d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.
   e. System labeling schedules, including electronic copy of labeling schedules that are part of the cable and asset identification system of the software specified in Parts 2 and 3.
4. Wiring Diagrams. Show typical wiring schematics including the following:
   a. Workstation outlets, jacks, and jack assemblies.
   b. Patch cords.
   c. Patch panels.
5. Cable Administration Drawings: As specified in Part 3 "Identification" Article.

6. Project planning documents as specified in Part 3.
7. Maintenance Data: For wire and cable to include in maintenance manuals.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by the basic designation only.

B. American Society of Testing Material (ASTM):

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

C. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

D. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-05.....Thermoset-Insulated Wires and Cables
83-08.....Thermoplastic-Insulated Wires and Cables
467-07.....Electrical Grounding and Bonding Equipment
486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors
486C-04.....Splicing Wire Connectors
486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations
486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
514B-04.....Fittings for Cable and Conduit
1479-03.....Fire Tests of Through-Penetration Fire Stops

1.7 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test each pair of UTP cable for open and short circuits.

1.8 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install UTP, optical fiber, and coaxial cables and connecting materials until wet work in

spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 GENERAL

A. General: All cabling locations shall be in conduit systems as outlined in Division 28 unless a waiver is granted in writing or an exception is noted on the construction drawings.

A. Support of Open Cabling: NRTL labeled for support of Category 6A cabling, designed to prevent degradation of cable performance and pinch points that could damage cable.

1. Support brackets with cable tie slots for fastening cable ties to brackets.
2. Lacing bars and spools.
3. Straps and other devices.

B. Cable Trays:

1. Basket Cable Trays: 6 inches (150 mm) wide and 4 inches (50 mm) deep Wire mesh spacing shall not exceed 2 by 4 inches (50 by 100 mm).
2. Trough Cable Trays: Nominally 6 inches (150 mm) wide.
3. Ladder Cable Trays: Nominally 18 inches (455 mm)] wide, and a rung spacing of 12 inches (305 mm).
4. Channel Cable Trays: One-piece construction, nominally 4 inches (100 mm) wide. Slot spacing shall not exceed 4-1/2 inches (115 mm) o.c.

C. Conduit and Boxes: Comply with requirements in Division 28 Section "Conduits and Backboxes for Electrical Systems." Flexible metal conduit shall not be used.

1. Outlet boxes shall be no smaller than 2 inches (50 mm) wide, 3 inches (75 mm) high, and 2-1/2 inches (64 mm) deep.

2.2 BACKBOARDS

A. Backboards: Plywood, fire-retardant treated, 3/4 by 48 by 96 inches (19 by 1220 by 2440 mm). Comply with requirements for plywood backing panels in Division 06 Section "Rough Carpentry".

2.3 UTP CABLE

A. Description: 100-ohm, 4-pair UTP, formed into 25-pair binder groups covered with a blue thermoplastic jacket.

1. Comply with ICEA S-90-661 for mechanical properties.
2. Comply with TIA/EIA-568-B.1 for performance specifications.
3. Comply with TIA/EIA-568-B.2, Category 6A.
4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
   a. Communications, General Purpose: Type CMP.
   b. Communications, Plenum Rated: Type CMP, complying with NFPA 262.
   c. Communications, Riser Rated: Type CMR, complying with UL 1666.
   d. Communications, Limited Purpose: Type CMX.
   e. Multipurpose: Type MP or MPG.
   f. Multipurpose, Plenum Rated: Type MPP, complying with NFPA 262.
   g. Multipurpose, Riser Rated: Type MPR, complying with UL 1666.

2.4 UTP CABLE HARDWARE

A. UTP Cable Connecting Hardware: IDC type, using modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of the same category or higher.

B. Connecting Blocks: 110-style for Category 5e. Provide blocks for the number of cables terminated on the block, plus 25 percent spare. Integral with connector bodies, including plugs and jacks where indicated.

2.5 RS-232 CABLE

A. Standard Cable: NFPA 70, Type CM.
   1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
   2. Polypropylene insulation.
   3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
   4. PVC jacket.
   5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
   6. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
   1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
   2. Plastic insulation.
   3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.

4. Plastic jacket.
5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with NFPA 262.

2.6 RS-485 CABLE

A. Standard Cable: NFPA 70, Type CM or CMG.
1. Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Fluorinated ethylene propylene jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.7 LOW-VOLTAGE CONTROL CABLE

A. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with NFPA 262.

C. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. PVC insulation.

3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

D. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Plastic jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.8 CONTROL-CIRCUIT CONDUCTORS

A. Class 1 Control Circuits: Stranded copper, Type THHN-THWN, in raceway complying with UL 83.

B. Class 2 Control Circuits: Stranded copper, Type THHN-THWN, in raceway, power-limited cable, concealed in building finishes, power-limited tray cable, in cable tray complying with UL 83.

C. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type TW or TF, complying with UL 83.

2.9 FIRE ALARM WIRE AND CABLE

A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

B. Signaling Line Circuits: Twisted, shielded pair, not less than No. 18 AWG size as recommended by system manufacturer.
1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a 2-hour rating.

C. Non-Power-Limited Circuits: Solid-copper conductors with 600-V rated, 75 deg C, color-coded insulation.
1. Low-Voltage Circuits: No. 16 AWG, minimum.
2. Line-Voltage Circuits: No. 12 AWG, minimum.
3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor with outer jacket with red identifier stripe, NTRL listed for fire alarm and cable tray installation, plenum rated, and complying with requirements in UL 2196 for a 2-hour rating.

2.10 IDENTIFICATION PRODUCTS

A. Comply with UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.11 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to evaluate cables.

B. Factory test UTP and optical fiber cables on reels according to TIA/EIA-568-B.1.

C. Factory test UTP cables according to TIA/EIA-568-B.2.

D. Factory test multimode optical fiber cables according to TIA/EIA-526-14-A and TIA/EIA-568-B.3.

E. Factory sweep test coaxial cables at frequencies from 5 MHz to 1 GHz. Sweep test shall test the frequency response, or attenuation over frequency, of a cable by generating a voltage whose frequency is varied through the specified frequency range and graphing the results.

F. Cable will be considered defective if it does not pass tests and inspections.

G. Prepare test and inspection reports.

2.12 WIRE LUBRICATING COMPOUND

A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.

B. Shall not be used on wire for isolated type electrical power systems.

2.13 FIREPROOFING TAPE

A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.

B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.

C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.

D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.

E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

PART 3 - EXECUTION

3.1 INSTALLATION OF CONDUCTORS AND CABLES

A. Comply with NECA 1.

B. General Requirements for Cabling:

1. Comply with TIA/EIA-568-B.1.
2. Comply with BICSI ITSIM, Ch. 6, "Cable Termination Practices."
3. Install 110-style IDC termination hardware unless otherwise indicated.
4. Terminate all conductors; no cable shall contain un-terminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
5. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
6. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIM, "Cabling Termination Practices" Chapter. Install lacing bars and distribution spools.
7. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
8. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
9. Pulling Cable:
   a. Comply with BICSI ITSIM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
   b. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
   c. Use ropes made of nonmetallic material for pulling feeders.
   d. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COR.
   e. Pull in multiple cables together in a single conduit.

C. Splice cables and wires where necessary only in outlet boxes, junction boxes, or pull boxes.
   1. Splices and terminations shall be mechanically and electrically secure.
   2. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

D. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.

E. Unless otherwise specified in other sections install wiring and connect to equipment/devices to perform the required functions as shown and specified.

F. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.

G. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

H. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.

I. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.

J. UTP Cable Installation:

1. Comply with TIA/EIA-568-B.2.
2. Do not untwist UTP cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.

K. Optical Fiber Cable Installation:

1. Comply with TIA/EIA-568-B.3.
2. Cable shall be terminated on connecting hardware that is rack or cabinet mounted.

L. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend copper cable not in a wireway or pathway a minimum of 8 inches (200 mm) above ceilings by cable supports not more than 60 inches (1525 mm)apart, or closer to prevent cable droop exceeding 12”.
3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

M. Installation of Cable Routed Exposed under Raised Floors:

1. Install plenum-rated cable only.

2. Install cabling after the flooring system has been installed in raised floor areas.
3. Coil cable 72 inches (1830 mm) long shall be neatly coiled not less than 12 inches (300 mm) in diameter below each feed point.

N. Outdoor Coaxial Cable Installation:
1. Install outdoor connections in enclosures complying with NEMA 250, Type 4X. Install corrosion-resistant connectors to keep out moisture.
2. Attach antenna lead-in cable to support structure at intervals not exceeding 36 inches (915 mm).

O. Separation from EMI Sources:
1. Comply with BICSI TDMM and TIA/EIA-569-A recommendations for separating unshielded copper voice and data communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).
3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.

b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (75 mm).

c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).

5. Separation between Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).

6. Separation between Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

3.2 FIRE ALARM WIRING INSTALLATION

A. Comply with NECA 1 and NFPA 72.

B. Wiring Method: Install wiring in metal raceway according to Division 28 Section CONDUITS AND BACKBOXES FOR ELECTRICAL SYSTEMS."

1. Install plenum cable in environmental air spaces, including plenum ceilings.

2. Fire alarm circuits and equipment control wiring associated with the fire alarm system shall be installed in a dedicated raceway system. This system shall not be used for any other wire or cable.

C. Wiring Method:

1. Cables and raceways used for fire alarm circuits, and equipment control wiring associated with the fire alarm system, may not contain any other wire or cable.

2. Fire-Rated Cables: Use of 2-hour, fire-rated fire alarm cables, NFPA 70, Types MI and CI, is not permitted.

3. Signaling Line Circuits: Power-limited fire alarm cables may be installed in the same cable or raceway as signaling line circuits.

D. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess.Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks. Mark each terminal according to the system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes, cabinets, or equipment enclosures where circuit connections are made.

F. Color-Coding: Color-code fire alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use different colors for visible alarm-indicating devices. Paint fire alarm system junction boxes and covers red.

G. Risers: Install at least two vertical cable risers to serve the fire alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent the receipt or transmission of signals from other floors or zones.

H. Wiring to Remote Alarm Transmitting Device: 1-inch (25-mm) conduit between the fire alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.3 CONTROL CIRCUIT CONDUCTORS

A. Minimum Conductor Sizes:

1. Class 1 remote-control and signal circuits, No. 14 AWG.
2. Class 2 low-energy, remote-control and signal circuits, No. 16 AWG.
3. Class 3 low-energy, remote-control, alarm and signal circuits, No. 12 AWG.

3.4 CONNECTIONS

A. Comply with requirements in Division 28 Section, PHYSICAL ACCESS CONTROL for connecting, terminating, and identifying wires and cables.

B. Comply with requirements in Division 28 Section "INTRUSION DETECTION" for connecting, terminating, and identifying wires and cables.

C. Comply with requirements in Division 28 Section "VIDEO SURVEILLANCE" for connecting, terminating, and identifying wires and cables.

D. Comply with requirements in Division 28 Section "ELECTRONIC PERSONAL PROTECTION SYSTEMS" for connecting, terminating, and identifying wires and cables.

E. Comply with requirements in Division 28 Section "FIRE DETECTION AND ALARM" for connecting, terminating, and identifying wires and cables.

3.5 FIRESTOPPING

A. Comply with requirements in Division 07 Section "PENETRATION FIRESTOPPING."

B. Comply with TIA/EIA-569-A, "Firestopping" Annex A.

C. Comply with BICSI TDMM, "Firestopping Systems" Article.

3.6 GROUNDING

A. For communications wiring, comply with ANSI-J-STD-607-A and with BICSI TDMM, "Grounding, Bonding, and Electrical Protection" Chapter.

B. For low-voltage wiring and cabling, comply with requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY."

3.7 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA/EIA-606-A.

B. Install a permanent wire marker on each wire at each termination.

C. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

D. Wire markers shall retain their markings after cleaning.

E. In each handhole, install embossed brass tags to identify the system served and function.

3.8 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Visually inspect UTP and optical fiber cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA/EIA-568-B.1.

2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.

3. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.

   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

4. Optical Fiber Cable Tests:

a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.1. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.

b. Link End-to-End Attenuation Tests:

1) Multimode Link Measurements: Test at 850 or 1300 nm in 1 direction according to TIA/EIA-526-14-A, Method B, One Reference Jumper.

2) Attenuation test results for links shall be less than 2.0 dB. Attenuation test results shall be less than that calculated according to equation in TIA/EIA-568-B.1.

5. Coaxial Cable Tests: Comply with requirements in Division 27 Section "Master Antenna Television System."

D. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.

E. End-to-end cabling will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

3.9 EXISTING WIRING

A. Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

SECTION 28 05 26
GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification of the grounding and bonding required for a fully functional Electronic Safety and Security (ESS) system.

B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, grounding electrodes.

C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 26 41 00 - FACILITY LIGHTNING PROTECTION. Requirements for a lightning protection system.

C. Section 28 05 00 - REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS. For general electrical requirements, quality assurance, coordination, and project conditions that are common to more than one section in Division 28.

D. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for low voltage power and lighting wiring.

E. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for commissioning.

1.3 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

B. Shop Drawings:

1. Clearly present enough information to determine compliance with drawings and specifications.
2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.

C. Test Reports: Provide certified test reports of ground resistance.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COR:

1. Certification that the materials and installation are in accordance with the drawings and specifications.

2. Certification by the contractor that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07.....National Electrical Safety Code

D. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

99-2005.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-05 .....Thermoset-Insulated Wires and Cables

83-08 .....Thermoplastic-Insulated Wires and Cables

467-07 .....Grounding and Bonding Equipment

486A-486B-03 .....Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be UL 83 insulated stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.

B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be ASTM B1 solid bare copper wire.

2.2 GROUND RODS

A. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.

B. Quantity of rods shall be as required to obtain the specified ground resistance.

2.3 SPLICES AND TERMINATION COMPONENTS

A. Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).2.4 ground connections

B. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

C. Below Grade: Exothermic-welded type connectors.

D. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.
5. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, pressure type with at least two bolts.
   a) Pipe Connectors: Clamp type, sized for pipe.
6. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.4 EQUIPMENT RACK AND CABINET GROUND BARS

A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x ¾ inch).

2.5 GROUND TERMINAL BLOCKS

A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.6 SPLICE CASE GROUND ACCESSORIES

A. Splice case grounding and bonding accessories shall be supplied by the splice case manufacturer when available. Otherwise, use 16 mm² (6 AWG) insulated ground wire with shield bonding connectors.

2.7 COMPUTER ROOM GROUND

A. Provide 50mm2 (1/0 AWG) bare copper grounding conductors bolted at mesh intersections to form an equipotential grounding grid. The equipotential grounding grid shall form a 600mm (24 inch) mesh pattern. The grid shall be bonded to each of the access floor pedestals.

2.8 SECURITY CONTROL ROOM GROUND

A. Provide 50mm2 (1/0 AWG) stranded copper grounding conductor(s) color coded with a green jacket, bolted at the Room's Communications System Grounding Electrode Cooper Plate and circulate to each equipment rack ground buss bar through the wire management system. Connect each equipment rack, wire management system's cable tray, ladder, etc. to the circulating ground wire with a minimum 25mm2 (4AWG) stranded Cooper Wire, color coded with a green jacket.
   1. Connect each equipment rack ground buss bar to the circulating ground wire a indicated in 2.9.A, and
   2. Connect each additional room item to the circulating ground wire as indicated in 2.9.A.

PART 3 - EXECUTION

3.1 GENERAL

A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.

B. System Grounding:
   1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
   2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 CORROSION INHIBITORS

A. When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.4 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.5 COMPUTER ROOM/SECURITY EQUIPMENT ROOM GROUNDING

A. Conduit: Ground and bond metallic conduit systems as follows:
   1. Ground metallic service conduit and any pipes entering or being routed within the computer room at each end using 16 mm² (6AWG) bonding jumpers.
   2. Bond at all intermediate metallic enclosures and across all joints using 16 mm² (6 AWG) bonding jumpers.

3.6 WIREWAY GROUNDING

A. Ground and Bond Metallic Wireway Systems as follows:
   1. Bond the metallic structures of wireway to provide 100 percent electrical continuity throughout the wireway system by connecting a 16 mm² (6 AWG) bonding jumper at all intermediate metallic enclosures and across all section junctions.
   2. Install insulated 16 mm² (6 AWG) bonding jumpers between the wireway system bonded as required in paragraph 1 above, and the closest building ground at each end and approximately every 16 meters (50 feet).
   3. Use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and cross all section junctions.
   4. Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 meters.

3.7 LIGHTNING PROTECTION SYSTEM

A. Bond the lightning protection system to earth ground externally to the building. Under no condition shall the electrical system's third of

fourth ground electrode system, or the telecommunications system circulating ground system be connected to the lightning protection system. The Facility's structural steel may be used to connected the lightning protection system at the direction of the COR certified by an independent certified grounding contractor.

3.8 EXTERIOR LIGHT/CAMERA POLES

A. Provide 20 ft [6.1 M] of No. 4 bare copper coiled at bottom of pole base excavation prior to pour, plus additional unspliced length in and above foundation as required to reach pole ground stud.

3.9 GROUND RESISTANCE

A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

C. Services at power company interface points shall comply with the power company ground resistance requirements.

D. Below-grade connections shall be visually inspected by the CORCOR prior to backfilling. The contractor shall notify the CORCOR 24 hours before the connections are ready for inspection.

3.10 GROUND ROD INSTALLATION

A. Drive each rod vertically in the earth, not less than 3000 mm (10 feet) in depth.

B. Where permanently concealed ground connections are required, make the connections by the exothermic process to form solid metal joints. Make accessible ground connections with mechanical pressure type ground connectors.

C. Where rock prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified resistance.

3.11 GROUNDING FOR RF/EMI CONTROL

A. Install bonding jumpers to bond all conduit, cable trays, sleeves and equipment for low voltage signaling and data communications circuits. Bonding jumpers shall consist of 100 mm (4 inches) wide copper strip or two 6 mm² (10 AWG) copper conductors spaced minimum 100 mm (4 inches) apart. Use 16 mm² (6 AWG) copper where exposed and subject to damage.

B. Comply with the following when shielded cable is used for data circuits.

1. Shields shall be continuous throughout each circuit.
2. Connect shield drain wires together at each circuit connection point and insulate from ground. Do not ground the shield.
3. Do not connect shields from different circuits together.
4. Shield shall be connected at one end only. Connect shield to signal reference at the origin of the circuit. Consult with equipment manufacturer to determine signal reference.

3.12 LABELING

A. Comply with requirements in Division 26 Section "ELECTRICAL IDENTIFICATION" Article for instruction signs. The label or its text shall be green.

B. Install labels at the telecommunications bonding conductor and grounding equalizer and at the grounding electrode conductor where exposed.

1. Label Text: "If this connector or cable is loose or if it must be removed for any reason, notify the facility manager."

3.13 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:

1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect

enclosure grounding terminal at individual ground rods. Make tests at ground rods before any conductors are connected.

a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.

b. Perform tests by fall-of-potential method according to IEEE 81.

C. Grounding system will be considered defective if it does not pass tests and inspections.

D. Prepare test and inspection reports.

E. Report measured ground resistances that exceed the following values:

1. Power Distribution Units or Panel boards Serving Electronic Equipment: 3 ohm(s).

2. Manhole Grounds: 10 ohms.

F. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

- - - E N D - - -

SECTION 28 05 28.33
CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing certification of the conduit, fittings, and boxes to form a complete, coordinated, raceway system(s). Conduits and when approved separate UL Certified and Listed partitioned telecommunications raceways are required for a fully functional Electronic Safety and Security (ESS) system. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 06 10 53 - MISCELLANEOUS ROUGH CARPENTRY. Requirements for mounting board for communication closets.

C. Section 07 84 00 – JOINT FIRESTOPPING. Requirements for sealing around penetrations to maintain the integrity of fire rated construction.

D. Section 07 62 00 - SHEET METAL FLASHING AND TRIM. Requirements for fabrications for the deflection of water away from the building envelope at penetrations.

E. Section 07 92 00 - JOINT SEALANTS. Requirements for sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

F. Section 09 91 24 – INTERIOR PAINTING. Requirements for identification and painting of conduit and other devices.

G. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general electrical requirements, general arrangement of the contract documents, coordination, quality assurance, project conditions, equipment and materials, and items that is common to more than one section of Division 28.

H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

I. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for commissioning - systems readiness checklists, and training.

J. Section 31 20 00 - EARTH MOVING. For bedding of conduits.

1.3 DEFINITIONS

A. EMT: Electrical metallic tubing.

B. ENT: Electrical nonmetallic tubing.

C. EPDM: Ethylene-propylene-diene terpolymer rubber.

D. FMC: Flexible metal conduit.

E. IMC: Intermediate metal conduit.

F. LFMC: Liquidtight flexible metal conduit.

G. LFNC: Liquidtight flexible nonmetallic conduit.

H. NBR: Acrylonitrile-butadiene rubber.

I. RNC: Rigid nonmetallic conduit.

1.4 QUALITY ASSURANCE

A. Refer to Paragraph 1.4 Quality Assurance, in Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

1.5 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Furnish the following:

B. Shop Drawings:

1. Size and location of main feeders;
2. Size and location of panels and pull boxes
3. Layout of required conduit penetrations through structural elements.
4. The specific item proposed and its area of application shall be identified on the catalog cuts.

C. Certification: Prior to final inspection, deliver to the COR four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

D. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

E. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

F. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.
   1. Custom enclosures and cabinets.
   2. Handholes and boxes for underground wiring, including the following:
      a. Duct entry provisions, including locations and duct sizes.
      b. Frame and cover design.
      c. Grounding details.
      d. Dimensioned locations of cable rack inserts, and pulling-in and lifting irons.
      e. Joint details.

G. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:
   1. Structural members in the paths of conduit groups with common supports.
   2. HVAC and plumbing items and architectural features in the paths of conduit groups with common supports.

H. Manufacturer Seismic Qualification Certification: Submit certification that enclosures and cabinets and their mounting provisions, including those for internal components, will withstand seismic forces defined in Division 16 Section "Electrical Supports and Seismic Restraints." Include the following:
   1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
      a. The term "withstand" means "the cabinet or enclosure will remain in place without separation of any parts when subjected to the seismic forces specified.
   2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
   3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

I. Source quality-control test reports.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. National Electrical Manufacturers Association (NEMA):

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

C. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

50-07.....Enclosures for Electrical Equipment

360-09.....Liquid-Tight Flexible Steel Conduit

467-07.....Grounding and Bonding Equipment

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

514C-02.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

1242-06.....Intermediate Metal Conduit

PART 2 - PRODUCTS

2.1 GENERAL

A. Conduit Size: In accordance with the NEC, but not less than 20 mm (3/4 inch) unless otherwise shown.

2.2. CONDUIT

A. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.

B. Rigid aluminum: Shall Conform to UL 6A, ANSI C80.5.

C. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.

D. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 volts or less.

E. Flexible galvanized steel conduit: Shall Conform to UL 1.

F. Liquid-tight flexible metal conduit: Shall Conform to UL 360.

G. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).

2.3. WIREWAYS AND RACEWAYS

A. Surface metal raceway: Shall Conform to UL 5.

2.4. CONDUIT FITTINGS

A. Rigid steel and IMC conduit fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
3. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
4. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
5. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
6. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

B. Rigid aluminum conduit fittings:
1. Standard threaded couplings, locknuts, bushings, and elbows: Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.
2. Locknuts and bushings: As specified for rigid steel and IMC conduit.
3. Set screw fittings: Not permitted for use with aluminum conduit.

C. Electrical metallic tubing fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression

type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.

4. Indent type connectors or couplings are prohibited.
5. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

D. Flexible steel conduit fittings:
1. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
2. Clamp type, with insulated throat.

E. Liquid-tight flexible metal conduit fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.

F. Direct burial plastic conduit fittings:
1. Fittings shall meet the requirements of UL 514C and NEMA TC3.
2. As recommended by the conduit manufacturer.

G. Surface metal raceway fittings: As recommended by the raceway manufacturer.

H. Expansion and deflection couplings:
1. Conform to UL 467 and UL 514B.
2. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
3. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
4. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

2.5 CONDUIT SUPPORTS

A. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.

B. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.

C. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.

D. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

2.6 OUTLET, JUNCTION, AND PULL BOXES

A. UL-50 and UL-514A.

B. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.

C. Nonmetallic Outlet and Device Boxes: NEMA OS 2.

D. Metal Floor Boxes: Cast or sheet metal, semi-adjustable, rectangular.

E. Sheet metal boxes: Galvanized steel, except where otherwise shown.

F. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

2.7 CABINETS

A. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.

B. Hinged door in front cover with flush latch and concealed hinge.

C. Key latch to match panelboards.

D. Metal barriers to separate wiring of different systems and voltage.

E. Accessory feet where required for freestanding equipment.

2.8 WIREWAYS

A. Equip with hinged covers, except where removable covers are shown.

2.9 WARNING TAPE

A. Standard, 4-Mil polyethylene 76 mm (3 inches) wide tape non-detectable type, red with black letters, and imprinted with “CAUTION BURIED ELECTRONIC SAFETY AND SECURITY CABLE BELOW”.

2.10 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

A. Description: Comply with SCTE 77.

1. Color of Frame and Cover: Gray.
2. Configuration: Units shall be designed for flush burial and have closed bottom, unless otherwise indicated.
3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure.

4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
5. Cover Legend: Molded lettering, as indicated for each service.
6. Conduit Entrance Provisions: Conduit-terminating fittings shall mate with entering ducts for secure, fixed installation in enclosure wall.
7. Handholes 300 mm wide by 600 mm long (2 inches wide by 24 inches long) and larger shall have inserts for cable racks and pulling-in irons installed before concrete is poured.

B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel or fiberglass or a combination of the two.

C. Fiberglass Handholes and Boxes with Polymer-Concrete Frame and Cover: Sheet-molded, fiberglass-reinforced, polyester-resin enclosure joined to polymer-concrete top ring or frame.

2.11 SLEEVES FOR RACEWAYS

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.

B. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.

C. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch (1.3- or 3.5-mm) thickness as indicated and of length to suit application.

D. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 84 00 "FIRESTOPPING."

2.12 SLEEVE SEALS

A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and cable.

1. Sealing Elements: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
2. Pressure Plates: Carbon steel. Include two for each sealing element.
3. Connecting Bolts and Nuts: Carbon steel with corrosion-resistant coating of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.13 GROUT

A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, non staining, mixed with water to consistency suitable for application and a 30-minute working time. WIRELINE DATA TRANSMISSION MEDIA FOR SECURITY SYSTEMS

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:
   1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the COR prior to drilling through structural sections.
   2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the COR as required by limited working space.

B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, “JOINT SEALANTS”.

3.2 INSTALLATION, GENERAL

A. Install conduit as follows:
   1. In complete runs before pulling in cables or wires.
   2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
   3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
   4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
   5. Mechanically continuous.
   6. Independently support conduit at 2.4 m (8 foot) on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling

supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).

7. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
11. Flashing of penetrations of the roof membrane is specified in Section 07 62 00, “FSHEET METAL FLASHING AND TRIM”.
12. Do not use aluminum conduits in wet locations.
13. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COR.

D. Fire Alarm:
1. Fire alarm conduit shall be painted red (a red “top-coated” conduit from the conduit manufacturer may be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, “FIRE DETECTION AND ALARM”.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:
1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
2. Align and run conduit in direct lines.

3. Install conduit through concrete beams only when the following occurs:
   a. Where shown on the structural drawings.
   b. As approved by the COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inch) thick is prohibited.
   a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
   b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
   c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

B. Furred or Suspended Ceilings and in Walls:
1. Conduit for conductors above 600 volts:
   a. Rigid steel or rigid aluminum.
   b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
2. Conduit for conductors 600 volts and below:
   a. Rigid steel, IMC, rigid aluminum, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 1800 mm (6 feet) of flexible metal conduit extending from a junction box to the fixture.
5. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 volts and below:

1. Rigid steel, IMC, rigid aluminum, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.

F. Surface metal raceways: Use only where shown.

G. Painting:

1. Paint exposed conduit as specified in Section09 91 00, “PAINTING”.
2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 24, “INTERIOR PAINTING” for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.

C. Install expansion and deflection couplings where shown.

3.6 CONDUIT SUPPORTS, INSTALLATION

A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers

that are designed to support a load equal to or greater than the sum of

the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
   b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
   c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts are permitted.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

A. Boxes for Concealed Conduits:

1. Flush mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.

C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes).

E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 100 mm (4 inches) square by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.

F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".

G. On all Branch Circuit junction box covers, identify the circuits with black marker.

3.8 ELECTRONIC SAFETY AND SECURITY CONDUIT

A. Install the electronic safety and security raceway system as shown on drawings.

B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.

C. All conduit ends shall be equipped with insulated bushings.

D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.

E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.

F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.

G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.

H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.

I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
¾	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in on the wall of communication closets where shown on drawings . Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.

K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

3.9 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 – "COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS" for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00, "COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS" and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SECTION 28 08 00

COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 28.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) hired by the Contractor will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning the Facility electronic safety and security systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 28 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 28, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility exterior closure systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of Electronic Safety and Security systems will require inspection of individual elements of the electronic safety and security systems throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule electronic safety and security systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the

type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 28 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the COR. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the COR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the VA COR after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING

REQUIREMENTS and Division 28 Sections for additional Contractor training requirements.

----- END -----

SECTION 28 13 00
PHYSICAL ACCESS CONTROL SYSTEM

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification of a complete and fully operating Physical Access Control System, hereinafter referred to as the PACS.

B. This Section includes a Physical Access Control System consisting of a system server, one or more networked workstation computers, operating system and application software, and field-installed Controllers connected by a high-speed electronic data transmission network. The PACS shall have the following:

1. Physical Access Control:
   a. Regulating access through doors, gates, traffic-control bollards.
   b. Anti-passback
   c. Visitor assignment
   d. Surge and tamper protection
   e. Secondary alarm annunciator
   f. Credential cards and readers
   g. Biometric identity verification equipment
   h. Push-button switches
   i. RS-232 ASCII interface
   j. Credential creation and credential holder database and management
   k. Monitoring of field-installed devices
   l. Interface with paging, HVAC, elevator control systems.
   m. Reporting
2. Security:
   a. Real-time guard tour.
   b. Time and attendance.
   c. Key tracking.
   d. Video and camera control.
   e. Time and attendance

C. System Architecture:

1. Criticality, operational requirements, and/or limiting points of failure may dictate the development of an enterprise and regional server architecture as opposed to system capacity. Provide server and workstation configurations with all necessary connectors, interfaces and accessories as shown.

D. PACS shall provide secure and reliable identification of Federal employees and contractors by utilizing credential authentication per FIPS-201.

E. Physical Access Control System (PACS) shall consist of:
   1. Head-End equipment server,
   2. One or more networked PC-based workstations,
   3. Physical Access Control System and Database Management Software,
   4. Credential validation software/hardware,
   5. Field installed controllers,
   6. PIV Middelware,
   7. Card readers,
   8. Biometric identification devices,
   9. PIV cards,
   10. Supportive information system,
   11. Door locks and sensors,
   12. Power supplies,
   13. Interfaces with:
      a. Video Surveillance and Assessment System,
      b. Gate, turnstile, and traffic arm controls,
      c. Automatic door operators,
      d. Intrusion Detection System,
      e. Intercommunication System
      f. Fire Protection System,
      g. HVAC,
      h. Building Management System,
      i. Elevator Controls,

F. Head-End equipment server, workstations and controllers shall be connected by a high-speed electronic data transmission network.

G. Information system supporting PACS , Head-End equipment server, workstations, network switches, routers and controllers shall comply with FIPS 200 requirements (Minimum Security Requirements for Federal Information and Information Systems)and NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems).

H. PACS system shall support:
   1. Multiple credential authentication modes,
   2. Bidirectional communication with the reader,
   3. Incident response policy implementation capability; system shall have capability to automatically change access privileges for

certain user groups to high security areas in case of incident/emergency.

4. Visitor management,

I. All security relevant decisions shall be made on "secure side of the door". Secure side processing shall include;
   1. Challenge/response management,
   2. PKI path discovery and validation,
   3. Credential identifier processing,
   4. Authorization decisions.

J. For locations where secure side processing is not applicable the tamper switches and certified cryptographic processing shall be provided per FIPS-140-2.

K. System Software: Based on central-station, workstation operating system, server operating system, and application software.

L. Software and controllers shall be capable of matching full 56 bit FASC-N plus minimum of 32 bits of public key certificate data.

M. Software shall have the following capabilities:
   1. Multiuser multitasking to allow for independent activities and monitoring to occur simultaneously at different workstations.
   2. Support authentication and enrolment;
      a. PIV verification,
      b. Expiration date check,
      c. Biometric check,
      d. Digital photo display/check,
      e. Validate digital signatures of data objects (Objects are signed by the Trusted Authority
      f. Private key challenge (CAK & PAK to verify private key public key pairs exist and card is not a clone)
   3. Support CRL validation via OCSP or SCVP on a scheduled basis and automatically deny access to any revoked credential in the system.
   4. Graphical user interface to show pull-down menus and a menu tree format that complies with interface guidelines of Microsoft Windows operating system.
   5. System license shall be for the entire system and shall include capability for future additions that are within the indicated system size limits specified in this Section.

6. System shall have open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with operating system.
7. Operator login and access shall be utilized via integrated smart card reader and password protection.

N. Systems Networks:
1. A standalone system network shall interconnect all components of the system. This network shall include communications between a central station and any peer or subordinate workstations, enrollment stations, local annunciation stations, portal control stations or redundant central stations.

O. Security Management System Server Redundancy:
1. The SMS shall support multiple levels of fault tolerance and SMS redundancy listed and described below:
   a. Hot Standby Servers
   b. Clustering
   c. Disk Mirroring
   d. RAID Level 10
   e. Distributed Intelligence

P. Number of points:
1. PACS shall support multiple autonomous regional servers that can connect to a master command and controller server.
2. Unlimited number of access control readers, unlimited number of inputs or outputs, unlimited number of client workstations, unlimited number of cardholders.
3. Total system solution to enable enterprise-wide, networked, multi-user access to all system resources via a wide range of options for connectivity with the customer’s existing LAN and WAN.

Q. Console Network:
1. Console network, if required, shall provide communication between a central station and any subordinate or separate stations of the system. Where redundant central or parallel stations are required, the console network shall allow the configuration of stations as master and slave. The console network may be a part of the field device network or may be separate depending upon the manufacturer's system configuration.

R. Network(s) connecting PCs and Controllers shall comply with NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems) and consist of one or more of the following:
   1. Local area, IEEE 802.3 Fast Ethernet 1000 BASE-TX star topology network based on TCP/IP.
   2. Direct-connected, RS-232 cable from the COM port of the Central Station to the first Controller, then RS-485 to interconnect the remainder of the Controllers at that Location.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
B. Section 07 84 00 – JOINT FIRESTOPPING. Requirements for firestopping application and use.
C. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.
D. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
E. Section 26 05 19 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
F. Section 26 05 33 – RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.
G. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.
H. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.
I. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general requirements that are common to more than one section in Division 28.

J. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
K. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
L. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
M. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY. For requirements for commissioning, systems readiness checklists, and training.
N. Section 28 13 16 - ACCESS CONTROL SYSTEM AND DATABASE MANAGEMENT. Requirements for control and operation of all security systems.
O. Section 28 13 53 - SECURITY ACCESS DETECTION. Requirements for screening of personnel and shipments.
P. Section 28 16 00 - INTRUSION DETECTION SYSTEM (IDS). Requirements for alarm systems.
Q. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.
R. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS). Requirements for emergency and interior communications.
S. Section 28 31 00 - FIRE DETECTION AND ALARM. Requirements for integration with fire detection and alarm system.

1.3 QUALITY ASSURANCE

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1
A. The Contractor shall be responsible for providing, installing, and the operation of the PACS as shown. The Contractor shall also provide certification as required.
B. The security system will be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.
C. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
D. Product Qualifications:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

E. Contractor Qualifications:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules.The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

a. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
b. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

F. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 SUBMITTALS

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1
A. Submit below items in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, Section 02 41 00, DEMOLITION, and Section 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
B. Provide certificates of compliance with Section 1.3, Quality Assurance.
C. Provide a complete and thorough pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (1220 x 1220 millimeters); drawing submittals shall be per the established project schedule.
D. Shop drawing and as-built packages shall include, but not be limited to:
1. Index Sheet that shall:
a. Define each page of the design package to include facility name, building name, floor, and sheet number.
b. Provide a complete list of all security abbreviations and symbols.
c. Reference all general notes that are utilized within the design package.
d. Specification and scope of work pages for all individual security systems that are applicable to the design package that will:

1) Outline all general and job specific work required within the design package.
2) Provide a detailed device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.

2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Clearly define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A detailed riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer’s name and part number for the wire/cable being installed.
4. A detailed system drawing for each applicable security system shall:
   a. Clearly identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.

d. Show device locations that correspond to the floor plans.
e. All general and drawing specific notes shall be included with the system drawings.

5. A detailed schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the PACS, provide the door ID, door type (e.g. wood or metal), locking mechanism (e.g. strike or electromagnetic lock) and control device (e.g. card reader or biometrics).
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Pre-installation design packages shall go through a full review process conducted by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per Section 01 00 00, GENERAL REQUIREMENTS, and Section 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

H. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the

requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

I. General: Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 23 – SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, which outline basic submittal requirements and coordination.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer’s information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for COR and Contractor review stamps.
5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the COR for approval before the initiation of work.

6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.
      1) Where two (2) or more binders are necessary to accommodate data, correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and or maintenance of the component or system.
      2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.
   b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.
   c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.
   d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20 pound white bond paper.
   e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.
      1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
      2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.
      3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: In each manual include information specified in the individual Specification section, and the following information for each major component of building equipment and controls:
   1) General system or equipment description.
   2) Design factors and assumptions.
   3) Copies of applicable Shop Drawings and Product Data.
   4) System or equipment identification including: manufacturer, model and serial numbers of each component, operating instructions, emergency instructions, wiring diagrams, inspection and test procedures, maintenance procedures and schedules, precautions against improper use and maintenance, repair instructions, sources of required maintenance materials and related services, and a manual index.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.

h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.

i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.

j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name.

Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.

k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.

l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor’s manufacturer certifications.

7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer’s catalog numbers and conformance of submittal with requirements of contract documents. Return non-

conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor's stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.

8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.
9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract document section number, paragraph number, and the referenced standards for each listed product.

J. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization. Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:
   a. General – Drawings shall conform to VA Special Conditions and CAD Standards Documents. All text associated with security details shall be 1/8" tall and meet VA text standard for AutoCAD™ drawings.
   b. Cover Sheet – Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
   c. General Information Sheets – General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
   d. Floor Plans – Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8" tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
      1) security devices by symbol,

2) the associated device point number (derived from the loading sheets),
3) wire & cable types and counts
4) conduit sizing and routing
5) conduit riser systems
6) device and area detail call outs

e. Architectural details – Architectural details shall be produced for each device mounting type (door details for doors with physical access control, reader pedestals and mounts, security panel and power supply details).

f. Riser Diagrams – Contractor shall provide a riser diagram indicating riser architecture and distribution of the physical access control system throughout the facility (or area in scope).

g. Block Diagrams – Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., physical access control, intrusion detection, closed circuit television, intercom, and other associated subsystems) integration; and data transmission and media conversion methodologies.

h. Interconnection Diagrams – Contractor shall provide interconnection diagram for each sensor, and device component. Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:
1) Panel Assembly Detail – For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.
2) Panel Details – Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.
3) Device Mounting Details – Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling

configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.

4) Details of connections to power supplies and grounding
5) Details of surge protection device installation
6) Sensor detection patterns – Each system sensor shall have associated detection patterns.
7) Equipment Rack Detail – For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCI wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include use vertical and horizontal latter rack system.
8) Security Control Room – The contractor shall provide a layout plan for the Security Control Room. The layout plan shall identify all equipment and details associated with the installation.
9) Operator Console – The contractor shall provide a layout plan for the Operator Console.The layout plan shall identify all equipment and details associated with the installation. Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.
10) Equipment Room – Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and associated equipment and device placements both vertical and horizontally.

j. Electrical Panel Schedule – Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.

k. Door Schedule – A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:

1) Item Number
2) Door Number (Derived from A/E Drawings)

3) Floor Plan Sheet Number
4) Standard Detail Number
5) Door Description (Derived from Loading Sheets)
6) Data Gathering Panel Input Number
7) Door Position or Monitoring Device Type & Model Number
8) Lock Type, Model Number & Power Input/Draw (standby/active)
9) Card Reader Type & Model Number
10) Shunting Device Type & Model Number
11) Sounder Type & Model Number
12) Manufacturer
13) Misc. devices as required
    a) Delayed Egress Type & Model Number
    b) Intercom
    c) Camera
    d) Electric Transfer Hinge
    e) Electric Pass-through device
14) Remarks column indicating special notes or door configurations

2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the COR to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:
   a. Item Number
   b. Camera Number
   c. Naming Conventions
   d. Description of Camera Coverage
   e. Camera Location
   f. Floor Plan Sheet Number
   g. Camera Type
   h. Mounting Type
   i. Standard Detail Reference
   j. Power Input & Draw
   k. Power Panel Location
   l. Remarks Column for Camera
3. Section II – Data Gathering Panel Documentation Package

a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.
b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.
c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.
d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.
e. The DGP spreadsheet shall include an entry section for the following information:
   1) DGP number
   2) First Reader Number
   3) First Monitor Point Number
   4) First Relay Number
   5) DGP, input or output Location
   6) DGP Chain Number
   7) DGP Cabinet Tamper Input Number
   8) DGP Power Fail Input Number
   9) Number of Monitor Points Reserved For Expansion Boards
   10) Number of Control Points (Relays) Reserved For Expansion Boards

f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
   1) System Numbers for Card Readers
   2) System Numbers for Monitor Point Inputs
   3) System Numbers for Control Points (Relays)
   4) Next DGP or input module First Monitor Point Number
   5) Next DGP or output module First Control Point Number
g. The DGP spreadsheet shall provide the following information for each card reader:
   1) DGP Reader Number
   2) System Reader Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
   6) Description Field
   7) DGP Input Location
   8) Date Test
   9) Date Passed
   10) Cable Type
   11) Camera Numbers (of cameras viewing the reader location)
h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
   1) DGP Monitor Point Input Number
   2) System Monitor Point Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
   6) DGP or input module Input Location
   7) Date Test
   8) Date Passed
   9) Cable Type
   10) Camera Numbers (of associated alarm event preset call-ups)
i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
   1) DGP Control Point (Relay) Number

2) System (Control Point) Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device: Lock Control, Local Sounder, etc.)
6) Description Field
7) DGP or OUTPUT MODULE Output Location
8) Date Test
9) Date Passed Cable Type
10) Camera Number (of associated alarm event preset call-ups)

j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
1) Header
a) DGP Input and Output Worksheet
b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
2) Footer
a) File Name
b) Date Printed
c) Page Number

4. Section III - Construction Mock-up: In areas with exposed EMT/Conduit Raceways, contractor shall conceal raceway as much as practical and unobtrusively. In addition, historic significance must be considered to determine installation means and methods for approval by the owner.
5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance requirements of this specification. The data package shall include the following:
a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and

configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.

b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.

c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.

7. Section VI – Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

K. Group II Technical Data Package

1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the COR documenting changes to the site, particularly those conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the COR.

2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:

a. Baseline configuration

b. Access levels

c. Schedules (intrusion detection, physical access control, holidays, etc.)

d. Badge database

e. System monitoring and reporting (unit level and central control)

f. Naming conventions and descriptors

L. Group III Technical Data Package

1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and

be customized to the contract requirements. The Contractor will deliver the test procedures to the COR for approval at least 60 calendar days prior to the requested test date.

M. Group IV Technical Data Package

1. Performance Verification Test

a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the COR for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.

2. Training Documentation

a. New Facilities and Major Renovations: Familiarization training shall be provided for new equipment or systems. Training can include site familiarization training for VA technicians and administrative personnel. Training shall include general information on new system layout including closet locations, turnover of the completed system including all documentation, including manuals, software, key systems, and full system administration rights. Lesson plans and training manuals training shall be oriented to type of training to be provided.

b. New Unit Control Room:

1) Provide the security personnel with training in the use, operation, and maintenance of the entire control room system (Unit Control and Equipment Rooms). The training documentation must include the operation and maintenance. The first of the training sessions shall take place prior to system turnover and the second immediately after turnover. Coordinate the training sessions with the Owner. Completed classroom sessions will be witnessed and documented by the Architect/Engineer, and approved by the COR. Instruction is not to begin until the system is operational as designed.

2) The training documents will cover the operation and the maintenance manuals and the control console operators' manuals and service manuals in detail, stressing all important operational and service diagnostic information necessary for the maintenance and operations personnel to efficiently use and maintain all systems.
3) Provide an illustrated control console operator's manual and service manual. The operator's manual shall be written in laymen's language and printed so as to become a permanent reference document for the operators, describing all control panel switch operations, graphic symbol definitions and all indicating functions and a complete explanation of all software.
4) The service manual shall be written in laymen's language and printed so as to become a permanent reference document for maintenance personnel, describing how to run internal self diagnostic software programs, troubleshoot head end hardware and field devices with a complete scenario simulation of all possible system malfunctions and the appropriate corrective measures.
5) Provide a professional color DVD instructional recording of all the operational procedures described in the operator's manual. All charts used in the training session shall be clearly presented on the video. Any DVD found to be inferior in recording or material content shall be reproduced at no cost until an acceptable DVD is submitted. Provide four copies of the training DVD, one to the architect/engineer and three to the owner.

3. System Configuration and Data Entry:
   a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines. The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor

shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:

1) Physical Access control system components,
2) All intrusion detection system components,
3) Video surveillance, control and recording systems,
4) Intercom systems components,
5) All other security subsystems shown in the contract documents.

b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.

c. Refer to Part 3 for system programming requirements and planning guidelines.

4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor’s field surveys, and all other pertinent information in the Contractor’s possession to complete the graphics. The Contractor shall identify and request from the COR, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the COR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

N. Group V Technical Data Package: Final copies of the manuals shall be delivered to the COR as part of the acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual’s contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or

systems, as well as the nearest service representatives for each item of equipment for each system. The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on CD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:
   a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings; system schematics and layout drawings; alignment and calibration procedures; manufacturer’s repair list indicating sources of supply; and interface definition.
3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
   a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data formats, command characters, and a sample of each type of data transfer.
4. Operator’s Manual: The operator’s manual shall fully explain all procedures and instructions for the operation of the system, including:

a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands' alarm messages, and printing formats; and system access requirements.

5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the COR a complete list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.
7. Operation, Maintenance & Service Manuals:The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable sets of manageable size.Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.
8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
   a. Equipment and/or system function.
   b. Operating characteristics.
   c. Limiting conditions.
   d. Performance curves.
   e. Engineering data and test.
   f. Complete nomenclature and number of replacement parts.
   g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
   h. Provide information detailing essential maintenance procedures including the following: routine operations, trouble shooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.

i. Provide information on equipment and system operating procedures, including the following; start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.

j. Manufacturer equipment and systems maintenance manuals are permissible.

9. Project Redlines:During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words 'Master Redlines' on the cover sheet and be maintained by the Contractor in the project office. The Contractor will provide access to redline documents anytime during the project for review and inspection by the COR or authorized Office of Protection Services representative. Master redlines shall be neatly maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in strict accordance with the drawings shall be so noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the COR for review and approval of all changes or modifications to the documents. Each sheet shall have COR initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline documents daily. Field drawings shall not be considered "master redlines".

10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and

record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the COR. As with master relines, Contractor shall maintain record specifications for COR review and inspection at anytime.

11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later. Note related Change Orders and mark up of Record Construction Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the COR.
12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements resulting in miscellaneous records include, a minimum of the following:
    a. Certificates received instead of labels on bulk products.
    b. Testing and qualification of tradesmen. (“Contractor’s Qualifications”)
    c. Documented qualification of installation firms.
    d. Load and performance testing.
    e. Inspections and certifications.
    f. Final inspection and correction procedures.
    g. Project schedule
13. Record Construction Documents (Record As-Built)
    a. Upon project completion, the contractor shall submit the project master redlines to the COR prior to development of Record construction documents. The COR shall be given a minimum of a thirty (30) day review period to determine the adequacy of the

master redlines. If the master redlines are found suitable by the COR, the COR will initial and date each sheet and turn redlines over to the contractor for as built development.

b. The Contractor shall provide the COR a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on CD or DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number as applicable. All corrective notations made by the Contractor shall be legible when submitted to the COR. If, in the opinion of the COR, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover sheets with suitable titles, dates, and other identifications printed on the cover. The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.

c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the COR. The Contractor shall organize into bound and labeled sets for the COR's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown.All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).

O. FIPS 201 Compliance Certificates

1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:

   a. Fingerprint Capture Station

   b. Card Readers

c. Facial Image Capturing Camera

d. PIV Middelware

e. Template Matcher

f. Electromagnetically Opaque Sleeve

g. Certificate Management

1) CAK Authentication System

2) PIV Authentication System

3) Certificate Validator

4) Cryptographic Module

P. Approvals will be based on complete submission of manuals together with shop drawings.

Q. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

C. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

D. Department of Justice American Disability Act (ADA)

28 CFR Part 36.....ADA Standards for Accessible Design 2010

E. Department of Veterans Affairs (VA):

PACS-R: Physical Access Control System (PACS) Requirements

VA Handbook 0730 Security and Law Enforcement

F. Government Accountability Office (GAO):

GAO-03-8-02 Security Responsibilities for Federally Owned and Leased Facilities

G. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

H. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

I. National Fire Protection Association (NFPA):

70-11..... National Electrical Code

J. Underwriters Laboratories, Inc. (UL):

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

639-97.....Standard for Intrusion-Detection Units

752-05.....Standard for Bullet-Resisting Equipment

827-08.....Central Station Alarm Services

1076-95.....Standards for Proprietary Burglar Alarm Units and Systems

1981-03.....Central Station Automation System

2058-05.....High Security Electronic Locks

K. Homeland Security Presidential Directive (HSPD):

HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

L. Federal Communications Commission (FCC):

(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

M. Federal Information Processing Standards (FIPS):

FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

N. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-63.....Electronic Authentication Guideline

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-73-3....Interfaces for Personal Identity Verification (4 Parts)

.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation

.....Pt. 2- PIV Card Application Card Command Interface

.....Pt. 3- PIV Client Application Programming Interface

.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification

Special Pub 800-76-1....Biometric Data Specification for Personal Identity Verification

Special Pub 800-78-2....Cryptographic Algorithms and Key Sizes for Personal Identity Verification

Special Pub 800-79-1....Guidelines for the Accreditation of Personal Identity Verification Card Issuers

Special Pub 800-85B-1...DRAFTPIV Data Model Test Guidelines

Special Pub 800-85A-2...PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-37.....Guide for Applying the Risk Management Framework to Federal Information Systems

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-104A....Scheme for PIV Visual Card Topography

Special Pub 800-116.....Recommendation for the Use of PIV Credentials in Physical Access Control Systems (PACS)

O. Institute of Electrical and Electronics Engineers (IEEE):

C62.41.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

P. International Organization for Standardization (ISO):

7810.....Identification cards – Physical characteristics

7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics

7816-2.....Identification cards – Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts

7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols

7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods

7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange

14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance

15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

19794.....Information technology - Biometric data interchange formats

Q. Uniform Federal Accessibility Standards (UFAS) 1984

R. ADA Standards for Accessible Design 2010

S. Section 508 of the Rehabilitation Act of 1973

1.6 DEFINITIONS

Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

A. ABA Track: Magnetic stripe that is encoded on track 2, at 75-bpi density in binary-coded decimal format; for example, 5-bit, 16-character set.

B. Access Control List: A list of (identifier, permissions) pairs associated with a resource or an asset. As an expression of security policy, a person may perform an operation on a resource or asset if and only if the person’s identifier is present in the access control list (explicitly or implicitly), and the permissions in the (identifier, permissions) pair include the permission to perform the requested operation.

C. Access Control: A function or a system that restricts access to authorized persons only.

D. API Application Programming Interface

E. Assurance Level (or E-Authentication Assurance Level): A measure of trust or confidence in an authentication mechanism defined in OMB Memorandum M-04-04 and NIST Special Publication (SP) 800-63, in terms of four levels: [M-04-04]
   1. Level 1: LITTLE OR NO confidence
   2. Level 2: SOME confidence
   3. Level 3: HIGH confidence
   4. Level 4: VERY HIGH confidence
F. Authentication: A process that establishes the origin of information, or determines an entity's identity. In this publication, authentication often means the performance of a PIV authentication mechanism.
G. Authenticator: A memory, possession, or quality of a person that can serve as proof of identity, when presented to a verifier of the appropriate kind. For example, passwords, cryptographic keys, and fingerprints are authenticators.
H. Authorization: A process that associates permission to access a resource or asset with a person and the person's identifier(s).
I. BIO or BIO-A: A FIPS 201 authentication mechanism that is implemented by using a Fingerprint data object sent from the PIV Card to the PACS. Note that the short-hand "BIO (-A)" is used throughout the document to represent both BIO and BIO-A authentication mechanisms.
J. Biometric: An authenticator produced from measurable qualities of a living person.
K. CAC EP – CAC End Point with end point PIV applet
L. CAC NG – CAC Next Generation with transitional PIV applet
M. Card Authentication Key (CAK): A PIV authentication mechanism (or the PIV Card key of the same name) that is implemented by an asymmetric or symmetric key challenge/response protocol. The CAK is an optional mechanism defined in NIST SP 800-73. [SP800-73] NIST strongly recommends that every PIV Card contain an asymmetric CAK and corresponding certificate, and that agencies use the asymmetric CAK protocol, rather than a symmetric CAK protocol, whenever the CAK authentication mechanism is used with PACS.
N. CCTV: Closed-circuit television.
O. Central Station: A PC with software designated as the main controlling PC of the PACS. Where this term is presented with initial capital letters, this definition applies.

P. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

Q. CPU: Central processing unit.

R. Credential: Data assigned to an entity and used to identify that entity.

S. File Server: A PC in a network that stores the programs and data files shared by users.

T. FIPS Federal Information Processing Standards

U. FRAC – First Responder Authentication Credential

V. HSPD Homeland Security Presidential Directive

W. I/O: Input/Output.

X. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.

Y. IEC International Electrotechnical Commission

Z. ISO International Organization for Standardization

AA. KB Kilobyte

BB. kbit/s Kilobits / second

CC. LAN: Local area network.

DD. LED: Light-emitting diode.

EE. Legacy CAC – Contact only Common Access Card with v1 and v2 applets

FF. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

GG. NIST: National Institute of Standards and Technology

HH. PACS: Physical Access Control System

II. PC/SC: Personal Computer / Smart Card

JJ. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

KK. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

LL. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

MM. PIV: Personal Identification Verification

NN. PIV-I – PIV Interoperable credential

OO. PPS: Protocol and Parameters Selection

PP. RF: Radio frequency.

QQ. ROM: Read-only memory. ROM data are maintained through losses of power.

RR. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

SS. RS-485: An TIA/EIA standard for multipoint communications.

TT. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

UU. TPDU: Transport Protocol Data Unit

VV. TWIC – Transportation Worker Identification Credential

WW. UPS: Uninterruptible power supply.

XX. Vcc: Voltage at the Common Collector

YY. WAN: Wide area network.

ZZ. WAV: The digital audio format used in Microsoft Windows.

AAA. Wiegand: Patented magnetic principle that uses specially treated wires embedded in the credential card.

BBB. Windows: Operating system by Microsoft Corporation.

CCC. Workstation: A PC with software that is configured for specific limited security system functions.

1.7 COORDINATION

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.

4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.8 MAINTENANCE & SERVICE

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

A. General Requirements

1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The COR shall be advised in writing of the name of the designated service representative, and of any change in personnel. The COR shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

1. The work shall be performed during regular working ours, Monday through Friday, excluding federal holidays. These inspections shall include:
   a) The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.
      1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
      2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

E. Emergency Service
1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.
   a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from arrival on site. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.
   b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

F. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

G. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

H. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

I. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COR. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

J. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year’s

warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.9 PERFORMANCE REQUIREMENTS

A. PACS shall provide support for multiple authentication modes and bidirectional communication with the reader. PACS shall provide implementation capability for enterprise security policy and incident response.

B. All processing of authentication information must occur on the "safe side" of a door

C. Physical Access Control System shall provide access to following Security Areas:
   1. Controlled
   2. Limited
   3. Exclusion

D. PACS shall provide:
   1. One authentication factor for access to Controlled security areas
   2. Two authentication factors for access to Limited security areas
   3. Three authentication factors for access to Exclusion security areas

E. PACS shall provide Credential Validation and Path Validation per NIST 800-116.

F. The PACS System shall have an Enterprise Path Validation Module (PVM) component that processes X.509 certification paths composed of X.509 v3 certificates and X.509 v2 CRLs. The PVM component MUST support the following features:
   1. Name chaining;
   2. Signature chaining;
   3. Certificate validity;
   4. Key usage, basic constraints, and certificate policies certificate extensions;
   5. Full CRLs; and
   6. CRLs segmented on names.

G. Distributed Processing: System shall be a fully distributed processing system so that information, including time, date, valid codes, access levels, and similar data, is downloaded to Controllers so that each Controller makes access-control decisions for that Location. Do not use intermediate Controllers for physical access control. If communications to Central Station are lost, all Controllers shall automatically buffer event transactions until communications are restored, at which time buffered events shall be uploaded to the Central Station.

H. Number of Locations: Support unlimited number of separate Locations using a single PC with combinations of direct-connect, dial-up, or TCP/IP LAN connections to each Location.

1. Each Location shall have its own database and history in the Central Station. Locations may be combined to share a common database.

I. Data Capacity:

1. [130] one hundred thirty different card-reader formats.
2. [999] nine hundred ninety nine comments.
3. [16] sixteen graphic file types for importing maps.

J. Location Capacity:

1. [128] one hundred twenty eight reader-controlled doors.
2. [50,000] fifty thousand total access credentials.
3. [2048] two thousand forty eight supervised alarm inputs.
4. [2048] two thousand forty eight programmable outputs.
5. [32,000] thirty two thousand custom action messages per Location to instruct operator on action required when alarm is received.

K. System Network Requirements:

1. Interconnect system components and provide automatic communication of status changes, commands, field-initiated interrupts, and other communications required for proper system operation.
2. Communication shall not require operator initiation or response, and shall return to normal after partial or total network interruption such as power loss or transient upset.
3. System shall automatically annunciate communication failures to the operator and identify the communication link that has experienced a partial or total failure.
4. Communications Controller may be used as an interface between the Central Station display systems and the field device network.

Communications Controller shall provide functions required to attain the specified network communications performance.

L. Central Station shall provide operator interface, interaction, display, control, and dynamic and real-time monitoring. Central Station shall control system networks to interconnect all system components, including workstations and field-installed Controllers.

M. Field equipment shall include Controllers, sensors, and controls. Controllers shall serve as an interface between the Central Station and sensors and controls. Data exchange between the Central Station and the Controllers shall include down-line transmission of commands, software, and databases to Controllers. The up-line data exchange from the Controller to the Central Station shall include status data such as intrusion alarms, status reports, and entry-control records. Controllers are classified as alarm-annunciation or entry-control type.

N. System Response to Alarms:Field device network shall provide a system end-to-end response time of [1] one second(s) or less for every device connected to the system. Alarms shall be annunciated at the Central Station within 1 second of the alarm occurring at a Controller or device controlled by a local Controller, and within 100 ms if the alarm occurs at the Central Station. Alarm and status changes shall be displayed within 100 ms after receipt of data by the Central Station. All graphics shall be displayed, including graphics-generated map displays, on the console monitor within 5 seconds of alarm receipt at the security console. This response time shall be maintained during system heavy load.

O. False Alarm Reduction: The design of Central Station and Controllers shall contain features to reduce false alarms. Equipment and software shall comply with SIA CP-01.

P. Error Detection: A cyclic code error detection method shall be used between Controllers and the Central Station, which shall detect single- and double-bit errors, burst errors of eight bits or less, and at least 99 percent of all other multibit and burst error conditions. Interactive or product error detection codes alone will not be acceptable. A message shall be in error if one bit is received incorrectly. System shall retransmit messages with detected errors. A two-digit decimal number shall be operator assignable to each communication link representing the number of retransmission attempts. When the number of consecutive retransmission attempts equals the

assigned quantity, the Central Station shall print a communication failure alarm message. System shall monitor the frequency of data transmission failure for display and logging.

Q. Data Line Supervision: System shall initiate an alarm in response to opening, closing, shorting, or grounding of data transmission lines.

R. Door Hardware Interface: Coordinate with Division 08 Sections that specify door hardware required to be monitored or controlled by the PACS. The Controllers in this Section shall have electrical characteristics that match the signal and power requirements of door hardware. Integrate door hardware specified in Division 08 Sections to function with the controls and PC-based software and hardware in this Section.

S. References to industry and trade association standards and codes are minimum installation requirement standards.

T. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.10 EQUIPMENT AND MATERIALS

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COR a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the COR prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.11 WARRANTY OF CONSTRUCTION.

A. Warrant PACS work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

1.12 GENERAL REQUIREMENTS

A. For general requirements that are common to more than one section in Division 28 refer to Section 28 05 00, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS.

B. General requirements applicable to this section include:
   1. General Arrangement Of Contract Documents,
   2. Delivery, Handling and Storage,
   3. Project Conditions,
   4. Electrical Power,
   5. Lightning, Power Surge Suppression, and Grounding,
   6. Electronic Components,
   7. Substitute Materials and Equipment, and
   8. Like Items.

PART 2 – PRODUCTS

2.1 GENERAL

A. All equipment and materials for the system will be compatible to ensure correct operation as outlined in FIPS 201, March 2006 and HSPD-12.

B. The security system characteristics listed in this section will serve as a guide in selection of equipment and materials for the PACS. If updated or more suitable versions are available then the Contracting Officer will approve the acceptance of prior to an installation.

C. PACS equipment shall meet or exceed all requirements listed below.

D. A PACS shall be comprised of, but not limited to, the following components:

1. Physical Access Control System
2. Application Software
3. System Database
4. Surge and Tamper Protection
5. Standard Workstation Hardware
6. Communications Workstation
7. Controllers (Data Gathering Panel)
8. Secondary Alarm Annunciator
9. Keypads
10. Card Readers
11. Credential Cards
12. Biometric Identity Verification Equipment
13. Enrolment Center (To be provided in accordance with the VA PIV enrollment and issuance system.)
14. System Sensors and Related Equipment
15. Push Button Switches
16. Interfaces
17. Door and Gate Hardware interface
18. RS-232 ASCII Interface
19. Floor Select Elevator Control
20. After-Hours HVAC Control
21. Real Time Guard Tour
22. Video and Camera Control
23. Cables
24. Transformers

2.2 CARD READERS

A. **Physical access control readers shall be HID pivCLASS RP40-H Wall Switch Reader, as manufactured by HID Global. Provide this model. No substitutions permitted.**

2.3 SECURITY MANAGEMENT SYSTEM (SMS)

A. Shall allow the configuration of an enrollment and badging, alarm monitoring, administrative, asset management, digital video management, intrusion detection, visitor enrollment, remote access level management, and integrated client workstations or any combination of all or some.

B. Shall be expandable to support an unlimited number of individual module or integrated client workstations. All access control field hardware, including Data Gathering Panels(DGP), shall be connected to all physical access control system workstation on the network.

C. Shall have the ability to compose, file, maintain, update, and print reports for either individuals or the system as follows.
   1. Individual reports that consist of an employee’s name, office location, phone number or direct extension, and normal hours of operation. The report shall provide a detail listing of the employee’s daily events in relation to accessing points within a facility.
   2. System reports shall be able to produce information on a daily/weekly/monthly basis for all events, alarms, and any other activity associated with a system user.

D. All reports shall be in a date/time format and all information shall be clearly presented. Shall be designed to allow it to work with any industry standard network protocol and topology listed below:
   1. Transmission Control Protocol (TCP)/IP
   2. Novell Netware (IPX/SPX)
   3. Banyan VINES
   4. IBM LAN Server (NetBEUI)
   5. Microsoft LAN Manager (NetBEUI)
   6. Network File System (NFS) Networks
   7. Remote Access Service (RAS) via ISDN, x.25, and standard phone lines.

E. Shall provide full interface and control of the PACS to include the following subsystems within the PACS:
   1. Public Key Infrastructure
   2. Card Management
   3. Identity and Access Management
   4. Personal Identity Verification

F. Shall have the following features or compatibilities:
   1. The ability to be operated locally or remotely via a LAN, WAN, internet, or intranet.
   2. Event and Alarm Monitoring
   3. Database Partitioning
   4. Ability to fully integrate with all other security subsystems
   5. Enhanced Monitoring Station with Split Screen Views

6. Alternate and Extended Shunt by Door
7. Escort Management
8. Enhanced IT-based Password Protection
10. N-man Rule and Occupancy Restrictions
11. Open Journal Data Format for Enhanced Reporting
12. Automated Personnel Import
13. ODBC Support
14. Windows 2000 Professional, Windows Server 2003, Windows XP Professionals for Servers, Windows 7
15. Field-Level Audit Trail
16. Cardholder Access Events

2.4 APPLICATION SOFTWARE

A. System Software: Based on [64] sixty-rour-bit, Microsoft Windows central-station and workstation operating system and application software. Software shall have the following features:
   1. Multiuser multitasking to allow independent activities and monitoring to occur simultaneously at different workstations.
   2. Graphical user interface to show pull-down menus and a menu tree format.
   3. Capability for future additions within the indicated system size limits.
   4. Open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with operating system.
   5. Password-protected operator and smart card login and access.

B. Peer Computer Control Software: Shall detect a failure of a central computer, and shall cause the other central computer to assume control of all system functions without interruption of operation. Drivers shall be provided in both central computers to support this mode of operation.

C. Application Software: Interface between the alarm annunciation and entry-control Controllers, to monitor sensors, operate displays, report alarms, generate reports, and help train system operators. Software shall have the following functions:
   1. Resides at the Central Station, workstations, and Controllers as required to perform specified functions.
   2. Operate and manage peripheral devices.
   3. Manage files for disk I/O, including creating, deleting, and copying

files; and automatically maintain a directory of all files, including size and location of each sequential and random-ordered record.

4. Import custom icons into graphics views to represent alarms and I/O devices.
5. Globally link I/O so that any I/O can link to any other I/O within the same Location, without requiring interaction with the host PC. This operation shall be at the Controller.
6. Globally code I/O links so that any access-granted event can link to any I/O with the same Location without requiring interaction with the host PC. This operation shall be at the Controller.
7. Messages from PC to Controllers and Controllers to Controllers shall be on a polled network that utilizes check summing and acknowledgment of each message. Communication shall be automatically verified, buffered, and retransmitted if message is not acknowledged.
8. Selectable poll frequency and message time-out settings shall handle bandwidth and latency issues for TCP/IP, RF, and other PC-to-Controller communications methods by changing the polling frequency and the amount of time the system waits for a response.
9. Automatic and encrypted backups for database and history backups shall be automatically stored at the central control PC and encrypted with a nine-character alphanumeric password, which must be used to restore or read data contained in backup.
10. Operator audit trail for recording and reporting all changes made to database and system software.

D. Workstation Software:

1. Password levels shall be individually customized at each workstation to allow or disallow operator access to program functions for each Location.
2. Workstation event filtering shall allow user to define events and alarms that will be displayed at each workstation. If an alarm is unacknowledged (not handled by another workstation) for a preset amount of time, the alarm will automatically appear on the filtered workstation.

E. Controller Software:

1. Controllers shall operate as an autonomous intelligent processing unit. Controllers shall make decisions about physical access

control, alarm monitoring, linking functions, and door locking schedules for its operation, independent of other system components. Controllers shall be part of a fully distributed processing control network. The portion of the database associated with a Controller and consisting of parameters, constraints, and the latest value or status of points connected to that Controller, shall be maintained in the Controller.

2. Functions: The following functions shall be fully implemented and operational within each Controller:
   a. Monitoring inputs.
   b. Controlling outputs.
   c. Automatically reporting alarms to the Central Station.
   d. Reporting of sensor and output status to Central Station on request.
   e. Maintaining real time, automatically updated by the Central Station at least once a day.
   f. Communicating with the Central Station.
   g. Executing Controller resident programs.
   h. Diagnosing.
   i. Downloading and uploading data to and from the Central Station.
3. Controller Operations at a Location:
   a. Location: Up to [64] sixty four Controllers connected to RS-485 communications loop. Globally operating I/O linking and anti-passback functions between Controllers within the same Location without central-station or workstation intervention. Linking and anti-passback shall remain fully functional within the same Location even when the Central Station or workstations are off line.
   b. In the event of communications failure between the Central Station and a Location, there shall be no degradation in operations at the Controllers at that Location. The Controllers at each Location shall be connected to a memory buffer with a capacity to store up to 10,000 events; there shall be no loss of transactions in system history files until the buffer overflows.
   c. Buffered events shall be handled in a first-in-first-out mode of operation.
4. Individual Controller Operation:
   a. Controllers shall transmit alarms, status changes, and other data

to the Central Station when communications circuits are operable.

If communications are not available, Controllers shall function in a stand-alone mode and operational data, including the status and alarm data normally transmitted to the Central Station, shall be stored for later transmission to the Central Station. Storage capacity for the latest 1024 events shall be provided at each Controller.

b. Card-reader ports of a Controller shall be custom configurable for at least [120] one hundred twenty different card-reader or keypad formats. Multiple reader or keypad formats may be used simultaneously at different Controllers or within the same Controller.
c. Controllers shall provide a response to card-readers or keypad entries in less than 0.25 seconds, regardless of system size.
d. Controllers that are reset, or powered up from a nonpowered state, shall automatically request a parameter download and reboot to its proper working state. This shall happen without any operator intervention.
e. Initial Startup: When Controllers are brought on-line, database parameters shall be automatically downloaded to them. After initial download is completed, only database changes shall be downloaded to each Controller.
f. Failure Mode: On failure for any reason, Controllers shall perform an orderly shutdown and force Controller outputs to a predetermined failure mode state, consistent with the failure modes shown and the associated control device.
g. Startup After Power Failure: After power is restored, startup software shall initiate self-test diagnostic routines, after which Controllers shall resume normal operation.
h. Startup After Controller Failure: On failure, if the database and application software are no longer resident, Controllers shall not restart, but shall remain in the failure mode until repaired. If database and application programs are resident, Controllers shall immediately resume operation. If not, software shall be restored automatically from the Central Station.

5. Communications Monitoring:
   a. System shall monitor and report status of TCP/IP communication status of each Location.

b. Communication status window shall display which Controllers are currently communicating, a total count of missed polls since midnight, and which Controller last missed a poll.

c. Communication status window shall show the type of CPU, the type of I/O board, and the amount of RAM memory for each Controller.

6. Operating systems shall include a real-time clock function that maintains seconds, minutes, hours, day, date, and month. The real-time clock shall be automatically synchronized with the Central Station at least once a day to plus or minus 10 seconds. The time synchronization shall be automatic, without operator action and without requiring system shutdown.

F. PC-to-Controller Communications:

1. Central-station or workstation communications shall use the following:

a. Direct connection using serial ports of the PC.

b. TCP/IP LAN network interface cards.

c. Dial-up modems for connections to Locations.

2. Serial Port Configuration: Each serial port used for communications shall be individually configurable for "direct communications," "modem communications incoming and outgoing," or "modem communications incoming only"; or as an ASCII output port.

3. Multiport Communications Board: Use if more than two serial ports are needed.

a. Expandable and modular design. Use a 4-, 8-, or 16-serial port configuration that is expandable to 32 or 64 serial ports.

b. Connect the first board to an internal PCI bus adapter card.

4. Direct serial, TCP/IP, and dial-up communications shall be alike in the monitoring or control of system, except for the connection that must first be made to a dial-up Location.

5. TCP/IP network interface card shall have an option to set the poll frequency and message response time-out settings.

6. PC-to-Controller and Controller-to-Controller communications (direct, dial-up, or TCP/IP) shall use a polled-communication protocol that checks sum and acknowledges each message. All communications shall be verified and buffered and retransmitted if not acknowledged.

G. Direct Serial or TCP/IP PC-to-Controller Communications:

1. Communication software on the PC shall supervise the PC-to-Controller communications link.
2. Loss of communications to any Controller shall result in an alarm at all PCs running the communications software.
3. When communications are restored, all buffered events shall automatically upload to the PC, and any database changes shall be automatically sent to the Controller.

H. Dial-up Modem PC-to-Controller Communications:
1. Communication software on the PC shall supervise the PC-to-Controller communications link during dial-up modem connect times.
2. Communication software shall be programmable to routinely poll each of the remote dial-up modem Locations, collecting event logs and verifying phone lines at time intervals that are operator selectable for each Location.
3. System shall be programmable for dialing and connecting to all dial-up modem Locations and for retrieving the accrued history transactions on an automatic basis as often as once every [10] ten minutes.
4. Failure to communicate to a dial-up Location three times in a row shall result in an alarm at the PC.
5. Time offset capabilities shall be present so that Locations in a different geographical time zone than the host PC will be set to, and maintained at, the proper local time. This feature shall allow for geographical time zones that are ahead of or behind the host PC.
6. The Controller connected to a dial-up modem shall automatically buffer all normal transactions until its buffer reaches 80 percent of capacity. When the transaction buffer reaches 80 percent, the Controller shall automatically initiate a call to the Central Station and upload all transactions.
7. Alarms shall be reported immediately.
8. Dial-up modems shall be provided by manufacturer of the system. Modems used at the Controller shall be powered by the Controller. Power to the modem shall include battery backup if the Controller is so equipped.

I. Controller-to-Controller Communications:
1. Controller-to-Controller Communications: RS-485, 4-wire, point-to-point, regenerative (repeater) communications network methodology.

2. RS-485 communications signal shall be regenerated at each Controller.

J. Database Downloads:

1. All data transmissions from PCs to a Location, and between Controllers at a Location, shall include a complete database checksum to check the integrity of the transmission. If the data checksum does not match, a full data download shall be automatically retransmitted.
2. If a Controller is reset for any reason, it shall automatically request and receive a database download from the PC. The download shall restore data stored at the Controller to their normal working state and shall take place with no operator intervention.
3. Software shall provide for setting downloads via dial-up connection to once per 24-hour period, with time selected by the operator.
4. Software shall provide for setting delays of database downloads for dial-up connections. Delays change the download from immediately to a delay ranging from 1 to 999 minutes.

K. Operator Interface:

1. Inputs in system shall have two icon representations, one for the normal state and one for the abnormal state.
2. When viewing and controlling inputs, displayed icons shall automatically change to the proper icon to display the current system state in real time. Icons shall also display the input's state, whether armed or bypassed, and if the input is in the armed or bypassed state due to a time zone or a manual command.
3. Outputs in system shall have two icon representations, one for the secure (locked) state and one for the open (unlocked) state.
4. Icons displaying status of the I/O points shall be constantly updated to show their current real-time condition without prompting by the operator.
5. The operator shall be able to scroll the list of I/Os and press the appropriate toolbar button, or right click, to command the system to perform the desired function.
6. Graphic maps or drawings containing inputs, outputs, and override groups shall include the following:
   a. Database to import and store full-color maps or drawings and allow for input, output, and override group icons to be placed on maps.

b. Maps to provide real-time display animation and allow for control of points assigned to them.
c. System to allow inputs, outputs, and override groups to be placed on different maps.
d. Software to allow changing the order or priority in which maps will be displayed.

7. Override Groups Containing I/Os:
a. System shall incorporate override groups that provide the operator with the status and control over user-defined "sets" of I/Os with a single icon.
b. Icon shall change automatically to show the live summary status of points in that group.
c. Override group icon shall provide a method to manually control or set to time zone points in the group.
d. Override group icon shall allow the expanding of the group to show icons representing the live status for each point in the group, individual control over each point, and the ability to compress the individual icons back into one summary icon.

8. Schedule Overrides of I/Os and Override Groups:
a. To accommodate temporary schedule changes that do not fall within the holiday parameters, the operator shall have the ability to override schedules individually for each input, output, or override group.
b. Each schedule shall be composed of a minimum of two dates with separate times for each date.
c. The first time and date shall be assigned the override state that the point shall advance to, when the time and date become current.
d. The second time and date shall be assigned the state that the point shall return to, when the time and date become current.

9. Copy command in database shall allow for like data to be copied and then edited for specific requirements, to reduce redundant data entry.

L. Operator Access Control:
1. Control operator access to system controls through [3]three password-protected operator levels. System operators and managers with appropriate password clearances shall be able to change operator levels for operators.

2. Three successive attempts by an operator to execute functions beyond their defined level during a 24-hour period shall initiate a software tamper alarm.
3. A minimum of [32] thirty-two passwords shall be available with the system software. System shall display the operator's name or initials in the console's first field. System shall print the operator's name or initials, action, date, and time on the system printer at login and logoff.
4. The password shall not be displayed or printed.
5. Each password shall be definable and assignable for the following:
   a. Commands usable.
   b. Access to system software.
   c. Access to application software.
   d. Individual zones that are to be accessed.
   e. Access to database.

M. Operator Commands:
1. Command Input: Plain-language words and acronyms shall allow operators to use the system without extensive training or data-processing backgrounds. System prompts shall be a word, a phrase, or an acronym.
2. Command inputs shall be acknowledged and processing shall start in not less than [1] one second(s).
3. Tasks that are executed by operator's commands shall include the following:
   a. Acknowledge Alarms: Used to acknowledge that the operator has observed the alarm message.
   b. Place Zone in Access: Used to remotely disable intrusion alarm circuits emanating from a specific zone. System shall be structured so that console operator cannot disable tamper circuits.
   c. Place Zone in Secure: Used to remotely activate intrusion alarm circuits emanating from a specific zone.
   d. System Test: Allows the operator to initiate a system-wide operational test.
   e. Zone Test: Allows the operator to initiate an operational test for a specific zone.
   f. Print reports.
   g. Change Operator: Used for changing operators.

h. Security Lighting Controls: Allows the operator to remotely turn on/off security lights.

i. Display Graphics: Used to display any graphic displays implemented in the system. Graphic displays shall be completed within 20 seconds from time of operator command.

j. Run system tests.

k. Generate and format reports.

l. Request help with the system operation.

1) Include in main menus.

2) Provide unique, descriptive, context-sensitive help for selections and functions with the press of one function key.

3) Provide navigation to specific topic from within the first help window.

4) Help shall be accessible outside the applications program.

m. Entry-Control Commands:

1) Lock (secure) or unlock (open) each controlled entry and exit up to four times a day through time-zone programming.

2) Arm or disarm each monitored input up to four times a day through time-zone programming.

3) Enable or disable readers or keypads up to twice a day through time-zone programming.

4) Enable or disable cards or codes up to four times per day per entry point through access-level programming.

4. Command Input Errors: Show operator input assistance when a command cannot be executed because of operator input errors. Assistance screen shall use plain-language words and phrases to explain why the command cannot be executed. Error responses that require an operator to look up a code in a manual or other document are not acceptable. Conditions causing operator assistance messages include the following:

a. Command entered is incorrect or incomplete.

b. Operator is restricted from using that command.

c. Command addresses a point that is disabled or out of service.

d. Command addresses a point that does not exist.

e. Command is outside the system's capacity.

N. Alarms:

1. System Setup:

a. Assign manual and automatic responses to incoming point status change or alarms.
b. Automatically respond to input with a link to other inputs, outputs, operator-response plans, unique sound with use of WAV files, and maps or images that graphically represent the point location.
c. 60-character message field for each alarm.
d. Operator-response-action messages shall allow message length of at least 65,000 characters, with database storage capacity of up to 32,000 messages. Setup shall assign messages to access point.
e. Secondary messages shall be assignable by the operator for printing to provide further information and shall be editable by the operator.
f. Allow 25 secondary messages with a field of 4 lines of 60 characters each.
g. Store the most recent 1000 alarms for recall by the operator using the report generator.

2. Software Tamper:
   a. Annunciate a tamper alarm when unauthorized changes to system database files are attempted. Three consecutive unsuccessful attempts to log onto system shall generate a software tamper alarm.
   b. Annunciate a software tamper alarm when an operator or other individual makes three consecutive unsuccessful attempts to invoke functions beyond their authorization level.
   c. Maintain a transcript file of the last 5000 commands entered at the each Central Station to serve as an audit trail. System shall not allow write access to system transcript files by any person, regardless of their authorization level.
   d. Allow only acknowledgment of software tamper alarms.
3. Read access to system transcript files shall be reserved for operators with the highest password authorization level available in system.
4. Animated Response Graphics: Highlight alarms with flashing icons on graphic maps; display and constantly update the current status of alarm inputs and outputs in real time through animated icons.
5. Multimedia Alarm Annunciation: WAV files to be associated with alarm events for audio annunciation or instructions.

6. Alarm Handling: Each input may be configured so that an alarm cannot be cleared unless it has returned to normal, with options of requiring the operator to enter a comment about disposition of alarm. Allow operator to silence alarm sound when alarm is acknowledged.
7. Alarm Automation Interface: High-level interface to Central Station alarm automation software systems. Allows input alarms to be passed to and handled by automation systems in same manner as burglar alarms, using an RS-232 ASCII interface.
8. CCTV Alarm Interface: Allow commands to be sent to CCTV systems during alarms (or input change of state) through serial ports.
9. Camera Control: Provides operator ability to select and control cameras from graphic maps.

O. Alarm Monitoring: Monitor sensors, Controllers, and DTS circuits and notify operators of an alarm condition. Display higher-priority alarms first and, within alarm priorities, display the oldest unacknowledged alarm first. Operator acknowledgment of one alarm shall not be considered acknowledgment of other alarms nor shall it inhibit reporting of subsequent alarms.

1. Displayed alarm data shall include type of alarm, location of alarm, and secondary alarm messages.
2. Printed alarm data shall include type of alarm, location of alarm, date and time (to nearest second) of occurrence, and operator responses.
3. Maps shall automatically display the alarm condition for each input assigned to that map, if that option is selected for that input location.
4. Alarms initiate a status of "pending" and require the following two handling steps by operators:
   a. First Operator Step: "Acknowledged." This action shall silence sounds associated with the alarm. The alarm remains in the system "Acknowledged" but "Un-Resolved."
   b. Second Operator Step: Operators enter the resolution or operator comment, giving the disposition of the alarm event. The alarm shall then clear.
5. Each workstation shall display the total pending alarms and total unresolved alarms.

6. Each alarm point shall be programmable to disallow the resolution of alarms until the alarm point has returned to its normal state.
7. Alarms shall transmit to Central Station in real time, except for allowing connection time for dial-up locations.
8. Alarms shall be displayed and managed from a minimum of four different windows.
   a. Input Status Window: Overlay status icon with a large red blinking icon. Selecting the icon will acknowledge the alarm.
   b. History Log Transaction Window: Display name, time, and date in red text. Selecting red text will acknowledge the alarm.
   c. Alarm Log Transaction Window: Display name, time, and date in red. Selecting red text will acknowledge the alarm.
   d. Graphic Map Display: Display a steady colored icon representing each alarm input location. Change icon to flashing red when the alarm occurs. Change icon from flashing red to steady red when the alarm is acknowledged.
9. Once an alarm is acknowledged, the operator shall be prompted to enter comments about the nature of the alarm and actions taken. Operator's comments may be manually entered or selected from a programmed predefined list, or a combination of both.
10. For locations where there are regular alarm occurrences, provide programmed comments. Selecting that comment shall clear the alarm.
11. The time and name of the operator who acknowledged and resolved the alarm shall be recorded in the database.
12. Identical alarms from same alarm point shall be acknowledged at same time the operator acknowledges the first alarm. Identical alarms shall be resolved when the first alarm is resolved.
13. Alarm functions shall have priority over downloading, retrieving, and updating database from workstations and Controllers.
14. When a reader-controlled output (relay) is opened, the corresponding alarm point shall be automatically bypassed.

P. Monitor Display: Display text and graphic maps that include zone status integrated into the display. Colors are used for the various components and current data. Colors shall be uniform throughout the system.
   1. Color Code:
      a. FLASHING RED: Alerts operator that a zone has gone into an alarm or that primary power has failed.

b. STEADY RED: Alerts operator that a zone is in alarm and alarm has been acknowledged.

c. YELLOW: Advises operator that a zone is in access.

d. GREEN: Indicates that a zone is secure and that power is on.

2. Graphics:

a. Support 32,000 graphic display maps and allow import of maps from a minimum of 16 standard formats from another drawing or graphics program.

b. Allow I/O to be placed on graphic maps by the drag-and-drop method.

c. Operators shall be able to view the inputs, outputs, and the point's name by moving the mouse cursor over the point on graphic map.

d. Inputs or outputs may be placed on multiple graphic maps. The operator shall be able to toggle to view graphic map associated with inputs or outputs.

e. Each graphic map shall have a display-order sequence number associated with it to provide a predetermined order when toggled to different views.

f. Camera icons shall have the ability to be placed on graphic maps that, when selected by an operator, will open a video window, display the camera associated with that icon, and provide pan-tilt-zoom control.

g. Input, output, or camera placed on a map shall allow the ability to arm or bypass an input, open or secure an output, or control the pan-tilt-zoom function of the selected camera.

Q. System test software enables operators to initiate a test of the entire system or of a particular portion of the system.

1. Test Report: The results of each test shall be stored for future display or printout. The report shall document the operational status of system components.

R. Report Generator Software: Include commands to generate reports for displaying, printing, and storing on disk and tape. Reports shall be stored by type, date, and time. Report printing shall be the lowest priority activity. Report generation mode shall be operator selectable but set up initially as periodic, automatic, or on request. Include time and date printed and the name of operator generating the report. Report formats may be configured by operators.

1. Automatic Printing: Setup shall specify, modify, or inhibit the report to be generated; the time the initial report is to be generated; the time interval between reports; the end of period; and the default printer.
2. Printing on Requests: An operator may request a printout of any report.
3. Alarm Reports: Reporting shall be automatic as initially set up. Include alarms recorded by system over the selected time and information about the type of alarm [such as door alarm, intrusion alarm, tamper alarm, etc.), the type of sensor, the location, the time, and the action taken.
4. Access and Secure Reports: Document zones placed in access, the time placed in access, and the time placed in secure mode.
5. Custom Reports: Reports tailored to exact requirements of who, what, when, and where. As an option, custom report formats may be stored for future printing.
6. Automatic History Reports: Named, saved, and scheduled for automatic generation.
7. Cardholder Reports: Include data, or selected parts of the data, as well as the ability to be sorted by name, card number, imprinted number, or by any of the user-defined fields.
8. Cardholder by Reader Reports: Based on who has access to a specific reader or group of readers by selecting the readers from a list.
9. Cardholder by Access-Level Reports: Display everyone that has been assigned to the specified access level.
10. Who Is In (Muster) Report:
    a. Emergency Muster Report: One click operation on toolbar launches report.
    b. Cardholder Report. Contain a count of persons that are "In" at a selected Location and a count with detailed listing of name, date, and time of last use, sorted by the last reader used or by the group assignment.
11. Panel Labels Reports: Printout of control-panel field documentation including the actual location of equipment, programming parameters, and wiring identification. Maintain system installation data within system database so that they are available on-site at all times.
12. Activity and Alarm On-Line Printing: Activity printers for use at workstations; prints all events or alarms only.

13. History Reports: Custom reports that allows the operator to select any date, time, event type, device, output, input, operator, Location, name, or cardholder to be included or excluded from the report.
    a. Initially store history on the hard disk of the host PC.
    b. Permit viewing of the history on workstations or print history to any system printer.
    c. The report shall be definable by a range of dates and times with the ability to have a daily start and stop time over a given date range.
    d. Each report shall depict the date, time, event type, event description, device, or I/O name, cardholder group assignment, and cardholder name or code number.
    e. Each line of a printed report shall be numbered to ensure that the integrity of the report has not been compromised.
    f. Total number of lines of the report shall be given at the end of the report. If the report is run for a single event such as "Alarms," the total shall reflect how many alarms occurred during that period.
14. Reports shall have the following four options:
    a. View on screen.
    b. Print to system printer. Include automatic print spooling and "Print To" options if more than one printer is connected to system.
    c. "Save to File" with full path statement.
    d. System shall have the ability to produce a report indicating status of system inputs and outputs or of inputs and outputs that are abnormal, out of time zone, manually overridden, not reporting, or in alarm.
15. Custom Code List Subroutine: Allow the access codes of system to be sorted and printed according to the following criteria:
    a. Active, inactive, or future activate or deactivate.
    b. Code number, name, or imprinted card number.
    c. Group, Location, access levels.
    d. Start and stop code range.
    e. Codes that have not been used since a selectable number of days.
    f. In, out, or either status.
    g. Codes with trace designation.

16. The reports of system database shall allow options so that every data field may be printed.
17. The reports of system database shall be constructed so that the actual position of the printed data shall closely match the position of the data on the data-entry windows.

S. Anti-Passback:

1. System shall have global and local anti-passback features, selectable by Location. System shall support hard and soft anti-passback.
2. Hard Anti-Passback: Once a credential holder is granted access through a reader with one type of designation (IN or OUT), the credential holder may not pass through that type of reader designation until the credential holder passes though a reader of opposite designation.
3. Soft Anti-Passback: Should a violation of the proper IN or OUT sequence occur, access shall be granted, but a unique alarm shall be transmitted to the control station, reporting the credential holder and the door involved in the violation. A separate report may be run on this event.
4. Timed Anti-Passback: A Controller capability that prevents an access code from being used twice at the same device (door) within a user-defined amount of time.
5. Provide four separate zones per Location that can operate without requiring interaction with the host PC (done at Controller). Each reader shall be assignable to one or all four anti-passback zones. In addition, each anti-passback reader can be further designated as "Hard," "Soft," or "Timed" in each of the four anti-passback zones. The four anti-passback zones shall operate independently.
6. The anti-passback schemes shall be definable for each individual door.
7. The Master Access Level shall override anti-passback.
8. System shall have the ability to forgive (or reset) an individual credential holder or the entire credential holder population anti-passback status to a neutral status.

T. Visitor Assignment:

1. Provide for and allow an operator to be restricted to only working with visitors. The visitor badging subsystem shall assign

credentials and enroll visitors. Allow only access levels that have been designated as approved for visitors.

2. Provide an automated log of visitor name, time and doors accessed, and whom visitor contacted.
3. Allow a visitor designation to be assigned to a credential holder.
4. PACS shall be able to restrict the access levels that may be assigned to credentials that are issued to visitors.
5. Allow operator to recall visitors' credential holder file, once a visitor is enrolled in the system.
6. The operator may designate any reader as one that deactivates the credential after use at that reader. The history log shall show the return of the credential.
7. System shall have the ability to use the visitor designation in searches and reports. Reports shall be able to print all or any visitor activity.

U. Time and Attendance:

1. Time and attendance reporting shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
2. Shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
3. System software setup shall allow designation of selected access-control readers as time and attendance hardware to gather the clock-in and clock-out times of the users at these readers.
   a. Reports shall show in and out times for each day, total in time for each day, and a total in time for period specified by the user.
   b. Allow the operator to view and print the reports, or save the report to a file.
   c. Alphabetically sort reports on the person's last name, by Location or location group. Include all credential holders or optionally select individual credential holders for the report.

V. Training Software: Enables operators to practice system operation including alarm acknowledgment, alarm assessment, response force deployment, and response force communications. System shall continue normal operation during training exercises and shall terminate exercises when an alarm signal is received at the console.

W. Entry-Control Enrollment Software: Database management functions that allow operators to add, delete, and modify access data as needed.

1. The enrollment station shall not have alarm response or acknowledgment functions.
2. Provide multiple, password-protected access levels. Database management and modification functions shall require a higher operator access level than personnel enrollment functions.
3. The program shall provide means to disable the enrollment station when it is unattended to prevent unauthorized use.
4. The program shall provide a method to enter personnel identifying information into the entry-control database files through enrollment stations. In the case of personnel identity verification subsystems, this shall include biometric data. Allow entry of personnel identifying information into the system database using menu selections and data fields. The data field names shall be customized during setup to suit user and site needs. Personnel identity verification subsystems selected for use with the system shall fully support the enrollment function and shall be compatible with the entry-control database files.
5. Cardholder Data: Provide 99 user-defined fields. System shall have the ability to run searches and reports using any combination of these fields. Each user-defined field shall be configurable, using any combination of the following features:
   a. MASK: Determines a specific format that data must comply with.
   b. REQUIRED: Operator is required to enter data into field before saving.
   c. UNIQUE: Data entered must be unique.
   d. DEACTIVATE DATE: Data entered will be evaluated as an additional deactivate date for all cards assigned to this cardholder.
   e. NAME ID: Data entered will be considered a unique ID for the cardholder.
6. Personnel Search Engine: A report generator with capabilities such as search by last name, first name, group, or any predetermined user-defined data field; by codes not used in definable number of days; by skills; or by seven other methods.
7. Multiple Deactivate Dates for Cards: User-defined fields to be configured as additional stop dates to deactivate any cards assigned to the cardholder.

8. Batch card printing.
9. Default card data can be programmed to speed data entry for sites where most card data are similar.
10. Enhanced ACSII File Import Utility: Allows the importing of cardholder data and images.
11. Card Expire Function: Allows readers to be configured to deactivate cards when a card is used at selected devices.

X. System Redundancy & High Availability: The system shall provide multiple levels of communications redundancy and failover for all PACS hosted controllers, digital video recorders, and client workstations. The PACS shall be capable of automatically re-routing communications to alternate computers across the system without operator intervention.

1. PACS system configuration with a single application/ database server shall provide at a minimum the following redundancy and failover capability:
   a. The PACS shall provide communications redundancy and failover for network-attached devices. Each network attached device shall have one or more alternative communication sever(s) that can provide hosting in case of primary communications server failure.
   b. In case of primary communications server failure, the system shall automatically re-route network-attached devices to their designated backup communications servers to allow continuous system operations without loss of alarm and event transaction processing during failover.
   c. Network-attached devices which transition to backup communications servers, shall be able to be redirected back to their default primary servers, once the primary communications servers have been restored.
2. PACS system configuration with multiple regional application/ database servers shall provide at a minimum the following redundancy and failover capability:
   a) The PACS shall support the same level of communications redundancy and failover for network-attached devices per regional application/database server, allowable to span across regional application/database servers in the event of a regional application/database server failure.

b) In case of a regional application/database server failure, client workstations shall be able to failover to their designated backup regional application/database server to allow continuous system operations.

c) In case of a regional application/database server failure, upon server restoration, the ISMS shall automatically update and synchronize the regional application/database server.

d) Client workstations which transition to a backup regional application/database server, shall be able to be redirected back to their default regional application/database server, once the regional application/database server functions have been restored.

2.5 SURGE AND TAMPER PROTECTION

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

A. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor-entry connection to components.

1. Minimum Protection for Power Connections 120 V and More: Auxiliary panel suppressors complying with requirements in Division 26 Section "Transient-Voltage Suppression for Low-Voltage Electrical Power Circuits."
2. Minimum Protection for Communication, Signal, Control, and Low-Voltage Power Connections: Comply with requirements in Division 26 Section "Transient-Voltage Suppression for Low-Voltage Electrical Power Circuits" as recommended by manufacturer for type of line being protected.

B. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially disassembled. Control-station control-unit alarm display shall identify tamper alarms and indicate locations.

2.6 PACS SERVER HARDWARE

A. SMS Server Computer: Standard unmodified PC of modular design. The CPU word size shall be [64] sixty four bytes or larger; the CPU operating speed shall be at least [3.4] three point four [GHz].

1. Processor family: [Intel® Xeon® E5640 (4 core, 2.66 GHz, 12MB L3, 80W)] four.
2. Number of processors: 2
3. Memory: [12] twelve GB RAM , expandable to a minimum of [192] one hundred ninety two GB without additional chassis or power supplies. Memory protection [Mirrored Memory, Online Spare, Advanced ECC, Memory Lock Step Mode].
4. Input/Output: 2 expansions slots, Network Controller (2) 1GbE NC382i Multifunction 4 Ports.
5. Power Supply: Dual - minimum capacity of [460] four hundred sixty W hot plug.
6. Real-Time Clock:
   a. Accuracy: Plus or minus 1 minute per month.
   b. Time Keeping Format: 24-hour time format including seconds, minutes, hours, date, day, and month; resettable by software.
   c. Clock shall function for 1 year without power.
   d. Provide automatic time correction once every 24 hours by synchronizing clock with the Time Service Department of the U.S. Naval Observatory.
7. Serial Ports: Provide two RS-232-F serial ports for general use, with additional ports as required. Data transmission rates shall be selectable under program control.
8. Parallel Port: An enhanced parallel port.
9. The server shall have a 1 GB NIC or greater network card, rated at 100/1000 MB/sec.
10. The server shall have dual [100] one hundred GB hard disk drives at [7200]] seven thousand two hundred RPM.
11. The server shall have a CD / DVD combo drive.
12. The server operating system shall be either:
    a. Windows 2003 Server, 32 bit native mode, with Service Pack 2 or later with default services enabled.
    b. Windows XP Professional Service Pack 2 or later and default services enabled.
    c. Windows 2008.
13. The Web Server shall be [IIS 7.0] seven or better.
14. The Database shall be [SQL Server 2005 (Express, Standard, Data Center, or Enterprise)].

15. Sound Card: For playback and recording of digital WAV sound files that are associated with audible warning and alarm functions.
16. Color Monitor: [27””] or larger LED (minimum 1920x1080) monitor with true color support. The server shall have a dedicated accelerated video card with at least 4GB onboard RAM.
17. Keyboard: With a minimum of 64 characters, standard ASCII character set based on ANSI X3.154.
18. Mouse: Standard, compatible with the installed software.
19. Special function keyboard attachments or special function keys to facilitate data input of the following operator tasks:
    a. Help.
    b. Alarm Acknowledge.
    c. Place Zone in Access.
    d. Place Zone in Secure.
    e. System Test.
    f. Print Reports.
    g. Change Operator.
    20. CD-ROM Drive:
    a. Nominal storage capacity of [650] six hundred fifty MB.
    b. Data Transfer Rate: [1.2] one point two Mbps.
    c. Average Access Time: [150] one hundred fifty ms.
    d. Cache Memory: [256] two hundred fifty six KB.
    e. Data Throughput: [1] one MB/second, minimum.
21. Dot Matrix Alarm Printer:
    a. Connected to the Central Station.
    b. Minimum of 96 characters, standard ASCII character set based on ANSI X3.154, and with graphics capability and programmable control of top-of-form.
    c. Prints in both red and black without ribbon change.
    d. Adjustable sprockets for paper width up to 11 inches.
    e. 80 columns per line, minimum speed of 200 characters per second.
    f. Character Spacing: Selectable at 10, 12, or 17 characters per inch.
    g. Paper: Sprocket-fed fan fold paper.
22. Report Printer:
    a. Connected to the Central Station and designated workstations.
    b. Laser printer with minimum resolution of [1200] one thousand two hundred dpi.

c. RAM: [2] two MB, minimum.

d. Printing Speed: Minimum [12] twelve pages per minute.

e. Paper Handling: Automatic sheet feeder with [250] two hundred fifty-sheet paper cassette and with automatic feed.

f. Interface: Bidirectional parallel and universal serial bus.

B. Redundant Central Computer:One identical redundant central computer, connected in a hot standby, peer configuration. This computer shall automatically maintain its own copies of system software, application software, and data files. System transactions and other activities that alter system data files shall be updated to system files of redundant computer in near real-time. If central computer fails, redundant computer shall assume control immediately and automatically.

C. PACS controllers clustering shall support the following features:

1. Assignment of Master and alternate master controllers for cluster communication to the SMS server
2. Primary and backup communication paths to the SMS server
3. Encrypted communications
4. Up to [16]sixteen controllers per cluster
5. Logical event linking between controllers in a cluster independent of SMS server communication
6. Asynchronous communication via TCP/IP (Polled devices shall not be acceptable)

D. UPS: Self-contained; complying with requirements in Division 26 Section "Static Uninterruptible Power Supply."

1. Size: Provide a minimum of [15] fifteen hours of operation of the central-station equipment, including 2 hours of alarm printer operation.
2. Batteries: Sealed, valve regulated, recombinant, lead calcium.
3. Accessories:

a. Transient voltage suppression.

b. Input-harmonics reduction.

c. Rectifier/charger.

d. Battery disconnect device.

e. Static bypass transfer switch.

f. Internal maintenance bypass/isolation switch.

g. External maintenance bypass/isolation switch.

h. Output isolation transformer.

i. Remote UPS monitoring.

j. Battery monitoring.

k. Remote battery monitoring.

2.7 STANDARD WORKSTATION HARDWARE

A. Workstation shall consist of a standard unmodified PC, with accessories and peripherals that configure the workstation for a specific duty.

B. Workstation Computer: Standard unmodified PC of modular design. The CPU word size shall be [32] thirty two bytes or larger; the CPU operating speed shall be at least [2] GHz.

1. Memory: Minimum 8GB of usable installed memory, expandable to a minimum of [64] 64GB without additional chassis or power supplies.
2. Power Supply: Minimum capacity of [250] two hundred fifty W.
3. Real-Time Clock:
   a. Accuracy: Plus or minus 1 minute per month.
   b. Time Keeping Format: 24-hour time format including seconds, minutes, hours, date, day, and month; resettable by software.
   c. Provide automatic time correction once every [24 hours]twenty four hours by synchronizing clock with the Central Station.
4. Serial Ports: Provide two RS-232-F serial ports for general use, with additional ports as required. Data transmission rates shall be selectable under program control.
5. Parallel Port: An enhanced parallel port.
6. LAN Adapter Card: 1000BASE-TX 100MBPS PCI bus, internal network interface card.
7. Sound Card: For playback and recording of digital WAV sound files that are associated with audible warning and alarm functions.
8. Color Monitor: Not less than inches 27” twentryseven inches, with a minimum resolution of 1920x1080 pixels, noninterlaced, and a maximum dot pitch of [0.28]mm. The video card shall support at least 16m colors at a resolution of 19820x1080 at a minimum refresh rate of [70] seventy Hz.
9. Keyboard: With a minimum of 64 characters, standard ASCII character set based on ANSI X3.154.
10. Mouse: Standard, compatible with the installed software.
11. Disk storage shall include the following, each with appropriate controller:
    a. Minimum 1TB hard disk, maximum average access time of [10] ten ms.

b. Floppy Disk Drive: High density, 3-1/2-inch (90-mm) size.

12. CD-ROM Drive:
    a. Nominal storage capacity of [650] six hundred fifty MB.
    b. Data Transfer Rate: [1.2] one point two Mbps.
    c. Average Access Time: [150] one hundred fifty ms.
    d. Cache Memory: [256] two hundred fifty six KB.
    e. Data Throughput: [1] one MB/second, minimum.
13. Printer:
    a. Connected to the Central Station and designated workstations.
    b. Laser printer with minimum resolution of [600] six hundred dpi.
    c. RAM: [2] two MB, minimum.
    d. Printing Speed: Minimum [12] twelve pages per minute.
    e. Paper Handling: Automatic sheet feeder with [250] two hundred fifty-sheet paper cassette and with automatic feed.
14. Interface: Bidirectional parallel, and universal serial bus.
15. LAN Adapter Card: 1000 Mbps internal network interface card.

C. Redundant Workstation: One identical redundant workstation, connected in a hot standby, peer configuration. This workstation shall automatically maintain its own copies of system software, application software, and data files. System transactions and other activities that alter system data files shall be updated to system files of redundant workstation in near real time. If its associated workstation fails, redundant workstation shall assume control immediately and automatically.

D. UPS: Self-contained, complying with requirements in Division 26 Section "Static Uninterruptible Power Supply."
1. Size: Provide a minimum of 10 minutes of operation of the central-station equipment, including 10 minutes of alarm printer operation.
2. Batteries: Sealed, valve regulated, recombinant, lead calcium.
3. Accessories:
    a. Transient voltage suppression.
    b. Input-harmonics reduction.
    c. Rectifier/charger.
    d. Battery disconnect device.
    e. Static bypass transfer switch.
    f. Internal maintenance bypass/isolation switch.
    g. External maintenance bypass/isolation switch.
    h. Output isolation transformer.

i. Remote UPS monitoring.

j. Battery monitoring.

k. Remote battery monitoring.

2.8 COMMUNICATIONS WORKSTATION

A. Standard workstation, modified as follows:

1. Two additional RS-232-F serial ports. The CPU word size shall be [64] sixty four bytes or larger; the CPU operating speed shall be at least [2] two ghz. Multiplexed serial ports shall be expandable with [8] eight character transmit and receive buffers for each port. Total buffer size shall be a minimum of [1] one MB.
2. Redundant workstation is not required.
3. Printer is not required.

2.9 CONTROLLERS

A. Controllers: Intelligent peripheral control unit, complying with UL 294, that stores time, date, valid codes, access levels, and similar data downloaded from the Central Station or workstation for controlling its operation. As a basis if design, the MCR door controller shall be an HID Aero X1100 Intelligent Controller, or approved equal, capable of controlling a minimum of 8 doors.

B. Subject to compliance with requirements in this Article, manufacturers may use multipurpose Controllers.

C. Battery Backup: Sealed, lead acid; sized to provide run time during a power outage of 90 minutes, complying with UL 924.

D. Alarm Annunciation Controller:

1. The Controller shall automatically restore communication within 10 seconds after an interruption with the field device network.
   a. Inputs: Monitor dry contacts for changes of state that reflect alarm conditions. Provides at least eight alarm inputs, which are suitable for wiring as normally open or normally closed contacts for alarm conditions.
   b. Alarm-Line Supervision:
      1) Supervise the alarm lines by monitoring each circuit for changes or disturbances in the signal, and for conditions as described in UL 1076 for line security equipment using dc change measurements. System shall initiate an alarm in response to an abnormal current, which is a dc change of 10 percent or more for longer than 500 ms.

2) Transmit alarm-line-supervision alarm to the Central Station during the next interrogation cycle after the abnormal current condition.

c. Outputs: Managed by Central Station software.

2. Auxiliary Equipment Power: A GFI service outlet inside the Controller enclosure.

E. Entry-Control Controller:

1. Function: Provide local entry-control functions including one- and two-way communications with access-control devices such as card readers, keypads, biometric personal identity verification devices, door strikes, magnetic latches, gate and door operators, and exit push-buttons.

a. Operate as a stand-alone portal Controller using the downloaded database during periods of communication loss between the Controller and the field-device network.

b. Accept information generated by the entry-control devices; automatically process this information to determine valid identification of the individual present at the portal:

1) On authentication of the credentials or information presented, check privileges of the identified individual, allowing only those actions granted as privileges.

2) Privileges shall include, but not be limited to, time of day control, day of week control, group control, and visitor escort control.

c. Maintain a date-, time-, and Location-stamped record of each transaction. A transaction is defined as any successful or unsuccessful attempt to gain access through a controlled portal by the presentation of credentials or other identifying information.

2. Inputs:

a. Data from entry-control devices; use this input to change modes between access and secure.

b. Database downloads and updates from the Central Station that include enrollment and privilege information.

3. Outputs:

a. Indicate success or failure of attempts to use entry-control devices and make comparisons of presented information with stored identification information.

b. Grant or deny entry by sending control signals to portal-control devices and mask intrusion alarm annunciation from sensors stimulated by authorized entries.
c. Maintain a date-, time-, and Location-stamped record of each transaction and transmit transaction records to the Central Station.
d. Door Prop Alarm: If a portal is held open for longer than 20 seconds, alarm sounds.

4. With power supplies sufficient to power at voltage and frequency required for field devices and portal-control devices.
5. Data Line Problems: For periods of loss of communications with Central Station, or when data transmission is degraded and generating continuous checksum errors, the Controller shall continue to control entry by accepting identifying information, making authentication decisions, checking privileges, and controlling portal-control devices.
   a. Store up to [1000] one thousand transactions during periods of communication loss between the Controller and access-control devices for subsequent upload to the Central Station on restoration of communication.
6. Controller Power: NFPA 70, Class II power supply transformer, with 12- or 24-V ac secondary, backup battery and charger.
   a. Backup Battery: Premium, valve-regulated, recombinant-sealed, lead-calcium battery; spill proof; with a full 1-year warranty and a pro rata 19-year warranty. With single-stage, constant-voltage-current, limited battery charger, comply with battery manufacturer's written instructions for battery terminal voltage and charging current recommendations for maximum battery life.
   b. Backup Battery: Valve-regulated, recombinant-sealed, lead-acid battery; spill proof. With single-stage, constant-voltage-current, limited battery charger, comply with battery manufacturer's written instructions for battery terminal voltage and charging current recommendations for maximum battery life.
   c. Backup Power Supply Capacity: [90] minutes of battery supply. Submit battery and charger calculations.
   d. Power Monitoring: Provide manual dynamic battery load test, initiated and monitored at the control center; with automatic disconnection of the Controller when battery voltage drops below

Controller limits. Report by using local Controller-mounted LEDs and by communicating status to Central Station. Indicate normal power on and battery charger on trickle charge. Indicate and report the following:

1) Trouble Alarm: Normal power off load assumed by battery.
2) Trouble Alarm: Low battery.
3) Alarm: Power off.

2.10 PIV MIDDLEWARE

A. PIV Middleware shall provide three-factor authentication, including biometric matching using a fingerprint capture device capable of single fingerprint capture. Unit shall enable digital certificates can to be verified by security personnel using the issuer's certificate authority, SCVP, OCSP responder/repeater, orthe TSA hot list for TWIC cardholders. All cards shall be validated using FIPS-201 challenge-response protocol in order to identify forged or cloned cards. PIV Middleware solution shall validate all PIV, TWIC, NG CAC, and FRAC cards. TWIC card FASC-Ns shall also be verified against a live or cached TSA hot list.

B. PIV Middleware shall have ability to :

1. Verify cardholder identity and validates FIPS 201-compliant PIV-II, next-generation (NG) CAC, TWIC, or FRAC credentials in real-time
2. Perform three-factor authentication of cardholder using PIN, biometrics, and certificate (or serial numbers) detecting forged or cloned cards
3. Enroll FASC-N, photo, and pertinent cardholder information into PACS software
4. Automatically suspend a cardholder’s badge if his or her PIV, TWIC, or CAC card certificate serial number is on the Certificate Revocation List (CRL)
5. Upload a cardholder transaction audit trail to central database or exports it to a .csv file for centralized transaction management
6. Be compatible with biometric mobile terminal for off-site verification and enrollment
7. Re-validate imported cardholder certificates on a periodic basis via the Internet
8. Operate with commercial, off-the-shelf (COTS) FIPS 201 PIV-II and ANSI INCITS 378-compliant fingerprint capture devices

9. Revalidate imported cardholder certificates at regular intervals, ensuring that the credentials used in PACS system are backed by a valid set of digital certificates. Digital certificates are verified against local OCSP repeater/validation authority using the issuer's validation authority, or Microsoft Crypto Application Programming Interface (API) on Windows XP SP3 or Vista.
10. Certificate Manager shall fully support SCVP and OCSP for fast, online validation.
11. Provide verification of TWIC credentials against a live TSA hot list.
12. Support uploading local transactions to a central database for consolidated activity reporting. This application shall support a variety of ODBC- or ADO-compliant databases, including Oracle, SQL Server 2005, Informix, DB2, and Firebird.
13. Provide user with ability to produce canned transaction log queries as well as creating queries directly from the SQL database.

C. PIV Middleware PC requirements:
1. PIV Middleware software shall operate on Intel-based PC with minimum 1.8 GHz CPU, 1 GB RAM, 40 GB hard disk, and Microsoft Windows XP SP2 with Microsoft .NET Framework 2.0
2. Unit shall fingerprint capture devices and smart card reader.

D. PIV Middleware shall be FIPS 201 approved product.

2.11 CARD READERS

A. Power: Card reader shall be powered from its associated Controller, including its standby power source.

B. Response Time: Card reader shall respond to passage requests by generating a signal that is sent to the Controller. Response time shall be [800]eight hundred ms or less, from the time the card reader finishes reading the credential card until a response signal is generated.

C. Enclosure: Suitable for surface, semiflush, or pedestal mounting. Mounting types shall additionally be suitable for installation in the following locations:
1. Indoors, controlled environment.
2. Indoors, uncontrolled environment.
3. Outdoors, with built-in heaters or other cold-weather equipment to extend the operating temperature range as needed for operation at the site.

D. Display: LED or other type of visual indicator display shall provide visual and audible status indications and user prompts. Indicate power on/off, whether user passage requests have been accepted or rejected, and whether the door is locked or unlocked.

E. Shall be utilized for controlling the locking hardware on a door and allows for reporting back to the main control panel with the time/date the door was accessed, the name of the person accessing the point of entry, and its location.

F. Will be fully programmable and addressable, locally and remotely, and hardwired to the system.

G. Shall be individually home run to the main panel.

H. Shall be installed in a manner that they comply with:
   1. The Uniform Federal Accessibility Standards (UFAS)
   2. The Americans with Disabilities Act (ADA)
   3. The ADA Standards for Accessible Design

I. Shall support a variety of card readers that must encompass a wide functional range. The PACS may combine any of the card readers described below for installations requiring multiple types of card reader capability (i.e., card only, card and/or PIN, card and/or biometrics, card and/or pin and/or biometrics, supervised inputs, etc.). These card readers shall be available in the approved technology to meet FIPS 201, and is ISO 14443 A or B, ISO/IEC 7816 compliant. The reader output can be Wiegand, RS-22, 485 or TCP/IP.

J. Shall be housed in an aluminum bezel with a wide lead-in for easy card entry.

K. Shall contain read head electronics, and a sender to encode digital door control signals.

L. LED’s shall be utilized to indicate card reader status and access status.

M. Shall be able to support a user defined downloadable off-line mode of operation (e.g. locked, unlocked), which will go in effect during loss of communication with the main control panel.

N. Shall provide audible feedback to indicate access granted/denied decisions. Upon a card swipe, two audible tones or beeps shall indicate access granted and three tones or beeps shall indicate access denied. All keypad buttons shall provide tactile audible feedback.

O. Shall have a minimum of two programmable inputs and two programmable outputs.

P. All card readers that utilize keypad controls along with a reader and shall meet the following specifications:
   1. Entry control keypads shall use a unique combination of alphanumeric and other symbols as an identifier. Keypads shall contain an integral alphanumeric/special symbols keyboard with symbols arranged in ascending ASCII code ordinal sequence. Communications protocol shall be compatible with the local processor.

Q. Shall include a Light Emitting Diode (LED) or other type of visual indicator display and provide visual or visual and audible status indications and user prompts. The display shall indicate power on/off, and whether user passage requests have been accepted or rejected. The design of the keypad display or keypad enclosure shall limit the maximum horizontal and vertical viewing angles of the keypad. The maximum horizontal viewing angle shall be plus and minus five (5) degrees or less off a vertical plane perpendicular to the plane of the face of the keypad display. The maximum vertical viewing angle shall be plus and minus 15 degrees or less off a horizontal plane perpendicular to the plane of the face of the keypad display.
   1. Shall respond to passage requests by generating a signal to the local processor. The response time shall be 800 milliseconds or less from the time the last alphanumeric symbol is entered until a response signal is generated.
   2. Shall be powered from the source as designed and shall not dissipate more than 150 Watts.
   3. Shall be suitable for surface, semi-flush, pedestal, or weatherproof mounting as required.
   4. Shall provide a means for users to indicate a duress situation by entering a special code.

R. PIV Contact Card Reader
   1. Application Protocol Data Unit (APDU) Support: At a minimum, the contact interface shall support all card commands for contact based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.
   2. Buffer Size: The reader must contain a buffer large enough to receive the maximum size frame permitted by International Organization for Standardization International Electrotechnical Commission (ISO/IEC) 7816-3:1997, Section 9.4.

3. Programming Voltage: PIV Readers shall not generate a Programming Voltage.
4. Support for Operating Class: PIV Readers shall support cards with Class A Vccs as defined in ISO/IEC 7816-3:1997 and ISO/IEC 7816-3:1997/Amd 1:2002.
5. Retrieval Time: Retrieval time[1] for 12.5 kilobytes (KB) of data through the contact interface of the reader shall not exceed 2.0 seconds.
6. Transmission Protocol: The PIV Reader shall support both the character-based T=0 protocol and block-based T=1 protocol as defined in ISO/IEC 7816-3:1997.
7. Support for PPS Procedure: The reader shall support Protocol and Parameters Selection (PPS) procedure by having the ability to read character TA1 of the Answer to Reset (ATR) sent by the card as defined in ISO/IEC 7816-3:1997.

S. Contactless Smart Cards and Readers

1. Smart card readers shall read credential cards whose characteristics of size and technology meet those defined by ISO/IEC 7816, 14443, 15693.
2. The readers shall have "flash" download capability to accommodate card format changes.
3. The card reader shall have the capability of reading the card data and transmitting the data to the main monitoring panel.
4. The card reader shall be contactless and meet or exceed the following technical characteristics:
   a. Data Output Formats: FIPS 201 low outputs the FASC-N in an assortment of Wiegand bit formats from 40 – 200 bits. FIPS 201 medium outputs a combination FASC-N and HMAC in an assortment of Wiegand bit formats from 32 – 232 bits. All Wiegand formats or the upgradeability from Low to Medium Levels can be field configured with the use of a command card.
   b. FIPS 201 readers shall be able to read, but not be limited to, DESfire and iCLASS cards.
   c. Reader range shall comply with ISO standards 7816, 14443, and 15693, and also take into consideration conditions, are at a minimum 1” to 2” (2.5 – 5 cm).

d. APDU Support: At a minimum, the contactless interface shall support all card commands for contactless based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.
e. Buffer Size: The reader shall contain a buffer large enough to receive the maximum size frame permitted by ISO/IEC 7816-3, Section 9.4.
f. ISO 14443 Support: The PIV Reader shall support parts (1 through 1) of ISO/IEC 14443 as amended in the References of this publication.
g. Type A and B Communication Signal Interfaces: The contactless interface of the reader shall support both the Type A and Type B communication signal interfaces as defined in ISO/IEC 14443-2:2001.
h. Type A and B Initialization and Anti-Collision The contactless interface of the reader shall support both Type A and Type B initialization and anti-collision methods as defined in ISO/IEC 14443-3:2001.
i. Type A and B Transmission Protocols: The contactless interface of the reader shall support both Type A and Type B transmission protocols as defined in ISO/IEC 14443-4:2001.
j. Retrieval Time: Retrieval time for 4 KB of data through the contactless interface of the reader shall not exceed 2.0 seconds.
k. Transmission Speeds: The contactless interface of the reader shall support bit rates of fc/128 (~106 kbits/s), fc/64(~212 kbits/s), and configurable to allow activation/deactivation.
l. Readability Range: The reader shall not be able to read PIV card more than 10cm(4inch) from the reader

2.12 KEYPADS

A. Designed for use with unique combinations of alphanumeric and other symbols as an Identifier. Keys of keypads shall contain an integral alphanumeric/special symbol keyboard with symbols arranged in ascending ASCII-code ordinal sequence.. Communications protocol shall be compatible with Controller.
   1. Keypad display or enclosure shall limit viewing angles of the keypad as follows:

a. Maximum Horizontal Viewing Angle: 5 degrees or less off in either direction of a vertical plane perpendicular to the plane of the face of the keypad display.
b. Maximum Vertical Viewing Angle: 15 degrees or less off in either direction of a horizontal plane perpendicular to the plane of the face of the keypad display.

2. Duress Codes: Provide duress situation indication by entering a special code.
3. As a basis of design, the card reader keypad combo shall be an HID pivCLASS RPK40 or approved equal.

2.13 CREDENTIAL CARDS

A. Personal Identity Verification (PIV) credential cards shall comply to Federal Information Processing Standards Publication (FIPS) 201.
B. Visual Card Topography shall be compliant with NIST 800-104.
C. PIV logical credentials shall contain multiple data elements for the purpose of verifying the cardholder's identity at graduated assurance levels. These mandatory data elements shall collectively comprise the data model for PIV logical credentials, and include the following:
1. CHUID
2. PIN
3. PIV authentication data (one asymmetric key pair and corresponding certificate)
4. + Two biometric fingerprints.

D. The credential card (PIV) shall be an ISO 14443 type smart card with contactless interface that operates at 13.56 MHZ.
E. The credential card (PIV) shall be an ISO 7816 type smart card.

2.14 SYSTEM SENSORS AND RELATED EQUIPMENT

A. The PACS (Physical Access Control System) and related Equipment provided by the Contractor shall meet or exceed the following performer specifications:
B. Request to Exit Detectors:
1. Passive Infrared Request to Exit Motion Detector (REX PIR) (1) The Contractor shall provide a surface mounted motion detector to signal the physical access control system request to exit input. The motion detector shall be a passive infrared sensor designed for wall or ceiling mounting 2134 to 4572 mm (7 to 15 ft) height. The detector shall provide two (2) form “C” (SPDT) relays rated one (1) Amp. @ 30 VDC for DC resistive loads. The detectors relays shall be

user adjustable with a latch time from 1-60 seconds. The detector shall also include a selectable relay reset mode to follow the timer or absence of motion. The detection pattern shall be adjustable plus or minus fourteen (± 14) degrees. The detector shall operate on 12 VDC with approximately 26 mA continuous current draw.The detector shall have an externally visible activation LED. The motion detector shall measure approximately 38 mm H x 158 mm W x 38 mm D (1.5 x 6.25 x 1.5 in). The detector shall be immune to radio frequency interference.The detector shall not activate or set-up on critical frequencies in the range 26 to 950 Megahertz using a 50 watt transmitter located 30.5 cm (1 ft) from the unit or attached wiring. The detector shall be available on gray or black enclosures. The color of the housing shall be coordinated with the surrounding surface.

2. As a basis of design, the request to exit sensor shall be a Bosch DS160 or approved equal.

H. Door Status Indicators:

1. Shall monitor and report door status to the SMS.
2. Door Position Sensor:
   a. Shall provide an open or closed indication for all doors operated on the PACS and report directly to the SMS.
   b. Shall also provide alarm input to the Intrusion Detection System for all doors operated by the PACS and all other doors that require monitoring by the intrusion detection system.
   c. Switches for doors operated by the PACS shall be double pole double throw (DPDT). One side of the switch shall monitor door position and the other side if the switch shall report to the intrusion detection system. For doors with electromagnetic locks a magnetic bonding sensor (MBS) can be used in place of one side of a DPDT switch, in turn allowing for the use of a single pole double throw (SPDT) switch in it place of a DPDT switch.
   d. Switches for doors not operated by the PACS shall be SPDT and report directly to the IDS.
   e. Shall be surface or flush mounted and wide gap with the ability to operate at a maximum distance of up to 2” (5 cm).
   3. As a basis of design the door position sensor switch shall be a NASCOM N1178CB/ST,or approved equal.

2.15 PUSH BUTTON SWITCHES

A. Push-Button Switches: Momentary-contact back-lighted push buttons, with stainless-steel switch enclosures.
   1. Electrical Ratings:
      a. Minimum continuous current rating of [10]ten A at 120 V ac or [5] five A at 240-V ac.
      b. Contacts that will make 720 VA at [60]sixty A and that will break at 720 VA at [10] ten A.
   2. Enclosures: Flush or surface mounting. Push buttons shall be suitable for flush mounting in the switch enclosures.
   3. Enclosures shall additionally be suitable for installation in the following locations:
      a. Indoors, controlled environment.
      b. Indoors, uncontrolled environment.
      c. Outdoors.
   4. Power: Push-button switches shall be powered from their associated Controller, using dc control.

2.16 PORTAL CONTROL DEVICES

A. Shall be used to assist the PACS.
B. Such devices shall:
   1. Provide a means of monitoring the doors status.
   2. Allow for exiting a space via either a push button, request to exit, or panic/crash bar.
   3. Provide a means of override to the PACS via a keypad or key bypass.
   4. Assist door operations utilizing automatic openers and closures.
   5. Provide a secondary means of access to a space via a keypad.
C. Shall be connected to and monitored by the main PACS panel.
D. Shall be installed in a manner that they comply with:
   1. The Uniform Federal Accessibility Standards (UFAS)
   2. The Americans with Disabilities Act (ADA)
   3. The ADA Standards for Accessible Design
E. Shall provide a secondary means of physical access control within a secure area.
F. Push-Button Switches:
   1. Shall be momentary contact, back lighted push buttons, and stainless steel switch enclosures for each push button as shown. Buttons are to be utilized for secondary means of releasing a locking mechanism.

a. In an area where a push button is being utilized for remote access of the locking device then no more than two (2) buttons shall operate one door from within one secure space. Buttons will not be wired in series with one other.
b. In an area where locally stationed guards control entry to multiple secure points via remote switches. An interface board shall be designed and constructed for only the amount of buttons it shall house. These buttons shall be flush mounted and clearly labeled for ease of use. All buttons shall be connected to the PACS and SMS system for monitoring purposes.
c. Shall have double-break silver contacts that will make 720 VA at 60 amperes and break 720 VA at 10 amperes.

G. Entry Control Devices:
1. Shall be hardwired to the PACS main control panel and operated by either a card reader or a biometric device via a relay on the main control panel.
2. Shall be fail-safe in the event of power failure to the PACS system.
3. Shall operate at 24 VCD, with the exception of turnstiles and be powered by a separate power supply dedicated to the door control system. Each power supply shall be rated to operate a minimum of two doors simultaneously without error to the system or overload the power supply unit.
4. Shall have a diode or metal-oxide veristor (MOV) to protect the controller and power supply from reverse current surges or back-check.
5. Electric Strikes/Bolts: Shall be:
a. Made of heavy-duty construction and tamper resistant design.
b. Tested to over one million cycles.
c. Rated for a minimum of 1000 lbs. holding strength.
d. Utilize an actuating solenoid for the strike/bolt. The solenoid shall move from fully open to fully closed position and back in not more than 500 milliseconds and be rated for continuous duty.
e. Utilize a signal switch that will indicate to the system if the strike/bolt is not engaged or is unlocked when it should be secured.
f. Flush mounted within the door frame.
6. Electric Mortise Locks: Shall be installed within the door and an electric transfer hinge shall be utilized to allow the wires to be

transferred from the door frame to the lock. If utilized with a double door then the lock shall be installed inside the active leaf. Electric Mortise Locks shall:

a. These locks shall be provided and installed by the Division 8 "DOOR HARDWARE" Contractor.

b. Have integrated Request to Exit switch for new doors receiving physical access control devices.

b. Provide integration of the Electric Mortise Locks with the PACS for:

1) Lock Power

2) Request to Exit switch.

2.17 SECONDARY ALARM ANNUNCIATOR

A. Secondary Alarm Annunciation Site: A workstation with limited I/O capacity, consisting of a secondary alarm annunciation workstation to display alarms or system status changes only.

2.18 INTERFACES

A. CCTV System Interface

1. An Ethernetinterface associated driver, and controller shall be provided for connection of the SMS Central Computer to the CCTV Alarm interface and switcher. The interface shall provide alarm data to the CCTV Alarm interface for automatic camera call-up. If required the Security Contractor shall be responsible for programming the command strings into the SMS Server.

B. Intercom System Interface

1. The CCTV call-up from intercom stations shall be through the intercom unit via Ethernet communications interface to the SMS system, then through the matrix switcher.

a. Application Software

1) Provides the interface between the Alarm Annunciation System and Operator; all sensors, local processors and data links, drive displays, report alarms, and report generation.

2) Software is categorized as System Software and Application Software. System Software must consist of software to support set-up, operation, hard drive back-ups and maintenance processor. Application Software must consist of software to provide the completion of Physical Access Control System.

C. Power Supplies:
   1. Shall be UL rated and able to adequately power (enter number) entry control devices on a continuous base without failure.
   2. Shall meet the following minimum technical characteristics:

INPUT POWER	110 VAC 60 HZ (enter amperage)A
OUTPUT VOLTAGE	12 VDC Nominal (13.8 VDC) 24 VDC Nominal (27.6 VDC) Filtered and Regulated
BATTERY	Dependant on Output Voltage shall provide up to [5] Ah
OUTPUT CURRENT	[10] amp max. [@ 13.8] VDC [5] amp max. [@ 27.6] VDC
PRIMARY FUSE SIZE	6.3 amp (non-removable)
BATTERY FUSE SIZE	12 amp, 3AG
CHARGING CIRCUIT	Built-in standard

2.22 WIRES AND CABLES

A. Refer to section 280513 "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY".

A. Comply with Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."

B. PVC-Jacketed, RS-232 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, and individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage; PVC jacket. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
   1. NFPA 70, Type CM.
   2. Flame Resistance: UL 1581 Vertical Tray.

C. Plenum-Type, RS-232 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, plastic insulation, and individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage; plastic jacket. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

D. RS-485 communications require 2 twisted pairs, with a distance limitation of 4000 feet (1220 m).

E. PVC-Jacketed, RS-485 Cable: Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, PVC insulation, unshielded, PVC jacket, and NFPA 70, Type CMG.

F. Plenum-Type, RS-485 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and fluorinated-ethylene-propylene jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

G. Multiconductor, Readers and Wiegand Keypads Cables: No. 22 AWG, paired and twisted multiple conductors, stranded (7x30) tinned copper conductors, semirigid PVC insulation, overall aluminum foil-polyester tape shield with 100 percent shield coverage, plus tinned copper braid shield with 65 percent shield coverage, and PVC jacket.
   1. NFPA 70, Type CMG.
   2. Flame Resistance: UL 1581 Vertical Tray.
   3. For TIA/EIA-RS-232 applications.

H. Paired Readers and Wiegand Keypads Cables: Paired, 3 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, individual aluminum foil-polyester tape shielded pairs each with No. 22 AWG, stranded tinned copper drain wire, 100 percent shield coverage, and PVC jacket.
   1. NFPA 70, Type CM.
   2. Flame Resistance: UL 1581 Vertical Tray.

I. Paired Readers and Wiegand Keypads Cable: Paired, 3 pairs, twisted, No. 20 AWG, stranded (7x28) tinned copper conductors, polyethylene (polyolefin) insulation, individual aluminum foil-polyester tape shielded pairs each with No. 22 AWG, stranded (19x34) tinned copper drain wire, 100 percent shield coverage, and PVC jacket.
   1. NFPA 70, Type CM.
   2. Flame Resistance: UL 1581 Vertical Tray.

J. Plenum-Type, Paired, Readers and Wiegand Keypads Cable: Paired, 3 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, plastic insulation, individual aluminum foil-polypropylene tape shielded pairs each with No. 22 AWG, stranded tinned copper drain wire, 100 percent shield coverage, and fluorinated-ethylene-propylene jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

K. Plenum-Type, Multiconductor, Readers and Keypads Cable: 6 conductors, No. 20 AWG, stranded (7x28) tinned copper conductors, fluorinated-ethylene-propylene insulation, overall aluminum foil-polyester tape shield with 100 percent shield coverage plus tinned copper braid shield with 85 percent shield coverage, and fluorinated-ethylene-propylene jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

L. Paired Lock Cable: 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.
   1. NFPA 70, Type CMG.
   2. Flame Resistance: UL 1581 Vertical Tray.

M. Plenum-Type, Paired Lock Cable: 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

N. Paired Lock Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.
   1. NFPA 70, Type CMG.
   2. Flame Resistance: UL 1581 Vertical Tray.

O. Plenum-Type, Paired Lock Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and plastic jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

P. Paired Input Cable: 1 pair, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, overall aluminum foil-polyester tape shield with No. 22 AWG, stranded (7x30) tinned copper drain wire, 100 percent shield coverage, and PVC jacket.
   1. NFPA 70, Type CMR.
   2. Flame Resistance: UL 1666 Riser Flame Test.

Q. Plenum-Type, Paired Input Cable: 1 pair, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, aluminum foil-polyester tape shield (foil side out), with No. 22 AWG drain wire, 100 percent shield coverage, and plastic jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

R. Paired AC Transformer Cable: 1 pair, twisted, No. 18 AWG, stranded (7x26) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.
   1. NFPA 70, Type CMG.
S. Plenum-Type, Paired AC Transformer Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and plastic jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.
T. Elevator Travel Cable: Steel center core, with shielded, twisted pairs, No. 20 AWG conductor size.
   1. Steel Center Core Support: Preformed, flexible, low-torsion, zinc-coated, steel wire rope; insulated with 60 deg C flame-resistant PVC and covered with a nylon or cotton braid.
   2. Shielded Pairs: Insulated copper conductors; color-coded, insulated with 60 deg C flame-resistant PVC; each pair shielded with bare copper braid for 85 percent coverage.
   3. Jute Filler: Electrical grade, dry.
   4. Binder: Helically wound synthetic fiber.
   5. Braid: Rayon or cotton braid applied with 95 percent coverage.
   6. Jacket: 60 deg C PVC specifically compounded for flexibility and abrasion resistance. UL VW-1 and CSA FT1 flame rated.
U. LAN (Ethernet) Cabling: Comply with Division 28 Section "Conductors and Cables for Electronic Safety and Security."

PART 3 - EXECUTION

3.1 GENERAL

A. The Contractor shall install all system components and appurtenances for new TR/TE and MCR locations in accordance with the manufacturers' instructions, ANSI C2, and shall furnish all necessary interconnections, services, and adjustments required for a complete and operable system as specified. Control signals, communications, and data transmission lines grounding shall be installed as necessary to preclude ground loops, noise, and surges from affecting system operation. Equipment, materials, installation, workmanship, inspection, and testing shall be in accordance with manufacturers' recommendations and as modified herein.

B. Consult the manufacturers' installation manuals for all wiring diagrams, schematics, physical equipment sizes, etc., before beginning system installation. Refer to the Riser/Connection diagram for all schematic system installation/termination/wiring data.

C. All equipment shall be attached to walls and ceiling/floor assemblies and shall be held firmly in place (e.g., sensors shall not be supported solely by suspended ceilings). Fasteners and supports shall be adequate to support the required load.

3.2 CURRENT SITE CONDITIONS

A. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions which will affect performance of the system to the Owner in a report as defined in paragraph Group II Technical Data Package. The Contractor shall not take any corrective action without written permission from the Owner.

3.3 EXAMINATION

A. Examine pathway elements intended for cables. Check raceways, cable trays, and other elements for compliance with space allocations, installation tolerances, hazards to cable installation, and other conditions affecting installation.

B. Examine roughing-in for LAN and control cable conduit systems to PCs, Controllers, card readers, and other cable-connected devices to verify actual locations of conduit and back boxes before device installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.4 PREPARATION

A. Comply with recommendations in SIA CP-01.

B. Comply with EIA/TIA-606, "Administration Standard for the Telecommunications Infrastructure of Commercial Buildings."

C. Obtain detailed Project planning forms from manufacturer of access-control system; develop custom forms to suit Project. Fill in all data available from Project plans and specifications and publish as Project planning documents for review and approval.

1. Record setup data for control station and workstations.
2. For each Location, record setup of Controller features and access requirements.
3. Propose start and stop times for time zones and holidays, and match up access levels for doors.

4. Set up groups, linking, and list inputs and outputs for each Controller.
5. Assign action message names and compose messages.
6. Set up alarms. Establish interlocks between alarms, intruder detection, and video surveillance features.
7. Prepare and install alarm graphic maps.
8. Develop user-defined fields.
9. Develop screen layout formats.
10. Propose setups for guard tours and key control.
11. Discuss badge layout options; design badges.
12. Complete system diagnostics and operation verification.
13. Prepare a specific plan for system testing, startup, and demonstration.
14. Develop acceptance test concept and, on approval, develop specifics of the test.
15. Develop cable and asset management system details; input data from construction documents. Include system schematics and Technical Drawings.

D. In meetings with Architect and Owner, present Project planning documents and review, adjust, and prepare final setup documents. Use final documents to set up system software.

3.5 CABLING

A. Comply with NECA 1, "Good Workmanship in Electrical Contracting."

B. Install cables and wiring according to requirements in Division 28 Section "Conductors and Cables for Electronic Safety and Security."

C. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters. Conceal raceway and wiring except in unfinished spaces.

D. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces and in gypsum board partitions where unenclosed wiring method may be used. Use NRTL-listed plenum cable in environmental air spaces, including plenum ceilings. Conceal raceway and cables except in unfinished spaces.

E. Install LAN cables using techniques, practices, and methods that are consistent with Category 5E rating of components and that ensure Category 5E performance of completed and linked signal paths, end to end.

F. Install cables without damaging conductors, shield, or jacket.

G. Boxes and enclosures containing security system components or cabling, and which are easily accessible to employees or to the public, shall be provided with a lock. Boxes above ceiling level in occupied areas of the building shall not be considered to be accessible. Junction boxes and small device enclosures below ceiling level and easily accessible to employees or the public shall be covered with a suitable cover plate and secured with tamperproof screws.

H. Install end-of-line resistors at the field device location and not at the Controller or panel location.

3.6 CABLE APPLICATION

A. Comply with EIA/TIA-569, "Commercial Building Standard for Telecommunications Pathways and Spaces."

B. Cable application requirements are minimum requirements and shall be exceeded if recommended or required by manufacturer of system hardware.

C. RS-232 Cabling: Install at a maximum distance of 50 feet (15 m).

D. RS-485 Cabling: Install at a maximum distance of 4000 feet (1220 m).

E. Card Readers and Keypads:

1. Install number of conductor pairs recommended by manufacturer for the functions specified.
2. Unless manufacturer recommends larger conductors, install No. 22 AWG wire if maximum distance from Controller to the reader is 250 feet (75 m), and install No. 20 AWG wire if maximum distance is 500 feet (150 m).
3. For greater distances, install "extender" or "repeater" modules recommended by manufacturer of the Controller.
4. Install minimum No. 18 AWG shielded cable to readers and keypads that draw 50 mA or more.

F. Install minimum No. 16 AWG cable from Controller to electrically powered locks. Do not exceed [250 feet (75 m)].

G. Install minimum No. 18 AWG ac power wire from transformer to Controller, with a maximum distance of [25 feet (8 m)] twenty five feet.

3.7 GROUNDING

A. Comply with Division 26 Section "Grounding and Bonding for Electrical Systems."

B. Comply with IEEE 1100, "Power and Grounding Sensitive Electronic Equipment."

C. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments.

D. Signal Ground:

1. Terminal: Locate in each equipment room and wiring closet; isolate from power system and equipment grounding.
2. Bus: Mount on wall of main equipment room with standoff insulators.
3. Backbone Cable: Extend from signal ground bus to signal ground terminal in each equipment room and wiring closet.

3.8 INSTALLATION

A. System installation shall be in accordance with UL 294, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.

B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.

C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a operable system.

D. The PACS will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a network.

E. For integration purposes, the PACS shall be integrated where appropriate with the following associated security subsystems:

1. CCTV:
   a. Provide 24 hour coverage of all entry points to the perimeter and agency buildings. As well as all emergency exits utilizing a fixed color camera.
   b. Be able to monitor, control and record cameras on a 24 hours basis.
   c. Be programmed automatically call up a camera when an access point is but into an alarm state.
   d. For additional PACS system requirements as they relate to the CCTV, refer to Section 28 23 00, VIDEO SURVEILLANCE.

2. IDS:
   a. Be able monitor door control sensors.
   b. Be able to monitor and control the IDS on a 24 hours basis.
   c. Be programmed to go into an alarm state when an IDS device is put into an alarm state, and notify the operator via an audible alarm.
   d. For additional PACS system requirements as they relate to the IDS, refer to Section 28 16 11, INTRUSION DETECTION SYSTEM.
3. Security Access Detection:
   a. Be able to monitor all objects that have been screened with an x-ray machine and be able to monitor all data acquired by the bomb detection unit.
   b. For additional PACS system requirements as they relate to the Security Access Detection, refer to Section 28 13 53, SECURITY ACCESS DETECTION.
4. EPPS:
   a. Be programmed to go into an alarm state when an emergency call box or duress alarm/panic device is activated, and notify the Physical Access Control System and Database Management of an alarm event.
   b. For additional PACS requirements as they relate to the EPPS, refer to Section 28 26 00, ELECTRONIC PERSONAL PROTECTION SYSTEM.

F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

G. For programming purposes refer to the manufacturers requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.

H. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system. The Contractor shall not take any corrective action without written permission from the Government.

I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a

report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

J. Existing Equipment:

1. The Contractor shall connect to and utilize existing door equipment, control signal transmission lines, and devices as outlined in the design package. Door equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing door equipment and signal lines intended to be incorporated into the PACS, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or improper installation of equipment.
5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations

on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

L. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

M. Control Panels:
   1. Connect power and signal lines to the controller.
   2. Program the panel as outlined by the design and per the manufacturer’s programming guidelines.

N. SMS:
   1. Coordinate with the VA agency’s IT personnel to place the computer on the local LAN or Intranet and provide the security system protection levels required to insure only authorized VA personnel have access to the system.
   2. Program and set-up the SMS to ensure it is in fully operation.

O. Card Readers:
   1. Connect all signal inputs and outputs as shown and specified.
   2. Terminate input signals as required.
   3. Program and address the reader as per the design package.
   4. Readers shall be surface or flushed mounted and all appropriate hardware shall be provided to ensure the unit is installed in an enclosed conduit system.

P. Biometrics:
   1. Connect all signal input and output cables along with all power cables.
   2. Program and ensure the device is in operating order.

Q. Portal Control Devices:
   1. Install all signal input and output cables as well as all power cables.
   2. Devices shall be surface or flush mounted as per the design package.
   3. Program all devices and ensure they are working.

R. Door Status Indicators:
   1. Install all signal input and output cables as well as all power cables.

2. RTE's shall be surface mounted and angled in a manner that they cannot be compromised from the non-secure side of a windowed door, or allow for easy release of the locking device from a distance no greater than 6 feet from the base of the door.
3. Door position sensors shall be surface or flush mounted and wide gap with the ability to operate at a maximum distance of up to 2" (5 cm).

S. Entry Control Devices:
1. Install all signal input and power cables.
2. Strikes and bolts shall be mounted within the door frame.
3. Mortise locks shall be mounted within the door and an electric transfer hinge shall be utilized to transfer the wire from within the door frame to the mortise lock inside the door.
4. Electromagnetic locks shall be installed with the mag-lock mounted to the door frame and the metal plate mounted to the door.

T. System Start-Up:
1. The Contractor shall not apply power to the PACS until the following items have been completed:
   a. PACS equipment items and have been set up in accordance with manufacturer's instructions.
   b. A visual inspection of the PACS has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
   c. System wiring has been tested and verified as correctly connected as indicated.
   d. All system grounding and transient protection systems have been verified as installed and connected as indicated.
   e. Power supplies to be connected to the PACS have been verified as the correct voltage, phasing, and frequency as indicated.
2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.
3. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

U. Supplemental Contractor Quality Control:

1. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed PACS; and are approved by the Contracting Officer.
2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.9 SYSTEM SOFTWARE

A. Install, configure, and test software and databases for the complete and proper operation of systems involved. Assign software license to Owner.

3.10 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect, test, and adjust field-assembled components and equipment installation, including connections, and to assist in field testing. Report results in writing.

B. Testing Agency: Engagea qualified testing and inspecting agency to perform field tests and inspections and prepare test reports:

C. Perform the following field tests and inspections and prepare test reports:

1. LAN Cable Procedures: Inspect for physical damage and test each conductor signal path for continuity and shorts. Use Class 2, bidirectional, Category 5 tester. Test for faulty connectors, splices, and terminations. Test according to TIA/EIA-568-1, "Commercial Building Telecommunications Cabling Standards - Part 1 General Requirements." Link performance for UTP cables must comply with minimum criteria in TIA/EIA-568-B.
2. Test each circuit and component of each system. Tests shall include, but are not limited to, measurements of power supply output under maximum load, signal loop resistance, and leakage to ground where applicable. System components with battery backup shall be operated on battery power for a period of not less than 10 percent

of the calculated battery operating time. Provide special equipment and software if testing requires special or dedicated equipment.

3. Operational Test: After installation of cables and connectors, demonstrate product capability and compliance with requirements. Test each signal path for end-to-end performance from each end of all pairs installed. Remove temporary connections when tests have been satisfactorily completed.

3.11 PROTECTION

A. Maintain strict security during the installation of equipment and software. Rooms housing the control station, and workstations that have been powered up shall be locked and secured, with an activated burglar alarm and access-control system reporting to a Central Station complying with UL 1610, "Central-Station Burglar-Alarm Units," during periods when a qualified operator in the employ of Contractor is not present.

3.12 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.13 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

C. Develop separate training modules for the following:

1. Computer system administration personnel to manage and repair the LAN and databases and to update and maintain software.
2. Operators who prepare and input credentials to man the control station and workstations and to enroll personnel.
3. Security personnel.
4. Hardware maintenance personnel.

5. Corporate management.

D. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

-----END----

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 28 13 53
SECURITY ACCESS DETECTION

PART 1 – GENERAL

1.1 DESCRIPTION

A. Provide and install a complete Detection and Screening System, hereinafter referred to as the Security Access Detection as specified in this section.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 – JOINT FIRESTOPPING. Requirements for firestopping application and use.

C. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general requirements that are common to more than one section in Division 28.

D. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

E. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

F. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

G. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. For commissioning requirements, systems readiness checklists, and training.

H. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for physical access control integration.

I. Section 28 16 00 - INTRUSION DETECTION SYSTEM. Requirements for alarm systems.

J. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.

1.3 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the Security Access Detection as shown. The Contractor shall also provide certification as required.

B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

D. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

E. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

F. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System’s (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner’s permission and representative, to verify the quality of installation and the references’ level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to

install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 SUBMITTALS

A. Submit below items in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, Section 02 41 00, DEMOLITION, and Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

B. Provide certificates of compliance with Section 1.3, Quality Assurance.

C. Provide a complete and thorough pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (in.) (1220 x 1220 millimeters) (mm); drawing submittals shall be per the established project schedule.

D. Pre-installation design and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
   a. Clearly define each page of the design package to include facility name, building name, floor, and sheet number.
   b. Provide a complete list of all security abbreviations and symbols.
   c. Reference all general notes that are utilized within the design package.
   d. Specification and scope of work pages for all individual security systems that are applicable to the design package that will:
      1) Outline all general and job specific work required within the design package.
      2) Provide a detailed device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Clearly define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements.
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A detailed riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one (1) diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1

Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.

4. A detailed system drawing for each applicable security system shall:
   a. Clearly identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.
   d. Show device locations that correspond to the floor plans.
   e. All general and drawing specific notes shall be included with the system drawings.
5. A detailed schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, provide the Security Access Detection detector or screening device ID, type (e.g. walk-through screener, X-ray, explosive detector, etc.), type of technology used by system for detection and model number.
6. Provide detail and elevation drawings for all devices that define how they were installed and mounted.

E. The pre-installation design packages shall go through a full review process conducted by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. The Contractor shall provide manufacturer security system product cut-sheets that clearly and completely indicate the description and

function of each component of the security systems they are associated with. Also, indicate all termination points of devices and interconnections required for operation of the system, and between modules and devices.

G. The Contractor shall submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include detailed procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

H. The Contractor shall submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing for all security system devices, power sources, control panels, and monitoring equipment.

I. The Contractor shall provide complete maintenance and operating manuals from the manufacturer that support as-builts and system design, to include all technical product sheets and overall system schematics. Two (2) weeks prior to the final inspection, four (4) copies of the maintenance and operating manuals also need to be submitted to the RE.

J. Certifications: Two (2) weeks prior to final inspection, submit four (4) copies of the following to the RE:

1. Complete maintenance and operating manuals from the manufacturer that support as-built and systems design, to include all technical data sheets and overall system schematics.
2. Certification by the Contractor that the materials submitted is in accordance with the drawings and specifications.
3. Certification by the Contractor that a complete security system installation has been installed, tested and adjusted.

K. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM)

C1238-97 (R03).....Standard Guide for Installation of Walk-Through Metal Detectors

C. Department of Justice American Disability Act (ADA)

28 CFR Part 36-94.....ADA Standards for Accessible Design

D. Department of Veterans Affairs

VHA National CAD Standard Application Guide, 2006

VA BIM Guide, V1.0 10

E. Federal Communications Commision (FCC):

(47 CFR 15) Part 15.....Limitations on the Use of Wireless Equipment/Systems

F. Government Accountability Office (GAO):

GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

G. Institute of Electrical and Electronics Engineers (IEEE):

C95.1-05.....Standards for Safety Levels with Respect to Human Exposure in Radio Frequency Electromagnetic Fields

H. National Fire Protection Association (NFPA):

70-11..... Article 780-National Electrical Code

I. National Institute of Justice (NIJ)

0601.02-03.....Standards for Walk-Through Metal Detectors for use in Weapons Detection

0602.02-03.....Hand-Held Metal Detectors for Use in Concealed Weapon and Contraband Detection

J. National Electrical Manufactures Association (NEMA)

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

K. Occupational and Safety Health Administration (OSHA):

29 CFR 1910.97.....Nonionizing radiation

L. Security Industry Association (SIA):

AG-01.....Security CAD Symbols Standards

M. Underwriters Laboratories, Inc. (UL):

187-98.....Standard for X-ray Equipment

464-03.....Audible Signal Appliances

N. United States Department of Commerce:

Special Pub 500-101 ....Care and Handling of Computer Magnetic Storage Media

O. Uniform Federal Accessibility Standards (UFAS), 1984

P. Architectural Barriers Act (ABA), 1968

1.6 COORDINATION

A. Coordinate arrangement, mounting, and support of security access detection equipment:
   1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
   2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
   3. To allow right of way for piping and conduit installed at required slope.
   4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.7 WARRANTY OF CONSTRUCTION.

A. Warrant Security Access Detection work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 – PRODUCTS

2.1 GENERAL

A. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 hertz (Hz) or 60 Hz alternating current (AC) power system unless documented otherwise in subsequent sections listed within this spec. All equipment shall have a battery back-up source of power that will provide 12 hours (hrs.) of run time in the event of a loss of primary power to Security Access Detection systems until a backup generator comes on-line.

B. Walk-through metal detectors and X-ray machines shall meet the National Institute of Justice (NIJ) Standards and Safety requirements.

C. The Security Access Detection shall be designed, installed, and programmed in a manner that will allow for easy of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All Security Access Detection components located in designated "HAZARDOUS ENVIRONMENT" areas where fire or explosion could occur due to the presence of natural gases or vapors, flammable liquids, combustible residue, or ignitable fibers or debris, shall be rated Class II, Division I, Group F, and installed in accordance with NFPA 70, Chapter 5.

E. All Security Access Detection equipment and materials provided shall be new, first grade, standard, current products of the manufacturer and shall be suitable for the systems being installed and the intent of the design.

F. All Security Access Detection equipment and materials shall be stored, adequately protected and carefully handled to prevent damage before and during installation and according to manufacture's instructions.

G. All Security Access Detection equipment provided with a factory finish shall be maintained free of dust, dirt and foreign matter. Dents, marred finishes and other damage shall be repaired to its original condition or shall be replaced, at no additional cost to the Owner.

H. The Contractor shall provide the RE with written verification, that the type of wire/cable being provided is recommended and approved by the OEM. Cabling shall meet the interconnecting wiring requirements of NFPA 70 (NEC). The Contractor is responsible for providing the correct protection cable duct and/or conduit and wiring.

I. The Contractor is responsible for interfacing Security Access Detection with other security subsystems. The Contractor shall utilize interfacing methods that are approved by the OEM and RE. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection; but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The interface point must adhere to all standards described herein.

J. The characteristics listed in this section will serve as a guide in selection of equipment and materials for the Security Access Detection. If updated or more suitable versions are available then the RE will approve the acceptance of prior to an installation.

K. If any obsolete, incompatible, or damaged equipment is offered by the Contractor at the time of installation, then the equipment will be returned and replaced with equipment at no cost to the government.

2.2 EQUIPMENT ITEMS

A. General

1. All specifications listed within this section are the minimum requirements to be met to ensure a working Security Access Detection is in place.
2. Detection Sensor subsystems shall consist of sensors capable of:
   a. Locating and identifying prohibited, threatening, contraband materials and items the system is designed to detect and protect against being brought into a facility.
   b. Sensors shall be adjustable to maximize capabilities based on environmental and security requirement changes.
3. Annunciation: Shall contain one (1) or more indicator lamps, alphanumeric displays that provide status information about a circuit or condition of the operating units. Walk-Through or conveyer pass through units must provide a uniform two-digit error code to identify different types of system failures.
4. Audible Signal Device: Shall consist of audible sound for alarms, supervisory, and trouble signals and shall be distinctive.
5. Assessment: Shall consist of electronic devices required to visually and audibly verify the validity and functionality of Security Access Detection. Assessment also includes providing indication of tampering, fail-safe, low battery, and power losses.
6. Alarm Reporting: Shall consist of electronic devices to annunciate Security Access Detection information to at least two (2) separate locations. The alarms shall maintain the capability to respond with local and remote visible and audible signals upon activation of detection sensors. The alarms should have the capability of a silent mode only alerting personnel using the system.
7. Power Supply: Security Access Detection shall be capable of continuous operation and include a battery backup module capable of 12 hrs. of backup use. All non-portable systems shall operate on 100-240 VAC. Hand-Held Security Access Detection (Metal and Explosive Detectors) shall have the capability to operate on rechargeable batteries.

2.3. WALK-THROUGH METAL DETECTORS:

A. Shall meet NIJ Standard 0601.02 and be able to detect and locate guns, knives, and other flat and rod-shaped objects regardless of orientation.

B. All electronics shall be modular in design for easy plug-in and replacement. The Detector shall use multiple coil circuits with dual alarm lights to indicate which side of the individual the detected item is located.

C. Shall be capable of self-diagnostics and conduct self-test of all systems to automatically identify failures or problems with components as displayed on the control unit liquid crystal display (LCD). The detection unit shall not require re-calibration each time the system is turned off and back on.

D. Shall provide for full body coverage: coverage on the left, center, right, front, and back of the body from head to floor, providing uniform detection.

E. Shall include individual zones that are adjustable for customization of detection characteristics and/or compensation for metallic environmental challenges.

F. Shall have the capability to detect and discriminate signals from two (2) or more detectable items located in close proximity that may be detected as only one (1).

G. Shall include adjustable legs to provide for accurate leveling on uneven floors.

H. Major components include:

1. Walk-through portal/passage way
2. Control Unit
3. Test Unit

I. Technical Characteristics:

Operating Temperatures	-4°F (-20°C) to 158°F (70°C) 95% humidity non-condensing
Power Supply Unit	Fully automatic input 100 to 240 VAC 50 or 60 Hz – five (5) watts Uninterrupted Power supply (UPS) Battery Backup (12 hours)
Construction	Minimum 3/32 in. (2.381mm) aluminum in strength and weather resistant
Opening Sizes	Interior Width: 30 in. (762mm) Interior Height: 80 in.(2.032 meters)
Programmable	Capable of 16 independent programs

	settings for zones and sensitivity
Sensitivity Boost	Three (3) levels at ankle level
Detection Sensors	Multi-dimensional coil 33 distinct pin-point zones - customizable
Sensitivity Levels	200
Interference Protection	Faraday shielding
Alarms	Audible and light-emitting diode (LED) Visual
Testing Device	Simulate size, shape, and composition of threat objects meet FAA testing requirements
Traffic Flow Indicators	LED Lights
Infrared Sensor	Traffic control and counter

J. Control Unit: Shall consist of the components to constantly monitor, input settings, and verify inputs of sensors.

1. The control unit is to be attached to the exit side of the scanner or shall be able to be detached and operational from up to 50 feet (ft.) (15.24 meters)(m) from detector.
2. The control unit will consist of a multiple functional electronic digital keypad/touchpad. The keypad/touchpad requires human/machine interface (HMI) with numerical or function keys that can activate, deactivate, observe or change sensitivity and detector settings using secure codes.
3. The Control Unit shall be programmed to be self-prompting for input.
4. The LCD display shall be large, easily seen, backlit with alpha-numeric display that reports in words to regulate, control and provide self-prompt functions of the control unit.
5. Control Unit Technical Characteristics:

Display	LCD
Connection to Unit	Wired with extension of 50 ft. (15.24m) for remote use
Touchpad Controls	Operate, Off, Counter, Volume, +/-, Program and Access
Displays	LED bar-graphs for detection sensitivity Alarm lights Functionality Program in operation Errors Traffic Count Alarm activations Alarm Percentages
Tamper alarm	10 seconds after access of touchpad
Access Control	Dual-level access codes for: Operators

REISSUED 02-18-2026

	Supervisors

K. Control Unit Interface:

1. The system shall include an interface module for network transmission of data and remote monitoring of system at the Physical Access Control System and Database Management.
2. Integration with the Physical Access Control System and Database Management shall allow for control, real time monitoring and diagnostics capabilities.
3. Control Unit Interface Technical Characteristics:

Display	LCD (laptop or Desktop Monitor)
Connection	10-Base T Network
System Capabilities	Monitor up to 4 scanners
Capabilities	Change settings LED bar-graph display Functionality Program in operation Errors Traffic Count Alarm activations Alarm Percentages Technician trouble-shoot
Access Control	Dual-level access codes Operators Supervisory

2.4. HAND-HELD METAL DETECTORS:

A. Shall meet NIJ Standard 0602.02 and be rugged in design and water-proof; lightweight to reduce stress of handling; and provide ease of freedom of movement and control.

B. Shall be easily made operational with a one (1) switch operation that does not require any adjustments.

C. Technical Characteristics:

Operating Temperatures	-35°F (-37°C) to 158°F (70°C) 95% humidity non-condensing
Operating Frequency	93 kHz
Audio Frequency	2kHz Warble Earphone capable
Tuning	Automatic
Controls	Power switch On/Off Interference Elimination
LED Alert Lights	Power On, Battery Low, Alarm
Indicators	Silent/Vibrate Audible Speaker LED Alert Lights
Power	Standard 9 volt and Nickel-Metal Hydride(NiMH)rechargeable battery
Battery life	60 hours continuous operations
Minimum Detection	Medium Pistol – 9 in. (228.6mm)

Capability Distances	Large Knife- 5 in. (127mm) Razor Blade- 3 in. (76.2mm) Small foil and jewelry – 1 in.

2.5 X-RAY DETECTORS:

A. Shall be surface mounted, multilayer, fully integrated, high frequency, and solid state using high speed processors.

B. Shall meet NIJ Standards including a Personal Computer (PC) based system that can be networked with other inspection systems and can transmit data.

C. The type of X-ray unit selected shall require consideration of its application and use (i.e., used to screen items through lobby control points versus screening items, which may be larger in size, such as through mail room/shipping and receiving facility areas).

D. The system should provide the capability to send images through a network to a central server PC where the images can be viewed, stored or printed.

E. The conveyer belt system belts should be guaranteed to perform auto tracking for life.

F. All x-ray systems shall be certified to be in full compliance with all international radiation safety requirements and external emissions limits.

G. Technical Characteristics:

X-Ray Generator	Self Contained operating at 90 kilovolts
Controls	Edge sharpening, variable intensity control, zoom, atomic number measurement
Zoom Capability	2X to 32X penetration levels
Discrimination	Organic, inorganic, mixed
Penetration	0.39 in. (10 mm) steel
Resolution capability	Detect #40 AWG
Color Tones	Two (2) million (Multi-Energy Colors)
Conveyer belt weight capabilities	200 lbs. (90 kilograms)
Conveyer belt speed	Controllable – 48 fpm (24 cm/sec)-reversible
Network Capable	Ethernet using TCP/IP

H. Central Processing Unit Technical Characteristics:

Processor	2.4 GHz Intel Pentium IV
Hard Disk Size	40 GB
Memory	256 RAM
Network Card	10/100 Base-T

CD-ROM Drive	10X
Monitor/Video Adapter board	19” (482.6mm)SVGA (1280 x 1044)Flicker Free Flat Screen .28 dot pitch
Floppy Drive	1.44 MB
Ports	2 serial, 1 parallel, USB
Backup	Tape or CDRW

2.6 EXPLOSIVES DETECTORS:

A. Handheld: Provide for a self-contained analytical unit, with on-board computer, printer and touch screen display. The detector shall be easy to operate by non-technical staff/operators:

1. System will use dual vapor and particulate detection without any external carrier gas or radioactive source.
2. Detector shall be a simple push-button automatic operation that displays go/no go results on a LCD display.
3. Explosive Detectors Technical Characteristics:

Power	12 volt direct current (DC) rechargeable 12 volt External battery pack 12 volt AC adapter
Device Controls	Power switch, keypad, automatic vapor/particulate selector, volume control (with optional earphone, and sample switch.
Memory	Store a minimum of 1000 previous readings
Detection	Dual vapor and particulate
Detection Analysis	<20 seconds
Detection Capabilities	Nanogram levels of: C-4, TNT, Dynamite, PETN, Semtex, EGDN, DMNB, RDX, ANFO, Black Powder, Ammonium Nitrate, Urea Nitrate, Nitroglycerine and TATP

B. Desktop:

1. Shall have a built-in networking and communication capability. The device shall easily interface with other screening systems and printer if it is not part of the unit.
2. Shall be self-contained, self-cleaning, self-calibrating, and require no external gas supply.
3. A touch screen display shall be provided that displays both alarm and compound identification information Red flashing light on unit and audible alarm Automatic “Print on Alarm” option.
4. Contractor shall provide collection device for input of data.
5. Technical Characteristics:

Power	90 to 265 volts alternating current (VAC) 50-60 Hz
Technology	Dual- gas chromatography and Ion mobility spectrometer
Power Consumption	Less than 500 watts
Device Controls	Touch screen display Power switch
Operating Modes	Continuous and Single Cycle
Warm up time	< 20 minutes (cold start)
Memory	Store a minimum of 1000 previous readings
Detection	Dual vapor and particulate
Analysis Time	< 20 seconds
Detection Capabilities	Nanogram levels of: 1) Explosives: PETN, RDX,TNT, NG, Dynamite, Semtex, C4 2) Narcotics: Cocaine, Opiates (heroine & morphine), Cannabis marijuana & hashish), Amphetamine-type stimulants amphetamine, ecstasy & methamphetamine.

PART 3 - EXECUTION

3.1 GENERAL

A. System installation shall be in accordance with appropriate NEC, UL, NFPA, Related Work VA specifications, and appropriate installation manual for each type of Security Access Detection.

B. The Security Access Detection system will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a complete network.

C. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.

D. All Security Access Detection requiring VAC connection will be installed with surge protection and Uninterrupted Power Supply (UPS).

E. Architectural space planning design requirements need to be considered and defined prior to the installation of metal detection, x-ray and explosive detection equipment at main lobby entrance or other security control points. This also applies to the use of x-ray and explosive detectors in mail and shipping/receiving facility areas.

F. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the

manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.

G. Walk-through metal detectors will not be located on floors with high metal content that may interfere with screening without protection between the floor and detector being considered.

H. The Contractor shall provide walk-through metal detectors with the capability for floor mounting (OEM recommended brackets) to increase stability.

3.2 WIRING

A. Wiring Method: Install cables in raceways[except in accessible indoor ceiling spaces, in attics,] [in hollow gypsum-board partitions,] and as otherwise indicated. Conceal raceways and wiring except in unfinished spaces.

B. Wiring Method: Install cables concealed in accessible ceilings, walls, and floors where possible.

C. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points with no excess and without exceeding manufacturer's limitations on bending radii. Provide and use lacing bars and distribution spools.

D. Splices, Taps, and Terminations: For power and control wiring, use numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures. Tighten electrical connectors and terminals according to manufacturer's published torque-tightening values. If manufacturer's torque values are not indicated, use those specified in UL 486A and UL 486B.

E. Grounding: Provide independent-signal circuit grounding recommended in writing by manufacturer.

3.3 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect field-assembled components and equipment installation and supervise pretesting, testing, and adjusting of video surveillance equipment.

B. Inspection: Verify that units and controls are properly installed, connected, and labeled, and that interconnecting wires and terminals are identified.

C. Test Schedule: Schedule tests after pretesting has been successfully completed and system has been in normal functional operation for at least 14 days. Provide a minimum of 10 days' notice of test schedule.

D. Operational Tests: Perform operational system tests to verify that system complies with Specifications. Include all modes of system operation. Test equipment for proper operation in all functional modes.

E. Remove and replace malfunctioning items and retest as specified above.

F. Record test results for each piece of equipment.

G. Retest: Correct deficiencies identified by tests and observations and retest until specified requirements are met.

3.4 ADJUSTING

A. Occupancy Adjustments:When requested within 12 months of date of Substantial Completion, provide on-site assistance in adjusting system to suit actual occupied conditions and to optimize performance of the installed equipment. Tasks shall include, but are not limited to, the following:

1. Check cable connections.
2. Check proper operation of detectors.
3. Recommend changes to walk trough detectors, X-ray machines, and associated equipment to improve Owner' utilization of security access detection system.
4. Provide a written report of adjustments and recommendations.

B. Adjustment/Alignment/Synchronization: Contractor shall prepare for system activation by following manufacturer’s recommended procedures for adjustment, alignment, programming, or synchronization. Prepare each component in accordance with appropriate provisions of the component’s installation, operations, and maintenance instructions.

3.5 CLEANING

A. Cleaning: Subsequent to installation, clean each system component of dust, dirt, grease, or oil incurred during installation in accordance to manufacture instructions.

3.6 INTEGRATION

A. For integration purposes, the Security Access Detection system shall be integrated with the Physical Access Control System and Database Management via CAT-V cables and where appropriate with CCTV and EPPS. The CCTV Security System will:

1. Provide full coverage of all lobby entrance screening areas utilizing a fixed color camera.
2. Record activity on a 24 hours basis.
3. The CCTV system should have facial recognition software to assist in identifying individuals for current and future purposes.
4. For additional CCTV system requirements as they relate to the Security Access Detection, refer to Section 28 13 53, SECURITY ACCESS DETECTION.

B. Integration with CCTV and EPPS security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

C. For programming purposes, refer to the manufacturers requirements for correct system operations. Ensure computer hardware being utilized for system integration meets or exceeds the minimum system requirements as well as systems software requirements.

3.7 EXISTING CONDITIONS

A. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

B. Existing Equipment

1. The Contractor shall connect to and utilize existing equipment, and control signal transmission lines, and devices as outlined in the design package. Equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing equipment, power outlets, and signal lines intended to be used by the Security Access Detection, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating

equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.

4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or improper installation of equipment.
5. The Contracting Officer shall provide a full list of all equipment that is to be removed or replaced by the Contractor. The Contractor shall dispose of all equipment that has been removed or replaced. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

3.8 SYSTEM START-UP AND TESTING

A. System Start-Up
   1. The Contractor shall not apply power to any installed Security Access Detection until the following items have been completed:
      a. Security Access Detection equipment items have been set up in accordance with manufacturer's instructions.
      b. A visual inspection of the Security Access Detection system has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
      c. System wiring has been tested and verified as correctly connected as indicated.
      d. All system grounding and transient protection systems have been verified as installed and connected as indicated.
      e. Power supplies to be connected to the Security Access Detection system have been verified as the correct voltage, phasing, and frequency as indicated by the manufacturer.
   2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

B. Supplemental Contractor Quality Control: The following requirements supplement the Contractor quality control requirements specified elsewhere in the contract:
   1. The Contractor shall provide the services of technical representatives who are familiar with all components and

installation procedures of any installed Security Access Detection; and are approved by the Contracting Officer.

2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

C. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

D. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.9 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS and related sections for contractor responsibilities for system commissioning.

-----END----

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 28 16 00
INTRUSION DETECTION SYSTEM

PART 1 – GENERAL

1.1 DESCRIPTION

A. Provide and install a complete Intrusion Detection System, hereinafter referred to as IDS, as specified in this section.

B. This Section includes the following:

1. Intrusion detection with [hard-wired] [multiplexed], modular, microprocessor-based controls, intrusion sensors and detection devices, and communication links to perform monitoring, alarm, and control functions.
2. Responsibility for integrating electronic and electrical systems and equipment is specified in the following Sections, with Work specified in this Section:
   a. Division 08 Section "DOOR HARDWARE".
   b. Division 27 Section "INTERCOMMUNICATIONS AND PROGRAM SYSTEMS".
   c. Division 28 Section "PHYSICAL ACCESS CONTROL".
   d. Division 28 Section "FIRE DETECTION AND ALARM".
   e. Division 28 Section "VIDEO SURVEILLANCE".
   f. Division 32 Section "CHAIN LINK FENCES AND GATES".

C. Related Sections include the following:

1. Division 28 Section "VIDEO SURVEILLANCE" for closed-circuit television cameras that are used as devices for video motion detection.
2. Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY" for cabling between central-station control units and field-mounted devices and controllers.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 – JOINT FIRESTOPPING. Requirements for firestopping application and use.

C. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
D. Section 26 05 19 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
E. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
F. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
G. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
H. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
I. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY. Requirements for commissioning - systems readiness checklists, and training.
J. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for physical access control integration.
K. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.
L. Section 28 31 00 - FIRE DETECTION AND ALARM. Requirements for integration with fire detection and alarm system.

1.3 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the IDS as shown. The Contractor shall also provide certification as required.
B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.
C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

1.4 DEFINITIONS

A. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

B. I/O: Input/Output.

C. Intrusion Zone: A space or area for which an intrusion must be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.

D. LED: Light-emitting diode.

E. NEC: National Electric Code

F. NEMA: National Electrical Manufacturers Association

G. NFPA: National Fire Protection Association

H. NRTL: Nationally Recognized Testing Laboratory.

I. SMS: Security Management System – A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

J. PIR: Passive infrared.

K. RF: Radio frequency.

L. Standard Intruder: A person who weighs 45 kg (100 lb.) or less and whose height is 1525 mm (60 in) or less; dressed in a long-sleeved shirt, slacks, and shoes.

M. Standard-Intruder Movement: Any movement, such as walking, running, crawling, rolling, or jumping, of a "standard intruder" in a protected zone.

N. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

O. UPS: Uninterruptible Power Supply

P. UTP: Unshielded Twisted Pair

1.5 SUBMITTALS

A. Submit below items in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 02 41 00, DEMOLITION.

B. Provide certificates of compliance with Section 1.3, Quality Assurance.

C. Provide a shop drawing and as-built design package in both electronic format and on paper, minimum size 1220 x 1220 millimeters (48 x 48

inches); drawing submittals shall be per the established project schedule.

D. Shop drawing and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
   a. Define each page of the design package to include facility name, building name, floor, and sheet number.
   b. Provide a list of all security abbreviations and symbols.
   c. Reference all general notes that are utilized within the design package.
   d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
      1) Outline all general and job specific work required within the design package.
      2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1

Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.

4. A system drawing for each applicable security system shall:
   a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.
   d. Show device locations that correspond to the floor plans.
   e. All general and drawing specific notes shall be included with the system drawings.
5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the IDS, provide the sensor ID, sensor type and housing model number.
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Shop drawing packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture's certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

H. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Security Industry Association (SIA):

PIR-01-00.....Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

CP-01-00.....Control Panel Standard-Features for False Alarm Reduction

C. Department of Justice American Disability Act (ADA)

28 CFR Part 36.....2010 ADA Standards for Accessible Design

D. Federal Communications Commission (FCC):

(47 CFR 15) Part 15.....Limitations on the Use of Wireless Equipment/Systems

E. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

70-11.....National Electrical Code

731-08.....Standards for the Installation of Electric Premises Security Systems

G. Underwriters Laboratories, Inc. (UL):

464-09.....Audible Signal Appliances

609-96.....Local Burglar Alarm Units and Systems

634-07.....Standards for Connectors with Burglar-Alarm Systems

639-07.....Standards for Intrusion Detection Units

1037-09.....Standard for Anti-theft Alarms and Devices

1635-10.....Digital Alarm Communicator System Units

H. Uniform Federal Accessibility Standards (UFAS), 19841.

1.7 COORDINATION

A. Coordinate arrangement, mounting, and support of intrusion detection system equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.
4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.8 EQUIPMENT AND MATERIALS

A. General

1. All equipment associated within the IDS shall be rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.
2. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 96 hours of run time in the event of a loss of primary power to the facility.
3. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

4. All IDS components located in designated "HAZARDOUS ENVIRONMENT" areas where fire or explosion could occur due to the presence of natural gases or vapors, flammable liquids, combustible residue, or ignitable fibers or debris, shall be rated Class II, Division I, Group F, and installed in accordance with National Fire Protection Association (NFPA) 70 National Electric Code, Chapter 5.
5. All equipment and materials for the system will be compatible to ensure functional operation in accordance with requirements.

1.9 WARRANTY OF CONSTRUCTION.

A. Warrant IDS work subject to the Article "Warranty of Construction" of FAR 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 – PRODUCTS

2.1 FUNCTIONAL DESCRIPTION OF SYSTEM

A. Supervision: System components shall be continuously monitored for normal, alarm, supervisory, and trouble conditions. Indicate deviations from normal conditions at any location in system. Indication includes identification of device or circuit in which deviation has occurred and whether deviation is an alarm or malfunction.
   1. Alarm Signal: Display at central-station control unit and actuate audible and visual alarm devices.
   2. Trouble Condition Signal: Distinct from other signals, indicating that system is not fully functional. Trouble signal shall indicate system problems such as battery failure, open or shorted transmission line conductors, or controller failure.
   3. Supervisory Condition Signal: Distinct from other signals, indicating an abnormal condition as specified for the particular device or controller.

B. System Control: Central-station control unit shall directly monitor intrusion detection units and connecting wiring.

C. System Control: Central-station control unit shall directly monitor intrusion detection devices, perimeter detection units, controllers associated with perimeter detection units, and connecting wiring in a multiplexed distributed control system or as part of a network.

D. System shall automatically reboot program without error or loss of status or alarm data after any system disturbance.

E. Operator Commands:

1. Help with System Operation: Display all commands available to operator. Help command, followed by a specific command, shall produce a short explanation of the purpose, use, and system reaction to that command.
2. Acknowledge Alarm: To indicate that alarm message has been observed by operator.
3. Place Protected Zone in Access: Disable all intrusion-alarm circuits of a specific protected zone. Tamper circuits may not be disabled by operator.
4. Place Protected Zone in Secure: Activate all intrusion-alarm circuits of a protected zone.
5. Protected Zone Test: Initiate operational test of a specific protected zone.
6. System Test: Initiate system-wide operational test.
7. Print Reports.

F. Timed Control at Central-Station Control Unit: Allow automatically timed "secure" and "access" functions of selected protected zones.

G. Automatic Control of Related Systems: Alarm or supervisory signals from certain intrusion detection devices control the following functions in related systems:

1. Switch selected lights.
2. Shift elevator control to a different mode.
3. Open a signal path between certain intercommunication stations.
4. Shift sound system to "listening mode" and open a signal path to certain system speakers.
5. Switch signal to selected monitor from closed-circuit television camera in vicinity of sensor signaling an alarm.

H. Printed Record of Events:Print a record of alarm, supervisory, and trouble events on system printer. Sort and report by protected zone, device, and function. When central-station control unit receives a signal, print a report of alarm, supervisory, or trouble condition. Report type of signal (alarm, supervisory, or trouble), protected zone description, date, and time of occurrence. Differentiate alarm signals from other indications.When system is reset, report reset event with the same information concerning device, location, date, and time.

Commands shall initiate the reporting of a list of current alarm, supervisory, and trouble conditions in system or a log of past events.

I. Response Time: 2 seconds between actuation of any alarm and its indication at central-station control unit.

J. Circuit Supervision: Supervise all signal and data transmission lines, links with other systems, and sensors from central-station control unit. Indicate circuit and detection device faults with both protected zone and trouble signals, sound a distinctive audible tone, and illuminate an LED. Maximum permissible elapsed time between occurrence of a trouble condition and indication at central-station control unit is 20 seconds. Initiate an alarm in response to opening, closing, shorting, or grounding of a signal or data transmission line.

K. Programmed Secure-Access Control: System shall be programmable to automatically change status of various combinations of protected zones between secure and access conditions at scheduled times. Status changes may be preset for repetitive, daily, and weekly; specially scheduled operations may be preset up to a year in advance. Manual secure-access control stations shall override programmed settings.

L. Manual Secure-Access Control: Coded entries at manual stations shall change status of associated protected zone between secure and access conditions.

2.2 SYSTEM COMPONENT REQUIREMENTS

A. Compatibility: Detection devices and their communication features, connecting wiring, and central-station control unit shall be selected and configured with accessories for full compatibility with the following equipment:

1. Data Gathering Panel, Output Module, Input Module, 28 13 00 PHYSICAL ACCESS CONTROL SYSTEM.

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.

1. Minimum Protection for Power Lines 120 V and More: Auxiliary panel suppressors complying with requirements in Division 26 Section TRANSIENT-VOLTAGE SUPPRESSION FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS.

2. Minimum Protection for Communication, Signal, Control, and Low-Voltage Power Lines: Comply with requirements in Division 26 Section TRANSIENT-VOLTAGE SUPPRESSION FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS as recommended by manufacturer for type of line being protected.

C. Interference Protection: Components shall be unaffected by radiated RFI and electrical induction of 15 V/m over a frequency range of 10 to 10,000 MHz and conducted interference signals up to 0.25-V RMS injected into power supply lines at 10 to 10,000 MHz.

D. Tamper Protection: Tamper switches on detection devices, controllers, annunciators, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially disassembled and when entering conductors are cut or disconnected. Central-station control-unit alarm display shall identify tamper alarms and indicate locations.

E. Self-Testing Devices: Automatically test themselves periodically, but not less than once per hour, to verify normal device functioning and alarm initiation capability. Devices transmit test failure to central-station control unit.

F. Antimasking Devices: Automatically check operation continuously or at intervals of a minute or less, and use signal-processing logic to detect blocking, masking, jamming, tampering, or other operational dysfunction. Devices transmit detection of operational dysfunction to central-station control unit as an alarm signal.

G. Addressable Devices: Transmitter and receivers shall communicate unique device identification and status reports to central-station control unit.

H. Remote-Controlled Devices: Individually and remotely adjustable for sensitivity and individually monitored at central-station control unit for calibration, sensitivity, and alarm condition.

2.3 ENCLOSURES

A. Interior Sensors: Enclosures that protect against dust, falling dirt, and dripping noncorrosive liquids.

B. Interior Electronics: NEMA 250, Type 12.

C. Exterior Electronics: NEMA 250, Type 4X [fiberglass] [stainless steel].

D. Corrosion Resistant: NEMA 250, Type 4X [PVC] [stainless steel].

E. Screw Covers: Where enclosures are accessible to inmates, secure with security fasteners of type appropriate for enclosure.

2.5 EQUIPMENT ITEMS

A. General:
   1. All requirements listed below are the minimum specifications that need to be met in order to comply with the IDS.
   2. All IDS sensors shall conform to UL 639, Intrusion Detection Standard.
   3. Ensure that IDS is fully integrated with other security subsystems as required to include, but not limited to, the CCTV, PACS, EPPS, and Physical Access Control System and Database Management. The IDS provided shall not limit the expansion and growth capability to a single manufacturer and shall allow modular expansion with minimal equipment modifications.

B. IDS Components: The IDS shall consist of, but not be limited to, the following components:
   1. Control Panel
   2. Exterior Detection Devices (Sensors)
   3. Interior Detection Devices (Sensors)
   4. Power Supply
   5. Enclosures

2.6 CONTROL PANEL

A. The Control panel shall be the main point of programming, monitoring, accessing, securing, and troubleshooting the IDS. Refer to American National Standards Institute (ANSI) CP-01 Control Panel Standard-Features for False Alarm Reduction.

B. The Control Panel shall provide a means of reporting alarms to an Physical Access Control System and Database Management via a computer interface or direct connection to an alarm control monitoring panel.

C. The Control panel shall utilize a Multifunctional Keypad, Input and Output Modules for expansion of alarm zones, interfacing with additional security subsystems, programming, monitoring and controlling the IDS.

D. The Control panel shall meet or exceed the following minimum functional requirements for programming outputs, system response, and user interface:
   1. Programming Outputs:
      a. 2 Amps alarm power at 12 VDC

b. 1.4 Amps auxiliary power at 12 VDC
c. Four alarm output patterns
d. Programmable bell test
e. Programmable bell shut-off timer

2. System Response:
a. Selectable point response time
b. Cross point capability
c. Alarm verification
d. Watch mode
e. Scheduled events arm, disarm, bypass and un-bypass points, control relays, and control authority levels

3. User Interface:
a. Supervises up to eight command points (e.g. Up to 16 unsupervised keypads can be used)
b. Provides custom keypad text
c. Addresses full function command menu including custom functions
d. Allows user authority by defined area and 16-character name
e. Provides for 14 custom authority control levels allowing user's authority to change, add, delete pass codes, disarm, bypass points, and start system tests.

4. The Control panel shall meet or exceed the following technical characteristics:

Input Voltage via 110 VAC or 220 VAC Step-down Transformer	16 or 18 VAC
Operating Voltage	12 VDC
Output Voltage	12 VDC @ 2 A max
Direct Hardwire Zones	7
Partitions	8
Multifunctional Keypads	16 (2 per partition)
Communications Port	RJ-11

E. A multifunctional keypad shall be utilized as a user interface for arming, disarming, monitoring, troubleshooting, and programming the alarm control panel.

F. Keypads shall have the following features:
1. Multiple function keypads suitable for remote mounting, no greater than 1333 m (4000 ft), shall be provided from the control panel and

have a light emitting diode (LED) readout of alarm and trouble conditions by zone.

2. An alphanumeric English language display, with keypad programmability, and EE-PROM memory, shall also be provided.
3. Trouble alarm indicators shall be distinguishable from intrusion alarms.
4. A minimum of four (4) zones selectable as entry and exit with programmable time delay.
5. Complete system test activated capability at the keypad.
6. Capability for opening and closing reports to a remote monitoring location.
7. Adjustable entry and exit delay times.
8. Capability for a minimum of two (2) multiple function keypads.
9. Capability to shunt or bypass selected interior zones while arming perimeter protection and remaining interior zones.
10. Capability for a minimum of seven assignable pass-codes that are keypad programmable from a suppressed master code.
11. The control panel shall have a communications port that will allow for communications with a computer for programming, monitoring, and troubleshooting purposes. The communications port will be, at a minimum, and RJ-11 or better.
12. The control panel will have a systems success probability of 95% or better, and shall include the following success considerations:
    a. False Alarm: Shall not exceed one (1) false alarm per 30 days per sensor zone.
    b. Nuisance Alarm: Shall not exceed a rate of one (1) alarm per seven (7) days per zone within the first 60 days after installation and acceptance. Sensor adjustments will be made and then shall not exceed one (1) alarm per 30 days.
13. The Control Panel will be able to detect either a line fault or power loss for all supervised data cables.
    a. Line Fault Detection: Communication links of the IDS shall have an active mode for line fault detection. Fault isolation at the systems level shall have the same geographic resolutions as provided for intrusion detection. The line fault alarm shall be clearly distinguishable from other alarms.
    b. Power Loss Detection: Provide the capability to detect when critical components experience temporary or permanent loss of

power and annunciate to clearly identify the component experiencing power loss.

2.7 KEYPADS

A. Keypads shall meet or exceed the following technical characteristics:

Connections	4-wire flying lead for data and power
Operating Temperature	0°C to +50°C (+32°F to +122°F)
Display Window	8-point LED
Indicators: Illuminated keys	Armed Status-LED
	Point Status-LED
	Command Mode-LED
	Power-LED
Voltage	Nominal 12 VDC

2.8 INPUT MODULE

A. An input module shall be utilized to connect additional detection devices to the control panel. This module will meet or exceed the following technical characteristics:

Operating Voltage	8.5 to 14.5 VDC Nominal
Zone Inputs	Style A (Class B) Supervised
Operating Temperature	0 to 40 degrees C (32 to 140 degrees F)

2.9 OUTPUT MODULE

A. An output module shall be utilized to interface the control panel with other security subsystems. The output module shall meet or exceed the following technical characteristics:

Operating Voltage	8.5 to 14.5 VDC Nominal
Output Relays	"Form C" Dry Relay Contracts
Relay Contact Rating	4A @ 24 VDC
	4A @ 24 VAC
	1A @ 70 VAC
Operating Temperature	0 to 40 degrees C F (32 to 140 degrees)

2.10 EXTERIOR DETECTION DEVICES (SENSORS)

A. The IDS shall consist of interior, exterior, and other detection devices that are capable of:

1. Locating intrusions at individually protected asset areas or at an individual portal;
2. Locating intrusions within a specific area of coverage;
3. Locating failures or tampering of individual sensors or components.

B. Audible annunciation shall meet UL 464 Audible Signal Appliance requirements as well as other stated within this specification. IDS shall provide and adjust for devices so that coverage is maximized in the space or area it is installed in. For large areas where multiple devices are required, ensure exterior device coverage is overlapping.

C. Detection sensitivity shall be set up to ensure maximum coverage of the secure area is obtained while at the same time limiting excessive false alarms due to the environment and impact of small animals. All detection devices shall be anti-masking with exception of video motion detection.

D. Dual sensor technology shall be used when possible. Sensor technology shall not be of the same type that is easily defeated by a single method. This will reduce the amount of false alarms.

E. Exterior sensors described in this section are intended for outdoor use for perimeter and fence control monitoring purposes. Some sensors described in the interior sensor section may be utilized that can provide both outdoor and indoor protection.

F. External Sensors Environmental Characteristics:

Temperature	-25°F - 140°F (-32°C - 60°C)
Pressure	Sea Level to 15,000 ft. (4573m) above sea level
Solar Radiation	Six (6) hrs. exposure at dry bulb temp. 120°F (60°C)
Rain	Two (2) in. (50 mm) per hour
Humidity	5% - 95%
Fungus	Components of non-fungus nutrient materials
Salt/fog	Atmosphere 5% salinity
Snow loading	48 lbs per sq. ft. (234 kg per sq. meter)
Ice accumulation	Up to ½ in. (12.7 mm) radial ice
Wind limitations	50 mph (80 km/h) Gusts to 66 mph (106 km/h)
Acoustical Noise Suitability	> 110 decibels (dB)

G. Electromechanical Fence Sensors

1. Electromechanical Fence Sensors: Shall sense mechanical vibrations or motion associated with scaling, cutting, or attempting to lift standard security chain link fence as follows: Note: Dead zones shall not exist from a monitoring and alarm coverage perspective.
2. The sensor zone control unit shall alarm when a sufficient number of sensing unit activations surface within a specified time period.
3. Individual sensing units and the alarm thresholds shall be field adjustable (i.e., performed by an authorized technician or trained maintenance personnel). Midrange sensitivity settings shall alarm a sensor when an intruder attempts to scale or climb the fence in areas of reduced sensitivity (e.g. around poles and rigid supports, etc.) and attempted lifting or scaling of a fence, including using assisted methods (e.g. items leaned against the fence, etc.)occur. Sensors shall allow gradual changes in fence positioning due to expansion, settling, and aging, without increased numbers of nuisance alarms taking place.
4. Exterior sensor components shall be housed in rugged, corrosion-resistant enclosures, protected from environmental impact and degradation.
5. Fence cable support hardware shall be weather-resistant. Interfacing between sensor zones and alarm enunciators, require they be installed in underground conduit and cables.
6. Fencing Cable Technical Characteristics:

Input voltage	12-30 V DC
Current requirement	4 mA quiescent 25 mA (max) in alarm
Transient suppression	On data, power input lines and on relay output
Enclosure	Weatherproof
Sensor type	Inertial band-pass-filter
Transponder	4 zone controller Output relays for dry contacts, or RS-485 communication Inputs for weather sensor
Sensor spacing	2.5 to 3 m (8.2 to 9.9 ft.)
Data I/O	RS 485 communications
Data output	• Vibration alarm (in either line)

	• Line alarm (in either line) • End of line action • Wind situation • Weather sensor line failure • Enclosure tamper switch • Program fail • A dry contact output with end of line resistor per each of 4 vibration inputs

H. Strain Sensitive Cable Sensors

1. Strain-Sensitive Cable Sensors: These devices shall detect movement on a standard security chain link fence associated with an intruder scaling, cutting through, or attempting to lift the fence fabric. The entire sensor system shall be mounted directly on the fence and able to withstand the same environmental condition exposures. Note: The length of the fence shall also maintain no sensor monitoring dead zones.
   a. Individual sensing units and the alarm threshold shall be field adjustable (i.e. by authorized technicians or trained maintenance personnel) for compensation of winds up to 40km/h (25 mph) or by zone without increased nuisance alarms while maintaining specified sensor performance as under ambient conditions.
   b. Sensor zone control units shall provide an analog audio output for interface to an external audio amplifier to permit remote audio assessment regardless of sensor alarm status. The sensor zone control unit alarm output interface shall be a separately supervised relay contact normally open or normally closed.
   c. The length of the fence shall be divided into 100m (300 ft) zones.
   d. The sensing unit shall consist of transducer cable capable of achieving specified performance either by attachment directly to the fence fabric by plastic cable every 300 to 455 mm (12 to 18 inches) or by installation inside electrical metallic tubing conduit mounted on the fence.
   e. The sensing unit shall have equal adjustable sensitivity throughout the entire fence length. Only conventional waterproof coaxial cable connectors shall be used for connections of the sensing unit to avoid electrical magnetic interference.

f. The entire sensor system shall be tamper resistant and capable of detecting tampering within each portion of the system by sensor zone.

g. Magnetic Sensor Cable Technical Characteristics:

Magnetic Sensor Cable	
Type cable	Four (4) conductor magnetically loaded, aluminum foil shield and ground wire
Maximum zone length	300 m (1000 ft.)
Life expectancy	10 years
Sensitivity	Uniform over length of cable
Audio Bandwidth	Five (5) kHz
Outer Cover	Black Polyurethane, Ultraviolet resistant
Insensitive Cable (remote processing)	
Type cable	2 twisted pair, individually sealed
Outer Cover	Black Polyurethane, Ultraviolet resistant
Dual Channel Signal Processor	
Input Power	10.2 – 13.8 VDC 65 mA
Alarm Output	Alarm contacts SPNC 0.75 mA, 200 VDC
Indicators	Three (3):Alarm, tamper, events
Cut processor	Sensitivity - 10 settings Time window – 0.5 – 4.5 min Event Counter – nine (9)
Climb processor	Sensitivity – 10 settings

I. Buried Electromagnetic Cable Sensor

1. The system shall be able to function as a standalone system or as an integral component of a centralized security control system.
2. The detection field shall be formed by radio-frequency (RF) signals carried by sensor cables that are buried along the perimeter.
3. The RF signals shall form an invisible electromagnetic detection field around the sensor cables that can detect the presence of an intruder passing through the field.
4. The system shall detect moving intruders that have a significant electromagnetic field (e.g. humans, vehicles, and other large conductive objects) while rejecting other environmental stimuli such as birds, small animals, weather elements.

5. A sensor module shall contain the electronics required to:
   a. Transmit and receive the RF signal without the use of an external antenna.
   b. Monitor the detection fields of two (2) zones and produce an alarm when an intruder enters the zones.
6. Field power modules shall be available for standalone systems and networked systems.
7. As a standalone system, the primary operator interface shall be a local interface module that is connected directly to the sensor module.
8. As part of a network configuration, the primary operator interface shall be a personal computer (PC) based central controller. The central controller shall monitor the performance of the entire buried coaxial cable outdoor intrusion detection system and any auxiliary sensors. The central controller shall have the capability of acknowledging, processing and reporting alarms. A customized color site map that is displayed on the PC monitor shall be an available option for the system to monitor sensor locations.
9. Transmission and reception shall be accomplished without the use of antennae. The RF signal shall be monitored and analyzed by the sensor module for any changes in the detection field properties that would indicate the presence of an intruder.
10. Alarms generated by internal electronic processes (cables excluded) shall not exceed one (1) per zone per month. System generated alarms are averaged based on the total number of zones in the system.
11. When the system is calibrated in accordance with the manufacturers' recommendations, the detection field shall be continuous and uniform over the protected site perimeter.
12. When system sensitivity is calibrated according to manufacturers' recommendations, the detection field shall not detect a valid target that is a minimum of 2 m. (6.5 ft) from the nearest sensor cable.
13. Buried Electromagnetic Cable Sensor Technical Characteristics:

Burial Medium	Clay, sand, soil, asphalt, concrete
Snow limitation	Up to 30c. (1 foot) deep
Degradation Guaranty	Minimum 10 yr.
Detection Medium	Radio Frequency (RF)
Detection Coverage	Maximum 200m (656 ft.) per zone

Detection Capability	Human: >34 kg. (75 lbs)
Detection Speed	Human walk, crawl, run, roll, jump 2.5 cm/sec (1 in./sec.) -15 m/sec (50 ft./sec.) regardless of direction across field
Velocity Response	Programmable
Detection Probability	Human: 99% with 95% confidence factor Animal: Less than 10 kg. (22 lbs.) Less than 5% with 90% confidence factor
Terrain Detection Capabilities	Even to uneven ground with maximum (max) grade 4 m (13 ft.) Corner bend radius 6.5m (22 ft.)
Detection Field Cross Section	Upright walking; Height1m: (3.2 ft.) above ground Width: 2m (6.5 ft.) single cable 3m. (9.75 ft) double cable
Sensing Element	Ported (leaky) coaxial cables
Cable Construction	Abrasion and chemical resistant, high density polyethylene, with flooding compound
Cable Requirements	Two (2):Transmit cable, receive cable
Configurations Available	Two (2):Single cable, double cable
Cable Lengths	50 m (164 ft.), 100 m (328 ft.), 150 m (492 ft.), 200 m (656 ft.)
Zone Length Minimum	10 m (33 ft.)
Antenna Requirements	None
False alarm rate	Less than one (1) per day

14. Sensor Module: Each sensor module shall transmit, receive and process the electromagnetic detection fields independently from other sensor modules. Failure of one (1) sensor module shall not affect the remainder of the perimeter. The sensor module shall operate as either a standalone unit, or in a network configuration in conjunction with a central controller. The sensor module shall be mounted in a weatherproof enclosure when installed outdoors as follows.
    a. The sensor module shall use an adaptive filter to analyze the detection signal and adjust the signal processing to reduce

nuisance alarms caused by environmental factors such as rainfall or slow-running water.

b. The sensor module shall identify, by type, sensor, tamper, and failure alarms either locally at the sensor module, or centrally at a central controller. The sensor cables shall provide the data paths between the sensor modules, for the transmission, reception and display of alarm conditions.

c. Each sensor module shall include an internal interface for the collection of auxiliary sensor data.

d. It shall be possible to supply power directly to each unit for applications that require either a single sensor module or multiple sensor modules with independent power sources.

e. The sensor module's response shall be demonstrated by an analog output signal that can be displayed on a voltmeter or on an analog voltage-recording device. The output signal shall be encoded to indicate the alarm trip-point, thereby showing the sensor module’s degree of detection above or below the level required to cause an alarm.

f. Sensor Module Technical Characteristics:

Sensor Module Power Output	12 VDC at 150 milliampere (mA)
Sensor Module Power Requirements	Stand-alone: 12 VDC 500 mA max Network: 48 VDC 175 mA max
Sensor capability	Two (2) zones independent of other sensor modules
Sensor coverage	400 m. (1,312 ft)
Calibration	Locally and remotely from Central Controller
Self Test	Via 4 relay drive points
Detection coverage	Unlimited expansion using multiple modules
Nuisance avoidance	Adaptive filtering
Connectivity	RS-485 twisted pair cable
Sensor Support	Dual redundant data paths
Transmission capability	Eight (8) contact-closure signals

g. The field power module shall be capable of supplying power to sensor modules as follows:

1) In a network configuration where power is supplied redundantly via the sensor cables, the sensor modules shall operate within specifications when power is removed from either of the two (2) sensor cables.
2) Each cable zone shall be capable of being calibrated either locally at the sensor module, or remotely from a central controller. Additional signal processing parameters, including high speed and low speed response, shall be capable of being set from a central controller.
3) Detection sensitivity for each zone shall be adjusted either locally at the sensor module with a local interface module, or from a central controller. Access to the local calibration controls shall require the removal of the enclosure's cover and shall cause a tamper alarm to be generated.
4) Power Module Technical Characteristics:

Output support	Nine (9) sensor modules max 2,800 m (3,063 yards)
System block configuration	1,400 m (1,531 yds.)
Power Output	Stand-alone: 12 VDC 500 mA max Network: 48 VDC 175 mA max

J. Microwave Sensors

1. The system shall be a modular microwave outdoor intrusion detection sensor based on microwave radar technology. The detection field shall be formed by radio frequency (RF) signals, in the X-band, carried between a transmitter and a receiver. The RF signals shall form an invisible electromagnetic detection field that can detect the presence of an intruder who walks, crawls, rolls, jumps, or runs through a detection field as follows.
   a. Transmitter shall create the RF signals that form the detection field. A receiver shall house the necessary electronics to monitor the detection field and to raise an alarm when an intruder enters the field. The transmitter and receiver shall be powered individually, as a standalone unit.
   b. An electromagnetic wave is emitted by the antenna of the transmitter and received by the antenna of the receiver. The

receiver shall detect changes that are caused by the presence of an intruder.

c. The system shall detect moving intruders having a significant electromagnetic cross-section (e.g. humans, vehicles, and other large conductive objects) rejecting other environmental stimuli.

d. The system shall be capable of detecting human intruders moving through the detection field regardless of the direction of motion.

e. Processor description: The receiver shall contain the necessary electronics to perform the signal processing for the detection zone. The transmitter and receiver shall be operated as a standalone unit with independent power and data. Both the transmitter and receiver shall be installed in weatherproof enclosures.

f. Distributed processing: Transmitter-receiver pairs distributed along a perimeter shall provide extended range and fail-safe operation. The failure of one (1) pair shall not affect the coverage of the remainder of the perimeter.

g. Alarms: The signal processor shall identify intrusion and tamper/fail alarms locally, at the transmitter or receiver.

1) An alarm caused by opening the outer enclosure of the transmitter or receiver shall be identified as a tamper alarm. Tamper alarms shall be distinctive from intrusion alarms.

2) Alarms caused by power failure or internal electronic failure are fail alarms, distinctive from intrusion alarms.

h. Microwave Sensor System Technical Characteristics:

Operating voltage Transmitter	11 – 15 VDC 70mA max. current
Operating voltage Receiver	11 – 15 VDC 30mA max. current
Operating Environment	-30°C (-22F) and 60°C (140 F)
LEDs	POWER ON, WRONG CHANNEL, ALARM
Maximum zone length	10 m (33 ft.) and a maximum of 457 m (1500 ft.) per zone.
Detection Success Probability	34 kg (75 lbs.) 99% with a 95% confidence factor
Operating frequency	X Band 10.525 ± 0.025 gigahertz (GHz)
Type modulation	Class A2 with one (1) of six (6) selectable

	crystal-controlled frequencies.
Detection movement speed	5 cm/sec. (2.0 in. sec.) to 8 m/sec. (26 ft. sec.)
Audio assessment	Via 1/8 in. phone jack on receiver
Alarms	Tamper, failure, intrusion
Tamper/fail alarm	Via sealed relay rated one (1) ampere 28 VDC
Intrusion field alarm	Via sealed relay rated two (2) ampere 28 VDC.
Intrusion alarm latch time	Adjustable: 0.5 sec and 10 sec
Processing	Distributed: receiver/transmitter pairs
Perimeter Length	Single Receiver/transmitter pair: 457 m (1500 ft.) Multiple pairs: Unlimited

K. Taut-Wire Sensors

1. These sensors shall consist of a perimeter intrusion detection sensor incorporated into a wire security fence. Intrusion detection shall be achieved by sensing the cutting of any single wire or deflection of the fence, such as by climbing.
   a. Sensor zone: Includes one (1) or more 61 m (200 ft.) maximum sections of 2.3 m (seven (7) ft.) high parallel fence. Each sector shall consist of 13 horizontal barbed wires attached to the taut-wire fence posts, and three (3) strands as outriggers, and an "anti-ladder" trip wire supported by rods extending from the outriggers for a total vertical height of approximately 2.6 m (eight (8) ft.).
   b. Displacement switches for each horizontal wire shall be mounted 2within a pre-wired channel fastened to the fabric fence post at the midpoint of each section. Outrigger barbed wire and tripwire may share the same switch in these locations.
   c. Abnormal displacement of a switch lever resulting from cutting or deflecting its attached wire, as by climbing on or through fence strands, shall initiate an alarm condition. A damping mechanism within the sensor shall reduce alarm thresholds due to slowly changing environmental phenomena such as the ground shifting, daily and seasonal temperature variations, winds changes, etc.
   d. Sensor switches shall be provided with electrical contact closures as a means for initiating an alarm condition.

e. The system shall provide relay outputs to interface alarm outputs with the overall IDS.

f. Taut-wire Sensor Technical Characteristics:

Power requirements	Input: 120 - 208 VAC
Sensor zone control unit capability	Up to 10 zones
Sensitivity	19 mm (0.75 in.)
Environment Limits	Winds up to 56 km/h (35 mph)

L. Electrostatic Field Sensors

1. These sensors generate an electrostatic field around one (1) or more horizontal wires and detect intrusion of the electrostatic field as follows.

   a. Sensors shall initiate an alarm when an intruder attempts to approach or scale a fence or physical barrier. Electrostatic field sensors shall detect human presence by generating an electric field around one (1) or more horizontal wires that detects the induced signal in parallel sensing wires.

   b. Sensors shall monitor the induced signal for changes that result from the presence of a human body, which distorts coupling between transmitting and sensor wires.

   c. Sensor components shall consist of one (1) or more signal generator field wires and mounting hardware, sensing wires, an amplifier/signal processors, power supplies, and necessary circuitry hardware. Mounting and support hardware shall be provided by the equipment manufacturer.

   d. Wires shall be spring tension-mounted and provided with end-of-line terminators to detect cutting, shorting, or breaking of the wires.

   e. Sensor configuration shall be able to detect an intruder that may crawl under the bottom wire, through the wires, or over the top wire by divided sensor zones.

   f. Signal processing circuitry shall provide filtering to distinguish nuisance alarms.

   g. Sensor configuration shall incorporate balanced, opposed field construction to eliminate distant field noise.

h. Sensor sensitivity shall be adjustable. Adjustment controls shall be inaccessible to operating personnel and system sensitivity controls shall be set at approximately midrange.

i. Sensors shall provide some means of indicating an alarm condition at the protected perimeter to facilitate installation and calibration.

j. The sensor system shall include an indicator disabling device within a tamperproof enclosure.

2. Electrostatic Field Sensor Technical Characteristics:

Power	115 -120 VAC transformer
Operating Power Requirements	16-22 VAC, 225 mA single zone 275 dual zone
Detection Sensitivity	77 lbs within 915 mm (3 ft.)- midrange setting
Detection Velocity	30 m (0.1 ft.) - 300 m (10 ft.) per sec
Supervision	AC Monitoring of fence and field wires – open, short, and grounded circuits
Tamper Switch	One (1)-pole, two (2) position
Lightening arrestor	Transistors on all relay output and power inputs
Battery Charger	Built-in
Processor Enclosure	Base plate, steel NEMA enclosure Weather resistant

M. Gate Sensors

1. They shall be provided in accordance with specific fence sensor manufacturer's recommendations to ensure continuous fence sensor zone protection for the entire protected perimeter.

a. When gate units are not provided by the fence sensor manufacturer, provide separately zoned Balanced Magnetic Switch (BMS) gate sensors.

b. Sensors shall perform as specified in Section 2.3-E.6 entitled "Balanced Magnetic Switches (BMS)."

2.11 INTERIOR DETECTION DEVICES (SENSORS)

A. The IDS shall consist of interior, exterior, and other detection devices that are capable of:

1. Locating intrusions at individually protected asset areas or at an individual portal;
2. Locating intrusions within a specific area of coverage;
3. Locating failures or tampering of individual sensors or components.

B. Provide and adjust for devices so that coverage is maximized in the space or area it is installed in. For large rooms where multiple devices are required, ensure device coverage is overlapping.

C. Detection sensitivity shall be set up to ensure maximum coverage of the secure area is obtained while at the same time limiting excessive false alarms due to the environment and impact of small animals. All detection devices shall be anti-masking with exception of video motion detection.

D. Dual sensor technology shall be used when possible. Sensor technology shall not be of the same type that is easily defeated by a single method. This will reduce the amount of false alarms.

E. Interior Environmental Conditions: Systems shall be able to operate in environmentally protected interior areas and shall meet operational performance requirements for the following ambient conditions:

1. If components are installed in unheated areas they shall be able to operate in temperatures as low as -17 C (0 F);
2. Interior Sensor Environmental Characteristics:

Temperatures	0 to 50 C (32F to 120 F)
Pressure	Sea Level to 4573m (15,000 ft.) above sea level
Humidity	5% - 95%
Fungus	Components of non-fungus nutrient materials
Acoustical Noise	Suitable for high noise environments above 100db

F. Balanced Magnetic Switches (BMS)

1. BMS switches shall be surface or recessed mounted according to manufacturer’s instructions. Recessed mounted is the preferred method to reduce tampering or defeating of the system. Switches shall activate when a disturbance in the balanced magnetic field occurs.
2. Switches shall have a minimum of two (2) encapsulated reed switches.
3. Contractor shall provide each BMS with a current protective device, rated to limit current to 80% of the switch capacity.

4. Surface Mounted BMS: For exterior application, components shall be housed in weatherproof enclosures.
5. BMS field adjustments in the fixed space between magnet and switch housing shall not be possible. Attempts to adjust or disturb the magnetic field shall cause a tamper alarm.
6. BMS Technical Characteristics:

Maximum current	.25 amperes
Maximum voltage	30 VDC
Maximum power	3.0 W (without internal terminating resistors). 1.0 W (with internal terminating resistors).
Components	Three (3) pre-adjusted reed switches Three (3) pre-adjusted magnets
Output contacts	Transfer type SPDT
Contact rating	0.5 amperes, 28 VDC
Switch mechanism	Internally adjustable ¼ - ½ in. (6-13 mm)
Wiring	Two (2) wires #22 American Wire Gauge (AWG), three (3) or 11 foot attached cable
Activation lifetime	1,000,000 activations
Enclosure	Nonferrous materials
Tamper alarm activation	Cover opened 3 mm (1/8 in.) and inaccessible until actuated

G. Window Intrusion Detection
1. These IDS devices shall detect intrusions thru inertia (shock) or by sound, and shall utilize either a Breakwire Sensor or Acoustic and Seismic Sensor.
2. Break wire Sensors (wire trap):
   a. Detect intrusion thru shock or breakage of window glazing. Also used for the protection of utility openings.
   b. Sensors shall consist of fine wire embedded in or affixed to interior of glazing. Breakage of protected glazing shall result in wire breakage.
   c. Wire shall be hard-drawn copper up to #26 AWG diameter.
   d. If sensors are affixed to glazing the sensor shall be protected by a clear coating which shall not affect sensor functioning.

e. Sensor shall be terminated in insulated connectors which are concealed and tamper resistant.

f. Protection of inlet openings:

1) Shall consist of up to 26 AWG hard-drawn copper wire with a tensile strength of 17.8 N 4 pounds maximum.

2) Wire shall be interlaced throughout the opening such that no opening between wires shall be larger than 100 mm (4 in.. on center.

3) Sensors shall be terminated so that attempts to cut the wire or otherwise enlarge openings between wires shall cause an alarm.

4) Sensors shall be terminated in insulated connectors which are concealed and tamper resistant.

H. Acoustic and Seismic Glass Break Detectors

1. Detects intrusion thru the use of audible sound and vibration emitted from the breaking of glass using a tuned frequency range and sound pattern recognition. This initiates an alarm when glass they protect is broken or cracked.
2. Detectors shall be installed in strict conformance with manufacture’s installation instructions.
3. The detector’s power circuit shall be switched via an output relay on the control panel to provide latching alarm LED reset capability.
4. Sensors shall be contained in a fire-resistant ABS plastic housing and must be mounted in contact with a window.
5. Sensing shall be accomplished through the use of a mechanical filtered piezoelectric element.
6. Sensors shall have a sensitivity adjustment controlling output voltage from the piezoelectric element which triggers a solid-state latching device.
7. Sensors shall selectively filter input to minimize false alarms and not initiate alarm in response to ambient seismic vibrations or other ambient stimuli.
8. A manufacture’s test unit will be used to validate the sensor by simulating glass breakage.
9. The Contractor shall provide sensors for adjusting sensitivity and two-sided polyurethane tape with acrylic adhesive for window attachment.

10. Sensor shall include exterior label to protect adhesive tape from direct sunlight.
11. Window Intrusion Detection Sensor Technical Specifications:

Power	Auxiliary power supply 12 VDC @ 25 mA (+/-) 10%
Power Input	10 – 15 VDC at 16mA protected against reverse polarity, 20 mA during relay closure
Relay Output Rating	Minimum of 25 VDC mA
Coverage Audio	6,000 Square ft.
Coverage Glass Break	7.5 m (25 ft.) wide by 7.5 m wide (25 ft.) Minimum: 7.62 m (25 feet) from the detector to the furthest point on protected glass.
Audio Output	300 – 12,000 HZ
Alarm Output	Relay NO or NC selectable
Interconnection	12 pin Panduit connector, 22 AWG
Radio Frequency Interface	No alarm or setup on between frequencies 26 – 100 MHz 50 v/m Immunity to mobile RF interference 100 watts 3 m @ (9.8 Ft.) in 27-100 MHz range
Alarm period	Two (2) to three (3)
Mounting	Ceiling, same wall, adjacent wall, opposite wall
Features	Test and alarm LEDs for acoustic seismic and alarm condition latching, Alarm LED and tamper switch on cover.
Alarm verification	Digital signal processing or dual acoustic processing technologies
Detection ability	Single and multi-pane glass, wired glass, tempered and laminated glass to 6 mm (¼ inch) or thickness

I. Screening

1. This material shall be used on windows to protect and detect intrusion as follows.
   a. Security screens shall be constructed from a maximum of 26 AWG insulated hard-drawn copper.

b. Screens shall be connected to an alarm circuitry by means of flexible armored cords. Security screen circuitry shall provide end-of-line resistors in series or equivalent methods ensuring alarm activation if short-circuiting of the screen is attempted.
c. If unable to install a break wire sensor (wire traps), then tamper switches will be provided.
d. Contractor shall provide tamper switches in the frames as required with not less than one (1) switch on each side if dimensions are 610 mm two((2) ft. square) or less, and two (2) switches if dimensions exceed 610 mm (2 ft. square). Tamper switches shall be corrosion-resistant, spring-operated, and shall initiate an alarm with a movement of 50 mm (two (2) in.) or less before access to the switch is possible.
e. Electrical characteristics of the switch shall match the alarm system requirements.

J. Vibration Sensors
1. These sensors shall initiate alarms upon detecting drilling, cutting, or blasting through walls, or other methods of forced entry through a structure as follows.
2. Sensors shall detect and selectively amplify signals generated by forced penetration of a protective structure.
3. Sensors shall be designed to give peak response to structurally conveyed vibrations associated with forcible attack on the protected surface.
4. Sensors will initiate an alarm if attempts are made to remove them from the surface of the wall.
5. Sensors shall be enclosed in protective mountings.
6. Sensors shall include an adjustable alarm discriminator to prevent incidental vibrations which may occur from triggering the alarm circuit.
7. Sensors shall be provided with a tamper switch.
8. Sensor sensitivity shall be individually adjustable unless a sensor is designed to accommodate vibration ranges of specific surface type on which it will be mounted. Sensitivity adjustments shall not be accessible without removing the sensor cover. Also, a sensor shall not be responsive to airborne sound.
9. Vibration Sensor Technical Characteristics:

Power requirements	External DC power source

	Eight (8)- 14.5 VDC, two (2) volt max peak to peak ripple
Alarm output	Form C (NO/C/NC) solid state alarm relay, rated 100 mA, 28 VDC
Tamper Connection	Tamper switch and external magnetic
Current rating and alarm output	No alarm state 20mA SPDT relay contact rating (Form C)
Sensor range	Concrete (poured) 4 m (13.2 ft.) Concrete block 2 m (6.6 ft.) Brick block 1 m (3.3 ft.)
Frequency range	3kHz-20kHz (-15db) 7kHz-10kHz (-10db)
Adjustable	Sensitivity eight (8) steps Alarm response 0-30 sec

K. Passive Infrared Motion Sensors (PIR)

1. These sensors shall detect an intruder presence by monitoring the level of infrared energy emitted by objects within a protected zone and meet ANSI PIR-01 Passive Infrared Motion Detector Standards Features for Enhancing False Alarm Immunity. An alarm shall be initiated when motion and temperature changes within set patterns are detected as follows.
2. The detector shall provide multiple detection zones distributed at a variety of angles and distance.
3. Sensors shall be passive in nature; no transmitted energy shall be required for detection.
4. Sensors shall be sensitive to infrared energy emitted at wavelengths corresponding to human body and other objects at ambient temperatures.
5. Sensors shall not alarm in response to general area thermal variations and shall be immune to radio frequency interference.
6. Sensors shall not be susceptible to changes in temperature due to an air conditioner being turned on or off.
7. Sensors shall be housed in a tamper-alarmed enclosure.
8. Sensor detectors shall include motion analyzer processing, adjustable lens, and walk test LED’s visible from any angle.
9. Sensors shall provide some means of indicating an alarm condition during installation and calibration. A means of disabling the indication shall be provided within the sensor enclosure.

10. Sensor detectors shall include a motion monitoring verification circuit that will signal trouble or alarm if the detector fails to detect motion for an extended period.
11. PIR Technical Characteristics:

Power	Six (6) - 12 VDC 25 mA continuous current draw 38 mA peaks
Alarm Velocity	1500 mm (Five (5) ft.) at a velocity of 30 mm (0.1 ft.) per second, and one (1) step per second, assuming 150 mm (6 in.) per step. Also, faster than 30 mm (1 foot) per second, up to 3000 mm (10 feet) per second
Maximum detection range	10.6 m (35 ft.)
Frequency range- non activation or setup use	26 to 950 MHz using a 50 watt transmitter located 1 ft. from the unit or attached wiring
Infrared detection	1 1/2°C (3°F) different from the background temperature
Detection Pattern	180 degrees for volumetric units, non PIR 360
PIR 360°Detection Pattern	Programmable 60 detection zones including one directly below
Mounting	Ceiling and walls
Ceiling heights	2.4 m (Eight (8) ft.) - 5.4 m (18 ft)
Sensitivity adjustments	Three (3) levels

L. Microwave-Passive Infrared Detector

1. This sensor shall be designed to detect the motion of a human body within a protected area by means of a combination of microwave sensing technology and passive infrared (MPIR) sensing technology as follows.
2. The sensor shall require both technologies to sense intrusion before an alarm may occur.
3. The sensor shall be designed for wall mounting on swivel bracket. A high-security gimbaled bracket shall be provided.
4. The PIR fields of view shall be focused on the pyroelectric element by means of an internal multi-faceted mirror.

5. The sensor shall incorporate a look-down lens system that detects the passing of an intruder directly beneath the sensor.
6. The sensor shall incorporate a microwave supervision system which shall activate the trouble output if the device technology fails.
7. The sensor shall incorporate self-diagnostics which shall monitor the sensor systems and report a trouble to the control panel if any system device fails.
8. The sensor shall have compensation against loss of sensitivity as the ambient temperature nears human body temperature.
9. MPIR Technical Characteristics:

Technology	Microwave and Passive Infrared
Power	Nine (9) – 15 VDC max current consumption 22 mA at 12 VDC
Operating Temperature	0° C (32°F) – 49° C (120° F)
Detection Area	30 m (98 ft.) long by 3 m (9.8 ft.) wide or 21 m (69 ft.) long by 21m (69 ft.) wide
Electronics	Microcontroller based
Alarm Contact	Form-C rated 125 mA, 28 VDC
Tamper Contact	125 mA, 28 VDC
Trouble Contact	Form-B rated 25 mA, 30 VDC
Microwave Operating Frequency	10.525 GHz
Microwave Sensitivity	Adjustable on circuit board
Detection pattern adjustment	Changing of internal lens
Sensing element	Pyro-electric
LED Indicators	PIR, microwave, alarm
Bug and Dust protection	zero-clearance, gasket bug guard
Lens	Interchangeable: standard 18x24 m (60x80 ft.), corner mounting, ultra-wide, pet alley, long range, room and corridor combo, room and ceiling combo, creep zone

M. Photoelectric Sensors

1. The sensor devices shall be able to detect an intruder presence by sending out a series of infrared or ultraviolet beams. Intrusion is based on disruption of the signal beams as follows.

a. Sensors shall consist of a modulating transmitter, focusing lenses, mirrors, demodulating receiver, power supply, and interconnecting lines.
b. Beam transmitters shall be designed to emit light. Beams may be reflected by one (1) or more mirrors before being received and amplified.
c. The photoelectric sensor shall initiate an alarm when the beam is interrupted with monitoring controls set at midrange.
d. Transmitted beams shall be uniquely modulated to prohibit defeat of the IDS system by shining another light source into the receiver.
e. Sensors shall provide a means of local alarm indication on the detector for use at the protected zone during installation and calibration.
f. Sensors shall include an indicator-disabling device within the sensor enclosure.
g. Sensors shall utilize automatic gain control or be provided with sensitivity adjustments to allow for various beam lengths.
h. Sensor controls shall be inaccessible to operating personnel.
i. Sensors that use multiple beams shall be tested by attempting to crawl under and jump through and over beams. Each system sensor shall provide cutoffs of at least 90% to handle a high percentage of light cutoffs prior to initiating an alarm.
j. Sensor components shall be housed in tamper-alarmed enclosure.

2. Photoelectric Sensor Technical Characteristics:

Power requirements	Nine (9)-16 VDC, protected against reverse polarity
Relay output	Normally closed. 18 ohm resister in series with contacts. 0.5 amperes resistance/24 VDC
Current	Transmitter 15 mA, Receiver 15 mA
LED	Alignment, walk-test alarm, off
Range	Indoor: 39 m (130 ft.) Outdoor19.5 m: (65 ft.)
Alarm relay contacts	Two (2) amperes at 120 VAC minimum
Enclosure	High impact acrylic
Type	Dual beam
Mounting	Wall, corner, flush

Beam width	Six (6) degrees
Receiver field of view	Six (6) degrees horizontal and vertical
Adjustments	Vertical +10 – 20 degrees Horizontal 30 degrees
Alarm period	Two (2) – three (3) sec
Infrared source	Long-life Gallium Arsenide LED
Infrared sensor	PIN photodiode
Transmitter Frequency	One (1) kHz 10 microsecond pulse width
IR Wavelength	950 nm

N. CCTV Video Motion Detection Sensors: Refer to Section 28 23 00 VIDEO SURVEILLANCE that outlines related video motion detection requirements.

2.12 TAMPER ALARM SWITCHES

A. The following IDS sensors shall be used to monitor and detect potential tampering of sensors, control panels and enclosures.
   1. Tamper Switches: All enclosures including cabinets, housings, boxes, raceways, and fittings with hinged doors or removable covers containing circuits and power supplies related to the IDS shall include corrosion-resistant tamper switches.
   2. Tamper alarms shall be annunciated to be clearly distinguishable from IDS alarms.
   3. Tamper switches will not be in a viewable from a direct line of sight perspective. The minimum amount of time the tamper switch becomes active and sends a signal after an enclosure is opened or panel removable is attempted, shall be one (1) second.
   4. Tamper switches will initiate when enclosure doors or covers is removed as little as 6.35 mm (1/4 inch) from the closed position unless otherwise indicated. Tamper switches shall be:
      a. Push/pull automatic reset type;
      b. Inaccessible until switch is activated;
      c. Spring-loaded and held in closed position by door or cover; and
      d. Wired to break a circuit when door or cover is removed with each sensor annunciated individually at a central reporting processor.
   5. Fail-Safe Mode: Shall provide the capability to detect and annunciate diminished functional capabilities and perform self-

tests. Fail-safe alarms shall be annunciated to be clearly distinguishable from other types of alarms.

2.13 POWER SUPPLY

A. A power supply shall only be utilized if the control panel is unable to support the load requirements of the IDS system.

B. All power supplies shall be UL rated and able to adequately power two entry control devices on a continuous base without failure.

C. Power supplies shall meet the following minimum technical characteristics:

INPUT POWER	110 VAC 60 HZ 2 amp
OUTPUT VOLTAGE	12 VDC Nominal (13.8 VDC) 24 VDC Nominal (27.6 VDC) Filtered and Regulated
BATTERY	Dependant on Output Voltage shall provide up to [insert number]Ah, rechargeable
OUTPUT CURRENT	4 amp max. @ 13.8 VDC 3 amp max. @ 27.6 VDC
BATTERY FUSE SIZE	3.5 A @ 250 VAC
CHARGING CIRCUIT	Built-in standard

2.14 AUDIBLE AND VISUAL ALARM DEVICES

A. Bell: Central-station control unit 10 inches (254 mm) in diameter, rated to produce a minimum sound output of 84 dB at 10 feet (3 m) from central-station control unit.

1. Enclosure: Weather-resistant steel box equipped with tamper switches on cover and on back of box.

B. Weatherproof Motor-Driven Hooter: UL listed, rated to produce a minimum sound output of 120 dB at 3 feet (1 m), plus or minus 3 dB, at a frequency of 470 Hz. Rated for intermittent use: two minutes on and five minutes off.

1. Designed for use in industrial areas and in high noise, severe weather marine environments.

C. Siren: 30-W speaker with siren driver, rated to produce a minimum sound output of 103 dB at 10 feet (3 m) from central-station control unit.

1. Enclosure: Weather-resistant steel box with tamper switches on cover and on back of box.

D. Strobe: Xenon light complying with UL 1638, with a clear polycarbonate lens.
   1. Light Output: 115 cd, minimum.
   2. Flash Rate: 60 per minute.

2.15 SECURITY FASTENERS

A. Security fasteners shall be operable only by tools produced for use on specific type of fastener by fastener manufacturer or other licensed fabricator. Drive system type, head style, material, and protective coating as required for assembly, installation, and strength.

B. Drive System Types: Pinned Torx or pinned hex (Allen).
C. Socket Flat Countersunk Head Fasteners:
   1. Heat-treated alloy steel, ASTM F 835 (ASTM F 835M).
   2. Stainless steel, ASTM F 879 (ASTM F 879M), Group 1 CW.
D. Socket Button Head Fasteners:
   1. Heat-treated alloy steel, ASTM F 835 (ASTM F 835M).
   2. Stainless steel, ASTM F 879 (ASTM F 879M), Group 1 CW.
E. Socket Head Cap Fasteners:
   1. Heat-treated alloy steel, ASTM A 574 (ASTM A 574M).
   2. Stainless steel, ASTM F 837 (ASTM F 837M), Group 1 CW.
F. Protective Coatings for Heat-Treated Alloy Steel:
   1. Zinc chromate, ASTM F 1135, Grade 3 or 4; for exterior applications and interior applications where indicated.
   2. Zinc phosphate with oil, ASTM F 1137, Grade I, or black oxide.

PART 3 - EXECUTION

3.1 INSTALLATION

A. IDS installation shall be in accordance with Underwriters Laboratories (UL) 639 Standards for Intrusion Detection Units and UL 634 Standards for Connectors with Burglar Alarm Systems, and appropriate manufacture’s installation manuals for each type of IDS.
B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.
C. The Contractor shall install all system components including VA furnished equipment, and appurtenances in accordance with the manufacturer's instructions and shall furnish all necessary connectors,

terminators, interconnections, services, and adjustments required for a complete and operable system.

D. The IDS will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or designed as a computer network.

E. The IDS shall be able to be integrated with other security subsystems. Integration with these security subsystems shall be achieved by computer programming and the direct hardwiring of the systems. Determination for methodology shall be outlined when the system(s) is/are being designed and engineered. For installation purposes, the IDS shall utilize an output module for integration with other security subsystems. The Contractor will ensure all connections are per the OEM and that any and all software upgrades required to integrate the systems are installed prior to system start-up.

F. For programming purposes, the Contractor shall refer to the manufacturer’s requirements and Contracting Officer instructions for correct system operations. This includes ensuring computers being utilized for system integration meet or exceeds the minimum system requirements outlined in the IDS software packages.

G. Lightening and power surges to the central alarm reporting and display unit shall be protected at both ends against excessive voltages. This requirement shall apply for circuits that are routed both in underground conduits and overhead runs.

H. At a minimum, the Contractor shall install primary detection devices, such as three electrode gas-type surge arresters, and secondary protectors to reduce dangerous voltages to levels that will cause no damage. Fuses shall not be permitted as protection devices.

I. The Contractor shall provide fail-safe gas tube type surge arresters on exposed IDS data circuits. In addition, transient protection shall protect against spikes up to 1000 volts peak voltage with a one-microsecond rise time and 100-microsecond decay time, without causing false alarms. The protective device shall be automatic and self-restoring. Also, circuits shall be designed or selected assuming a maximum of 25 ohms to ground.

J. Product Delivery, Storage and Handling:

1. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name, equipment

model and serial identification numbers, and UL logo. The Contracting Officer may inventory the IDS equipment at the time of delivery and reject items that do not conform to this requirement.

2. Storage and Handling: Store and protect equipment in a manner that will preclude damage as directed by the Contracting Officer.

K. Cleaning and Adjustments:

1. Cleaning: Subsequent to installation, clean each system component of dust, dirt, grease, or oil incurred during installation in accordance to manufacture instructions.
2. Prepare for system activation by following manufacturer's recommended procedures for adjustment, alignment, or synchronization. Prepare each component in accordance with appropriate provisions of the component's installation, operations, and maintenance instructions.

L. Tamper Switches

1. Install tamper switches to initiate an alarm signal when a panel, box, or component housing door or cover is moved as little as 6.35 mm (1/4 inch) from the normally closed position unless otherwise specified.
2. Locate tamper switches within enclosures, cabinets, housings, boxes, raceways, and fittings to prevent direct line of sight to any internal components and to prevent tampering with switch or circuitry.
3. Conceal tamper switch mounting hardware so that the location of the switch within the enclosure cannot be determined from the exterior.

M. Unique IDS Installation Components:

1. BMS Surface Mounted:
   a. Surface mounted BMS housing for the switch element shall have the capability to receive threaded conduit. Housing covers for surface mounted BMS, if made of cast aluminum, shall be secured by stainless steel screws. Magnet housing cover shall not be readily removable and BMS housings shall be protected from unauthorized access by a cover operated, corrosion-resistant tamper device.
   b. Conductors running from a door to alarm circuits shall be contained within a flexible armored cord constructed from corrosion-resistant metal. Each end of the armored cord shall terminate in a junction box or other enclosure. Armored cord ends

shall be mechanically secured to the junction boxes by clamps or bushings. Conductors within the armored cord shall be provided with lug terminals at each end. Conductors and the armored cord shall experience no mechanical strain as the door is removed from fully open to closed position. Switch circuits shall initiate an alarm if a short circuit is applied to the door cord.

c. For exterior application on double gates, both BMS elements must be mounted on the gate. Flexible armored cord constructed from corrosion-resistant metal shall be used to provide electrical connection.

2. BMS Recessed Mounted:
   a. Ball bearing door trips shall be mounted within vault door headers such that when the locking mechanism is secured, the door bolt engages an actuator, mechanically closing the switch.
   b. Door bolt locking mechanisms shall be fully engaged before the ball bearing door trip is activated. Also, circuit jumpers from the door shall be provided.
3. Vibration Sensors:
   a. Mount vibration sensors directly contacting the surface to be protected.
   b. Provide at least one (1) sensor on each monolithic slab or wall section, even though spacing closer than that required for midrange sensitivity may result.
   c. House sensors in protective mountings and fasten to surface with concealed mounting screws or an epoxy.
   d. Adjust discriminator on the job to precise needs of application. Connect sensors to an electronic control unit by means of wiring or fiber optics cable run in rigid steel conduit or electrical metallic tubing (EMT).
4. Passive Infrared Detectors: (PIR)
   a. The protective beam shall be focused in a straight line.
   b. Installed beam distance from transmitter to receiver shall not exceed 80% of the manufacturer's maximum recommended rating.
   c. Mirrors may be used to extend the beam or to establish a network of beams. Each mirror used shall not lower the rated maximum system range by more than 50%.

d. Mirrors and photoelectric sources used in outdoor applications shall have self-heating capability to eliminate condensation and shall be housed in weatherproof enclosures.

5. Taut-Wire:

a. Housing for switch assembly shall be covered by a neoprene cap to retain the center bolt (lever arm), which functions as a lever to translate movement of the attached horizontal wire into contact closure. When the neoprene cap is firmly seated on the cup-shaped polycarbonate housing, it shall function as the fulcrum for the lever (bolt).

b. Upper exposed end of the lever shall be threaded to accommodate clamping to the horizontal wire. The lower end of the lever, which is fashioned to serve as the movable electrical contact, shall be held suspended in a small cup-shaped contact that floats in a plastic putty material.

c. Plastic putty used shall retain a degree of elasticity under varying temperature conditions and provide the sensor switch with a self-adjusting property. This provides the switch with a built-in compensating mechanism that ignores small, very slow changes in lever alignment (i.e. which may result from environmental changes such as extreme temperature variations and ground seepage due to weather conditions) and to react to fast changes only, as caused by manual deflection or cutting of the wires.

d. Contractor shall provide metal slider strips having slots through which the barbed wires pass. Wires shall be prevented from leaving the slots by rivets. A slider strip shall be used to translate normal forces to the barbed wire and to the horizontal displacement of the sensor.

e. Install one (1) slider strip pair, upper and lower, on every fence post except where sensor posts or anchor strips are installed.

f. Separation between slider elements along the fence shall be 3000 mm (10 feet).

g. Attach wires of sensor to existing, specially installed fence posts, called anchor posts, located equidistant on both sides of sensor posts and at ends of sensor zone run.

h. Anchor strip shall be a strip of steel plate on which fastening plates are installed. Weld or otherwise attach the strip to

anchor post and ends of tensed barbed wires wrapped around the fastening plates. Attempts to climb on fastening plates or on the attached barbed wires shall cause plates to break off, creating an alarm and making it impossible to defeat the system by climbing at the anchor post.

i. The use of barbed wire as part of the IDS system shall be suitable for installation under a preload tension of approximately 392 N 88 pounds and be flexible enough for convenient manipulation during tensioning. Double-strand 15 1/2-gage barbed wire shall be the minimum acceptable.

6. Electromechanical Fence Sensors:
   a. The fence length shall be divided into 100m (300 ft). or zones.
   b. Sensors shall consist of individual electromechanical sensing units mounted every three-thousand and 3045mm (10 ft). on the fence fabric or posts and wired in series to a sensor zone control unit and associated power supply.
7. Electrostatic Field Sensors:
   a. Sensors shall be capable of following irregular contours and barrier bends without degrading sensitivity below the specified detection level.
   b. In no case shall a single sensor zone exceed 100m (300 ft). or be long enough to significantly degrade sensitivity.
   c. Adjacent zones shall provide continuous coverage to avoid a dead zone. Adjacent zones shall be designed to prevent crosstalk interference.
   d. Exterior components shall be housed in rugged corrosion-resistant enclosures, protected from environmental degradation and include tamper switches.
   e. Interfacing between exterior units shall be carried in underground cables.
   f. Exterior support hardware shall be stainless or galvanized to avoid tension degradation.
   g. Sensor and field wires shall be stainless steel. Wire spacing for various configurations shall be maintained constant throughout each zone and shall be uniform with respect to the ground and follow manufacturer's specifications.
   h. Signal processing equipment shall be separately mounted such that no desensitized zones are created within the zone of detection.

8. Microwave: Do not install microwave sensors where fluorescent lights may pose a problem due to radiated ionization from lights.

3.2 WIRING INSTALLATION

A. Wiring Method: Install wiring in metal raceways according to Section 28 05 28.33 "CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY." Conceal raceway except in unfinished spaces and as indicated. Minimum conduit size shall be 3/4 inch (20 mm). Control and data transmission wiring shall not share conduit with other building wiring systems.

B. Wiring Method: Install wiring in raceways except in accessible indoor ceiling spaces and in interior hollow gypsum board partitions where cable may be used. Conceal raceways and wiring except in unfinished spaces and as indicated. Minimum conduit size shall be 3/4 inch (20 mm). Control and data transmission wiring shall not share conduit with other building wiring systems.

C. Wiring Method: Cable, concealed in accessible ceilings, walls, and floors when possible.

D. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points. Use lacing bars and distribution spools. Separate power-limited and non-power-limited conductors as recommended in writing by manufacturer. Install conductors parallel with or at right angles to sides and back of enclosure.Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with intrusion system to terminal blocks. Mark each terminal according to system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Wires and Cables:

1. Conductors: Size as recommended in writing by system manufacturer, unless otherwise indicated.
2. 120-V Power Wiring: Install according to Division 26 Section "LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES," unless otherwise indicated.
3. Control and Signal Transmission Conductors: Install unshielded, twisted-pair cable, unless otherwise indicated or if manufacturer recommends shielded cable, according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."

4. Computer and Data-Processing Cables: Install according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."
5. Television Signal Transmission Cables: Install according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."

F. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.

G. Install power supplies and other auxiliary components for detection devices at controllers, unless otherwise indicated or required by manufacturer. Do not install such items near devices they serve.

H. Identify components with engraved, laminated-plastic or metal nameplate for central-station control unit and each terminal cabinet, mounted with corrosion-resistant screws.

3.3 GROUNDING

A. Ground system components and conductor and cable shields to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments.

B. Signal Ground Terminal: Locate at main equipment rack or cabinet. Isolate from power system and equipment grounding. Provide [5] <Insert selected maximum value>-ohm ground. Measure, record, and report ground resistance.

C. Install grounding electrodes of type, size, location, and quantity indicated. Comply with installation requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY SYSTEMS."

3.4 STARTUP AND TESTING

A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.5 COMMISIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.6 TESTS AND TRAINING

A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

B. Provide services of manufacturer’s technical representative for [insert number] hours to instruct VA personnel in operation and maintenance of units.

C. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

-----END----

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 28 23 00
VIDEO SURVEILLANCE

PART 1 – GENERAL

1.1 DESCRIPTION

A. Provide and install a complete Video Surveillance System, which is identified as the Video Assessment and Surveillance System hereinafter referred to as the VASS System as specified in this section.

B. This Section includes video surveillance system consisting of cameras, data transmission wiring, and a control station with its associated equipment.

C. Video surveillance system Video assessment & surveillance system shall be integrated with monitoring and control system specified in Division 28 Section [INTRUSION DETECTION] [PHYSICAL ACCESS CONTROL] [SECURITY ACCESS DETECTION] that specifies systems integration.

D. Headend equipment shall be provided and installed as fully redundant.

E. In MCR and all TRs with new installed cameras, provide a dedicated network switch exclusively for camera use.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

D. Section 14 21 00 - ELECTRIC TRACTION ELEVATORS. Requirements for elevators.

E. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.

F. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.

G. Section 26 05 19 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.

H. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.

I. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.

J. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

K. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

L. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

M. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

N. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY. Requirements for commissioning, systems readiness checklists, and training.

O. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEM. Requirements for physical access control system integration.

P. Section 28 13 16 - PHYSICAL ACCESS CONTROL SYSTEM AND DATABASE MANAGEMENT. Requirements for control and operation of all security systems.

Q. Section 28 13 53 - SECURITY ACCESS DETECTION. Requirements for screening of personnel and shipments.

R. Section 28 16 00 - INTRUSION DETECTION SYSTEM (IDS). Requirements for alarm systems.

S. Section 28 26 00 - ELECTRONIC PERSONAL PROTECTION SYSTEM (EPPS). Requirements for emergency and interior communications.

1.3 DEFINITIONS

A. AGC: Automatic gain control.

B. B/W: Black and white.

C. CCD: Charge-coupled device.

D. H.264 (also known as MPEG4 Part 10): a encoding format that compresses video much more effectively than older (MPEG4) standards.

E. ips: Images per second.

F. MPEG: Moving picture experts group.

G. MPEG4: a video encoding and compression standard that uses inter-frame encoding to significantly reduce the size of the video stream being transmitted.

H. UPS: Uninterruptible power supply.

1.4 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the VASS System as shown. The Contractor shall also provide certification as required.

B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is

stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

D. Manufacturers' Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

E. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

F. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Video Assessment and Surveillance System's (VASS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the VASS. The Contractor shall only utilize factory-trained technicians to install, terminate and service cameras, control, and recording

equipment. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 SUBMITTALS

A. Submit below items in conjunction with Master Specification Sections 01 33 23, Shop Drawings, Product Data, and Samples, and Section 02 41 00, Demolition Drawings.
B. Provide certificates of compliance with Section 1.4, Quality Assurance.
C. Provide a pre-installation and as-built design package in both electronic format and on paper, minimum size 1220 x 1220 millimeters (48 x 48 inches); drawing submittals shall be per the established project schedule.
D. Pre-installation design and as-built packages shall include, but not be limited to:
   1. Index Sheet that shall:
      a. Define each page of the design package to include facility name, building name, floor, and sheet number.

b. Provide a list of all security abbreviations and symbols.
c. Reference all general notes that are utilized within the design package.
d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
1) Outline all general and job specific work required within the design package.
2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.

2. Floor plans, site plans, and enlarged plans shall:
a. Include a title block as defined above.
b. Define the drawings scale in both standard and metric measurements.
c. Provide device identification and location.
d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
e. Identify all pull box and conduit locations, sizes, and fill capacities.
f. Address all general and drawing specific notes for a particular drawing sheet.

3. A riser drawing for each applicable security subsystem shall:
a. Indicate the sequence of operation.
b. Relationship of integrated components on one diagram.
c. Include the number, size, identification, and maximum lengths of interconnecting wires.
d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer’s name and part number for the wire/cable being installed.

4. A system drawing for each applicable security system shall:
a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
b. Provide full details of all system components wiring from point-to-point.

c. Identify wire types utilized for connection and interconnection with associate security subsystems.
d. Show device locations that correspond to the floor plans.
e. All general and drawing specific notes shall be included with the system drawings.

5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the VASS Systems, provide the camera ID, camera type (e.g. fixed or pan/tilt/zoom (P/T/Z), lens type (e.g. for fixed cameras only) and housing model number.
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

H. Submit completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance

with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

1.6 APPLICABLE PUBLICATIONS – contractor is responsible for conforming to the most recent release of the following publications

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

C. Institute of Electrical and Electronics Engineers (IEEE):

C62.41.2.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

802.3af-08.....Power over Ethernet Standard

D. Federal Communications Commission (FCC):

(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

E. National Electrical Contractors Association (NECA):

303.....Installing Closed Circuit Television (CCTV) Systems

F. National Fire Protection Association (NFPA):

70-08.....Article 780-National Electrical Code

G. Federal Information Processing Standard (FIPS):

140-2-02.....Security Requirements for Cryptographic Modules

H. Underwriters Laboratories, Inc. (UL):

983-06.....Standard for Surveillance Camera Units

3044-01.....Standard for Surveillance Closed Circuit Television Equipment

1.7 COORDINATION

A. Coordinate arrangement, mounting, and support of video surveillance equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.

3. To allow right of way for piping and conduit installed at required slope.
4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for video surveillance items that are behind finished surfaces or otherwise concealed.

1.8 WARRANTY OF CONSTRUCTION

A. Warrant VASS System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 – PRODUCTS

2.1 GENERAL

A. Video signal format shall comply H.264 (MPEG-4 Part 10/AVC) and H.265 (MPEG-H Part 2/HEVC).

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.

C. Power Connections: Comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2, as recommended by manufacturer for type of line being protected.

D. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially disassembled. Control-station, control-unit alarm display shall identify tamper alarms and indicate locations.

2.2 CAMERAS

A. Security cameras shall be Axis M3057-PLVE Mk II as manufactured by Axis Communications. Substitutions are not permitted.

B. All Cameras will be EIA 330 and UL 1.Minimum Protection for Power

Connections 120 V and more: Auxiliary panel suppressors shall comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2.

C. Minimum Protection for Communication, Signal, Control, and Low-Voltage 983 compliant as well as:

1. Will be charge coupled device (CCD cameras and shall conform to National Television System Committee (NTSC) formatting.
2. Fixed cameras shall be color and the primary choice for monitoring following the activities described below.
3. Shall be powered over Ethernet. Network switches supporting PoE cameras shall have a back-up power source to ensure cameras are still operational in the event of loss of primary power to the VASS System.
4. Shall be rated for continuous operation under the environmental conditions listed in Part 1, Project Conditions.
5. Will be home run to a monitoring and recording device via a controlling device such as a matrix switcher or network server and monitored on a 24 hour basis at a designated Security Management System location.
6. Each function and activity shall be addressed within the system by a unique user defined name, with a minimum of twenty (20) characters. The use of codes or mnemonics identifying the VASS action shall not be accepted.
7. Shall come with built-in video motion detection that shall automatically monitor and process information from each camera. The camera motion detection shall detect motion within the camera's field of view and provide automatic visual, remote alarms as a result of detected motion.
8. Shall be programmed to digitally flip from color to black and white at dusk and vice versa at low light conditions.
9. Will be fitted with AI/DC lenses to ensure the image quality under different light conditions.
10. Dummy or fake cameras will not be utilized at any time.
11. Appropriate signage shall be designed, provided, and posted that notifies people that an area is under camera surveillance.

2.3 DIGITAL BASED VIDEO MANAGEMENT SYSTEM

A. Key Features

1. Open Platform: Open API/SDK, supports seamless integration with third party applications.
2. Multi-server and multi-site video surveillance solution: Unlimited recording of video from IP cameras.
3. Optimized Recording Storage Management: Unique data storage and archiving solution that combines superior performance and scalability and cost efficient long-term video storage
4. Wide IP camera and device support: Supports connection of more than 839 IP cameras and selected DVR models from over 79 different vendors through dedicated device integration
5. ONVIF™ and PSIA compliant: Supports ONVIF™ and PSIA compliant cameras and devices
6. Wide compression technology support: Supports compression methods; H.264 (MPEG-4 Part 10/AVC, H.265 (MPEG-H Part 2/HEVC), Motion JPEG
7. System configuration wizards: Guides the user through the process of adding cameras, configuring video and recording, adjustment of motion detection and user configuration
8. Sequence Explorer: Displaying sequences and time intervals in thumbnail pre-views, the Sequence Explorer gives unparalleled visual overview of recorded video combined with smooth navigation
9. Overlay buttons: Intuitive control of cameras, camera-integrated devices and other integrated systems- directly from the camera view
10. Independent Playback: Instant and independent playback function allows you to independently playback recorded video for one or more cameras, while in live viewing or playback mode
11. Built-in Video Motion Detection: Independent of camera model and supporting up to 64 cameras simultaneously per server
12. Multiple language support: Let operators use the system in their native language with support for 20 different languages
13. Fast evidence export: Quickly deliver authentic evidence to public authorities by exporting video to various formats, including video from multiple cameras with viewer, logs, and user notes included

B. Administration Features

1. Single Management Application: A new Management Application provides a consolidated single point management access to Recording Servers.

2. System configuration wizards: Guides the user through the process of adding cameras, configuring video and recording, adjustment of motion detection and user configuration.
3. Automated device discovery: Enables fast discovery of camera devices using methods such as Universal Plug And Play, Broadcast and IP Range scanning.
4. Smart bulk configuration option: Change settings across multiple devices simultaneously and in a very few clicks.
5. Adaptable application behavior: Guides novice users, while expert users can optimize the application for efficient use.
6. Export/import of system and user configuration data: System backup for reliable system operation and fast system recovery. System cloning for efficient rollout of multiple systems with the same, or similar, configuration.
7. Import of off-line configuration data: Enabling off-line editing of configuration data, including camera and device definitions.
8. Automatic system restore points: A 'Restore Point' is created each time a configuration change is confirmed.
9. Enables easy rollback to previously defined system configuration points and enables cancelation of undesired configuration changes and restoration of earlier valid configurations.

C. Integration Options

1. Open Software Development Kit (SDK) makes it possible to video enable your business processes, through seamless integration of third party applications, such as video analytics, access systems, etc.
2. Compatible with Central for alarm overviews and operational status in larger video surveillance installations.
3. Integrate with physical access control systems, alarms, gates, building management systems, etc. using hardware I/O, internal events and TCP/IP events
4. Create, import and use HTML pages for navigation between views or to trigger a Smart Wall preset
5. Develop third party plug-ins for the Smart Client to expand with new functionality

D. Server Modules

1. Recording Server

a. Simultaneous digital multi-channel video and audio recording and live viewing (relaying).
b. Bandwidth optimized multi-streaming by splitting a single camera video stream to differentiated streams for live view and recording, where each can be optimized independently with respect to frame rate and resolution.
c. Connectivity to cameras and selected DVRs supports H.264 (MPEG-4 Part 10/AVC), H.265 (MPEG-H Part 2/HEVC), Motion JPEG.
d. Auto-detect camera models during setup.

2. Flexible multi-site, multi-server license structure charged per camera.
3. Unlimited number of installed cameras; simultaneous recording and live view of up to 64 cameras per server.
4. Recording technology: secure high speed database holding JPEG images or MPEG4 and MxPEG streams including audio.
5. Frame rate 25/30 fps with power line frequency 50/60 Hz.
6. Recording quality depends entirely on camera and video encoder capabilities: no software limitation.
7. Start cameras on live view requests from clients.
8. Unlimited recording capacity with multiple archives possible per day.
9. Hourly to daily database archiving with optional automatic move to network drive saves storage capacity on the local server – with images still available transparently for playback
10. Built-in, real-time, camera independent motion detection (VMD); fully adjustable sensitivity, zone exclusions, recording activation with frame rate speed up, and alert activation through email or SMS.
11. Start recording on event.
12. Client initiated start of recording based on pre-defined recording time and access privileges.

E. Recording Server Manager

1. Local console management of the Recording Server accessible from the notification area.
2. Start and stop Recording Server service.
3. Access to Recording Server configuration settings.
4. Access to Recording Server help system.
5. View system status and log information.

F. Image Server

1. Remote access for Smart and Remote Clients.
2. Built-in web server for download and launch of clients and plug-ins.
3. Set up one Master and multiple Slave Servers.
4. Authenticate access based on Microsoft Active Directory user account, or user name and password.
5. Authorize access privileges per Microsoft Active Directory user account/group, user profile or grant full access.
6. User profiles control access to: Live view, Output control, Events, Listen to microphone, Talk to speaker, Manual recording; Playback, AVI export, JPG export, DB export, Sequences, Smart Search and audio. As well as Set up views, Edit private views and Edit shared public views.
7. Audit logs of exported evidence by user and file.
8. Audit logs of client user activity by time, locations and cameras.

G. Recording Viewer

1. Playback recorded video locally.

H. Recording Server.

1. View up to 16 cameras time-synched during playback.
2. Scrollable activity timeline with magnifying feature.
3. Instant search on recordings based on date/time and activity/alarm (Video Motion Detection).
4. 'Smart Search' for highlighted image zones and objects.
5. Evidence can be generated as a printed report, a JPEG image, an AVI film or in the native database format.
6. Export video digitally zoomed to view area of interest only and to minimize export footprint size.
7. Export 'Evidence CD/DVD' containing native database and Recording Viewer for instant, easy viewing by authorities.
8. Encryption & password protection option for exported recordings and files.
9. Ability to add comments to exported evidence, also encrypted.
10. Option to send email.

I. Smart Client Module

1. Smart Client includes all the features of Remote Client plus more:
2. Installed per default on Recording Server for local viewing and playback of video and audio.
3. Start recording on cameras for a pre-defined time (default 5 minutes). Subject to privileges set by administrator.

4. Independent Playback capability allows for instant playback of recorded video for one or more cameras, while in live and playback mode
5. Live view digital zoom allows zoomed-out recordings while the operator digitally can zoom in to see details.
6. ’Update On Motion Only’ optimizes CPU usage by letting motion detection control whether the image should be decoded and displayed or not. The visual effect is a still image in the view until motion is detected.
7. Shared and private camera views offer 1x1 up to 10x10 layouts in addition to asymmetric views.
8. Views optimized for both 4:3 and 16:9 screen ratios.
9. Multiple computer monitor support with a main window and any number of either windowed or full screen views.
10. Hotspot function for working in details with a camera selected from a view containing multiple cameras.
11. Carousel function allows a specified view to rotate between pre-defined cameras with individual timing and order with multiple appearances. Carousel function can be controlled allowing the operator to pause carousel function and to switch to previous or next camera.
12. Overlay buttons provides intuitive control of cameras, camera-integrated devices and other integrated systems- directly from the camera view
13. Matrix function to view live video from multiple cameras through the Image Server in any view layout with customizable rotation path, remotely controlled by Smart
14. Clients or Recording Servers sending Matrix remote commands
15. Send Matrix remote commands to display live video remotely on computers running the Matrix Monitor or the Smart Client with Matrix Plug-in.
16. Separate pop-up window displaying sequences and time intervals in thumbnail pre-views, the Sequence Explorer gives unparalleled visual overview of recorded video combined with smooth navigation
17. Presents recorded sequences for individual cameras, or all cameras in a view
18. Seamlessly available in both Live and Playback modes

19. Smooth navigation with sliding preview and "drag-and throw" function for video thumbnails
20. Instant playback of video sequences
21. Application Options allows users to adapt the layout and personalize the application to their particular preferences

K. Remote Client

1. View live video or playback recordings for 1-16 cameras simultaneously; from the same or different servers.
2. Advanced video navigation including fast/slow playback, jump to date/time, single step and video motion search.
3. Individual views can be user-defined in various layouts: view or playback camera images from multiple servers simultaneously in the same view.
4. Shared views can be managed centrally via the server with admin/user rights and user groups.
5. Control output port relay operation, for example control of gates.
6. Quick overview of sequences with detected motion and preview window.
7. Quick overview of events/alerts.

9. Optional video compression in streaming from server to client gives better use of bandwidth.
10. Create AVI files or save JPEG images.
11. Print incident reports with free-text user comments.
12. System logon using user name and password.
13. System logon using Microsoft Active Directory user accounts.

L. Matrix Monitor

1. Virtual Matrix showing live video directly from up to 4 cameras at a time triggered remotely by Matrix remote commands.
2. Camera view shifts by FIFO (first-in-first-out)
3. Multiple events can control a single Matrix monitor and single events can control multiple monitors.

M. Minimum System Requirements VMS Server

1. HW Platform:
   a. Minimum Intel® Xeon® E3-1275 v3.
   b. Minimum 200 GB disk space available, excluding space needed for recordings.
2. OS:
   a. Microsoft® Windows® Server 2012

3. Software:
   a. Microsoft .NET 4.6.1, or newer.
   b. DirectX 12.0 or newer required to run Playback Viewer application.

N. Minimum System Requirements VMS Client
1. HW Platform:
   a. Minimum Intel® Xeon® E3-1275 v3 CPU, 32 GB DDR3 ECC
2. Graphics Card:
   a. Intel HD Graphics P4700 or better
3. OS:
   a. Microsoft® Windows® Server 2012
4. Software:
   a. DirectX 12.0 or newer required to run Playback Viewer application.
   b. Microsoft .NET 7 or newer.

O. Minimum System Requirements VMS Remote Client
1. HW Platform:
   a. Minimum Dual Core i5 2.67 GHZ CPU, 4 GB RAM .
2. OS:
   a. Microsoft Windows 11.
3. Software:
   a. DirectX 12.0 or newer required to run Playback Viewer Application Microsoft Edge

P. Licensing Structure
1. Base Server License
   a. An VMS Base Server license is mandatory for installing the product.
2. The Base Server license contains:
   a. Unlimited numbers of Recording Server licenses
   b. Unlimited numbers of Smart Clients, Remote Clients, and Matrix Monitor licenses
3. Camera License
   a. To connect to a camera, a Device License per camera channel is required
   b. In total, for all copies of the product installed under a given Base Server license, the product may only be used with as many cameras as you have purchased camera licenses for. Video encoders

and DVRs with multiple analog cameras require a license per channel to operate.

c. Camera Licenses can be purchased in any numbers. To extend the installation with additional Camera Licenses, the Base Server License number (SLC) is required when ordering.

4. Client License:

a. All client modules are not licensed and can be installed and used on any number of computers.

2.4 VIDEO DISPLAY EQUIPMENT

A. Video Display Equipment

1. Will consist of color monitors and shall be EIA 375A compliant.
2. Shall be able to display analog, digital, and other images in either NTSC or MPEG format associated with the operation of the Security Management System (SMS).
3. Shall:

a. Have front panel controls that provide for power on/off, and user-accessible on-screen controls for video input port selection, brightness, and contrast.

b. Accept multiple inputs, either directly or indirectly.

c. Have the capabilities to observe and program the VASS System.

d. Be installed in a manner that they cannot be witnessed by the general public.

B. Light Emitting Diode (LED) Flat Panel Display Monitor

C. The minimum [27] twenty seven-inch color LED monitor shall have a flat screen and minimum [27] twenty seven-inch diagonal viewing area and consists of an LED panel, bezel, and stand.

D. The monitor shall meet or exceed the following specifications:

1. The monitor shall incorporate a minimum [27] twenty seven-inch LED panel.

a. The pixel pitch of the monitor’s LED panel shall be 0.3108 mm horizontal and 0.3108 mm vertical.

b. The monitor shall have a minimum resolution of1920x1080 @60Hz.

e. The monitor shall display at least 16.7 million colors.

f. The light source for the LED panel shall have a lifetime of 50,000 hours.

g. The horizontal frequency shall be 30 K to 80 KHz and the scan frequency vertical shall be 56 to 75 Hz.

h. The viewing angle for the monitor shall be 170 degrees horizontal and 170 degrees vertical.

3. The monitor shall use one or more the following signal connectors:

a. HDMI b. Display Port

4. The monitor shall have minimum one audio speaker.

a. The speaker shall be 0.5 W minimum.

5. The monitor shall have the following user accessible control panel buttons:

a. Power on/off

b. LED indicator

c. OSD control

d. Increase (volume)

e. Decrease (volume)

6. The monitor shall have the following options for adjustment in an onscreen display menu:

a. Color

b. Sharpness

c. Brightness

d. Volume

e. Language

f. Self-diagnosis

E. The electrical specifications for the monitor shall be as follows:

1. Input voltage shall be 120VAC, with DC supplied by included power cable.

2. Power consumption shall be 70 W maximum.

F. The environmental specifications for the monitor shall be as follows:

1. Operating temperature shall be 50 to 104 degrees Fahrenheit or 10 to 40 degrees Celsius.

2. Operating humidity shall be 10 to 85 percent.

G. The monitor shall conform to these compliance standards:

1. FCC

2. CE (EMC/LVD)3. UL

2.5 CONTROLLING EQUIPMENT

A. Shall be utilized to call up, operate, and program all cameras associated VASS System components.

B. Will have the ability to operate the cameras locally and remotely. A matrix switcher or a network server shall be utilized as the VASS System controller.

C. The controller shall be able to fit into a standard 47.5 cm (19 inch) equipment rack.

D. Control and programming keyboards shall be provided with its own type of switcher. All keyboards shall:

1. Be located at each monitoring station.
2. Be addressable for programming purposes.
3. Provide interface between the operator and the VASS System.
4. Provide full control and programming of the switcher.
5. Have the minimum following controls:
   a. programming
   b. switching
   c. lens function
   d. environmental housing
   e. annotation

2.6 VIDEO CAMERAS

A. The cameras shall be high-resolution color video cameras with wide dynamic range capturing capability.

B. The camera shall meet or exceed the following specifications:

1. The image capturing device shall be a 1/2.7”-inch image sensor designed for capturing wide dynamic images.
   a. The image capturing device shall sample each pixel multiple times per second.
3. The camera shall optimize each pixel independently.
4. The camera shall have onscreen display menus for programming of the camera’s settings.
5. The video output shall MPEG compressed via H264 and H.256

c. The camera shall come with a varifocal lens.

H. Fixed Color Camera

1. The camera shall be a high-resolution color video camera with wide dynamic range capturing capability.
2. Comply with UL 639.
3. Pickup Device: 1/2.7” CCD interline transfer.

4. With AGC, manually selectable on or off.
6. Automatic backlight compensation or normal lighting.
8. White Balance: Auto-tracing white balance.
9. Fixed Color Cameras Technical Characteristics:

Pickup device	1/2.7” " interline transfer CCD
Resolution	2592x1944 to 160/90
Sync. System	Internal Sync
Electronic shutter	1/33500s to 1/5s
Min. illumination	0.13 lux F1.3
White balance	Auto
Automatic gain control	ON
Lens type	varifocal lens
Focal length	3-8mm
Power source	PoE
Power consumption	12.1watt max

10. Fixed color camera shall be enclosed in dome and have board mounted varifocal lens.
11. Camera accessories shall include:
    a. Surface mount adapter
    b. Wall mount adapter
    c. Flush mount adapter

2.7 AUTOMATIC COLOR DOME CAMERA

A. Indoor/Outdoor Fixed Mini Dome System (IP)

1. The indoor/outdoor fixed mini dome system shall include a built-in 100Base-TX network interface for live streaming to a standard Web browser.
2. The network mini dome shall be integrated into the back box design to accept multiple camera options without modification. The network

mini dome shall operate in open architecture connectivity for third-party software recording solutions.

3. The indoor/outdoor fixed mini dome system shall meet or exceed the following design and performance specifications.

Imaging Device	1/2.7”-inch type CCD
Resolution	2592x1944 to 160x90
Synchronization	Internal
Electronic Shutter Range	Auto 1/33500 s to 1/5 s
Lens Type	Varifocal with auto iris
Format Size	1/3-inch
Focal Length	3.0-8.0mm
Operation	Iris Auto Zoom Manual
Minimum Illumination	Color (day): 0.13 lux, B-W (night): 0.0 lux,
Compression	MPEG-4 via h.264, MPEG-H vis H.265 MJPEG in Web viewing mode
Bit Rate	Configurable, 20 kbps to 2 Mpbs per stream
Web User Interface	
Environment	Low temperature, indoor/outdoor
Connectors	RJ-45 for 1000BASE-TX
Cabling	CAT6A cable
Input Voltage	24 VAC (18-36) or PoE input voltage
Power Consumption	13w maximum
Light Attenuation	smoked bubble, f/1.5 light loss; clear bubble, zero light loss

CERTIFICATIONS	CE, Class B UL Listed Meets NEMA Type 4X and IP66 standards

4. As a basis of design, interior MCR cameras shall be AXIS P3267-LV or approved equal. Exterior MCR cameras shall be AXIS P3267-LVE with WALL-AND-POLE MOUNT T91L61, and PENDENT KIT TP3103-E or approved equal. Interior TR cameras shall be AXIS M3057-PLVE Mk II or approved equal.

T. NETWORK CAMERAS

1. Shall be IEEE 802.3af compliant.
   a. Shall be utilized for interior and exterior purposes.
   b. A Category 6A cable will be the primary source for carrying signals up to 100 m(300 ft.)..
   c. Shall be routed to a controlling device via a provided dedicated network switch: 1RU, 19” rack-mountable, managed, minimum 8 ports, minimum 1000BASE-TX. Switch shall connect to VMS over the network via fiber optics.
   d. Shall be of hybrid design with both an Internet Protocol (IP) output and a monitor video output which produces a picture equivalent to an analog camera and allows simultaneous output of both.
   e. Shall be a programmable IP address that allows for installation of multiple units in the same Local Area Network (LAN) environment.
   d. Incorporate a minimum of Transmission Control Protocol (TCP)/IP, User Datagram Protocol (UDP), Hypertext Transfer Protocol (HTTP), File Transfer Protocol (FTP), Internet Control Message Protocol (ICMP0, Address Resolution Protocol (ARP), Real-Time Transport Protocol (RTP), Dynamic Host Configuration Protocol (DHCP), Network Time Protocol (NTP), Simple Mail Transfer Protocol (SMTP), Internet Group Management Protocol (IGMP), and Differentiated Service Code Point (DSCP) protocols for various network applications.

Z. Fixed Network Camera

1. The fixed network camera shall have following technical characteristics:

Video Standards	MPEG-4; M-JPEG
Video Data Rate	Controllable frame rate and bandwidth
Image Resolution	2592x1944 to 160x90
Frame Rate	25/30 fps with power line frequency 50/60 Hz
Network Protocols	IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPSa, HTTP/2, TLSa, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTCP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3, DHCPv4/v6, ARP, SSH, SIP, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)
Software Update	Remote programmable
Configuration	Via web browser,
Sensitivity	Color: 0.13 lux at 50 IRE, F1.3 B/W: 0 lux at 50 IRE, F1.3
Minimum Illumination	Color: 0.13 lux at 50 IRE, F1.3 B/W: 0 lux at 50 IRE, F1.3
Input Voltage	PoE: IEEE 802.3af/802.3at compliant

2. Camera accessories shall include:
   a. Surface mount adapter
   b. Wall mount adapter
   c. Flush mount adapter

BB. LENSES

1. Camera Field of View shall be set by the Contractor to produce full view of door or window opening and anyone entering or leaving

through it. Follow the project construction drawings for design intent.

2. Camera Lenses shall be of the type supplied with the camera from the manufacturer. All cameras which are not supplied with lenses from the factory are specified in this specification. The lens shall be equipped with an auto-iris mechanism unless otherwise specified. Lenses shall have sufficient circle of illumination to cover the image sensor evenly. Lenses shall not be used on a camera with an image format larger than the lens is designed to cover. Lenses shall be provided with pre-set capability.
3. Lenses shall have optical-quality coated optics, designed specifically for video surveillance applications, and matched to specified camera. Provide color-corrected lenses with color cameras, megapixel lenses for megapixel cameras, and lenses with day/night for color/b&w cameras.
4. Auto-Iris Lens: Electrically controlled iris with circuit set to maintain a constant video level in varying lighting conditions.
5. Zoom Lenses: Lenz zoom shall be digital.
6. Lenses: Shall be utilized in a manner that provides maximum coverage of the area being monitored by the camera. The lenses shall:
   a. Be 1/2.7” to fit CCD fixed camera.
   b. Be all glass with coated optics.
   c. Shall be integrated with the camera selected.
   d. Have a maximum f-stop of f/1.3 for fixed lenses, and a maximum f-stop of f/1.6 for variable focus lenses.
   f. Be equipped with an auto-iris mechanism.
   g. Have sufficient circle of illumination to cover the image sensor evenly.
   h. Not be used on a camera with an image format larger than the lens is designed to cover.
   i. Be provided with pre-set capability.
7. Two types of lenses shall be utilized for both interior and exterior fixed cameras:
   a. Manual Variable Focus
   b. Auto Iris Fixed
8. Manual Variable Focus:

a. Shall be utilized in large areas that are being monitored by the camera. Examples of this are perimeter fence lines, vehicle entry points, parking areas, etc.
b. Shall allow for setting virtually any angle of field, which maximizes surveillance effects.
c. Technical Characteristics:

Image format	1/2.7 inch
Focal length	3mm-8mm
Iris range	F1.3 to close
Focus range	1m (3.3 ft)
Horizontal field of view	104°-40°
Vertical field of view	74°-29°
Iris control	automatic
Focus ctrl	manual
Zoom ctrl	manual

CC. CAMERA HOUSINGS AND MOUNTS

1. This section pertains to all interior and exterior housings, domes, and applicable wall, ceiling, corner, pole, and rooftop mounts associated with the housing. Housings and mounts shall be specified in accordance to the type of cameras used.
2. All cameras and lenses shall be enclosed in a tamper resistant housing. Any additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
3. The camera and lens contained inside the housing shall be installed on a camera mount. All additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
4. Shall be manufactured in a manner that meet environmental requirements for the geographical area the camera support equipment is being installed on or within.
5. Environmentally Sealed
   a. Shall be designed in manner that it provides a condensation free environment for correct camera operation.
   b. Shall be operated in a 100 percent condensing humidity atmosphere.

c. Shall be constructed in a manner that:

5) It shall contain camera mounts or supports as needed to allow for correct positioning of the camera and lens.

6) The housing and any sunshield are to be white in color.

6. All electrical and signal cables required for correct operations shall be supplied in a hardened carrier system from the controller to the camera.
7. The mounting bracket shall be adjustable to allow for the housing weight of the camera and the housing unit it is placed in.
8. Accessibility to the camera and mounts shall be taken into consideration for maintenance and service purposes.

DD. Indoor Mounts

1. Ceiling Mounts:
   a. This enclosure and mount shall be installed in a finished or suspended ceiling.
   b. The enclosure and mount shall be fastened to the finished ceiling, and shall not depend on the ceiling tile grid for complete support.
   c. Suspended ceiling mounts shall be low profile, and shall be suitable for replacement of 610mm x 610mm (2 foot by 2 foot) ceiling tiles.
2. Wall Mounts:
   a. The enclosure shall be installed in manner that it matches the existing décor and placed at a height that it will be unobtrusive, unable to cause personal harm, and prevents tampering and vandalism.
   b. The mount shall contain a manual pan/tilt head that will provide 360 degrees of horizontal and vertical positioning from a horizontal position, and has a locking bar or screw to maintain its fixed position once it has been adjusted. Cameras with fully adjustable components shall use same manufacturer recommended mounts.

EE. Interior Domes

1. The interior dome shall be a pendant mount, pole mount, ceiling mount, surface mount, or corner mounted equipment.

2. The lower portion of the dome that provides camera viewing shall be made of black opaque acrylic and shall have a light attenuation factor of no more than 1 f-stop.
3. Cameras with fully adjustable components shall use same manufacturer recommended mounts.

FF. Exterior Domes

1. The exterior dome shall meet all requirements outlined in the interior dome paragraph above.
2. The housing shall be constructed to be dust and watertight, and fully operational in 100 percent condensing humidity.
3. All exterior-mounted PoE or LAN-attached IP cameras must be bonded to the telecommunications bonding infrastructure.

GG. Exterior Wall Mounts

1. Shall have an adjustable head for mounting the camera.
2. Shall be constructed of IP66-, NEMA 4X- and IK10-rated Polycarbonate, Polycarbonate casing and weather shield.
3. The head shall be adjustable for not less than Pan ±190°, tilt -10 to +80°, rotation ±190°. Any brackets or mounts shall be matching camera manufacturer.
4. Shall be installed at a height that allows for maximum coverage of the area being monitored.
5. All exterior-mounted PoE or LAN-attached IP cameras must be bonded to the telecommunications bonding infrastructure.

2.8 POWER SUPPLIES

A. Cameras shall be Power over Ethernet (PoE) IEEE 802.3af/802.3at Type 1 Class 3 Typical 6.4 W, max 12.1 W.

2.9 INFRARED ILLUMINATORS

A. If required, lighting fixtures that emit light only in the infrared spectrum, suitable for use with cameras indicated, for nighttime surveillance, without emitting visible light.
1. Field-Selectable Beam Patterns: Narrow, medium, and wide.
2. Rated Lamp Life: More than 8000 hours
3. Power Supply: 12-VAC/DC.

B. Area Coverage: Illumination to 50 m (150 feet) in a narrow beam pattern.

C. Exterior housings shall be suitable for same environmental conditions as associated camera.

2.10 NETWORK SERVER

A. Allow for the transmission of live video, data, and audio over a dedicated security system network, requiring an IP address. The network shall operate in a box-to-box configuration allowing for encoded video to be decoded and displayed on an monitor.

B. If a VASS System network is going to be utilized as the primary means of monitoring, operating, and recording cameras then the following equipment shall be required as part of the system:

1. System Server
2. Computer Workstation
3. Recording Device
4. Monitor
5. Switch
6. Router
7. Encryptor

C. Shall provide overall control, programming, monitoring, and recording of all cameras and associated devices within the VASS System.

D. All equipment on the network shall be IP addressable.

E. The VASS System network shall meet or exceed the following design and performance specifications:

1. Two MPEG-4 video streams for a total of 40 images per second will be provided.
2. PC Software that manages the installation and maintenance of all hardware transmitters and receivers on the network shall be provided.
3. Video Source that supports any MPEG-4video source to the computer network shall be addressed.
4. Receivers that could be used to display the video on a standard monitor will be addressed.

F. The system shall support the following network protocols:

1. IPv4, IPv6 USGv6, ICMPv4/ICMPv6, HTTP, HTTPSa, HTTP/2, TLSa, QoS Layer 3 DiffServ, FTP, SFTP, CIFS/SMB, SMTP, mDNS (Bonjour), UPnP®, SNMP v1/v2c/v3 (MIB-II), DNS/DNSv6, DDNS, NTP, NTS, RTSP, RTCP, RTP, SRTP/RTSPS, TCP, UDP, IGMPv1/v2/v3,

DHCPv4/v6, ARP, SSH, SIP, LLDP, CDP, MQTT v3.1.1, Secure syslog (RFC 3164/5424, UDP/TCP/TLS), Link-Local address (ZeroConf)

2. Video Display: MPEG-4, M-JPEG in server push mode only.
3. Have the ability to adjust bandwidth, image quality and image rate.
4. Provide a video frame rate of at least 30 images per second.
5. Support LAN Interface Ethernet 100/1000BaseT and be auto sensing.
6. Have a minimum LAN Data Rate of 5.0 Mbps.

G. All connections within the system shall be via CAT6Acable and RJ-45 jacks.

H. The VASS network system shall conform to all VA agency wide security standards for administrator and operator use.

I. Server Technical Characteristics:

Hardware	Personal Computer
CPU	2 x 4th Generation Intel® Xeon® Scalable processors or better
Hard Disk Interface	SATA or better
RAM	32 GB DDR5
OS	Microsoft® Windows® Server 2012
Graphic Card	Intel HD Graphics P4700 or better
Ethernet Card	Gigabit Ethernet (1000Base-T)
Software	PELCO VideoXpert
Free Memory	480GB

J. Network Switch Technical Characteristics

Protocol and standard	IEEE802.3 IEEE802.3u IEEE802.3ab
Ports	24 1000M/10G auto-negotiation RJ-45 ports with auto MDI/MDI-X
Network media	Cat 6A UTP for 1,000Mbps
Transmission method	store-and-forward
LED	indicator power, act/link, speed

K. Router Technical Characteristics

Network Standards	IEEE 802.3, 802.3u 10Base-T Ethernet (WAN) 100Base-T Ethernet (LAN) IEEE 802.3x Flow Control IEEE802.1p Priority Queue ANS/IEEE 802.3 NWay auto-negotiation
Protocol	CSMA/CD, TCP, IP, UDP, PPPoE, AND DHCP (client and server)

VPN Supported	PPTP, IPSec pass-through
Management	Browser
Ports	4 x 100/1000Base-T Auto sensing RJ45 ports, and an auto uplink RJ45port(s) 1 x 10Base-T RJ45 port, WAN
LEDs	Power, WAN Activity, LAN Link (100/1000), LAN Activity

L. Encryptor Technical Characteristics:

Cryptography	Standard - Triple DES 168-bit (ANSI 9.52) Rijndael - AES (128, 192, 256)
Performance	Throughput (end-to-end) @ 100 Mbps line speed: >188 Mbps full duplex (large frames) >200 kfps full duplex (small frames) Latency (end-to-end) @ 100 Mbps
Key Management	Automatic KEK/DEK Exchange Using Signed Diffie-Hellman Unit Authentication Using X.509 Certificates
Physical Interfaces	100/1000BaseT Ethernet (Host and Network Ports) 10BaseT Ethernet Management Port Back and Front-Panel Serial Control Port
Device Management	THALES Element Manager, Front Panel Viewer, and Certificate Manager 10Base T (RJ-45) or 9-pin Serial Control Port SNMP Network Monitoring
Security Features	Tamper Proof Cryptographic Envelope Tamper Evident Chassis Hardware Random Number Generator
Management	Channel Encrypted Using Same Algorithm as Data Traffic
Security Certifications	FIPS 140-2 Level 3 CAPS Baseline and Enhanced Grades Common Criteria EAL4 and EAL5 (under evaluation)
Regulatory	EN60950, FCC, UL, CE, EN 50082-1, and EN 55022

M. As a basis of design, Server shall be a DELL PowerEdge R760 Rack Server or approved equal.

2.11 RECORDING DEVICES

A. All cameras on the VASS System shall be recorded in real time using a Digital Video Recorder (DVR), Network Video Recorder (NVR), or attached storage. The type of recording device utilized should be determined by

the size and type of VASS System designed and installed, and to what extent the system is to be utilized.

B. All recording devices shall be 47.5 cm (19 inch) rack mountable.

C. All DVR's and NVR's that are viewable over an Intranet or Internet will be routed through an encryptor.

D. Encryptors shall:

1. Comply with FIPS PUB 140-2.
2. Support TCP/IP.
3. Directly interfaces to low-cost commercial routers.
4. Provide packet-based crypto synchronization.
5. Encrypt source and destination IP addresses.
6. Support web browser based management requiring no additional software.
7. Have a high data sustained throughput — 1.544 Mbps (T1) full duplex data rate.
8. Provide for both bridging and routing network architecture support.
9. Support Electronic Key Management System (EKMS) compatible.
10. Have remote management ability.
11. Automatically reconfigure when secure network or wide area network changes.

E. Digital Video Recorder (DVR)

1. Shall record video to a hard drive-based digital storage medium in MPEG format.
2. Shall meet the following minimum requirements:
   a. Record at minimum rate of 30 images per second (IPS).
   b. Have a minimum of eight (8) to 16 looping inputs.
   c. Have a minimum of eight (8) to 16 alarm inputs and two (2) relay outputs.
   d. Shall provide instantaneous playback of all recorded images.
   e. Be IP addressable, if part of a VASS network.
   f. Have built-in digital motion detection with masking and sensitivity adjustments.
   g. Provide easy playback and forward/reverse search capabilities.
   h. Complete audit trail database, with a minimum of a six-month history that tracks all events related to the alarm; specifically who, what, where and when.
   i. DVR management capability providing automatic video routing to a back-up spare recorder in case of failure.

j. Accessible locally via the campus network.

k. Records all alarm events in real time, ensuring 60 seconds before and after the event are included in the recording.

l. Utilize RS-232, Ethernet, or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.

m. Allow for independently adjustable frame rate settings.

n. Be compatible with the matrix switcher utilized to operate the cameras. The DVR could be utilized as a matrix switcher only if it meets all of the requirements listed in the matrix switcher section.

3. Technical Characteristics:

Compression	MPEG-4
Internal Storage Capacities.	10 TB. Optional internal DVD available
Digital Recording	Up to [16] video and [8] audio channels, or [8] video and [4] audio channels.
Full real-time video recording	
Multiple simultaneous functions	Live viewing, Recording, playback, network transmission, back-up
Search functions	Date/time search, event search, bookmark search, smart (pixel) Search
User ID security	3 levels
Connectivity to external devices:	Eight [8] or sixteen [16] video input and looping output channels. VGA and dual monitor BNC outputs. Four [4] or eight [8] audio inputs and one [1] audio output. Ethernet 100/1000BaseT network connection. Eight [8] to sixteen [16] alarm inputs and four [4] or eight [8] relay outputs. Front and back USB connectors to connect to a PC mouse, or archive video to a USB memory stick or similar device.
PC requirements	Microsoft® Windows® Server 2012Intel® Xeon® E3-1276 v332 GB DDR3 ECC or more

	RAM. 200 GB hard drive. VGA interface; VXS models are designed to be configured remotely through web interface
Electrical	Power Input: 100 to 240 VAC; 50/60 Hz Power consumption: 300w Max. 3 A
Video	Video standard: MPEG-4. Resolution: 1024 x 768
Audio	Inputs: 4 or 8 line in, 30 kOhm Output: 1 line, 100 kOhm
Monitors	Minimum 27” LED, 1920x1080
Frame Rate and Resolution	[16]-channels 30fps, 2592x1944 to 160x90
Alarm inputs	[8] [16] configurable NO/NC, max. input 5 VDC.
Alarm outputs	[4] or [8] relay outputs, configurable NO/NC, max. rated 1A, 125 VAC.
Connections	Ethernet: RJ45 modular jack 8 pins shielded, 100/1000 Base-T. Biphase: Screw terminal connector (5 outputs). Maximum 5 controllable cameras per Biphase output. Keyboard: USB
Network:	Bandwidth control: Automatic Remote users: Maximum 5 simultaneous connected Control Center users.

Processor	2 x 4th Generation Intel® Xeon® Scalable processors
Memory	32 GB DDR5
Operating System	Microsoft® Windows® Server 2012
Video Card	VGA interface; VXS models are designed to be configured remotely through web interface.
Free Hard Disk Space	200 GB for software installation
Network Card	1000Base-T network for LAN operation
Archiving	5TB Hard Drive; CD-RW

Video Input	MPEG-4
Video Output Level	MPEG-4
Network Interface	Ethernet (RJ-45, 100/1000M)
Network Protocol	TCP/IP, DHCP, HTTP, UDP
Network Capabilities	Live/Playback/
Recording Rate	30 ips
Password Protection	Menu Setup, Remote Access
Recording Capacity	5TB (1 or 2 fixed HDD) 1 DVD-R
Power Interrupt	Auto recovered to recording mode

4. As a basis of design, Server shall be a DELL PowerEdge R760 Rack Server or approved equal.

F. Network Video Recorder (NVR)

1. Shall record video to a hard drive-based digital storage medium in MPEG, MPEG4 or H.264 format.
2. Shall meet the following minimum requirements:
   a. Record at minimum rate of 30 IPS.
   b. Have a minimum of eight (8) to 16 looping inputs.
   c. Have a minimum of eight (8) to 16 alarm inputs and two (2) relay outputs.
   d. Shall provide instantaneous playback of all recorded images.
   e. Be IP addressable, if part of a VASS network.
   f. Have built-in digital motion detection with masking and sensitivity adjustments.
   g. Easy playback and forward/reverse search capabilities.
   h. Complete audit trail database, with minimum of a six-month history that tracks all events related to the alarm; specifically who, what, where and when.
   i. NVR management capability providing automatic video routing to a back-up spare recorder in case of failure.
   j. Accessible locally via the campus network.
   k. Records all alarm events in real time, ensuring 60 seconds before and after the event are included in the recording.
   l. Utilize RS-232, Ethernet, or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.

m. Allow for independently adjustable frame rate settings.

n. Be compatible with the matrix switcher utilized to operate the cameras.

3. Technical Characteristics:

Hardware/CPU	2 x 4th Generation Intel® Xeon® Scalable processors
HDD Interface	SATA or better
RAM	32 GB DDR5
Operating System	Microsoft® Windows® Server 2012
Graphic	VGA interface; VXS models are designed to be configured remotely through web interface.
Ethernet Card	100/1000 MB or better
Memory	32 GB DDR5
Software Setup	Centralized setup from each authorized PC; access via integrated web server
Storage Media	All storage media possible (e.g., HD, RAID), depending on operating system
Storage Mode	Linear mode, ring mode (capacity-based)
Recording Configuration	Camera name assignment, bandwidth limit, frame rate, video quality
Recording Content	Video and/or audio data
Search Parameters	Time, date, event
Playback	Playback via any IP network (LAN/WAN) simultaneous recording, playback, and backup
Network Interface	Ethernet (RJ-45, 100/1000M)
Network Protocol	TCP/IP, DHCP, HTTP, UDP
Network Capabilities	Live/Playback
Recording Rate	30 ips
Password Protection	Menu Setup, Remote Access
Recording Capacity	5TB 1 DVD-R
Power Interrupt	Auto recovered to recording mode

4. As a basis of design, Server shall be a DELL PowerEdge R760 Rack Server or approved equal.

2.12 WIRES AND CABLES

A. Shall meet or exceed the manufactures recommendation for power and signal.

B. Will be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
C. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
D. All conduit, pull boxes, and junction boxes shall be clearly marked with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.
E. Conduit fills shall not exceed 50 percent unless otherwise documented.
F. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.
G. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area
H. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security system shall be defined as any cable or sets of cables carrying 30 VDC/VAC or higher.
I. For all equipment that is carrying digital data between the Physical Access Control System and Database Management or at a remote monitoring station, shall not be less that 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.
J. All cables and conductors, except fiber optic cables, that act as a control, communication, or signal lines shall include surge protection. Surge protection shall be furnished at the equipment end and additional triple electrode gas surge protectors rated for the application on each wire line circuit shall be installed within 1 m. (3 ft.) of the building cable entrance. The inputs and outputs shall be tested in both normal and common mode using the following wave forms:
   1. A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 watts and peak current of 60 amperes.
   2. An 8 microsecond rise time by 20 microsecond pulse width wave form with a peak voltage of 1000 volts and peak current of 500 amperes.

K. The surge suppression device shall not attenuate or reduce the video or sync signal under normal conditions. Fuses and relays shall not be used as a means of surge protection.

9. Signal Cables:

a. Signal wiring for PoE cameras depends on the distance the camera is being installed from either a hub or the server.

b. If the camera is up to 300 ft from a hub or the server, then use a UTP category 6A (CAT6A) cable a with standard RJ-45 connector at each end. The cable with comply with the Power over Ethernet, IEEE802.3af, Standard.

d. CAT6A Technical Characteristics:

Number of Pairs	4
Total Number of Conductors	8
AWG	23
Stranding	Solid
Conductor Material	BC - Bare Copper
Insulation Material	CMP-Plenum rated
Overall Nominal Diameter	.25 in.
IEC Specification	11801 Category 6A
TIA/EIA Specification	568.2-D Category 6A
Max. Capacitance Unbalance	<330 pF per 100m (328 ft.) at 1 kHz
Nom. Velocity of Propagation	67%
Max. Conductor DC Resistance	<9.38 ohm per 100m (328 ft.)
Max. DCR Unbalance@ 20°C	3 %
Max. Operating Voltage	UL 300 V RMS

10. Power Cables

a. Will be sized accordingly and shall comply with the NEC. High voltage power cables will be a minimum of three conductors, 14 AWG, stranded, and coated with a non-conductive polyvinylchloride (PVC) jacket. Low voltage cables will be a minimum of 18 AWG, stranded and non-conductive polyvinylchloride (PVC) jacket.

b. Will be utilized for all components of the VASS System that require either a 110 VAC 60 Hz or 220 VAC 50 Hz input. Each feed will be connected to a dedicated circuit breaker at a power panel that is primarily for the security system.

c. All equipment connected to AC power shall be protected from surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used as a means of surge protection.
d. Shall be rated for either 110 or 220 VAC, 50 or 60 Hz, and shall comply with VA Master Spec 26 05 21 Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
e. Low Voltage Power Cables
   1) Shall be a minimum of 18 AWG, Stranded and have a polyvinylchloride outer jacket.
   2) Cable size shall determined using a basic voltage over distance calculation and shall comply with the NEC's requirements for low voltage cables.

PART 3 - EXECUTION

3.1. GENERAL

A. Installation: The Contractor shall install all system components including Owner furnished equipment, and appurtenances in accordance with the manufacturer's instructions, ANSI C2 and as shown, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable data transmission system.
B. Identification and Labeling: The Contractor shall supply permanent identification labels for each cable at each end that will appear on the as-built drawings. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified by type or signal being carried and termination points. The labels shall be printed on letter size label sheets that are self laminated vinyl that can be printed from a computer data base or spread sheet. The labels shall be E-Z code WES12112 or equivalent.
   1. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing.
C. Transient Voltage Surge Suppressors (TVSS): The Contractor shall mount TVSS within 3 m (118 in) of equipment to be protected inside terminal cabinets or suitable NEMA 1 enclosures. Terminate off-premise conductors on input side of device. Connect the output side of the device to the equipment to be protected. Connect ground lug to a low

impedance earth ground (less than 10 ohms) via Number 12 AWG insulated, stranded copper conductor.

D. Contractor's Field Test: The Contractor shall verify the complete operation of the data transmission system during the Contractor's Field Testing. Field test shall include a bit error rate test. The Contractor shall perform the test by sending a minimum of 1,000,000 bits of data on each DTM circuit and measuring the bit error rate. The bit error rate shall not be greater than one (1) bit out of each 100,000 bits sent for each dial-up DTM circuit, and one (1) bit out of 1,000,000 bits sent for each leased or private DTM circuit. The Contractor shall submit a report containing results of the field test.

E. Acceptance Test and Endurance Test: The wire line data transmission system shall be tested as a part of the completed IDS and EECS during the Acceptance test and Endurance Test as specified.

F. Identification and Labeling: The Contractor shall supply identification tags or labels for each cable. Cable shall be labeled at both end points and at intermediate hand holes, manholes, and junction boxes. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified with type of signal being carried and termination points.

3.2 INSTALLATION

A. System installation shall be in accordance with NECA 303, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.

B. Components shall be configured with appropriate "service points" to pinpoint system trouble in less than 30 minutes.

C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.

D. The VASS System will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be

integrated with all associated security subsystems, whether the system is a stand alone or a complete network.

E. For integration purposes, the VASS System shall be integrated where appropriate with the following associated security subsystems:
   1. PACS:
      a. Provide 24-hour coverage of all entry points to the perimeter and agency buildings, as well as all emergency exits utilizing a fixed color camera.
      b. Record cameras on a 24-hours basis.
   2. IDS:
      a. Provide a recorded alarm event via a color camera that is connected to the IDS system by either direct hardwire or a security system computer network.
      b. Record cameras on a 24-hours basis.
      c. Be programmed to go into an alarm state when an IDS device is put into an alarm state and notify the PACS.
      d. For additional VASS System requirements as they relate to the IDS, refer to Section 28 16 00 “INTRUSION DETECTION”.
   3. Security Access Detection:
      a. Provide full coverage of all vehicle and lobby entrance screening areas utilizing a fixed color camera.
      b. Record cameras on a 24 hour basis.
      c. The VASS System should have facial recognition software to assist in identifying individuals for current and future purposes.

F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

G. For programming purposes refer to the manufacturers’ requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.

H. A complete VASS System shall be comprised of, but not limited to, the following components:
   1. Cameras
   2. Lenses
   3. Video Display Equipment
   4. Camera Housings and Mounts
   5. Controlling Equipment
   6. Recording Devices

7. Wiring and Cables

I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

J. Existing Equipment

1. The Contractor shall connect to and utilize existing video equipment, and devices as outlined in the design package. Video equipment that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing video monitoring station equipment intended to be incorporated into the VASS System, and furnish a report to the Contracting Officer as part of the site survey report. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or incorrect installation of equipment.
5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations

from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

L. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

M. Interconnection of Console Video Equipment: The Contractor shall connect signal paths between video equipment as specified by the OEM. Cables shall be as short as practicable for each signal path without causing strain at the connectors. Rack mounted equipment on slide mounts shall have cables of sufficient length to allow full extension of the slide rails from the rack.

N. Cameras:
   1. Install the cameras with the focal length lens as indicated for each location.
   2. Connect power and signal lines to the camera.
   3. Aim camera to give field of view as needed to cover the intended area.
   4. Aim fixed mounted cameras installed outdoors facing the rising or setting sun sufficiently below the horizon to preclude the camera looking directly at the sun.
   5. Focus the lens to give a sharp picture (to include checking for day and night focus and image quality) over the entire field of view
   6. Synchronize all cameras so the picture does not roll on the monitor when cameras are selected.

O. Monitors:
   1. Install the monitors as shown and specified in design and construction documents.
   2. Connect all signal inputs and outputs as shown and specified.
   3. Terminate video input signals as required.
   4. Connect the monitor to AC power.

P. Switcher:

1. Install the switcher as shown in the design and construction documents, and according to the OEM.
2. Connect all subassemblies as specified by the manufacturer and as shown.
3. Connect video signal inputs and outputs as shown and specified; terminate video inputs as required.
4. Connect alarm signal inputs and outputs as shown and specified; connect control signal inputs and outputs for ancillary equipment or secondary control/monitoring sites as specified by the manufacturer and as shown.
5. Connect the switcher CPU and switcher subassemblies to AC power.
6. Load all software as specified and required for an operational VASS System configured for the site and building requirements, including data bases, operational parameters, and system, command, and application programs.
7. Provide the original and 2 backup copies for all accepted software upon successful completion of the endurance test.
8. Program the video annotation for each camera.

Q. Video Server:

1. Install the video server per design and construction documents, and as specified by the OEM.
2. Connect video server to AC power (UPS).
3. Connect to VASS network.
4. Install operating system and Video Management Software.
5. Provide Video Management Software programming per VA guidance and the requirements provided by the Owner. Programming shall include:
   a. Camera names
   b. Screen views
   c. Camera recording schedules (continuous and event) driven recording. Events include alarms from other systems (sensors), manual input, and video motion detection.
   d. Video detection zones for each camera requiring video motion detection
   e. Alarm interface
   f. Alarm outputs
   g. GUI maps, views, icons and actions
   i. Reports

R. Video Workstation:
   1. Install the video workstation per design and construction documents, and as specified by the OEM.
   2. Connect video workstation to AC power (UPS).
   3. Connect to VASS network.
   4. Install operating system and application software.
   5. Provide application software programming per VA guidance and the requirements provided by the Owner. Programming shall include:
      a. Screen views
      b. Graphical User Interface (GUI) maps, views, icons and actions
      c. Alarm outputs
      d. Reports

S. Network Switch:
   1. Provide and install dedicated minimum 8-port managed switch at cable termination locations for all cameras.
   2. Install the network switch per design and construction documents, and as specified by the OEM.
   3. Connect network switch to AC power (UPS).
   4. Connect network cameras to network switch.
   5. Configure the network switch per manufacturer’s recommendation and project requirements.

T. Network Recording Equipment
   1. Install the NVR or video storage unit as shown in the design and construction documents, and as specified by the OEM.
   2. Connect recording device to AC power (UPS).
   3. Connect recording device to network switch as shown and specified.
   4. Configure network connections
   5. Provide recording unit programming per VA guidance and the requirements provided by the Owner. Programming shall include:
      a. Camera names
      b. Screen views
      c. Camera recording schedules (continuous and event) driven recording. Events include alarms from other systems (sensors), manual input, and video motion detection.
      d. Video detection zones for each camera requiring video motion detection
      e. Alarm interface
      f. Alarm outputs

g. GUI maps, views, icons and actions

i. Reports

U. Video Recording Equipment:

1. Install the video recording equipment as shown in the design and construction documents, and as specified by the OEM.
2. Connect video signal inputs and outputs as shown and specified.
3. Connect alarm signal inputs and outputs as shown and specified.
4. Connect video recording equipment to AC power.
5. Program the video recording equipment;
   a. Recording schedules
   b. Camera caption

V. Video Signal Equipment:

1. Install the video signal equipment as shown in the design and construction documents, and as specified by the OEM.
2. Connect video or signal inputs and outputs as shown and specified.
3. Terminate video inputs as required.
4. Connect alarm signal inputs and outputs as required.
5. Connect control signal inputs and outputs as required
6. Connect electrically powered equipment to AC power.

W. Camera Housings, Mounts, and Poles:

1. Install the camera housings and mounts as specified by the manufacturer and as shown, provide mounting hardware sized appropriately to secure each camera, housing and mount with maximum wind and ice loading encountered at the site.
2. Provide electrical and signal transmission cabling to the mount location via a hardened carrier system from the Physical Access Control System and Database Management to the device.
5. Connect signal lines and AC power to the housing interfaces.
6. Connect building wiring harness to camera.

3.3 SYSTEM START-UP

A. The Contractor shall not apply power to the VASS System until the following items have been completed:

1. VASS System equipment items and have been set up in accordance with manufacturer's instructions.
2. A visual inspection of the VASS System has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.

3. System wiring has been tested and verified as correctly connected as indicated.
4. All system grounding and transient protection systems have been verified as installed and connected as indicated.
5. Power supplies to be connected to the VASS System have been verified as the correct voltage, phasing, and frequency as indicated.

B. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

C. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

3.4 SUPLEMENTAL CONTRACTOR QUIALITY CONTROL

A. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed VASS System; and are approved by the Contracting Officer.

B. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.

C. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.

D. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.5 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 - COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 28 08 00 – "COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS" and related sections for contractor responsibilities for system commissioning.

3.6 DEMONSTRATION AND TRAINING

A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, "GENERAL REQUIREMENTS".

B. Provide services of manufacturer's technical representative for [four] <insert hours> hours to instruct VA personnel in operation and maintenance of units.

C. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – "COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS".

-----END----

- - - THIS PAGE LEFT INTENTIONALLY BLANK - - -

SECTION 28 31 00
FIRE DETECTION AND ALARM

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section of the specifications includes the furnishing, installation, and connection of the fire alarm equipment to form a complete coordinated system ready for operation. It shall include, but not be limited to, alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring as shown on the drawings and specified. The fire alarm system shall not be combined with other systems such as building automation, energy management, security, etc.

B. For Telecommunication Rooms, and affected spaces, the existing fire alarm system shall be extended and or modified as necessary to maintain a complete fire alarm system in accordance with NFPA 72. Telecommunication Rooms require fire alarm audibility but do not require dedicated fire alarm visible or audible notification devices. Telecommunication Rooms do not require smoke detection. Contractor is to demolish any existing fire alarm notification devices or smoke detection within new or existing Telecommunication Rooms.

C. For the new Main Computer Building, a new fire alarm control panel and NFPA 72 compliant fire alarm and detection system shall be provided for the new Main Computer Room building and connected to the campus fire alarm network through direct connection of the fiberoptic network as a new node. The data center shall be protected by new devices as indicated on the drawings including monitoring the new clean agent releasing panel, new duct detectors for data center CRAC units, and new notification devices. Provide smoke dampers as required by the drawings to be activated by smoke detection. Provide shop drawings and calculations for the new data center only.

D. The contractor is required to provide new fiber for the fire alarm system between the Main Compute Room and Building 209. The contractor is required to provide all programming required to integrate the new main computer room building into the campus fire alarm network. Provide fiber cable to match existing fire alarm campus network. Terminate at Building 209 Room 4 fire alarm control panel. Provide a dedicated

conduit run for the fire alarm fiber. See Civil Drawing 00-CU-109 documents for civil conduit routing. Contractor shall field verify final path and entry location to the FACP within Building 209 and coordinate any core drilling or penetrations with architectural and structural drawings. Restore all affected finishes and fire-rated assemblies to their original condition upon completion.

1.2 SCOPE

A. The existing addressable fire alarm shall be extended and modified in a manner to maintain adequate audibility throughout the facility. Extension of the existing fire alarm system is required for the new data center. Any and all device locations and wiring runs shown on the drawings are for reference only. Actual locations shall be in accordance with NFPA 72 and this specification and coordinated by the contractor prior to submitting shop drawings. Provide Shop Drawings for the new data center only.

B. All existing fire alarm equipment, wiring, devices, and sub-systems that are not impacted by the scope of work shall remain in place and operational. Any equipment or devices that are not reused shall be removed. All existing fire alarm conduit not reused shall be removed.

C. A new fire alarm control panel and NFPA 72 compliant fire alarm and detection system shall be provided for the new Main Computer Room building and connected to the campus fire alarm network through direct connection of the fiberoptic network as a new node.

D. Existing fire alarm bells, chimes, door holders, 120VAC duct smoke detectors, valve tamper switches and waterflow/pressure switches may be reused only as specifically indicated on the drawings and provided the equipment:

1. Meets this specification section
2. Is UL listed or FM approved
3. Is compatible with new equipment being installed
4. Is verified as operable through contractor testing and inspection
5. Is warranted as new by the contractor.

E. Existing 120 VAC duct smoke detectors, waterflow/pressure switches, and valve tamper switches reused by the Contractor shall be equipped with an addressable interface device compatible with the new equipment being installed.

F. Existing reused equipment shall be covered as new equipment under the Warranty specified herein.

G. Basic Performance:

1. Alarm and trouble signals from each building fire alarm control panel shall be digitally encoded by UL listed electronic devices onto a multiplexed communication system.
2. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed 5 seconds.
3. The signaling line circuits (SLC) between building fire alarm control units shall be wired class X in accordance with the VA Fire Protection Design Manual.
4. Initiating device circuits (IDC) shall be wired class B in accordance with the VA Fire Protection Design Manual.
5. Signaling line circuits (SLC) within buildings shall be wired class B in accordance with the VA Fire Protection Design Manual. Individual signaling line circuits shall be limited to covering 22,500 square feet (2,090 square meters) of floor space or 3 floors whichever is less.
6. Notification appliance circuits (NAC) shall be wired B in accordance with the VA Fire Protection Design Manual.

H. Fire alarm systems shall comply with requirements of the most recent VA FIRE PROTECTION DESIGN MANUAL and NFPA 72 unless variations to NFPA 72 are specifically identified within these contract documents by the following notation: "variation".

I. The design, system layout, document submittal preparation, and supervision of installation and testing shall be provided by a technician that is certified NICET level III or a registered fire protection engineer. The NICET certified technician shall be on site for the supervision and testing of the system. Installers shall have a minimum of 2 years experience installing fire alarm systems.

1.3 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Requirements for procedures for submittals.

B. Section 07 84 00 - FIRESTOPPING. Requirements for fire proofing wall penetrations.

C. Section 08 71 00 - DOOR HARDWARE. For combination Closer-Holders.

D. Section 21 13 13 - WET-PIPE SPRINKLER SYSTEMS. Requirements for sprinkler systems.
E. Section 21 22 00 – CLEAN AGENT FIRE SUPPRESSION SYSTEMS. Requirements for clean agent suppression systems.
F. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.
G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
I. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
J. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
J. Section 28 08 00, COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for commissioning - systems readiness checklists, and training.
K. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for integration with physical access control system.

1.4 SUBMITTALS

A. General: Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
B. Drawings:
   1. Prepare drawings using AutoCAD Release 14 software and include all contractors information. Layering shall be by VA criteria as provided by the Contracting Officer’s Technical Representative (COR). Bid drawing files on AutoCAD will be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.
   2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways

and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions.

3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety interfaces. Show wiring Styles on the riser diagram for all circuits. Provide diagrams both on a per building and campus wide basis.
4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
5. Two weeks prior to final inspection, the Contractor shall deliver to the COR 3 sets of as-built drawings and one set of the as-built drawing computer files using AutoCAD 2007 or later). As-built drawings (floor plans) shall show all new and/or existing conduit used for the fire alarm system.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
   a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.

b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturer's installation limitations including but not limited to circuit length limitations.
e. Complete listing of all digitized voice messages.
f. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include the magnets for holding the doors open for one minute.
g. Include information indicating who will provide emergency service and perform post contract maintenance.
h. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
i. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall also be provided in the manual. Provide the disk in a pocket within the manual.
j. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.
k. A print out for all devices proposed on each signaling line circuit with spare capacity indicated.

2. Two weeks prior to final inspection, deliver the final updated maintenance and operating manual to the COR.
   a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.

b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.
c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
d. Certificate of Installation as required by NFPA 72 for each building. The certificate shall identify any variations from the National Fire Alarm Code.
e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

D. Certifications:
1. Together with the shop drawing submittal, submit the technician's NICET level III fire alarm certification as well as certification from the control unit manufacturer that the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name and title of the manufacturer’s representative who makes the certification.
2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.
3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.5 WARRANTY

All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to

the extent referenced. The publications are referenced in text by the basic designation only and the latest editions of these publications shall be applicable.

B. National Fire Protection Association (NFPA):

NFPA 13 .....Standard for the Installation of Sprinkler Systems, 2022 edition

NFPA 70.....National Electrical Code (NEC), 2023 edition

NFPA 72.....National Fire Alarm Code, 2022 edition

NFPA 75.....Fire Protection of Information Technology Equipment, 2020 edition

NFPA 90A.....Standard for the Installation of Air Conditioning and Ventilating Systems, 2021 edition

NFPA 101.....Life Safety Code, 2021 edition

C. Underwriters Laboratories, Inc. (UL): Fire Protection Equipment Directory

D. Factory Mutual Research Corp (FM): Approval Guide

E. American National Standards Institute (ANSI):

S3.41.....Audible Emergency Evacuation Signal, 2020 edition

F. International Code Council, International Building Code (IBC), 2021 edition

PART 2 – PRODUCTS

2.1 EQUIPMENT AND MATERIALS, GENERAL

A. Existing equipment may be reused only where indicated on the drawings.

B. Except as indicated in paragraph A above, All equipment and components shall be new and the manufacturer's current model. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturer's requirements and that satisfactory total system operation has been achieved.

2.2 CONDUIT, BOXES, AND WIRE

A. Conduit shall be in accordance with Section 28 05 28.33, CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY and as follows:

1. All new and reused conduit shall be installed in accordance with NFPA 70.
2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
3. All new conduit shall be 3/4 inch (19 mm) minimum. All new conduit shall be factory finished color red.

B. Wire:

1. All existing wiring shall be removed and new wiring installed in a conduit or raceway.
2. Wiring shall be in accordance with NEC article 760, Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, and as recommended by the manufacturer of the fire alarm system. All wires shall be color coded. Number and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification device circuits.
3. Addressable circuits and wiring used for the multiplex communication loop shall be twisted and shielded unless specifically accepted by the fire alarm equipment manufacturer in writing.
4. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.
5. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All new and reused boxes shall be sized and installed in accordance with NFPA 70.
3. New and existing covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 3/4 inch (19 mm) high.

4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the COR.

2.4 ALARM NOTIFICATION APPLIANCES

A. Strobes:
1. LED flash tube type minimum 15 candela in toilet rooms and 75 candela in all other areas with a flash rate of 1 HZ. Strobes shall be synchronized where required by the National Fire Alarm Code (NFPA 72).
2. Backplate shall be red with 1/2 inch (13 mm) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of 20 percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.

B. Fire Alarm Horns:
1. Shall be electric, utilizing solid state electronic technology operating on a nominal 24 VDC.
2. Shall be a minimum nominal rating of 80 dBA at 10 feet (3,000 mm).
3. Mount on removable adapter plates on conduit boxes.
4. Horns located outdoors shall be of weatherproof type with metal housing and protective grille.
5. Each horn circuit shall have a minimum of 20 percent spare capacity.

2.5 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations:
1. Shall be non-breakglass, address reporting type.
2. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.

3. Stations shall be of single action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE".
4. Operating handles shall be constructed of a durable material. On operation, the lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting, or conducting tests and drills.
5. Unless otherwise specified, all exposed parts shall be red in color and have a smooth, hard, durable finish.
6. Stations identified as key operated only shall have a single standardized lock and key separate from the control equipment.

B. Smoke Detectors:
1. Smoke detectors shall be photoelectric type and UL listed for use with the fire alarm control unit being furnished.
2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
4. All spot type and duct type detectors installed shall be of the photoelectric type.
5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.

C. Heat Detectors:
1. Heat detectors shall be of the addressable restorable rate compensated fixed-temperature spot type.

2. Detectors shall have a minimum smooth ceiling rating of 2,500 square feet (230 square meters).
3. Ordinary temperature (135 degrees F (57 degrees C)) heat detectors shall be utilized in elevator shafts and elevator mechanical rooms. Intermediate temperature rated (200 degrees F (93 degrees C)) heat detectors shall be utilized in all other areas.
4. Provide a remote indicator lamp, key test station and identification nameplate (e.g. "Heat Detector - Elevator P-_____) for each elevator group. Locate key test station in plain view on elevator machine room wall.

D. Water Flow and Pressure Switches:

1. Wet pipe water flow switches and dry pipe alarm pressure switches for sprinkler systems shall be connected to the fire alarm system by way of an address reporting interface device.
2. All new water flow switches shall be of a single manufacturer and series and non-accumulative retard type. See Section 21 12 00, FIRE-SUPPRESSION STANDPIPES and Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS for new switches added. Connect all switches shown on the approved shop drawings.
3. All new switches shall have an alarm transmission delay time that is conveniently adjustable from 0 to 60 seconds. Initial settings shall be 30-45 seconds. Timing shall be recorded and documented during testing.

E. Extinguishing System Connections:

1. Each gaseous suppression system shall be monitored for system alarm and system trouble conditions via addressable interface devices.

2.6 SUPERVISORY DEVICES

A. Duct Smoke Detectors:

1. Duct smoke detectors shall be provided and connected by way of an address reporting interface device. Detectors shall be provided with an approved duct housing mounted exterior to the duct, and shall have perforated sampling tubes extending across the full width of the duct (wall to wall). Detector placement shall be such that there is uniform airflow in the cross section of the duct.
2. Interlocking with fans shall be provided in accordance with NFPA 90A and as specified hereinafter under Part 3.2, "TYPICAL OPERATION."
3. Provide remote indicator lamps, key test stations and identification nameplates (e.g. "DUCT SMOKE DETECTOR AHU-X") for all duct detectors. Locate key test stations in plain view on walls or ceilings so that they can be observed and operated from a normal standing position.

B. Sprinkler and Standpipe System Supervisory Switches:

1. Each sprinkler system water supply control valve, riser valve or zone control valve, and each standpipe system riser control valve shall be equipped with a supervisory switch. Standpipe hose valves,

and test and drain valves shall not be equipped with supervisory switches.

2. PIV (post indicator valve) or main gate valve shall be equipped with a supervisory switch. Provide supervised monitoring of the new Post Indicator Valve.
3. Valve supervisory switches shall be connected to the fire alarm system by way of address reporting interface device. See Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS and the design drawings for new switches to be added. Connect tamper switches for all control valves shown on the approved shop drawings.
4. The mechanism shall be contained in a weatherproof die-cast aluminum housing that shall provide a 3/4 inch (19 mm) tapped conduit entrance and incorporate the necessary facilities for attachment to the valves.
5. The entire installed assembly shall be tamper-proof and arranged to cause a switch operation if the housing cover is removed or if the unit is removed from its mounting.
6. Where dry-pipe sprinkler systems are installed, high and low air pressure switches shall be provided and monitored by way of an address reporting interface devices.
7. Fire supervisory signals required by NFPA 20 and monitored by the pump controller shall be provided and monitored by way of address reporting interface devices for the fire pump located indicate location.

2.7 SPARE AND REPLACEMENT PARTS

A. Provide spare and replacement parts as follows:
   1. Smoke detectors – 1 each type
   2. Control equipment keys – 5
   3. Notification Devices – 1 each type
   4. Fire alarm SLC cable (same as installed) – 200 feet

B. Spare and replacement parts shall be in original packaging and submitted to the COR.

C. Furnish and install a storage cabinet of sufficient size and suitable for storing spare equipment. Doors shall include a pad locking device. Padlock to be provided by the VA. Location of cabinet to be determined by the COR.

D. Provide to the VA, all hardware, software, programming tools, license and documentation necessary to permanently modify the fire alarm system on site. The minimum level of modification includes addition and deletion of devices, circuits, zones and changes to system description, system operation, and digitized evacuation and instructional messages.

2.10 INSTRUCTION CHART:

Provide a typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame with a backplate. Install the frame in a conspicuous location observable from each control unit where operations are performed. The card shall show those steps to be taken by an operator when a signal is received under all conditions, normal, alarm, supervisory, and trouble. Provide an additional copy with the binder for the input output matrix for the sequence of operation. The instructions shall be approved by the COR before being posted.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment manufacturer. Fire alarm wiring shall be installed in conduit. All conduit and wire shall be installed in accordance with, Section 28 05 13 CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 26 GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY, and all penetrations of smoke and fire barriers shall be protected as required by Section 07 84 00, FIRESTOPPING.

B. All conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas.

C. All new and reused exposed conduits shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.

D. All existing accessible fire alarm conduit not reused shall be removed.

E. Existing devices that are reused shall be properly mounted and installed. Where devices are installed on existing shallow backboxes, extension rings of the same material, color and texture of the new fire alarm devices shall be used. Mounting surfaces shall be cut and patched

in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Restoration, and be re-painted in accordance with Section 09 91 00, PAINTING as necessary to match existing.

F. All fire detection and alarm system devices, control units and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations are to be approved by the COR.

G. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas.

H. Strobes shall be flush wall mounted with the bottom of the unit located 80 inches (2,000 mm) above the floor or 6 inches (150 mm) below ceiling, whichever is lower. Locate and mount to maintain a minimum 36 inches (900 mm) clearance from side obstructions.

I. Manual pull stations shall be installed not less than 42 inches (1,050 mm) or more than 48 inches (1,200 mm) from finished floor to bottom of device and within 60 inches (1,500 mm) of a stairway or an exit door.

J. Where possible, locate water flow and pressure switches a minimum of 12 inches (300 mm) from a fitting that changes the direction of the flow and a minimum of 36 inches (900 mm) from a valve.

K. Mount valve tamper switches so as not to interfere with the normal operation of the valve and adjust to operate within 2 revolutions toward the closed position of the valve control, or when the stem has moved no more than 1/5 of the distance from its normal position.

L. Connect flow and tamper switches installed under Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS.

M. Connect combination closer-holders installed under Section 08 71 00, DOOR HARDWARE.

3.2 TYPICAL OPERATION

A. Activation of any manual pull station, water flow or pressure switch, heat detector, gaseous suppression system, or smoke detector shall cause the following operations to occur:

1. Operate the general alarm in the Main Computer Room building.
2. Continuously sound a temporal pattern general alarm and flash all strobes in the building in alarm until reset at the local fire alarm control unit.

3. Transmit a separate alarm signal, via the main fire alarm control unit to the fire department.
4. Unlock the electrically locked exit doors within the zone of alarm.

B. Operation of duct smoke detectors shall cause a system supervisory condition and shut down the ventilation system and close the associated smoke dampers as appropriate.

C. Operation of any sprinkler or standpipe system valve supervisory switch, high/low air pressure switch, or fire pump alarm switch shall cause a system supervisory condition.

D. Alarm verification shall not be used for smoke detectors installed for the purpose of early warning.

3.3 TESTS

A. Provide the service of a NICET level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the COR.

B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the COR. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract requirements. After the system has passed the initial test and been approved by the COR, the contractor may request a final inspection.

1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
4. Open each alarm initiating and notification circuit to see if trouble signal actuates.
5. Ground each alarm initiation and notification circuit and verify response of trouble signals.

C. User Acceptance Test (UAT) – Conduct a witnessed, point-by-point walk-through of the Graphical User Interfaces where every device activation shall be validated for correct icon change, color, label, and audible indication.

D. Audibility Testing Results: The Contractor shall perform audibility testing to ensure that all audible notification appliances meet or exceed the minimum sound level thresholds of 15 dB above average ambient, 5 dB above maximum ambient, or 75 dBA, whichever is greater, as determined by NFPA 72. The Contractor shall measure and document the sound pressure level at representative points within the protected area using a calibrated sound level meter, demonstrating compliance with these decibel requirements. Submit a report of all audibility measurements and locations, verifying that the required sound levels have been achieved.

3.4 COMMISSIONING

A. The contractor shall commission all new and upgraded fire alarm components and systems in compliance with the requirements of NFPA 72. This includes integrating and verifying the performance of the new fiber-optic backbone, clean agent releasing panel and detection devices, and damper controls for fire and smoke dampers. All commissioning activities shall ensure system functionality, interoperability, code compliance, and completeness of documentation.

B. Coordinate with Section 28 08 00, COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

C. Pre-Functional Checks

1. Documentation Review: Examine design drawings, submittals, device listings, and manufacturer data sheets to confirm alignment with the approved plans, NFPA 72, and local requirements.

2. Equipment Verification: Inspect all new fiber-optic infrastructure used for fire alarm network communication. Confirm labeling, routing, terminations, and that the fiber is tested for continuity and signal strength.

3. Clean Agent Integration: Verify compatibility of the clean agent control panel, releasing devices, detectors, and notification

appliances with the primary fire alarm system and confirm that interlocking signals (e.g., suppression release, alarm annunciation) are properly addressed.

D. Functional Testing

1. Detection & Notification Devices: Activate each initiating device (smoke detectors, pull stations, heat detectors, clean agent detectors) to ensure proper alarm signal transmission to the fire alarm control panel (FACP). Test each notification appliance (strobes, horns, speakers) for correct audibility, visibility, and intelligibility.

2. Network Communication & Fiber Optics: Confirm the fiber-optic loop or backbone reliably connects field panels, transponders, or remote annunciators. Perform supervised signal tests to verify that alarm and trouble conditions are correctly transmitted throughout the network.

3. Clean Agent System: Initiate a test scenario to confirm that the FACP receives and processes the clean agent alarm signal; verify that the releasing panel responds properly, and that relevant supervisory signals, pre-discharge warnings, and notifications are generated in accordance with NFPA 72 and NFPA 2001.

4. Fire & Smoke Damper Operation: Command each damper closure through the fire alarm system (via relay modules or direct connections) to ensure dampers fully close upon activation of the appropriate initiating device. Confirm that correct supervisory signals and alarm indications appear at the FACP and annunciators.

E. Interfacing & Integration

a. HVAC & Damper Shutdown: Verify that alarm events and smoke detection signals correctly prompt HVAC shutdown or damper actuation per design. Confirm Data Center Room 105 dampers are activated. Confirm the Storage Room 109 dampers are activated.

b. Building Automation & Monitoring Systems: Confirm that monitored points (e.g., alarm, supervisory, trouble) are accurately transmitted to any building automation system or remote

supervising station, if applicable.

c. Power Supplies & Backup: Inspect that battery backup systems, UPS devices, or generator feeds associated with the fire alarm system.

F. Final Verification & Documentation

a. System Acceptance Testing: Perform final acceptance testing with the Owner, AHJ, and other stakeholders to demonstrate that all fire alarm components and integrated systems meet the performance criteria of NFPA 72.

3.5 FINAL INSPECTION AND ACCEPTANCE

A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.

B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests in Article 3.3 TESTS and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a VA representative.

3.6 INSTRUCTION

A. The manufacturer's authorized representative shall provide instruction and training to the VA as follows:

1. Six 1-hour sessions to engineering staff, security police and central attendant personnel for simple operation of the system. Two sessions at the start of installation, 2 sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
2. Four 2-hour sessions to engineering staff for detailed operation of the system. Two sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
3. Three 8-hour sessions to electrical technicians for maintaining,

programming, modifying, and repairing the system at the completion of installation and one 8-hour refresher session 3 months after the completion of installation.

B. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the VA. The sequence of operation will be shown for each input in the system in a matrix format and provided in a loose leaf binder. When reading the sequence of operation, the reader will be able to quickly and easily determine what output will occur upon activation of any input in the system. The INPUT/OUTPUT matrix format shall be as shown in Appendix A to NFPA 72.

C. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

- - END - -

SECTION 31 20 11 EARTHWORK

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the requirements for furnishing all equipment, materials, labor, tools, and techniques for earthwork including, but not limited to, the following:

1. Site preparation.
2. Excavation.
3. Filling and backfilling.
4. Grading.
5. Soil Disposal.
6. Clean Up.

1.2 DEFINITIONS:

A. Unsuitable Materials:

1. Fills: Topsoil, frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic materials, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable and any material with a liquid limit and plasticity index exceeding 40 and 15 respectively. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction, as defined by ASTM D698.
2. Existing Subgrade (Except Footing Subgrade): Same materials as above paragraph, that are not capable of direct support of slabs, pavement, and similar items, with the possible exception of improvement by compaction, proof rolling, or similar methods of compaction verification.
3. Existing Subgrade (Footings only): Same as Paragraph 1, but no fill or backfill. If materials differ from design requirements, excavate to acceptable strata subject to Resident Engineer's approval.

B. Building Earthwork: Earthwork operations required in area enclosed by a line located 1500 mm (5 feet) outside of principal building perimeter.

It also includes earthwork required for auxiliary structures and buildings.

C. Trench Earthwork: Trenchwork required for utility lines.

D. Site Earthwork: Earthwork operations required in area outside of a line located 1500 mm (5 feet) outside of principal building perimeter and within new construction area with exceptions noted above.

E. Degree of compaction: Degree of compaction is expressed as a percentage of maximum density obtained by laboratory test procedure. This percentage of maximum density is obtained through use of data provided from results of field test procedures presented in ASTM D1556, ASTM D2167, and ASTM D6938.

F. Fill: Satisfactory soil materials used to raise existing grades. In the Construction Documents, the term “fill” means fill or backfill as appropriate.

G. Backfill: Soil materials or controlled low strength material used to fill an excavation.

H. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or indicated lines and dimensions without written authorization by the Resident Engineer. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.

I. Authorized additional excavation: Removal of additional material authorized by the Resident Engineer based on the determination by the Government’s soils testing agency that unsuitable bearing materials are encountered at required sub-grade elevations. Removal of unsuitable material and its replacement as directed will be paid on basis of Conditions of the Contract relative to changes in work.

J. Subgrade: The undisturbed earth or the compacted soil layer immediately below granular sub-base, drainage fill, or topsoil materials.

K. Structure: Buildings, foundations, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.

L. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.

M. Drainage course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.

N. Bedding course: Layer placed over the excavated sub-grade in a trench before laying pipe. Bedding course shall extend up to the springline of the pipe.

O. Sub-base Course: Layer placed between the sub-grade and base course for asphalt paving or layer placed between the sub-grade and a concrete pavement or walk.

P. Utilities include on-site underground pipes, conduits, ducts, and cables as well as underground services within buildings.

Q. Debris: Debris includes all materials located within the designated work area not covered in the other definitions and shall include but not be limited to items like vehicles, equipment, appliances, building materials or remains thereof, tires, any solid or liquid chemicals or products stored or found in containers or spilled on the ground.

R. Contaminated soils: Soil that contains contaminates as defined and determined by the Resident Engineer or the Government’s testing agency.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety Requirements and blasting operations: Section 01 35 26, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.

C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

E. Erosion Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, and Section 32 90 00, PLANTING.

F. Site preparation: Section 31 23 19, DEWATERING

G. Foundation system requirements: Section 31 62 00, DRIVEN PILES, Section 31 63 16, AUGER CAST GROUT PILES, Section 31 63 26, DRILLED CAISSONS, Section 31 23 23.33, FLOWABLE FILL.

H. Paving sub-grade requirements: Section 32 12 16, ASPHALT PAVING.

1.4 CLASSIFICATION OF EXCAVATION:

A. Unclassified Excavation: Removal and disposal of pavements and other man-made obstructions visible on the surface; utilities, and other items including underground structures indicated to be demolished and removed; together with any type of materials regardless of character of material and obstructions encountered.

B. Classified Excavation: Removal and disposal of all material not defined as rock.

C. Rock Excavation:

1. Solid ledge rock (igneous, metamorphic, and sedimentary rock).
2. Bedded or conglomerate deposits so cemented as to present characteristics of solid rock which cannot be excavated without blasting; or the use of a modern power excavator (shovel, backhoe, or similar power excavators) of no less than 0.75 m3 (1 cubic yard) capacity, properly used, having adequate power and in good running condition.
3. Boulders or other detached stones each having a volume of 0.4 m3 (1/2 cubic yard) or more.
4. Blasting: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be removed with conventional methods may be performed by blasting.
4. Definitions of rock and guidelines for equipment are presented for general information purposes only. The Contractor is expected to use the information presented in the Geotechnical Engineering Report to evaluate the extent and competency of the rock and to determine both quantity estimations and removal equipment and efforts.

1.5 MEASUREMENT AND PAYMENT FOR EXCAVATION:

A. Measurement: The unit of measurement for excavation and borrow will be the cubic yard, computed by the average end area method from cross sections taken before and after the excavation and borrow operations, including the excavation for ditches, gutters, and channel changes, when the material is acceptably utilized or disposed of as herein

specified. Quantities should be computed by a Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS. The measurement will include authorized excavation for rock, authorized excavation of satisfactory subgrade soil, and the volume of loose, scattered rocks and boulders collected within the limits of the work; allowance will be made on the same basis for selected backfill ordered as replacement. The measurement will not include the volume of subgrade material or other material used for purposes other than directed. The volume of overburden stripped from borrow pits and the volume of excavation for ditches to drain borrow its, unless used as borrow material, will not be measured for payment. The measurement will not include the volume of any excavation performed prior to taking of elevations and measurements of the undisturbed grade.

1.6 NOT USED

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Rock Excavation Report:

1. Certification of rock quantities excavated.

2. Excavation method.

3. Labor.

4. Equipment.

5. Land Surveyor's or Civil Engineer's name and official registration stamp.

6. Plot plan showing elevation.

7. Blasting Plan: Blasting is not permitted

C. Furnish to Resident Engineer:

1. Contactor shall furnish resumes with all personnel involved in the project including Project Manager, Superintendent, and on-site Engineer. Project Manager and Superintendent should have at least 3 years of experience on projects of similar size.

2. Soil samples.

   a. Classification in accordance with ASTM D2487 for each on-site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.

   b. Laboratory compaction curve in accordance with ASTM D698 for each on site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.

   c. Test reports for compliance with ASTM D2940 requirements for subbase material.

   d. Pre-excavation photographs and videotape in the vicinity of the existing structures to document existing site features, including surfaces finishes, cracks, or other structural blemishes that might be misconstrued as damage caused by earthwork operations.

   e. The Contractor shall submit a scale plan daily that defines the location, limits, and depths of the area excavated.

3. Contractor shall submit procedure and location for disposal of unused satisfactory material. Proposed source of borrow material. Notification of encountering rock in the project. Advance notice on the opening of excavation or borrow areas. Advance notice on shoulder construction for rigid pavements.

1.8 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Nursery and Landscape Association (ANLA):
   2004.....American Standard for Nursery Stock

C. American Association of State Highway and Transportation Officials (AASHTO):
   T99-10.....Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop
   T180-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 4.54-kg [10 lb] Rammer and a 457 mm (18 inch) Drop

D. American Society for Testing and Materials (ASTM):

C33-03.....Concrete Aggregate

D698-e1.....Laboratory Compaction Characteristics of Soil Using Standard Effort

D1140-00.....Amount of Material in Soils Finer than the No. 200 (75-micrometer) Sieve

D1556-00.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Laboratory Compaction Characteristics of Soil Using Modified Effort

D2167-94 (2001).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2487-06.....Standard Classification of Soil for Engineering Purposes (Unified Soil Classification System)

D6938-10.....Standard Test Methods for Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)

E. Standard Specifications of Maine Department of Transportation, latest revision.

PART 2 - PRODUCTS

2.1 MATERIALS:

A. General: Provide borrow soil material when sufficient satisfactory soil materials are not available from excavations.

B. Fills: Material in compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups; free of rock or gravel larger than 75 mm (3 inches) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter. Material approved from on site or off-site sources having a minimum dry density of 1760 kg/m3 (110 pcf), a maximum Plasticity Index of 15, and a maximum Liquid Limit of 40.

C. Engineered Fill: Naturally or artificially graded mixture of compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups, or as approved by the Engineer or material with at least 90 percent passing a 37.5-mm (1 1/2-

inch) sieve and not more than 12 percent passing a 75-µm (No. 200) sieve, per ASTM D2940.

D. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 8 percent passing a 75-µm (No. 200) sieve.

E. Drainage Fill: Washed, narrowly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size 57; with 100 percent passing a 37.5 mm (1 1/2-inch) sieve and 0 to 5 percent passing a 2.36 mm (No. 8) sieve.

F. Granular Fill:

1. Under concrete slab, - granular fill shall consist of clean, poorly graded crushed rock, crushed gravel, or uncrushed gravel placed beneath a building slab with or without a vapor barrier to cut off the capillary flow of pore water to the area immediately below. Fine aggregate grading shall conform to ASTM C 33 with a maximum of 3 percent by weight passing ASTM D 1140, and no more than 2 percent by weight passing the 4.75 mm (No. 4)size sieve.

2. Bedding for sanitary and storm sewer pipe, crushed stone or gravel graded from 13 mm (1/2 inch) to 4.75 mm (No 4), per ASTM D2940.

G. Requirements for Offsite Soils: Offsite soils brought in for use as backfill shall be tested for TPH, BTEX and full TCLP including ignitability, corrosivity and reactivity. Backfill shall contain less than 100 parts per million (ppm) of total hydrocarbons (TPH) and less than 10 ppm of the sum of Benzene, Toleune, Ethyl Benzene, and Xylene (BTEX) and shall not fail the TCLP test. TPH concentrations shall be determined by using EPA 600/4-79/020 Method 418.1. BTEX concentrations shall be determined by using EPA SW-846.3-3a Method 5030/8020. TCLP shall be performed in accordance with EPA SW-846.3-3a Method 1311. Provide Borrow Site Testing for TPH, BTEX and TCLP from a composite sample of material from the borrow site, with at least one test from each borrow site.

H. Buried Warning and Identification Tape: Polyethylene plastic warning tape manufactured specifically for warning and identification of buried

utility lines. Provide tape on rolls, 3-inch minimum width, color coded as specific below for the intended utility with warning and identification imprinted in bold black letters continuously over the entire tape length. Warning and identification to read, "CAUTION, BURIED (intended service) LINE BELOW" or similar wording. Color and printing shall be permanent, Unaffected by moisture or soil. Warning tape color codes in accordance with APWA Unified Color Codes:

Red:	Electric
Yellow:	Gas, Oil, Dangerous Materials
Orange:	Telephone and Other Communications
Blue:	Water Systems
Green:	Sewer Systems
White:	Steam Systems
Gray:	Compressed Air

I. Warning Tape for Metallic Piping: Acid and alkali-resistant polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of tape shall be 0.076 mm (0.003 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi) lengthwise, and 8.6 MPa (1250 psi) crosswise, with a maximum 350 percent elongation.

J. Detectable Warning Tape for Non-Metallic Piping: Polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of the tape shall be 0.102 mm (0.004 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi) lengthwise and 8.6 MPa (1250 psi) crosswise. Tape shall be manufactured with integral wires, foil backing, or other means of enabling detection by a metal detector when tape is buried up to 0.9 m (3 feet) deep. Encase metallic element of the tape in a protective jacket or provide with other means of corrosion protection.

K. Detection Wire For Non-Metallic Piping: Detection wire shall be Insulated single strand, solid copper with a minimum of 12 AWG.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

A. Clearing: Clearing within the limits of earthwork operations as described or designated by the COR. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash and any other obstructions. Remove materials from the Medical Center.

B. Grubbing: Remove stumps and roots 75 mm (3 inches) and larger diameter. Undisturbed sound stumps, roots up to 75 mm (3 inches) diameter, and nonperishable solid objects which will be a minimum of 900 mm (3 feet) below subgrade or finished embankment may be left.

C. Trees and Shrubs: Trees and shrubs, not shown for removal, may be removed from the areas within 4500 mm (15 feet) of new construction and 2250 mm (7’-6”) of utility lines if such removal is approved in advance by the COR. Remove materials from the Medical Center Trees and shrubs, shown to be transplanted, shall be dug with a ball of earth and burlapped in accordance with the latest issue of the, "American Standard for Nursery Stock", of the American Association of Nurserymen, Inc. Transplant trees and shrubs to a permanent or temporary position within two hours after digging. Maintain trees and shrubs held in temporary locations by watering as necessary and feeding semi-annually with liquid fertilizer with a minimum analysis of 5 percent nitrogen, 10 percent phosphorus and 5 percent potash. Maintain plants moved to permanent positions as specified for plants in temporary locations until the conclusion of the contract. Box, and otherwise protect from damage, existing trees and shrubs which are not shown to be removed in the construction area. Repair immediately damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including the roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Building materials shall not be stored closer to trees and shrubs that are to remain, than the farthest extension of their limbs.

D. Stripping Topsoil: Unless otherwise indicated on the drawings, the limits of earthwork operations shall extend anywhere the existing grade is filled or cut or where construction operations have compacted or otherwise disturbed the existing grade or turf. Strip topsoil as

defined herein from within the limits of earthwork operations as specified above unless specifically indicated or specified elsewhere in the specifications or shown on the drawings. Topsoil shall be fertile, friable, natural topsoil of loamy character and characteristic of the locality. Topsoil shall be capable of growing healthy horticultural crops of grasses. Stockpile topsoil and protect as directed by the COR. Eliminate foreign material, such as weeds, roots, stones, subsoil, frozen clods, and similar foreign materials, larger than 0.014 m3 (1/2 cubic foot) in volume, from soil as it is stockpiled. Retain topsoil on the station. Remove foreign materials larger than 50 mm (2 inches) in any dimension from topsoil used in final grading. Topsoil work, such as stripping, stockpiling, and similar topsoil work, shall not, under any circumstances, be carried out when the soil is wet so that the tilth of the soil will be destroyed.

E. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of trench excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from Medical Center.

F. Lines and Grades: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and grades.

1. Grades shall conform to elevations indicated on plans within the tolerances herein specified. Generally grades shall be established to provide a smooth surface, free from irregular surface changes. Grading shall comply with compaction requirements and grade cross sections, lines, and elevations indicated. Where spot grades are indicated the grade shall be established based on interpolation of the elevations between the spot grades while maintaining appropriate transition at structures and paving and uninterrupted drainage flow into inlets.

2. Locations of existing and proposed elevations indicated on plans, except spot elevations, are from a site survey that measured spot elevations and subsequently generated existing contours and spot

elevations. Contractor is responsible to notify Resident Engineer of any differences between existing elevations shown on plans and those encountered on site by Surveyor/Engineer described above. Notify Resident Engineer of any differences between existing or constructed grades, as compared to those shown on the plans.

3. Subsequent to establishment of lines and grades, Contractor will be responsible for any additional cut and/or fill required to ensure that site is graded to conform to elevations indicated on plans.

4. Finish grading is specified in Section 32 90 00, PLANTING.

G. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

A. Shoring, Sheeting and Bracing: Shore, brace, or slope, its angle of repose or to an angle considered acceptable by the Resident Engineer, banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities.

1. Design of the temporary support of excavation system is the responsibility of the Contractor. The Contractor shall submit a Shoring and Sheeting plan for approval 15 days prior to starting work. Submit drawings and calculations, certified by a registered professional engineer, describing the methods for shoring and sheeting of excavations. Shoring, including sheet piling, shall be furnished and installed as necessary to protect workmen, banks, adjacent paving, structures, and utilities. Shoring, bracing, and sheeting shall be removed as excavations are backfilled, in a manner to prevent caving.

2. Construction of the support of excavation system shall not interfere with the permanent structure and may begin only after a review by the Resident Engineer.

3. Extend shoring and bracing to a minimum of 1500 mm (5 feet) below the bottom of excavation. Shore excavations that are carried below elevations of adjacent existing foundations.

4. If bearing material of any foundation is disturbed by excavating, improper shoring or removal of existing or temporary shoring, placing of backfill, and similar operations, the Contractor shall underpin the existing foundation under disturbed foundations, as directed by Resident Engineer, at no additional cost to the Government. Do not remove shoring until permanent work in excavation has been inspected and approved by Resident Engineer.

5. The Contractor is required to hire a Professional Geotechnical Engineer to provide inspection of excavations and soil/groundwater conditions throughout construction. The Geotechnical Engineer shall be responsible for performing pre-construction and periodic site visits throughout construction to assess site conditions. The Geotechnical Engineer shall update the excavation, sheeting and dewatering plans as construction progresses to reflect changing conditions and shall submit an updated plan if necessary. A written report shall be submitted, at least monthly, informing the Contractor and Resident Engineer of the status of the plan and an accounting of the Contractor's adherence to the plan addressing any present or potential problems. The Geotechnical Engineer shall be available to meet with the Resident Engineer at any time throughout the contract duration.

B. Excavation Drainage: Operate pumping equipment as required to keep excavation free of water and subgrade dry, firm, and undisturbed until approval of permanent work has been received from Resident Engineer. Approval by the Resident Engineer is also required before placement of the permanent work on all subgrades. Groundwater flowing toward or into excavations shall be controlled to prevent sloughing of excavation slopes and walls, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches will not be permitted within 0.9 m (3 feet) of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Control measures shall be taken by the time the excavation reaches the water level in order to maintain the integrity of the in situ material. While the excavation is open, the water level shall be maintained continuously,

at least 2m (6 feet) below the working level. Operate dewatering system continuously until construction work below existing water levels is complete. Submit performance records weekly. Measure and record performance of dewatering system at same time each day by use of observation wells or piezometers installed in conjunction with the dewatering system.

C. Subgrade Protection: Protect subgrades from softening, undermining, washout, or damage by rain or water accumulation. Reroute surface water runoff from excavated areas and not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches. When subgrade for foundations has been disturbed by water, remove disturbed material to firm undisturbed material after water is brought under control. Replace disturbed subgrade in trenches with concrete or material approved by the Resident Engineer.

D. Blasting: Blasting is not permitted

E. Proofrolling:

1. After rough grade has been established in cut areas and prior to placement of fill in fill areas under building and pavements, proofroll exposed subgrade with a fully loaded dump truck to check for pockets of soft material.

2. Proof rolling shall be done on an exposed subgrade free of surface water (wet conditions resulting from rainfall) which would promote degradation of an otherwise acceptable subgrade. Operate the roller in a systematic manner to ensure the number of passes over all areas, and at speeds between 4 to 5.5 km/hour (2 1/2 to 3 1/2 mph). When proof rolling, one-half of the passes made with the roller shall be in a direction perpendicular to the other passes. Notify the Resident Engineer a minimum of 3 days prior to proof rolling. Proof rolling shall be performed in the presence of the Resident Engineer. Rutting or pumping of material shall be undercut as directed by the COR. Maintain subgrade until succeeding operation has been accomplished.

REISSUED 02-18-2026

F. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.

2. Excavate foundation excavations to solid undisturbed subgrade.

3. Remove loose or soft materials to a solid bottom.

4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete poured separately from the footings.

5. Do not tamp earth for backfilling in footing bottoms, except as specified.

6. Slope grades to direct water away from excavations and to prevent ponding.

7. Capillary water barrier (granular fill) under concrete floor and area-way slabs on grade shall be placed directly on the subgrade and shall be compacted with a minimum of two passes of a hand-operated plate-type vibratory compactor.

8. Ensure that footing subgrades have been inspected and approved by the Resident Engineer prior to concrete placement. Excavate to bottom of pile cap prior to placing or driving piles, unless authorized otherwise by the Resident Engineer. Backfill and compact over excavations and changes in grade due to pile driving operations to 95 percent of ASTM D698 maximum density.

G. Trench Earthwork:

1. Utility trenches (except sanitary and storm sewer):

   a. Excavate to a width as necessary for sheeting and bracing and proper performance of the work.

   b. Grade bottom of trenches with bell holes scooped out to provide a uniform bearing.

   c. Support piping on suitable undisturbed earth unless a mechanical support is shown. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular

material placed in layers not exceeding 150 mm (6 inches) loose thickness.

d. Length of open trench in advance of piping laying shall not be greater than is authorized by Resident Engineer.

e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade

f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

g. Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D 698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

1) Class I: Angular, 6 to 40 mm (0.25 to 1.5 inches), graded stone, including a number of fill materials that have regional significance such as coral, slag, cinders, crushed stone, and crushed shells.

2) Class II: Coarse sands and gravels with maximum particle size of 40 mm (1.5 inches), including various graded sands and gravels containing small percentages of fines, generally granular and noncohesive, either wet or dry. Soil Types GW, GP, SW, and SP are included in this class as specified in ASTM D2487.

3) Clean, coarse-grained sand classified as State Standard or by ASTM D2487 for bedding and backfill as indicated.

4) Clean, coarsely graded natural gravel, crushed stone or a combination thereof identified in accordance with State Standard.

2. Sanitary and storm sewer trenches:

a. Trench width below a point 150 mm (6 inches) above top of pipe shall be 600 mm (24 inches) maximum for pipe up to and including 300 mm (12 inches) diameter, and four-thirds diameter of pipe plus 200 mm (8 inches) for pipe larger than 300 mm (12 inches). Width of trench above that level shall be as necessary for sheeting and bracing and proper performance of the work.

1) Bed bottom quadrant of pipe on suitable undisturbed soil or granular fill. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm (6 inches) loose thickness.1) Undisturbed: Bell holes shall be no larger than necessary for jointing. Backfill up to a point 300 mm (12 inches) above top of pipe shall be clean earth placed and tamped by hand.

2) Granular Fill: Depth of fill shall be a minimum of 75 mm (3 inches) plus one sixth of pipe diameter below pipe to 300 mm (12 inches) above top of pipe. Place and tamp fill material by hand.

c. Place and compact as specified remainder of backfill using acceptable excavated materials. Do not use unsuitable materials.

d. Use granular fill for bedding where rock or rocky materials are excavated.

e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade

f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

g. Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

1) Class I: Angular, 6 to 40 mm (0.25 to 1.5 inches), graded stone, including a number of fill materials that have regional significance such as coral, slag, cinders, crushed stone, and crushed shells.

2) Class II: Coarse sands and gravels with maximum particle size of 40 mm (1.5 inches), including various graded sands and

REISSUED 02-18-2026

gravels containing small percentages of fines, generally granular and noncohesive, either wet or dry. Soil Types GW, GP, SW, and SP are included in this class as specified in ASTM D2487.

3) Clean, coarse-grained sand as indicated.

4) Clean, coarsely graded natural gravel, crushed stone or a combination thereof in accordance with ASTM D2487 for bedding and backfill as indicated.

H. Site Earthwork: Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, other items indicated to be removed; together with soil, boulders, bedrock and not classified as unauthorized excavation located in the noted paths of new excavation. Excavation shall be accomplished as required by drawings and specifications. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 25 mm (1 inch). Extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, complying with OSHA requirements, and for inspections. Remove subgrade materials that are determined by Resident Engineer as unsuitable and replace with acceptable material. If there is a question as to whether material is unsuitable or not, the contractor shall obtain samples of the material, under the direction of the Resident Engineer, and the materials shall be examined by an independent testing laboratory for soil classification to determine whether it is unsuitable or not. When unsuitable material is encountered and removed, contract price and time will be adjusted in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable. Adjustments to be based on volume in cut section only.

1. Site Grading:

a. Provide a smooth transition between adjacent existing grades and new grades.

b. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.

c. Slope grades to direct water away from buildings and to prevent ponds from forming where not designed. Finish subgrades to required elevations within the following tolerances:

1) Lawn or Unpaved Areas: Plus or minus 25 mm (1 inch).

2) Walks: Plus or minus 25 mm (1 inch).

3) Pavements: Plus or minus 13 mm (1 inch).

d. Grading Inside Building Lines: Finish subgrade to a tolerance of 13 mm (1/2 inch) when tested with a 3000 mm (10 foot) straightedge.

3.3 NOT USED

3.4 FILLING AND BACKFILLING:

A. General: Do not fill or backfill until all debris, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from the excavation. Proof-roll exposed subgrades with a fully loaded dump truck. Use excavated materials or borrow for fill and backfill, as applicable. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately braced, waterproofing or dampproofing applied, and pipes coming in contact with backfill have been installed, and inspected and approved by COR.

B. Placing: Place material in horizontal layers not exceeding 200 mm (8 inches) in loose depth and then compacted. Do not place material on surfaces that are muddy, frozen, or contain frost wherever possible.

C. Compaction: Use approved equipment (hand or mechanical) well suited to the type of material being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without the prior approval of the COR. Moisten or aerate material as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used. Compact each layer until there is no evidence of further compaction and to not less than 95 percent of the maximum density determined in accordance with the following test method ASTM D698 and D1557 Method A. Backfill adjacent to any and all types of structures shall be placed and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent

laboratory maximum density for cohesionless materials to prevent wedging action or eccentric loading upon or against the structure.

D. Borrow Material: Borrow material shall be selected to meet the requirements and conditions of the particular fill or embankment for which it is to be used. Borrow material shall be obtained from the from approved private sources. Unless otherwise provided in the contract, the Contractor shall obtain from the owners the right to procure material, pay royalties and other charges involved, and bear the expense of developing the sources, including rights-of-way for hauling. Borrow material from approved sources on Government-controlled land may be obtained without payment of royalties. Unless specifically provided, no borrow shall be obtained within the limits of the project site without prior written approval. Necessary clearing, grubbing, and satisfactory drainage of borrow pits and the disposal of debris thereon shall be considered related operations to the borrow excavation.

E. Opening and Drainage of Excavation and Borrow Pits: The Contractor shall notify the COR sufficiently in advance of the opening of any excavation or borrow pit to permit elevations and measurements of the undisturbed ground surface to be taken. Except as otherwise permitted, borrow pits and other excavation areas shall be excavated providing adequate drainage. Overburden and other spoil material shall be transported to designated spoil areas or otherwise disposed of as directed. Borrow pits shall be neatly trimmed and drained after the excavation is completed. The Contractor shall ensure that excavation of any area, operation of borrow pits, or dumping of spoil material results in minimum detrimental effects on natural environmental conditions.

3.5 GRADING:

A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.

B. Cut rough or sloping rock to level beds for foundations. In pipe spaces or other unfinished areas, fill low spots and level off with coarse sand or fine gravel.

C. Slope backfill outside building away from building walls for a minimum distance of 1800 mm (6 feet).

D. Finish grade earth floors in pipe basements as shown to a level, uniform slope and leave clean.

E. Finished grade shall be at least 150 mm (6 inches) below bottom line of window or other building wall openings unless greater depth is shown.

F. Place crushed stone or gravel fill under concrete slabs on grade, tamped, and leveled. Thickness of fill shall be 150 mm (6 inches) unless otherwise shown.

G. Finish subgrade in a condition acceptable to Resident Engineer at least one day in advance of paving operations. Maintain finished subgrade in a smooth and compacted condition until succeeding operation has been accomplished. Scarify, compact, and grade subgrade prior to further construction when approved compacted subgrade is disturbed by Contractor's subsequent operations or adverse weather.

H. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.6 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center.

B. Place excess excavated materials suitable for fill and/or backfill on site where directed.

C. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.

D. Segregate all excavated contaminated soil designated by the COR from all other excavated soils, and stockpile on site on two 0.15 mm (6 mil) polyethylene sheets with a polyethylene cover. A designated area shall be selected for this purpose. Dispose of excavated contaminated material in accordance with State and Local requirements.

3.7 CLEAN-UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove debris, rubbish, and excess material from the Medical Center.

- - - E N D - - -

SECTION 31 23 19
DEWATERING

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies performance of dewatering required to lower and control ground water table levels and hydrostatic pressures to permit excavation, backfill, and construction to be performed in the dry. Control of surface water shall be considered as part of the work under this specification.

1.2 SUMMARY:

A. The work to be completed by the Contractor includes, but is not necessarily limited to the following:
   1. Implementation of the Erosion and Sedimentation Control Plan.
   2. Dewater excavations, including seepage and precipitation.

B. The Contractor shall be responsible for providing all materials, equipment, labor, and services necessary for care of water and erosion control. Excavation work shall not begin before the Erosion and Sedimentation Control Plan is in place.

1.3 REQUIREMENT:

A. Dewatering system shall be of sufficient size and capacity necessary to lower and maintain ground water table to an elevation at least 3 feet below lowest foundation subgrade or bottom of pipe trench and to allow material to be excavated and concrete placed, in a reasonably dry condition. Materials to be removed shall be sufficiently dry to permit excavation to grades shown and to stabilize excavation slopes where sheeting is not required. Operate dewatering system continuously until backfill work has been completed.

B. Reduce hydrostatic head below any excavation to the extent that water level in the construction area is a minimum of 300 mm (1 foot) below prevailing excavation surface.

C. Prevent loss of fines, seepage, boils, quick conditions or softening of foundation strata.

D. Maintain stability of sides and bottom of excavation.

E. Construction operations are performed in the dry.

F. Control of surface and subsurface water is part of dewatering requirements. Maintain adequate control so that:

1. The stability of excavated and constructed slopes are not adversely affected by saturated soil, including water entering prepared subbase and subgrades where underlying materials are not free draining or are subject to swelling or freeze-thaw action.
2. Erosion is controlled.
3. Flooding of excavations or damage to structures does not occur.
4. Surface water drains away from excavations.
5. Excavations are protected from becoming wet from surface water, or insure excavations are dry before additional work is undertaken.

G. Permitting Requirements: The contractor shall comply with and obtain the required State and County permits where the work is performed.

1.4 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety Requirements: Section 01 35 26, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.

C. Submittal requirements as specified in Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

D. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

E. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.11, PHYSICAL DATA.

F. Excavation, backfilling, site grade and utilities: Section 31 20 00, EARTH MOVING.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Drawings and Design Data:

1. Submit drawings and data showing the method to be employed in dewatering excavated areas 30 days before commencement of excavation.
2. Material shall include: location, depth and size of wellpoints, headers, sumps, ditches, size and location of discharge lines, capacities of pumps and standby units, and detailed description of dewatering methods to be employed to convey the water from site to adequate disposal.
3. Include a written report outlining control procedures to be adopted if dewatering problem arises.
4. Capacities of pumps, prime movers, and standby equipment.
5. Design calculations proving adequacy of system and selected equipment. The dewatering system shall be designed using accepted and professional methods of design and engineering consistent with the best modern practice. The dewatering system shall include the deep wells, wellpoints, and other equipment, appurtenances, and related earthwork necessary to perform the function.
6. Detailed description of dewatering procedure and maintenance method.
7. Materials submitted shall be in a format acceptable for inclusion in required permit applications to any and all regulatory agencies for which permits for discharge water from the dewatering system are required due to the discharge reaching regulated bodies of water.

C. Inspection Reports.

D. All required permits.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Install a dewatering system to lower and control ground surface water in order to permit excavation, construction of structure, and placement of backfill materials to be performed under dry conditions. Make the dewatering system adequate to pre-drain the water-bearing strata above and below the bottom of structure foundations, utilities and other excavations.

B. In addition, reduce hydrostatic pressure head in water-bearing strata below structure foundations, utility lines, and other excavations, to extent that water levels in construction area are a minimum of three feet below prevailing excavation surface at all times.

3.2 OPERATION:

A. Prior to any excavation below the ground water table, place system into operation to lower water table as required and operate it continuously 24 hours a day, 7 days a week until utilities and structures have been satisfactorily constructed, which includes the placement of backfill materials and dewatering is no longer required.

B. Place an adequate weight of backfill material to prevent buoyancy prior to discontinuing operation of the system.

3.3 WATER DISPOSAL:

A. Dispose of water removed from the excavations in such a manner as:

1. Will not endanger portions of work under construction or completed.
2. Will cause no inconvenience to Government or to others working near site.
3. Will comply with the stipulations of required permits for disposal of water.
4. Will Control Runoff: The Contractor shall be responsible for control of runoff in all work areas including but not limited

to: excavations, access roads, parking areas, laydown, and staging areas. The Contractor shall provide, operate, and maintain all ditches, basins, sumps, culverts, site grading, and pumping facilities to divert, collect, and remove all water from the work areas. All water shall be removed from the immediate work areas and shall be disposed of in accordance with applicable permits.

B. Excavation Dewatering:
   1. The Contractor shall be responsible for providing all facilities required to divert, collect, control, and remove water from all construction work areas and excavations.
   2. Drainage features shall have sufficient capacity to avoid flooding of work areas.
   3. Drainage features shall be so arranged and altered as required to avoid degradation of the final excavated surface(s).
   4. The Contractor shall utilize all necessary erosion and sediment control measures as described herein to avoid construction related degradation of the natural water quality.

C. Dewatering equipment shall be provided to remove and dispose of all surface and ground water entering excavations, trenches, or other parts of the work during construction. Each excavation shall be kept dry during subgrade preparation and continually thereafter until the structure to be built, or the pipe to be installed therein, is completed to the extent that no damage from hydrostatic pressure, flotation, or other cause will result.

3.4 STANDBY EQUIPMENT:

Provide complete standby equipment, installed and available for immediate operation, as may be required to adequately maintain de-watering on a continuous basis and in the event that all or any part of the system may become inadequate or fail.

3.5 CORRECTIVE ACTION:

If dewatering requirements are not satisfied due to inadequacy or failure of the dewatering system (loosening of the foundation strata, or instability of slopes, or damage to foundations or

structures), perform work necessary for reinstatement of foundation soil and damaged structure or damages to work in place resulting from such inadequacy or failure by Contractor, at no additional cost to Government.

3.6 DAMAGES:

Immediately repair damages to adjacent facilities caused by dewatering operations.

3.7 REMOVAL:

Ensure compliance with all conditions of regulating permits and provide such information to the COR. Obtain written approval from COR before discontinuing operation of dewatering system.

- - - E N D - - -

SECTION 31 32 19 - MECHANICALLY STABILIZED EARTH (MSE) SEGMENTAL RETAINING WALL

PART 1 - GENERAL

1.1 DESCRIPTION:

A. Provide a complete engineered segmental retaining wall (SRW)/MSE wall system including facing units, soil reinforcement, reinforced backfill, leveling pad, drainage, geotextiles, and incidentals required for a complete installation. The wall system is a delegated-design specialty system if deviation from basis of design; the Contractor shall provide all engineering, shop drawings, materials, and installation necessary for a complete, stable, durable wall meeting the design intent and site constraints.

1. Basis of Design: Redi-Rock Positive Connection (PC) MSE/SRW system, or Equal.
2. Architectural requirement: Ledgestone texture with color selected by the VA.

B. Wall System Type: Wet-cast modular precast concrete facing units with positive mechanical connection to geogrid reinforcement.

B. Prohibited Systems: Unconnected rockery walls or stacked boulder walls without a proprietary mechanical connection system are not permitted.

C. Design Life: Minimum 75 years

D. Temporary Shoring: The Contractor is responsible for providing all temporary shoring and support necessary to safely construct the retaining wall without undermining West Cemetery Road or impacting existing utilities.

E. Restoration of Pavement: Any disturbance or damage to West Cemetery Road resulting from construction activities must be restored to equal or better condition at the Contractor’s expense.

E. Delegated Design Professional: The Contractor shall retain a Professional Engineer licensed in the State of Maine to prepare sealed shop drawings and calculations. The delegated designer shall explicitly incorporate the provided geotechnical report’s parameters and recommendations. Deviations from the geotechnical report parameters shall require written justification by the Contractor’s hired Professional Engineer.

1.2 DEFINITIONS:

A. Segmental Retaining Wall (SRW): A gravity or mechanically stabilized earth (MSE) retaining wall system constructed of interlocking, wet-cast concrete segmental units, with or without soil reinforcement, designed to resist earth pressures through unit mass, batter, and reinforcement interaction.

B. Mechanically Stabilized Earth (MSE) Wall: A retaining wall system consisting of segmental concrete facing units combined with horizontal soil reinforcement layers placed within engineered backfill to form a composite reinforced soil mass.

C. Wall Height (H): The vertical distance measured from the bottom of wall embedment (bottom of lowest course or leveling pad) to the top of wall. Wall height shall include the buried embedment portion unless specifically noted otherwise.

D. Exposed Wall Height: The vertical distance from finished grade at the toe of wall to the top of wall.

E. Tiered Wall System: Two or more retaining walls constructed at different elevations with an intervening slope or bench. The upper wall shall be considered a surcharge on the lower wall unless separation distance satisfies independent wall criteria. Tiered wall systems require compound and global stability evaluation.

F. Top of Wall (TOW): The highest finished elevation of the retaining wall units, excluding cap units unless otherwise indicated.

G. Bottom of Wall (BOW): The lowest elevation of the retaining wall units, including embedment below finished grade.

H. Embedment Depth: The vertical distance from finished grade at the toe of wall to the bottom of the lowest retaining wall unit or leveling pad. Embedment shall satisfy frost depth and minimum toe stability requirements.

I. Leveling Pad: A minimum 18-inch-thick compacted crushed stone layer placed beneath the first course of segmental units to provide a level, uniform bearing surface.

J. Reinforced Soil Zone: The volume of compacted structural backfill behind the facing units that contains geogrid reinforcement and forms the stabilized mass of an MSE wall.

K. Retained Soil: Soil located behind the reinforced zone that exerts lateral earth pressure on the retaining wall system.

L. Foundation Soil: The in-place soil or bedrock supporting the leveling pad and reinforced soil mass.

M. Structural Backfill (Reinforced Backfill): Engineered, non-frost susceptible granular material placed within the reinforced soil zone and compacted to specified density.

O. Geogrid Reinforcement: Polymeric soil reinforcement placed in horizontal layers within the reinforced soil zone and mechanically connected to the segmental facing units.

P. Connection Capacity: The allowable load that can be transferred from the geogrid reinforcement to the segmental facing unit without pullout or structural failure.

Q. External Stability: Stability of the entire reinforced soil mass considered as a rigid body, including sliding, overturning, and bearing capacity checks.

R. Internal Stability: Stability of individual reinforcement layers and facing connections within the reinforced soil mass, including pullout resistance, tensile rupture, and connection capacity.

S. Global Stability (Overall Slope Stability: Evaluation of the stability of the entire slope system, including tiered walls, retained soils, foundation soils, and groundwater conditions.

T. Compound Stability: Global stability analysis that considers interaction between upper and lower tiers of a tiered wall system and the intervening slope.

U. Toe of Wall: The finished ground surface immediately in front of the base of the retaining wall.

V. Heel of Wall: The back edge of the reinforced soil zone farthest from the wall face.

W. Passive Resistance: Soil resistance developed in front of the wall toe. Passive resistance shall not be relied upon for permanent sliding resistance unless specifically approved.

X. Groundwater: Subsurface water that may be encountered within foundation soils, reinforced soil zone, or retained soil. Groundwater may include perched water conditions above relatively impervious strata.

Y. Underdrain System: Perforated pipe system installed at the base of the reinforced zone, surrounded by free-draining aggregate and geotextile, intended to relieve hydrostatic pressure.

Z. Drainage Aggregate: Free-draining crushed stone placed behind facing units or around underdrain pipe to prevent hydrostatic buildup.

AB. Subgrade (Wall): The prepared surface beneath the leveling pad consisting of compacted soil or bedrock.

AC. Over-Excavation: Removal of unsuitable or unstable materials below required subgrade elevations and replacement with approved structural fill or crushed stone.

AD. Frost Depth: The maximum depth of seasonal frost penetration requiring embedment and frost-protected construction.

AE. Surcharge Load: Additional vertical or horizontal load applied to retained soil, including traffic, roadway loads, adjacent structures, or upper-tier walls.

AF. Construction Surcharge: Temporary loads applied during construction, including equipment or stockpiled materials.

AG. Facing Units: Segmental concrete retaining wall blocks forming the visible exterior face of the retaining wall.

AH. Cap Units: Segmental units placed at the top of wall for architectural finish and protection.

AI. Temporary Cut: Excavation made to facilitate wall construction that must be stable during construction operations. Contractor to consult with Geotechnical Engineer for layback requirement in bedrock and insitu soil conditions. Recommendation should also consider OSHA requirement for layback for excavation.

AJ. Wall Design Engineer: Professional Engineer responsible for design of the SRW/MSE wall system.

1.3 RELATED WORK:

A. Quality control, materials testing, and inspection during construction:
Section 01 45 00, QUALITY CONTROL
Section 01 45 29, TESTING LABORATORY SERVICES

B. Safety requirements and construction vibration control: Section 01 35 26, SAFETY REQUIREMENTS

C. Protection of existing utilities, roads, pavements, and facilities:
Section 01 00 00, GENERAL REQUIREMENTS

D. Subsurface investigation and geotechnical report: Appendix 40 00 00, GEOTECHNICAL ENGINEERING REPORT

E. Temporary environmental protection and erosion control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS

F. Earthwork and excavation:
Section 31 20 11, EARTHWORK
Section 31 23 19, DEWATERING

G. Cast-in-place concrete for leveling pads, caps, and related items:
Section 03 30 00, CAST-IN-PLACE CONCRETE

I. Paving subgrade and pavement construction:
Section 32 12 16, ASPHALT PAVING

J. Stormwater and drainage utilities:
Section 33 40 00, STORM SEWER UTILITIES

1.3 DESIGN CRITERIA

A. General: Design the wall for external stability (sliding, overturning, bearing), internal stability (reinforcement pullout, rupture, and connection capacity), and global stability where required.

B. Tiered Walls: Where walls are tiered or superimposed, design the lower wall considering the upper wall as a surcharge load and perform overall slope stability analysis for the combined configuration. Provide compound stability evaluation and global stability evaluation as recommended in the geotechnical report.

C. Wall Height Definition: Wall height used in earth pressure and surcharge calculations shall include the embedded (buried) portion of the wall below finished grade at the toe.

D. Passive Resistance: Do not rely on passive soil resistance at the toe for permanent sliding resistance unless specifically accepted in writing by the VA and Geotechnical Engineer of Record.

E. Groundwater: Anticipate groundwater seepage and perched water at the site. Provide positive drainage behind and beneath the wall to prevent hydrostatic pressure within the reinforced zone. Unless the wall designer demonstrates that seepage/hydrostatic forces will not develop for the wall alignment, include both a base drain and a chimney/back

drain or geocomposite drain behind the reinforced mass.

F. Minimum Embedment: Provide embedment consistent with wall geometry and toe conditions and not less than that required for frost protection and erosion control. Minimum embedment to top of leveling pad shall be established in the sealed shop drawings based on bearing, settlement, toe slope/geometry, and erosion/scour considerations, and shall be shown on elevation views in the shop drawings.

G. Surcharge Loads: Include site surcharges shown on the Contract Drawings. Where a uniform live load surcharge is required and not otherwise shown, use 250 psf for parking/traffic and 100 psf for landscaping areas above the wall. Temporary construction surcharges (equipment, stockpiles) shall be included where applicable and shall be controlled by construction sequencing and exclusion zones shown on shop drawings.

H. Seismic: Design for seismic loading consistent with the requirements of the VA Seismic Design Guide. Use Geotechnical Site Class C as indicated in the geotechnical report unless superseded by updated project geotechnical criteria. Provide internal and external stability checks under seismic load combinations as applicable. Per the VA Seismic Risk Definitions, for the Togus VAMC, S_s = 0.31, S1 = 0.068, and Seismicity = Moderate-Low.

I. Deformation/Serviceability: Provide facing and joint detailing compatible with anticipated settlements and differential movements. Where differential settlement or curvature is anticipated, provide appropriate joint gaps and construction controls.

1.4 DESIGN PARAMETERS

A. The following geotechnical parameters shall be used for design unless revised by the Delegated Design Professional based on additional investigation:

Zone/Item	**Unit Weight**	**Friction Angle / Value**
Reinforced Soil (Wall Zone)	130 pcf	34 degrees
Retained Soil	125 pcf	30 degrees
Foundation Soil	125 pcf	30 degrees
Design Frost Depth	-	5 feet
Allowable Bearing Pressure	-	5.0 ksf

(Soil)		
Allowable Bearing Pressure (Bedrock)	-	10.0 ksf
Base Friction Factor (Concrete/Stone on Soil)	-	0.35
At-Rest Lateral Earth Pressure Coefficient (Backfill)	-	0.5
Mapped Spectral Acceleration at Short Period S_S	0.031	
Mapped Spectral Acceleration At 1.0 Second Period, S_1	0.068	

B. Clarification: The "at-rest" coefficient above is provided as a geotechnical parameter and may not directly govern MSE internal load models; the delegated wall designer shall use earth pressure models consistent with AASHTO LRFD and FHWA MSE guidance and shall clearly state coefficients used in the sealed calculations.

1.5 SUBMITTALS:

A. Shop Drawings and Calculations: Submit sealed shop drawings and design calculations prepared by the Contractor's Professional Engineer licensed in Maine if deviation from basis of design otherwise provide shop drawings prepared by contractor. Include:

1. Wall layout plan and profile, elevation views, and sections showing: wall alignment, stationing, BOW/TOW elevations, embedment, steps, reinforcement lengths, vertical spacing, facing batter, and tiered wall geometry. Provide a front elevation view for each wall segment showing existing grade and finished grade at top and bottom.
2. Reinforcement schedule, type, strength, long-term design strength (LTDS) calculations including reduction factors for creep, installation damage, and durability, and connection capacity verification.
3. External stability calculations: sliding, overturning, bearing using design parameters above.
4. Internal stability calculations: tensile rupture, pullout, connection capacity.

5. Global stability analysis and, where tiered walls exist, compound stability analysis. Use target global stability safety factors consistent with FHWA (FS = 1.30 where parameters are well defined; FS = 1.50 where based on limited information) unless otherwise directed by the Engineer.

6. Drainage design: base drain, chimney/back drain or geocomposite drain, outlet locations, pipe slopes, cleanouts, freeze protection, and integration with storm drainage.
7. Construction sequencing plan (including exclusion zones for surcharges adjacent to wall face).
8. Temporary excavation, shoring, and staging plan addressing protection of West Cemetery Road and existing utilities.C. Reinforcement schedule (geogrid strength, spacing, lengths) and connection capacity.

B. Product Data: Submit manufacturer’s product data for facing units, geogrid, geotextile, adhesives, drainage materials, and accessories.
C. Samples: Provide texture and color samples; provide minimum 2 full-size units.
D. Certifications: Provide certificates of compliance for:
1. Facing units (ASTM compliance, compressive strength, air content, absorption/freeze-thaw durability as applicable).
2. Geogrid (ASTM D6637 tensile properties and ASTM D5262 creep data; lot testing and quality control documentation).
3. Aggregates (gradation, fines, PI testing, and source certification).

1.6 QUALITY ASSURANCE:

A. Installer Qualifications: Installer shall have minimum 5 years documented experience installing MSE/SRW systems of similar height and complexity (including tiered walls where applicable) and shall follow manufacturer’s requirements.
B. Preconstruction Meeting: Conduct meeting with Contractor, Installer, Manufacturer’s Representative, Government, and Architect Engineer of Record to review the excavation/shoring plan, drainage plan, sequencing, QC testing, and acceptance tolerances.
C. Construction Verification and Special Inspection:

1. A Geotechnical Engineer to provide observation and testing shall be performed during excavation, foundation preparation, placement and compaction of reinforced backfill, reinforcement placement, and drainage installation, as required by the Contract and IBC/VA special inspection requirements.
2. Manufacturer’s field representative shall be present during initial wall construction and at key milestones as required to verify proper installation.

1.7 DELIVERY, STORAGE, AND HANDLING

A. Store geogrid and geotextiles protected from UV exposure, moisture, and damage; do not store in standing water or under traffic.
B. Handle facing units to prevent chipping/spalling; units with structural damage are rejected.

1.8 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
B. Department of Veterans Affairs:
- H-18-8, VA Seismic Design Requirements, Revised November 1, 2024
- VA Seismic Risk Definitions, July 1, 2023

C. American Association of State Highway and Transportation Officials (AASHTO):
- T 99 Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop
- T 180 Moisture-Density Relations of Soils Using a 4.54 kg (10 lb) Rammer and a 457 mm (18 inch) Drop
- T 310 In-Place Density and Moisture Content of Soil and Soil-Aggregate by Nuclear Methods

D. American Society for Testing and Materials (ASTM):
- C33 Concrete Aggregates
- C1372 Segmental Retaining Wall Units
- C1776 Wet-Cast Precast Modular Retaining Wall Units
- D698 Laboratory Compaction Characteristics of Soil Using Standard Effort

- D1140 Amount of Material in Soils Finer than the No. 200 (75 µm) Sieve
- D1556 Density and Unit Weight of Soil in Place by the Sand-Cone Method
- D1557 Laboratory Compaction Characteristics of Soil Using Modified Effort
- D2167 Density and Unit Weight of Soil in Place by the Rubber Balloon Method
- D2487 Classification of Soils for Engineering Purposes (Unified Soil Classification System)
- D3080 Direct Shear Test of Soils Under Consolidated Drained Conditions
- D5262 Test Method for Evaluating the Unconfined Tension Creep Behavior of Geosynthetics
- D6637 Tensile Properties of Geogrids by the Single or Multi-Rib Tensile Method
- D6916 Determination of Shear Strength Reduction Factors for Geosynthetic Reinforcements
- D6938 Density of Soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
- D6706 Pullout Resistance of Geosynthetics in Soil

E. National Concrete Masonry Association (NCMA):

- NCMA SRWU-2 Design Manual for Segmental Retaining Walls
- NCMA SRWU-1 Performance Guidelines for Segmental Retaining Walls

F. Federal Highway Administration (FHWA):

- FHWA-NHI-10-024 Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes
- FHWA-NHI-10-025 Design and Construction of Mechanically Stabilized Earth Walls and Reinforced Soil Slopes – Volume II

G. Maine Department of Transportation (MaineDOT)Standard Specifications, latest edition, including:

- 703.13 Crushed Stone
- 703.20 Gravel Borrow
- 703.24 French Drain

PART 2 - PRODUCTS

2.1 SEGMENTAL RETAINING WALL UNITS

A. Basis of Design:
Redi-Rock Positive Connection (PC) wet-cast SRW/MSE units, or Equal.

B. Block Size:

1. Primary facing units shall be 41-inch (nominal 1030 mm) tall modular wet-cast segmental retaining wall units.
2. 28-inch (nominal 710 mm) tall units shall be permitted at wall steps, returns, grade transitions, and top courses as required to achieve finished elevations and geometry shown on the Contract Drawings.

C. Reinforcement System:

1. Provide Positive Connection mechanical connection system compatible with the selected SRW units and geogrid reinforcement.
2. Units shall include factory-formed geogrid connection channels, slots, or mechanical connectors designed to provide full structural connection between facing units and geogrid reinforcement.
3. Geogrid shall be manufacturer-approved for use with the specified wall system and shall meet long-term design strength requirements established by sealed design calculations.

D. Texture: Ledgestone.

E. Color: Selected by the VA from manufacturer’s available standard colors.

F. Material Properties:

1. Units shall comply with ASTM C1776, Wet-Cast Precast Modular Retaining Wall Units, or ASTM C1372 where applicable.
2. Minimum 28-day compressive strength: 4,000 psi.
3. Units shall be air-entrained for freeze-thaw durability suitable for severe weather climates.

G. Unit Weight and Mass:

1. Units shall be of sufficient mass to provide stability during construction and to meet external stability requirements as demonstrated by sealed design calculations.
2. Typical 41-inch units shall have a nominal weight of approximately one ton or greater; submit manufacturer data indicating actual unit weights.

H. Architectural Mold Requirements:
   1. Facing units shall be manufactured using a minimum of ten (10) distinct face molds to minimize visible repetition in the wall surface.
   2. Mold sequencing shall be varied during installation to prevent repeating vertical or horizontal pattern alignment.
   3. Provide documentation from manufacturer confirming number of available molds for the specified texture.
I. Manufacturing Requirements:
   1. Units shall be wet-cast architectural-grade precast concrete.
   2. Units shall be dimensionally consistent to allow proper alignment and mechanical interlock.
   3. Units shall be suitable for construction of convex and concave radii where required.
J. Accessories: Provide standard units, corner units, cap units, coping units, and accessories required for wall geometry, alignment, steps, returns, and radii as shown on the Contract Drawings.

2.2 SOIL REINFORCEMENT (GEOGRID)

A. Provide geogrid reinforcement compatible with the selected block system and positive connection hardware.
B. Products: Mirafi geogrid, or Equal.
C. Provide long-term design strength values, reduction factors, and connection capacity values with submittals.
D. Reinforcement shall be placed at 100% coverage ratio at each reinforcement level. Reinforcement elevations shall be consistent across the wall length except at steps/returns as detailed. Maximum vertical spacing shall comply with the approved design.

2.3 GEOTEXTILES

A. Separator/Filter Fabric: Nonwoven geotextile for separation and drainage applications.
B. Products: Mirafi 180N separation fabric, or Equal, beneath leveling pad where placed on soil subgrades.
C. Joint/Back Face Filter: Nonwoven geotextile at joints/openings as required to prevent soil loss.

D. Wrap geotextile around drainage aggregate and underdrain pipes as required.

2.4 LEVELING PAD

A. Provide 18-inch thick minimum compacted washed ¾-inch crushed stone leveling pad meeting Maine DOT 703.13 or approved equal, unless a concrete leveling pad is required by the approved wall design.
B. Where leveling pad is placed on soil, place geotextile separator beneath pad.
C. Tolerances: Top of leveling pad within ±1/8 inch over 10 feet.

2.5 DRAINAGE MATERIALS

A. Pipe: Provide 6-inch diameter perforated PVC pipe, ASTM D3034, SDR 35, or approved equal, installed at the base of the reinforced zone as shown on the Drawings. Perforations shall be oriented downward.
B. Drainage Aggregate: Bed pipe in a minimum 12 inches of free-draining crushed stone (¾-inch to 1½-inch angular aggregate) extending a minimum of 6 inches below and 6 inches above the pipe. Extend aggregate to the back of the wall units and to the limits shown.
C. Geotextile: Wrap drainage aggregate in a nonwoven geotextile, minimum 8 oz/SY, meeting AASHTO M288 Class 2 survivability requirements, to prevent migration of fines into the drainage system.
D. Outlet: Provide positive gravity outlet to daylight or storm drainage system. Maintain minimum 1% slope unless otherwise indicated. Protect outlets with rodent screen and provide erosion protection at discharge location.
E. Cleanouts: Provide vertical cleanouts at a maximum spacing of 100 feet, and at all changes in alignment. Extend cleanouts to finished grade with threaded cap and protective traffic-rated box where located in paved areas.
F. Heat Trace: Provide self-regulating heat trace cable suitable for direct burial, installed along the full length of the underdrain and extended into cleanouts. Provide GFCI-protected dedicated circuit and thermostat control rated for exterior use. Coordinate electrical requirements.

G. Installation: Install underdrain continuously along the base of wall. Prevent crushing or displacement during backfill operations. Verify positive drainage prior to completion of backfill.

2.6 MSE WALL IMPORTED BACKFILL IN REINFORCED ZONE

A. Provide clean, non-frost susceptible sand and gravel for reinforced backfill and for foundations/entrance slab transition zones where applicable.

B. MSE Wall Reinforced Fill Gradation (Percent Finer by Weight):

Sieve Size	**Percent Passing**
4 inch	100
No. 40	0 to 60
No. 200	0 to 15

MSE backfill material to conform to Gravel Borrow Section 703.20 Maine Department of Transportation Specification.

The select backfill material shall exhibit an angle of internal friction of not less than 34 degrees, as determined by the standard Direct Shear Test, AASHTO T236 (ASTM D3080-72),on the portion finer than the 2 mm [#10 sieve], compacted to 95 percent of AASHTO T99, Methods C or D (with oversized correction as outlined in Note 7) at optimum moisture content. No testing is required for backfills where 80 percent of sizes are greater than 3/4 in. (19 mm) Before construction begins, the borrow material selected shall be subject to show conformance with this frictional requirement. Compliance with the test requirements shall be the responsibility of the Contractor, who shall furnish a copy of the backfill test results prior to construction.

B. Prohibited Materials: On-site silty soils are not permitted for reinforced backfill. Organic soils, frozen soils, and soils with excessive fines/plasticity are prohibited within reinforced zone.

C. Geogrid Protection Layer: Unless the wall designer provides installation-damage testing and reduction factors supporting larger particle sizes, the first 6 inches of fill placed directly on top of each geogrid layer (and within 12 inches above/below primary reinforcement layers) shall have a maximum particle size of ¾ inch.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verify site conditions, alignment, grades, and that excavation support and dewatering are in place. Do not proceed until unsuitable materials are removed and subgrade approved.

3.2 EXCAVATION AND TEMPORARY SUPPORT

A. Provide all excavation, shoring, bracing, and temporary support required for safe construction of the work. Perform operations in compliance with applicable OSHA, Federal, State, and local safety requirements. Protect adjacent structures, utilities, pavements, and roadways—including West Cemetery Road—from undermining, settlement, lateral movement, or damage.

B. Where West Cemetery Road, associated pavements, or other improvements are located above or adjacent to the wall excavation, design, furnish, install, monitor, and remove temporary support systems necessary to maintain roadway stability and traffic safety. Submit a temporary excavation and shoring plan sealed by a Professional Engineer licensed in the project state. The plan shall address excavation limits, slope geometry, shoring systems, sequencing, groundwater control, monitoring, and protection of utilities. Obtain written concurrence from the Delegated Design Engineer that the proposed temporary cut and/or backslope configuration is acceptable prior to excavation.

C. Dewatering: Anticipate seepage; provide sumping/pumping and surface controls (ditches/swales) as needed to maintain stable subgrades and keep water at least 1 foot below planned excavation depths where practicable.

D. Bedrock Removal: Blasting is not permitted. Remove bedrock by drilling and splitting (hydraulic wedges or expansive cement), or Equal method, by a licensed contractor as required.

E. Vibration Control: Control construction vibrations to not exceed 0.5 in/sec at nearby structures, wells, and infrastructure within 500 feet unless more restrictive criteria are required for sensitive equipment.

3.3 FOUNDATION PREPARATION

A. Remove organics, topsoil, and unsuitable materials within the reinforced zone and wall footprint.
B. Proof-roll and compact subgrade. Remove and replace unsuitable areas with structural fill or crushed stone as required.
C. Prepare foundation for a width equal to the reinforcement length plus 5 feet, unless otherwise shown on the approved shop drawings.

3.4 LEVELING PAD INSTALLATION

A. Install geotextile separator where required.
B. Place and compact leveling pad to provide a firm, level bearing surface. Compact crushed stone with 3 to 5 passes of a vibratory plate compactor having a static weight of at least 500 pounds, or Equal compaction method producing equivalent densification.

3.5 WALL ERECTION

A. Install blocks in successive horizontal lifts in accordance with approved shop drawings.
B. Maintain line, grade, and batter. Use temporary bracing as required.
C. Tolerances: Overall wall plumbness shall not exceed 1/2 inch per 10 feet of wall height. Maximum offset at any unit joint during construction shall not exceed 3/4 inch unless more stringent manufacturer requirements apply.

3.6 REINFORCEMENT PLACEMENT

A. Place reinforcement at elevations shown. Extend reinforcement to full design length. Pull taut and secure to prevent wrinkles prior to placement of overlying backfill.
B. Do not cut reinforcement to avoid obstructions unless the sealed design provides an approved detail maintaining full capacity.

C. Skewing: Place reinforcement normal to wall face unless otherwise detailed. Where skew is unavoidable, provide connection hardware and reduce capacity as required by sealed design.

3.7 BACKFILL PLACEMENT AND COMPACTION

A. Place reinforced backfill in horizontal lifts. Loose lift thickness shall not exceed 12 inches.

B. Compaction: Compact to minimum 95% of maximum dry density per ASTM D1557 (or AASHTO T 180 if specified for the project) for reinforced zone, except within 3 feet of the wall face where compaction method and equipment shall be adjusted to prevent facing movement; minimum density within 3 feet of face shall be 90% unless manufacturer requires higher and the wall face tolerances can be maintained.

C. Do not operate heavy compaction equipment within 3 feet of the wall face. Compact within 3 feet of the wall using lightweight equipment as required.

D. Weather: Do not place fill on frozen subgrade; protect from freezing; do not place during heavy rain.

3.8 DRAINAGE INSTALLATION

A. Install drainage aggregate and underdrain pipe at the base of wall as shown on approved shop drawings. Wrap drainage aggregate and pipe with nonwoven geotextile as required. Provide positive gravity outlet protected from freezing, clogging, and backflow. Provide enhanced drainage measures where required by sealed design.

3.9 DRAINAGE INSTALLATION

A. Install base drain and chimney/back drain (or geocomposite drain) prior to placing backfill above drain levels. Wrap drains with geotextile as required.

B. Provide positive outlets and protect from freezing/clogging/backflow. Provide outlets at locations shown; coordinate with storm sewer system.

C. End-of-day protection: Slope top lift away from wall to divert runoff away from reinforced zone.

3.10 SURFACE WATER MANAGEMENT

A. Provide surface grading and a low-permeability cap layer at the top of the reinforced zone to reduce infiltration. Ensure all drainage features are integrated so hydrostatic pressures do not develop in the reinforced mass.

3.10 FIELD QUALITY CONTROL

A. Field density tests: Perform density/moisture tests at a minimum rate of one per 2,000 cubic yards with a minimum of one test per lift; increase frequency within 3 feet of face as directed.
B. Gradation and PI tests: Perform a minimum one per 2,000 CY for reinforced backfill and one per 5,000 CY for retained backfill, and with each source/material change.
C. Document as-builts: Record reinforcement type, strength, length, elevation, connection method, backfill source, test results, and drain installation photos/outlet locations.
D. Correct out-of-tolerance work promptly; remove and rebuild affected zones as necessary.

- - - E N D - - -

SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Subbase for concrete pavements.
   2. Pedestrian Pavement: Walks, grade slabs, lawn mower strips, pedestrian crossings, wheelchair curb ramps, and terraces.

1.2 RELATED REQUIREMENTS

A. Field Testing: Section 01 45 29, TESTING LABORATORY SERVICES.
B. Step Nosings and Railings: Section 05 50 00, METAL FABRICATIONS.
C. Subgrade Preparation and Subbase Compaction: Section 31 20 00, EARTHWORK.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Association of State Highway and Transportation Officials (AASHTO):
   1. M147-65-UL-04 - Materials for Aggregate and Soil-Aggregate Subbase, Base and Surface Courses.
   2. M233-86 - Boiled Linseed Oil Mixture for Treatment of Portland Cement Concrete.
C. American Concrete Institute (ACI):
   1. 305R-10 - Guide to Hot Weather Concreting.
   2. 306R-10 - Guide to Cold Weather Concreting.
D. American National Standards Institute (ANSI):
   1. B101.3 - Wet DOCF of Common Hard Surface Floor Materials (Including Action and Limit Thresholds for the Suitable Assessment of the Measured Values).
E. ASTM International (ASTM):
   1. A615/A615M-16 - Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
   2. A996/A996M-15 - Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.
   3. A1064/A1064M-16 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
   4. C33/C33M-16 - Concrete Aggregates.

5. C94/C94M-16 - Ready Mixed Concrete.
6. C143/C143M-15a - Slump of Hydraulic Cement Concrete.
7. C150/C150M-16 - Portland Cement.
8. C171-16 - Sheet Materials for Curing Concrete.
9. C260/C260M-10a - Air Entraining Admixtures for Concrete.
10. C309-11 - Liquid Membrane Forming Compounds for Curing Concrete.
11. C494/C494M-15a - Chemical Admixtures for Concrete.
12. C618-15 - Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
13. C979/C979M-16 - Pigments for Integrally Colored Concrete.
14. C989/C989M-14 - Slag Cement for Use in Concrete and Mortars.
15. C1240-15 - Silica Fume Used in Cementitious Mixtures.
16. D1751-04(2013)e1 - Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
17. D5893/D5893M-10 - Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements.
18. D6690-15 - Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Architect/Engineer.
      c. Contractor.
      d. Installer.
      e. Other installers responsible for adjacent and intersecting work, including excavation, and plantings.
   2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
      a. Installation schedule.
      b. Installation sequence.
      c. Preparatory work.
      d. Protection before, during, and after installation.
      e. Installation.
      f. Terminations.

g. Transitions and connections to other work.

h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

2. Show reinforcing.

3. Include jointing plan for concrete pavements, curbs and gutters.

C. Manufacturer's Literature and Data:

1. Description of each product.

2. Installation instructions.

D. Samples:

1. Exposed Aggregate Concrete Panel: 0.4 sq. m by 50 mm (4 sq. ft. by 2 inches) thick, 2 required, each color and finish.

2. Colored Concrete Panel: As specified in Section 09 06 00, SCHEDULE FOR FINISHES, with mix data.

E. Test reports: Certify products comply with specifications.

1. Concrete materials.

2. Select subbase materials.

3. Field test reports.

F. Certificates: Certify products comply with specifications.

1. Expansion joint filler.

2. Reinforcement.

3. Curing materials.

4. Concrete protective coating.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list.

2. Land surveyor.

H. Concrete mix design.

I. Select subbase job-mix design.

J. Proposed hot and cold weather concreting methods.

K. Land surveyor's construction staking notes, before placing concrete.

1. Identify discrepancies between field conditions and Drawings.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations.
      a. Project Experience List: Provide contact names and addresses for completed projects.

B. Land Surveyor: Professional land surveyor or engineer registered to provide land surveys in jurisdiction where project is located.

C. Preconstruction Testing:
   1. Engage independent testing laboratory to perform tests and submit reports.
      a. Deliver samples to laboratory in number and quantity required for testing.
   2. Concrete mix design.
   3. Select subbase job-mix design. Report the following:
      a. Material sources.
      b. Gradation.
      c. Plasticity index.
      d. Liquid limit.
      e. Laboratory compaction curves indicating maximum density at optimum moisture content.

1.7 DELIVERY

A. Deliver steel reinforcement to prevent damage.

B. Before installation, return or dispose of distorted or damaged steel reinforcement.

C. Bulk Products: Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Hot Weather Concreting Procedures: ACI 305R.

B. Cold Weather Concreting Procedures: ACI 306R.

1. Use non-corrosive, non-chloride accelerator admixture.
2. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 CONCRETE MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.
B. Pozzolans:
   1. Fly Ash: ASTM C618, Class C or F including supplementary optional physical requirements.
   2. Slag: ASTM C989/C989M Grade 120.
   3. Silica Fume: ASTM C1240.
C. Coarse Aggregate: ASTM C33/C33M; size to suit application.
D. Fine Aggregate: ASTM C33/C33M.
E. Mixing Water: Fresh, clean, and potable.
F. Air-Entraining Admixture: ASTM C260/C260M.
G. Chemical Admixtures: ASTM C494/C494M.
H. Reinforcing Steel: ASTM A615/A615M or ASTM A996/A996M,
I. Welded Wire Fabric: ASTM A1064/A1064M sized as indicated.
J. Expansion Joint Filler: ASTM D1751.
K. Sheet Materials for Curing Concrete: ASTM C171.
L. Color Pigment: ASTM C979/C979M, colored and white powder pigments.

2.2 SELECT SUBBASE

A. Subbase: AASHTO M147; Grade A.
   1. Select granular material composed of sand, sand-gravel, crushed stone, crushed or granulated slag, with or without soil binder, or combinations of these materials.

SUBBASE GRADING REQUIREMENTS							
Sieve Size		Percentage Passing by Mass					
		Grades					
(mm)	(in)	A	B	C	D	E	F
50	2	100	100				

SUBBASE GRADING REQUIREMENTS							
Sieve Size		Percentage Passing by Mass					
		Grades					
25	1		75-95	100	100	100	100
9.5	3/8	30-65	40-75	50-85	60-100		
4.47	No. 4	25-55	30-60	35-65	50-85	55-100	70-100
2.00	No. 10	15-40	20-45	25-50	40-70	40-100	55-100
0.425	No. 40	8-20	15-30	15-30	25-45	20-50	30-70
0.075	No. 200	2-8	5-20	5-15	5-20	6-20	8-25

B. Other Acceptable Gradations: Materials within three to five percent, plus or minus, of specified gradation, or as recommended by the geotechnical engineer and approved by the Contracting Officer's Representative.

2.3 FORMS

A. Forms: Wood, plywood, metal, or other materials, approved by Contracting Officer's Representative, of grade or type suitable to obtain type of finish specified.
   1. Plywood: Exterior grade, free of defects and patches on contact surface.
   2. Lumber: Sound, grade-marked, S4S stress graded softwood, minimum 50 mm (2 inches) thick, free from warp, twist, loose knots, splits, or other defects.
   3. Form Coating: As recommended by Architect/Engineer.

B. Provide forms suitable in cross-section, depth, and strength to resist springing during depositing and consolidating concrete.
   1. Do not use forms varying from straight line more than 3 mm in 3000 mm (1/8 inch in 10 feet), horizontally and vertically.

C. Provide flexible or curved forms for forming radii.

2.4 CONCRETE CURING MATERIALS

A. Concrete curing materials, conform to one of the following:
   1. Burlap: Minimum 233 g/sq. m (7 ounces/sq. yd.) dry.
   2. Sheet Materials for Curing Concrete: ASTM C171.
   3. Curing Compound: ASTM C309, Type 1 clear; liquid membrane forming type, without paraffin or petroleum.

2.5 CONCRETE MIXES

A. Design concrete mixes according to ASTM C94/C94M, Option C.

B. Concrete Type: See Table I.

TABLE I - CONCRETE TYPES					
Concrete Type	Minimum 28 Day Compressive Strength f'c MPa (psi)	Non-Air-Entrained		Air-Entrained	
		Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
A	35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
B	30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
C	25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
D	25 (3000)1,2	300 (500)	*	310 (520)	*

Footnotes:

1. If trial mixes are used, achieve compressive strength 8.3 MPa (1,200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve compressive strength 9.7 MPa (1,400 psi) in excess of f’c.
2. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.
3. Laboratory Determined according to ACI 211.1 for normal weight concrete.

C. Maximum Slump: ASTM C143/C143M. See Table II.

TABLE II - MAXIMUM SLUMP	
APPLICATION	MAXIMUM SLUMP
Curb & Gutter	75 mm (3 inches)
Pedestrian Pavement	75 mm (3 inches)
Vehicular Pavement	50 mm (2 inches) Machine Finished 100 mm (4 inches) Hand Finished
Equipment Pad	75 to 100 mm (3 to 4 inches)

2.6 ACCESSORIES

A. Equipment and Tools: Obtain Contracting Officer's Representative's, approval of equipment and tools needed for handling materials and performing work before work begins.

B. Maintain equipment and tools in satisfactory working condition.

C. Sealants:

1. Concrete Paving Expansion Joints: ASTM D5893/D5893M, Type SL, single component, self-leveling, silicone joint sealant.
2. Concrete Paving Joints: ASTM D6690, Type IV, hot-applied, single component joint sealant.

D. Concrete Protective Coating: AASHTO M233 linseed oil mixture.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Prepare, construct, and finish subgrade. See Section 31 20 00, EARTHWORK.

D. Maintain subgrade in smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE

A. Placing:

1. Place subbase material on prepared subgrade in uniform layer to required contour and grades, and to maximum 200 mm (8 inches) loose depth.
2. When required compacted thickness exceeds 150 mm (6 inches), place subbase material in equal thickness layers.
3. When subbase elevation is 13 mm (1/2 inch) or more below required grade, excavate subbase minimum 75 mm (3 inches) deep. Place and compact subbase to required grade.

B. Compaction:

1. Perform compaction with approved hand or mechanical equipment well suited to the material being compacted.
2. Maintain subbase at optimum moisture content for compaction.
3. Compact each subbase layer to minimum 95 percent or 100 percent of maximum density as specified in Section 31 20 00, EARTHWORK.

C. Subbase Tolerances:

1. Variation from Indicated Grade: Maximum 9 mm (3/8 inch).
2. Variation from Indicated Thickness: Maximum 13 mm (1/2 inch).

D. Protection:

1. Protect subbase from damage until concrete is placed.

2. Reconstruct damaged subbase before placing concrete.

3.3 SETTING FORMS

A. Form Substrate:
1. Compact form substrate to uniformly support forms along entire length.
2. Correct substrate imperfections and variations by cutting, filling, and compacting.

B. Form Setting:
1. Set forms to indicated line and grade with tight joints. Rigidly brace forms preventing movement.
2. Remove forms when removal will not damage concrete and when required for finishing.
3. Clean and oil forms before each use.
4. Correct forms, when required, immediately before placing concrete.

C. Land Surveyor: Establish control, alignment, and grade for forms.
1. Notify Contracting Officer's Representative immediately when discrepancies exist between field conditions and drawings.
2. Correct discrepancies greater than 25 mm (1 inch) before placing concrete.

D. Form Tolerances:
1. Variation from Indicated Line: Maximum 6 mm (1/4 inch).
2. Variation from Indicated Grade: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).

3.4 PLACING REINFORCEMENT

A. Keep reinforcement clean from contamination preventing concrete bond.

B. Install reinforcement shown on drawings.

C. Support and securely tie reinforcing steel to prevent displacement during concrete placement.

D. Obtain Contracting Officer's Representative's reinforcement placement approval before placing concrete.

3.5 JOINTS - GENERAL

A. Place joints, where shown on approved submittal Drawings.
1. Conform to details shown.
2. Install joints perpendicular to finished concrete surface.

B. Make joints straight and continuous from edge to edge of pavement.

3.6 CONSTRUCTION JOINTS

A. Locate construction joints between slabs of vehicular pavement as shown on approved submittal Drawings.

B. Place transverse construction joints of type shown, where indicated, and whenever concrete placement is suspended for more than 30 minutes.

C. Provide butt-type joint with dowels in curb and gutter at planned joint locations.

D. Provide keyed joints with tie bars when joint occurs in middle third of planned curb and gutter joint interval.

3.7 CONTRACTION JOINTS

A. Tool or cut joints to width, depth, and radius edge shown on drawings using grooving tool, jointer, or saw.

B. Construct joints in curbs and gutters by inserting 3 mm (1/8 inch) steel plates conforming to curb and gutter cross sections.

1. Keep plates in place until concrete can hold its shape.

C. Finish joint edges with edging tool.

D. Score pedestrian pavement with grooving tool or jointer.

3.8 EXPANSION JOINTS

A. Form expansion joints with expansion joint filler of thickness shown on drawings.

1. Locate joints around perimeter of structures and features abutting site work concrete.
2. Create complete, uniform separation between structure and site work concrete.

B. Extend expansion joint material full depth of concrete with top edge of joint filler below finished concrete surface where sealant is indicated on Drawings.

C. Cut and shape material matching cross section.

D. Anchor with approved devices to prevent displacing during placing and finishing operations.

E. Round joint edges with edging tool.

3.9 PLACING CONCRETE - GENERAL

A. Preparation before Placing Concrete:

1. Obtain Contracting Officer's Representative approval.
2. Remove debris and other foreign material.
3. Uniformly moisten substrate, without standing water.

B. Convey concrete from mixer to final location without segregation or loss of ingredients. Deposit concrete to minimize handling.

C. During placement, consolidate concrete by spading or vibrating to minimize voids, honeycomb, and rock pockets.

1. Vibrate concrete against forms and along joints.
2. Avoid excess vibration and handling causing segregation.

D. Place concrete continuously between joints without bulkheads.

E. Install construction joint in concrete placement suspended for more than 30 minutes.

F. Replace concrete with cracks, chips, bird baths, and other defects to nearest joints, approved by Contracting Officer's Representative.

3.10 PLACING CONCRETE FOR CURB AND GUTTER, PEDESTRIAN PAVEMENT, AND EQUIPMENT PADS

A. Place concrete in one layer conforming to cross section shown on Drawings after consolidating and finishing.

B. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

C. Strike concrete surface to proper section ready for consolidation.

D. Consolidate concrete with approved mechanical finishing equipment.

E. Finish concrete surface with wood or metal float.

F. Construct concrete pads and pavements with sufficient slope to drain, preventing standing water.

3.11 PLACING CONCRETE FOR VEHICULAR PAVEMENT

A. Deposit concrete as close as possible to its final position.

B. Place concrete continuously between construction joints without cold joints.

C. Strike and consolidate concrete with finishing machine, vibrating screed, or by hand-finishing.

D. Finish concrete surface to elevation and crown shown on drawings.

E. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

F. Obtain Contracting Officer's Representative's approval before placing adjacent lanes.

G. Curb-Forming Machines: Curb-forming machines for constructing integral curbs will be approved based on trial use on the project. When equipment produces unsatisfactory results, discontinue use of the

equipment at any time during construction and accomplish work by hand method construction. Remove unsatisfactory work and reconstruct full length between regularly scheduled joints. Dispose of removed portions off the project site.

3.12 FORM REMOVAL

A. Keep forms in place minimum 12 hours after concrete placement. Remove forms without damaging concrete.

B. Do not use bars or heavy tools against concrete to remove forms. Repair damage concrete found after form removal.

3.13 CONCRETE FINISHING - GENERAL

A. Follow operation sequence below, unless otherwise indicated on Drawings:

1. Consolidating, floating, striking, troweling, texturing, and joint edging.

B. Use edging tool with 6 mm (1/4 inch) radius, unless otherwise shown on Drawings.

C. Keep finishing equipment and tools clean and suitable for use.

3.14 CONCRETE FINISHING - PEDESTRIAN PAVEMENT

A. Walks, Grade Slabs:

1. Finish concrete surfaces with metal float, troweled smooth, and finished with a broom moistened with clear water.
2. Finish slab edges and formed transverse joints with edger.
3. Broom surfaces transverse to traffic direction.
   a. Use brooming to eliminate flat surface produced by edger.
   b. Produce uniform corrugations, maximum 1.5 mm (1/16 inch) deep profile.
4. Provide surface uniform in color and free of surface blemishes, form marks, and tool marks.
5. Paving Tolerances:
   a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).
   b. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).
6. Replace paving within joint boundary when paving exceeds specified tolerances.

B. Step Treads, Risers and Sidewalls: Finish as specified for pedestrian pavement, except as follows:

1. Remove riser forms sequentially, starting with top riser.
2. Rub riser face with wood or concrete rubbing block and water. Remove blemishes, form marks, and tool marks. Use outside edger to round nosing; use inside edger to finish bottom of riser.
3. Apply uniform brush finish to treads, risers, and sidewall.
   a. Apply stiff brush finish to treads to provide slip resistant surface complying with ANSI B101.3.
4. Step Tolerance:
   a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).

3.15 CONCRETE FINISHING - VEHICULAR PAVEMENT

A. Align finish surfaces where new and existing pavements abut.
B. Longitudinally float pavement surface to profile and grade indicated on drawings.
C. Straighten surface removing irregularities and maintaining specified tolerances while concrete is plastic.
D. Finish pavement edges and joints with edging tool.
E. Broom finish concrete surface after bleed water dissipates and before concrete hardens.
   1. Broom surface transverse to traffic direction.
      a. Use brooming to eliminate flat surface produced by edger.
      b. Produce uniform corrugations, maximum 3 mm (1/8 inch) deep profile.
F. Pavement Tolerances:
   1. Variation from Indicated Plane: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet) tested parallel and perpendicular to traffic direction at maximum 1500 mm (5 feet) intervals.
   2. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).
G. Replace paving within joint boundary when paving exceeds specified tolerances.

3.16 CONCRETE FINISHING - CURBS AND GUTTERS

A. Round edges of gutter and top of curb with edging tool.
B. Gutter and Curb Top:
   1. Float surfaces and finish with smooth wood or metal float until true to grade and section and uniform color.

2. Finish surfaces, while still plastic, longitudinally with bristle brush.

C. Curb Face:

1. Remove curb form and immediately rub curb face with wood or concrete rubbing block removing blemishes, form marks, and tool marks and providing uniform color.
2. Brush curb face, while still plastic, matching gutter and curb top.

D. Curb and Gutter Tolerances: Except at grade changes or curves.

1. Variation from Indicated Plane and Grade:
   a. Gutter: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).
   b. Curb Top and Face: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet).

E. Replace curbs and gutters within joint boundary when curbs and gutters exceed specified tolerances.

F. Correct depressions causing standing water.

3.17 CONCRETE FINISHING - EQUIPMENT PADS

A. Strike pad surface to elevation shown on Drawings.

B. Provide smooth, dense float finish, free from depressions or irregularities.

C. Finish pad edges with edger.

D. After removing forms, rub pad edge faces with wood or concrete rubbing block, removing blemishes, form marks, and tool marks and providing uniform color.

E. Pad Tolerances:

1. Variation from Indicated Plane: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).
2. Variation from Indicated Elevation: Maximum 6 mm (1/4 inch).
3. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).

F. Replace pads when pads exceed specified tolerances.

3.18 SPECIAL FINISHES

A. Exposed Aggregate Finish:

1. Prepare concrete base 10 to 13 mm (3/8 to 1/2 inch) lower than the finish grade.
2. Scatter aggregate over concrete base surface and embed by use of hand float, straight edge, or darby.

3. Apply concrete mix and mark off surface as indicated on Drawings with surface joints at least 10 mm (3/8 inch) deep. Level off finish to a true surface and compact with wood float, working as little as possible so that coarse material will remain at the top. Before finish has set, treat top surface with cement retarding material. When body of concrete finish has set, remove retarded surface film by wire brushes and fine water spray to remove mortar from top of colored aggregate. Continue washing and brushing until flush water runs clear and no noticeable cement film left on the aggregate.

B. Colored Concrete: Add integral color pigment to the pedestrian concrete paving mix at batch plant. Introduce sufficient quantities of carbon black mineral oxide pigment to produce color specified in Section 09 06 00, SCHEDULE FOR FINISHES.

3.19 CONCRETE CURING

A. Concrete Protection:
   1. Protect unhardened concrete from rain and flowing water.
   2. Provide sufficient curing and protection materials available and ready for use before concrete placement begins.
   3. Protect concrete to prevent pavement cracking from ambient temperature changes during curing period.
      a. Replace pavement damaged by curing method allowing concrete cracking.
      b. Employ another curing method as directed by Contracting Officer's Representative.

B. Cure concrete for minimum 7 days by one of the following methods appropriate to weather conditions preventing moisture loss and rapid temperature change:
   1. Burlap Mat: Provide minimum two layers kept saturated with water during curing period. Overlap Mats at least 150 mm (6 inches).
   2. Sheet Materials:
      a. Wet exposed concrete surface with fine water spray and cover with sheet materials.
      b. Overlap sheets minimum 300 mm (12 inches).
      c. Securely anchor sheet materials preventing displacement.
   3. Curing Compound:
      a. Protect joints indicated to receive sealants preventing contamination from curing compound.

b. Insert moistened paper or fiber rope into joint or cover joint with waterproof paper.
c. Apply curing compound before concrete dries.
d. Apply curing compound in two coats at right angles to each other.
e. Application Rate: Maximum 5 sq. m/L (200 sq. ft./gallon), both coats.
f. Immediately reapply curing compound to surfaces damaged during curing period.

3.20 CONCRETE PROTECTIVE COATING

A. Apply protective coating of linseed oil mixture to exposed-to-view concrete surfaces, drainage structures, and features that project through, into, or against concrete exterior improvements to protect the concrete against deicing materials.
B. Complete backfilling and curing operation before applying protective coating.
C. Dry and thoroughly clean concrete before each application.
D. Apply two coats, with maximum coverage of 11 sq. m/L (50 sq. yds./gal.); first coat, and maximum 16 sq. m/L (70 sq. yds./gal.); second coat, except apply commercially prepared mixture according to manufacturer's instructions.
E. Protect coated surfaces from vehicular and pedestrian traffic until dry.
F. Do not heat protective coating, and do not expose protective coating to open flame, sparks, or fire adjacent to open containers or applicators. Do not apply material at temperatures lower than 10 degrees C (50 degrees F).

3.21 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
1. Compaction.
a. Pavement subgrade.
b. Curb, gutter, and sidewalk.
2. Concrete:
a. Delivery samples.
b. Field samples.

3. Slip Resistance: Steps and pedestrian paving.

3.22 CLEANING

A. After completing curing:
   1. Remove burlap and sheet curing materials.
   2. Sweep concrete clean, removing foreign matter from the joints.
   3. Seal joints as specified.

3.23 PROTECTION

A. Protect exterior improvements from traffic and construction operations.
   1. Prohibit traffic on paving for minimum seven days after placement, or longer as directed by Contracting Officer's Representative.
B. Remove protective materials immediately before acceptance.
C. Repair damage.
   1. Replace concrete containing excessive cracking, fractures, spalling, and other defects within joint boundary, when directed by Contracting Officer's Representative, and at no additional cost to the Government.

- - - E N D - - -

SECTION 32 12 16
ASPHALT PAVING

PART 1 - GENERAL

1.1 DESCRIPTION

This work shall cover the composition, mixing, construction upon the prepared subgrade, and the protection of hot asphalt concrete pavement. The hot asphalt concrete pavement shall consist of an aggregate or asphalt base course and asphalt surface course constructed in conformity with the lines, grades, thickness, and cross sections as shown. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course.

1.2 RELATED WORK

A. Laboratory and field testing requirements: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Subgrade Preparation: Paragraph 3.3 and Section 31 20 00, EARTHWORK.

C. Pavement Markings: Section 32 17 23, PAVEMENT MARKINGS.

1.3 INSPECTION OF PLANT AND EQUIPMENT

The Resident Engineer shall have access at all times to all parts of the material producing plants for checking the mixing operations and materials and the adequacy of the equipment in use.

1.4 ALIGNMENT AND GRADE CONTROL

The Contractor’s Registered Professional Land Surveyor shall establish and control the pavement (aggregate or asphalt base course and asphalt surface course) alignments, grades, elevations, and cross sections as shown on the Drawings.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

B. Data and Test Reports:

1. Aggregate Base Course: Sources, gradation, liquid limit, plasticity index, percentage of wear, and other tests required by State Highway Department.
2. Asphalt Base/Surface Course: Aggregate source, gradation, soundness loss, percentage of wear, and other tests required by State Highway Department.
3. Job-mix formula.

C. Certifications:
   1. Asphalt prime and tack coat material certificate of conformance to State Highway Department requirements.
   2. Asphalt cement certificate of conformance to State Highway Department requirements.
   3. Job-mix certification - Submit plant mix certification that mix equals or exceeds the State Highway Specification.
D. One copy of State Highway Department Specifications.
E. Provide MSDS (Material Safety Data Sheets) for all chemicals used on ground.

PART 2 - PRODUCTS

2.1 GENERAL

A. Aggregate base, asphaltic base, and asphalt concrete materials shall conform to the requirements of the following and other appropriate sections of the latest version of the State Highway Material Specifications, including amendments, addenda and errata. Where the term "Engineer" or "Commission" is referenced in the State Highway Specifications, it shall mean the VA Resident Engineer or VA Contracting Officer.

2.2 AGGREGATES

A. Provide aggregates consisting of crushed stone, gravel, sand, or other sound, durable mineral materials processed and blended, and naturally combined.
B. Subbase aggregate (where required) maximum size: 38mm(1-1/2").
C. Base aggregate maximum size:
   1. Base course over 152mm(6") thick: 38mm(1-1/2");
   2. Other base courses: 19mm(3/4").
D. Asphaltic base course:
   1. Maximum particle size not to exceed 25.4mm(1”).
   2. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.
E. Aggregates for asphaltic concrete paving: Provide a mixture of sand, mineral aggregate, and liquid asphalt mixed in such proportions that the percentage by weight will be within:

Sieve Sizes	Percentage Passing
19mm(3/4")	100
9.5mm(3/8")	67 to 85
6.4mm(1/4")	50 to 65
2.4mm(No. 8 mesh)	37 to 50
600µm(No. 30 mesh)	15 to 25
75µm(No. 200 mesh)	3 to 8

plus 50/60 penetration liquid asphalt at 5 percent to 6-1/2 percent of the combined dry aggregates.

2.3 ASPHALTS

A. Comply with provisions of Asphalt Institute Specification SS2:
   1. Asphalt cement: Penetration grade 50/60
   2. Prime coat: Cut-back type, grade MC-250
   3. Tack coat: Uniformly emulsified, grade SS-1H

2.4 SEALER

A. Provide a sealer consisting of suitable fibrated chemical type asphalt base binders and fillers having a container consistency suitable for troweling after thorough stirring, and containing no clay or other deleterious substance.

B. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

PART 3 - EXECUTION

3.1 GENERAL

The Asphalt Concrete Paving equipment, weather limitations, job-mix formula, mixing, construction methods, compaction, finishing, tolerance, and protection shall conform to the requirements of the appropriate sections of the State Highway Specifications for the type of material specified.

3.2 MIXING ASPHALTIC CONCRETE MATERIALS

A. Provide hot plant-mixed asphaltic concrete paving materials.
   1. Temperature leaving the plant: 143 degrees C(290 degrees F) minimum, 160 degrees C(320 degrees F) maximum.
   2. Temperature at time of placing: 138 degrees C(280 degrees F) minimum.

3.3 SUBGRADE

A. Shape to line and grade and compact with self-propelled rollers.

B. All depressions that develop under rolling shall be filled with acceptable material and the area re-rolled.

C. Soft areas shall be removed and filled with acceptable materials and the area re-rolled.

D. Should the subgrade become rutted or displaced prior to the placing of the subbase, it shall be reworked to bring to line and grade.

E. Proof-roll the subgrade with maximum 45 tonne (50 ton) gross weight dump truck as directed by VA Resident Engineer or VA Contracting Officer. If pumping, pushing, or other movement is observed, rework the area to provide a stable and compacted subgrade.

3.4 BASE COURSES

A. Subbase (when required)

1. Spread and compact to the thickness shown on the drawings.
2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
3. After completion of the subbase rolling there shall be no hauling over the subbase other than the delivery of material for the top course.

B. Base

1. Spread and compact to the thickness shown on the drawings.
2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
3. After completion of the base rolling there shall be no hauling over the base other than the delivery of material for the top course.

C. Thickness tolerance: Provide the compacted thicknesses shown on the Drawings within a tolerance of minus 0.0mm (0.0") to plus 12.7mm (0.5").

D. Smoothness tolerance: Provide the lines and grades shown on the Drawings within a tolerance of 5mm in 3m (3/16 inch in ten feet).

E. Moisture content: Use only the amount of moisture needed to achieve the specified compaction.

3.5 PLACEMENT OF ASPHALTIC CONCRETE PAVING

A. Remove all loose materials from the compacted base.

B. Apply the specified prime coat, and tack coat where required, and allow to dry in accordance with the manufacturer’s recommendations as approved by the Architect or Engineer.

C. Receipt of asphaltic concrete materials:

1. Do not accept material unless it is covered with a tarpaulin until unloaded, and unless the material has a temperature of not less than 130 degrees C(280 degrees F).
2. Do not commence placement of asphaltic concrete materials when the atmospheric temperature is below 10 degrees C (50 degrees F), not during fog, rain, or other unsuitable conditions.

D. Spreading:

1. Spread material in a manner that requires the least handling.
2. Where thickness of finished paving will be 76mm (3") or less, spread in one layer.

E. Rolling:

1. After the material has been spread to the proper depth, roll until the surface is hard, smooth, unyielding, and true to the thickness and elevations shown own the drawings.
2. Roll in at least two directions until no roller marks are visible.
3. Finished paving smoothness tolerance:
   a. No depressions which will retain standing water.
   b. No deviation greater than 3mm in 1.8m (1/8" in six feet).

3.6 APPLICATION OF SEAL COAT

A. Prepare the surfaces, mix the seal coat material, and apply in accordance with the manufacturer’s recommendations as approved by the Architect or Engineer.

B. Achieve a finished surface seal which, when dry and thoroughly set, is smooth, tough, resilient, of uniform black color, and free from coarse textured areas, lap marks, ridges, and other surface irregularities.

C. When sealing new asphalt paving wait an entire year to allow for the expansion and contraction of a year’s cycle of both warm and cool temperatures. This allows for the asphalt’s oils to properly cure and begin oxidation before applying a seal coat.

D. When seal coating in less than a year apply two coats, spray applied. This application method is preferred for less than a year application when there is still plenty of asphalt cement present for the seal coat to bond to.

E. When seal coating existing paving that has new asphalt patches, apply two coats sprayed to the existing asphalt and a single lighter coat on new patch work, just enough to make the color of the new patches match the rest of the reseal coated paving.

F. When resealing existing paving 5, 10, 15 years and older, that is oxidized and is very light in color, squeegee apply the first coat of seal coat and spray on a second coat. Two coats are preferred in older paving when the asphalt cement has oxidized leaving the seal coat with nothing to bond to other than the aggregate that in many cases has polished over time leaving less than a desirable surface to bond to.

3.7 PROTECTION

Protect the asphaltic concrete paved areas from traffic until the sealer is set and cured and does not pick up under foot or wheeled traffic.

3.8 FINAL CLEAN-UP

Remove all debris, rubbish, and excess material from the work area.

- - - E N D - - -

SECTION 32 17 23
PAVEMENT MARKINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Paint and reflective glass beads on pavement surfaces, in form of traffic lanes, parking bays, areas restricted to handicapped persons, crosswalks, and other detail pavement markings.

1.2 RELATED REQUIREMENTS

A. Paint VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Paint Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Federal Specifications (Fed. Spec.):

1. TT-B-1325D - Beads (Glass Spheres) Retro-Reflective.
2. TT-P-1952F - Paint, Traffic and Airfield Marking, Waterborne.

C. Master Painters Institute (MPI):

1. No. 97 - Traffic Marking Paint, Latex.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show pavement marking configuration and dimensions.
2. Show international symbol of accessibility at designated parking spaces.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Application instructions.

D. Samples:

1. Paint: 200 mm (8 inches) square, each type and color.

E. Certificates: Certify products comply with specifications.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.
B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Product Temperature: Minimum 13 degrees C (55 degrees F) for minimum 48 hours before installation.
      a. Surface to be painted and ambient temperature: Minimum 10 degrees C (50 degrees F) and maximum 35 degrees C (95 degrees F).
B. Field Measurements: Verify field conditions affecting traffic marking installation. Show field measurements on Submittal Drawings.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design paint complying with specified performance:
   1. Application: Fed. Spec. TT-P-1952.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer and from one production run.

C. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:

a. Paints and coatings.

2.3 SANDBLASTING EQUIPMENT

A. Air compressor, hoses, and nozzles of proper size and capacity as required for cleaning painted surfaces. Compressor to provide minimum 0.08 cu. m/s (150 cfm) of air at pressure of minimum 625 kPa (90 psi) at each nozzle used.

2.4 PAINT APPLICATOR

A. Apply marking paint with approved mechanical equipment. Provide equipment with constant agitation of paint and travel at controlled speeds. Synchronize one or more paint "guns" to automatically begin and cut off paint flow in case of skip lines. Equipment to have manual control to apply continuous lines of varying length and marking widths as indicated on Drawings. Provide pneumatic spray guns for hand application of paint in areas where mobile paint applicator cannot be used. Use separate piece of equipment when equipment does not have glass bead dispenser. Adjust and synchronize equipment with paint applicator to distribute reflective beads on paint lines uniformly within ten seconds without any waste.

2.5 PAINT

A. Paint: MPI No. 97. For obliterating existing markings comply with Fed. Spec. TT-P-1952. Provide minimum 18 L (5 gallons) containers.

B. Color: Match existing stripping color.

2.6 REFLECTIVE GLASS BEADS

A. Beads: Comply with Fed. Spec. TT-B-1325, Type I, Gradation A. In regions of high humidity, coat beads with silicone or other suitable waterproofing material to ensure free flow. Provide glass beads in containers suitable for handling and strong enough to prevent loss during shipment.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Allow new pavement surfaces to cure for period of minimum 14 days before application of marking materials.
B. Protect existing construction and completed work from damage.
C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
   1. Remove dust, dirt, and other granular surface deposits by sweeping, blowing with compressed air, rinsing with water, or combination of these methods.
   2. Completely remove rubber deposits, existing paint markings, and other coatings adhering to pavement with scrapers, wire brushings, sandblasting, mechanical abrasion, or approved chemicals as directed by Contracting Officer's Representative.
   3. As an option, comply with Fed. Spec. TT-P-1952 for removal of existing paint markings on asphalt pavement. Apply black paint in as many coats as necessary to completely obliterate existing markings.
   4. Scrub affected areas with several applications of trisodium phosphate solution or other approved detergent or degreaser, and rinse thoroughly after each application, where oil or grease are present on old pavements to be marked.
      a. After cleaning, seal oil-soaked areas with cut shellac to prevent bleeding through new paint.
   5. Clean and dry surface before pavement marking. Do not begin any marking until Contracting Officer's Representative inspected surface and gives permission to proceed.

3.2 TEMPORARY PAVEMENT MARKING

A. Apply Temporary Pavement Markings of colors, widths and lengths shown on drawings or directed by Contracting Officer's Representative. After temporary marking has served its purpose and when so ordered by Contracting Officer's Representative, remove temporary marking by carefully controlled sandblasting, approved grinding equipment, or other approved method to prevent damage on applied surface.
B. As an option, provide approved preformed pressure sensitive, reflective, adhesive tape type of temporary pavement marking of

required colors, widths and lengths in lieu of temporary painted and reflective marking. Continuous durability and effectiveness of such marking is required during period for which its use is required. Remove any unsatisfactory tape type marking and replace with painted and reflective markings.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.4 PAINT APPLICATION

A. Apply uniformly painted and reflective pavement marking of required colors, length, and width with true, sharp edges and ends on properly cured, prepared, and dried surfaces.
B. Comply with details as indicated on drawings and established control points.
C. Apply paint at wet film thickness of 0.4 mm (0.015 inch). Disperse reflective glass beads evenly on wet paint at rate of 720 g/L (6 pounds per gal.) of paint. Apply paint in one coat. When directed by Contracting Officer's Representative, apply additional coats at markings showing light spots. Comply with paint manufacturer's maximum drying time requirements to prevent undue softening of asphalt, and pick-up, displacement, or discoloration by tires of traffic.
D. When deficiency in marking drying occurs, discontinue paint operations until cause of slow drying is determined and corrected.
E. Remove and replace marking applied less than minimum material rates, deviates from true alignment, exceeds stipulated length and width tolerances, or shows light spots, faulty distribution of beads, smears, or other deficiencies or irregularities.
F. Remove marking by carefully controlled sandblasting, approved grinding equipment, or other approve method to prevent damage on applied surface.

3.5 DETAIL PAVEMENT MARKING APPLICATION

A. Apply Detail Pavement Markings, exclusive of actual traffic lane marking as follows:

1. At exit and entrance islands and turnouts.
2. On curbs.
3. At crosswalks.
4. At parking bays.
5. Other locations as indicated on drawings.

B. Apply International Handicapped Symbol at indicated parking spaces. Color as shown on drawings. Apply paint for symbol using suitable template that will provide pavement marking with true, sharp edges and ends.

C. Install detail pavement markings of colors, widths and lengths, and design pattern at locations indicated on drawings.

3.6 TOLERANCES

A. Length and Width of Lines: Plus or minus 75 mm (3 inches) and plus or minus 3 mm (1/8 inch), respectively, in case of skip markings.

B. Length of intervals exceeding line length tolerance are not acceptable.

3.7 CLEANING

A. Remove excess paint before paint sets.

3.8 PROTECTION

A. Protect pavement markings from traffic and construction operations.

1. Protect newly painted markings from vehicular traffic until paint is dry and track free.
2. Place warning signs at beginning of wet line, and at points well in advance of marking equipment for alerting approaching traffic from both directions.
3. Place small flags or other similarly effective small objects near freshly applied markings at frequent intervals to reduce crossing by traffic.

B. Repair damage.

- - - E N D - - -

SECTION 32 90 00
PLANTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Plants, soils, edging, turf, and landscape materials.

1.2 RELATED REQUIREMENTS

1.3 DEFINITIONS

A. Pesticide: Any substance or mixture of substances, including biological control agents, that may prevent, destroy, repel, or mitigate pests and is specifically labeled for use by U.S. Environmental Protection Agency (EPA). Also, any substance used as plant regulator, defoliant, disinfectant, or biocide.

B. Planter Bed: An area containing one or combination of following plant types: shrubs, vines, wildflowers, annuals, perennials, ground cover, and mulch topdressing excluding turf. Trees may also be found in planter beds.

C. Stand of Turf: 95 percent of established species.

1.4 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute (ANSI):

1. Z60.1-2014 - Nursery Stock.

C. American Society for Testing And Materials (ASTM):

1. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
2. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
3. C33/C33M-16-Concrete Aggregates.
4. C136/C136M-14 - Sieve Analysis of Fine and Coarse Aggregates.
5. C602-13a - Agricultural Liming Materials.
6. D977-13e1 - Emulsified Asphalt.
7. D5268-13 - Topsoil Used for Landscaping Purposes.

D. Hortus Third: Concise Dictionary of Plants Cultivated in United States and Canada.

E. Tree Care Industry Association (TCIA):

1. A300P1-2008 - Tree Care Operations - Trees, Shrubs and Other Woody Plant Maintenance Standard Practices (Pruning).
2. Z133.1-2012 - Arboricultural Operations - Safety Requirements.

F. Turfgrass Producers International (TPI):
1. 2006 Guideline Specifications to Turfgrass Sodding.

G. United States Department of Agriculture (USDA):
1. DOA SSIR 42-2014 - Soil Survey Laboratory Methods Manual.
2. Handbook No. 60 - Diagnosis and Improvement of Saline and Alkali Soils.

1.5 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
1. Required Participants:
a. Contracting Officer's Representative.
b. Architect/Engineer.
c. Contractor.
d. Installer.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
a. Inspection of planting materials.
b. Installation schedule.
c. Installation sequence.
d. Preparatory work.
e. Protection before, during, and after installation.
f. Installation.
g. Inspecting.
h. Environmental procedures.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.6 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
1. Description of each product.
2. Photographs: Color photographs of each plant species showing actual size and condition of plants to be provided with measuring device

included for scale. Where more than 20 plants are required of any species, submit minimum three photographs of average, best, and worst quality plant to be provided. Include on each photograph, plant full scientific name, size, and source nursery.

3. Installation instructions.
4. Warranty.

C. Samples:

1. Trees and Shrubs: Full sized of each variety and size. Deliver samples to project site and maintain samples for duration of construction period.
2. Organic and Compost Mulch: 1 L. (1 quart) sealed plastic bag of each required mulch, including label with percentage weight of each material and source representing material to be provided. Samples to match color, texture, and composition of installed material.
3. Mineral Mulch: 2.5 kg (5 lb.) sealed plastic bag of mulch, including label with source. Samples to match color, texture, and composition of installed material.
4. Filter Fabric: 300 by 300 mm (12 by 12 inches).
5. Edging Materials and Accessories: Manufacturer's standard sizes.
6. Tree Wrap: Width of panel by 300 mm (12 inches).

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
   a. Show type and quantity for each product.

E. Test reports: Certify products comply with specifications.

F. Certificates: Certify products comply with specifications.

1. Plant Materials: Department of Agriculture certification by State Nursery Inspector declaring material to be free from insects and disease.
2. Seed and Turf Materials: Notarized certificate of product analysis.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer, including supervisor with project experience list.

H. Operation and Maintenance Data:

1. Care instructions for each plant material.

1.7 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.
3. Member in good standing of either Professional Landcare Network or American Nursery and Landscape Association.
4. Personnel assigned to Work certified in one of following categories from Professional Landcare Network and submit one copy of certificate to Contracting Officer’s Representative:
   a. Certified Landscape Technician (CLT) - Exterior, with installation specialty areas, designated CLT-Exterior.
   b. Certified Landscape Technician (CLT) - Interior, designated CLT-Interior.
   c. Certified Ornamental Landscape Professional, designated COLP.

B. Licensed Arborist required to submit one copy of license to Contracting Officer’s Representative.

C. Independent or university laboratory, recognized by State Department of Agriculture, with experience and capability to conduct testing indicated and that specializes in types of tests to be performed.

D. Measure plants according to ANSI Z60.1. Pruning to obtain required sizes will not be permitted.

E. Contracting Officer’s Representative may review plant materials either at place of growth or project site before planting for compliance with requirements. Contracting Officer’s Representative retains right to inspect trees and shrubs to determine if any unacceptable conditions exist and to reject any trees or shrubs at any time during Project. All rejected trees and shrubs must be immediately removed from Project site.
   1. Submit plant material source information to Contracting Officer’s Representative seven days in advance of delivery to Project site.

F. Material Test Reports: For existing in-place surface soil and imported or manufactured topsoil.
   1. For each unamended soil type, provide soil analysis and written report by qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation

exchange capacity; sodium absorption ratio; deleterious material; pH; and mineral and plant-nutrient content of soil.

2. Comply with USDA's Handbook No. 60 testing methods and written recommendations.
3. Soil-testing laboratory to oversee soil sampling; with depth, location, and number of samples to be taken per instructions from Contracting Officer’s Representative. Take minimum 3 representative samples from varied locations for each soil to be used or amended for planting purposes.
4. Report suitability of tested soil for plant growth.
5. Based on test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 92.9 sq. m (1000 sq. ft.) or volume per 0.76 cu. m (1 cu. yd.) for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.
6. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.

1.8 DELIVERY

A. Deliver packaged products in manufacturer's original sealed packaging.

B. Bulk Products:

1. Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.
2. Install erosion control materials to prevent erosion or displacement of bulk products.

C. Apply antidesiccant to trees and shrubs according to manufacturer's instructions to protect during digging, handling, and transportation.

1. For deciduous trees or shrubs in full leaf, spray with antidesiccant at nursery before transporting and again two weeks after planting.

D. Wrap trees and shrubs with tree wrap according to manufacturer's instructions to protect from wind and other damage during digging, handling, and transportation.

E. Deliver bare-root stock plants freshly dug with root system packed in wet straw, hay, or similar material.

F. Deliver branched plants with branches tied and exposed branches covered with material that allows air circulation. Prevent damage to branches, trunks, root systems, and root balls and desiccation of leaves.

G. Use of equipment such as "tree spades" is permitted provided plant balls are sized according to ANSI Z60.1 and tops are protected from damage.

1.9 STORAGE AND HANDLING

A. Store bulbs, corms, and tubers in dry location at 16 to 18 degrees C (60 to 65 degrees F) until planting.

B. Store seeds and other packaged materials in dry locations away from contaminants.

C. Plant Storage and Protection: Store and protect plants not planted on day of arrival at Project site as follows:

1. Shade and protect plants in outdoor storage areas from wind and direct sunlight until planted.
2. Heel-in bare root plants.
3. Protect balled and burlapped plants from freezing or drying out by covering balls or roots with moist burlap, sawdust, wood chips, shredded bark, peat moss, or other approved material. Provide covering that allows air circulation.
4. Keep plants in moist condition until planted by watering with fine mist spray.
5. Do not store plant materials directly on concrete or bituminous surfaces.

D. Topsoil: Before stockpiling topsoil, eradicate on site undesirable growing vegetation. Clear and grub existing vegetation three to four weeks before stockpiling existing topsoil.

E. Root Control Barrier and Weed Control Fabric: Store materials in site in enclosures or under protective covering in dry location out of direct sunlight. Do not store materials directly on ground.

F. Handling: Do not drop or dump plants from vehicles. Avoid damaging plants being moved from nursery or storage area to planting site. Handle plants carefully to avoid damaging or breaking earth ball or root structure. Do not handle plants by trunk or stem. Puddle bare-root plants after removal from heeling-in bed to protect roots from drying out. Remove damaged plants from Project site.

1.10 FIELD CONDITIONS

A. Environment:

1. Coordinate installation of planting materials during optimal planting seasons for each type of plant material required.
2. Restrictions: Do not plant when ground is frozen, snow covered, muddy, or when air temperature exceed 32 degrees C (90 degrees F).

B. Weather Limitations: Install plantings only during current and forecasted weather conditions that are comply with plant requirements. Apply associated products in compliance with manufacturers' instructions.

1.11 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant plantings and against material defects.

1. Warranty Period: Two years.
2. Plant and Turf Warranty Periods will begin from date of Government acceptance of project or phase for beneficial use and occupancy.
3. Contracting Officer's Representative will reinspect plants and turf at end of Warranty Period. Replace any dead, missing, or defective plant material and turf immediately. Warranty Period will end on date of this inspection provided Contractor has complied with warranty work required by this specification. Comply with following requirements:
   a. Replace any plants more than 25 percent dead, missing or defective plant material before final inspection.
   b. Only one replacement of each plant will be required except when losses or replacements are due to failure to comply with these requirements.
   c. Complete remedial measures directed by Contracting Officer’s Representative to ensure plant and turf survival.
   d. Repair damage caused while making plant or turf replacements.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Provide each product from one source or manufacturer.

B. Sustainable Construction Requirements:
   1. Select products with recycled content to achieve overall Project recycled content requirement.
      a. Fertilizer.
      b. Weed control fabric.
      c. Root control barrier.
   2. Steel Recycled Content: 30 percent total recycled content, minimum.
   3. Aluminum Recycled Content: 80 percent total recycled content, minimum.
   4. Biobased Content:
      a. Organic Mulch: 100 percent.
      b. Peat: 100 percent.

2.2 PLANT MATERIALS

A. Plant Materials: ANSI Z60.1, conforming to varieties specified and be true to scientific name as listed in Hortus Third. Well-branched, well-formed, sound, vigorous, healthy planting stock free from disease, sunscald, windburn, abrasion, and harmful insects or insect eggs and having healthy, normal, and undamaged root system.
   1. Trees-Deciduous and Evergreen: Single trunked with single leader, unless otherwise indicated; symmetrically developed deciduous trees and shrubs of uniform habit of growth; straight boles or stems; free from objectionable disfigurements; evergreen trees and shrubs with well-developed symmetrical tops, with typical spread of branches for each particular species or variety. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed between two branches or between branch and trunk; crossing trunks; cut-off limbs more than 19 mm (3/4 inch) in diameter; or with stem girdling roots will be rejected.
   2. Ground Cover and Vine Plants: Provide number and length of runners for size specified on drawings, together with proper age for grade of plants specified. Provide vines and ground cover plants well established in removable containers, integral containers, or formed homogeneous soil sections. Provide plants grown under climatic conditions similar to those in locality of project. Spray all plants budding into leaf or having soft growth with an anti-desiccant at nursery before digging.

3. Provide plants of sizes indicated, measured before pruning with branches in normal position. Plants larger in size than specified is acceptable with approval of Contracting Officer’s Representative, with no change in contract price. When larger plants are used, increase ball of earth or spread of roots according to ANSI Z60.1.
4. Provide nursery grown plant material conforming to requirements and recommendations of ANSI Z60.1. Dig and prepare plants for shipment in manner that will not cause damage to branches, shape, and future development after planting.
5. Balled and burlapped (B&B) plant ball sizes and ratios will conform to ANSI Z60.1, consisting of firm, natural balls of soil wrapped firmly with burlap or strong cloth and tied.
6. Bare root (BR) plants to have root system substantially intact, but with earth carefully removed. Cover roots with thick coating of mud by "puddling" after plants are dug.
7. Container grown plants to have sufficient root growth to hold earth intact when removed from containers, but not be root bound.
8. Make substitutions only when plant (or alternates as specified) is not obtainable and Contracting Officer’s Representative authorizes change order providing for use of nearest equivalent obtainable size or variety of plant with same essential characteristics and an equitable adjustment of contract price.
9. Existing plants to be relocated: Ball sizes to conform to requirements for collected plants in ANSI Z60.1, and plants dug, handled, and replanted according to applicable articles of this Section.
10. Only plants grown in nursery are permitted.

B. Label plants with durable, waterproof labels in weather-resistant ink. Provide labels stating correct botanical and common plant name and variety and size as specified in list of required plants. Groups of plants may be labels by tagging one plant. Labels to be legible for minimum 60 days after delivery to planting site.

2.3 SOD

A. Sod: Nursery grown, certified and classified in TPI's "Guideline Specifications to Turfgrass Sodding" as GSS. Machine cut sod at uniform thickness of 19 mm (3/4 inch) within tolerance of 6 mm (1/4 inch), excluding top growth and thatch. Each individual sod piece to be strong

enough to support its own weight when lifted by ends. Broken pads, irregularly shaped pieces, and torn or uneven ends will not be permitted.

B. Sod Species: Genetically pure, free of weeds, pests, and disease.

2.4 SEED

A. Grass Seed: State-approved seed of latest season's crop delivered in original sealed packages, bearing producer's guaranteed analysis for percentages of mixtures, purity, germination, weed seed content, and inert material. Label in conformance with AMS Seed Act and applicable state seed laws. Wet, moldy, or otherwise damaged seed will not be acceptable. Field mixes will be acceptable when field mix is performed on site in presence of Contracting Officer's Representative.

B. Seed Mixtures: Proportion seed mixtures by weight.

2.5 TURF SELECTIONS

A. Grasses for Cool Regions:

1. Bentgrasses: Redtop (Agrostis alba) and Colonial (Agrostis tenuis).
2. Bluegrasses: Kentucky (Popratensis), Rough-stalked (Potrivialis) and Canada(Poa compressa).
3. Fescue: Red (Festucrubra), Meadow (Festucpratensis) and Tall (Festucarundinacea).
4. Ryegrasses: Perennial (Lolium perenne).

B. Grasses for Warm Regions:

1. Bermuda grass (Cynodon dactylon).
2. Carpetgrass (Axonopus affinis).
3. Centipedegrass (Eremochloophiuroides).
4. St. Augustinegrass (Stenotaphrum secundatum).
5. Zoysiagrass (Zoysimatrella).

2.6 SPRIGS

A. Sod Sprigs: Healthy living stems, stolons, or rhizomes and attached roots of locally adapted grass without adhering soil, including two to three nodes and from 100 to 150 mm (4 to 6 inches) long. Obtain from heavy, dense certified sod classified as TPI GSS. Obtain sprigs from designated area on project site. Provide sprigs grown under climatic conditions similar to those of project site. Coordinate harvesting and planting to prevent sun exposure for more than 30 minutes before

covering and moistening. Sprigs containing weeds or other detrimental material or that are heat damaged will be rejected.

2.7 PLUGS

A. Plugs: Nursery grown sod, certified and classified in TPI's "Guideline Specifications to Turfgrass Sodding" as GSS.

B. Square or round sections with deep, mature root system.

1. Species to match adjacent sod.
2. Plug Size: 50 mm (2 inches).

2.8 PLANTING SOILS

A. Planting Soil: Evaluate soil for use as topsoil according to ASTM D5268. From 5 to 10 percent organic matter as determined by topsoil composition tests of Organic Carbon, 6A, Chemical Analysis Method described in USDA DOA SSIR 42. Maximum particle size, 19 mm (3/4 inch), with maximum 3 percent retained on 6 mm (1/4 inch) screen. Mix topsoil with following soil amendments and fertilizers as recommended by soils analysis.

B. Existing Planting Soil: Existing, native surface topsoil formed under natural conditions retained during excavation process and stockpiled on-site. Verify suitability of native surface topsoil to produce viable planting soil. Clean soil of roots, plants, sod, stones, clay lumps, and other extraneous materials harmful to plant growth.

1. Supplement with another specified planting soil when quantities are insufficient.
2. Mix existing, native surface topsoil with soil amendments and fertilizers as recommended by soils analysis.

C. Imported Planting Soil: Imported topsoil or manufactured topsoil from off-site sources are acceptable if sufficient topsoil is not available on site to meet specified depth. At least 10 days before topsoil delivery, notify Contracting Officer’s Representative of topsoil sources. Obtain imported topsoil displaced from naturally well-drained construction or mining sites where topsoil is at least 100 mm (4 inches) deep. Topsoil from agricultural land, bogs, or marshes will be rejected.

2.9 INORGANIC SOIL AMENDMENTS

A. Lime: Commercial grade hydrated or burnt limestone containing calcium carbonate equivalent (CCE) specified in ASTM C602 of minimum 80 percent.

B. Sulfur: 100 percent elemental.

C. Iron Sulfate: 100 percent elemental.

D. Aluminum Sulfate: Commercial grade.

E. Perlite: Horticultural grade.

F. Agricultural Gypsum: Coarsely ground from recycled scrap gypsum board comprised of calcium sulfate dehydrate 91 percent, calcium 22 percent, sulfur 17 percent, minimum 96 percent passing through 850 micrometers 20 mesh screen, 100 percent passing through 970 micrometers 16 mesh screen.

G. Coarse Sand: ASTM C33/C33M, clean and free of materials harmful to plants.

H. Vermiculite: Horticultural grade for planters.

I. Diatomaceous Earth: Calcined, 90 percent silica, with approximately 140 percent water absorption capacity by weight.

J. Zeolites: Mineral clinoptilolite with at least 60 percent water absorption by weight.

2.10 ORGANIC SOIL AMENDMENTS

A. Organic Matter: Commercially prepared compost. Free of substances toxic to plantings and as follows:

1. Organic Matter Content: Wood cellulose fiber wood chips from project site when available. Biobased content 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting factors, dyed with non-toxic, biodegradable dye to appropriate color to facilitate visual metering of materials application.
2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.

B. Peat: Natural product of peat moss derived from fresh-water site, conforming to ASTM D4427 and containing no invasive species, including seeds. Shred and granulate peat to pass 12.5 mm (1/2 inch) mesh screen and condition in storage pile for minimum 6 months after excavation. Biobased content minimum 100 percent.

C. Composted Derivatives: Ground bark, nitolized sawdust, humus, or other green wood waste material free of stones, sticks, invasive species, including seeds, and soil stabilized with nitrogen and having following properties:
   1. Particle Size: Minimum percent by weight passing:
      a. 4.75 mm (No. 4) mesh screen: 95.
      b. 2.36 mm (No. 8) mesh screen: 80.
   2. Nitrogen Content: Minimum percent based on dry weight:
      a. Fir sawdust: 0.7.
      b. Fir or pine bark: 1.0.
   3. Biobased Content: 100 percent.

D. Manure: Well-rotted, horse or cattle manure containing maximum 25 percent by volume of straw, sawdust, or other bedding materials; free of seeds, stones, sticks, soil, and other invasive species.

2.11 PLANT FERTILIZERS

A. Soil Test: Evaluate existing soil conditions and requirements before fertilizer selection and application to minimize use of all fertilizers and chemical products. Obtain approval of Contracting Officer’s Representative for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable weather and site conditions according to manufacturer's instructions and warranty requirements. Fertilizers to be registered and approved by EPA, acceptable to authorities having jurisdiction, and of type recommended by manufacturer applicable to specific areas as required for Project conditions and application. Provide commercial grade plant and turf fertilizers, free flowing, uniform in composition and conforms to applicable state and federal regulations.

B. Fertilizer for groundcover, wildflowers, and grasses is not acceptable. Provide fertilizer for trees, plants, and shrubs as recommended by plant supplier, except synthetic chemical fertilizers are not acceptable. Fertilizers containing petrochemical additives or that have been treated with pesticides or herbicides are not acceptable.

C. Granular Fertilizer: Organic, granular controlled release fertilizer containing minimum percentages, by weight, of plant food nutrients.

1. Composition: Nitrogen, phosphorous, potassium, sulfur, and iron in amounts recommended in soil reports from qualified soil-testing laboratory.

D. Fertilizer Tablets: Organic plant tablets composed of tightly compressed fertilizer chips, insoluble in water, to provide continuous release of nutrients for minimum 24 months and containing following minimum percentages, by weight, of plant food nutrients:
   1. Nutrient Composition: 20 percent available nitrogen, 20 percent available phosphorous, and 5 percent available potassium.

2.12 WEED CONTROL FABRIC

A. Roll Type Polypropylene or Polyester Mats: Woven, needle punched, or non-woven fabric treated for protection against deterioration due to ultraviolet radiation. Minimum 99 percent opaque to prevent photosynthesis and seed germination, fabric allows air, water, and nutrients to pass through to plant roots.
   1. Minimum weight: 0.11 kg per square meter (5 ounces per square yard).
   2. Minimum thickness: 0.50 mm (20 mils).

2.13 MULCH

A. Organic Mulch:
   1. Wood cellulose fiber for project site when available. Biobased content minimum 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting factors, dyed with non-toxic, biodegradable dye to an appropriate color to facilitate visual metering of application.
      a. Straw for Lawn Seed Bed Mulch: Stalks from oats, wheat, rye, barley, or rice free of noxious weeds, mold or other objectionable material. Air dried and suitable for placing with blower equipment.
      b. Wood cellulose fiber for hydraulic application of grass seed and fertilizer: Specially prepared wood cellulose fiber, processed to contain no growth or germination inhibiting factors, and dyed an appropriate color to facilitate visual metering of application of materials. Maximum 12 percent moisture dry weight, plus or minus 3 percent at time of manufacture. pH range from 3.5 to 5.0. Manufacturer wood cellulose fiber for application as follows:

1) After addition and agitation in slurry tanks with fertilizers, grass seeds, water, and other approved additives, fibers will become uniformly suspended to form a homogeneous slurry.
2) When hydraulically sprayed, material will form blotter-like cover impregnated uniformly with grass seed.
3) Cover will allow absorption of moisture and allow rainfall or applied water to percolate to underlying soil.

2. Color: Natural.

B. Compost Mulch: Decomposed organic matter with low carbon to nitrogen ratio.

C. Mineral Mulch: Coarse, clean stone of following type, size, and color:
1. Type: Pea gravel.
2. Size: ASTM C136/C136M, 65 mm (2-1/2 inches) maximum and 25 mm (1 inch) minimum.
3. Color: Acceptable to Contracting Officer’s Representative.

2.14 ANTIDESICCANT

A. Antidesiccant: An emulsion specifically manufactured for agricultural use that will provide protective film over plant surfaces permeable enough to permit transpiration.

2.15 EROSION CONTROL

A. Erosion Control Blankets: 100 percent agricultural straw stitched with degradable nettings, designed to degrade within 12 months.

B. Erosion Control Fabric: Knitted construction of polypropylene yarn with uniform mesh openings 19 to 25 mm (3/4 to 1 inch) square with strips of biodegradable paper. Minimum filler paper strip life of six months.

C. Erosion Control Net: Heavy, twisted jute mesh weighing approximately 605 grams per meter (1.22 pounds per linear yard) and 1200 mm (4 feet) wide with mesh openings approximately 25 mm (1 inch) square.

D. Erosion Control Material Anchors: As recommended by erosion control material manufacturer.

2.16 ROOT CONTROL BARRIER

A. Root Control Barrier: Flexible and permeable geotextile fabric with permanently attached time-release nodules. Pre-formed round, tapered cylinder barrier with integral vertical root deflecting ribs constructed of ultraviolet resistant polypropylene material.

2.17 TACKIFIERS AND ADHESIVES

A. Non-asphalt Tackifier: Colloidal liquid fixative recommended by fiber mulch manufacturer for hydroseeding.

B. Asphalt emulsion: ASTM D977, Grade SS-1.

2.18 WATER

A. Water: Source approved by Contracting Officer's Representative and suitable quality for irrigation, containing no elements toxic to plant life, including acids, alkalis, salts, chemical pollutants, and organic matter. Use collected storm water or graywater when available.

2.19 PESTICIDES

A. Consider IPM (Integrated Pest Management) practices to minimize use of all pesticides and chemical products. Obtain Contracting Officer's Representative's approval for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable weather and site conditions according to manufacturer's instructions and warranty requirements.

2.20 FINISHES

A. Steel Paint Finish:

1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of following:

a. One coat primer.

b. One coat thermosetting topcoat.

c. Dry-film Thickness: 0.05 mm (2 mils) minimum.

d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

B. Aluminum Anodized Finish: NAAMM AMP 500.

1. Color Anodized Finish: AA-C22A32 or AA-C22A34; Class II Architectural, 0.01 mm (0.4 mil) thick.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas to receive plants for compliance with requirements and conditions affecting installation and performance.

1. Verify that no materials that would inhibit plant growth are present in planting area. If such materials are present, remove soil and

contaminants ad directed by Contracting Officer's Representative and provide new planting soil.

2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
3. Suspend soil spreading, grading, and tilling operations if soil moisture becomes excessive. Resume soil preparations when moisture content returns to acceptable level.
4. If soil is excessively dry, not workable, and too dusty, moisten uniformly.
5. Special conditions may exist that warrant variance in specified planting dates or conditions. Submit written request to Contracting Officer’s Representative stating special conditions and proposed variance.

B. Proceed with planting operations only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Protect existing and proposed landscape features, elements, and site construction and completed work from damage. Protect trees, vegetation, and other designated features by erecting high-visibility, reusable construction fencing. Locate fence no closer to trees than drip line. Plan equipment and vehicle access to minimize and confine soil disturbance and compaction to areas indicated on drawings.

B. Install erosion control materials at all areas inside or outside limits of construction that are disturbed by planting operations. Provide erosion control and seeding with native plant species to protect slopes.

C. Stake out approved plant material locations and planter bed outlines on project site before digging plant pits or beds. Contracting Officer’s Representative reserves right to adjust plant material locations to meet field conditions. Do not plant closer than 900 mm (36 inches) to building wall and other similar structures. Provide on-site locations for excavated rock, soil, and vegetation.

3.3 PLANT BED PREPARATION

A. Verify location of underground utilities before excavation. Protect existing adjacent turf before excavations are made. Do not disturb topsoil and vegetation in areas outside those indicated on Drawings.

Where planting beds occur in existing turf areas, remove turf to depth that will ensure removal of entire roof system. Measure depth of plant pits from finished grade. Provide depth of plant pit excavation and relation of top of root ball and finish grade as indicated on drawings. Install plant materials as specified in Article 3.8. Do not plant trees within 3 m (10 feet) of any utility lines or building walls.

B. For newly graded subgrades, loosen subgrade to minimum 100 mm (4 inches) deep. Remove stones larger than 50 mm (2 inches) in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Government's property.
   1. Apply fertilizer and soil amendments directly to subgrade before loosening, at rates recommended by soils analysis.
   2. Spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly blend planting soil.
   3. Spread planting soil 100 mm (4 inches) deep but minimum required to meet finish grades after light rolling and natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.
      a. Spread approximately 1/2 thickness of planting soil over loosened subgrade. Mix thoroughly into top 50 mm (2 inches) of subgrade. Spread remainder of planting soil.
      b. Reduce elevation of planting soil to allow for soil thickness of sod.

C. Finish grade planting areas to smooth, uniform surface plane with loose, uniformly fine texture. Grade to within plus or minus 13 mm (1/2 inch) of finish elevation. Roll and rake, remove ridges, and fill depressions to meet finish grades. Limit finish grading to areas that can be planted in immediate future.

3.4 GROUND COVER AND PLANT INSTALLATION

A. Place ground cover and plants, not including trees, shrubs, and vines, 300 mm (12 inches) apart as indicated on drawings in even rows and with triangular spacing.

B. Use prepared soil mixture for backfill.

C. Place so roots are in natural position.

D. Do not remove plants from flats or containers until immediately before planting. Plat at depth to sufficiently cover all roots. Start watering areas planted as required by temperature and wind conditions. Water

plants at sufficient rate to ensure thorough wetting of soil to 150 mm (6 inches) deep without runoff or puddling. Smooth planting areas after planting to provide even, smooth finish.

E. Plant ground cover in areas to receive erosion control materials through material after erosion control materials are in place.

3.5 TREE, SHRUB, AND VINE PLANTING

A. Move plant materials only by supporting root ball container. Set plants on hand compacted layer of prepared backfill soil mixture 150 mm (6 inches) thick and hold plumb in center of pit until soil has been tamped firmly around root ball.

B. Set plant materials in relation to surrounding finish grade 25 to 50 mm (1 to 2 inches) above depth at which they were grown in nursery, collecting field, or container. Replace plant material whose root balls are cracked or damaged either before or during planting process.

C. Place backfill soil mixture on previously scarified subsoil to completely surround root balls and bring to smooth and even surface, blending into existing areas.

D. Balled and Burlapped Stock: Backfill with topsoil to approximately half ball depth then tamp and water. Carefully remove or fold back excess burlap and tying materials from top to minimum 1/3 depth from top of root ball. Tamp and complete backfill, place mulch topdressing, and water. Remove wires and non-biodegradable materials from plant pit before backfilling.

3.6 MECHANIZED TREE SPADE PLANTING

A. At designated locations and with approved equipment, trees may be planted by mechanized tree spade. Tree spade is not acceptable for moving trees that are larger than maximum size of similar field-grown, balled-and-burlapped root-ball diameter recommended by ANSI Z60.1, or that are larger than manufacturer's recommended maximum size for tree spade to be used, whichever is smaller.

B. For tree extraction, center trunk in tree spade and move tree and solid root ball.

C. Cut any exposed roots with sharp instruments.

D. Excavate planting hole with same tree spade used to extract and move tree.

E. If possible, place trees with same orientation as at location from which they were extracted.

3.7 TREE AND SHRUB PRUNING

A. Pruning: Performed by trained and experience personnel according to TCIA A300P1.

B. Remove dead and broken branches. Prune only to correct structural defects.

C. Retain typical growth shape of individual plants with as much height and spread as practical. Do not central leader on trees. Make cuts with sharp instruments. Do not flush cut with trunk or adjacent branches. Collars to remain in place.

D. Do not apply tree wound dressing to cuts.

3.8 STAKING AND GUYING

A. Staking: Stake plants with number of stakes indicated on drawings with double strand of guy wire. Attach guy wire at half tree trunk height but maximum 1.5 m (5 feet) high. Drive stakes to depth of 0.80 to 0.91 m (2-1/2 to 3 feet) into the ground outside plant pit. Do not injure root ball. Install hose chafer guards where wire is in contact with tree trunk.

B. Guying: Guy plants as indicated on drawings. Attach two strands of guy wire around tree trunk at 0.785 rad (45 degrees) at half tree trunk height. Install hose chafer guards where wire is in contact with tree trunk. Anchor guys to ground stakes. Fasten flags to each guying wire at 2/3 of the distance above ground level. Provide turnbuckles as indicated on drawings.

3.9 ROOT CONTROL BARRIER INSTALLATION

A. At trees planted within 1500 mm (60 inches) of paving, walls, curbs, and walkways, install root control barrier, unless otherwise shown on Drawings.

B. Install geotextile fabric in soil for surrounding application with appropriate holding device to ensure fabric position. For vertical and horizontal application, provide minimum 50 mm (2 inch) soil cover over surface. Extend fabric minimum 450 mm (18 inches) beyond structure area to be protected to prevent root growth around fabric edges.

C. Install polypropylene barrier minimum 25 mm (1 inch) above finished grade to prevent root growth over barrier. Backfill outside barrier

with 19 to 25 mm (3/4 to 1 inch) of gravel for minimum 50 mm (2 inches). For linear application, use device recommended by barrier manufacturer to connect two pieces.

3.10 MULCH INSTALLATION

A. Provide specified mulch over entire planting bed surfaces and individual plant surfaces, including earth mount watering basin around plants, to 75 mm (3 inches) depth after plant installation and before watering. Do not place mulch in crowns of shrubs. Place mulch minimum 50 to 75 mm (2 to 3 inches) away from tree or shrub trunks. Place mulch on all weed control fabric.

3.11 EDGING INSTALLATION

A. Uniformly edge beds of plants to provide clear cut division line between planted area and adjacent lawn. Construct bed shapes as indicated on drawings.

B. Metal Edging: Install edging material according to manufacturer's instructions.

C. Natural Cut Edging: Provide uniform ‘V’ cut with one vertical side adjacent to turf areas 125 mm (5 inches) deep and second side angled 250 mm (10 inches) toward center of plant bed for clear cut division line between plant bed and adjacent lawn.

3.12 SODDING

A. Place sod maximum 36 hours after initial harvesting according to TPI GSS, except as modified herein.

B. For slopes 2 to 1 and greater, lay sod with long edge perpendicular to contour. For V-ditches and flat bottomed ditches, lay sod with long edge perpendicular to water flow. Anchor each piece of sod with wood pegs or wire staples maximum 600 mm (24 inches) on center. On sloped areas, start sodding at bottom of slope.

C. Finishing: After sodding, blend edges of sodded area smoothly into surrounding area. Eliminate air pockets and provide true and even surface. Trim frayed areas and patch holes and missing areas with sod.

D. Rolling: Immediately after sodding, firm entire area, except slopes in excess of 3: 1, with roller maximum 134 kg (90 lbs.) for each foot of roller width.

E. Watering: Start watering sodded areas as required by daily temperature and wind conditions. Water at rate sufficient to ensure thorough

wetting of soil to minimum 150 mm (6 inches) deep. Prevent run-off, puddling, and wilting. Do not drive watering trucks over turf areas, unless otherwise directed. Prevent watering of other adjacent areas or plant materials.

3.13 SPRIGGING

A. Plant sod sprigs after finish grade is properly prepared and thoroughly soaked day in advance. Plant sprigs in rows spaced maximum 300 mm (12 inches) apart with springs placed in rows at maximum 150 mm (6 inches) apart. Firm entire area with roller not exceeding 130 kg/m (90 lb./ft.) of roller width. Do not roll slopes over maximum 3: 1. Water thoroughly and keep soil moist. Weed by hand or hoe. Do not treat sprig area with herbicide.

3.14 PLUGGING

A. Plant fresh sod plugs after finish grade is properly prepared. Plant plugs in rows, spaced 300 mm (12 inches) apart in both directions. On slopes, contour rows to near level. Water thoroughly and keep soil moist. Weed by hand or hoe. Do not treat plug area with herbicide.

3.15 SEEDING

A. Broadcast and Drop Seeding: Uniformly broadcast seed at rate of 5 pounds per 1000 square feet. Use broadcast or drop seeders. Sow one-half seed in one direction and sow remainder at right angles to first sowing. Cover seed uniformly to maximum 6 mm (1/4 inch) deep in clay soils and 13 mm (1/2 inch) deep in sandy soils by means of spike-tooth harrow, cultipacker, raking, or other approved device.

B. Drill Seeding: Drill seed uniformly to 13 mm (1/2 inch) deep.

C. Rolling: Immediately after seeding, firm entire area, except for slopes in excess of 3 to 1, with roller not exceeding 130 kg/m (90 lb./ft.) of roller width.

3.16 HYDROSEEDING

A. Mix water with wood cellulose fiber, paper fiber, or recycled paper at rate of 11.2 kg per 100 square meters (1,000 lb. per acre) dry weight. Add seed and fertilizer to fiber and water and mix to produce homogeneous slurry.

1. Broadcast seed mixture at rate of 5 pounds per 1000 square feet

2. Hydraulically spray slurry to form uniformly impregnated grass seed cover. Spread with one application with no second application of mulch.

3.17 TURF RENOVATION

A. General: Restore to original condition existing turf areas damaged during turf installation and construction operations. Keep at least one paved pedestrian access route and one paved vehicular access route to each building clean at all times. Clean other paving when work in adjacent areas is complete.

B. Aeration: Eradicate weeds and, with Contracting Officer's Representative's approval to proceed, aerate turf areas with approved device. Leave all soil plugs that are produced, in turf area. After aeration operations are complete, topdress entire area 12.7 mm (1/2 inch) deep. Blend all parts of topdressing mixture to uniform consistency. Clean all soil plugs off of other paving when work is complete.

C. Vertical Mowing: At completion of aerating and, with Contracting Officer's Representative's approval to proceed, vertical mow turf areas indicated on drawings with approved device to 13 mm (1/2 inch) deep above existing soil level to reduce thatch build-up, grain, and surface compaction. Remove all debris generated during this operation off site.

D. Dethatching: At completion of aerating and, with Contracting Officer's Representative's approval to proceed, dethatch turf areas indicated on drawings with approved device to 13 mm (1/2 inch) deep below existing soil level to reduce thatch build-up, grain, and surface compaction. Remove all debris generated during this operation off site.

E. Overseeding: Apply seed according to applicable portions of "Seed Application Method" at rates specified in "Seed Composition."

3.18 PLANT MAINTENANCE

A. Frequency: Begin maintenance immediately after plants have been installed. Inspect plants at least once week and perform required maintenance promptly.

B. Promotion of Plant Growth and Vigor: Water, prune, fertilize, mulch, eradicate weeds, and perform other operations necessary to promote plant growth and vigor.

C. Planter Beds: Weed, fertilize, and irrigate planter beds and keep pest free, pruned, and mulch levels maintained. Do not permit planter beds encroach into turf areas. Maintain edging breaks between turf areas and planter beds. Fertilize plant materials to promote healthy growth without encouraging excessive top foliar growth. Remove noxious weeds common to area from planter beds by mechanical means.

D. Shrubs: In addition to planter bed maintenance requirements, selectively prune and shape shrubs for health and safety when following conditions exist:

1. Remove growth in front of windows, over entrance ways or walks, and any growth which will obstruct vision at street intersections or of security personnel.
2. Remove dead, damaged, or diseased branches or limbs where shrub growth obstructs pedestrian walkways, where shrub growth is growing against or over structures, and where shrub growth permits concealment of unauthorized persons.
3. Properly dispose of all pruning debris.

3.19 SLOPE EROSION CONTROL MAINTENANCE

A. Provide slope erosion control maintenance to prevent undermining of all slopes in newly landscaped natural growth areas. Maintenance tasks include immediate repairs to weak spots in sloped areas and maintaining clean, clear culverts and graded berms and terraces to intercept and direct water flow to prevent development of large gullies and slope erosion and securing irrigation systems during periods of extended rainfall.

1. Fill eroded areas with amended topsoil and replant with same plant species.
2. Reinstall erosion control materials damaged due to slope erosion.

3.20 REMOVAL OF DYING OR DEAD PLANTS

A. Remove dead and dying plants and provide new plants immediately upon commencement of specified planting season and replace stakes, guys, mulch, and eroded earth mound water basins. No additional correction period will be required for replacement plants beyond original warranty period. Plants will be considered dead or dying as follows:

1. Tree: Main leader died back or minimum 20 percent of crown died.

2. Shrub and Ground Cover: Minimum 20 percent of plant died.
3. Determination: Scrape on maximum 2 mm (1/16 inch) square branch area to determine dying plant material cause and provide recommendations for replacement.

3.21 TURF MAINTENANCE

A. Mow turf to uniform finished height measured from soil. Perform mowing in manner that prevents scalping, rutting, bruising, uneven and rough cutting. Before mowing, remove and dispose of all rubbish, debris, trash, leaves, rocks, paper, and limbs or branches on turf areas. Sweep or vacuum clean adjacent paved areas.

B. Apply fertilizer in manner that promotes health, growth, vigor, color and appearance of cultivated turf areas. Determine method of application, fertilizer type and frequencies by results of laboratory soil analysis. Provide organic fertilizer. If organic fertilizer does not produce desired effect, contact Contracting Officer's Representative for approval before applying synthetic fertilizer. Apply fertilizer by approved methods and according to manufacturer's instructions.

C. Watering: Perform irrigation in manner that promotes health, growth, color, and appearance of cultivated vegetation, complying with Federal, State, and local water agency and authority directives. Prevent overwatering, water run-off, erosion, and ponding due to excessive quantities or rate of application.

D. Aeration: Eradicate weeds and, with Contracting Officer's Representative's approval to proceed, aerate turf areas with approved device. Leave all soil plugs that are produced, in turf area. Clean all soil plugs off of other paving when work is complete.

3.22 CLEANING

A. Remove and legally dispose of all excess soil and planting debris.

3.23 PROTECTION

A. Protect plants from traffic and construction operations.

B. Provide temporary fences or enclosures and signage, at planted areas. Maintain fences and enclosures during maintenance period.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

REISSUED 02-18-2026

SECTION 33 08 00

COMMISSIONING OF SITE UTILITY SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 31.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning the Facility site utilities systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 31 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 and of Division 31, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility site utilities systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of Site Utility systems will require inspection of individual elements of the site utility systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule site utility systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the

type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 31 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the VA Resident Engineer after submission and approval of formal training plans. Refer to Section 01

91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 31 Sections for additional Contractor training requirements.

----- END -----

SECTION 33 10 00

WATER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and procedures for construction of underground water distribution for domestic and/or fire supply systems outside the building that are complete and ready for operation. This includes piping, structures, appurtenances and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. Concrete: Section 03 30 00, CAST IN-PLACE CONCRETE.

C. Fire Protection System connection: Section 21 13 13, WET-PIP SPRINKLER SYSTEMS.

D. General plumbing: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

E. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

F. Metering: Section 25 10 10, ADVANCED UTILITY METERING SYSTEM.

G. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

A. Water distribution system: Pipelines and appurtenances which are part of the distribution system outside the building for potable water and fire supply.

B. Water service line: Pipeline from main line to 5 feet outside of building.

1.4 ABBREVIATIONS

A. DI: Ductile iron pipe.

B. WOG: Water, Oil and Gas.

1.5 DELIVERY, STORAGE AND HANDLING

A. Ensure that valves are dry and internally protected against rust and corrosion. Protect valves against damage to threaded ends and flange faces.

B. Use a sling to handle valves and fire hydrants if size requires handling by crane or lift. Rig valves to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

C. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.

D. Protect stored piping from moisture and dirt by elevating above grade. Protect flanges, fittings, and specialties from moisture and dirt.

E. Store plastic piping protected from direct sunlight and support to prevent sagging and bending.

F. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.

1.6 COORDINATION

A. Coordinate connection to water main with Public Utility company.

B. Coordinate water service lines with building contractor.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

B. Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least three years.

C. Regulatory requirements:

1. Comply with the rules and regulations of the public utility company having jurisdiction over the connection to public water lines and the extension and/or modifications to public utility systems.

2. Comply with the rules and regulations of the Federal, State and/or Local Health Department having jurisdiction for potable water-service.
3. Comply with rules and regulations of Federal, State and/or Local authorities having jurisdiction for fire-suppression water-service piping including materials, hose threads, installation and testing.

D. Provide certification of factory hydrostatic testing of not less than 500 psi (3.5 MPa) in accordance with AWWA C151. Piping materials shall bear the label, stamp or other markings of the specified testing agency.

E. Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the American Welding Society.

F. Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation.

G. Applicable codes:
1. Plumbing Systems: IPC, International Plumbing Code.
2. Electrical components, devices and accessories shall be listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction and marked for intended use.
3. Fire-service main products shall be listed in the FM Global “Approval Guide” or Underwriters Laboratories (UL) “Fire Protection Equipment Directory”.

1.8 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI):

MSS SP-60-2004 .....Connecting Flange Joint Between Tapping Sleeves and Tapping Valves

MSS SP-108-2002.....Resilient-Seated Cast Iron, Eccentric Plug Valves

MSS SP-123-1998(R2006)..Non-Ferrous Threaded and Solder-Joint Unions for Use With Copper Water Tube

C. American Society of Mechanical Engineers (ASME):

A112.1.2-2004.....Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors))

A112.6.3-2001.....Floor Drains

B16.1-2010.....Gray Iron Pipe Flanges and Flanged Fittings, Class 25, 125, 250

B16.18-2001.....Cast Copper Alloy Solder Joint Pressure Fittings

B16.22-2001.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings

B16.24-2006.....Cast Copper Alloy Pipe Flanges and Flanged Fittings; Classes 150, 300, 600, 900, 1500 and 2500

B31.....Code for Pressure Piping Standards

D. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Carbon Structural Steel

A48/A48M-08(2008).....Gray Iron Castings

A536-84(2009).....Ductile Iron Castings

A674-10.....Polyethylene Encasement for Ductile Iron Pipe for Water or Other Liquids

B61-08.....Steam or Valve Bronze Castings

B62-09.....Composition Bronze or Ounce Metal Castings

B88/B88M-09.....Seamless Copper Water Tube

C651-05.....Disinfecting Water Mains

C858-10e1.....Underground Precast Utility Structures

F1267-07.....Metal, Expanded, Steel

E. American Water Works Association (AWWA):

B300-10.....Hypochlorites

B301-10.....Liquid Chlorine

C104-08.....Cement-Mortar Lining for Ductile Iron Pipe and Fittings

C105/A21.5-10.....Polyethylene Encasement for Ductile Iron Pipe Systems

C110-08.....Ductile Iron and Gray-Iron Fittings

C111/A21.11-07.....Rubber-Gasket Joints for Ductile Iron Pressure Pipe and Fittings

C115/A21.11-11.....Flanged Ductile Iron Pipe with Ductile Iron or Gray-Iron Threaded Flanges

C151/A21.51-09.....Ductile Iron Pipe, Centrifugally Cast

C153/A21.53-11.....Ductile Iron Compact Fittings for Water Service

C502-05.....Dry-Barrel Fire Hydrants

C503-05.....Wet-Barrel Fire Hydrants

C504-10.....Rubber-Seated Butterfly Valves

C508-09.....Swing-Check Valves for Waterworks Service, 2-In. Through 24-In. (50-mm Through 600-mm) NPS

C509-09.....Resilient-Seated Gate Valves for Water Supply Service

C510-07.....Double Check Valve Backflow Prevention Assembly

C511-07.....Reduced-Pressure Principle Backflow Prevention Assembly

C512-07.....Air Release, Air/Vacuum and Combination Air Valves

C550-05.....Protective Interior Coatings for Valves and Hydrants

C600-10.....Installation of Ductile Iron Mains and Their Appurtenances

C606-11.....Grooved and Shouldered Joints

C651-05.....Disinfecting Water Mains

C700-09.....Cold-Water Meters, "Displacement Type," Bronze Main Case

C800-05.....Underground Service Line Valves and Fittings

C906-07.....Polyethylene (PE) Pressure Pipe and Fittings, 4 In. (100 mm) Through 64 In. (1,600 mm), for Water Distribution and Transmission

M44-2nd Ed.....Distribution Valves: Selection, Installation, Field Testing and Maintenance

F. National Fire Protection Association (NFPA):

NFPA 24-2010 Ed.....Installation of Private Fire Service Mains and Their Appurtenances

NFPA 1963-2009 Ed.....Fire Hose Connections

G. NSF International (NSF):

NSF/ANSI 14 (2013).....Plastics Piping System Components and Related Materials

NSF/ANSI 61-2012.....Drinking Water System Components - Health Effects

NSF/ANSI 372-2011.....Drinking Water System Components – Lead Content

H. American Welding Society (AWS):

A5.8/A5.8M-2004 .....Filler Metals for Brazing and Braze Welding

I. American Society of Safety Engineers (ASSE):

1003-2009 .....Water Pressure Reducing Valves

1015-2009.....Double Check Backflow Prevention Assemblies and Double Check Fire Protection Backflow Prevention Assemblies

1020-2004.....Pressure Vacuum Breaker Assembly

1047-2009.....Performance Requirements for Reduced Pressure Detector Fire Protection Backflow Prevention Assemblies

1048-2009.....Performance Requirements for Double Check Detector Fire Protection Backflow Prevention Assemblies

1060-2006.....Performance Requirements for Outdoor Enclosures for Fluid Conveying Components

J. Underwriters' Laboratories (UL):

246.....Hydrants for Fire-Protection Service

262.....Gate Valves for Fire-Protection Service

312.....Check Valves for Fire-Protection Service

405.....Fire Department Connection Devices

753.....Alarm Accessories for Automatic Water-Supply Control Valves for Fire Protection Service

789.....Indicator Posts for Fire-Protection Service

1091.....Butterfly Valves for Fire-Protection Service

1.9 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the

Contractor will furnish all manufacturers' and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption, and shall be certified in accordance with NSF/ANSI 61 or NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements. The contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.3 SAFETY GUARDS

A. All equipment shall have moving parts protected to prevent personal injury. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gauge sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 1/4 inch (6 mm) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.

2.4 LIFTING ATTACHMENTS

A. Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.5 DUCTILE IRON PIPE AND FITTINGS

A. Mechanical-Joint, Ductile-Iron Pipe: AWWA C151, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated, 350 psi (2400 kPa).

1. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.

2. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.

B. Push-on-Joint, Ductile-Iron Pipe: AWWA C151, with push-on-joint bell and plain spigot end unless grooved or flanged ends are indicated, 350 psi (2400 kPa).
   1. Gaskets: AWWA C111, rubber.

C. Flanged Ductile Iron Pipe: AWWA C115/A21.11, with factory applied screwed long hub flanges.
   1. Flanges: ASME B16.1 for 250 psi (1725 kPa) pressure ratings, as necessary.
   2. Wall Sleeve Castings, size and types shown on the drawings, shall be hot dipped galvanized per ASTM A123.
   3. Pipe and fittings exposed to view in the finished work are to be painted in accordance with Section 09 91 00, PAINTING. Pipe shall be shop primed with one coat of rust inhibitive primer. Final paint color shall match the final wall color.

D. Cement Mortar Internal Lining: Cement mortar lining and bituminous seal coat as per AWWA C104.

E. Exterior Pipe Coating: The exterior of pipe shall have the standard asphaltic coating.

F. From inside face of exterior wall to approximately 1500 mm (5 feet) outside of building and underground inside building, material to be the same for the size specified inside the building.

G. Provide flanged and anchored connection to interior piping.

2.6 VALVES

A. Gate Valves: AWWA C509, Non-rising Stem, Resilient Seat, 200 psi (1380 kPa).
   1. Valves 3 inches (75 mm) and larger: Resilient seat valve with gray- or ductile iron body and bonnet; cast iron or bronze double-disc gate; bronze gate rings; non-rising bronze stem and stem nut.
   2. Interior and exterior coating: AWWA C550, thermo-setting or fusion epoxy.
   3. Underground valve nut: Furnish valves with 2 inch (50 mm) nut for socket wrench operation.
   4. Aboveground and pit operation: Furnish valves with hand wheels.

5. End connections shall be mechanical joint.
6. Valve Boxes: AWWA M44 with top section, adjustable extension of length required for depth of burial of valve, plug with lettering "WATER," and bottom section with base that fits over valve and with a barrel.
7. Operating Wrenches: Steel, tee-handle with one pointed end, stem of length to operate deepest buried valve, and socket matching valve operating nut. (Provide two wrenches for Project.)
8. Indicator Posts: UL 789, FMG approved, vertical-type, cast iron body with operating wrench, extension rod, and adjustable cast iron barrel of length required for depth of burial of valve.
9. Shutoff Rods: Steel, tee-handle with one pointed end. Stem length shall extend 2 feet (600 mm) above top of valve box for operation of deepest buried valve, with slotted end matching curb valve.

B. Post-Indicator: NFPA 24 and be fully compatible with the valve and supervisory switches. The post shall feature a factory-applied red epoxy coating. The post shall include integral “OPEN” and “SHUT” target plates and a mounting provision for a supervisory switch. Provide and install a UL/FM-listed supervisory switch for valve position monitoring in accordance with NFPA 72.

2.7 PROTECTIVE ENCLOSURES

A. Freeze-Protection Enclosures: Designed to protect aboveground water piping, equipment, or specialties from freezing and damage, with heat source to maintain minimum internal temperature of 40 deg F (4 deg C) when external temperatures reach as low as minus 34 deg F (minus 36 deg C) meeting the requirements of ASSE 1060.
   1. Class I, for equipment or devices other than pressure or atmospheric vacuum breakers.
   2. Reinforced aluminum or fiberglass Housing with dimensions indicated, but not less than those required for access and service of protected unit. Include a drain opening for units with drain connection; access doors with locking devices; insulation inside housing; and anchoring devices for attaching the housing to the concrete base.
   3. Include an electric heating cable or heater with self-limiting temperature control.

B. Weather-Resistant Enclosures: Un-insulated enclosure designed to protect aboveground water piping, equipment, or specialties from weather and damage meeting the requirements of ASSE 1060.
   1. Class III, for equipment or devices other than pressure or atmospheric vacuum breakers.
   2. Provide reinforced aluminum or fiberglass housing with dimensions indicated, but not less than those required for access and service of protected unit. Include a drain opening for units with drain connection; access doors with locking devices; insulation inside housing; and anchoring devices for attaching the housing to the concrete base.
C. Expanded-Metal Enclosures: ASTM F1267; designed to protect aboveground water piping, equipment, or specialties from damage; expanded metal side and top panels, of weight and with reinforcement of same metal at edges as required for rigidity.
   1. Type II, expanded and flattened.
   2. Class 3, corrosion-resisting steel.
D. Enclosure Bases: 6 inch (150 mm) minimum thickness precast concrete, extending at least 6 inches (150 mm) beyond edges of enclosure housings. Include openings for piping.

2.8 FLUSHING HYDRANTS

A. Post-Type Flushing Hydrants: Non-freeze and drainable, of length required for shutoff valve installation below frost line.
   1. Pressure Rating: 150 psi (1035 kPa) minimum
   2. Outlet: One, with horizontal discharge
   3. Hose Thread: NPS 2-1/2 (DN 65), with NFPA 1963 external hose thread for use by local fire department, and with cast iron cap with brass chain
   4. Barrel: steel pipe with breakaway feature
   5. Valve: Bronze body with bronze-ball or plunger closure , and automatic draining
   6. Security: Locking device for padlock
   7. Exterior Finish: Red alkyd-gloss enamel paint.
   8. Inlet: NPS 2 (DN 50) minimum
   9. Operating Wrench: One for each unit

B. Ground-Type Flushing Hydrants: Non-freeze and drainable, of length required for shutoff valve installation below frost line.
   1. Pressure Rating: 150 psi (1035 kPa) minimum
   2. Outlet: One, with angle discharge
   3. Hose Thread: NPS 2-1/2 (DN 65), with NFPA 1963 external hose thread for use by local fire department, and with cast iron cap with brass chain
   4. Barrel: steel pipe
   5. Valve: Bronze body with bronze-ball or plunger closure, and automatic draining
   6. Inlet: NPS 2 (DN 50) minimum
   7. Hydrant Box: Cast iron with cover, for ground mounting
   8. Operating Wrench: One for each unit

C. Post-Type Sampling Station: Non-freeze and drainable, of length required for shutoff valve installation below frost line.
   1. Pressure Rating: 100 psi (690 kPa) minimum
   2. Sampling Outlet: One unthreaded nozzle with handle
   3. Valve: Bronze body with bronze-ball or plunger closure. Include operating handle.
   4. Drain: Tubing with separate manual vacuum pump
   5. Inlet: NPS 3/4 (DN 20) minimum
   6. Housing: Weatherproof material with locking device. Include anchor device
   7. Operating Wrench: One for each unit

2.9 FIRE DEPARTMENT CONNECTIONS

A. Fire system base water supply must provide a minimum of 1000 gpm (3785 l/m) at 150 psi (1035 kPa) and 700 gpm (2650 l/m) at 200 psi (1380 kPa) at the Fire Department connection. For hydraulic calculations, the calculated demand shall not fall less than 10 percent below the water supply curve.

B. Fire Department connections: UL 405, NFPA 1963, exterior wall mounted, cast bronze body, thread inlets, and matching local fire department hose threads, threaded bottom outlet, lugged caps, gaskets, and chains; lugged swivel connection and drop clapper for each hose-connection inlet; 18 inch (460 mm) high brass sleeve; round escutcheon plate, meeting the requirements of UL 405.

1. Connections: Two NPS 2-1/2 (DN 65) inlets and one NPS 4 (DN 100) outlet.
2. Inlet Alignment: inline, horizontal
3. Finish Including Sleeve: Polished bronze
4. Escutcheon Plate Marking: “AUTO SPKR” & “STANDPIPE”

2.10 ALARM DEVICES

A. Alarm Devices-General: UL 753 and FMG approved, of types and sizes to mate and match piping and equipment.

B. Water-Flow Indicators: Vane-type water-flow detector, rated for 250-psi (1725-kPa) working pressure; designed for horizontal or vertical installation; 2 single-pole, double-throw circuit switches to provide isolated alarm and auxiliary contacts, 7 A, 125-V ac and 0.25 A, 24-V dc; complete with factory-set, field-adjustable retard element to prevent false signals and tamperproof cover that sends signal when cover is removed.

C. Supervisory Switches: Single pole, double throw; designed to signal valve in other than fully open position.

D. Pressure Switches: Single pole, double throw; designed to signal increase in pressure.

2.11 DISINFECTION CHLORINE

A. Liquid chlorine: AWWA B301.

B. Sodium Hypochlorite: AWWA B300 with 5 percent to 15 percent available chlorine.

C. Calcium hypochlorite: AWWA B300 supplied in granular form of 5 g. tablets, and shall contain 65 percent chlorine by weight.

2.12 WARNING TAPE

A. Warning tape shall be standard, 4 mil. Polyethylene, 3 inch (76 mm) wide tape, detectable type, blue with black letters and imprinted with “CAUTION BURIED WATER LINE BELOW”.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Use pipe, fittings, and joining methods for piping systems according to the following applications.

1. Transition couplings and special fittings with pressure ratings at least equal to piping pressure rating may be used, unless otherwise indicated.
2. Do not use flanges or unions for underground piping.
3. Flanges, unions, grooved-end-pipe couplings, and special fittings may be used, instead of joints indicated, on aboveground piping and piping in vaults.
4. Provide flanged and anchored connection to building interior piping.

B. Underground Fire-Service-Main Piping 4” to 8” diameter shall be the following:
1. Ductile iron, push-on-joint pipe and gasketed joints, or mechanical-joint pipe; Ductile Iron, mechanical-joint fittings; and mechanical grooved-end pipe; Ductile Iron-pipe appurtenances; and grooved joints.

C. Underground Combined Water-Service and Fire-Service-Main Piping 4” to 8” diameter shall be the following:
1. Ductile iron, push-on-joint pipe and gasketed joints, or mechanical-joint pipe; Ductile Iron, mechanical-joint fittings; and mechanical grooved-end pipe; Ductile Iron-pipe appurtenances; and grooved joints.

3.2 VALVE APPLICATIONS

A. Use mechanical-joint-end valves for NPS 3 (DN 80) and larger underground installation. Use threaded- or flanged-end valves for installation in vaults. Use UL/FMG, non-rising-stem gate valves for installation with indicator posts. Use corporation valves and curb valves with ends compatible with piping, for NPS 2 (DN 50) and smaller installation.

B. Drawings indicate valve types to be used. Where specific valve types are not indicated, the following requirements apply:
1. Underground Valves, NPS 3 (DN 80) and Larger: AWWA, cast iron, non-rising-stem, high-pressure, resilient -seated gate valves with valve box.
2. Underground Valves, NPS 4 (DN 100) and Larger, for Indicator Posts: UL/FMG, cast iron, non-rising-stem gate valves with indicator post.

3.3 DUCTILE IRON PIPE

A. Install Ductile Iron, water-service piping according to AWWA C600 and AWWA M41-3rd Edition.

1. Install PE corrosion-protection encasement according to ASTM A674 or AWWA C105/A21.5.

B. Pipe shall be sound and clean before laying. When laying is not in progress, the open ends of the pipe shall be closed by watertight plug or other approved means.

C. When cutting pipe is required, the cutting shall be done by machine, leaving a smooth cut at right angles to the axis of the pipe. Bevel cut ends of pipe to be used with push-on bell to conform to the manufactured spigot end. Cement lining shall be undamaged.

D. Push on joints shall be made in strict accordance with the manufacturer’s instruction. Pipe shall be laid with bell ends looking ahead.

3.4 ANCHORAGE INSTALLATION

A. Install water-distribution piping with restrained joints. Anchorages and restrained-joint types that may be used include: concrete thrust blocks, locking mechanical joints, and set-screw mechanical retainer glands.

B. Install anchorages for tees, plugs and caps, bends, crosses, valves, and hydrant branches. Include anchorages for the following piping systems:

1. Gasketed-Joint, Ductile Iron, Water-Service Piping: According to AWWA C600.
2. Fire-Service-Main Piping: According to NFPA 24.

C. Apply full coat of asphalt or other acceptable corrosion-resistant material to surfaces of installed ferrous anchorage devices.

3.5 VALVE INSTALLATION

A. AWWA Valves: Install each underground valve with stem pointing up and with valve box.

B. UL/FMG, Valves: Install each underground valve and valves in vaults with stem pointing up and with vertical cast iron indicator post.

C. MSS Valves: Install as component of connected piping system.

D. Raise or lower existing valve and curb stop boxes and fire hydrants to finish grade in areas being graded.

3.6 PROTECTIVE ENCLOSURE INSTALLATION

A. Install concrete base level and with top approximately 2 inches (50 mm) above grade.

B. Install protective enclosure over valves and equipment and anchor protective enclosure to concrete base.

3.7 FLUSHING HYDRANT INSTALLATION

A. Install post-type flushing hydrants with valve below frost line and provide for drainage. Support in upright position. Include separate gate valve or curb valve and restrained joints in supply piping.

B. Install ground-type flushing hydrants with valve below frost line and provide for drainage. Install hydrant box flush with grade. Include separate gate valve and restrained joints in supply piping.

C. Install sampling stations with valve below frost line and provide for drainage. Attach weather-resistant housing and support in upright position. Include separate curb valve in supply piping.

3.8 FIRE DEPARTMENT CONNECTION INSTALLATION

A. Install ball drip valves at each check valve for fire department connection to mains.

B. Install protective pipe bollards on two sides of each fire department connection.

3.9 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties. Install water service lines to a point of connection within approximately 5 feet (1500 mm) outside of building(s) to which service is to be connected and make connections thereto. If building services have not been installed provide temporary caps and mark for future connection.

3.10 FIELD QUALITY CONTROL

A. Conduct piping tests before joints are covered and after concrete thrust blocks have hardened sufficiently. Fill pipeline 24 hours before testing and apply test pressure to stabilize system. Use only potable water.

B. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.

C. Perform hydrostatic tests at not less than one-and-one-half times working pressure for two hours.

1. Increase pressure in 50-psi (350-kPa) increments and inspect each joint between increments. Hold at test pressure for 1 hour; decrease to 0 psi (0 kPa). Slowly increase again to test pressure and hold for 1 more hour. Maximum allowable leakage is 2 quarts (1.89 L) per hour

per 100 joints. Remake leaking joints with new materials and repeat test until leakage is within allowed limits.

2. When the pipe is located under a vehicular access and within 4 feet of grade, sub base and base layers shall be in place and compacted prior to preforming hydrostatic tests.

D. Prepare reports of testing activities.

3.11 IDENTIFICATION

A. Install continuous underground warning tape 12 inches (300 mm) directly over piping.

3.12 CLEANING

A. Purge new water-distribution piping systems and parts of existing systems that have been altered, extended, or repaired before use.

B. Use purging and disinfecting procedure prescribed by local utility provider or other authorities having jurisdiction or, if method is not prescribed by authorities having jurisdiction, use procedure described in AWWA C651 or do as follows:

1. Fill the water system with a water/chlorine solution containing at least 50 ppm of chlorine; isolate and allow to stand for 24 hours.
2. Drain the system of the previous solution and refill with water/chlorine solution containing at least 200 ppm of chlorine; isolate and allow system to stand for 3 hours.
3. After standing time, flush system with clean, potable water until no chlorine remains in water coming from system.
4. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows evidence of contamination.

C. Prepare reports of purging and disinfecting activities.

--- E N D ---

SECTION 33 30 00

SANITARY SEWER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and procedures for construction of outside, underground sanitary sewer systems that are complete and ready for operation. This includes piping, structures and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTHWORK.

B. General plumbing, protection of Materials and Equipment, and quality assurance: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

C. Fabrication of Steel Ladders: Section 05 50 00, METAL FABRICATION.

D. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

E. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

A. Sewer system: Pipelines and appurtenances which are part of the sewer system outside the building.

B. Sewer service line: Pipeline from main line to 5 feet outside of building.

1.4 ABBREVIATIONS

A. PVC: Polyvinyl chloride plastic

B. DI: Ductile iron pipe

1.5 DELIVERY, STORAGE AND HANDLING

A. Store plastic piping protected from direct sunlight and support to prevent sagging and bending. Protect stored piping from moisture and dirt by elevating above grade. Protect flanges, fittings, and specialties from moisture and dirt.

B. Handle manholes according to manufacturer's written rigging instructions.

1.6 COORDINATION

A. Contractor to obtain approval from the Public Agency that the existing sanitary sewer systems have the capacity to handle the discharge from the facility.

B. Coordinate exterior utility lines and connections to building lines up to 5 feet of building wall.

C. Coordinate connection to public sewer system with Public Utility Company.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

B. Comply with the rules and regulations of the Public Utility having jurisdiction over the connection to Public Sanitary Sewer lines and the extension, and/or modifications to Public Utility Systems.

1.8 SUBMITTALS:

A. Manufacturers' Literature and Data shall be submitted for the following as one package:

1. Pipe, Fittings, and, Appurtenances.
2. Jointing Material.
3. Manhole and Structure Material.
4. Frames and Covers.
5. Steps and Ladders.

1.9 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A74-09.....Cast Iron Soil Pipe and Fittings

A185/A185M-07.....Steel Welded Wire Reinforcement, Plain, for Concrete

A615/A615M-09b.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

A746-99.....Ductile-Iron Gravity Sewer Pipe

C478-09.....Precast Reinforced Concrete Manhole Sections

C857-11.....Minimum Structural Design Loading for Underground Precast Concrete Utility Structures

C890-11.....Minimum Structural Design Loading for Monolithic or Sectional Precast Concrete Water and Wastewater Structures

C913-08.....Precast Concrete Water and Wastewater Structures

C923-08.....Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes, and Laterals

C924-02(2009).....Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method

C990-09.....Joints for Concrete Pipe, Manholes, and precast Box Sections using Preformed Flexible Joint Sealants

C1173-10.....Flexible Transition Couplings for Underground Piping Systems

C1440-08.....Thermoplastic Elastomeric (TPE) Gasket Materials for Drain, Waste and Vent (DWV), Sewer, Sanitary and Storm Plumbing Systems

C1460-08.....Shielded Transition Couplings for Use With Dissimilar DWV Pipe and Fittings Above Ground

C1461-08.....Mechanical Couplings Using Thermoplastic Elastomeric (TPE) Gaskets for Joining Drain, Waste and Vent (DWV), Sewer, Sanitary and Storm Plumbing systems for Above and below Ground Use

D2321-11.....Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D3034-08.....Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

F477-10.....Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F679-08.....Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings

F891-10.....Coextruded Poly(vinyl Chloride) (PVC) Plastic Pipe With a Cellular Core

F949-10.....Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings

F1417-11.....Standard Test Method for Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air

F1668-08.....Construction Procedures for Buried Plastic Pipe

C. American Water Works Association (AWWA):

C105/A21.5-10.....Polyethylene Encasement for Ductile-Iron Pipe Systems

C110-08.....Ductile-Iron and Gray-Iron Fittings

C111/A21.11-06.....Rubber Gasket Joints for Ductile Iron Pressure Pipe and Fittings

C151/A21.51-09.....Ductile Iron Pipe, Centrifugally Cast

C153/A21.53-06.....Ductile Iron Compact Fittings for Water Service

C219-11.....Bolted, Sleeve-Type Couplings for Plain-End Pipe

C600-10.....Installation of Ductile-Iron Mains and Their Appurtenances

C900-07.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

D. American Society of Mechanical Engineers:

A112.36.2M-1991.....Cleanouts

1.10 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will provide all manufacturers' and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements.

B. All pipe and fittings used in the construction of force mains shall be rated to meet the system maximum operating pressure with a minimum of 150 psi (1035 kPa).

C. The Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.2 DUCTILE-IRON PIPE AND FITTINGS

A. Mechanical Joint Piping

1. Pipe and Fittings: AWWA C151, unless otherwise shown or specified.
2. Compact Fittings: AWWA C153.
3. Gaskets: AWWA C111.
4. Exterior coating: AWWA C151.
5. Interior lining shall be as per ASTM A746.
6. Pipe and fittings shall be polyethylene encased as per AWWA C105.

B. Push-on-Joint Piping:

1. Pipe: AWWA C151, with bolt holes in bell.
2. Standard Fittings: AWWA C110.
3. Compact Fittings: AWWA C153.

4. Gaskets: AWWA C111.
5. Exterior coating: AWWA C151.
6. Interior lining: AWWA C151.
7. Pipe and fittings shall be polyethylene encased as per AWWA C105.

2.3 PVC, GRAVITY SEWER PIPE AND FITTINGS

A. PVC Gravity Sewer Piping:
1. Pipe and Fittings shall conform to ASTM D3034, SDR 35.
2. Gaskets: ASTM F477.

2.4 NONPRESSURE-TYPE TRANSITION COUPLINGS

A. Comply with ASTM C1173, elastomeric, sleeve type, reducing or transition coupling, for joining underground nonpressure piping. Include ends to match same sizes of main line piping and install corrosion-resistant metal tension bands and tightening mechanism on each end.

B. Sleeve Materials:
1. For Plastic Pipes: ASTM F477, elastomeric seal.
2. For Dissimilar Pipes: PVC or other material compatible with pipe materials being joined.

C. Unshielded, Flexible Couplings:
1. Couplings shall be elastomeric sleeve with stainless steel shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.

D. Shielded, Flexible Couplings:
1. Couplings shall meet ASTM C1460 with elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield with corrosion-resistant-metal tension band and tightening mechanism on each end.

E. Ring-Type, Flexible Couplings:
1. Couplings shall be elastomeric compression seal with dimensions to fit inside bell of larger mainline pipe and for spigot of smaller main line pipe to fit inside ring.

F. Nonpressure-Type, Rigid Couplings:
1. Coupling shall be ASTM C1461, sleeve-type, reducing- or transition-type mechanical coupling, molded from ASTM C1440, TPE material; with corrosion-resistant-metal tension band and tightening mechanism on each end.

2.5 PRESSURE-TYPE PIPE COUPLINGS

A. Tubular-Sleeve Couplings:

1. Couplings shall meet AWWA C219, with center sleeve, gaskets, end rings, and bolt fasteners.

B. Metal, bolted, sleeve-type, reducing or transition couplings for joining underground pressure piping:

1. Couplings shall meet a 150-psi (1035-kPa) minimum pressure rating and ends of same sizes of the main line piping.

C. Center-Sleeve Material:

1. Sleeve shall be Manufacturer's standard.

D. Gasket material: Gaskets shall be natural or synthetic rubber.

E. Metal component finish: Finish shall be a corrosion-resistant material or coating.

2.6 EXPANSION JOINTS AND DEFLECTION FITTINGS

A. Ductile-Iron, Flexible Expansion Joints:

1. Compound fittings: Fittings shall have a combination of flanged and mechanical-joint ends complying with AWWA C110 or AWWA C153. Include two gasketed ball-joint sections and one gasketed sleeve section, rated for 250-psi (1725-kPa) minimum working pressure and for offset and expansion indicated.

B. Ductile-Iron Expansion Joints:

1. Jointing Material: Joints shall be a three-piece assembly of telescoping sleeve with gaskets and restrained-type, ductile iron, bell-and-spigot end sections complying with AWWA C110 or AWWA C153. Include rating for 250-psi (1725-kPa) minimum working pressure and for expansion indicated.

C. Ductile-Iron Deflection Fittings:

1. Jointing Material: Compound coupling fittings with ball joint, flexing section, gaskets, and restrained-joint ends shall comply with AWWA C110 or AWWA C153. Include rating for 250-psi (1725-kPa) minimum working pressure and for up to 15 deg of deflection.

2.7 CLEANOUTS

A. PVC Cleanouts:

1. PVC body with PVC threaded plug: Cleanout shall be as per ASTM D3034. PVC sewer pipe fitting and riser to cleanout.
2. Cleanout Riser: Sewer pipe fitting on main line sewer and riser shall match main line piping.

2.8 MANHOLES

A. Standard precast concrete manholes and vaults shall be constructed of precast concrete segmental blocks, precast reinforced concrete rings, precast reinforced sections or cast-in-place concrete.

1. Precast Concrete Manholes: Material shall be as per ASTM C478, precast, reinforced concrete, of depth indicated, with sealed joints.
2. Concrete Base: Concrete for base of manhole shall have a minimum compressive strength of 5000 psi (35 MPa) at 28 days. Thickness to be 8 inches (200 mm), minimum.
3. Riser Section: 4 inch (100 mm) minimum thickness, of lengths to provide the total depth of manhole.
4. Top Section: Eccentric-cone type unless otherwise indicated. Top section to match adjustment ring configurations.
5. Joint Sealant: ASTM C990.
6. Resilient Pipe Connectors: ASTM C923.
7. Steps: If over 60 inches (1500 mm) in depth, individual FRP steps or ladder ASTM A615 deformed, 1/2 inch (13 mm) steel reinforcing rods encased in precast concrete sections, with 16 inch (400 mm) minimum width, 12 to 16 inches (300 to 400 mm) center-to-center from top to bottom.
8. Adjusting Rings: Reinforced-concrete rings; 6 to 9 inch (150 to 225 mm) total thickness, with diameter matching manhole frame and cover, and with height as required to adjust manhole frame and cover to indicated elevation and slope.

2.9 CONCRETE

A. Cast-in-place concrete shall be 4000 psi (27.6 MPa) minimum, with 0.45 maximum water/cementitious materials ratio.

B. Reinforcement

1. Reinforcing fabric shall be ASTM A185, steel, welded wire fabric, plain.
2. Reinforcing bars shall be ASTM A615, Grade 60 (420 MPa) deformed steel.

C. Benches shall be concrete, sloped to drain into the channel. Provide 6 inches (150 mm) from the cut section of top of pipe to edge of manhole.

D. Ballast and Pipe Supports shall be Portland cement design mix, 3000 psi (20.7 MPa) minimum, with 0.58 maximum water/cementitious materials ratio.

2.10 WARNING TAPE

A. Warning tape shall be standard, 4 mil (0.1 mm) polyethylene 3 inch (76 mm) wide tape detectable type, green with black letters and imprinted with "CAUTION BURIED SEWER LINE BELOW".

PART 3 - EXECUTION

3.1 PIPING INSTALLATION

A. Drawing plans and details indicate the general location and arrangement of underground sanitary sewer piping. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.

B. Install piping beginning at the low point, true to grades and alignment indicated on the drawings, with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for using lubricants, cements, and other installation requirements.

C. Do not lay pipe on unstable material, in wet trench or when trench and weather conditions are unsuitable for the work.

D. Support pipe on compacted bedding material. Excavate bell holes only large enough to properly make the joint.

E. Inspect pipes and fittings for defects before installation. Defective materials shall be plainly marked and removed from the site. Cut pipe shall have smooth regular ends at right angles to axis of pipe.

F. Lower pipe into trench carefully and bring to proper line, grade, and joint. After jointing, interior of each pipe shall be thoroughly wiped or swabbed to remove any dirt, trash or excess jointing materials.

G. Do not walk on pipe in trenches until covered by layers of bedding or backfill material to a depth of 12 inches (300 mm) over the crown of the pipe.

H. Warning tape shall be continuously placed 12 inches (300 mm) above sewer pipe

I. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.

J. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.

K. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process or microtunneling.

L. Install gravity-flow, non-pressure, drainage piping according to the following:

1. Install piping pitched down in direction of flow, at minimum slope of 1 percent unless otherwise indicated.
2. Install piping with minimum cover as shown on Drawings.
3. Install ductile iron, gravity sewer piping according to AWWA C600.
4. Install PVC cellular-core, PVC corrugated sewer, PSM sewer and PVC gravity sewer according to ASTM D2321 and ASTM F1668.

M. Clear interior of piping and manholes of dirt and superfluous material as work progresses. Maintain swab or drag in piping, and pull past each joint as it is completed. Place plug in end of incomplete piping at end of day and when work stops.

3.2 PIPE JOINT CONSTRUCTION

A. Join gravity-flow, non-pressure, drainage piping according to the following:

1. Join ductile iron, gravity sewer piping according to AWWA C600 for push-on joints.
2. Join PVC piping according to ASTM D2321.
3. Join dissimilar pipe materials with nonpressure-type, flexible or rigid couplings.
4. Join dissimilar pipe materials with pressure-type couplings.

B. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.

1. Use non-pressure flexible couplings where required to join gravity-flow, non-pressure sewer piping unless otherwise indicated.
   a. Unshielded flexible or rigid couplings for pipes of same or slightly different OD.
   b. Unshielded, increaser/reducer-pattern, flexible or rigid couplings for pipes with different OD.
   c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.
2. Use pressure pipe couplings for force-main joints.

3.3 SEWER AND MANHOLE SUPPORTS, CONCRETE CRADLES WITHIN VAULTS

A. Install reinforced concrete as detailed on the drawings. The concrete shall not restrict access for future maintenance of the joints within the piping system.

3.4 BUILDING SERVICE LINES

A. Install sanitary sewer service lines to point of connection within approximately 5 feet (1500 mm) outside of building(s) where service is required and make connections. Coordinate the invert and location of the service line with the Contractor installing the building lines.

3.5 MANHOLE INSTALLATION

A. Install manholes complete with appurtenances and accessories indicated.
   1. Precast concrete segmental blocks shall lay true and plumb. All horizontal and vertical joints shall be completely filled with mortar. Parge interior and exterior of structure with 1/2 inch (15 mm) or cement mortar applied with a trowel and finished to an even glazed surface.
   2. Precast reinforced concrete rings shall be installed true and plumb. The joints between rings and between rings and the base and top, shall be sealed as per manufacturer’s recommendations. Adjust the length of the rings so that the top section will be at the required elevation. Cutting the top section is not acceptable.
   3. Concrete manhole risers and tops: Install as specified.

B. Designed Concrete Structures:
   1. Concrete structures shall be installed in accordance with Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. Do not build structures when air temperature is 32 deg F (0 deg C), or below.

D. The wall that supports access rungs or ladder shall be 90 deg vertical from the floor of structure to manhole cover.

E. Install steps and ladders per the manufacturer’s recommendations. Steps and ladders shall not move or flex when used. All loose steps and ladders shall be replaced by the Contractor.

F. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. In unpaved areas, the rim elevation shall be 2 inches (50 mm) above the adjacent finish grade.

G. Install manhole frames and covers on a mortar bed, such that frames and covers shall not move when subject to vehicular traffic. Install a

concrete collar around the frame to protect the frame from moving until the adjacent pavement is placed. Install an 8 inches (200 mm) thick, by 12 inches (300 mm) wide concrete collar around the perimeter of the frame. Slope the top of the collar away from the frame.

3.6 CLEANOUT INSTALLATION

A. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Cleanouts should be 6 inches (150 mm) in diameter and consist of a ductile iron 45 degree fitting on end of run, or combination Y fitting and 1/8 bend in the run with ductile iron pipe extension, water tight plug or cap and cast frame and cover flush with finished grade. Install piping so cleanouts open in direction of flow in sewer pipe.
   1. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
   2. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
   3. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
   4. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.

B. Set cleanout frames and covers in earth in cast-in-place-concrete, 18 by 18 by 12 inches (450 by 450 by 300 mm) 1 inch (25 mm) above surrounding grade.

C. Where cleanout is in force main, provide a blind flange top connection. The center of the flange shall be equipped with a 2 inches (50 mm) base valve to allow the pressure in the line to be relieved prior to removal of the blind flange. Frames and covers for pressure (force) mains shall be 24 inches (600 mm) in diameter.

D. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

E. The top of the cleanout assembly shall be 2 inches (50 mm) below the bottom of the cover to prevent loads being transferred from the frame and cover to the piping.

3.7 CONNECTIONS

A. Make connections to existing piping and underground manholes by coring and installing the pipe at the design invert. Install an elastomeric gasket around the pipe, and grout the interstitial space between the pipe and the core.

B. Connection to an existing manhole: The bench of the manhole shall be cleaned and reshaped to provide a smooth flowline for all new pipes connected to the manhole.

C. Use commercially manufactured wye fittings for piping branch connections. Encase entire wye fitting plus 6-inch (150-mm) overlap with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

1. Make branch connections from the side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500), by removing a section of the existing pipe.
2. Make branch connections from the side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes by cutting an opening into existing unit large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe or manhole wall, encase entering connection in concrete to provide additional support of collar from connection to undisturbed ground.
3. Protect existing piping and manholes to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

3.8 REGRADING

A. Raise or lower existing manholes and structures frames and covers, cleanout frames and covers and valve boxes in regraded areas to finish grade. Carefully remove, clean and salvage cast iron frames and covers. Adjust the elevation of the top of the manhole or structure as detailed on the drawings. Adjust the elevation of the cleanout pipe riser, and reinstall the cap or plug. Reset cast iron frame and cover, grouting below and around the frame. Install concrete collar around reset frame and cover as specified for new construction.

B. During periods when work is progressing on adjusting manholes or structures cover elevations, the Contractor shall install a temporary cover above the bench of the structure or manhole. The temporary cover shall be installed above the high flow elevation within the structure, and shall prevent debris from entering the wastewater stream.

3.9 CLOSING ABANDONED SANITARY SEWER SYSTEMS

A. Close open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed.
   1. Piping under and within 5 feet (1500 mm) of building areas shall be completely removed.
   2. Piping outside of building areas shall plugged with concrete, and abandoned in-place.

B. Excavate around manholes as required and use either procedure below:
   1. Manholes and structures outside of building areas: Remove frame and cover, cut and remove the top of an elevation of 2 feet (600 mm) below finished grade. Fill the remaining portion with compacted gravel or crushed rock or concrete.
   2. Manholes and structures with building areas: Remove frame and cover and remove the entire structure and the base.

C. Backfill to grade according to Division 31 Section 31 20 00, EARTH MOVING.

D. When the limit of the abandonment terminates in an existing manhole to remain, the flow line in the bench of the manhole to the abandoned line shall be filled with concrete and shaped to maintain the flowline of the lines to remain.

3.10 PIPE SEPARATION

A. Horizontal Separation - Water Mains and Sewers:
   1. Existing and proposed water mains shall be at least 10 feet (3 m) horizontally from any proposed gravity flow and pressure (force main) sanitary sewer or sewer service connection.
   2. Gravity flow mains and pressure (force) mains may be located closer than 10 feet (3 m) but not closer than 6 feet (1.8 m) to a water main when:
      a. Local conditions prevent a lateral separation of 10 feet (3 m); and
      b. The water main invert is at least 18 inches (450 mm) above the crown of the gravity sewer or 24 inches (600 mm) above the crown of the pressure (force) main; and the water main is in a separate trench separated by undisturbed earth.

3. When it is impossible to meet (1) or (2) above, both the water main and sanitary sewer main shall be constructed of push-on or mechanical joint ductile iron pipe.

B. Vertical Separation - Water Mains and Sewers at Crossings:

1. Water mains shall be separated from sewer mains so that the invert of the water main is a minimum of 24 inches (600 mm) above the crown of gravity flow sewer or 48 inches (1200 mm) above the crown of pressure (force) mains. The vertical separation shall be maintained within 10 feet (3 m) horizontally of the sewer and water crossing. When these vertical separations are met, no additional protection is required.
2. In no case shall pressure (force) sanitary main cross above, or within 24 inches (600 mm) of water lines.
3. When it is impossible to meet (1) above, the gravity flow sewer may be installed 18 inches (450 mm) above or 12 inches (300 mm) below the water main, provided that both the water main and sewer shall be constructed of push-on or mechanical ductile pipe. Pressure (Force) sewers may be installed 24 inches (600 mm) below the water line provided both the water line and sewer line are constructed of ductile iron pipe.
4. The required vertical separation between the sewer and the water main shall extend on each side of the crossing until the perpendicular distance from the water main to the sewer line is at least 10 feet (3 m).

3.11 IDENTIFICATION

A. Install green warning tape directly over piping and at outside edges of underground manholes.

3.12 FIELD QUALITY CONTROL

A. All systems shall be inspected and obtain the Resident Engineer's approval. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.

B. To inspect, thoroughly flush out the lines and manholes before inspection. Lamp test between structures and show full bore indicating sewer is true to line and grade. Lips at joints on the inside of gravity sewer lines are not acceptable.

1. Submit separate report for each system inspection.
2. Defects requiring correction include the following:

a. Alignment: Less than full diameter of inside of pipe is visible between structures.
b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
d. Infiltration: Water leakage into piping.
e. Exfiltration: Water leakage from or around piping.

3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
4. Re-inspect and repeat procedure until results are satisfactory.

C. Air Tests: Test sanitary sewerage according to requirements of authorities having jurisdiction and the following:
1. Test plastic gravity sewer piping according to ASTM F1417.
2. Test concrete gravity sewer piping according to ASTM C924.
3. Clean and isolate the section of sewer line to be tested. Plug or cap the ends of all branches, laterals, tees, wyes, and stubs to be included in the test to prevent air leakage. The line shall be pressurized to 4 psi (28 kPa) and allowed to stabilize. After pressure stabilization, the pressure shall be dropped to 3.5 psi (24 kPa) greater than the average back-pressure of any groundwater above the sewer.
4. For force mains, perform testing after supports and anchors are installed. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psi (1035 kPa).
5. Testing of Fiberglass Sewage Holding Tanks shall show no leakage during a 5 psi (35 kPa) air pressure test with 5:1 safety factor.
6. Testing of Concrete Wet Well shall show no leakage with the wet well completely filled with water for a duration of 4 hours.

3.13 CLEANING

A. Clean dirt and superfluous material from interior of piping.

--- E N D ---

SECTION 33 40 00

STORM SEWER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies materials and procedures for construction of outside, underground storm sewer systems that are complete and ready for operation. This includes piping, structures and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTHWORK.

B. Concrete Work, Reinforcing, Placement and Finishing: Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. General plumbing, protection of Materials and Equipment, and quality assurance: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

D. Fabrication of Steel Ladders: Section 05 50 00, METAL FABRICATIONS.

E. Materials and Testing Report Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

F. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

A. Storm sewer system: Pipelines and appurtenances which are part of the storm sewer system outside the building.

B. Storm sewer service line: Pipeline from main line to 5 feet outside of building.

1.4 ABBREVIATIONS

A. HDPE: High-density polyethylene

B. PE: Polyethylene

1.5 DELIVERY, STORAGE, AND HANDLING

A. Do not store plastic manholes, pipe, and fittings in direct sunlight.

B. Handle manholes, catch basins, and stormwater inlets according to manufacturer's written rigging instructions.

1.6 COORDINATION

A. Coordinate connection to storm sewer main with the Public Agency providing storm sewer off-site drainage.

B. Coordinate exterior utility lines and connections to building services up to the actual extent of building wall.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

1.8 SUBMITTALS

A. Manufacturers' Literature and Data shall be submitted, as one package, for pipes, fittings and appurtenances, including jointing materials, hydrants, valves and other miscellaneous items.

1.9 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A185/A185M-07.....Steel Welded Wire Reinforcement, Plain, for Concrete

A242/A242M-04(2009).....High-Strength Low-Alloy Structural Steel

A615/A615M-09b.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

A849-10.....Post-Applied Coatings, Paving, and Linings for Corrugated Steel Sewer and Drainage Pipe

A929/A929M-01(2007).....Steel Sheet, Metallic-Coated by the Hot-Dip Process for Corrugated Steel Pipe

B745/B745M-97(2005).....Corrugated Aluminum Pipe for Sewers and Drains

B788/B788M-09.....Installing Factory-Made Corrugated Aluminum Culverts and Storm Sewer Pipe

C14-07.....Non-reinforced Concrete Sewer, Storm Drain, and Culvert Pipe

C33/C33M-08.....Concrete Aggregates

C76-11.....Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

C150/C150M-11.....Portland Cement

C443-10.....Joints for Concrete Pipe and Manholes, Using Rubber Gaskets

C478-09.....Precast Reinforced Concrete Manhole Sections

C506-10b.....Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe

C507-10b.....Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe

C655-09.....Reinforced Concrete D-Load Culvert, Storm Drain, and Sewer Pipe

C857-07.....Minimum Structural Design Loading for Underground Precast Concrete Utility Structures

C891-09.....Installation of Underground Precast Concrete Utility Structures

C913-08.....Precast Concrete Water and Wastewater Structures

C923-08.....Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes, and Laterals

C924-02(2009).....Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method

C990-09.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants

C1103-03(2009).....Joint Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines

C1173-08.....Flexible Transition Couplings for Underground Piping Systems

C1433-10.....Precast Reinforced Concrete Monolithic Box Sections for Culverts, Storm Drains, and Sewers

C1479-10.....Installation of Precast Concrete Sewer, Storm Drain, and Culvert Pipe Using Standard Installations

D448-08.....Sizes of Aggregate for Road and Bridge Construction

D698-07e1.....Laboratory Compaction Characteristics of Soil Using Standard Effort (12 400 ft-lbf/ft3 (600 kN-m/m3))

D1056-07.....Flexible Cellular Materials—Sponge or Expanded Rubber

D1785-06.....Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120

D2321-11.....Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2751-05.....Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings

D2774-08.....Underground Installation of Thermoplastic Pressure Piping

D3034-08.....Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

D3350-10.....Polyethylene Plastics Pipe and Fittings Materials

D3753-05e1.....Glass-Fiber-Reinforced Polyester Manholes and Wetwells

D4101-11.....Polypropylene Injection and Extrusion Materials

D5926-09.....Poly (Vinyl Chloride) (PVC) Gaskets for Drain, Waste, and Vent (DWV), Sewer, Sanitary, and Storm Plumbing Systems

F477-10.....Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F679-08.....Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings

F714-10.....Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter

F794-03(2009).....Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter

F891-10.....Coextruded Poly(Vinyl Chloride) (PVC) Plastic Pipe With a Cellular Core

F894-07.....Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe

F949-10.....Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings

F1417-11.....Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air

F1668-08.....Construction Procedures for Buried Plastic Pipe

C. American Association of State Highway and Transportation Officials (AASHTO):

M190-04.....Bituminous-Coated Corrugated Metal Culvert Pipe and Pipe Arches

M198-10.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants

M252-09.....Corrugated Polyethylene Drainage Pipe

M294-10.....Corrugated Polyethylene Pipe, 12 to 60 In. (300 to 1500 mm) Diameter

D. American Water Works Association(AWWA):

C105/A21.5-10.....Polyethylene Encasement for Ductile iron Pipe Systems

C110-08.....Ductile-Iron and Gray-Iron Fittings

C219-11.....Bolted, Sleeve-Type Couplings for Plain-End Pipe

C600-10.....Installation of Ductile iron Mains and Their Appurtenances

C900-07.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

M23-2nd ed.....PVC Pipe ”Design And Installation”

E. American Society of Mechanical Engineers (ASME):

A112.6.3-2001.....Floor and Trench Drains

A112.14.1-2003.....Backwater Valves

A112.36.2M-1991.....Cleanouts

F. American Concrete Institute (ACI):

318-05.....Structural Commentary and Commentary

350/350M-06.....Environmental Engineering Concrete Structures and Commentary

G. National Stone, Sand and Gravel Association (NSSGA): Quarried Stone for Erosion and Sediment Control

1.10 WARRANTY

The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will furnish all manufacturers’ and suppliers’ written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements. The Contractor shall guarantee performance of assemblies

of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

2.2 PE PIPE AND FITTINGS

A. Corrugated PE drainage pipe and fittings, NPS 3 to NPS 10 (DN 80 to DN 250); ASTM F714, SDR 21 with smooth waterway for coupling joints.
   1. Silt-tight Couplings: PE sleeve with ASTM D1056, Type 2, Class A, Grade 2 gasket material that mates with tube and fittings.

B. Corrugated PE pipe and fittings, NPS 12 to NPS 60 (DN 300 to DN 1500); ASTM F714, SDR 21 for pipes 3 to 24 inches (300 to 600 mm) with smooth waterway for coupling joints. Pipe shall be produced from PE certified by the resin producer as meeting the requirements of ASTM D3350, minimum cell class 335434C.
   1. Water tight joints shall be made using a PVC or PE coupling and rubber gaskets as recommended by the pipe manufacturer. Rubber gaskets shall conform to ASTM F477. Soil tight joints shall conform to requirements in AASHTO HB-17, Division II, for soil tightness and shall be as recommended by the manufacturer.

C. Profile Wall PE Pipe: Pipe shall comply with ASTM F894, Class 160.
   1. Profile Wall PE Plastic Pipe Joints: Joints shall be as per ASTM F894, gasket or thermal weld type with integral bell.

D. PVC Pipe And Fittings
   1. PVC Cellular-Core Pipe And Fittings: ASTM F891, Sewer and Drain Series, PS 50 minimum stiffness, PVC cellular-core pipe with plain ends for solvent-cemented joints.
   2. Fittings: ASTM D3034, SDR 35, PVC socket-type fittings.

E. PVC Corrugated Sewer Piping
   1. Pipe: ASTM F949, PVC, corrugated pipe with bell-and-spigot ends for gasketed joints.
   2. Fittings: ASTM F949, PVC molded or fabricated, socket type.
   3. Gaskets: ASTM F477, elastomeric seals.

F. PVC Profile Sewer Piping
   1. Pipe: ASTM F794, PVC profile, gravity sewer pipe with bell-and-spigot ends.
   2. Fittings: ASTM D3034, PVC with bell ends.
   3. Gaskets: ASTM F477, elastomeric seals.

G. PVC Type PSM Sewer Piping

1. Pipe: ASTM D3034, SDR 35, PVC Type PSM sewer pipe with bell-and-spigot ends.
2. Fittings: ASTM D3034, PVC with bell ends.
3. Gaskets: ASTM F477, elastomeric seals.

H. PVC Gravity Sewer Piping

1. Pipe and fittings shall be ASTM F679, T-1 wall thickness, PVC gravity sewer pipe with bell-and-spigot ends.
2. Gaskets: ASTM F477, elastomeric seals for gasketed joints.

2.3 CONCRETE PIPE AND FITTINGS

A. Non-Reinforced-Concrete sewer pipe and fittings shall be ASTM C14, Class 1, with bell-and-spigot or tongue-and-groove ends and gasketed joints with ASTM C443, rubber gaskets sealant joints with ASTM C990, bitumen or butyl-rubber sealant.

2.4 NONPRESSURE TRANSITION COUPLINGS

A. Comply with ASTM C1173, elastomeric, sleeve-type, reducing or transition coupling, for joining underground non-pressure piping. Include ends of same sizes as piping to be joined, and corrosion-resistant-metal tension band and tightening mechanism on each end.

B. Sleeve Materials

1. For concrete pipes: ASTM C443, rubber.
2. For plastic pipes: ASTM F477, elastomeric seal or ASTM D5926, PVC.
3. For dissimilar pipes: ASTM D5926, PVC or other material compatible with pipe materials being joined.

C. Unshielded, Flexible Couplings: Couplings shall be an elastomeric sleeve with stainless-steel shear ring and corrosion-resistant-metal tension band and tightening mechanism on each end.

D. Shielded, flexible couplings shall be elastomeric or rubber sleeve with full-length, corrosion-resistant outer shield and corrosion-resistant-metal tension band and tightening mechanism on each end.

E. Ring-Type, flexible couplings shall be elastomeric compression seal with dimensions to fit inside bell of larger pipe and for spigot of smaller pipe to fit inside ring.

2.5 CLEANOUTS

A. Cast-Iron Cleanouts: ASME A112.36.2M, round, gray-iron housing with clamping device and round, secured, scoriated, gray-iron cover. Include gray-iron ferrule with inside calk or spigot connection and countersunk, tapered-thread, brass closure plug.

1. Top-Loading Classification(s): Heavy Duty
2. Pipe fitting and riser to cleanout shall be same material as main pipe line.

B. Plastic Cleanouts shall have PVC body with PVC threaded plug. Pipe fitting and riser to cleanout shall be of same material as main line pipe.

2.6 DRAINS

A. Cast-Iron Area Drains: ASME A112.6.3, gray-iron round body with anchor flange and round grate. Include bottom outlet with inside calk or spigot connection, of sizes indicated.
   1. Top-Loading Classification(s): Heavy Duty

B. Cast-Iron Trench Drains: ASME A112.6.3, 6 inch (150 mm) wide top surface, rectangular body with anchor flange or other anchoring device, and rectangular grate. Include units of total length indicated and quantity of bottom outlets with inside calk or spigot connections, of sizes indicated.
   1. Top-Loading Classification(s): Heavy Duty

C. Steel Trench Drains: ASTM A242, welded steel plate, to form rectangular body with uniform bottom downward slope of 2 percent toward outlet, anchor flange, and grate.
   1. Plate Thicknesses: 1/4 inch (6.4 mm)
   2. Overall Widths: 7-1/2 inches (190 mm) and 12-1/3 inches (313 mm)

D. Grate openings shall be 1/4 inch (6.4 mm) circular or 3/8 by 3 inch (9.5 by 76 mm) slots.

2.7 ENCASEMENT FOR PIPING

A. Material: AWWA C105 Linear low-density polyethylene film of 0.008 inch (0.20 mm) or high-density, cross-laminated polyethylene film of 0.004 inch (0.10 mm) minimum thickness.

B. Form: Sheet or tube

C. Color: Black

2.8 MANHOLES AND CATCH BASINS

A. Standard Precast Concrete Manholes:
   1. Description: ASTM C478 (ASTM C478M), precast, reinforced concrete, of depth indicated, with provision for sealant joints.
   2. Diameter: 48 inches (1200 mm) minimum unless otherwise indicated.
   3. Ballast: Increase thickness of precast concrete sections or add concrete to base section as required to prevent flotation.

4. Base Section: 6 inch (150 mm) minimum thickness for floor slab and 4-inch (102 mm) minimum thickness for walls and base riser section, and separate base slab or base section with integral floor.
5. Riser Sections: 4 inch (102 mm) minimum thickness, and lengths to provide depth indicated.
6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated, and top of cone of size that matches grade rings.
7. Joint Sealant: ASTM C990 (ASTM C990M), bitumen or butyl rubber.
8. Resilient Pipe Connectors: ASTM C923 (ASTM C923M), cast or fitted into manhole walls, for each pipe connection.
9. Steps: If total depth from floor of manhole to finished grade is greater than 60 inches (1500 mm). Individual FRP steps or FRP ladder ASTM A615, deformed, 1/2 inch (13 mm) steel reinforcing rods encased in ASTM D4101, PP, width of 16 inches (400 mm) minimum, spaced at 12 to 16 inch (300 to 400 mm) intervals.
10. Adjusting Rings: Reinforced-concrete rings, 6 to 9 inch (150 to 225 mm) total thickness, to match diameter of manhole frame and cover, and height as required to adjust manhole frame and cover to indicated elevation and slope.

B. Manhole Frames and Covers:
1. Description: Ferrous; 24 inch (610 mm) ID by 7 to 9 inch (175 to 225 mm) riser with 4 inch (102 mm) minimum width flange and 26-inch (600 mm) diameter cover. Include indented top design with lettering cast into cover, using wording equivalent to "STORM SEWER."
2. Material: ASTM A536, Grade 60-40-18 ductile iron unless otherwise indicated.

2.9 CONCRETE FOR MANHOLES AND CATCH BASINS

A. General: Cast-in-place concrete according to ACI 318, ACI 350/350R, and the following:
1. Cement: ASTM C150, Type II.
2. Fine Aggregate: ASTM C33, sand.
3. Coarse Aggregate: ASTM C33, crushed gravel.
4. Water: Potable.

B. Concrete Design Mix: 4000 psi (27.6 MPa) minimum, compressive strength in 28 days.
1. Reinforcing Fabric: ASTM A185, steel, welded wire fabric, plain.

2. Reinforcing Bars: ASTM A615, Grade 60 (420 MPa) deformed steel.

C. Manhole Channels and Benches: Channels shall be the main line pipe material. Include benches in all manholes and catch basins.

1. Channels: Main line pipe material or concrete invert. Height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope. Invert Slope: Same slope as the main line pipe. Bench to be concrete, sloped to drain into channel. Minimum of 6 inch slope from main line pipe to wall sides.

2.10 POLYMER-CONCRETE, CHANNEL DRAINAGE SYSTEMS

A. General Requirements for Polymer-Concrete, Channel Drainage Systems: Modular system of precast, polymer-concrete channel sections, grates, and appurtenances; designed so grates fit into channel recesses without rocking or rattling. Include quantity of units required to form total lengths indicated.

B. Sloped-Invert, Polymer-Concrete Systems:

1. Channel Sections:

a. Interlocking-joint, precast, modular units with end caps.

b. 4-inch (102 mm) inside width and deep, rounded bottom, with built-in invert slope of 0.6 percent and with outlets in quantities, sizes, and locations indicated.

c. Extension sections necessary for required depth.

d. Frame: Include gray-iron or steel frame for grate.

2. Grates:

a. Manufacturer's designation "Heavy," with slots or perforations that fit recesses in channels.

b. Material: Gray iron, unless otherwise indicated.

3. Covers: Solid gray iron if indicated.

4. Locking Mechanism: Manufacturer's standard device for securing grates to channel sections.

C. Narrow-Width, Level-Invert, Polymer-Concrete Systems:

1. Channel Sections:

a. Interlocking-joint, precast, modular units with end caps.

b. 5 inch (127 mm) inside width and 9-3/4 inch (248 mm) deep, rounded bottom, with level invert and with NPS 4 (DN 100) outlets in quantities, sizes, and locations indicated.

2. Grates:

a. Slots or perforations that fit recesses in channels.
b. Material: Gray iron unless otherwise indicated.
3. Covers: Solid gray iron if indicated.
4. Locking Mechanism: Manufacturer's standard device for securing grates to channel sections.

D. Wide-Width, Level-Invert, Polymer-Concrete Systems:
1. Channel Sections:
a. Interlocking-joint, precast, modular units with end caps.
b. 8 inch (203 mm) inside width and 13-3/4 inch (350 mm) deep, rounded bottom, with level invert and with outlets in quantities, sizes, and locations indicated.
2. Grates:
a. Slots or other openings that fit recesses in channels.
b. Material: Gray iron unless otherwise indicated.
3. Covers: Solid gray iron if indicated.
4. Locking Mechanism: Manufacturer's standard device for securing grates to channel sections.

E. Drainage Specialties: Precast, polymer-concrete units.
1. Large Catch Basins:
a. 24 by 12 inch (610 by 305-mm) polymer-concrete body, with outlets in quantities and sizes indicated.
b. Gray-iron slotted grate.
c. Frame: Include gray-iron or steel frame for grate.
2. Small Catch Basins:
a. 19 to 24 inch by approximately 6 inch (483 to 610 mm by approximately 150 mm) polymer-concrete body, with outlets in quantities and sizes indicated.
b. Gray-iron slotted grate.
c. Frame: Include gray-iron or steel frame for grate.

F. Supports, Anchors, and Setting Devices: Manufacturer's standard unless otherwise indicated.

G. Channel-Section Joining and Fastening Materials: As recommended by system manufacturer.

2.11 PLASTIC, CHANNEL DRAINAGE SYSTEMS

A. General Requirements for Plastic, Channel Drainage Systems:
1. Modular system of plastic channel sections, grates, and appurtenances.

2. Designed so grates fit into frames without rocking or rattling.
3. Number of units required to form total lengths indicated.

B. Fiberglass Systems:
1. Channel Sections:
a. Interlocking-joint, fiberglass modular units, with built-in invert slope of approximately 1 percent and with end caps.
b. Rounded or inclined inside bottom surface, with outlets in quantities, sizes, and locations indicated.
c. Width: 6 inches (150 mm) or 8 inches (150 or 203 mm).
2. Factory- or field-attached frames that fit channel sections and grates.
a. Material: Manufacturer's standard metal.
3. Grates with slots or perforations that fit frames.
a. Material: Gray iron.
4. Covers: Solid gray iron if indicated.
5. Drainage Specialties:
a. Large Catch Basins: 24 inch (610 mm) square plastic body, with outlets in quantities and sizes indicated. Include gray-iron frame and slotted grate.
b. Small Catch Basins: 12 by 24 inch (305 by 610 mm) plastic body, with outlets in quantities and sizes indicated. Include gray-iron frame and slotted grate.

C. PE Systems:
1. Channel Sections: Interlocking-joint, PE modular units, 4 inches (102 mm) wide, with end caps. Include rounded bottom, with level invert and with outlets in quantities, sizes, and locations indicated.
2. Grates: PE, ladder shaped; with stainless-steel screws.
3. Color: Gray unless otherwise indicated.
4. Drainage Specialties: Include the following PE components:
a. Drains: 4 inch (102 mm) diameter, round, slotted top; with NPS 4 (DN 100) bottom outlet.
b. Drains: 8 inch (203 mm) diameter, round, slotted top; with NPS 6 (DN 150) bottom outlet.
c. Drains: 4 inch (102 mm) square, slotted top; with NPS 3 (DN 80) bottom outlet.
d. Drains: 8 inch (203 mm) square, slotted top; with NPS 6 (DN 150) bottom outlet.

e. Catch Basins: 12 inch (305 mm) square plastic body, with outlets in quantities and sizes indicated. Include PE slotted grate 11-3/4 inches (298 mm) square by 1-1/8 inches (28.6 mm) thick.

D. Supports, Anchors, and Setting Devices: Manufacturer's standard unless otherwise indicated.

E. Channel-Section Joining and Fastening Materials: As recommended by system manufacturer.

2.12 PIPE OUTLETS

A. Head walls: Cast in-place reinforced concrete, with apron and tapered sides.

B. Riprap basins: Broken, irregularly sized and shaped, graded stone according to NSSGA's "Quarried Stone for Erosion and Sediment Control."

1. Average Size: NSSGA No. R-4, screen opening 3 inches (76 mm).

C. Filter Stone: NSSGA's "Quarried Stone for Erosion and Sediment Control," No. FS-2, No. 4 screen opening, average-size graded stone.

D. Energy Dissipaters: To be as per NSSGA's "Quarried Stone for Erosion and Sediment Control," No. A-1, 3-ton (2721-kg) average weight armor stone, unless otherwise indicated.

2.13 STORMWATER DISPOSAL SYSTEMS

A. Pipe Systems: Perforated manifold, header, and lateral piping complying with AASHTO M252 for NPS 10 (DN 250) and smaller, AASHTO M294 for NPS 12 to NPS 60 (DN 300 to DN 1500). Include fittings, couplings, seals, and filter fabric.

2.14 HEADWALLS

A. Headwalls: Cast in-place concrete with a minimum compressive strength of 3000 psi (20 MPa) at 28 days.

2.15 FLARED END SECTIONS

A. Flared End Sections: Sections shall be of standard design fabricated from zinc-coated steel sheets conforming to requirements of ASTM A929.

2.16 PRECAST REINFORCED CONCRETE BOX CULVERT

A. Precast Reinforced Concrete Box Culvert: Designed for highway loadings with 2 feet (600 mm) of cover or more subjected to dead load only, conforming to ASTM C1433. For less than 2 feet (600 mm) of cover, subjected to highway loading, conform to ASTM C1433.

2.17 RESILIENT CONNECTORS AND DOWNSPOUT BOOTS FOR BUILDING ROOF DRAINS

A. Resilient connectors and downspout boots: Flexible, watertight connectors used for connecting pipe to manholes and inlets, and shall conform to ASTM C923.

2.18 WARNING TAPE

A. Standard, 4-Mil polyethylene 3 inch (76 mm) wide tape detectable type, green with black letters, and imprinted with "CAUTION BURIED STORM DRAIN LINE BELOW".

PART 3 - EXECUTION

3.1 PIPE BEDDING

A. The bedding surface of the pipe shall provide a firm foundation of uniform density throughout the entire length of pipe. Concrete pipe requirements are such that when no bedding class is specified, concrete pipe shall be bedded in a soil foundation accurately shaped and rounded to conform with the lowest one-fourth of the outside portion of circular pipe. When necessary, the bedding shall be tamped. Bell holes and depressions for joints shall not be more than the length, depth, and width required for properly making the particular type of joint. Plastic pipe bedding requirements shall meet the requirements of ASTM D2321. Bedding, haunching and initial backfill shall be either Class IB or Class II material. Corrugated metal pipe bedding requirements shall conform to ASTM A798.

3.2 PIPING INSTALLATION

A. Drawing plans and details indicate general location and arrangement of underground storm drainage piping. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.

B. Install piping with minimum cover as shown on the Drawings.

C. Install piping beginning at low point, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.

1. Do not lay pipe on unstable material, in wet trench or when trench and weather conditions are unsuitable for the work.

2. Support pipe on compacted bedding material. Excavate bell holes only large enough to properly make the joint.
3. Inspect pipes and fittings, for defects before installation. Defective materials shall be plainly marked and removed from the site. Cut pipe shall have smooth regular ends at right angles to axis of pipe.
4. Clean interior of all pipe thoroughly before installation. When work is not in progress, open ends of pipe shall be closed securely to prevent entrance of storm water, dirt or other substances.
5. Lower pipe into trench carefully and bring to proper line, grade, and joint. After jointing, interior of each pipe shall be thoroughly wiped or swabbed to remove any dirt, trash or excess jointing materials.
6. Do not walk on pipe in trenches until covered by layers of shading to a depth of 12 inches (300 mm) over the crown of the pipe.
7. Warning tape shall be continuously placed 12 inches (300 mm) above storm sewer piping.

D. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.

E. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.

F. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of microtunneling.

G. Install gravity-flow, nonpressure drainage piping according to the following:
1. Install piping pitched down in direction of flow.
2. Install piping NPS 6 (DN 150) and larger with restrained joints at tee fittings and at changes in direction. Use corrosion-resistant rods, pipe or fittings; or cast in-place concrete supports or anchors.
3. Install cast iron soil piping according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook."
4. Install ductile iron piping and special fittings according to AWWA C600.
5. Install corrugated steel piping according to ASTM A798.

6. Install corrugated aluminum piping according to ASTM B788.
7. Install ABS sewer piping according to ASTM D2321 and ASTM F1668.
8. Install PE corrugated sewer piping according to ASTM D2321 with gasketed joints.
9. Install PVC cellular-core piping, PVC sewer piping, and PVC profile gravity sewer piping, according to ASTM D2321 and ASTM F1668.
10. Install reinforced concrete sewer piping according to ASTM C1479.

3.3 REGRADING

A. Raise or lower existing manholes and structures frames and covers in regraded areas to finish grade. Carefully remove, clean and salvage cast iron frames and covers. Adjust the elevation of the top of the manhole or structure as detailed on the drawings. Reset cast iron frame and cover, grouting below and around the frame. Install concrete collar around reset frame and cover as specified for new construction.

B. During periods when work is progressing on adjusting manholes or structures cover elevations, the Contractor shall install a temporary cover above the bench of the structure or manhole. The temporary cover shall be installed above the high flow elevation within the structure, and shall prevent debris from entering the wastewater stream.

3.4 CONNECTIONS TO EXISTING VA-OWNED MANHOLES

A. Make pipe connections and alterations to existing manholes so that finished work will conform as nearly as practicable to the applicable requirements specified for new manholes, including concrete and masonry work, cutting, and shaping.

3.5 CONNECTIONS TO EXISTING PUBLIC UTILITY MANHOLES

A. Comply with all rules and regulations of the public utility.

B. Cleanout Installation

1. Install cleanouts and riser extensions from sewer pipes to cleanouts at grade. Use cast iron soil pipe fittings in sewer pipes at branches for cleanouts and cast iron soil pipe for riser extensions to cleanouts. Install piping so cleanouts open in direction of flow in sewer pipe.
   a. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
   b. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.

c. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
d. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.

2. Set cleanout frames and covers in earth in cast in-place concrete block, 18 by 18 by 12 inches (450 by 450 by 300 mm) deep, unless otherwise indicated. Set with tops 1 inch (25 mm) above surrounding earth grade, unless otherwise indicated.

C. Set cleanout frames and covers in concrete pavement and roads with tops flush with pavement surface.

3.6 DRAIN INSTALLATION

A. Install type of drains in locations indicated.
1. Use Light-Duty, top-loading classification cleanouts in earth or unpaved foot-traffic areas.
2. Use Medium-Duty, top-loading classification cleanouts in paved foot-traffic areas.
3. Use Heavy-Duty, top-loading classification cleanouts in vehicle-traffic service areas.
4. Use Extra-Heavy-Duty, top-loading classification cleanouts in roads.

B. Embed drains in 4 inch (102 mm) minimum concrete around bottom and sides.

C. Set drain frames and covers with tops flush with pavement surface.

D. Assemble trench sections with flanged joints and embed trench sections in 4 inch (102 mm) minimum concrete around bottom and sides.

3.7 MANHOLE INSTALLATION

A. Install manholes, complete with appurtenances and accessories indicated. Install precast concrete manhole sections with sealants according to ASTM C891.

B. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops 3 inches (76 mm) above finished surface elsewhere unless otherwise indicated.

C. Circular Structures:
1. Precast concrete segmental blocks shall lay true and plumb. All horizontal and vertical joints shall be completely filled with mortar. Parge interior and exterior of structure with 1/2 inch (15 mm) or cement mortar applied with a trowel and finished to an even glazed surface.

2. Precast reinforced concrete rings shall be installed true and plumb. The joints between rings and between rings and the base and top shall be sealed with a preform flexible gasket material specifically manufactured for this type of application. Adjust the length of the rings so that the eccentric conical top section will be at the required elevation. Cutting the conical top section is not acceptable.
3. Precast reinforced concrete manhole risers and tops. Install as specified for precast reinforced concrete rings.

D. Rectangular Structures:

1. Precast concrete structures shall be placed on a 8 inch (200 mm) reinforced concrete pad, or be provided with a precast concrete base section. Structures provided with a base section shall be set on an 8 inch (200 mm) thick aggregate base course compacted to a minimum of 95 percent of the maximum density as determined by ASTM D698. Set precast section true and plumb. Seal all joints with preform flexible gasket material.
2. Do not build structures when air temperature is 32 deg F (0 deg C), or below.
3. Invert channels shall be smooth and semicircular in shape conforming to inside of adjacent sewer section. Make changes in direction of flow with a smooth curve of as large a radius as size of structure will permit. Make changes in size and grade of channels gradually and evenly. Construct invert channels by one of the listed methods:
   a. Forming directly in concrete base of structure.
   b. Building up with brick and mortar.
4. Floor of structure outside the channels shall be smooth and slope toward channels not less than 1 to 12 or more than 1 to 6. Bottom slab and benches shall be concrete.
5. The wall that supports access rungs or ladder shall be 90 deg vertical from the floor of structure to manhole cover.
6. Install steps and ladders per the manufacturer’s recommendations. Steps and ladders shall not move or flex when used. All loose steps and ladders shall be replaced by the Contractor.
7. Install manhole frames and covers on a mortar bed, and flush with the finish pavement. Frames and covers shall not move when subject to vehicular traffic. Install a concrete collar around the frame to

protect the frame from moving until the adjacent pavement is placed. In unpaved areas, the rim elevation shall be 2 inches (50 mm) above the adjacent finish grade. Install an 8 inch (203 mm) thick, by 12 inch (300 mm) concrete collar around the perimeter of the frame. Slope the top of the collar away from the frame.

3.8 CATCH BASIN INSTALLATION

A. Construct catch basins to sizes and shapes indicated.

B. Set frames and grates to elevations indicated.

3.9 STORMWATER INLET AND OUTLET INSTALLATION

A. Construct inlet head walls, aprons, and sides of reinforced concrete.

B. Construct riprap of broken stone.

C. Install outlets that spill onto grade, anchored with concrete.

D. Install outlets that spill onto grade, with flared end sections that match pipe.

E. Construct energy dissipaters at outlets.

3.10 CHANNEL DRAINAGE SYSTEM INSTALLATION

A. Install with top surfaces of components, except piping, flush with finished surface.

B. Assemble channel sections to form slope down toward drain outlets. Use sealants, adhesives, fasteners, and other materials recommended by system manufacturer.

C. Embed channel sections and drainage specialties in 4 inch (102 mm) minimum concrete around bottom and sides.

D. Assemble channel sections with flanged or interlocking joints.

E. Embed channel sections in 4 inch (102 mm) minimum concrete around bottom and sides.

3.11 STORMWATER DISPOSAL SYSTEM INSTALLATION

A. Piping Systems: Excavate trenches of width and depth, and install piping system, filter fabric, and backfill, according to piping manufacturer's written instructions.

3.12 CONNECTIONS

A. Connect nonpressure, gravity-flow drainage piping in building's storm building drains specified in Division 22 Section FACILITY STORM DRAINAGE PIPING.

B. Encase entire connection fitting, plus 6 inch (150 mm) overlap, with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

C. Make connections to existing piping and underground manholes.
   1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe; install wye fitting into existing piping.
   2. Make branch connections from side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500). Remove section of existing pipe, install wye fitting into existing piping.
   3. Make branch connections from side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes and structures by cutting into existing unit and creating an opening large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe, manhole, or structure wall, use epoxy-bonding compound as interface between new and existing concrete and piping materials.
   4. Protect existing piping, manholes, and structures to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

D. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
   1. Use nonpressure-type flexible couplings where required to join gravity-flow, nonpressure sewer piping unless otherwise indicated.
      a. Unshielded flexible couplings for same or minor difference OD pipes.
      b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.
      c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.
   2. Use pressure-type pipe couplings for force-main joints.

3.13 CLOSING ABANDONED STORM DRAINAGE SYSTEMS

A. Abandoned Piping: Close open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed. Use either procedure below:

1. Close open ends of piping with at least 8 inch (203 mm) thick, brick masonry bulkheads.
2. Close open ends of piping with threaded metal caps, plastic plugs, or other acceptable methods suitable for size and type of material being closed. Do not use wood plugs.

B. Abandoned Manholes and Structures: Excavate around manholes and structures as required and use one procedure below:
1. Remove manhole or structure and close open ends of remaining piping.
2. Remove top of manhole or structure down to at least 36 inches (915 mm) below final grade. Fill to within 12 inches (300 mm) of top with stone, rubble, gravel, or compacted dirt. Fill to top with concrete.

C. Backfill to grade according to Division 31 Section EARTH MOVING.

3.14 IDENTIFICATION

A. Install green warning tape directly over piping and at outside edge of underground structures.

3.15 FIELD QUALITY CONTROL

A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.
1. Submit separate reports for each system inspection.
2. Defects requiring correction include the following:
a. Alignment: Less than full diameter of inside of pipe is visible between structures.
b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
d. Infiltration: Water leakage into piping.
e. Exfiltration: Water leakage from or around piping.
3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
4. Reinspect and repeat procedure until results are satisfactory.

3.16 TESTING OF STORM SEWERS:

A. Submit separate report for each test.

B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.

1. Do not enclose, cover, or put into service before inspection and approval.
2. Test completed piping systems according to requirements of authorities having jurisdiction.
3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours advance notice.
4. Submit separate report for each test.
5. Air test gravity sewers. Concrete Pipes conform to ASTM C924, Plastic Pipes conform to ASTM F1417, all other pipe material conform to ASTM C828 or C924, after consulting with pipe manufacturer. Testing of individual joints shall conform to ASTM C1103.
6. Test force-main storm drainage piping. Perform hydrostatic test after thrust blocks, supports, and anchors have hardened. Test at pressure not less than 1-1/2 times the maximum system operating pressure, but not less than 150 psi (1035 kPa).
   a. Ductile iron Piping: Test according to AWWA C600, "Hydraulic Testing" Section.
   b. PVC Piping: Test according to AWWA M23, "Testing and Maintenance" Chapter.

C. Leaks and loss in test pressure constitute defects that must be repaired. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

3.17 CLEANING

A. Clean interior of piping of dirt and superfluous materials. Flush with water.

--- E N D ---

40 00 00 GEOTECHNICAL ENGINEERING REPORT

REPORT

23-1147

July 26, 2023

Explorations and Geotechnical Engineering Services

Proposed Main Computer Room
Off Stoddard Street
VA Togus
Chelsea, Maine

Prepared For:
GDM Architects-Engineers
Attention: Conrad Chandler, P.E.
1401 W. 34th Avenue
Anchorage, AK 99503

Prepared By:
S. W. Cole Engineering, Inc.
26 Coles Crossing Drive
Sidney, ME 04330
T: 207.626.0600

REISSUED 02-18-2026

TABLE OF CONTENTS

1.0 INTRODUCTION 1
1.1 Scope and Purpose 1
1.2 Site and Proposed Construction 1
2.0 EXPLORATION AND TESTING 2
2.1 Explorations 2
2.2 Field Testing 2
2.3 Laboratory Testing 2
3.0 SUBSURFACE CONDITIONS 3
3.1 Soil and Bedrock 3
3.2 Groundwater 3
4.0 EVALUATION AND RECOMMENDATIONS 4
4.1 General Findings 4
4.2 Site and Subgrade Preparation 5
4.3 Excavation and Dewatering 5
4.4 Foundations 6
4.5 Foundation Drainage 7
4.6 Slab-On-Grade 7
4.7 Entrance Slabs and Sidewalks 8
4.8 Segmental Retaining Wall 8
4.9 Fill, Backfill and Compaction 9
4.10 Weather Considerations 9
4.11 Design Review and Construction Testing 10
5.0 CLOSURE 10

Appendix A Limitations
Appendix B Figures
Appendix C Exploration Logs & Key
Appendix D Laboratory Test Results

23-1147

July 26, 2023

GDM Architects-Engineers
Attention: Conrad Chandler, P.E.
1401 W. 34th Avenue
Anchorage, AK 99503

Subject: Explorations and Geotechnical Engineering Services
Off Stoddard Road
VA Togus Campus
Chelsea, Maine

Dear Conrad:

In accordance with our Proposal, dated June 7, 2023, we have performed subsurface explorations for the subject project. This report summarizes our findings and geotechnical recommendations, and its contents are subject to the limitations set forth in Appendix A.

1.0 INTRODUCTION

1.1 Scope and Purpose

The purpose of our services was to obtain subsurface information at the site in order to develop geotechnical recommendations relative to foundations and earthwork associated with the proposed construction. Our scope of services included test boring explorations, soils laboratory testing, a geotechnical analysis of the subsurface findings and preparation of this report.

1.2 Site and Proposed Construction

The site is in a moderately to heavily wooded area on the westerly side of Stoddard Street on the VA Togus campus. The site generally slopes downward from north to south with up to 20 feet of surface relief across the proposed development area. Surficial cobbles and boulders were observed across the proposed development area.

REISSUED 02-18-2026

Based on the conceptual plan received 7/20/2023, we understand development plans call for construction of a new, ±110-foot by 40-foot, single-story building and ±30-foot by 40-foot utility area cut into the existing slope on the westerly side of Stoddard Street. We anticipate the building structure will be a combination of wood and metal stud framing with slab on-grade floor and spread footing foundations. We understand the utility area will include equipment supported on on-grade slab foundations. We understand the proposed cut slopes will taper up to ±10 feet in height and new site retaining walls with exposed heights of up to 7 feet tall are proposed.

Proposed and existing site features are shown on the "Exploration Location Plan" attached in Appendix B.

2.0 EXPLORATION AND TESTING

2.1 Explorations

Six test borings (B-23-1 through B-23-6) were made at the site on June 27 and 28, 2023 by S. W. Cole Explorations, LLC. The exploration locations were selected and established in the field, where accessible, by S. W. Cole Engineering, Inc. (S.W.COLE) using a mapping grade GPS. The approximate exploration locations are shown on the "Exploration Location Plan" attached in Appendix B. Logs of the explorations and a key to the notes and symbols used on the logs are attached in Appendix C.

2.2 Field Testing

The test borings were drilled using a combination of hollow-stem auger, cased wash-boring, and NQ2 rock core techniques. The soils were sampled at 2-to-5-foot intervals using a split spoon sampler and Standard Penetration Testing (SPT) methods. Pocket Penetrometer Tests (PPT) were performed where stiffer cohesive soils were encountered. Upon encountering refusal borings B-23-4 and B-23-6 were advanced 24 and 15 feet into bedrock, respectively, by rock core. SPT blow counts, PPT, and Rock Quality Designation (RQD) are shown on the logs. Photos of the rock core are attached in Appendix C.

2.3 Laboratory Testing

Soil and rock core samples obtained from the explorations were returned to our laboratory for further classification and testing. Soil moisture content and unconfined

rock core compressive strength test results are noted on the logs. The results of one soil gradation test are attached in Appendix D.

3.0 SUBSURFACE CONDITIONS

3.1 Soil and Bedrock

Test borings B-23-1 through B-23-6 were made in the area of the proposed building and encountered a soils profile generally consisting of forest duff overlying surficial sand overlying glacial till overlying refusal surfaces (bedrock) on the upland side of the site and forest duff over stiff clayey silt overlying glacial till overlying refusal surfaces (bedrock) on the downslope side of the site. The principal strata encountered are summarized below. Not all the strata were encountered at each exploration; refer to the attached logs for more detailed subsurface information.

Surficial: A surface layer of forest duff was encountered in each exploration. The forest duff generally varied from about 7 to 16 inches in thickness. Numerous cobbles and boulders were observed across the site.

Native Clayey Silt: Below the forest duff, borings B-23-1, B-23-2, and B-23-3 encountered, native, very stiff to stiff, clayey silt with sand. The native clayey silt with sand extended to depths of about 4.5 to 9.5 feet.

Native Glacial Till: Below the forest duff or native clayey silt, glacial till was encountered in each exploration. The glacial till generally consisted of dense to very dense, gravelly silty sand with cobbles and boulders.

Refusal Surfaces (Probable Bedrock): Each of the explorations was continued to a refusal surface (probable bedrock) at depths varying from about 6 to 15 feet below the ground surface. Rock coring performed at borings B-23-4 and B-23-6 encountered bedrock consisting of gray, Granodiorite with an RQD of 48 to 87 percent.

3.2 Groundwater

The soils encountered at the test borings were moist from the ground surface. Saturated soils were encountered in borings B-23-4 and B-23-6 at depths of about 9 to 12 feet. Groundwater will likely become perched on the relatively impervious clayey silt, glacial till, and bedrock encountered at the test borings. Long term groundwater information is not

available. It should be anticipated that groundwater levels will fluctuate, particularly in response to periods of snowmelt and precipitation, as well as changes in site use.

4.0 EVALUATION AND RECOMMENDATIONS

4.1 General Findings

Based on the subsurface findings, the proposed construction appears feasible from a geotechnical standpoint. The principle geotechnical considerations include:

- Relatively shallow bedrock is present at the site, including within proposed cut area for the proposed building and yard area. The bedrock will require blasting for excavation. Loose and over-blasted bedrock must be removed beneath the proposed building footprint.

- Spread footing foundations and a slab-on-grade floors bearing on properly prepared subgrades appear suitable for the proposed building. Footings should bear on at least 6 inches of compacted Crushed Stone covered with a geotextile fabric. On-grade floor slabs should bear on at least 18 inches of properly compacted Crushed Stone. Geotextile fabric should be used in areas with soil subgrade.

- Based on the findings at the explorations, foundation and slab subgrade for the proposed building is anticipated to transition from bedrock to glacial till soils along the westerly edge of the proposed building. The layer of crushed stone below footings is intended to help transition between bedrock and soil bearing conditions and to help minimize differential settlement between differing subgrade materials.

- Groundwater seepage should be anticipated from rock and soil cut slopes. The contractor should anticipate the need to dewater temporary excavations for foundations and utilities.

- Blasted bedrock may be processed on-site to reuse for mass fills in the proposed paved areas as well as gravels for pavements and foundation backfill. The existing site soils are generally silty and may be suitable for reuse as subgrade fill in paved areas, provided earthwork is completed during dry, non-freezing weather.

4.2 Site and Subgrade Preparation

We recommend site preparation begin with the construction of an erosion control system to protect adjacent drainage ways and areas outside the construction limits. Surficial organics, roots and topsoil should be completely removed from areas of proposed fill and construction. As much vegetation as possible should remain outside the construction areas to lessen the potential for erosion and site disturbance.

We anticipate subgrades for the proposed building and utility area will generally consist of bedrock with areas of glacial till soils along the southerly edge of the site. We recommend spread footings be underlain by at least 6 inches of Crushed Stone and the slab on grade floor be underlain by 18 inches of Crushed Stone. The layer of Crushed Stone below footings is intended to help transition between bedrock and soil bearing conditions and to help minimize differential settlement between differing subgrade materials.

Utility yard equipment foundations should bear on at least 6 inches of compacted Crushed Stone overlying compacted Structural Fill extending to frost depth (5 feet) or bedrock, whichever is shallower. The extent of soil removal below foundations should extend 1 foot laterally outward from outside edge of perimeter footings for every 1-foot of excavation depth (1H:1V bearing splay).

4.3 Excavation and Dewatering

Excavations will generally encounter forest duff, soils with organics, native clayey silt and sandy silt, glacial till, cobbles and boulders, and bedrock. Care must be exercised during construction to limit disturbance of soil bearing surfaces.

Based on the subsurface findings, we anticipate bedrock removal will be required to achieve proposed building and site grades. We understand bedrock removal with blasting will not be permitted at the site due to proximity to the VAMC hospital. Based on the bedrock present at the site, we anticipate hoe ramming will not be feasible for rock removal. We anticipate rock removal will require drilling and splitting with hydraulic wedges or expansive cement. We anticipate the closely-spaced, large-diameter drill hole (such as with an air-track) will be needed. We recommend a licensed contractor be engaged to provide bedrock removal.

Vibrations from construction should be controlled below threshold limits of 0.5 in/sec for structures, water supply wells and infrastructure within 500 feet of the project site. More restrictive vibration limits may be warranted in specific cases with sensitive equipment, historic structures, or artifacts on-site or within close proximity.

Groundwater seepage should be anticipated from rock and soil cut slopes. Sumping and pumping dewatering techniques should be adequate to control groundwater in smaller excavations. Construction of ditches and swales will likely be needed to assist groundwater control within deeper rock cut area. Controlling the water levels to at least one foot below planned soil excavation depths will help stabilize subgrades during construction. Excavations must be properly shored or sloped in accordance with OSHA Regulations to prevent sloughing and caving of the sidewalls during construction. Care must be taken to preclude undermining adjacent structures, utilities, and roadways. The design and planning of excavations, excavation support systems, and dewatering is the responsibility of the contractor.

4.4 Foundations

We recommend the proposed building be supported on spread footings founded on at least 6 inches of Crushed Stone bearing on properly prepared glacial till or bedrock. Exterior equipment supported on shallow mat foundations, should be founded on at least 6 inches of compacted Crushed Stone overlying compacted Structural Fill extending to frost depth or bedrock, whichever is shallower. For foundations bearing on properly prepared subgrades, we recommend the following geotechnical parameters for design consideration:

Geotechnical Parameters for Spread Footings and Foundation Walls	
Design Frost Depth (100-year AFI)	5 feet
Allowable Soil Bearing Pressure	5.0 ksf
Allowable Bedrock Bearing Pressure	10.0 ksf
Base Friction Factor	0.35
Total Unit Weight of Backfill	125 pcf
At-Rest Lateral Earth Pressure Coefficient	0.5
Internal Friction Angle of Backfill	30°
Seismic Soil Site Class	C (IBC 2015)
Estimated Total Settlement	1-inch or less
Differential Settlement	½-inch or less

4.5 Foundation Drainage

We recommend an underdrain system be installed on the outside edge of perimeter footings. The underdrain pipe should consist of 4-inch diameter, perforated SDR-35 foundation drainpipe bedded in Crushed Stone and wrapped in non-woven geotextile fabric. The underdrain pipe must have a positive gravity outlet protected from freezing, clogging and backflow. Surface grades should be sloped away from the building for positive surface water drainage. General underdrain details are illustrated on the "Foundation Detail Sketch" attached in Appendix B.

4.6 Slab-On-Grade

On-grade floor slabs in heated areas may be designed using a subgrade reaction modulus of 120 pci (pounds per cubic inch) provided the slab is underlain by at least 18 inches of compacted Crushed Stone placed over properly prepared subgrades. The structural engineer or concrete consultant must design steel reinforcing and joint spacing appropriate to slab thickness and function.

The presence of shallow bedrock beneath the proposed building increases the risk of radon intrusion in the building. We recommend building design consider a sub-slab radon venting system and positive building pressurization. Radon design should be provided by a qualified radon consultant.

We recommend a sub-slab vapor retarder particularly in areas of the building where the concrete slab will be covered with an impermeable surface treatment or floor covering that may be sensitive to moisture vapors. The vapor retarder must have a permeance that is less than the floor cover or surface treatment that is applied to the slab. The vapor retarder must have sufficient durability to withstand direct contact with the sub-slab base material and construction activity. The vapor retarder material should be placed according to the manufacturer's recommended method, including the taping and lapping of all joints and wall connections. The architect and/or flooring consultant should select the vapor retarder products compatible with flooring and adhesive materials.

The floor slab should be appropriately cured using moisture retention methods after casting. Typical floor slab curing methods should be used for at least 7 days. The architect or flooring consultant should assign curing methods consistent with current applicable American Concrete Institute (ACI) procedures with consideration of curing method compatibility to proposed surface treatments, flooring and adhesive materials.

4.7 Entrance Slabs and Sidewalks

Entrance slabs and sidewalks adjacent to the building must be designed to reduce the effects of differential frost action between adjacent pavement, doorways, and entrances. We recommend non-frost susceptible Structural Fill be provided to a depth of at least 5 feet below the top of entrance slabs. This thickness of Structural Fill should extend the full footprint of the entrance slab, thereafter, transitioning up to the bottom of the adjacent sidewalk or pavement gravels at a 3H:1V or flatter slope. General details of this frost transition zone are shown on the "Foundation Detail Sketch" attached in Appendix B.

4.8 Segmental Retaining Wall

Based on the anticipated variable subsurface conditions, we recommend the proposed site retaining walls consist of segmental-block retaining walls (SRWs). We recommend the segmental block consist of wet-cast segmental retaining wall units. We recommend the facing blocks be founded on a minimum 6-inch-thick leveling course of compacted Crushed Stone overlying properly prepared subgrades. For design of Segmental Retaining Walls (SRW), such as Redi-Rock, we recommend the following geotechnical parameters for design:

Geotechnical Parameters for Segmental Retaining Wall		
Wall Zone	**Unit Weight (pcf)**	**Friction Angle**
Reinforced Soil	130	34
Retained Soil	125	30
Foundation Soil	125	30

Design of the retaining wall and evaluation of base sliding, overturning and internal stability of the wall are the responsibility of the wall design engineer. The wall designer must account for construction surcharge loads and future live load conditions. S.W.COLE should be retained to perform a global stability analysis of the SRW and to review the SRW submittal if designed by others.

We recommend SRW walls meet the requirements of current NCMA design methodologies and material requirements.

4.9 Fill, Backfill and Compaction

We recommend the following fill and backfill materials: recycled products must also be tested in accordance with applicable environmental regulations and approved by a qualified environmental consultant.

Structural Fill: Backfill for foundations and material below exterior entrances slabs should be clean, non-frost susceptible sand and gravel meeting the gradation requirements for Structural Fill as given below:

Structural Fill	
Sieve Size	**Percent Finer by Weight**
4 inch	100
3 inch	90 to 100
¼ inch	25 to 90
No. 40	0 to 30
No. 200	0 to 6

Crushed Stone: Crushed Stone, used beneath foundations and for underdrain aggregate should be washed ¾-inch crushed stone meeting the requirements of 2020 MaineDOT Standard Specification 703.13 Crushed Stone ¾-Inch.

Reuse of Site Soils: The non-organic on-site soils are silty and unsuitable for reuse in building areas but may be suitable for reuse as subgrade fill in paved and landscape areas, provided earthwork is completed during dry, non-freezing weather and the soils are at a compactable moisture content at the time of reuse.

Placement and Compaction: Fill should be placed in horizontal lifts and compacted such that the desired density is achieved throughout the lift thickness with 3 to 5 passes of the compaction equipment. Loose lift thicknesses for grading, fill and backfill activities should not exceed 12 inches. We recommend that fill and backfill in building and paved areas be compacted to at least 95 percent of its maximum dry density as determined by ASTM D-1557. Crushed Stone should be compacted with 3 to 5 passes of a vibratory plate compactor having a static weight of at least 500 pounds.

4.10 Weather Considerations

Construction activity should be limited during wet and freezing weather and the site soils may require drying or thawing before construction activities may continue. The contractor

should anticipate the need for water to temper fills in order to facilitate compaction during dry weather. If construction takes place during cold weather, subgrades, foundations and floor slabs must be protected during freezing conditions. Concrete and fill must not be placed on frozen soil; and once placed, the concrete and soil beneath the structure must be protected from freezing.

4.11 Design Review and Construction Testing

S.W.COLE should be retained to review the construction documents prior to bidding to determine that our earthwork and foundation recommendations have been properly interpreted and implemented.

A construction material testing and quality assurance program should be implemented during construction to observe compliance with the design concepts, plans, and specifications. S.W.COLE is available to observe earthwork activities, the preparation of foundation bearing surfaces and pavement subgrades, as well as to provide testing and IBC Special Inspection services for soils, concrete, steel, spray-applied fireproofing, fire-stopping, structural masonry and asphalt construction materials.

5.0 CLOSURE

It has been a pleasure to be of assistance to you with this phase of your project. We look forward to working with you during the construction phase of the project.

Sincerely,

S. W. Cole Engineering, Inc.

STATE OF MAINE
MICHAEL A. ST. PIERRE
No. 12519
LICENSED
PROFESSIONAL ENGINEER

Michael St. Pierre, P.E.
Senior Geotechnical Engineer

MAS:rec

APPENDIX A

Limitations

This report has been prepared for the exclusive use of GDM Architects-Engineers for specific application to the proposed Main Computer Room project at the Togus VA off Stoddard Street in Chelsea, Maine. S. W. Cole Engineering, Inc. (S.W.COLE) has endeavored to conduct our services in accordance with generally accepted soil and foundation engineering practices. No warranty, expressed or implied, is made.

The soil profiles described in the report are intended to convey general trends in subsurface conditions. The boundaries between strata are approximate and are based upon interpretation of exploration data and samples.

The analyses performed during this investigation and recommendations presented in this report are based in part upon the data obtained from subsurface explorations made at the site. Variations in subsurface conditions may occur between explorations and may not become evident until construction. If variations in subsurface conditions become evident after submission of this report, it will be necessary to evaluate their nature and to review the recommendations of this report.

Observations have been made during exploration work to assess site groundwater levels. Fluctuations in water levels will occur due to variations in rainfall, temperature, and other factors.

S.W.COLE's scope of services has not included the investigation, detection, or prevention of any Biological Pollutants at the project site or in any existing or proposed structure at the site. The term "Biological Pollutants" includes, but is not limited to, molds, fungi, spores, bacteria, and viruses, and the byproducts of any such biological organisms.

Recommendations contained in this report are based substantially upon information provided by others regarding the proposed project. In the event that any changes are made in the design, nature, or location of the proposed project, S.W.COLE should review such changes as they relate to analyses associated with this report. Recommendations contained in this report shall not be considered valid unless the changes are reviewed by S.W.COLE.

APPENDIX B

Figures

N

LEGEND

APPROXIMATE BORING LOCATION

NOTES:

1. EXPLORATION LOCATION PLAN PREPARED FROM ORTHOIMAGERY ENTITLED "ORTHOREGIONAL2018," PROVIDED BY THE MAINE GEOLIBRARY.

2. PROPOSED BUILDING OVERLAID FROM A GEOREFERENCED CAD FILE PROVIDED BY GDM ARCHITECTS-ENGINEERS, RECEIVED VIA E-MAIL 6/13/2023.

3. THE BORINGS LOCATED IN THE FIELD BY GPS SURVEY BY S. W. COLE ENGINEERING, INC. USING A MAPPING GRADE GPS RECEIVER.

4. THIS PLAN SHOULD BE USED IN CONJUNCTION WITH THE ASSOCIATED S. W. COLE ENGINEERING, INC. GEOTECHNICAL REPORT.

5. THE PURPOSE OF THIS PLAN IS ONLY TO DEPICT THE LOCATION OF THE EXPLORATIONS IN RELATION TO THE EXISTING CONDITIONS AND PROPOSED CONSTRUCTION AND IS NOT TO BE USED FOR CONSTRUCTION.

0 15 30 60 90 Feet

S.W.COLE ENGINEERING, INC.

GDM ARCHITECTS-ENGINEERS

EXPLORATION LOCATION PLAN

PROPOSED MAIN COMPUTER ROOM
OFF STODDARD STREET
VA TOGUS CAMPUS, CHELSEA, MAINE

Job No.	23-1147	Scale	1" = 30'
Date:	07/20/2023	Sheet	1

R:\2023\23-1147\ArcProject\23-1147.aprx, 7/20/2023 11:25 AM 23-1147 Sheet 1 - ELP, Scale: 1:360, CMORRISON, S. W. COLE ENGINEERING, INC.

REISSUED 02-18-2026

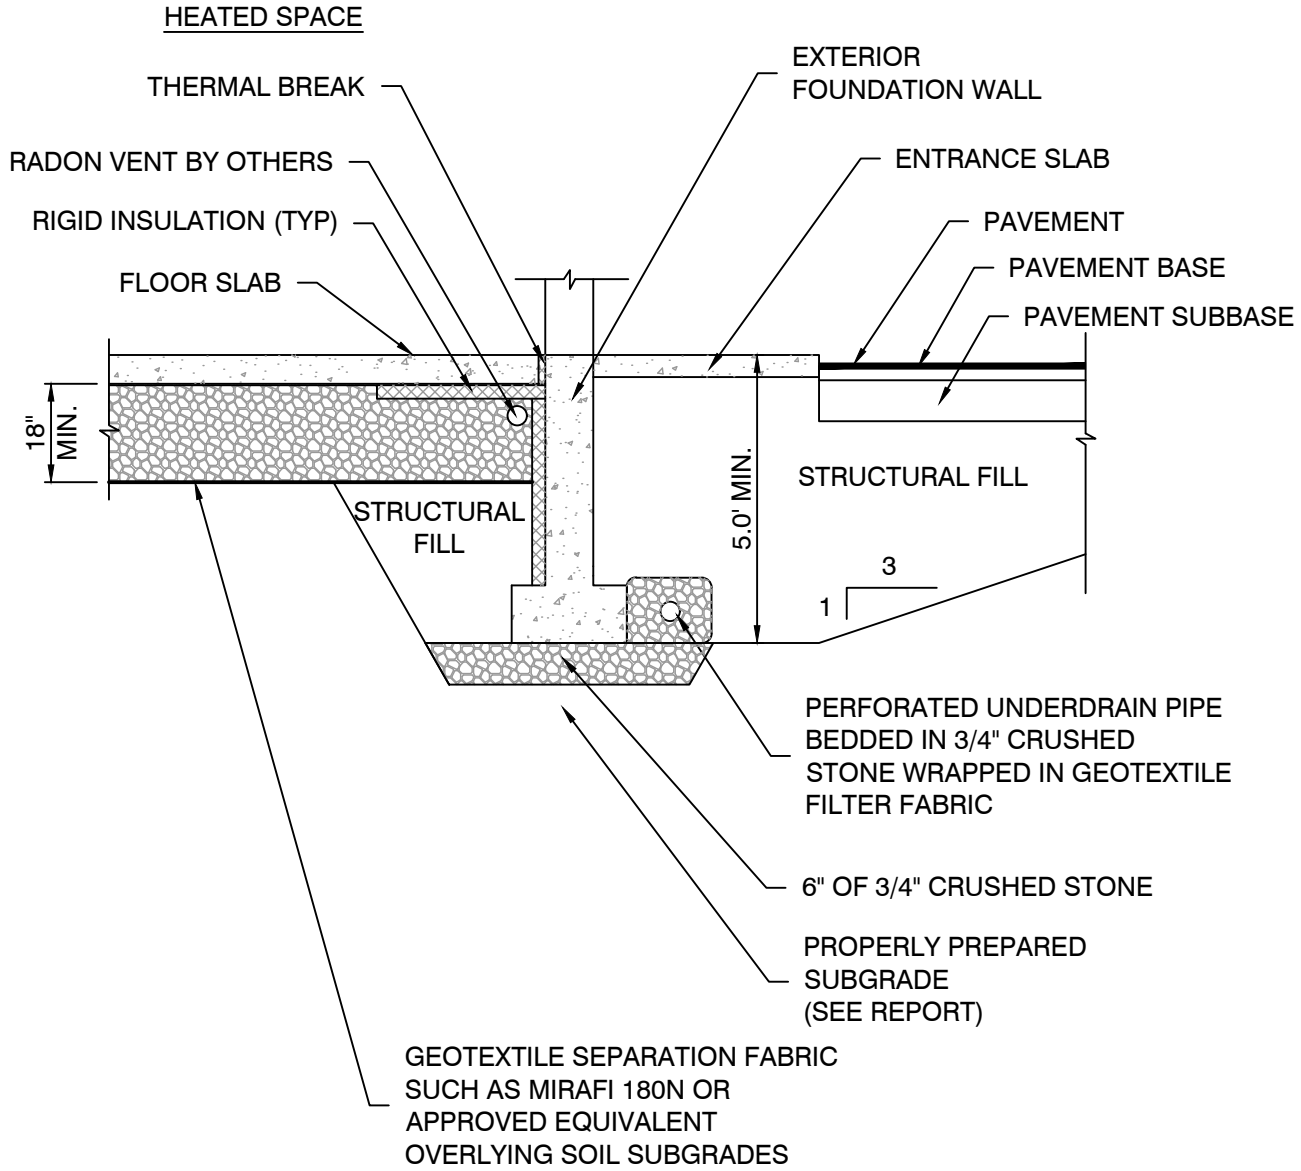

NOTE:

1. UNDERDRAIN INSTALLATION AND MATERIAL GRADATION RECOMMENDATIONS ARE CONTAINED WITHIN THIS REPORT.
2. DETAIL IS PROVIDED FOR ILLUSTRATIVE PURPOSES ONLY, NOT FOR CONSTRUCTION.

S.W.COLE ENGINEERING, INC.

GDM ARCHITECTS-ENGINEERS

FOUNDATION DETAIL SKETCH

PROPOSED MAIN COMPUTER ROOM
OFF STODDARD STREET
VA TOGUS CAMPUS, CHELSEA, MAINE

Job No.:	23-1147	Scale:	Not to Scale
Date :	07/20/2023	Sheet:	2

R:\2023\23-1147\CAD\Drawings\23-1147 FDS.dwg, 7/20/2023 11:33:13 AM, CEM, S. W. Cole Engineering, Inc.

REISSUED 02-18-2026

APPENDIX C

Exploration Logs and Key

KEY TO NOTES & SYMBOLS

Test Boring and Test Pit Explorations

Stratification lines represent the approximate boundary between soil types and the transition may be gradual.

Key to Symbols Used:

w	-	water content, percent (dry weight basis)
q_u	-	unconfined compressive strength, kips/sq. ft. - laboratory test
S_v	-	field vane shear strength, kips/sq. ft.
L_v	-	lab vane shear strength, kips/sq. ft.
q_p	-	unconfined compressive strength, kips/sq. ft. – pocket penetrometer test
O	-	organic content, percent (dry weight basis)
W_L	-	liquid limit - Atterberg test
W_P	-	plastic limit - Atterberg test
WOH	-	advance by weight of hammer
WOM	-	advance by weight of man
WOR	-	advance by weight of rods
HYD	-	advance by force of hydraulic piston on drill
RQD	-	Rock Quality Designator - an index of the quality of a rock mass.
γ_T	-	total soil weight
γ_B	-	buoyant soil weight

Description of Proportions:

Trace:	0 to 5%
Some:	5 to 12%
"Y"	12 to 35%
And	35+%
With	Undifferentiated

Description of Stratified Soils

Parting:	0 to 1/16" thickness
Seam:	1/16" to 1/2" thickness
Layer:	½" to 12" thickness
Varved:	Alternating seams or layers
Occasional:	one or less per foot of thickness
Frequent:	more than one per foot of thickness

REFUSAL: **Test Boring Explorations** - Refusal depth indicates that depth at which, in the drill foreman's opinion, sufficient resistance to the advance of the casing, auger, probe rod or sampler was encountered to render further advance impossible or impracticable by the procedures and equipment being used.

REFUSAL: **Test Pit Explorations** - Refusal depth indicates that depth at which sufficient resistance to the advance of the backhoe bucket was encountered to render further advance impossible or impracticable by the procedures and equipment being used.

Although refusal may indicate the encountering of the bedrock surface, it may indicate the striking of large cobbles, boulders, very dense or cemented soil, or other buried natural or man-made objects or it may indicate the encountering of a harder zone after penetrating a considerable depth through a weathered or disintegrated zone of the bedrock.

BORING LOG

BORING NO.:	**B-23-1**
SHEET:	1 of 1
PROJECT NO.	23-1147
DATE START:	6/27/2023
DATE FINISH:	6/27/2023

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 12.0 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Hollow Stem Auger
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** 2 1/4 in / 5 5/8 in **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** N/A /N/A **CORE BARREL:** N/A
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): No free water observed
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level
▽ At time of Drilling
▼ At Completion of Drilling
▼ After Drilling

D = Split Spoon Sample
U = Thin Walled Tube Sample
R = Rock Core Sample
V = Field Vane Shear

Pen. = Penetration Length
Rec. = Recovery Length
bpf = Blows per Foot
mpf = Minute per Foot

WOR = Weight of Rods
WOH = Weight of Hammer
RQD = Rock Quality Designation
PID = Photoionization Detector

S_v = Field Vane Shear Strength, kips/sq.ft.
q_U = Unconfined Compressive Strength, kips/sq.ft.
Ø = Friction Angle (Estimated)
N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-2	24/24	1-2-5-7	q_P=8.5-9.0 ksf		Forest Duff		
										1.0 Very stiff, brown, clayey SILT, trace fine sand		
			2D		2-4	24/24	6-7-10-12	q_P=7.5-8.0 ksf				
										3.0 Very stiff, gray and brown mottled, clayey SILT		
	5		3D		5-7	24/24	3-5-7-8	q_P=5.0-7.0 ksf				
	10		4D		10-12	24/15	17-17-11-10			9.5 Dense, brown, gravelly silty SAND with cobbles (Glacial Till)		

Auger Refusal at 12.0 feet
Probable Bedrock

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING / WELL 10-12-2022 23-1147.GPJ SWCE TEMPLATE.GDT 7/26/23

BORING LOG

S.W.COLE

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

BORING NO.: B-23-2
SHEET: 1 of 1
PROJECT NO. 23-1147
DATE START: 6/27/2023
DATE FINISH: 6/27/2023

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 13.7 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Hollow Stem Auger
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** 2 1/4 in / 5 5/8 in **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** N/A /N/A **CORE BARREL:** N/A
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): No free water observed
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level
▽ At time of Drilling
▼ At Completion of Drilling
▼ After Drilling

D = Split Spoon Sample
U = Thin Walled Tube Sample
R = Rock Core Sample
V = Field Vane Shear

Pen. = Penetration Length
Rec. = Recovery Length
bpf = Blows per Foot
mpf = Minute per Foot

WOR = Weight of Rods
WOH = Weight of Hammer
RQD = Rock Quality Designation
PID = Photoionization Detector

S_v = Field Vane Shear Strength, kips/sq.ft.
q_U = Unconfined Compressive Strength, kips/sq.ft.
Ø = Friction Angle (Estimated)
N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-2	24/18	1-2-3-6	q_P=5.0-5.5 ksf		0.6 Forest Duff		
			2D		2-4	24/16	5-7-8-11	q_P=6.0-8.0 ksf		Very stiff, brown, clayey SILT, trace fine sand		
	5		3D		5-7	24/24	13-27-27-40	ID 14919A w =8.1 %		4.3 Dense to very dense, brown, silty gravelly SAND with cobbles (Glacial Till)		
	10		4D		10-12	24/6	11-10-19-22					

Auger Refusal at 13.7 feet
Probable Bedrock

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING NO.: B-23-2

REISSUED 02-18-2026

BORING LOG

BORING NO.:	**B-23-3**
SHEET:	1 of 1
PROJECT NO.	23-1147
DATE START:	6/27/2023
DATE FINISH:	6/27/2023

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 6.2 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Hollow Stem Auger
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** 2 1/4 in / 5 5/8 in **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** N/A /N/A **CORE BARREL:** N/A
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): No free water observed
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level
▽ At time of Drilling
▼ At Completion of Drilling
▼ After Drilling

D = Split Spoon Sample
U = Thin Walled Tube Sample
R = Rock Core Sample
V = Field Vane Shear

Pen. = Penetration Length
Rec. = Recovery Length
bpf = Blows per Foot
mpf = Minute per Foot

WOR = Weight of Rods
WOH = Weight of Hammer
RQD = Rock Quality Designation
PID = Photoionization Detector

S_v = Field Vane Shear Strength, kips/sq.ft.
q_U = Unconfined Compressive Strength, kips/sq.ft.
Ø = Friction Angle (Estimated)
N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-2	24/16	2-3-4-3	q_P=6.0-7.0 ksf		Forest Duff (0.8)		
			2D		2-4	24/24	3-6-8-8	q_P=7.5-8.5 ksf		Very stiff, brown and gray mottled, clayey SILT		
	5		3D		5-6.2	14/10	10-20-50/2"					

Auger Refusal at 6.2 feet
Probable Bedrock

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING NO.: **B-23-3**

REISSUED 02-18-2026

BORING LOG

BORING NO.:	**B-23-4**
SHEET:	1 of 1
PROJECT NO.	23-1147
DATE START:	6/28/2023
DATE FINISH:	6/28/2023

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 30.3 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Cased Boring
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** N/A / N/A **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** 4 in / 4 1/2 in **CORE BARREL:** NQ2 / 2
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): ▼ 11.8 ft measured in open borehole after coring
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level: ▽ At time of Drilling; ▼ At Completion of Drilling; ▼ After Drilling
D = Split Spoon Sample; U = Thin Walled Tube Sample; R = Rock Core Sample; V = Field Vane Shear
Pen. = Penetration Length; Rec. = Recovery Length; bpf = Blows per Foot; mpf = Minute per Foot
WOR = Weight of Rods; WOH = Weight of Hammer; RQD = Rock Quality Designation; PID = Photoionization Detector
S_v = Field Vane Shear Strength, kips/sq.ft.; q_u = Unconfined Compressive Strength, kips/sq.ft.; Ø = Friction Angle (Estimated); N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-2	24/8	1-1-2-7			Forest Duff		
										1.3 Very dense, brown, gravelly silty SAND, with cobbles and boulders (Glacial Till)		
			2D		2-3.1	13/4	17-46-50/1"					
	5		3D		5-6.3	16/16	37-38-50/4"					
			1R		6.3-11.3	60/58	48	ID 14920A UCT=20,440psi		6.3 Gray, fine-grained, GRANODIORITE, hard, fresh to very slightly weathered, joints are horizontal to low angle (0-35° from horizontal), close to moderately close, and tight to slightly open.		
	10											
			2R		11.3-16.3	60/60	72				▼	
	15											
			3R		16.3-21.3	60/60	62					
	20											
			4R		21.3-26.3	60/60	87					
	25											
			5R		26.3-30.3	48/48	54					
	30									Bottom of Exploration at 30.3 feet		

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING NO.: **B-23-4**

BORING LOG

BORING NO.:	**B-23-5**
SHEET:	1 of 1
PROJECT NO.	23-1147
DATE START:	6/28/2023
DATE FINISH:	6/28/2023

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 4.6 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Hollow Stem Auger
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** 2 1/4 in / 5 5/8 in **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** N/A /N/A **CORE BARREL:** N/A
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): No free water observed
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level: ▽ At time of Drilling; ▼ At Completion of Drilling; ▼ After Drilling
D = Split Spoon Sample; U = Thin Walled Tube Sample; R = Rock Core Sample; V = Field Vane Shear
Pen. = Penetration Length; Rec. = Recovery Length; bpf = Blows per Foot; mpf = Minute per Foot
WOR = Weight of Rods; WOH = Weight of Hammer; RQD = Rock Quality Designation; PID = Photoionization Detector
S_v = Field Vane Shear Strength, kips/sq.ft.; q_U = Unconfined Compressive Strength, kips/sq.ft.; Ø = Friction Angle (Estimated); N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	SAMPLE INFORMATION: Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-2	24/14	6-7-29-8			Forest Duff (1.0)		
										Dense, brown, gravelly silty SAND with cobbles and boulders (Glacial Till)		

Auger Refusal at 4.6 feet
Probable Bedrock

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING / WELL 10-12-2022 23-1147.GPJ SWCE TEMPLATE.GDT 7/26/23

BORING LOG

BORING NO.:	**B-23-6**
SHEET:	1 of 1
PROJECT NO.	23-1147
DATE START:	6/28/2023
DATE FINISH:	6/28/2023

CLIENT: GDM Architects-Engineers
PROJECT: Proposed Main Computer Room
LOCATION: Togus VAMC Campus, off Stoddard Street, Chelsea, Maine

Drilling Information

LOCATION: See Exploration Location Plan **ELEVATION (FT):** **TOTAL DEPTH (FT):** 30.1 **LOGGED BY:** Kevin Hanscom
DRILLING CO.: S. W. Cole Explorations, LLC **DRILLER:** Kevin Hanscom **DRILLING METHOD:** Cased Boring
RIG TYPE: Track Mounted Diedrich D-50 **AUGER ID/OD:** N/A / N/A **SAMPLER:** Standard Split-Spoon
HAMMER TYPE: Automatic **HAMMER WEIGHT (lbs):** 140 **CASING ID/OD:** 4 in / 4 1/2 in **CORE BARREL:** NQ2 / 2
HAMMER CORRECTION FACTOR: 1.53 **HAMMER DROP (inch):** 30
WATER LEVEL DEPTHS (ft): ▽ 8.8 ft measured in open borehole prior to coring
GENERAL NOTES:

KEY TO NOTES AND SYMBOLS:
Water Level: ▽ At time of Drilling; ▼ At Completion of Drilling; ▼ After Drilling
D = Split Spoon Sample; U = Thin Walled Tube Sample; R = Rock Core Sample; V = Field Vane Shear
Pen. = Penetration Length; Rec. = Recovery Length; bpf = Blows per Foot; mpf = Minute per Foot
WOR = Weight of Rods; WOH = Weight of Hammer; RQD = Rock Quality Designation; PID = Photoionization Detector
S_v = Field Vane Shear Strength, kips/sq.ft.; q_u = Unconfined Compressive Strength, kips/sq.ft.; Ø = Friction Angle (Estimated); N/A = Not Applicable

Elev. (ft)	Depth (ft)	Casing Pen. (bpf)	Sample No.	Type	Depth (ft)	Pen./ Rec. (in)	Blow Count or RQD	Field / Lab Test Data	Graphic Log	Sample Description & Classification	H_20 Depth	Remarks
			1D		0-1.8	22/13	1-2-7-50/4"			Forest Duff (1.0)		
										Dense to very dense, brown, gravelly silty SAND with cobbles and boulders (Glacial Till)		
	5		2D		5-7	24/18	20-21-25-30					
	10		3D		10-12	24/15	15-17-15-10				▽	
	15		4D		15-15.1	1/0	50/1"			(15.1) Gray, fine-grained, GRANODIORITE, hard, fresh to very slightly weathered, joints are horizontal to low angle (0-35° from horizontal), close to moderately close, and tight to slightly open.		
			1R		15.1-20.1	60/60	62					
	20		2R		20.1-25.1	60/60	82	ID 14921A UCT=15,400psi				
	25		3R		25.1-30.1	60/60	68					
	30									Bottom of Exploration at 30.1 feet		

Stratification lines represent approximate boundary between soil types, transitions may be gradual. Water level readings have been made at times and under conditions stated. Fluctuations of groundwater may occur due to other factors than those present at the time measurements were made.

BORING NO.: **B-23-6**

BORING / WELL 10-12-2022 23-1147.GPJ SWCE TEMPLATE.GDT 7/26/23

REISSUED 02-18-2026

B-23-4, 1R 6.3-11.3 ft
B-23-4, 2R 11.3-16.3 ft
B-23-4, 3R 16.3-21.3 ft
B-23-4, 4R 21.3-26.3 ft

B-23-4, 5R, 26.3-30.0 ft
B-23-6, 1R, 15.1-20.1 ft
B-23-6, 2R, 20.1-25.1 ft
B-23-6, 3R, 25.1-30.1 ft

APPENDIX D

Laboratory Test Results

Report of Gradation

ASTM C-117 & C-136

Project Name	AUGUSTA ME - PROPOSED VA TOGUS CAMPUS MAIN COMPUTER ROOM - EXPLORATIONS AND GEOTECHNICAL ENGINEERING	Project Number	23-1147
Client	GDM, INC.	Lab ID	14919A
		Date Received	7/17/2023
		Date Completed	7/21/2023
Material Source	**B-23-2, 3D, 5FT**	Tested By	TRAVIS SMITH

STANDARD DESIGNATION (mm/µm)	SIEVE SIZE	AMOUNT PASSING (%)	
150 mm	**6"**	**100**	
100 mm	**4"**	**100**	
75 mm	**3"**	**100**	
50 mm	**2"**	**100**	
38.1 mm	**1-1/2"**	**100**	
25.0 mm	**1"**	**100**	
19.0 mm	**3/4"**	**89**	
12.5 mm	**1/2"**	**79**	
9.5 mm	**3/8"**	**79**	
6.3 mm	**1/4"**	**73**	
4.75 mm	**No. 4**	**70**	29.5% Gravel
2.00 mm	**No. 10**	**63**	
850 um	**No. 20**	**56**	
425 um	**No. 40**	**49**	48.2% Sand
250 um	**No. 60**	**42**	
150 um	**No. 100**	**34**	
75 um	**No. 200**	**22.3**	22.3% Fines

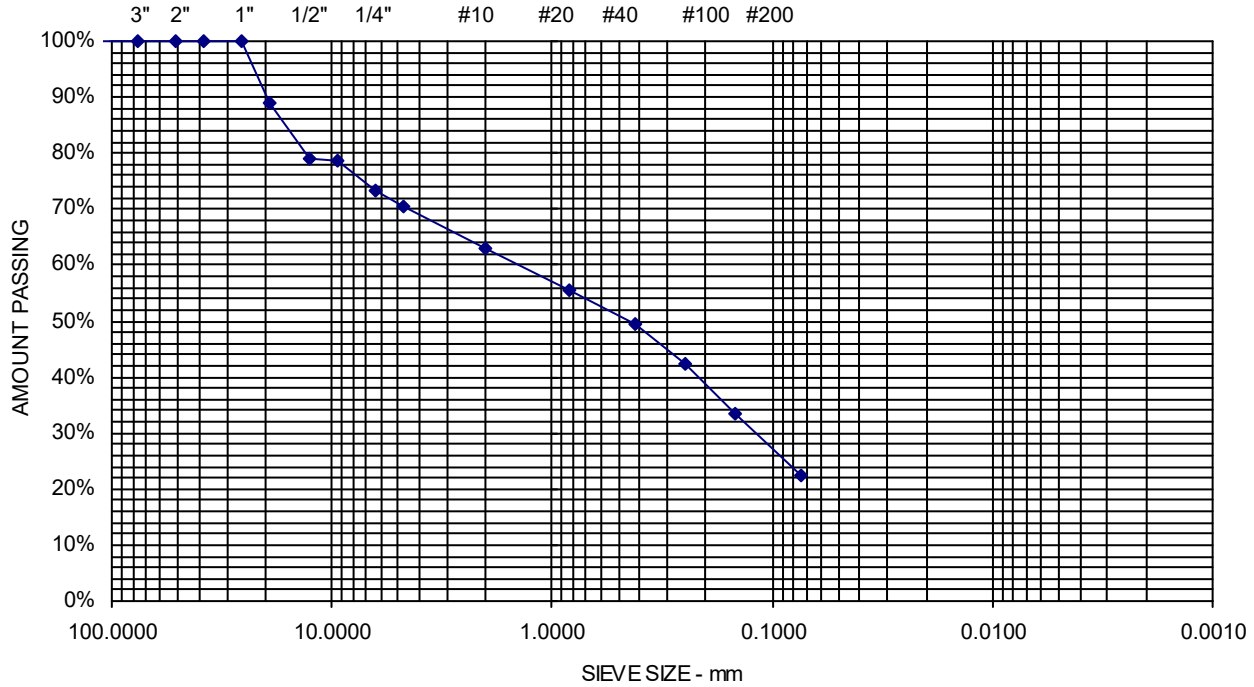

Comments: As Delivered MC: 8.1%

Sheet

REISSUED 02-18-2026