United States Department of Agriculture
Forest Service

TETON COUNTY, IDAHO
CLARK COUNTY, IDAHO
R4 INTERMOUNTAIN REGION
CARIBOU-TARGHEE NATIONAL FOREST
TETON BASIN RANGER DISTRICT; DUBOIS RANGER DISTRICT

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

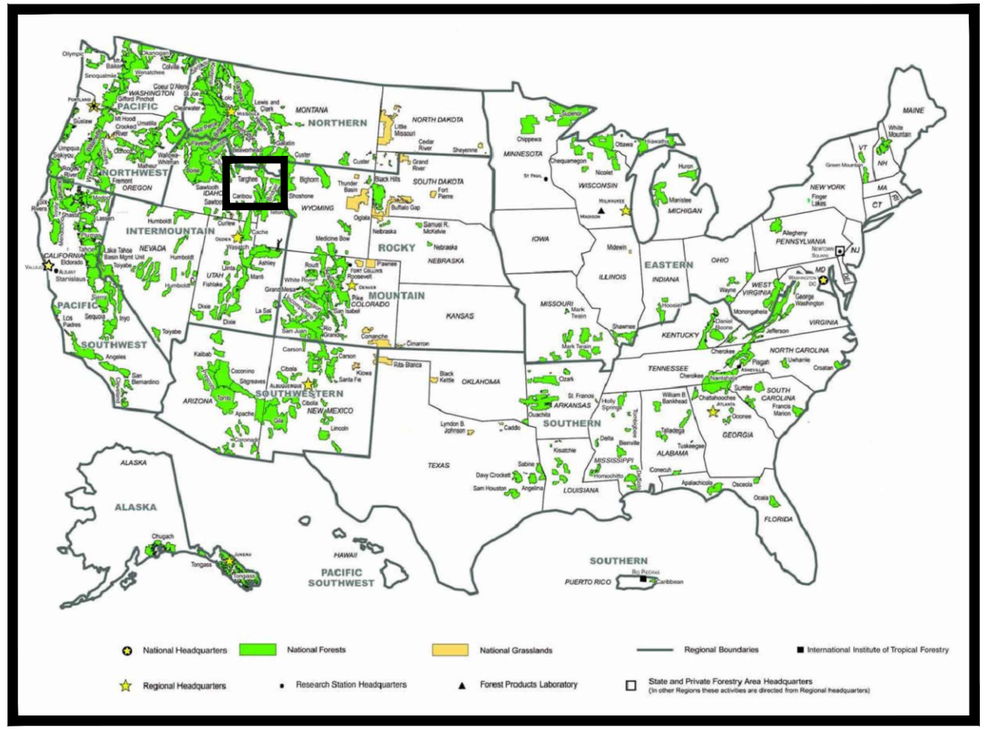

FOREST LOCATION MAP

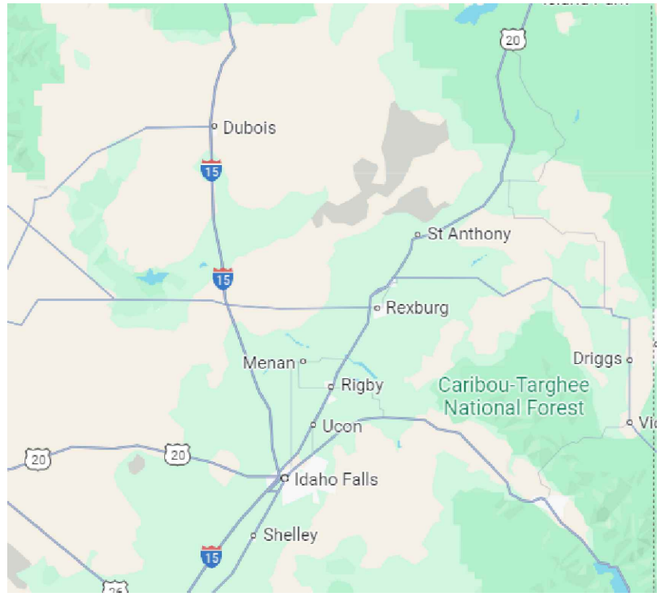

PROJECT LOCATION MAP: DUBOIS

TRAVEL DIRECTIONS:

DUBOIS:
FROM IDAHO FALLS, TAKE I-15 NORTH TOWARD ROBERTS/BUTTE FOR 48 MILES. TAKE EXIT 167 FOR ID-22 TOWARD DUBOIS. TURN RIGHT ONTO A-2 CLARK COUNTY RD/W MAIN STREET. FOR HOUSE #1, TURN NORTH ONTO OAKLEY AVENUE TO 23 N OAKLEY AVENUE (44.1769°, -112.2309). FOR HOUSE #3 AND 4, TAKE OAKLEY AVENUE SOUTH AND TURN WEST ONTO WEST 4TH STREET SOUTH. 285 AND 273 W. 4TH ST. S. WILL BE ON THE CORNER OF 4TH ST. S. AND CLARK STREET (44.1706°, -112.2334°). FOR HOUSE #5, TAKE CLARK STREET SOUTH TO 444 S (44.1703°,-112.2336°). FOR HOUSE #2, TURN EAST ONTO 5TH ST. S. TO THOMAS AVENUE. 483 S WILL BE ON THE CORNER OF 5TH ST. S. AND THOMAS AVENUE (44.1698°, -112.2326).

INDEX OF SHEETS

SHEET	SHEET TITLE
G-01	COVERSHEET
G-02	PROJECT DESCRIPTION
C-01	1137T DRIGGS BUNKHOUSE 215 N 2ND E
C-02	1332T DUBOIS DWELLING #1 GARAGE 94 N OAKLEY ST.
C-03	1129 DUBOIS DWELLING #2 483 S THOMAS
C-04	1138 DUBOIS DWELLING #3 273 W 4TH S
C-05	1139 DUBOIS DWELLING #4 285 W 4TH S
C-06	1135T DUBOIS DWELLING #5 444 S CLARK
C-07	1165 DUBOIS BUNKHOUSE 266 WEST 5TH ST.
C-08	SOFFIT & FASCIA (FOR UNIT 1137T)

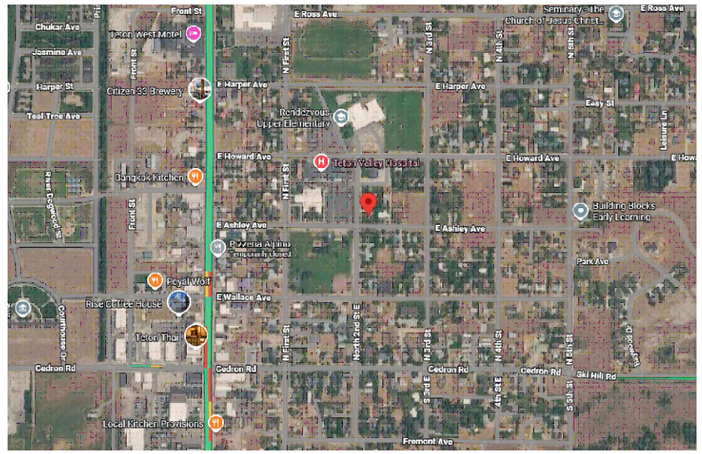

PROJECT LOCATION MAP: DRIGGS

TRAVEL DIRECTIONS:

DRIGGS:
FROM IDAHO FALLS,TAKE US-20 E FOR 30 MILES TO ID-33 E. TAKE EXIT 339 TOWARD ID-33 E FOR 42 MILES. TURN LEFT ONTO HOWARD AVENUE IN DRIGGS. CONTINUE ON E HOWARD AVENUE FOR 0.3 MILES TO S 2ND ST/NORTH 2ND ST E. DRIGGS BUNKHOUSE, 215 NORTH 2ND ST E, WILL BE ON THE CORNER OF 2ND ST E AND E ASHLEY AVENUE (43.7261°, -111.1067°).

APPROVED:

STEVEN JENKINS — Digitally signed by STEVEN JENKINS Date: 2026.05.06 13:46:44 -06'00'
FOREST ENGINEER — DATE

Digitally signed by JAY PENCE Date: 2026.05.06 14:30:03 -06'00'
DISTRICT RANGER — DATE

BLAKE DORY — Digitally signed by BLAKE DORY Date: 2026.05.07 12:53:17 -06'00'
DISTRICT RANGER — DATE

KIMBERLY PIERSON — Digitally signed by KIMBERLY PIERSON Date: 2026.05.07 15:34:53 -06'00'
FOREST SUPERVISOR — DATE

5/6/26 13:32 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

1137T Driggs Bunkhouse

PROJECT DESCRIPTION (Teton Basin Ranger District):
The Project will consist of replacing siding on housing unit 1137T.

- Tear off and dispose of all siding on bunkhouse down to the exterior wall sheathing.
- Tear off and dispose of all soffit and fascia.
- Provide and Install building wrap over the sheathing.
- Replace damaged sheathing.
- Replace exising siding with insulated steel log siding.
- Replace Soffit and Fascia on unit 1137T with vented aluminum soffit.

QUANTITIES ASSOCIATED WITH THESE OPTIONS ARE IDENTIFIED IN THE SCHEDULE OF ITEMS.
PROJECT NOTES:

- Depicted Measurements are Approximate.
- Contractor to Field Verify Measurements Prior to Bidding.

1137T Driggs Bunkhouse

1332T Dubois Garage

1129 Dubois Dwelling #2

PROJECT DESCRIPTION (Dubois Ranger District):
The Project will consist of replacing siding on housing units 1129, 1135, 1138 & 1139, and 1165.
Also, Unit Garage 1332T.

- Tear off and dispose of all siding on housing and garage units down to the exterior wall sheathing.
- Provide and Install building wrap over the sheathing.
- Replace damaged sheathing.
- Replace existing siding with fiber cement siding on units 1129, 1135, 1138, 1139, 1165, and garage 1332T.
- Replace beam wrap on unit 1165.

QUANTITIES ASSOCIATED WITH THESE OPTIONS ARE IDENTIFIED IN THE SCHEDULE OF ITEMS.
PROJECT NOTES:

- Depicted Measurements are Approximate.
- Contractor to Field Verify Measurements Prior to Bidding.

1138 & 1139 Dubois Dwellings #3 &4

1135 Dubois Dwelling #5

Beams to Wrap

1165 Dubois Bunkhouse

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		11/28/2025
2		12/02/2024
1		10/23/2024

PROJECT NAME

DUBOIS HOUSING ROOF REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICT

DRAWING TITLE

PROJECT DESCRIPTION

DATE 12/15/2025	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. G-02
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 02 OF 10

5/6/26 13:32 NINIANDERSON C:\USERS\NINIANDERSON\BOX\01. NINI.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

Driggs Bunkhouse

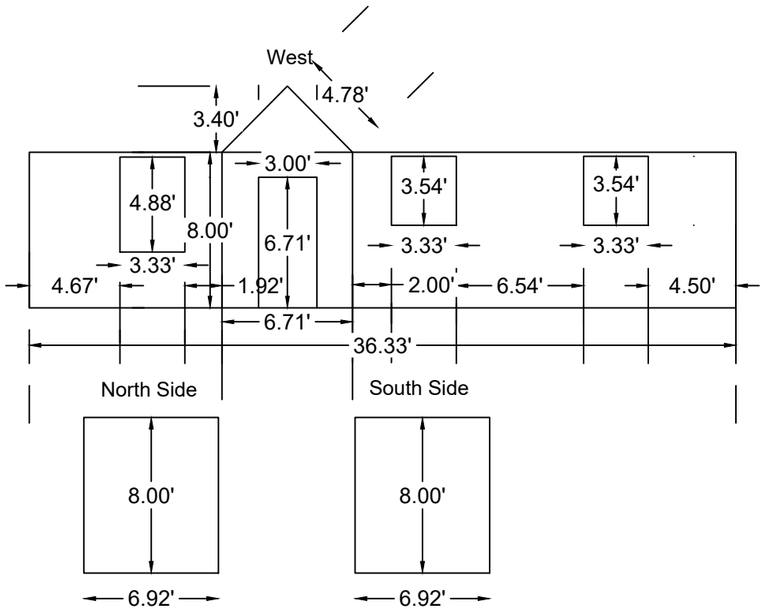

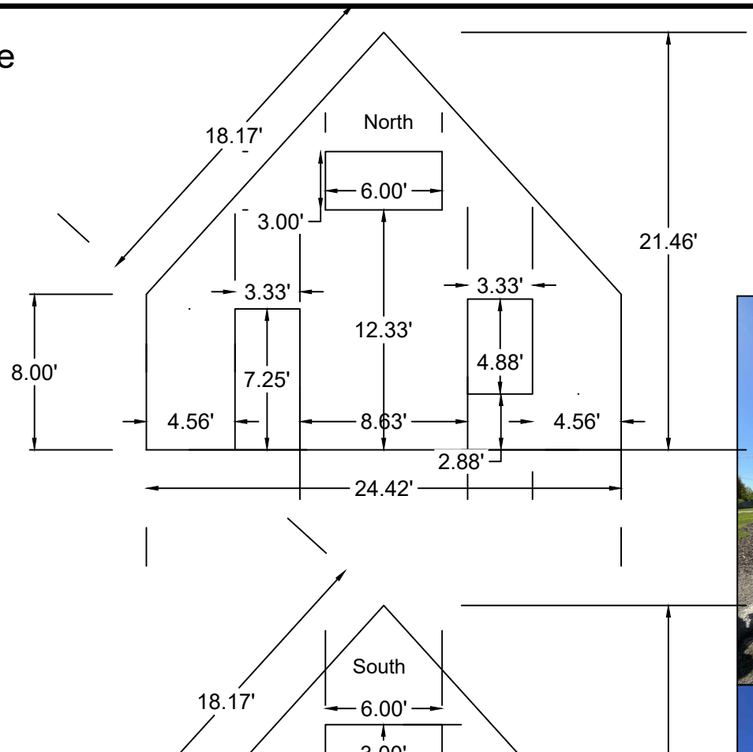

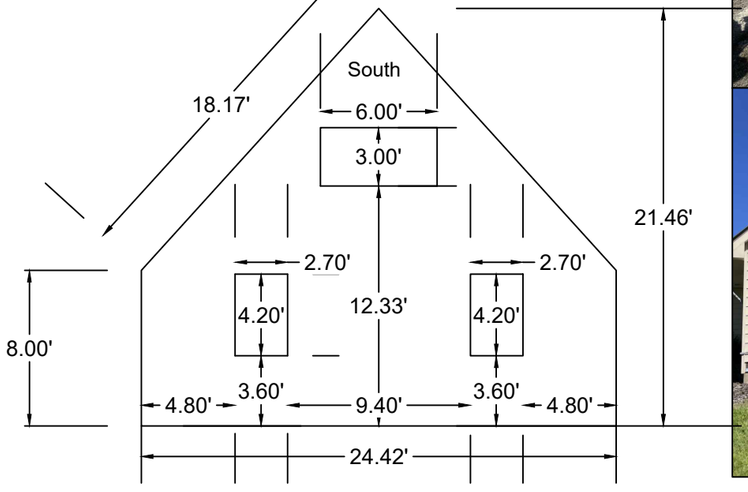

CONTRACTOR TO FIELD VERIFY MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1137T DRIGGS BUNKHOUSE
215 N 2ND E
DRIGGS, ID 83422

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-01
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 03 OF 10

5/6/26 13:32 NINAANDERSON C:\USERS\NINAANDERSON\BOX\01. NINA.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

Dubois Dwelling #1 Garage

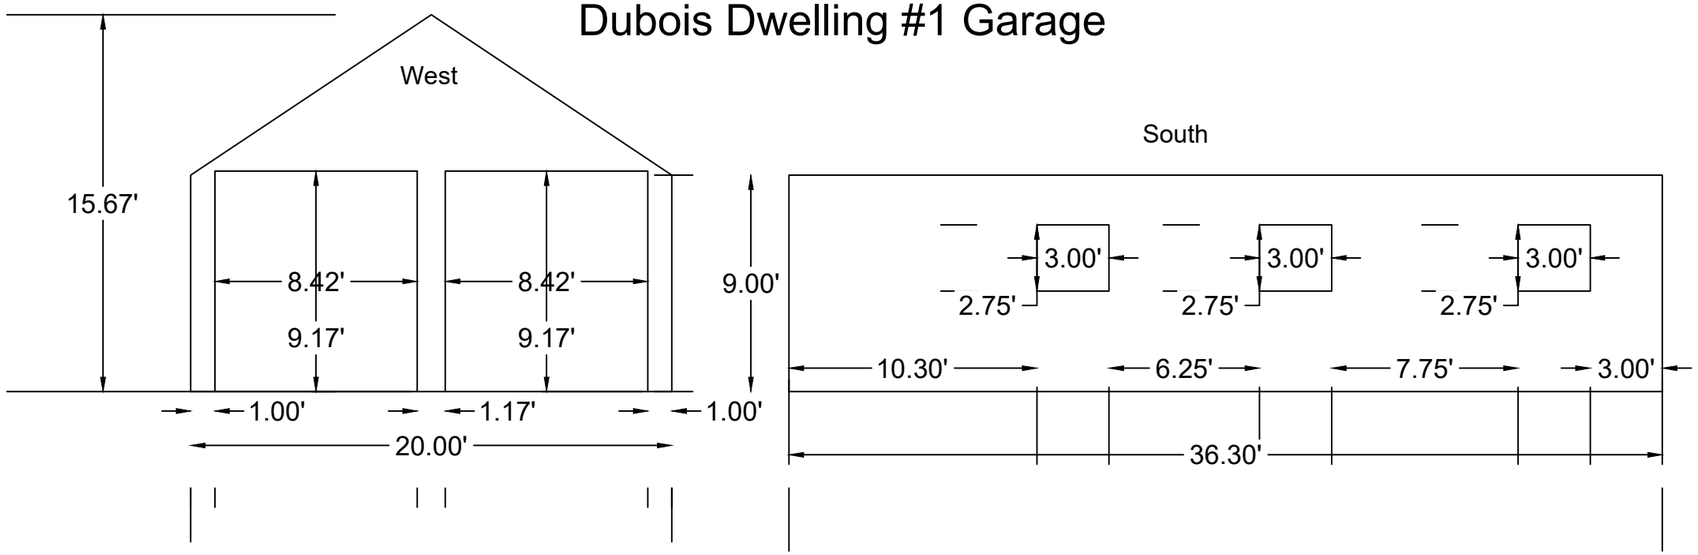

CONTRACTOR TO FIELD VERIFY
MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

5/6/26 13:32 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1332T DWELLING #1 GARAGE 94 N OAKLEY AVE

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-02
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 04 OF 10

Dubois Dwelling #2

South

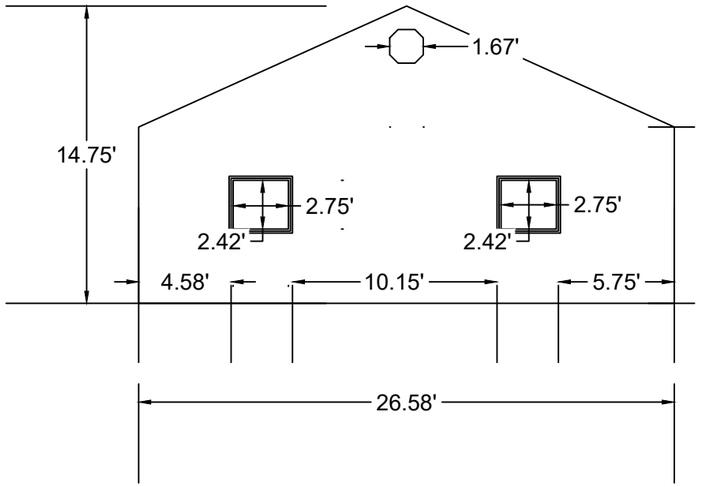

Front

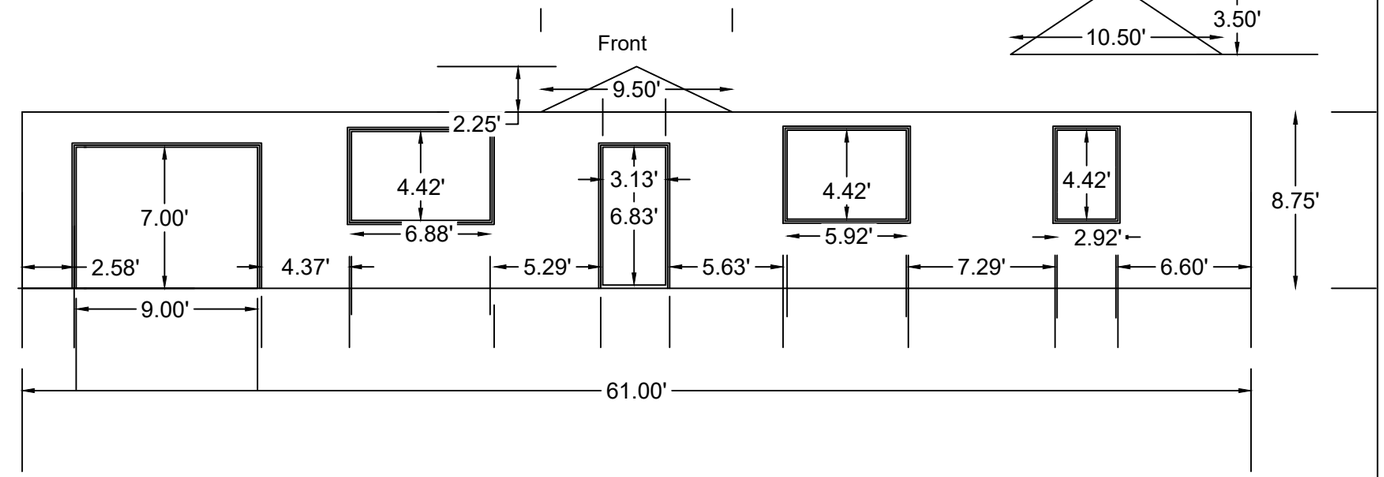

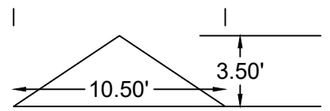

North

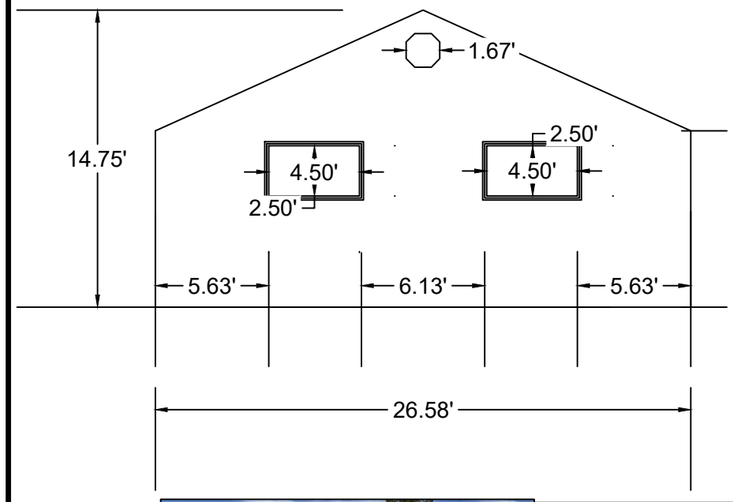

Back

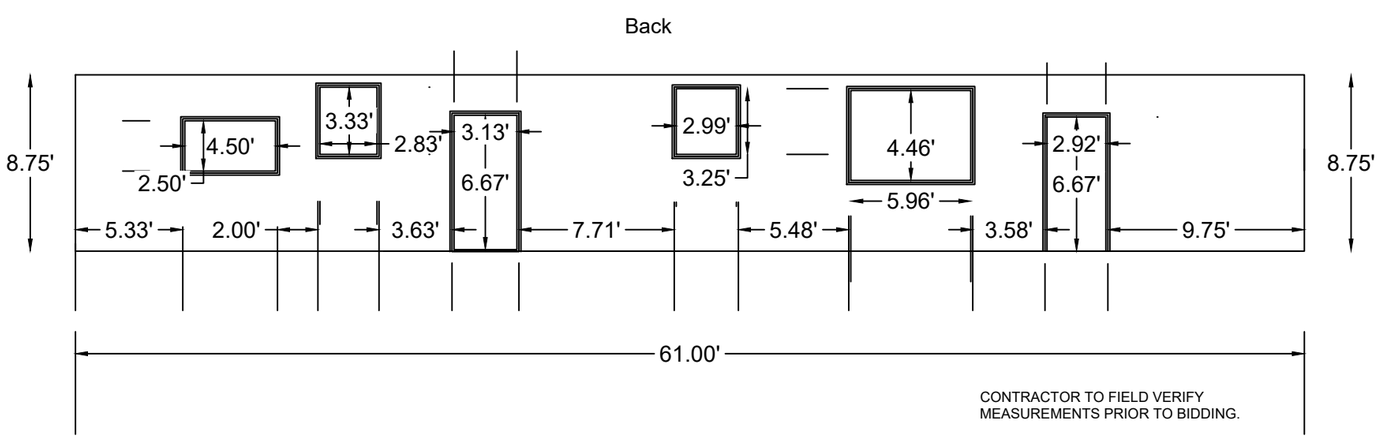

CONTRACTOR TO FIELD VERIFY
MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1129 DWELLING #2
483 S THOMAS

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-03
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 05 OF 10

5/6/26 13:32 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSP ACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

Dubois Dwelling #3

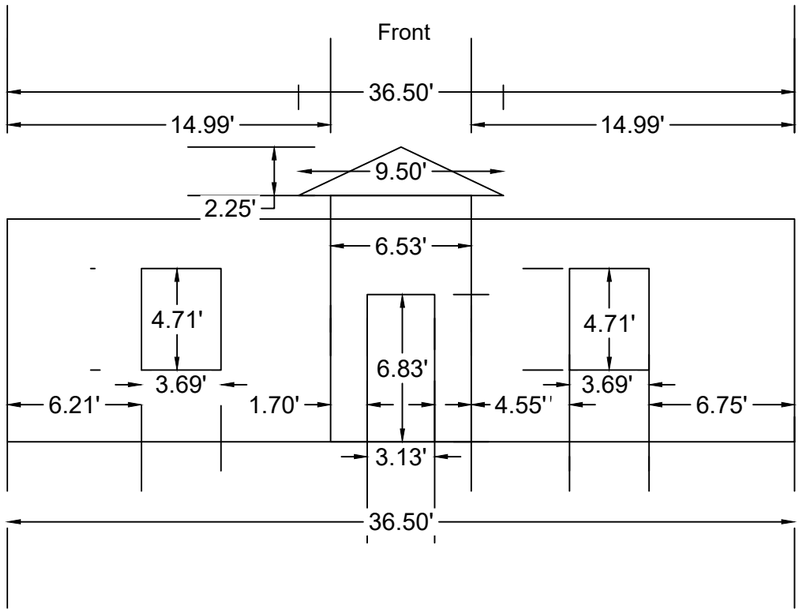

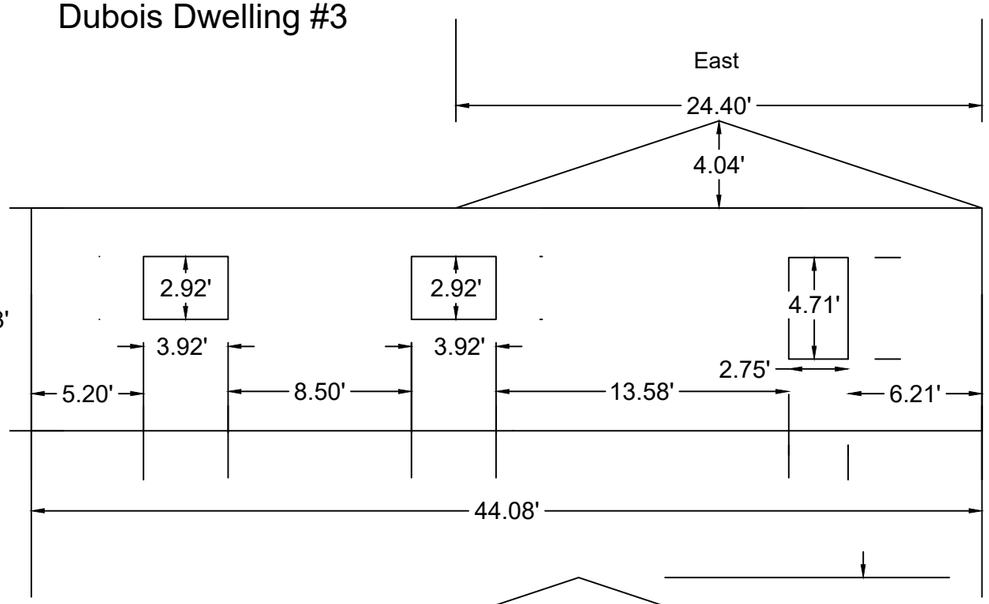

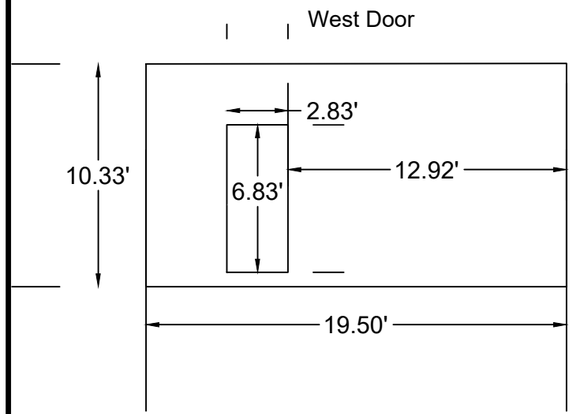

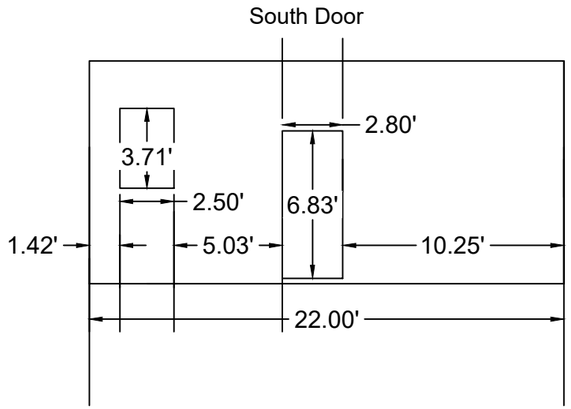

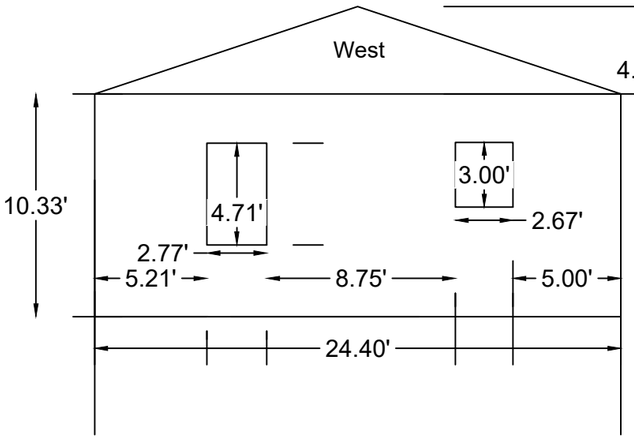

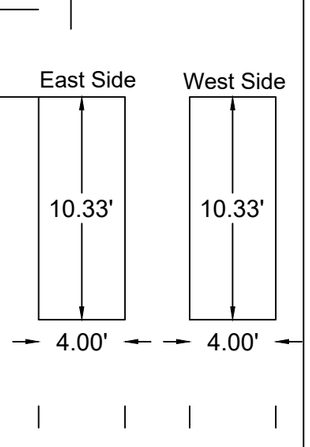

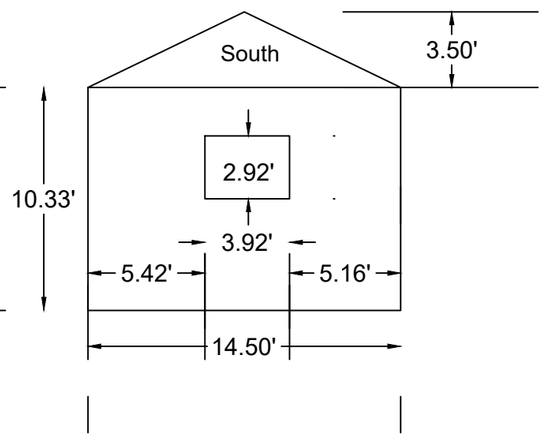

CONTRACTOR TO FIELD VERIFY
MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1138 DWELLING #3
273 W 4TH ST

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-04
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 06 OF 10

5/6/26 13:32 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

Dubois Dwelling #4

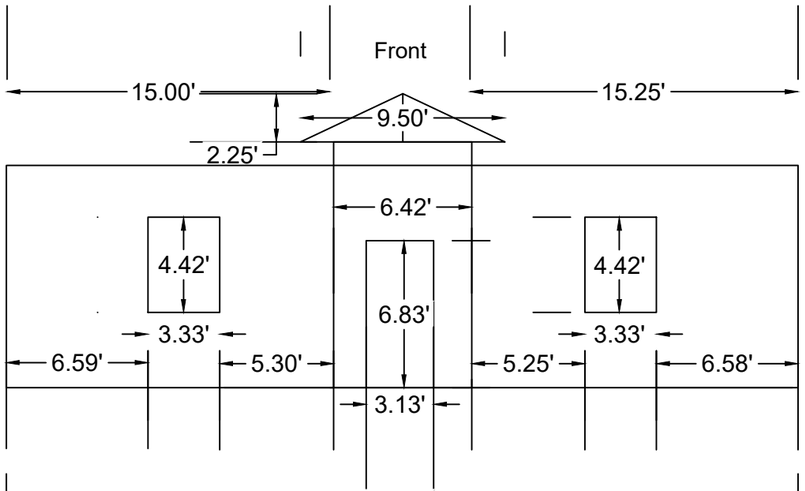

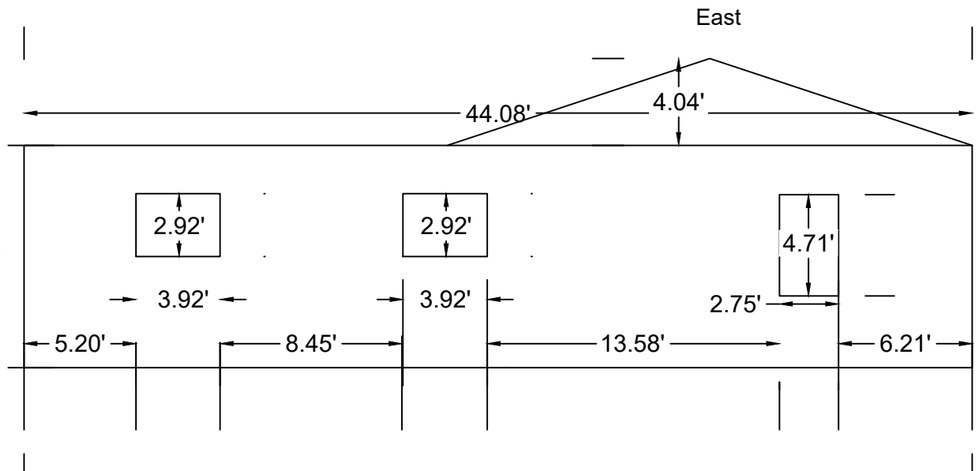

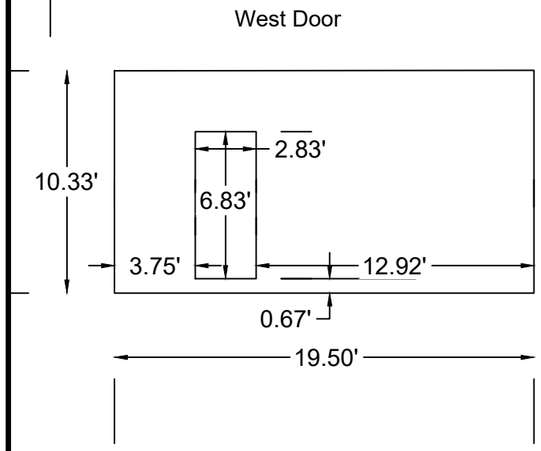

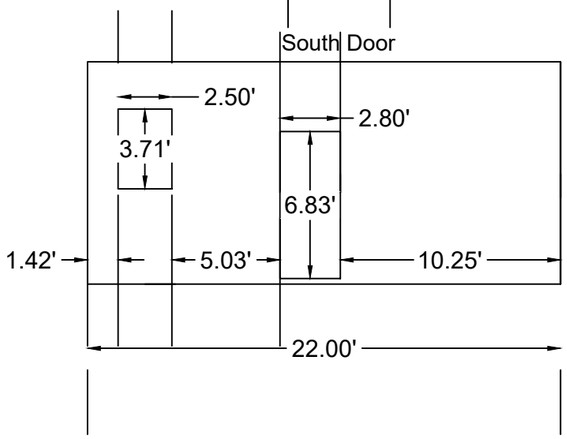

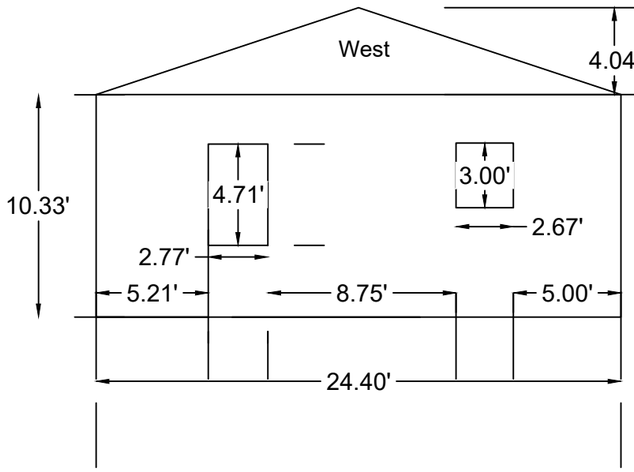

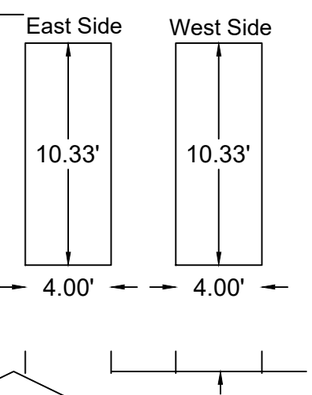

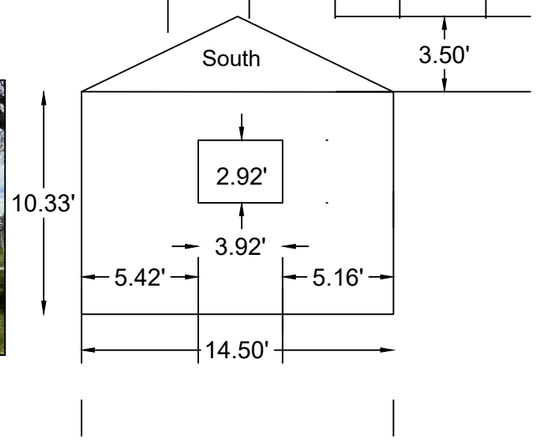

CONTRACTOR TO FIELD VERIFY MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

USDA FOREST SERVICE

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1138 DWELLING #4
285 W 4TH ST

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-05
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 07 OF 10

5/6/26 13:32 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

Dubois Dwelling #5

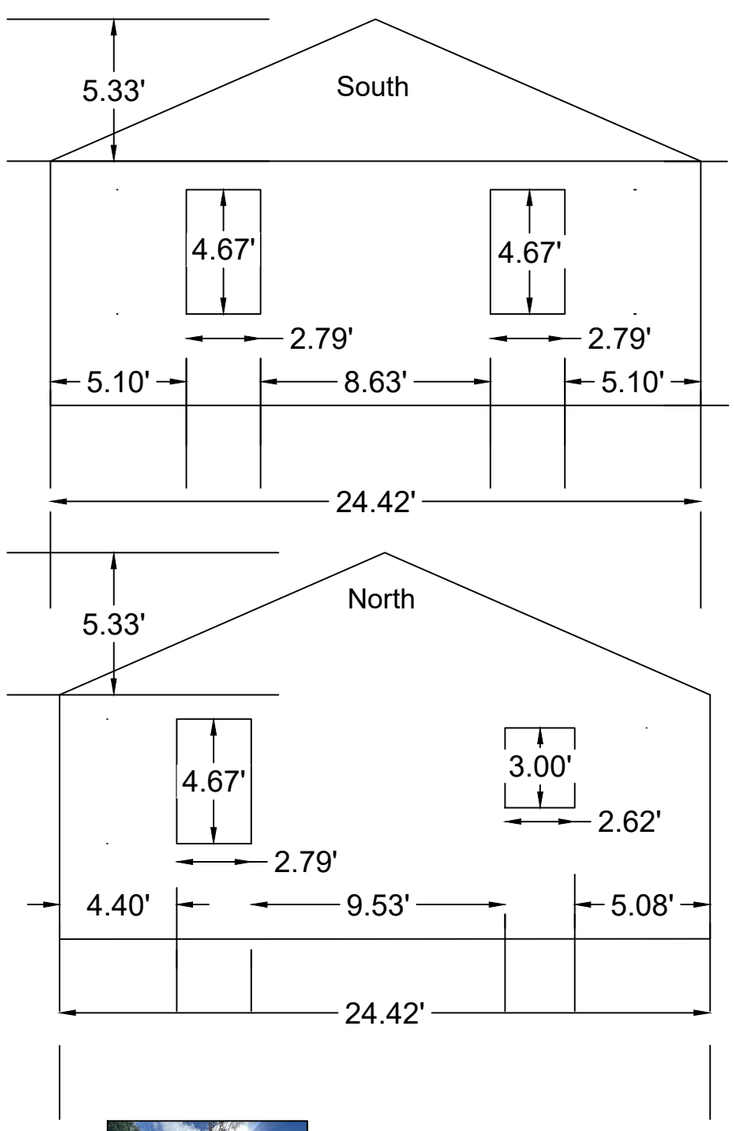

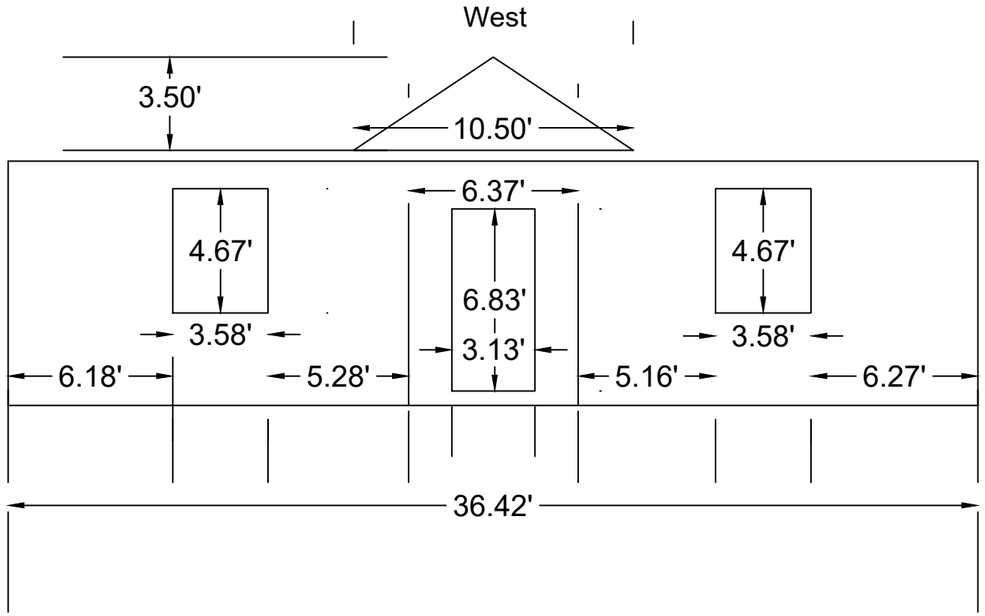

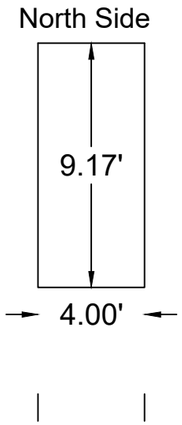

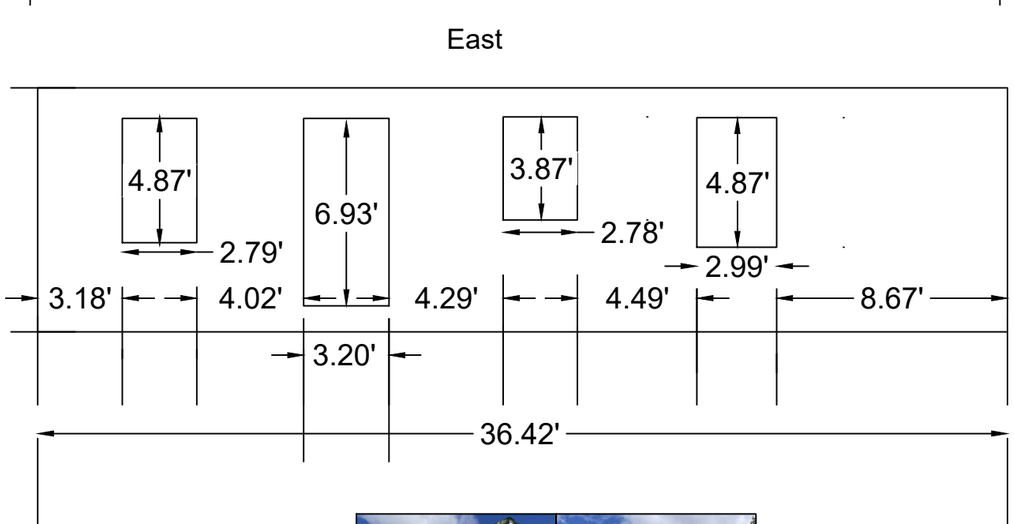

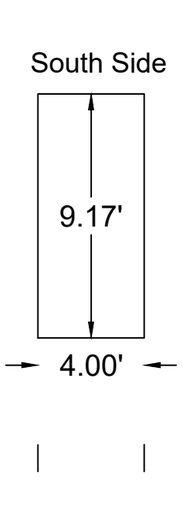

NO SCALE

CONTRACTOR TO FIELD VERIFY MEASUREMENTS PRIOR TO BIDDING.

5/6/26 13:32 NINANDERSON C:\USERS\NINANDERSON\BOX\01. NIN.ANDERSON WORKSP ACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BASIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1135T DWELLING #5
444 S CLARK

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-06
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 08 OF 10

Dubois Bunkhouse

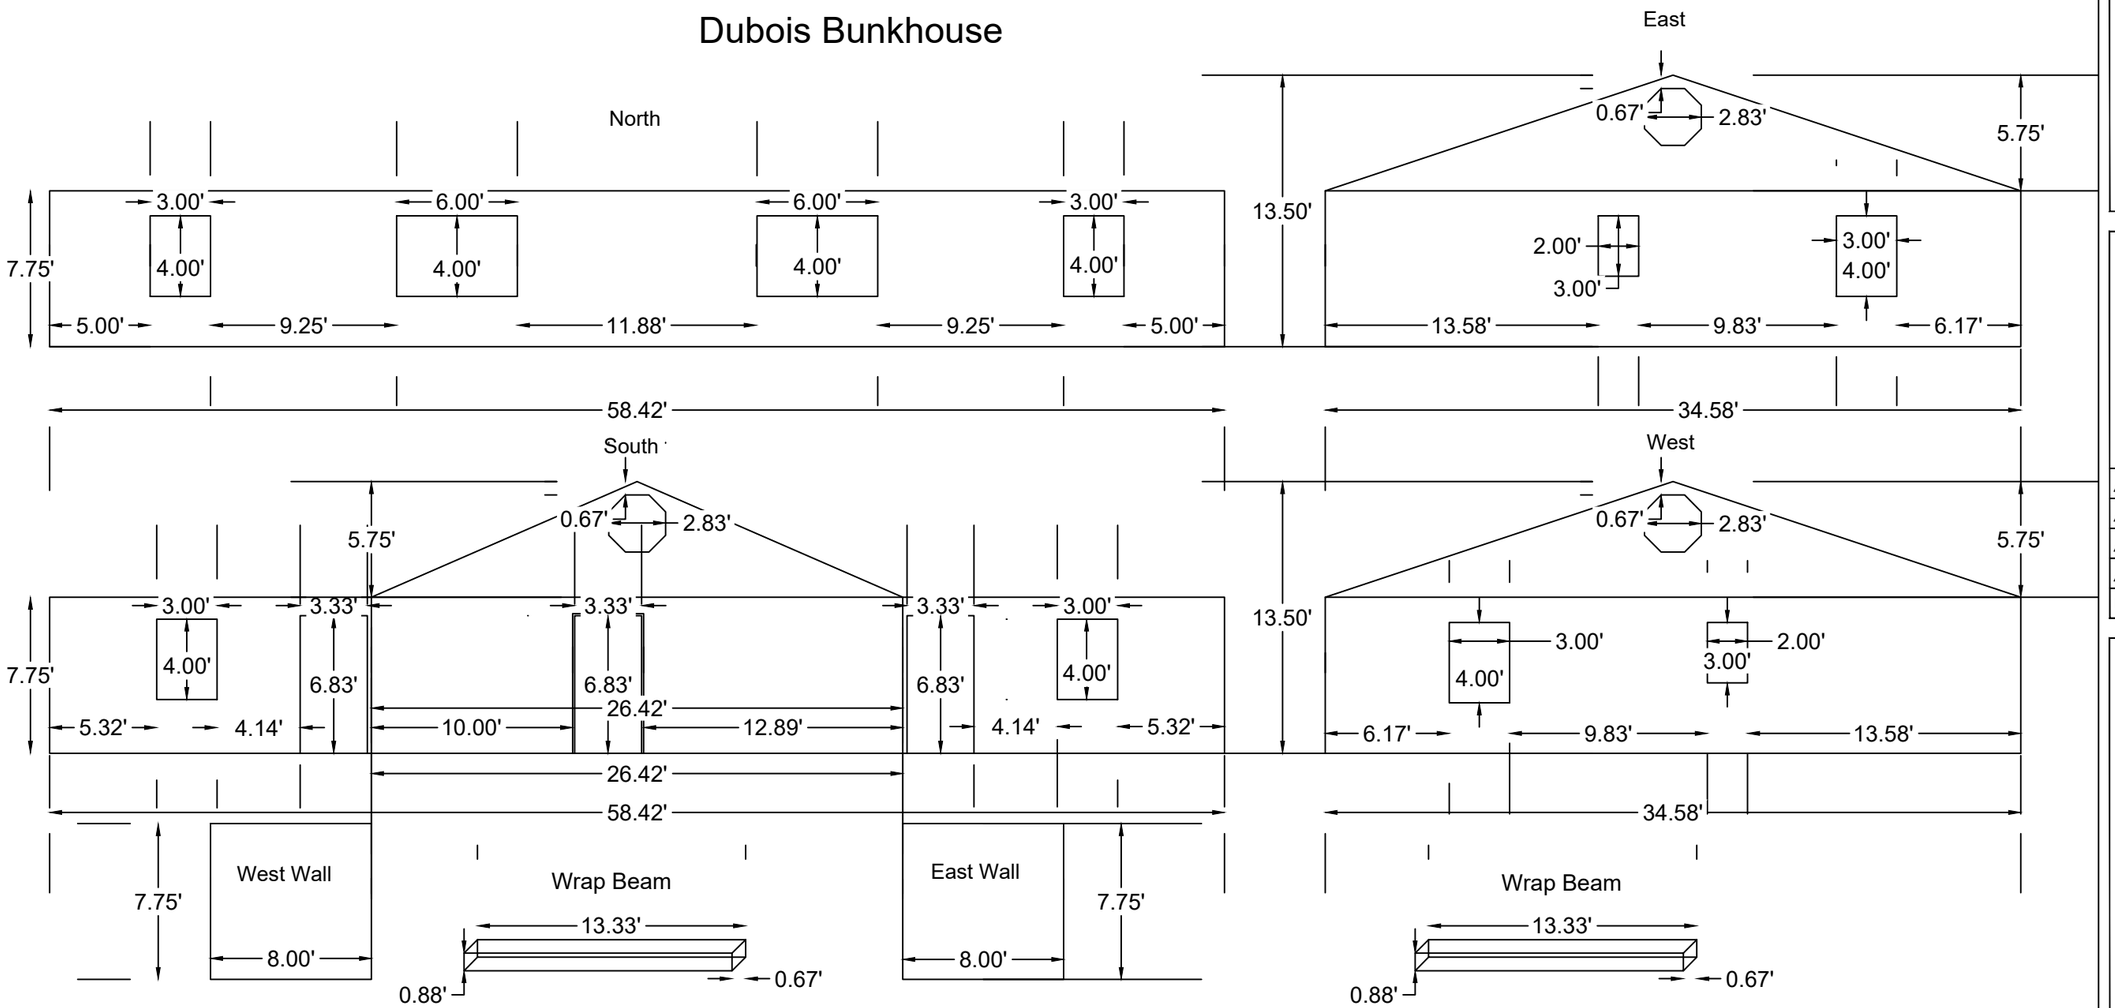

CONTRACTOR TO FIELD VERIFY
MEASUREMENTS PRIOR TO BIDDING.

NO SCALE

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BAISIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1165 DUBOIS BUNKHOUSE
266 WEST 5TH STREET

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-07
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 09 OF 10

5/8/26 13:32 NINAANDERSON C:\USERS\NINAANDERSON\BOX\01. NINA.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;

ALUMINUM FASCIA WITH GABLE END

1. Freeze Runner—Top edge of runner channel must be level and aligned with the bottom surface of the fascia board. Using nailing flange of channel, nail and install along the entire length of the wall surfaces and up to gable peak on side wall.
2. Soffit Panels—gable end—Start installation at the base of the gable end working up to the peak as far as full panels will fit. Slide panels into channel and secure into position using nails in panel grooves as required, to under edge of fascia board. When both sides are done to this point, it may be necessary to cut a panel, bend to match peak angle and rebend edges to make interlocking jointings. Slide peak panel into position and nail.
3. Soffit Panels—other sides— Staring from one end, slide into channel and secure into position using nails in panel grooves as required, to under edge of fascia board. Continue panel installation for entire side.
4. Fascia Trim—Beginning at corners, cut and bend to form box, position up snug to underside of soffit panel, predrill (align with soffit grooves) and nail through bottom lip of fascia trim every 36" along bottom edge of fascia board. NEVER 'face nail' fascia. DO NOT drive nails tight—fascia must be 'hung', only snug to soffit, to allow expansion and help prevent distortion. Allow at least 1" overlap of fascia where lengths meet. Cover balance of gable end with fascia trim and cut to make overlap joint at peak.
5. Finish Trim—Use drip edge to cover and finish top edge of fascia trim. If installing soffit panels over existing wood soffits, soffit 'J' channel can be used in place of freeze runner.
6. Follow all manufacturer's instructions.

SOFFIT & FASCIA DETAIL

NOT TO SCALE

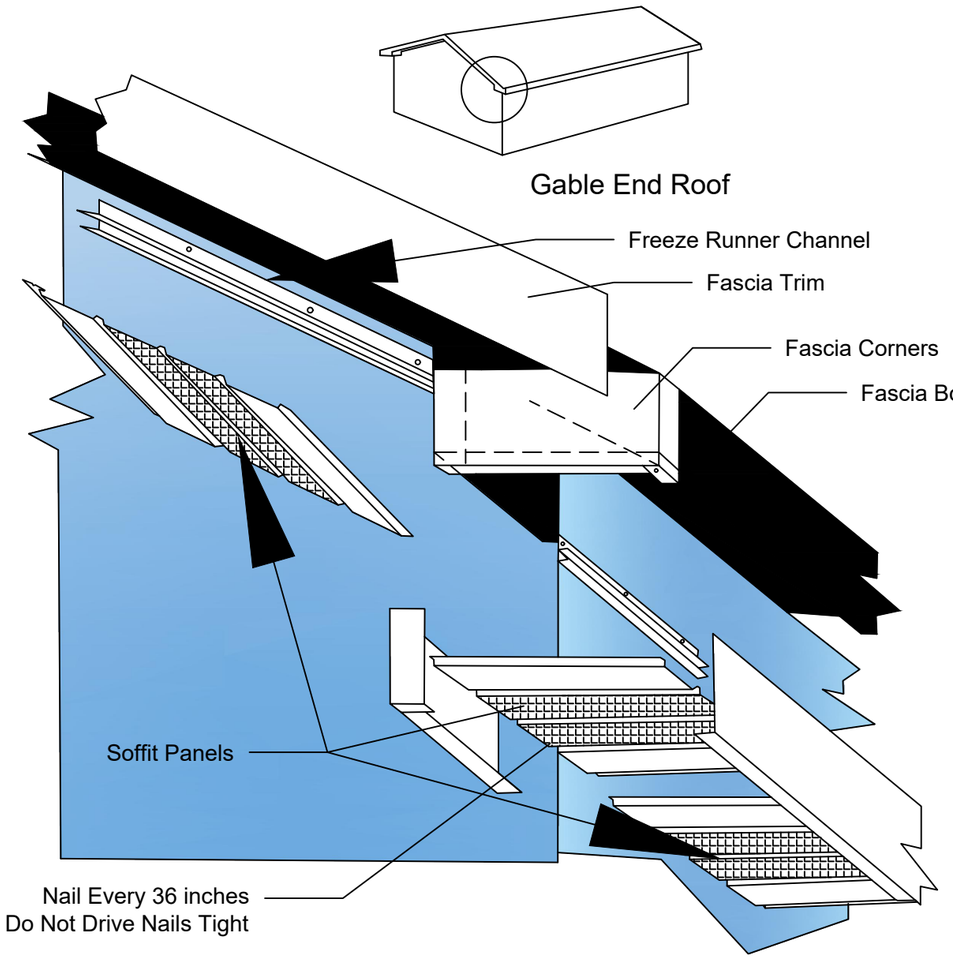

United States Department of Agriculture
Forest Service

R4
INTERMOUNTAIN REGION

STAMPS, LOGOS, AND SEALS

NO.	REVISION / ISSUE	DATE
4		
3		
2		
1		

PROJECT NAME

DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT

CARIBOU-TARGHEE NATIONAL FOREST

TETON BAISIN & DUBOIS RANGER DISTRICTS

DRAWING TITLE

1165 DUBOIS BUNKHOUSE
266 WEST 5TH STREET

DATE 04/28/2026	ARCHIVE NO.
DESIGNER N. Anderson	DRAWING SHEET NO. C-08
DRAWN N. Anderson	
CHECKED S. Jenkins	
PROJECT NO.	SHEET 10 OF 10

5/8/26 13:32 NINAANDERSON C:\USERS\NINAANDERSON\BOX01. NINA.ANDERSON WORKSPACE\ENGINEERING DESIGN\DRIGGS & DUBOIS HOUSING SIDING REPLACEMENT\DUBOIS SIDING.DWG;