APOGEE
Engineers | Architects

PROJECT SPECIFICATIONS

Department of Veterans Affairs
VA Northern California Health Care System
Renovation of Outpatient Pharmacy and HVAC
VA Project No. 612A4-19-016

100% Bid Documents
October 13, 2023

Prepared by:
Apogee Consulting Group, PA
1151 Kildaire Farm Road
Cary, NC 27511

VA | U.S. Department of Veterans Affairs

DocuSign Envelope ID: 69894941-EC75-4A21-8670-F7E86EAF4FE5

VA Northern California Health Care System
Renovation of Outpatient Pharmacy and HVAC
Project: 612A4-19-016

APOGEE
Engineers | Architects

1151 Kildaire Farm Road
Cary, NC 27511
acg-pa.com

Renee M. Clarke, RA
Registered Architect

Rajesh B. Kaul
Mechanical Engineer

Date: October 13, 2023

DocuSign Envelope ID: 69894941-EC75-4A21-8670-F7E86EAF4FE5

DocuSign Envelope ID: 69894941-EC75-4A21-8670-F7E86EAF4FE5

VA Northern California Health Care System
Renovation of Outpatient Pharmacy and HVAC
Project: 612A4-19-016

APOGEE
Engineers | Architects

1151 Kildaire Farm Road
Cary, NC 27511
acg-pa.com

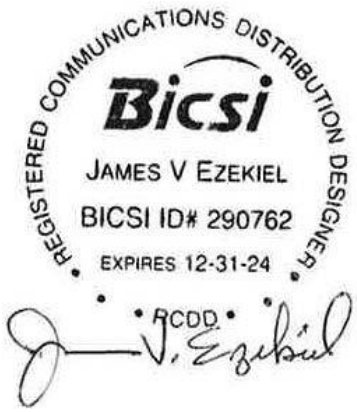

Joshua A. VamdenEnde
Electrical Engineer

James V. Ezekiel
Electrical Engineer

Date: October 13, 2023

DocuSign Envelope ID: 69894941-EC75-4A21-8670-F7E86EAF4FE5

VA Northern California Health Care System
Renovation of Outpatient Pharmacy and HVAC
Project: 612A4-19-016

APOGEE
Engineers | Architects

1151 Kildaire Farm Road
Cary, NC 27511
acg-pa.com

REGISTERED PROFESSIONAL ENGINEER
GREGORY M. GORDON
5649
10/9/23
STRUCTURAL
STATE OF CALIFORNIA

EXP: 09/30/24
Gregory Gordon
Structural Engineer

Date: October 13, 2023

DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 15	List of Drawing Sheets	07-15
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	03-19
01 32 16	Project Schedules	03-18
01 33 23	Shop Drawings, Product Data, and Samples	12-18
01 35 26	Safety Requirements	03-18
01 35 26.1	Infection Control Risk Assessment (ICRA)	N/A
01 42 19	Reference Standards	09-19
01 45 00	Quality Control	03-18
01 45 29	Testing Laboratory Services	11-18
01 50 00	Temporary Facilities and Controls	N/A
01 50 00.01	Temporary Facilities and Controls	N/A
01 74 19	Construction Waste Management	12-18
01 91 00	General Commissioning Requirements	10-15
	DIVISION 02 – EXISTING CONDITIONS	
02 41 00	Demolition	08-17
	DIVISION 03 – CONCRETE	
03 30 00	Cast-in-Place Concrete	07-19
03 41 13	Precast Concrete Hollow Core Planks	07-11
	DIVISION 05 – METALS	
05 12 00	Structural Steel Framing	11-18
05 31 00	Steel Decking	02-16
05 40 00	Cold-Formed Metal Framing	05-16
	DIVISION 06 – WOOD, PLASTICS AND COMPOSITES	
06 83 10	Composite Column Enclosures	
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 01 50.19	Preparation for Re-Roofing	02-16
07 21 13	Thermal Insulation	10-17
07 22 00	Roof and Deck Insulation	02-16
07 24 00	Exterior Insulation and Finish Systems	02-16
07 53 23	Ethylene-Propylene-Diene-Monomer Roofing	01-21

SECTION NO.	DIVISION AND SECTION TITLES	DATE
07 84 00	Firestopping	02-16
07 92 00	Joint Sealants	10-17
07 95 13	Expansion Joint Cover Assemblies	02-16
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	08-16
08 14 00	Interior Wood Doors	02-16
08 31 13	Access Doors and Frames	02-16
08 34 53	Security Doors and Frames	05-15
08 34 59	Vault Doors and Day Gates	02-16
08 41 13	Aluminum-Framed Entrances and Storefronts	08-16
08 56 19	Pass Windows	02-16
08 56 59	Service and Teller Window Units	02-16
08 71 00	Door Hardware	01-20
08 71 13	Automatic Door Operators	02-16
08 71 13.11	Low Energy Power Assist Door Operators	08-16
08 80 00	Glazing	10-15
	DIVISION 09 – FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	02-15
09 06 00	Schedule for Finishes	04-15
09 22 16	Non-Structural Metal Framing	06-18
09 29 00	Gypsum Board	06-18
09 30 13	Ceramic/Porcelain Tiling	09-15
09 51 00	Acoustical Ceilings	12-18
09 65 13	Resilient Base and Accessories	02-16
09 65 16	Resilient Sheet Flooring	05-18
09 65 19	Resilient Tile Flooring	05-18
09 91 00	Painting	01-16
	DIVISION 10 – SPECIALTIES	
10 14 00	Signage	01-21
10 26 00	Wall and Door Protection	10-15
10 28 00	Toilet, Bath, and Laundry Accessories	02-16
10 44 13	Fire Extinguisher Cabinets	08-18
10 56 13	Metal Storage Shelving (FrameWRX)	N/A
	DIVISION 11 – EQUIPMENT	
11 17 36	Package Transfer Units	01-21
	DIVISION 12 – FURNISHINGS	
12 32 00	Manufactured Wood Casework	09-15
12 36 00	Countertops	12-18

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 13 – SPECIAL CONSTRUCTION	
13 05 41	Seismic Restraint Requirements for Non-Structural Components	01-14
	DIVISION 21- FIRE SUPPRESSION	
21 13 13	Wet-Pipe Sprinkler Systems	06-15
	DIVISION 22 – PLUMBING	
22 05 11	Common Work Results for Plumbing	07-16
22 05 23	General-Duty Valves for Plumbing Piping	09-15
22 05 33	Heat Tracing for Plumbing Piping	09-15
22 07 11	Plumbing Insulation	09-19
22 11 00	Facility Water Distribution	11-19
22 13 00	Facility Sanitary and Vent Piping	09-15
22 40 00	Plumbing Fixtures	09-15
	DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	02-20
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	02-20
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	02-20
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20
23 07 11	HVAC and Boiler Plant Insulation	02-20
23 08 00	Commissioning of HVAC Systems	02-20
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	02-20
23 22 13	Steam and Condensate Heating Piping	02-20
23 31 00	HVAC Ducts and Casings	02-20
23 34 00	HVAC Fans	02-20
23 36 00	Air Terminal Units	02-20
23 37 00	Air Outlets and Inlets	02-20
23 40 00	HVAC Air Cleaning Devices	02-12
23 74 13	Packaged, Outdoor, Central-Station Air-Handling Units	04-11
23 82 16	Air Coils	04-11
	DIVISION 26 – ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 73	Overcurrent Protective Device Coordination Study	01-18
26 09 23	Lighting Controls	01-18
26 24 13	Distribution Switchboards	01-18
26 24 16	Panelboards	01-18

SECTION NO.	DIVISION AND SECTION TITLES	DATE
26 27 26	Wiring Devices	01-18
26 29 11	Motor Controllers	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 43 13	Surge Protective Devices	01-17
26 51 00	Interior Lighting	01-18
	DIVISION 27 – COMMUNICATIONS	
27 05 11	Requirements for Communications Installations	09-19
27 05 26	Grounding and Bonding for Communications Systems	06-15
27 05 33	Raceways and Boxes for Communications Systems	10-18
27 10 00	Control, Communication and Signal Wiring	06-15
27 11 00	Telecommunications Room Fittings	06-15
27 15 00	Communications Structured Cabling	01-16
	DIVISION 28 – ELECTRONIC SAFETY AND SECURITY	
28 05 00	Common Work Results for Electronic Safety and Security	04-18
28 05 13	Conductors and Cables for Electronic Safety and Security	10-18
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11
28 16 00	Intrusion Detection System	10-11
28 31 00	Fire Detection and Alarm	10-11

---END---

SECTION 00 01 15
LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of the contract.

Drawing No.	Title
GENERAL	
G-001	COVER
G-002	GENERAL INFORMATION
G-003	INFECTION CONTROL MATRIX
G-004	ICRA INFORMATION AND DETAILS
G-005	FIRST FLOOR INFECTION CONTROL AND PHASING PLAN
G-006	TRAILER LOCATION - SITE PLAN AND FLOOR PLAN
LS101	FIRST FLOOR LIFE SAFETY PLAN
STRUCTURAL	
S-001	ABBREVIATIONS, SYMBOL LEGEND, AND GENERAL STRUCTURAL NOTES
S-002	SPECIAL INSPECTIONS
S-101	DEMO, FOUNDATION PLAN, VAULT ROOF PLAN
S-102	ROOF FRAMING PLAN
S-501	DETAILS
S-502	DETAILS
ARCHITECTURAL	
A-001	ARCHITECTURAL SYMBOLS, ABBREVIATIONS AND NOTES
AD101	FIRST FLOOR DEMOLITION AND ICRA PLAN AND REFLECTED CEILING PLAN
A-101	FIRST FLOOR PLAN AND REFLECTED CEILING PLAN
A-104	ROOF PLAN
A-501	PARTITION TYPES AND TRANSITION DETAILS
A-601	DOOR SCHEDULE, ELEVATIONS AND DETAILS
A-701	PLAN AND SECTION DETAILS
INTERIORS	
I-001	PRODUCT SCHEDULES, SYMBOLS AND ABBREVIATIONS
I-101	FIRST FLOOR FINISH AND FLOOR PATTERN PLANS
I-131	FIRST FLOOR WALL PROTECTION PLAN AND DETAILS

I-141	FIRST FLOOR SIGNAGE PLAN
I-201	CASEWORK ELEVATIONS AND ENLARGED PLAN
I-202	CASEWORK DETAILS
I-401	INTERIOR ELEVATIONS - WALL PROTECTION
I-402	INTERIOR ELEVATIONS - EQUIPMENT
I-411	FIRST FLOOR OVERALL EQUIPMENT PLAN
I-421	FIRST FLOOR ENLARGED EQUIPMENT PLAN - A
I-422	FIRST FLOOR ENLARGED EQUIPMENT PLAN - B
I-423	ENLARGED EQUIPMENT PLANS
I-431	ENLARGED TOILET PLANS AND ELEVATIONS
I-601	EQUIPMENT SCHEDULE

FIRE SUPPRESSION

FX001	FIRE SUPPRESSION GENERAL INFORMATION
FX101	FIRST FLOOR FIRE SUPPRESSION PLAN

PLUMBING

P-001	PLUMBING GENERAL INFORMATION
P-101	FIRST FLOOR PLUMBING PLAN
P-501	PLUMBING DETAILS

MECHANICAL

M-001	MECHANICAL GENERAL INFORMATION
MD101	FIRST FLOOR MECHANICAL DEMOLITION PLAN
MH101	FIRST FLOOR HVAC PLAN
MH102	ROOF HVAC PLAN
MP101	FIRST FLOOR MECHANICAL PIPING PLAN
M-301	MECHANICAL SECTIONS
M-501	MECHANICAL DETAILS
M-502	MECHANICAL DETAILS
M-503	MECHANICAL DETAILS
M-504	MECHANICAL CONTROLS
M-601	MECHANICAL SCHEDULES

ELECTRICAL

E-001	ELECTRICAL GENERAL NOTES, SYMBOL LEGENDS, AND ABBREVIATIONS
ES101	ELECTRICAL SITE PLAN

ED101	FIRST FLOOR ELECTRICAL AND TECHNOLOGY DEMOLITION PLAN
E-101	ELECTRICAL OVERALL WORK PLAN
EP101	FIRST FLOOR POWER PLAN
EL101	FIRST FLOOR LIGHTING PLAN
EM101	FIRST FLOOR MECHANICAL POWER AND TECHNOLOGY SYSTEMS PLAN
E-501	ELECTRICAL AND TECHNOLOGY DETAILS
E-601A	SINGLE-LINE DIAGRAM
E-601B	SINGLE-LINE DIAGRAM
E-602	EXISTING ELECTRICAL PANEL SCHEDULES
E-603	ELECTRICAL PANEL SCHEDULES

TECHNOLOGY

TK001	TECHNOLOGY GENERAL NOTES, SYMBOL LEGENDS, AND ABBREVIATIONS
TK101	FIRST FLOOR TECHNOLOGY PLAN
TK501	TECHNOLOGY DETAILS

FIRE ALARM

FA001	FIRE ALARM GENERAL NOTES, SYMBOL LEGEND, AND RISER
FA101	FIRST FLOOR FIRE ALARM PLAN
FA102	ROOF FIRE ALARM PLAN
FA501	FIRE ALARM DETAILS

- - - END - - -

--- INTENTIONALLY BLANK ---

SECTION 01 00 00

GENERAL REQUIREMENTS

TABLE OF CONTENTS

1.1 GENERAL INTENTION 2
1.2 STATEMENT OF BID ITEM(S) 2
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR 4
1.4 CONSTRUCTION PROJECT SCHEDULE 4
1.5 CONSTRUCTION SAFETY REQUIREMENTS 4
1.6 CONSTRUCTION SECURITY REQUIREMENTS 5
1.7 CONSTRUCTION QUALITY CONTROL PLAN 8
1.8 CONSTRUCTION SCHEDULE OF VALUES 9
1.9 NAME BRAND ITEMS 9
1.10 OPERATIONS AND STORAGE AREAS 9
1.11 ALTERATIONS 14
1.12 DISPOSAL AND RETENTION 15
1.13 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, AND UTILITIES 15
1.14 RESTORATION 15
1.15 PHYSICAL DATA 16
1.16 PROFESSIONAL SURVEYING SERVICES 16
1.17 LAYOUT OF WORK 16
1.18 AS-BUILT DRAWINGS 16
1.19 USE OF ROADWAYS 16
1.20 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT 16
1.21 TEMPORARY USE OF EXISTING ELEVATORS 17
1.22 TEMPORARY USE OF NEW ELEVATORS 17
1.23 TEMPORARY TOILETS 17
1.24 AVAILABILITY AND USE OF UTILITY SERVICES 18
1.25 NEW TELEPHONE EQUIPMENT 18
1.26 TESTS 18
1.27 INSTRUCTIONS 18
1.28 GOVERNMENT-FURNISHED PROPERTY 19
1.29 RELOCATED EQUIPMENT AND/OR ITEMS 20
1.30 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT 20
1.31 CONSTRUCTION SIGN 21
1.32 SAFETY SIGN 21
1.33 REQUIRED USE OF SUBMITTAL EXCHANGE 21
1.34 PHOTOGRAPHIC DOCUMENTATION 22
1.35 FINAL ELEVATION DIGITAL IMAGES 25
1.36 HISTORIC PRESERVATION 26
1.37 GUARANTEE PERIOD OF SERVICES 26

SECTION 01 00 00

GENERAL REQUIREMENTS

PART 1 - GENERAL

1.1 GENERAL INTENTION

A. Contractor shall furnish all labor, materials, equipment, supervision and necessary engineering to perform the work as required by the project specifications and drawings. This shall include, but not limited to, completely preparing site for building operations, all demolition activities and/or removal of existing structures required to perform the work, foundations, superstructure, mechanical, electrical, plumbing, special systems, landscaping and other site improvements.

B.

B.. Offices of Apogee Consulting Group, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

C.. Before placement and installation of work subject to tests by testing laboratory retained by the Contractor, the Contractor shall notify the COR in sufficient time to allow COR witnessing of testing laboratory personnel proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the COR.

D.. All employees of general Contractor and Subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.2 STATEMENT OF BID ITEM(S)

A. ITEM I, GENERAL CONSTRUCTION: Work includes general construction, alterations, necessary removal of existing structures and construction and certain other items.

B. ITEM II, Civil Work: Limited to connection of temporary utilities for the temporary pharmacy.

C. ITEM III, Structural Work: Work includes all labor, material, equipment and supervision to perform the required structural construction work on this project including the installation of foundations, slabs,

structural block at the vault, and other components related to structural engineering elements. SEE STRUCTURAL DRAWINGS.

D. ITEM IV, Architectural Work: Work includes all labor, material, equipment and supervision to perform the required architectural construction work on this project including the installation of interior materials and finishes; roof assemblies limited to area at new RTU; doors and windows and associated frames, glazing, and hardware; interior partition assemblies; ceiling systems; rated assemblies; and other components related to architectural finishes and systems. SEE ARCTHITECTURAL AND INTERIOR DESIGN DRAWINGS.

E. ITEM V, Fire Protection Work: Work includes all labor, material, equipment and supervision to perform the required fire protection construction work on this project including the installation of fire suppression, fire alarm systems, and any other components related to fire suppression or fire alarm systems. SEE FIRE PROTECTION DRAWINGS.

F. ITEM VII, Plumbing Work: Work includes all labor, material, equipment and supervision to perform the required plumbing construction work on this project including the installation of plumbing fixtures, domestic hot and cold water supply piping, waste water piping, vent piping, and any other components related to plumbing systems. SEE PLUMBING DRAWINGS.

G. ITEM VIII, Mechanical Work: Work includes all labor, material, equipment and supervision to perform the required mechanical construction work on this project including the installation of mechanical systems, ductwork, supply/return grilles, and other components related to mechanical systems. SEE MECHANICAL DRAWINGS.

H. ITEM IX, Electrical Work: Work includes all labor, material, equipment and supervision to perform the required electrical construction work on this project including the installation of power, lighting, fixtures, panels, conduit, and other components related to electrical systems. Power will be connected to existing feeds in the facility. SEE ELECTRICAL DRAWINGS.

I. ITEM X, Technology Work: Work includes all labor, material, equipment and supervision to perform the required telecom/data construction work on this project including the installation of cabling, cable trays, racks, conduit, panels, security, and other components related to

technology systems to connect to existing infrastructure. SEE TECHNOLOGY DRAWINGS.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractors expense.

1.4 CONSTRUCTION PROJECT SCHEDULE

A. Contractor shall submit a prepared work schedule for approval and arrange with the COTR the sequence of work. Phasing of work may be required for completion of this project and shall be planned thoroughly by the Contractor. Project will require night and weekend work to accomplish specific tasks (i.e. any work that will be disruptive to current daily operations will need to be scheduled during nights and weekends). Work areas shall remain protected, per the project Specifications, from employee and patient access throughout the contract period. 100% of ALL project submittals shall be approved prior to the construction start date.

B. General Contractor schedule shall account for time required to obtain approval on all submittals prior to 'breaking ground' for construction work. Submitted project schedule shall show expected submittal period. General Contractor shall note that it will generally take 14 days for AE review, followed by an additional 5 to 14 days for Department of Veterans Affairs to review and approve submittals, depending on the content.

C. Refer to section 01 32 16, PROJECT SCHEDULES, for project scheduling requirements.

1.5 CONSTRUCTION SAFETY REQUIREMENTS

A. The General Contractor shall develop a plan for both the area of work and the interaction of the work with the facility per OSHA, AIA, and VA guidelines. The Infection Prevention Measures, as set forth in the VA Infection Control Risk Assessment, shall be included in the Safety Plan. The Interim Life Safety Measures (ILSM), as set forth in the project ILSM, shall also be implemented in the Safety Plan. The General Contractor shall submit a copy of their Daily Safety Inspection form. The Safety Plan shall be a submittal and approved by the designated VA COR prior to the start of construction. Contractor shall note that the required training of all personnel shall be specific for 'Construction

Safety', (29 CFR 1926), NOT 'General Industry' safety training, (29 CFR 1910). Contractor shall reference project Specifications for in depth safety and documentation requirements such as hazard analyses and respective hazard mitigation techniques to be required for specific work activities. Some general safety precautions are listed below:

1. Work shall be conducted in a manner to afford maximum protection to Contractors, VA employees, patients, public guests, existing building infrastructure, and to prevent unreasonable delay or interference with normal hospital operations.
2. Provide fire extinguishers that are readily available at all times. Provide additional fire detection equipment as required to meet VA guidelines and the project ILSM.
3. It will be the obligation of the Contractor to maintain clean work site. Material and tools shall be kept within designated areas and trash will be removed daily.
4. It will be the responsibility of the Contractor to seek and obtain any required permits for construction, which includes but not limited to NESHAPS Permit, Dust Permit, etc. Reference project Specifications for details.

B. Refer to section 01 35 26, SAFETY REQUIREMENTS, for safety and infection control requirements.

1.6 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:
1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-Contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:
1. General Contractors employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. Before starting work the General Contractor shall give one week's notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.

3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractors employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting officers representative COR for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation.

D. Document Control:

1. Before starting any work, the General Contractor/ Subcontractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).

a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Records Management Requirements: The following standard items relate to records generated in executing the contract and should be included in a typical Electronic Information Systems (EIS) procurement contract:

1. Citations to pertinent laws, codes and regulations such as 44 U.S.C chapters 21, 29, 31 and 33; Freedom of Information Act (5 U.S.C. 552); Privacy Act (5 U.S.C. 552a); 36 CFR Part 1222 and Part 1228.
2. Contractor shall treat all deliverables under the contract as the property of the U.S. Government for which the Government Agency shall have unlimited rights to use, dispose of, or disclose such data contained therein as it determines to be in the public interest.
3. Contractor shall not create or maintain any records that are not specifically tied to or authorized by the contract using Government IT equipment and/or Government records.
4. Contractor shall not retain, use, sell, or disseminate copies of any deliverable that contains information covered by the Privacy Act of 1974 or that which is generally protected by the Freedom of Information Act.
5. Contractor shall not create or maintain any records containing any Government Agency records that are not specifically tied to or authorized by the contract.
6. The Government Agency owns the rights to all data/records produced as part of this contract.
7. The Government Agency owns the rights to all electronic information (electronic data, electronic information systems, electronic databases, etc.) and all supporting documentation created as part of this contract. Contractor must deliver sufficient technical documentation with all data deliverables to permit the agency to use the data.
8. Contractor agrees to comply with Federal and Agency records management policies, including those policies associated with the safeguarding of records covered by the Privacy Act of 1974. These policies include the

preservation of all records created or received regardless of format [paper, electronic, etc.] or mode of transmission [e-mail, fax, etc.] or state of completion [draft, final, etc.].

9. No disposition of documents will be allowed without the prior written consent of the Contracting Officer. The Agency and its Contractors are responsible for preventing the alienation or unauthorized destruction of records, including all forms of mutilation. Willful and unlawful destruction, damage or alienation of Federal records is subject to the fines and penalties imposed by 18 U.S.C. 2701. Records may not be removed from the legal custody of the Agency or destroyed without regard to the provisions of the agency records schedules.
10. Contractor is required to obtain the Contracting Officer's approval prior to engaging in any contractual relationship (Subcontractor) in support of this contract requiring the disclosure of information, documentary material and/or records generated under, or relating to, this contract. The Contractor (and any Subcontractor) is required to abide by Government and Agency guidance for protecting sensitive and proprietary information.

F. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. The Contractor shall only park within its construction designated area of work. Offsite parking is allowed. Permission to park onsite can be approved on a case by case basis if and only if there are reasons that benefit the govt or the project.

1.7 CONSTRUCTION QUALITY CONTROL PLAN

A. The General Contractor shall develop a plan for which all construction crews under this project shall follow. The General Contractor shall specifically identify appropriate standard forms for Quality Control inspections that will become part of the construction documents. This includes the punch lists format that the Contractor will be using internally for their work inspections. Quality Control Plan shall be a submittal and approved by the COR prior to the start of construction.

B. The General Contractor is responsible for the Quality Control of their work. The Department of Veterans Affairs is responsible for the Quality

Assurance of the General Contractors process. Once the General Contractor is ready for project turnover to the VA, the results of the Contractor Quality Control plan will be presented to the COR. Once reviewed, the General Contractors superintendent will present the Contractors pre-final acceptance walk through (punch list) to the COR. Only at this point will the General Contractor and the Department of Veterans Affairs conduct the final acceptance inspection. Once satisfactory, project will be turned over to the Department of Veterans Affairs.

C. Prior to the project final acceptance, General Contractor shall submit to the COR completed 'New Equipment Entry Form(s)' for every piece of equipment installed during project that will require future maintenance or as directed by the project COTR. General Contractor shall make all subcontractors, vendors and/or material suppliers aware of this requirement. The 'New Equipment Entry Form(s)' is attached or will be provided by the COR.

D. Refer to section 01 45 00, QUALITY CONTROL, for QAQC requirements.

1.8 CONSTRUCTION SCHEDULE OF VALUES

A. The General Contractors Schedule of Values shall be broken down by a) work related tasks as derived from the project schedule, then by b) division, as detailed in the VA Master Specification. Schedule of Values shall be broken down further at the request of the COR. The total price will be shown separately (to include cost break down by divisions as detailed above). Schedule of Values shall be a submittal and approved by the COR prior to the start of construction.

B. General Contractors Schedule of Values shall mirror the project schedule for work related tasks. Coordinate with COR as necessary.

1.9 NAME BRAND ITEMS

A. Contractor shall reference solicitation for Contracting Officers approved list of NAME BRAND ITEMS (FAR 52.236-5).

1.10 OPERATIONS AND STORAGE AREAS

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractors performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the

Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

D. Working space and space available for storing materials shall be as shown on the drawings or determined by the COR.

F. Workmen are subject to rules of the Medical Center applicable to their conduct.

G. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.

H. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractors personnel, except as permitted by COR where required by limited working space.

   1. Do not store materials and equipment in other than assigned areas.
   2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.

3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractors materials and equipment will be permitted subject to fire and safety requirements.

I. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR. All such actions shall be coordinated with the COR or Utility Company involved:

1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Contractor.

J. Phasing: The Medical Center must maintain its operation 24 hours a day, 7 days a week. Therefore, any interruption in service must be scheduled and coordinated with the COR to ensure that no lapses in operation occur. It is the Contractors responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks. To insure such executions, Contractor shall furnish the COR with an accurate schedule of dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR three (3) weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to insure accomplishment of this work in successive phases mutually agreeable to COR and Contractor, as follows:

1. General Contractors base bid shall include the necessary compensation for nights and/or weekend work to accomplish specific tasks in order to limit disturbances, impacts, and/or interruptions to the Medical Center.

K. Building(s) No.(s) 650 outside of the area of work, will be occupied during performance of work but immediate areas of alterations will be vacated. Contractor shall take all measures and provide all material(s) necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered.

Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting, etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.

L. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.

M. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:

1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractors employee or watchman.

N. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted

without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director's prior knowledge and written approval.

2. Contractor shall submit a request to interrupt any such services to COR, in writing, 21 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractors normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 21 calendar days prior to the desired time and shall be performed as directed by the COR.
5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.

O. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

P. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walk ways and entrances to grounds, parking and occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
2. Whenever an excavation for new utility lines crosses existing roads, at least one lane must remain open to traffic at all times. Contractor must have COR approval prior to modifying traffic flow and/or start of excavation activities.

3. Method and scheduling of required cutting, altering and removal of existing roads, walk ways and entrances must be approved by the COR.

Q. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.11 ALTERATIONS

A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:

1. Existing conditions and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
3. Shall note any discrepancies between drawings and existing conditions at site.
4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COR.

B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of the COR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by the Contractor with new items in accordance with the project specifications. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS".

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of

Contractor to restore damage caused by Contractors workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.12 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractors operation.

1.13 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, AND UTILITIES

A. NOT APPLICABLE

1.14 RESTORATION

A. NOT APPLICABLE

1.15 PHYSICAL DATA

A. NOT APPLICABLE

1.16 PROFESSIONAL SURVEYING SERVICES

NOT APPLICABLE

1.17 LAYOUT OF WORK

A. NOT APPLICABLE

1.18 AS-BUILT DRAWINGS

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the COR review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.19 USE OF ROADWAYS

A. NOT APPLICABLE

1.20 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:

1. Permission to use each unit or system must be given by COR in writing. If the equipment is not installed and maintained in accordance with the written agreement and following provisions, the COR will withdraw permission for use of the equipment.
2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2014 Edition), Article 590, *Temporary Installations.* Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined

that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.

3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government. Boilers, pumps, feedwater heaters and auxiliary equipment must be operated as a complete system and be fully maintained by operating personnel. Boiler water must be given complete and continuous chemical treatment.

B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the Contractor at the Contractors expense.

1.21 TEMPORARY USE OF EXISTING ELEVATORS

A. NOT APPLICABLE

1.22 TEMPORARY USE OF NEW ELEVATORS

A. NOT APPLICABLE

1.23 TEMPORARY TOILETS

A. Provide where directed, (for use of all Contractors workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by COR, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections

and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.24 AVAILABILITY AND USE OF UTILITY SERVICES

A. NOT APPLICABLE

1.25 NEW TELEPHONE EQUIPMENT

The Contractor shall coordinate with the work needed for installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

1.26 TESTS

A. NOT APPLICABLE

1.27 INSTRUCTIONS

A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR, coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the

job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The Contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.28 GOVERNMENT-FURNISHED PROPERTY

A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings.

B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.

C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center

D. Notify Contracting Officer in writing, 90 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.

   1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.

   2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.

E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the Contractor at no additional cost to the Government.

F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.

G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.29 RELOCATED EQUIPMENT AND/OR ITEMS

A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated by symbol "R" or otherwise shown to be relocated by the Contractor.

B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.

C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, at the main whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".

D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

1.30 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT

A. NOT APPLICABLE

1.31 CONSTRUCTION SIGN

A. Provide a Construction Sign where directed by the COR. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.

C. Maintain sign and remove it when directed by the COR.

D. Detail Drawing of construction sign showing required legend and other characteristics of sign is shown on the drawings.

1.32 SAFETY SIGN

A. Provide a Safety Sign where directed by COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.

B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.

C. Maintain sign and remove it when directed by COR.

D. Standard Detail Drawing Number SD10000-02(Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings.

E. Post the number of accident free days on a daily basis.

1.33 REQUIRED USE OF SUBMITTAL EXCHANGE

A. Submittal Exchange (web-based application): The Contractor shall coordinate and utilize Submittal Exchange to manage construction documents and submissions. The intent is to use Submittal Exchange as a secure online collaboration tool for sharing documents and information during the construction phase of this project. Common types of information and documents shared with this tool include drawings, specifications, BIM files and models, meeting minutes, budgets, schedules, photos and any

other contract collaboration documents. Contractor shall coordinate directly with Submittal Exchange representatives to ensure the project folder is up and running prior to the start of the submittal process. Any start up fees shall be part of the based bid.

1.34 PHOTOGRAPHIC DOCUMENTATION

Estimated Cost		No. of Photographs
Up to	$250,000	75 to 100
" "	$500,000	125 to 150
" "	$1,000,000	175 to 200
" "	$2,000,000	225 to 250
" "	$5,000,000	300 to 350
" "	$8,000,000	450 to 500

A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. The commercial photographer or the Subcontractor used for this work shall meet the following qualifications:
   1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.

B. Photographic documentation elements:
   1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.
   2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.

3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture actual conditions throughout construction and at critical milestones.
4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.
5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning when stud work commences and continuing until Project completion.
6. As-built condition of pre-foundation utilities and site utilities shall be documented prior to pouring footers, placing concrete and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.
7. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
8. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by

the COR in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.

9. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the COR. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
10. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently, shall be dated, labeled and inserted into a Section in the navigation structure entitled "Slideshows," allowing this information to be stored in the same "place" as the formal scope.
11. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and navigation accomplished through interactive architectural plans.
12. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photo path.
13. Weekly (21 Max) Site Progressions - Photographic documentation capturing the project at different stages of construction. These progressions shall capture underground utilities, excavation, grading, backfill, landscaping and road construction throughout the duration of the project.
14. Regular (8 max) interior progressions of all walls of the entire project to begin at time of substantial framed or as directed by the COR through to completion.
15. Detailed Exact-Built of all Slabs for all project slab pours just prior to placing concrete or as directed by the COR.
16. Detailed Interior exact built overlapping photos of the entire building to include documentation of all mechanical, electrical and plumbing

systems in every wall and ceiling, to be conducted after rough-ins are complete, just prior to insulation and or drywall, or as directed by COR.

17. Finished detailed Interior exact built overlapping photos of all walls, ceilings, and floors to be scheduled by COR prior to occupancy.
18. In event a greater or lesser number of images than specified above are required by the COR, adjustment in contract price will be made in accordance with clause entitled "CHANGES".

C. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.

D. Coordination of photo shoots is accomplished through COR. Contractor shall also attend construction team meetings as necessary. Contractors operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Builts viewable on-line and anticipated future shoot dates.

E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.

F. Contractor shall provide technical support related to using the system or service.

G. Upon completion of the project, final copies of the documentation (the "Permanent Record") with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

1.35 FINAL ELEVATION DIGITAL IMAGES

A. A minimum of four (4) images of each elevation shall be taken with a minimum 6 MP camera, by a professional photographer with different settings to allow the COR to select the image to be printed. All images are provided to the COR on a CD.

B. Photographs shall be taken upon completion, including landscaping. They shall be taken on a clear sunny day to obtain sufficient detail to show depth and to provide clear, sharp pictures. Pictures shall be 400 mm x 500 mm (16 by 20 inches), printed on regular weight paper, matte finish archival grade photographic paper and produced by a RA4 process from the

digital image with a minimum 300 PPI. Identifying data shall be carried on label affixed to back of photograph without damage to photograph and shall be similar to that provided for final construction photographs.

C. Furnish six (6) 400 mm x 500 mm (16 by 20 inch) color prints of the following buildings constructed under this project (elevations as selected by the RE from the images taken above). Photographs shall be artistically composed showing full front elevations. All images shall become property of the Government. Each of the selected six prints shall be place in a frame with a minimum of 2 inches of appropriate matting as a border. Provide a selection of a minimum of 3 different frames from which the SRE will select one style to frame all six prints. Photographs with frames shall be delivered to the COR in boxes suitable for shipping.

1.36 HISTORIC PRESERVATION

Where the Contractor or any of the Contractors employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up.

- - - E N D - - -

-INTENTIONALLY BLANK-

SECTION 01 32 16
PROJECT SCHEDULES

PART 1- GENERAL

1.1 DESCRIPTION

A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of Sub-Contractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE

A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COR).

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.

C. The Contractor’s representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT

A. The Contractor shall submit a qualification proposal to the COR, within (10) days of bid acceptance. The qualification proposal shall include:

1. The name and address of the proposed consultant.
2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph. F
3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision within seven (7) calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within (10) calendar days for renewed consideration. The Contractor shall

have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

A. The Contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include:

1. Three (3) copies of up to five different reports (inclusive of all pages). The COR shall identify the five different reports/ report formats that the Contractor shall provide.
2. A hard copy and electronic file copy listing of all project schedule changes and associated data at the time of the schedule update.
3. A hard copy and electronic file copy of the resulting monthly updated schedule in CPM format.
4. Contractor project scheduling software shall be compatible with existing VA project scheduling software to ensure VA can view submitted electronic files. Project scheduling software shall be approved by the Contracting Officer or designated COR.
5. The above items must be submitted with and substantively support the Contractor’s monthly payment request and the signed look ahead report.

B. The Contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA will report errors in computer-produced reports to the Contractor’s representative within ten (10) calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated data, when requested by the Contracting Officer’s Representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

A. Within (30) calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program (reference paragraph 1.4.A.4 above). The submittal shall also include three copies of a computer-produced activity/event ID schedule

showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The Contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the Contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

B. Within (14) calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and resubmit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by

the Contracting Officer and, if found to be as previously agreed upon, will be approved.

C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

D. The complete Project Schedule shall contain 100% of all work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The Contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 – 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS).

C. In accordance with FAR 52.236 – 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 – 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:
   a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
   b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
   c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
   d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
   e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COR may approve the showing of a longer duration.
4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:
   1. The appropriate project calendar including working days and holidays.

2. The planned number of shifts per day.
3. The number of hours per shift.

   Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COR's approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR

A. Monthly, the Contractor shall submit an application and certificate for payment using VA provided templates reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 – 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

A. Monthly schedule update meetings will be held on dates mutually agreed to by the COR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COR three work days in

advance of the schedule update meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
5. Completion percentage for all completed and partially completed activities/events.
6. Logic and duration revisions required by this section of the specifications.
7. Activity/event duration and percent complete shall be updated independently.

B. After completion of the joint review, the Contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer’s Representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

C. After completing the monthly schedule update, the Contractor’s representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the Contractor and Resident Engineer for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the Resident Engineer. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the Resident Engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after**

progress. In addition, once the final network diagram is approved, the Contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.

D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all Sub-Contractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
   1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
   2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
   3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
   1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
   2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
   3. The schedule does not represent the actual prosecution and progress of the project.
   4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 – 4 (Changes) and VAAR 852.236 – 88 (Changes – Supplemental), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 – 4 (Changes) and VAAR 852.236 – 88 (Changes – Supplemental). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI’s, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

---END---

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 – GENERAL

1.1 DESCRIPTION

A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.

B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.

C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor’s expense.

1.2 DEFINITIONS

A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.

B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.

C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if

specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.

E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.

F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.

H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.

I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.

J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.

K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.

B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.

C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.

D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.

E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.

B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.

C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.

D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.

C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.

D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with

review.

E. Provide a transmittal form for each submittal with the following information:
   1. Project title, location and number.
   2. Construction contract number.
   3. Date of the drawings and revisions.
   4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
   5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
   6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
   7. Product identification and location in project.

F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.

G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

| CONTRACTOR |

| (Firm Name) |

|

|_____ Approved |

|_____ Approved with corrections as noted on submittal data and/or |

| attached sheets(s) |

|

|SIGNATURE: _____|

|TITLE: _____|

|DATE: _____|

|_____|

1.6 SUBMITTAL FORMAT AND TRANSMISSION

A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.

B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.

C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.

D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.

E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for

setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.

F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

A. Submit two sets of physical samples showing range of variation, for each required item.

B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.

C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.

D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.

E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.

F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.

B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining

contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.

C. Period of review for each resubmittal is the same as for initial submittal.

D. VA review period is 15 working days for submittals.

E. VA review period is 10 working days for RFIs.

F. The VA will return submittals to the Contractor with the following notations:

1. "Approved": authorizes the Contractor to proceed with the work covered.
2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.

B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor’s expense.

C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

SECTION 01 35 26
SAFETY REQUIREMENTS

PART 1 - GENERAL

1.1 APPLICABLE PUBLICATIONS

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011	Pre-Project & Pre-Task Safety and Health Planning
A10.34-2012	Protection of the Public on or Adjacent to Construction Sites
A10.38-2013	Basic Elements of an Employer’s Program to Provide a Safe and Healthful Work Environment American National Standard Construction and Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013	Surface Burning Characteristics of Building Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010	Guidelines for Design and Construction of Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2013	Standard for Portable Fire Extinguishers
30-2012	Flammable and Combustible Liquids Code
51B-2014	Standard for Fire Prevention During Welding, Cutting and Other Hot Work
70-2014	National Electrical Code
70B-2013	Recommended Practice for Electrical Equipment Maintenance
70E-2015	Standard for Electrical Safety in the Workplace
99-2012	Health Care Facilities Code
241-2013	Standard for Safeguarding Construction, Alteration, and Demolition Operations

F. The Joint Commission (TJC):

TJC Manual	Comprehensive Accreditation and Certification Manual

G. U.S. Nuclear Regulatory Commission:

10 CFR 20	Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1904	Reporting and Recording Injuries & Illnesses
29 CFR 1910	Safety and Health Regulations for General Industry

29 CFR 1926	Safety and Health Regulations for Construction Industry
CPL 2-0.124	Multi-Employer Citation Policy

I. VHA Directive 2005-007

1.2 DEFINITIONS

A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts performed out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.

B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f).

C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.

D. High Visibility Accident. Any mishap which may generate publicity or high visibility.

E. Accident/Incident Criticality Categories:

1. No impact – near miss incidents that should be investigated but are not required to be reported to the VA;
2. Minor incident/impact – incidents that require first aid or result in minor equipment damage (less than $5000). These incidents must be investigated but are not required to be reported to the VA;
3. Moderate incident/impact – Any work-related injury or illness that results in:
   a. Days away from work (any time lost after day of injury/illness onset);
   b. Restricted work;
   c. Transfer to another job;
   d. Medical treatment beyond first aid;

e. Loss of consciousness;

f. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (a) through (e) above or,

g. Any incident that leads to major equipment damage (greater than $5000);

These incidents must be investigated and are required to be reported to the VA;

4. Major incident/impact – Any mishap that leads to fatalities, hospitalizations, amputations or loss of fingers/ toes/ hands/ arms/ eyes and/or similar body parts as a result of Contractor(s) activities. Or any incident which leads to major property damage (greater than $20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

E. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even though treatment is provided by a physician or registered individual(s).

1.3 REGULATORY REQUIREMENTS

A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, 29 CFR 1910 as incorporated by reference within 29 CFR 1926, ASSE A10.34, and all applicable CAL-OSHA, and VHA regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer Representative.

1.4 ACCIDENT PREVENTION PLAN (APP)

A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractors overall safety and health program. Include any portions of the Contractors overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each Subcontractor(s). Contractors are responsible for informing their Subcontractors of the safety provisions

under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting Subcontractor operations to ensure that accident prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
2. Address both the Prime Contractors and the Subcontractors work operations.
3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
4. Address all the elements/sub-elements and in order as follows:
   a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
      1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);
      2) Plan approver (company/corporate officers authorized to obligate the company);
      3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).
   b. **BACKGROUND INFORMATION.** List the following:
      1) Contractor;
      2) Contract number;
      3) Project name;
      4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).
   c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health (SOH) Policy Statement, detailing commitment to providing a safe and healthful workplace for

all employees. The Contractors written safety program goals, objectives, and accident experience goals for this contract should be provided.

d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:
   1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
   2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
   3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
   4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
   5) Requirements for pre-task Activity Hazard Analysis (AHAs);
   6) Lines of authority;
   7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

e. **SUBCONTRACTORS AND SUPPLIERS.** If applicable, provide procedures for coordinating SOH activities with other employers on the job site:
   1) Identification of Subcontractors and suppliers (if known);
   2) Safety responsibilities of Subcontractors and suppliers.

f. **TRAINING.**
   1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required and documented on the daily log.
   2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc.) and any requirements for periodic retraining/recertification are required.

3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. **SAFETY AND HEALTH INSPECTIONS.**
1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT).

h. **ACCIDENT/INCIDENT INVESTIGATION & REPORTING.** The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the Facility Safety, & Contracting Officer Representative:
1) Exposure data (man-hours worked);
2) Accident investigation reports;
3) Project site injury and illness logs.

i. **PLANS (PROGRAMS, PROCEDURES) REQUIRED.** Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:
1) Emergency response;
2) Contingency for severe weather;
3) Fire Prevention;
4) Medical Support;
5) Posting of emergency telephone numbers;
6) Prevention of alcohol and drug abuse;

7) Site sanitation (housekeeping, drinking water, toilets);
8) Night operations and lighting;
9) Hazard communication program;
10) Welding/Cutting "Hot" work;
11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
12) General Electrical Safety;
13) Hazardous energy control (Machine LOTO);
14) Site-Specific Fall Protection & Prevention;
15) Excavation/trenching;
16) Asbestos abatement;
17) Lead abatement;
18) Crane Critical lift;
19) Respiratory protection;
20) Health hazard control program;
21) Radiation Safety Program;
22) Abrasive blasting;
23) Heat/Cold Stress Monitoring;
24) Crystalline Silica Monitoring (Assessment);
25) Demolition plan (to include engineering survey);
26) Formwork and shoring erection and removal;
27) Pre-cast Concrete;
28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

C. Submit the APP to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES (10) calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.

D. Once accepted by the Contracting Officer Representative, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.

E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer Representative. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the

exposure and control the hazard. Notify the Contracting Officer within 12 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHA)

A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity, involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or Subcontractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)

B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.

C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, Subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

1. The names of the Competent/Qualified Person(s) required for the particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.

2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).

   a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.

   b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not

requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.

3. Submit AHAs to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least (15) calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
5. Develop the AHA using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the Contractor, supplier, or Subcontractor and provided to the prime Contractor for review and approval and then submitted to the Contracting Officer Representative.

1.6 PRECONSTRUCTION CONFERENCE

A. Contractor representatives who have a responsibility or significant role in implementation of the APP, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, Subcontractor superintendents, and any other assigned safety and health professionals.

B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.

C. Deficiencies in the submitted APP will be brought to the

attention of the Contractor within (7) days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP)

A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractors safety program and Government-accepted Accident Prevention Plan. Each Subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.

B. Further, all specialized Competent Persons for the work crews will be supplied by the respective Contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

C. These Competent Persons can have collateral duties as the Subcontractors Superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations). However, the SSHO shall be a separate qualified individual from the Prime Contractors Superintendent and/or Quality Control Manager with duties only as the SSHO.

D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.

E. The repeated presence of uncontrolled hazards during a Contractors work operation will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING

A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience,

and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.

C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented “repeat” deficiencies in the execution of safety requirements will require retaking the requisite formal course.

D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.

E. Submit training records associated with the above training requirements to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES (10) calendar days prior to the date of the preconstruction conference for acceptance.

F. Prior to any worker for the Contractor or Subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation in daily logs shall be provided to the Contracting Officer Representative that individuals have undergone Contractors safety briefing.

G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.9 INSPECTIONS

A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the Subcontractors CPs shall conduct frequent and regular safety inspections (daily) of their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the Subcontractors "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative.

B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

   1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
   2. The Contracting Officer Representative will be notified immediately prior to start of the inspection and invited to accompany the inspection.
   3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
   4. A report of the inspection findings with status of abatement will be provided to the Contracting Officer Representative within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS

A. The prime Contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both Government and Contractor) that occur on site. Notify the Facility Safety or Contracting Officer Representative as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incident, High Visibility Incident, or any weight handling and/or hoisting equipment accident. Within notification include Contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if

known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Facility Safety or Contracting Officer Representative determine whether a Government investigation will be conducted.

B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least $20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent), and provide the report to the Facility Safety and the Contracting Officer Representative within (5) calendar days of the accident. The Contracting Officer Representative will provide copies of any required or special forms.

C. A summation of all man-hours worked by the Contractor and associated sub-Contractors for each month will be reported to the Contracting Officer Representative monthly.

D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated Subcontractors for each month will be provided to the Contracting Officer Representative or Government Designated Authority monthly. The Contractor and associated Subcontractors OSHA 300 logs will be made available to the Contracting Officer Representative or Government Designated Authority as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE)

A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats – unless written authorization is given by the Project Manager in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the Project Manager in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.

3. Appropriate Safety Shoes – based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the Project Manager in circumstances of no foot hazards.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

A. Infection Control is critical in all Medical Center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled by a duct mitigation plan submitted by the Contractor for approval to the contracting officer representative.

B. Contractor shall be responsible to comply with all ICRA requirements including the submittal of ICRA permits and/or forms to the COR prior to the commencement of any work.

C. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website or locally designed document will be utilized. Risk classifications of Class II or lower require approval by Facility Safety and Contracting Officer Representative before beginning any construction work. Risk classifications of Class III or higher require a permit before beginning any construction work. Infection Control permits require approval by all parties above in addition to Industrial Hygienist and Infection Control. The ICRA will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The required infection control precautions with each class are as follows:

1. Class I requirements:
   a. During Construction Work:
      1) Notify the Contracting Officer Representative
      2) Execute work by methods to minimize raising dust from construction operations.

3) Ceiling tiles: Immediately replace a ceiling tiles displaced for visual inspection.

b. Upon Completion:

1) Clean work area upon completion of task

2) Notify the Contracting Officer Representative

2. Class II requirements:

a. During Construction Work:

1) Notify the Contracting Officer Representative

2) Isolate area with barriers and provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.

3) Water mist work surfaces to control dust while cutting.

4) Seal unused doors with duct/masking tape.

5) Block off and seal air vents.

6) Wipe surfaces with disinfectant.

7) Provide adhesive walk-off mats at entrance and exit of work area.

8) Remove or isolate HVAC system in areas where work is being performed.

b. Upon Completion:

1) Completed construction area will be terminally cleaned and disinfected.

2) Contain construction waste before transport in tightly covered containers.

3) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.

4) Upon completion, restore HVAC system where work was performed

5) Notify the Contracting Officer Representative

3. Class III requirements:

a. During Construction Work:

1) Project Manager to notify Infection Control and Environmental Services before construction begins.

2) Obtain permit from the Contracting Officer Representative

2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.

3) Complete all critical barriers or use Control Cute Method, before construction begins (i.e. sheetrock, plywood, plastic), to seal area from non-work area or implement control cube method (cart

with rigid plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.

4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the Contractor.
5) Wear paper coveralls and shoe coverings for wall demolition or other activities creating excessive dust. Remove each time workers leave the work site.
6) Contain construction waste before transport in tightly covered containers.
7) Cover transport receptacles or carts. Tape covering unless solid lid.
8) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.

b. Upon Completion:

1) Do not remove barriers from work area until completed project is inspected by the Safety, Contracting Officer Representative, Infection control and thoroughly cleaned by the VA Environmental Services Department.
2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
3) Vacuum work area with HEPA filtered vacuums.
4) Wet mop area with cleaner/disinfectant.
5) Upon completion, restore HVAC system where work was performed.
6) Terminally clean the area (contact Environmental Services/Housekeeping)
7) Return permit to the Contracting Officer Representative

4. Class IV requirements: (all the precautions for Class I, II & III, plus)

a. During Construction Work:

1) Obtain permit from Contracting Officer Representative

2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from nonwork area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the Contractor.
5) Seal holes, pipes, conduits, and punctures appropriately.
6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.

b. Upon Completion:
1) Do not remove barriers from work area until completed project is thoroughly cleaned and disinfected by Environmental Services/Housekeeping and inspected by Safety and Infection Control.

Safety, Contracting Officer Representative, Infection Control and thorough cleaning by the VA Environmental Services Dept.

2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
3) Contain construction waste before transport in tightly covered containers.
4) Cover transport receptacles or carts. Tape covering unless solid lid.
5) Vacuum work area with HEPA filtered vacuums.

6) Wet mop area with cleaner/disinfectant.

7) Upon completion, restore HVAC system where work was performed.

8) Return permit to the Contracting Officer Representative

D. Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:

1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
   a. Class III & IV (where dust control is the only hazard and approved by the contracting officer representative) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
   b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
   c. Class III & IV - Seal all penetrations in existing barrier airtight
   d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
   e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
   f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

E. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness is only permitted in areas with fire alarms and sprinklers.
2. Barrier Doors: Self Closing One-hour fire-rated solid core wood in steel frame, painted
3. Dust proof one-hour fire-rated drywall
4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other pre-filter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA

filters and other filters will be in accordance with manufacturer's instructions.

5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
7. Disinfectant: Hospital-approved disinfectant or equivalent product
8. Portable Ceiling Access Module

F. Before any construction on site begins, all Contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the Medical Center.

G. A dust control program will be established and maintained as part of the Contractors infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to contracting officer representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

H. Medical Center Infection Control personnel will monitor for airborne disease (e.g. aspergillosis) during construction. A baseline of conditions will be established by the Medical Center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.

H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the Medical Center through intake vents, or building openings. HEPA filtration is required where the exhaust dust may reenter the Medical Center.
2. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to an occupied Medical Center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
3. Vacuum and wet mop all transition areas from construction to the occupied Medical Center at the end of each workday. Vacuum shall

utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.

5. The Contractor shall not haul debris through patient-care areas without prior approval of the contracting officer representative. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

I. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

J. Exterior Construction:

1. Contractor shall verify that dust will not be introduced into the Medical Center through intake vents, or building openings. HEPA filtration on intake vents is required where dust may be introduced.
2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary
3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

1.13 TUBERCULOSIS SCREENING

A. Contractor shall provide written self-certification form that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractor shall be required to provide written self-certification of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved Guantiferon Gold blood test.

1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined per current CDC guidelines prior to working on VHA property.
2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction Contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.
4. Any construction work occurring within these defined areas will require the Contractor to comply with this requirement:

Station Name	**Bldg. Number**	**Station Name**	**Bldg. Number**	**Station Name**	**Bldg. Number**
Martinez	19	Mather	646	Mather	801
Martinez	20	Mather	647	Mather	801A
Martinez	22	Mather	649	Mather	801B
Martinez	23	Mather	650 (1st floor only)	Mather	802
Martinez	24	Mather	700	Mather	807
Martinez	AB4	Mather	720	Mather	T-6
Martinez	AB6	Mather	722	Mather	T-8
Martinez	MRI	Mather	722a	Mather	645

Martinez	R-1	Mather	726	Vallejo	201
Martinez	R-4	Mather	727	Travis AFB	778
McClellan	88	Mather	728		
McClellan	98	Mather	800		

1.14 FIRE SAFETY

A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.

B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

D. Temporary Construction Partitions:

1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, 1-hour fire/smoke rated doors with self-closing devices.
2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.

E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.

F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with the Contracting Officer Representative.

G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Contracting Officer Representative.

H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

J. Standpipes: Install and extend standpipes up with each floor in accordance with 29 CFR 1926 and NFPA 241.

K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.

L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Contracting Officer Representative. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the Medical Center. Parameters for the testing and results of any tests performed shall be recorded by the Medical Center and copies provided to the Resident Engineer.

M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with the Contracting Officer Representative as necessary.

N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with contracting officer representative. Obtain permits from contracting officer representative at least 48 hours in advance.

O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative.

P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

R. If required, submit documentation to the contracting officer representative that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.15 ELECTRICAL

A. All electrical work shall comply with NEC, NFPA 70, NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J – General Environmental Controls, 29 CFR Part 1910 Subpart S – Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.

B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, Subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The Contracting Officer Representative with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the Contracting Officer Representative.

D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alterative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, Subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30- ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C)(2).

1.16 FALL PROTECTION

A. The fall protection (FP) threshold height requirement is 6 feet (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities,

systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.

1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.17 SCAFFOLDS AND OTHER WORK PLATFORMS

A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.

B. The fall protection (FP) threshold height requirement is 6 feet (1.8 m) as stated in Section 1.16.

C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
4. Emergency descent devices shall not be used as working platforms.

D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:

1. The Competent Person’s name and signature;
2. Dates of initial and last inspections.

E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 feet (6 m) in height, positive fall protection shall be used.

1.18 EXCAVATION AND TRENCHES

A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the Contractors "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeing, laying in, or stooping within the excavation is required.

B. All excavations and trenches 15 inches in depth or greater shall require a written trenching and excavation permit (NOTE – some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater than 5 feet in depth. Each section of the permit shall be provided to the contracting officer representative prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the contracting officer representative. The permit shall be maintained onsite and the first section of the permit shall include the following:

1. Estimated start time & stop time
2. Specific location and nature of the work.
3. Indication of the Contractors "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the Contractors CP.
4. Indication of whether soil or concrete removal to an offsite location is necessary.
5. Indication of whether soil samples are required to determined soil contamination.
6. Indication of coordination with local authority (i.e. "One Call") or Contractors effort to determine utility location with search and survey equipment.
7. Indication of review of site drawings for proximity of utilities to digging/drilling.

C. The second section of the permit for excavations greater than five feet in depth shall include the following:
   1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetrometer will be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT2 – Type C, 0.5 Tons/FT2 to 1.5 Tons/FT2 – Type B, greater than 1.5 Tons/FT2 – Type A without condition to reduce to Type B).
   2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as “Type A” or “Solid Rock”, only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.
   3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.
   4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs, providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.

D. As required by OSHA 29 CFR 1926.651(b)(1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.
   1. The planned dig site will be outlined/marked in white prior to locating the utilities.

2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.
3. 811 will be called two business days before digging on all local or State lands and public Right-of Ways.
4. Digging will not commence until all known utilities are marked.
5. Utility markings will be maintained

E. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.

F. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

1.19 CRANES

A. All crane work shall comply with 29 CFR 1926 Subpart CC.

B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no “Phase In” date.

C. A detailed lift plan for all lifts shall be submitted to the contracting officer representative 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.

D. Crane operators shall not carry loads,
   1. Over the general public or VAMC personnel;
   2. Over any occupied building unless:
      a. the top two floors are vacated;
      b. or overhead protection with a design live load of 300 psf is provided.

1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced

operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].

B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the contracting officer representative.

1.22 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with contracting officer representative. Obtain permits from contracting officer representative at least 48 hours in advance.

1.23 LADDERS

A. All Ladder use shall comply with 29 CFR 1926 Subpart X.

B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.

C. Manufacturer safety labels shall be in place on ladders

D. Step Ladders shall not be used in the closed position

E. Top steps or cap of step ladders shall not be used as a step

F. Portable ladders, used as temporary access, shall extend at least 3 feet (0.9 m) above the upper landing surface.

1. When a 3-foot (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.

G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and

withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.

B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. See 21.F for covering and labeling requirements. Skylights located in floors or roofs are considered floor or roof hole/openings.

C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toe boards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.

1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
5. Workers are prohibited from standing/walking on skylights.

1.25 SEASONAL INFLUENZA VACCINATION

Requirement: Seasonal influenza vaccination is the single best way to prevent the spread of influenza in healthcare settings. It is the policy of this Medical Center that any Contractor working on the VA premises must show evidence of receiving a flu shot during the flu season or wear an ordinary loop mask while working on site. The Contractor will be responsible for insuring its employees have had these vaccinations while performing work within inpatient care defined areas between the dates of November 1st to March 31st. Flu vaccination can be done at an outside provider or in the Medical Center Occupational Health at no charge. Proof

of vaccination must be shown to the Project Engineer prior to start of work using the self-certification form for each employee that will working in the defined patient care area at the Medical Facility during the defined timeline.

- - - E N D - - -

Infection Control Risk Assessment (ICRA)

Project Name: Renovate Outpatient Pharmacy and HVAC	Planned Project Start Date:
Project Number: 612A4-19-016	
PM / COR P.O.C. : Andy Malone	P.O.C extension: 9129
Location of Construction: Mather B650 1st floor, existing pharmacy	Estimated Duration:

Type: Choose an item. D

Using the following table, *identify* the <u>Type</u> of Construction Project Activity (Type A-D) and enter is blank above.

TYPE A	**Inspection and Non-Invasive Activities**. Includes, but is not limited to: ▪ removal of ceiling tiles for visual inspection only, e.g., limited to 1 tile per 50 square feet ▪ painting (but not sanding) ▪ wall covering, electrical trim work, minor plumbing, and activities which do not generate dust or require cutting of walls or access to ceilings other than for visual inspection.
TYPE B	**Small scale, short duration activities which create minimal dust** Includes, but is not limited to: ▪ installation of telephone and computer cabling ▪ access to chase spaces ▪ cutting of walls or ceiling where dust migration can be controlled.
TYPE C	**Work that generates a moderate to high level of dust or requires demolition or removal of any fixed building components or assemblies** Includes, but is not limited to: ▪ sanding of walls for painting or wall covering ▪ removal of floorcoverings, ceiling tiles and casework ▪ new wall construction ▪ minor duct work or electrical work above ceilings ▪ major cabling activities ▪ any activity which cannot be completed within a single work shift.
TYPE D	**Major demolition and construction projects** Includes, but is not limited to: ▪ activities which require consecutive work shifts ▪ requires heavy demolition or removal of a complete cabling system ▪ new construction.
TYPE E	**All projects which are external/detached from patient care areas and existing facility buildings.**

Step 2: Choose an item. High

Using the following table, *identify* the Patient Risk Groups (*Low, Medium, High, Highest*) that will be affected and enter in the blank above. If more than one risk group will be affected, select the higher risk group.

Low Risk	Medium Risk	High Risk	Highest Risk
▪ Office areas ▪ All external/detached projects that have no physical communication with patient care areas or existing facility buildings	▪ Cardiology ▪ Echocardiography ▪ Endoscopy ▪ Nuclear Medicine ▪ Physical Therapy ▪ Radiology/MRI ▪ Respiratory Therapy ▪ Primary Care ▪ Inpatient/Outpatient Behavioral Health	▪ Emergency Room ▪ Laboratories (specimen) ▪ Medical/Surgical and telemetry units ▪ Outpatient Surgery ▪ Pharmacy ▪ Post Anesthesia Care Unit	▪ Any area caring for immunocompromised patients ▪ Cardiac Cath Lab ▪ Central Sterile Supply ▪ Intensive Care Units ▪ Negative pressure isolation rooms ▪ Hematology/Oncology ▪ Operating rooms ▪ Sterile Processing Services

Step 3: Choose an item. IV

***Match* the:**

Patient Risk Group (***Low, Medium, High, Highest***) with the planned **…**
Construction Project Type (***A, B, C, D, E***) on the following matrix, to find the **…**
Class of Precautions (***I, II, III, IV***) or level of infection control activities required.
Class I-IV or Color-Coded Precautions are delineated on page 7's *Infection Control Construction Permit*.

Patient Risk Group	TYPE A	TYPE B	TYPE C	TYPE D	TYPE E
LOW Risk Group	I	II	II	III/IV	I
MEDIUM Risk Group	I	II	III	IV	N/A
HIGH Risk Group	I	II	III/IV	IV	N/A
HIGHEST Risk Group	II	III/IV	III/IV	IV	N/A

Step 4: Identify the areas surrounding the project area, assessing potential impact.

Unit Below	Unit Above	Lateral	Lateral	Behind	Front
III/IV	III/IV	lab IV	primary care IV	primary care IV	office/hallway III/IV
Risk Group	Risk Group	Risk Group	Risk Group	Risk Group	Risk Group

Step 5: Identify any other potential requirements by using the following checklist.

INFECTION CONTROL REQUIREMENTS CHECKLIST	***YES***	***NO***	***N/A***
INFECTION CONTROL EDUCATION: Identified site specific activity and met with Services/Sections surrounding construction site to inform them of impact/precautions to be taken & to instruct them in basic I/C requirements?	✔		
INFECTION CONTROL EDUCATION: Met with the Construction Manager, Construction Crews, and Sub-Contractors to inform them of impact/precautions to be taken & to instruct them in Basic I/C requirements?	✔		
OUTAGE EVENTS: Identified any issues related to ventilation, plumbing and electrical in terms probable outage events?	✔		
CONTAINMENT MEASURES: What types of barriers, i.e., solids, wall barriers? Will HEPA filtration be required?	✔		
CONTAINMENT MEASURES: Discussed containment issues with the project team like traffic flow, housekeeping and debris removal (how and when)?	✔		
CONTAINMENT MEASURES: Informed the Project Coordinator that barriers are not to be removed from work area until completed project is inspected by the Safety and Infection Control Sections and thoroughly cleaned by Environmental Management Service?	✔		
WATER DAMAGE RISK: Is there a risk due to compromising structural integrity, i.e., wall, ceiling and/or roof? (Note: Renovation/construction area will be isolated from occupied areas and negative with respect to surrounding areas)		✔	
WORK HOURS: Can or will the work be done during non-patient care hours?		✔	
ISOLATION/NEGATIVE AIRFLOW: Do plans allow for adequate number of isolation/negative airflow rooms?	✔		
HAND HYGIENE: Does the plan allow for the required number and type of hand washing sinks?	✔		
HAND HYGIENE: Does the infection prevention & control staff agree with the minimum number of sinks for this project? (Note: Verify against FGI Design and Construction Guidelines for types and area)	✔		
CLEAN/SOILED UTILITY: Does the infection prevention & control staff agree with the plans relative to clean and soiled utility rooms?			✔
TUBERCULOSIS RISK ASSESSMENT: Does this project involve risk of airborne exposure to known or suspected TB case. Is construction near patient care areas? **NO:** Baseline TB skin testing is not required for contractors **YES:** The Contractor will provide written certification that all contract staff have a pre-placement TB screen within 90 days prior to assignment to the worksite and have been found to have negative TB screening reactions. Contract staff manifesting positive screening reactions to TB must show proof of being on treatment prior to working on VHA property.	✔		
LEGIONELLA IMPACT: Will this project involve disturbing or breaking water systems, or result in stagnation of the water systems for greater than 7 days? 1. All hot/cold water systems will be flushed until flow clear and without air in the system. NOT LESS THAN 10 MINUTES. 2. All faucets and showerheads will be removed and cleaned. 3. Temperatures will be measured to insure hot water is within limits identified above. 4. Water samples will be taken to verify: levels of chlorine/safety of water for human use. 5. Take a representative sample at affected distal fixtures and send for culture testing. (Note: It is not necessary to wait for sample prior to returning the area to service)		✔	

Please describe, in the brief, the nature of the work to be undertaken and detail all infection control mitigation measures:

Demolition of the interior pharmacy and renovation of the interior space. New shelving, furniture, and work stations and new vault. Check in stations moved to the main hallway in building 650. Work zone contained by floor to ceiling barriers while maintaining hallway access of patients,staff to primary care sections and to lab waiting room.

_____

Signature of Project Manager Date

_____

Signature of Project Manager's Supervisor Date

When the Construction Activity and Risk Level indicate Class III or Class IV, control procedures are necessary and the following signatures are required. **The *Infection Control Construction Permit* on page 7 of this attachment is also required and MUST BE POSTED AT SITE.**

_____

Signature of VANCHCS Infection Control Nurse Date

_____

Signature of VANCHCS Safety Designee Date

Infection Control Construction Permit

	Permit No:
Location of Construction: Outpatient Pharmacy Building 650 1st floor	Project Start Date: 1/1/23
Project COR: Andy Malone	Estimated Duration: 12 months
Contractor Performing Work: TBD	Permit Expiration Date:
Supervisor: Jonathan Bassignani	Telephone: 916-843-9129

YES	NO	CONSTRUCTION ACTIVITY	YES	NO	INFECTION CONTROL RISK GROUP
☐	☐	TYPE A: Inspection, non-invasive activity	☐	☐	GROUP 1: Low Risk
☐	☐	TYPE B: Small scale, short duration, moderate to high levels	☐	☐	GROUP 2: Medium Risk
☐	☐	TYPE C: Activity generates moderate to high levels of dust, requires greater 1 work shift for completion	☐	☐	GROUP 3: Medium/High Risk
☐	☐	TYPE D: Major duration and construction activities Requiring consecutive work shifts	☐	☐	GROUP 4: Highest Risk

CLASS I	1. Execute work by methods to minimize raising dust from construction operations. 2. Immediately replace any ceiling tile displaced for visual inspection.	3. Minor demolition for remodeling.
CLASS II	1. Provides active means to prevent air-borne dust from dispersing into atmosphere. 2. Water mist work surfaces to control dust while cutting. 3. Seal unused doors with duct tape. 4. Block off and seal air vents. 5. Wipe surfaces with disinfectant.	6. Contain construction waste before transport in tightly covered containers. 7. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 8. Place dust mat at entrance and exit of work area. 9. Remove or isolate HVAC system in areas where work is being performed.
CLASS III **Date** **Initial**	1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of the duct system. 3. Complete all critical barriers or implement control cube method before construction begins. 4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 5. Do not remove barriers from work area until complete project is thoroughly cleaned.	6. Vacuum work with HEPA filtered vacuums. 7. Wet mop with disinfectant. 8. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. Contain construction waste before transport in tightly covered containers. 9. Cover transport receptacles or carts. Tape covering. 10. Remove or isolate HVAC system in areas where work is being performed.
CLASS IV **Date** **Initial**	1. Obtain infection control permit before construction begins. 2. Isolate HVAC system in area where work is being done to prevent contamination of duct system. 3. Complete all critical barriers or implement control cube method before construction begins. 4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 5. Seal holes, pipes, conduits, and punctures appropriately. 6. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave the work site.	7. All personnel entering work site are required to wear shoe covers. 8. Do not remove barriers from work area until completed project is thoroughly cleaned. 9. Vacuum work area with HEPA filtered vacuums. 10. Wet mop with disinfectant. 11. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. 12. Contain construction waste before transport in tightly covered containers. 13. Cover transport receptacles or carts. Tape covering. 14. Remove or isolate HVAC system in areas where construction is being done.

Additional Requirements:

_____ Date Initials	_____ Date Initials Exceptions/Additions to this permit are noted by attached memoranda.
Permit Requested By:	Permit Authorized By:
Date:	Date:

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to – GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.
http://www.aluminum.org

AABC Associated Air Balance Council
http://www.aabchq.com

AAMA American Architectural Manufacturer's Association
http://www.aamanet.org

AASHTO American Association of State Highway and Transportation Officials
http://www.aashto.org

AATCC American Association of Textile Chemists and Colorists
http://www.aatcc.org

ACGIH American Conference of Governmental Industrial Hygienists
http://www.acgih.org

ACI American Concrete Institute
http://www.aci-int.net

ACPA American Concrete Pipe Association
http://www.concrete-pipe.org

ACPPA American Concrete Pressure Pipe Association
http://www.acppa.org

ADC Air Diffusion Council
http://flexibleduct.org

AGA American Gas Association
http://www.aga.org

AGC Associated General Contractors of America
http://www.agc.org

AGMA American Gear Manufacturers Association, Inc.
http://www.agma.org

AH American Hort
https://www.americanhort.org

AHAM Association of Home Appliance Manufacturers
http://www.aham.org

AIA American Institute of Architects

http://www.aia.org

AISC American Institute of Steel Construction
http://www.aisc.org

AISI American Iron and Steel Institute
http://www.steel.org

AITC American Institute of Timber Construction
https://aitc-glulam.org

AMCA Air Movement and Control Association, Inc.
http://www.amca.org

ANSI American National Standards Institute, Inc.
http://www.ansi.org

APA The Engineered Wood Association
http://www.apawood.org

ARI Air-Conditioning and Refrigeration Institute
http://www.ari.org

ARPM Association for Rubber Product Manufacturers
https://arpm.com

ASABE American Society of Agricultural and Biological Engineers
https://www.asabe.org

ASCE American Society of Civil Engineers
http://www.asce.org

ASHRAE American Society of Heating, Refrigerating, and Air-Conditioning Engineers
http://www.ashrae.org

ASME American Society of Mechanical Engineers
http://www.asme.org

ASSE American Society of Sanitary Engineering International
http://www.asse-plumbing.org

ASTM American Society for Testing and Materials International
http://www.astm.org

AWI Architectural Woodwork Institute
https://www.awinet.org

AWS American Welding Society
https://www.aws.org

AWWA American Water Works Association
https://www.awwa.org

BHMA	Builders Hardware Manufacturers Association https://www.buildershardware.com
BIA	The Brick Industry Association http://www.gobrick.com
CAGI	Compressed Air and Gas Institute https://www.cagi.org
CGA	Compressed Gas Association, Inc. https://www.cganet.com
CI	The Chlorine Institute, Inc. https://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association https://www.cisca.org
CISPI	Cast Iron Soil Pipe Institute https://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute https://www.chainlinkinfo.org
CPA	Composite Panel Association https://www.compositepanel.org
CPMB	Concrete Plant Manufacturers Bureau https://www.cpmb.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute https://www.crsi.org
CTI	Cooling Technology Institute https://www.cti.org
DHA	Decorative Hardwoods Association https://www.decorativehardwood.org
DHI	Door and Hardware Institute https://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute https://www.eei.org
EPA	United States Environmental Protection Agency https://www.epa.gov

ETL	ETL Testing Services http://www.intertek.com
FAA	Federal Aviation Administration https://www.faa.gov
FCC	Federal Communications Commission https://www.fcc.gov
FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org\
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry http://msshq.org
NAAMM	National Association of Architectural Metal Manufacturers https://www.naamm.org

PHCC	Plumbing-Heating-Cooling Contractors Association https://www.phccweb.org
NBS	National Bureau of Standards See - NIST
NBBI	The National Board of Boiler and Pressure Vessel Inspectors https://www.nationalboard.org
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association https://www.nema.org
NFPA	National Fire Protection Association https://www.nfpa.org
NHLA	National Hardwood Lumber Association https://www.nhla.com
NIH	National Institute of Health https://www.nih.gov
NIST	National Institute of Standards and Technology https://www.nist.gov
NELMA	Northeastern Lumber Manufacturers Association, Inc. http://www.nelma.org
NPA	National Particleboard Association (See CPA, Composite Panel Association)
NSF	National Sanitation Foundation http://www.nsf.org
OSHA	Occupational Safety and Health Administration Department of Labor https://www.osha.gov
PCA	Portland Cement Association https://www.cement.org
PCI	Precast Prestressed Concrete Institute https://www.pci.org
PPI	Plastics Pipe Institute https://www.plasticpipe.org
PEI	Porcelain Enamel Institute http://www.porcelainenamel.com
PTI	Post-Tensioning Institute http://www.post-tensioning.org

RFCI	Resilient Floor Covering Institute https://www.rfci.com
RIS	Redwood Inspection Service (See Western Wood Products Association) https://www.wwpa.org
SCMA	Southern Cypress Manufacturers Association http://www.cypressinfo.org
SDI	Steel Door Institute http://www.steeldoor.org
SJI	Steel Joist Institute https://www.steeljoist.org
SMACNA	Sheet Metal & Air-Conditioning Contractors' National Association https://www.smacna.org
SSPC	The Society for Protective Coatings https://www.sspc.org
STI	Steel Tank Institute https://www.steeltank.com
SWI	Steel Window Institute https://www.steelwindows.com
TCNA	Tile Council of North America https://www.tcnatile.com
TEMA	Tubular Exchanger Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute https://www.tpinst.org
UBC	The Uniform Building Code (See ICC)
UL	Underwriters' Laboratories Incorporated https://www.ul.com
ULC	Underwriters' Laboratories of Canada https://www.ulc.ca
WCLB	West Coast Lumber Inspection Bureau http://www.wclib.org
WDMA	Window and Door Manufacturers Association https://www.wdma.com

WRCLA Western Red Cedar Lumber Association

https://www.realcedar.com

WWPA Western Wood Products Association

http://www.wwpa.org

- - - E N D - - -

SECTION 01 45 00
QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies requirements for Contractor Quality Control (CQC) for Design-Bid-Build (DBB) or Design-Build (DB) construction projects. This section can be used for both project types.

1.2 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

B. ASTM International (ASTM)

1. ASTM D3740 - (2012a) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
2. ASTM E29 - (2014a) Standard Specification for Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

1.3 SUBMITTALS

Government approval is required for all submittals. Contractor shall note below are the minimum requirements and additional control measures may apply per specification section. Contractor shall note the following on all submittals: 'applicable Specification section - naming convention: Requirement description'.

1. Preconstruction Submittals
   a. Interim CQC Plan(s)
   b. CQC Plan
   c. Additional Requirements for Design Quality Control (DQC) Plan (if applicable)
2. Design Data (if applicable)
   a. Discipline-Specific Checklists
   b. Design Quality Control
3. Test Reports
   a. Verification Statement

PART 2 PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

Establish and maintain an effective quality control (QC) system that complies with the FAR Clause 52.246.12 titled "Inspection of Construction". QC consists of plans, procedures, and organization necessary to produce an end product which complies with the contract requirements. The QC system covers all design and construction operations, both onsite and offsite, and be keyed to the proposed design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Office or authorized designee for noncompliance with the quality requirements specified in the contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent maintains a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer.

3.2 CQC PLAN

A. Submit no later than (30) days after receipt of Notice to Proceed (NTP) the CQC Plan proposed to implement the requirements of the FAR Clause 52.246.12 titled "Inspection of Construction". The Government will consider an Interim CQC Plan for the first (30) days of operation, which must be accepted within (5) business days of NTP. Design and/or construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an Interim plan applicable to the particular feature of work to be started. Work outside of the accepted Interim CQC Plan will not be permitted to begin until acceptance of a CQC Plan or another Interim CQC Plan containing the additional work scope is accepted.

B. Content of the CQC Plan: Include, as a minimum, the following to cover all design and construction operations, both onsite and offsite, including work by Subcontractors, designers of record consultants, architects/engineers (A/E), fabricators, suppliers, and purchasing agents:

   1. A description of the QC organization, including a chart showing lines of authority and acknowledgement that the CQC staff will implement the three-phase control system for all aspects of the work specified. Include a CQC System Manager that reports to the project Superintendent.

2. The name, qualifications (in resume format) duties, responsibilities, and authorities of each person assigned a CQC function.
3. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the contract. Letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities will to the Contracting Officer or authorized designee. be issued by the CQC System Manager. Furnish copies of these letters
4. Procedures for scheduling, reviewing, certifying, and managing submittals including those of Subcontractors, designers of record, consultants, A/E's offsite fabricators, suppliers and purchasing agents. These procedures must be in accordance with Section 01 33 23 Shop Drawings, Product Data, and Samples.
5. Control, verification, and acceptance of testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the Contracting Officer or authorized designee are required to be used)
6. Procedures for tracking Preparatory, Initial, and Follow-Up control phases and control, verification, and acceptance tests including documentation.
7. Procedures for tracking design and construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected.
8. Reporting procedures, including proposed reporting formats.
9. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks has separate control requirements, and is identified by different trades or disciplines, or it is work by the same trade in a different environment. Although each section of specifications can generally be considered as a definable feature of work, there are frequently more than one definable feature under a particular section. This list will be agreed upon during the Coordination meeting.

10. Coordinate schedule work with Special Inspections required by the Statement of Special Inspections and Schedule of Special Inspections. Where the applicable Code issue by the International Code Council (ICC) calls for inspections by the Building Official, the Contractor must include the inspections in the CQC Plan and must perform the inspections required by the applicable ICC. The Contractor must perform these inspections using independent qualified inspectors. Include the Special Inspection Plan requirements in the CQC Plan.

C. Additional Requirements for Design Quality Control (DQC) Plan: *The following additional requirements apply to the DQC Plan for DB projects only and not DBB projects.*

1. Submit and maintain a DQC Plan as an effective QC program which assures that all services required by this contract are performed and provided in a manner that meets professional architectural and engineering quality standards. As a minimum, all documents must be technically reviewed by competent, independent reviewers identified in the DQC Plan. The same element that produced the product may not perform the independent technical review (ITR). Correct errors and deficiencies in the design documents prior to submitting them to the Government.
2. Include the design schedule in the master project schedule, showing the sequence of events involved in carrying out the project design tasks within the specific contract period. This should be at a detailed level of scheduling sufficient to identify all major design tasks, including those that control the flow of work. Include review and correction periods associated with each item. This should be a forward planning as well as a project monitoring tool. The schedule reflects calendar days and not dates for each activity. If the schedule is changed, submit a revised schedule reflecting the change within 7 calendar days. Include in the DQC Plan the discipline-specific checklists to be used during the design and quality control of each submittal. Submit at each design phase as part of the project documentation these completed discipline-specific checklists.
3. Implement the DQC Plan by a DQC Manager who has the responsibility of being cognizant of and assuring that all documents on the project have been coordinated. This individual must be a person who has verifiable engineering or architectural design experience and is a Professional Engineer or Registered Architect within the state of Construction

location. Notify the Contracting Officer or authorized designee, in writing, of the name of the individual, and the name of an alternate person assigned to the position.

D. Acceptance of Plan: Acceptance of the Contractors plan is required prior to the start of design and/or construction. Acceptance is conditional and will be predicated on satisfactory performance during the design and/or construction. The Government reserves the right to require the Contractor to make changes in the CQC Plan and operations including removal of personnel as necessary, to obtain the quality specified.

E. Notification of Changes: After acceptance of the CQC Plan, notify the Contracting Officer or authorized designee in writing of any proposed change. Proposed changes are subject to acceptance by the Government prior to implementation by the Contractor.

3.3 COORDINATION MEETING

A. After the Preconstruction Conference before start of construction or Post-Award Conference before start of design, and prior to acceptance by the Government of the CQC Plan, meet with the Contracting Officer or authorized designee to discuss the Contractors quality control system. Submit the CQC Plan a minimum of (5) business days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CC operations, design activities (if applicable), control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractors Management and control with the Governments Quality Assurance. Minutes of the meeting will be prepared by the Contractor, signed by both the Contractor and Contracting Officer or authorized designee and will become a part of the contract file. There can be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

3.4 QUALITY CONTROL ORGANIZATION

A. Personnel Requirements: The requirements for the CQC organization are a Safety and Health Manager, CQC System Manager, a Design Quality Manager (if applicable), and any sufficient number of additional qualified personnel to ensure safety and contract compliance (dependent on the project complexity and scope). Personnel identified in the technical provisions as requiring specialized skills to assure the required work is

being performed properly will also be included as part of the CQC organization. The Contractors CQC staff maintains a presence at the site at all times during progress of the work and have complete authority and responsibility to take any action necessary to ensure contract compliance. The Contractor is to provide adequate office space, filing systems, and other resources as necessary to maintain an effective and fully functional CQC organization. The CQC organization is responsible to maintain all project documents and records at the site at all times, except as otherwise acceptable to the Government. The CQC staff will be subject to acceptance by the Contracting Officer or authorized designee.

B. CQC Safety and Health Manager: Identified CQC Safety and Health Manager shall satisfy the requirements of the 'Site Safety and Health Officer (SSHO) per specification '01 35 26 - Safety Requirements' and reports directly to a senior project (or corporate) official independent from the CQC System Manager. The Safety and Health Manager will serve as a member of the CQC Staff.

C. CQC System Manager: Identified CQC System Manager is an individual within the onsite work organization that is responsible for overall management of CQC and has the authority to act in all CQC matters for the Contractor. The assigned CQC system Manager is permitted to have concurrent site duties such as Project Superintendent or Project Engineer or Senior Project Manager, depending on the project complexity. Identify in the plan an alternate to serve in the event of the CQC System Manager's absence. The requirements for the alternate are the same as the CQC System Manager.

D. CQC Personnel: In addition to CQC personnel specified elsewhere in the contract, provide as part of the CQC organization specialized personnel (i.e. 'Competent Person' per specification 01 35 26 - Safety Requirements) to assist the CQC System Manager for the following areas, as applicable: electrical, mechanical, civil, structural, environmental, architectural, materials technician submittals clerk, Commissioning Agent/LEED specialist, and low voltage systems. These individuals or specified technical companies shall be employees of the General Contractor or Subcontractor; be responsible to the CQC System Manager; be physically present at the construction site during work on the specialized personnel's areas of responsibility; have the necessary education or experience in accordance with the Experience Matrix listed herein. These individuals can perform other duties but need to be allowed sufficient

time to perform the specialized personnel's assigned quality controls duties as described in the CQC Plan. A single person can cover more than one area provided that the single person is qualified to perform QC activities in each designated area.

EXPERIENCE MATRIX

Area	Qualifications
Civil	Graduate Civil Engineer or Construction Manager with 2 years experience in the type of work being performed on this project or technician with 5 years related experience.
Mechanical	Graduate Mechanical Engineer with 2 years experience or construction professional with 5 years of experience supervising mechanical features of work in the field with a construction company.
Electrical	Graduate Electrical Engineer with 2 years related experience or construction professional with 5 years of experience supervising electrical features of work in the field with a construction company.
Structural	Graduate Civil Engineer (with Structural Track or Focus), Structural Engineer, or Construction Manager with 2 years experience or construction professional with 5 years experience supervising structural features of work in the field with a construction company.
Architectural	Graduate Architect with 2 years experience or construction professional with 5 years of related experience.
Environmental	Graduate Environmental Engineer with 3 years experience.
Submittals	Submittal Clerk with 1 year experience.

Area	Qualifications
Concrete, Pavement, and Soils	Materials Technician with 2 years experience for the appropriate area.
Testing, Adjusting, and Balancing (TAB)	Specialist must be a member of the AABC/NEBB or an experienced technician from a firm certified by the AABC/NEBB.
Design Quality Control Manager	Registered Architect or Professional Engineer

E. Organizational Changes: Maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer or authorized designee for acceptance.

3.5 SUBMITTALS AND DELIVERABLES

A. Submittals have to comply with the requirements in Section 01 33 23 Shop Drawings, Product Data, and Samples. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements. The submittals required by the section have to be coordinated with the Section 01 33 23 Shop Drawings, Product Data, and Samples to ensure adequate time is allowed for each type of submittal required.

3.6 CONTROL

A. CQC is the means by which the Contractor ensures that the construction, to include that of Subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control are required to be conducted by the CQC System Manager for each definable feature of the construction work as follows:

1. Preparatory Phase: This phase is performed prior to beginning work on each definable feature of work after all required plans/ documents/ materials are approved/ accepted, and after copies are at the work site. This phase includes:

   a. A review of each paragraph of applicable specifications, references codes, and standards. Make available during the preparatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.

b. Review of the contract drawings.
c. Check to assure that all materials and equipment have been tested, submitted, and approved.
d. Review of provisions that have been made to provide required control inspection and testing.
e. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the contract.
f. Examination of required materials, equipment, and sample work to assure that they are on hand conform to approved shop drawings or submitted data, and are properly stored.
g. Review of the appropriate Activity Hazard Analysis (AHA) to assure safety requirements are met.
h. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards – contract defined or industry standard if not contract defined - for that feature of work.
j. Check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.
k. Discussion of the initial control phase.
l. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the Preparatory control phase. Include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. Document the results of the Preparatory phase actions by separate minutes prepared by the CQC System Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

B. Initial Phase: This phase is accomplished at the beginning of a definable feature of work. Accomplish the following:
1. Check work to ensure that it is in full compliance with contract requirements. Review minutes of the Preparatory meeting.
2. Verify adequacy of controls to ensure full contract compliance. Verify the required control inspection and testing is in compliance with the contract.

3. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
4. Resolve all differences.
5. Check safety to include compliance with an upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
6. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the initial phase for definable features of work. Prepare separate minutes of this phase by the CQC System Manager and attach to the daily CQC report. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with Follow-Up phases.
7. The initial phase for each definable feature of work is repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.

C. Follow-Up Phase: Perform daily checks to assure control activities, including control testing, are providing continued compliance with contract requirements until the completion of the particular feature of work. Record the checks in the CQC documentation. Conduct final Follow-Up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work. **Do not build upon nor conceal non-conforming work.**

D. Additional Preparatory and Initial Phases on the same definable features of work if: the quality ongoing work is unacceptable; if there are changes in the applicable CQC staff or onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity; or if other problems develop.

3.7 TESTS

A. Testing Procedure: Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and acceptance test when specified. Procure the services of a Department of Veteran Affairs approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:

1. Verify that testing procedures comply with contract requirements.
2. Verify that facilities and testing equipment are available and comply with testing standards.
3. Check test instrument calibration data against certified standards.
4. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
5. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the unique sequential control number identifying the test. If approved by the Contracting Officer or authorized designee, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the Contracting Officer or authorized designee. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this contract.

B

3.8 COMPLETION INSPECTION

A. Punch-Out Inspection: Conduct an inspection of the work by the CQC system Manager near the end of the work, or any increment of the work established by a time stated FAR 52.211-10 – Commencement, Prosecution, and Completion of Work, or by the specifications. Prepare and include in the CQC documentation a punch list of items which do not conform to the approved drawings and specifications. Include within the list of deficiencies the estimated date by which the deficiencies will be corrected. Make a second inspection the CQC System Manager or staff to ascertain that all deficiencies have been corrected. Once this is accomplished, notify the Government that the facility is ready for the Government Pre-Final Inspection.

B. Pre-Final Inspection: The Government will perform the Pre-Final Inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. Ensure that all items on this list have been corrected before notifying the Government, so that a Final Acceptance Inspection with the customer can be scheduled. Correct any items noted on the Pre-Final Inspection in a timely manner. These inspections and any deficiency

corrections required by this paragraph need to be accomplished within the time slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate construction completion dates.

C. Final Acceptance Inspection: The General Contractor is responsible for the Quality Control of their work. The Contracting Officer or authorized designee is responsible for the Quality Assurance of the General Contractors process. Once the General Contractor is ready for project turnover to the Government, the results of the Contractor Quality Control plan will be presented to the Governments authorized designee. Once reviewed, the General Contractors superintendent will present the Contractors Pre-Final acceptance walkthrough 'punch list' to the Government. Only at this point will the General Contractor and the Government conduct the final acceptance inspection. The Contractors QC inspection personnel, plus the Superintendent or other primary management person, and the Contracting Officers authorized designee is required to be in attendance at the Final Acceptance Inspection. Additional Government personnel can also be in attendance. The Final Acceptance Inspection will be formally scheduled by the Contracting Officer's or authorized designee based upon results of the Pre-Final Inspection. Notify the Contracting Officer through the Resident Engineer office at least 14 days prior to the Final Acceptance Inspection and include the Contractors assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date schedule for the Final Acceptance Inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Governments additional inspection cost in accordance with FAR Clause 52.246-12 titled "Inspection of Construction".

3.9 DOCUMENTATION

A. Quality Control Activities: Maintain current records providing factual evidence that required QC activities and tests have been performed. Include in these records the work of Subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:
   1. The name and area of responsibility of the Contractor/Subcontractor
   2. Operating plant/equipment with hours worked, idle, or down for repair.

3. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
4. Test and control activities performed with results and references to specification/drawing requirements. Identify the Control Phase (Preparatory, Initial, and/or Follow-Up). List deficiencies noted, along with corrective action.
5. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specification/drawing requirements.
6. Submittals and deliverables reviewed, with contract reference, by whom, and action taken.
7. Offsite surveillance activities, including actions taken.
8. Job safety evaluations stating what was checked, results, and instructions or corrective actions.
9. Instructions given/received and conflicts in plans and specifications.
10. Provide documentation of design quality control activities. For independent design reviews, provide, as a minimum, identification of the Independent Technical Reviewer (ITR) team, the ITR review comments, responses, and the record of resolution of the comments.

B. Verification Statement: Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the contract. Furnish the original and one copy of these records in report form to the Government daily with 1 week after the date covered by the report, except that reports need not be submitted for day son which no work is performed. As a minimum, prepare and submit on report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the CQC System Manager. Include copies of test reports and copies of reports prepared by all subordinate QC personnel within the CQC System Manager Report.

3.10 SAMPLE FORMS

014500 Referenced
Example Form Templa

3.11 NOTIFICATION OF NONCOMPLIANCE

A. The Contracting Officer or authorized designee will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor should take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site will be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer can issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made the subject of claim for extension of time or for excess costs or damages by the Contractor.

--- END ---

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the General Contractor.

1.2 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates

T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine

T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop

T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate

T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop

T191-02(R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method

T310-13.....Standard Method of Test for In-place Density and Moisture Content of Soil and Soil-aggregate by Nuclear Methods (Shallow Depth)

C. American Concrete Institute (ACI):

506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

D. American Society for Testing and Materials (ASTM):

A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

A416/A416M-10.....Standard Specification for Steel Strand, Uncoated Seven-Wire for Prestressed Concrete

C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the Field

C33/C33M-11a.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

C136-06.....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

C140-12.....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic Cement Concrete

C172/C172M-10.....Standard Practice for Sampling Freshly Mixed Concrete

C173/C173M-10b.....Standard Test Method for Air Content of freshly Mixed Concrete by the Volumetric Method

C330/C330M-09.....Standard Specification for Lightweight Aggregates for Structural Concrete

C567/C567M-11.....Standard Test Method for Density Structural Lightweight Concrete

C780-11.....Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry

C1019-11.....Standard Test Method for Sampling and Testing Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

C1314-11a.....Standard Test Method for Compressive Strength of Masonry Prisms

D422-63(2007).....Standard Test Method for Particle-Size Analysis of Soils

D698-07e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort

D1140-00(2006).....Standard Test Methods for Amount of Material in Soils Finer than No. 200 Sieve

D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations Under Static Axial Compressive Load

D1188-07e1.....Standard Test Method for Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Coated Samples

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000ft lbf/ft3 (2,700 KNm/m3))

D2166-06.....Standard Test Method for Unconfined Compressive Strength of Cohesive Soil

D2167-08).....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2216-10.....Standard Test Methods for Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D2974-07a.....Standard Test Methods for Moisture, Ash, and Organic Matter of Peat and Other Organic Soils

D3666-11.....Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for Agencies Engaged in Testing and/or Inspection of Soil and Rock as used in Engineering Design and Construction

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

E94-04(2010).....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection

E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing

E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle Examination

E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

F3125/F3125M-15.....Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

E. American Welding Society (AWS):

D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories shall be accredited by a laboratory accreditation authority and shall be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory’s scope of accreditation shall include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the “Corporate Office.”

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:

1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
2. Provide full time observation of fill placement and compaction and field density testing in building areas and provide full time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with AASHTO T99/T180 Method A ASTM D698 and/or ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D693, or ASTM D2167 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. If the testing laboratory propose these alternative methods, they shall provide satisfactory explanation to the COR before the tests are conducted.
   a. Building Slab Subgrade: At least one test of subgrade for every 185 m^2 (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test for every 185 m^2 (2000 square feet) of overlaying building slab, but in no case fewer than three tests.
   b. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
   c. Pavement Subgrade: One test for each 335 m^2 (400 square yards), but in no case fewer than two tests.
   d. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
   e. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
   f. Footing Subgrade: At least one test for each layer of soil on which footings shall be placed. Subsequent verification and approval of each footing subgrade shall be based on a visual comparison of each subgrade with related tested subgrade when acceptable to COR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.

C. Fill and Backfill Material Gradation: One test per 500 cubic yards stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM C136.

D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.

E. Testing Materials: Test suitability of on-site and off-site borrow as directed by COR.

3.2 LANDSCAPING:

A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.

1. Test for organic material by using ASTM D2974.
2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.

B. Submit laboratory test report of topsoil to COR.

3.3 ASPHALT CONCRETE PAVING:

A. Aggregate Base Course:

1. Determine maximum density and optimum moisture content for aggregate base material in accordance with AASHTO T180, Method D.
2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with AASHTO T191.
3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.

B. Asphalt Concrete:

1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.
3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

3.4 SITE WORK CONCRETE:

Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.5 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COR with concurrence of COR and perform periodic inspections thereafter as determined by COR.
2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:
1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads shall be removed from the site at the Contractor’s expense. Any rejected concrete that is placed shall be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m^3 (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. After good concrete quality control has been established and maintained as determined by COR make three cylinders for each 80 m^3 (100 cubic yards) or less of each concrete type, and at least three cylinders from any one day's pour for each concrete type. Label each cylinder with an

identification number. COR shall require additional cylinders to be molded and cured under job conditions.

4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m^3 (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m^3 (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
    a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
    b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs,

and grade of steel prior to concrete placement. Submit detailed report of observations.

12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
    a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
    b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
    a. Monitor and record amount of water added at project site.
    b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
    a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
    b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
    c. Provide the Contractor and the COR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
    a. Grouting under base plates.
    b. Grouting anchor bolts and reinforcing steel in hardened concrete.

C. Laboratory Tests of Field Samples:

1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COR. Compile laboratory test reports as follows:

Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.

2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to COR. In test report, indicate the following information:
   a. Cylinder identification number and date cast.
   b. Specific location at which test samples were taken.
   c. Type of concrete, slump, and percent air.
   d. Compressive strength of concrete in MPa (psi).
   e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
   f. Weather conditions during placing.
   g. Temperature of concrete in each test cylinder when test cylinder was molded.
   h. Maximum and minimum ambient temperature during placing.
   i. Ambient temperature when concrete sample in test cylinder was taken.
   j. Date delivered to laboratory and date tested.

3.6 REINFORCEMENT:

A. Review mill test reports furnished by Contractor.
B. Make one tensile and one bend test in accordance with ASTM A370 from each pair of samples obtained.
C. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.
D. Perform tension tests of mechanical and welded splices in accordance with ASTM A370.

3.7 ARCHITECTURAL PRECAST CONCRETE:

A. Inspection at Plant: Forms, placement of reinforcing steel, concrete cover, and placement and finishing of concrete.
B. Concrete Testing: Test concrete including materials for concrete as required in Article CONCRETE of this section, except make two test cylinders for each day's production of each strength of concrete produced.

C. Inspect members to insure specification requirements for curing and finishes have been met.

3.8 MASONRY:

A. Mortar Tests:
   1. Laboratory compressive strength test:
      a. Comply with ASTM C780.
      b. Obtain samples during or immediately after discharge from batch mixer.
      c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
      d. Test one sample at 7 days and 2 samples at 28 days.
   2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:
   1. Laboratory compressive strength test:
      a. Comply with ASTM C1019.
      b. Test one sample at 7 days and 2 samples at 28 days.
      c. Perform test for each 230 m^2 (2500 square feet) of masonry.

C. Masonry Unit Tests:
   1. Laboratory Compressive Strength Test:
      a. Comply with ASTM C140.
      b. Test 3 samples for each 460 m^2 (5000 square feet) of wall area.

D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m^2 (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.9 STRUCTURAL STEEL:

A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:
   1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
   2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
   3. Approve welder qualifications by certification or retesting.
   4. Approve procedure for control of distortion and shrinkage stresses.

5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:

1. Weld Inspection:

a. Inspect welding equipment for capacity, maintenance and working condition.

b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.

c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.

d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.

e. Measure 25 percent of fillet welds.

f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:

1) 20 percent of all shear plate fillet welds at random, final pass only.

2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.

3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.

4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.

5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.

g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.

h. Welding Radiographic Testing: Test in accordance with ASTM E94, and AWS D1.1 for 5 percent of all full penetration welds at random.

i. Verify that correction of rejected welds are made in accordance with AWS D1.1.

j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.

2. Bolt Inspection:
   a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
   b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
   c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
   d. Bolts installed by turn-of-nut tightening shall be inspected with calibrated wrench when visual inspection was not performed during tightening.
   e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
   f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.

D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COR.

3.10 STEEL DECKING:

A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer’s requirements.

B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with “Welder Qualification” procedures of AWS D1.1. Refer to the “Plug Weld Qualification Procedure” in Part 3 “Field Quality Control.”

C. Submit inspection reports, certification, and instances of noncompliance to COR.

3.11 SHEAR CONNECTOR STUDS:

A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.

B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.

C. Submit inspection reports, certification, and instances of noncompliance to COR.

3.12 SPRAYED-ON FIREPROOFING:

A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.

B. Obtain a copy of approved submittals from COR.

C. Use approved installation in test areas as criteria for inspection of work.

D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.

1. Thickness gauge specified in ASTM E605 shall be modified for pole extension so that overhead sprayed material can be reached from floor.

E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
2. Density: Take density determinations from each floor, or one test from each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to COR.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 01 50 00
TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the construction of temporary facilities for the relocation of the Pharmacy Service during the construction renovation period of the department.

B. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 QUALITY CONTROL

A. Establish and maintain quality control for the environmental protection of all items set forth herein.

1.3 REFERENCES

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. U.S. National Archives and Records Administration (NARA):
33 CFR 328.....Definitions

1.4 SUBMITTALS

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Drawings showing locations of the proposed temporary facilities to include general site layout, foundations, building construction details and sections, dimensions, and other pertinent information.
2. The general location and building layout is shown on the drawings. Contractor shall use the drawings as a guide and template for the temporary buildings. Plan should include measures for marking the limits of use areas.
3. Inclusion of “best management practices” and methodologies.

B. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.

C. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.

D. Approval of the Contractor's Plan will not relieve the Contractor of responsibility for adequate and continued control of any environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

B. Restoration of Property: If any direct or indirect damage is done to the property resulting from the erection and use of the temporary facilities, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

C. Final Clean-up: On completion of project and after removal of all structures, debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

1.6 USE CHARGES

A. General: Installation and removal of and use charges for temporary facilities shall be included in the General Conditions cost unless otherwise indicated. Allow other entities to use temporary services and facilities without cost, including, but not limited to, Owner's construction forces, Architect, occupants of Project, testing agencies, and authorities having jurisdiction.

B. Sewer Service: Owner will pay sewer-service use charges for sewer usage by all entities for temporary facility operations.

C. Water Service: Owner will pay water-service use charges for water used by all entities for temporary facility operations.

D. Electric Power Service: Owner will pay electric-power-service use charges for electricity used by all entities for construction operations.

1.7 QUALITY ASSURANCE

A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.

B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

PART 2 - PRODUCTS

2.1 SITE

A. Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch- (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top rails.

B. Portable Chain-Link Fencing: Minimum 2-inch (50-mm), 0.148-inch- (3.8-mm-) thick, galvanized-steel, chain-link fabric fencing; minimum 6 feet (1.8 m) high with galvanized-steel pipe posts; minimum 2-3/8-inch- (60-mm-) OD line posts and 2-7/8-inch- (73-mm-) OD corner and pull posts, with 1-5/8-inch- (42-mm-) OD top and bottom rails. Provide galvanized-steel bases for supporting posts.

C. Dust-Control Adhesive-Surface Walk-off Mats: Provide mats minimum 36 by 60 inches (914 by 1624 mm).

D. Insulation: Unfaced mineral-fiber blanket, manufactured from glass, slag wool, or rock wool; with maximum flame-spread and smoke-developed indexes of 25 and 50, respectively.

2.2 INTERIOR FINISHES

1. Provide the following interior finishes, reference 09 06 00, Schedule of Finishes for additional basis of design information:
   a. Flooring: Luxury Vinyl Tile, LVT-3
   b. Flooring at Toilet Rooms: Porcelain Tile, PT-1 with Trim, TR-1 along floor tile to wall tile transition
   c. Base: Resilient Base, RB-2
   d. Walls-Typical: Paint, P-1
   e. Walls at Toilet Rooms: Porcelain Tile, PT-1 to 5’-6”AFF with Epoxy Paint, EP-1 above, provide Trim, TR-2 along top exposed edge of wall tile
   f. Door/Frame Paint: Paint, P-2
   g. Ceiling, Typical: Grid with Acoustic Tile, AT-1
   h. Ceiling at Toilet Rooms: GYP coated with Epoxy Paint, EP-2
   i. Casework: Plastic Laminate Cladded Wood Casework, PL-1

j. Countertops: Solid Surface, SS-1

2.3 EQUIPMENT

A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

B. TV Mounting Brackets for Patient Tracking Monitors: assume a total of 2 locations directed by the VA.

C. Toilet Cover Dispenser: Surface Mounted, Satin Finish Stainless Steel, Capacity to be 250 standard single fold or half fold covers, covers to be inserted through bottom of dispenser. Assume a total of 2 locations directed by the VA.

D. Grab Bars: Type IV, Surface Mounted, Class 2, Fabricated from Stainless Steel or Nylon Coated Steel, 38mm (1-1/2 inch) outside diameter, Concealed Mounting

E. Garment Hooks: Fabricate units from chromium plated brass with satin finish or stainless steel as a double hook on a single shaft, fastenings to be concealed.

F. ADA Slope Mirror: Frame to be fabricated of anodized aluminum or stainless steel with square corners, 0.9 mm (0.035 inch) metal thickness, Glass to be a minimum of 6 mm (1/4 inch) thick set with protective vinyl glazing tape, provide filler fabricated from same material as mirror to be used where mirror is installed at porcelain tile wainscot to conceal void between back of mirror and wall surface.

G. Pharmacy shelving to be provided and installed by the VA.

2.4 ELECTRICAL AND LOW VOLTAGE EQUIPMENT AND FIXTURES

A. Interior lighting fixtures capable of maintaining average illumination of 20 fc (215 lx) at table height. All lighting to have dimming controls. Battery back-up for path of egress fixtures

B. Exterior lighting fixtures to maintain 1.5 fc between trailers along any platforms or ramps. Battery back-up for exterior lights along path of egress.

C. Telecommunications wall mount rack in pharmacy trailer, lockable with 2500 watt UPS. Rack to contain CAT6A patch panels to all data outlets in both trailers. Include 12 pair single mode fiber patch panel (OS2) with LC connectors

D. Provide 2 CAT 6A data jacks at each computer workstation assume a total of 24 locations directed by the VA for a total of 48 cables.

E. Provide IP based cameras meeting the national defense authorization act cameras should be positioned with vantage points of the following locations:
   1. Perimeter of trailers
   2. Entry points for trailers
   3. Waiting areas
   4. All areas of the pharmacy floor
   5. Entrance to pharmacy vault
F. Provide security system for trailers that monitors pharmacy exterior doors and windows, and vault door. Provide wireless dialer and monitoring services during construction.
G. Provide physical access controls per project specifications for all exterior doors with card access controls. Provide card access control with keypad for pharmacy vault door.
H. Provide power outlets at all workstations and in waiting area. Min 30 total for trailers.
I. Provide fire alarm devices and FACP for building designed by NICET certified designer. FACP to have fiber interface for connection to main building through fiber connection.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

A. General: Install temporary service or connect to existing service.
   1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.
B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.
   1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.
C. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable

to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.

D. Sanitary Facilities: Provide temporary connection for temporary use. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.

E. Telephone Service: Provide temporary telephone service in common-use facilities for use by Owner. Install one telephone line(s) for each trailer component, Pharmacy and Waiting.

1. Provide additional telephone lines for the following:

a. Provide a dedicated telephone line for each facsimile machine in the Pharmacy.

3.3 SUPPORT FACILITIES INSTALLATION

A. General: Comply with the following:

1. Provide construction for temporary Waiting and Outpatient Pharmacy located within the Canteen parking area that is noncombustible according to ASTM E 136. Comply with NFPA 241.

2. Maintain support facilities until COR and Architect schedules Substantial Completion inspection.

B. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.

1. Identification Signs: Provide Project identification signs as indicated on Drawings.

2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to temporary construction.

C. Waste Disposal Facilities: Comply with requirements specified in Section 01 74 19 "Construction Waste Management and Disposal."

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.

B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.

C. Stormwater Control: Comply with requirements of authorities having jurisdiction.

D. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people and animals from easily entering site except by entrance gates.----is this needed??

1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.

E. Covered Walkway and Ramps: Erect protective, covered non-combustible walkways for passage of individuals through or adjacent to Project site as shown on drawings. Provide ramps with handrails for compliant egress. Coordinate with entrances and exits, other facilities, and obstructions. Comply with regulations of authorities having jurisdiction and requirements indicated on Drawings.

1. Provide overhead decking, handrails, barricades, warning signs, exit signs, lights, safe and well-drained walkways, and similar provisions for protection and safe passage.
2. Paint and maintain appearance of walkway and ramp for duration of the Work.

F. Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner.

G. Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
2. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.5 OPERATION, TERMINATION, AND REMOVAL

A. Maintenance: Maintain facilities in good operating condition until removal.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

B. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.

C. Termination and Removal: Remove temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.

---END---

SECTION 01 50 00.01
TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the construction of temporary facilities for the relocation of the Pharmacy Service during the construction renovation period of the department.

B. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

C. General Contractor to provide site survey to confirm locations of utilities that may be running through the parking lot. Parking lot is defined as everything with the following boundaries: the face of building 647 to the west, the face of building 650 to the south, the loop road to the north, and the drive aisle to the warehouse to the east. To avoid utility conflict and disruption, vacuum potholing shall be provided at locations that will be dug out to add in ground structure and service.

D. General Contractor to provide private utility locate in the parking lot.

1.2 GENERAL INTENTION

A. Waiting & Outpatient Pharmacy Temporary Facilities to be prefabricated or mobile units with serviceable finishes, temperature controls, and foundations adequate for normal loading.

B. Outpatient Pharmacy Vault to be constructed on site as a separate space connected to the prefabricated Pharmacy trailer as indicated on the site plan.

C. Spaces to be of sufficient size to accommodate needs of Owner.

D. The Contractor will be responsible for the timely construction of the temporary facilities to enable the relocation of the department to be renovated.

E. Renovation work shall not commence until the temporary facilities are accepted by the COR.

F. The Contractor will be responsible for the timely removal of the trailers and vault facilities and complete site restoration upon completion and acceptance by the COR.

G. Upon acceptance of the temporary facilities the VA will assume all operational costs. The Contractor shall be responsible for maintenance including exteriors, utility functions and a watertight envelope.

H. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.

1.3 QUALITY CONTROL

A. Establish and maintain quality control for the environmental protection of all items set forth herein.

1.4 REFERENCES

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. U.S. National Archives and Records Administration (NARA):
33 CFR 328.....Definitions

C. 2021 VA Physical Security Requirements Design Manual with waivers as applicable.

1.5 SUBMITTALS

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Drawings showing locations of the proposed temporary facilities to include general site layout, foundations, building construction details and sections, dimensions, and other pertinent information.
2. The general location and building layout is shown on the drawings. Contractor shall use the drawings as a guide and template for the temporary buildings. Plan should include measures for marking the limits of use areas.
3. Inclusion of “best management practices” and methodologies.

B. Site Plan: Show temporary facilities, utility hookups, staging areas, and parking areas for construction personnel.

C. Fire-Safety Program: Show compliance with requirements of NFPA 241 and authorities having jurisdiction. Indicate Contractor personnel responsible for management of fire-prevention program.

D. Approval of the Contractor's Plan will not relieve the Contractor of responsibility for adequate and continued control of any environmental protection measures.

1.6 PROTECTION OF ENVIRONMENTAL RESOURCES

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

B. Restoration of Property: If any direct or indirect damage is done to the property resulting from the erection and use of the temporary facilities, the Contractor shall restore the damaged property to a condition equal to that existing before the damage caused by the installation of the facilities at no additional cost to the Government. Repair, rebuild, or restore property as directed to make good such damage in an acceptable manner.

C. Final Clean-up: On completion of project and after removal of all structures, debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

1.7 USE CHARGES

A. General: Installation and removal of and use charges for temporary facilities shall be included in the General Conditions cost unless otherwise indicated. Allow other entities to use temporary services and facilities without cost, including, but not limited to, Owner's construction forces, Architect, occupants of Project, testing agencies, and authorities having jurisdiction.

B. Sewer Service: Owner will pay sewer-service use charges for sewer usage by all entities for temporary facility operations.

C. Water Service: Owner will pay water-service use charges for water used by all entities for temporary facility operations.

D. Electric Power Service: Owner will pay electric-power-service use charges for electricity used by all entities for construction operations.

1.8 QUALITY ASSURANCE

A. Electric Service: Comply with NECA, NEMA, and UL standards and regulations for temporary electric service. Install service to comply with NFPA 70.

B. Tests and Inspections: Arrange for authorities having jurisdiction to test and inspect each temporary utility before use. Obtain required certifications and permits.

PART 2 - PRODUCTS

2.1 SITE

A. Ramps and Stair System: Ramp and stairs are included within the temporary prefabricated trailer and shall meet ADA and VA standards.

2.2 ARCHITECTURAL COMPONENTS

1. Temporary trailers
   a. Provide and locate prefabricated trailers as indicated on Site Plan G-005.
   b. Trailer gross dimensions shall be 11’-8” wide by 60’-0” length. Basis of Design: Modular Genius http:modulargenius.com
   c. Configurations:
      1 set of three trailers with site constructed vault and toilet room for Pharmaceutical use.
      1 set of two trailers with waiting area, office and toilet room for general waiting area use.
2. Windows:
   a. Exterior Windows at Waiting Area Trailers shall be double hung insulated units equipped with 3/8” diameter steel bars at 4” on center on the exterior. Bars shall be securely fastened to the building.
   d. Pharmacy Counter Vision Panels:
      1) 1” ballistic glass with aluminum frame and integral speaker.
   e. Office Observation window:
      1) 24” wide x 36” high ¼” thick tempered glazing set into aluminum frame.
2. Doors:
   a. Exterior Doors: Doors shall be minimum 16 gage hollow metal with PIV control, electric strike, weatherstripping, lockset and closer as required.
   b. Interior Doors:
      1) Solid core wood at Office and Toilet Rooms.
      2) Provide dutch door at Door to Pharmacy from Waiting.
      3) Thickness: 1 3/4”

3. Door Hardware

   Interior Doors:

   a. Office: lockset

   b. Hinges: 1 ½ Pair per door

   c. Provide key pads at door to Pharmacy from Waiting.

4. Temporary Vault

   a. Roof Structure at Vault: Roof structure shall be cold form steel joist construction with 1 ½" metal deck (16 gage minimum), one layer of 9 gauge welded wire mesh welded to the metal deck at 12" on center each way, 3" Rigid Insulation (R-30), ¼" per foot tapered rigid insulation for drainage, .060 thick TPO roof with aluminum fascia, gutters and downspouts for drainage.

   b. Floor Structure at Vault: shall be 8" thick concrete plank or reinforced concrete slab on comparable supported metal floor deck.

   c. Wall Construction: Exterior walls at Vault: shall be 8" grout filled reinforced concrete masonry units for foundation and 8" cold form metal stud framing at 8" on center walls. Floor structure shall be 8" thick concrete plank or reinforced concrete slab on comparable supported metal deck and structure. Wall interior to be finished with 5/8" gypsum wall board over 1 ½" rigid insulation (R-12).

   c. Vault Doors: Heavy duty vault door with day gate to meet these requirements:

      Federal Qualified Products List (QPL):

      1. AA D 600 8 - Door, Vault, Security.

      2. FF 2470 8 - Locks, Combination.

      Federal Specifications (Fed. Spec.):

      1. AA D 600D(2) - Door, Vault, Security.

      2. FF L 2740A(1) - Locks, Combination.

      Fed. Spec. AA D 600, Class 5 V, Type IIR (right open swing) or Type IIL (left open swing) -see floor plan, without optical device, Style K, (Key change combination lock).

   1. Approved Products: QPL AA D 600 listed.

   2. Door Stop: Floor type to suit application.

   3. COMBINATION LOCK

      Fed. Spec. FF L 2740, Style 1 self contained with key change combination.

4. Approved Products: QPL FF L 2740 listed.

d. DAY GATE

1. Self closing metal construction with expanded mesh or solid bars infill, minimum 3.038 mm (0.12 inch) steel.

2. Finish: Match vault door and frame.

3. Hardware: Heavy duty hinges.

4. Locking: Automatic, key controlled from vault exterior, and thumb turn latch release accessible from vault interior, only.

5. Keying: Match Pharmacy door hardware cylinder keying.

5. Ceiling:

a. Vault Ceiling shall be painted 5/8” gypsum wall board fastened to structure with surface mounted lights.

2.3 INTERIOR FINISHES

1. Provide the following interior finishes, reference 09 06 00, Schedule of Finishes for additional basis of design information:

a. Flooring: Luxury Vinyl Tile, LVT-3

b. Flooring at Toilet Rooms: Porcelain Tile, PT-1 with Trim, TR-1 along floor tile to wall tile transition

c. Base: Resilient Base, RB-2

d. Walls-Typical: Paint, P-1

e. Walls at Toilet Rooms: Porcelain Tile, PT-1 to 5’-6”AFF with Epoxy Paint, EP-1 above, provide Trim, TR-2 along top exposed edge of wall tile

f. Door/Frame Paint: Paint, P-2

g. Ceiling, Typical: Grid with Acoustic Tile, AT-1

h. Ceiling at Toilet Rooms: GYP coated with Epoxy Paint, EP-2

i. Casework: Plastic Laminate Cladded Wood Casework, PL-1

j. Countertops: Solid Surface, SS-1

2.4 EQUIPMENT

A. Fire Extinguishers: Portable, UL rated; with class and extinguishing agent as required by locations and classes of fire exposures.

B. TV Mounting Brackets for Patient Tracking Monitors: assume a total of 2 locations directed by the VA.

C. Toilet Cover Dispenser: Surface Mounted, Satin Finish Stainless Steel, Capacity to be 250 standard single fold or half fold covers, covers to be inserted through bottom of dispenser. Assume a total of 2 locations directed by the VA.

D. Grab Bars: Type IV, Surface Mounted, Class 2, Fabricated from Stainless Steel or Nylon Coated Steel, 38mm (1-1/2 inch) outside diameter, Concealed Mounting

E. Garment Hooks: Fabricate units from chromium plated brass with satin finish or stainless steel as a double hook on a single shaft, fastenings to be concealed.

F. ADA Slope Mirror: Frame to be fabricated of anodized aluminum or stainless steel with square corners, 0.9 mm (0.035 inch) metal thickness, Glass to be a minimum of 6 mm (1/4 inch) thick set with protective vinyl glazing tape, provide filler fabricated from same material as mirror to be used where mirror is installed at porcelain tile wainscot to conceal void between back of mirror and wall surface.

G. Pharmacy shelving to be provided and installed by the VA.

2.5 PLUMBING

A. Waiting Area Trailer:

1. Provide 1” domestic cold-water supply for lavatory and toilet.
2. 2.Provide instantaneous point of use electric hot water heater underneath the sink.
3. Provide 4”-sanitary sewer piping for toilet and lavatory.
4. Provide 2” vent.
5. Insulate domestic cold-water piping.

B. Pharmacy Trailer:

1. Provide water supply to cannister type electric humidifier to maintain the space relative humidity above minimum (30%).
2. Provide ¾" domestic cold-water connection to the humidifier. Provide inline water filter.
3. Provide ½" domestic water connection to the humidifier drain aftercooler.
4. Provide 1” domestic cold-water supply for lavatory and toilet.
5. Provide instantaneous point of use electric hot water heater underneath the sink.
6. Provide 4”-sanitary sewer piping for toilet and lavatory.
7. Provide 2” vent.
8. Insulate domestic cold-water piping.

C. **Utility to trailer site:**

1. Provide 1.5” domestic cold-water piping with backflow preventer from the nearest building to the trailer area.

2. Provide 4” sanitary sewer serving both trailers and connect the main to the nearest building.

2.6 HEATING AND COOLING EQUIPMENT

A. Provide necessary equipment to maintain a uniform indoor temperature of 68 to 72 deg F (20 to 22 deg C).

B. HVAC Equipment: Provide temporary HVAC system with individual space thermostatic control.

1. Use of gas-burning space heaters, open-flame heaters, or salamander-type heating units is prohibited.
2. Heating Units: Listed and labeled for type of fuel being consumed, by a qualified testing agency acceptable to authorities having jurisdiction and marked for intended location and application.
3. Permanent HVAC System: permanent HVAC system for temporary use during construction.

C. Air-Filtration Units: Primary and secondary HEPA-filter-equipped portable units with four- stage filtration. Provide single switch for emergency shutoff. Configure to run continuously.

D. Waiting Area Trailer:

1. Provide HVAC system for cooling the 1440 square feet space, approximately 5-ton cooling capacity. The HVAC unit will be located outside the trailer and supply and return ducts will be provided for air distribution.
2. Provide electric heat approximately 10 kW, as part of HVAC unit to maintain the space conditions during winter. Alternatively provide heat pump unit.
3. Provide wall mounted exhaust fan for the restroom.

E. Pharmacy Trailer:

1. Provide HVAC system for cooling the space that will provide minimum 4 AC/hr., approximately 1200 cfm unit. The HVAC unit will be located outside the trailer and supply and return ducts will be provided for air distribution.
2. Provide cannister type electric humidifier to maintain the space relative humidity above minimum (30%).
3. Provide wall mounted exhaust fan for the restroom.
4. Provide DX-mini split (heat pump) unit for the waiting area (1-ton).
5. Insulate domestic cold-water piping.

F. Vault
   1. Provide 12,000 BTU per Hour cooling capacity DX split unit heat pump capable of providing heating during winter.
   2. Indoor unit will be located within the vault and outdoor unit will be located outside the trailer at safe location and clearance around the unit for proper airflow.
   3. Indoor and outdoor unit shall be connected via refrigerant piping and necessary electrical power/wiring.
   4. Provide condensate pump and necessary power and route condensate drain piping to the outside.

2.7 ELECTRICAL AND LOW VOLTAGE EQUIPMENT AND FIXTURES

A. Interior lighting fixtures capable of maintaining average illumination of 20 fc (215 lx) at table height. All lighting to have dimming controls. Battery back-up for path of egress fixtures
B. Exterior lighting fixtures to maintain 1.5 fc between trailers along any platforms or ramps. Battery back-up for exterior lights along path of egress.
C. Telecommunications wall mount rack in pharmacy trailer, lockable with 2500 watt UPS. Rack to contain CAT6A patch panels to all data outlets in both trailers. Include 12 pair single mode fiber patch panel (OS2) with LC connectors
D. Provide 2 CAT 6A data jacks at each computer workstation assume a total of 24 locations directed by the VA for a total of 48 cables.
E. Provide IP based cameras meeting the national defense authorization act cameras should be positioned with vantage points of the following locations:
   1. Perimeter of trailers
   2. Entry points for trailers
   3. Waiting areas
   4. All areas of the pharmacy floor
   5. Entrance to pharmacy vault
F. Provide security system for trailers that monitors pharmacy exterior doors and windows, and vault door. Provide wireless dialer and monitoring services during construction.
G. Provide physical access controls per project specifications for all exterior doors with card access controls. Provide card access control with keypad for pharmacy vault door.

H. Provide power outlets at all workstations and in waiting area. Min 30 total for trailers.

I. Provide fire alarm devices and FACP for building designed by NICET certified designer. FACP to have fiber interface for connection to main building through fiber connection.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

A. Provide each facility ready for use when needed to avoid delay. Do not remove until facilities are no longer needed or are replaced by authorized use of completed permanent facilities.

3.2 TEMPORARY UTILITY INSTALLATION

A. General: Install temporary service or connect to existing service.

1. Arrange with utility company, Owner, and existing users for time when service can be interrupted, if necessary, to make connections for temporary services.

B. Sewers and Drainage: Provide temporary utilities to remove effluent lawfully.

1. Connect temporary sewers to municipal system as directed by authorities having jurisdiction.

C. Water Service: Connect to Owner's existing water service facilities. Clean and maintain water service facilities in a condition acceptable to Owner. At Substantial Completion, restore these facilities to condition existing before initial use.

D. Sanitary Facilities: Provide temporary connection for temporary use. Comply with requirements of authorities having jurisdiction for type, number, location, operation, and maintenance of fixtures and facilities.

3.3 SUPPORT FACILITIES INSTALLATION

A. General: Comply with the following:

1. Provide construction for temporary Waiting and Outpatient Pharmacy located within the Canteen parking area that is noncombustible according to ASTM E 136. Comply with NFPA 241.

2. Maintain support facilities until COR and Architect schedules Substantial Completion inspection.

B. Project Signs: Provide Project signs as indicated. Unauthorized signs are not permitted.

1. Identification Signs: Provide Project identification signs as indicated on Drawings.
2. Temporary Signs: Provide other signs as indicated and as required to inform public and individuals seeking entrance to temporary construction.

C. Waste Disposal Facilities: Comply with requirements specified in Section 01 74 19 "Construction Waste Management and Disposal."

3.4 SECURITY AND PROTECTION FACILITIES INSTALLATION

A. Protection of Existing Facilities: Protect existing vegetation, equipment, structures, utilities, and other improvements at Project site and on adjacent properties, except those indicated to be removed or altered. Repair damage to existing facilities.

B. Environmental Protection: Provide protection, operate temporary facilities, and conduct construction as required to comply with environmental regulations and that minimize possible air, waterway, and subsoil contamination or pollution or other undesirable effects.

C. Stormwater Control: Comply with requirements of authorities having jurisdiction.

D. Site Enclosure Fence: Before construction operations begin, furnish and install site enclosure fence in a manner that will prevent people and animals from easily entering site except by entrance gates.----is this needed??

1. Extent of Fence: As required to enclose entire Project site or portion determined sufficient to accommodate construction operations.

E. Covered Walkway and Ramps: Erect protective, covered non-combustible walkways for passage of individuals through or adjacent to Project site as shown on drawings. Provide ramps with handrails for compliant egress. Coordinate with entrances and exits, other facilities, and obstructions. Comply with regulations of authorities having jurisdiction and requirements indicated on Drawings.

1. Provide overhead decking, handrails, barricades, warning signs, exit signs, lights, safe and well-drained walkways, and similar provisions for protection and safe passage.
2. Paint and maintain appearance of walkway and ramp for duration of the Work.

F. Partitions: Provide floor-to-ceiling dustproof partitions to limit dust and dirt migration and to separate areas occupied by Owner.

G. Fire Protection: Install and maintain temporary fire-protection facilities of types needed to protect against reasonably predictable and controllable fire losses. Comply with NFPA 241; manage fire-prevention program.

1. Develop and supervise an overall fire-prevention and -protection program for personnel at Project site. Review needs with local fire department and establish procedures to be followed. Instruct personnel in methods and procedures. Post warnings and information.
2. Provide temporary standpipes and hoses for fire protection. Hang hoses with a warning sign stating that hoses are for fire-protection purposes only and are not to be removed. Match hose size with outlet size and equip with suitable nozzles.

3.5 OPERATION, TERMINATION, AND REMOVAL

A. Maintenance: Maintain facilities in good operating condition until removal.

1. Maintain operation of temporary enclosures, heating, cooling, humidity control, ventilation, and similar facilities on a 24-hour basis where required to achieve indicated results and to avoid possibility of damage.

B. Temporary Facility Changeover: Do not change over from using temporary security and protection facilities to permanent facilities until Substantial Completion.

C. Termination and Removal: Remove temporary facility when need for its service has ended, when it has been replaced by authorized use of a permanent facility, or no later than Substantial Completion. Complete or, if necessary, restore permanent construction that may have been delayed because of interference with temporary facility. Repair damaged Work, clean exposed surfaces, and replace construction that cannot be satisfactorily repaired.

1. Materials and facilities that constitute temporary facilities are property of Contractor. Owner reserves right to take possession of Project identification signs.

---END---

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

1. Waste Management Plan development and implementation.
2. Techniques to minimize waste generation.
3. Sorting and separating of waste materials.
4. Salvage of existing materials and items for reuse or resale.
5. Recycling of materials that cannot be reused or sold.

D. At a minimum, the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc.).
6. Metal products (eg, steel, wire, beverage containers, copper, etc.).
7. Cardboard, paper and packaging.
8. Bitumen roofing materials.
9. Plastics (eg, ABS, PVC).
10. Carpet and/or pad.
11. Gypsum board.
12. Insulation.
13. Paint.
14. Fluorescent lamps.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction/ Demolition waste includes products of the following:
   1. Excess or unusable construction materials.
   2. Packaging used for construction products.
   3. Poor planning and/or layout.
   4. Construction error.
   5. Over ordering.
   6. Weather damage.
   7. Contamination.
   8. Mishandling.
   9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website http://www.wbdg.org/tools/cwm.php provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a

new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling – Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
2. Off-site Recycling – Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facility permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

B. Prepare and submit to the Resident Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:

1. Procedures to be used for debris management.
2. Techniques to be used to minimize waste generation.
3. Analysis of the estimated job site waste to be generated:
   a. List of each material and quantity to be salvaged, reused, recycled.
   b. List of each material and quantity proposed to be taken to a landfill.

4. Detailed description of the Means/Methods to be used for material handling.
   a. On site: Material separation, storage, protection where applicable.
   b. Off site: Transportation means and destination. Include list of materials.
      1) Description of materials to be site-separated and self-hauled to designated facilities.
      2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
   c. The names and locations of mixed debris reuse and recycling facilities or sites.
   d. The names and locations of trash disposal landfill facilities or sites.
   e. Documentation that the facilities or sites are approved to receive the materials.

C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.

D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC): LEED Green Building Rating System for New Construction

1.7 RECORDS

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

A. List of each material and quantity to be salvaged, recycled, reused.

B. List of each material and quantity proposed to be taken to a landfill.

C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.

C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 01 91 00
GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.

B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.

C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.

D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.

E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA’s operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup, control system calibration, testing and balancing, performance testing

and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contact documents and according to the manufacturer's recommendations.
2. Verify and document proper integrated performance of equipment and systems.
3. Verify that Operations & Maintenance documentation is complete.
4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
5. Verify that the VA’s operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the Resident Engineer as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.

B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA Resident Engineer and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the Resident Engineer and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the Resident Engineer.

C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to

the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and Resident Engineer. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
2. Commissioning Issues identified by the Commissioning Agent will be delivered to the Resident Engineer and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
3. In the event that any Commissioning Issues and suggested resolutions are deemed by the Resident Engineer to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or Resident Engineer will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the Resident Engineer of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or Resident Engineer, with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

1.3 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

C. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.4 SUMMARY

A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.

B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.

C. The commissioning activities have been developed to support the United States Green Building Council's (USGBC) LEED ™ rating program and to support delivery of project performance in accordance with the VA requirements developed for the project to support the following credits:

1. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" and the prerequisite of "Fundamental Building Systems Commissioning."
2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.

D. The commissioning activities have been developed to support the Green Buildings Initiative's Green Globes rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning

List of Acronyms	
Acronym	Meaning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer’s Representative (see also VA-RE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner’s Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager
VA-RE	VA Resident Engineer
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself.. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the

Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (http://www.wbdg.org/resources/cobie.php)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

Commissioning Issue: A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also – Commissioning Observation).

Commissioning Manager (CxM): A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

Commissioning Observation: An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to

the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers’ recommended maintenance clearances. On

mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See "Commissioning Issue".

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted

on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns – and their resolution – that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment. Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

Owner's Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its

systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are

intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners operators to operate the systems.

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA. Validation: The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).
3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner's Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

Systems To Be Commissioned	
System	**Description**
Building Exterior Closure	
Foundations (excluding structural)	Standard, special, slab-on-grade, vapor barriers, air barriers
Basements	Basement walls, crawl spaces, waterproofing, drainage
Superstructure	Floor construction, roof construction, sunshades, connections to adjacent structures
Exterior Closure	Exterior walls, exterior windows, exterior doors, louvers, grilles and sunscreens,
Roofing	Roof system (including parapet), roof openings (skylights, pipe chases, ducts, equipment curbs, etc.)
Note:	The emphasis on commissioning the above building envelope systems is on control of air flow, heat flow, noise, infrared, ultraviolet, rain penetration, moisture, durability, security, reliability, constructability, maintainability, and sustainability.
Specialties	
Patient Bed Service Walls	Medical gas certification and cross check, electrical connections
Equipment	
Parking Control Equipment	Barriers
Laboratory Fume Hoods	Fume Hood Certification
Biological Safety Cabinets	Cabinet Certification
Packaged Incinerators	Combustion Testing, Cycle Certification
Conveying Equipment	
Electric Dumbwaiters	Interface with other systems (Fire Alarm, etc.) [ASTM testing and certification by others]

Systems To Be Commissioned	
System	**Description**
Elevators	Interface with other systems (fire alarm, etc.) [ASTM testing and certification by others]
Escalators	Interface with other systems (fire alarm, etc.) [ASTM testing and certification by others]
Material Delivery Systems	Interface with other systems (fire alarm, elevators, etc.)
Pneumatic Tube Systems	Interface with other systems (fire alarm, etc.)
Fire Suppression	
Fire Pump	Fire Pump, jockey pump, fire pump controller/ATS
Fire Sprinkler Systems	Wet pipe system, dry pipe system, pre-action system, special agent systems
Plumbing	
Domestic Water Distribution	Booster pumps, backflow preventers, water softeners, potable water storage tanks
Domestic Hot Water Systems	Water heaters**, heat exchangers, circulation pumps, point-of-use water heaters*
Sewerage Pump Systems	Sewage ejectors
Wastewater Pump Systems	Sump pumps
Sanitary Waste Interceptors	Grease interceptors, acid neutralizers
General Service Air Systems	Packaged compressor systems, air dryers, filtration
Medical Air Systems	Packaged medical air compressor units. Outlet certification, cross-connection verification
Medical Vacuum Systems	Packaged medical vacuum units, outlet certification, cross-connection verification
Dental Air Systems	Packaged dental air compressor units, outlet certification, cross-connect verification

Systems To Be Commissioned	
System	**Description**
Dental Evacuation and Vacuum Systems	Packaged Dental Evacuation units, packaged dental vacuum units, outlet certification, cross-connection verification
Waste Anesthesia Gas Systems	Packaged Waste Anesthesia Gas units, outlet certification, cross-connection verification
Medical Gas Systems (other than Medical Air Systems)	Medical gas (oxygen, nitrogen, nitrous oxide, etc.) tank/manifold systems, outlet certification, cross-connection verification
Chemical Waste Systems	Chemical storage tanks, neutralization systems, ventilation, process control
Reverse-Osmosis Systems	Packaged Reverse-Osmosis systems
Water De-Alkalizing Systems	Package Water De-Alkalizing systems
HVAC	
Noise and Vibration Control	Noise and vibration levels for critical equipment such as Air Handlers, Chillers, Cooling Towers, Boilers, Generators, etc. will be commissioned as part of the system commissioning
Direct Digital Control System**	Operator Interface Computer, Operator Work Station (including graphics, point mapping, trends, alarms), Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
Chilled Water System**	Chillers (centrifugal, rotary screw, air-cooled), pumps (primary, secondary, variable primary), VFDs associated with chilled water system components, DDC Control Panels (including integration with Building Control System)

Systems To Be Commissioned	
System	**Description**
Condenser Water System**	Cooling Towers, Fluid Coolers, heat exchangers/economizers, pumps, VFDs associated with condenser water system components, DDC control panels.
Steam/Heating Hot Water System**	Boilers, boiler feed water system, economizers/heat recovery equipment, condensate recovery, water treatment, boiler fuel system, controls, interface with facility DDC system.
HVAC Air Handling Systems**	Air handling Units, packaged rooftop AHU, Outdoor Air conditioning units, humidifiers, DDC control panels
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust, laboratory exhaust, isolation exhaust, room pressurization control systems
HVAC Energy Recovery Systems**	Heat Wheels, Heat Recovery Loops, AHU Integrated Heat Recovery
HVAC Terminal Unit Systems**	VAV Terminal Units, CAV terminal units, fan coil units, fin-tube radiation, unit heaters
Decentralized Unitary HVAC Systems*	Split-system HVAC systems, controls, interface with facility DDC
Unitary Heat Pump Systems**	Water-source heat pumps, controls, interface with facility DDC
Humidity Control Systems	Humidifiers, de-humidifiers, controls, interface with facility DDC
Hydronic Distribution Systems	Pumps, DDC control panels, heat exchangers,
Facility Fuel Systems	Boiler fuel system, generator fuel system
Geothermal Energy Direct Use Heating **	Geothermal well, ground heat exchanger, geothermal pumps, heat exchanger, valves, instrumentation
Solar Energy Heating Systems **	Solar collectors, heat exchangers, storage tanks, solar-boosted domestic hot water heater, pumps, valves, instrumentation

Systems To Be Commissioned	
System	**Description**
Facility Fuel Gas Systems	Witness Natural gas piping pressure testing, natural gas compressors and storage, propane storage
Smoke Evacuation System	Atrium smoke evacuation, other smoke evacuation and smoke management systems, controls, interface with other systems (fire alarm), emergency operation.
Electrical	
Medium-Voltage Electrical Distribution Systems	Medium-Voltage Switchgear, Medium-Voltage Switches, Underground ductbank and distribution, Pad-Mount Transformers, Medium-Voltage Load Interrupter Switches,
Grounding & Bonding Systems	Witness 3rd party testing, review reports
Electric Power Monitoring Systems	Metering, sub-metering, power monitoring systems, PLC control systems
Electrical System Protective Device Study	Review reports, verify field settings consistent with Study
Secondary Unit Substations	Medium-voltage components, transformers, low-voltage distribution, verify breaker testing results (injection current, etc)
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, switchboards, distribution panels, panelboards, verify breaker testing results (injection current, etc)
Emergency Power Generation Systems	Generators, Generator paralleling switchgear, automatic transfer switches, PLC and other control systems

Systems To Be Commissioned	
System	**Description**
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls
Cathodic Protection Systems	Review 3rd party testing results.
Lightning Protection System	Witness 3rd party testing, review reports
Communications	
Grounding & Bonding System	Witness 3rd party testing, review reports
Structured Cabling System	Witness 3rd party testing, review reports
Master Antenna Television System	Witness 3rd party testing, review reports
Public Address & Mass Notification Systems	Witness 3rd party testing, review reports
Intercom & Program Systems	Witness 3rd party testing, review reports
Nurse Call & Code Blue Systems	Witness 3rd party testing, review reports
Security Emergency Call Systems	Witness 3rd party testing, review reports
Duress Alarm Systems	Witness 3rd party testing, review reports
Electronic Safety and Security	
Grounding & Bonding	Witness 3rd party testing, review reports
Physical Access Control Systems	Witness 3rd party testing, review reports
Access Control Systems	Witness 3rd party testing, review reports
Security Access Detection Systems	Witness 3rd party testing, review reports
Video Surveillance System	Witness 3rd party testing, review reports

Systems To Be Commissioned	
System	**Description**
Electronic Personal Protection System	Witness 3rd party testing, review reports
Fire Detection and Alarm System	100% device acceptance testing, battery draw-down test, verify system monitoring, verify interface with other systems.
Renewable Energy Sources	
Geothermal Energy Electrical Generation Systems **	Geothermal well, DC-AC Inverters, storage batteries, turbine generator modules, switchgear, combiner boxes, instrumentation, monitoring and control systems
Solar Energy Electrical Power Generation Systems **	Solar collector modules, DC-AC inverter, storage batteries, combiners, Switchgear, instrumentation, monitoring and control systems
Wind Energy Electrical Power Generation Systems **	Wind Turbines, DC-AC inverter, storage batteries, combiners, switchgear, instrumentation, monitoring and control systems
Site Utilities	
Water Utilities	City Water Service Entrance, Backflow Prevention, Pressure Control, Booster Pumps, Irrigation Systems
Sanitary Sewerage Utilities	City Sanitary Connection, Waste Treatment Systems
Storm Drainage Utilities	City Storm Water Connection, Site Storm Water Distribution
Energy Distribution Utilities	Connection to Third Party Energy (Steam, High Temp Hot Water, Chilled Water) Supply Systems, Metering, Pressure Control
Transportation	
Active Traffic Barrier Systems	Witness 3rd party testing

Systems To Be Commissioned	
System	**Description**
Integrated Systems Tests	
Loss of Power Response	Loss of power to building, loss of power to campus, restoration of power to building, restoration of power to campus.
Fire Alarm Response	Integrated System Response to Fire Alarm Condition and Return to Normal
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite.	

1.8 COMMISSIONING TEAM

A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.

B. Members Appointed by Contractor:

1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

C. Members Appointed by VA:

1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
2. User: Representatives of the facility user and operation and maintenance personnel.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 VA'S COMMISSIONING RESPONSIBILITIES

A. Appoint an individual, company or firm to act as the Commissioning Agent.

B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:

1. Coordination meetings.
2. Training in operation and maintenance of systems, subsystems, and equipment.
3. Testing meetings.
4. Witness and assist in Systems Functional Performance Testing.
5. Demonstration of operation of systems, subsystems, and equipment.

C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.

B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.

C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:

1. Participate in commissioning coordination meetings.
2. Conduct operation and maintenance training sessions in accordance with approved training plans.
3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with

entity responsible for system and equipment installation, recommend corrective action.

5. Review and comment on commissioning documentation.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the Commissioning Agent for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

1.11 COMMISSIONING AGENT'S RESPONSIBILITIES

A. Organize and lead the commissioning team.

B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.

C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.

E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying

participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.

F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.

G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.

H. Coordinate Systems Functional Performance Testing schedule with the Contractor.

I. Witness selected systems startups.

J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.

K. Witness and document Systems Functional Performance Testing.

L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.

M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.

N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.

O. Prepare commissioning Field Observation Reports.

P. Prepare the Final Commissioning Report.

Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

1.12 COMMISSIONING DOCUMENTATION

A. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:

1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
3. Identification of systems and equipment to be commissioned.
4. Schedule of Commissioning Coordination meetings.
5. Identification of items that must be completed before the next operation can proceed.
6. Description of responsibilities of commissioning team members.
7. Description of observations to be made.
8. Description of requirements for operation and maintenance training.
9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
12. Preliminary Systems Functional Performance Test procedures.

B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems

Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
2. Test number.
3. Time and date of test.
4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
5. Dated signatures of the person performing test and of the witness, if applicable.
6. Individuals present for test.
7. Observations and Issues.
8. Issue number, if any, generated as the result of test.

C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.

D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The

Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.

F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.

1. Creating a Commissioning Issues Log Entry:
   a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
   b. Assign a descriptive title for the issue.
   c. Identify date and time of the issue.
   d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
   e. Identify system, subsystem, and equipment to which the issue applies.
   f. Identify location of system, subsystem, and equipment.
   g. Include information that may be helpful in diagnosing or evaluating the issue.
   h. Note recommended corrective action.
   i. Identify commissioning team member responsible for corrective action.
   j. Identify expected date of correction.
   k. Identify person that identified the issue.
2. Documenting Issue Resolution:
   a. Log date correction is completed or the issue is resolved.
   b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
   c. Identify changes to the Contract Documents that may require action.

d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
e. Identify person(s) who corrected or resolved the issue.
f. Identify person(s) verifying the issue resolution.

G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:

1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
2. Commissioning plan.
3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.
4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
5, Commissioning Issues Log.
6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.

H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:

1. Documentation of deferred and off season test(s) results.

2. Completed Systems Functional Performance Test Procedures for off season test(s).
3. Documentation that unresolved system performance issues have been resolved.
4. Updated Commissioning Issues Log, including status of unresolved issues.
5. Identification of potential Warranty Claims to be corrected by the Contractor.

I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:
1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
2. Reference to Final Commissioning Plan.
3. Reference to Final Commissioning Report.
4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:
1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.

4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system’s testing.

B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor’s project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.

C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.

D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.

E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.

F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA Resident Engineer with copies to the Contractor and Architect.

G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.

H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.

I. Data for Commissioning:

1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

1.14 COMMISSIONING PROCESS

A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

B. Within 21 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.

C. Within 14 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.

B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.

C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.

D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.

E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.

B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors

shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

PART 3 - EXECUTION

3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A	
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O	
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	

Construction Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Document Reviews	TAB Plan Review	L	A	R	R	O	
	Submittal and Shop Drawing Review	R	A	R	L	O	
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A	
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A	
Site Observations	Witness Factory Testing	P	A	P	L	O	
	Construction Observation Site Visits	L	A	R	R	O	
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O	
	Final Functional Performance Test Protocols	L	A	R	R	O	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Pre-Test Coordination Meeting	L	A	P	P	O	
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	

Acceptance Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase		CxA = Commissioning Agent RE = Resident Engineer A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	RE	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
   a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
   b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
   a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
   b. The full startup plan shall at a minimum consist of the following items:
      1) The Pre-Functional Checklists.
      2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
      3) The manufacturer's normally used field checkout sheets.

c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.
d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.

3. Sensor and Actuator Calibration
   a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
   b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup
   a. Four weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
   b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
   c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
   d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.

B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.

C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

3.4 PHASED COMMISSIONING

A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the VA, Commissioning Agent, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.

B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers – Critical, Priority, and Maintenance.

1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
2. Priority level alarms are to be printed to a printer which is connected to the Operator’s Work Station located within the engineer’s office. Additionally Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from

the operator or maintenance personnel within a normal work shift, and not immediate action.

3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the Resident Engineer and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:

1. Pre-testing, Testing, and Post-testing – Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the Resident Engineer. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the Resident Engineer, prior to the execution of Systems Functional Performance Testing.

2. Dynamic plotting – The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.
3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
OA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Mixed Air Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
RA Pre-Filter Status	AI	None	None	None	N/A		
OA Pre-Filter Status	AI	None	None	None	N/A		
After Filter Status	AI	None	None	None	N/A		
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
OA Supply Temp	AI	15 Min	24 hours	3 days	P	±5°F from SP	10 min
RA Supply Temp	AI	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
Initial UVC Intensity (%)	AI	None	None	None	N/A		
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	6 min
CO2 Level	AI	15 Min	24 hours	3 days	P	±10% from SP	10 min
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Freeze Stat Level 1	DI	COV	24 hours	3 days	C	True	10 min
Freeze Stat Level 2	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #2 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #3 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
OA Alarm	DI	COV	24 hours	3 days	C	True	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
UVC Emitter Alarm	DI	COV	24 hours	3 days	P	True	10 min
CO2 Alarm	DI	COV	24 hours	3 days	P	True	10 min
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
Supply Fan Speed	AO	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AO	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		

Dual-Path Air Handling Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 day	N/A	N/A		

Terminal Unit (VAV, CAV, etc.) Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

4-Pipe Fan Coil Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

2-Pipe Fan Coil Unit Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Unit Heater Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Heating Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Unit Heater ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Steam and Condensate Pumps Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Steam Flow (LB/HR)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Pump Run Hours	AI	15 Minutes	12 hours	3 days	N/A		
Water Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Electric Meter (KW/H)	AI	15 Minutes	12 hours	3 days	N/A		
Irrigation Meter (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Chilled Water Flow (TONS)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Flow (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
High Water Level Alarm	DI	COV	12 hours	3 days	C	True	5 Min
Condensate Pump Start/Stop	DO	COV	12 hours	3 days	P	Status <> Command	10 min

Domestic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Domestic HW Setpoint WH-1	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Setpoint WH-2	AI	15 Minute	12 Hours	3 days	N/A		
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	C	> 135 oF	10 Min
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	P	±5°F from SP	10 Min
Dom. Circ. Pump #1 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #2 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Dom. Circ. Pump #1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Dom. Circ. Pump #2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Domestic HW Start/Stop	DO	COV	12 Hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
System HWS Temperature	AI	15 min	12 hours	3 days	C	±5°F from SP	10 Min
System HWR Temperature	AI	15 min	12 hours	3 days	M	±15°F from SP	300 Min
HX-1 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-2 Leaving Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
System Flow (GPM)	AI	15 min	12 hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
System Differential Pressure	AI	15 min	12 hours	3 days	P	±10% from SP	8 Min
				3 days			
HW Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 1 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 2 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #2 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station Bypass Valve Position	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HW Pump 2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HWR #1 Valve	DO	COV	12 Hours	3 days	N/A		
HWR #2 Valve	DO	COV	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 1 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 1 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 1 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Entering Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Leaving Temperature	AI	15 Minutes	12 Hours	3 days	P	±5°F from SP	10 Min
Chiller 2 Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Percent Load	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 KW Consumption	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Decoupler Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Secondary Loop Flow	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Supply Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Secondary Loop Tonnage	AI	15 Minutes	12 Hours	3 days	N/A		
Primary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Primary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Secondary Loop Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 1 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Chiller 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
Chiller 2 Evaporator Iso-Valve	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Evaporator Flow Switch	DI	COV	12 Hours	3 days	N/A		
Chiller 2 Unit Alarm	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Detector	DI	COV	12 Hours	3 days	C	True	10 Min
Refrigerant Exhaust Fan Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min
Emergency Shutdown	DI	COV	12 Hours	3 days	P	True	1 Min
Primary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		

Chilled Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Primary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 1 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Pump 2 VFD Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 1 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Enable	DO	COV	12 Hours	3 days	N/A		
Chiller 2 Iso-Valve Command	DO	COV	12 Hours	3 days	N/A		
Refrigerant Exhaust Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 1 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 1 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Entering Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser Leaving Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Cooling Tower 2 Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Basin Temp	AI	15 Minutes	12 Hours	3 days	P	< 45 oF	10 Min
Condenser Water Supply Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Condenser Water Return Temp	AI	15 Minutes	12 Hours	3 days	N/A		
Outdoor Air Wet Bulb	AI	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 1 Basin Heat	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 1 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Cooling Tower 2 Basin Heat	DI	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Heat Trace	DI	COV	12 Hours	3 days	N/A		
Chiller 1 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min

Condenser Water System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Chiller 2 Isolation Valve	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Condenser Water Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	1 min
Chiller 1 Condenser Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Chiller 2 Condenser By-Pass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Bypass Valve	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Speed	AO	15 Minutes	12 Hours	3 days	N/A		
Cooling Tower 1 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Cooling Tower 2 Fan Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Condenser Water Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

Steam Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Boiler 1 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 2 Steam Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
System Steam Pressure	AI	15 Minutes	12 Hours	3 days	P	±5% from SP	10 Min
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 1 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Low Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min
Boiler 2 High Water Alarm	DI	COV	12 Hours	3 days	C	True	5 Min

Steam Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Boiler 2 Feed Pump	DI	COV	12 Hours	3 days	N/A		
Combustion Damper Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Condensate Recovery Pump Status	DI	COV	12 Hours	3 days	P	Status <> Command	5 min
Boiler 1 Feed Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		
Boiler 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Combustion Damper Command	DO	COV	12 Hours	3 days	N/A		
Condensate Recovery Pump Start / Stop	DO	COV	12 Hours	3 days	N/A		

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Outside Air Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Fire Signal	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Entering Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 2 Leaving Water Temperature	AI	15 Minutes	12 Hours	3 days	N/A		

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Hot Water Supply Temperature	AI	15 Minutes	12 Hours	3 days	P	±5 oF from SP	10 Min
Hot Water Return Temperature	AI	15 Minutes	12 Hours	3 days	N/A		
Secondary Loop Differential Pressure	AI	15 Minutes	12 Hours	3 days	C	±5% from SP	10 Min
Lead Boiler	AI	15 Minutes	12 Hours	3 days	N/A		
Boiler 1 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 1 Isolation Valve	DI	COV	12 Hours	3 days	N/A		
Boiler 1 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 1 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Boiler 2 Enable	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Boiler 2 Isolation Valve	DI	COV	12 Hours	3 days	N/A		
Boiler 2 on Fuel Oil	DI	COV	12 Hours	3 days	N/A		
Boiler 2 Alarm	DI	COV	12 Hours	3 days	C	True	1 Min
Combustion Dampers Open	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min

Hot Water Boiler System Trending and Alarms							
Point	**Type**	**Trend Interval**	**Operational Trend Duration**	**Testing Trend Duration**	**Alarm Type**	**Alarm Range**	**Alarm Delay**
Secondary Pump 1 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Secondary Pump 2 Status	DI	COV	12 Hours	3 days	P	Status <> Command	10 min
Primary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Primary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 VFD Speed	AO	COV	12 Hours	3 days	N/A		
Hot Water System Enable	DO	COV	12 Hours	3 days	N/A		
Combustion Dampers Command	DO	COV	12 Hours	3 days	N/A		
Primary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Primary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 1 Start / Stop	DO	COV	12 Hours	3 days	N/A		
Secondary Pump 2 Start / Stop	DO	COV	12 Hours	3 days	N/A		

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the Resident Engineer and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.

3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	**Calibration Frequency**	**O&M Calibration Procedure Reference**
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.

B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general,

each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:

1. System and equipment or component name(s)
2. Equipment location and ID number
3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment

4. Date
5. Project name
6. Participating parties
7. A copy of the specification section describing the test requirements
8. A copy of the specific sequence of operations or other specified parameters being verified
9. Formulas used in any calculations
10. Required pretest field measurements
11. Instructions for setting up the test.
12. Special cautions, alarm limits, etc.
13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
15. A section for comments.
16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.

E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.

1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the

appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.

3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.

F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.

H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.

J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.

K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

A. Documentation: The Commissioning Agent will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.

B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All

items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.

1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
   a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of noncompliance and the Contractor’s response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
   b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.
5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:
   a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor’s response shall also be reported on a

Commissioning Field Report and on the Master Commissioning Issues Log.

b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.

c. The Commissioning Agent will document the resolution process.

d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:

1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.

2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.

3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.

E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

3.8 DEFERRED TESTING

A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.

B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances

Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's Resident Engineer, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.

B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 sections. The Training and Demonstration shall include, but is not limited to, the following:

1. Review the Contract Documents.
2. Review installed systems, subsystems, and equipment.
3. Review instructor qualifications.
4. Review instructional methods and procedures.
5. Review training module outlines and contents.
6. Review course materials (including operation and maintenance manuals).
7. Review and discuss locations and other facilities required for instruction.
8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.
9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:

1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.

2. Qualification Data: Submit qualifications for facilitator and/or instructor.
3. Attendance Record: For each training module, submit list of participants and length of instruction time.
4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
5. Demonstration and Training Recording:
   a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
   b. Video Format: Provide high quality color DVD color on standard size DVD disks.
   c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
   d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
   e. Submit two copies within seven days of end of each training module.
6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. Quality Assurance:
   1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.

2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. Training Coordination:
1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.
2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:
1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
b. Intrusion detection systems.
c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
d. Medical equipment, including medical gas equipment and piping.
e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
i. HVAC instrumentation and controls.

j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
l. Lighting equipment and controls.
m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.
n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.

G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:
1. Basis of System Design, Operational Requirements, and Criteria: Include the following:
a. System, subsystem, and equipment descriptions.
b. Performance and design criteria if Contractor is delegated design responsibility.
c. Operating standards.
d. Regulatory requirements.
e. Equipment function.
f. Operating characteristics.
g. Limiting conditions.
H, Performance curves.
2. Documentation: Review the following items in detail:
a. Emergency manuals.
b. Operations manuals.
c. Maintenance manuals.
d. Project Record Documents.
e. Identification systems.
f. Warranties and bonds.
g. Maintenance service agreements and similar continuing commitments.
3. Emergencies: Include the following, as applicable:

a. Instructions on meaning of warnings, trouble indications, and error messages.
b. Instructions on stopping.
c. Shutdown instructions for each type of emergency.
d. Operating instructions for conditions outside of normal operating limits.
e. Sequences for electric or electronic systems.
f. Special operating instructions and procedures.

4. Operations: Include the following, as applicable:
   a. Startup procedures.
   b. Equipment or system break-in procedures.
   c. Routine and normal operating instructions.
   d. Regulation and control procedures.
   e. Control sequences.
   f. Safety procedures.
   g. Instructions on stopping.
   h. Normal shutdown instructions.
   i. Operating procedures for emergencies.
   j. Operating procedures for system, subsystem, or equipment failure.
   k. Seasonal and weekend operating instructions.
   l. Required sequences for electric or electronic systems.
   m. Special operating instructions and procedures.
5. Adjustments: Include the following:
   a. Alignments.
   b. Checking adjustments.
   c. Noise and vibration adjustments.
   d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
   a. Diagnostic instructions.
   b. Test and inspection procedures.
7. Maintenance: Include the following:
   a. Inspection procedures.
   b. Types of cleaning agents to be used and methods of cleaning.
   c. List of cleaning agents and methods of cleaning detrimental to product.
   d. Procedures for routine cleaning
   e. Procedures for preventive maintenance.

f. Procedures for routine maintenance.

g. Instruction on use of special tools.

8. Repairs: Include the following:

a. Diagnosis instructions.

b. Repair instructions.

c. Disassembly; component removal, repair, and replacement; and reassembly instructions.

d. Instructions for identifying parts and components.

e. Review of spare parts needed for operation and maintenance.

H. Training Execution:

1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.

2. Instruction:

a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.

b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.

2) The VA will furnish an instructor to describe VA's operational philosophy.

3) The VA will furnish the Contractor with names and positions of participants.

3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.

4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.
5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

---END---

---INTENTIONALLY BLANK---

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies selective demolition and removal of selected existing construction of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

A. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).

B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.

C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.

D. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.

E. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS, Article 1.12, INFECTION CONTROL.

1.3 PROTECTION:

A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.

B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS.

C. In addition to previously listed fire and safety rules to be observed in performance of work, include following:

1. No wall or part of wall shall be permitted to fall outwardly from structures.
2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.

3. Keep fire extinguishers clear and accessible at all times. Prohibit debris from accumulating within a radius of (5 feet) of fire extinguishers.

D. Before beginning any demolition work, the Contractor shall survey the project area and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR’s approval.

E. The work shall comply with the requirements of Section 01 50 00, TEMPORARY FACILITIES AND CONTROLS.

F. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

1.4 UTILITY SERVICES:

A. Demolish and remove outside utility service lines shown to be removed.

B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 DEMOLITION:

A. Completely demolish and remove selected construction within buildings and structures, including all appurtenances related or connected thereto, as noted below:

1. As required for installation of new utility service lines.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition

site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations . All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

D. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

A. On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

---END---

---INTENTIONALLY BLANK---

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK – NOT USED

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:

A. Testing agency for the trial concrete mix design retained and reimbursed by the Contractor and approved by Resident Engineer. For all other testing, refer to Section 01 45 29 Testing Laboratory Services.

B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.

C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES:

A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).

B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.

C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).

D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:

1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.
2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).

3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

1.5 REGULATORY REQUIREMENTS:

A. ACI SP-66 – ACI Detailing Manual.

B. ACI 318 - Building Code Requirements for Reinforced Concrete.

C. ACI 301 – Standard Specifications for Structural Concrete.

1.6 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings: Reinforcing steel: Complete shop drawings

C. Mill Test Reports:

1. Reinforcing Steel.
2. Cement.

D. Manufacturer's Certificates:

1. Abrasive aggregate.
2. Lightweight aggregate for structural concrete.
3. Air-entraining admixture.
4. Chemical admixtures, including chloride ion content.
5. Waterproof paper for curing concrete.
6. Liquid membrane-forming compounds for curing concrete.
7. Non-shrinking grout.
8. Waterstops.
9. Expansion joint filler.
10. Adhesive binder.

E. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.

F. Test Report for Concrete Mix Designs: Trial mixes including water-cement fly ash ratio curves, concrete mix ingredients, and admixtures.

G. Shoring and Reshoring Sequence: Submit for approval a shoring and reshoring sequence for flat slab/flat plate portions, prepared by a registered Professional Engineer. As a minimum, include timing of form stripping, reshoring, number of floors to be re-shored and timing of re-shore removal to serve as an initial outline of procedures subject

to modification as construction progresses. Submit revisions to sequence, whether initiated by Resident Engineer (see FORMWORK) or Contractor.

1.7 DELIVERY, STORAGE, AND HANDLING:

A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.

B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.

C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 PRE-CONCRETE CONFERENCE:

A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.

B. Agenda: Includes but is not limited to:

1. Submittals.
2. Coordination of work.
3. Availability of material.
4. Concrete mix design including admixtures.
5. Methods of placing, finishing, and curing.
6. Finish criteria required to obtain required flatness and levelness.
7. Timing of floor finish measurements.
8. Material inspection and testing.

C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; lightweight aggregate manufacturer; admixture manufacturers; Resident Engineer; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.

D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):

117-10.....Specifications for Tolerances for Concrete Construction and Materials and Commentary

211.1-91(R2009).....Standard Practice for Selecting Proportions for Normal, Heavyweight, and Mass Concrete

214R-11.....Guide to Evaluation of Strength Test Results of Concrete

301-10.....Standard Practice for Structural Concrete

304R-00(R2009).....Guide for Measuring, Mixing, Transporting, and Placing Concrete

305.1-06.....Specification for Hot Weather Concreting

306.1-90(R2002).....Standard Specification for Cold Weather Concreting

308.1-11.....Specification for Curing Concrete

309R-05.....Guide for Consolidation of Concrete

318-11.....Building Code Requirements for Structural Concrete and Commentary

347-04.....Guide to Formwork for Concrete

SP-66-04.....ACI Detailing Manual

C. American National Standards Institute and American Hardboard Association (ANSI/AHA):

A135.4-2004.....Basic Hardboard

D. American Society for Testing and Materials (ASTM):

A82/A82M-07.....Standard Specification for Steel Wire, Plain, for Concrete Reinforcement

A185/185M-07.....Standard Specification for Steel Welded Wire Reinforcement, Plain, for Concrete

A615/A615M-09.....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement

A653/A653M-11.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process

A706/A706M-09.....Standard Specification for Low Alloy Steel Deformed and Plain Bars for Concrete Reinforcement

A767/A767M-09.....Standard Specification for Zinc Coated (Galvanized) Steel Bars for Concrete Reinforcement

A775/A775M-07.....Standard Specification for Epoxy Coated Reinforcing Steel Bars

A820-11.....Standard Specification for Steel Fibers for Fiber Reinforced Concrete

A996/A996M-09.....Standard Specification for Rail Steel and Axle Steel Deformed Bars for Concrete Reinforcement

C31/C31M-10.....Standard Practice for Making and Curing Concrete Test Specimens in the field

C33/C33M-11A.....Standard Specification for Concrete Aggregates

C39/C39M-12.....Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens

C94/C94M-12.....Standard Specification for Ready Mixed Concrete

C143/C143M-10.....Standard Test Method for Slump of Hydraulic Cement Concrete

C150-11.....Standard Specification for Portland Cement

C171-07.....Standard Specification for Sheet Materials for Curing Concrete

C172-10.....Standard Practice for Sampling Freshly Mixed Concrete

C173-10.....Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method

C192/C192M-07.....Standard Practice for Making and Curing Concrete Test Specimens in the Laboratory

C231-10.....Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method

C260-10.....Standard Specification for Air Entraining Admixtures for Concrete

C309-11.....Standard Specification for Liquid Membrane Forming Compounds for Curing Concrete

C330-09.....Standard Specification for Lightweight Aggregates for Structural Concrete

C494/C494M-11.....Standard Specification for Chemical Admixtures for Concrete

C618-12.....Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete

C666/C666M-03(R2008)....Standard Test Method for Resistance of Concrete to Rapid Freezing and Thawing

C881/C881M-10.....Standard Specification for Epoxy Resin Base Bonding Systems for Concrete

C1107/1107M-11.....Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)

C1315-11.....Standard Specification for Liquid Membrane Forming Compounds Having Special Properties for Curing and Sealing Concrete

D6-95(R2011).....Standard Test Method for Loss on Heating of Oil and Asphaltic Compounds

D297-93(R2006).....Standard Methods for Rubber Products Chemical Analysis

D412—06AE2.....Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension

D1751-04(R2008).....Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types)

D4263-83(2012).....Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method.

E1155-96(R2008).....Standard Test Method for Determining F_F Floor Flatness and F_L Floor Levelness Numbers

F1249-13.....Standard Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor

F1869-11.....Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride.

E. American Welding Society (AWS):

D1.4/D1.4M-11.....Structural Welding Code - Reinforcing Steel

F. Concrete Reinforcing Steel Institute (CRSI):

Handbook 2008

G. U. S. Department of Commerce Product Standard (PS):

PS 1.....Construction and Industrial Plywood

PS 20.....American Softwood Lumber

H. U. S. Army Corps of Engineers Handbook for Concrete and Cement:

CRD C513.....Rubber Waterstops

CRD C572.....Polyvinyl Chloride Waterstops

PART 2 - PRODUCTS:

2.1 FORMS:

A. Wood: PS 20 free from loose knots and suitable to facilitate finishing concrete surface specified; tongue and grooved.

B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.

C. Concrete products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Concrete Penetrating Liquid	79 percent biobased material
Concrete form Release Agent	87 percent biobased material
Concrete Sealer	11 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material.

2.2 MATERIALS:

A. Portland Cement: ASTM C150 Type I or II.

B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.

C. Coarse Aggregate: ASTM C33.

1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
2. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
3. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of

slabs, nor three-fourth of minimum clear spacing between reinforcing bars.

D. Lightweight Aggregates for Structural Concrete: ASTM C330, Table 1. Maximum size of aggregate not larger than one-fifth of narrowest dimension between forms, nor three-fourth of minimum clear distance between reinforcing bars. Contractor to furnish certified report to verify that aggregate is sound and durable, and has a durability factor of not less than 80 based on 300 cycles of freezing and thawing when tested in accordance with ASTM C666.

E. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 µm (No. 100) sieve.

F. Mixing Water: Fresh, clean, and potable.

G. Admixtures:

1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
5. Air Entraining Admixture: ASTM C260.
6. Calcium Nitrite corrosion inhibitor: ASTM C494 Type C.
7. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
8. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.

H. Vapor Barrier: ASTM F1249, 0.25 mm (10 mil) WVT 0.012 ft./hr..

I. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.

J. Welded Wire Fabric: ASTM A185.

K. Reinforcing Bars to be Welded: ASTM A706.

L. Galvanized Reinforcing Bars: ASTM A767.

M. Cold Drawn Steel Wire: ASTM A82.

N. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.

O. Expansion Joint Filler: ASTM D1751.

P. Sheet Materials for Curing Concrete: ASTM C171.

Q. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye, and shall meet the requirements of ASTM C1315.Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.

R. Abrasive Aggregate: Aluminum oxide grains or emery grits.

S. Moisture Vapor Emissions & Alkalinity Control Sealer: 100% active colorless aqueous siliconate solution concrete surface.

1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34% solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.

2. MVE 15-Year Warranty:

a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer's instruction, sealer manufacturer shall warrant the floor covering system against failure due to moisture vapor migration or moisture-born contaminates for a period of fifteen (15) years from the date of original installation. The warranty shall <u>cover all labor and materials</u> needed to replace all floor covering that fails due to moisture vapor emission & moisture born contaminates.

T. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when

placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.

2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.

U. Adhesive Binder: ASTM C881.

V. Waterstops:

1. Polyvinyl Chloride Waterstop: CRD C572.
2. Rubber Waterstops: CRD C513.
3. Bentonite Waterstop: Flexible strip of bentonite 25 mm x 20 mm (1 inch by 3/4 inch), weighing 8.7 kg/m (5.85 lbs. per foot) composed of Butyl Rubber Hydrocarbon (ASTM D297), Bentonite (SS-S-210-A) and Volatile Matter (ASTM D6).
4. Non-Metallic Hydrophilic: Swellable strip type compound of polymer modified chloroprene rubber that swells upon contact with water shall conform to ASTM D412 as follows: Tensile strength 420 psi minimum; ultimate elongation 600 percent minimum. Hardness shall be 50 minimum on the type A durameter and the volumetric expansion ratio in in 70 deg water shall be 3 to 1 minimum.

W. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).

X. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.

Y. Architectural Concrete: For areas designated as architectural concrete on the Contract Documents, use colored cements and specially selected aggregates as necessary to produce a concrete of a color and finish which exactly matches the designated sample panel.

2.3 CONCRETE MIXES:

A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.

1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m^3

(cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement-fly ash ratio, and consistency of each cylinder in terms of slump.

3. Prepare a curve showing relationship between water-cement fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
4. If the field experience method is used, submit complete standard deviation analysis.

B. Fly Ash Testing: Submit certificate verifying conformance with ASTM 618 initially with mix design and for each truck load of fly ash delivered from source. Submit test results performed within 6 months of submittal date. Notify Resident Engineer immediately when change in source is anticipated.

1. Testing Laboratory used for fly ash certification/testing shall participate in the Cement and Concrete Reference Laboratory (CCRL) program. Submit most recent CCRL inspection report.

C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of Resident Engineer or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. Resident Engineer may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.

D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with 20% replacement by weight in all structural work. Increase this replacement to 40% for mass concrete, and reduce it to 10% for drilled piers and caissons.

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air-Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m^3 (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m^3 (lbs/c. yd)	Max. Water Cement Ratio
35 (4500)[1,3]	375 (630)	0.45	385 (650)	0.40

30 (4000)[1,3]	325 (550)	0.55	340 (570)	0.50
25 (3000)[1,3]	280 (470)	0.65	290 (490)	0.55

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f’c.
2. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
3. Determined by Laboratory in accordance with ACI 211.1 for normal concrete.

E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES)*

Type of Construction	Normal Weight Concrete	
Reinforced Footings and Substructure Walls	75mm (3 inches)	
Slabs, Beams, Reinforced Walls, and Building Columns	100 mm (4 inches)	

F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches), and 75 mm to 100 mm (3 inches to 4 inches) for lightweight concrete. This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.

G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Air-entrainment of lightweight structural concrete shall conform with Table IV. Determine air content by either ASTM C173 or ASTM C231.

TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

H. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, synthetic fiber concrete, architectural concrete, concrete required to be watertight, and concrete with a water/cement ratio below 0.50 use high-range water-reducing admixture (superplasticizer).

I. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. For air content requirements see Table III or Table IV.

J. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, Resident Engineer may require any one or any combination of the following corrective actions, at no additional cost to the Government:

1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
2. Require additional curing and protection.
3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, Resident Engineer may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.

4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, Resident Engineer may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the Resident Engineer.

2.4 BATCHING AND MIXING:

A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by Resident Engineer. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38^{0}C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the Resident Engineer for consultation during batching, mixing, and placing operations of lightweight structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural lightweight aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise Resident Engineer.

PART 3 – EXECUTION

3.1 FORMWORK:

A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.

1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and Resident Engineer approves their reuse.
2. Provide forms for concrete footings unless Resident Engineer determines forms are not necessary.
3. Corrugated fiberboard forms: Place forms on a smooth firm bed, set tight, with no buckled cartons to prevent horizontal displacement, and in a dry condition when concrete is placed.

B. Treating and Wetting: Treat or wet contact forms as follows:
1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
3. Use sealer on reused plywood forms as specified for new material.

C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than 1/270 of free span of member.

D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.

E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.

F. Architectural Liner: Attach liner as recommended by the manufacturer with tight joints to prevent leakage.

G. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6

inches) above each construction joint. Space through-ties adjacent to horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.

H. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.

1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.
2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.
3. Do not install sleeves in beams, joists or columns except where shown or permitted by Resident Engineer. Install sleeves in beams, joists, or columns that are not shown, but are permitted by the Resident Engineer, and require no structural changes, at no additional cost to the Government.
4. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
5. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

I. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 PLACING REINFORCEMENT:

A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.

B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.

1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
3. Splice column steel at no points other than at footings and floor levels unless otherwise shown.

C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.

D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
   1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
   2. Welded splices: Splicing by butt-welding of reinforcement permitted providing the weld develops in tension at least 125 percent of the yield strength (fy) for the bars. Welding conform to the requirements of AWS D1.4. Welded reinforcing steel conform to the chemical analysis requirements of AWS D1.4.
      a. Submit test reports indicating the chemical analysis to establish weldability of reinforcing steel.
      b. Submit a field quality control procedure to insure proper inspection, materials and welding procedure for welded splices.
      c. Department of Veterans Affairs retained testing agency shall test a minimum of three splices, for compliance, locations selected by Resident Engineer.
   3. Mechanical Splices: Develop in tension and compression at least 125 percent of the yield strength (fy) of the bars. Stresses of transition splices between two reinforcing bar sizes based on area of smaller bar. Provide mechanical splices at locations indicated. Use approved exothermic, tapered threaded coupling, or swaged and threaded sleeve. Exposed threads and swaging in the field not permitted.
      a. Initial qualification: In the presence of Resident Engineer, make three test mechanical splices of each bar size proposed to be spliced. Department of Veterans Affairs retained testing laboratory will perform load test.
      b. During installation: Furnish, at no additional cost to the Government, one companion (sister) splice for every 50 splices for load testing. Department of Veterans Affairs retained testing laboratory will perform the load test.
E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by Resident Engineer.
F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose, flaky rust, mud, oil, or similar coatings that will reduce bond.

G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

3.3 VAPOR BARRIER:

A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.
   1. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
   2. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
   3. Patch punctures and tears.

3.4 SLABS RECEIVING RESILIENT COVERING

A. Slab shall be allowed to cure for 6 weeks minimum prior to placing resilient covering. After curing, slab shall be tested by the Contractor for moisture in accordance with ASTM D4263 or ASTM F1869. Moisture content shall be less than 3 pounds per 1000 sf prior to placing covering.

B. In lieu of curing for 6 weeks, Contractor has the option, at his own cost, to utilize the Moisture Vapor Emissions & Alkalinity Control Sealer as follows:
   1. Sealer is applied on the day of the concrete pour or as soon as harsh weather permits, prior to any other chemical treatments for concrete slabs either on grade, below grade or above grade receiving resilient flooring, such as, sheet vinyl, vinyl composition tile, rubber, wood flooring, epoxy coatings and overlays.
   2. Manufacturer’s representative will be on the site the day of concrete pour to install or train its application and document. He shall return on every application thereafter to verify that proper procedures are followed.
      a. Apply Sealer to concrete slabs as soon as final finishing operations are complete and the concrete has hardened sufficiently to sustain floor traffic without damage.
      b. Spray apply Sealer at the rate of 20 m^2 (200 square feet) per gallon. Lightly broom product evenly over the substrate and product has completely penetrated the surface.

c. If within two (2) hours after initial application areas are subjected to heavy rainfall and puddling occurs, reapply Sealer product to these areas as soon as weather condition permits.

3.5 CONSTRUCTION JOINTS:

A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by Resident Engineer.

B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.

C. Place concrete for columns slowly and in one operation between joints. Install joints in concrete columns at underside of deepest beam or girder framing into column.

D. Allow 2 hours to elapse after column is cast before concrete of supported beam, girder or slab is placed. Place girders, beams, grade beams, column capitals, brackets, and haunches at the same time as slab unless otherwise shown.

E. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.6 EXPANSION JOINTS AND CONTRACTION JOINTS:

A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.

B. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

C. Provide contraction (control) joints in floor slabs as indicated on the contract drawings. Joints shall be either formed or saw cut, to the indicated depth after the surface has been finished. Complete saw joints within 4 to 12 hours after concrete placement. Protect joints from intrusion of foreign matter.

3.7 PLACING CONCRETE:

A. Preparation:
   1. Remove hardened concrete, wood chips, shavings and other debris from forms.
   2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
   3. Have forms and reinforcement inspected and approved by Resident Engineer before depositing concrete.
   4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.

B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
   1. Preparing surface for applied topping:
      a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
      b. Broom clean and keep base slab wet for at least four hours before topping is applied.
      c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.

C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete is subject to approval of Resident Engineer.

D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
   1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.

2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after its initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.
7. Concrete on metal deck:
   a. Concrete on metal deck shall be minimum thickness shown. Allow for deflection of steel beams and metal deck under the weight of wet concrete in calculating concrete quantities for slab.
      1) The Contractor shall become familiar with deflection characteristics of structural frame to include proper amount of additional concrete due to beam/deck deflection.

E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into

place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.8 HOT WEATHER:

A. Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.9 COLD WEATHER:

A. Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyantes or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.10 PROTECTION AND CURING:

A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by Resident Engineer.

1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer’s instructions. Apply immediately after finishing. Maximum coverage $10m^2/L$ (400 square feet

per gallon) on steel troweled surfaces and 7.5m²/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.

2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.11 REMOVAL OF FORMS:

A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
   1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
   2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.

B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

3.12 CONCRETE SURFACE PREPARATION:

A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.

B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of

same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.

C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.13 CONCRETE FINISHES:

A. Vertical and Overhead Surface Finishes:

1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by Resident Engineer, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.

3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
   a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
   b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 µm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
   c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
   d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.
4. Textured: Finish as specified. Maximum quantity of patched area 0.2 m^2 (2 square feet) in each 93 m^2 (1000 square feet) of textured surface.

B. Slab Finishes:
1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Monitor elevations of structural steel in key locations before and after concrete placement to establish typical deflection patterns for the structural steel. Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to Resident Engineer and floor consultant for evaluation and recommendations for subsequent placements.
2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless Resident Engineer determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to

wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.

3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
7. Scratch Finish: Finish base slab to receive a bonded applied cementitious application as indicated above, except that bull floats and darbys may be used. Thoroughly coarse wire broom within two hours after placing to roughen slab surface to insure a permanent bond between base slab and applied materials.
8. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with

material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.

9. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, future floor roof slabs, applied toppings, and other interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.
10. Broom Finish: Finish exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by Resident Engineer from sample panel.
11. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
    a. Areas covered with carpeting, or not specified otherwise in b. below:
        1) Slab on Grade:
            a) Specified overall value F_F 25/F_L 20
            b) Minimum local value F_F 17/F_L 15
        2) Level suspended slabs (shored until after testing) and topping slabs:
            a) Specified overall value FF 25/FL 20
            b) Minimum local value FF 17/FL 15
        3) Unshored suspended slabs:
            a) Specified overall value FF 25
            b) Minimum local value FF 17
        4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
    b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:
        1) Slab on grade:
            a) Specified overall value FF 36/FL 20
            b) Minimum local value FF 24/FL 15

2) Level suspended slabs (shored until after testing) and topping slabs
   a) Specified overall value FF 30/FL 20
   b) Minimum local value FF 24/FL 15
3) Unshored suspended slabs:
   a) Specified overall value FF 30
   b) Minimum local value FF 24
4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.

c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.

d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.

12. Measurements

a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by Resident Engineer, to verify compliance with FF, FL, and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.

b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the

finish as it progresses in order to achieve the specific flatness and levelness numbers.

13. Acceptance/ Rejection:
    a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.
    b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.
14. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by Resident Engineer, until a slab finish constructed within specified tolerances is accepted.

3.14 SURFACE TREATMENTS:

A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.

B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.

C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8% per 1/10th m^2 (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

3.15 APPLIED TOPPING:

A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.

B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

3.16 RESURFACING FLOORS:

Remove existing flooring areas to receive resurfacing to expose existing structural slab and extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by roughening, broom cleaning, and dampening. Apply specified bonding grout. Place topping while the bonding grout is still tacky.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 03 41 13
PRECAST CONCRETE HOLLOW CORE PLANKS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Section specifies precast concrete planks at Vault.

1.2 MANUFACTURER'S QUALIFICATIONS

A. Products of one manufacturer regularly engaged in making precast concrete planks of type specified.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: Roofing plank framing layout, anchorage, and installation details.

C. Manufacturers Certificates: Stating plank conforms to specification requirements.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of specification to extent referenced. Publications are referred to in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Carbon Structural Steel

A185/A185M-07.....Steel Welded Wire, Reinforcement, Plain, for Concrete

A615/A615M-09.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

A653/A653M-10.....Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process

A996/A996M-09.....Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement

C150/C150M-09.....Portland Cement

C494/C494M-10.....Chemical Admixtures for Concrete

C881/C881M-02.....Epoxy-Resin-Base Bonding Systems for Concrete

PART 2 - PRODUCTS

2.1 MATERIALS

A. Portland Cement: ASTM C150, Type I or III.

B. Reinforcing:
   1. Welded wire Fabric: ASTM A185, galvanized size as required by plank manufacturers.
   2. Bars: ASTM A615 or A996, deformed. Grade as required by plank manufacturer.
C. Chemical Admixtures: ASTM C494, Type as required by plank manufacturer.
D. Bonding Adhesive: ASTM C881.
E. Steel Clips:
   1. ASTM A653.
   2. Designed to anchor planks to steel framing.
F. Grout:
   1. Cement Grout: One part portland cement and two parts fine sand.
   2. Epoxy Grout: ASTM C881.
G. Steel Angles: ASTM A36.

2.2 FABRICATION

A. Planks:
   1. Shapes: 6” (inch) tongue and grooved flat plank as shown.
   2. Manufacture: Reinforced concrete, composed of regular weight mineral aggregate, portland cement and water, resulting in a unit having a minimum compressive strength of 24000 MPa (3500 psi) for structural (non-nailable) slabs; 6900 Mpa (1000 psi) for nailable slabs.
B. Allowable Tolerances:
   1. Thickness and depth 3 mm, (1/8 inch).
   2. Length and width 6 mm (1/4 inch).
   3. Camber or Sweep:
      a. Plus or minus 6 mm (1/4-inch).
      b. Variation in camber between adjacent and abutting members,3 mm (1/8 inch).
   4. Inserts, bolts and pipe sleeves: Deviation from location shown - not more than 10 mm (3/8 inch).
C. Exposed concrete surfaces natural cement color free of honeycomb, pit holes, or other defects.
D. Not acceptable: Warped, cracked or broken units.
E. Flat Plank:
   1. Fabricate to thickness shown with tongue and groove edges at abutting edges, square edges at exposed ends and sides.
   2. Reinforce with wire fabric in both top and bottom of slab.

F. Channel Plank:
   1. Fabricate to thickness shown.
   2. Provide plank with square edges and closed ends and sides at roof edges except where concealed in finished work.
   3. Reinforce channel plank with wire fabric in the web section, and steel reinforcement bars in flanges.
G. Steel Clips/Weld Plates:
   1. Provide zinc-coated steel clips for plank to secure plank to framing or top of wall.
   2. For inclines exceeding 1 in 6 (2-inches per foot), provide an angle clip to support planks at lower purlin.
H. Structural Steel Headers:
   1. ASTM A36.
   2. Angle sizes as shown.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install slabs in accordance with manufacturer's instructions.
B. Before erection of slabs, clean bearing surfaces free from dirt, mortar particles, and trash.
C. Erect slabs to prevent chipping and cracking and to provide a level deck surface.
   1. Stagger end joints
   2. Locate end joints on centerline of support.
   3. After erection, fill joints on upper side of flat slabs with portland cement grout.
   4. Finish grout joint flush.
D. Erect steel-edged tongue and groove plank so that planks have one structural support.
   1. Form tight and closed joints at sides and ends of slabs.
   2. Clip slabs to structural support.
E. Do not make cutouts without approval of Contracting Officer Representative (COR).
   1. Form openings or carefully saw cut; do not punch openings.
   2. Locate openings less than 150 mm (6-inches) wide in sections of plank between reinforcing bars.

3. Frame openings larger than 150 mm (6-inches) wide with structural steel headers.

3.2 REPLACEMENT AND REPAIR

A. Replace broken, cracked, and warped plank, and planks exceeding allowable tolerances.

B. Plank having defects, not affecting serviceability of deck, shall be repaired with epoxy grout if approved by Contracting Officer Representative (COR).

- - - E N D - - -

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Structural steel shapes, plates, and bars.
   2. Structural pipe.
   3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

A. Steel Decking: Section 05 31 00, STEEL DECKING.
B. Steel Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.
C. Painting: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Institute of Steel Construction (AISC):
   1. AISC Manual - Steel Construction Manual, 15th Ed.
   2. -360--16: Specification for Structural Steel Buildings.
C. The American Society of Mechanical Engineers (ASME):
   1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.
D. American Welding Society (AWS):
   1. D1.1/D1.1M-15 - Structural Welding Code - Steel.
E. ASTM International (ASTM):
   1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
   2. A36/A36M-14 - Carbon Structural Steel.
   3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
   4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
   5. A242/A242M-13 - High-Strength Low-Alloy Structural Steel.
   6. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.
   7. A307-14 - Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
   8. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.

9. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
10. A572/A572M-15 - High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
11. A992/A992M-15 - Structural Shapes.
12. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
13. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

F. Master Painters Institute (MPI):
1. No. 18 - Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):
1. MIL-P-21035 - Paint, High Zinc Dust Content, Galvanizing, Repair.

H. Occupational Safety and Health Administration (OSHA):
1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.

I. Research Council on Structural Connections (RCSC) of The Engineering Foundation:
1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and fabrication and installation details.

C. Test Reports: Certify products comply with specifications.
1. Welders' qualifying tests.

D. Certificates: Certify each product complies with specifications.
1. Structural steel.
2. Steel connections.
3. Welding materials.
4. Shop coat primer paint.

E. Qualifications: Substantiate qualifications comply with specifications.
1. Fabricator with project experience list.

2. Installer with project experience list.
3. Welders and welding procedures.

F. Record Surveys: Signed and sealed by responsible surveyor or engineer.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: AISC Quality Certification participant designated as AISC Certified Plant, Category STD.
1. Regularly fabricates specified products.
2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
a. Project Experience List: Provide contact names and addresses for completed projects.

B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC -Certified Erector, Category ACSE.
1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
a. Project Experience List: Provide contact names and addresses for completed projects.

C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.

D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. W -Shapes:
1. ASTM A992/A992M.

B. M S -Shapes:
1. ASTM A36/A36M.

C. Channel and Angles:
1. ASTM A36/A36M.

D. Plates and Bars:
1. ASTM A36/A36M.

E. Hollow Structural Sections:

1. ASTM A500/A500M.
2. ASTM A501/A501M.

F. Structural Pipe: ASTM A53/A53M, Grade B.

G. Bolts, Nuts and Washers: Galvanized for galvanized framing and plain finish for other framing.

1. High strength bolts, including nuts and washers: ASTM F3125.
2. Bolts and nuts, other than high -strength: ASTM A307, Grade A.
3. Plain washers, other than those in contact with high -strength bolt heads and nuts: ASME B18.22.1.

H. Welding Materials: AWS D1.1, type to suit application.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

2.3 FABRICATION

A. Fabricate structural steel according to Chapter M, AISC 360.

B. Shop and Field Connections:

1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
2. High -Strength Bolts: High -strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn -of -nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip -critical using Direct Tension Indicators. Twist -off torque bolts are not an acceptable alternate fastener for slip critical connections.

2.4 FINISHES

A. Shop Priming:

1. Prime paint structural steel according to AISC 303, Section 6.
   a. Interstitial Space Structural Steel: Prime paint, unless indicated to receive sprayed on fireproofing.

B. Shop Finish Painting: Apply primer and finish paint as specified in Section 09 91 00, PAINTING.

C. Do not paint:

1. Surfaces within 50 mm (2 inches) of field welded joints.
2. Surfaces indicated to be encased in concrete.
3. Surfaces receiving sprayed on fireproofing.

4. Beam top flanges receiving shear connector studs applied.

D. Structural Steel Galvanizing: ASTM A123/A123M, hot dipped, after fabrication. Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

1. Galvanize structural steel framing installed at exterior locations.

E. Bolts, Nuts, and Washers Galvanizing: ASTM F2329, hot -dipped.

2.5 ACCESSORIES

A. General: Shop paint steel according to AISC 303, Section 6.

B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.

C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

A. Erect structural steel according to AISC 303 and AISC 360.

B. Set structural steel accurately at locations and elevations indicated on drawings.

C. Maintain erection tolerances of structural steel within AISC 303 requirements.

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

A. After welding, clean and prime weld areas to match adjacent finish.

B. Touch-up primer damaged by construction operations.

C. Apply galvanizing repair paint to galvanized coatings damaged by construction operations.

D. Finish Painting: As specified in Section 09 91 00, PAINTING.

3.3 FIELD QUALITY CONTROL

A. Record Survey:

1. Engage registered land surveyor or registered civil engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS to perform survey.

2. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.

3. Identify deviations from allowable tolerances specified in AISC Manual.

- - E N D - -

SECTION 05 31 00
STEEL DECKING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Single pan fluted metal form deck supporting concrete fill as roof substrate.
   2. Corrugated metal form deck supporting concrete fill as roof substrate.
   3. Single pan fluted metal roof deck as roof substrate.
   4. Acoustic metal roof deck as roof substrate.

1.2 RELATED REQUIREMENTS

A. Structural Steel Shapes: Section 05 12 00, STRUCTURAL STEEL FRAMING.
B. Color: Section 09 06 00, SCHEDULE FOR FINISHES.
C. Finish Painting: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. AISI - American Iron and Steel Institute.
   1. S100-12 - Specification for the Design of Cold-formed Steel Structural Members.
C. American Welding Society (AWS):
   1. D1.1/D1.1M-15 - Structural Welding Code - Steel.
   2. D1.3/D1.3M-08 - Structural Welding Code - Sheet Steel.
D. ASTM International (ASTM):
   1. A36/A36M-14 - Carbon Structural Steel.
   2. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
   3. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
   4. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
   5. E119-15 - Fire Tests of Building Construction and Materials.
E. FM Global (FM):
   1. 1-28-15 - Wind Design.
   2. Factory Mutual Research Approval Guide.
F. Master Painters Institute (MPI):
   1. No. 18 - Primer, Zinc Rich, Organic.

G. Military Specifications (Mil. Spec.):
   1. MIL-P-21035B - Paint, High Zinc Dust Content, Galvanizing Repair.
H. Steel Deck Institute (SDI):
   1. No. 31-07 - Design Manual for Composite Deck, Form Decks, and Roof Decks.
I. UL LLC (UL):
   1. Listed - Online Certifications Directory.
   2. 580-13 - Tests for Uplift Resistance of Roof Assemblies.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Submittal Drawings:
   1. Show layout, connections to supporting members, anchorage, sump pans, accessories, deck openings and reinforcements.
   2. Show similar information necessary for completing installation as shown and specified, including supplementary framing, ridge and valley plates, cant strips, cut openings, special jointing or other accessories.
   3. Show welding, side lap, closure, deck reinforcing and closure reinforcing details.
   4. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Show steel decking section properties and structural characteristics.
D. Sustainable Construction Submittals:
   1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
E. Certificates: Certify each product complies with specifications.
   1. Fire Resistance Product Listing: For each metal deck type and thickness supporting concrete slab or fill.

1.5 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design steel decking and accessories according to AISI S100.
   1. Wind Uplift Resistance and Corner Conditions:
      a. Eave Overhang: 2.1 kPa (45 psf), minimum.
      b. Other Roof Areas: 1.4 kPa (30 psf), minimum.

2.2 MATERIALS

A. Galvanized Steel Sheet: ASTM A653/A653M; G60 coating.
B. Painted Steel Sheet: ASTM A1008/A1008M, Grade C or D, shop primed.
C. Primer for Shop Painted Sheets: Manufacturer's standard primer (2 coats). When finish painting of steel decking is specified in Section 09 91 00, PAINTING primer coating shall be compatible with specified finish painting.
D. Steel Shapes: ASTM A36/A36M.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
B. Sustainable Construction Requirements:
   1. Steel Recycled Content: 30 percent total recycled content, minimum.

2.4 METAL ROOF DECK

A. Metal Roof Deck: as metal roof deck panels.
   1. Steel decking of the type, depth, thickness, and section properties as shown on structural drawings.
B. Do not use steel deck for hanging supports of building components including suspended ceilings, electrical light fixtures, plumbing, heating, or air conditioning pipes or ducts or electrical conduits.

2.5 FABRICATION

A. Fabricate steel decking in sufficient lengths to extend over 3 or more supports.
   1. Cut metal deck units to proper length in shop.
B. Fabricate accessories required to complete installation of steel decking.
   1. Exposed to View: Fabricate from sheet steel matching metal decking.
   2. Concealed from View: Fabricate from galvanized sheet steel.
C. Sheet Metal Accessories:
   1. Metal Cover Plates: For end-abutting decking, to close gaps at changes in deck direction, columns, walls and openings.
      a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.

2. Continuous Sheet Metal Edging: At openings, concrete slab edges and roof deck edges.
   a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
3. Metal Closure Strips: For openings between decking and other construction. Form to configurations required to provide tight-fitting closures at open ends of flutes and sides of decking.
   a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
4. Ridge and Valley Plates: Minimum 100 mm (4 inch) wide ridge and valley plates where roof slope exceeds 1/24 (1/2 inch per foot).
   a. Sheet Steel: Minimum 1.0 mm (0.04 inch) thick.
5. Cant Strips: Provide bent metal 45 degree leg cant strips where indicated on the drawings. Fabricate cant strips with minimum 125 mm (5 inch) face width.
   a. Sheet Steel: Minimum 0.8 mm (0.03 inch) thick.
6. Seat Angles for Deck: Provide where beam does not frame into column.
7. Sump Pans for Roof Drains: Fabricated from single piece galvanized sheet steel with level bottoms and sloping sides to direct water flow to drain. Provide sump pans of adequate size to receive roof drains and with bearing flanges minimum 75 mm (3 inches) wide. Recess pans minimum 38 mm (1-1/2 inches) below roof deck surface, unless otherwise shown or required by deck configuration. Drain holes will be field cut.
   a. Sheet Steel: Minimum 1.7 mm (0.06 inch) thick.

2.6 FINISHES

A. Shop prime painted sheet steel with two coats of primer.

2.7 ACCESSORIES

A. Primer: Manufacturer's standard primer compatible with finish painting specified in Section 09 91 00, PAINTING.
B. Welding Materials: AWS D1.1, type to suit application.
C. Galvanizing Repair Paint: MPI No. 18.
D. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.

C. Remove contaminates from structural steel surfaces where steel decking will be welded.

D. Verify structural steel framing installation is completed, plumbed, and aligned with temporary bracing installed where required.

E. Coordinate with structural steel erector to prevent overloading of structural members when placing steel decking for installation.

3.2 ERECTION

A. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace deck units that become damaged after erection and before casting concrete at no cost additional to the Government.

B. Place steel decking at right angles to supporting members with ends located over supports.

C. Lap end joints 50 mm (2 inches), minimum.

D. Roof Deck Fastening:

1. Fasten decking to steel supporting members by welding per structural drawings.
2. Fasten split or partial decking panels to structure in every valley.
3. Fasten decking to each supporting member at ribs where side laps occur.
   a. Power driven fasteners is acceptable in lieu of welding if strength equivalent to welding specified above is provided. Submit test data and design calculations verifying equivalent design strength.
4. Fasten decking side laps per structural drawings.

- - E N D - -

--- INTENTIONALLY BLANK ---

SECTION 05 40 00
COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:
   1. Exterior load-bearing and non-load bearing steel stud walls.
   2. Steel joists.
   3. Steel trusses.

1.2 RELATED WORK

A. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Non-load-bearing metal stud framing assemblies.

B. Section 09 29 00, GYPSUM BOARD: Gypsum board assemblies.

1.3 DESIGN REQUIREMENTS

A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.

B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.

C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.
   1. Design Loads: As indicated.
   2. Design framing systems to withstand design loads without deflections greater than the following:
      a. Exterior Non-load-Bearing Curtain wall: Lateral deflection of 1/360 of the wall height.
   3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
   4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.

5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer’s Representative (COR) review and approval

B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.

C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.

D. Design of the light gauge for this project shall be provided by the contractor’s structural engineer for the loads shown on the construction documents. Submit signed and sealed calculations performed by a structural engineer with at least 5 years of experience in the design of light gauge metal and registered in the state of the project. Calculations shall be submitted with plans elevations and details for review and approval.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Iron and Steel Institute (AISI): Specification and Commentary for the Design of Cold-Formed Steel Structural Members (2016)

C. ASTM International (ASTM):

A36/A36M-19.....Standard Specification for Carbon Structural Steel

A123/A123M-17.....Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A153/A153M-16a.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

A307-14e1.....Standard Specifications for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength

A653/A653M-20.....Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process

C955-18e1.....Standard Specification for Cold Formed Steel Structural Framing Members

C1107/1107M-20.....Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)

E488/E488M-18.....Standard Test Methods for Strength of Anchors in Concrete Elements

E1190-11(2018).....Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members

D. American Welding Society (AWS):

D1.3/D1.3M-18.....Structural Welding Code-Sheet Steel

E. Military Specifications (Mil. Spec.):

MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

F. VA Physical Security and Resiliency Design Manual October 1, 2020.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Sheet Steel for joists, studs and accessories 16 gauge and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.

B. Sheet Steel for joists, studs and accessories 18 gauge and lighter: ASTM A653, structural steel, zinc coated G60, with a yield of 230 MPa (33 ksi) minimum.

C. Galvanizing Repair Paint: MIL-P-21035B.

D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and a 30 minute working time.

2.2 WALL FRAMING

A. Steel Studs: Complying with ASTM C 955. Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
   1. Minimum Base-Steel Thickness(uncoated): 1.37 mm (0.0538 inch)
   2. Flange Width: (1-5/8 inches)
   3. Web: Punched.

B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:
   1. Design Uncoated-Steel Thickness: Matching steel studs.
   2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 FRAMING ACCESSORIES

A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
   1. Supplementary framing.
   2. Bracing, bridging, and solid blocking.
   3. Web stiffeners.
   4. Gusset plates.
   5. Deflection track and vertical slide clips.
   6. Stud kickers and girts.
   7. Joist hangers and end closures.
   8. Reinforcement plates.

2.4 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.

B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.

C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.

D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.

E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.5 REQUIREMENTS

A. Welding in accordance with AWS D1.3

B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION

3.1 FABRICATION

A. Framing components may be preassembled into panels. Panels shall be square with components attached.

B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.

C. Hold members in place until fastened.

D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.

1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.

E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION

A. Handle and lift prefabricated panels in a manner as to not distort any member.

B. Securely anchor tracks to supports as shown.

C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.

D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.

E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.

F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.

G. Install headers in all openings that are larger than the stud spacing in that wall.

H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.

I. Studs in one piece for their entire length, splices will not be permitted.

J. Provide a load distribution member at top track where joist is not located directly overbearing stud.

K. Provide joist bridging and web stiffeners at reaction points where shown.

L. Provide end blocking where joist ends are not restrained from rotation.

M. Provide an additional joist under parallel partitions, unless otherwise shown, when partition length exceeds one-half joist span and when floor and roof openings interrupt one or more spanning members.

N. Provide temporary bracing and leave in place until framing is permanently stabilized.

O. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.

P. Fasten reinforcement plate over web penetrations that exceed size of manufacturer’s standard punched openings.

3.3 TOLERANCES

A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.

B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.

C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.

D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR

A. Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

SECTION 06 83 10
COMPOSITE COLUMN ENCLOSURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Materials to create fiberglas column covers.

1.2 REFERENCES

A. Abbreviations and Acronyms:

1. ANSI: American National Standards Institute
2. ASTM: American Society for Testing and Materials
3. CPA: Composite Panel Association
4. LEED: Leadership in Energy and Environmental Design
5. FRP: Fiber Reinforced Panel
6. USGBC: US Green Building Council
7. SFI: Sustainable Forestry Initiative

1.3 SUBMITTALS

A. General: Submit the following in accordance with conditions of contract and Division 1 specification section 01 33 00 “Submittal Procedures”.

B. Product data and detailed specifications for each system component and installation accessory required, including installation methods.

C. Shop drawings showing locations, seam locations, installation method, corner conditions and installation details of panel products.

D. Samples for verification purposes: Submit the following samples, as proposed for this work, for verification of color, texture, pattern and thickness:

E. Product test reports from a qualified independent testing laboratory showing compliance of each component with requirements indicated.

F. Maintenance data for wall system components for inclusion in the operating and maintenance manuals specified in Division 1.

1.4 QUALITY ASSURANCE

1. Installer qualifications: Engage an installer who has no less than 3 years experience in installation of panels similar in complexity to those required for this project.
2. Product quality standard. Quality grade to be premium.
3. Code compliance: Assemblies should conform to all applicable codes including IBC, UBC, SBCCI, BOCA and Life Safety.
4. Fire performance characteristics: Provide wall panels fabricated from fire rated materials tested in accordance with ASTM-E84 (CAN/ULC S102.2) for Class 1 characteristics listed below:

a. Flame spread 25 or less

b. Smoke developed: 150 or less (DELETE IF CLASS A IS NOT REQUIRED)

1.5 DELIVERY, STORAGE AND HANDLING

A. Immediately upon delivery, contractor must open crate and inspect goods prior to signing the bill of lading. This must occur regardless of any visible signs of external damage to the crating material. Freight Damage is not the responsibility of Soelberg Industries. If damage is found, contractor must sign for the freight as damaged and the driver must acknowledge that the contractor is signing for damaged freight. It is the responsibility of the contractor to file any and all freight claims resulting from this process. Soelberg Industries has no liability after the goods are shipped from Seller's address. Store materials in original, undamaged packaging in a clean, dry place out of direct sunlight and exposure to the elements. A room temperature of 40-100°F (4-38°C) should be maintained.

B. Materials must be stored flat.

1.6 PROJECT CONDITIONS

A. HVAC: Operate HVAC system to maintain occupancy level temperature and relative humidity conditions (25-55 percent) in the area of installation from 48 hours prior to delivery of panels to the installation area through remainder of construction period.

B. Materials must be acclimated in an environment of 65-75°F (18-24°C) with maintained relative humidity levels of 25-55% for at least 48 hours prior to beginning the installation.

C. Lighting: Permanent project lighting, including any special lighting used to highlight the panels, must be operational during installation.

1.7 WARRANTY

A. The FRP columns shall be guaranteed in writing against defects of materials or workmanship for a period of one (1) year from date of Substantial Completion of the project. Provide manufacturer's written warranty for labor and materials on finished components.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Column enclosures shall be round fiberglass column covers.

B. Provide glass cloth, matt and "chop" by one manufacturer.

C. Polyester resins shall be Class A. The resin will be flame retarding promoted thixotropic polyester resin designed for use in hand lay-up and spray-up processes. This resin is specifically formulated for use in applications that require an ASTM-84, Class 1 flame spread rating, without the use of fillers or antimony trioxide, with an ASTM-84 flame spread rating of 10 unfilled.

D. Gel Coat shall be part of system specified at a .015" to .025" thickness.

E. Finish shall be capable of accommodating wall coverings as specified.

F. Final ratio of materials shall be 25% fiber 75% resin for the body of components.

G. Shaft thickness shall be minimum 1/4" depending on size.

H. Allowable Tolerances

a. (1) Dimensions 10' or under: +/- 1/4".

(2) Dimensions 10' to 20': +/- 3/8".

b. Out of Square: 1/8" per 6.'

c. Warpage or bowing: +/- 1/16" per ft.

I. Physical Properties (1/8" Glass Mat Laminate)

Typical Properties	Typical Range
Flexural Strength, psi 77 degrees F	15,000 - 20,000
Flexural Modulus, psi 77 degrees F	550,000 - 700,000
Tensile Strength, psi 77 degrees F	10,000 - 18,000
Tensile Modulus, psi 77 degrees F	700,000 - 850,000
Barcol Hardness	45 - 55
Glass Content 0/0	24% - 29.5%
Compression Strength, psi	15,000 - 20,000
Water Absorption	.04% - .05%
Thermal Expansion (in./in./ft.)	.000011 - .000012

Flammability Properties (1/8" Glass Mat Laminate)

ASTM E-84 Tunnel Test = 10 (unfilled)

HLT-15 Rating = 100

ASTM D-635-74 = AEB<1.0 CM, ATB<5 sec.

ASTM D-2863-74 Oxygen Index = 36.5

2.2 INSTALLATION

A. Align the column enclosure to be plumb and tightly fit.

B. Prime the filled area and finish paint the column with urethane or oil based primer and paint.

C. Fill all joint seams and screw head holes with fiberglass auto body filler. Sand smooth and paint with high quality paint.

2.3 FABRICATION

A. General: Fabricate enclosures to comply with requirements indicated for design, dimensions, detail, finish and sizes. All based upon required field verified dimensions.

2.4 FINISHES

A. Paint Grade Paint finishing to be performed by others under Section 09 91 00-Painting

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.

B. Coordinate with responsibly entity to correct unsatisfactory conditions.

C. Commencement of work by installer is acceptance of conditions.

3.2 PREPARATION

A. Surface preparation: Prior to installation, clean substrate to remove dirt, debris and loose particles.

B. Protection: Take all necessary steps to prevent damage to material during installation as required in manufacturer's installation instructions. Store flat and in HVAC controlled area at all times.

3.3 INSTALLATION

A. Install in accordance with the Manufacturer's recommendations and the required field verified dimensions.

B. Attach first half of the shaft to the blocking at the top and bottom of the existing column using non-corrosive fasteners. You may also attach the column to intermediately placed blocking along the shaft seam to further secure the column shaft.

C. Apply a small amount of polyester resin or polyurethane adhesive to the ship-lap joint on each half column to bond the halves together, remove excess.

D. Paint finishing shall be performed under Section 09 91 23-Interior Painting. (If applicable)

3.4 CLEANING

A. General: Immediately upon completion of installation, clean enclosures and accessories in accordance with manufacturer's recommended cleaning method.

3.5 PROTECTION

A. Protect installed materials to prevent damage during remainder of construction period. Store flat and in HVAC controlled area at all times.

---END---

---INTENTIONALLY BLANK---

SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Partial existing roof construction and roofing removal for new roof openings for HVAC rooftop unit system installation.
2. Roofing membrane and selective roofing system component for new roof membrane installation.

B. Existing Roofing System: EPDM membrane roofing (**VA to verify**).

1.2 RELATED REQUIREMENTS

A. Replacement Roof Deck: Section 05 31 00, STEEL DECKING.

B. New Roofing System: Section 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):

1. FX-1-01(R2006) Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.

C. American Society for Nondestructive Testing (ASNT):

1. SNT-TC-1A - Personnel Qualification and Certification for Nondestructive Testing.

D. ASTM International (ASTM):

1. C208-12 - Cellulosic Fiber Insulating Board.
2. C578-15 - Rigid, Cellular Polystyrene Thermal Insulation.
3. C728-15 - Perlite Thermal Insulation Board.
4. C1177/C1177M-13 - Glass Mat Gypsum Substrate for Use as Sheathing.
5. C1153-97(2003)e1 - Location of Wet Insulation in Roofing Systems Using Infrared Imaging.
6. C1278/C1278M-07a(2015) - Fiber-Reinforced Gypsum Panel.
7. D4263-83(2012) - Indicating Moisture in Concrete by the Plastic Sheet Method.

E. U.S. Department of Commerce National Institute of Standards and Technology (NIST):

1. DOC PS 1-09 - Structural Plywood.
2. DOC PS 2-04 - Performance Standard for Wood-Based Structural-Use Panels.

1.4 PREINSTALLATION MEETINGS

A. Conduct pre-installation meeting minimum 30 days before beginning Work of this section.

1. Required Participants:
   a. Contracting Officer's Representative (COR).
   b. Architect/Engineer.
   c. Contractor.
   d. Installer.
   e. Manufacturer's field representative.
   f. Other installers responsible for adjacent and intersecting work, including mechanical and electrical equipment installers.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Removal and installation schedule.
   b. Removal and installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Removal and installation.
   f. Temporary roofing including daily terminations.
   g. Transitions and connections to other work.
   h. Inspecting and testing.
   i. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Description of temporary roof system and components.
3. List of patching materials.
4. Recover board fastening requirements.
5. Temporary roofing installation instructions and removal instructions. preparation instructions to receive new roofing.
6. Existing roofing warrantor's instructions provided by the COR.

D. Photographs: Document existing conditions potentially affected by roofing operations before work begins.

E. Field Inspection Reports:

1. Certify warrantor inspected completed roofing and existing warranty remains in effect.

F. Infrared Roof Moisture Survey Report.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Same installer as Section 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING
2. Licensed to perform asbestos abatement in Project jurisdiction when removal of asbestos-containing material is required.
3. Approved by existing roofing system warrantor when work affects existing roofing system under warranty.

1.7 FIELD CONDITIONS

A. Building Occupancy: Perform work to minimize disruption to normal building operations.

1. Verify occupants are evacuated from affected building areas when working on structurally impaired roof decking above occupied areas.
2. Provide notice minimum 72 hours before beginning activities affecting normal building operations.

B. Existing Roofing Available Information:

1. The following are available for Contractor reference:
   a. Roof moisture survey.
   b. Test cores analysis.
   c. Construction drawings and project manual.
2. Examine available information before beginning work of this section.

C. Weather Limitations: Proceed with reroofing/roof patching preparation only during dry weather conditions as specified for new roofing installation in Section 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

1. Remove only as much roofing in one day as can be made watertight in same day.

D. Hazardous materials are not expected in existing roofing system.

1. Known hazardous materials were removed before start of work.
2. Do not disturb suspected hazardous materials. When discovered, notify the COR.

3. Hazardous materials discovered during execution of the work shall be removed by Government as work of a separate contract.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Existing Warranties: Perform work to maintain existing roofing warranty in effect.

1. Notify warrantor before beginning, and upon completion of reroofing.
2. Obtain warrantor's instructions for maintaining existing warranty.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Patching Materials: Match existing roofing system materials.

B. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

C. Temporary Roofing System Materials: Contractor's option.

D. Recover Board: One of the following:

1. Insulation: See Section 07 22 00, ROOF AND DECK INSULATION.
2. Fiber Board: ASTM C208, Type II, fiber board; 13 mm (1/2 inch) thick.
3. Glass Mat Gypsum Board: ASTM C1177/C1177M, water-resistant; 6 mm (1/4 inch) 13 mm (1/2 inch) Type X, 16 mm (5/8 inch) thick.
4. Fiber Reinforced Gypsum Board: ASTM C1278/C1278M, water-resistant; 6 mm (1/4 inch) 10 mm (3/8 inch) 13 mm (1/2 inch) 16 mm (5/8 inch) thick.
5. Perlite: ASTM C728; 3 mm (1/2 inch) 19 mm (3/4 inch) 25 mm (1 inch) thick.

E. Fasteners: Type and size required by roof membrane manufacturer to resist wind uplift.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Infrared Roof Moisture Survey: Ground-based, walk-over type performed according to ASTM C1153.

1. Record the entire survey on DVD and provide one copy to the COR with report.

2. Include in report thermograms of suspect areas and corresponding daytime photos of same locations.
3. Conduct inspection by NDT test technician certified to at least Level 2 in Thermal/Infrared test method according to ASNT SNT-TC-1A.
4. Mark out roof areas determined to be wet to indicate minimum areas to be removed.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing roofing system indicated to remain.
   1. Cover roof membrane with temporary protection materials without impeding drainage.
   2. Limit traffic and material storage to protected areas.
   3. Maintain temporary protection until replacement roofing is completed.
C. Protect existing construction and completed work from damage.
D. Protect landscaping from damage.
E. Maintain access to existing walkways and adjacent occupied facilities.
F. Coordinate use of rooftop fresh air intakes with COR to minimize effect on indoor air quality.
G. Ensure temporary protection materials are available for immediate use in case of unexpected rain.
H. Ensure roof drainage remains functional.
   1. Keep drainage systems clear of debris.
   2. Prevent water from entering building and existing roofing system.
I. Coordinate rooftop utilities remaining active during roofing work with Contacting Officer's Representative.

3.3 RE-ROOFING/PATCHING PREPARATION - GENERAL

A. Notify Contacting Officer's Representative of planned operations, daily.
   1. Identify location and extent of roofing removal.
   2. Request authorization to proceed.

3.4 OVERBURDEN REMOVAL

A. Remove pavers and paver support.
   1. Store undamaged pavers and paver supports for reuse.
   2. Dispose of damaged pavers.
B. Remove plants, planting medium, water retention mat, and root barrier from vegetated roof assembly.

1. Store materials and plants for reuse.
2. Protect plants from root exposure and drying.

C. Remove insulation and drainage board from protected roofing membrane.
1. Store insulation and drainage board for reuse.

3.5 PARTIAL ROOFING SYSTEM REMOVAL

A. Remove existing roofing system for new work completely, exposing structural roof deck.
1. Remove any cover board, roof insulation, vapor retarder, and substrate board.
2. Remove or cut-off roofing system fasteners.

3.6 ROOFING MEMBRANE AND SELECTIVE ROOFING SYSTEM COMPONENT REMOVAL

A. Remove existing roofing membrane, only, in locations and to extent indicated on drawings.

B. Visually inspect and document cover board, roof insulation, vapor retarder, and substrate board for moisture immediately after roof membrane removal.
1. Coordinate with COR to observe inspections.
2. Identify wet roofing system components required to be removed.
3. Mark roofing system removal locations and extents.

C. Remove wet roofing system components.
1. Remove or cut-off roofing system fasteners when removals expose structural roof deck.

D. Patch selective roofing system removals immediately after inspection and repair.

E. Install patching materials to match existing roofing system.

F. Patch roofing membrane to maintain building watertight unless new roofing membrane is installed same day as removal and repair.

3.7 DECK PREPARATION

A. Inspect structural roof deck after roofing system removal.

B. Concrete Roof Decks:
1. Visually confirm concrete roof deck is dry.
2. Perform moisture test according to ASTM D4263 each day for each separate roof area.
   a. Proceed with roofing work only when moisture is not observed.

C. Steel Roof Decks-??:
1. Visually inspect structural roof deck installation and fasteners.

a. Notify COR of unsuitable conditions and inadequate fastenings potentially affecting roof system performance.

2. Secure roof deck with additional fastenings as indicated on drawings. determined by COR.

3. Replace roof deck as indicated on drawings. determined by COR.

a. Replacement Roof Deck: See Section 05 31 00, STEEL DECKING.

3.8 TEMPORARY ROOFING

A. Install temporary roofing to maintain building watertight.

B. Remove temporary roofing before installing new roofing.

C. Prepare temporary roofing to receive new roofing.

3.9 EXISTING MEMBRANE PREPARATION FOR NEW ROOFING

A. Remove existing roofing surface projections and irregularities. Produce smooth surface to receive recover boards.

1. Broom clean existing surface.

3.10 RECOVER BOARD INSTALLATION

A. Install recover boards over existing roof insulation, roofing membrane with butted joints. Stagger end joints in adjacent rows.

B. Fasten recover boards to resist wind-uplift.

1. Fastening Requirements: See Section 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

2. Uplift Resistance: Base on pull out resistance determined by specified field testing.

3.11 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 00, QUALITY CONTROL

1. Fastener Pull out Tests: ANSI/SPRI FX-1.

B. Existing Roofing System Warrantor Services:

1. Inspect reroofing preparation and roofing installation to verify compliance with existing warranty conditions.

2. Submit reports of field inspections, and supplemental instructions issued during inspections.

3.12 DISPOSAL

A. Collect waste materials in containers.

B. Remove waste materials from project site, regularly, to prevent accumulation.

C. Legally dispose of waste materials.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical insulation.
   a. Semi-rigid insulation at interior framed partitions.
   b. Batt and blanket insulation at interior framed partitions and ceilings.

1.2 RELATED REQUIREMENTS

A. Safing Insulation: Section 07 84 00, FIRESTOPPING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C516-08(2013)e1 - Vermiculite Loose Fill Thermal Insulation.
2. C549-06(2012) - Perlite Loose Fill Insulation.
3. C552-15 - Cellular Glass Thermal Insulation.
4. C553-13 - Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
5. C578-15 - Rigid, Cellular Polystyrene Thermal Insulation.
6. C591-15 - Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
7. C612-14 - Mineral Fiber Block and Board Thermal Insulation.
8. C665-12 - Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
9. C728-15 - Perlite Thermal Insulation Board.
10. C954-15 - Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness.
11. C1002-14 - Steel Self-Piercing Tapping Screws for Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.
12. D312/D312M-15 - Asphalt Used in Roofing.
13. E84-15a - Surface Burning Characteristics of Building Materials.
14. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show insulation type, thickness, and R-value for each location.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Adhesive indicating manufacturer recommendation for each application.
D. Sustainable Construction Submittals:
   1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
   2. Low Pollutant-Emitting Materials:
      a. Show volatile organic compound types and quantities.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.
B. Protect products from damage during handling and construction operations.
C. Protect foam plastic insulation from UV exposure.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL

A. Insulation Thickness:
   1. Provide thickness required by R-value shown on drawings.
   2. Provide thickness indicated when R-value is not shown on drawings.
B. Insulation Types:
   1. Provide one insulation type for each application.
C. Sustainable Construction Requirements:
   1. Insulation Recycled Content:
      a. Polyisocyanurate/polyurethane rigid foam: 9 percent recovered material.

b. Polyisocyanurate/polyurethane foam-in-place: 5 percent recovered material.

c. Glass fiber reinforced: 6 percent recovered material.

d. Phenolic rigid foam: 5 percent recovered material.

e. Rock wool material: 75 percent recovered material.

2.2 ACOUSTICAL INSULATION

A. Semi Rigid, Batts and Blankets:

1. Widths and lengths to fit tight against framing.
2. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semi rigid FSK faced or unfaced .
   a. Density: nominal 4.5 pound.
3. Mineral Fiber Batt or Blankets: ASTM C665 FSK faced or unfaced.
4. Maximum Surface Burning Characteristics: ASTM E84.
   a. Flame Spread Rating: 25.
   b. Smoke Developed Rating: 450.

B. Sound Deadening Board:

1. Mineral Fiber Board: ASTM C612, Type IB.
   a. Thickness: 13 mm (1/2 inch).
2. Perlite Board: ASTM C728.
   a. Thickness: 13 mm (1/2 inch).

2.3 ACCESSORIES

A. Fasteners:

1. Staples or Nails: ASTM F1667, zinc-coated, size and type to suit application.
2. Screws: ASTM C954 or ASTM C1002, size and length to suit application with washer minimum 50 mm (2 inches) diameter.
3. Impaling Pins: Steel pins with head minimum 50 mm (2 inches) diameter.
   a. Length: As required to extend beyond insulation and retain cap washer when washer is placed on pin.
   b. Adhesive: Type recommended by manufacturer to suit application.

B. Insulation Adhesive:

1. Nonflammable type recommended by insulation manufacturer to suit application.

C. Tape:

1. Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative (COR)consideration.

B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.

C. Install board and block insulation with joints close and flush, in regular courses, and with end joints staggered.

D. Install batt and blanket insulation with joints tight. Fill framing voids completely. Seal penetrations, terminations, facing joints, facing cuts, tears, and unlapped joints with tape.

E. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 ACOUSTICAL INSULATION

A. General:

1. Install insulation without voids.
2. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
3. Pack behind outlets, around pipes, ducts, and services encased in walls.
4. Hold insulation in place with pressure sensitive tape.
5. Lap facer flanges together over framing for continuous surface. Seal all penetrations through the insulation and facers.
6. Do not compress insulation below required thickness except where embedded items prevent required thickness.

B. Semi Rigid, Batts and Blankets:

1. Semi Rigid Batts and Blankets:

a. When insulation is not full thickness of cavity, adhere insulation to one side of cavity, maintaining continuity of insulation and covering penetrations or embedments.

b. Wood Framing:

1) Fasten blanket insulation between wood framing and joists with nails or staples through flanged edges of insulation.

2) Space fastenings maximum 150 mm (6 inches) on center.

c. Metal Framing:

1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.

2) At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing.

3) Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.

C. Sound Deadening Board:

1. Secure with adhesive to masonry and concrete. Secure sufficiently in place until subsequent cover is installed. Seal all cracks with caulking.

3.4 CLEANING

A. Remove excess adhesive before adhesive sets.

3.5 PROTECTION

A. Protect insulation from construction operations.

B. Repair damage.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 07 22 00
ROOF AND DECK INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Removal of existing roof insulation at new roof penetrations for HVAC systems and rooftop unit.

B. Removal and installation of roof and deck insulation, substrate board, vapor retarder, and cover board on existing concrete metal deck?? substrates ready to receive roofing or waterproofing membrane.

C. Repairs and alteration work to existing roof insulation at new roof penetrations for HVAC ductwork and RTU system installation.

1.2 RELATED REQUIREMENTS – NOT USED

1.3 APPLICABLE PUBLICATIONS

A. 12Comply with references to extent specified in this section.

B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):

1. Standard 90.1-13 - Energy Standard for Buildings except Low-Rise Residential Buildings.

C. ASTM International (ASTM):

1. C208-12 - Cellulosic Fiber Insulating Board.
2. C552-15 - Cellular Glass Thermal Insulation.
3. C726-05 - Mineral Fiber Roof Insulation Board.
4. C728-15 - Perlite Thermal Insulation Board.
5. C1177/C1177M-13 - Glass Mat Gypsum Substrate for Use as Sheathing.
6. C1278/C1278M-07a(2015) - Fiber-Reinforced Gypsum Panel.
7. C1289-15 - Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
8. C1396/C1396M-14a - Gypsum Board.
9. D41/D41M-11 - Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing.
10. D312-06 - Asphalt Used in Roofing.
11. D1970/D1970M-15 - Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
12. D2178/D2178M-15 - Asphalt Glass Felt Used in Roofing and Waterproofing.
13. D2822/D2822M-11 - Asphalt Roof Cement, Asbestos Containing.
14. D4586/D4586M-07(2012)e1 - Asphalt Roof Cement, Asbestos-Free.

15. E84-15a - Surface Burning Characteristics of Building Materials.
16. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.

D. National Roofing Contractors Association (NRCA):
1. Manual-15 - The NRCA Roofing Manual: Membrane Roof Systems.

E. U.S. Department of Agriculture (USDA):
1. USDA BioPreferred Program Catalog.

F. UL LLC (UL):
1. Listed - Online Certifications Directory.

G. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
1. DOC PS 1-09 - Structural Plywood.
2. DOC PS 2-04 - Performance Standard for Wood-Based Structural-Use Panels.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
1. Show size, configuration, and installation details.
a. Nailers, cants, and terminations.
b. Layout of insulation showing slopes, tapers, penetrations, and edge conditions.

C. Manufacturer's Literature and Data:
1. Description of each product.

D. Samples:
1. Roof insulation, each type.
2. Fasteners, each type.

E. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
a. Show type and quantity for each product.
3. Low Pollutant-Emitting Materials:
a. Show volatile organic compound types and quantities.
b. Certify each and agrifiber product contain no added urea formaldehyde.

F. Qualifications: Substantiate qualifications meet specifications.
1. Installer.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Same installer as Division 07 roofing section installer.

1.6 DELIVERY

A. Comply with recommendations of NRCA Manual.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Comply with recommendations of NRCA Manual.

B. Store products indoors in dry, weathertight facility.

C. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Install products when existing and forecasted weather permit installation according to manufacturer's instructions.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant substrate board, vapor retarder, insulation, and cover board against material and manufacturing defects as part of Division 07 roofing system warranty.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Insulation Thermal Performance:

1. Overall Average R-Value: RSI-57 (R-33), minimum, thickness to match adjacent existing materials.

2. Any Location R-Value: RSI-17 (R-10), minimum.

B. Fire and Wind Uplift Resistance: Provide roof insulation complying with requirements specified in Division 07 roofing section.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

B. Sustainable Construction Requirements:

1. Insulation Recycled Content:
   a. Mineral Fiber: 75 percent total recycled content, minimum.
   b. Fiberglass: 20 percent total recycled content, minimum.
   c. Cellulose: 75 percent post-consumer recycled content, minimum.
   d. Perlite Composite Board: 23 percent post-consumer recycled content, minimum.
   e. Rigid Foam: 9 percent total recycled content, minimum.
   f. Glass Fiber Reinforced Rigid Foam: 6 percent total recycled content, minimum.
2. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.

2.3 ADHESIVES

A. Primer: ASTM D41/D41M.

B. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.

C. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

D. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

E. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

F. Roof Cement: Asbestos free, ASTM D2822/D2822M, Type I or Type II; or, ASTM D4586/D4586M, Type I or Type II.

2.4 ROOF AND DECK INSULATION

A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer.

B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, faced with glass fiber reinforced cellulosic felt facers on both major surfaces of the core foam.

C. Cellular Glass Board Insulation: ASTM C552, Type IV, kraft-paper sheet faced.

D. Perlite Board Insulation: ASTM C728, expanded perlite particles, selected binders, and cellulosic fibers with surface treated to reduce bitumen absorption.

E. Cellulosic Fiber Board Insulation: ASTM C208, Type II, Grade 1 for built-up asphalt or modified bitumen roofing , Grade 2 for single-ply roofing-????.

F. Tapered Roof Insulation System:

1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
2. Cut to provide high and low points with crickets and slopes as shown.
3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
4. Minimum slope 1/48 (1/4 inch per 12 inches).

2.5 INSULATION ACCESSORIES

A. Glass (Felt): ASTM D2178/D2178M, Type VI, heavy duty ply sheet.

B. Cants and Tapered Edge Strips:

1. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
2. Tapered Edge Strips: 1/12 (1 inch per 12 inches), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
   a. Cellulosic Fiberboard: ASTM C208.
   b. Mineral Fiberboard: ASTM C726.
   c. Perlite Board: ASTM C728.

C. Vapor Retarder:

1. Glass-Fiber Felts: ASTM D2178/D2178M, Type IV, asphalt impregnated.
2. Self-Adhering Sheet Vapor Retarder: ASTM D1970/D1970M, minimum 1.0 mm (40 mils) thick membrane of HDPE film fully coated with asphalt adhesive, or 0.76 to 1.0 mm (30 to 40 mils) thick membrane of butyl rubber based adhesive backed by a layer of high density cross-laminated polyethylene; maximum permeance rating of 6 ng/Pa/s/sq. m (0.1 perms).

D. Substrate Board:

1. Gypsum Board: ASTM C1396/C1396M, 16 mm (5/8 inch) thick, Type X.

2. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, Type X, 16 mm (5/8 inch) thick, factory primed.
3. Cellulosic-Fiber-Reinforced, Water-Resistant Gypsum Roof Board: ASTM C1278/C1278M, 16 mm (5/8 inch) thick.

E. Cover Board:
1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 16 mm (5/8 inch) thick, factory primed.
2. Cellulosic-Fiber-Reinforced, Water-Resistant Gypsum Roof Board: ASTM C1278/C1278M, 16 mm (5/8 inch) thick.

2.6 ACCESSORIES

A. Fasteners: Corrosion-resistant carbon steel fasteners and galvalume-coated steel or plastic round plates for fastening substrate board and insulation to roof deck.

B. Nails: ASTM F1667; type to suit application.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Comply with requirements of Division 07 roofing section.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative (COR)consideration.

B. Comply with requirements of UL for insulated steel roof deck.

C. Attach substrate board and other products to meet requirements of Division 07 roofing section.

3.4 SUBSTRATE BOARD INSTALLATION

A. Fasten substrate board to top flanges of steel decking to resist uplift pressures according requirements for specified roofing system.
1. Locate the long dimension edge joints solidly bearing on top of decking ribs.

3.5 VAPOR RETARDER INSTALLATION

A. Vapor Retarder Installation, General:
1. Install continuous vapor retarder on roof decks where indicated.

2. At vertical surfaces, turn up vapor retarder to top of insulation or base flashing.
3. Seal penetrations through vapor retarder with roof cement to prevent moisture entry from below.

B. Cast in Place Concrete Decks, Except Insulating Concrete:
1. Prime deck as specified.
2. Apply two plies of asphalt saturated felt mopped down to deck.

C. Precast Concrete Unit Decks Without Concrete Topping:
1. Prime deck as specified.
2. Apply two plies of asphalt saturated felt.
3. Mop to deck, keeping bitumen 100 mm (4 inches) away from joints of precast units. Bridge joints with felt. Mop between plies as specified.

3.6 INSULATION INSTALLATION

A. Insulation Installation, General:
1. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate before installation of insulation.
2. Cant Strips: Install preformed insulation cant strips at junctures of roofing system with vertical construction.
3. Use same insulation as existing for roof repair and alterations unless specified otherwise.

B. Insulation Thickness:
1. Thickness of roof insulation shown on drawings is nominal. Provide thickness required to comply with specified thermal performance.
2. Insulation on Metal Decks: Provide insulation in minimum thickness recommended by insulation manufacturer to span deck flutes. Support edges of insulation on metal deck ribs.
3. When actual insulation thickness differs from drawings, coordinate alignment and location of roof drains, flashing, gravel stops, fascias and similar items.
4. Where tapered insulation is used, maintain insulation thickness at high points and roof edges shown on drawings.
   a. Low Point Thickness: Minimum 38 mm (1-1/2 inches).
5. Use minimum two layers of insulation when required thickness is 68 mm (2.7 inch) or greater.

C. Lay insulating units with close joints, in regular courses and with end joints staggered.
   1. Stagger joints between layers minimum 150 mm (6 inches).
D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.
E. Seal cut edges at penetrations and at edges against blocking with bitumen or roof cement.
F. Cut to fit tightly against blocking or penetrations.
G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.
H. Installation Method:
   1. Adhered Insulation:
      a. Prime substrate as required.
      b. Set each layer of insulation firmly in solid mopping of hot asphalt.
      c. Set each layer of insulation firmly in ribbons of bead-applied insulation adhesive.
      d. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.
   2. Mechanically Fastened Insulation:
      a. Fasten insulation according to requirements in Division 07 roofing section.
      b. Fasten insulation to resist uplift pressures specified in Division 07 roofing section.
   3. Mechanically Fastened and Adhered Insulation:
      a. Fasten first layer of insulation according to "Mechanically Fastened Insulation" requirements.
      b. Fasten each subsequent layer of insulation according to "Adhered Insulation" requirements.

3.7 COVER BOARD INSTALLATION

A. Install cover boards over insulation with long joints in continuous straight lines with staggered end joints.
B. Offset cover board joints from insulation joints 150 mm (6 inches), minimum.
C. Secure cover boards according to "Adhered Insulation" "Mechanically Fastened Insulation" requirements.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 07 24 00
EXTERIOR INSULATION AND FINISH SYSTEMS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Exterior insulation and finish systems (EIFS) at temporary vault.

1.2 RELATED WORK

A. Section 09 06 00, SCHEDULE FOR FINISHES Color.

B. Section 09 29 00, GYPSUM SHEATHING: Gypsum Board Sheathing.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute (ANSI):

A108/A118/A136-19.....Installation of Ceramic Tile.

A137.1-19.....Ceramic Tile - Version 1.

C. ASTM International (ASTM):

B117-19.....Operating Salt Spray (Fog) Apparatus.

C67/C67M-20.....Sampling and Testing Brick and Structural Clay Tile.

C177-19.....Steady-State Heat Flux Measurements and Thermal Transmission Properties by Means of the Guarded-Hot-Plate Apparatus.

C297/C297M-16.....Flatwise Tensile Strength of Sandwich Constructions.

C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.

C666/C666M-15.....Resistance of Concrete to Rapid Freezing and Thawing.

C920-18.....Elastomeric Joint Sealants.

D968-17.....Abrasion Resistance of Organic Coatings by Falling Abrasive.

D2794-93(2019).....Resistance of Organic Coatings to the Effects of Rapid Deformation (Impact).

E84-20.....Surface Burning Characteristics of Building Materials.

E96/E96M-16.....Water Vapor Transmission of Materials.

E119-20.....Fire Tests of Building Construction and Materials.

E330/E330M-14.....Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference.

E331-00(2016).....Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Wall by Uniform Static Air Pressure Differences.

E2486/E2486M-13(2018)...Impact Resistance of Class PB and PI Exterior Insulation and Finish Systems (EIFS).

G90-17.....Performing Accelerated Outdoor Weathering of Nonmetallic Materials Using Concentrated Natural Sunlight.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

a. Contracting Officer's Representative.

b. Contractor.

c. Installer.

d. Manufacturer's field representative.

e. Other installers responsible for adjacent and intersecting work, including air barriers and sealants.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

a. Installation schedule.

b. Installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Installation.

f. Terminations.

g. Transitions and connections to other work.

h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.
   2. Show details for corner treatment, sills, soffits, dentils, quoins, lintels, openings, penetrations, flashing, and other special applications.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.
   3. Warranty.
D. Samples: Two 300 mm (1 foot) square samples of EIFS simulated synthetic stucco finishes over cement board identical to proposed installation in thickness, color, texture, insulation and workmanship.
E. Test reports: Certify each product and complete system complies with specifications.
F. Qualifications: Substantiate qualifications comply with specifications.
   1. Installer with project experience list.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.
B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Environment: Unless greater temperature is required by system manufacturer, install products only when ambient air temperature is

minimum 7 degrees C (45 degrees F) and rising and predicted to persist for 24 hours after installation.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant EIFS system materials against material and manufacturing defects.

1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide system components from one manufacturer and from one production run.

2.2 EXTERIOR INSULATION AND FINISH SYSTEM (EIFS)

A. Description: Polymer-Based (PB) system consists of Type I molded rigid polystyrene insulation adhered to sheathing and finished with glass-fiber-mesh reinforced based-coat and textured finish coat.

B. Performance Requirements:

1. Surface Burning Characteristics: When tested according to ASTM E84.

a. Flame Spread Rating: 25 maximum.

b. Smoke Developed Rating: 450 maximum.

2. Full Scale Wall Fire Test: No significant surface flaming or propagation of vertical or lateral flames when tested according to ASTM E119.

3. Impact Resistance (Sample to be cured. Finish, base coat and fabric over 25 mm (1 inch) insulation typical of project application), ASTM E2486/E2486M:

a. High Impact Resistance - 10.2 to 17J (90-150 inch-lbs.).

4. Structural Performance: (Test panels 1200 mm x 1200 mm (4 feet by 4 feet) typical of project application): ASTM E330/E330M, no permanent deformation, delamination or deterioration for positive and negative pressures as required.

a. Wind Loads: Uniform pressure as indicated on Drawings.

5. Water Penetration: ASTM E331, no water penetration minimum 720Pa (15 psf) for windows and 300 Pa (6.24 psf) for curtain wall assembly.
6. Abrasion Resistance: ASTM D968, 500 liters of sand with slight smoothing and no loss of film integrity.
7. Accelerated Weathering: ASTM G90; 2000 hours with no deterioration.
8. Salt Spray Resistance: ASTM B117; Withstand 300 hours with no deleterious effects.
9. Water Vapor: ASTM E96/E96M; Maximum 12 grains/hour/square meter (18 grains/hour/square foot.).
10. Absorption-Freeze-Thaw (Pre-weighed 100 mm x 200 mm (4 inch by 8 inch) specimens; 25 mm (1 inch) insulation, faced with finish coat cured and stored in air; tested with edges and back open), ASTM C67.
    a. 50 Cycles: 20 hours at 9 degrees C (4 degrees F); 4-hour thaw in water.
    b. After 50 cycles; total weight gain of maximum 6.2 grams. No checking splitting, or cracking.

C. Adhesive: Manufacturers standard product including primer compatible with sheathing.

D. Insulation:
1. Thermal Resistance: Thermal resistance (R-value), as indicated, measured by ASTM C177.
2. Insulating Material: ASTM C578, as recommended by EIFS manufacturer and treated to be compatible with EIFS components. Age insulation minimum of 6 weeks before installation.
3. Provide Type I Molded Expanded Polystyrene (MEPS) insulation board for Type PB systems, in sizes as required except maximum 600 mm X 1200 mm (24 X 48 inches) boards, and maximum 100 mm (4 inches) thick.

E. Mechanical Anchors: As recommended by EIFS manufacturer.

F. Accessories:
1. Trim, control joints, weep screed, edging, anchors, expansion joints, and other items required for proper installation as recommended by EIFS manufacturer.
2. Metal Items and Fasteners: Corrosion resistant.

G. Reinforcing Fabric: Balanced, open weave, glass fiber fabric made from twisted multi-end strands specifically treated for compatibility with the other materials of system.
    1. Minimum weight 100 grams/square meter (4.3 ounces/square yard).
H. Base Coat: Manufacturer's standard.
I. Finish Coat: Manufacturer's standard. Minimum thickness 1.5 mm (1/16 inch), complying with performance requirements.
J. Texture and Finish Color: Basis-of-Design: STO’s Traditional Fine Finish Texture, Cotton, or as per manufacturer’s selections.
K. Sealant: ASTM C920; Class 50 with 100 percent recovery. Type, grade and use as recommended by sealant manufacturer.
    1. When required, provide non-staining primer, bond breaker, and backer rods as recommended by sealant manufacturer.
    2. Do not use absorptive materials as backer rods.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Notify Contracting Officer's Representative in writing of conditions detrimental to proper completion of work.
D. Do not proceed with work until unsatisfactory conditions are corrected.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
    1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 CONTROL JOINT INSTALLATION

A. See drawings for location of building control joints and surface control joints.
B. Install surface control joints as follows:
    1. Exterior Insulation and Finish System. Install at 15 meters (50 feet) maximum in both directions and at building expansion joints, floor lines and where EIFS intersects other materials per manufacturer's recommendations.

3.4 SEALANT INSTALLATION

A. Exterior Insulation and Finish System: Apply sealant according to EIFS manufacturer's recommendation.

B. Do not apply sealant in locations intended for water drainage.

3.5 EXTERIOR INSULATION AND FINISH SYSTEM INSTALLATION

A. Insulation Board Layout: Place horizontally from level base line. Stagger vertical joints and interlock at corners. Butt joints tightly. Provide flush surfaces at joints. Offset insulation board joints from joints in sheathing minimum 200 mm (8 inches). Do not align joints with corners of doors, windows and other openings. Do not leave insulation board exposed longer than recommended by insulation manufacturer.

B. Adhesive: Apply directly to entire back surface of the insulation board as recommended by the system manufacturer and immediately apply to gypsum board substrate. Apply firm pressure over entire board to ensure uniform contact and level surface. Allow adhesive to cure for 24 hours minimum before sanding.

C. Create means of drainage between insulation board and gypsum board sheathing.

D. Flash penetrations and terminations to discharge water to exterior.

E. Mechanical Fasteners: Fasten with manufacturer's standard anchors, spaced as recommended by manufacturer, maximum 600 mm (24 inches) on center horizontally and vertically.

F. Sanding: Sand entire surface of insulation before applying base coat, level high joints and remove dirt and weathering damage. Do not pre-fill low areas with basecoat.

G. Base Coat: Trowel apply uniform thickness of base coat to insulation with minimum thickness of 1-1/2 times reinforcing fabric thickness and minimum 2.4 mm (3/32 inches) wet thickness.

H. Install reinforcing fabric embedded in base coat. Provide diagonal reinforcement at opening corners, back wrapping, and other reinforcement recommended by EIFS manufacturer. Ensure fabric pattern is not visible beneath the surface of the basecoat after installation. Cure basecoat 24 hours minimum before applying finish coat.

I. Finish Coat:

1. Inspect basecoat for damage or defects and repair before applying finish coat.
2. Trowel apply finish coat minimum 1.6 mm (1/16 inch) thick.

3. Texture finish as required.
4. Surface Tolerance: Maximum 1/500 (1/4 inch in 10 feet) deviation from plumb and plane.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 07 53 23

ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ethylene Propylene Diene Monomer (EPDM) sheet roofing.

1.2 RELATED WORK

A. Section 07 01 50.19, PREPARATION FOR REROOFING: Preparation of Existing Membrane Roofs and Repair Areas.

B. Section 07 22 00, ROOF AND DECK INSULATION: Substrate Board, Vapor Retarder, Roof Insulation, and Cover Board.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):

FX-1-16.....Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.

RP-4 2019.....Wind Design Standard for Ballasted Single-ply Roofing Systems.

C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):

7-16.....Minimum Design Loads for Buildings and Other Structures.

D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):

90.1-13.....Energy Standard for Buildings Except Low-Rise Residential Buildings.

E. ASTM International (ASTM):

A276/A276M-17.....Stainless Steel Bars and Shapes.

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric).

C67-20.....Sampling and Testing Brick and Structural Clay Tile.

C140/C140M-20a.....Sampling and Testing Concrete Masonry Units and Related Units.

C936/C936M-20.....Solid Concrete Interlocking Paving Units.

C1371-15.....Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers.

C1549-16.....Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer.

D751-19.....Standard Test Methods for Coated Fabrics.

D1248-16.....Polyethylene Plastics Extrusion Materials for Wire and Cable.

D1876-08(2015) e1.....Peel Resistance of Adhesives (T-Peel Test).

D2103-15.....Polyethylene Film and Sheeting.

D2240-15e1.....Rubber Property-Durometer Hardness.

D3884-09(2017).....Abrasion Resistance of Textile Fabrics (Rotary Platform, Double-Head Method).

D4263-83(2018).....Indicating Moisture in Concrete by the Plastic Sheet Method.

D4586/D4586M-07(2018)...Asphalt Roof Cement, Asbestos-Free.

D4637/D4637M-15.....EPDM Sheet Used In Single-Ply Roof Membrane.

E96/E96M-16.....Water Vapor Transmission of Materials.

E408-13(2019).....Total Normal Emittance of Surfaces Using Inspection-Meter Techniques.

E1918-16.....Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.

E1980-11(2019).....Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.

G21-15.....Resistance of Synthetic Polymeric Materials to Fungi.

F. Cool Roof Rating Council (CRRC):

1-20.....Product Rating Program.

G. Federal Specifications (Fed. Spec.):

UU-B-790A.....Building Paper, Vegetable Fiber: (Kraft, Waterproofed, Water Repellent and Fire Resistant).

H. Florida Department of Business and Professional Regulation (FL): Approved Product Approval.

I. National Roofing Contractors Association (NRCA):

Manual-19.....The NRCA Roofing Manual: Membrane Roof Systems.

J. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog.

K. UL LLC (UL):

580-06..... Tests for Uplift Resistance of Roof Assemblies.

1897-20.....Uplift Tests for Roof Covering Systems.

L. U.S. Department of Commerce National Institute of Standards and Technology (NIST):

DOC PS 1-19.....Structural Plywood.

DOC PS 2-18.....Performance Standard for Wood-Based Structural-Use Panels.

M. U.S. Environmental Protection Agency (EPA):

Energy Star.....ENERGY STAR Program Requirements for Roof Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at the Project site minimum 30 days before beginning Work of this section.

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Contractor.
   c. Installer.
   d. Other installers responsible for adjacent and intersecting work, including roof deck, flashings, roof specialties, roof accessories, utility penetrations, rooftop curbs and equipment.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Terminations.
   g. Transitions and connections to other work.
   h. Inspecting and testing.
   i. Other items affecting successful completion.
   j. Pull out test of fasteners.
   k. Material storage, including roof deck load limitations.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Roofing membrane layout.
2. Roofing membrane fastener pattern and spacing if applicable.
3. Roofing membrane seaming and joint details.
4. Roof membrane penetration details.
5. Base flashing and termination details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Minimum fastener pull out resistance.
3. Installation instructions.
4. Warranty.
5. Product Data for Federally-Mandated Bio-Based Materials: For roof materials, indicating USDA designation and compliance with definitions for bio-based products, Rapidly Renewable Materials, and certified sustainable wood content.

D. Sustainable Construction Submittals:

1. Solar Reflectance Index (SRI) for roofing membrane.
2. Low Pollutant-Emitting Materials:
   a. Show volatile organic compound types and quantities.
3. Energy Star label for roofing membrane.

E. Samples:

1. Roofing Membrane: 150 mm (6 inch) square.
2. Base Flashing: 150 mm (6 inch) square.
3. Fasteners: Each type.
4. Roofing Membrane Seam: 300 mm (12 inches) square.

F. Certificates: Certify products comply with specifications.

1. Fire and windstorm classification.
2. High wind zone design requirements.
3. Energy performance requirements.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Installer, including supervisors
2. Manufacturer's field representative

H. Field quality control reports.

I. Temporary protection plan. Include list of proposed temporary materials.

J. Operation and Maintenance Data:

1. Maintenance manuals.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
2. Regularly installs specified products.
3. Installed specified products with satisfactory service on five similar installations for minimum five years.
4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer's Representative and installer's personnel.

B. Manufacturer's Field Representative:

1. Manufacturer's full-time technical employee or independent roofing inspector.
2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Comply with NRCA Manual storage and handling requirements.

B. Store products indoors in dry, weathertight facility.

C. Store adhesives according to manufacturer's instructions.

D. Protect products from damage during handling and construction operations.

E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 4 degrees C (40 degrees F) and rising before installation.

2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant roofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.

1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Roofing System: Installation method to match that of existing adjacent roofing system. Verify in field and/or with the VA's COR.

2.2 SYSTEM PERFORMANCE

A. Design roofing system meeting specified performance:

1. Load Resistance: ASCE/SEI 7; Design criteria as indicated on Drawings.

2. Energy Performance:

a. EPA Energy Star Listed for low-slope roof products.

b. ASTM E1980; Minimum 78 Solar Reflectance Index (SRI).

c. CRRC-1; Minimum 0.70 initial solar reflectance and minimum 0.75 emissivity.

d. Three-Year Aged Performance: Minimum 0.55 solar reflectance tested in according to ASTM C1549 or ASTM E1918, and minimum 0.75 thermal emittance tested in according to ASTM C1371 or ASTM E408.

1) Where tested aged values are not available:

a) Calculate compliance adjusting initial solar reflectance according to ASHRAE 90.1.

b) Provide roofing system with minimum 64 three-year aged Solar Reflectance Index calculated according to ASTM E1980 with 12 watts/square meter/degree K (2.1 BTU/hour/square foot) convection coefficient.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide roof system components from one manufacturer.

2.4 EPDM ROOFING MEMBRANE

A. EPDM Sheet: ASTM D4637/D4637M, Type II - internally reinforced.

1. Thickness: 1.5 mm (60 mils)

B. Additional Properties:

PROPERTY	TEST METHOD	REQUIREMENT
Shore A Hardness	ASTM D2240	55 to 75 Durometer
Water Vapor Permeance	ASTM E96/E96M	Minimum 8 ng/Pa/s/sq. m (0.14 perms) Water Method
Fungi Resistance	ASTM G21	After 21 days, no sustained growth or discoloration.

1. Use fire retardant membrane when not protected by ballast or pavers. Verify for UL or approval.

2.5 MEMBRANE ACCESSORY MATERIALS

A. Sheet roofing manufacturer's specified products.

B. Flashing Sheet: Manufacturer's standard; same material, and color as roofing membrane.
   1. Self-curing EPDM flashing adaptable to irregular shapes and surfaces.
   2. Minimum Thickness: 1.5 mm (0.060 inch).

C. Factory Formed Flashings: Inside and outside corners, pipe boots, and other special flashing shapes to minimize field fabrication.

D. Splice Adhesive or Tape: Manufacturer's standard for roofing membrane and flashing sheet.

E. Splice Lap Sealant: Liquid EPDM rubber for exposed lap edge.

F. Bonding Adhesive: Manufacturer's standard, to suit substrates.

G. Termination Bars: Manufacturer's standard, stainless steel or aluminum, 25 mm wide by 3 mm thick (1 inch wide by 1/8 inch thick) factory drilled for fasteners.

H. Battens: Manufacturer's standard, galvannealed or galvanized steel, 25 mm wide by 1.3 mm thick (1 inch wide by 0.05 inch thick), factory punched for fasteners.

I. Pipe Compression Clamp:
   1. Stainless steel drawband.
   2. Worm drive clamp device.

J. Fasteners: Manufacturer's standard coated steel with metal or plastic plates, to suit application.

K. Fastener Sealer: One-part elastomeric adhesive sealant.

L. Temporary Closure Sealers (Night Sealant): Polyurethane two-part sealer.

M. Primers, Splice Tapes, Cleaners, and Butyl Rubber Seals: As specified by roof membrane manufacturer.

N. Asphalt Roof Cement: ASTM D4586/D4586M.

2.6 FASTENERS

A. Fasteners and washers required for securing pavers together with straps and to walls or other anchorage:

1. Straps for Securing Pavers Together:

a. Stainless Steel: ASTM A276/A276M, Type 302 or 304, minimum 0.46 mm (0.018 inch) thick.

b. Aluminum Strap: ASTM B209/B209M, minimum 2.39 mm (0.094 inch) thick.

c. Round corners on straps.

d. Form straps 38 mm (1-1/2 inches) wide, 3 m (10 feet) maximum length with 6 by 10 mm (1/4 by 3/8 inch) punched slotted holes at 100 mm (4 inch) centers centered on width of strap. Punch hole size 2 mm (1/16 inch) larger than fastener shank when shank is thicker than 5 mm (3/16 inch).

B. Fasteners or Connectors for Pavers:

1. For Concrete Pavers: Extruded interlocking hollow shape polyethylene connector:

a. ASTM D1248, Type 1, low density, Class C, black weather resistant, Grade E6, tensile strength 15 MPa (2200 psi), Shore D hardness of 4, brittleness low temperature - 82 degrees C (180 degrees F), softening temperature above 80 degrees C (176 degrees F).

b. Length: 50 mm (2 inches), with center stop and insert leg with ribs to resist withdrawal; minimum 1.3 mm (0.05 inch) thick.

2. Fasteners for Pavers Straps:

a. Stainless steel as recommended by manufacturer of paver in which fastener is anchored.

b. Fasteners that are not acceptable include:

1) Impact or power actuated fasteners.

2) Fasteners that do not require a predrilled pilot hole.

3) Fasteners with lead or white metal anchors.

4) Plastic anchors not stabilized against ultraviolet light.

2.7 SEPARATION SHEET

A. Polyethylene Film: ASTM D2103, 0.2 mm (6 mils) thick.

B. Building Paper: Fed. Spec. UU-B-790.

1. Water Vapor Resistance: Type I, Grade A, Style 4, reinforced.
2. Water Vapor Permeable: Type I, Grade D, Style 4, reinforced.

2.8 FLEXIBLE TUBING

A. Closed cell neoprene, butyl polyethylene, vinyl, or polyethylene tube or rod.

B. Diameter approximately 1-1/2 times joint width.

2.9 ACCESSORIES

A. Temporary Protection Materials:

1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine and verify substrate suitability for product installation with roofing installer and roofing inspector present.

1. Verify roof penetrations are complete, secured against movement, and firestopped.
2. Verify roof deck is adequately secured to resist wind uplift.
3. Verify roof deck is clean, dry, and in-plane ready to receive roofing system.

B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

A. Complete roof deck construction before beginning roofing work:

1. Curbs, blocking, edge strips, and other components to which roofing and base flashing is attached in place ready to receive insulation and roofing.
2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of workday.

B. Dry out surfaces that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.

C. Broom clean roof decks. Remove dust, dirt and debris.

D. Remove projections capable of damaging roofing materials.

E. Concrete Decks, except Insulating Concrete:

1. Test concrete decks for moisture according to ASTM D4263 before installing roofing materials.
2. Prime concrete decks. Keep primer back 100 mm (f4our inches) from precast concrete deck joints.
3. Allow primer to dry before application of bitumen.

F. Existing Membrane Roofs and Repair Areas:

1. Comply with Section 07 01 50.19 PREPARATION FOR REROOFING.

3.3 TEMPORARY PROTECTION

A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.

B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.

C. Temporarily seal exposed insulation surfaces within roofing membrane.

1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.
2. Direct water away from work. Provide drainage, preventing water accumulation.
3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.

D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.

1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.

E. Remove sandbags and store for reuse.

3.4 INSTALLATION, GENERAL

A. Install products according to manufacturer's instructions.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Comply with NRCA Manual installation requirements.
C. Comply with UL 580 or UL 1897 for uplift resistance.
D. Do not allow membrane and flashing to contact surfaces contaminated with asphalt, coal tar, oil, grease, or other substances incompatible with EPDM.

3.5 ROOFING INSTALLATION

A. Install membrane perpendicular to long dimension of insulation boards.
B. Begin membrane installation at roof low point and work towards high point. Lap membrane shingled in water flow direction.
C. Position membrane free of buckles and wrinkles.
D. Roll membrane out; inspect for defects as membrane is unrolled. Remove defective areas:
   1. Allow 30 minutes for membrane to relax before proceeding.
   2. Lap edges and ends minimum 75 mm (3 inches). Clean lap surfaces.
   3. Install seam adhesive or tape, unless furnished with factory applied adhesive strips. Apply pressure to develop full adhesion.
   4. Check seams to ensure continuous adhesion and correct defects.
   5. Finish seam edges with beveled bead of lap sealant.
   6. Finish seams same day as membrane is installed.
   7. Anchor membrane perimeter to roof deck and parapet wall as indicated on drawings.
E. Membrane Perimeter Anchorage:
   1. Install batten with fasteners at perimeter of each roof area, curb flashing, expansion joints and similar penetrations on top of roof membrane as indicated on drawings.
   2. Mechanical Fastening:
      a. Space fasteners maximum 300 mm (12 inches) on center, starting 25 mm (1 inch) from ends.
      b. When battens are cut, round edge and corners before installing.
      c. Set fasteners in lap sealant and cover fastener head with fastener sealer, including batten.

d. Stop batten where batten interferes with drainage. Space ends of batten 150 mm (6 inch) apart.

e. Cover batten with 225 mm (9 inch) wide strip of flashing sheet. Seal laps with lap seam adhesive and finish edges with lap sealant.

f. At parapet walls intersecting building walls and curbs, secure roofing membrane to structural deck with fasteners 150 mm (6 inches) on center or as shown in NRCA Manual.

F. Adhered System Installation:

1. Apply bonding adhesive in quantities required by roofing membrane manufacturer.
2. Fold sheet back on itself, clean and coat the bottom side of the membrane and the top of substrate with adhesive. Do not coat the lap joint area.
3. After adhesive has set according to adhesive manufacturer's instructions, roll roofing membrane into adhesive minimizing voids and wrinkles.
4. Repeat for other half of sheet.
5. Cut voids and wrinkles to lay flat. Clean and patch cut area.

G. Mechanical Fastened System Installation:

1. Secure roofing membrane to structural deck with fasteners through battens to achieve specified wind uplift performance.
   a. Drill pilot holes for fasteners installed into cast-in-place concrete. Drill hole minimum 10 mm (3/8 inch) deeper than fastener penetration.
2. When fasteners are installed within membrane laps, locate battens minimum 13 mm (1/2 inch) from edge of sheets.
3. Apply lap sealant under battens and anchor to deck while lap sealant is still fluid. Cover fastener head with fastener sealer.
4. Where fasteners are installed over roofing membrane after seams are welded, cover fasteners with minimum 200 mm (8 inch) diameter EPDM membrane cap centered over fasteners. Where battens are used cover battens with minimum 200 mm (8 inch) wide EPDM strip cap centered over batten. Splice caps to roofing membrane and finish edges with lap sealant.

3.6 FLASHING INSTALLATION

A. Install flashings on same day as roofing membrane is installed. When flashing cannot be completely installed in one day, complete installation until flashing is watertight and provide temporary covers or seals.

B. Flashing Roof Drains:

1. Install roof drain flashing according to roofing membrane manufacturer's instructions.
   a. Coordinate to set the metal drain flashing in asphalt roof cement, holding cement back from the edge of the metal flange.
   b. Do not allow roof cement to contact EPDM roofing membrane.
   c. Adhere roofing membrane to metal flashing with bonding adhesive.
2. Turn metal drain flashing and roofing membrane down into drain body. Install clamping ring and strainer.

C. Installing Base Flashing and Pipe Flashing:

1. Install flashing sheet to pipes, walls and curbs to minimum 200 mm (8 inches) height above roof surfaces and extend roofing manufacturer's standard lap dimension onto roofing membranes.
   a. Adhere flashing with bonding adhesive.
   b. Form inside and outside corners of flashing sheet according to NRCA Manual. Form pipe flashing according to NRCA Manual.
   c. Lap ends roofing manufacturer's standard dimension.
   d. Adhesively splice flashing sheets together, and adhesively splice flashing sheets to roofing membranes. Finish exposed edges with lap sealant.
2. Anchor top of flashing to walls and curbs with fasteners spaced maximum 150 mm (6 inches) on center. Use surface mounted fastening strip with sealant on ducts. Use pipe clamps on pipes or other round penetrations.
3. Apply sealant to top edge of flashing.

D. Repairs to Membrane and Flashings:

1. Remove sections of roofing membrane or flashing sheet that are creased, wrinkled, or fishmouthed.
2. Cover removed areas, cuts and damaged areas with patch extending 100 mm (4 inches) beyond damaged, cut, or removed area. Adhesively splice patch to roofing membrane or flashing sheet. Finish edge of lap with lap sealant.

3.7 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 00, QUALITY CONTROL

1. Fastener Pull Out Tests: ANSI/SPRI FX-1; one test for every 230 square meter (2,500 square foot) of deck. Perform tests for each combination of fastener type and roof deck type before installing roof insulation.
   a. Test at locations selected by Contracting Officer's Representative.
   b. Do not proceed with roofing work when pull out resistance is less than manufacturer's required resistance.
   c. Test Results:
      1) Repeat tests using different fastener type or use additional fasteners achieve pull out resistance required to meet specified wind uplift performance.
      2) Patch cementitious deck to repair areas of fastener tests holes.
2. Examine and probe roofing membrane and flashing seams in presence of Contracting Officer's Representative and Manufacturer's field representative.
3. Probe seams to detect marginal bonds, voids, skips, and fishmouths.
4. Cut 100 mm (4 inch) wide by 300 mm (12 inch) long samples through seams where directed by Contracting Officer's Representative.
5. Cut one sample for every 450 meter (1500 feet) of seams.
6. Cut samples perpendicular to seams.
7. Failure of samples to pass ASTM D1876 test will be cause for rejection of work.
8. Repair areas where samples are taken and where marginal bond, voids, and skips occur.
9. Repair fishmouths and wrinkles by cutting to lay flat. Install patch over cut area extending 100 mm (4 inches) beyond cut.

3.8 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed roofing surfaces. Remove contaminants and stains .

3.9 PROTECTION

A. Protect roofing system from construction operations.

1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.

B. Loose lay temporary insulation board overlaid with plywood or OSB.
1. Weight boards to secure against wind uplift.

C. Remove protection when directed by Contacting Officer's Representative .

D. Repair damage.

- - E N D - -

SECTION 07 84 00
FIRESTOPPING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.

B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK:

A. Expansion and seismic joint firestopping: Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.

B. Sealants and application: Section 07 92 00, JOINT SEALANTS.

C. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS , Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Installer qualifications.

D. Inspector qualifications.

E. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.

F. List of FM, UL, or WH classification number of systems installed.

G. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

H. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

1.4 DELIVERY AND STORAGE:

A. Deliver materials in their original unopened containers with manufacturer’s name and product identification.

B. Store in a location providing protection from damage and exposure to the elements.

1.5 QUALITY ASSURANCE:

A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements." Submit qualification data.

C. Inspector Qualifications: Contractor to engage a qualified inspector to perform inspections and final reports. The inspector to meet the criteria contained in ASTM E699 for agencies involved in quality assurance and to have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. The inspector to be completely independent of, and divested from, the Contractor, the installer, the manufacturer, and the supplier of material or item being inspected. Submit inspector qualifications.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

E84-14.....Surface Burning Characteristics of Building Materials

E699-09.....Standard Practice for Evaluation of Agencies Involved in Testing, Quality Assurance, and Evaluating of Building Components

E814-13a.....Fire Tests of Through-Penetration Fire Stops

E2174-14.....Standard Practice for On-Site Inspection of Installed Firestops

E2393-10a.....Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers

C. FM Global (FM):

Annual Issue Approval Guide Building Materials

4991-13.....Approval of Firestop Contractors

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

723-10(2008).....Standard for Test for Surface Burning Characteristics of Building Materials

1479-04(R2014).....Fire Tests of Through-Penetration Firestops

E. Intertek Testing Services - Warnock Hersey (ITS-WH):
Annual Issue Certification Listings

F. Environmental Protection Agency (EPA):
40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS:

A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.

B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 in.) nominal pipe or 0.01 sq. m (16 sq. in.) in overall cross sectional area.

C. Firestop sealants used for firestopping or smoke sealing to have the following properties:

1. Contain no flammable or toxic solvents.
2. Release no dangerous or flammable out gassing during the drying or curing of products.
3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
5. VOC Content: Firestopping sealants and sealant primers to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
   a. Sealants: 250 g/L.
   b. Sealant Primers for Nonporous Substrates: 250 g/L.

c. Sealant Primers for Porous Substrates: 775 g/L.

D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:
   1. Classified for use with the particular type of penetrating material used.
   2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
   3. For unenclosed cable use firestop grommets to permanently seal small cable penetrations in fire rated wall construction.

E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.

F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.

G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.

H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
   1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
   2. For floor penetrations with annular spaces exceeding 101 mm (4 in.) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.
   3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS:

A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.

B. Provide mineral fiber filler and bond breaker behind sealant.

C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.

D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

2.3 COLOR:

A. Firestopping sealants used within utility spaces or not visible to the public shall be red. Other locations shall be paintable.

PART 3 - EXECUTION

3.1 EXAMINATION:

A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.

B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION:

A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer’s recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from

firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION:

A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP:

A. As work on each floor is completed, remove materials, litter, and debris.

B. Clean up spills of liquid type materials.

C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.

D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK:

A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).

B. Furnish service of approved inspector to inspect firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

A. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING. See this specification for fire-rated sealant materials and installation.

B. Sound Rated Gypsum Partitions/Sound Sealants: Section 09 29 00, GYPSUM BOARD.

C. Mechanical Work: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION .

1.3 QUALITY ASSURANCE:

A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.

B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.

C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.

1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

D. Lab Tests: Submit samples of materials that will be in contact or affect joint sealants to joint sealant manufacturers for tests as follows:

1. Adhesion Testing: Before installing elastomeric sealants, test their adhesion to protect joint substrates according to the method in ASTM C794 to determine if primer or other specific joint preparation techniques are required.
2. Compatibility Testing: Before installing elastomeric sealants, determine compatibility when in contact with glazing and gasket materials.
3. Stain Testing: Perform testing per ASTM C1248 on interior and exterior sealants to determine if sealants or primers will stain adjacent surfaces. No sealant work is to start until results of these tests have been submitted to the Contracting Officer Representative (COR) and the COR has given written approval to proceed with the work.1.4 certification:

A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Sustainable Design Submittals, as described below:
   1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
C. Installer qualifications.
D. Contractor certification.
E. Manufacturer's installation instructions for each product used.
F. Cured samples of exposed sealants for each color.
G. Manufacturer's Literature and Data:
   1. Primers
   2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.
H. Manufacturer warranty.

1.5 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
   a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
   b. When joint substrates are wet.

B. Joint-Width Conditions:
1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:
1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.7 DEFINITIONS:

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Backing Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International (ASTM):

C509-06	Elastomeric Cellular Preformed Gasket and Sealing Material
C612-14	Mineral Fiber Block and Board Thermal Insulation
C717-14a	Standard Terminology of Building Seals and Sealants
C734-06(R2012)	Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
C794-10	Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
C919-12.	Use of Sealants in Acoustical Applications.
C920-14a	Elastomeric Joint Sealants.
C1021-08(R2014)	Laboratories Engaged in Testing of Building Sealants
C1193-13	Standard Guide for Use of Joint Sealants.
C1248-08(R2012)	Test Method for Staining of Porous Substrate by Joint Sealants
C1330-02(R2013)	Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
C1521-13	Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
D217-10	Test Methods for Cone Penetration of Lubricating Grease
D1056-14	Specification for Flexible Cellular Materials—Sponge or Expanded Rubber
E84-09	Surface Burning Characteristics of Building Materials

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

D. Environmental Protection Agency (EPA):

40 CFR 59(2014)	National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. Floor Joint Sealant:

1. ASTM C920, Type S or M, Grade P, Class 25, Use T. S-#F1
2. S-#F2 Provide location(s) of floor joint sealant as follows.

a. Control and expansion joints in floors, slabs, ceramic tile, and walkways.

C. Interior Sealants:

1. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system are to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
   a. Architectural Sealants: 250 g/L.
   b. Sealant Primers for Nonporous Substrates: 250 g/L.
   c. Sealant Primers for Porous Substrates: 775 g/L.
2. S-#I1 Vertical and Horizontal Surfaces: ASTM C920, Type S or M, Grade NS, Class 25.
3. Provide location(s) of interior sealant as follows:
   a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.
   b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.
   c. Interior surfaces of exterior wall penetrations.
   d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.
   e. Perimeter of lead faced control windows and plaster or gypsum wallboard walls.
   f. Exposed isolation joints at top of full height walls.
   g. Joints between bathtubs and ceramic tile; joints between shower receptors and ceramic tile; joints formed where nonplanar tile surfaces meet.
   h. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change.
   i. Behind escutcheon plates at valve pipe penetrations and showerheads in showers.

D. Acoustical Sealant:

1. Conforming to ASTM C919; flame spread of 25 or less; and a smoke developed rating of 50 or less when tested in accordance with ASTM E84. Acoustical sealant have a consistency of 250 to 310 when tested in accordance with ASTM D217; remain flexible and adhesive

after 500 hours of accelerated weathering as specified in ASTM C734; and be non-staining.

2. Provide location(s) of acoustical sealant as follows:
   a. Exposed acoustical joint at sound rated partitions.
   b. Concealed acoustic joints at sound rated partitions.
   c. Joints where item pass-through sound rated partitions.

2.2 COLOR:

A. Sealants used with exposed masonry are to match color of mortar joints.

B. Sealants used with unpainted concrete are to match color of adjacent concrete.

C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:

1. Type C: Closed-cell material with a surface skin.

C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 FILLER:

A. Mineral fiberboard: ASTM C612, Class 1.

B. Thickness same as joint width.

C. Depth to fill void completely behind back-up rod.

2.5 PRIMER:

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

2.6 CLEANERS-NON POROUS SURFACES:

A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering

with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:

a. Metal.

b. Glass.

c. Porcelain enamel.

d. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.
3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.

1. Apply primer prior to installation of back-up rod or bond breaker tape.
2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.

B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.

C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.

D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.

E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to “skin” over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
11. Replace sealant which is damaged during construction process.

B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.

C. Interior Sealants: Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
   1. Extent of Testing: Test completed elastomeric sealant joints as follows:
      a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
      b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.

B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.

C. Inspect tested joints and report on following:
   1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
   2. Compare these results to determine if adhesion passes sealant manufacturer’s field-adhesion hand-pull test criteria.
   3. Whether sealants filled joint cavities and are free from voids.
   4. Whether sealant dimensions and configurations comply with specified requirements.

D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.

E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.

F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.

B. Leave adjacent surfaces in a clean and unstained condition.

---END---

---INTENTIONALLY BLANK---

SECTION 07 95 13
EXPANSION JOINT COVER ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Prefabricated floor, wall, and ceiling seismic and building expansion joint assemblies.
   a. Metal plate covers at floor wall and ceiling joints.
   b. Elastomeric joint covers at wall and ceiling joints.
   c. Preformed elastomeric sealant joint at interior floor and wall control joints.
   d. Match existing wall to suspended acoustic ceiling panel expansion joint. Width: 4-5”.

1.2 RELATED REQUIREMENTS

A. Color of Elastomer Inserts, Filler Strips, Exterior Wall Seals and Metal Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.

B. American Society of Civil Engineers (ASCE):

1. ASCE/SEI 7-10 - Minimum Design Loads For Buildings and Other Structures.

C. ASTM International (ASTM):

1. A36/A36M-14 - Structural Steel.
2. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.
3. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.
4. A786/A786M-05(2009) - Hot-Rolled Carbon, Low-Alloy, High-Strength Low-Alloy, and Alloy Steel Floor Plates.
5. B36/B36M-13 - Brass, Plate, Sheet, Strip, and Rolled Bar.
6. B121/B121M-11 - Leaded Brass Plate, Sheet, Strip and Rolled Bar.
7. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
8. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
9. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
10. B221M 13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
11. B455-10 - Copper-Zinc-Lead Alloy (Leaded-Brass) Extruded Shapes.

12. C864-05(2011) - Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.
13. D1187/D1187M-97(2011)e1 - Asphalt-Base Emulsions for Use as Protective Coatings for Metal.
14. E1399/E1399M-97(2013)e1 - Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems.
15. E1966-15 - Standard Test Method for Fire-Resistive Joint Systems.

D. National Association of Architectural Metal Manufacturers (NAAMM):
1. AMP 500-06 - Metal Finishes Manual.

E. UL LLC (UL):
1. 2079-15 - Standard for Tests for Fire Resistance of Building Joint Systems.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this Section.
1. Required Participants:
a. Contracting Officer's Representative (COR).
b. Architect/Engineer.
c. Inspection and Testing Agency.
d. Contractor.
e. Installer.
f. Manufacturer's field representative.
g. Other installers responsible for adjacent and intersecting work.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
a. Installation schedule.
b. Installation sequence.
c. Preparatory work.
d. Protection before, during, and after installation.
e. Installation.
f. Terminations.
g. Transitions and connections to other work.
h. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Include large-scale details indicating profiles of each type of expansion joint cover, splice joints between joint sections, transitions to other assemblies, terminations, anchorages, fasteners, and relationship to adjoining work and finishes.
2. Show size, configuration, and fabrication and installation details.
3. Include composite drawings showing work specified in other Sections coordinated with expansion joints.

C. Manufacturer's Literature and Data:

1. Description of each product specified.
2. Show movement capability of each cover assembly and suitability of material used in exterior seals for ultraviolet exposure .
3. Description of materials and finishes.
4. Installation instructions.

D. Samples: Submit 300 mm (12 inch) long samples.

1. Each type and color of metal finish for each required thickness and alloy.
2. Each type and color of flexible seal.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
   a. Identify volatile organic compound types and quantities.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list .

G. Certificates: Indicate products comply with specifications.

1. Fire rated expansion joint cover assemblies.

H. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting expansion joint cover assembly fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Provide joint cover assemblies that permit unrestrained movement of joint without disengagement of cover, and, where applicable, maintain moisture, watertight and fire-rated protection.

B. Provide templates to related trades for location of support and anchorage items.

2.2 SYSTEM PERFORMANCE

A. Design expansion joint cover assemblies complying with specified performance.

B. Joint Movement: ASTM E1399.

1. Nominal Joint Width: 6 mm (2 inches).
2. Minimum Movement Capability: 25 percent.
3. Movement Type: Seismic .

C. Floor Joints: Live loads, including rolling loads.

1. Load Resistance: ASCE/SEI 7; Design criteria as indicated on Drawings.
2. Maximum Deflection: 1/360 of span, maximum.

D. Fire Rated Joints: ASTM E1399, ASTM E1966, or UL 2079, including hose stream test at full-rated period.
1. Fire rating: Match adjacent floor, wall, and ceiling construction.
2. System: Capable of anticipated movement while maintaining fire rating.
3. Coverless Applications: Maintain fire rating without joint cover system.

2.3 MATERIALS

A. Stainless Steel: ASTM A240/A240M, Type 302 or 304.

B. Structural Steel Shapes: ASTM A36/A36M.

C. Steel Plate: ASTM A283/A283M, Grade C.

D. Rolled Steel Floor Plate: ASTM A786/A786M.

E. Aluminum:
1. Extruded: ASTM B221M (ASTM B221), alloy 6063-T5, 6063-T6, or 6061-T6.
2. Plate and Sheet: ASTM B209M (ASTM B209), alloy 6061-T6.

F. Elastomeric Sealant: As specified in Section 07 92 00, JOINT SEALANTS.

G. Elastomeric Seals:
1. Flexible extruded polyvinyl chloride, meeting a Shore A hardness of 75 with UV stabilizer. Manufacturer's standard colors.

H. Thermoplastic Rubber:
1. ASTM C864.
2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.

I. Compression Seals: Pre-compressed secondary sealant using preformed expanding foam sealant; open-cell polyurethane foam impregnated with polymer-modified acrylic adhesive.

J. Water Barrier Sheets: Neoprene or EPDM flexible sheet materials minimum 45 mils thick.
1. Provide with drain tubes for horizontal applications.

K. Vinyl Invertor Sealant Waterstops: Manufacturer's standard shapes and grade.

L. Moisture Barrier: Fabric reinforced clear vinyl sheet material sized to accommodate opening.

M. Flexible Membrane: 1.5 mm (60 mil) EPDM sheet, with manufacturer's standard support foam.

N. Fire Barrier: Labeled by an approved independent testing laboratory for fire resistance rating ratings indicated for maximum joint width.

a. Thermal Insulation: Manufacturer's standard with factory cut miters and transitions.

b. Fire Barrier Lengths:

1) Joint widths up to and including 150 mm (6 inches): Maximum 15 m (50 feet) to minimize field splicing.

2) Other Joint widths: 3 m (10 foot) with overlapping ends for field splicing.

O. Ceramic Blanket: Manufacturer's standard joint filler to achieve fire rating indicated.

P. Butyl Caulk Tape: Self adhering double sided butyl rubber sealant tape with easy-release silicone coated paper.

2.4 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer.

1. Provide ceiling and wall expansion joint cover assemblies design matching floor to wall and floor to floor expansion joint cover design.

2. Provide expansion joint cover assembly designs, profiles, materials and configuration indicated, as required to accommodate joint size variations in adjacent surfaces, and anticipated movement.

C. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.

2. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.

3. Aluminum Recycled Content: 80 percent total recycled content, minimum.

4. Low Pollutant-Emitting Materials: Maximum VOC content by weight.

a. Non-Flooring Adhesives and Sealants.

2.5 FABRICATION

A. Fabricate Expansion Joint Cover Assemblies:

1. As complete assembly ready for installation.

2. In longest practicable lengths to minimize number of end joints.

3. With factory mitered corners where joint changes directions or abuts other materials.
   a. With closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
4. Joints within enclosed spaces such as chase walls, include 1 mm (0.04 inch) thick galvanized steel cover where conventional expansion joint cover is not used.
5. Where floor slab is fire rated provide ceramic blanket at joints.
6. Seal Strip: Factory-formed and bonded to metal frames and anchor members.
7. Compression Seals: Fabricate from expanding foam as secondary seal and elastomeric sealant to sizes and profiles shown.

B. Floor-to-Floor Metal Plate Joints:
1. Frames: Metal, continuous on both sides of joint designed to support cover plate.
   a. Flush Design: Seating surface and raised floor rim to accommodate adjacent flooring.
   b. Anchorage: Concealed bolt and steel anchors for embedment in concrete.
2. Cover Plate: Metal, matching frames where exposed.
   a. Supported Load: 19.2 MPa (400 psf), minimum.
   b. Rattle-free due to traffic.
3. Fillers: Resilient material between raised rim of frame and edge of cover plate, where shown.
   a. No gaps or bulges over full design range joint movement.
4. Fire Barrier: As required for fire resistance rating.
5. Water Stop: Manufacturer's standard, continuous, full length of joint.
6. Seismic: As required by Code.
7. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

C. Floor-to-Wall Metal Plate Joints:
1. Frames: Metal, continuous on floor side of joint only.
   a. Provide wall side frame where required by manufacturer's design.
2. Cover Plates: Angle cover plates with countersunk flat-head exposed fasteners for securing cover plate to wall unless shown otherwise.
   a. Fastener Spacing: As recommended by manufacturer.
3. Joint Design: Match adjacent floor to floor design.

4. Fire Barrier: As required for fire resistance rating.
5. Water Stop: Manufacturer's standard, continuous, full length of joint.
6. Seismic: As required by Code.
7. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

D. Interior Wall Joint Cover Assemblies:
1. Frame: Metal, surface mounted, concealed fastening to wall on one sides of joint.
2. Cover Plate: Metal, smooth surface, lap both sides of joint and permitting free movement on one side.
   a. Fabricate with concealed attachment of cover to frame when cover is in close contact with adjacent wall surface finish.
   b. Use angle cover plates at intersecting walls.
3. Joint Design: Match adjacent floor to floor design.
4. Fire Barrier: As required for fire resistance rating.
5. Seismic: As required by Code.
6. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

E. Extruded Thermoplastic Rubber Joint Assemblies:
1. Frames: Aluminum, both sides of joint.
2. Primary Seal: Flexible rubber on exposed face after frame installation with factory welded watertight miters and transitions.
   a. Anchor spaced at ends and not over 600 mm (24 inches).
      1) Variable movement extruded rubber primary seal designed to remain in aluminum frame, throughout movement of joint.
   b. Flush mounted seal minimum 3 mm (0.12 inch) thick with dual movement grooves designed for plus or minus 50 percent, movement of joint width.
   c. Seismic seal minimum 3 mm (0.12 inch) thick with multi-movement grooves designed for plus or minus 100 percent movement of joint width.
   d. Recessed front face seal minimum 3 mm (0.12 inch) thick with no movement grooves, designed for plus or minus 50 percent movement of joint width.
   e. Provide pantographic wind load supports, maximum 2400 mm (8 feet) on center to support seal systems of 300 mm (12 inches) wide and greater.
3. Secondary Seal: Continuous vinyl sheet seal.

4. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

F. Ceiling and Soffit Assemblies:

1. Frames: Metal, continuous on both sides of joint, flush mounted with no exposed fasteners.
2. Flexible Insert: Variable movement semi-rigid vinyl locked into frame.
   a. Face Style: Flush or accordion, as shown, to span joint width without sagging.
3. Seismic: As required by Code.
4. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

G. Preformed Sealant Joint: Factory installed elastomeric sealant between extruded aluminum angle frame both sides.

1. Frames: Extruded aluminum angle on both sides of joint.
2. Filler: Elastomeric sealant.
3. Anticipated movement: 25 percent maximum.
4. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

2.6 FINISHES

A. Carbon Steel: NAAMM AMP 500, Galvanized G90.

B. Stainless Steel: NAAMM AMP 500, No. 2B bright finish.

C. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

D. Aluminum Paint Finish:

1. Fluorocarbon Finish: AAMA 2605; 70 percent fluoropolymer resin, 2-coat system.
2. Fluorocarbon Finish: AAMA 605; 70 percent fluoropolymer resin, 2-coat system.

2.7 ACCESSORIES

A. General: Manufacturer's standard anchors, fasteners, set screws, spaces, protective coating, and filler materials, adhesive and other accessories required for installation.

B. Barrier Coating: ASTM D1187/D1187M.

C. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

D. Fasteners: Type and size recommended by expansion joint cover assembly manufacturer.
   1. Exterior Applications: Stainless steel.
   2. Fasteners for Aluminum: Stainless steel.
   3. Other Applications: Galvanized steel or stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Provide items embedded in concrete and masonry in time for building into work without delaying work.
B. Protect existing construction and completed work from damage.
C. Apply barrier coating to aluminum brass bronze steel surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings .
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for the COR’s consideration.
B. Install anchorage devices and fasteners for securing expansion joint assemblies to in-place construction where anchors are not embedded in concrete and masonry.
   1. Secure with metal fasteners, type and size to suit application.
C. Perform cutting, drilling and fitting required for installation of expansion joint cover assemblies.
D. Install joint cover assemblies aligned and positioned in correct relationship to expansion joint opening and adjoining finished surfaces measured from established lines and levels.
   1. Allow for thermal expansion and contraction of metal to avoid buckling.
   2. Accommodate joint opening size at time of installation.
E. Set floor covers at elevations flush with adjacent finished flooring, unless shown otherwise.
F. Grout floor frames set in prepared recesses.
G. Locate wall, ceiling and soffit covers in continuous contact with adjacent surfaces. Secure with required accessories.

H. Locate anchors at interval recommended by manufacturer, but minimum 75 mm (3 inches) from each end, and, maximum 600 mm (24 inches) on centers.

I. Maintain continuity of expansion joint cover assemblies with end joints held to a minimum and metal members aligned mechanically using splice joints.

J. Cut and fit ends to accommodate thermal expansion and contraction of metal to avoid buckling of frames and cover plates.

K. Flush Metal Cover Plates:
   1. Secure flexible filler between frames to allow compression and expansion.
   2. Adhere flexible filler materials to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.

L. Waterstops:
   1. Install in conjunction with floor joints, and where shown.
   2. Install continuously to prevent water damage to finish spaces.
   3. Seal waterstop to frames to prevent water leakage.
   4. Install drainage tubes from waterstops to discharge collected water in nearest plumbing air gap drain.

M. Fire Barriers:
   1. Install in compliance with tested assembly.
   2. Install at joints in floors and in fire rated walls.
   3. Use fire barrier sealant furnished with expansion joint assembly.

N. Apply sealant where required to prevent water and air infiltration.

O. Vertical Exterior Extruded Thermoplastic Rubber.
   1. Install side frames mounted on sealant or butyl caulk tape with appropriate anchors 600 mm (24 inches) on center complete with secondary seal.
   2. Install primary seals retained in extruded aluminum side frames.

P. Extruded Thermoplastic Rubber or Seals:
   1. For straight sections, install preformed seals in continuous lengths.
   2. Vulcanize or heat-seal field spliced joints to provide watertight joints as recommended by manufacturer.

Q. Preformed Elastomeric Sealant Joint:
   1. Locate joint directly over joints in wall and floor substrates.
   2. Fasten full length to substrate using construction adhesive.

3. Install flush or slightly below finish material.

R. Reuse existing expansion joint materials where possible and aesthetically cohesive.

3.3 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed metal surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Cover floor joints with plywood where wheel traffic occurs before Substantial completion.

B. Remove protective covering when adjacent work areas are completed. Clean exposed surfaces in compliance with manufacture's printed instructions.

- - E N D - -

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hollow metal doors hung in hollow metal frames at interior locations.
2. Hollow metal door frames for wood doors and borrowed lights at interior locations.
3. Glazed openings and louvers in hollow metal doors.

1.2 RELATED REQUIREMENTS

A. Forced Entry and Ballistic Resistant doors: Section 08 34 53, SECURITY DOORS AND FRAMES.

B. Door Hardware: Section 08 71 00, DOOR HARDWARE.

C. Glazing: Section 08 80 00, GLAZING.

D. Card Readers and Biometric Devices: Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.

E. Intrusion Alarm: Section 28 16 00, INTRUSION DETECTION SYSTEM.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standard Institute (ANSI):

1. A250.8-2014 - Standard Steel Doors and Frames.

C. ASTM International (ASTM):

1. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
2. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip.
3. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
4. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
5. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
6. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
7. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
8. D3656/D3656M-13 - Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns.

9. E90-09 - Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.

D. Federal Specifications (Fed. Spec.):

1. L-S-125B - Screening, Insect, Nonmetallic.

E. Master Painters Institute (MPI):

1. No. 18 - Primer, Zinc Rich, Organic.

F. National Association of Architectural Metal Manufacturers (NAAMM):

1. AMP 500-06 - Metal Finishes Manual.

G. National Fire Protection Association (NFPA):

1. 80-16 - Fire Doors and Other Opening Protectives.

H. UL LLC (UL):

1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.
2. 1784-15 - Air Leakage Tests of Door Assemblies and Other Opening Protectives.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Include schedule showing each door and frame requirements fire label and smoke control label for openings.
3. Installation instructions.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Test reports: Certify each product complies products comply with specifications.

1. Sound rated door.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design hollow metal doors and frames complying with specified performance:

1. Fire Doors and Frames: UL 10C; NFPA 80 labeled.
   a. Fire Ratings: See drawings.
2. Smoke Control Doors and Frames: UL 1784; NFPA 80 labeled, maximum 0.15424 cu. m/s/sq. m (3.0 cfm/sf) at 24.9 Pa (0.10 inches water gage) pressure differential.
3. Sound Rated Doors and Frames: Minimum 45 sound transmission class (STC) when tested according to ASTM E90.

2.2 MATERIALS

A. Sheet Steel: ASTM A1008/A1008M, cold-rolled.

B. Galvanized Sheet Steel: ASTM A653.

C. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

D. Provide hollow metal doors and frames from one manufacturer.

E. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.

2. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.

2.3 HOLLOW METAL DOORS

A. Hollow Metal Doors: ANSI A250.8; 44 mm (1-3/4 inches) thick. See drawings for sizes and designs.

B. Interior Doors: Pharmacy entrance doors from corridor locations are specified in Section 08 34 53, SECURITY DOORS AND FRAMES.

C. Door Faces:

1. Interior Doors: Galvanized sheet steel minimum Z275 (G90) coating.

D. Door Cores:

1. Interior Doors: vertical steel stiffeners.
2. Fire Doors: Manufacturer's standard complying with specified fire rating performance.

2.4 HOLLOW METAL FRAMES

A. Hollow Metal Frames: ANSI A250.8; face welded. See drawings for sizes and designs.

1. Interior Frames:

a. Level 2 Hollow Metal Doors: 1.3 mm (0.053 inch) thick all doors except Pharmacy entrance Corridor doors.

b. Wood Doors and Borrowed/Side Lights : 1.3 mm (0.053 inch) thick.

2. Interior Borrowed/Side Light Frames: 1.3 mm (0.051 inch) thick.

B. Frame Materials:

1. Interior Frames: Galvanized sheet steel minimum Z275 (G90) coating.

2.5 LOUVERS

A. Louver Style: Sight-proof lightproof permitting free ventilation.

1. Provide insect screen and wire guards at exterior doors.

B. Louver Construction: Sheet metal matching door faces.

1. Interior Door Louvers: 0.8 mm (0.032 inch) thick.

2.6 FABRICATION

A. Hardware Preparation: ANSI A250.8; for hardware specified in Section 08 71 00, DOOR HARDWARE.

B. Hollow Metal Door Fabrication:

1. Close top edge of exterior doors flush and seal to prevent water intrusion.
2. Fill spaces between vertical steel stiffeners with insulation.

C. Fire and Smoke Control Doors:

1. Close top and vertical edges flush.

2. Apply steel astragal to active leaf at pair and double egress doors.
   a. Exception: Where vertical rod exit devices are specified for both leaves swinging in same direction.
3. Fire and Smoke Control Door Clearances: NFPA 80.

D. Sound Rated Doors:
1. Seals: Integral spring type automatic door bottom seal.
2. Fabricate vision panel cutouts and frames to receive double glazing as shown on drawings.

E. Transom Panel Fabrication:
1. Fabricate panels as specified for doors.
2. Fabricate bottom edge with rabbet stop where no transom bar occurs.

F. Hollow Metal Frame Fabrication:
1. Fasten mortar guards to back of hardware reinforcements, except on lead-lined frames.
2. Concealed Closers in Head Frame: Provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed face plates and control valves, except when cover plates are furnished with closer.
3. Terminated Stops: ANSI A250.8.
4. Borrowed Light and Panel Opening Frames:
   a. Provide integral stop on exterior, corridor, or secure side of door.
   b. Design rabbet width and depth to receive glazing material or panel shown on drawings.
5. Two Piece Frames:
   a. One piece unequal leg finished rough buck sub-frames as shown, drilled for anchor bolts.
   b. Unequal leg finished frames formed to fit subframes and secured to subframe legs with countersunk, flat head screws, spaced 300 mm (12 inches) on center at head and jambs on both sides.
   c. Preassemble at factory for alignment.
6. Frame Anchors:
   a. Floor anchors:
      1) Provide extension type floor anchors to compensate for depth of floor fills.
      2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.

3) Provide 50 mm by 50 mm by 9 mm (2 inch by 2 inch by 3/8 inch) clip angle for lead lined frames, drilled for floor fasteners.
4) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.
5) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
   a) Space floor bolts50 mm (24 inches) on center.

b. Jamb anchors:
1) Place anchors on jambs:
   a) Near top and bottom of each frame.
   b) At intermediate points at maximum 600 mm (24 inches) spacing.
2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.
3) Anchors set in masonry: Provide adjustable anchors designed for friction fit against frame and extended into masonry minimum 250 mm (10 inches). Provide one of following types:
   a) Wire Loop Type: 5 mm (3/16 inch) diameter wire.
   b) T-Shape type.
   c) Strap and stirrup type: Corrugated or perforated sheet steel.
4) Anchors for stud partitions: Provide tabs for securing anchor to sides of studs. Provide one of the following:
   a) Welded type.
   b) Lock-in snap-in type.
5) Anchors for frames set in prepared openings:
   a) Steel pipe spacers 6 mm (1/4 inch) inside diameter, welded to plate reinforcing at jamb stops, or hat shaped formed strap spacers 50 mm (2 inches) wide, welded to jamb near stop.
   b) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass through frame and spacers.
   c) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
6) Anchors for observation windows and other continuous frames set in stud partitions.

a) Weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
b) Space maximum 600 mm (24 inches) on centers.

7) Modify frame anchors to fit special frame and wall construction.
8) Provide special anchors where shown on drawings and where required to suit application.

G. Sound Rated Door Frames:
1. Seals: Integral continuous gaskets on frames.

H. Louver Fabrication:
1. Fabricate louvers as complete units.
2. Weld stationary blades to frames.
3. Factory install louvers in door cutouts, welded to door.

2.7 FINISHES

A. Galvanized Steel: ANSI A250.8; shop primed.
B. Finish exposed surfaces after fabrication.

2.8 ACCESSORIES

A. Primers: ANSI A250.8.
B. Barrier Coating: ASTM D1187/D1187M.
C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
D. Clips Connecting Members and Sleeves: Match door faces.
E. Fasteners: stainless steel .
1. Metal Framing: Steel drill screws.
2. Masonry and Concrete: Expansion bolts and power actuated drive pins.
F. Anchors: stainless steel.
G. Galvanizing Repair Paint: MPI No. 18.
H. Insulation: Unfaced mineral wool.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and reviewed submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for the COR's consideration.
2. Install fire doors and frames according to NFPA 80.
3. Install smoke control doors and frames according to NFPA 105.

3.3 FRAME INSTALLATION

A. Apply barrier coating to concealed surfaces of frames built into masonry.

B. Plumb, align, and brace frames until permanent anchors are set.
   1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
   2. Use wood spreaders at bottom of frame when shipping spreader is removed.
   3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
   4. Remove wood spreaders and braces when walls are built, and jamb anchors are secured.

C. Floor Anchors:
   1. Anchor frame jambs to floor with two expansion bolts.
      a. Lead Lined Frames: Use 9 mm (3/8 inch) diameter bolts.
      b. Other Frames: Use 6 mm (1/4 inch) diameter bolts.
   2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.

D. Jamb Anchors:
   1. Masonry Walls:
      a. Embed anchors in mortar.
      b. Fill space between frame and masonry with grout or mortar as walls are built.
   2. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
   3. Prepared Masonry and Concrete Openings:
      a. Direct Securement: 6 mm (1/4 inch) diameter expansion bolts through spacers.
      b. Subframe or Rough Buck Securement:
         1) 6 mm (1/4 inch) diameter expansion bolts on 600 mm (24 inch) centers.
         2) Power activated drive pins on 600 mm (24 inches) centers.

c. Secure two-piece frames to subframe or rough buck with machine screws on both faces.

E. Frames for Sound Rated Doors: Fill frames with insulation.

F. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.

2. Repair painted surfaces with touch up primer.

3.4 DOOR INSTALLATION

A. Install doors plumb and level.

B. Adjust doors for smooth operation.

C. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.

2. Repair painted surfaces with touch up primer.

3.5 CLEANING

A. Clean exposed door and frame surfaces. Remove contaminants and stains.

3.6 PROTECTION

A. Protect doors and frames from traffic and construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

---END---

---INTENTIONALLY BLANK---

SECTION 08 14 00
INTERIOR WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior flush wood doors transparent finish.

a. Fire rated doors.

b. Smoke rated doors.

c. Acoustical doors.

1.2 RELATED REQUIREMENTS

A. Door Hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.

B. Installation of Doors and Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES and Section 08 71 00, DOOR HARDWARE.

C. Door Finish: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Window and Door Manufacturers Association (ANSI/WDMA):

1. I.S. 1A-13 - Architectural Wood Flush Doors.

2. I.S. 6A-13 - Interior Architectural Stile and Rails Doors.

C. ASTM International (ASTM):

1. E90-09 - Laboratory Measurements of Airborne Sound Transmission Loss of Building Partitions and Elements.

D. National Fire Protection Association (NFPA):

1. 80-16 - Fire Doors and Other Opening Protectives.

2. 252-12 - Fire Tests of Door Assemblies.

E. UL LLC (UL):

1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.

F. Window and Door Manufacturers Association (WDMA):

1. TM 7-14 - Cycle-Slam Test.

2. TM 8-14 - Hinge Loading Test.

3. TM 10-14 - Screw Holding Capacity.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

2. Include details of glazing and louvers.
3. Indicate project specific requirements not included in Manufacturer's Literature and Data submittal.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Fire rated doors showing conformance with NFPA 80.

D. Samples:
1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
2. Veneer sample 200 mm by 275 mm (8 inch by 11 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.

E. Sustainable Construction Submittals:
1. Low Pollutant-Emitting Materials:
a. Show volatile organic compound types and quantities.

F. Test Reports: Indicate each product complies products comply with specifications.
1. Screw Holding Capacity Test.
2. Cycle-Slam Test.
3. Hinge-Loading Test.

G. Operation and Maintenance Data:
1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:
1. Regularly and presently manufactures specified products. Manufactures specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
1. Minimum 0.15 mm (6 mil) polyethylene bags or cardboard packaging to remain unbroken during delivery and storage.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.
1. Identify door opening corresponding to Door Schedule.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight and conditioned facility.
   1. Store doors according to ANSI/WDMA I.S. 1A.
B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
   2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
   3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.
      a. Comply with door manufacturer's instructions for relative humidity.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
B. Manufacturer's Warranty: Warrant interior factory finished wood doors against material and manufacturing defects.
   1. Warranty Period: Lifetime of original installation.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
B. Provide each product from one manufacturer.

2.2 FLUSH WOOD DOORS

A. General:
   1. ANSI/WDMA I.S. 1A, Extra Heavy Duty.
   2. Adhesive: Type II.
   3. Core: Structural composite lumber, except when mineral core is required for fire rating.
   4. Thickness: 44 mm (1-3/4 inches) unless otherwise shown or specified.
   5. ANSI/WDMA I.S. 1A.
   6. One species throughout project unless scheduled or otherwise shown.
   7. Transparent Finished Faces: Premium Grade. rotary cut, white maple white birch red oak white oak-facility standard?.

a. AA Grade face veneer.
b. Match face veneers for doors for uniform effect of color and grain at joints.
c. Door Edges: Same species as door face veneer.
d. In existing buildings, where doors are required to have transparent finish, use wood species, grade, and assembly of face veneers to match adjacent existing doors.

8. Painted Finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay.
9. Factory sand doors for finishing.

B. Wood For Stops, Louvers, Muntins and Moldings For Flush Doors Required to Have Transparent Finish:

1. Solid wood of same species as face veneer, except maple is acceptable on birch doors.
2. Glazing:
   a. On non-fire-rated doors, use applied wood stops nailed tightly on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on center.
3. Wood Louvers:
   a. Door manufacturer's standard product, fabricated of solid wood sections.
   b. Wood Slats: minimum 5 mm (3/16 inch) thick.
   c. Stiles routed out to receive slats.
   d. Secure louvers in prepared cutouts with wood stops.

C. Stiles and Rails:

1. Composite material having screw withdrawal force greater than minimum performance level value when tested according to WDMA TM 10.
2. Provide adequate blocking for bottom of doors having mechanically operated door bottom seal meeting or exceeding performance duty level per WDMA TM 10 for horizontal door edge screw holding.
3. Rabbeted transom meeting rail edges match face veneers of doors. Bottom rail of transom panel match face veneer on non-rabbeted meeting rail edge.

D. Fire-Rated Wood Doors:

1. Fire Resistance Rating:
   a. B Label: 1-1/2 hours.

b. C Label: 3/4 hour.

2. Labels:
   a. Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
   b. Metal labels with raised or incised markings.
3. Performance Criteria for Stiles of Doors Utilizing Standard Mortise Leaf Hinges:
   a. Hinge Loading: WDMA TM 8. Average of 10 test samples for Extra Heavy Duty doors.
   b. Direct Screw Withdrawal: WDMA TM 10 for Extra Heavy Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
   c. Cycle-Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested according to WDMA TM 7.
4. Hardware Reinforcement:
   a. Provide fire and smoke rated doors with hardware reinforcement blocking.
   b. Size of lock blocks as required to secure hardware specified.
   c. Top, Bottom and Intermediate Rail Blocks: Minimum 125 mm (5 inches) by full core width.
   d. Reinforcement blocking in compliance with labeling requirements.
   e. Mineral material similar to core is not acceptable.
5. Other Core Components: Manufacturer's standard as allowed by labeling requirements.
6. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
7. Astragal: Steel type for pairs of doors.

E. Smoke Barrier Doors:
1. Glazed Vision Panel Frame: Steel approved for use in labeled doors.
2. Astragal: Steel type for pairs of doors, including double egress doors.

F. Sound Rated Doors:
1. Fabricated as specified for flush wood doors with additional construction requirements to comply with specified sound transmission class (STC).
2. STC Rating of door assembly in place when tested according to ASTM E90 by independent acoustical testing laboratory minimum 40 .
3. Accessories:

a. Frame Gaskets and Automatic Door Bottom Seal: As specified in Section 08 71 00, DOOR HARDWARE.

2.3 FABRICATION

A. Factory machine interior wood doors to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
   1. Factory fit fire rated doors according to NFPA 80.
B. Rout doors for hardware using templates and location heights specified in Section 08 71 00, DOOR HARDWARE.
C. Factory fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (2 inches) of door thickness undercut where shown.
D. Clearances between Doors and Frames and Floors:
   1. Fire Rated Doors: Comply with NFPA 80.
      a. Doors with Automatic Bottom Seal: Maximum clearance 10 mm (3/8 inch) at threshold.
      b. Other Door Bottoms: Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
   2. Door Jambs, Heads, and Meeting Stiles: Maximum 3 mm (1/8 inch).
E. Provide cutouts for glazed and louver openings.
F. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
G. Identify each door on top edge.
   1. Mark with stamp, brand or other indelible mark, giving manufacturer’s name, door’s trade name, construction of door, date of manufacture and quality.
   2. Mark door or provide separate certification including name of inspection organization.
   3. Identify door manufacturing standard, including glue type.
   4. Identify veneer and quality certification.
   5. Identification of preservative treatment for stile and rail doors.

2.4 FINISHES

A. Field Finished Doors: Seal top and bottom edges of doors with two coats of catalyzed polyurethane or water resistant sealer.
B. Factory Transparent Finish:
   1. Factory finish flush wood doors.
      a. ANSI/WDMA I.S. 1A Section F-3 Finish System Descriptions for System 5, Conversion Varnish or System 7, Catalyzed Vinyl.

b. Use stain when required to produce finish specified in Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Verify door frames are properly anchored.
   2. Verify door frames are plumb, square, in plane, and within tolerances for door installation.

B. Protect existing construction and completed work from damage.

C. Install astragal on active leaf of pair of smoke doors and one leaf of double egress smoke doors.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and reviewed submittal drawings.
   1. Install fire rated doors according to NFPA 80.
   2. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 PROTECTION

A. After installation, place shipping container over door and tape in place.
   1. Do not apply tape to door faces and edges.

B. Provide protective covering over exposed hardware in addition to covering door.

C. Maintain covering in good condition until removal is directed by Contracting Officer's Representative.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 08 31 13
ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Access doors and panels installed in walls and ceilings.

1.2 RELATED REQUIREMENTS

A. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.

B. Field Painting: Section 09 91 00, PAINTING.

C. Finish Color: Section 09 06 00, SCHEDULE FOR FINISHES.

D. Locations of Access Doors for Ductwork Cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Welding Society (AWS):

1. D1.3/D1.3M-08 - Structural Welding Code - Sheet Steel.

C. ASTM International (ASTM):

1. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Sip Process.
2. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
3. A666-15 - Annealed or Cold-Worked Austenitic Stainless-Steel sheet, Strip, Plate, and Flat Bar.
4. E119-15 - Fire Test of Building Construction and Materials.

D. National Fire Protection Association (NFPA):

1. 80-16 - Fire Doors and Other Opening Protectives.
2. 251-12 - Fire Tests of Door Assemblies.

E. National Association of Architectural Metal Manufacturers (NAAMM):

1. AMP 500-06 - Metal Finishes Manual.

F. UL LLC (UL):

1. Listed - Online Certifications Directory.
2. 10B-08 - Standard for Fire Tests of Door Assemblies.
3. 263-11 - Fire Tests of Building Construction and Materials.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting access door fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Steel Sheet: ASTM A1008/A1008M.

B. Galvanized Steel: ASTM A 653/A 653M.

C. Stainless Steel: ASTM A666; Type 302 or Type 304.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer.

C. Sustainable Construction Requirements:

1. Steel Access Doors Recycled Content: 30 percent total recycled content, minimum.
2. Stainless Steel Access Doors Recycled Content: 70 percent total recycled content, minimum.

2.3 ACCESS DOORS, FIRE-RATED

A. Door Construction:
   1. Ceiling Access Door Construction: ASTM E119 or UL 263.
   2. Wall Access Doors: NFPA 252 or UL 10B.
B. Label: Class B opening according to UL 10B or test by another nationally recognized laboratory. 1 hour fire-rated, 1-1/2 hour fire-rated, with maximum temperature rise of 120 degrees C (216 degrees F).
C. Door Panel: Minimum 0.9 mm (0.0359 inch) thick stainless steel sheet, with mineral-fiber insulation core, insulated sandwich type construction.
D. Frame: Minimum 1.5 mm (0.0598 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
   1. Frame Flange: Provide at units installed in concrete, masonry, or gypsum board.
   2. Exposed Joints in Flange: Weld and grind smooth.
E. Provide automatic closing device.
F. Hinge: Continuous stainless steel hinge with stainless steel pin.
G. Lock: Self-latching, mortise type with provision for fitting flush a standard screw-in type lock cylinder.
   1. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
   2. Latch release device operable from inside of door.
H. Anchors for Fire-Rated Access Doors: Comply with requirements of applicable fire test.

2.4 ACCESS DOORS, FLUSH PANEL, NON-RATED

A. Door Panel:
   1. 1.5 mm (0.06 inch) thick stainless steel sheet.
   2. Reinforce to maintain flat surface.
B. Frame:
   1. 1.5 mm (0.06 inch) thick stainless steel sheet, depth and configuration to suit material and construction type where installed.

2. Frame Flange: Provide at units installed in concrete, masonry, and gypsum board.
3. Exposed Joints in Flange: Weld and grind smooth.

C. Hinge:
1. Concealed spring hinge, 175 degrees of opening.
2. Removable hinge pin to allow removal of door panel from frame.

D. Lock:
1. Flush, screwdriver-operated cam lock.
2. Tamper proof screws (spanner head locks) for access panels in Behavioral Health Areas.

2.5 ACCESS DOOR, RECESSED PANEL, NON-RATED

A. Door Panel:
1. 1.2 mm (0.05 inch) thick stainless steel sheet to form a 25 mm (1 inch) deep recessed pan to accommodate installation of acoustical units and other materials where shown in walls and ceiling.
2. Reinforce to prevent sagging.

B. Frame:
1. 1.5 mm (0.06 inch) thick steel sheet of depth and configuration to suit installation in suspension system of ceiling or wall framing.
2. Extend sides of frame to protect edge of acoustical units when door panel is in open position.
3. Provide shims, bushings, clips and other devices necessary for installation.

C. Hinge: Continuous stainless steel hinge with stainless steel pin, or concealed hinge.

D. Lock:
1. Flush screwdriver-operated cam lock.
2. Plastic sleeve or stainless steel grommet to protect hole made in acoustical unit for screwdriver access to lock.
3. Tamper proof screws (spanner head locks) for access panels in Behavioral Health Areas.

2.6 FABRICATION - GENERAL

A. Size: Minimum 600 mm (24 inches) square door unless otherwise shown or required to suit opening in suspension system of ceiling.

B. Component Fabrication: Straight, square, flat and in same plane where required.

1. Exposed Edges: Slightly rounded, without burrs, snags and sharp edges.
2. Exposed Welds: Continuous, ground smooth.
3. Welding: AWS D1.3/D1.3M.

C. Locks and Non-Continuous Hinges: Provide in numbers required to maintain alignment of door panel with frame. For fire-rated doors, provide hinges and locks as required by fire test.

D. Anchoring: Make provisions in frame for anchoring to adjacent construction. Provide anchors in size, number and location on four sides to secure access door to substrate. Provide anchors as required by fire test.

2.7 FINISHES

A. Stainless Steel Exposed Surfaces: NAAMM AMP 500; No. 4 polished finish.

2.8 ACCESSORIES

A. Fasteners: Type and size recommended by access door manufacturer, to suit application.
1. Stainless Steel Access Doors: Stainless steel fasteners.
2. Other Access Doors: Stainless steel fasteners.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
1. Verify access door locations and sizes provide required maintenance access to installed building services components.

B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Install access doors and panels permitting access to service valves, traps, dampers, cleanouts, and other mechanical, electrical and conveyor control items concealed in walls and partitions and concealed above gypsum board and plaster ceilings.

C. Install fire rated access door according to NFPA 80.

D. Install fire-rated doors in fire-rated partitions and ceilings.

E. Install flush access panels in partitions and in gypsum board and plaster ceilings.

F. Install recessed panel access doors where necessary to access utility service valves, HVAC ductwork or controls or electrical devices.

3.3 ACCESS DOOR AND FRAME INSTALLATION

A. Wall Installations: Install access doors in openings with sides vertical.

B. Ceiling Installations: Install access doors parallel to ceiling suspension grid or room partitions.

C. Frames without Flanges: Install frame flush with surrounding finish surfaces.

D. Frames with Flanges: Overlap opening, with face uniformly spaced from finish surface.

E. Recessed Panel Access Doors: Install with face of surrounding materials flush with door panel installed finish.

F. Secure frames to adjacent construction with fasteners.

G. Install type, size and quantity of anchoring device suitable for material surrounding opening to maintain alignment, and resist displacement, during normal use of access door.

3.4 ADJUSTMENT

A. Adjust hardware so door panel opens freely.

B. Adjust door when closed so door panel is centered in frame.

- - E N D - -

SECTION 08 34 53
SECURITY DOORS AND FRAMES

PART 1 - GENERAL

2.1 DESCRIPTION

The extent of forced-entry resistant (FE) and ballistic resistant (BR) door assemblies required for the Project is indicated on Contract Drawings, and in Door/Frame/Hardware schedules, including construction, profiles, swing, sizes, hardware, accessories, devices, and locations.

2.2 RELATED WORK

A. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES: Doors and frames not designated for special security performances.

B. Section 08 14 00, INTERIOR WOOD DOORS: Doors and frames not designated for special security performances.

C. Section 08 71 00, DOOR HARDWARE: Door Hardware.

D. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEMS: Card readers and biometric devices.:

E. Section 28 16 00, INTRUSION DETECTION SYSTEM: Intrusion alarm.

2.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

F. ASTM International (ASTM):

A153/A153M-16a.....Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

A240/A240M-20.....Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and General Applications

A653/A653M-20.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process

A1008/A1008M-20.....Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable

A1011/A1011M-18a.....Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength

D1044-19.....Standard Test Method for Resistance of Transparent Plastics to Surface Abrasion.

G. American National Standards Institute (ANSI):

ANSI A156.115 (2014)....Hardware Preparation in Steel Doors and Steel Frames

ANSI A156.115W (2006)...Hardware Preparation in Wood Doors with Wood or Steel Frames

ANSI/SDI A250.8 (2014)..Specifications for Standard Steel Doors and Frames

ANSI/SDI A250.11 (2012).Recommended Erection Instructions for Steel Frames.

H. American Welding Society (AWS):

D1.1/D1.1M (2010).....Structural Welding Code - Steel

I. National Fire Protection Association (NFPA):

NFPA 80 (2013) ..... Standard for Fire Doors and Other Opening Protectives

NFPA 252(2013).....Standard Methods of Fire Tests of Door Assemblies

J. Society for Protective Coatings (SSPC):

SSPC-SP 2 - 2004.....Hand Tool Cleaning

SSPC-SP 3 - 2004.....Power Tool Cleaning

K. Underwriters Laboratories, Inc. (UL):

UL 752-2005.....Bullet Resisting Equipment

L. United States Department of State Bureau of Diplomatic Security (DS):

SD-STD-01.01-1993(R2004).....Certification Standard for Forced Entry and Ballistic Resistance of Structural Systems

2.4 PERFORMANCE REQUIREMENTS

A. General: Fabricate and install FE/BR door assemblies to achieve indicated levels of resistance. Extend resistance to include anchorages, interfaces with adjoining substrates, and hardware. Security attacks shall be unable to penetrate through closed/locked security door assemblies in manner described; it is recognized that

such attacks may damage units beyond repair and reuse, requiring replacement of work by Government:

1. Fire-rated assemblies: Where indicated for fire resistance, provide flush steel doors-and-frame units; comply with NFPA 80. Provide units that have been tested by recognized testing agency in accordance with NFPA No. 252. Doors shall be smoke rated.
2. Forced-Entry (FE) resistant assemblies: Where door assembly is shown or scheduled as FE, provide door manufacturer's material and fabrication for panels, inserts, hardware, devices, and framing of units. Provide rated units where shown or scheduled:
3. FE resistance rating-UL 752, Level 3 Ballistic.
4. Provide resistance of 15 minutes for forced entry, using basic hand tools.
5. Ballistic Resistant (BR) assemblies: Where door assembly is shown or scheduled as BR, provide door manufacturer's materials and fabrication for panel, inserts, and framing of unit. Provide rated units where shown or scheduled.

2.5 SUBMITTALS

A. General: For each security door assembly, submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. Product data for each element of work, whether purchased from other manufacturers or provided as door Fabricator's standard production. Include data substantiating that products comply with requirements of these specifications.
2. Manufacturer's standard color chart.
3. Certificates: Letter from manufacturer indicating the products have been certified to meet the specified ratings.
4. Shop drawings showing each dimensioned details of each door assembly, including performance rating, swing, hardware set, and adjacent construction. Provide drawings on B-size 11 in x 17 inch (300 mm x 430 mm) sheets. Show typical door exterior elevations at not less than ¼ inch = 1 foot (1:50) scale. After final modifications and corrections have been incorporated into the drawings, submit drawings as AutoCAD files with DWG extension. Show the following:
   a. Unit information:

1) Model Number.
2) Ballistic resistant rating.
3) Marks (window no.).
4) Door/frame finish.
5) Door type.

b. Elevation Drawings:
1) Rough opening.
2) Door opening.
3) Frame opening.
4) Vision opening.
5) Finished floor.
6) Sill condition.
7) Reference numbers for primer and finish paint, including number of coats applies.
8) Door class rating: rated or non-rated.
9) Door and frame gauge thickness.

c. Plan drawings:
1) Relate to elevation on drawing.
2) Identify “Attack” and “Protected” sides.
3) Identify door swing (i.e., RH, LH, RHRB, LHRB).
4) Provide key on drawings.
5) Indicate room space numbers taken from Contract Drawings.

d. Details: Show section at not less than ¾ inch = 1 ft (1:20) scale of members indicating construction, size, and thickness of components, frame profile, location of conduit entry, threshold configuration, vision panel together with connections, fastenings, and means of separating dissimilar metals.

e. Breakdown of Product Line Items:
1) If Manufacturer produces one contract line item as several parts (door with transom and sidelights), they shall breakout items on drawings. Each item shall be a subdivision of that product line item number.
2) Installation instructions shall cite all anchorage components, including complete description of expansion anchor as well as installation criteria such as torque requirements, minimum embedment, and minimum edge distance, and shall include alert

to installers to avoid cutting of rebar during concrete anchor installation.

2.6 QUALITY ASSURANCE

A. Testing Laboratory Qualifications: For compliance with non-security performance requirements (such as fire ratings, resistance to deterioration from moisture, accessibility to persons with disabilities, or sound attenuation) on security door assemblies of this Section, use only those testing laboratories which have successfully demonstrated to Project Manager that they have experience and capabilities needed to satisfactorily conduct required tests.

M. Provide products that have been certified by Bureau of Diplomatic Security (DS) in accordance with DS/PSD SD-STD-01.01.

2.7 IDENTIFICATION SYSTEMS

A. Identify each assembly to provide VA with ready reference to original manufacturer to facilitate reorders, replacement parts, service, resolution of complaints, and inventory. The label shall be typically embossed/printed metal plate or metallic foil with adhesive backing for permanent identification. Locate label so that it is readily visible and convenient for identification by Project Manager after installation of assembly. The label shall be approximately 1½ inch x 3 inch (40 x 75 mm) and shall cite:

1. Manufacturer's name/city/state.
2. Contract number.
3. Month/Year of manufacture.
4. Mark number and Ballistic resistant rating.

2.8 DELIVERY, STORAGE AND HANDLING

A. Deliver each assembly project site with fabrication, finishing, and assembly of primary panels, inserts, and frames completed and prepared for installation and connection with security systems. Disassemble hardware for shipping only to extent hardware interferes with shipping.

N. Refer to Division One for shipping requirements.

O. Provide removable spreader bar between jambs during fabrication, delivery, and installation and to include mullions of each frame assembly, except where integral threshold is required and serves same purpose. Do not mar finishes of assembly with installation or removal of spreader bars.

P. Provide protection of pre-finished units, such as pre-finished with baked enamel or stainless steel, using self-adhesive paper.

PART 2 - PRODUCTS

2.9 MANUFACTURERS

A. Certified units: provide units, including frames and sub-frames which are produced by manufacturer who has previously produced, within last 10 years, units of similar security attack resistance of equivalent size and resistance ratings.

2.10 MATERIALS, GENERAL

A. Hot-Rolled Steel Sheets and Strips: ASTM A1011, commercial quality, pickled and oiled, except as otherwise indicated.

A. Cold-Rolled Steel Sheets: ASTM A1008, commercial quality, except as otherwise indicated.

B. Galvanized Steel Sheets: ASTM A653 with G90 zinc coating, mill phosphatized; commercial quality, except as otherwise indicated.

C. Supports and Anchors: Fabricate to endure required performances, but of not less than 1/16 inch (1.5 mm) sheet steel.

D. Inserts, Bolts, Fasteners: Standard units of strengths required to endure performances; hot-dip zinc coated where used in exterior wall assemblies in compliance with ASTM A 153, Class C/D.

1. Forced-Entry (FE) Resistance: Where assembly is indicated for forced-entry resistance rating (FE), provide light of size shown or scheduled in accordance with certification.
2. Ballistic Resistance (BR): Where assembly is indicated for ballistic-resistance rating (BR), provide light of size shown or scheduled in accordance with certification.

2.11 HARDWARE

A. General: Provide special units of door hardware to achieve performances, and as shown and scheduled. Standard units for each security door assembly are specified to be furnished as work of Section 08 71 00, DOOR HARDWARE; see Project "Finish Hardware Schedule" and "Data Sheets," and provisions of this Section, as well as notes on door-and-frame schedule.

2.12 FABRICATION AND ASSEMBLY

A. General: Fabricate, test, and preassemble security door assemblies with hardware at factory; disassemble hardware only to extent necessary for

handling, packaging, shipment, and installation at Project. Fabricate metal work to comply with performance requirements. Fabrications shall be rigid, neat, and free from warp/buckle/similar defects, with eased edges and continuously-welded joints, ground where exposed, to produce smooth, flush, invisible joints. Weld in accordance with AWS D1.1, Structural Welding Code for Steel:

3. Prepare panels and frames of each assembly to receive hardware, devices, and accessory units as shown and scheduled. Reinforce work for hardware and devices, and cut work for mortised or concealed units; comply with ANSI A156.115, working from templates supplied by unit manufacturers and suppliers:
   a. Locate hardware, devices, and accessories as required by Section Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 14 00, INTERIOR WOOD DOORS and Section 08 71 00, DOOR HARDWARE.
   b. Locate hardware, devices, and accessories as shown and scheduled (including on approved shop drawings) or, if not otherwise indicated: 1) in accordance with ANSI A156.115 and A156.115W Recommended Locations for Builder's Hardware or, 2) in accordance with security device manufacturer's recommendation for optimum responses, but 3) in any case, as required to achieve required assembly performances.
   c. Except where assembly is equipped with door-seal stripping at jambs and head, provide neoprene door silencers on stops; three at strike jamb for single door, and four at head for double door.
   d. Except as otherwise indicated, pre-fabricate, and preassemble security door assemblies to include full extent of required conduit-protected electrical/electronic power-and-control wiring placed and supported to avoid conflicts with other elements and subsequent drilling/cutting-in of work during installation of units. Provide access ports as required to support 1 inch (25 mm) conduit.
   e. Clearances: Not more than 1/8 inch (3 mm) at jambs and heads, except not more than 1/4 inch (6 mm) between fire-rated pair of doors. Nor more than 1/4 inch (6 mm) at bottom. Undercut for carpets are not permitted where doors are used in corridors. Fabricate frames with horizontally slotted bolt holes.

4. Provide removable glazing stops and similar moldings on interior or "safe" side of assemblies. Glazing shall be removable without removing door from frame.
5. Shop Painting: Provide base-coat, factory-applied painting of ferrous metal elements of assemblies excluding other specified exposed-finish surfaces of stainless steel, aluminum, bronze, and similar metals not intended for painting.
   a. Clean steel and zinc-coated steel surfaces of mill scale, rust, oil, grease, dirt and other substances, immediately before finish application.
   b. Apply pretreatment of cold phosphate solution (SSPC-SP 2) or basic zinc chromate/vinyl-butyl solution (SSPC-SP 3).
   c. Apply paint coat specified for shop application, and bake on within time limits recommended by manufacturer of pretreatment. Apply in a uniform, smooth coat to result in dry film thickness of not less than 0.002 inch (0.05 mm).

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install security door assemblies in accordance with approved shop drawings, manufacturer's data and instructions, and requirements of these specifications. Install as required to achieve specified performances, and to comply with recommendations of related industry association or testing agency sponsoring standards for required non-security performances. Install door assemblies plumb and level:
   1. Install assemblies in compliance with recommendations and instructions of ANSI A250.8 and ANSI A250.11.
   2. At fire-rated door openings, comply with NFPA Standard No. 80.
   3. Properly hang and align FE/BR doors so that pull open exertion does not exceed 12 lbs (5.4 kg.).
   4. Installer shall not grind any portion of door, frame or locking device strikes.
   5. Locking device strikes shall engage strike plate without binding.
B. Anchorage: The door manufacturer shall provide anchors appropriate for substrate to which door frame is to be fastened. Structural frames shall have pre-drilled bolt hole patterns not to exceed 12 inches (300 mm) on center. The manufacturer shall verify substrates involved, and

supply any special fastening tools (e.g., special drill or bit) required by anchoring system. The anchor shall be acceptable for shock/short duration loading, and have potential for removal during life of building. The anchor shall also meet the following requirements:

1. Anchor diameter: 3/8 inch (10 mm) minimum.
2. Embedment and edge distances shall be as appropriate for anchor and substrate, but not less than the following:
   a. Edge distance: 3 inches (75 mm).
3. The minimum anchor strengths shall be:

a. Yield Strength: 135,000 psi (900 MPa)

b. Tensile Strength: 186,000 psi (1240 MPa)

1. Avoid cutting of rebar during concrete anchor installation. Shims provided for rough opening (RO) frame clearance should not exceed1/4 inch (6 mm). Cap plugs used in frame shall match frame finish.

3.2 ADJUST AND CLEAN

A. General: Upon request of Project Manager, remove protective coverings and clean exposed surfaces. Repair damaged elements, restore abraded surfaces, touch-up base-coat paint finish with air-drying primer, and remove imperfections from exposed natural metal finishes.

C. Check and readjust hardware, devices, and accessories with door-to-frame-and-sill/threshold clearances set for proper operation of locks, door seals, and other operational units. Do not remove permanently applied performance labels.

D. Comply with "Door Hardware" section requirements for protection and handling of keys and locking devices, and associated information.

E. Exercise extreme care in the cleaning of exposed surfaces of polycarbonate; comply with manufacturer’s directions.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 08 34 59
VAULT DOORS AND DAY GATES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Factory finished vault door complete with frame, combination lock, hardware, threshold, and day gate installed in reinforced concrete masonry unit wall within Out Patient Pharmacy.

1.2 RELATED REQUIREMENTS

A. Day gate lock cylinder: Section 08 71 00, DOOR HARDWARE.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Federal Qualified Products List (QPL):

1. AA-D-600-8 - Door, Vault, Security.
2. FF-2470-8 - Locks, Combination.

C. Federal Specifications (Fed. Spec.):

1. AA-D-600D(2) - Door, Vault, Security.
2. FF-L-2740A(1) - Locks, Combination.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings: Show size, configuration, and configuration and installation details.

1. Vault door.
2. Day gate.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Key change and combination changing instructions with copy of signed receipt.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

B. Sustainable Construction Requirements:

1. Steel Components Recycled Content: 30 percent total recycled content, minimum.

2.2 VAULT DOOR

A. Fed. Spec. AA-D-600, Class 5-V, Type IIR (right open swing) or Type IIL (left open swing) -see floor plan, without optical device, Style K, (Key change combination lock).

1. Approved Products: QPL AA-D-600 listed.

B. Door Stop: Floor type to suit application.

2.3 COMBINATION LOCK

A. Fed. Spec. FF-L-2740, Style 1 self-contained with key change combination.

1. Approved Products: QPL FF-L-2740 listed.

2.4 DAY GATE

A. Self-closing metal construction with expanded mesh or solid bars infill, minimum 3.038 mm (0.12 inch) steel.

1. Finish: Match vault door and frame.

B. Hardware: Heavy duty hinges.

C. Locking: Automatic, key controlled from vault exterior, and thumb-turn latch release accessible from vault interior, only.

1. Keying: Match Pharmacy door hardware cylinder keying.

2.5 FINISHES

A. Steel Paint Finish:

1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of the following:

a. One coat primer.

b. One coat thermosetting topcoat.

c. Dry-film Thickness: 0.05 mm (2 mils) minimum.

d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Verify rough opening is properly sized and located.
   2. Verify wall construction shall support vault and day gate door weight.
   3. Verify factory-applied lock seal is unbroken.

B. Remove key change and combination changing instructions from packaging and deliver to Contracting Officer's Representative, in manufacturer's original, unopened packaging.
   1. Obtain signed receipt.

C. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Hang vault door and day gate plumb and level.

C. Securely attach vault door and day gate to wall construction.

D. Engage locksmith to reset lock combination in presence of Contracting Officer's Representative.

E. Adjust vault door and day gate for smooth operation and proper locking.
   1. Ensure vault door and day gate remain stationary when set anywhere within full swing path.

3.3 CLEANING

A. Clean exposed vault door and day gate surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Protect vault door and day gate from construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

- - E N D - -

--- INTENTIONALLY BLANK ---

SECTION 08 41 13
ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum-framed entrances .

1.2 RELATED REQUIREMENTS

A. Door Finish and Color: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Glass and Glazing: Section 08 80 00, GLAZING.

C. Hardware: Section 08 71 00, DOOR HARDWARE.

D. Automatic Door Actuators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.

E. Aluminum Finish and Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Architectural Manufacturers Associations (AAMA):

2603-15.....Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels

2604-13.....Performance Requirements and Test Procedures or High Performance Organic Coatings on Architectural Extrusions and Panels

2605-13.....Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels

C. American Welding Society (AWS):

D1.2/D1.2M-14.....Structural Welding Code - Aluminum

D. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)

D1187/D1187M-97(2018)...Asphalt-Base Emulsions for Use as Protective Coatings for Metal

E283/E283M-19.....Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

E330/E330M-14.....Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference

E331-00(2016).....Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference

E1886-19.....Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missiles and Exposes to Cyclic Pressure Differentials

E1996-17.....Performance of Exterior Windows, Curtain Walls, Doors, and impact Protective Systems Impacted by Windborne Debris in Hurricanes

F468-16.....Nonferrous Bolts, Hex Cap Screws, and Studs for General Use

F593-17.....Stainless Steel Bolts, Hex Cap Screws, and Studs

E. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

F. National Fenestration Rating Council (NFRC):

500-14(E1A0).....Determining Fenestration Product Condensation Resistance Values

G. Department of Veterans Affairs(VA):

1. VA Physical Security and Resiliency Design Manual October 1, 2020

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

a. Contracting Officer's Representative.

b. Architect/Engineer.

c. Contractor.

d. Installer.

e. Manufacturer's field representative.

f. Other installers responsible for adjacent and intersecting work.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

a. Installation schedule.

b. Installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Installation.

f. Terminations.

g. Transitions and connections to other work.

h. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings: Minimum 1 to 2 (half size) scale.

1. Show size, configuration, and fabrication and installation details.

2. Show anchorage and reinforcement.

3. Show interface and relationship to adjacent work, including thermal, air, and water barrier continuity.

C. Manufacturer's Literature and Data:

1. Description of each product.

2. Doors, each type.

3. Entrance and Storefront construction.

4. Installation instructions.

5. Warranty.

D. Samples:

1. Door Corner Section: Minimum 450 mm x 450 mm (18 x 18 inches) for each specified door type, showing head rail and hinge stile, door closer reinforcement.

2. Aluminum Anodized Finish: wo sample extrusions minimum 150 mm (6 inches) long for each specified color in sets of three showing maximum color range.

3. Aluminum Paint Finish: wo sample extrusions minimum 150 mm (6 inches) long for each specified color.

E. Sustainable Construction Submittals:
   1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
F. Test reports: Certify products comply with specifications.
G. Certificates: Certify products comply with specifications.
   1. Certify anodized finish thickness.
H. Qualifications: Substantiate qualifications comply with specifications.
   1. Manufacturer with project experience list.
   2. Installer with project experience list.
   3. Welders and welding procedures.
I. Delegated Design Drawings and Calculations: Signed and sealed by responsible design professional.
   1. Show location and magnitude of loads applied to building structural frame.
   2. Identify deviations from details shown on drawings.
J. Operation and Maintenance Data:
   1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:
   1. Regularly manufactures specified products.
   2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.
   1. Installer Qualifications: Product manufacturer
   2. Regularly installs specified products.
   3. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.
B. Welders and Welding Procedures Qualifications: AWS D1.2/D1.2M.

1.7 DELIVERY, STORAGE AND HANDLING

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

D. Store products indoors in dry, weathertight conditioned facility.

E. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant painted finish against material and manufacturing defects.

1. Warranty Period: 20 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where work is located.

1. Minor deviations to details shown on drawings to accommodate manufacturer’s standard products may be accepted by Contracting Officer's Representative when deviations do not affect design concept and specified performance.

B. Design aluminum framed entrances and storefronts complying with specified performance:

1. For interior performance.

2.2 MATERIALS

A. Aluminum:

1. Sheet Metal: ASTM B209M (ASTM B209), minimum 1.6 mm (0.063 inch) thick.

2. Extrusions: ASTM B221M (ASTM B221).

a. Framing: Minimum 3 mm (0.125 inch) wall thickness.

b. Glazing Beads, Moldings, and Trim: Minimum 1.25 mm (0.050 inch) thick.

3. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights and storefronts.

4. Alloy 6061 temper T6 for guide tracks for sliding doors and other extruded structural members.

a. Color Anodized Aluminum: Provide aluminum alloy required to produce specified color.

B. Stainless Steel: ASTM A240/A240M; Type 302 or Type 304.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide aluminum framed entrances and storefronts from one manufacturer and from one production run.

C. Provide aluminum entrances and systems from same manufacturer.

D. Sustainable Construction Requirements:

1. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.4 FRAMES

A. Framing Members: Extruded aluminum.

B. Stops: Provide integral fixed stops and glass rebates and snap-on removable stops.

C. Provide concealed screws, bolts and other fasteners.

D. Secure cover boxes to frames in back of lock strike cutouts.

2.5 STILE AND RAIL DOORS

A. Stiles and Rails: Extruded aluminum.

1. Thickness: 45 mm (1-3/4 inch).
2. Stiles and Head Rails: 90 mm (3-1/2 inches) wide.
3. Bottom Rails: 250 mm (10 inches) wide.

B. Single-Acting Doors:

1. Bevel: 3 mm (1/8 inch) at lock, hinge, and meeting stile edges.
2. Clearances: 2 mm (1/16 inch) at hinge stiles, 3 mm (1/8 inch) at lock stiles and top rails, and 5 mm (3/16 inch) at floors and thresholds.

C. Glass Rebates: Integral with stiles and rails.

D. Glazing Beads: Extruded aluminum, 1.3 mm (0.050 inch) thick. Integral with stiles and rails or applied type, snap-fit secured.

E. Stile and Rail Joints: Welded or interlocking dovetail joints between stiles and rails.

1. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel tie rod extending into stiles, and having self-locking nut and washer at both ends.
2. Reinforce stiles and rails to prevent door distortion when tie rods are tightened.
3. Provide compensating spring-type washer under each nut for stress relief.
4. Construct joints to remain rigid and tight when door is operated.

F. Weather-stripping: Removable, woven pile type (silicone-treated) weather-stripping attached to aluminum or vinyl holder.
   1. Make slots for applying weather-stripping integral with doors and door frame stops.
   2. Apply continuous weather-stripping to heads, jambs, bottom, and meeting stiles of doors and frames so doors swing freely and close positively.

2.6 FABRICATION

A. Form metal parts and fit and assemble joints, except joints designed to accommodate movement. Seal joints to resist air infiltration and water penetration.

B. Welding:
   1. Make welds without distorting and discoloring exposed surfaces.
   2. Clean and dress welds. Remove welding flux and weld spatter.

C. Prepare and reinforce doors and frames for hardware and accessories.
   1. Coordinate preparation with specified hardware. See Section 08 71 00, DOOR HARDWARE.
   2. Fabricate reinforcement from stainless steel plates.
      a. Hinge and pivot reinforcing: Minimum 4.5 mm (0.179 inch) thick.
      b. Lock Face, Flush Bolts, Concealed Holders, Concealed and Surface Mounted Closers Reinforcing: Minimum 2.6 mm (0.104 inch) thick.
      c. Other Surface Mounted Hardware Reinforcing: Minimum 1.5 mm (0.059 inch) thick.
   3. Where concealed hardware is specified, provide space, cutouts, and reinforcement for installation and secure fastening.

D. Factory assembled doors.

2.7 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.
   1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
   2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.
   3. Clear Anodized Finish: AA-C22A31; Class II Architectural, 0.01 mm (0.4 mil) thick.
   4. Color Anodized Finish: AA-C22A32 or AA-C22A34; Class II Architectural, 0.01 mm (0.4 mil) thick.

2.8 ACCESSORIES

A. Dielectric Tape: Plastic, non-absorptive, with pressure sensitive adhesive; 0.18 to 0.25 mm (7 to 10 mils) thick.

B. Barrier Coating: ASTM D1187/D1187M.

C. Welding Materials: AWS D1.2/D1.2M, type to suit application.

D. Fasteners:

1. Aluminum: ASTM F468, Alloy 2024.
2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

E. Anchors: Aluminum or stainless steel; type to suit application.

F. Galvanizing Repair Paint: MPI No. 18.

G. Touch-Up Paint: Match shop finish.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

1. Coordinate floor closer installation recessed into concrete slabs.
2. Coordinate anchor installation built into masonry and concrete.

B. Protect existing construction and completed work from damage.

C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

D. Apply dielectric tape or barrier coating to aluminum surfaces in contact with dissimilar metals to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Install aluminum framed entrances and storefronts plumb and true, in alignment and to lines shown on drawings.

C. Anchor frames to adjoining construction at heads, jambs and sills.

D. Provide concealed aluminum clips to connect adjoining frame sections.

E. Install door hardware and hang doors. See Section 08 71 00, DOOR HARDWARE.

F. Install door operators. See Section 08 71 13, AUTOMATIC DOOR OPERATORS.

G. Adjust doors and hardware uniform clearances and proper operation.

H. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

I. Tolerances:

1. Variation from Plumb, Level, Warp, and Bow: Maximum 3 mm in 3 meters (1/8 inch in 10 feet).
2. Variation from Plane: Maximum3 mm in 3.65 meters (1/8 inch in 12 feet); 6 mm (1/4 inch) over total length.
3. Variation from Alignment: Maximum 1.5 mm (1/16 inch) in-line offset and maximum3 mm (1/8 inch) corner offset.
4. Variation from Square: Maximum 3 mm (1/8 inch) diagonal measurement differential.

3.3 PROTECTION, CLEANING AND REPAIRING

A. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.

B. Protect aluminum-framed entrances and storefronts from construction operations.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 08 56 19
PASS WINDOWS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Factory finished bullet proof double lite window unit with bullet proof lazy susan transaction unit, counter mounted pass unit.
2. Factory finished bullet proof double lite window unit with oversized bullet proof lazy susan transaction unit for passage of bulky products, counter mounted pass unit.
3. Factory finished bullet proof wall mounted package receiver unit for passage of products.
4. Factory finished glass mounted bullet proof talk thru for natural voice transmission unit.

1.2 RELATED REQUIREMENTS

A. Window Finish Color: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Glass and Glazing: Section 08 80 00, GLAZING.

C. Ballistic Rating: UL Level 3.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
2. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
3. C509-06(2011) - Elastomeric Cellular Preformed Gasket and Sealing Material.
4. D1187/D1187M-97(2011)e1 - Asphalt-Base Emulsions for Use as Protective Coatings for Metal.

C. American Society of Mechanical Engineers (ASME):

1. B18.6.4-98(R2005) - Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws inch.

D. National Association of Architectural Metal Manufacturers (NAAMM):

1. AMP 500-06 - Metal Finishes Manual.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Samples:

1. Exposed Finishes: 50 by 100 mm (2 by 4 inches), each type and color.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant pass window units against material and manufacturing.

1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum Extrusions:

1. ASTM B221M (ASTM B221).
2. Alloy and temper recommended by window manufacturer for strength, corrosion resistance, and application of required finish, but

minimum 150 MPa (22,000 psi) ultimate tensile strength, and yield of 110 MPa (16,000 psi).

3. Aluminum alloy used for colored anodic coating as required to produce specified color.

B. Stainless Steel:

1. Type 304.

C. Stainless Steel Casting:

D. Glazing Gaskets: ASTM C509.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer.

C. Sustainable Construction Requirements:

1. Aluminum Recycled Content: 80 total recycled content, minimum.

2.3 PASS WINDOWS

A. Pass Window Units: Factory fabricated and assembled, glazed unit; horizontal sliding type.

1. Frame: Extruded aluminum.
2. Sash: Extruded aluminum.
3. Glass: Safety ballistic type specified in Section 08 80 00, GLAZING.
4. Hardware: Manufacturer's standard track, rollers, guides, lock, and keys.

2.4 FABRICATION

A. Fabricate glass sash and frames of extruded aluminum with corners mitered.

B. Fabricate sash to receive 6 mm (1/2 inch) laminated thick glass.

C. Fabricate lazy susan table sliding sash of "H" channel molding at bottom edges including concealed nylon rollers at bottom set on track and guides at top set into track.

D. Provide sash with pin tumbler lock and two keys.

E. Provide sash with surface-mounted pull.

F. Fabricate frame with channel sash slot, bottom roller track, and top guides.

G. Factory glaze sash using glazing gaskets.

H. Use concealed fasteners for assembly.

2.5 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.6 ACCESSORIES

A. Barrier Coating: ASTM D1187/D1187M.

B. Fasteners: ASME B18.6.4, stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Verify rough opening is properly sized and located.

B. Protect existing construction and completed work from damage.

C. Apply barrier coating to aluminum surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - PASS WINDOWS

A. Install products according to manufacturer's instructions and approved submittal drawings.

B. Install pass window units within the transaction glazing unit as a complete unit level and plumb according to manufacturer's installation instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

C. Secure window with fasteners.
   1. Install fasteners within 100 mm (4 inches) of ends.
   2. Space fasteners maximum 600 mm (24 inches) on center.

D. Separate aluminum from sources of corrosion with one coat of ASTM D1187/D1187M at points of contact with other materials.

E. Adjust pass windows to roll smoothly and stay in position where stopped.

F. Tag keys to identify associated pass window. Deliver keys to Contracting Officer's Representative.

3.3 CLEANING

A. Clean exposed window unit surfaces. Remove temporary labels, contaminants, and stains.

3.4 PROTECTION

A. Protect pass window units from construction operations.

B. Remove protective materials immediately before acceptance.

C. Repair damage.

1. Replace glass that has been broken, chipped, cracked, or damaged during construction period.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 08 56 59
SERVICE AND TELLER WINDOW UNITS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Service drawer units within concrete masonry partitions at Pharmacy.

1.2 RELATED WORK

A. Section 28 16 00, INTRUSION DETECTION SYSTEM: Intrusion Alarm.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.

F593-17.....Stainless Steel Bolts, Hex Cap Screws, and Studs.

F594-09(2020).....Stainless Steel Nuts.

F1233-08(2019).....Security Glazing Materials and Systems.

C. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual.

D. UL LLC (UL):

752-05.....Bullet-Resisting Equipment.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings: Service windows, showing design, construction and installation.

1. Indicate size, configuration, and fabrication and installation details.
2. Indicate bullet resistant reinforcing for metal components.

C. Manufacturer's Literature and Data: Service windows.

1. Description of each product.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Test reports: Report bullet resistance level.

F. Certificates: Certify products comply with specified bullet resistance rating.

1.5 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Service Drawer Units: Factory fabricated, assembled, ; bullet resistant type.
   1. Frame: Stainless steel with integral counter, oversized deal tray, and jamb openings to permit voice communication through window.
   2. Pharmacy Oversized Deal Tray: Size indicated on drawings

2.2 SYSTEM PERFORMANCE

A. Design service and teller window units complying with specified performance:
   1. Bullet Resistance: UL 752; Level 3, minimum.
      a. Exception: Pharmacy deal tray.
   2. Forced Entry Resistance: ASTM F1233; Threat Class 3 using basic hand tools.

2.3 MATERIALS

A. Stainless Steel: ASTM A240/A240M; Type 304, 3 mm (0.12 inch) thick, minimum.

2.4 PRODUCTS - GENERAL

A. Sustainable Construction Requirements:
   1. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.

2.5 FABRICATION

A. Form stainless steel fabrications to sizes, profiles, and configurations indicated on Drawings.
B. Frames: Stainless steel.
   1. Jambs and Heads: Continuous with integral glazing stop on dispensing side of window unit.
   2. Voice Communication: Frame profile and jamb spacers or manufacturer provided compliant openings to provide two-way natural voice communication.
C. Frame Anchors: Stainless steel; masonry type, compatible with partition construction.
   1. Provide minimum three frame anchors for each jamb.

D. Sill: Stainless steel.
   1. Fabricate sill full opening width to receive both jambs.
   2. Fabricate sill with extended writing shelf on both sides of window unit.
E. Deal Tray: Stainless steel.
   1. Incorporate deal tray into sill, without visible seams.
   2. Interior box size 18” high x 18” wide x 18” deep.

2.6 FINISHES

A. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.
B. Blend welds to match adjacent finish.

2.7 ACCESSORIES

A. Fasteners: ASTM F593 and ASTM F594, stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Verify opening is correctly sized and located.
   2. Verify partition is prepared to receive frame anchors.
B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings .
B. Install service and teller window units according to manufacturer's installation instructions.
C. Set units accurately, plumb, and level.
D. Securely anchor to masonry as shown on submittal drawings to withstand ballistic and forced entry forces.
E. Coordinate with window intrusion detection system specified in Section 28 16 00, INTRUSION DETECTION SYSTEM.

3.3 CLEANING

A. Clean exposed window unit surfaces. Remove temporary labels, contaminants, and stains.
B. Polish stainless steel surfaces for uniform appearance.

3.4 PROTECTION

A. Protect window units from construction operations.
B. Remove protective materials immediately before acceptance.
C. Repair damage.

- - E N D - -

---INTENTIONALLY BLANK---

SECTION 08 71 00
DOOR HARDWARE

PART 1 - GENERAL

1.1 DESCRIPTION

A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

A. Caulking: Section 07 92 00 JOINT SEALANTS.

B. Application of Hardware: Section 08 14 00, WOOD DOORS, Section 08 11 13 HOLLOW METAL DOORS AND FRAMES, Section 08 34 53, SECURITY DOORS AND FRAMES and, Section 08 71 13, AUTOMATIC DOOR OPERATORS

C. Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.

D. Painting: Section 09 91 00, PAINTING.

E. Electrical: Division 26, ELECTRICAL.

F. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 GENERAL

A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.

B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).

C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.

D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.

E. The following items shall be of the same manufacturer, except as otherwise specified:

1. Mortise locksets.
2. Hinges for hollow metal and wood doors.
3. Surface applied overhead door closers.
4. Exit devices.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
   1. Locks, latchsets, and panic hardware: 5 years.
   2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:
   1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
   2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates

shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer’s Representative. Review the following:

1. Inspection of door hardware.
2. Job and surface readiness.
3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

1.9 INSTRUCTIONS

A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a

number. Each number designates a set of hardware items applicable to a door type.

B. Keying: All cylinders shall be keyed into existing _____ Great Grand Master Key System . Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset . Cylinders shall be 7 pin type. Keying information shall be furnished at a later date by the COR.

C. Keying: A new Great Grandmaster key shall be established for this project. The key system shall be small format (Best size and profile) removable core type as previously described. The key blanks shall be protected by a utility patent with a minimum seven years remaining on the patent from the start of construction, and protected by contract-controlled distribution. The manufacturer shall furnish code pattern listings in both paper and electronic formats so keys may be reproduced by code.; provide electronic format in file type required by project's key control software. The manufacturer shall design the new key system with the capacity to rekey the existing system and also provide for 25 percent expansion capability beyond this requirement. Submit a keying chart for approval showing proposed keying layout and listing expansion capacity.

1. Keying information will be furnished to the Contractor by the COR.
2. Supply information regarding key control of cylinder locks to manufacturers of equipment having cylinder type locks. Notify CPR immediately when and to whom keys or keying information is supplied. Return all such keys to the COR.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. American Society for Testing and Materials (ASTM):

F883-04.....Padlocks

E2180-07.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

A156.2-03.....Bored and Pre-assembled Locks and Latches

A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts

A156.4-08.....Door Controls (Closers)

A156.5-14.....Cylinders and Input Devices for Locks.

A156.6-05.....Architectural Door Trim

A156.8-05.....Door Controls-Overhead Stops and Holders

A156.11-14.....Cabinet Locks

A156.12-05 .....Interconnected Locks and Latches

A156.13-05.....Mortise Locks and Latches Series 1000

A156.14-07 .....Sliding and Folding Door Hardware

A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical

A156.16-08.....Auxiliary Hardware

A156.17-04 .....Self-Closing Hinges and Pivots

A156.18-06.....Materials and Finishes

A156.20-06 .....Strap and Tee Hinges, and Hasps

A156.21-09.....Thresholds

A156.22-05.....Door Gasketing and Edge Seal Systems

A156.23-04.....Electromagnetic Locks

A156.24-03.....Delayed Egress Locking Systems

A156.25-07 .....Electrified Locking Devices

A156.26-06.....Continuous Hinges

A156.28-07 .....Master Keying Systems

A156.29-07 .....Exit Locks and Alarms

A156.30-03 .....High Security Cylinders

A156.31-07 .....Electric Strikes and Frame Mounted Actuators

A156.36-10.....Auxiliary Locks

A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Other Opening Protectives

101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGES

A. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:

1. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.

B. Provide quantity and size of hinges per door leaf as follows:

1. Doors up to 1210 mm (4 feet) high: 2 hinges.
2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
7. Provide heavy-weight hinges where specified.
8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.

C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 CONTINUOUS HINGES

A. ANSI/BHMA A156.26, Grade 1-600.

1. Listed under Category N in BHMA's "Certified Product Directory."

B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete

C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.
   1. Base Metal for Exterior Hinges: Stainless steel.
   2. Base Metal for Interior Hinges: Stainless steel.
   3. Base Metal for Hinges for Fire-Rated Assemblies: Stainless steel.
   4. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
   5. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide wide throw hinges of minimum width required.
   6. Provide with manufacturer’s cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
   7. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
   8. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer’s adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

2.3 DOOR CLOSING DEVICES

A. Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

A. Conform to ANSI A156.4, Grade 1.

B. Closers shall conform to the following:
   1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
   2. Where specified, closer shall have hold-open feature.
   3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
   4. Material of closer body shall be forged or cast.
   5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.

6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 DOOR STOPS

A. Conform to ANSI A156.16.

B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.

C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.

D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its

width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.

E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.

F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.

G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.

H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.

I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.

J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.

K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.

L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.6 OVERHEAD DOOR STOPS AND HOLDERS

A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.7 FLOOR DOOR HOLDERS

A. Conform to ANSI Standard A156.16. Provide extension strikes for Types L01301 and L01311 holders where necessary.

2.8 LOCKS AND LATCHES

A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not

less than six pins seven pins . Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.

B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching [_____]. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.
2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design

to match design selected by Architect or to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)

3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.36.

2.9 ELECTROMAGNETIC LOCKS???

A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."
   1. Type: Full exterior or full interior, as required by application indicated.
   2. Strength Ranking: 1500 lbf (6672 N) 1000 lbf (4448 N) 500 lbf (2224 N).
   3. Inductive Kickback Peak Voltage: Not more than 53 0 V.
   4. Residual Magnetism: Not more than 4 lbf (18 N)0 lbf (0 N) to separate door from magnet.

B. Delayed-Egress Locks: BHMA A156.24. Listed under Category G in BHMA's "Certified Product Directory."
   1. Means of Egress Doors: Lock releases within 15 seconds after applying a force not more than 15 lbf (67 N) for not more than 3 seconds, as required by NFPA 101.
   2. Security Grade: Activated from secure side of door by initiating device.
   3. Movement Grade: Activated by door movement as initiating device.
   4. The lock housing shall not project more than 4-inches (101mm) from the underside of the frame head stop.

2.10 ELECTRIC STRIKES

A. ANSI/ BHMA A156.31 Grade 1.

B. General: Use fail-secure electric strikes at fire-rated doors.

2.11 KEYS

A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	**Quantity**
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	2 keys

B. Psychiatric keys shall be cut so that first two bittings closest to the key shoulder are shallow to provide greater strength at point of greatest torque.

2.12 KEY CABINET

A. ANSI Standard A156.11. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent. Provide minimum number of multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.

B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."

C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.

D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the COR.

2.13 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

A. Conform to ANSI Standard A156.6.

B. Provide protective plates and door edging as specified below:

1. Kick plates, mop plates and armor plates of metal, Type J100 series.
2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
3. Kick plates and/or mop plates are not required on following door sides:
   a. Armor plate side of doors;
   b. Closet side of closet doors;
4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.

5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.14 EXIT DEVICES

A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.

C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.

D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.

E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.

F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.15 MISCELLANEOUS HARDWARE

A. Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E07213, conforming to ANSI A156.11. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.

B. Cylinders for Various Partitions and Doors: Key cylinders same as entrance doors of area in which partitions and door occur, except as otherwise specified. Provide cylinders to operate locking devices where specified for following partitions and doors:

1. Day gate on vault door.

C. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

2.16 FINISHES

A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.

B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.

C. Miscellaneous Finishes:

1. Hinges --interior doors: 652 or 630.
2. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
3. Thresholds: Mill finish aluminum.
4. Other primed steel hardware: 600.

D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.

E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.

F. Anti-microbial Coating: All hand-operated hardware (levers, pulls, push bars, push plates, paddles, and panic bars) shall be provided with an anti-microbial/anti-fungal coating that has passed ASTM E2180 tests. Coating to consist of ionic silver (Ag+). Silver ions surround bacterial cells, inhibiting growth of bacteria, mold, and mildew by blockading food and respiration supplies.

2.17 BASE METALS

A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	**Base Metal**
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA COR for approval

B. Hardware Heights from Finished Floor:

1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
3. Deadlocks centerline of strike 1219 mm (48 inches).
4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
5. Centerline of door pulls to be 1016 mm (40 inches).
6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors. . At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with hex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

Door Thickness	**Door Width**	**Hinge Height**
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

Door Description	**Number butts**
Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:
   1. Re-adjust hardware.
   2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
   3. Identify items that have deteriorated or failed.
   4. Submit written report identifying problems.

3.4 DEMONSTRATION

A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

INTERIOR SINGLE DOORS

HW-1-Door 107

Each Door to Have: NON-RATED

1	Continuous Hinge	
1	Latchset	F04
1	Kick Plate	J102
1	Wall Stop	L02101 CONVEX
3	Silencers	L03011

HW-2-Door 101

Each Door to Have: NON-RATED

1	Continuous Hinge	
1	Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR
1	Closer	C02011/C02021
1	Kick Plate	J102
1	Mop Plate (@ Inswing Doors)	J103
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154

HW-3-Door 103

Each Door to Have: NON-RATED

	Hinges	QUANTITY & TYPE AS REQUIRED
1	Office Lock	F04
1	Closer	C02011/C02021
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154

HW-4E-Door 100

Each Door to Have: 3/4 HOUR RATED

1	Continuous Hinge	
1	Storeroom Lock	F07
1	Closer (@ rated doors)	C02011/C02021
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Auto Door Bottom	R0Y346 - HEAVY DUTY
2	Sets Self-Adhesive Seals	R0Y154

HW-5B-Doors 102, 104A, 104B

Each Door to Have: ONE HOUR RATED

1	Continuous Hinge	x INTEGRAL HINGE GUARD CHANNEL X ADJUSTA-SCREWS
1	Lockset	F07
1	Closer	C02011/C02021
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154
1	PIV	
1	Video Monitor w/buzzer	
1	Electric Strike	

HW-5D HW-Vault Door 106

Each Door to Have: ONE HOUR RATED

1 See Specification

HW-Vault Door Day Gate -Door 106

Each Door to Have: NON-RATED

1 See Specification

HW-5G-Door 102A-Alum. Sliding Door

Each Door to Have: NON-RATED

1 PIV

2 Wave Sensors

Balance by Door supplier

SECURITY HARDWARE ABBREVIATIONS LEGEND:

AC = Access Control Device (Card reader, biometric reader, keypad, etc.)

ADO = Automatic Door Operator

DEML = Delayed Egress Magnetic Lock

DEPH = Delayed Egress Panic Exit Device

DPS = Door Position Switch (Door or Alarm Contact)

EL = Electric Lock or Electric Lever Exit Device

PB = Push-button Combination Lock (stand-alone)

RR = Remote Release Button

ELR = Electric Latch Retraction Exit Device

REX = Request-to-Exit Switch in Latching Device Inside Trim

INTERIOR SINGLE SECURITY DOORS

HW-SH-4H-Doors C650C

Each [AC, EL] Door to Have:		NON-RATED
1	Continuous Transfer Hinge	x 4-THRUWIRE TRANSFER x IN-HINGE ACCESS PANEL
1	Electrified Lock	F13-MOD x RIGID OUTSIDE LEVER X KEY RETRACTS LATCHBOLT AND DEADBOLT (E01-REX, E06) 24VDC
1	Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1	Closer	C02011/C02021
1	Kick Plate	J102
1	Floor Stop	L02121 x 3 FASTENERS
1	Set Self-Adhesive Seals	R0Y154
1	PIV	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.
CARD READER BY DIVISION 28.

- - - E N D - - -

SECTION 08 71 13

AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Automatic operators for swinging doors.

1.2 RELATED REQUIREMENTS

A. Door Hardware: Section 08 71 00, DOOR HARDWARE.

B. Access Control Devices: Division 28, ELECTRONIC SAFETY AND SECURITY.

C. Electric General Wiring, Connections and Equipment Requirements: Division 26, ELECTRICAL.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
2. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.

C. Builders Hardware Manufacturers Association (BHMA):

1. BHMA A156.10-11 - Power Operated Pedestrian Doors.

D. National Fire Protection Association (NFPA):

1. 101-15 - Life Safety Code.

E. Underwriters Laboratories (UL):

1. 325-13 - Standard for Doors, Drapery, Gate, Louver, and Window Operators and Systems.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.
3. Warranty.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Test reports: Certify each product complies with specifications.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

2. Installer with project experience list.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

1.5 QUALITY ASSURANCE

A. Manufacturer’s Qualifications:

1. Regularly manufactures specified products.

2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

B. Installer’s Qualifications: Experienced installer, approved by the manufacturer.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.

1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Comply with requirements of BHMA A156.10. Unless otherwise indicated on Drawings, provide operators that move doors from fully closed to fully opened position in three seconds maximum time interval, when speed adjustment is at maximum setting.

B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.

C. Electrical Wiring, Connections and Equipment: Motors, starters, controls, associated devices, and interconnecting wiring required for installation. Equipment and wiring as specified in Division 26, ELECTRICAL.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide door operators from one manufacturer.

C. Provide one type of operator throughout project.

D. Sustainable Construction Requirements:

1. Steel Recycled Content: 30 percent total recycled content, minimum.
2. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.3 SWING DOOR OPERATORS

A. General:

1. Type: Institutional type.
2. Size: As recommended by manufacturer for door weight and sizes.

B. Function:

1. Provide operators, enclosed in housing, permitting opening of door by energizing motor and stopped by electrically reducing Voltage and stalling motor against mechanical stop.
2. Door to close by means of spring energy, and closing force controlled by gear system and motor being used as dynamic brake without power, or controlled by hydraulic closer in electro-hydraulic operators.
3. Opening and Closing Speeds: Field adjustable.
4. Operators with checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
5. Operators capable of recycling doors instantaneously to full open position from any point in closing cycle when control switch is activated.
6. When automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.

C. Connect hardware with drive arm attached to door with pin linkage rotating in a self-lubricating bearing. Prevent doors from pivoting on shaft of operator.

D. Operator Housing:

1. ASTM B209, Type 6063-T5 aluminum alloy, 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high by 3.2 mm (0.125 inch) thick, aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems.

E. Power Operator:

1. Completely assembled and sealed unit including gear drive transmission, mechanical spring and bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mounted units with provisions for easy maintenance and replacement, without removing door from pivots or frame.

F. Motors:
1. Provide with interlock to prevent operation when doors are electrically locked from opening.

G. Electrical Control:
1. Self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator.
2. Connecting Harnesses: Interlocking plugs.

H. Accessories:
1. Metal mounting supports, brackets and other accessories necessary for installation of operators at head of door frames.

I. Microprocessor Controls:
1. Multi-function microprocessor control providing adjustable hold open time (1-30 seconds) with fully adjustable opening speed, LED indications for sensor input signals and operator status and power assist close options. Control capable of receiving activation signals from any device with normally open dry contact output.
2. Hold doors held open by low Voltage applied to the continuous duty motor.
3. Controls:
   a. Adjustable safety circuit that monitors door operation and stops opening direction of door if obstruction is sensed.
   b. Recycle feature that reopens door if obstruction is sensed at any point during closing cycle.
   c. Standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated on drawings.

2.4 POWER UNITS

A. Self-contained, electric operated and independent of door operator.
1. Capacity and size of power circuits according to automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.5 DOOR CONTROLS

A. Control Devices: BHMA A156.10; control opening and closing functions.

B. Open doors when control device is actuated; hold doors in open positions; then, close doors after a set time period, unless safety device or reactivated control interrupts operation.

C. Manual Controls:

1. Push Plate Wall Switch: Recessed type, stainless steel push plate minimum 100 mm by 100 mm (4 inch by 4 inch), with 13 mm (1/2 inch) high letters "To Operate Door-Push" engraved on face of plate.
2. Wave to Open Switch: Stainless steel plate with touchless low energy wall mounted door opener.

D. Motion Detector:

1. Mounting: Surface or concealed.
2. Detection Area: 1500 mm (60 inches) deep and 1500 mm (60 inches) across, plus or minus 150 mm (6 inches).
3. Response Time: 25 milliseconds, maximum.
4. Control Power: 24 Volt DC.
5. Design units to be unaffected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

2.6 SAFETY DEVICES

A. Swing Doors: Install presence sensor on pull side of door to detect any person standing in door swing path and prevent door from opening.

1. Time delay Switches: Adjustable between 3 to 60 seconds and control closing cycle of doors.

B. Install decal signs with "In" or "Do Not Enter" on both faces of each door where shown.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

1. Verify door opening is correctly sized and within acceptable tolerances.

B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Coordinate door installation with other related work.

C. Install manual controls and power disconnect switches recessed or semi-flush mounted in partitions.

D. Secure operator components to adjacent construction with suitable fastenings.

E. Conceal conduits, piping, and electric equipment, in finish work.

F. Install power units in locations shown.

1. Where units are mounted on walls, provide metal supports or shelves for units.
2. Ensure equipment, including time delay switches, are accessible for maintenance and adjustment.

G. Ensure operators are adjusted and function properly for type of expected traffic.

H. Synchronize each leaf of pair doors to open and close simultaneously. Permit each door leaf to be opened manually, independent of other door leaf.

I. Install controls at positions shown and ensuring convenience for expected traffic.

J. Push Plate/Wave Wall Switches Mounting Height: 1000 mm (40 inches) maximum, unless otherwise approved by Contracting Officer's Representative.

3.3 DEMONSTRATION AND TRAINING

A. Instruct VA personnel in proper automatic door operator operation and maintenance.

1. Trainer: Manufacturer approved instructor.
2. Training Time: 2 hours minimum.

B. Coordinate instruction to VA personnel with VA Contracting Officer's Representative.

- - E N D - -

SECTION 08 71 13.11
LOW ENERGY POWER ASSIST DOOR OPERATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Low-energy, power-assisted automatic swing door operators.

1.2 RELATED WORK

A. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES: Steel Doors.

B. Section 08 14 00, INTERIOR WOOD DOORS: Wood Doors.

C. Section 08 71 00, DOOR HARDWARE: Door Hardware.

D. Section 09 06 00, SCHEDULE FOR FINISHES: Finish Color.

E. Division 26, ELECTRICAL: Electric General Wiring, Connections and Equipment Requirements.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate.

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

C. Builders Hardware Manufacturers Association, Inc. (BHMA):

156.19-07.....Power Assist and Low Energy Power Operated Doors.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

a. Contracting Officer's Representative.

b. Architect/Engineer. and Interior Designer.

c. VA Interior Designer.

d. Inspection and Testing Agency.

e. Contractor.

f. Installer.

g. Manufacturer's field representative.

h. Other installers responsible for adjacent and intersecting work, including electrical wiring installers.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Maintenance manuals.
   3. Installation instructions.
   4. Warranty.
D. Certificates: Certify each product complies products comply with specifications.
   1. Show door operator is UL Listed for specified application.
E. Operation and Maintenance Data:
   1. Care instructions for each exposed finish product.
   2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:
   1. Regularly manufactures specified products.
B. Installer Qualifications:
   1. Regularly installs specified products.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.
B. Protect products from damage during handling and construction operations.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.
   1. Warranty Period: Ten years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Power assisted automatic door equipment accommodating normal traffic as well as the weight of the doors; UL approved and comply with applicable codes.

2.2 SYSTEM PERFORMANCE

A. Opening Force: Maximum 67 N (15 pound force).

B. Cycle Tests: 300,000 cycles.

1. Use the widest and heaviest door specified as a test specimen. Narrower or lighter doors of the same configurations will be considered to meet the cycle test requirements.

2.3 MATERIALS

A. Aluminum:

1. Sheet: ASTM B209.
2. Extrusions: ASTM B221.

2.4 PRODUCTS - GENERAL

A. Provide automatic door operators from one manufacturer.

2.5 LOW-ENERGY AUTOMATIC DOOR OPERATORS

A. Conform to BHMA A156.19.

B. Mounting: Surface-mounted on Toilet Room side.

C. Enclosure: Self-contained within an extruded aluminum housing (alloy 6063-T6) to conceal operator mechanism and mounting brackets and with removable access cover with an overall maximum size of 140 mm (5-1/2 inches) wide by 150 mm (6 inches) deep.

D. Safety Features:

1. Adjustable time delay.
2. Adjustable speed for opening and closing operations.
3. Adjustable backcheck.
4. Decals indicating "In" or "Do Not Enter" installed on both faces of each door where shown conforming to the requirements of ANSI/BHMA A156.19.
5. Re-activation sensor mounted on the push-side door face near the top detect any person standing in the door swing path and prevent the door from closing.
6. Motion sensor to detect any person standing in the door swing path and prevent the door from opening.

a. Adjustable door sensor system providing complete operation and safety zone coverage.

E. Power Units:

1. Self-contained electric circuits for automatic operators located on each floor of the building.
2. Interruption or failure of power circuits for operators located on one floor of the building shall not interfere with continuous performance of automatic operated doors located on other floors.
3. Power units designed to not interfere with continuous performance of automatic operated doors located on other floors in the case of power interruption or failure.
4. Capacity and size of power circuits according to automatic operator manufacturer's specifications.

2.6 OPERATION

A. Traffic Operation:

1. Single Door: One way.

B. Operator: Electromechanical; surface-mounted.

1. Operators to have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
2. Operators to recycle doors instantaneously to full open position from any point in closing cycle when control switch is reactivated.
3. Operators to allow manual door control in event of power failure.

C. Controls: Solid-state type.

D. Activation: Push-plate switch.

2.7 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.8 ACCESSORIES

A. Signage: BHMA standard for operation and door type specified.

B. Guide Rails: Aluminum bar with anodized finish.

C. Fasteners: Corrosion-resistant, compatible with adjoining materials.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine conditions effecting work, including door and frame preparation and electrical rough-ins.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Coordinate installation of equipment with other related work.
C. Mount manual controls and power disconnect switches recessed or semi-flush in partitions.
D. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment in finish work.
E. Install power units and controls in locations indicated.
   1. Where units are to be mounted on walls, provide metal supports or shelves for the units.

3.3 ADJUSTING

A. All equipment, including time delay switches, to be accessible for maintenance and adjustment.
B. Adjust operators to function properly for the type o£ traffic (pedestrians) expected to pass through doors.
C. Adjust each door leaf of pairs of doors to open and close in synchronization.
D. On pairs of doors, adjust operators allowing either door to be opened manually without the other door opening.

3.4 DEMONSTRATION AND TRAINING

A. Instruct VA personnel in proper door operator operation and maintenance.
   1. Trainer: Manufacturer approved instructor.
B. Acceptance Condition: After completing work, operate door operators 15 consecutive calendar days without breakdown.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the following:

1. Glass.
2. Plastic glazing.
3. Glazing materials and accessories for both factory and field glazed assemblies.

1.2 RELATED WORK:

A. Factory glazed by manufacturer in following units:

1. Sound resistant doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, and Section 08 14 00, WOOD DOORS.
2. Mirrors: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.
3. Bullet resisting glass: Section 08 56 59, SERVICE AND TELLER WINDOW UNITS.
4. Service and Teller Windows: Section 08 56 19, PASS WINDOW UNITS.
5. Forced Entry (FE) resistant and Ballistic Resistance (BR) rated doors and frames: Section 08 34 53, SECURITY DOORS AND FRAMES.
6. Wiring (120 V AC, 15A or 20A): Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER AND CONDUCTORS AND CABLES.
7. Junction and Switch Boxes: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS.

1.3 LABELS:

A. Temporary labels:

1. Provide temporary label on each light of glass and plastic material identifying manufacturer or brand and glass type, quality and nominal thickness.
2. Label in accordance with NFRC label requirements.
3. Temporary labels are to remain intact until glass and plastic material is approved by Contracting Officer Representative (COR).

B. Permanent labels:

1. Locate in corner for each pane.
2. Label in accordance with ANSI Z97.1 and SGCC label requirements.
   a. Tempered glass.
   b. Laminated glass or have certificate for panes without permanent label.

c. Organic coated glass.

3. Bullet resistance glass or plastic assemblies:
   a. Bullet resistance glass or plastic assemblies in accordance with UL 752 requirements for power rating specified.
   b. Identify each security glazing permanently with glazing manufacturer's name, date of manufacture, product number, and DOS Code number inconspicuously located in lower corner on protective side and visible after glazing is framed.
   c. The "attack (threat) side" is to be identified in bold lettering on each side of glazing with removable label.
4. Fire rated glazing assemblies: Mark in accordance with IBC.

1.4 PERFORMANCE REQUIREMENTS:

A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual, and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing system; deflections beyond specified limits; or other defects in construction.

B. Glazing Unit Design: Design glass, including engineering analysis meeting requirements of authorities having jurisdiction. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.
   1. Design glass in accordance with ASTM E1300, and for conditions beyond the scope of ASTM E1300, by a properly substantiated structural analysis.
   2. Design Wind Pressures: N/A

C. Ballistic- and Blast- resistant glass assemblies:
   1. For blast-resistant and ballistic-resistant units comply with requirements in UFC 4-010-01, Physical Security Design Manual for VA Facilities, and project-specific criteria provided by VA.

2. Spall Resistance: Laminated glazing is not permitted to produce spall to interior (protected side) when impacted with scheduled ballistics.
3. Tolerances:
   a. Outside dimensions: Overall outside dimensions (height and width) of laminated security glazing is to maintain tolerance of ± 3 mm (± 0.12 inch).
   b. Warpage: Out-of-flat (warpage or bowing) condition of laminates is not to exceed 2.5 mm per lineal meter (0.10 inch per 3.3 lineal foot). The condition, if present, is to be localized to extent not greater than 0.75 mm (0.03 inch) for any 0.3 meter (0.98 feet) section.

1.5 SUBMITTALS:

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:
   1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Manufacturer's Certificates:
   1. Certificate stating that fire-protection and fire-resistive glazing units meet code requirements for fire-resistance-rated assembly and applicable safety glazing requirements.
   2. Certificate on solar heat gain coefficient when value is specified.
   3. Certificate on "R" value when value is specified.
   4. Certificate test reports confirming compliance with specified bullet resistive rating.
   5. Certificate that blast resistant glass meets the specified requirements

D. Manufacturer Warranty.

E. Manufacturer's Literature and Data:
   1. Glass, each kind required.
   2. Glazing cushion.
   3. Sealing compound.
   4. Bullet resistive material.
   5. Plastic glazing material, each type required.

F. Samples:
   1. Size: 305 mm by 305 mm (12 inches by 12 inches).

2. Clear glass.

G. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer’s test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING:

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":

1. Treat security glazing as fragile merchandise: packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling to comply with manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.

2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.

3. Temporary protections: The glass front and polycarbonate back of glazing are to be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the

film used on exposed polycarbonate surfaces is to be approved and applied by manufacturer.

4. Edge protection: To cushion and protect glass clad, and polycarbonate edges from contamination or foreign matter, the four (4) edges are to be sealed the depth of glazing with continuous standard-thickness thermoplastic rubber tape. Alternatively, continuous channel shaped extrusion of thermoplastic rubber are to be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 degrees C (60 to 75 degrees F), during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS:

Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY:

A. Construction Warranty: Comply with the FAR clause 52.246-21 “Warranty of Construction”.

B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows. Submit manufacturer warranty.

1. Bullet resistive plastic material to remain visibly clear without discoloration for 10 years.
2. Laminated glass units to remain laminated for five (5) years.
4. Polycarbonate to remain clear and ultraviolet light stabilized for five (5) years.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Architectural Manufacturers Association (AAMA):

800.....Test Methods for Sealants

810.1-77.....Expanded Cellular Glazing Tape

C. American National Standards Institute (ANSI):

Z97.1-14.....Safety Glazing Material Used in Building - Safety Performance Specifications and Methods of Test

D. ASTM International (ASTM):

C542-05(R2011).....Lock-Strip Gaskets

C716-06.....Installing Lock-Strip Gaskets and Infill Glazing Materials

C794-10.....Adhesion-in-Peel of Elastomeric Joint Sealants

C864-05(R2011).....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers

C920-14a.....Elastomeric Joint Sealants

C964-07(R2012).....Standard Guide for Lock-Strip Gasket Glazing

C1036-11(R2012).....Flat Glass

C1048-12.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.

C1172-14.....Laminated Architectural Flat Glass

C1349-10.....Standard Specification for Architectural Flat Glass Clad Polycarbonate

C1376-10.....Pyrolytic and Vacuum Deposition Coatings on Flat Glass

D635-10.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastic in a Horizontal Position

D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

E84-14.....Surface Burning Characteristics of Building Materials

E119-14.....Standard Test Methods for Fire Test of Building Construction and Material

F1233-08.....Standard Test Method for Security Glazing Materials and Systems

F1642-12.....Test Method for Glazing and Glazing Systems Subject to Airblast Loadings

E. Code of Federal Regulations (CFR):

16 CFR 1201-10.....Safety Standard for Architectural Glazing Materials

F. Glass Association of North America (GANA):

2010 Edition.....GANA Glazing Manual

2008 Edition.....GANA Sealant Manual

2009 Edition.....GANA Laminated Glazing Reference Manual

2010 Edition.....GANA Protective Glazing Reference Manual

G. International Code Council (ICC):

IBC.....International Building Code

H. Intertek Testing Services – Warnock Hersey (ITS-WHI)

I. National Fire Protection Association (NFPA):

80-16.....Fire Doors and Windows

252-12.....Fire Tests of Door Assemblies

257-12.....Standard on Fire Test for Window and Glass Block Assemblies

J. National Fenestration Rating Council (NFRC)

K. Safety Glazing Certification Council (SGCC) 2012:

Certified Products Directory (Issued Semi-Annually).

L. Underwriters Laboratories, Inc. (UL):

9-08(R2009).....Fire Tests of Window Assemblies

263-14.....Fire Tests of Building Construction and Materials

752-11.....Bullet-Resisting Equipment.

M. Unified Facilities Criteria (UFC):

4-010-01-03(R2007).....DOD Minimum Antiterrorism Standards for Buildings

N. U.S. Veterans Administration:

Physical Security Design Manual for VA Facilities (VAPSDG); Life Safety Protected

Physical Security Design Manual for VA Facilities (VAPSDG); Mission Critical Facilities

Architectural Design Manual for VA Facilities (VASDM)

O. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCT

2.1 GLASS:

A. Provide minimum thickness stated and as additionally required to meet performance requirements.

1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.

B. Obtain glass units from single source from single manufacturer for each glass type.

C. Clear Glass:

1. ASTM C1036, Type I, Class 1, Quality q3 .

D. Ultra-clear-Low-Iron Float Glass:

1. ASTM C1036, Type I, Class 1, Quality q3 and with visible light transmission of not less than 90 percent.

2.2 HEAT-TREATED GLASS:

A. Roller Wave Limits for Heat-Treated Glass: Orient all roller wave distortion parallel to bottom surface of glazing, and provide units complying with the following limitations:

1. Measurement Parallel to Line: Maximum peak to valley 0.203 mm (0.008 inch).
2. Measurement Perpendicular to Line: Maximum 0.0254 mm (0.001 inch).
3. Bow/Warp: Maximum 50 percent of bow and warp allowed by ASTM C1048.

B. Clear Heat Strengthened Glass:

1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.

C. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.

2.3 LAMINATED GLASS:

A. Laminated Glass: ASTM C1172. Two or more lites of glass bonded with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent-resin interlayer complying with interlayer manufacturer's written instructions.

B. Interlayer: Use min. 0.75 mm (0.030 inch) thick interlayer for vertical glazing unless otherwise indicated in construction documents or as scheduled.

C. Interlayer: Use 1.5 mm (0.060 inch) thick interlayer for:

1. Horizontal or sloped glazing.
2. Acoustical glazing.
3. Assemblies requiring heat strengthened or fully tempered glass.

D. Interlayer: Use 2.28 mm (0.090 inch) thick interlayer where required to meet performance requirements.

E. Interlayer Color: Clear, unless otherwise indicated in construction documents scheduled.

2.4 SECURITY GLAZING ASSEMBLY:

A. Provide ballistic level as scheduled in accordance with UL 752 Level 3.

B. Forced Entry Resistance: As scheduled, in accordance with ASTM F1233.

C. Blast Resistance: Provide and interior security glazing units providing protection based upon hazard rating as scheduled, in accordance with ASTM F1642, and peak pressure and positive phase impulse indicated.

D. Laminated Glass Security Glazing Units: Fabricate from multiple lites of scheduled glass with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent resin interlayers between the layers of glazing.

2.5 FIRE PROTECTION AND FIRE RESISTANCE GLAZING:

A. Fire-Protection-Rated Glazing: Glazing units tested for use in fire door assemblies or fire windows, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC, for fire-protection ratings as indicated on construction documents, scheduled, based upon positive-pressure testing per NFPA 257 or UL 9, and complying with NFPA 80.

1. Hose-Stream Test: Units must comply, except units having fire-protection rating of 20 minutes.
2. Temperature Rise Limitation: Units over 0.065 sq. m (100 sq. in.) must comply with 232 deg. C (450 deg. F) limitation.
3. Labeling: Permanently label fire-protection-rated glazing units in accordance with IBC.
4. Safety Glazing: Comply with 16 CFR 1201, Category II.
5. Fire-Protection-Rated Tempered Glass: For 20-minute fire-protection-rated door assemblies, of thickness scheduled.

B. Fire-Resistance-Rated Glazing: Glazing units tested for use in fire wall assemblies, UL, ITS-WHI or equivalent listed and labeled by testing agency in accordance with IBC for fire-resistance ratings of wall assemblies as indicated on construction documents scheduled, based upon testing according to NFPA 252 and ASTM E119 or UL 263.

1. Labeling: Permanently label fire-resistance-rated glazing units in accordance with IBC.
2. Safety Glazing: Comply with 16 CFR 1201, Category II.
3. Fire-Resistance-Rated Laminated Glass with Intumescent Interlayers: Units made from multiple lites of uncoated, ultra-clear low-iron

float glass, in intumescent interlayers, of thickness and rating scheduled.

4. Fire-Resistance-Rated Double Glazing Units with Gel Fill: Units made from two lites of uncoated, fully tempered, ultra-clear (low-iron) float glass, with perimeter metal spacer and edge seal forming cavity filled with clear, fully transparent, heat-absorbing gel, of thickness and fire-protection rating scheduled.

2.6 GLAZING ACCESSORIES:

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer’s installation instructions.

B. Setting Blocks: ASTM C864:
   1. Silicone type.
   2. Channel shape; having 6 mm (1/4 inch) internal depth.
   3. Shore A hardness of 80 to 90 Durometer.
   4. Block lengths: 50 mm (2 inches) except 100 to 150 mm (4 to 6 inches) for insulating glass.
   5. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
   6. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:
   1. Channel shape having a 6 mm (1/4 inch) internal depth.
   2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
   3. Lengths: 25 to 76 mm (1 to 3 inches).
   4. Shore A hardness of 40 to 50 Durometer.

D. Glazing Tapes:
   1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
   2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
   3. Complying with AAMA 800 for the following types:

a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.

F. Glazing Clips: Galvanized steel spring wire designed to hold glass in position in rabbeted sash without stops.

G. Glazing Points (Sprigs): Pure zinc stock, thin, flat, triangular or diamond shaped pieces, 6 mm (1/4 inch) minimum size.

H. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
2. Soft, closed cell with locking key for sash key.
3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.

I. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.

J. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
2. Class 25 or 50 as recommended by manufacturer for application.
3. Grade NS.
4. Shore A hardness of 25 to 30 Durometer.
5. VOC Content: For sealants used inside the weatherproofing system, not more than 250 g/L or less when calculating according to 40 CFR 59, (EPA Method 24).

K. Color:
1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames to match color of the finished aluminum and be non-staining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted are to be black, gray, or neutral color.

PART 3 - EXECUTION

3.1 EXAMINATION:

A. Verification of Conditions:

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.

B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units.

3.2 PREPARATION:

A. For sealant glazing, prepare glazing surfaces in accordance with GANA Sealant Manual.

B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.

C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.

D. Verify that components used are compatible.

E. Clean and dry glazing surfaces.

F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION – GENERAL:

A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.

B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.

C. Set glazing without bending, twisting, or forcing of units.

D. Do not allow glass to rest on or contact any framing member.

E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.

F. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.

G. Plastic:

1. Use dry glazing method.
2. Use only neoprene or EPDM gaskets.

H. Laminated Glass:

1. Tape edges to seal interlayer and protect from glazing sealants.
2. Do not use putty or glazing compounds.

I. Fire Protective and Fire Resistance Glass:
1. Wire Glass: Glaze in accordance with NFPA 80.
2. Other fire protective and fire resistant glass: Glaze in accordance with manufacturer's installation instructions and NFPA 80.

J. Bullet Resisting Material:
1. Glaze as recommended by manufacturer, using glazing material which will permit expansion and contraction of the bullet resistive material in the frame.
2. The polycarbonate surface is not to be cleaned by scraping, razor blade, squeegee, or use of highly alkaline cleaner.
3. At no time is polycarbonate material be exposed to chemical solvents (benzene, gasoline, acetone, paint thinners) or aromatic hydrocarbons (toluene or xylene), nor should any of these solvents or fumes by used or present in confined area such as a security guard booth.
4. Due care is to be exercised (paint formula, ventilation, protection of polycarbonate) when painting becomes necessary to interiors of rooms of hardline glazed units; exposure to chemical solvents could result in irreparable damage to security glazings (delaminations, distortions, cracks, severe stress crazing, and air bubbles).

3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING):

A. Cut glazing tape to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.

B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.

C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.

D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.

E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.

F. Trim protruding tape edge.

3.5 REPLACEMENT AND CLEANING:

A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.

B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.

C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.6 PROTECTION:

A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.7 MONOLITHIC GLASS SCHEDULE:

A. Glass Type MG# : Clear fully tempered float glass.

1. Unit Thickness: 6 mm (0.23 inch).
2. Safety glazing label required.

B. Glass Type MG# : Ultra-clear (low-iron) fully tempered float glass.

1. Unit Thickness: 6 mm (0.23 inch.
2. Safety glazing label required.

3.8 LAMINATED GLASS SCHEDULE:

A. Glass Type LG# : Clear laminated glass with two (2) lites of fully tempered float glass.

1. Minimum Thickness of Each Glass Lite: 3 mm (0.12 inch).
2. Interlayer Thickness: 1.52 mm (0.060 inch).
3. Safety glazing label required.
4. Application: Interior glazing of units unless otherwise scheduled.

B. Glass Type LG# : Clear laminated glass with two (2) lites of fully tempered float glass.

1. Minimum Thickness of Each Glass Lite: 4 mm (0.16 inch).
2. Interlayer Thickness: 1.52 mm (0.060 inch).
3. Safety glazing label required.
4. Application: Interior glazing units in Psychiatric Nursing Units, Alcohol Dependency Treatment Nursing Units, Drug Abuse Treatment Nursing Units, Medical, Surgical and Neurological (MS&N) Security Bedrooms, Security Exam Rooms, and Security Holding Rooms per VAADM.

3.9 FIRE-PROTECTIVE AND FIRE-RESISTANCE GLAZING SCHEDULE:

A. Glass Type FR# : Fire-protection-rated tempered glass.

1. Thickness: 6 mm (0.23 inch), 10 mm (0.39 inch), 12 mm (0.47 inch) .
2. Rating: 20 minutes.
3. Application: Fire-protection-rated door assemblies with openings not over 0.65 sq. m (100 sq. in.).

3.10 SECURITY GLAZING SCHEDULE:

A. Glass Type SG# : Clear Tempered Glass Clad Polycarbonate Security Glazing Unit:

1. Outer Glass Panes: Fully tempered, 3 mm (0.12 inch) thick.
2. Interlayers: Minimum 1.3 mm (0.050 inch) polyurethane sheeting, in thickness required to meet performance requirements.
3. Core: Clear polycarbonate sheet, minimum 3 mm (0.12 inch) thick, in thickness required to meet performance requirements.
4. Ballistic-Resistance Rating: Level 3.
5. Forced Entry Resistance Rating: 15 Minutes .
6. Blast Resistance: Provide units that meet the ballistic rating.

---END---

---INTENTIONALLY BLANK---

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies subsurface preparation requirements for areas to receive the installation of applied and resinous flooring.

B. This section includes removal of existing floor coverings, testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, and floor leveling and repair as required.

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS.

B. Section 09 65 16, RESILIENT SHEET FLOORING, Section 09 65 19, RESILIENT TILE FLOORING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.

B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer

C. Product Data:

1. Moisture remediation system
2. Underlayment Primer
3. Cementitious Self-Leveling Underlayment
4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)

D. Test Data:

1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer’s technical representative.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.

B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International(ASTM):

D638-14(2014).....Standard Test Method for Tensile Properties of Plastics

D4259-18(2019).....Standard Practice for Preparation of Concrete by Abrasion Prior to Coating Application.

C109/C109M-20b(2020)....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or [50-mm] Cube Specimens

7234-19(2020).....Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers

E96/E96M-16(2016).....Standard Test Methods for Water Vapor Transmission of Materials

F710-1e1(2020).....Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring

F1869-16a.....Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

F2170-19a(2020).....Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

C348-20(2020).....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars

C191-19(2020).....Standard Test Method for Time of Setting of Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING

A. System Descriptions:

1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products, VCT, tile and carpet where issues caused by moisture vapor are a concern.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify

compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:

1. Liquid applied coating:
   a. Resin: epoxy.
   b. Formulation Description: Multiple component high solids.
   c. Application: Per manufacturer's written installation requirements.
   d. Thickness: minimum 10 mils

D. Material Vapor Permeance: Application shall achieve a permeance rating of less than 0.1 perm in accordance with ASTM E96/E96M.

E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113 (Amended 02/05/2016)	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	$1.9X10^5$psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufacture's Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

A. System Descriptions:
   1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

C. System Characteristics:
   1. Wearing Surface: smooth

2. Thickness: Per architectural drawings, ranging from feathered edge to 1”, per application. Applications greater than 1” require additional 3/8” aggregate to mix or as recommended by manufacturer.

D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348

G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours and floor coverings in 16 hours.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:

1. Primer:
   a. Resin: copolymer
   b. Formulation Description: single component ready to use.
   c. Application Method: Squeegee and medium nap roller.
   d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
   e. Number of Coats: (1) one.
2. Grout Resurfacing Base:
   a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.
   b. Application Method: colloidal mix pump, cam rake, spike roll.
      1) Thickness of Coats: Per architectural scope, 1” lifts.
      2) Number of Coats: More than one if needed.
   c. Aggregates: for applications greater than 1inch, require additional 3/8” aggregate to mix.

J.

Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT(NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

B. Compressive Strength: Minimum 4000 psi in 28 days

C. Trowel-applied underlayment shall not contain silica quartz (sand).

D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.

B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.

C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

A. Existing concrete slabs with existing floor coverings:

1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.

B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.

C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.

D. Prepare concrete substrates per ASTM D4259 as follows:

1. Dry abrasive blasting.
2. Wet abrasive blasting.

3. Vacuum-assisted abrasive blasting.
4. Centrifugal-shot abrasive blasting.
5. Comply with manufacturer's written instructions.

E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.

F. Verify that concrete substrates are dry.

G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.

H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture’s formal and project specific written recommendation.

I. Provide a written report showing test placement and results.

J. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer’s instructions.

K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer’s technical representative.

L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4” deviation in 10’. As required, install underlayment to achieve required tolerance.

M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING

A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.

B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM D4259.

C. Mix and apply moisture remediation coating in accordance with manufacturer’s instructions.

3.4 CEMENTITOUS UNDERLAYMENT

A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.

B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 09 06 00
SCHEDULE FOR FINISHES

VAMC: Sacramento VA Medical Center

Location: 10535 Hospital Way, Mather, CA 95655

Project no. and Name: #612A4-19-016 Renovation of Outpatient Pharmacy and HVAC

Submission: 100% Bid Documents

Date: October 13, 2023

SECTION 09 06 00
SCHEDULE FOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

1.2 MANUFACTURERS

A. Manufacturer’s trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer’s equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

1.3 SUBMITALS

A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide duplicate samples for color approval of materials and finishes specified in this section.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. MASTER PAINTING INSTITUTE: (MPI)
6/1/2019..... Architectural Painting Specification Manual

PART 2 - PRODUCTS

2.1 DIVISION 08 - OPENINGS

A. SECTION 08 14 00, INTERIOR WOOD DOORS

Component	Finish/Color
Doors	Maple, Clear Stain
Frames	P-2, Benjamin Moore OC-149 Decorators White

2.2 DIVISION 09 - FINISHES

A. SECTION 09 30 13, CERAMIC/PORCELAIN TILING

1. SECTION 09 30 13, CERAMIC/PORCELAIN TILING					
Finish Code	Size	Shape	Manufacturer	Pattern	Mfg. Color Name/No.
PT-1	24” x 24”	Square	Daltile	Haute Monde	Glitterati Grnt HM03, Matte
PT-2	4” x 12”	Rectilinear	Daltile	Mythology	MY91 Olympus
GWT-1	12” X 12”	Random Interlocking	Daltile	Serenade	Surf Rock F192

2. SECTION 09 30 13, [CERAMIC/PORCELAIN TILING] GROUT		
Finish Code	Manufacturer	Mfg. Color Name/No.
G-1	Mapei	Epoxy, Color TBD, To Match PT-1
G-2	Mapei	Epoxy, Color TBD, To Match PT-2/GWT-1

3.SECTION 09 30 13, [CERAMIC/PORCELAIN TILING] METAL DIVIDER STRIPS			
Finish Code	Manufacturer	Profile	Color
TR-1 (Cove)	Schluter	Dilex-AHK	Satin Anodized Nickel
TR-2 (Top Cap)	Schluter	Rondec	Satin Anodized Nickel
TR-3 (Outside Corner)	Schluter	Rondec	Satin Anodized Nickel
TR-4 (Inside Corner)	Schluter	Dilex	Satin Anodized Nickel

B. SECTION 09 51 00, ACOUSTICAL CEILINGS

Finish Code	Component	Color Pattern	Manufacturer	Mfg Name/No.
Grid	Exposed Suspension System	White	Armstrong	Prelude XL 15/16
AT-1	Type XII	White	Armstrong	3352 Optima 2’x2’ Lay-In

AT-2	TypeIV	White	Armstrong	8806 Calla High CAC 2'x2' Square Tegular 15/16

C. SECTION 09 65 19, RESILIENT TILE FLOORING

Finish Code	Size	Material/Component	Manufacturer	Mfg Name/No.
LVT-1	18" x 36"	Luxury Vinyl Tile	Armstrong	Coalesce - ST832 Geome Dolomite
LVT-2	11.81" x 23.6"	Luxury Vinyl Tile	Shaw Contract	Terrace 2.5mm 4108V - Cedar 08755
LVT-3	18" x 36"	Luxury Vinyl Tile	Shaw Contract	Strand 0516V - Dune 16516

D. SECTION 09 65 16, RESILIENT SHEET FLOORING, HEAT WELDED SEAMS (WSF)

Finish Code	Material/Component	Pattern name	Manufacturer	Mfg. Color Name/No.
RSF-1	Rubber Sheet	Noraplan Valua 175A(3mm)	Nora	6715 Pecan
RSF-2	Rubber Sheet	Noraplan Environcare 1463(3mm)	Nora	7041 Whale Watch
RSFB-1	Rubber Sanitary Base	Sanitary Base	Nora	7062 Football
Welding Rods	Heat Weld	--	Nora	TBD, To Match RSF-1
Welding Rods	Heat Weld	--	Nora	TBD, To Match RSF-2

E. SECTION 09 65 13, RESILIENT BASE AND ACCESSORIES

Finish Code	Item	Height	Manufacturer	Color	Mfg Name/No.
RB-1	Rubber Base (RB)	6"	Johnsonite	Pebble	MW-32-F6
RB-2	Vinyl Base (VB)	4"	Johnsonite	Pebble	Traditional Cove

F. SECTION 09 91 00, PAINTING

1. MPI Gloss and Sheen Standards

		Gloss @60	Sheen @85
Gloss Level 1	a traditional matte finish-flat	max 5 units, and	max 10 units

Gloss Level 2	a high side sheen flat-"a velvet-like"	max 10 units, and finish 10-35 units
Gloss Level 3	a traditional "egg-shell like" finish	10-25 units, and 10-35 units
Gloss Level 4	a "satin-like" finish	20-35 units, and min. 35 units
Gloss Level 5	a traditional semi-gloss	35-70 units
Gloss Level 6	a traditional gloss	70-85 units
Gloss level 7	a high gloss	more than 85 units

2. Paint code	Gloss	Manufacturer	Mfg. Color Name/No.
P-1	3	Kelly Moore	KM541 Tufted Tan
P-2	5	Benjamin Moore	OC-149 Decorators White
P-3	3	Dunn Edwards	Silver Screen DET591
P-4	3	Dunn Edwards	Gray Flannel DE6319
P-5	3	Dunn Edwards	Sycamore Strand DEC781
EP-1	Epoxy Paint	Dunn Edwards	Gray Flannel DE6319
EP-2	Epoxy Paint	Dunn Edwards	Warm White DEW380

2.3 DIVISION 10 - SPECIALTIES

A. 10 14 00, INTERIOR SIGNAGE

Sign Type	Component	Mfg. Color Name/No.
Primary Room Identification with Insert / Perpendicular Flag Mount / Restroom Identification	Header Panels	Wilsonart, Kensington Maple 10776-60
	Body Panels	Off White Acrylic
	Text	Black
	Frames	Brushed Silver-tone Metallic
Dimensional Letters		Brushed Aluminum
Restroom Door Identification		Off White Through Body Acrylic 3/16" thick , 1/8" radius on all corners and all edges to be eased

B. SECTION 10 26 00, WALL AND DOOR PROTECTION

Item	Material	Manufacturer	Mfg. Color Name/No.
Corner Guards	CG-1	Inpro / Series Stainless Steel	2.5” Wing x 48”H x 1/8”R
End Guards	EG-1	Inpro / 140D End Wall Protector	48”H / Natural Maple 0531
End Guards	EG-2	Inpro/Stainless Steel	48”H x 1/8”R
Handrail	HR-1	Inpro / Series 3500	Stainless Steel
Crash Rail	CR-1	Inpro / Series 1600	Antique White 0104
High Impact Wallcovering (PETG)	HIW-1	Inpro / Series Palladium	.06” Thick / Natural Maple 0531
High Impact Wallcovering (PETG)	HIW-2	Inpro / Series Palladium	.04” Thick / Antique White 0104 Vertical seams to have color matched caulk
Flexible High Impact Wallcovering	HIW-3	Koroguard / Traffic Patterns	.03” Thick / Sailcloth Pier 832139
High Impact Wallcovering Vertical Divider Bar	HIWT-1	Inpro / Series Palladium	Color Match Panel / Cashew 0240
High Impact Wallcovering Top Cap	HIWT-2	Inpro / Series Palladium	Color Match Panel / Cashew 0240
High Impact Wallcovering Inside Corner	HIWT-3	Inpro / Series Palladium	Color Match Panel / Cashew 0240
High Impact Wallcovering Horizontal Divider Bar	HIWT-4	Inpro / Aluminum Trim	Clear Anodized Aluminum

C. SECTION 10 28 00, TOILET, BATH AND LAUNDRY ACCESSORIES

Item	Material	Manufacturer	Mfg. Color Name/No.
Coat Hooks	Match Campus Standards		Match Campus Standards
Mirror	Match Campus Standards		Match Campus Standards
Grab Bars	Match Campus Standards		Match Campus Standards
Seat Cover Dispenser	Match Campus Standards		Match Campus Standards

D. SECTION 10 44 13, FIRE EXTNGUISHER CABINETS

Component	Material	Finish
		TO MATCH CAMPUS STANDARDS

E. SECTION 10 56 13, METAL STORAGE SHELVING

Item	Manufacturer	Type	Mfg. Color Name/No.
C1 – 36”W Double Sided Metal Shelving	SpaceSaver	FrameWRX Stationary Shelving– 84”H w/ 9 adjustable Trays at 13”D – Shelf to have front ledge allowing for flat or cantilever installation. Steel Canopy Tops w/Steel End Caps at all exposed ends	TBD from Manufacturer standard
C2 – 24”W Double Sided Metal Shelving			
C3 – 36”W Single Sided Metal Shelving			
C4 – 24”W Single Sided Metal Shelving			
Multi Color Bins	Quantum Storage	QUS220, 7-3/8”L x 4-1/8”W” x 3”H – 775 Total QUS230, 10-7/8”L x 5-1/2”W x 5”H – 3,000 Total QUS235, 10-7/8”L x 11”W x 5”H – 300 Total QUS245, 10-7/8”L x 16-1/2”W x 5”H – 200 Total	Colors & Color Quantities TBD

2.4 DIVISION 12- FURNISHINGS

A. SECTION 12 32 00, MANUFACTURED WOOD CASEWORK

Finish Code	Location	Finish/Color
PL-1	Cabinets	Wilsonart, Fusion Maple

B. SECTION 12 36 00, COUNTERTOPS

Type	Finish/Color
Solid Surface Countertop	SS-1 Corian, Clam Shell

--- E N D---

---INTENTIONALLY BLANK---

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

1.2 RELATED WORK

A. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS: Section 09 29 00, GYPSUM BOARD.

1.3 TERMINOLOGY

A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.

C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Studs, runners and accessories.
2. Hanger inserts.
3. Channels (Rolled steel).
4. Furring channels.
5. Screws, clips and other fasteners.

C. Shop Drawings:

1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical shaft wall assembly
4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

A653/653M-11.....Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by Hot-Dip Process.

C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings

C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-11.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C841-03(R2008).....Installation of Interior Lathing and Furring

C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

E580-11.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G40 or equivalent.

2.2 STEEL STUDS AND RUNNERS (TRACK)

A. ASTM C645, modified for thickness specified and sizes as shown.
   1. Use C 645 steel, 0.75 mm (0.0296-inch) minimum base-metal (30 mil).
   2. Runners same thickness as studs.
   3. Exception: Members that can show certified third party testing with gypsum board in accordance with ICC ES AC86 (Approved May 2012) need not meet the minimum thickness limitation or minimum section properties set forth in ASTM C 645. The submission of an evaluation report is acceptable to show conformance to this requirement. Use C 645 steel, 0.48mm (0.019 inch) minimum base-metal (19 mil).

B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.

C. Doubled studs for openings and studs for supporting concrete backer-board.

D. Studs 3600 mm (12 feet) or less in length shall be in one piece.

E. Shaft Wall Framing:
   1. Conform to rated wall construction.
   2. C-H Studs or C-T Studs.
   3. E Studs.
   4. J Runners.
   5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

A. Rigid furring channels (hat shape): ASTM C645.

B. Resilient furring channels:
   1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
   2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

C."Z" Furring Channels:
   1. Not less than 0.45 mm (0.0179-inch)-thick base metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
   2. Web furring depth to suit thickness of insulation.

D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:

1. ASTM A641, soft temper, Class 1 coating.
2. Gage (diameter) as specified in ASTM C754 or ASTM C841.

G. Attachments for Wall Furring:

1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.

B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2)

of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.

B. Space studs not more than 610 mm (24 inches) on center.

C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.

D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.

E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions and insulated exterior wall furring.

F. At existing plaster ceilings and where shown, studs may terminate at ceiling as shown.

G. Openings:

1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

H. Fastening Studs:

1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

I. Chase Wall Partitions:

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

J. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:

1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.

D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture

accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.

B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

A. Conform to UL Design No. U438 for two-hour fire rating. Provide one hour fire rating Shaft wall at _____.

B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.

C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.

D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.

E. Suitably frame all openings to maintain structural support for wall:
   1. Provide necessary liner fillers and shims to conform to label frame requirements.
   2. Frame openings cut within a liner panel with E studs around perimeter.
   3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

F. Elevator Shafts:
   1. Frame elevator door frames with 0.87 mm (0.0341-inch) thick J strut or J stud jambs having 75 mm (three-inch) long legs on the shaft side.
   2. Protrusions including fasteners other than flange of shaft wall framing system or offsets from vertical alignments more than 3 mm (1/8-inch) are not permitted unless shown.
   3. Align shaft walls for plumb vertical flush alignment from top to bottom of shaft.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
   1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
   2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.

B. New exposed concrete slabs:
   1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
   2. Furnish for installation under Division 3, CONCRETE.
   3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.

C. Concrete slabs on steel decking composite construction:
   1. Use pull down tabs when available.
   2. Use power activated fasteners when direct attachment to structural framing cannot be accomplished.

D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.

E. Existing concrete construction exposed or concrete on steel decking:
   1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
   2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.

F. Steel decking without concrete topping:
   1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
   2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.

G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
   1. Install only for ceilings to receive screw attached gypsum board.
   2. Install in accordance with ASTM C636.
      a. Install main runners spaced 1200 mm (48 inches) on center.

b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.

c. Install wall track channel at perimeter.

H. Installing Ceiling Bracing System:

1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and overhead construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.

2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.

3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.

B. Plumb and align vertical members within 3 mm (1/8-inch.)

C. Level or align ceilings within 3 mm (1/8-inch.)

---END---

---INTENTIONALLY BLANK---

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies installation and finishing of gypsum board.

B. This section specifies the installation of exterior gypsum sheathing at the temporary vault.

1.2 RELATED WORK

A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

B. Sound deadening board: Section 07 21 13, THERMAL INSULATION.

C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

D. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

1.3 TERMINOLOGY

A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.

C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Cornerbead and edge trim.
2. Finishing materials.
3. Laminating adhesive.
4. Gypsum board, each type.

C. Shop Drawings:

1. Typical gypsum board installation, showing corner details, edge trim details and the like.
2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
3. Typical shaft wall assembly.

4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

F. Certificates: Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos material.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems

C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board

C840-08.....Application and Finishing of Gypsum Board

C919-08.....Sealants in Acoustical Applications

C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base

C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing

C1658-06.....Glass Mat Gypsum Panels

C1396-06.....Gypsum Board

E84-08.....Surface Burning Characteristics of Building Materials

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.
2. ASTM C1658: Glass Mat Gypsum Panels,
3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.

D. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

B. ASTM C1177, Type X.

2.3 ACCESSORIES

A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

C. Select screws of size and type recommended by the manufacturer of the material being fastened.

D. For fire rated construction, type and size same as used in fire rating test.

E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:

1. Two sides of partitions:
   a. Fire rated partitions.
   b. Smoke partitions.
   c. Sound rated partitions.
   d. Full height partitions shown (FHP).
   e. Corridor partitions.
2. One side of partitions or furring:
   a. Inside of exterior wall furring or stud construction.
   b. Room side of room without suspended ceilings.
   c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.

B. In locations other than those specified, extend gypsum board from floor to heights as follows:

1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
2. At ceiling of suspended gypsum board ceilings.
3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

A. Coordinate installation of gypsum board with other trades and related work.

B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.

C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.

D. Use gypsum boards in maximum practical lengths to minimize number of end joints.

E. Bring gypsum board into contact, but do not force into place.

F. Ceilings:

1. For single-ply construction, use perpendicular application.
2. For two-ply assembles:
   a. Use perpendicular application.
   b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.

G. Walls (Except Shaft Walls):

1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
3. Stagger screws on abutting edges or ends.
4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.

7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
   a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
   b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
   a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
   b. Not required for wall lengths less than 9000 mm (30 feet).
   c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

I. Electrical and Telecommunications Boxes:
1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

J. Accessories:
1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
   a. Install at all vertical and horizontal external corners and where shown.

b. Use screws only. Do not use crimping tool.

4. Edge Trim (casings Beads):

a. At both sides of expansion and control joints unless shown otherwise.

b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.

c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.

d. Where shown.

3.3 INSTALLING GYPSUM SHEATHING

A. Install in accordance with ASTM C840, except as otherwise specified or shown.

B. Use screws of sufficient length to secure sheathing to framing.

C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.

D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.

E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

FINISHING OF GYPSUM BOARD

A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for al finished areas open to public view.

B. Before proceeding with installation of finishing materials, assure the following:

1. Gypsum board is fastened and held close to framing or furring.

2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non-decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain

the integrity of the smoke barrier, fire rated and sound rated construction sanding is not required of non-decorated surfaces.

3.4 REPAIRS

A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.

B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.

C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.

D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non-decorated surface to provide smoke tight construction or fire protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

3.5 UNACCESSIBLE CEILINGS

At Mental Health and Behavioral Nursing Units, areas accessible to patients and not continuously observable by staff (e.g., patient bedrooms, day rooms), ceilings should be a solid material such as gypsum board. This will limit patient access. Access doors are needed to access electrical and mechanical equipment above the ceiling. These doors should be locked to prevent unauthorized access and secured to ceiling using tamper resistant fasteners.

---END---

SECTION 09 30 13
CERAMIC/PORCELAIN TILING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies interior porcelain tile, waterproofing membranes for thin-set applications, crack isolation membranes, setting materials, metal edge strips, movement joint profiles, self-leveling underlayment and tile backer board.

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS: Sealing of Joints.

B. Section 09 06 00, SCHEDULE FOR FINISHES: Color, Texture, Pattern, and Size of Field Tile and Trim Shapes, and Color of Grout Specified.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Samples:

1. Porcelain tile, each type, color, patterns and size.
2. Wall (or wainscot) tile, each color, size and pattern.
3. Metal edge strips in 6-inch lengths

D. Product Data:

1. Ceramic, glass, and porcelain tile, marked to show each type, size, and shape required.
2. Chemical resistant mortar and grout (epoxy).
3. Divider strip.
4. Elastomeric membrane and bond coat.
5. Reinforcing tape.
6. Leveling compound.
7. Latex-portland cement mortar and grout.
8. Fasteners.

E. Shop Drawings:

1. Layout of patterns as shown on the construction documents.
2. Edge strip locations showing types and detail cross sections.

F. Certification:

1. Master grade certificate, ANSI A137.1.

2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
   a. Elastomeric membrane and bond coat.
   b. Reinforcing tape.
   c. Latex-portland cement mortar and grout.
   d. Leveling compound.

G. Installer Qualifications:
   1. Submit letter stating installer's experience.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.

B. Store material to prevent damage or contamination.

1.5 QUALITY ASSURANCE

A. Installers to be from a company specializing in performing installation of products specified and have a minimum of three (3) years' experience installing tile of the same type and installation method specified, in projects of similar size and complexity.

B. Each type and color of tile to be provided from a single source.

C. Each type and color of mortar, adhesive, and grout to be provided from the same source.

1.6 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

B. General Warranty: Special warranty specified in this Article shall not deprive Owner of other rights Owner may have under other provisions of the Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of the Contract Documents.

C. Special Fracture-Free Warranty: Written warranty, signed by crack suppression membrane manufacturer agreeing to replace ceramic tile that does not comply with requirements or that fails within specified warranty period. Warranty does not include deterioration or failure of ceramic tile due to unusual traffic, vandalism, or abuse. Failures include, but are not limited to, cracks in ceramic tile floors and joints.
   1. Warranty Period: Twenty-five (25) years from date of Substantial Completion.

D. System Bond Warranty: Written warranty, signed by mortar and grout manufacturer agreeing to replace ceramic tile that has bond failure within specified warranty period. Warranty does not include deterioration or failure of ceramic tile due to unusual traffic, vandalism, or abuse. Failures include, but are not limited to, cracks in ceramic tile floors and joints.

1. Warranty Period: Twenty-five (25) years from date of Substantial Completion.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

A10.20-06(R2016).....Safe Operating Practices for Tile, Terrazzo and Marble WorkA108/A118/A136.1:2019
Installation of Ceramic Tile

A108.01-18.....Subsurfaces and Preparations by Other Trades

A108.02-19.....Materials, Environmental, and Workmanship

A108.1A-17.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar

A108.1B-17.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

A108.1C-17.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

A108.4-09.....Ceramic Tile with Organic Adhesives or Water Cleanable Tile-Setting Epoxy Adhesive

A108.5-10 .....Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar

A108.6-10.....Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy

A108.9-10.....Ceramic Tile with Modified Epoxy Emulsion Mortar/Grout

A108.10-17.....Grout in Tilework

A108.11-18.....Interior Installation of Cementitious Backer Units

A108.12-10.....Installation of Ceramic Tile with EGP (Exterior Glue Plywood) Latex-Portland Cement Mortar

A108.13-16.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone

A108.17-16.....Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone

A118.3-13.....Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive

A118.6-19.....Standard Cement Grouts for Tile Installation

A118.8-16.....Modified Epoxy Emulsion Mortar/ Grout

A118.9-19.....Cementitious Backer Units

A118.10-14.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation

A118.12-14.....Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation

A118.13-14.....Bonded Sound Reduction Membranes for Thin-Set Ceramic Tile Installation

A137.1-17.....American National Standard Specifications for Ceramic Tile

C. ASTM International (ASTM):

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar

A1064/A1064M-18a.....Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete

C109/C109M-20b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2 inch. or [50-mm] Cube Specimens)

C241/C241M-15e1.....Abrasion Resistance of Stone Subjected to Foot Traffic

C348-20.....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars

C627-18.....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester

C954-18.....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness

C979/C979M-16.....Pigments for Integrally Colored Concrete

C1002-18.....Steel Self-Piercing Tapping Screws for the Application of Panel Products

C1027-19.....Test Method for Determining Visible Abrasion Resistance of Glazed Ceramic Tile

C1127/C1127M-15.....Standard Guide for Use of High Solids Content, Cold Liquid-Applied Elastomeric Waterproofing Membrane with an Integral Wearing Surface

C1178/C1178M-18.....Standard Specification for Coated Glass Mat Water-Resistant Gypsum Backing Panel

C1325-19.....Non-Asbestos Fiber-Mat Reinforced Cementitious Backer Units

C1353/C1353M-20e1.....Abrasion Resistance of Dimension Stone Subjected to Foot Traffic Using a Rotary Platform, Double-Head Abraser

D1204-14(2020).....Test Method for Linear Dimensional Changes of Nonrigid Thermoplastic Sheeting or Film at Elevated Temperature

D2240-15e1.....Test Method for Rubber Property - Durometer Hardness

D3045-2018.....Heat Aging of Plastics Without Load

D4397-16.....Standard Specification for Polyethylene Sheeting for Construction, Industrial and Agricultural Applications

D5109-12(Withdrawn2020).Standard Test Methods for Copper-Clad Thermosetting Laminates for Printed Wiring Boards (recommend deletion)

D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Tile Council of North America, Inc. (TCNA):
Handbook for Ceramic Tile Installation (2020 TK4)G. TCNA DCOF AcuTest-2012,Dynamic Coefficient of Friction Test

PART 2 - PRODUCTS

2.1 TILE

A. Comply with ANSI A137.1, Standard Grade, except as modified:
1. Inspection procedures listed under the Appendix of ANSI A137.1.
2. Abrasion Resistance Classification:
a. Tested in accordance with values listed in Table 1, ASTM C1027.
b. Class V, 12000 revolutions for floors in Corridors, Kitchens, Storage including Refrigerated Rooms
c. Class IV, 6000 revolutions for remaining areas.
3. Slip Resistant Tile for Floors:
a. Coefficient of friction, when tested in accordance with ANSI A137.1 and measured per the TCNA DCOF AcuTest.
1) Equal to or greater than .42 for level interior tile floors that will be walked on when wet.
4. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one (1) package show the same range in colors as those taken from other packages and match approved samples.
5. Factory-Applied Temporary Protective Coating:
a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of hot applied petroleum paraffin wax.
b. Do not coat unexposed tile surfaces.
c. Pre-wax tiles set or grouted with epoxy or latex modified mortars.

2.2 BACKER UNITS

A. Cementitious Backer Units:
1. Use in toilet rooms, showers or wet areas.
2. Conform to ASTM C1325; Type A.
3. Use in maximum lengths available to minimize end to end butt joints.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.

B. Tape Embedding Material: Latex-portland cement mortar complying with ANSI A108.01.

C. Joint material, including reinforcing tape, and tape embedding material, are to be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

A. Screws for Cementitious Backer Units.

1. Standard screws for gypsum board are not acceptable.
2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
3. ASTM C954 for steel 1 mm (0.033 inch) thick.
4. ASTM C1002 for steel framing less than 0.0329 inch thick.

B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

A. Conform to TCNA Handbook for Ceramic Tile Installation.

B. Latex-Portland Cement Mortar: ANSI A118.4 TK 7.

1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.4.
2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
3. For glass tile applications, provide white non-sag, polymer fortified adhesive mortar that is specifically formulated for use inglass tile applications.

C. Elastomeric Waterproofing Membrane and Bond Coat:

1. TCNA F122-20 (on ground concrete) and TCNA F112A-20 TK11(above ground concrete).
2. ANSI A118.10.
3. One component polyurethane, liquid applied material having the following additional physical properties:
   a. Hardness: Shore "A" between 40-60.
   b. Elongation: Between 300-600 percent.

c. Tensile strength: Between .27 - .41 Newton per square millimeter (40-60 pounds per square inch gauge).

d. No volatile compounds (VOC).

4. Coal tar modified urethanes are not acceptable.

D. Crack Isolation Membrane:

1. Fabric-Reinforced, Fluid-Applied Membrane: System consisting of liquid-latex rubber or elastomeric polymer and fabric reinforcement.

2. Provide membrane that complies with ANSI A118.12 for standard performance and is recommended by the manufacturer for the application indicated. Include reinforcement and accessories recommended by manufacturer.

2.6 GROUTING MATERIALS

A. Water-Cleanable Epoxy Grout: ANSI A118.3 [TK15], with a VOC content of 65 g/L or less when calculated according to 40 CFR 59 (EPA Method 24) .

1. Provide product capable of withstanding continuous and intermittent exposure to temperatures of up to 60 and 100 degrees C (140 and 212 degrees F), respectively, and certified by manufacturer for intended use.

2.7 PATCHING AND LEVELING COMPOUND

A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Provide a patching and leveling compound with the following minimum physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.

2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).

3. Tensile strength – 4.1 MPa (600 psi) per ANSI 118.7.

4. Density – 1.9.

C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 101 mm (4 inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.

D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.

E. Ready for use in 48 hours after application.

2.8 METAL TRANSITIONS

Set transition strips in mortar bed to line and level centered under doors or in openings.

A. At preformed sealant joint: Refer to Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
   1. Comply with recommendations in TCNA for Vertical and Horizontal Joint Design Essentials. TCNA Systems EJ 171.
      a. Locate joint in tile surfaces directly above joint in sub-floor or where indicated when used with isolation membranes to allow off-setting of joint location from sub-floor joint.
      b. Fasten full length to sub-floor using a construction adhesive.
      c. Trowel setting material with full coverage over the entire leg.
   2. Set tile up against the joint ensuring that the top edge of the joint is flush or slightly below the top of the tile.

B. Floors:
   1. Install metal divider strips in floor joints between ceramic floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise on construction documents.
   2. Set aluminum trim edge protection and transition profile in mortar bed to line and level centered under doors or in openings
   3. Provide aluminum trim edge protection and transition profile for all flooring, provide between all dislike adjacent materials with straight embedded anchoring leg. Profile to be selected by flooring installer for appropriate materials.
   4. Finish to be anodized aluminum with type, style and width as required for selected materials.
   5. Height as required to coordinate with flooring systems and setting systems as applicable.

C. Walls:
   1. Provide aluminum trim edge protection with round visible surface profile for all wall tile on all vertical internal and external corner joints, wall top edge horizontal joints, between floor and wall tile with matching inside, outside, and internal connectors.
   2. Provide integrated trapezoid-perforated anchoring leg, and integrated grout joint spacer. Profile to be selected by tile installer for appropriate materials.
   3. Cove shape Trim: Single integrated trapezoid-perforated anchoring leg and dovetailed channel, connected at a 90 degree angle by a cove-shaped 3/8 inch (10 mm) radius section that forms the visible

surface. Provide with matching inside and outside corners with matching end caps.

4. Finish to be anodized aluminum with type, style and width as required for selected materials.
5. Height as required to coordinate with tile selection and setting system selected.
6. Finish: Clear anodic coating unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

2.9 WATER

A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.10 CLEANING COMPOUNDS

A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.

B. Materials containing acid or caustic Material are not acceptable.

2.11 FLOOR MORTAR BED REINFORCING

A. ASTM A1064/A1064M welded wire fabric without backing, MW3 x MW3 (2 x 2-W0.5 x W0.5).

2.12 POLYETHYLENE SHEET

A. Polyethylene sheet conforming to ASTM D4397.

B. Nominal thickness: 0.15 mm (6 mils).

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degrees C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three (3) days after installation.

B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.

C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).

D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).

E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after third day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
   1. Not more than 6 mm in 3048 mm (1/4 inch in 10 feet) from required elevation where portland cement mortar setting bed is used.
   2. Not more than 3 mm in 3048 mm (1/8 inch in 10 feet) where dry-set portland cement, and latex-portland cement mortar setting beds and chemical-resistant bond coats are used.

B. Variation in Plane of Wall Surfaces:
   1. Not more than 6 mm in 2438 mm (1/4 inch in 8 feet) from required plane where portland cement mortar setting bed is used.
   2. Not more than 3 mm in 2438 mm (1/8 inch in 8 feet) where dry-set or latex-portland cement mortar is used.

3.3 SURFACE PREPARATION

A. Patching and Leveling:
   1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
   2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
      a. Thickness of compound as required to bring finish tile system to elevation shown on construction documents.
      b. Float finish except finish smooth for elastomeric waterproofing.
      c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
   3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
   4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

B. Additional preparation of concrete floors for tile set with epoxy, or furan-resin is to be in accordance with the manufacturer's printed instructions.

C. Cleavage Membrane:
   1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.

2. Turn up at edge of depressed floor slab to top of floor.

D. Walls:

1. In showers or other wet areas cover studs with polyethylene sheet.
2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
4. Apply metal lath to framing in accordance with ANSI A108.1:
   a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
   b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1C.
   c. Total thickness of scratch and leveling coats:
      1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
      2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.
      3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.
   d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick in two (2) coats.

E. Existing Floors and Walls:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles, cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

3.4 CEMENTITIOUS BACKER UNITS

A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.

B. Install in accordance with ANSI A118.9 except as specified otherwise.

C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a "V" joint for joint treatment.

D. Secure cementitious backer units to each framing member with screws spaced not more than 203 mm (8 inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.

E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.

F. Do not install joint treatment for seven (7) days after installation of cementitious backer unit.

G. Joint Treatment:

1. Fill horizontal and vertical joints and corners with latex-portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 CERAMIC TILE – GENERAL

A. Comply with ANSI A108/A118/A136 series of tile installation standards applicable to methods of installation and TCNA Installation Guidelines.

B. Installing Mortar Beds for Floors:

1. Install mortar bed in a manner that does not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
2. Install floor mortar bed reinforcing centered in mortar fill.
3. Screed finish to level plane or slope to drains shown on construction documents, float finish.
4. For thin set systems cure mortar bed not less than seven (7) days. Do not use curing compounds or coatings.

5. For tile set with portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

C. Setting Beds or Bond Coats:

1. Where recessed or depressed floor slabs are filled with portland cement mortar bed, set ceramic mosaic floor tile in either portland cement paste over plastic mortar bed or latex-portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1C, TCNA System F121-14 or F111-14.
   a. Portland cement paste over plastic mortar bed. ANSI A108.1A.
   b. Dry-set portland cement mortar over cured mortar bed. ANSI A108.1B.
2. Set floor tile in elastomeric bond coat over elastomeric membrane per ANSI 108.13, TCNA System F122-14 where indicated on construction documents.
3. Set wall tile installed over concrete backer board in latex-portland cement mortar, ANSI A108.1B.
4. Set wall tile installed over portland cement mortar bed on metal lath base in portland cement paste over plastic mortar bed, or dry-set portland cement mortar or latex-portland cement mortar over a cured mortar bed, ANSI A108.1C, TCNA System W231-14, W241-14.
5. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.1, TCNA System W242-14.

D. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise on construction documents.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
   a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
   b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.

6. Completed work is to be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
   a. Align finish surface of new tile work flush with other and existing adjoining floor finish where indicated in construction documents.
   b. In areas where floor drains occur, slope tile to drains.
   c. Push and vibrate tiles over 203 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
   a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights as indicated in construction documents with tile.
   b. Finish reveals of openings with tile, except where other finish materials are indicated in construction documents.
   c. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
    a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise on construction documents.
    b. Make joints in tile, porcelain type; maximum 3 mm (1/8 inch) wide.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108/A118/A136 series of tile installation standards:
    a. Tile wall installations in wet areas, including showers, tub enclosures, laundries and swimming pools.
    b. Tile installed with chemical-resistant mortars and grouts.
    c. Tile wall installations composed of tiles 203 by 203 mm (8 by 8 inches) or larger.

3.6 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR

A. Mortar Mixes for Floor, Wall and Base Tile: ANSI A108.1A. except specified otherwise.

B. Installing Wall and Base Tile: ANSI A108.1A, except specified otherwise.

C. Installing Floor Tile: ANSI A108.1A, except as specified otherwise. Slope mortar beds to floor drains at a minimum of 3 mm in 305 mm (1/8 inch per foot).

3.7 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR

A. Due to the denseness of porcelain tile use latex portland cement bonding mortar that meets the requirements of ANSI A108.01. Mix bonding mortars in accordance with manufacturer’s instructions. Provide liquid ratios and comply with dwell times during the placement of bonding mortar and tile.

3.8 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

A. Installation of Tile: ANSI A108.1B, except as specified otherwise.

B. Slope tile work to drains at not less than 3 mm in 305 mm (1/8 inch per foot).

3.9 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT

A. Surface Preparation: Prepare surfaces as specified.

B. Installation of Elastomeric Membrane: ANSI A108.10 and TCNA F122-14 (on ground concrete) and F122A-14 (above-ground concrete).

1. Prime surfaces, where required, in accordance with manufacturer's instructions.
2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.76 to 1.3 mm (30 to 50 mils).
3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 101 mm (4 inches) above finish floor surface.
4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
5. After curing test for leaks with 25 mm (1 inch) of water for 24 hours.

C. Installation of Tile in Elastomeric Membrane:

1. Spread no more material than can be covered with tile before material starts to set.
2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at

aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.10 GROUTING

A. Grout Type and Location:
   1. Grout for glazed wal tile, porcelain tile and unglazed mosaic tile portland cement grout, latex-portland cement grout, dry-set grout, or commercial portland cement grout.
   2. Grout for glazed wall, porcelain, unglazed mosaic tile, and glass tile wall, floor, and base:
      a. Epoxy grout.

B. Workmanship:
   1. Install and cure grout in accordance with the applicable standard.
   2. Epoxy Grout: ANSI A108.6.
   3. Water-Cleanable Epoxy Grout: ANSI A118.3.

3.11 MOVEMENT JOINTS

A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.

B. TCNA details EJ 171-14.

C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.

D. Rake out grout at joints between tile not less than 6 mm (1/4 inch) deep.

3.12 CLEANING:

A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.

B. Methods and materials used are not permitted to damage or impair appearance of tile surfaces.

C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.

D. Clean tile grouted with epoxy, furan and commercial portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

3.13 PROTECTION

A. Keep traffic off tile floor, until grout and setting material is fully set and cured.

B. Where traffic occurs over tile floor is unavoidable, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover

until time for final inspection. Clean tile of any tape, adhesive and stains.

3.14 TESTING FINISH FLOOR

A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical units.
2. Metal ceiling suspension system for acoustical ceilings.
3. Adhesive application.

1.2 RELATED REQUIREMENTS

A. Color, pattern, and location of each type of acoustical unit: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Access doors in adhesive applied tile: Section 08 31 13, ACCESS DOORS AND FRAMES.

C. Ceiling Suspension System: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

D. Lay in gypsum board ceiling panels: Section 09 29 00, GYPSUM BOARD.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. A641/A641M-09a(2014) - Zinc-coated (Galvanized) Carbon Steel Wire.
2. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process.
3. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
4. C634-13 - Terminology Relating to Environmental Acoustics.
5. C635/C635M-13a - Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
6. C636/C636M-13 - Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
7. D1779-98(2011) - Adhesive for Acoustical Materials.
8. E84-15b - Surface Burning Characteristics of Building Materials.
9. E119-16 - Fire Tests of Building Construction and Materials.
10. E413-16 - Classification for Rating Sound Insulation.
11. E580/E580M-14 - Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions.
12. E1264-14 - Classification for Acoustical Ceiling Products.

C. International Organization for Standardization (ISO):

1. ISO 14644-1 - Classification of Air Cleanliness.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Architect/Engineer.
      c. VA Interior Designer.
      d. Inspection and Testing Agency.
      e. Contractor.
      f. Installer.
      g. Manufacturer's field representative.
      h. Other installers responsible for adjacent and intersecting work, including sprinkler, HVAC, and lighting installers.
   2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
      a. Installation schedule.
      b. Installation sequence.
      c. Preparatory work.
      d. Protection before, during, and after installation.
      e. Installation.
      f. Terminations.
      g. Transitions and connections to other work.
      h. Inspecting and testing.
      i. Other items affecting successful completion.
   3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Ceiling suspension system indicating manufacturer recommendation for each application.
   3. Installation instructions.

4. Warranty.

D. Samples:

1. Acoustical units, 150 mm (6 inches) in size, each type, including units specified to match existing.
   a. Submit quantity required to show full color and texture range.
2. Suspension system, trim and molding, 300 mm (12 inches) long.
3. Colored markers for access service.
4. Approved samples may be incorporated into work.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
   a. Show type and quantity for each product.
   b. Show volatile organic compound types and quantities.

F. Certificates: Certify products comply with specifications.

1. Acoustical units, each type.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

H. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Ceiling System: Acoustical ceilings units on exposed grid suspension systems.

2.2 SYSTEM PERFORMANCE

A. Design product complying with specified performance:

1. Maximum Deflection: 1/360of span, maximum.

B. Surface Burning Characteristics: When tested according to ASTM E84.

1. Flame Spread Rating: 25 maximum.
2. Smoke Developed Rating: 450 maximum.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide acoustical units from one manufacturer.

1. Provide each product exposed to view from one production run.

C. Provide suspension system from same manufacturer.

D. Sustainable Construction Requirements:

1. Mineral Base Recycled Content: 71 percent, total recycled content, minimum. Select products with recycled content to achieve overall Project recycled content requirement.
2. Steel Recycled Content: 30 percent total recycled content, minimum.

2.4 ACOUSTICAL UNITS

A. General:

1. Ceiling Panel and Tile: ASTM E1264, bio-based content according to USDA Bio-Preferred Product requirements.
   a. Mineral Fiber: 3.6 kg/sq. m (3/4 psf) weight, minimum.
2. Classification: Provide type and form as follows:
   a. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply factory-applied latex paint over paint coat. Mold, mildew and bacteria-resistant surface. Washable and scrubbable with long lasting water-repellency
   b. NRC (Noise Reduction Coefficient): ASTM C423, minimum 0.55 unless specified otherwise.
   c. CAC (Ceiling Attenuation Class): ASTM E413, 40-44 range unless specified otherwise.
   d. LR (Light Reflectance): Minimum 0.75.
3. Lay-in panels: Sizes as indicated on Drawings, with square edges
   a. Sizes:
      1) Concealed Grid Upward Access System: 600 by 600 mm (24 by 24 inch).
      2) Edge and Joint Detail: Square edges and joints as required to suit suspension and access system.
4. Perforated Metal Facing (Pan):
   a. Panels: Sizes as indicated on Drawings with flat panel with square edges to finish flush with exposed grid suspension system.
   b. Sound Absorbent Element: Non-sifting mineral wool or glass fiber (formaldehyde-free). Density and thickness to provide specified noise reduction coefficient. Enclose sound absorbent elements within plastic envelopes.
   c. Support sound absorbent elements on wire spacer nominal 6 mm (1/4 inch) high. Fit sound absorbent element and the spacer into the unit.

2.5 METAL SUSPENSION SYSTEM

A. General: ASTM C635, heavy-duty system, except as otherwise specified.
   1. Suspension System: Provide the following:
      a. Galvanized cold-rolled steel, bonderized.
   2. Main and Cross Runner: Use same construction Do not use lighter-duty sections for cross runners.

B. Exposed Grid Suspension System: Support of lay-in panels.
   1. Grid Width: 22 mm (7/8 inch) minimum with8 mm (5/16 inch) minimum panel bearing surface.
   2. Molding: Fabricate from the same material with same exposed width and finish.
   3. Finish: Baked-on enamel flat texture finish.
      a. Color: To match adjacent acoustical units unless specified otherwise in Section 09 06 00, SCHEDULE FOR FINISHES.

C. Suspension System Support of Metal Type V, VI, and VII Tiles:

D. Anchors and Inserts: Provide anchors or inserts to support twice the loads imposed by hangers.
   1. Hanger Inserts: Steel, zinc-coated (galvanized after fabrication).
      a. Nailing type option for wood forms:
         1) Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
         2) Lower portion provided with minimum 8 mm (5/16 inch) hole to permit attachment of hangers.
      b. Flush ceiling insert type:
         1) Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
         2) Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
         3) Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

E. Clips: Galvanized steel, designed to secure framing member in place. When required by manufacturer.

F. Wire: ASTM A641.
   1. Size:
      a. Wire Hangers: Minimum diameter 2.68 mm (0.1055 inch).
      b. Bracing Wires: Minimum diameter 3.43 mm (0.1350 inch).

2.6 ACCESSORIES

A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

B. Perimeter Seal: Vinyl, polyethylene or polyurethane open cell sponge material, density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
   1. Thickness: As required to fill voids between back of wall molding and finish wall.
   2. Size: Minimum 9 mm (3/8 inch) wide strip.

C. Access Identification Markers: Colored markers with pressure sensitive adhesive on one side, paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) diameter.
   1. Color Code: Provide the following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls
Black	Gas: Laboratory, Medical, Air and Vacuum

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Remove existing acoustical panels and suspension system to permit new installation.
   1. Retain existing for reuse.
   2. Dispose of removed materials.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 ACOUSTICAL UNIT INSTALLATION

A. Applications:
   1. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.

B. Layout acoustical unit symmetrically, with minimum number of joints.

C. Installation:

1. Install acoustic tiles after wet finishes have been installed and solvents have cured.
2. Install lay-in acoustic panels in exposed grid with minimum 6 mm (1/4 inch) bearing at edges on supports.
   a. Install tile to lay level and in full contact with exposed grid.
   b. Replace cracked, broken, stained, dirty, or tile.
3. Markers:
   a. Install color coded markers to identify the various concealed piping, mechanical, and plumbing systems.
   b. Attach colored markers to exposed grid on opposite sides of the units providing access.
   c. Attach marker on exposed ceiling surface of upward access acoustical unit.

D. Touch up damaged factory finishes.

1. Repair painted surfaces with touch up primer.

3.4 CEILING SUSPENSION SYSTEM INSTALLATION

A. General: Install according to ASTM C636.

1. Use direct or indirect hung suspension system or combination of both.
2. Support a maximum area of 1.48 sq. m (16 sq. ft.) of ceiling per hanger.
3. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
4. Provide additional hangers located at each corner of support components.
5. Provide minimum 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown.
6. Provide main runners minimum 1200 mm (48 inches) in length.
7. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Direct Hung Suspension System: ASTM C635.

1. Support main runners by hanger wires attached directly to the structure overhead.

2. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

C. Anchorage to Structure:

1. Concrete:
   a. Install hanger inserts and wire loops required for support of hanger and bracing wire. Install hanger wires with looped ends through steel deck when steel deck does not have attachment device.
   b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.
2. Steel:
   a. Install carrying channels for attachment of hanger wires.
      1) Size and space carrying channels to support load within performance limit.
      2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
   b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fireproofing is installed. Weld or use steel clips for beam attachment.
   c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

D. Indirect Hung Suspension System: ASTM C635.

1. Space carrying channels for indirect hung suspension system maximum 1200 mm (4 feet) on center. Space hangers for carrying channels maximum 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) or center to ensure that specified requirements are not exceeded.
2. Support main runners by specially designed clips attached to carrying channels.

E. Seismic Ceiling Bracing System:

1. Install according to ASTM E580.
2. Connect bracing wires to structure above as specified for anchorage to structure and to main runner or carrying channels of suspended ceiling at bottom.

3.5 CEILING TREATMENT

A. Moldings:
1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

B. Perimeter Seal:
1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

C. Existing ceiling:
1. Where extension of existing ceilings occurs, match existing.
2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

3.6 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed surfaces. Remove contaminants and stains.

---END---

SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Resilient base (RB) adhered to interior walls and partitions.

1.2 RELATED REQUIREMENTS

A. Sheet Flooring Integral Base: Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

F1861-16.....Resilient Wall Base.

D4259-18.....Preparation of Concrete by Abrasion Prior to Coating Application.

C. International Concrete Repair Institute (ICRI):

310.2R-2013.....Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Adhesives and primers indicating manufacturer's recommendation for each application.
3. Installation instructions.

C. Samples:

1. Resilient Base: 150 mm (6 inches) long, each type and color.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
   a. Show volatile organic compound types and quantities.

E. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage when handling and during construction operations.

1.7 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer and from one production run.

2.2 RESILIENT BASE

A. Resilient Base: 3 mm (1/8 inch) thick, 100 mm (4 inches) high.

1. Type: Rubber or vinyl; use one type throughout.
2. ASTM F1861, Type TP thermoplastic rubber or Type TV thermoplastic vinyl, Group 2 - layered.

B. Applications:

1. Carpet Flooring Locations: Style A - Straight.
2. Other Locations: Style B - Cove.

2.3 RESILIENT CONTOURABLE WALL BASE

A. Resilient Base: 11 mm (1/4 inch) thick, 152.4 (6 inches) high,

1. Type: Rubber; use one type throughout.
   ASTM F1861, Type TP thermoplastic rubber or Type TP thermoplastic vinyl, Group 1 - layered

2.4 ADHESIVES

A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Remove existing base to permit new installation.
   1. Dispose of removed materials.
D. Correct substrate deficiencies.
   1. Fill cracks, pits, and depressions with leveling compound.
   2. Remove protrusions; grind high spots.
E. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
F. Allow substrate to dry and cure.

3.2 INSTALLATION GENERAL

A. Install products according to manufacturer's instructions.
   1. When instructions deviate from specifications, submit proposed resolution for Contracting Officer consideration.

3.3 RESILIENT BASE INSTALLATION

A. Applications:
   1. Install resilient base in rooms scheduled on Drawings.
   2. Install resilient base on casework, and other curb supported fixed equipment.
   3. Extend resilient base into closets, alcoves, and cabinet knee spaces, and around columns within scheduled room.
B. Lay out resilient base with minimum number of joints.
   1. Length: 600 mm (24 inches) minimum, each piece.
   2. Locate joints 150 mm (6 inches) minimum from corners and intersection of adjacent materials.
C. Installation:
   1. Apply adhesive uniformly for full contact between resilient base and substrate.
   2. Set resilient base with hairline butted joints aligned along top edge.
D. Field form corners and end stops.

1. V-groove back of outside corner.
2. V-groove face of inside corner and notch cove for miter joint.

E. Roll resilient base ensuring complete adhesion.

3.4 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed resilient base. Remove contaminants and stains.

1. Clean with mild detergent. Leave surfaces free of detergent residue.

C. Polish exposed resilient base to gloss sheen.

3.5 PROTECTION

A. Replace damaged products and re-clean.

1. Damaged Products include cut, gouged, scraped, torn, and unbonded products.

- - E N D - -

SECTION 09 65 16
RESILIENT SHEET FLOORING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Welded seam sheet flooring (WSF) with heat welded seams and integral cove base.

1.2 RELATED REQUIREMENTS

A. Color, Pattern and Texture: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Resilient Base over Base of Lockers, Equipment and Casework: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. D4259-88(2012) - Abrading Concrete.
2. E648-15e1 - Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source.
3. E662-15a - Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials.
4. F1860-14 - Rubber Sheet Floor Covering With Backing.

C. International Concrete Repair Institute (ICRI):

1. 310.2R-13 - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, and Polymer Overlays, and Concrete Repair.

D. SCS Global Services (SCS):

1. FloorScore.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1. Show size, configuration, and fabrication and installation details.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.
3. Warranty.

C. Samples:

1. Sheet material, 150 mm by 300 mm (6 inch by 12 inch), of each color
2. Welding rod: 150mm (6 inches) long for each color.
3. Cap strip and fillet strip, 300 mm (12 inches) for integral base.

4. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
5. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
6. Edge strips: 150 mm (6 inches) long each type.
7. Primer: Pint container, each type.

D. Sustainable Construction Submittals:
1. Low Pollutant-Emitting Materials:
a. Sheet Flooring: Submit FloorScore label.
b. Identify volatile organic compound types and quantities.

E. Certificates: Certify products comply with specifications.
1. Heat welded seaming is manufacturer's prescribed method of installation.

F. Qualifications: Substantiate qualifications comply with specifications.
1. Manufacturer with project experience list.
2. Installer with project experience list.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
b. Career long training.
c. Manufacturer endorsed training.
d. Fundamental journeyman skills certification.

B. Furnish product type materials from the same production run.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight, conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Work Area Ambient Temperature Range: Minimum 18 to 38 degrees C (65 to 100 degrees F) continuously, beginning 48 hours before installation. Maintain room temperature above 18 degrees C (65 degrees F) after installation.
2. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant resilient sheet flooring against material and manufacturing defects.

1. Warranty Period: 2 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Sheet Flooring:

1. Critical Radiant Flux: ASTM E648; 0.45 watts per sq.cm or more, Class I.
2. Smoke Density: ASTM E662; less than 450.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide vinyl sheet color and pattern from one production run.

C. Sustainable Construction Requirements:

2.3 WELDED SEAM SHEET FLOORING

A. Welded Seam Sheet Flooring (WSF): ASTM F1860; Type II rubber, with backing.

1. Wear Surface: Smooth.
2. Wear Layer Thickness: Minimum 1.0 mm (0.040 inches).
3. Total Thickness: 2 mm (0.080 inches).

B. Sheet Size: Provide maximum size sheet produced by manufacturer to minimize joints.

1. Minimum Width: 1200 mm (48 inches).

2.4 ACCESSORIES

A. Welding Rod: Flooring manufacturer's standard, in color matching field color of sheet flooring.

B. Adhesives: Water resistant type recommended by flooring manufacturer to suit application.

C. Base Accessories:

1. Fillet Strip: 19 mm (3/4 inch) radius fillet strip compatible with flooring material.
2. Cap Strip: J-Shape extruded flanged reducer strip compatible with flooring material approximately 25 mm (1 inch) exposed height with 13 mm (1/2 inch) flange.

D. Leveling Compound:

1. Provide cementitious type with latex or polyvinyl acetate resins additive.

E. Primer:

1. Type recommended by adhesive or flooring manufacturer.

F. Floor transition:

G. . Metal edge protection and transition profile for floors, provide between all disalike materials with anchoring leg. Finish to be satin anodized aluminum with type, style and width as required for selected material. Sealant:

1. As specified in Section 07 92 00, JOINT SEALANTS.
2. Compatible with flooring.

H. Polish: Type recommended by flooring manufacturer to suit application and anticipated traffic.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Remove existing sheet flooring to permit new installation.

1. Do not use solvents for removing adhesives.
2. Dispose of removed materials.

D. Ensure interior finish work such as plastering, drywall finishing, concrete, terrazzo, ceiling work, and painting work is complete and dry before installation.

1. Complete mechanical, electrical, and other work above ceiling line.

2. Ensure heating, ventilating, and air conditioning systems are installed and operating in order to maintain temperature and humidity requirements.

E. Correct substrate deficiencies.
1. Fill cracks, pits, and dents with leveling compound.
2. Grind, sand, or cut away protrusions. Grind high spots.
3. Level flooring substrate to 3 mm (1/8 inch) maximum variation.

F. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
1. Mechanically clean concrete floor substrate according to ASTM D4259.
2. Surface Profile: ICRI 310.2R CSP 3 to CSP 4.

G. Perform flooring manufacturer’s recommended bond, substrate moisture content, and pH tests.

H. Broom or vacuum clean substrates immediately before flooring installation.

I. Primer: Apply primer according to manufacturer’s instructions.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 INSTALLATION OF FLOORING

A. Flooring Layout:
1. Arrange pattern in one direction and end joints pattern matched.
2. Extend flooring wall-to-wall, under cabinets, casework, laboratory and pharmacy furniture, and other equipment for seamless flooring installation.
3. Arrange sheets to minimize seams.
4. Locate seams in inconspicuous and low traffic areas, minimum 150 mm (6 inches) away from parallel joints in flooring substrates.

B. Match edges of flooring for color shading and pattern at seams.

C. Install flooring flush with adjacent floor finishes.

D. Extend flooring into toe spaces, door reveals, closets, and similar openings.

E. Install flooring fully adhered to substrate.
1. Air pockets or loose edges are not acceptable.

2. Trim sheet materials tight to flooring penetrations; seal joints at pipe with waterproof sealant specified in Section 07 92 00, JOINT SEALANTS.

F. Butt joints tight, without gaps and bulges.

G. Installation of Edge Strips:

1. Install edge strips at flooring terminations and transitions to other floor finishes.
2. Locate edge strips under center lines of doors unless otherwise indicated.
3. Set edge strips in adhesive and mechanically fasten to substrate.

3.4 INTEGRAL COVE BASE INSTALLATION

A. Set preformed fillet strip at floor intersection with walls and other vertical surfaces.

B. Extend flooring over fillet strip and 100 mm (4 inches) up wall surface.

C. Form straight or radius internal and external corners to suit Application.

D. Adhere base to wall surface.

E. Terminate base exposed top edge with cap strip. Seal cap strip to wall with sealant.

F. Weld joints as specified for flooring.

3.5 HEAT WELDING

A. Heat weld joints of flooring and base using welding rod.

B. Rout joint, insert welding rod into routed space, and fuse flooring and welding rods for seamless, watertight installation.

1. Fuse joints for seamless weld.

C. Finish joints flush, free from voids, and recessed or raised areas.

3.6 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean and polish materials.

C. Vacuum floor thoroughly.

D. Perform initial maintenance according to flooring manufacturer’s instructions.

1. Delay washing flooring until adhesive is fully set and welded joints can contain wash water.

3.7 PROTECTION

A. Protect flooring from traffic and construction operations.

B. Keep traffic off sheet flooring for minimum 24 hours after installation.

C. Cover flooring with reinforced kraft paper, and plywood or hardboard.

D. Remove protective materials immediately before acceptance.

E. Repair damage.

F. Buff flooring to uniform sheen.

---END---

---INTENTIONALLY BLANK---

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the installation of luxury vinyl tile and accessories required for a complete installation.

1.2 RELATED WORK:

A. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

B. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

C. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1. PART 2 - PRODUCTS.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Resilient material manufacturer’s recommendations for adhesives, underlayment, primers, and polish.
3. Application, installation and maintenance instructions.

C. Samples:

1. Tile: Each type, color, thickness and finish.
2. Edge Strips: Each type, color, thickness and finish.
3. Feature Strips: Each type, color, thickness and finish.

D. Shop Drawings:

1. Layout of patterns as shown on the construction documents.
2. Edge strip locations showing types and detail cross sections.

E. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.
2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.4 DELIVERY:

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE:

A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they shall be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE:

A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.

1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
   a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
   b. Career long training.
   c. Manufacturer endorsed training.
   d. Fundamental journeyman skills certification.

C. Furnish product type materials from the same production run.

1.7 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

D2047-2017.....Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine

D2240-2015.....Test Method for Rubber Property—Durometer Hardness

D4078-2015.....Water Emulsion Floor Finish

E648-2019.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source

E662-2019.....Specific Optical Density of Smoke Generated by Solid Materials

E1155/E1155M-14.....Determining Floor Flatness and Floor Levelness Numbers

F510/F510M-2020.....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method

F710-2019.....Preparing Concrete Floors to Receive Resilient Flooring

F925-13.....Test Method for Resistance to Chemicals of Resilient Flooring

F1869-2016.....Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

F2170-2019.....Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in Situ Probes

C. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

D. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS:

A. Provide adhesives, underlayment, primers, and polish recommended by resilient floor material manufacturer.

B. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.

C. Smoke Density: Less than 450 per ASTM E662.

D. Slip Resistance – Not less than 0.5 when tested with ASTM D2047.

2.2 LUXURY VINYL TILE:

A. ASTM F1700, Class III, Printed Film Vinyl Tile, Type B.

B. Thickness: 2.5mm with 20mil and 32mil wear layer (1/8 inch).

C. Size: Varies.

D. Provide products with recycled content with not less than 30 percent.

E. Chemical Resistance: ASTM F925; pass.

2.3 ADHESIVES:

A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. VOC content to be less than the 50 grams/L when calculated according to 40 CFR 59 (EPA Method 24). Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

2.4 PRIMER FOR CONCRETE SUBFLOORS:

A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.5 LEVELING COMPOUND FOR CONCRETE FLOORS:

A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.6 POLISH AND CLEANERS:

A. Cleaners: As recommended in writing by floor tile manufacturer.

B. Polish: ASTM D4078.

2.7 FLOOR TRANSITIONS:

A. Metal edge protection and transition profile for floors, provide between all disalike materials with anchoring leg. Finish to be satin anodized aluminum with type, style and width as required for selected material.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS:

A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.

B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR TESTING AND PREPARATION:

A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
   1. Remove existing resilient floor and existing adhesive.

B. Prepare concrete substrates in accordance with ASTM F710.

3.3 INSTALLATION:

A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.

B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.

C. Tile Layout:
   1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
   2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
   3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary.

D. Application:
   1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
   2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
   3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
   4. Roll tile floor with a minimum 45 kg (100 pound) roller.

E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.

F. Installation of Metal Edge Strips:
   1. Locate edge strips under center line of doors unless otherwise shown on construction documents.

2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

3.4 CLEANING AND PROTECTION:

A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.

B. Keep traffic off resilient material for a minimum 72 hours after installation.

C. Clean flooring as recommended in accordance with manufacturer’s printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the recommended number of coats and type of polish and/or finish in accordance with manufacturer’s written instructions.

D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.

E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and mouldings, re-clean resilient materials.

3.5 LOCATION:

A. Unless otherwise indicated in construction documents, install tile flooring, under areas where casework, laboratory and pharmacy furniture and other equipment occur.

B. Extend tile flooring for room into adjacent closets and alcoves.

---END---

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting interior concrete block exposed to view.
7. Painting gypsum drywall exposed to view.
8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 RELATED WORK

A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.

B. Division 08 OPENINGS: Shop prime painting of steel and ferrous metals.

C. Section 08 14 00, INTERIOR WOOD DOORS: Prefinished flush doors with transparent finishes.

D. Section 09 06 00, SCHEDULE FOR FINISHES: Type of Finish, Color, and Gloss Level of Finish Coat.

E. Division 10 SPECIALTIES: Shop prime painting of steel and ferrous metals.

F. Division 12 FURNISHINGS: Shop prime painting of steel and ferrous metals.

G. Division 13 SPECIAL CONSTRUCTION: Shop prime painting of steel and ferrous metals.

H. Division 21 FIRE SUPPRESSION: Shop prime painting of steel and ferrous metals.

I. Division 22 PLUMBING: Shop prime painting of steel and ferrous metals.

J. Division 23 HEATING; VENTILATION AND AIR-CONDITIONING: Shop prime painting of steel and ferrous metals.

K. Division 26 ELECTRICAL: Shop prime painting of steel and ferrous metals.

L. Division 27 COMMUNICATIONS: Shop prime painting of steel and ferrous metals.

M. Division 28 ELECTRONIC SAFETY AND SECURITY: Shop prime painting of steel and ferrous metals.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Painter qualifications.

D. Manufacturer's Literature and Data:

1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal

requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

E. Sample Panels:
   1. After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified.
   2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
   3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
   4. Attach labels to panel stating the following:
      a. Federal Specification Number or manufacturers name and product number of paints used.
      b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
      c. Product type and color.
      d. Name of project.
   5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

F. Sample of identity markers if used.

G. Manufacturers' Certificates indicating compliance with specified requirements:
   1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
   2. High temperature aluminum paint.
   3. Epoxy coating.
   4. Intumescent clear coating or fire-retardant paint.
   5. Plastic floor coating.

1.4 DELIVERY AND STORAGE

A. Deliver materials to site in manufacturer's sealed container marked to show following:

1. Name of manufacturer.
2. Product type.
3. Batch number.
4. Instructions for use.
5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:
1. Federal Specification Number, where applicable, and name of material.
2. Surface upon which material is to be applied.
3. Specify Coat Types: Prime; body; finish; etc.

C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 QUALITY ASSURANCE

A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.

B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 REGULATORY REQUIREMENTS

A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
2. Lead-Base Paint:
   a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
   b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
   c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
3. Asbestos: Provide materials that do not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints.

1.7 SAFETY AND HEALTH

A. Apply paint materials using safety methods and equipment in accordance with the following:
   1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.

C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
   1. The applicable manufacturer’s Material Safety Data Sheets (MSDS) or local regulation.
   2. 29 CFR 1910.1000.

3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.8 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):

ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)

ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

C. ASME International (ASME):

A13.1-07(R2013).....Scheme for the Identification of Piping Systems

D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Commercial Item Description (CID):

A-A-1272A.....Plaster Gypsum (Spackling Compound)

F. Federal Specifications (Fed Spec):

TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Master Painters Institute (MPI):

1.....Aluminum Paint

2.....Primer, Alkali Resistant, Water Based

3.....Interior/ Exterior Latex Block Filler

4.....Primer, Bonding, Waterbased

5.....Organic Zinc Rich Primer

6.....Aluminum Paint, High Heat (up to 590% - 1100F)

7.....Primer, Metal, Surface Tolerant

8.....Interior Satin Latex, MPI Gloss Level 4

9.....Interior Low Sheen Latex, MPI Gloss Level 2

10.....Interior Primer Sealer

11.....Interior Enamel Undercoat

12.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5

13.....Interior Alkyd, Gloss, MPI Gloss Level 6

14.....Interior Latex Primer Sealer

15.....Interior Alkyd, Eggshell, MPI Gloss Level 3

16.....Interior Latex, MPI Gloss Level 3

17.....Interior Latex, Flat, MPI Gloss Level 1

18.....Interior Latex, Semi-Gloss, MPI Gloss Level 5

19.....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss

20.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss

21.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved)

22.....Interior Latex Fire Retardant, Top-Coat (ULC Approved)

23.....Polyurethane, Moisture Cured, Clear, Flat

24.....Epoxy Cold Cured, Gloss

25.....Marine Alkyd Metal Primer

26.....Fast Drying Metal Primer

27.....High Build Epoxy Coating

28.....Epoxy Anti-Corrosive Metal Primer

29.....Primer, Rust-Inhibitive, Water-based

30.....High Build Epoxy Coating, Low Gloss

31.....Interior Latex, Gloss

32.....Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)

33.....Dry Fall, Latex Flat

34.....Exterior Latex, High Gloss (acrylic)

35.....Galvanized Water Based Primer

36.....Non-Cementitious Galvanized Primer

37.....Interior High Performance Latex, MPI Gloss Level 2

38.....Interior High Performance Latex, MPI Gloss Level 3

39.....Interior High Performance Latex, MPI Gloss Level 4

40.....Interior High Performance Latex (SG) MPI Gloss Level 5

41.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 2)

42.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 3)

43.....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 4)

44.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 3)

45.....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 4)

H. Society for Protective Coatings (SSPC):

SSPC SP 1-82(R2004).....Solvent Cleaning

SSPC SP 2-82(R2004).....Hand Tool Cleaning

SSPC SP 3-28(R2004).....Power Tool Cleaning

SSPC SP 10/NACE No.2....Near-White Blast Cleaning

SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. Maple Flooring Manufacturer’s Association (MFMA):

J. U.S. National Archives and Records Administration (NARA):

29 CFR 1910.1000.....Air Contaminants

K. Underwriter’s Laboratory (UL)

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer’s technical data sheets for specified coatings and solvents.

2.2 PAINT PROPERTIES:

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.

D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:
   1. Flat Paints and Coatings: 50 gram/liter.
   2. Non-flat Paints and Coatings: 150 gram/liter.
   3. Dry-Fog Coatings: 400 gram/liter.
   4. Primers, Sealers, and Undercoaters: 200 gram/liter.
   5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 gram/liter.
   6. Zinc-Rich Industrial Maintenance Primers: 340 gram/liter.
   7. Pretreatment Wash Primers: 420 gram/liter.
   8. Shellacs, Clear: 730 gram/liter.
   9. Shellacs, Pigmented: 550 gram/liter.

E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 PLASTIC TAPE:

A. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.

B. Pressure sensitive adhesive back.

C. Snap on coil plastic markers.

D. Widths as shown on construction documents.

PART 3 - EXECUTION

3.1 JOB CONDITIONS:

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
   1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
   2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
   a. Less than 3 degrees C (5 degrees F) above dew point.
   b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
   c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer’s printed instructions.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will warm.
5. Apply only on clean, dry and frost-free surfaces except as follows:
   a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
   b. Concrete and masonry when permitted by manufacturer’s recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
   a. Apply in clean areas and in still air.
   b. Before varnishing vacuum and dust area.
   c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 INSPECTION:

A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 GENERAL WORKMANSHIP REQUIREMENTS:

A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.

B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.

C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.

D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.

E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.

F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.

G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.

H. All coats are to be dry to manufacturer’s recommendations before applying succeeding coats.

I. All suction spots or “hot spots” in plaster after the application of the first coat are to be touched up before applying the second coat.

J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

3.4 SURFACE PREPARATION:

A. General:

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is

started. All surfaces to be painted or finished are to be completely dry, clean and smooth.

2. See other sections of specifications for specified surface conditions and prime coat.
3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
   a. Concrete: 12 percent.
   b. Fiber-Cement Board: 12 percent.
   c. Masonry (Clay and CMU's): 12 percent.
   d. Wood: 15 percent.
   e. Gypsum Board: 12 percent.
   f. Plaster: 12 percent.

B. Wood:

1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
   a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
   b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.

7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
   a. Thin filler in accordance with manufacturer's instructions for application.
   b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

C. Ferrous Metals:
1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
   a. Fill flat head countersunk screws used for permanent anchors.
   b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys Surfaces Specified Painted:
1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne

Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

E. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:
   1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
   2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
   3. Remove loose mortar in masonry work.
   4. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three (3) days and brush thoroughly free of crystals.
   5. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in Division 03, CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

F. Gypsum Plaster and Gypsum Board:
   1. Remove efflorescence, loose and chalking plaster or finishing materials.
   2. Remove dust, dirt, and other deterrents to paint adhesion.
   3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 PAINT PREPARATION:

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.

B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.

C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.

D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.

E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 APPLICATION:

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.

B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.

C. Apply each coat evenly and cover substrate completely.

D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.

E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.

1. Apply painting materials specifically required by manufacturer to be applied by spraying.
2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in “Building and Structural Work Field Painting”; “Work not Painted”; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.

F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 PRIME PAINTING:

A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.

B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.

D. Metals except boilers, incinerator stacks, and engine exhaust pipes:

1. Steel and iron: MPI 95 (Fast Drying Metal Primer). Use MPI 101 (Cold Curing Epoxy Primer) where MPI 77 (Epoxy Cold Cured, Gloss),

MPI 98 (High Build Epoxy Coating), MPI 108 (High Build Epoxy Marine Coating finish is specified.

2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer), MPI 135 (Non-Cementitious Galvanized Primer).
3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
4. Terne Metal: MPI 95 (Fast Drying Metal Primer).
5. Copper and copper alloys scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
6. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel).
7. Asphalt coated metal: MPI 1 (Aluminum Paint).
8. Metal over 94 degrees C (201 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating).

E. Gypsum Board :

1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI Gloss Level 1,MPI 52 (Interior Latex, MPI Gloss Level 3), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5), MPI 114 (Interior Latex, Gloss) finish: Use MPI 53 (Interior Latex, MPI Gloss Level 3, MPI 52 (Interior Latex, MPI Gloss Level 3), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5), MPI 114 (Interior Latex, Gloss) respectively.
2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) in shower and bathrooms.

3.8 INTERIOR FINISHES:

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Metal Work:

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
   a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) unless specified otherwise.
   b. Two (2) coats of MPI 48 (Interior Alkyd Gloss) or MPI 51 (Interior Alkyd, Eggshell).

C. Gypsum Board:

1. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3).
2. Two (2) coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2).
3. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5) or MPI 114 (Interior Latex, Gloss).
4. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 48 (Interior Alkyd Gloss).

D. Masonry and Concrete Walls:
1. Two (2) coats of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1), MPI 52 (Interior Latex, MPI Gloss Level 3), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5), MPI 114 (Interior Latex, Gloss).
2. Two (2) coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2), MPI 139 (Interior High Performance Latex, MPI Gloss Level 3), MPI 140 (Interior High Performance Latex MPI Gloss Level 4), MPI 141 (Interior High Performance Latex MPI Gloss Level 5), MPI 114 (Interior Latex, Gloss).
3. Paint Finish:
   a. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 47 (Interior Alkyd, Semi-Gloss.
   b. One (1) coat of MPI 45 Interior Primer Sealer) plus one (1) coat of MPI 48 (Interior Alkyd Gloss).
   c. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).

E. Miscellaneous:
1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
2. MPI 1 (Aluminum Paint): Two (2) coats of aluminum paint.

3.9 REFINISHING EXISTING PAINTED SURFACES:

A. Clean, patch and repair existing surfaces as specified under “Surface Preparation”. No “telegraphing” of lines, ridges, flakes, etc., through new surfacing is permitted. Where this occurs, sand smooth and re-finish until surface meets with COR’s approval.

B. Remove and reinstall items as specified under “General Workmanship Requirements”.

C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.

D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.

E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.

F. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.

G. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.

H. Sand or dull glossy surfaces prior to painting.

I. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.10 PAINT COLOR:

A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. For additional requirements regarding color see Articles, "REFINISHING EXISTING PAINTED SURFACE" and "MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE".

C. Coat Colors:

1. Color of priming coat: Lighter than body coat.
2. Color of body coat: Lighter than finish coat.
3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:

1. Paint to match color of casework where casework has a paint finish.
2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.11 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE:

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.

B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified below.

C. Paint various systems specified in Division 02 – EXISTING CONDITIONS, Division 21 – FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 –

HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 – ELECTRONIC SAFETY AND SECURITY.

D. Paint after tests have been completed.

E. Omit prime coat from factory prime-coated items.

F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.

G. Omit field painting of items specified in “BUILDING AND STRUCTURAL WORK FIELD PAINTING”; “Building and Structural Work not Painted”.

H. Color:

1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.
2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:
   a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
   b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
   c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
   d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
   e. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.
   f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.

I. Apply paint systems on properly prepared and primed surface as follows:

1. Interior Locations:

a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) to following items:

Metal under 94 degrees C (201 degrees F) of items such as bare piping, fittings, hangers and supports.

Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.

Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

b. Paint electrical conduits containing cables rated 600 volts or more using two (2) coats of MPI 9 (Exterior Alkyd Enamel), MPI 8 (Exterior Alkyd, Flat), MPI 94 (Exterior Alkyd, Semi-gloss) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.

2. Other exposed locations:

a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two (2) coats of MPI 1 (Aluminum Paint).

b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One (1) coat of MPI 50 (Interior Latex Primer Sealer) and one (1) coat of MPI 10 (Exterior Latex, Flat), MPI 11 (Exterior Latex Semi-Gloss, MPI 119 (Exterior Latex, High Gloss (acrylic)).

3.12 BUILDING AND STRUCTURAL WORK FIELD PAINTING:

A. Painting and finishing of interior and exterior work except as specified here-in-after.

1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.

2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.

3. Painting of ferrous metal and galvanized metal.

4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
5. Identity painting and safety painting.

B. Building and Structural Work not Painted:

1. Prefinished items:
   a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
   b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
2. Finished surfaces:
   a. Hardware except ferrous metal.
   b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
   c. Signs, fixtures, and other similar items integrally finished.
3. Concealed surfaces:
   a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
   b. Inside walls or other spaces behind access doors or panels.
   c. Surfaces concealed behind permanently installed casework and equipment.
4. Moving and operating parts:
   a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
   b. Tracks for overhead or coiling doors, shutters, and grilles.
5. Labels:
   a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
   b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Galvanized metal:
   a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
   b. Gas Storage Racks.
   c. Except where specifically specified to be painted.
7. Metal safety treads and nosings.

8. Gaskets.
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
10. Face brick.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces.
14. Ceilings, walls, and columns in pipe basements.
15. Wood Shingles.

3.13 IDENTITY PAINTING SCHEDULE:

A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.

1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
3. Locate Legends clearly visible from operating position.
4. Use arrow to indicate direction of flow using black stencil paint.
5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:
   a. High Pressure - 414 kPa (60 psig) and above.
   b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
   c. Low Pressure - 103 kPa (14 psig) and below.
   d. Add Fuel oil grade numbers.
6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off		Green	White	Blow-off

Boiler Feedwater	Green	White	Blr Feed
A/C Condenser Water Supply	Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return	Green	White	A/C Cond Wtr Ret
Chilled Water Supply	Green	White	Ch. Wtr Sup
Chilled Water Return	Green	White	Ch. Wtr Ret
Shop Compressed Air	Blue	White	Shop Air
Air-Instrument Controls	Green	White	Air-Inst Cont
Drain Line	Green	White	Drain
Emergency Shower	Green	White	Emg Shower
High Pressure Steam	Green	White	H.P. _____*
High Pressure Condensate Return	Green	White	H.P. Ret ____*
Medium Pressure Steam	Green	White	M. P. Stm ____*
Medium Pressure Condensate Return	Green	White	M.P. Ret _____*
Low Pressure Steam	Green	White	L.P. Stm _____*
Low Pressure Condensate Return	Green	White	L.P. Ret _____*
High Temperature Water Supply	Green	White	H. Temp Wtr Sup
High Temperature Water Return	Green	White	H. Temp Wtr Ret
Hot Water Heating Supply	Green	White	H. W. Htg Sup
Hot Water Heating Return	Green	White	H. W. Htg Ret
Gravity Condensate Return	Green	White	Gravity Cond Ret
Pumped Condensate Return	Green	White	Pumped Cond Ret
Vacuum Condensate Return	Green	White	Vac Cond Ret
Fuel Oil - Grade	Brown	White	Fuel Oil-Grade
(Diesel Fuel included under Fuel Oil)			
Boiler Water Sampling	Green	White	Sample
Chemical Feed	Green	White	Chem Feed
Continuous Blow-Down	Green	White	Cont. B D
Pumped Condensate	Green	White	Pump Cond
Pump Recirculating	Green	White	Pump-Recirc.
Vent Line	Green	White	Vent
Alkali	Orange	Black	Alk
Bleach	Orange	Black	Bleach
Detergent	Yellow	Black	Det
Liquid Supply	Yellow	Black	Liq Sup
Reuse Water	Yellow	Black	Reuse Wtr
Cold Water (Domestic) White	Green	White	C.W. Dom
Hot Water (Domestic)			

Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Orange	Black	Acid Waste
Vent		Orange	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler	Red	Red	White	Auto Spr
Standpipe	Red	Red	White	Stand
Sprinkler	Red	Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000, 15000, or 25000.
8. See Sections for methods of identification, legends, and abbreviations of the following:
   a. Conduits containing high voltage feeders over 600 volts: Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS / Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS / Section 28 05 28.33, CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:
1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (18 inches) below overhead structural slab.
3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
4. Color:
   a. Use black on concrete columns.
   b. Use white or contrasting color on steel columns.

3.14 PROTECTION CLEAN UP, AND TOUCH-UP:

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 10 14 00
SIGNAGE

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies interior signage for room numbers, dimensional lettering, and code required signs.

1.2 RELATED WORK

A. Section 09 06 00, SCHEDULE FOR FINISHES: Color and Finish of Interior Signs.

1.3 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Provide signage that is the product of one manufacturer, who has provided signage as specified for a minimum of three (3) years. Submit manufacturer’s qualifications.

B. Installer’s Qualifications: Minimum three (3) years’ experience in the installation of signage of the type as specified in this Section. Submit installer’s qualifications.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 00, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Interior Sign Samples: Sign panels and frames, with letters and symbols, for each sign type.

1. Sign Panel, 203 x 254 mm (8 x 10 inches), with letters.
2. Color samples of each color, 152 x 152 mm (6 x 6 inches. Show anticipated range of color and texture.
3. Sample of typeface, arrow and symbols in a typical full-size layout.

D. Manufacturer's Literature:

1. Showing the methods and procedures proposed for the anchorage of the signage system to each surface type.
2. Manufacturer’s printed specifications and maintenance instructions.

E. Sign Location Plan, showing location, type and total number of signs required.

F. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.

G. Full size layout patterns for dimensional letters.

H. Manufacturer’s qualifications.

I. Installer’s qualifications.

1.5 DELIVERY AND STORAGE

A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.

B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.

C. Deliver signs only when the site and mounting services are ready for installation work to proceed.

D. Store products in dry condition inside enclosed facilities.

1.6 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21, “Warranty of Construction”.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Architectural Manufacturers Association (AAMA):

611-14.....Anodized Architectural Aluminum

2603-13.....Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels

C. American National Standards Institute (ANSI):

A117.1-09.....Accessible and Usable Buildings and Facilities

D. ASTM International (ASTM):

A36/A36M-19.....Carbon Structural Steel

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar

A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate (Metric)
B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
C1036-16.....Flat Glass
C1048-18.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass
C1349-17.....Architectural Flat Glass Clad Polycarbonate
D1003-13.....Test Method for Haze and Luminous Transmittance of Transparent Plastics
D4802-16.....Poly(Methyl Methacrylate) Acrylic Plastic Sheet

E. Code of Federal Regulation (CFR):
40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

F. Federal Specifications (Fed Spec):
MIL-PRF-8184F.....Plastic Sheet, Acrylic, Modified.
MIL-P-46144C.....Plastic Sheet, Polycarbonate

G. National Fire Protection Association (NFPA):
70-14.....National Electrical Code

PART 2 - PRODUCTS

2.1 SIGNAGE GENERAL

A. Provide signs of type, size and design shown on the construction documents.

B. Provide signs complete with lettering, framing and related components for a complete installation.

C. Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.

D. Do not scale construction documents for dimensions. Verify dimensions and coordinate with field conditions. Notify Contracting Officer Representative (COR) of discrepancies or changes needed to satisfy the requirements of the construction documents.

2.2 INTERIOR SIGN MATERIALS

A. Aluminum:
   1. Sheet and Plate: ASTM B209M (B209).
   2. Extrusions and Tubing: ASTM B221M (B221).
B. Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matt finish water white clear acrylic shall not be acceptable.
C. Polycarbonate: MIL-P-46144C; Type I, class 1.
D. Vinyl: Premium grade 0.1 mm (0.004 inch) thick machine cut, having a pressure sensitive adhesive and integral colors.
E. Adhesives:
   1. Adhesives for Field Application: Mildew-resistant, nonstaining adhesive for use with specific type of panels, sheets, or assemblies; and for substrate application; as recommended in writing by signage manufacturer.
   2. Adhesives to have VOC content of 50 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).
F. Typography: Comply with VA Signage Design Manual.
   1. Type Style: Helvetica Medium and Helvetica Medium Condensed. Initial caps or all caps, as indicated in Sign Message Schedule.
   2. Arrow: Comply with graphic standards in construction documents.
   3. Letter spacing: Comply with graphic standards in construction documents.
   4. Letter spacing: Comply with graphic standards in construction documents.
   5. Provide text, arrows, and symbols in size, colors, typefaces and letter spacing shown in construction documents. Text shall be a true, clean, accurate reproduction of typeface(s). Text shown in construction documents is for layout purposes only; final text for signs is listed in Sign Message Schedule.

2.3 INTERIOR SIGN TYPES

A. Conform to the VA Signage Design Manual.
B. Provide curved frame component system.
C. Component System Signs:
   1. Provide interior sign system as follows:

a. Interchangeable system that allows for changes of graphic components of the installed sign, without changing sign in its entirety.
b. Provide sign system comprised of following primary components: Rail Back: Horizontal rails, spaced to allow for uniform, modular sizing of sign types.
   1) Rail Insert: Mount to back of Copy Panels to allow for attachment to Rail Back.
   2) Copy Panels: Fabricate of acrylic materials to allow for different graphic needs.
   3) End Caps: Interlock to Rail Back to enclose and secure changeable Copy Panels.
   4) Joiners and Accent Joiners: To connect separate Rail Backs together.
   5) Top Accent Bars: To provide decorative trim cap that encloses the top of sign.
c. Provide rail back, rail insert and end caps in anodized extruded aluminum.
d. Provide signs in system that are convertible in the field to allow for enlargement from one (1) size to another in height and width through use of joiners or accent joiners, which connect rail back panels together blindly, providing a butt joint between copy panels. Connect accent joiners to rail backs with a visible 3 mm (1/8") horizontal rib, flush to the adjacent copy insert surfaces.
e. Provide sign configurations as indicated on construction documents that vary in width from 228 mm (9 inches) to 2032 mm (80 inches), and have height dimensions of 50 mm (2 inches), 76 mm (3 inches), 152 mm (6 inches), 228 mm (9 inches) and 305 mm (12 inches). Height that can be increased beyond 305 mm (12 inches), by repeating height module in full or in part.

2. Provide rail back functions as internal structural member of sign. Fabricate of 6063T5-extruded aluminum, anodized black.
   a. Fabricate to accept an extruded aluminum or plastic insert on either side, depending upon sign type.
   b. Provide components that are convertible in field to allow for connection to other rail back panels.

c. Provide mounting devices including wall mounting for screw-on applications, wall mounting with pressure sensitive tape and other mounting devices as needed.

3. Provide rail insert functions as mounting device for copy panels on to the rail back. The rail insert mounts to the back of the copy panel with adhesive suitable for attaching particular copy insert material.
   a. Provide copy panels that slide or snap into the horizontal rail back.
4. Provide copy panels that accept various forms of copy and graphics, and attach to the rail back with the rail insert. Provide copy panels fabricated of acrylic.
   a. Provide copy panels that are interchangeable by sliding horizontally from either side of sign, and to other signs in system of equal or greater width or height.
   b. Provide materials that are cleanable without use of special chemicals or cleaning solutions.
   c. Copy Panel Materials.
      1) Acrylic - 2 mm (.080 inches) non-glare acrylic.
         a) Pressure bonded to extruded rail insert using adhesive.
         b) Background Color: Painted in acrylic lacquer or acrylic enamel.
5. End Caps: Extruded using 6063T5 aluminum with a black anodized finish. End caps interlock with rail back with clips to form an integral unit, enclosing and securing the changeable copy panels, without requiring tools for assembly.
   a. Interchangeable to each end of sign and to other signs in signage system of equal height.
   b. Provide mechanical fasteners that can be added to the end caps that will secure it to rail back to make sign tamper resistant.
6. Joiners: Extruded using 6063T5 aluminum with a black anodized finish. Rail joiners connect rail backs together blindly, providing a butt joint between copy inserts.
7. Accent Joiners: Extruded using 6063T5 aluminum with a mirror polished finish. Connect joiner and rail backs together with a visible 3 mm (.125 inches) horizontal rib, flush to the adjacent copy panel surfaces.

8. Top Accent Rail: Extruded rail using 6063T5 aluminum with a mirror polished finish that provides a 3.2 mm (.125 inches) high decorative trim cap. Cap butts flush to adjacent copy panel and encloses top of rail back and copy panel.
9. Typography:
   a. Vinyl First Surface Copy (non-tactile): Applied vinyl copy.
   b. Subsurface Copy Inserts: Textured 1 mm (.030 inches) clear polycarbonate face with subsurface applied vinyl copy.
      1) Spray face back with paint and laminated to extruded aluminum carrier insert.
   c. Integral Tactile Copy Inserts: Phenolic photopolymer etched with 2.3 mm (.0937 inches) raised copy.

D. Tactile Sign:
1. Tactile sign made from a material that provides for letters, numbers and Braille to be integral with sign. Photopolymer etched metal, sandblasted phenolic or embossed material. Do not apply letters, numbers and Braille with adhesive.
2. Numbers, letters and Braille to be raised 0.8 mm (1/32 inches) from the background surface. The draft of the letters, numbers and Braille to be tapered, vertical and clean.
3. Braille Dots: Conform with ANSI A117.1 for Braille position and layout; (a) Dot base diameter: 1.5 mm (.059 inches) (b) Inter-dot spacing: 2.3 mm (.090 inches) (c) Horizontal separation between cells: 6.0 mm (.241 inches) (d) Vertical separation between cells: 10.0 mm (.395 inches)
4. Paint assembly specified color. After painting, apply white or other specified color to surface of the numbers and letters. Apply protective clear coat sealant to entire sign.
5. Finish: Eggshell, 11 to 19 degree on a 60 degree glossmeter.

E. Glass Door and Side Light Graphics:
1. Provide text and graphics as first surface applied stylus cut vinyl.
2. Provide typeface, color, and spacing, with each message or message group on a single quick release backing sheet.

F. Dimensional Letters:
1. Provide dimensional letters that are mill or laser cut aluminum in size and thickness indicated in construction documents.
2. Provide draft of letters perpendicular to letters face.

3. Fabricate letters with square corners, such as where a letter stem and bar intersect.

2.4 FABRICATION

A. Design interior signage components to allow for expansion and contraction for a minimum material temperature range of 38 degrees C (100 degrees F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.

B. Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Provide concealed fasteners wherever possible.

C. Shop fabricate so far as practicable. Fasten joints flush to conceal reinforcement, or weld joints, where thickness or section permits.

D. Level and assemble contract surfaces of connected members so joints will be tight and practically unnoticeable, without applying filling compound.

E. Signs: Fabricate with fine, even texture to be flat and sound.

1. Maintain lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern.
2. Plane surfaces to be smooth, flat and without oil-canning, free of rack and twist.
3. Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inches). Restore texture to filed or cut areas.

F. Finish extruded members to be free from extrusion marks. Fabricate square turns, sharp corners, and true curves.

G. Finish hollow signs with matching material on all faces, tops, bottoms and ends. Miter edge joints to give appearance of solid material.

H. Do not manufacture signs until final sign message schedule and location review has been completed by the COR and forwarded to contractor.

I. Drill holes for bolts and screws. Mill smooth exposed ends and edges with corners slightly rounded.

J. Form joints exposed to weather to exclude water.

K. Movable Parts, Including Hardware: Cleaned and adjusted to operate as designed without binding or deformation of members. Center doors and covers in opening or frame.

1. Align contact surfaces fit tight and even without forcing or warping components.

L. Pre-assemble items in shop to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.

M. Prime painted surfaces as required. Apply finish coating of paint for complete coverage with no light or thin applications allowing substrate or primer to show.

1. Finish surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter and other imperfections.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Locate signs as shown on the Sign Location Plans.

B. Where not otherwise indicated conform to the VA Signage Design Manual for installation requirements.

C. At each sign location there are no utility lines behind each sign location that will be affected by installation of signs.

1. Correct and repair damage done to utilities during installation of signs at no additional cost to Government.

D. Provide inserts and anchoring devices which must be set in concrete or other material for installation of signs. Submit setting drawings, templates, instructions and directions for installation of anchorage devices, which may involve other trades.

E. Refer to Sign Message Schedule for mounting method. Mount signs in proper alignment, level and plumb according to the Sign Location Plan and the dimensions given on elevation and Sign Location Plans. When exact position, angle, height or location is not clear, contact COR for resolution.

F. When signs are installed on glass, provide blank glass back up to be placed on opposite side of glass exactly behind sign being installed. Provide blank glass back that is the same size as sign being installed.

G. Touch up exposed fasteners and connecting hardware to match color and finish of surrounding surface.

H. At completion of sign installation, clean exposed sign surfaces. Clean and repair adjoining or adjacent surfaces that became soiled or damaged as a result of installation of signs.

- - - END - - -

---INTENTIONALLY BLANK---

SECTION 10 26 00
WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. T**his section specifies handrail, corner guards,** and high impact wall covering.

1.2 RELATED WORK

A. Section 08 71 00, DOOR HARDWARE: Armor plates and kick plates not specified in this section.

B. Section 09 06 00, SCHEDULE FOR FINISHES: Color and texture of aluminum and resilient material.

1.3 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Manufacturer with a minimum of three (3) years’ experience in providing items of type specified.

1. Obtain wall and door protection from single manufacturer.

B. Installer’s Qualifications: Installers are to have a minimum of three (3) years’ experience in the installation of units required for this project.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Shop Drawings: show design, locations and installation details.

D. Manufacturer's Literature and Data:

1. **Handrail.**
2. **Corner Guards.**
3. **High Impact Wall covering.**

E. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

F. Manufacturer’s qualifications.

G. Installer’s qualifications.

H. Manufacturer’s warranty.

1.5 DELIVERY AND STORAGE

A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.

B. Protect from damage from handling and construction operations before, during and after installation.

C. Store in a dry environment of approximately 21 degrees C (70 degrees F) for at least 48 hours prior to installation.

1.6 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their wall and door protection for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.7 APPLICABLE PUBLICATIONS

A. publications listed below form a part of this specification to extent referenced. publications are referenced in text by basic designation only.

B. ASTM International (ASTM):

A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and For General Applications

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric)

D256-10(2018).....Determining the Izod Pendulum Impact Resistance of Plastics

D635-18.....Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position

E84-20.....Surface Burning Characteristics of Building Materials

C. Aluminum Association (AA):

DAF 45-09.....Designation System for Aluminum Finishes

D. American Architectural Manufacturers Association (AAMA):

611-14.....Voluntary Specification for Anodized Architectural Aluminum

E. Code of Federal Regulation (CFR):

40 CFR 59(2020) Subpart D National Volatile Organic Compound Emission Standards for Architectural Coatings

F. The National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

G. National Fire Protection Association (NFPA):

80-2019.....Standard for Fire Doors and Other Opening Protectives

H. SAE International (SAE):

J 1545-2014-10.....Instrumental Color Difference Measurement for Exterior Finishes, Textiles and Colored Trim.

I. Underwriters Laboratories Inc. (UL):

Annual Issue.....Building Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: A240/A240M, Type 304.

B. Aluminum Extruded: ASTM B221M (B221), Alloy 6063, Temper T5 or T6.

C. Resilient Material:

1. Provide resilient material consisting of high impact resistant extruded acrylic vinyl, polyvinyl chloride, or injection molded thermal plastic conforming to the following:

a. Minimum impact resistance of 960.8 N-m/m (18 feet-pounds/square inch) when tested in accordance with ASTM D256 (Izod impact, feet-pounds per inch notched).

b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.

c. Rated self-extinguishing when tested in accordance with ASTM D635.

d. Provide material labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.

e. Provide resilient material for protection on fire rated doors and frames assemblies that is listed by the testing laboratory performing the tests.

f. Provide resilient material installed on fire rated wood/steel door and frame assemblies that have been tested on similar type assemblies. Test results of material tested on any other combination of door and frame assembly are not acceptable.

g. Provide integral color with colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.

2.2 CORNER GUARDS

A. Resilient, Shock-Absorbing Corner Guards: Flush mounted type.

1. Flush mounted corner guards installed on any fire rated wall to be installed in a manner that maintains the fire rating of the wall. Provide fire test of proposed corner guard system to verify compliance.

a. Where insulating materials are an integral part of the corner guard system, provide insulating materials furnished by the manufacturer of the corner guard system.

B. **Stainless steel: To be type 304 alloy with #4 satin finish; minimum strength and durability properties as specified in ASTM A276. Aluminum: To be alloy 5005 H34 with clear anodized finish for models; minimum strength and durability properties as specified in ASTM B221.**

C. All necessary fasteners to be supplied by the manufacturer.

2.3 WALL GUARDS AND HANDRAILS

A. Stainless Steel Handrail: Construct handrail, including brackets and wall guards, of minimum to be type 304 alloy with #4 satin finish, 1/4" (6.35mm); minimum strength and durability properties as specified in ASTM A276.

a. Anchor to wall at maximum 762 mm (30 inches) on center.

2.4 HIGH IMPACT WALL COVERING

A. Provide wall covering consisting of high impact rigid acrylic vinyl or polyvinyl chloride resilient material.

B. Submit fire rating and extinguishing test results for resilient material.

C. Submit statements attesting that the items comply with specified fire and safety code requirements.

D. **High Impact Wall Covering**: Wall covering thickness to be 1.52 mm (0.060 inch)

1. **Engineering PETG: high impact wallcovering shall be rigid sheet in 4′ x 8′ or 10′ sheet sizes in standard suede texture. Chemical and stain resistance should be per ASTM D543 standards as established by the manufacturer. Aluminum: Optional aluminum trims to be alloy 6063 T5 with clear or colored anodized finish; minimum strength and**

durability properties as specified in ASTM B221. The colored anodized finish is available in eight colors and is not covered under 1.04.G

2.5 FASTENERS AND ANCHORS

A. Provide fasteners and anchors as required for each specific type of installation.

B. Where type, size, spacing or method of fastening is not shown or specified in construction documents, submit shop drawings showing proposed installation details.

2.6 FINISH

A. Aluminum: In accordance with AA DAF-45.

1. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.

B. Stainless Steel: In accordance with NAAMM AMP 500 finish Number 4.

C. Resilient Material: Embossed textures and color in accordance with SAE J1545.

PART 3 - INSTALLATION

3.1 RESILIENT CORNER GUARDS

A. Install corner guards on walls in accordance with manufacturer's instructions.

3.2 STAINLESS STEEL CORNER GUARDS

A. Mount guards on external corners of interior walls, partitions and columns as shown on construction documents.

B. Where corner guards are installed on gypsum board, clean surface and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Remove excess adhesive from around edge of guard and allow curing undisturbed for 24 hours.

3.3 RESILIENT HANDRAILS AND CRASH RAILS

A. Secure guards to walls with mounting cushions, brackets, and fasteners in accordance with manufacturer's details and instructions.

3.4 HIGH IMPACT WALL COVERING

A. Surfaces to receive protection to be clean, smooth and free of obstructions.

B. Install protectors after frames are in place but preceding installation of doors in accordance with approved shop drawings and manufacturer's specific instructions.

C. Apply with adhesive in controlled environment according to manufacturer's recommendations.

D. Protection installed on fire rated doors and frames to be installed according to NFPA 80 and installation procedures listed in UL Building Materials Directory; or, equal listing by other approved independent testing laboratory establishing the procedures.

- - - E N D - - -

SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. SUMMARY:

1. Section Includes: Toilet and bath accessories at toilets and other areas indicated on drawings.

1.2 RELATED WORK

A. Section 09 06 00, SCHEDULE FOR FINISHES: Color of finishes.

B. Section 09 30 13, CERAMIC/PORCELAIN TILING: Ceramic Toilet and Bath Accessories.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Society of Mechanical Engineers (ASME):

1. B18.6.4-98(R2005) Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws inch.

C. American Welding Society (AWS):

D10.4-86(2000).....Welding Austenitic Chromium-Nickle Stainless Steel Piping and Tubing.

D. ASTM International (ASTM):

A269/A269M-15a(2019)....Seamless and Welded Austenitic Stainless Steel Tubing for General Service.

A312/A312M-19.....Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes.

A653/A653M-20.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar.

A1011/A1011M-18a.....Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.

B30-20.....Copper Alloys in Ingot Form.

B75/B75M-20.....Seamless Copper Tube.

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).

B456-17.....Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium.

B824-17.....General Requirements for Copper Alloy Castings.

C1036-16.....Flat Glass.

C1048-18.....Heat-Strengthened and Fully Tempered Flat Glass.

D635-18.....Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.

F446-19.....Grab Bars and Accessories Installed in the Bathing Area.

E. Federal Specifications (Fed. Spec.):

A-A-3002.....Mirror, Glass.

FF-S-107C(2).....Screws, Tapping and Drive.

WW-P-541/8B(1).....Plumbing Fixtures (Accessories, Land Use).

F. National Architectural Metal Manufacturers(NAAMM):

AMP 500-06.....Metal Finishes Manual.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication, anchorage, and installation details.
2. Show mounting locations and heights.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Certificates: Certify each product complies with specifications.

1. Soap dispensers: Certify soap dispensers are fabricated of material that will not be affected by liquid soap, aseptic detergents, and hexachlorophene solutions.

E. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

F. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum: ASTM B221M (ASTM B221), Alloy 6063-T5 and Alloy 6463-T5.

B. Stainless Steel:

1. Plate Or Sheet: ASTM A666, Type 304, 0.8 mm (0.031 inch) thick unless otherwise specified.

2. Tubing: ASTM A269/A269M, Grade TP 304, seamless or welded.

3. Pipe: ASTM A312/A312M; Grade TP 304.

C. Steel Sheet: ASTM A653/A653M, zinc-coated (galvanized) coating designation G90.

D. Chrome Plating (Service Condition Number SC 2): ASTM B456.

E. Brass Castings: ASTM B30.

F. Copper:

1. Tubing: ASTM B75/B75M.

2. Castings: ASTM B824.

G. Glass:

1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors, and for mirror doors in medicine cabinets.

2. ASTM C1036, Type 1 Class 1 Quality q3, for shelves in medicine cabinets.

3. ASTM C1048, Kind FT, Condition A, Type 1, Class 1 for glass and mirrors in Mental Health and Behavior Patient Care Units, and Security Examination Rooms.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer.

2.3 TOILET COVER

a. Surface-Mounted

b. Satin Finish Stainless Steel

c. Seat Cover Capacity: 250 standard single-fold or half-fold toilet seat covers

d. Insert seat covers through bottom of dispenser

2.4 GRAB BARS

A. Fed. Spec. WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and complying with ASTM F446.

B. Fabricate from stainless steel or nylon coated steel, use one type throughout project:

1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.
2. Nylon Coated Steel: Grab bars and flanges complete with mounting plates and fasteners. Color as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

C. Mounting:

1. Walls: Concealed type.

D. Bars:

1. Fabricate to 38 mm (1-1/2 inch) outside diameter.
   a. Stainless steel, minimum 1.2 mm (0.05 inch) thick.
   b. Nylon coated bars, minimum 1.5 mm (0.06 inch) thick.
2. Fabricate in one continuous piece with ends turned toward walls.
   a. Swing up grab bars and grab bars continuous around three sides of showers may be fabricated in two sections, with concealed slip joint between.
3. Continuously weld intermediate support to grab bar.
4. Swing Up Bars: Manually operated; designed to prevent bar from falling when in raised position.

E. Flange for Concealed Mounting:

1. Minimum 2.65 mm (0.1 inch) thick, maximum 79 mm (3-1/8 inch) diameter by 13 mm (1/2 inch) deep, with minimum three set screws for securing flange to back plate.
2. Insert grab bar through center of flange and continuously weld perimeter of grab bar flush to back side of flange.
3. In lieu of providing flange for concealed mounting, and back plate as specified, grab bar may be welded to back plate covered with flange.

F. Back Plates:
1. Minimum 2.65 mm (0.1046 inch) thick metal.
2. Fabricate in one piece, maximum 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.
3. Provide spreaders, through bolt fasteners, and cap nuts, where grab bars are mounted on partitions.

2.5 CLOTHES HOOKS, ROBE OR COAT

A. Fabricate hook units from chromium plated brass with satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to thickness of metal, or 3 mm (1/8 inch) minimum radius.

B. Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to wall flange, provided with concealed fastenings.

2.6 METAL FRAMED MIRRORS

A. Fed. Spec. A-A-3002 metal frame; anodized aluminum, or stainless steel.

B. Mirror Glass:
1. Minimum 6 mm (1/4 inch) thick.
2. Set mirror in a protective vinyl glazing tape.

C. Frames:
1. Channel or angle shaped section with face of frame minimum 9 mm (3/8 inch) wide. Fabricate with square corners.
2. Metal Thickness 0.9 mm (0.035 inch).
3. Filler:
   a. Where mirrors are mounted on walls having ceramic tile wainscots not flush with wall above, provide fillers contoured to conceal void between back of mirror and wall surface.
   b. Fabricate fillers from same material and finish as mirror frame.

D. Back Plate:
   1. Fabricate backplate for concealed wall hanging from zinc-coated, or cadmium plated 0.9 mm (0.036 inch) thick sheet steel, die cut to fit face of mirror frame.
   2. Provide set screw type theft resistant concealed fastening system for mounting mirrors.
E. Mounting Bracket:
   1. Designed to support mirror tight to wall.
   2. Designed to retain mirror with concealed set screw fastenings.

2.7 FABRICATION - GENERAL

A. Welding, AWS D10.4.
B. Grind, dress, and finish welded joints to match finish of adjacent surface.
C. Form exposed surfaces from one sheet of stock, free of joints.
D. Provide steel anchors and components required for secure installation.
E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.
F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
G. Hot-dip galvanized steel or stainless steel, anchors and fastening devices.
H. Shop assemble accessories and package with components, anchors, fittings, fasteners and keys.
I. Key items alike.
J. Provide templates and rough-in measurements.
K. Round and deburr edges of sheets to remove sharp edges.

2.8 FINISH

A. Steel Paint Finish:
   1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of the following:
      a. One coat primer.
      b. One coat thermosetting topcoat.
      c. Dry-film Thickness: 0.05 mm (2 mils) minimum.
      d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.
B. Nylon Coated Steel: Nylon coating powder formulated for fluidized bonding process to steel to provide hard smooth, medium gloss finish,

minimum 0.3 mm (0.012 inch) thick, rated as self-extinguishing when tested according to ASTM D635.

C. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.

D. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

E. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.

2.9 ACCESSORIES

A. Fasteners:

1. Fasteners in Mental Health and Behavioral Patient Care Units: Tamper resistant hot-dipped galvanized or stainless steel.
2. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
3. Concealed Fasteners:
   a. Shower, Bath Tubs, and High Moisture Areas: Stainless steel.
   b. Other Locations: Steel, hot-dipped galvanized.
4. Toggle Bolts: For use in hollow masonry or frame construction.
5. Sex bolts: For through bolting on thin panels.
6. Expansion Shields: Lead or plastic for solid masonry and concrete substrate as recommended by accessory manufacturer to suit application.
7. Screws:
   a. ASME B18.6.4.
   b. Fed. Spec. FF-S-107, Stainless steel Type A.

B. Adhesive: As recommended by manufacturer to suit application.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

1. Verify blocking to support accessories is installed and located correctly.

B. Verify location of accessories with Contracting Officer's Representative.

C. Provide labor or prep as required for VA-furnished and contractor installed or VA-furnished and installed components.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Install grab bars according to ASTM F446.

C. Set work accurately, in alignment and where indicated, parallel or perpendicular as required to line and plane of surface. Install accessories plumb, level, free of rack and twist.

D. Toggle bolt to steel anchorage plates in frame partitions and hollow masonry.

E. Install accessories to function as designed. Perform maintenance service without interference with performance of other devices.

F. Align mirrors, dispensers and other accessories even and level, when installed in battery.

G. Install accessories to prevent striking by other moving, items or interference with accessibility.

3.3 CLEANING

A. After installation, clean toilet accessories according to manufacturer’s instructions.

3.4 PROTECTION

A. Protect accessories from damage until project completion.

- - E N D - -

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL

1.1 DESCRIPTION

This section covers recessed fire extinguisher cabinets.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.3 APPLICATION PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Testing and Materials (ASTM):

D4802-15.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

A. Semi-recessed type with flat trim of size and design shown.

2.2 FABRICATION

A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.

B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.

1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
2. Design doors to open 180 degrees.
3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

A. Finish interior of cabinet body with baked-on semigloss white enamel.

B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

PART 3 - EXECUTION

A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

B. Install cabinet so that the extinguisher height within meets the requirements of NFPA 10

---END---

SECTION 10 56 13
METAL STORAGE SHELVING (FRAMEWRX)

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 1 Specification Sections, apply to this Section.

1.2 SUMMARY

A. This Section includes the following:
   1. Cantilever bracket type metal shelving.

B. Related Work, Not Furnished:
   1. Finish floor covering materials and installation.

C. Related Sections:
   1. Sections in Division 9 - Finishes, relating to finish floor and base materials.

1.3 REFERENCES

A. American National Standards Institute (ANSI) Standards:
   1. Applicable standards for fasteners used for assembly.

B. American Society for Testing and Materials (ASTM) Standards:
   1. Applicable standards for steel sheet materials used for fabrication.

C. American Institute Of Steel Construction (AISC) Standards:
   1. Applicable standards for steel materials used for fabrication.

D. American Library Association (ALA) Standards:
   1. Applicable standards for Cantilever Bracket Type Metal Library Bookstack; Library Technology Reports.

1.4 DESCRIPTION

A. General: Cantilever Bracket Type Metal Shelving.

B. Finishes:
   1. Fabricated Metal Components and Assemblies: All components to be painted with an electrostatically applied Powder Coat paint that meets or exceeds specifications set forth by the American Library Association for Cantilever Bracket Type Metal Library Bookstacks published in their Library Technology Reports.
   2. Fabricated Acrylic Components and Assemblies: Manufacturer's standard.

C. Sizes:
   1. Height of 84 inches increments as required.
   2. Available in nominal widths of 24 & 36 inches as noted on drawings.

3. Available in nominal single-faced depths of [13] inches ([330MM]) as noted on drawings.
4. Available in double-faced depths of 28 inches as noted on drawings.

1.5 PERFORMANCE REQUIREMENTS

A. Seismic Performance: Provide cantilever shelving capable of withstanding the effects of earthquake movement when required by applicable building codes.

1.6 SUBMITTALS

A. Product Data: Submit manufacturer's product literature and installation instructions for each type of cantilever shelving required. Include data substantiating that products to be furnished comply with requirements of the contract documents.

B. Shop Drawings: Show fabrication, assembly, and installation details including descriptions of procedures and diagrams. Show complete extent of cantilever shelving installation layout including quantities, locations and types of accessory units required. Include notations and descriptions of all installation items and components.
   1. Show installation details at non-standard conditions, if any.
   2. Provide layout, dimensions, and identification of each unit corresponding to sequence of installation and erection procedures.
   3. Provide installation schedule and complete erection procedures to ensure proper installation.

C. Samples: Provide minimum 3 inch (76MM) square example of each color and texture on actual substrate for each component to remain exposed after installation.

D. Selection Samples: For initial selection of colors and textures, submit manufacturer's color charts consisting of actual product pieces, showing full range of colors and textures available.

E. Warranty: Submit draft copy of proposed warranty for review by the COR.

F. Maintenance Data: Provide in form suitable for inclusion in maintenance manuals for cantilever shelving. Data shall include operating and maintenance instructions, parts inventory listing, purchase source listing, emergency instructions, and similar information.
   1. Submit manufacturer's instructions for proper maintenance materials and procedures.

2. Submit manufacturer's printed instructions for maintenance of installed work, including methods and frequency recommended for maintaining optimum condition under anticipated use conditions. Include precautions against using materials and methods, which may be detrimental to finishes and performance.

G. Reference List: Provide a list of recently installed cantilever shelving to be visited by owner, architect, and contractor. Intent of list is to aid in verifying the suitability of manufacturer's products and comparison with materials and product specified in this section.

1.7 QUALITY ASSURANCE

A. Manufacturer Qualifications: Engage an experienced manufacturer who is ISO 9001 certified for the design, production, installation and service of cantilever shelving. Furnish certification attesting ISO 9001 quality system registration.

B. Installer Qualifications: Engage an experienced installer who is a manufacturer's authorized representative for the specified products for installing cantilever shelving.

1. Minimum Qualifications: 1-year experience installing cantilever shelving of comparable size and complexity to specified project requirements.

1.8 DELIVERY, STORAGE AND HANDLING

A. Follow manufacturer’s instructions and recommendations for delivery, storage, and handling requirements.

1.9 PROJECT CONDITIONS

A. Field Measurements: Verify quantities of cantilever shelving units before fabrication. Indicate verified measurements on Shop Drawings. Coordinate fabrication and delivery to ensure no delay in progress of the Work.

B. Established Dimensions: Where field measurements cannot be made without delaying the Work, establish dimensions and proceed with fabricating cantilever shelving units without field measurements. Coordinate construction to ensure actual dimensions correspond to established dimensions.

1.10 SEQUENCING AND SCHEDULING

A. Sequence cantilever shelving units with other work to minimize possibility of damage and soiling during remainder of construction period.

B. Schedule installation of specified cantilever shelving after finishing operations; including painting have been completed.

C. Provide components, which must be built in at a time, which causes no delays general progress of the Work.

D. Pre-installation Conference: Schedule and conduct conference on project site to review methods and procedures for installing cantilever shelving units including, but not limited to, the following:

1. Recommended attendees include:

a. COR.

b. VA Interior Designer

c. Prime Contractor or representative.

d. The Architect.

e. Manufacturer's representative.

f. Subcontractors or installers whose work may affect, or be affected by, the work of this section.

1.11 WARRANTY

A. Provide a written warranty, executed by Contractor, Installer, and Manufacturer, agreeing to repair or replace units, which fail in materials or workmanship within the established warranty period. This warranty shall be in addition to, and not a limitation of, other rights the Owner may have under General Conditions provisions of the Contract Documents.

B. Limited Lifetime Warranty: Subject to the terms in the written warranty, warrant the original purchaser exclusively that the shelving manufactured by it will be free from defects in materials and workmanship for the lifetime of the shelving.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. General: Products are based upon cantilever shelving manufactured by Spacesaver Corporation.

2.2 BASIC MATERIALS

A. General: Provide materials and quality of workmanship, which meets or exceeds established industry standards for products specified. Use furniture grade sheet metal, wood panels, plastic laminate and fasteners for component fabrication unless indicated otherwise.

Material thicknesses/gauges are manufacturer's option unless indicated otherwise.

2.3 MANUFACTURED COMPONENTS

A. Welded Frame Upright:

1. The welded frame shall consist of 2 vertical upright columns constructed of a minimum of 14-gauge (1.9MM) steel. Upright column shall be 2" (51MM) deep with a 1 1/4" face with 1/2" (13MM) return flanges. The uprights are fully welded to a tubular top spreader and a channel bottom spreader. The uprights shall have shelf attachment slots on 1" (25MM) increments the entire length of the upright. Slots shall be 5/8" x 1/4" (16MM x 6MM). Uprights shall include location indicators the entire length of upright on a minimum of 6" (152MM) centers.
2. The tubular top spreader shall be a minimum of 14-gauge (1.9MM) steel tube 2 1/2" tall x 1" wide (64MM tall x 25MM wide).
3. The bottom spreader channel shall be a 16-gauge (1.5MM) channel 1-3/4" tall x 1" wide (44MM tall x 25MM wide) with two 1/2" (12MM) square holes provided for cage nuts for use with optional levelers.
4. Non-welded frame cantilever type shelving units are unacceptable.

B. Base supports:

1. A base support shall be provided to provide lateral unit stability. The support shall be a minimum of 14-gauge (1.9MM) steel 9" (228MM) high with a 1" (25MM) return on the bottom for support. Support shall attach to frame upright with two 3/8" (10MM) - 16 UNC bolts and 3/8" (10MM) keps nuts.
2. A gussetted base support shall be provided between every unit where work surfaces are used, and on mobile to provide lateral unit stability. The gusset will be a minimum of 14-gauge (1.9MM) steel with a minimum of 1-1/2" return on the bottom for support.

C. Leveler Kits:

1. Single-Faced: Consists of one or two 3/8 (10MM) -16 UNC cage nut(s) and leveler(s) held by the single faced base support. Two additional cage nuts and levelers are provided to be used in the welded frame itself.
2. Double-Faced: Consists of two or four 3/8 (10MM) -16 UNC cage nuts and levelers held by the double-faced base support. Two additional

cage nuts and levelers are provided to be used in the welded frame itself.

D. Shelves:

1. Shall be a single-piece formed from a minimum of 16-gauge (1.5MM) cold rolled steel with a double 90-degree bend on the rear of the shelf and a double 90-degree bend on the front of the shelf. Shelf front, rear and sides all to be turned up 90-degrees, creating a tray-style shelf. Shelf brackets shall be integral to the shelf itself and have a minimum of three hooks, enabling two-position mounting of the shelf to the column (post). Two-position mounting shall be level and at 17-degree slope for easier access / gravity feed applications.

E. EZ Rail:

1. Shall be a one-piece welded design manufactured from two formed parts a minimum of 16-gauge (1.5MM) cold rolled steel, and mounting brackets made from a minimum of 14-gauge (1.9MM) steel and welded at the rear of the rail. The EZ Rail shall contain a top surface for engagement of industry standard hanging bins as well as a slot on the face for the engagement of industry standard slat wall accessories and peg board hooks.

F. Metal canopy tops:

1. Shall be formed from minimum 18-gauge (1.2MM) cold rolled steel with a triple 90-degree bend on front edges with a maximum edge thickness of ¾" (19MM). Single face and double face units to be one-piece design.

G. Work Surface mounting brackets:

1. Work surface mounting brackets shall be a one-piece design formed from a minimum of 11-gauge (3.0MM) hot rolled steel and contain a minimum of two hooks for mounting into the column (post), and one safety lug to help prevent accidental disengagement. One bracket provided per post.
   a. All parts of identical dimensions shall be totally interchangeable without modification.

H. ACCESSORIES:

1. Acrylic Canopy Tops: Provide manufacturer's standard.
2. Acrylic End Panels: Provide manufacturer's standard.

2.4 FABRICATION

A. General: Coordinate fabrication and delivery to ensure no delay in progress of the Work.

2.5 FINISHES

A. Colors: Selected from manufacturer's standard available colors.

B. Paint Finish: Provide factory applied electrostatic powder coat paint. Meet or exceed specifications of the American Library Association.

C. Acrylic Finish: Selected from manufacturer's standard available colors and patterns.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine shelving units scheduled to receive accessories [with Installer present] for compliance with requirements for installation tolerances and other conditions affecting performance of specified accessory items.

B. Verify that intended installation locations of sorter unit units will not interfere with or block established required exit paths or similar means of egress once units are installed.

C. Proceed with accessory installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Follow manufacturer’s written instructions for installation of each type of accessory item specified.

3.3 FIELD QUALITY CONTROL

A. Verify accessory unit alignment and plumb after installation. Correct if required following manufacturer's instructions.

B. Remove components that are chipped, scratched, or otherwise damaged and which do not match adjoining work. Replace with new matching units, installed as specified and in manner to eliminate evidence of replacement.

3.4 ADJUSTING

A. Adjust all accessories to provide smoothly operating, visually acceptable installation.

3.5 CLEANING

A. Immediately upon completion of installation, clean components and surfaces. Remove surplus materials, rubbish and debris resulting from

installation upon completion of work and leave areas of installation in neat, clean condition.

3.6 DEMONSTRATION/TRAINING

A. Schedule and conduct demonstration of installed accessory items and features with Owner's personnel.

B. Schedule and conduct maintenance training with Owner's maintenance personnel. Training session should include lecture and demonstration of all maintenance and repair procedures that end user personnel would normally perform.

3.7 PROTECTION

A. Protect system against damage during remainder of construction period. Advise Owner of additional protection needed to ensure that system will be without damage or deterioration at time of substantial completion.

---END---

SECTION 11 17 36
PACKAGE TRANSFER UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies package transfer units and pressurized pass-through units used in lab/cleanroom spaces.

1.2 RELATED WORK

A. Section 08 56 19 PASS WINDOWS: Standard pass windows.

B. Section 09 06 00, SCHEDULE FOR FINISHES: Color and texture of factory finish.

1.3 SUBMITTAL

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

B. Shop Drawings: Show material and finish, size of members, and details of construction, installation, and anchorage:

1. Package transfer box
2. Pressurized Pass-through window

C. Manufacturer's Literature and Data:

1. Package transfer box
2. Pressurized Pass through window

D. Certificates: Letter from manufacturer indicating the products have been certified to meet the specified ratings.

1.4 DELIVERY

A. Deliver products to site in sealed packages of containers; labeled for identification with manufacturer's name, brand, and contents.

1.5 STORAGE

A. Store products in weathertight and dry storage facility.

B. Protect from damage from handling, weather and construction operations before, during and after installation in accordance with manufacturer's instructions.

1.6 PERFORMANCE REQUIREMENTS

A. Fabricate and install Forced Entry/Ballistic Resistant (FE/BR) package transfer assemblies to achieve indicated levels of resistance. Extend resistance to include anchorages, interfaces with adjoining substrates, and hardware. Security attacks shall be unable to penetrate through closed/locked assemblies in manner described; it is recognized that such attacks may damage units beyond repair and reuse, requiring replacement of work by Government.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International(ASTM):

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A1008/A1008M-20.....Steel, Sheet, Cold-Rolled, Carbon, Structural High Strength Low Alloy

B26/B26M-18e1.....Aluminum Alloy Sand Castings

B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

C. American Society of Mechanical Engineers (ASME):

B18.6.4-98(R2005).....Thread Forming and Thread Cutting Tapping Screws

D. American Welding Society (AWS):

D9.1-06.....Sheet Metal Welding Code

E. National Association of Architectural Metal Manufacturers (NAAMM)

AMP 500-06.....Metal Finishes Manual

F. Federal Specifications (Fed. Spec):

A-A-1922A.....Shield, Expansion

G. Underwriters Laboratories, Inc. (UL):

752-11.....Bullet-Resisting Equipment.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: ASTM A167, Type 302B.

B. Fasteners:

1. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.
2. Concealed Fasteners: Steel, hot-dip galvanized.
3. Screws: ASME B18.6.4.
4. Expansion Shields: A-A-1922A as recommended by manufacturer for component and substrate for use in solid masonry or concrete.

2.2 PRODUCT REQUIREMENTS

A. Products meet, as a minimum, the requirements specified, and be a standard commercial product of a manufacturer regularly and presently manufacturing products specified.

2.3 PACKAGE TRANSFER BOX (DETAIL NO. SD5659-01)

A. Security prefabricated type, of size and design shown complete with doors, body and flanges.

B. Doors: Stainless Steel with stainless steel piano hinges.

1. Mechanical interlocking type that prevents both doors from being opened at same time.
2. Pull handles on Ante Room side, locking handles on Buffer Room (Secure) side. Bright chromium plated finish on handles.

C. Body of transfer box: Use 5 mm (3/16-inch) thick welded sheet steel with 3 mm (1/8-inch) thick steel fixed outer flanges and adjustable inner flanges.

2.4 PRESSURIZED PASS-THROUGH WINDOWS

A. Prefabricated type, of size and design shown with unit constructed of 16 & 20 ga type 304 stainless steel with w #4 finish. Provide in standard size 16”.

1. Provide complete with:
   a. -chamber area to be double wall construction
   b. -Electrical interlock system using electro-magnetic locks (fail safe)
   c. -Single pass fan powered HEPA filter system for continuous operation
   d. -Filter to be 12 x 12 x 3 ½” downstream gel seal HEPA filter 99.99% effective on particles of 0.3 microns in size
   e. -Air to exhaust from chamber thru exhaust vent
   f. -Welded one piece finishing trims for each side of Pass-Thru
   g. -Doors with stainless steel pin hinges, stainless steel latching handle, 1/4” clear safety glass glazing and EPDM gasket seal
   h. -1ea Mag gage to monitor HEPA filter pressure
   i. -Red/Green door status lights
   j. -2ea Support gussets 16ga stainless steel as required for size pass-through selected.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install product by experienced mechanics capable of installing item in accordance with drawings, specifications, and shop drawings.

B. Set work accurately, in alignment and where shown. Install plumb, level, free of rack and twist, and set parallel or perpendicular to required line and plane of surface.

C. Provide anchoring devices and fasteners necessary for securing each item to building construction.

1. Do not use power actuated drive pins.
2. Do not anchor to wood ground strips.

D. Touch up abraded and damaged areas of finish coat with paint furnished by the manufacturer.

E. Fit flanges of package transfer box tight against walls. Use shims where required for leveling.

F. Connect pass through to HVAC supply air and electrical system connections as required.

3.2 CLEANING AND ADJUSTING

A. After installation, clean items as recommended by the manufacturer and protect from damage until completion of the project.

B. Adjust movable parts including hardware to operate as designed, without binding or deformation of the members, centered in the opening or frame, and where applicable, with contact surfaces fit tight and even, without forcing or warping the components.

- - - E N D - - -

SECTION 12 32 00
MANUFACTURED WOOD CASEWORK

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies plastic laminate casework as detailed on the construction documents, including related components and accessories required to form integral units. Wood casework items shown on the construction documents, but not specified below are to be included as part of the work under this section, and applicable portions of the specification are to apply to these items.

1.2 RELATED WORK:

A. Sealants: Section 07 92 00, JOINT SEALANTS.

B. Color of Casework Finish: Section 09 06 00, SCHEDULE OF FINISHES.

C. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

D. Backing Plates for Wall Mounted Casework: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

E. Countertop Construction and Materials and Items Installed in Countertops: Section 12 36 00, COUNTERTOPS.

F. Plumbing Requirements Related to Casework: Division 22, PLUMBING.

G. Electrical Lighting and Power Requirements Related to Casework: Division 26, ELECTRICAL.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Casework hardware.

C. Samples:

1. Plastic laminate.

D. Shop Drawings (1/2 full size):

1. Each casework type, showing details of construction, including materials, hardware and accessories.
2. Fastenings and method of installation.

E. Certification:

1. Manufacturer’s qualifications specified.
2. Installer’s qualifications specified.

1.4 QUALITY ASSURANCE:

A. Approval by COR is required of manufacturer and installer based upon certification of qualifications specified.

B. Manufacturer's qualifications:
   1. Manufacturer is regularly engaged in design and manufacture of plastic laminate casework, casework components and accessories of scope and type similar to indicated requirements for a period of not less than five (5) years.
   2. Manufacturer has successfully completed at least three (3) projects of scope and type similar to indicated requirements.
   3. Submit manufacturer's qualifications and list of projects, including owner contact information.
C. Installer Qualifications:
   1. Installer has completed at least three (3) projects in last five (5) years in which these products were installed.
   2. Submit installer qualifications.

1.5 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
B. Manufacturer Warranty: Manufacturer shall warranty their wood casework for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
B. ASTM International (ASTM):
   A240/A240M-14.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
   A1008/A1008M-13.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
   C1036-11E1(R2012).....Flat Glass
C. Builders Hardware Manufacturers Association (BHMA):
   A156.1-13.....Butts and Hinges
   A156.9-10.....Cabinet Hardware
   A156.5-14.....Auxiliary Locks and Associated Products
   A156.11-14.....Cabinet Locks
D. Composite Panel Association (CPA):
   A208.1-09.....Particleboard

A208.2-09.....Medium Density Fiberboard (MDF) for Interior Applications

E. U.S. Department of Commerce Product Standards (Prod. Std):
PS 1-09.....Construction and Industrial Plywood

F. Architectural Woodwork Institute (AWI):
Architectural Woodwork Standards, Edition 2 Certification Program - 2014

G. American Society of Mechanical Engineers (ASME):
A112.18.1-12.....Plumbing Fixture Fittings

H. National Electrical Manufacturers Association (NEMA):
LD 3-05.....High Pressure Decorative Laminates

PART 2 - PRODUCTS

2.1 PLASTIC LAMINATE:

A. NEMA LD 3.

B. Exposed decorative surfaces, both sides of cabinet doors, and for items having plastic laminate finish. General purpose Type HGL.

C. Cabinet Interiors Including Shelving: Both of following options to comply with NEMA LD 3 as a minimum.

1. Plastic laminate clad plywood or particleboard, MDF (excluding shelves).
2. Low pressure laminate (LPL).

D. Backing sheet on bottom of plastic laminate covered wood tops. Backer Type BKL.

E. Post Forming Fabrication, Decorative Surface: Post forming Type HGP.

2.2 PLYWOOD, SOFTWOOD:

A. Prod. Std. PS1, five (5) ply construction from 13 mm to 28 mm (1/2 inch to 1-1/8 inch) thickness, and seven (7) ply for 31 mm (1 1/4 inch) thickness.

2.3 PARTICLEBOARD:

A. CPA A208.1, Type 1, Grade M or medium density.

2.4 MEDIUM DENSITY FIBERBOARD (MDF):

A. Fully waterproof bond conforming to CPA A208.1 and CPA A208.2.

2.5 HARDWARE:

A. Hinged Doors:

1. Provide doors 915 mm (36 inches) and more in height with three (3) hinges and doors less than 915 mm (36 inches) in height is to have

two (2) hinges. Each door is to close against two (2) rubber bumpers.

2. Concealed Hinges: BHMA A156.9, Type B01602, 100 degrees of opening.
3. Fasteners: Provide full thread wood screws to fasten hinge leaves to door and cabinet frame. Finish screws to match finish of hinges.

B. Door Catches:
1. Friction or Magnetic type, fabricated with metal housing.
2. Provide one (1) catch for cabinet doors 1220 mm (48 inches) high and under, and two (2) for doors over 1220 mm (48 inches) high.

C. Drawer and Door Pulls:
1. Doors and drawers to have flush pulls, fabricated of either chromium-plated brass, chromium plated steel, stainless steel, or anodized aluminum. Drawer and door pulls to be of a design that can be operated with a force of 22.2 N (5 pounds) or less, with one (1) hand and not require tight grasping, pinching or twisting of the wrist.

D. Drawer Slides:
1. Full extension steel slides with nylon ball-bearing rollers.
2. Slides to have positive stop.
3. Equip drawers with rubber bumpers.

E. Shelf Standards (Except For Fixed Shelves):
1. Bright zinc-plated steel for recessed mounting with screws, 16 mm (5/8 inch) wide by 5 mm (3/16 inch) high providing 13 mm (1/2 inch) adjustment, complete with shelf supports.

2.6 MANUFACTURED PRODUCTS:

A. When two (2) or more units are required, use products of one (1) manufacturer.

B. Manufacturer of casework assemblies is to assume complete responsibility for the final assembled unit.

C. Provide products of a single manufacturer for parts which are alike.

2.7 FABRICATION:

A. Casework to be of the flush overlay design and, except as otherwise specified, be of Premium Grade construction and of component thickness in conformance with AWI Quality Standards.

B. Fabricate casework of plastic laminated covered plywood or particleboard as follows:

1. Where shown, doors, drawers, shelves, and all semi-concealed surfaces to be plastic laminated.

C. Provide plastic laminated sloping tops for casework where shown on construction drawings. Fasten sloping tops with oval-head screws inserted from interior. Exposed ends of sloping tops to have flush closures fastened as recommended by manufacturer.

D. Support Members for Tops of Tables and Countertops:
   1. Construct as detailed on construction documents.
   2. Provide miscellaneous steel members and anchor as shown on construction drawings.

2.8 PRODUCTS OF OTHER COMPONENTS DIRECTLY RELATED TO CASEWORK:

A. Refer to Section 07 92 00, JOINT SEALANTS for work related to sealants used in conjunction with joints of countertops, casework systems, and adjacent materials.

B. Refer to Section 09 65 13, RESILIENT BASE AND ACCESSORIES for work related to rubber base adhered to casework systems.

C. Refer to Section 09 22 16, NON-STRUCTURAL METAL FRAMING for backing plates used in conjunction with wall assemblies for the attachment of casework systems.

D. Refer to Section 12 36 00, COUNTERTOPS for work related to methyl methacrylic polymer countertops and/or shelving used in conjunction with casework systems. When countertop materials are provided by the casework manufacturer, they are to include the following features:
   1. Capable of being suspended from vertical support rails or horizontal wall strips or service modules.
   2. Provided with rounded corners and impact resistant material on exposed edges.
   3. Capable of being easily relocated and installed without tools.
   4. Capable of being suspended and easily changed under counter mounted storage units.
   5. Provide leveling adjustment capability so units can be brought into a level position.
   6. Secured using fasteners. Show detail on shop drawings.

E. Refer to Division 22, PLUMBING for the following work related to casework systems:
   1. Sinks, faucets and other plumbing service fixtures, venting, and piping systems.

F. Refer to Division 26, ELECTRICAL for the following work related to casework systems:
   1. Connections and wiring devices.
   2. Connections and lighting fixtures except when factory installed by the manufacturer.

PART 3 - EXECUTION

3.1 COORDINATION:

A. Begin only after work of other trades is complete, including wall and floor finish completed, ceilings installed, light fixtures and diffusers installed and connected and area free of trash and debris.
B. Verify location and size of mechanical and electrical services as required and perform cutting of components of work installed by other trades.
C. Verify reinforcement of walls and partitions for support and anchorage of casework.
D. Coordinate with other Divisions and Sections of the specification for work related to installation of casework systems to avoid interference and completion of service connections.

3.2 INSTALLATION:

A. Install casework in accordance with manufacturer’s written instructions.
   1. Install in available space; arranged for safe and convenient operation and maintenance.
   2. Align cabinets for flush joints except where shown otherwise.
   3. Install with bottom of wall cabinets in alignment and tops of base cabinets aligned level, plumb, true, and straight to a tolerance of 3.2 mm in 2438 mm (1/8 inch in 96 inches).
   4. Install corner cabinets with hinges on corner side with filler or spacers sufficient to allow opening of drawers.
B. Support Rails:
   1. Install true to horizontal at heights shown on construction documents; maximum tolerance for uneven floors is plus or minus 13 mm (1/2 inch).
   2. Shim as necessary to accommodate variations in wall surface not exceeding 5 mm (3/16 inch) at fastener.
C. Wall Strips:

1. Install true to vertical and spaced as shown on construction documents.
2. Align slots to assure that hanging units will be level.

D. Plug Buttons:
1. Install plug buttons in predrilled or prepunched perforations not used.
2. Use chromium plate plug buttons or buttons finish to match adjacent surfaces.

E. Seal junctures of casework systems with mildew-resistant silicone sealants as specified in Section 07 92 00, JOINT SEALANTS.

3.3. CLOSURES AND FILLER PLATES:

A. Close openings larger than 6 mm (1/4 inch) wide between cabinets and adjacent walls with flat, steel closure strips, scribed to required contours, or machined formed steel fillers with returns, and secured with sheet metal screws to tubular or channel members of units, or bolts where exposed on inside.

B. Where ceilings interfere with installation of sloping tops, omit sloping tops and provide flat steel filler plates.

C. Secure filler plates to casework top members, unless shown otherwise on construction documents.

D. Secure filler plates more than 152 mm (6 inches) in width top edge to a continuous 25 x 25 mm (1 x 1 inch) 0.889 mm (1/16 inch) thick steel formed steel angle with screws.

E. Anchor angle to ceiling with toggle bolts.

F. Install closure strips at exposed ends of pipe space and offset opening into concealed space.

G. Finish closure strips and fillers with same finishes as cabinets.

3.4 FASTENINGS AND ANCHORAGE:

A. Do not anchor to wood ground strips.

B. Provide hat shape metal spacers where fasteners span gaps or spaces.

C. Use 6 mm (1/4 inch) diameter toggle or expansion bolts, or other appropriate size and type fastening device for securing casework to walls or floor. Use expansion bolts shields having holding power beyond tensile and shear strength of bolt and breaking strength of bolt head.

D. Use 6 mm (1/4 inch) diameter hex bolts for securing cabinets together.

E. Use 6 mm (1/4 inch) by minimum 38 mm (1-1/2 inch) length lag bolt anchorage to wood blocking for concealed fasteners.

F. Use not less than No. 12 or 14 wood screws with not less than 38 mm (1-1/2 inch) penetration into wood blocking.

G. Space fastening devices 305 mm (12 inches) on center with minimum of three (3) fasteners in 915 or 1220 mm (3 or 4 foot) unit width.

H. Anchor floor mounted cabinets with a minimum of four (4) bolts through corner gussets. Anchor bolts may be combined with or separate from leveling device.

I. Secure cabinets in alignment with hex bolts or other internal fastener devices removable from interior of cabinets without special tools. Do not use fastener devices which require removal of tops for access.

J. Where units abut end to end, anchor together at top and bottom of sides at front and back. Where units are back to back, anchor backs together at corners with hex bolts placed inconspicuously inside casework.

K. Where type, size, or spacing of fastenings is not shown on construction documents or specified, show on shop drawings proposed fastenings and method of installation.

3.5 ADJUSTMENTS:

A. Adjust equipment to insure proper alignment and operation.

B. Replace or repair damaged or improperly operating materials, components or equipment.

3.6 CLEANING:

A. Immediately following installation, clean each item, removing finger marks, soil and foreign matter.

B. Remove from job site trash, debris and packing materials.

C. Leave installed areas clean of dust and debris.

3.7 INSTRUCTIONS:

A. Provide operational and cleaning manuals and verbal instructions in accordance with Article INSTRUCTIONS, SECTION 01 00 00, GENERAL REQUIREMENTS.

B. Provide in service training both prior to and after facility opening. Coordinate in service activities with COR.

C. Commencing at least seven (7) days prior to opening of facility, provide one (1) four (4) hour day of on-site orientation and technical instruction on use and cleaning procedures application to products and systems specified herein.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 12 36 00
COUNTERTOPS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies casework countertops.

1.2 RELATED WORK

A. Color and patterns of solid surface: SECTION 09 06 00, SCHEDULE FOR FINISHES.

1.3 SUBMITTALS

A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings

1. Show dimensions of section and method of assembly.
2. Show details of construction at a scale of ½ inch to a foot.

C. Samples:

1. 150 mm (6 inch) square samples each top.
2. Front edge, back splash, end splash and core with surface material and booking.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Hardboard Association (AHA):

A135.4-95.....Basic Hardboard

C. Composite Panel Association (CPA):

A208.1-09.....Particleboard

D. American Society for Testing and Materials (ASTM):

A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

A1008-10.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength, Low Alloy

D256-10.....Pendulum Impact Resistance of Plastic

D570-98(R2005).....Water Absorption of Plastics

D638-10.....Tensile Properties of Plastics

D785-08.....Rockwell Hardness of Plastics and Electrical Insulating Materials

D790-10.....Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials

D4690-99(2005).....Urea-Formaldehyde Resin Adhesives

E. Federal Specifications (FS):

A-A-1936.....Adhesive, Contact, Neoprene Rubber

F. U.S. Department of Commerce, Product Standards (PS):

PS 1-95.....Construction and Industrial Plywood

PART 2 - PRODUCTS

2.1 MATERIALS

A. Particleboard: CPA A208.1, Grade 2-M-2.

B. Plywood: PS 1, Exterior type, veneer grade AC not less than five ply construction.

C. Hardboard: ANSI/AHA A135.4, Type I, tempered, fire retardant treated, smooth surface one side.

D. Adhesive

1. For Field Joints:

a. Epoxy type, resistant to chemicals as specified for plastic laminate laboratory surfaces.

b. Fungi resistant: ASTM G-21, rating of 0.

E. Fasteners:

1. Metals used for welding same metal as materials joined.

2. Use studs, bolts, spaces, threaded rods with nuts or screws suitable for materials being joined with metal splice plates, channels or other supporting shape.

F. Solid Polymer Material:

1. Filled Methyl Methacrylic Polymer.

2. Performance properties required:

Property	Result	Test
Elongation	0.3% min.	ASTM D638
Hardness	90 Rockwell M	ASTM D785
Gloss (60^0 Gordon)	5-20	NEMA LD3.1
Color stability	No change	NEMA LD3 except 200 hour

Property	Result	Test
Abrasion resistance	No loss of pattern Max wear depth 0.0762 mm (0.003 in) - 10000 cycles	NEMA LD3
Water absorption weight (5 max)	24 hours 0.9	ASTM D-570
Izod impact	14 N·m/m (0.25 ft-lb/in)	ASTM D256 (Method A)
Impact resistance	No fracture	NEMA LD-3 900 mm (36") drop 1 kg (2 lb.) ball
Boiling water surface resistance	No visible change	NEMA LD3
High temperature resistance	Slight surface dulling	NEMA LD3

3. Cast into sheet form and bowl form.
4. Color throughout with subtle veining through thickness.
5. Joint adhesive and sealer: Manufacturers silicone adhesive and sealant for joining methyl methacrylic polymer sheet.
6. Bio-based products will be preferred.

2.2 COUNTERTOPS

A. Fabricate in largest sections practicable.
B. Fabricate with joints flush on top surface.
C. Fabricate countertops to overhang front of cabinets and end of assemblies 25 mm (one inch) except where against walls or cabinets.
D. Provide 1 mm (0.039 inch) thick metal plate connectors or fastening devices (except epoxy resin tops).
E. Join edges in a chemical resistant waterproof cement or epoxy cement, except weld metal tops.
F. Fabricate with end splashes where against walls or cabinets.
G. Splash Backs and End Splashes:
   1. Not less than 19 mm (3/4 inch) thick.
   2. Height 100 mm (4 inches) unless noted otherwise.
H. Drill or cutout for sinks, and penetrations.
   1. Accurately cut for size of penetration.
   2. Cutout for VL 81 photographic enlarger cabinet.

a. Finish cutout to fit flush with vertical side of cabinet, allowing adjustable shelf to fit into cutout space of cabinet at counter top level. Finish cutout surface as an exposed edge.
b. Provide braces under enlarger space to support not less than 45 kg (100 pounds) centered on opening side along backsplash.

I. Methyl Methacrylic Polymer Tops:
1. Fabricate countertop of methyl methacrylic polymer cast sheet, 13 mm (1/2 inch) thick.
2. Fabricate back splash and end splash to height shown.
3. Fabricate skirt to depth shown.
4. Fabricate with marine edge where sinks occur.
5. Fabricate in one piece for full length from corner to corner up to 3600 mm (12 feet).
6. Join pieces with adhesive sealant.
7. Cut out countertop for lavatories, plumbing trim.
8. Provide concealed fasteners and epoxy cement for anchorage of sinks to countertop.

J. Countertop products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Composite Panel	89 percent biobased material
Hardwood	89 percent biobased material
Particleboard	89 percent biobased material
Plywood	89 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Before installing countertops verify that wall surfaces have been finished as specified and that mechanical and electrical service locations are as required.

B. Secure countertops to supporting rails of cabinets with metal fastening devices, or screws through pierced slots in rails.

1. Where type, size or spacing of fastenings is not shown or specified, submit shop drawings showing proposed fastenings and method of installation.
2. Use round head bolts or screws.
3. Use epoxy or silicone to fasten the epoxy resin countertops to the cabinets.
4. Use wood or sheet metal screws for wood or plastic laminate tops; minimum penetration into top 16 mm (5/8 inch), screw size No 8, or 10.

C. Rubber Moldings:

1. Where shown install molding with butt joints in horizontal runs and mitered joints at corners where ceramic tile occurs omit molding.
2. Fasten molding to wall and to splashbacks and splashends with adhesive.

3.2 PROTECTION AND CLEANING

A. Tightly cover and protect against dirt, water, and chemical or mechanical injury.

B. Clean at completion of work.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 13 05 41
SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS

PART 1 – GENERAL

1.1 DESCRIPTION:

A. Provide seismic restraint in accordance with the requirements of this section in order to maintain the integrity of nonstructural components of the building so that they remain safe and functional in case of seismic event.

B. The design to resist seismic load shall be based on Seismic Design Categories per section 4.0 of the VA Seismic Design Requirements (H-18-8) dated August 2013,http:www.cfm.va.gov/til/etc/seismic.pdf.

C. Definitions: Non-structural building components are components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural components of buildings include:

1. Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; stairs isolated from the basic structure; cabinets; bookshelves; medical equipment; and storage racks.
2. Electrical Elements: Power and lighting systems; substations; switchgear and switchboards; auxiliary engine-generator sets; transfer switches; motor control centers; motor generators; selector and controller panels; fire protection and alarm systems; special life support systems; and telephone and communication systems.
3. Mechanical Elements: Heating, ventilating, and air-conditioning systems; medical gas systems; plumbing systems; sprinkler systems; pneumatic systems; boiler equipment and components.
4. Transportation Elements: Mechanical, electrical and structural elements for transport systems, i.e., elevators and dumbwaiters, including hoisting equipment and counterweights.

1.2 RELATED WORK:

A. Section No. 09 51 00 Acoustical ceilings

B. Section no. 23 21 13 Hydronic Piping

B. Section No. 23 22 13 Steam and Condensate Heating Piping

C. Section No. 23 31 00 HVAC Ducts and Casing

d. Section No. 26 51 00 Interior Lighting

1.3 QUALITY CONTROL:

A. Shop-Drawing Preparation:

1. Have seismic-force-restraint shop drawings and calculations prepared by a professional structural engineer experienced in the area of seismic force restraints. The professional structural engineer shall be registered in the state where the project is located.
2. Submit design tables and information used for the design-force levels, stamped and signed by a professional structural engineer registered in the State where project is located.

B. Coordination:

1. Do not install seismic restraints until seismic restraint submittals are approved by the Contracting Officers Representative (COR).
2. Coordinate and install trapezes or other multi-pipe hanger systems prior to pipe installation.

C. Seismic Certification:

In structures assigned to IBC Seismic Design Category C, D, E, or F, permanent equipments and components are to have Special Seismic Certification in accordance with requirements of section 13.2.2 of ASCE 7 except for equipment that are considered rugged as listed in section 2.2 OSHPD code application notice CAN No. 2-1708A.5, and shall comply with section 13.2.6 of ASCE 7.

1.4 SUBMITTALS:

A. Submit a coordinated set of equipment anchorage drawings prior to installation including:

1. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
2. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, and welds. clearly identified and specified.
3. Numerical value of design seismic brace loads.
4. For expansion bolts, include design load and capacity if different from those specified.

B. Submit prior to installation, a coordinated set of bracing drawings for seismic protection of piping, with data identifying the various support-to-structure connections and seismic bracing structural connections, include:

1. Single-line piping diagrams on a floor-by-floor basis. Show all suspended piping for a given floor on the same plain.
2. Type of pipe (Copper, steel, cast iron, insulated, non-insulated).
3. Pipe contents.
4. Structural framing.
5. Location of all gravity load pipe supports and spacing requirements.
6. Numerical value of gravity load reactions.
7. Location of all seismic bracing.
8. Numerical value of applied seismic brace loads.
9. Type of connection (Vertical support, vertical support with seismic brace).
10. Seismic brace reaction type (tension or compression): Details illustrating all support and bracing components, methods of connections, and specific anchors to be used.

C. Submit prior to installation, bracing drawings for seismic protection of suspended ductwork and suspended electrical and communication cables, include:
1. Details illustrating all support and bracing components, methods of connection, and specific anchors to be used.
2. Numerical value of applied gravity and seismic loads and seismic loads acting on support and bracing components.
3. Maximum spacing of hangers and bracing.
4. Seal of registered structural engineer responsible for design.

D. Submit design calculations prepared and sealed by the registered structural engineer specified above in paragraph 1.3A.

E. Submit for concrete anchors, the appropriate ICBC evaluation reports, OSHPD pre-approvals, or lab test reports verifying compliance with OSHPD Interpretation of Regulations 28-6.

1.5 APPLICABLE PUBLICATIONS:

A. The Publications listed below (including amendments, addenda revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):
355.2-07.....Qualification for Post-Installed Mechanical Anchors in Concrete and Commentary

C. American Institute of Steel Construction (AISC):

Load and Resistance Factor Design, Volume 1, Second Edition

D. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Standard Specification for Carbon Structural Steel

A53/A53M-10.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A307-10.....Standard Specification for Carbon Steel Bolts and Studs; 60,000 PSI Tensile Strength.

A325-10.....Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength

A325M-09.....Standard Specification for High-Strength Bolts for Structural Steel Joints [Metric]

A490-10.....Standard Specification for Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength

A490M-10.....Standard Specification for High-Strength Steel Bolts, Classes 10.9 and 10.9.3, for Structural Steel Joints [Metric]

A500/A500M-10.....Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes

A501-07.....Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing

A615/A615M-09.....Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement

A992/A992M-06.....Standard Specification for Steel for Structural Shapes for Use in Building Framing

A996/A996M-09.....Standard Specification for Rail-Steel and Axel-Steel Deformed Bars for Concrete Reinforcement

E488-96(R2003).....Standard Test Method for Strength of Anchors in Concrete and Masonry Element

E. American Society of Civil Engineers (ASCE 7) Latest Edition.

F. International Building Code (IBC) Latest Edition

G. VA Seismic Design Requirements, H-18-8, August 2013

H. National Uniform Seismic Installation Guidelines (NUSIG)

I. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Seismic Restraint Manual - Guidelines for Mechanical Systems, 1998 Edition and Addendum

1.6 REGULATORY REQUIREMENT:

A. IBC Latest Edition.

B. Exceptions: The seismic restraint of the following items shall be omitted:

1. Equipment weighing less than 400 pounds, which is supported directly on the floor or roof.
2. Equipment weighing less than 20 pounds, which is suspended from the roof or floor or hung from a wall.
3. Gas and medical piping less than 2 ½ inches inside diameter.
4. Piping in boiler plants and equipment rooms less than 1 ¼ inches inside diameter.
5. All other piping less than 2 ½ inches inside diameter, except for automatic fire suppression systems.
6. All piping suspended by individual hangers, 12 inches or less in length from the top of pipe to the bottom of the support for the hanger.
7. All electrical conduits, less than 2 ½ inches inside diameter.
8. All rectangular air handling ducts less than six square feet in cross sectional area.
9. All round air handling ducts less than 28 inches in diameter.
10. All ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of support for the hanger.

PART 2 – PRODUCTS

2.1 STEEL:

A. Structural Steel: ASTM A36 A36M A992 .

B. Structural Tubing: ASTM A500, Grade B.

C. Structural Tubing: ASTM A501.

D. Steel Pipe: ASTM A53/A53M, Grade B.

E. Bolts & Nuts: ASTM A307 A325 A325M A490 A490M .

2.2 CAST-IN-PLACE CONCRETE:

A. Concrete: 28 day strength, f’c = 25 MPa (3,000 psi) 30 MPa (4,000 psi) xx MPa 5000 psi

B. Reinforcing Steel: ASTM A615/615M or ASTM A996/A996M deformed.

PART 3 – EXECUTION

3.1 CONSTRUCTION, GENERAL:

A. Provide equipment supports and anchoring devices to withstand the seismic design forces, so that when seismic design forces are applied, the equipment cannot displace, overturn, or become inoperable.

B. Provide anchorages in conformance with recommendations of the equipment manufacturer and as shown on approved shop drawings and calculations.

C. Construct seismic restraints and anchorage to allow for thermal expansion.

D. Testing Before Final Inspection:

1. Test 10-percent of anchors in masonry and concrete per ASTM E488, and ACI 355.2 to determine that they meet the required load capacity. If any anchor fails to meet the required load, test the next 20 consecutive anchors, which are required to have zero failure, before resuming the 10-percent testing frequency.
2. Before scheduling Final Inspection, submit a report on this testing indicating the number and location of testing, and what anchor-loads were obtained.

3.2 EQUIPMENT RESTRAINT AND BRACING:

A. See drawings for equipment to be restrained or braced.

3.3 MECHANICAL DUCTWORK AND PIPING; BOILER PLANT STACKS AND BREACHING; ELECTRICAL BUSWAYS, CONDUITS, AND CABLE TRAYS; AND TELECOMMUNICATION WIRES AND CABLE TRAYS

A. Support and brace mechanical ductwork and piping; electrical busways, conduits and cable trays; and telecommunication wires and cable trays including boiler plant stacks and breeching to resist directional forces (lateral, longitudinal and vertical).

B. Brace duct and breeching branches with a minimum of 1 brace per branch.

D. Provide supports and anchoring so that, upon application of seismic forces, piping remains fully connected as operable systems which shall not displace sufficiently to damage adjacent or connecting equipment, or building members.

E. Seismic Restraint of Piping:

1. Design criteria:
   a. Piping resiliently supported: Restrain to support 120 -percent of the weight of the systems and components and contents.

b. Piping not resiliently supported: Restrain to support 60 -percent of the weight of the system components and contents.

2. Provide seismic restraints according to one of the following options:

F. Piping Connections: Provide flexible connections where pipes connect to equipment. Make the connections capable of accommodating relative differential movements between the pipe and equipment under conditions of earthquake shaking.

3.4 PARTITIONS

A. In buildings with flexible structural frames, anchor partitions to only structural element, such as a floor slab, and separate such partition by a physical gap from all other structural elements.

B. Properly anchor masonry walls to the structure for restraint, so as to carry lateral loads imposed due to earthquake along with their own weight and other lateral forces.

3.5 CEILINGS AND LIGHTING FIXTURES

A. At regular intervals, laterally brace suspended ceilings against lateral and vertical movements, and provide with a physical separation at the walls.

B. Independently support and laterally brace all lighting fixtures. Refer to applicable portion of lighting specification, Section 26 51 00, INTERIOR LIGHTING.

3.6 FACADES AND GLAZING

A. Do not install concrete masonry unit filler walls in a manner that can restrain the lateral deflection of the building frame. Provide a gap with adequately sized resilient filler to separate the structural frame from the non-structural filler wall.

B. Tie brick veneers to a separate wall that is independent of the steel frame as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

C. Install attachments to structure for all façade materials as shown on construction drawings to ensure strength against applicable seismic forces at the project location.

3.7 STORAGE RACKS, CABINETS, AND BOOKCASES

A. Install storage racks to withstand earthquake forces and anchored to the floor or laterally braced from the top to the structural elements.

B. Anchor medical supply cabinets to the floor or walls and equip them with properly engaged, lockable latches.

C. Anchor filing cabinets that are more than 2 drawers high to the floor or walls, and equip all drawers with properly engaged, lockable latches.

D. Anchor bookcases that are more than 30 inches high to the floor or walls, and equip any doors with properly engaged, lockable latches.

- - - E N D - - -

SECTION 21 13 13
WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Design, installation and testing shall be in accordance with NFPA 13.

B. Modification of the existing sprinkler system as indicated on the drawings and as further required by these specifications.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 07 84 00, FIRESTOPPING.

D. Section 09 91 00, PAINTING.

E. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING.

F. Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 DESIGN CRITERIA

A. Design Basis Information: Provide design, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13.

1. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Do not restrict design area reductions permitted for using quick response sprinklers throughout by the required use of standard response sprinklers in the areas identified in this section.

2. Sprinkler Protection: Sprinkler hazard classifications shall be in accordance with NFPA 13. The hazard classification examples of uses and conditions identified in the Annex of NFPA 13 shall be mandatory for areas not listed below. Request clarification from the Government for any hazard classification not identified. To determining spacing and sizing, apply the following coverage classifications:

a. Light Hazard Occupancies: Patient care, treatment, and customary access areas.

b. Ordinary Hazard Group 1 Occupancies: Laboratories, Mechanical Equipment Rooms, Transformer Rooms, Electrical Switchgear Rooms, Electric Closets, and Repair Shops.

c. Ordinary Hazard Group 2 Occupancies: Storage rooms, trash rooms, clean and soiled linen rooms, pharmacy and associated storage,

laundry, kitchens, kitchen storage areas, retail stores, retail store storage rooms, storage areas, building management storage, boiler plants, energy centers, warehouse spaces, file storage areas for the entire area of the space up to 140 square meters (1500 square feet) and Supply Processing and Distribution (SPD).

3. Hydraulic Calculations: Calculated demand including hose stream requirements shall fall no less than 10 percent below the available water supply curve.
4. Water Supply: Contractor to perform flow test at the site.
5. Zoning:
   a. For each sprinkler zone provide a control valve, flow switch, and a test and drain assembly with pressure gauge. For buildings greater than two stories, provide a check valve at each control valve.
   b. Sprinkler zones shall conform to the smoke barrier zones shown on the drawings.
6. Provide seismic protection in accordance with NFPA 13. Contractor shall submit load calculations for sizing of sway bracing for systems that are required to be protected against damage from earthquakes.

1.4 SUBMITTALS

A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Prepare detailed working drawings that are signed by a Registered Professional Engineer licensed in the field of Fire Protection Engineering in CA. As the Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and provide an index referencing the appropriate specification section. In addition to the hard copies, provide submittal items in Paragraphs 1.4(A) 1 through 1.4(A) 5 electronically in pdf format on a compact disc or as directed by the COR. Submittals shall include the following:

1. Qualifications:

a. Provide a copy of the installing contractors fire sprinkler and state contractor's license.
b. Working drawings shall be prepared and stamped by a Registered Professional Engineer licensed in the field of Fire Protection Engineering in CA.
c. Provide documentation showing that the installer has been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.

2. Drawings: Submit detailed 1:100 (1/8 inch) scale (minimum) working drawings conforming to the Plans and Calculations chapter of NFPA 13. Drawings shall include graphical scales that allow the user to determine lengths when the drawings are reduced in size. Include a plan showing the piping to the water supply test location.
3. Manufacturer's Data Sheets: Provide data sheets for all materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheets describe items in addition to those proposed to be used for the system, clearly identify the proposed items on the sheet.
4. Calculation Sheets:
   a. Submit hydraulic calculation sheets in tabular form conforming to the requirements and recommendations of the Plans and Calculations chapter of NFPA 13.
   b. Submit calculations of loads for sizing of sway bracing in accordance with NFPA 13.
5. Valve Charts: Provide a valve chart that identifies the location of each control valve. Coordinate nomenclature and identification of control valves with COR. Where existing nomenclature does not exist, the chart shall include no less than the following: Tag ID No., Valve Size, Service (control valve, main drain, aux. drain, inspectors test valve) and Location.
6. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. In addition, submittals shall include the following:
   a. A complete set of as-built drawings showing the installed system with the specific interconnections between the system switches and the fire alarm equipment. Provide a complete set in the

formats as follows. Submit items 2 and 3 below on a compact disc or as directed by the COR.

1) One full size (or size as directed by the COR) printed copy.
2) One complete set in electronic pdf format.
3) One complete set in AutoCAD format or a format as directed by the COR.

b. Material and Testing Certificate: Upon completion of the sprinkler system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 13. Certificates shall be provided to document all parts of the installation.

c. Operations and Maintenance Manuals that include step-by-step procedures required for system startup, operation, shutdown, and routine maintenance and testing. The manuals shall include the manufacturer's name, model number, parts list, and tools that should be kept in stock by the owner for routine maintenance, including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization, including address and telephone number, for each item of equipment.

d. One paper copy of the Material and Testing Certificates and the Operations and Maintenance Manuals above shall be provided in a binder. In addition, these materials shall be provided in pdf format on a compact disc or as directed by the COR.

e. Provide one additional copy of the Operations and Maintenance Manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser or as directed by the COR.

1.5 QUALITY ASSURANCE

A. Installer Reliability: The installer shall possess a valid State of California fire sprinkler contractor's license. The installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.

B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL or approved by FM, or other nationally recognized testing laboratory for the specific purpose for which it is used. All

materials, devices, and equipment shall be approved by the VA. All materials and equipment shall be free from defect. All materials and equipment shall be new unless specifically indicated otherwise on the contract drawings.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. National Fire Protection Association (NFPA):
13-current edition.....Installation of Sprinkler Systems
25-current edition.....Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems
101-current edition.....Life Safety Code
170-current edition.....Fire Safety Symbols

C. Underwriters Laboratories, Inc. (UL):
Fire Protection Equipment Directory (2011)

D. Factory Mutual Engineering Corporation (FM):
Approval Guide

PART 2 - PRODUCTS

2.1 PIPING & FITTINGS

A. Piping and fittings for sprinkler systems shall be in accordance with NFPA 13.
1. Plain-end pipe fittings with locking lugs or shear bolts are not permitted.
2. Piping sizes 50 mm (2 inches) and smaller shall be black steel Schedule 40 with threaded end connections.
3. Piping sizes 65 mm (2 ½ inches) and larger shall be black steel Schedule 10 with grooved connections. Grooves in Schedule 10 piping shall be rolled grooved only.
4. Use nonferrous piping in MRI Scanning Rooms.
5. Plastic piping shall not be permitted except for drain piping.
6. Flexible sprinkler hose shall be FM Approved and limited to hose with threaded end fittings with a minimum inside diameter or 25mm (1-inch) and a maximum length of 2 m (6-feet).

2.2 VALVES

A. General:

1. Valves shall be in accordance with NFPA 13.
2. Do not use quarter turn ball valves for 50 mm (2 inch) or larger drain valves.

B. Control Valve: The control valves shall be a listed indicating type. Control valves shall be UL Listed or FM Approved for fire protection installations. System control valve shall be rated for normal system pressure but in no case less than 1200 kpa (175 PSI).

C. Check Valve: Shall be of the swing type with a flanged cast iron body and flanged inspection plate.

D. Automatic Ball Drips: Cast brass 20 mm (3/4 inch) in-line automatic ball drip with both ends threaded with iron pipe threads.

E. Alarm Check Valve: Alarm check valve shall be UL Listed and Factory Mutual Approved. The alarm check valve shall be listed for installation in the vertical or horizontal position. The alarm check valve shall be equipped with a removable cover assembly, gauge connections on the system side and supply side of the valve clapper, variable pressure trim, and an external bypass to eliminate false water flow alarms. The alarm check valve trim piping shall be galvanized. Maximum water working pressure to 1700 kpa(250 PSI).

2.3 SPRINKLERS

A. All sprinklers shall be FM approved quick response except "institutional" type sprinklers shall be permitted to be UL Listed quick response. Provide FM approved quick response sprinklers in all areas.

B. Provide sprinkler guards in accordance with NFPA 13 and when the elevation of the sprinkler head is less than 7 feet 6 inches above finished floor. The sprinkler guard shall be UL listed or FM approved for use with the corresponding sprinkler.

2.4 SPRINKLER CABINET

A. Provide sprinkler cabinet with the required number of sprinkler heads of all ratings and types installed, and a sprinkler wrench for each type of sprinkler in accordance with NFPA 13. Locate adjacent to the riser.

B. Provide a list of sprinklers installed in the property in the cabinet. The list shall include the following:

1. Manufacturer, model, orifice, deflector type, thermal sensitivity, and pressure for each type of sprinkler in the cabinet.

2. General description of where each sprinkler is used.
3. Quantity of each type present in the cabinet.
4. Issue or revision date of list.

2.5 SPRINKLER SYSTEM SIGNAGE

A. Rigid plastic, steel or aluminum signs with white lettering on a red background with holes for easy attachment. Sprinkler system signage shall be attached to the valve or piping with chain.

2.6 SWITCHES:

A. OS&Y Valve Supervisory Switches shall be in a weatherproof die cast/red baked enamel, oil resistant, aluminum housing with tamper resistant screws, 13 mm (1/2 inch) conduit entrance and necessary facilities for attachment to the valves. Provide two SPDT switches rated at 2.5 amps at 24 VDC.

B. Water flow Alarm Switches: Mechanical, non-coded, non-accumulative retard and adjustable from 0 to 60 seconds minimum. Set flow switches at an initial setting between 20 and 30 seconds.

C. Alarm Pressure Switches: Activation by any flow of water equal to or in excess of the discharge from one sprinkler. The alarm pressure switch shall be UL Listed or Factory Mutual Approved for the application in which it is used. Activation of the alarm pressure switch shall cause an alarm on the fire alarm system control unit.

D. Valve Supervisory Switches for Ball and Butterfly Valves: May be integral with the valve.

2.8 GAUGES

A. Provide gauges as required by NFPA 13. Provide gauges where the normal pressure of the system is at the midrange of the gauge.

2.9 PIPE HANGERS, SUPPORTS AND RESTRAINT OF SYSTEM PIPING

A. Pipe hangers, supports, and restraint of system piping shall be in accordance with NFPA 13.

B. The contractor shall provide wire guard for all sprinkler heads in telecommunications, security and bio medical rooms.

2.10 WALL, FLOOR AND CEILING PLATES

A. Provide chrome plated steel escutcheon plates.

2.12 VALVE TAGS

A. Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch)

for service designation on 19 gage, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook, brass chain, or nylon twist tie.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be accomplished by the licensed contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.

B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In any situation where bending of the pipe is required, use a standard pipe-bending template. Concealed piping in spaces that have finished ceilings. Where ceiling mounted equipment exists, such as in operating and radiology rooms, install sprinklers so as not to obstruct the movement or operation of the equipment. Sidewall heads may need to be utilized. In stairways, locate piping as near to the ceiling as possible to prevent tampering by unauthorized personnel and to provide a minimum headroom clearance of 2250 mm (seven feet six inches). Piping shall not obstruct the minimum means of egress clearances required by NFPA 101. Pipe hangers, supports, restraint of system piping, and seismic bracing shall be installed accordance with NFPA 13.

C. Welding: Conform to the requirements and recommendations of NFPA 13.

D. Drains: Provide drips and drains, including low point drains, in accordance with NFPA 13. Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drips and drains where necessary and required by NFPA 13. The drain piping shall not be restricted or reduced and shall be of the same diameter as the drain collector.

E. Supervisory Switches: Provide supervisory switches for sprinkler control valves.

F. Waterflow Alarm Switches: Install waterflow alarm switches and valves in stairwells or other easily accessible locations.

G. Inspector's Test Connection: Install and supply in accordance with NFPA 13, locate in a secured area, and discharge to the exterior of the building.

H. Affix cutout disks, which are created by cutting holes in the walls of pipe for flow switches and non-threaded pipe connections to the respective waterflow switch or pipe connection near to the pipe from where they were cut.

I. Provide escutcheon plates for exposed piping passing through walls, floors or ceilings.

J. Clearances: For systems requiring seismic protection, piping that passes through floors or walls shall have penetrations sized 50 mm (2 inches) nominally larger than the penetrating pipe for pipe sizes 25 mm (1 inch) to 90 mm (3 ½ inches) and 100 mm (4 inches) nominally larger for penetrating pipe sizes 100 mm (4 inches) and larger.

K. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is used in lieu of sleeves, also seal space. Seal penetrations of walls, floors and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.

M. Provide pressure gauges at each water flow alarm switch location and at each main drain connection.

O. Firestopping shall be provided for all penetrations of fire resistance rated construction. Firestopping shall comply with Section 07 84 00, FIRESTOPPING.

Q. Painting of Pipe: In finished areas where walls and ceilings have been painted, paint primed surfaces with two coats of paint to match adjacent surfaces, except paint valves and operating accessories with two coats of gloss red enamel. Exercise care to avoid painting sprinklers. Painting of sprinkler systems above suspended ceilings and in crawl spaces is not required. Painting shall comply with Section 09 91 00, PAINTING. Any painted sprinkler shall be replaced with a new sprinkler.

R. Sprinkler System Signage: Provide rigid sprinkler system signage in accordance with NFPA 13 and NFPA 25. Sprinkler system signage shall include the following:

1. Identification Signs:
   a. Provide signage for each control valve, drain valve, sprinkler cabinet, and inspector's test.
   b. Provide valve tags for each operable valve. Coordinate nomenclature and identification of operable valves with COR. Where existing nomenclature does not exist, the Tag Identification shall include no less than the following: (FP-B-F/SZ-#) Fire Protection, Building Number, Floor Number/Smoke Zone (if applicable), and Valve Number. (E.g., FP-500-1E-001) Fire Protection, Building 500, First Floor East, Number 001.)
2. Instruction/Information Signs:
   a. Provide signage for each control valve to indicate valve function and to indicate what system is being controlled.
   b. Provide signage indicating the number and location of low point drains.
3. Hydraulic Placards:
   a. Provide signage indicating hydraulic design information. The placard shall include location of the design area, discharge densities, required flow and residual pressure at the base of riser, occupancy classification, hose stream allowance, flow test information, and installing contractor. Locate hydraulic placard information signs at each alarm check valve.

S. Repairs: Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.

T. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the 's Representative (COR). Contractor shall develop an interim fire protection program where interruptions involve occupied spaces. Request in writing at least one week prior to the planned interruption.

3.2 INSPECTION AND TEST

A. Preliminary Testing: Flush newly installed systems prior to performing hydrostatic tests in order to remove any debris which may have been left as well as ensuring piping is unobstructed. Hydrostatically test system, including the fire department connections, as specified in NFPA 13, in the presence of the COR or his designated representative. Test

and flush underground water line prior to performing these hydrostatic tests.

B. Final Inspection and Testing: Subject system to tests in accordance with NFPA 13, and when all necessary corrections have been accomplished, advise COR to schedule a final inspection and test. Connection to the fire alarm system shall have been in service for at least ten days prior to the final inspection, with adjustments made to prevent false alarms. Furnish all instruments, labor and materials required for the tests and provide the services of the installation foreman or other competent representative of the installer to perform the tests. Correct deficiencies and retest system as necessary, prior to the final acceptance. Include the operation of all features of the systems under normal operations in test

3.3 INSTRUCTIONS

A. Furnish the services of a competent instructor for not less than two hours for instructing personnel in the operation and maintenance of the system, on the dates requested by the COR.

---END---

---INTENTIONALLY BLANK---

SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section shall apply to all sections of Division 22.

B. Definitions:

1. Exposed: Piping and equipment exposed to view in finished rooms.

C. Abbreviations/Acronyms:

1. ABS: Acrylonitrile Butadiene Styrene
2. AC: Alternating Current
3. ACR: Air Conditioning and Refrigeration
4. AI: Analog Input
5. AISI: American Iron and Steel Institute
6. AO: Analog Output
7. AWG: American Wire Gauge
8. BACnet: Building Automation and Control Network
9. BAg: Silver-Copper-Zinc Brazing Alloy
10. BAS: Building Automation System
11. BCuP: Silver-Copper-Phosphorus Brazing Alloy
12. BSG: Borosilicate Glass Pipe
13. CDA: Copper Development Association
14. C: Celsius
15. CLR: Color
16. CO: Carbon Monoxide
17. COR: Contracting Officer’s Representative
18. CPVC: Chlorinated Polyvinyl Chloride
19. CR: Chloroprene
20. CRS: Corrosion Resistant Steel
21. CWP: Cold Working Pressure
22. CxA: Commissioning Agent
23. db(A): Decibels (A weighted)
24. DDC: Direct Digital Control
25. DI: Digital Input
26. DISS: Diameter Index Safety System
27. DO: Digital Output
28. DVD: Digital Video Disc
29. DN: Diameter Nominal

30. DWV: Drainage, Waste and Vent
31. ECC: Engineering Control Center
32. EPDM: Ethylene Propylene Diene Monomer
33. EPT: Ethylene Propylene Terpolymer
34. ETO: Ethylene Oxide
35. F: Fahrenheit
36. FAR: Federal Acquisition Regulations
37. FD: Floor Drain
38. FED: Federal
39. FG: Fiberglass
40. FNPT: Female National Pipe Thread
41. FPM: Fluoroelastomer Polymer
42. GPM: Gallons Per Minute
43. HDPE: High Density Polyethylene
44. Hg: Mercury
45. HOA: Hands-Off-Automatic
46. HP: Horsepower
47. HVE: High Volume Evacuation
48. ID: Inside Diameter
49. IPS: Iron Pipe Size
50. Kg: Kilogram
51. kPa: Kilopascal
52. lb: Pound
53. L/s: Liters Per Second
54. L/min: Liters Per Minute
55. MAWP: Maximum Allowable Working Pressure
56. MAX: Maximum
57. MED: Medical
58. m: Meter
59. MFG: Manufacturer
60. mg: Milligram
61. mg/L: Milligrams per Liter
62. ml: Milliliter
63. mm: Millimeter
64. MIN: Minimum
65. NF: Oil Free Dry (Nitrogen)
66. NPTF: National Pipe Thread Female

67. NPS: Nominal Pipe Size
68. NPT: Nominal Pipe Thread
69. OD: Outside Diameter
70. OSD: Open Sight Drain
71. OS&Y: Outside Stem and Yoke
72. OXY: Oxygen
73. PBPU: Prefabricated Bedside Patient Units
74. PH: Power of Hydrogen
75. PLC: Programmable Logic Controllers
76. PP: Polypropylene
77. PPM: Parts per Million
78. PSIG: Pounds per Square Inch
79. PTFE: Polytetrafluoroethylene
80. PVC: Polyvinyl Chloride
81. PVDF: Polyvinylidene Fluoride
82. RAD: Radians
83. RO: Reverse Osmosis
84. RPM: Revolutions Per Minute
85. RTRP: Reinforced Thermosetting Resin Pipe
86. SCFM: Standard Cubic Feet Per Minute
87. SDI: Silt Density Index
88. SPEC: Specification
89. SPS: Sterile Processing Services
90. STD: Standard
91. SUS: Saybolt Universal Second
92. SWP: Steam Working Pressure
93. TEFC: Totally Enclosed Fan-Cooled
94. TFE: Tetrafluoroethylene
95. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
96. THWN: Thermoplastic Heat & Water Resistant Nylon Coated Wire
97. T/P: Temperature and Pressure
98. USDA: U.S. Department of Agriculture
99. V: Volt
100. VAC: Vacuum
101. VA: Veterans Administration
102. VAMC: Veterans Administration Medical Center
103. VAC: Voltage in Alternating Current

104. WAGD: Waste Anesthesia Gas Disposal

105. WOG: Water, Oil, Gas

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

D. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout.

E. Section 05 31 00, STEEL DECKING: Building Components for Attachment of Hangers.

F. Section 07 84 00, FIRESTOPPING.

G. Section 07 92 00, JOINT SEALANTS.

H. Section 09 91 00, PAINTING.

I. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

J. Section 22 07 11, PLUMBING INSULATION.

K. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

L. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):
ASME Boiler and Pressure Vessel Code -
BPVC Section IX-2013....Welding, Brazing, and Fusing Qualifications
B31.1-2012.....Power Piping

C. American Society for Testing and Materials (ASTM):
A36/A36M-2019.....Standard Specification for Carbon Structural Steel
A575-96(R2018)e1.....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades
E84-2019b.....Standard Test Method for Surface Burning Characteristics of Building Materials
E119-2019.....Standard Test Methods for Fire Tests of Building Construction and Materials
F1760-2016.....Standard Specification for Coextruded Poly(Vinyl Chloride) (PVC) Non-Pressure Plastic Pipe Having Reprocessed-Recycled Content

D. International Code Council, (ICC):

IBC-2021.....International Building Code

IPC-2021.....International Plumbing Code

E. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:

SP-58-2018.....Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application and Installation

SP-69-2003(R2012).....Pipe Hangers and Supports - Selection and Application

F. Military Specifications (MIL):

P-21035B.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

G. National Fire Protection Association (NFPA):

51B-2019.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

54-2018.....National Fuel Gas Code

70-2019.....National Electrical Code (NEC)

H. NSF International (NSF):

14-2019.....Plastic Piping System Components and Related Materials

61-2019.....Drinking Water System Components – Health Effects

372-2016.....Drinking Water System Components – Lead Content

I. Department of Veterans Affairs (VA):

PG-18-10.....Plumbing Design Manual

PG-18-13-2011.....Barrier Free Design Guide

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements and will fit the space available.

D. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Installing Contractor shall provide lists of previous installations for selected items of equipment. Contact persons who will serve as references, with telephone numbers and e-mail addresses shall be submitted with the references.

G. Manufacturer's Literature and Data: Manufacturer’s literature shall be submitted under the pertinent section rather than under this section.

1. Equipment and materials identification.
2. Firestopping materials.
3. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
4. Wall, floor, and ceiling plates.

H. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient installation. Final review and approvals will be made only by groups.

I. Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment. Include complete list indicating all components of the systems with diagrams of the internal wiring for each item of equipment.
2. Include listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment shall be provided. The listing shall include belts for equipment: Belt

manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

1.5 QUALITY ASSURANCE

A. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture, supply and servicing of the specified products for at least 5 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least 5 years.
2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within four hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, compressors, water heaters, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the COR.
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.

6. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos shall not be used.
9. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

B. Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the American Welding Society.

C. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

D. Execution (Installation, Construction) Quality:
   1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract documents shall be referred to the COR for resolution. Printed copies or electronic files of manufacturer’s installation instructions shall be provided to the COR at least 10 working days prior to commencing installation of any item.
   2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to: all types of valves, filters and strainers, transmitters, and control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to COR for resolution.
   3. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved by VA.
   4. Installer Qualifications: Installer shall be licensed and shall provide evidence of the successful completion of at least five projects of equal or greater size and complexity. Provide tradesmen skilled in the appropriate trade.
   5. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or additional time to the Government.
E. Guaranty: Warranty of Construction, FAR clause 52.246-21.
F. Plumbing Systems: IPC, International Plumbing Code. Unless otherwise required herein, perform plumbing work in accordance with the latest version of the IPC. For IPC codes referenced in the contract documents, advisory provisions shall be considered mandatory, the word “should” shall be interpreted as “shall”. Reference to the “code official” or “owner” shall be interpreted to mean the COR.
G. Cleanliness of Piping and Equipment Systems:
   1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.

2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC). All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:
1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the COR. Such replacement shall be at no additional cost or additional time to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.
B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure

interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them on Auto-Cad version 2013 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and a certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 MATERIALS FOR VARIOUS SERVICES

A. Steel pipe shall contain a minimum of 25 percent recycled content.

B. Solder or flux containing lead shall not be used with copper pipe.

C. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption, and shall be certified in accordance with NSF 61 or NSF 372.

D. In-line devices such as check valves, stops, valves, and fittings shall comply with NSF 61 and NSF 372.

E. End point devices such as lavatory faucets, kitchen faucets, and end-point control valves used to dispense drinking water must meet requirements of NSF 61 and NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements.

B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly at no additional cost or time to the Government.

C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, shall be the same make and model.

2.3 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.4 SAFETY GUARDS

A. All Equipment shall have moving parts protected from personal injury.

2.5 LIFTING ATTACHMENTS

A. Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.6 CONTROL WIRING

A. All material and equipment furnished and installation methods used shall conform to the requirements of Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. All electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems shall be provided.

2.8 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings, or shown in the maintenance manuals. Coordinate equipment and valve identification with local VAMC shops. In addition, provide bar code identification nameplate for all equipment which shall allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.

E. Valve Tags and Lists:

1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19 gage, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic-coated valve list card(s), sized 215 mm (8-1/2 inches) by 275 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. An additional copy of the valve list shall be mounted in picture frames for mounting to a wall. COR shall instruct contractor where frames shall be mounted.
4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided in the 3-ring binder notebook. Each valve location shall be identified with a color-coded sticker or thumb tack in ceiling or access door.

2.9 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 22 07 11, PLUMBING INSULATION, for pipe insulation.

2.10 GALVANIZED REPAIR COMPOUND

A. Mil. Spec. DOD-P-21035B, paint.

2.11 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the

International Building Code (IBC) and Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Submittals based on the International Building Code (IBC) and Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in the state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the COR in all cases. See the above specifications for lateral force design requirements.

B. Type Numbers Specified: For materials, design, manufacture, selection, application, and installation refer to MSS SP-58. For selection and application refer to MSS SP-69.

C. For Attachment to Concrete Construction:
   1. Concrete insert: Type 18, MSS SP-58.
   2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
   3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

D. For Attachment to Steel Construction: MSS SP-58.
   1. Welded attachment: Type 22.
   2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.

E. Attachment to Metal Pan or Deck: As required for materials specified in Section 05 31 00, STEEL DECKING.

F. For Attachment to Wood Construction: Wood screws or lag bolts.

G. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

H. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 43 mm by 43 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts.
   1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).

2. Guide individual pipes on the horizontal member of every other trapeze hanger with 8 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2 inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.

I. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 22 07 11, PLUMBING INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.

1. General Types (MSS SP-58):
   a. Standard clevis hanger: Type 1; provide locknut.
   b. Riser clamps: Type 8.
   c. Wall brackets: Types 31, 32 or 33.
   d. Roller supports: Type 41, 43, 44 and 46.
   e. Saddle support: Type 36, 37 or 38.
   f. Turnbuckle: Types 13 or 15.
   g. U-bolt clamp: Type 24.
   h. Copper Tube:
      1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, copper-coated, plastic coated or taped with isolation tape to prevent electrolysis.
      2) For vertical runs use epoxy painted, copper-coated or plastic-coated riser clamps.
      3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
      4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
2. Plumbing Piping (Other Than General Types):
   a. Horizontal piping: Type 1, 5, 7, 9, and 10.
   b. Chrome plated piping: Chrome plated supports.
   c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action,

to hold piping, prevent vibration and compensate for all static and operational conditions.

d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gage) minimum.

J. Pre-insulated Calcium Silicate Shields:

1. Provide 360 degree water resistant high density 965 kPa (140 psig) compressive strength calcium silicate shields encased in galvanized metal.
2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
   a. Shields for supporting cold water shall have insulation that extends a minimum of 25 mm (1 inch) past the sheet metal.
   b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS SP-69. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psig) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36/A36M) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, trapeze hangers, roller supports or flat surfaces.

K. Seismic Restraint of Piping: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.12 PIPE PENETRATIONS

A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.

B. Pipe penetration sleeve materials shall comply with all firestopping requirements for each penetration.

C. Penetrations are not allowed through beams or ribs, but may shall be installed in concrete beam flanges, with structural engineer prior approval. Any deviation from these requirements must receive prior approval of COR.

D. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and

partitions, unless brass or steel pipe sleeves are specifically called for below.

E. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for.

F. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve shall be connected with a floor plate.

I. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with firestopping material and sealant to prevent the spread of fire, smoke, water and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

K. Pipe passing through roof shall be installed through a 4.9 kg per square meter copper flashing with an integral skirt or flange. Skirt or flange shall extend not less than 200 mm (8 inches) from the pipe and set in a solid coating of bituminous cement. Extend flashing a minimum of 250 mm (10 inches) up the pipe. Pipe passing through a waterproofing membrane shall be provided with a clamping flange. The annular space between the sleeve and pipe shall be sealed watertight.

2.13 TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the COR.

2.14 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch) pipe, 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.15 ASBESTOS

A. Materials containing asbestos are not permitted.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of windows, doors, openings, light outlets, and other services and utilities.

B. Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.

C. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance, testing and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, meters and control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown on the drawings shall not be changed nor reduced.

D. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.

E. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

F. Cutting Holes:

1. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.

2. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
3. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COR where working area space is limited.

G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other services are not shown but must be provided.

H. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced at no additional cost or time to the Government.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, shall be used for all pad or floor mounted equipment.

J. Gages, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gages shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

K. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control

devices, control and instrumentation panels, alarms, instruments and computer workstations. Comply with NFPA 70.

L. Work in Existing Building:
   1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
   2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will cause the least interfere with normal operation of the facility.

M. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers putty.

N. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above data equipment, and electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Drain valve shall be provided in low point of casement pipe.

O. Inaccessible Equipment:
   1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or additional time to the Government.
   2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.

B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain,

operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of paragraph 3.1 shall apply.

C. Temporary facilities and piping shall be completely removed back to the nearest active distribution branch or main pipe line and any openings in structures sealed. Dead legs are not allowed in potable water systems. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

A. Openings in building structures shall be planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.

C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.

E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Rigging plan and methods shall be referred to COR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the COR.

B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.

C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work shall be provided.

D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC) and these specifications.

E. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

F. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 PLUMBING SYSTEMS DEMOLITION

A. Rigging access, other than indicated on the drawings, shall be provided after approval for structural integrity by the COR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris

shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards including NFPA 51B. Inspections will be made by personnel of the VA Medical Center, and the Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate. Coordinate with the COR and Infection Control.

3.6 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
2. The following Material and Equipment shall NOT be painted:
   a. Controllers, control switches, and safety switches.
   b. Control and interlock devices.
   c. Regulators.
   d. Pressure reducing valves.
   e. Control valves and thermostatic elements.
   f. Lubrication devices and grease fittings.
   g. Copper, brass, aluminum, stainless steel and bronze surfaces.
   h. Valve stems and rotating shafts.
   i. Pressure gages and thermometers.
   j. Glass.
   k. Name plates.
3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint type and color obtained from manufacturer or computer matched.
4. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats per Section 09 91 00, Painting.
5. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be repainted, if necessary, to achieve this. Lead based paints shall not be used.

3.7 IDENTIFICATION SIGNS

A. Laminated plastic signs, with engraved lettering not less than 7 mm (3/16 inch) high, shall be provided that designates equipment function, for all equipment, switches, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall

correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, and performance data shall be placed on factory built equipment.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.8 STARTUP AND TEMPORARY OPERATION

A. Startup of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.9 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.

C. When completion of certain work or systems occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings during the first actual seasonal use of the respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

3.10 OPERATION AND MAINTENANCE MANUALS

A. All new and temporary equipment and all elements of each assembly shall be included.

B. Data sheet on each device listing model, size, capacity, pressure, speed, and other information shall be included.

C. Manufacturer’s installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.

D. Lubrication instructions, type and quantity of lubricant shall be included.

E. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.

F. Set points of all interlock devices shall be listed.

G. Trouble-shooting guide for the control system troubleshooting shall be inserted into the Operations and Maintenance Manual.

H. The control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.

3.11 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for one hours to instruct VA Personnel in operation and maintenance of the system.

---END---

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the requirements for general-duty valves for domestic water and sewer systems.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

A112.14.1-2003 .....Backwater Valves

C. American Society of Sanitary Engineering (ASSE):

1001-2008 .....Performance Requirements for Atmospheric Type Vacuum Breakers

1011-2004 .....Performance Requirements for Hose Connection Vacuum Breakers

1017-2009 .....Performance Requirements for Temperature

D. Actuated Mixing Valves for Hot Water Distribution Systems

1020-2020 .....Performance Requirements for Pressure Vacuum Breaker Assembly

1035-2008 .....Performance Requirements for Laboratory Faucet Backflow Preventers

1069-2020 .....Performance Requirements for Automatic Temperature Control Mixing Valves

1070-2015 .....Performance Requirements for Water Temperature Limiting Devices

1071-2012 .....Performance Requirements for Temperature Actuated Mixing Valves for Plumbed Emergency Equipment

E. American Society for Testing and Materials (ASTM):

A126-2004(R2019) .....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

A276-2013a .....Standard Specification for Stainless Steel Bars and Shapes

A536-1984(R2019) .....Standard Specification for Ductile Iron Castings

B62-2017 Standard Specification for Composition Bronze or Ounce Metal Castings

B584-2014 .....Standard Specification for Copper Alloy Sand Castings for General Applications

F. International Code Council (ICC):

IPC-2021 .....International Plumbing Code

G. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):

SP-25-2018 .....Standard Marking Systems for Valves, Fittings, Flanges and Unions

SP-67-2017 .....Butterfly Valves

SP-70-2011 .....Gray Iron Gate Valves, Flanged and Threaded Ends

SP-71-2018 .....Gray Iron Swing Check Valves, Flanged and Threaded Ends

SP-80-2019 .....Bronze Gate, Globe, Angle, and Check Valves

SP-85-2011 .....Gray Iron Globe & Angle Valves, Flanged and Threaded Ends

SP-110-2010 .....Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

H. National Environmental Balancing Bureau (NEBB):

7th Edition 2005 .....Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

I. NSF International (NSF):

61-2019 .....Drinking Water System Components – Health Effects

372-2016 Drinking Water System Components – Lead Content

University of Southern California Foundation for Cross Connection

J. Control and Hydraulic Research (USC FCCCHR):

9th Edition .....Manual of Cross-Connection Control

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data Including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Ball Valves.
2. Butterfly Valves.
3. Check Valves.
4. Thermostatic Mixing Valves.

D. Complete operating and maintenance manuals including technical data sheets and information for ordering replaceable parts:

1. Include complete list indicating all components of the systems.
2. Piping diagrams of thermostatic mixing valves to be installed.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Valves shall be prepared for shipping as follows:

1. Protect internal parts against rust and corrosion.
2. Protect threads, flange faces, grooves, and weld ends.
3. Set angle valves closed to prevent rattling.
4. Set ball valves open to minimize exposure of functional surfaces.
5. Set butterfly valves closed or slightly open.
6. Block check valves in either closed or open position.

B. Valves shall be prepared for storage as follows:

1. Maintain valve end protection.
2. Store valves indoors and maintain at higher than ambient dew point temperature.

C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

PART 2 - PRODUCTS

2.1 VALVES, GENERAL

A. Asbestos packing and gaskets are prohibited.

B. Bronze valves shall be made with dezincification resistant materials. Bronze valves made with copper alloy (brass) containing more than 15 percent zinc shall not be permitted.

C. Valves in insulated piping shall have 2 inch (50 mm) stem extensions and extended handles of non-thermal conductive material that allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.

D. All valves used to supply potable water shall meet the requirements of NSF 61 and NSF 372.

E. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

2.2 SHUT-OFF VALVES

A. Cold, Hot and Re-circulating Hot Water:

1. 2 inches (50 mm) and smaller: Ball, MSS SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 150 psig (1035 kPa) and a CWP rating of 600 psig (4138 kPa). The body material shall be Bronze ASTM B584, Alloy C844. The ends shall be non-lead solder.

2. Less than 4 inches (100 mm): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 200 psig (1380 kPa). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A536, ductile iron.

2.3 CHECK VALVES

A. 3 inches (75 mm) and smaller shall be Class 125, bronze swing check valves with non-metallic disc suitable for type of service. The check valve shall meet MSS SP-80 Type 4 standard. The check valve shall have

a CWP rating of 200 psig (1380 kPa). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B62, solder joints, and PTFE or TFE disc.

B. 4 inches (100 mm) and larger:
   1. Check valves shall be Class 125, iron swing check valve with lever and weight closure control. The check valve shall meet MSS SP-71 Type I standard. The check valve shall have a CWP rating of 200 psig (1380 kPa). The check valve shall have a clear or full waterway body design with gray iron body material conforming to ASTM A126, bolted bonnet, flanged ends, bronze trim.
   2. All check valves on the discharge side of submersible sump pumps shall have factory installed exterior level and weight with sufficient weight to prevent the check valve from hammering against the seat when the sump pump stops.

2.4 BACKFLOW PREVENTERS

A. A backflow prevention assembly shall be installed at any point in the plumbing system where the potable water supply comes in contact with a potential source of contamination. The backflow prevention assembly shall be approved by the University of Southern California Foundation for Cross Connection Control and Hydraulic Research (USCFCCC).

B. The reduced pressure principle backflow prevention assembly shall be ASSE listed 1013 with full port OS&Y positive-seal resilient gate valves and an integral relief monitor switch. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade 4. The seat ring and check valve shall be the thermoplastic type suited for water service. The stem shall be stainless steel conforming to ASTM A276. The seat disc shall be the elastomer type suited for water service. The checks and the relief valve shall be accessible for maintenance without removing the device from the line. An epoxy coated wye type strainer with flanged connections shall be installed on the inlet. Reduced pressure backflow preventers shall be installed in the following applications.
   1. Deionizers.
   2. Sterilizers.
   3. Stills.
   4. Dialysis, Deionized or Reverse Osmosis Water Systems.

5. Water make up to heating systems, cooling tower, chilled water system, generators, and similar equipment consuming water.
6. Water service entrance from loop system.
7. Dental equipment.
8. Power washer.
9. Medical equipment.
10. Process equipment.
11. Autopsy, on each hot and cold water outlet at each table or sink.
12. Reclaimed water systems.

C. The pipe applied or integral atmospheric vacuum breaker shall be ASSE listed 1001. The main body shall be cast bronze. The seat disc shall be the elastomer type suited for water service. The device shall be accessible for maintenance without removing the device from the service line. The installation shall not be in a concealed or inaccessible location or where the venting of water from the device during normal operation is deemed objectionable. Atmospheric vacuum breakers shall be installed in the following applications.

1. Hose bibs and sinks with threaded outlets.
2. Disposers.
3. Showers (telephone/handheld type).
4. Hydrotherapy units.
5. All kitchen equipment, if not protected by air gap.
6. Ventilating hoods with wash down system.
7. Film processor.
8. Detergent system.
9. Fume hoods.
10. Glassware washers.
11. Service sinks (integral with faucet only).
12. Laundry tubs (integral with faucet only).
13. Sitz baths.

D. The hose connection vacuum breaker shall be ASSE listed 1011. The main body shall be cast brass with stainless steel working parts. The diaphragm and disc shall be the elastomer type suited for water service. The device shall permit the attachment of portable hoses to hose thread outlets. Hose connection vacuum breakers shall be installed in the following locations requiring non-continuous pressure:

1. Hose bibbs and wall hydrants.

E. The double check backflow prevention assembly shall be ASSE listed 1015 and supply with full port, OS&Y, positive-seal, resilient gate valves. The main body and access cover shall be epoxy coated ductile iron conforming to ASTM A536 grade. The seat ring and check valve shall be the thermoplastic type suited for water service. The stem shall be stainless steel conforming to ASTM A276. The seat disc shall be the elastomer type suited for water service. The first and second check valve shall be accessible for maintenance without removing the device from the line. Double check valves shall be installed in the following location requiring continuous pressure subject to backpressure and backsiphonage conditions.

2.5 THERMOSTATIC MIXING VALVES

A. Thermostatic Mixing Valves shall comply with the following general performance requirements:
   1. Shall meet ASSE requirements for water temperature control.
   2. The body shall be cast bronze or brass with corrosion resistant internal parts preventing scale and biofilm build-up. Provide chrome-plated finish in exposed areas.
   3. No special tool shall be required for temperature adjustment, maintenance, replacing parts and disinfecting operations.
   4. Valve shall be able to be placed in various positions without making temperature adjustment or reading difficult.
   5. Valve finish shall be chrome plated in exposed areas.
   6. Valve shall allow easy temperature adjustments to allow hot water circulation. Internal parts shall be able to withstand disinfecting operations of chemical and thermal treatment of water temperatures up to 180 degrees F (82 degrees C) for 30 minutes or 50 ppm (50 mg/L) chlorine residual concentration for 24 hours.
   7. Parts shall be easily removed or replaced without dismantling the valves, for easy scale removal and disinfecting of parts.
   8. Valve shall have a manual adjustable temperature control with locking mechanism to prevent tampering by end user. Outlet temperature shall be visible to ensure outlet temperature does not exceed specified limits, particularly after thermal eradication procedures.
   9. Provide mixing valves with integral check valves with screens and stop valves.

B. Water Temperature Limiting Devices:
   1. Application: Single plumbing fixture point-of-use such as sinks or lavatories.
   2. Standard: ASSE 1070.
   3. Pressure Rating: 125 psig (861 kPa).
   4. Type: Thermostatically controlled water mixing valve set at 110 degrees F (43 degrees C).
   5. Connections: Threaded union, compression or soldered inlets and outlet.
   6. Upon cold water supply failure the hot water flow shall automatically be reduced to 0.2 gpm maximum.
C. Temperature Activated Mixing Valves:
   1. Application: Emergency eye/face/drench shower equipment.
   2. Standard: ASSE 1071.
   3. Pressure Rating: 125 psig (861 kPa).
   4. Type: Thermostatically controlled water mixing valve set at 75 to 85 degrees F (24 to 30 degrees C).
   5. Connections: Soldered or threaded union inlets and outlet.
   6. Thermometers shall be provided to indicate mixed water temperature.
   7. Upon cold water supply failure, the hot water flow shall automatically be reduced to 0.5 gpm maximum.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed, such as blocks, used to prevent disc movement during shipping and handling.
B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.
C. Threads on valve and mating pipe shall be examined for form and cleanliness.
D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its material composition is suitable for service and free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.

C. Valves shall be installed in horizontal piping with stem at or above center of pipe.

D. Valves shall be installed in a position to allow full stem movement.

E. Check valves shall be installed for proper direction of flow and as follows:

1. Swing Check Valves: In horizontal position with hinge pin level and on top of valve.

F. Install temperature-actuated water mixing valves with check stops or shutoff valves on inlets.

1. Install thermometers if specified.

G. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no cost to the Government.

3.3 LABELING AND IDENTIFYING

A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:

1. Master, thermostatic, water mixing valves.
2. Manifold, thermostatic, water-mixing-valve assemblies.

B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.

3.4 ADJUSTING

A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting. Valves shall be replaced if persistent leaking occurs.

B. Set field-adjustable temperature set points of temperature-actuated water mixing valves.

- - E N D - - -

---INTENTIONALLY BLANK---

SECTION 22 05 33
HEAT TRACING FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the requirement for supplying, installing, and testing of the electric heat tracing system of the plumbing piping. Freeze protection shall be utilized for domestic water piping in areas subject to freezing temperatures. Ice and snow melting shall be utilized for gutters, downspouts, roof drain bodies and roof drain leaders exposed to snow and ice accumulation.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

D. Section 22 07 11, PLUMBING INSULATION.

E. Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. The Institute of Electrical and Electronic Engineers (IEEE):

515.1-2012 Standard for the Testing, Design, Installation, and Maintenance of Electrical Resistance Trace Heating for Commercial Applications

C. International Code Council, (ICC):

IPC-2021 International Plumbing Code

D. National Fire Protection Association (NFPA):

70-2011 National Electrical Code (NEC)

E. Underwriters' Laboratories, Inc. (UL):

508-99 (R2013) Standard for Industrial Control Equipment

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 33, HEAT TRACING FOR PLUMBING PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Rated capacity.
2. Length of cable.
3. Cable spacing.
4. Electrical power requirements.
5. Controls.
6. Enclosures.
7. Accessories.

D. The shop drawings shall include plans, sections, details, wiring diagrams, and attachments to other work. The wiring diagrams shall include power, signal, and control wiring.

E. Field quality control test reports shall be submitted.

F. Operation and Maintenance data in accordance with article 1.6.

1.5 QUALITY ASSURANCE

G. Manufacturer Qualifications: Ten years' experience in design, engineering, manufacture and support of specified system and components.

H. Product Requirements:

1. Pipe or tank tracing cable assembly shall be factory assembled, immersed in water for a minimum of 12 hours, and then tested for insulation resistance, high potential breakdown and continuity before leaving the factory.
2. Factory Mutual approved heating cable that has the same wattage per lineal foot (power output), throughout its entire length.
3. UL Listed, thermostat and contactor panel.
4. UL Listed Control/Monitor Panel.

I. Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, by a qualified testing agency, and marked for intended location and application.

J. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA

recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments, construction revisions and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments shall be inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

PART 2 - PRODUCTS

2.1 SELF-REGULATING PARALLEL RESISTANCE HEATING CABLES

A. Self-regulating parallel resistance heating cables shall comply with IEEE 515.1.

B. The heating element shall be a pair of parallel No. 16 AWG **tinned** stranded copper bus wires embedded in cross linked conductive polymer core, which varies heat output in response to temperature along its length. Cables shall be terminated with waterproof, factory assembled non heating leads with connects at one and seal the opposite end watertight. The cable shall be capable of crossing over itself without overheating.

C. The electrical insulating jacket shall be flame-retardant polyolefin.

D. The cable cover shall be **stainless steel braid** and **polyolefin outer jacket with UV inhibitor.**

E. The maximum power on operating temperature shall be 150 degrees F (65 degrees C).

F. The maximum power off exposure temperature shall be 185 degrees F (85 degrees C).

G. The capacities and characteristics shall be:

1. Maximum heat output 3 W/foot (9.8 W/m)
2. Pipe Diameter: As shown on drawings.
3. Number of parallel cables: two.
4. Spiral wrap pitch: per manufacturer’s recommendation.
5. Volts: 120 V.
6. Phase: Three.
7. Hertz: 60.
8. Minimum circuit ampacity: per total connected load.
9. Maximum over current Protection: per NEC.

2.2 CONTROLS

A. Pipe mounting thermostats for Freeze protection shall have a remote bulb unit with adjustable temperature range from minus 34 to 50 degrees F (1 to 10 degrees C). The thermostat shall be snap action, open-on-rise, single pole switch with minimum current rating adequate for the connected cable. The thermostat shall be remote bulb on capillary, resistance temperature device, or thermistor for direct sensing of pipe wall temperature. The control enclosure shall be corrosion resistant and waterproof.

B. The enclosure shall be the NEMA 4X type.

C. A minimum 30 amp contactor shall be provided to energize cable or close other contactors. Provide relay with contacts to indicate operational status, on/off, and for interface with central energy management and control system.

2.3 ACCESSORIES

A. Cable Installation Accessories: Fiberglass tape, heat-conductive putty, cable ties, silicone end seals and splice kits, and installation clips all furnished by manufacturer, or as recommended in writing by manufacturer.

B. Warning Labels: Shall comply with NFPA 70.

C. Warning Tape: Continuously printed "Electrical Tracing"; vinyl, at least 3 mils (0.08 mm) thick, and with pressure-sensitive, permanent, waterproof, self-adhesive back.

1. Width for Markers on Pipes with Outside Dimension, Including Insulation, and Less Than 6 inches (150 mm): 3/4 inch (19 mm) minimum.
2. Width for Markers on Pipes with Outside Dimension, Including Insulation, 6 inches (150 mm) or Larger: 1-1/2 inches (38 mm) minimum.

PART 3 - EXECUTION

3.1 GENERAL

A. Inspect surfaces and substrates of electric heating cables for compliance with requirements of this specification. Ensure surfaces and pipes in contact with electric heating cables are free of burrs and sharp protrusions.

B. Notify COR if the existing substrate conditions are unsuitable for application of heating cables in accordance with manufacturer’s recommendations.

C. If the installation of the heat tracing is unsatisfactory, then the Contractor shall correct the installation at no cost to the Government.

3.2 INSTALLATION

A. Electric heating cable shall be installed for the following applications:
   1. Freeze protection of plumbing piping: **Self-regulating parallel-resistance** heating cable.

B. Electric heating cable shall be installed across expansion, construction, and control joints according to the manufacturer’s recommendations using cable protection conduit and slack cable to allow for movement without damage to cable.

C. Electric heating cable for pipe freeze protection shall be installed according to the following:
   1. Electric heating cables shall be installed after piping has been tested and before insulation is installed.
   2. Electric heat cables shall be installed according to IEEE 515.1
   3. Insulation shall be installed or applied over piping with electric cables. Refer to Section 22 07 11, PLUMBING INSULATION.
   4. Warning tape shall be installed on pipe insulation where piping is equipped with electric heating cables.

D. Field adjustable switches and circuit breaker trip ranges shall be set.

E. Heating cables including leads shall be protected from damage.

F. Equipment shall be grounded according to Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

G. Wiring shall be connected according to Section 26 05 19, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

3.3 TESTS

A. Manufacturer's Field Service: Engage a factory-authorized service representative to test and inspect components, assemblies, and equipment installations, including connections.

B. Perform the following tests and inspections:

1. Perform tests after cable installation but before application of coverings such as insulation, wall or ceiling construction, or concrete.
2. Test cables for electrical continuity and insulation integrity before energizing.
3. Test cables to verify rating and power input. Energize and measure voltage and current simultaneously.

C. Repeat tests for continuity, insulation resistance, and input power after applying thermal insulation on pipe-mounted cables.

D. If deficiency is found, Contractor shall correct all deficiencies at no cost to the Government.

E. Prepare test and inspection reports.

- - - E N D - - -

SECTION 22 07 11
PLUMBING INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Field applied insulation for thermal efficiency and condensation control for the following:
   1. Plumbing piping and equipment.
   2. Replacement of any part of existing insulation system (insulation, vapor retarder jacket, protective coverings/jacket) damaged during construction.

B. Definitions:
   1. ASJ: All Service Jacket, Kraft paper, white finish facing or jacket.
   2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
   3. All insulation systems installed within supply, return, exhaust, relief and ventilation air plenums shall be limited to uninhabited crawl spaces, areas above a ceiling or below the floor, attic spaces, interiors of air conditioned or heating ducts, and mechanical equipment rooms shall be noncombustible or shall be listed and labeled as having a flame spread indexes of not more than 25 and a smoke-developed index of not more than 50 when tested in accordance with ASTM E84 or UL 723. Note: ICC IMC, Section 602.2.1.
   4. Cold: Equipment or piping handling media at design temperature of 15 degrees C (60 degrees F) or below.
   5. Concealed: Piping above ceilings, in chases, and pipe spaces.
   6. Exposed: Piping and equipment exposed to view in finished areas including mechanical equipment rooms or exposed to outdoor weather. Shafts, chases, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
   7. FSK: Foil-scrim-Kraft facing.
   8. Hot: Plumbing equipment or piping handling media above 40 degrees C (104 degrees F).
   9. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
   10. Thermal conductance: Heat flow rate through materials.
      a. Flat surface: Watts per square meter (BTU per hour per square foot).

b. Pipe or Cylinder: Watts per linear meter (BTU per hour per linear foot) for a given outside diameter.

11. Thermal Conductivity (k): Watts per meter, per degree K (BTU - inch thickness, per hour, per square foot, per degree F temperature difference).
12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders/vapor barriers shall have a maximum published permeance of .02 perms.
13. HWR: Hot water recirculating.
14. CW: Cold water.
15. SW: Soft water.
16. HW: Hot water.
17. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.
B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
C. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.
D. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: General mechanical requirements and items, which are common to more than one section of Division 22.
E. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING: Hot and cold-water piping.
F. Section 22 05 33, HEAT TRACING FOR PLUMBING PIPING: Insulation over heating cables.
G. Section 23 21 13, HYDRONIC PIPING: electrical heat tracing systems.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
B. American Society for Testing and Materials (ASTM):
B209-2014..... Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
C411-2019 Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation

C449-2007 (R2013).....Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement

C450-2018.....Standard Practice for Fabrication of Thermal Insulating Fitting Covers for NPS Piping, and Vessel Lagging

Adjunct to C450..... Compilation of Tables that Provide Recommended Dimensions for Prefab and Field Thermal Insulating Covers, etc.

C533-2017..... Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation

C534/C534M-2019..... Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C547-2019..... Standard Specification for Mineral Fiber Pipe Insulation

C552-2018..... Standard Specification for Cellular Glass Thermal Insulation

C553-2019..... Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications

C591-2019..... Standard Specification for Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation

C680-2019..... Standard Practice for Estimate of the Heat Gain or Loss and the Surface Temperatures of Insulated Flat, Cylindrical, and Spherical Systems by Use of Computer Programs

C612-2014..... Standard Specification for Mineral Fiber Block and Board Thermal Insulation

C1126-2019.....Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation

C1136-2017..... Standard Specification for Flexible, Low Permeance Vapor Retarders for Thermal Insulation

C1710-2016..... Standard Guide for Installation of Flexible Closed Cell Preformed Insulation in Tube and Sheet Form

D1668/D1668M-1997a(2014) e1 Standard Specification for Glass Fabrics (Woven and Treated) for Roofing and Waterproofing

E84-2019b..... Standard Test Method for Surface Burning Characteristics of Building Materials

E2231-2019..... Standard Practice for Specimen Preparation and Mounting of Pipe and Duct Insulation to Assess Surface Burning Characteristics

C. Federal Specifications (Fed. Spec.):

L-P-535E-1979..... Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.

D. International Code Council, (ICC):

IMC-2021..... International Mechanical Code

E. Military Specifications (Mil. Spec.):

MIL-A-3316C (2)-1990.... Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (2)-1987... Adhesive, Flexible Unicellular-Plastic Thermal Insulation

MIL-PRF-19565C (1)-1988.Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier

MIL-C-20079H-1987.....Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass

F. National Fire Protection Association (NFPA):

90A-2018..... Standard for the Installation of Air-Conditioning and Ventilating Systems

G. Underwriters Laboratories, Inc (UL):

723-2018..... Standard for Test for Surface Burning Characteristics of Building Materials

1887-2017.....Standard for Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics

H. 3E Plus® version 4.1 Insulation Thickness Computer Program: Available from NAIMA with free download; http://www.pipeinsulation.net

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 07 11, PLUMBING INSULATION", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

D. Shop Drawings:

1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM Designation, Federal and Military specifications.

a. Insulation materials: Specify each type used and state surface burning characteristics.

b. Insulation facings and jackets: Each type used and state surface burning characteristics.

c. Insulation accessory materials: Each type used.

d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation shall follow the guidelines in accordance with ASTM C1710.

e. Make reference to applicable specification paragraph numbers for coordination.

f. All insulation fittings (exception flexible unicellular insulation) shall be fabricated in accordance with ASTM C450 and the referenced Adjunct to ASTM C450.

1.5 QUALITY ASSURANCE

A. Refer to article QUALITY ASSURANCE, in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.11.2.6, parts of which are quoted as follows:

4.3.3.1 Pipe and duct insulation and coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels and duct silencers used in duct systems shall have, in the form in which they are used, a maximum flame spread index of 25 without

evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with ASTM E84 and appropriate mounting practice, e.g. ASTM E2231.

4.3.3.3 Coverings and linings for air ducts, pipes, plenums and panels including all pipe and duct insulation materials shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service. In no case shall the test temperature be below 121 degrees C (250 degrees F).

4.3.11.2.6.3 Nonferrous fire sprinkler piping shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 1887, Standard for Safety Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics.

4.3.11.2.6.8 Smoke detectors shall not be required to meet the provisions of Section 4.3.

2. Test methods: ASTM E84, UL 723, and ASTM E2231.
3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.
4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use shall have a manufacturer's stamp or label giving the name of the manufacturer, description of the material, and the production date or code.

D. Bio-Based Materials: For products designated by the USDA’s Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD, inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CAD version 2013 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

1.7 STORAGE AND HANDLING OF MATERIAL

A. Store materials in clean and dry environment, pipe insulation jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m^3 (nominal 3 pcf), k = 0.037 (.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F).

B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 32 kg/m^3 (nominal 2 pcf), k = 0.04 (0.27) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F).

C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (446 degrees F) with an all service vapor retarder jacket (ASJ) and with polyvinyl chloride (PVC) premolded fitting covering.

2.2 FLEXIBLE ELASTOMERIC CELLULAR THERMAL

A. ASTM C534/C534M, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from minus 4 degrees C (40 degrees F) to 93 degrees C (199 degrees F). Under high humidity exposures for condensation control an external vapor retarder/barrier jacket is required. Consult ASTM C1710.

2.3 INSULATION FACINGS AND JACKETS

A. Vapor Retarder, higher strength with low water permeance = 0.02 or less perm rating, Beach puncture 50 units for insulation facing on pipe insulation jackets. Facings and jackets shall be ASJ or PVDC Vapor Retarder jacketing.

B. ASJ shall be white finish (kraft paper) bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture is 50 units, suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.

C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: FSK or PVDC type for concealed ductwork and equipment.

D. Except for flexible elastomeric cellular thermal insulation (not for high humidity exposures), field applied vapor barrier jackets shall be

provided, in addition to the specified facings and jackets, on all exterior piping as well as on interior piping exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.)in high humidity locations conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

E. Except for cellular glass thermal insulation, when all longitudinal and circumferential joints are vapor sealed with a vapor barrier mastic or caulking, vapor barrier jackets may not be provided. For aesthetic and physical abuse applications, exterior jacketing is recommended. Otherwise field applied vapor barrier jackets shall be provided, in addition to the applicable specified facings and jackets, on all exterior piping as well as on interior piping exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) in high humidity locations conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

F. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2070 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.

G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be PVC conforming to Fed Spec L-P-535E, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape. Staples, tacks, or any other attachment that penetrates the PVC covering is not allowed on any form of a vapor barrier system in below ambient process temperature applications.

H. Aluminum Jacket-Piping systems and circular breeching and stacks: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other

fittings shall be factory-fabricated or with cut aluminum gores to match shape of fitting and of 0.6 mm (0.024 inch) minimum thickness aluminum. Aluminum fittings shall be of same construction with an internal moisture barrier as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands with wing seals shall be installed on all circumferential joints. Bands shall be 15 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.

2.4 PIPE COVERING PROTECTION SADDLES

A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m^3 (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	**Insert Blocks mm (inches)**
Up through 125 (5)	150 (6) long
150 (6)	150 (6) long
200 (8), 250 (10), 300 (12)	225 (9) long
350 (14), 400 (16)	300 (12) long
450 through 600 (18 through 24)	350 (14) long

B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C (300 degrees F)), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m^3 (3.0 pcf).

2.5 ADHESIVE, MASTIC, CEMENT

A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.

B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.

C. Mil. Spec. MIL-A-24179A, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.

D. Mil. Spec. MIL-PRF-19565C, Type I: Protective finish for outdoor use.

E. Mil. Spec. MIL-PRFC-19565C, Type I or Type II: Vapor barrier compound for indoor use.

F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.

G. Other: Insulation manufacturers' published recommendations.

2.6 MECHANICAL FASTENERS

A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

B. Staples: Outward clinching galvanized steel. Staples are not allowed for below ambient vapor barrier applications.

C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy or stainless steel.

D. Bands: 13 mm (1/2 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

E. Tacks, rivets, screws or any other attachment device capable of penetrating the vapor retarder shall NOT be used to attach/close the any type of vapor retarder jacketing. Thumb tacks sometimes used on PVC jacketing and preformed fitting covers closures are not allowed for below ambient vapor barrier applications.

2.7 REINFORCEMENT AND FINISHES

A. Glass fabric, open weave: ASTM D1668/D1668M, Type III (resin treated) and Type I (asphalt or white resin treated).

B. Glass fiber fitting tape: Mil. Spec MIL-C-20079H, Type II, Class 1.

C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.

D. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.

E. PVC fitting cover: Fed. Spec L-P-535E, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 10 to 121 degrees C (50 to 250 degrees F). Below 10 degrees C (50 degrees F) and above 121 degrees C (250 degrees F) provide mitered pipe insulation of the same type as insulating straight pipe. Provide double layer

insert. Provide vapor barrier pressure sensitive tape matching the color of the PVC jacket.

2.8 FIRESTOPPING MATERIAL

A. Other than pipe insulation, refer to Section 07 84 00, FIRESTOPPING.

2.9 FLAME AND SMOKE

A. Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM and UL standards and specifications. See paragraph "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

A. Required pressure tests of piping joints and connections shall be completed and the work approved by the Contracting Officer’s Representative (COR) for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.

B. Except for specific exceptions or as noted, insulate all specified equipment, and piping (pipe, fittings, valves, accessories). Insulate each pipe individually. Do not use scrap pieces of insulation where a full length section will fit.

C. Insulation materials shall be installed with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down and sealed at all laps. Insulation shall be continuous through all sleeves and opening.

D. Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 15 degrees C (60 degrees F) and below. Lap and seal vapor barrier over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).

E. Install vapor stops with operating temperature 15 degrees C (60 degrees F) and below at all insulation terminations on either side of valves, pumps, fittings, and equipment and particularly in straight lengths every 4.6 to 6.1 meters (approx. 15 to 20 feet) of pipe insulation. The annular space between the pipe and pipe insulation of approx. 25 mm (1 inch) in length at every vapor stop shall be sealed with appropriate

vapor barrier sealant. Bio-based materials shall be utilized when possible.

F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer coating (caution about coating’s maximum temperature limit) or jacket material.

G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.

H. Plumbing work not to be insulated unless otherwise noted:
   1. Piping and valves of fire protection system.
   2. Chromium plated brass piping.

I. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum wet or dry film thickness. Bio-based materials shall be utilized when possible.

J. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. Use of polyurethane or polyisocyanurate spray-foam to fill a PVC elbow jacket is prohibited on cold applications.

K. Firestop Pipe insulation:
   1. Provide firestopping insulation at fire and smoke barriers through penetrations. Firestopping insulation shall be UL listed as defined in Section 07 84 00, FIRESTOPPING.
   2. Pipe penetrations requiring fire stop insulation including, but not limited to the following:
      a. Pipe risers through floors
      b. Pipe chase walls and floors
      c. Smoke partitions
      d. Fire partitions
      e. Hourly rated walls

L. Freeze protection of above grade outdoor piping (over heat tracing tape): 20 mm (3/4 inch) thick insulation, for all pipe sizes 75 mm (3 inches) and smaller and 25 mm (1 inch) thick insulation for larger pipes. Provide metal jackets for all pipe insulations. Provide freeze protection for cold water make-up piping and equipment where indicated

on the drawings as described in Section 23 21 13, HYDRONIC PIPING (electrical heat tracing systems).

O. Provide vapor barrier systems as follows:
   1. All piping exposed to outdoor weather.
   2. All interior piping conveying fluids below ambient air temperature in high humidity locations.

P. Provide metal jackets over insulation as follows:
   1. All plumbing piping exposed to outdoor weather.
   2. Piping exposed in building, within 1829 mm (6 feet) of the floor, that connects to sterilizers, kitchen and laundry equipment. Jackets may be applied with pop rivets except for cold pipe or tubing applications. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.
   3. A 50 mm (2 inch) jacket overlap is required at longitudinal and circumferential joints with the overlap at the bottom.

Q. Provide PVC jackets over insulation as follows:
   1. Piping exposed in building, within 1829 mm (6 feet) of the floor, on piping that is not precluded in previous sections.
   2. A 50 mm (2 inch) jacket overlap is required at longitudinal and circumferential joints with the overlap at the bottom.

3.2 INSULATION INSTALLATION

B. Molded Mineral Fiber Pipe and Tubing Covering:
   1. Fit insulation to pipe, aligning all longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation except for cold piping. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide cellar glass inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
   2. Contractor's options for fitting, flange and valve insulation:
      a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 15 degrees C (60 degrees F) or more.
      b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts surface temperature of above 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Provide mitered preformed

insulation of the same type as the installed straight pipe insulation for pipe temperatures below 4 degrees C (40 degrees F). Secure first layer of mineral fiber insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.

c. Factory preformed, ASTM C547 or fabricated mitered sections, joined with adhesive or (hot only) wired in place. (Bio-based materials shall be utilized when possible.) For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 15 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.

d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).

3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

C. Rigid Cellular Phenolic Foam:

1. Rigid closed cell phenolic insulation may be provided, exterior only, for piping, ductwork and equipment for temperatures up to 121 degrees C (250 degrees F).
2. Note the ASTM E84 or UL 723 surface burning characteristics requirements of maximum 25/50 indexes in paragraph "Quality Assurance".
3. Provide secure attachment facilities such as welding pins.
4. Apply insulation with joints tightly drawn together.
5. Apply adhesives, coverings, neatly finished at fittings, and valves.
6. Final installation shall be smooth, tight, neatly finished at all edges.
7. Minimum thickness in millimeters (inches) specified in the schedule at the end of this section.
8. Condensation control insulation: Minimum 25 mm (1 inch) thick for all pipe sizes depending on high humidity exposures.

a. Body of roof and overflow drains horizontal runs and offsets (including elbows) of interior downspout piping in all areas above pipe basement.

b. Waste piping from electric water coolers and icemakers to drainage system.

c. Waste piping located above basement floor from ice making and film developing equipment and air handling units, from equipment (including trap) to main vertical waste pipe.

d. MRI quench vent piping.

e. Bedpan sanitizer atmospheric vent

f. Reagent grade water piping.

g. Cold water piping, exterior only.

D. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.

2. Underground piping other than or in lieu of that specified in Section 22 11 00, FACILITY WATER DISTRIBUTION: Type II, factory jacketed with a 3 mm laminate jacketing consisting of 3000 mm x 3000 mm (10 ft x 10 ft) asphalt impregnated glass fabric, bituminous mastic and outside protective plastic film.

a. 75 mm (3 inches) thick for hot water piping.

b. As scheduled at the end of this section for chilled water piping.

c. Underground piping: Apply insulation with joints tightly butted. Seal longitudinal self-sealing lap. Use field fabricated or factory made fittings. Seal butt joints and fitting with jacketing as recommended by the insulation manufacturer. Use 100 mm (4 inch) wide strips to seal butt joints.

d. Provide expansion chambers for pipe loops, anchors and wall penetrations as recommended by the insulation manufacturer.

e. Underground insulation shall be inspected and approved by the COR as follows:

1) Insulation in place before coating.

2) After coating.

f. Sand bed and backfill: Minimum 75 mm (3 inches) all around insulated pipe or tank, applied after coating has dried.

g. All piping up to 482 degrees C (900 degrees F) requiring protection from physical heavy contact/abuse including in mechanical rooms and exposures to the public.

3. Cold equipment: 50 mm (2 inch) thick insulation faced with ASJ.

E. Polyisocyanurate Closed-Cell Rigid Insulation:

1. Polyisocyanurate closed-cell rigid insulation (PIR) may be provided for exterior piping and equipment for temperature up to 149 degree C (300 degree F).
2. Install insulation, vapor retarder and jacketing per manufacturer's recommendations. Particular attention should be paid to recommendations for joint staggering, adhesive application, external hanger design, expansion/contraction joint design and spacing and vapor retarder integrity.
3. Install insulation with all joints tightly butted (except expansion) joints in hot applications). Provide insulation contractions joints for very cold process temperatures.
4. If insulation thickness exceeds 65 mm (2-1/2 inches), install as a double layer system with longitudinal (lap) and butt joint staggering as recommended by manufacturer.
5. For cold applications, vapor retarder shall be installed in a continuous manner. No staples, rivets, screws or any other attachment device capable of penetrating the vapor retarder shall be used to attach the vapor retarder or jacketing. No wire ties capable of penetrating the vapor retarder shall be used to hold the insulation in place. Stainless steel banding shall be used for cold applications to attach PVC or metal jacketing.
6. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane or polyisocyanurate spray-foam to fill PVC elbow jacket is prohibited on cold applications.
7. For cold applications, the vapor retarder on elbows/fittings shall be either mastic-fabric-mastic or 2 mil thick PVDC vapor retarder adhesive tape. Bio-based materials shall be utilized when possible.
8. All PVC and metal jacketing shall be installed so as to naturally shed water. Joints shall point down and shall be sealed with either adhesive or caulking (except for periodic slip joints). Bio-based materials shall be utilized when possible.

9. Note the NFPA 90A burning characteristic requirements of 25/50 in paragraph "Quality Assurance". Refer to paragraph "General Requirements" for items not to be insulated.
10. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section.

F. Flexible Elastomeric Cellular Thermal Insulation:

1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats of weather resistant finish as recommended by the insulation manufacturer. External vapor barrier jacketing may be required for expected or anticipated high humidity exposures. See ASTM C1710.
2. Pipe and tubing insulation:
   a. Use proper size material. Do not stretch or strain insulation.
   b. To avoid undue compression of insulation, use supports as recommended by the elastomeric insulation manufacturer. Insulation shields are specified under Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
   c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Bio-based materials shall be utilized when possible.
3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.
4. Pipe insulation: nominal thickness in millimeters (inches as specified in the schedule at the end of this section.

G. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified below for piping other than in boiler plant.

Nominal Thickness Of Calcium Silicate Insulation (Non-Boiler Plant)				
Nominal Pipe Size Millimeters (Inches)	Thru 25 (1)	32 to 75 (1-1/4 to 3)	100-200 (4 to 8)	Greater than 200 (8)

93-260 degrees C (199-500 degrees F)(HPS, HPR)	100(4)	125(5)	150(6)	Greater than 150(6)

3.3 PIPE INSULATION SCHEDULE

A. Provide insulation for piping systems as scheduled below:

Insulation Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	**Insulation Material**	**Less than 25 (1)**	**25 – 32 (1 – 1¼)**	**38 – 75 (1½ - 3)**	**100 (4) and Greater**
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply and Return)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-60 degrees C (100-140 degrees F) (Domestic Hot Water Supply)	Cellular Glass Thermal	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
(4-15 degrees C (40-60 degrees F) (Domestic cold water piping)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	25 (1.0)	25(1.0)	25 (1.0)	25 (1.0)
4-15 degrees C (40-60 degrees F) (Domestic cold water piping)	Cellular Glass Thermal	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 22 11 00
FACILITY WATER DISTRIBUTION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Domestic water systems, including piping, equipment and all necessary accessories as designated in this section.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 07 84 00, FIRESTOPPING.

D. Section 07 92 00, JOINT SEALANTS.

E. Section 09 91 00, PAINTING.

F. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic Restraint.

G. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

H. Section 22 07 11, PLUMBING INSULATION.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

A13.1-2020.....Scheme for Identification of Piping Systems

B16.3-2016.....Malleable Iron Threaded Fittings: Classes 150 and 300

B16.9-2018.....Factory-Made Wrought Buttwelding Fittings

B16.11-2016(2017e).....Forged Fittings, Socket-Welding and Threaded

B16.12-2019.....Cast Iron Threaded Drainage Fittings

B16.15-2018 .....Cast Copper Alloy Threaded Fittings: Classes 125 and 250

B16.18-2018.....Cast Copper Alloy Solder Joint Pressure Fittings

B16.22-2018.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings

B16.24-2016.....Cast Copper Alloy Pipe Flanges and Flanged Fittings: Classes 150, 300, 600, 900, 1500, and 2500

ASME Boiler and Pressure Vessel Code -

BPVC Section IX-2021....Welding, Brazing, and Fusing Qualifications

C. American Society of Sanitary Engineers (ASSE):

1010-2004.....Performance Requirements for Water Hammer Arresters

D. American Society for Testing and Materials (ASTM):

A47/A47M-1999 (R2018)e1.Standard Specification for Ferritic Malleable Iron Castings

A53/A53M-2020.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A183-2014(R2020).....Standard Specification for Carbon Steel Track Bolts and Nuts

A269/A269M-2015A(R2019).Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service

A312/A312M-2019.....Standard Specification for Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes

A403/A403M-2020.....Standard Specification for Wrought Austenitic Stainless Steel Piping Fittings

A536-1984 (R2019)e1.....Standard Specification for Ductile Iron Castings

A733-2016.....Standard Specification for Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples

B32-2020.....Standard Specification for Solder Metal

B43-2020.....Standard Specification for Seamless Red Brass Pipe, Standard Sizes

B61-2015.....Standard Specification for Steam or Valve Bronze Castings

B62-2017.....Standard Specification for Composition Bronze or Ounce Metal Castings

B75/B75M-2020.....Standard Specification for Seamless Copper Tube

B88-2020.....Standard Specification for Seamless Copper Water Tube

B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

B687-1999 (R2016).....Standard Specification for Brass, Copper, and Chromium-Plated Pipe Nipples

C919-2019.....Standard Practice for Use of Sealants in Acoustical Applications

D2000-2018.....Standard Classification System for Rubber Products in Automotive Applications

E1120-2016.....Standard Specification for Liquid Chlorine

E1229-2016.....Standard Specification for Calcium Hypochlorite

E. American Water Works Association (AWWA):

C110-2012.....Ductile-Iron and Gray-Iron Fittings

C151-2017(2018e).....Ductile Iron Pipe, Centrifugally Cast

C153-2019.....Ductile-Iron Compact Fittings

C213-2015.....Fusion-Bonded Epoxy Coating for the Interior and Exterior of Steel Water Pipelines

C651-2014(2020).....Disinfecting Water Mains

F. American Welding Society (AWS):

A5.8M/A5.8-2019.....Specification for Filler Metals for Brazing and Braze Welding

G. International Code Council (ICC):

IPC-2021.....International Plumbing Code

H. Manufacturers Specification Society (MSS):

SP-58-2018-AMD1.....Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation

SP-72-2010a.....Ball Valves with Flanged or Butt-Welding Ends for General Service

SP-110-2010(ETRA 2010)..Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

I. NSF International (NSF):

61-2020.....Drinking Water System Components – Health Effects

372-2020.....Drinking Water System Components – Lead Content

J. Plumbing and Drainage Institute (PDI):

PDI-WH 201-2010.....Water Hammer Arrestors

K. Department of Veterans Affairs:
H-18-8-2019(R2020).....Seismic Design Handbook
H-18-10-2021.....Plumbing Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 11 00, FACILITY WATER DISTRIBUTIONS", with applicable paragraph identification.

C. Manufacturer's Literature and Data including full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
   1. All items listed in Part 2 - Products.

D. Complete operating and maintenance manuals including wiring diagrams, technical data sheets and information for ordering replacement parts:
   1. Include complete list indicating all components of the systems.
   2. Include complete diagrams of the internal wiring for each item of equipment.
   3. Diagrams shall have their terminals identified to facilitate installation, operation, and maintenance.

1.5 QUALITY ASSURANCE

A. A certificate shall be submitted prior to welding of steel piping showing the Welder's certification. The certificate shall be current and no more than one year old. Welder's qualifications shall be in accordance with ASME BPVC Section IX.

B. All grooved joint couplings, fittings, valves, and specialties shall be the products of a single manufacturer. Grooving tools shall be by the same manufacturer as the groove components.

C. All pipe, couplings, fittings, and specialties shall bear the identification of the manufacturer and any markings required by the applicable referenced standards.

D. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more

information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A list of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CAD version 2013 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certificate if applicable that all results of tests were within limits specified. If a certificate is not available, all documentation shall be on the Certifier's letterhead.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead are prohibited in any potable water system intended for human consumption and shall be certified in accordance with NSF 61 or NSF 372. Endpoint devices used to dispense water for drinking shall meet the requirements of NSF 61, Section 9.

B. Plastic pipe, fittings, and solvent cement shall meet NSF 14 and shall be NSF listed for the service intended.

2.2 ABOVE GROUND (INTERIOR) WATER PIPING

A. Pipe: Copper tube, ASTM B88, Type K or L, drawn.

B. Fittings for Copper Tube:

1. Wrought copper or bronze castings conforming to ASME B16.18 and B16.22. Unions shall be bronze, MSS SP-72, MSS SP-110, solder or braze joints. Use 95/5 tin and antimony for all soldered joints.
2. Grooved fittings, 50 to 150 mm (2 to 6 inch) wrought copper ASTM B75/B75M C12200, 125 to 150 mm (5 to 6 inch) bronze casting ASTM B584, C84400. Mechanical grooved couplings, 2070 kPa (300 psig) minimum ductile iron, ASTM A536 Grade 448-310-12 (Grade 65-45-12), or malleable iron, ASTM A47/A47M Grade 22410 (Grade 32510) housing, with EPDM gasket, steel track head bolts, ASTM A183, coated with copper colored alkyd enamel.
3. Mechanical press-connect fittings for copper pipe and tube **are prohibited**. See Plumbing Design Manual for additional information.
4. Mechanically formed tee connection: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall ensure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting. Braze joints.
5. Flanged fittings, bronze, class 150, solder-joint ends conforming to ASME B16.24.

D. Adapters: Provide adapters for joining pipe or tubing with dissimilar end connections.

E. Solder: ASTM B32 alloy type Sb5, HA or HB. Provide non-corrosive flux.

F. Brazing alloy: AWS A5.8M/A5.8, brazing filler metals shall be BCuP series for copper-to-copper joints and BAg series for copper to steel joints.

2.3 EXPOSED WATER PIPING

A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed water piping connecting fixtures, casework, cabinets, equipment, and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
   1. Pipe: ASTM B43, standard weight.
   2. Fittings: ASME B16.15 cast bronze threaded fittings with chrome finish.
   3. Nipples: ASTM B687, Chromium-plated.
   4. Unions: MSS SP-72, MSS SP-110, brass or bronze with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.

B. Unfinished Rooms, Mechanical Rooms and Kitchens: Chrome-plated brass piping is not required. Paint piping systems as specified in Section 09 91 00, PAINTING.

2.4 DIELECTRIC FITTINGS

A. Provide dielectric couplings or unions between pipe of dissimilar metals.

2.5 STERILIZATION CHEMICALS

A. Hypochlorite: ASTM E1229.

B. Liquid Chlorine: ASTM E1120.

2.6 WATER HAMMER ARRESTER

A. Closed copper tube chamber with permanently sealed 413 kPa (60 psig) air charge above a Double O-ring piston. Two high heat Buna-N 0-rings pressure packed and lubricated with FDA approved silicone compound. All units shall be designed in accordance with ASSE 1010. Access shall be provided where devices are concealed within partitions or above ceilings. Size and install in accordance with PDI-WH 201 requirements. Provide water hammer arrestors at:
   1. All solenoid valves.
   2. All groups of two or more flush valves.
   3. All quick opening or closing valves.
   4. All medical washing equipment.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Comply with the International Plumbing Code and the following:

1. Install branch piping for water from the piping system and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
2. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, except for plastic and glass, shall be reamed to remove burrs and a clean smooth finish restored to full pipe inside diameter.
3. All pipe runs shall be laid out to avoid interference with other work/trades.
4. Install union and shut-off valve on pressure piping at connections to equipment.
5. Pipe Hangers, Supports and Accessories:
   a. All piping shall be supported per the IPC, H-18-8 Seismic Design Handbook, MSS SP-58, and SMACNA as required.
   b. Shop Painting and Plating: Hangers, supports, rods, inserts and accessories used for pipe supports shall be shop coated with zinc chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
   c. Floor, Wall and Ceiling Plates, Supports, Hangers:
      1) Solid or split un-plated cast iron.
      2) All plates shall be provided with set screws.
      3) Pipe Hangers: Height adjustable clevis type.
      4) Adjustable Floor Rests and Base Flanges: Steel.
      5) Concrete Inserts: "Universal" or continuous slotted type.
      6) Hanger Rods: Mild, low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
      7) Pipe Hangers and Riser Clamps: Malleable iron or carbon steel. Pipe Hangers and riser clamps shall have a copper finish when supporting bare copper pipe or tubing.
      8) Rollers: Cast iron.
      9) Self-drilling type expansion shields shall be "Phillips" type, with case hardened steel expander plugs.

10) Hangers and supports utilized with insulated pipe and tubing shall have 180-degree (minimum) metal protection shield centered on and welded to the hanger and support. The shield thickness and length shall be engineered and sized for distribution of loads to preclude crushing of insulation without breaking the vapor barrier. The shield shall be sized for the insulation and have flared edges to protect vapor-retardant jacket facing. To prevent the shield from sliding out of the clevis hanger during pipe movement, center-ribbed shields shall be used.
11) Miscellaneous Materials: As specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6.1 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. Provide all necessary auxiliary steel to provide that support.
12) With the installation of each flexible expansion joint, provide piping restraints for the upstream and downstream section of the piping at the flexible expansion joint. Provide calculations supporting the restraint length design and type of selected restraints. Restraint calculations shall be based on the criteria from the manufacturer regarding their restraint design.

6. Install chrome plated cast brass escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
7. Penetrations:
   a. Firestopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke, and gases as specified in Section 07 84 00, FIRESTOPPING. Completely fill and seal clearances between raceways and openings with the firestopping materials.
   b. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

c. Acoustical sealant: Where pipes pass through sound rated walls, seal around the pipe penetration with an acoustical sealant that is compliant with ASTM C919.

B. Domestic Water piping shall conform to the following:

1. Grade all lines to facilitate drainage. Provide drain valves at bottom of risers and all low points in system. Design domestic hot and cold water circulating lines with no traps.
2. Connect branch lines at bottom of main serving fixtures below and pitch down so that main may be drained through fixture. Connect branch lines to top of main serving only fixtures located on floor above.

3.2 TESTS

A. General: Test system either in its entirety or in sections. Submit testing plan to COR 10 working days prior to test date.

B. Potable Water System: Test after installation of piping and domestic water heaters, but before piping is concealed, before covering is applied, and before plumbing fixtures are connected. Fill systems with water and maintain hydrostatic pressure of 1035 kPa (150 psig) gage for two hours. No decrease in pressure is allowed. Provide a pressure gage with a shutoff and bleeder valve at the highest point of the piping being tested. Pressure gauge shall have 1 psig increments.

D. All Other Piping Tests: Test new installed piping under 1-1/2 times actual operating conditions and prove tight.

E. The test pressure shall hold for the minimum time duration required by the applicable plumbing code or authority having jurisdiction.

3.3 STERILIZATION

A. After tests have been successfully completed, thoroughly flush and sterilize the interior domestic water distribution system in accordance with AWWA C651.

B. Use liquid chlorine or hypochlorite for sterilization.

- - - E N D - - -

SECTION 22 13 00
FACILITY SANITARY AND VENT PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section pertains to sanitary sewer and vent systems, including piping, equipment and all necessary accessories as designated in this section.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.

D. Section 07 92 00, JOINT SEALANTS: Sealant products.

E. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.

F. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.

G. Section 22 07 11, PLUMBING INSULATION.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

A13.1-2015.....Scheme for the Identification of Piping Systems
A112.36.2M-1991(R 2012).Cleanouts
A112.6.3-2019).....Standard for Floor and Trench Drains
B1.20.1-2013.....Pipe Threads, General Purpose (Inch)
B16.1-2015.....Gray Iron Pipe Flanges and Flanged Fittings
B16.4-2016.....Standard for Grey Iron Threaded Fittings Classes 125 and 250
B16.15-2015.....Cast Copper Alloy Threaded Fittings, Classes 125 and 250
B16.18-2018.....Cast Copper Alloy Solder Joint Pressure Fittings
B16.21-2016.....Nonmetallic Flat Gaskets for Pipe Flanges
B16.22-2018.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings

B16.23-2016.....Cast Copper Alloy Solder Joint Drainage Fittings: DWV

B16.24-2016.....Cast Copper Alloy Pipe Flanges and Flanged Fittings

B16.29-2017.....Wrought Copper and Wrought Copper Alloy Solder-Joint Drainage Fittings: DWV

B16.39-2014.....Malleable Iron Threaded Pipe Unions Classes 150, 250, and 300

B18.2.1-2012.....Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)

C. American Society of Sanitary Engineers (ASSE):

1001-2017.....Performance Requirements for Atmospheric Type Vacuum Breakers

1079-2012.....Performance Requirements for Dielectric Pipe Unions

D. American Society for Testing and Materials (ASTM):

A53/A53M-2018.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-coated, Welded and Seamless

A74-2013a.....Standard Specification for Cast Iron Soil Pipe and Fittings

A888-2013a.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

B32-2008.....Standard Specification for Solder Metal

B43-2015.....Standard Specification for Seamless Red Brass Pipe, Standard Sizes

B75-2019.....Standard Specification for Seamless Copper Tube

B88-2016.....Standard Specification for Seamless Copper Water Tube

B306-2013.....Standard Specification for Copper Drainage Tube (DWV)

B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

B687-1999 (R 2011).....Standard Specification for Brass, Copper, and Chromium-Plated Pipe Nipples

B813-2016.....Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube

B828-2002 (R 2016).....Standard Practice for Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings

C564-2014.....Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings

F477-2014.....Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F1545-2015a.....Standard Specification for Plastic-Lined Ferrous Metal Pipe, Fittings, and Flanges

E. Cast Iron Soil Pipe Institute (CISPI):

2006.....Cast Iron Soil Pipe and Fittings Handbook

301-2018.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

310-2012.....Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

F. Copper Development Association, Inc. (CDA):

A4015.....Copper Tube Handbook

G. International Code Council (ICC):

IPC-2021.....International Plumbing Code

H. Manufacturers Standardization Society (MSS):

SP-123-2018.....Non-Ferrous Threaded and Solder-Joint Unions for Use with Copper Water Tube

I. National Fire Protection Association (NFPA):

70-2019.....National Electrical Code (NEC)

J. Plumbing and Drainage Institute (PDI):

WH-201 (R 2010).....Water Hammer Arrestors Standard

K. Underwriters' Laboratories, Inc. (UL):

508-99 (R2013).....Standard for Industrial Control Equipment

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 13 00, FACILITY SANITARY AND VENT PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Piping.
2. Cleanouts.
3. Penetration Sleeves.
4. Pipe Fittings.
5. Traps.
6. Exposed Piping and Fittings.

D. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane or the floor drain.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them on Auto-Cad version 2013 provided on compact disk or DVD. If the installing contractor engages the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

B. Certification documentation shall be provided prior to submitting the request for final inspection. The documentation shall include all test

results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and a certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 SANITARY WASTE, DRAIN, AND VENT PIPING

A. Cast iron waste, drain, and vent pipe and fittings.
   1. Cast iron waste, drain, and vent pipe and fittings shall be used for the following applications:
      a. Pipe buried in or in contact with earth.
      b. Interior waste and vent piping above grade.
   2. Cast iron Pipe shall be bell and spigot or hubless (plain end or no-hub or hubless).
   3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI 301, ASTM A888, or ASTM A74.
   4. Cast iron pipe and fittings shall be made from a minimum of 95 percent post-consumer recycled material.
   5. Joints for hubless pipe and fittings shall conform to the manufacturer’s installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM C564.

B. Copper Tube,(DWV):
   1. Copper DWV tube sanitary waste, drain and vent pipe shall be used for piping above ground, except for urinal drains.
   2. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
   3. The copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME B16.29.
   4. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.

2.2 EXPOSED WASTE PIPING

A. Chrome plated brass piping of full iron pipe size shall be used in finished rooms for exposed waste piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron

including those furnished by the Government or specified in other sections.

1. The Pipe shall meet ASTM B43, regular weight.
2. The Fittings shall conform to ASME B16.15.
3. Nipples shall conform to ASTM B687, Chromium-plated.
4. Unions shall be brass or bronze with chrome finish. Unions 2-1/2 inch (65 mm) and larger shall be flange type with approved gaskets.

B. In unfinished Rooms such as mechanical Rooms, Chrome-plated brass piping is not required. The pipe materials specified under the paragraph "Sanitary Waste, Drain, and Vent Piping" can be used. The sanitary pipe in unfinished rooms shall be painted as specified in Section 09 91 00, PAINTING.

2.3 SPECIALTY PIPE FITTINGS

A. Transition pipe couplings shall join piping with small differences in outside diameters or different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear and corrosion resistant metal, tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:

1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
2. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.

B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 125 psig (861 kPa) at a minimum temperature of 180 degrees F (82 degrees C). The end connection shall be solder joint copper alloy and threaded ferrous.

C. Dielectric flange insulating kits shall be of non-conducting materials for field assembly of companion flanges with a pressure rating of 150 psig (1035 kPa). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.

D. The di-electric nipples shall be electroplated steel nipple complying with ASTM F1545 with a pressure rating of 300 psig (2070 kPa) at 225

degrees F (107 degrees C). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.4 CLEANOUTS

A. Cleanouts shall be the same size as the pipe, up to 4 inches (100 mm); and not less than 4 inches (100 mm) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. Minimum clearance of 24 inches (60 cm) shall be provided for clearing a clogged sanitary line.

B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 2 inches (50 mm). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated on drawings and at every building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty type.

C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 24 inches (60 cm) above the floor. If there are no fixtures installed on the lowest floor, the cleanout shall be installed at the base of the stack. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel-bronze square frame and stainless-steel cover with minimum opening of 6 by 6 inches (15 by 15 cm) shall be furnished at each wall cleanout. Where the piping is concealed, a fixture trap or a fixture with integral trap, readily removable without disturbing concealed pipe, shall be accepted as a cleanout equivalent providing the opening to be used as a cleanout opening is the size required.

D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/hubless cast iron ferrule.

Plain end (hubless) piping in interstitial space or above ceiling shall use plain end (hubless) blind plug and clamp.

2.5 TRAPS

A. Traps shall be provided on all sanitary branch waste connections from fixtures or equipment not provided with traps. Exposed brass shall be polished brass chromium plated with nipple and set screw escutcheons. Concealed traps may be rough cast brass or same material as the piping they are connected to. Slip joints are not permitted on sewer side of trap. Traps shall correspond to fittings on cast iron soil pipe or steel pipe respectively, and size shall be as required by connected service or fixture.

2.6 PENETRATION SLEEVES

A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 2 inches (50 mm) above finished floor and galvanized steel pipe extension in the bottom of the fitting that will extend through the floor slab. A waterproof caulked joint shall be provided at the top hub.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

A. The pipe installation shall comply with the requirements of the International Plumbing Code (IPC) and these specifications.
B. Branch piping shall be installed for waste from the respective piping systems and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
D. All pipe runs shall be laid out to avoid interference with other work.
E. The piping shall be installed above accessible ceilings where possible.
F. The piping shall be installed to permit valve servicing or operation.
G. The piping shall be installed free of sags and bends.
H. Seismic restraint shall be installed where required by code.

I. Changes in direction for soil and waste drainage and vent piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep quarter bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and eighth bend fittings shall be used if two fixtures are installed back-to-back or side by side with common drain pipe. Straight tees, elbows, and crosses may be used on vent lines. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

J. Buried soil and waste drainage and vent piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer’s written instruction for use of lubricants, cements, and other installation requirements.

K. Cast iron piping shall be installed according to CISPI’s “Cast Iron Soil Pipe and Fittings Handbook,” Chapter IV, “Installation of Cast Iron Soil Pipe and Fittings”

L. Aboveground copper tubing shall be installed according to Copper Development Association’s (CDA) “Copper Tube Handbook”.

M. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no cost to the Government.

3.2 JOINT CONSTRUCTION

A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI’s “Cast Iron Soil Pipe and Fittings Handbook” for compression joints.

B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI’s “Cast Iron Soil Pipe and Fittings Handbook” for lead and oakum calked joints.

C. Hubless or No-hub, cast iron piping shall be joined in accordance with CISPI’s “Cast Iron Soil Pipe and Fittings Handbook” for hubless piping coupling joints.

D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and

restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:

1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service.
2. Pipe sections with damaged threads shall be replaced with new sections of pipe.

E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.

3.3 SPECIALTY PIPE FITTINGS

A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.

B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES

A. All piping shall be supported according to the International Plumbing Code (IPC), Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications. Where conflicts arise between these the code and Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING the most restrictive or the requirement that specifies supports with highest loading or shortest spacing shall apply.

B. Hangers, supports, rods, inserts and accessories used for pipe supports shall be painted according to Section 09 91 00, PAINTING. Electroplated copper hanger rods, hangers and accessories shall be used with copper tubing.

C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.

D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:

1. 1-1/2 to 2 inch NPS (DN40 to DN50): 60 inches (1500 mm) with 3/8 inch (10 mm) rod.
2. 3 inch NPS (DN75): 60 inches (1500 mm) with 1/2 inch (50 mm) rod.
3. 4 to 5 inch NPS (DN100 to DN125): 60 inches (1500 mm) with 5/8 inch (18 mm) rod.
4. 6 to 8 inch NPS (DN150 to DN200): 60 inches (1500 mm) with 3/4 inch (20 mm) rod.

5. 10 to 12 inch NPS (DN250 to DN300): 60 inch (1500 mm) with 7/8 inch (23 mm) rod.

E. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 15 feet (4.6 m).

F. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, Floor, Wall and Ceiling Plates, Supports, Hangers shall have the following characteristics:

1. Solid or split unplated cast iron.
2. All plates shall be provided with set screws.
3. Height adjustable clevis type pipe hangers.
4. Adjustable floor rests and base flanges shall be steel.
5. Hanger rods shall be low carbon steel, fully threaded or threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
6. Riser clamps shall be malleable iron or steel.
7. Rollers shall be cast iron.
8. See Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, for requirements on insulated pipe protective shields at hanger supports.

G. Miscellaneous materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 20 feet (6.1 m) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.

H. Cast escutcheon with set screw shall be provided at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.

I. Penetrations:

1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.

2. Water proofing: At floor penetrations, clearances shall be completely sealed around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.

J. Exhaust vents shall be extended separately through roof. Sanitary vents shall not connect to exhaust vents.

3.5 TESTS

A. Sanitary waste and drain systems shall be tested either in its entirety or in sections.

B. Waste System tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.

1. If entire system is tested for a water test, tightly close all openings in pipes except highest opening, and fill system with water to point of overflow. If the waste system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 10 foot (3 m) head of water. In testing successive sections, test at least upper 10 feet (3 m) of next preceding section so that each joint or pipe except upper most 10 feet (3 m) of system has been submitted to a test of at least a 10 foot (3 m) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.

2. For an air test, an air pressure of 5 psig (34 kPa) gauge shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gauge shall be used for the air test.

3. After installing all fixtures and equipment, open water supply so that all p-traps can be observed. For 15 minutes of operation, all p-traps shall be inspected for leaks and any leaks found shall be corrected.

4. Final Tests: Either one of the following tests may be used.

a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1 inch W.G. (0.25 kPa) with a smoke machine. Chemical smoke is prohibited.

1) Peppermint Test: Introduce 2 ounces (60 ml) of peppermint into each line or stack.

---END---

SECTION 22 40 00
PLUMBING FIXTURES

PART 1 - GENERAL

1.1 DESCRIPTION

A. Plumbing fixtures associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 07 92 00, JOINT SEALANTS: Sealing between fixtures and other finish surfaces.

D. Flush panel access doors: Section 08 31 13, ACCESS DOORS AND FRAMES.

E. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

F. Section 22 13 00, FACILITY SANITARY AND VENT PIPING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. The American Society of Mechanical Engineers (ASME):

A112.6.1M-1997 (R2012)..Supports for Off-the-Floor Plumbing Fixtures for Public Use

A112.19.1-2013.....Enameled Cast Iron and Enameled Steel Plumbing Fixtures

A112.19.2-2013.....Ceramic Plumbing Fixtures

A112.19.3-2008.....Stainless Steel Plumbing Fixtures

C. American Society for Testing and Materials (ASTM):

A276-2013a.....Standard Specification for Stainless Steel Bars and Shapes

B584-2008.....Standard Specification for Copper Alloy Sand Castings for General Applications

D. CSA Group:

B45.4-2008 (R2013)..... Stainless Steel Plumbing Fixtures

E. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-2006.....Metal Finishes Manual

F. NSF International (NSF):

14-2013.....Plastics Piping System Components and Related Materials

61-2013.....Drinking Water System Components – Health Effects

372-2011.....Drinking Water System Components – Lead Content

G. American with Disabilities Act (A.D.A)

H. International Code Council (ICC):

IPC-2021.....International Plumbing Code

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 40 00, PLUMBING FIXTURES", with applicable paragraph identification.

C. Manufacturer's Literature and Data including Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, connections, and capacity.

D. Operating Instructions: Comply with requirements in Section 01 00 00, GENERAL REQUIREMENTS.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.]

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting

techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in AutoCAD version 2013 provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption and shall be certified in accordance with NSF/ANSI 61 or NSF 372. Endpoint devices used to dispense water for drinking must meet the requirements of NSF/ANSI 61, Section 9.

B. Plastic pipe, fittings, and solvent cement shall meet NSF/ANSI 14 and shall be NSF listed for the service intended.

2.2 STAINLESS STEEL

A. Corrosion-resistant Steel (CRS):

1. Plate, Sheet and Strip: CRS flat products shall conform to chemical composition requirements of any 300 series steel specified in ASTM A276.
2. Finish: Exposed surfaces shall have standard polish (ground and polished) equal to NAAMM finish Number 4.

B. Die-cast zinc alloy products are prohibited.

2.3 STOPS

A. Provide lock-shield loose key or screwdriver pattern angle stops, straight stops or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.

B. Furnish keys for lock shield stops to Contracting Officer Representative (COR).

C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.

D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e., red brass pipe nipple, chrome plated where exposed.

2.4 ESCUTCHEONS

A. Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling and floor penetrations in exposed finished locations and within cabinets and millwork.

2.5 LAMINAR FLOW CONTROL DEVICE

A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing. **Aerators are prohibited**.

B. Flow Control Restrictor:

1. Capable of restricting flow from 0.5 to 1.5 gpm (1.9 to 5.7 l/m) for lavatories; 2.0 to 2.2 gpm (7.6 to 8.3 l/m) for sinks P-528 and P-531 as specified.
2. Compensates for pressure fluctuation maintaining flow rate specified above within 10 percent between 25 and 80 psi (170 and 550 kPa).
3. Operates by expansion and contraction, eliminates mineral/sediment build-up with self-cleaning action and is capable of easy manual cleaning.

2.6 CARRIERS

A. ASME/ANSI A112.6.1M, with adjustable gasket faceplate chair carriers for wall hung closets with auxiliary anchor foot assembly, hanger rod support feet, and rear anchor tie down.

B. ASME/ANSI A112.6.1M, lavatory, chair carrier for thin wall construction or steel plate as detailed on drawing. All lavatory chair carriers shall be capable of supporting the lavatory with a 250-pound (113 kg) vertical load applied at the front of the fixture.

2.7 WATER CLOSETS

A. (P-103) Water Closet (Wall Hung, ASME A112.19.2) office and industrial, elongated bowl, siphon jet 1.28 gallons (4.8 L) per flush, wall outlet. Handicapped water closet shall have seat set 18 inches (46 cm) above finished floor.

1. Seat: Institutional/Industrial, extra heavy duty, chemical resistant, solid plastic, open front less cover for elongated bowls, integrally molded bumpers, concealed check hinge with stainless steel post. Seat shall be posture contoured body design. Color shall be white.
2. Fittings and Accessories: Gaskets-neoprene; bolts with chromium plated caps nuts and washers and carrier.
3. Flush valve: Large chloramines resistant diaphragm, semi-red brass valve body, exposed chrome plated, , battery powered active infra-red sensor for automatic operation with courtesy flush button for manual operation, 1 inch (25 mm) screwdriver back check angle stop with vandal resistant cap, adjustable tailpiece, a high back pressure vacuum breaker, spud coupling for 1-1/2 inch (38 mm) top spud, wall and spud flanges, and sweat solder adapter with cover tube and set screw wall flange. Valve body, cover, tailpiece and control stop shall be in conformance with ASTM alloy classification for semi-red brass. Seat bumpers shall be integral part of flush valve. Set centerline of inlet 11-1/2 inches (29 cm) above seat.

2.8 LAVATORIES

A. Dimensions for lavatories are specified, Length by width (distance from wall) and depth.

B. Brass components in contact with water shall contain no more than 0.25 percent lead content by dry weight. Faucet flow rates shall be either 0.5 gpm (1.9 l/m) or 0.25 gallons (1 L) per cycle for public lavatories.

C. (P-418) Lavatory (Sensor Control, Gooseneck Spout, ASME A112.19.2) straight back, approximately 20 by 18 inches (50 by 46 cm) and a 4 inch

(10 cm) minimum apron, first quality vitreous china with punching for gooseneck spout. Set rim 34 inches (86 cm) above finished floor.

1. Faucet: Solid cast brass construction, chrome plated, gooseneck spout with outlet 4 to 5 inches (10 to 13 cm) above rim. Electronic sensor operated, 4 inch (10 cm) center set mounting, wiring box, 120/24 volt solenoid, battery operated electronic module, back check valves, solid brass hot-cold water mixer adjusted from top deck with barrier free design control handle and inline filter. Provide laminar flow control device. Breaking the light beam shall activate the water flow. Flow shall stop when user moves away from light beam. Provide steel access door with key operated cylinder lock. See Section 08 31 13, ACCESS DOORS AND FRAMES. All connecting wiring between transformer, solenoid valve and sensor shall be cut to length with no excess hanging or wrapped up wiring allowed.
2. Drain: Cast or wrought brass with flat grid strainer with offset tailpiece, brass, chrome plated.
3. Stops: Angle type. See paragraph “Stops”.
4. Trap: Cast copper alloy, 1-1/2 by 1-1/4 inch (38 by 32 mm) P-trap. Adjustable with connected elbow and 17 gauge (1.4 mm) tubing extension to wall. Exposed metal trap surface and connection hardware shall be chrome plated with a smooth bright finish. Set trap parallel to wall.
5. Provide cover for drain, stops and trap per A.D.A.

2.9 SINKS

A. Dimensions for sinks are specified, length by width (distance from wall) and depth.

B. (P-528) Sink (CRS, Single Compartment, Countertop ASME A112.19.2M, Kitchen Sinks) self-rimming, back faucet ledge, approximately 21 by 22 inches (53 by 56 cm) with single compartment inside dimensions approximately 16 by 19 by 7-1/2 inches deep (40 by 48 by 19 cm). Shall be minimum of 18 gauge (1.3 mm) CRS. Corners and edges shall be well rounded:

1. Faucet: Solid brass construction, 2.2 gpm (8.3 l/m) deck mounted combination faucet with monel or ceramic seats, removable replacement unit containing all parts subject to ware, swivel gooseneck spout with approximately 8 inch (20 cm) reach with spout

outlet 6 inches (15 cm) above deck and 4 inch (10 cm) wrist blades levers with hose spray. Faucet shall be polished chrome plated.

2. Drain: Drain plug with cup strainer, stainless steel.
3. Trap: Cast copper alloy 1-1/2 inch (38 mm) P-trap with cleanout plug. Provide wall connection and escutcheon.
4. Provide cover for drain, stops and trap per A.D.A.

C. (P-531) Sink (CRS, Single Compartment, Countertop ASME A112.19.2M, Pharmacy Sinks) self-rimming, back faucet ledge, approximately 21 by 22 inches (53 by 56 cm) with single compartment inside dimensions approximately 16 by 19 by 7-1/2 inches deep (41 by 48 by 19 cm). Shall be minimum of 18 gauge (1.3 mm) CRS. Corners and edges shall be well rounded:

1. Faucet: Solid brass construction, 2.2 gpm (8.3 l/m) deck mounted combination faucet with monel or ceramic seats, removable replacement unit containing all parts subject to ware, swivel gooseneck spout with approximately 8 inch (20 cm) reach with spout outlet 6 inches (15 cm) above deck and [4 inch (10 cm) wrist blades levers. Faucet shall be polished chrome plated.
2. Drain: Drain plug with cup strainer, stainless steel.
5. Trap: Cast copper alloy 1-1/2 inch (38 mm) P-trap with cleanout plug. Provide wall connection and escutcheon.
6. Provide cover for drain, stops and trap per A.D.A.
7. Provide hole punch on top right faucet deck for eye/face wash.

2.10 SHOWER BATH FIXTURE

A. (P-713) Deck Mounted Eyewash/Facewash: Pull down activated eyewash/ facewash for deck mounting. Unit must meet provisions of ANSI Z358.1-2020 as both an eyewash and facewash. Unit will store in an upright position and swing down over the sink bowl for use.

1. Spray Head Assembly: Dual spray heads mounted side-by-side. Each head has a flip top dust cover, internal flow control and filter to remove impurities.
2. Valve: Forged brass squeeze valve activated by rotating the unit from vertical to horizontal position. Valve has replaceable stainless steel seat for exceptional durability. Valve stays open until replaced to the vertical position.
3. Mounting: Deck flange for countertop mounting.

4. Backflow Preventer: In-line dual check backflow preventer installed on inlet of hose.
5. Mixing Valve: ASSE 1070 Certified Tempering valve with dial thermometer on outlet to monitor temperature of delivered water. Valve shall have bimetallic thermostat set to deliver 4.2 GPM (16 l/min) or flow to match fixture of 85°F (29°C) water with a high temperature limit stop to 90°F (32°C) in compliance with ANSI Z358.1-2020.

2.11 HYDRANT, HOSE BIBB AND MISCELLANEOUS DEVICES

A. (P-811) Ice Maker Supply Box: White, metal powder coated ice maker outlet box with quarter turn arrester valve. Ice maker outlet box shall be constructed of minimum 20 gauge cold rolled steel with a white powder coated finish and include integral water hammer arrester quarter turn valve. Valves shall comply with ASME A112.18.1 and water hammer arrester shall comply with ASSE 1010.

B. (P-812) Water Supply Box Units: Fabricate of 16-gauge steel with highly corrosion resistant epoxy finish. Unit to have 1/2 inch (13 mm) combination MPT brass sweat connection, ball type shut-off valve. Size: 9 by 11-3/4 inches (229 by 298 mm) rough wall opening 8 by 10 by 3-5/8 inches (200 by 254 by 92 mm). Bottom of box shall be 18 inches (457 mm) above finished floor.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Fixture Setting: Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS.

B. Supports and Fastening: Secure all fixtures, equipment and trimmings to partitions, walls and related finish surfaces. Exposed heads of bolts and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.

C. Toggle Bolts: For hollow masonry units, finished or unfinished.

D. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 1/4 inch (6 mm) diameter bolts, and to extend at least 3 inches (76 mm) into masonry and be fitted with loose tubing or sleeves extending into masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.

E. Power Set Fasteners: May be used for concrete walls, shall be 1/4 inch (6 mm) threaded studs, and shall extend at least 1-1/4 inch (32 mm) into wall.

F. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.

G. Where water closet waste pipe has to be offset due to beam interference, provide correct and additional piping necessary to eliminate relocation of water closet.

H. Aerators are prohibited on lavatories and sinks.

I. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no cost or additional time to the Government.

3.2 CLEANING

A. At completion of all work, fixtures, exposed materials and equipment shall be thoroughly cleaned.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. Definitions:

1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
2. Exterior: Piping, ductwork, and equipment exposed to weather be it temperature, humidity, precipitation, wind, or solar radiation.

C. Abbreviations/Acronyms:

1. ac: Alternating Current
2. AC: Air Conditioning
3. ACU: Air Conditioning Unit
4. ACR: Air Conditioning and Refrigeration
5. AI: Analog Input
6. AISI: American Iron and Steel Institute
7. AO: Analog Output
8. ASJ: All Service Jacket
9. AWG: American Wire Gauge
10. BACnet: Building Automation and Control Networking Protocol
11. BAg: Silver-Copper-Zinc Brazing Alloy
12. BAS: Building Automation System
13. BCuP: Silver-Copper-Phosphorus Brazing Alloy
14. bhp: Brake Horsepower
15. Btu: British Thermal Unit
16. Btu/h: British Thermal Unit Per Hour
17. CDA: Copper Development Association
18. C: Celsius
19. CD: Compact Disk
20. CFM: Cubic Foot Per Minute
21. CH: Chilled Water Supply
22. CHR: Chilled Water Return
23. CLR: Color
24. CO: Carbon Monoxide
25. COR: Contracting Officer’s Representative
26. CPD: Condensate Pump Discharge

27. CPM: Cycles Per Minute
28. CPVC: Chlorinated Polyvinyl Chloride
29. CRS: Corrosion Resistant Steel
30. CTPD: Condensate Transfer Pump Discharge
31. CTPS: Condensate Transfer Pump Suction
32. CW: Cold Water
33. CWP: Cold Working Pressure
34. CxA: Commissioning Agent
35. dB: Decibels
36. dB(A): Decibels (A weighted)
37. DDC: Direct Digital Control
38. DI: Digital Input
39. DO: Digital Output
40. DVD: Digital Video Disc
41. DN: Diameter Nominal
42. DWV: Drainage, Waste and Vent
43. EPDM: Ethylene Propylene Diene Monomer
44. EPT: Ethylene Propylene Terpolymer
45. ETO: Ethylene Oxide
46. F: Fahrenheit
47. FAR: Federal Acquisition Regulations
48. FD: Floor Drain
49. FED: Federal
50. FG: Fiberglass
51. FGR: Flue Gas Recirculation
52. FOS: Fuel Oil Supply
53. FOR: Fuel Oil Return
54. FSK: Foil-Scrim-Kraft facing
55. FWPD: Feedwater Pump Discharge
56. FWPS: Feedwater Pump Suction
57. GC: Chilled Glycol Water Supply
58. GCR: Chilled Glycol Water Return
59. GH: Hot Glycol Water Heating Supply
60. GHR: Hot Glycol Water Heating Return
61. gpm: Gallons Per Minute
62. HDPE: High Density Polyethylene
63. Hg: Mercury

64. HOA: Hands-Off-Automatic
65. hp: Horsepower
66. HPS: High Pressure Steam (414 kPa (60 psig) and above)
67. HPR: High Pressure Steam Condensate Return
68. HW: Hot Water
69. HWH: Hot Water Heating Supply
70. HWHR: Hot Water Heating Return
71. Hz: Hertz
72. ID: Inside Diameter
73. IPS: Iron Pipe Size
74. kg: Kilogram
75. kPa: Kilopascal
76. lb: Pound
77. lb/hr: Pounds Per Hour
78. L/s: Liters Per Second
79. L/min: Liters Per Minute
80. LPS: Low Pressure Steam (103 kPa (15 psig) and below)
81. LPR: Low Pressure Steam Condensate Gravity Return
82. MAWP: Maximum Allowable Working Pressure
83. MAX: Maximum
84. MBtu/h: 1000 Btu/h
85. MBH: 1000 Btu/h
86. MBtu: 1000 Btu
87. MED: Medical
88. m: Meter
89. MFG: Manufacturer
90. mg: Milligram
91. mg/L: Milligrams Per Liter
92. MIN: Minimum
93. MJ: Megajoules
94. ml: Milliliter
95. Mlb: 1000 lb
96. mm: Millimeter
97. MPS: Medium Pressure Steam (110 kPa (16 psig) through 414 kPa (60 psig))
98. MPR: Medium Pressure Steam Condensate Return
99. MW: Megawatt

100. NC: Normally Closed
101. NF: Oil Free Dry (Nitrogen)
102. Nm: Newton Meter
103. NO: Normally Open
104. NOx: Nitrous Oxide
105. NPT: National Pipe Thread
106. NPS: Nominal Pipe Size
107. OD: Outside Diameter
108. OSD: Open Sight Drain
109. OS&Y: Outside Stem and Yoke
110. PC: Pumped Condensate
111. PID: Proportional-Integral-Differential
112. PLC: Programmable Logic Controllers
113. PP: Polypropylene
114. PPE: Personal Protection Equipment
115. ppb: Parts Per Billion
116. ppm: Parts Per Million
117. PRV: Pressure Reducing Valve \
118. PSIA: Pounds Per Square Inch Absolute
119. psig: Pounds Per Square Inch Gauge
120. PTFE: Polytetrafluoroethylene
121. PVC: Polyvinyl Chloride
122. PVDC: Polyvinylidene Chloride Vapor Retarder Jacketing, White
123. PVDF: Polyvinylidene Fluoride
124. rad: Radians
125. RH: Relative Humidity
126. RO: Reverse Osmosis
127. rms: Root Mean Square
128. RPM: Revolutions Per Minute
129. RS: Refrigerant Suction
130. RTD: Resistance Temperature Detectors
131. RTRF: Reinforced Thermosetting Resin Fittings
132. RTRP: Reinforced Thermosetting Resin Pipe
133. SCFM: Standard Cubic Feet Per Minute
134. SPEC: Specification
135. SPS: Sterile Processing Services
136. STD: Standard

137. SDR: Standard Dimension Ratio
138. SUS: Saybolt Universal Second
139. SW: Soft water
140. SWP: Steam Working Pressure
141. TAB: Testing, Adjusting, and Balancing
142. TDH: Total Dynamic Head
143. TEFC: Totally Enclosed Fan-Cooled
144. TFE: Tetrafluoroethylene
145. THERM: 100,000 Btu
146. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
147. THWN: Thermoplastic Heat & Water-Resistant Nylon Coated Wire
148. T/P: Temperature and Pressure
149. USDA: U.S. Department of Agriculture
150. V: Volt
151. VAC: Vacuum
152. VA: Veterans Administration
153. VAC: Voltage in Alternating Current
154. VA CFM: VA Construction & Facilities Management
155. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
156. VAMC: Veterans Administration Medical Center
157. VHA OCAMES: Veterans Health Administration – Office of Capital Asset Management Engineering and Support
158. VR: Vacuum condensate return
159. WCB: Wrought Carbon Steel, Grade B
160. WG: Water Gauge or Water Column
161. WOG: Water, Oil, Gas

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.
B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
D. Section 05 31 00, STEEL DECKING.
E. Section 07 84 00, FIRESTOPPING.
F. Section 07 92 00, JOINT SEALANTS.
G. Section 09 91 00, PAINTING.
H. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

I. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION.

J. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

K. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

L. Section 23 07 11, HVAC AND BOILER PLANT INSULATION.

M. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

N. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

O. Section 23 36 00, AIR TERMINAL UNITS.

P. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

Q. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

R. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. Air Movement and Control Association (AMCA):

410-Current Edition.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

C. American Society of Mechanical Engineers (ASME):

B31.1-2018.....Power Piping

B31.9-2014.....Building Services Piping

ASME Boiler and Pressure Vessel Code:

BPVC Section IX-2019 Welding, Brazing, and Fusing Qualifications

D. American Society for Testing and Materials (ASTM):

A36/A36M-2014.....Standard Specification for Carbon Structural Steel

A575-1996(R2018).....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

E. Association for Rubber Products Manufacturers (ARPM):

IP-20-2015.....Specifications for Drives Using Classical V-Belts and Sheaves

IP-21-2016.....Specifications for Drives Using Double-V (Hexagonal) Belts

IP-24-2016.....Specifications for Drives Using Synchronous Belts

IP-27-2015.....Specifications for Drives Using Curvilinear Toothed Synchronous Belts

F. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc.:

SP-58-2018.....Pipe Hangers and Supports-Materials, Design, Manufacture, Selection, Application, and Installation

SP-127-2014a.....Bracing for Piping Systems: Seismic-Wind-Dynamic Design, Selection, and Application

G. Military Specifications (MIL):

MIL-P-21035B-2013.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

H. National Fire Protection Association (NFPA):

70 National Electrical Code (NEC)

101 Current edition.....Life Safety Code

I. Department of Veterans Affairs (VA):

PG-18-10 current edition Physical Security and Resiliency Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 11, COMMON WORK RESULTS FOR HVAC", with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall

correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed contract documents, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together. Coordinate and properly integrate materials and equipment to provide a completely compatible and efficient installation.

G. Samples: Samples will not be required, except for where materials offered differ from specification requirements. Samples shall be accompanied by full description of characteristics different from specification. The Government, at the Government's expense, will perform evaluation and testing if necessary. The Contractor may submit samples of additional material at the Contractor's option; however, if additional samples of materials are submitted later, pursuant to Government request, adjustment in contract price and time will be made.

H. Coordination/Shop Drawings:

1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and

other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.

3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for HVAC systems, provide details of the following:
   a. Hangers, inserts, supports, and bracing.
   b. Pipe sleeves.
   c. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

I. Manufacturer's Literature and Data: Include full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity. Submit under the pertinent section rather than under this section.

1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COR.
2. Submit electric motor data and variable speed drive data with the driven equipment.
3. Equipment and materials identification.
4. Fire-stopping materials.
5. Hangers, inserts, supports and bracing. Provide complete stress analysis for variable spring and constant support hangers.
6. Wall, floor, and ceiling plates.

J. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan shall include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

K. HVAC Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.

2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   a. Include complete list indicating all components of the systems.
   b. Include complete diagrams of the internal wiring for each item of equipment.
   c. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.
3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

L. Provide copies of approved HVAC equipment submittals to the TAB and Commissioning Subcontractor.

M. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the Contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

N. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC.

B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

C. Equipment Vibration Tolerance:
   1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.

2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.

D. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
2. Refer to all other sections for quality assurance requirements for systems and equipment specified therein.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 33 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.

7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Use of asbestos products or equipment or materials containing asbestos is prohibited.

E. HVAC Equipment Service Providers: Service providers shall be authorized and trained by the manufacturers of the equipment supplied. These providers shall be capable of responding onsite and provide acceptable service to restore equipment operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shutdown of equipment; or within 24 hours in a non-emergency. Submit names, mail and e-mail addresses and phone numbers of service personnel and companies providing service under these conditions for (as applicable to the project): fans, air handling units, chillers, cooling towers, control systems, pumps, critical instrumentation, computer workstation and programming.

F. HVAC Mechanical Systems Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME BPVC Section IX. Provide proof of current certification.
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the associated code.

G. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR with submittals. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material and removal by the Contractor and no additional cost or time to the Government.

H. Execution (Installation, Construction) Quality:

1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract documents to the COR for resolution. Provide written hard copies and computer files on CD or DVD of manufacturer’s installation instructions to the COR with submittals prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received and approved by the VA. Failure to furnish these recommendations is a cause for rejection of the material.
2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to, all types of valves, filters and strainers, transmitters, control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to the COR for resolution. Failure of the Contractor to resolve, or point out any issues will result in the Contractor correcting at no additional cost or time to the Government.
3. Complete coordination/shop drawings shall be required in accordance with Article, SUBMITTALS. Construction work shall not start on any system until the coordination/shop drawings have been approved by VA.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

I. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

J. Guaranty: Warranty of Construction, FAR Clause 52.246-21.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Large equipment such as boilers, chillers, cooling towers, fans, and air handling units if shipped on open trailer trucks shall be covered with shrink on plastics or waterproof tarpaulins that provide protection from exposure to rain, road salts and other transit hazards. Protection shall be kept in place until equipment is moved into a building or installed as designed.
3. Repair damaged equipment in first class, new operating condition and appearance; or, replace same as determined and directed by the COR. Such repair or replacement shall be at no additional cost or time to the Government.
4. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
5. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
6. Protect plastic piping and tanks from ultraviolet light (sunlight).

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

   1. As-built drawings are to be provided, with a copy of them on AutoCAD version 2013 provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.
   2. As-built drawings are to be provided, with a copy of them in three-dimensional Building Information Modeling (BIM) software version Revit 2021 provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures

followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model, and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.8 JOB CONDITIONS – WORK IN EXISTING BUILDING

A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities that serve the VAMC.

B. Maintenance of Service: Schedule all work to permit continuous service as required by the VAMC.

C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COR during periods when the demands are not critical to the operation of the VAMC. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least 10 working days advance notice to the COR. The request shall include a detailed plan on the proposed shutdown and the intended work to be done along with manpower levels. All equipment and materials must be onsite and verified with plan 5 days prior to the shutdown or it will need to be rescheduled.

D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. Storm water or ground water leakage is prohibited. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA. Maintain all egress routes and safety systems/devices.

E. Acceptance of Work for Government Operation: As new equipment, systems and facilities are made available for operation and these items are

deemed of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Provide maximum standardization of components to reduce spare part requirements.

B. Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

C. Equipment and components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a nameplate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions must be approved by the VA, but may be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 V-BELT DRIVES

A. Type: ARPM standard V-belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.

B. Dimensions, rating and selection standards: ARPM IP-20 and ARPM IP-21.

C. Minimum Horsepower Rating: Motor horsepower plus recommended ARPM service factor (not less than 20 percent) in addition to the ARPM allowances for pitch diameter, center distance, and arc of contact.

D. Maximum Speed: 25 m/s (5000 feet per minute).

E. Adjustment Provisions: For alignment and ARPM standard allowances for installation and take-up.

F. Drives may utilize a single V-Belt (any cross section) when it is the manufacturer's standard.

G. Multiple Belts: Matched to ARPM specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.

H. Sheaves and Pulleys:

1. Material: Pressed steel, or close-grained cast iron.
2. Bore: Fixed or bushing type for securing to shaft with keys.
3. Balanced: Statically and dynamically.
4. Groove spacing for driving and driven pulleys shall be the same.

I. Drive Types, Based on ARI 435:

1. Provide adjustable-pitch or fixed-pitch drive as follows:
   a. Fan speeds up to 1800 RPM: 7.5 kW (10 horsepower) and smaller.
   b. Fan speeds over 1800 RPM: 2.2 kW (3 horsepower) and smaller.
2. Provide fixed-pitch drives for drives larger than those listed above.
3. The final fan speeds required to just meet the system CFM and pressure requirements, without throttling the design air flow branch, shall be determined by adjustment of a temporary adjustable-pitch motor sheave or by fan law calculation if a fixed-pitch drive is used initially.

J. Final Drive Set: If adjustment is required beyond the capabilities of the factory drive set, the final drive set shall be provided as part of this contract at no additional cost or time to the Government.

2.4 SYNCHRONOUS BELT DRIVES

A. Type: ARPM synchronous belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.

B. Dimensions, rating and selection standards: ARPM IP-24 and ARPM IP-27.

C. Minimum Horsepower Rating: Motor horsepower plus recommended ARPM service factor (not less than 20 percent) in addition to the ARPM allowances for pitch diameter, center distance, and arc of contact.

D. Maximum Speed: 25 m/s (5000 feet per minute).

E. Adjustment Provisions: For alignment and ARPM standard allowances for installation and take-up.

F. Drives may utilize a single belt of manufacturer’s standard width for the application.

G. Multiple Belts: Matched to ARPM specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.

H. Sheaves and Pulleys:

1. Material: Pressed steel, or close-grained cast iron.
2. Bore: Fixed or bushing type for securing to shaft with keys.
3. Balanced: Statically and dynamically.

I. Final Drive Set: The final fan speeds required to just meet the system CFM and pressure requirements, without throttling the design air flow branch, shall be determined by fan law calculation. If adjustment is required beyond the capabilities of the factory drive set, the final drive set shall be provided as part of this contract at no additional cost or time to the Government.

2.5 DRIVE GUARDS

A. For machinery and equipment, provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor to prevent damage to equipment and injury to personnel. Drive guards may be excluded where motors and drives are inside factory-fabricated air handling unit casings.

B. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gauge sheet steel; all edges shall be hemmed and ends shall be bent into flanges and the flanges shall be drilled and attached to

pump base with minimum of four 6 mm (1/4 inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.

C. V-belt and sheave assemblies shall be totally enclosed, firmly mounted, non-resonant. Guard shall be an assembly of minimum 22-gauge sheet steel and expanded or perforated metal to permit observation of belts. 25 mm (1 inch) diameter hole shall be provided at each shaft centerline to permit speed measurement.

D. Materials: Sheet steel, expanded metal or wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.

E. Access for Speed Measurement: 25 mm (1 inch) diameter hole at each shaft center.

2.6 LIFTING ATTACHMENTS

A. Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.7 ELECTRIC MOTORS

A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, MOTOR CONTROLLERS; and, Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.8 VARIABLE SPEED MOTOR CONTROLLERS

A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, MOTOR CONTROLLERS for specifications.

B. Coordinate variable speed motor controller communication protocol with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

C. Provide variable speed motor controllers with or without a bypass contactor as indicated in contract drawings.

D. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same

class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.

E. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.

F. Controller shall not add any current or voltage transients to the input ac power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the ac power system.

2.9 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents and shown in the maintenance manuals. Identification for piping is specified in Section 09 91 00, PAINTING.

B. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents and shown in the maintenance manuals. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.

C. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 5 mm (3/16 inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.

D. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 5 mm (3/16 inch) high riveted or bolted to the equipment.

E. Control Items: Label all instrumentation, temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

F. Valve Tags and Lists:

1. HVAC and Mechanical Rooms: Provide for all valves other than for equipment in Section 23 36 00, AIR TERMNAL UNITS.
2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less

than 6 mm (1/4 inch) for service designation on 19-gauge 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.

3. Valve lists: Typed or printed plastic-coated card(s), sized 21 cm (8-1/2 inches) by 27 cm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color-coded thumb tack in ceiling.

G. Ceiling Grid Labels:

1. 50 mm (2 inch) long by 15 mm (1/2 inch) wide by 0.025 mm (1 mil) thick UV resistant metalized polyester label with red border color and black custom lettering on white background interior. Peel and stick adhesive backing. Label and adhesive manufactured specifically for use in equipment inventory tagging.
2. Custom print labels with above ceiling HVAC equipment numbers.

2.10 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.11 GALVANIZED REPAIR COMPOUND

A. Mil-P-21035B, paint form.

2.12 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

B. Supports for Roof Mounted Items:

1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 by 100 mm (2 by 4 inches) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 27 cm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.

2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.

C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-58.

D. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

E. Attachment to Steel Building Construction:

1. Welded attachment: MSS SP-58, Type 22.
2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.

F. Attachment to existing structure: Support from existing floor/roof frame.

G. Attachment to Wood Construction: Wood screws or lag bolts.

H. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

I. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (12 gauge), designed to accept special spring held, hardened steel nuts. Trapeze hangers are prohibited for use for steam supply and condensate piping.

1. Allowable hanger load: Manufacturers rating less 91 kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2

inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

J. Supports for Piping Systems:

1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):
   a. Standard clevis hanger: Type 1; provide locknut.
   b. Riser clamps: Type 8.
   c. Wall brackets: Types 31, 32 or 33.
   d. Roller supports: Type 41, 43, 44 and 46.
   e. Saddle support: Type 36, 37 or 38.
   f. Turnbuckle: Types 13 or 15. Preinsulate.
   g. U-bolt clamp: Type 24.
   h. Copper Tube:
      1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non-adhesive isolation tape to prevent electrolysis.
      2) For vertical runs use epoxy painted or plastic-coated riser clamps.
      3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
      4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
   i. Supports for plastic piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.
3. High and Medium Pressure Steam (MSS SP-58):
   a. Provide eye rod or Type 17 eye nut near the upper attachment.

b. Piping 50 mm (2 inches) and larger: Type 43 roller hanger. For roller hangers requiring seismic bracing provide a Type 1 clevis hanger with Type 41 roller attached by flat side bars.

c. Piping with Vertical Expansion and Contraction:

1) Movement up to 20 mm (3/4 inch): Type 51 or 52 variable spring unit with integral turn buckle and load indicator.

2) Movement more than 20 mm (3/4 inch): Type 54 or 55 constant support unit with integral adjusting nut, turn buckle and travel position indicator.

4. Convertor and Expansion Tank Hangers: May be Type 1 sized for the shell diameter. Insulation where required will cover the hangers.

5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

K. Seismic Restraint of Piping and Ductwork: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Comply with MSS SP-127.

2.13 PIPE PENETRATIONS

A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.

B. To prevent accidental liquid spills from passing to a lower level, provide the following:

1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.

2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.

3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

C. Penetrations through beams or ribs are prohibited, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of COR.

D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.

F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.

G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.

H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.

I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.14 DUCT PENETRATIONS

A. Provide curbs or structural support beams for roof mounted piping, ductwork and equipment. Curbs shall be 45 cm (18 inches) high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.

B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.15 SPECIAL TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.

D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the COR.

E. Lubricants: A minimum of 1 L (1 quart) of oil, and 0.5 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.16 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.17 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. The coordination/shop drawings shall be submitted for review. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Equipment coordination/shop drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Follow manufacturer's published recommendations for installation methods not otherwise specified.

B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items,

valves, filters, strainers, transmitters, sensors, control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the contract documents.

C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.

D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

E. Cutting Holes:

1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill is prohibited, except as permitted by COR where working area space is limited.
2. Locate holes to avoid interference with structural members such as slabs, columns, ribs, beams or reinforcing. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
3. Do not penetrate membrane waterproofing.

F. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.

G. Electrical Interconnection of Instrumentation or Controls: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Devices shall be located so they are easily accessible for testing, maintenance, calibration, etc. The COR has the final determination on what is accessible and what is not. Comply with NFPA 70.

H. Protection and Cleaning:

1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's

recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced.

2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

I. Install gauges, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gauges to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

J. Install steam piping expansion joints as per manufacturer’s recommendations.

K. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.

L. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and data/telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall not be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 feet) above the equipment or to ceiling structure, whichever is lower (NFPA 70).

M. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and

maintenance or inspections, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or time to the Government.

2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to motors, fans, pumps, belt guards, transformers, high voltage lines, conduit and raceways, piping, hot surfaces, and ductwork. The COR has final determination on whether an installation meets this requirement or not.

3.3 TEMPORARY PIPING AND EQUIPMENT

A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.

B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Article, ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING apply.

C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

3.4 RIGGING

A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service requirements as well as structural integrity of the building.

C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will

check structure adequacy and advise Contractor of recommended restrictions.

E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Follow approved rigging plan.

G. Restore building to original condition upon completion of rigging work.

3.5 PIPE AND EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels designed by a structural engineer, secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the COR.

B. Use of chain pipe supports; wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above are prohibited. Replace or thoroughly clean rusty products and paint with zinc primer.

C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work.

D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-58. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.

E. HVAC Vertical Pipe Supports:

1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.

F. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.

2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

G. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural contract documents shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.6 MECHANICAL DEMOLITION

A. Rigging access, other than indicated on the contract documents, shall be provided by the Contractor after approval for structural integrity by the COR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation.

Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Debris accumulated in the area to the detriment of plant operation is prohibited. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VAMC, and Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with contract documents where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the contract documents of the other disciplines in the project for additional facilities to be demolished or handled.

D. All indicated valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these contract documents. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the

specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.

2. The following material and equipment shall not be painted:
   a. Motors, controllers, control switches, and safety switches.
   b. Control and interlock devices.
   c. Regulators.
   d. Pressure reducing valves.
   e. Control valves and thermostatic elements.
   f. Lubrication devices and grease fittings.
   g. Copper, brass, aluminum, stainless steel and bronze surfaces.
   h. Valve stems and rotating shafts.
   i. Pressure gauges and thermometers.
   j. Glass.
   k. Nameplates.
3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
4. Pumps, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats. This may include painting exposed metals where hangers were removed or where equipment was moved or removed.
6. Paint shall withstand the following temperatures without peeling or discoloration:
   a. Steam: 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (374 degrees F) on metal pipe surface.
7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.
8. Lead based paints are prohibited.

3.8 IDENTIFICATION SIGNS

A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16 inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including

automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

D. Attach ceiling grid label on ceiling grid location directly underneath above-ceiling air terminal, control system component, valve, filter unit, fan etc.

3.9 MOTOR AND DRIVES

A. Use synchronous belt drives only on equipment controlled by soft starters or variable frequency drive motor controllers without a bypass contactor. Use V-belt drives on all other applications.

B. Alignment of V-Belt Drives: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.

C. Alignment of Synchronous Belt Drives: Set driving and driven shafts parallel and align so that the corresponding pulley flanges are in the same plane.

D. Alignment of Direct-Connect Drives: Securely mount motor in accurate alignment so that shafts are per coupling manufacturer’s tolerances when both motor and driven machine are operating at normal temperatures.

3.10 LUBRICATION

A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. Field-check all devices for proper lubrication.

B. All devices and equipment shall be equipped with required lubrication fittings or devices. A minimum of 1 liter (1 quart) of oil and 0.5 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COR in unopened containers that are properly identified as to application.

C. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

D. All lubrication points shall be extended to one side of the equipment.

3.11 STARTUP, TEMPORARY OPERATION AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. The Commissioning Agent will observe startup and Contractor testing of selected equipment. Coordinate the startup and Contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.

D. Startup of equipment shall be performed as described in equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS Article, TESTS, and in individual Division 23 specification sections and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost or time to the Government.

C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

D. No adjustments may be made during the acceptance inspection. All adjustments shall have been made by this point.

E. Perform tests as required for commissioning provisions in accordance with Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

3.13 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.14 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation and connection of motors for HVAC and steam generation equipment.

B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

D. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

F. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Bearing Manufacturers Association (ABMA):

9-2015.....Load Ratings and Fatigue Life for Ball Bearings

11-2014.....Load Ratings and Fatigue Life for Roller Bearings

C. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):

90.1-2019(2021e).....Energy Efficient Design of New Buildings Except Low-Rise Residential Buildings

D. Institute of Electrical and Electronics Engineers (IEEE):

112-2017.....Standard Test Procedure for Polyphase Induction Motors and Generators

841-2009.....IEEE Standard for Petroleum and Chemical Industry-Premium-Efficiency, Severe-Duty, Totally Enclosed Fan-Cooled (TEFC) Squirrel Cage Induction Motors--Up to and Including 370 kW (500 hp)

E. National Electrical Manufacturers Association (NEMA):

MG 1-2016(R2018).....Motors and Generators

MG 2-2014.....Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators

250-2020.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

70-2020(2020e).....National Electrical Code (NEC)

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT", with applicable paragraph identification.

C. Submit motor submittals with driven equipment.

D. Shop Drawings:

1. Provide documentation to demonstrate compliance with contract documents.
2. Motor nameplate information shall be submitted including electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.

E. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:

1. Include complete list indicating all components of the systems.
2. Include complete diagrams of the internal wiring for each item of equipment.

3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

G. Certification: Two weeks prior to final inspection, unless otherwise noted, certification shall be submitted to the COR stating that the motors have been properly applied, installed, adjusted, lubricated, and tested.

H. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

I. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00,COMMISSIONING OF HVAC SYSTEMS.

1.5 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the ‘third party testing company’ requirement. Provide record drawings as follows:

1. As-built drawings are to be provided, with a copy of them on AutoCAD version 2013 provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.
2. As-built drawings are to be provided, with a copy of them in three-dimensional Building Information Modeling (BIM) software version Revit 2021 provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

PART 2 - PRODUCTS

2.1 MOTORS

A. For alternating current, fractional and integral horsepower motors, NEMA MG 1 and NEMA MG 2 shall apply.

B. For severe duty TEFC motors, IEEE 841 shall apply.

C. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, MOTOR CONTROLLERS; and Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors. Unless otherwise specified for a

particular application, use electric motors with the following requirements.

D. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.

E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.

1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.

F. Voltage ratings shall be as follows:

1. Single phase:
   a. Motors connected to 120-volt systems: 115 volts.
   b. Motors connected to 208-volt systems: 200 volts.
   c. Motors connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
2. Three phase:
   a. Motors connected to 208-volt systems: 200 volts.
   b. Motors, less than 74.6 kW (100 hp), connected to 240-volt or 480-volt systems: 208-230/460 volts, dual connection.
   c. Motors, 74.6 kW (100 hp) or larger, connected to 240-volt systems: 230 volts.
   d. Motors, 74.6 kW (100 hp) or larger, connected to 480-volt systems: 460 volts.
   e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA MG 1 for connection to the nominal system voltage shown on the drawings.

G. Number of phases shall be as follows:

1. Motors, less than 373 W (1/2 hp): Single phase.
2. Motors, 373 W (1/2 hp) and larger: 3 phase.
3. Exceptions:
   a. Hermetically sealed motors.
   b. Motors for equipment assemblies, less than 746 W (1 hp), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.

H. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the

motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.

I. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting, acceleration, and running torque without exceeding nameplate ratings or considering service factor.

J. Motor Enclosures:

1. Shall be the NEMA types as specified and/or shown in the Contract Documents.
2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types per NEMA 250, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
   a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
   b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
   c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed, and finish coated at the factory with manufacturer's prime coat and standard finish.

K. Electrical Design Requirements:

1. Motors shall be continuous duty.
2. The insulation system shall be rated minimum of Class B, 130 degrees C (266 degrees F).
3. The maximum temperature rise by resistance at rated power shall not exceed Class B limits, 80 degrees C (176 degrees F).
4. The speed/torque and speed/current characteristics shall comply with NEMA Design A or B, as specified.
5. Motors shall be suitable for full voltage starting, unless otherwise noted. Coordinate motor features with applicable motor controllers.
6. Motors for variable frequency drive applications shall adhere to NEMA MG 1, Part 30, Application Considerations for Constant Speed Motors Used on a Sinusoidal Bus with Harmonic Content and General-Purpose Motors Used with Adjustable-Voltage or Adjustable-Frequency

Controls or Both, or NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors.

L. Mechanical Design Requirements:

1. Bearings shall be rated in accordance with ABMA 9 or ABMA 11 for a minimum fatigue life of 26,280 hours for belt-driven loads and 100,000 hours for direct-drive loads based on L10 (Basic Rating Life) at full load direct coupled, except vertical high thrust motors which require a 40,000 hours rating. A minimum fatigue life of 40,000 hours is required for VFD drives.
2. Vertical motors shall be capable of withstanding a momentary up thrust of at least 30 percent of normal down thrust.
3. Grease lubricated bearings shall be designed for electric motor use. Grease shall be capable of the temperatures associated with electric motors and shall be compatible with Polyurea based greases.
4. Grease fittings, if provided, shall be Alemite type or equivalent.
5. Oil lubricated bearings, when specified, shall have an externally visible sight glass to view oil level.
6. Vibration shall not exceed 3.8 mm (0.15 inch) per second, unfiltered peak.
7. Noise level shall meet the requirements of the application.
8. Motors on 180 frames and larger shall have provisions for lifting eyes or lugs capable of a safety factor of 5.
9. All external fasteners shall be corrosion resistant.
10. Condensation heaters, when specified, shall keep motor windings at least 5 degrees C (9 degrees F) above ambient temperature.
11. Winding thermostats, when specified shall be normally closed, connected in series.
12. Grounding provisions shall be in the main terminal box.

M. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional cost or time to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.

3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
   a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
   b. Other wiring to control panels shall be NFPA 70 designation THWN.
   c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

N. Additional requirements for specific motors, as indicated in the other sections listed in Article, RELATED SECTIONS shall also apply.

O. NEMA Premium Efficiency Electric Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 W (1 hp) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 W (1 hp) or more with open, drip-proof, or TEFC enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Premium Efficiencies Open Drip-Proof				**Minimum Premium Efficiencies Totally Enclosed Fan-Cooled (TEFC)**			
Rating kW (hp)	**1200 RPM**	**1800 RPM**	**3600 RPM**	**Rating kW (hp)**	**1200 RPM**	**1800 RPM**	**3600 RPM**
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%

11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%

P. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM, and 3600 RPM. Power factor correction capacitors shall be provided unless the motor meets the 0.90 requirement without it or if the motor is controlled by a variable frequency drive. The power factor correction capacitors shall be able to withstand high voltage transients and power line variations without breakdown.

Q. Energy Efficiency of Small Motors (Motor Efficiencies): All motors under 746 W (1 hp) shall meet the requirements of the DOE Small Motor Regulation.

Polyphase Open Motors Average full load efficiency				**Capacitor-start capacitor-run and capacitor-start induction run open motors Average full load efficiency**			
Rating kW (hp)	**6 poles**	**4 poles**	**2 poles**	**Rating kW (hp)**	**6 poles**	**4 poles**	**2 poles**
0.18 (0.25)	67.5	69.5	65.6	0.18 (0.25)	62.2	68.5	66.6
0.25 (0.33)	71.4	73.4	69.5	0.25 (0.33)	66.6	72.4	70.5
0.37 (0.5)	75.3	78.2	73.4	0.37 (0.5)	76.2	76.2	72.4
0.55 (0.75)	81.7	81.1	76.8	0.55 (0.75)	80.2	81.8	76.2

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motors in accordance with manufacturer’s recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

B. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 FIELD TESTS

A. All tests shall be witnessed by the Commissioning Agent or by the COR.

B. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before startup. All shall test free from grounds.

C. Perform Load test in accordance with IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.

D. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

E. All test data shall be complied into a report form for each motor and provided to the contracting officer or their representative.

3.3 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.

3.4 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for one hour to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the application of noise control measures, seismic restraint for equipment and vibration control techniques to rotating equipment and parts including pumps, fans, compressors, and motors.

B. A complete listing of all common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
Noise criteria, seismic restraints for equipment , vibration tolerance and vibration isolation for HVAC and plumbing work.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and SAMPLES.

B. Section 23 31 00, HVAC DUCTS and CASINGS.

C. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.3 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Noise Criteria:

1. Noise levels in all 8 octave bands due to equipment and duct systems shall not exceed following NC levels:

TYPE OF ROOM	NC LEVEL
Audio Speech Pathology	25
Audio Suites	25
Auditoriums, Theaters	35-40
Bathrooms and Toilet Rooms	40
Chapels	35
Conference Rooms	35
Corridors (Nurse Stations)	40
Corridors(Public)	40
Dining Rooms, Food Services/ Serving	40
Examination Rooms	35
Gymnasiums	50
Kitchens	50
Laboratories (With Fume Hoods)	45 to 55

Laundries	50
Lobbies, Waiting Areas	40
Locker Rooms	45
Offices, Large Open	40
Offices, Small Private	35
Operating Rooms	40
Patient Rooms	35
Phono/Cardiology	25
Recreation Rooms	40-45
Shops	50
SPD (Decontamination and Clean Preparation)	45
Therapeutic Pools	45
Treatment Rooms	35
Warehouse	50
X-Ray and General Work Rooms	40

2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 8, Sound and Vibration.
3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

C. Seismic Restraint Requirements:

1. Equipment:

a. All mechanical equipment not supported with isolators external to the unit shall be securely anchored to the structure. Such mechanical equipment shall be properly supported to resist a horizontal force of 50 percent of the weight of the equipment furnished.

b. All mechanical equipment mounted on vibration isolators shall be provided with seismic restraints capable of resisting a horizontal force of 100 percent of the weight of the equipment furnished.

2. Piping: Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

3. Ductwork: Refer to specification Section 23 31 00, HVAC DUCTS AND CASINGS.

D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

1.4 SUBMITTALS

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Vibration isolators:

a. Floor mountings

b. Hangers

c. Snubbers

d. Thrust restraints

2. Bases.

3. Seismic restraint provisions and bolting.

4. Acoustical enclosures.

C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.

D. Seismic Requirements: Submittals are required for all equipment anchors, supports and seismic restraints. Submittals shall include

weights, dimensions, standard connections, and manufacturer's certification that all specified equipment will withstand seismic Lateral Force requirements as shown on drawings.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
Handbook 2021.....Fundamentals Handbook, Chapter 8, Sound and Vibration

C. American Society for Testing and Materials (ASTM):
A123/A123M-2017.....Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A307-2016.....Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
D2240-05(2010).....Standard Test Method for Rubber Property - Durometer Hardness

D. Manufacturers Standardization (MSS):
SP-58-2018.....Pipe Hangers and Supports-Materials, Design and Manufacture

E. Occupational Safety and Health Administration (OSHA):
29 CFR 1960.95.....Occupational Noise Exposure

F. American Society of Civil Engineers (ASCE):
ASCE 7-2017.....Minimum Design Loads for Buildings and Other Structures.

G. American National Standards Institute / Sheet Metal and Air Conditioning Contractor’s National Association (ANSI/SMACNA):
001-2008.....Seismic Restraint Manual: Guidelines for Mechanical Systems, 3rd Edition.

H. International Code Council (ICC):
IBC 2021.....International Building Code.

I. Department of Veterans Affairs (VA):
H-18-8 2016.....Seismic Design Requirements.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.

B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.

C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition, provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.

D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.

E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENTS

A. Bolt pad mounted equipment, without vibration isolators, to the floor or other support using ASTM A307 standard bolting material.

B. Floor mounted equipment, with vibration Isolators: Type SS. Where Type N isolators are used provide channel frame base horizontal restraints bolted to the floor, or other support, on all sides of the equipment Size and material required for the base shall be as recommended by the isolator manufacturer.

C. On all sides of suspended equipment, provide bracing for rigid supports and provide restraints for resiliently supported equipment.

2.3 VIBRATION ISOLATORS

A. Floor Mountings:

1. Double Deflection Neoprene (Type N): Shall include neoprene covered steel support plated (top and bottom), friction pads, and necessary bolt holes.
2. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators

shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.

3. Captive Spring Mount for Seismic Restraint (Type SS):
   a. Design mounts to resiliently resist seismic forces in all directions. Snubbing shall take place in all modes with adjustment to limit upward, downward, and horizontal travel to a maximum of 6 mm (1/4-inch) before contacting snubbers. Mountings shall have a minimum rating of one G coefficient of gravity as calculated and certified by a registered structural engineer.
   b. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Spring diameters shall be no less than 0.8 of the compressed height of the spring at rated load. Springs shall have a minimum additional travel to solid equal to 50 percent of the rated deflection. Mountings shall have ports for spring inspection. Provide an all directional neoprene cushion collar around the equipment bolt.
4. Spring Isolators with Vertical Limit Stops (Type SP): Similar to spring isolators noted above, except include a vertical limit stop to limit upward travel if weight is removed and also to reduce movement and spring extension due to wind loads. Provide clearance around restraining bolts to prevent mechanical short circuiting. Isolators shall have a minimum seismic rating of one G.
5. Pads (Type D), Washers (Type W), and Bushings (Type L): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
6. Seismic Pad (Type DS): Pads shall be natural rubber / neoprene waffle with steel top plate and drilled for an anchor bolt. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).

B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.
   1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series.

Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.

2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.
6. Hangers used in seismic applications shall be provided with a neoprene and steel rebound washer installed ¼′ clear of bottom of hanger housing in operation to prevent spring from excessive upward travel

C. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm (1/4 inch). Air gap between hard and resilient material shall be not less than 3 mm (1/8 inch) nor more than 6 mm (1/4 inch). Restraints shall be capable of withstanding design load without permanent deformation.

D. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and

stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension but not less than 100 mm (4 inches). Where rails are used with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.

B. Integral Structural Steel Base (Type B): Design base with isolator brackets to reduce mounting height of equipment which require a complete supplementary rigid base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension, but not less than 100 mm (four inches).

C. Inertia Base (Type I): Base shall be a reinforced concrete inertia base. Pour concrete into a welded steel channel frame, incorporating prelocated equipment anchor bolts and pipe sleeves. Level the concrete to provide a smooth uniform bearing surface for equipment mounting. Provide grout under uneven supports. Channel depth shall be a minimum of 1/12 of longest dimension of base but not less than 150 mm (six inches). Form shall include 13-mm (1/2-inch) reinforcing bars welded in place on minimum of 203 mm (eight inch) centers running both ways in a layer 40 mm (1-1/2 inches) above bottom. Use height saving brackets in all mounting locations. Weight of inertia base shall be equal to or greater than weight of equipment supported to provide a maximum peak-to-peak displacement of 2 mm (1/16 inch).

D. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS

Refer to specification Section 23 31 00, HVAC DUCTS and CASINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Vibration Isolation:

1. No metal-to-metal contact will be permitted between fixed and floating parts.
2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (l00 degrees F).
5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as the isolation hangers or support of the pipe connected to the equipment.

B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.

B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

C. Attach thrust limits at centerline of thrust and adjust to a maximum of ¼ inch (6 mm) movement during start and stop.

D. Adjust active height of spring isolators.

E. Adjust snubbers according to manufacturer's recommendations.

F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.

G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

3.3 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SELECTION GUIDE FOR VIBRATION ISOLATORS

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
CENTRIFUGAL FANS															
UP TO 50 HP:															
UP TO 200 RPM	B	N	0.3	B	S	2.5	B	S	2.5	B	S	3.5	B	S	3.5
201 - 300 RPM	B	N	0.3	B	S	2.0	B	S	2.5	B	S	2.5	B	S	3.5
301 - 500 RPM	B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.5	B	S	3.5
501 RPM & OVER	B	N	0.3	B	S	2.0	B	S	2.0	B	S	2.0	B	S	2.5
AIR HANDLING UNIT PACKAGES															
FLOOR MOUNTED:															
UP THRU 5 HP	---	D	---	---	S	1.0	---	S	1.0	---	S	1.0	---	S	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	D	---	R	S, THR	1.5	R	S, THR	2.5	R	S, THR	2.5	R	S, THR	2.5
501 RPM & OVER	---	D	---	---	S, THR	0.8	---	S, THR	0.8	R	S, THR	1.5	R	S, THR	2.0

--- INTENTIONALLY BLANK ---

ECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air and water distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.
9. Document critical paths of flow on reports.

B. Definitions:

1. Basic TAB used in this Section: Chapter 39, "Testing, Adjusting and Balancing" of 2019 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. TABB: Testing Adjusting and Balancing Bureau
6. SMACNA: Sheet Metal Contractors National Association
7. Hydronic Systems: Includes chilled water and heating hot water systems.
8. Air Systems: Includes all outside air, supply air, return air, exhaust air and relief air systems.
9. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

C. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

D. Section 23 07 11, HVAC, AND BOILER PLANT INSULATION.

E. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

G. Section 23 31 00, HVAC DUCTS AND CASINGS.

H. Section 23 36 00, AIR TERMINAL UNITS.

1.3 QUALITY ASSURANCE

A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

B. Qualifications:

1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.

2. The TAB agency shall be either a certified member of AABC, NEEB, TABB or NEBB to perform TAB service for HVAC, water balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another qualified TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC, TABB or NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency’s review shows unsatisfactory work performed by the predecessor agency.

3. TAB Specialist: The TAB specialist shall be either a member of AABC or TABB or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another TAB Specialist for approval. Any individual that has been the subject of

disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.

4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling and reporting all TAB work and related activities and will provide necessary information as required by the COR. The responsibilities would specifically include:
   a. Shall directly supervise all TAB work.
   b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC, TABB or NEBB.
   c. Would follow all TAB work through its satisfactory completion.
   d. Shall provide final markings of settings of all HVAC adjustment devices.
   e. Permanently mark location of duct test ports.
   f. Shall document critical paths from the fan or pump. These critical paths are ones in which are 100% open from the fan or pump to the terminal device. This will show the least amount of restriction is being imposed on the system by the TAB firm.
5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC, TABB or NEBB

C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards, TABB/SMACNA International Standards, or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose.

D. TAB Criteria:

1. One or more of the applicable AABC, NEBB,TABB or SMACNA publications, supplemented by ASHRAE Handbook "2019 HVAC Applications" Chapter 39, and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow ASHRAE Handbook "2019 HVAC Applications", Chapter 39, as a guideline. Air Filter resistance during tests, artificially imposed, if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
   a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.
   b. Air terminal units (maximum values): Minus 2 percent to plus 10 percent.
   c. Exhaust hoods/cabinets: 0 percent to plus 10 percent.
   d. Minimum outside air: 0 percent to plus 10 percent.
   e. Individual room air outlets and inlets, and air flow rates not mentioned above: Minus 5 percent to plus 10 percent except if the air to a space is 100 CFM or less the tolerance would be minus 5 to plus 5 percent.
   f. Chilled water coils: Minus 0 percent to plus 5 percent.
3. Systems shall be adjusted for energy efficient operation as described in PART 3.
4. Typical TAB procedures and critical path results shall be demonstrated to the COR for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the COR one of which shall be a critical path) and one hydronic system (three coils) as follows:
   a. When field TAB work begins.
   b. During each partial final inspection and the final inspection for the project if requested by VA.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.

C. For use by the COR staff, submit one complete set of applicable AABC, NEBB or TABB publications that will be the basis of TAB work.

D. Submit Following for Review and Approval:

1. Design Review Report within 90 days after the system layout on air and water side is completed by the Contractor.
2. Systems inspection report on equipment and installation for conformance with design.
3. Duct Air Leakage Test Report.
4. Systems Readiness Report.
5. Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
7. Include in each report the critical path for each balanced branch (air and hydronic. Every branch shall have at least one terminal device damper 100% open.

E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area with noted critical paths.

1.5 APPLICABLE PUBLICATIONS

A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.

B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):

Handbook 2019.....HVAC Applications ASHRAE Handbook, Chapter 39, Testing, Adjusting, and Balancing and Chapter 49, Sound and Vibration Control

C. Associated Air Balance Council (AABC):

7th Edition 2016 .....AABC National Standards for Total System Balance

D. National Environmental Balancing Bureau (NEBB):

9th Edition 2019 .....Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

3rd Edition 2015 .....Procedural Standards for the Measurement of Sound and Vibration

2rd Edition 2019 ... Standard for Whole Building Technical Commissioning of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

3rd Edition 2005 .....HVAC SYSTEMS Testing, Adjusting and Balancing

TABB- TAB Procedural Guide Current Edition

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC and BOILER PLANT INSULATION Provide for repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

A. Refer to TAB Criteria in Article, Quality Assurance.

B. Obtain applicable contract documents and copies of approved submittals for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications and advise the COR of any design deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

A. Inspect equipment and installation for conformance with design.

B. The inspection and report is to be done after air distribution equipment is on site and duct installation has begun, but well in

advance of performance testing and balancing work. The purpose of the inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.

C. Reports: Follow check list format developed by AABC, NEBB or SMACNA (TABB), supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT

TAB Agency shall perform the leakage test as outlined in "Duct leakage Tests and Repairs" in Section 23 31 00, HVAC DUCTS and CASINGS for TAB agency’s role and responsibilities in witnessing, recording and reporting of deficiencies.

3.5 SYSTEM READINESS REPORT

A. Inspect each System to ensure that it is complete including installation and operation of controls. Submit report to RE in standard format and forms prepared and or approved by the Commissioning Agent.

B. Verify that all items such as ductwork piping, dampers, valves, ports, terminals, connectors, etc., that is required for TAB are installed. Provide a report to the COR.

3.6 TAB REPORTS

A. The TAB contractor shall provide raw data immediately in writing to the COR if there is a problem in achieving intended results before submitting a formal report.

B. If over 20 percent of readings in the report fall outside the acceptable range, the TAB report shall be considered invalid, and all contract TAB work shall be repeated after engineering and construction have been evaluated and re-submitted for approval at no additional cost to the owner.

C. Do not proceed with the remaining systems until intermediate report is approved by the COR.

3.7 TAB PROCEDURES

A. TAB shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC, TABB or NEBB. Balancing shall be done proportionally to all applicable systems.

1. At least one trunk damper shall be 100% open.

2. At least one branch damper shall be 100%open per trunk.
3. At least one terminal device duct be 100% open per branch.

B. General: During TAB all related system components shall be in full operation. Fan and pump rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set controls and/or block off parts of distribution systems to simulate design operation of variable volume air or water systems for test and balance work.

C. Allow seven days in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.

D. Air Balance and Equipment Test: Include air handling units, fans, terminal units, room diffusers/outlets/inlets, and exhaust systems.
1. Artificially load air filters by partial blanking to produce static air pressure drop of manufacturer’s recommended pressure drop.
2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC .
3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other HVAC controls function properly.
4. Variable air volume (VAV) systems:
   a. Coordinate TAB, including system volumetric controls, with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
   b. Section 23 36 00, AIR TERMINAL UNITS, specifies that maximum and minimum flow rates for air terminal units (ATU) be factory set. Check and readjust ATU flow rates if necessary to meet design criteria. Balance air distribution from ATU on full cooling maximum scheduled cubic meters per minute (cubic feet per minute). Reset room thermostats and check ATU operation from maximum to minimum cooling, to the heating mode, and back to cooling. Record and report the heating coil leaving air temperature when the ATU is in the maximum heating mode. Record and report outdoor air flow rates under all operating conditions (The test shall demonstrate that the minimum outdoor air ventilation rate shall remain constant under al operating conditions).

c. Adjust operating pressure control setpoint to maintain the design flow to each space with the lowest setpoint.

5. Record final measurements for air handling equipment performance data sheets.

E. Water Balance and Equipment Test: Include coils:

1. Adjust flow rates for equipment. Set coils to values on equipment submittals, if different from values on contract drawings.
2. Record final measurements for hydronic equipment on performance data sheets. Include entering and leaving water temperatures for heating and cooling coils. Include entering and leaving air temperatures (DB/WB for cooling coils) for air handling units and reheat coils. Make air and water temperature measurements at the same time.

3.8 VIBRATION TESTING

A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC . Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger, including centrifugal/screw compressors, cooling towers, pumps, fans and motors.

B. Record initial measurements for each unit of equipment on test forms and submit a report to the COR. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the COR.

3.9 SOUND TESTING

A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

1. Take readings in rooms, approximately fifteen (15) percent of all rooms. The COR may designate the specific rooms to be tested.

B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC, TABB or NEBB.

C. Sound reference levels, formulas and coefficients shall be according to 2019 ASHRAE Handbook, "HVAC Applications", Chapter 49, SOUND AND VIBRATION CONTROL.

D. Determine compliance with specifications as follows:

1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:
   a. Reduce the background noise as much as possible by shutting off unrelated audible equipment.
   b. Measure octave band sound pressure levels with specified equipment "off."
   c. Measure octave band sound pressure levels with specified equipment "on."
   d. Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

   Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.
   e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.
2. When sound power levels are specified:
   a. Perform steps 1.a. thru 1.d., as above.
   b. For indoor equipment: Determine room attenuating effect, i.e., difference between sound power level and sound pressure level. Determined sound power level will be the sum of sound pressure level due to equipment plus the room attenuating effect.
   c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use 10 meters (30 feet) for sound level location.
3. Where sound pressure levels are specified in terms of dB(A measure sound levels using the "A" scale of meter. Single value readings will be used instead of octave band analysis.

E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the COR and the necessary sound tests shall be repeated.

F. Test readings for sound testing could go higher than 15 percent if determination is made by the COR based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the COR.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.13 CRITICAL FLOW PATH

A. Provide a documented critical path for all fluid flows. There shall be at least one terminal device that can be traced back to the fan or pump where there is no damper or valves that are less than 100% open.

- - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 23 07 11
HVAC AND BOILER PLANT INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION

A. Field applied insulation for thermal efficiency and condensation control for:

1. HVAC piping, ductwork, and equipment.

B. Definitions

1. ASJ: All service jacket, white finish facing or jacket.
2. Air-conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
3. Cold: Equipment, ductwork or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
4. Concealed: Ductwork and piping above ceilings and in chases, and pipe spaces.
5. Exposed: Piping, ductwork, and equipment exposed to view in finished areas including mechanical and electrical equipment rooms or exposed to outdoor weather. Attics and crawl spaces where air handling units are located are mechanical rooms. Shafts, chases, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
6. FSK: Foil-scrim-kraft facing.
7. Hot: HVAC Ductwork handling air at design temperature above 16 degrees C (60 degrees F); HVAC equipment or piping handling media above 41 degrees C (105 degrees F).
8. Density: kg/m^3 - kilograms per cubic meter (Pcf - pounds per cubic foot).
9. Runouts: Branch pipe connections up to 25 mm (one inch) nominal size to fan coil units or reheat coils for terminal units.
10. Thermal conductance: Heat flow rate through materials.
    a. Flat surface: Watt per square meter (BTU per hour per square foot).
    b. Pipe or Cylinder: Watt per square meter (BTU per hour per linear foot).
11. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).
12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor

retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.

13. HPS: High pressure steam (415 kPa [60 psig] and above).
14. HPR: High pressure steam condensate return.
15. MPS: Medium pressure steam (110 kPa [16 psig] thru 414 kPa [59 psig].
16. MPR: Medium pressure steam condensate return.
17. LPS: Low pressure steam (103 kPa [15 psig] and below).
18. LPR: Low pressure steam condensate gravity return.
19. PC: Pumped condensate.
20. HWH: Hot water heating supply.
21. HWHR: Hot water heating return.
22. GH: Hot glycol-water heating supply.
23. GHR: Hot glycol-water heating return.
24. FWPD: Feedwater pump discharge.
25. FWPS: Feedwater pump suction.
26. CTPD: Condensate transfer pump discharge.
27. CTPS: Condensate transfer pump suction.
28. VR: Vacuum condensate return.
29. CPD: Condensate pump discharge.
30. R: Pump recirculation.
31. FOS: Fuel oil supply.
32. FOR: Fuel oil return.
33. CW: Cold water.
34. SW: Soft water.
35. HW: Hot water.
36. CH: Chilled water supply.
37. CHR: Chilled water return.
38. GC: Chilled glycol-water supply.
39. GCR: Chilled glycol-water return.
40. RS: Refrigerant suction.
41. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 RELATED WORK

A Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 07 84 00, FIRESTOPPING.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

D. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

E. Section 23 21 13, HYDRONIC PIPING.

F. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING

1.3 QUALITY ASSURANCE

A. Refer to article QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

4.3.3.1 Pipe insulation and coverings, duct coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels, and duct silencers used in duct systems, unless otherwise provided for in 4.3.3.1.1 or 4.3.3.1.2., shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, *Standard Method of Test of Surface Burning Characteristics of Building Materials*.

4.3.3.1.1 Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. *(See 4.2.4.2.)*

4.3.3.1.2 The flame spread and smoke developed index requirements of 4.3.3.1.1 shall not apply to air duct weatherproof coverings where they are located entirely outside of a building, do not penetrate a wall or roof, and do not create an exposure hazard.

4.3.3.2 Closure systems for use with rigid and flexible air ducts tested in accordance with UL 181, Standard for Safety Factory-Made Air Ducts and Air Connectors, shall have been tested, listed, and used in accordance with the conditions of their listings, in accordance with one of the following:

(1) UL 181A, Standard for Safety Closure Systems for Use with Rigid Air Ducts and Air Connectors

(2) UL 181B, Standard for Safety Closure Systems for Use with Flexible Air Ducts and Air Connectors

4.3.3.3 Air duct, panel, and plenum coverings and linings, and pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.3.4 Air duct coverings shall not extend through walls or floors that are required to be fire stopped or required to have a fire resistance rating, unless such coverings meet the requirements of 5.4.6.4.

4.3.3.5* Air duct linings shall be interrupted at fire dampers to prevent interference with the operation of devices.

4.3.3.6 Air duct coverings shall not be installed to conceal or prevent the use of any service opening.

4.3.10.2.6 Materials exposed to the airflow shall be noncombustible or limited combustible and have a maximum smoke developed index of 50 or comply with the following.

4.3.10.2.6.1 Electrical wires and cables and optical fiber cables shall be listed as noncombustible or limited combustible and have a maximum smoke developed index of 50 or shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with NFPA 262, Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces.

4.3.10.2.6.2 Pneumatic tubing for control systems shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 1820, Standard for Safety Fire Test of Pneumatic Tubing for Flame and Smoke Characteristics.

4.3.10.2.6.4 Optical-fiber and communication raceways shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 2024, Standard for Safety Optical-Fiber Cable Raceway.

4.3.10.2.6.6 Supplementary materials for air distribution systems shall be permitted when complying with the provisions of 4.3.3.

5.4.6.4 Where air ducts pass through walls, floors, or partitions that are required to have a fire resistance rating and where fire dampers are not required, the opening in the construction around the air duct shall be as follows:

(1) Not exceeding a 25.4 mm (1 in.) average clearance on all sides

(2) Filled solid with an approved material capable of preventing the passage of flame and hot gases sufficient to ignite cotton waste when subjected to the time-temperature fire conditions required for fire barrier penetration as specified in NFPA 251, *Standard Methods of Tests of Fire Endurance of Building Construction and Materials*

2. Test methods: ASTM E84, UL 723, or NFPA 255.
3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal

conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.

4. All materials shall be compatible and suitable for service temperature and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings:

1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
   a. Insulation materials: Specify each type used and state surface burning characteristics.
   b. Insulation facings and jackets: Each type used. Make it clear that white finish will be furnished for exposed ductwork, casings and equipment.
   c. Insulation accessory materials: Each type used.
   d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
   e. Refer to applicable specification paragraph numbers for coordination.

C. Samples:

1. Each type of insulation: Minimum size 10 cm (4 inches) square for board/block/ blanket; 15 cm (6 inches) long, full diameter for round types.
2. Each type of facing and jacket: Minimum size 10 cm (4 inches square).
3. Each accessory material: Minimum 120 ML (4 ounce) liquid container or 120 gram (4 ounce) dry weight for adhesives / cement / mastic.

1.5 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. Federal Specifications (Fed. Spec.):

L-P-535E (2)- 1999.....Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.

C. Military Specifications (Mil. Spec.):

MIL-A-3316C -1987 Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (1)-2016 Adhesive, Flexible Unicellular-Plastic Thermal Insulation

MIL-C-19565C (1)- 2016 Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier

MIL-C-20079H-1987 .....Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass

D. American Society for Testing and Materials (ASTM):

A167-99 2014.....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

B209-2014.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C411-2019.....Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation

C449-2019.....Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement

C533-2017.....Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation

C534-2017.....Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C547-2017.....Standard Specification for Mineral Fiber pipe Insulation

C552-07 .....Standard Specification for Cellular Glass Thermal Insulation

C553-2015.....Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications

C585-2016.....Standard Practice for Inner and Outer Diameters of Rigid Thermal Insulation for Nominal Sizes of Pipe and Tubing (NPS System) R (1998)

C612-2014.....Standard Specification for Mineral Fiber Block and Board Thermal Insulation

C1126- 2019.....Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation

C1136- 2017.....Standard Specification for Flexible, Low Permeance Vapor Retarders for Thermal Insulation

D1668-97a 2017 .....Standard Specification for Glass Fabrics (Woven and Treated) for Roofing and Waterproofing

E84-2014.....Standard Test Method for Surface Burning Characteristics of Building Materials

E119-2007.....Standard Test Method for Fire Tests of Building Construction and Materials

E136-2019.....Standard Test Methods for Behavior of Materials in a Vertical Tube Furnace at 750 degrees C (1380 F)

E. National Fire Protection Association (NFPA):

90A-current edition.....Standard for the Installation of Air Conditioning and Ventilating Systems

96-current edition.....Standard~~s~~ for Ventilation Control and Fire Protection of Commercial Cooking Operations

101-current edition.....Life Safety Code

251-current edition.....Standard methods of Tests of Fire Endurance of Building Construction Materials

255-current edition.....Standard Method of tests of Surface Burning Characteristics of Building Materials

F. Underwriters Laboratories, Inc (UL):

723-current edition.....UL Standard for Safety Test for Surface Burning Characteristics of Building Materials with Revision of 09/08

G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):

SP58-current edition....Pipe Hangers and Supports Materials, Design, and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER OR FIBER GLASS

A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m^3 (3 pcf), k = 0.037 (0.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.

B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 32 kg/m^3 (2 pcf), k = 0.04 (0.27) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.

C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

2.2 RIGID CELLULAR PHENOLIC FOAM

A. Preformed (molded) pipe insulation, ASTM C1126, type III, grade 1, k = 0.021(0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

B. Equipment and Duct Insulation, ASTM C 1126, type II, grade 1, k = 0.021 (0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with rigid cellular phenolic insulation and covering, and all service vapor retarder jacket.

2.3 CELLULAR GLASS CLOSED-CELL

A. Comply with Standard ASTM C177, C518, density 120 kg/m^3 (7.5 pcf) nominal, k = 0.033 (0.29) at 24~~0~~ degrees C (75 degrees F).

B. Pipe insulation for use at temperatures up to 200 degrees C (400 degrees F) with all service vapor retarder jacket.

2.4 POLYISOCYANURATE CLOSED-CELL RIGID

A. Preformed (fabricated) pipe insulation, ASTM C591, type IV, K=0.027(0.19) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for use at temperatures up to 149 degree C (300 degrees F) with factory applied PVDC or all service vapor retarder jacket with polyvinyl chloride premolded fitting covers.

B. Equipment and duct insulation, ASTM C 591, type IV, K=0.027(0.19) at 24 degrees C (75 degrees F), for use at temperatures up to 149 degrees C (300 degrees F) with PVDC or all service jacket vapor retarder jacket.

2.5 FLEXIBLE ELASTOMERIC CELLULAR THERMAL

ASTM C177, C518, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from minus 4 degrees C (40 degrees F) to 93 degrees C (200 degrees F). No jacket required.

2.6 INSULATION FACINGS AND JACKETS

A. Vapor Retarder, higher strength with low water permeance $\underline{=}$ 0.02 or less perm rating, Beach puncture 50 units for insulation facing on exposed ductwork, casings and equipment, and for pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.

B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.

C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.

D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping and ductwork as well as on interior piping and ductwork exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.) in high humidity areas conveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.

F. Factory composite materials may be used if they have been tested and certified by the manufacturer.

G. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.

H. Aluminum Jacket-Piping systems: ASTM B209, 3003 alloy, H-14 temper, 0.6 mm (0.023 inch) minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.6 mm (0.024) inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless-steel bands shall be installed on all circumferential joints. Bands shall be 13 mm (0.5 inch) wide on 450 mm (18 inch) centers. System shall be weatherproof if utilized for outside service.

2.7 PIPE COVERING PROTECTION SADDLES

A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m^3 (3.0 pcf).

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size mm (inches)	Insert Blocks cm (inches)
Up through 125 (5)	15 (6) long
150 (6)	15 (6) long

B. Warm or hot pipe supports: Premolded pipe insulation (180-degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m^3 (3.0 pcf).

2.8 ADHESIVE, MASTIC, CEMENT

A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.

B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.

C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.

D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.

E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.

F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.

G. Other: Insulation manufacturers' published recommendations.

2.9 MECHANICAL FASTENERS

A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel-coated or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

B. Staples: Outward clinching Monel or galvanized steel.

C. Bands: 13 mm (0.5 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

2.10 REINFORCEMENT AND FINISHES

A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).

B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.

C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.

D. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick (28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.

E. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.11 FIRESTOPPING MATERIAL

Other than pipe and duct insulation, refer to Section 07 84 00 FIRESTOPPING.

2.12 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

A. Required pressure tests of duct and piping joints and connections shall be completed and the work approved by the COR for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.

B. Except for specific exceptions, insulate entire specified equipment, piping (pipe, fittings, valves, accessories), and duct systems. Insulate each pipe and duct individually. Do not use scrap pieces of insulation where a full-length section will fit.

C. Insulation materials shall be installed in a first-class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees C (60 degrees F) and below. Lap and seal vapor retarder over ends and exposed edges of insulation. Anchors, supports and other metal

projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 15 cm (6 inches).

D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.

E. Construct insulation on parts of equipment that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.

F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.

G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.

H. HVAC work not to be insulated:

1. Internally insulated ductwork and air handling units.
2. Relief air ducts (Economizer cycle exhaust air).
3. Exhaust air ducts and plenums, or ventilation exhaust air shafts.
4. In hot piping: Unions, flexible connectors, control valves, safety valves and discharge vent piping, vacuum breakers, or thermostatic vent valves. Insulate piping to within approximately 7 cm (3 inches) of uninsulated items.

I. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.

J. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow fitting. Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.

K. Firestop Pipe and Duct insulation:

1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
2. Pipe and duct penetrations requiring fire stop insulation including, but not limited to the following:
   a. Pipe risers through floors
   b. Pipe or duct chase walls and floors
   c. Smoke partitions
   d. Fire partitions

L. Freeze protection of above grade outdoor piping (overheat tracing tape): 25 mm (1 inch) thick insulation for all pipe sizes. Provide metal jackets for all pipes. Provide for cold water make-up to humidifier piping and chilled water piping as described in Section 23 21 13, HYDRONIC PIPING (electrical heat tracing systems).

M. Provide vapor barrier jackets over insulation as follows:
1. All piping and ductwork exposed to outdoor weather.
2. All interior piping and ducts conveying fluids exposed to outdoor air (i.e. in attics, ventilated (not air conditioned) spaces, etc.) below ambient air temperature in high humidity areas.

N. Provide metal jackets over insulation as follows:
1. All piping and ducts exposed to outdoor weather.
2. A 50 mm (2 inch) overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

A. Mineral Fiber Board:
1. Faced board: Apply board on pins spaced not more than 30 cm (12 inches) on center each way, and not less than 7 cm (3 inches) from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.
2. Plain board:
   a. Insulation shall be scored, beveled or mitered to provide tight joints and be secured to equipment with bands spaced 22 cm (9 inches) on center for irregular surfaces or with pins and clips

on flat surfaces. Use corner beads to protect edges of insulation.

3. Exposed, unlined ductwork and equipment in unfinished areas, mechanical and electrical equipment rooms and attics, interstitial spaces and duct work exposed to outdoor weather:
   a. 50 mm (2 inch) thick insulation faced with ASJ (white all service jacket): Supply air duct and after filter housing.
   b. 50 mm (2 inch) thick insulation faced with ASJ: Return air duct, mixed air plenums and prefilter housing.
   d. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a maximum water vapor permeability of 0.001 perms.

B. Flexible Mineral Fiber Blanket:
   1. Adhere insulation to metal with 7 cm (3 inch) wide strips of insulation bonding adhesive at 20 cm (8 inches) on center all around duct. Additionally, secure insulation to bottom of ducts exceeding 60 cm (24 inches) in width with pins welded or adhered on 45 cm (18 inch) centers. Secure washers on pins. Butt insulation edges and seal joints with laps and butt strips. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations with mastic. Sagging duct insulation will not be acceptable. Install firestop duct insulation where required.
   2. Supply air ductwork to be insulated includes main and branch ducts from AHU discharge to room supply outlets, and the bodies of ceiling outlets to prevent condensation. Insulate sound attenuator units, coil casings and damper frames. To prevent condensation, insulate trapeze type supports and angle iron hangers for flat oval ducts that are in direct contact with metal duct.
   3. Concealed supply air ductwork.
      a. Above ceilings at a roof level, in attics, and duct work exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with FSK.
      b. Above ceilings for other than roof level: 40 mm (1-1/2 inch) thick insulation faced with FSK.
   4. Concealed return air duct:

a. In attics (where not subject to damage) and where exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with FSK,
b. Above ceilings at a roof level, unconditioned areas, and in chases with external wall or containing steam piping; 40 mm (1-1/2 inch) thick, insulation faced with FSK.
c. In interstitial spaces (where not subject to damage): 40 mm (1-1/2-inch-thick insulation faced with FSK.
d. Concealed return air ductwork in other locations need not be insulated.

C. Molded Mineral Fiber Pipe and Tubing Covering:
1. Fit insulation to pipe or duct, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
2. Contractor's options for fitting, flange and valve insulation:
a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
b. Factory premolded, one-piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).

3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

D. Rigid Cellular Phenolic Foam:

1. Rigid closed cell phenolic insulation may be provided for piping, ductwork and equipment for temperatures up to 121 degrees C (250 degrees F).
2. Note the NFPA 90A burning characteristics requirements of 25/50 in paragraph 1.3.B
3. Provide secure attachment facilities such as welding pins.
4. Apply insulation with joints tightly drawn together
5. Apply adhesives, coverings, neatly finished at fittings, and valves.
6. Final installation shall be smooth, tight, neatly finished at all edges.
7. Minimum thickness in millimeters (inches) specified in the schedule at the end of this section.
8. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a maximum water vapor permeance of 0.00 perms.
9. Condensation control insulation: Minimum 25 mm (1.0 inch) thick for all pipe sizes.
   a. HVAC: Cooling coil condensation piping to waste piping fixture or drain inlet. Omit insulation on plastic piping in mechanical rooms.

E. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.
2. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a water vapor permeability of 0.00 perms.

F. Polyisocyanurate Closed-Cell Rigid Insulation:

1. Polyisocyanurate closed-cell rigid insulation (PIR) may be provided for exterior piping, equipment and ductwork for temperature up to 149 degree C (300-degree F).
2. Install insulation, vapor barrier and jacketing per manufacturer’s recommendations. Particular attention should be paid to recommendations for joint staggering, adhesive application, external

hanger design, expansion/contraction joint design and spacing and vapor barrier integrity.

3. Install insulation with all joints tightly butted (except expansion) joints in hot applications).
4. If insulation thickness exceeds 63 mm (2.5 inches), install as a double layer system with longitudinal (lap) and butt joint staggering as recommended by manufacturer.
5. For cold applications, vapor barrier shall be installed in a continuous manner. No staples, rivets, screws or any other attachment device capable of penetrating the vapor barrier shall be used to attach the vapor barrier or jacketing. No wire ties capable of penetrating the vapor barrier shall be used to hold the insulation in place. Banding shall be used to attach PVC or metal jacketing.
6. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill PVC elbow jacket is prohibited on cold applications.
7. For cold applications, the vapor barrier on elbows/fittings shall be either mastic-fabric-mastic or 2 mil thick PVDC vapor barrier adhesive tape.
8. All PVC and metal jacketing shall be installed to naturally shed water. Joints shall point down and shall be sealed with either adhesive or caulking (except for periodic slip joints).
10. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.
11. Note the NFPA 90A burning characteristic requirements of 25/50 in paragraph 1.3B. Refer to paragraph 3.1 for items not to be insulated.
12. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section.

G. Flexible Elastomeric Cellular Thermal Insulation:

1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats

of weather resistant finish as recommended by the insulation manufacturer.

2. Pipe and tubing insulation:
   a. Use proper size material. Do not stretch or strain insulation.
   b. To avoid undue compression of insulation, provide cork stoppers or wood inserts at supports as recommended by the insulation manufacturer. Insulation shields are specified under Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
   c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Make changes from mineral fiber insulation in a straight run of pipe, not at a fitting. Seal joint with tape.
3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.
4. Pipe insulation: nominal thickness in millimeters (inches) as specified in the schedule at the end of this section.
5. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.

3.3 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.4 PIPE INSULATION SCHEDULE

Provide insulation for piping systems as scheduled below:

Insulation Wall Thickness Millimeters (Inches)					
		Nominal Pipe Size Millimeters (Inches)			
Operating Temperature Range/Service	Insulation Material	Less than 25 (1)	25 - 32 (1 - 1¼)	38 - 75 (1½ - 3)	100 (4) and Above

	Insulation Wall Thickness Millimeters (Inches)				
100-121 degrees C (212-250 degrees F) (LPS)	Mineral Fiber (Above ground piping only)	62 (2.5)	62 (2.5)	75 (3.0)	75 (3.0)
100-121 degrees C (212-250 degrees F) (LPS)	Rigid Cellular Phenolic Foam	50 (2.0)	50 (2.0)	75 (3.0)	75 (3.0)
38-94 degrees C (100-200 degrees F) (HWH and HWHR)	Mineral Fiber (Above ground piping only)	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
38-99 degrees C (100-211 degrees F) (HWH and HWHR)	Rigid Cellular Phenolic Foam	38 (1.5)	38 (1.5)	50 (2.0)	50 (2.0)
39-99 degrees C (100-211 degrees F) (HWH and HWHR)	Polyiso-cyanurate Closed-Cell Rigid (Exterior Locations only)	38 (1.5)	38 (1.5)	----	----
38-94 degrees C (100-200 degrees F) (HWH and HWHR)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	----	----
4-16 degrees C (40-60 degrees F) (CH and CHR)	Rigid Cellular Phenolic Foam	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)
4-16 degrees C (40-60 degrees F) (CH and CHR)	Cellular Glass Closed-Cell	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)
4-16 degrees C (40-60 degrees F) (CH and CHR)	Polyiso-cyanurate Closed-Cell Rigid (Exterior Locations only)	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)
(40-60 degrees F) (CH and CHR)	Flexible Elastomeric Cellular Thermal (Above ground piping only)	38 (1.5)	38 (1.5)	38 (1.5)	38 (1.5)

- - - E N D - - -

SECTION 23 08 00
COMMISSIONING OF HVAC SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 33 00 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

D. Section 23 05 41 NOISE AND VIBRATION CONTROL for HVAC PIPING AND EQUIPMENT.

E. Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC.

F. Section 23 09 23 DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

1.3 SUMMARY

A. This Section includes requirements for commissioning the HVAC systems of the related subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 23 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance personnel in accordance with the requirements of Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and of Division 23, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility HVAC systems commissioning will include the systems listed in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.7 APPLICABLE PUBLICATIONS

A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.

B. Department of Veterans Affairs (VA):

PG 18-10 2007.....Mission Critical Facilities - DRAFT

PG 18-10 2007.....Life-Safety Protected Facilities - DRAFT

C. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):

HANDBOOK 2019.....HVAC Applications ASHRAE Handbook, Chapter 39, Testing, Adjusting, and Balancing, Chapter 44, HVAC Commissioning and Chapter 49, Sound and Vibration Control

HANDBOOK 2021.....HVAC Fundamentals ASHRAE Handbook, Chapter 8, Sound and Vibration

D. Associated Air Balance Council (AABC):

7th Edition 2016.....AABC National Standards for Total System Balance

E. National Environmental Balancing Bureau (NEBB):

9th Edition 2019.....Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

3rd Edition 2015 .....Procedural Standards for the Measurement of Sound and Vibration

2nd Edition 2019 ... Standard for Whole Building Technical Commissioning of New Construction

F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

006 2006.....HVAC Duct Construction Standard - Metal and Flexible Duct

3rd Edition 2005 ... HVAC Systems Testing, Adjusting and Balancing

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of HVAC systems will require inspection of individual elements of the HVAC systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and the Commissioning plan to schedule HVAC systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. Refer to Sections 23 05 41 NOISE AND VIBRATION CONTROL for HVAC PIPING AND EQUIPMENT, Section 23 05 93 TESTING, ADJUSTING, AND BALANCING FOR HVAC and Section 23 09 23 DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC requirements. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the

checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 23 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the COR. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional requirements.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the COR and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The instruction shall be scheduled in coordination with the VA COR

after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 23 Sections for additional Contractor training requirements.

---END---

---INTENTIONALLY BLANK---

SECTION 23 09 23
DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. Provide modifications to the existing direct-digital control system as indicated on the project documents, point list, interoperability tables, drawings and as described in these specifications. Include a complete and working direct-digital control system. Include all engineering, programming, controls and installation materials, installation labor, commissioning and start-up, training, final project documentation and warranty.

1. The existing direct-digital control system consists of high-speed, peer-to-peer network of DDC controllers, a control system server, and an Engineering Control Center.
2. The work administered by this Section of the technical specifications shall include all labor, materials, special tools, equipment, enclosures, power supplies, software, software licenses, Project specific software configurations and database entries, interfaces, wiring, tubing, installation, labeling, engineering, calibration, documentation, submittals, testing, verification, training services, permits and licenses, transportation, shipping, handling, administration, supervision, management, insurance, Warranty, specified services and items required for complete and fully functional Controls Systems.
3. The control system shall be designed such that each mechanical system shall operate under stand-alone mode. The contractor administered by this Section of the technical specifications shall provide controllers for each mechanical system. In the event of a network communication failure, or the loss of any other controller, the control system shall continue to operate independently. Failure of the ECC shall have no effect on the field controllers, including those involved with global strategies.

B. Some products are furnished but not installed by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractor’s formal acknowledgements in writing prior to submission the installation of the products. These products include the following:

1. Control valves.
2. Flow switches.
3. Flow meters.
4. Sensor wells and sockets in piping.
5. Terminal unit controllers.

C. Some products are installed but not furnished by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractor's formal acknowledgements in writing prior to submission the procurement of the products. These products include the following:
1. Factory-furnished accessory thermostats and sensors furnished with unitary equipment.

D. Some products are not provided by, but are nevertheless integrated with the work executed by, the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractor's formal acknowledgements in writing prior to submission the particulars of the products. These products include the following:
1. Fire alarm systems. If zoned fire alarm is required by the project-specific requirements, this interface shall require multiple relays, which are provided and installed by the fire alarm system contractor, to be monitored.
2. Terminal units' velocity sensors
3. Variable frequency drives. These controls, if not native BACnet, will require a BACnet Gateway.
4. The following systems have limited control (as individually noted below) from the ECC:
   a. Process refrigerators and freezers: in pharmacies: high temperature, trending and status alarms.

E. Responsibility Table:

Work/Item/System	**Furnish**	**Install**	**Low Voltage Wiring**	**Line Power**
Control system low voltage and communication wiring	23 09 23	23 09 23	23 09 23	N/A
Terminal units	23	23	N/A	26
Controllers for terminal units	23 09 23	23	23 09 23	16
LAN conduits and raceway	23 09 23	23 09 23	N/A	N/A
Automatic dampers (not furnished with equipment)	23 09 23	23	N/A	N/A
Automatic damper actuators	23 09 23	23 09 23	23 09 23	23 09 23
Manual valves	23	23	N/A	N/A
Automatic valves	23 09 23	23	23 09 23	23 09 23
Pipe insertion devices and taps, flow and pressure stations.	23	23	N/A	N/A
Thermowells	23 09 23	23	N/A	N/A
Current Switches	23 09 23	23 09 23	23 09 23	N/A
Control Relays	23 09 23	23 09 23	23 09 23	N/A
Power distribution system monitoring interfaces	23 09 23	23 09 23	23 09 23	26
All control system nodes, equipment, housings, enclosures and panels.	23 09 23	23 09 23	23 09 23	26
Smoke detectors	28 31 00	28 31 00	28 31 00	28 31 00
Fire/Smoke Dampers	23	23	28 31 00	28 31 00
Smoke Dampers	23	23	28 31 00	28 31 00
Fire Dampers	23	23	N/A	N/A
VFDs	23 09 23	26	23 09 23	26
Fire Alarm shutdown relay interlock wiring	28	28	28	26
Starters, HOA switches	23	23	N/A	26

F. This facility’s existing direct-digital control system is manufactured by JCI and its ECC is located at the Engineering Office. The existing system’s top-end communications is via BACnet. The contractor administered by this Section of the technical specifications shall observe the capabilities, communication network, services, spare capacity of the existing control system and its ECC prior to beginning work.

1. Provide new BACnet controllers that will communicate between the existing direct-digital control system and the new control system.

Real-time communication shall provide all object properties and read/write services shown on VA-approved interoperability schedules. The contractor administered by this Section of the technical specifications shall provide all necessary investigation and site-specific programming to execute the interoperability schedules.

G. This campus has standardized on an existing standard ASHRAE Standard 135, BACnet/IP Control System supported by a preselected controls service company. This entity is referred to as the "Control System Integrator" in this Section of the technical specifications. The Control system integrator is responsible for ECC system graphics and expansion. It also prescribes control system-specific commissioning/ verification procedures to the contractor administered by this Section of the technical specification. It lastly provides limited assistance to the contractor administered by this Section of the technical specification in its commissioning/verification work.

1. The General Contractor of this project shall directly hire the Control System Integrator in a contract separate from the contract procuring the controls contractor administered by this Section of the technical specifications.
2. The contractor administered by this Section of the technical specifications shall coordinate all work with the Control System Integrator. The contractor administered by this Section of the technical specifications shall integrate the ASHRAE Standard 135, BACnet/IP control network(s) with the Control System Integrator's area control through an Ethernet connection provided by the Control System Integrator.
3. The contractor administered by this Section of the technical specifications shall provide a peer-to-peer networked, stand-alone, distributed control system. This direct digital control (DDC) system shall include one portable operator terminal - laptop, one digital display unit, microprocessor-based controllers, instrumentation, end control devices, wiring, piping, software, and related systems. This contractor is responsible for all device mounting and wiring.

4. Responsibility Table:

Item/Task	**Section 23 09 23 contactor**	**Control system integrator**	**VA**
ECC expansion		X	
ECC programming		X	
Devices, controllers, control panels and equipment	X		
Point addressing: all hardware and software points including setpoint, calculated point, data point(analog/ binary), and reset schedule point	X		
Point mapping		X	
Network Programming	X		
ECC Graphics		X	
Controller programming and sequences	X		
Integrity of LAN communications	X		
Electrical wiring	X		
Operator system training		X	
LAN connections to devices	X		
LAN connections to ECC		X	
IP addresses			X
Overall system verification		X	
Controller and LAN system verification	X		

H. The direct-digital control system shall start and stop equipment, move (position) damper actuators and valve actuators, and vary speed of equipment to execute the mission of the control system. Use electricity as the motive force for all damper and valve actuators, unless use of pneumatics as motive force is specifically granted by the VA.

1.2 RELATED WORK

A. Section 23 21 13, Hydronic Piping.

B. Section 23 22 13, Steam and Condensate Heating Piping.

C. Section 23 31 00, HVAC Ducts and Casings.

D. Section 23 36 00, Air Terminal Units.

E. Section 23 74 13, Packaged, Outdoor, Central-Station Air-Handling Units.

F. Section 26 05 11, Requirements for Electrical Installations.

G. Section 26 05 19, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).

H. Section 26 05 26, Grounding and Bonding for Electrical Systems.

I. Section 26 05 33, Raceway and Boxes for Electrical Systems.

J. Section 26 27 26, Wiring Devices.

K. Section 26 29 11, Motor Starters.

L. Section 28 31 00, Fire Detection and Alarm.

1.3 DEFINITION

A. Algorithm: A logical procedure for solving a recurrent mathematical problem; A prescribed set of well-defined rules or processes for the solution of a problem in a finite number of steps.

B. ARCNET: ANSI/ATA 878.1 - Attached Resource Computer Network. ARCNET is a deterministic LAN technology; meaning it's possible to determine the maximum delay before a device is able to transmit a message.

C. Analog: A continuously varying signal value (e.g., temperature, current, velocity etc.

D. BACnet: A Data Communication Protocol for Building Automation and Control Networks , ANSI/ASHRAE Standard 135. This communications protocol allows diverse building automation devices to communicate data over and services over a network.

E. BACnet/IP: Annex J of Standard 135. It defines and allows for using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP sub-networks that share the same BACnet network number.

F. BACnet Internetwork: Two or more BACnet networks connected with routers. The two networks may sue different LAN technologies.

G. BACnet Network: One or more BACnet segments that have the same network address and are interconnected by bridges at the physical and data link layers.

H. BACnet Segment: One or more physical segments of BACnet devices on a BACnet network, connected at the physical layer by repeaters.

I. BACnet Broadcast Management Device (BBMD): A communications device which broadcasts BACnet messages to all BACnet/IP devices and other BBMDs connected to the same BACnet/IP network.

J. BACnet Interoperability Building Blocks (BIBBs): BACnet Interoperability Building Blocks (BIBBs) are collections of one or more BACnet services. These are prescribed in terms of an "A" and a "B" device. Both of these devices are nodes on a BACnet internetwork.

K. BACnet Testing Laboratories (BTL). The organization responsible for testing products for compliance with the BACnet standard, operated under the direction of BACnet International.

L. Baud: It is a signal change in a communication link. One signal change can represent one or more bits of information depending on type of transmission scheme. Simple peripheral communication is normally one bit per Baud. (e.g., Baud rate = 78,000 Baud/sec is 78,000 bits/sec, if one signal change = 1 bit).

M. Binary: A two-state system where a high signal level represents an "ON" condition and an "OFF" condition is represented by a low signal level.

N. BMP or bmp: Suffix, computerized image file, used after the period in a DOS-based computer file to show that the file is an image stored as a series of pixels.

O. Bus Topology: A network topology that physically interconnects workstations and network devices in parallel on a network segment.

P. Control Unit (CU): Generic term for any controlling unit, stand-alone, microprocessor based, digital controller residing on secondary LAN or Primary LAN, used for local controls or global controls

Q. Deadband: A temperature range over which no heating or cooling is supplied, i.e., 22-25 degrees C (72-78 degrees F), as opposed to a single point change over or overlap).

R. Device: a control system component that contains a BACnet Device Object and uses BACnet to communicate with other devices.

S. Device Object: Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.

T. Device Profile: A specific group of services describing BACnet capabilities of a device, as defined in ASHRAE Standard 135-2008, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing which service and BIBBs are supported by the device.

U. Diagnostic Program: A software test program, which is used to detect and report system or peripheral malfunctions and failures. Generally, this system is performed at the initial startup of the system.

V. Direct Digital Control (DDC): Microprocessor based control including Analog/Digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices in order to achieve a set of predefined conditions.

W. Distributed Control System: A system in which the processing of system data is decentralized and control decisions can and are made at the subsystem level. System operational programs and information are provided to the remote subsystems and status is reported back to the Engineering Control Center. Upon the loss of communication with the Engineering Control center, the subsystems shall be capable of operating in a stand-alone mode using the last best available data.

X. Download: The electronic transfer of programs and data files from a central computer or operation workstation with secondary memory devices to remote computers in a network (distributed) system.

Y. DXF: An AutoCAD 2-D graphics file format. Many CAD systems import and export the DXF format for graphics interchange.

Z. Electrical Control: A control circuit that operates on line or low voltage and uses a mechanical means, such as a temperature sensitive bimetal or bellows, to perform control functions, such as actuating a switch or positioning a potentiometer.

AA. Electronic Control: A control circuit that operates on low voltage and uses a solid-state components to amplify input signals and perform control functions, such as operating a relay or providing an output signal to position an actuator.

BB. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.

CC. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.

DD. Firmware: Firmware is software programmed into read only memory (ROM) chips. Software may not be changed without physically altering the chip.

EE. Gateway: Communication hardware connecting two or more different protocols. It translates one protocol into equivalent concepts for the other protocol. In BACnet applications, a gateway has BACnet on one side and non-BACnet (usually proprietary) protocols on the other side.

FF. GIF: Abbreviation of Graphic interchange format.

GG. Graphic Program (GP): Program used to produce images of air handler systems, fans, chillers, pumps, and building spaces. These images can be animated and/or color-coded to indicate operation of the equipment.

HH. Graphic Sequence of Operation: It is a graphical representation of the sequence of operation, showing all inputs and output logical blocks.

II. I/O Unit: The section of a digital control system through which information is received and transmitted. I/O refers to analog input (AI, digital input (DI), analog output (AO) and digital output (DO). Analog signals are continuous and represent temperature, pressure, flow rate etc., whereas digital signals convert electronic signals to digital pulses (values), represent motor status, filter status, on-off equipment etc.

JJ. I/P: a method for conveying and routing packets of information over LAN paths. User Datagram Protocol (UDP) conveys information to “sockets” without confirmation of receipt. Transmission Control Protocol (TCP) establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.

KK. JPEG: A standardized image compression mechanism stands for Joint Photographic Experts Group, the original name of the committee that wrote the standard.

LL. Local Area Network (LAN): A communication bus that interconnects operator workstation and digital controllers for peer-to-peer communications, sharing resources and exchanging information.

MM. Network Repeater: A device that receives data packet from one network and rebroadcasts to another network. No routing information is added to the protocol.

NN. MS/TP: Master-slave/token-passing (ISO/IEC 8802, Part 3). It is not an acceptable LAN option for VA health-care facilities. It uses twisted-pair wiring for relatively low speed and low cost communication.

OO. Native BACnet Device: A device that uses BACnet as its primary method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.

PP. Network Number: A site-specific number assigned to each network segment to identify for routing. This network number must be unique throughout the BACnet internetwork.

QQ. Object: The concept of organizing BACnet information into standard components with various associated properties. Examples include analog input objects and binary output objects.

RR. Object Identifier: An object property used to identify the object, including object type and instance. Object Identifiers must be unique within a device.

SS. Object Properties: Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.

TT. Operating system (OS): Software, which controls the execution of computer application programs.

UU. PCX: File type for an image file. When photographs are scanned onto a personal computer they can be saved as PCX files and viewed or changed by a special application program as Photo Shop.

VV. Peripheral: Different components that make the control system function as one unit. Peripherals include monitor, printer, and I/O unit.

WW. Peer-to-Peer: A networking architecture that treats all network stations as equal partners- any device can initiate and respond to communication with other devices.

XX. PICS: Protocol Implementation Conformance Statement, describing the BACnet capabilities of a device. All BACnet devices have published PICS.

YY. PID: Proportional, integral, and derivative control, used to control modulating equipment to maintain a setpoint.

ZZ. Repeater: A network component that connects two or more physical segments at the physical layer.

AAA. Router: a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN.

BBB. Sensors: devices measuring state points or flows, which are then transmitted back to the DDC system.

CCC. Thermostats : devices measuring temperatures, which are used in control of standalone or unitary systems and equipment not attached to the DDC system.

1.4 QUALITY ASSURANCE

A. Criteria:

1. Single Source Responsibility of subcontractor: The Contractor shall obtain hardware and software supplied under this Section and delegate the responsibility to a single source controls installation subcontractor. The controls subcontractor shall be responsible for the complete design, installation, and commissioning of the system. The controls subcontractor shall be in the business of design, installation and service of such building automation control systems similar in size and complexity.
2. Equipment and Materials: Equipment and materials shall be cataloged products of manufacturers regularly engaged in production and installation of HVAC control systems. Products shall be manufacturer’s latest standard design and have been tested and proven in actual use.
3. The controls subcontractor shall provide a list of no less than five similar projects which have building control systems as specified in this Section. These projects must be on-line and functional such that the Department of Veterans Affairs (VA) representative would observe the control systems in full operation.
4. The controls subcontractor shall have in-place facility within 50 miles with technical staff, spare parts inventory for the next five (5) years, and necessary test and diagnostic equipment to support the control systems.
5. The controls subcontractor shall have minimum of three years experience in design and installation of building automation systems similar in performance to those specified in this Section. Provide evidence of experience by submitting resumes of the project manager, the local branch manager, project engineer, the application

engineering staff, and the electronic technicians who would be involved with the supervision, the engineering, and the installation of the control systems. Training and experience of these personnel shall not be less than three years. Failure to disclose this information will be a ground for disqualification of the supplier.

6. Provide a competent and experienced Project Manager employed by the Controls Contractor. The Project Manager shall be supported as necessary by other Contractor employees in order to provide professional engineering, technical and management service for the work. The Project Manager shall attend scheduled Project Meetings as required and shall be empowered to make technical, scheduling and related decisions on behalf of the Controls Contractor.

B. Codes and Standards:

1. All work shall conform to the applicable Codes and Standards.
2. Electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference, and be so labeled.

1.5 PERFORMANCE

A. The system shall conform to the following:

1. Graphic Display: The system shall display up to four (4) graphics on a single screen with a minimum of twenty (20) dynamic points per graphic. All current data shall be displayed within ten (10) seconds of the request.
2. Graphic Refresh: The system shall update all dynamic points with current data within eight (8) seconds. Data refresh shall be automatic, without operator intervention.
3. Object Command: The maximum time between the command of a binary object by the operator and the reaction by the device shall be two(2) seconds. Analog objects shall start to adjust within two (2) seconds.
4. Object Scan: All changes of state and change of analog values shall be transmitted over the high-speed network such that any data used or displayed at a controller or work-station will be current, within the prior six (6) seconds.
5. Alarm Response Time: The maximum time from when an object goes into alarm to when it is annunciated at the workstation shall not exceed (10) seconds.

6. Program Execution Frequency: Custom and standard applications shall be capable of running as often as once every (5) seconds. The Contractor shall be responsible for selecting execution times consistent with the mechanical process under control.
7. Multiple Alarm Annunciations: All workstations on the network shall receive alarms within five (5) seconds of each other.
8. Performance: Programmable Controllers shall be able to execute DDC PID control loops at a selectable frequency from at least once every one (1) second. The controller shall scan and update the process value and output generated by this calculation at this same frequency.
9. Reporting Accuracy: Listed below are minimum acceptable reporting end-to-end accuracies for all values reported by the specified system:

Measured Variable	**Reported Accuracy**
Space temperature	±0.5°C (±1°F)
Ducted air temperature	±0.5°C [±1°F]
Outdoor air temperature	±1.0°C [±2°F]
Dew Point	±1.5°C [±3°F]
Water temperature	±0.5°C [±1°F]
Relative humidity	±2% RH
Water flow	±1% of reading
Air flow (terminal)	±10% of reading
Air flow (measuring stations)	±5% of reading
Carbon Monoxide (CO)	±5% of reading
Carbon Dioxide (CO_2)	±50 ppm
Air pressure (ducts)	±25 Pa [±0.1"w.c.]
Air pressure (space)	±0.3 Pa [±0.001"w.c.]
Water pressure	±2% of full scale *Note 1
Electrical Power	±0.5% of reading

Note 1: for both absolute and differential pressure

10. Control stability and accuracy: Control sequences shall maintain measured variable at setpoint within the following tolerances:

Controlled Variable	Control Accuracy	Range of Medium
Air Pressure (ducts)	±50 Pa (±0.2 in. w.g.)	0–1.5 kPa (0–6 in. w.g.)
Air Pressure (space)	±3 Pa (±0.01 in. w.g.)	-25 to 25 Pa (-0.1 to 0.1 in. w.g.)
Airflow	±10% of full scale	
Space Temperature	±1.0°C (±2.0°F)	
Duct Temperature	±1.5°C (±3°F)	
Humidity	±5% RH	
Fluid Pressure	±10 kPa (±1.5 psi)	0–1 MPa (1–150 psi)
Fluid Pressure	±250 Pa (±1.0 in. w.g.)	0–12.5 kPa (0–50 in. w.g.) differential

11. Extent of direct digital control: control design shall allow for at least the points indicated on the points lists on the drawings.

1.6 WARRANTY

A. Labor and materials for control systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.

B. Control system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and control devices.

C. The on-line support service shall allow the Controls supplier to dial out over telephone lines to or connect via (through password-limited access) VPN through the internet monitor and control the facility’s building automation system. This remote connection to the facility shall be within two (2) hours of the time that the problem is reported. This coverage shall be extended to include normal business hours, after business hours, weekend and holidays. If the problem cannot be resolved with on-line support services, the Controls supplier shall dispatch the qualified personnel to the job site to resolve the problem within 24 hours after the problem is reported.

D. Controls and Instrumentation subcontractor shall be responsible for temporary operations and maintenance of the control systems during the

construction period until final commissioning, training of facility operators and acceptance of the project by VA.

1.7 SUBMITTALS

A. Submit shop drawings in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's literature and data for all components including the following:

1. A wiring diagram for each type of input device and output device including DDC controllers, repeaters, etc. Diagram shall show how the device is wired and powered, showing typical connections at the digital controllers and each power supply, as well as the device itself. Show for all field connected devices, including but not limited to, control relays, motor starters, electric or electronic actuators, and temperature pressure, flow and humidity sensors and transmitters.
2. A diagram of each terminal strip, including digital controller terminal strips, terminal strip location, termination numbers and the associated point names.
3. Control dampers and control valves schedule, including the size and pressure drop.
4. Catalog cut sheets of all equipment used. This includes, but is not limited to software (by manufacturer and by third parties), DDC controllers, panels, peripherals, airflow measuring stations and associated components, and auxiliary control devices such as sensors, actuators, and control dampers. When manufacturer's cut sheets apply to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted. Each submitted piece of literature and drawings should clearly reference the specification and/or drawings that it supposed to represent.
5. Sequence of operations for each HVAC system and the associated control diagrams. Equipment and control labels shall correspond to those shown on the drawings.
6. Color prints of proposed graphics with a list of points for display.
7. Furnish a BACnet Protocol Implementation Conformance Statement (PICS) for each BACnet-compliant device.

8. Schematic wiring diagrams for all control, communication and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer manufacturers' model numbers and functions. Show all interface wiring to the control system.
9. An instrumentation list for each controlled system. Each element of the controlled system shall be listed in table format. The table shall show element name, type of device, manufacturer, model number, and product data sheet number.
10. Riser diagrams of wiring between central control unit and all new control panels.
11. Scaled plan drawings showing routing of LAN and locations of control panels, controllers, routers, gateways, ECC, and larger controlled devices.
12. Construction details for all installed conduit, cabling, raceway, cabinets, and similar. Construction details of all penetrations and their protection.
13. Quantities of submitted items may be reviewed but are the responsibility of the contractor administered by this Section of the technical specifications.

C. Product Certificates: Compliance with Article, QUALITY ASSURANCE.

D. Licenses: Provide licenses for all software residing on and used by the Controls Systems and transfer these licenses to the Owner prior to completion.

E. As Built Control Drawings:
1. Furnish three (3) copies of as-built drawings for each control system. The documents shall be submitted for approval prior to final completion.
2. Furnish one (1) stick set of applicable control system prints for each mechanical system for wall mounting. The documents shall be submitted for approval prior to final completion.
3. Furnish one (1) CD-ROM in CAD DWG and/or .DXF format for the drawings noted in subparagraphs above.

F. Operation and Maintenance (O/M) Manuals):
1. Submit in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS.
2. Include the following documentation:

a. General description and specifications for all components, including logging on/off, alarm handling, producing trend reports, overriding computer control, and changing set points and other variables.
b. Detailed illustrations of all the control systems specified for ease of maintenance and repair/replacement procedures, and complete calibration procedures.
c. One copy of the final version of all software provided including operating systems, programming language, operator workstation software, and graphics software.
d. Complete troubleshooting procedures and guidelines for all systems.
e. Complete operating instructions for all systems.
f. Recommended preventive maintenance procedures for all system components including a schedule of tasks for inspection, cleaning and calibration. Provide a list of recommended spare parts needed to minimize downtime.
g. Training Manuals: Submit the course outline and training material to the Owner for approval three (3) weeks prior to the training to VA facility personnel. These persons will be responsible for maintaining and the operation of the control systems, including programming. The Owner reserves the right to modify any or all of the course outline and training material.
h. Licenses, guaranty, and other pertaining documents for all equipment and systems.

G. Submit Performance Report to COR prior to final inspection.

1.8 INSTRUCTIONS

A. Instructions to VA operations personnel: Perform in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS, and as noted below.
1. First Phase: Formal instructions to the VA facilities personnel for a total of 4 hours, conducted sometime between the completed installation and prior to the performance test period of the control system, at a time mutually agreeable to the Contractor and the VA.
2. Second Phase: This phase of training shall comprise of on the job training during start-up, checkout period, and performance test period. VA facilities personnel will work with the Contractor’s

installation and test personnel on a daily basis during start-up and checkout period. During the performance test period, controls subcontractor will provide 8 hours of instructions, given in multiple training sessions (each no longer than four hours in length), to the VA facilities personnel.

3. The O/M Manuals shall contain approved submittals as outlined in Article 1.7, SUBMITTALS. The Controls subcontractor will review the manual contents with VA facilities personnel during second phase of training.
4. Training shall be given by direct employees of the controls system subcontractor.

1.9 PROJECT CONDITIONS (ENVIRONMENTAL CONDITIONS OF OPERATION)

A. The peripheral devices and system support equipment shall be designed to operate in ambient condition of 20 to 35°C (65 to 90°F) at a relative humidity of 20 to 80% non-condensing.

B. The CUs used outdoors shall be mounted in NEMA 4 waterproof enclosures, and shall be rated for operation at -40 to 65°C (-40 to 150°F).

C. All electronic equipment shall operate properly with power fluctuations of plus 10 percent to minus 15 percent of nominal supply voltage.

D. Sensors and controlling devices shall be designed to operate in the environment, which they are sensing or controlling.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
Standard 135-10.....BACNET Building Automation and Control Networks

C. American Society of Mechanical Engineers (ASME):
B16.18-01.....Cast Copper Alloy Solder Joint Pressure Fittings.
B16.22-01.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings.

D. American Society of Testing Materials (ASTM):
B32-08.....Standard Specification for Solder Metal
B88-09.....Standard Specifications for Seamless Copper Water Tube

B88M-09.....Standard Specification for Seamless Copper Water Tube (Metric)

B280-08.....Standard Specification for Seamless Copper Tube for Air-Conditioning and Refrigeration Field Service

D2737-03.....Standard Specification for Polyethylene (PE) Plastic Tubing

E. Federal Communication Commission (FCC):

Rules and Regulations Title 47 Chapter 1-2001 Part 15: Radio Frequency Devices.

F. Institute of Electrical and Electronic Engineers (IEEE):

802.3-11.....Information Technology-Telecommunications and Information Exchange between Systems-Local and Metropolitan Area Networks- Specific Requirements-Part 3: Carrier Sense Multiple Access with Collision Detection (CSMA/CD) Access method and Physical Layer Specifications

G. National Fire Protection Association (NFPA):

70-11.....National Electric Code

90A-09.....Standard for Installation of Air-Conditioning and Ventilation Systems

H. Underwriter Laboratories Inc (UL):

94-10.....Tests for Flammability of Plastic Materials for Parts and Devices and Appliances

294-10.....Access Control System Units

486A/486B-10.....Wire Connectors

555S-11.....Standard for Smoke Dampers

916-10.....Energy Management Equipment

1076-10.....Proprietary Burglar Alarm Units and Systems

PART 2 - PRODUCTS

2.1 MATERIALS

A. Use new products that the manufacturer is currently manufacturing and that have been installed in a minimum of 25 installations. Spare parts shall be available for at least five years after completion of this contract.

2.2 CONTROLS SYSTEM ARCHITECTURE

A. General

1. The Controls Systems shall consist of multiple Nodes and associated equipment connected by industry standard digital and communication network arrangements.
2. The networks shall, at minimum, comprise, as necessary, the following:
   a. BACnet-compliant routers, bridges, switches, hubs, gateways, interfaces and similar communication equipment.
   b. Active processing BACnet-compliant building controllers connected to other BACNet-compliant controllers together with their power supplies and associated equipment.
   c. Addressable elements, sensors, transducers and end devices.
   d. Third-party equipment interfaces and gateways as described and required by the Contract Documents.
   e. Other components required for a complete and working Control Systems as specified.

B. The Specifications for the individual elements and component subsystems shall be minimum requirements and shall be augmented as necessary by the Contractor to achieve both compliance with all applicable codes, standards and to meet all requirements of the Contract Documents.

C. Network Architecture

1. The Controls communication network shall utilize BACnet communications protocol operating over a standard Ethernet LAN and operate at a minimum speed of 100 Mb/sec.
2. The networks shall utilize only copper and optical fiber communication media as appropriate and shall comply with applicable codes, ordinances and regulations.

D. Third Party Interfaces:

1. The contractor administered by this Section of the technical specifications shall include necessary hardware, equipment, software and programming to allow data communications between the controls systems and building systems supplied by other trades.
2. Other manufacturers and contractors supplying other associated systems and equipment shall provide their necessary hardware, software and start-up at their cost and shall cooperate fully with the contractor administered by this Section of the technical

specifications in a timely manner and at their cost to ensure complete functional integration.

2.3 COMMUNICATION

A. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135-2008, BACnet.

1. The Data link / physical layer protocol (for communication) acceptable to the VA throughout its facilities is Ethernet (ISO 8802-3) and BACnet/IP.
3. The MS/TP data link / physical layer protocol is not acceptable to the VA in any new BACnet network or sub-network in its healthcare or lab facilities.

B. Each controller shall have a communication port for connection to an operator interface.

C. Internetwork operator interface and value passing shall be transparent to internetwork architecture.

1. An operator interface connected to a controller shall allow the operator to interface with each internetwork controller as if directly connected. Controller information such as data, status, reports, system software, and custom programs shall be viewable and editable from each internetwork controller.
2. Inputs, outputs, and control variables used to integrate control strategies across multiple controllers shall be readable by each controller on the internetwork. Program and test all cross-controller links required to execute specified control system operation. An authorized operator shall be able to edit cross-controller links by typing a standard object address.

D. Controllers with real-time clocks shall use the BACnet Time Synchronization service. The system shall automatically synchronize system clocks daily from an operator-designated device via the internetwork. The system shall automatically adjust for daylight savings and standard time as applicable.

2.4 BACNET PROTOCOL ANALYZER

A. For ease of troubleshooting and maintenance, provide a BACnet protocol analyzer. Provide its associated fittings, cables and appurtenances, for connection to the communications network. The BACnet protocol

analyzer shall be able to, at a minimum: capture and store to a file all data traffic on all network levels; measure bandwidth usage; filter out (ignore) selected traffic.

2.5 NETWORK AND DEVICE NAMING CONVENTION

A. Network Numbers

1. BACnet network numbers shall be based on a "facility code, network" concept. The "facility code" is the VAMC's or VA campus' assigned numeric value assigned to a specific facility or building. The "network" typically corresponds to a "floor" or other logical configuration within the building. BACnet allows 65535 network numbers per BACnet internet work.
2. The network numbers are thus formed as follows: "Net #" = "FFFNN" where:
   a. FFF = Facility code (see below)
   b. NN = 00-99 This allows up to 100 networks per facility or building

B. Device Instances

1. BACnet allows 4194305 unique device instances per BACnet internet work. Using Agency's unique device instances are formed as follows: "Dev #" = "FFFNNDD" where
   a. FFF and N are as above and
   b. DD = 00-99, this allows up to 100 devices per network.
2. Note Special cases, where the network architecture of limiting device numbering to DD causes excessive subnet works. The device number can be expanded to DDD and the network number N can become a single digit. In NO case shall the network number N and the device number D exceed 4 digits.
3. Facility code assignments:
4. 000-400 Building/facility number
5. Note that some facilities have a facility code with an alphabetic suffix to denote wings, related structures, etc. The suffix will be ignored. Network numbers for facility codes above 400 will be assigned in the range 000-399.

C. Device Names

1. Name the control devices based on facility name, location within a facility, the system or systems that the device monitors and/or controls, or the area served. The intent of the device naming is to

be easily recognized. Names can be up to 254 characters in length, without embedded spaces. Provide the shortest descriptive, but unambiguous, name. For example, in building #123 prefix the number with a "B" followed by the building number, if there is only one chilled water pump "CHWP-1", a valid name would be "B123.CHWP. 1.STARTSTOP". If there are two pumps designated "CHWP-1", one in a basement mechanical room (Room 0001) and one in a penthouse mechanical room (Room PH01), the names could be "B123.R0001.CHWP.1. STARTSTOP" or "B123.RPH01.CHWP.1.STARTSTOP". In the case of unitary controllers, for example a VAV box controller, a name might be "B123.R101.VAV". These names should be used for the value of the "Object_Name" property of the BACnet Device objects of the controllers involved so that the BACnet name and the EMCS name are the same.

2.6 BACNET DEVICES

A. All BACnet Devices – controllers, gateways, routers, actuators and sensors shall conform to BACnet Device Profiles and shall be BACnet Testing Laboratories (BTL) -Listed as conforming to those Device Profiles. Protocol Implementation Conformance Statements (PICSs), describing the BACnet capabilities of the Devices shall be published and available of the Devices through links in the BTL website.

1. BACnet Building Controllers, historically referred to as NACs, shall conform to the BACnet B-BC Device Profile, and shall be BTL-Listed as conforming to the B-BC Device Profile. The Device's PICS shall be submitted.
2. BACnet Advanced Application Controllers shall conform to the BACnet B-AAC Device Profile, and shall be BTL-Listed as conforming to the B-AAC Device Profile. The Device's PICS shall be submitted.
3. BACnet Application Specific Controllers shall conform to the BACnet B-ASC Device Profile, and shall be BTL-Listed as conforming to the B-ASC Device Profile. The Device's PICS shall be submitted.
4. BACnet Smart Actuators shall conform to the BACnet B-SA Device Profile, and shall be BTL-Listed as conforming to the B-SA Device Profile. The Device's PICS shall be submitted.
5. BACnet Smart Sensors shall conform to the BACnet B-SS Device Profile, and shall be BTL-Listed as conforming to the B-SS Device Profile. The Device's PICS shall be submitted.

6. BACnet routers and gateways shall conform to the BACnet B-OTH Device Profile, and shall be BTL-Listed as conforming to the B-OTH Device Profile. The Device's PICS shall be submitted.

2.7 CONTROLLERS

A. General. Provide an adequate number of BTL-Listed B-BC building controllers and an adequate number of BTL-Listed B-AAC advanced application controllers to achieve the performance specified in the Part 1 Article on "System Performance." Each of these controllers shall meet the following requirements.

1. The controller shall have sufficient memory to support its operating system, database, and programming requirements.
2. The building controller shall share data with the ECC and the other networked building controllers. The advanced application controller shall share data with its building controller and the other networked advanced application controllers.
3. The operating system of the controller shall manage the input and output communication signals to allow distributed controllers to share real and virtual object information and allow for central monitoring and alarms.
4. Controllers that perform scheduling shall have a real-time clock.
5. The controller shall continually check the status of its processor and memory circuits. If an abnormal operation is detected, the controller shall:
   a. assume a predetermined failure mode, and
   b. generate an alarm notification.
6. The controller shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute and Initiate) and Write (Execute and Initiate) Property services.
7. Communication.
   a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
   b. The controller shall provide a service communication port using BACnet Data Link/Physical layer protocol for connection to a portable operator's terminal.

8. Keypad. A local keypad and display shall be provided for each controller. The keypad shall be provided for interrogating and editing data. Provide a system security password shall be available to prevent unauthorized use of the keypad and display.
9. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
10. Memory. The controller shall maintain all BIOS and programming information in the event of a power loss for at least 72 hours.
11. The controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage. Controller operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).

B. Provide BTL-Listed B-ASC application specific controllers for each piece of equipment for which they are constructed. Application specific controllers shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute) Property service.
1. Each B-ASC shall be capable of stand-alone operation and shall continue to provide control functions without being connected to the network.
2. Each B-ASC will contain sufficient I/O capacity to control the target system.
3. Communication.
   a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
   b. Each controller shall have a BACnet Data Link/Physical layer compatible connection for a laptop computer or a portable operator’s tool. This connection shall be extended to a space temperature sensor port where shown.
4. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-

removable, modular terminal strips or to a termination card connected by a ribbon cable.

5. Memory. The application specific controller shall use nonvolatile memory and maintain all BIOS and programming information in the event of a power loss.
6. Immunity to power and noise. Controllers shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80%. Operation shall be protected against electrical noise of 5-120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
7. Transformer. Power supply for the ASC must be rated at a minimum of 125% of ASC power consumption and shall be of the fused or current limiting type.

C. Direct Digital Controller Software

1. The software programs specified in this section shall be commercially available, concurrent, multi-tasking operating system and support the use of software application that operates under DOS or Microsoft Windows.
2. All points shall be identified by up to 30-character point name and 16-character point descriptor. The same names shall be used at the ECC.
3. All control functions shall execute within the stand-alone control units via DDC algorithms. The VA shall be able to customize control strategies and sequences of operations defining the appropriate control loop algorithms and choosing the optimum loop parameters.
4. All controllers shall be capable of being programmed to utilize stored default values for assured fail-safe operation of critical processes. Default values shall be invoked upon sensor failure or, if the primary value is normally provided by the central or another CU, or by loss of bus communication. Individual application software packages shall be structured to assume a fail-safe condition upon loss of input sensors. Loss of an input sensor shall result in output of a sensor-failed message at the ECC. Each ACU and RCU shall have capability for local readouts of all functions. The UCUs shall be read remotely.
5. All DDC control loops shall be able to utilize any of the following control modes:

   a. Two position (on-off, slow-fast) control.

b. Proportional control.
c. Proportional plus integral (PI) control.
d. Proportional plus integral plus derivative (PID) control. All PID programs shall automatically invoke integral wind up prevention routines whenever the controlled unit is off, under manual control of an automation system or time initiated program.
e. Automatic tuning of control loops.

6. System Security: Operator access shall be secured using individual password and operator's name. Passwords shall restrict the operator to the level of object, applications, and system functions assigned to him. A minimum of six (6) levels of security for operator access shall be provided.
7. Application Software: The controllers shall provide the following programs as a minimum for the purpose of optimizing energy consumption while maintaining comfortable environment for occupants. All application software shall reside and run in the system digital controllers. Editing of the application shall occur at the ECC or via a portable operator's terminal, when it is necessary, to access directly the programmable unit.
   a. Economizer: An economizer program shall be provided for VAV systems. This program shall control the position of air handler relief, return, and outdoors dampers. If the outdoor air dry bulb temperature and humidity fall below changeover set point the energy control center will modulate the dampers to provide 100 percent outdoor air. The operator shall be able to override the economizer cycle and return to minimum outdoor air operation at any time.
   b. Night Setback/Morning Warm up Control: The system shall provide the ability to automatically adjust set points for this mode of operation.
   c. Optimum Start/Stop (OSS): Optimum start/stop program shall automatically be coordinated with event scheduling. The OSS program shall start HVAC equipment at the latest possible time that will allow the equipment to achieve the desired zone condition by the time of occupancy, and it shall also shut down HVAC equipment at the earliest possible time before the end of the occupancy period and still maintain desired comfort

conditions. The OSS program shall consider both outside weather conditions and inside zone conditions. The program shall automatically assign longer lead times for weekend and holiday shutdowns. The program shall poll all zones served by the associated AHU and shall select the warmest and coolest zones. These shall be used in the start time calculation. It shall be possible to assign occupancy start times on a per air handler unit basis. The program shall meet the local code requirements for minimum outdoor air while the building is occupied. Modification of assigned occupancy start/stop times shall be possible via the ECC.

d. Event Scheduling: Provide a comprehensive menu driven program to automatically start and stop designated points or a group of points according to a stored time. This program shall provide the capability to individually command a point or group of points. When points are assigned to one common load group it shall be possible to assign variable time advances/delays between each successive start or stop within that group. Scheduling shall be calendar based and advance schedules may be defined up to one year in advance. Advance schedule shall override the day-to-day schedule. The operator shall be able to define the following information:
   1) Time, day.
   2) Commands such as on, off, auto.
   3) Time delays between successive commands.
   4) Manual overriding of each schedule.
   5) Allow operator intervention.

f. Alarm Reporting: The operator shall be able to determine the action to be taken in the event of an alarm. Alarms shall be routed to the ECC based on time and events. An alarm shall be able to start programs, login the event, print and display the messages. The system shall allow the operator to prioritize the alarms to minimize nuisance reporting and to speed operator’s response to critical alarms. A minimum of six (6) priority levels of alarms shall be provided for each point.

g. Remote Communications: The system shall have the ability to dial out in the event of an alarm to the ECC and alpha-numeric pagers.

The alarm message shall include the name of the calling location, the device that generated the alarm, and the alarm message itself. The operator shall be able to remotely access and operate the system using dial up communications. Remote access shall allow the operator to function the same as local access.

h. Maintenance Management (PM): The program shall monitor equipment status and generate maintenance messages based upon the operators defined equipment run time, starts, and/or calendar date limits. A preventative maintenance alarm shall be printed indicating maintenance requirements based on pre-defined run time. Each preventive message shall include point description, limit criteria and preventative maintenance instruction assigned to that limit. A minimum of 480-character PM shall be provided for each component of units such as air handling units.

2.8 SPECIAL CONTROLLERS

A. Room Differential Pressure Controller: The differential pressure in laboratory rooms shall be maintained by controlling the quantity of air exhausted from or supplied to the room. A sensor-controller shall measure and control the velocity of air flowing into or out of the room through a sampling tube installed in the wall separating the room from the adjacent space, and display the value on its monitor. The sensor-controller shall meet the following as a minimum:

1. Operating range: -0.25 to +0.25 inches of water column
2. Resolution: 5 percent of reading
3. Accuracy: +/- 10 percent of reading +/- 0.005 inches of water column
4. Analog output: 0-10 VDC or 4-20 ma
5. Operating temperature range: 32°F-120°F

2.9 SENSORS (AIR AND WATER)

A. Sensors' measurements shall be read back to the DDC system, and shall be visible by the ECC.

B. Temperature and Humidity Sensors shall be electronic, vibration and corrosion resistant for wall, immersion, and/or duct mounting. Provide all remote sensors as required for the systems.

1. Temperature Sensors: thermistor type for terminal units and Resistance Temperature Device (RTD) with an integral transmitter type for all other sensors.

a. Duct sensors shall be rigid or averaging type as shown on drawings. Averaging sensor shall be a minimum of 1 linear ft of sensing element for each sq ft of cooling coil face area.
b. Immersion sensors shall be provided with a separable well made of stainless steel, bronze or monel material. Pressure rating of well is to be consistent with the system pressure in which it is to be installed.
c. Space sensors shall be equipped with in-space User set-point adjustment, override switch, numerical temperature display on sensor cover, and communication port. Match room thermostats. Provide a tooled-access cover.
1) Public space sensor: setpoint adjustment shall be only through the ECC or through the DDC system's diagnostic device/laptop. Do not provide in-space User set-point adjustment. Provide an opaque keyed-entry cover if needed to restrict in-space User set-point adjustment.
d. Outdoor air temperature sensors shall have watertight inlet fittings and be shielded from direct sunlight.
e. Room security sensors shall have stainless steel cover plate with insulated back and security screws.
f. Wire: Twisted, shielded-pair cable.
g. Output Signal: 4-20 ma.
2. Humidity Sensors: Bulk polymer sensing element type.
a. Duct and room sensors shall have a sensing range of 20 to 80 percent with accuracy of ± 2 to ± 5 percent RH, including hysteresis, linearity, and repeatability.
b. Outdoor humidity sensors shall be furnished with element guard and mounting plate and have a sensing range of 0 to 100 percent RH.
c. 4-20 ma continuous output signal.
C. Static Pressure Sensors: Non-directional, temperature compensated.
1. 4-20 ma output signal.
2. 0 to 5 inches wg for duct static pressure range.
3. 0 to 0.25 inch wg for Building static pressure range.
D. Water flow sensors:
1. Type: Insertion vortex type with retractable probe assembly and 2 inch full port gate valve.

a. Pipe size: 3 to 24 inches.

b. Retractor: ASME threaded, non-rising stem type with hand wheel.

c. Mounting connection: 2 inch 150 PSI flange.

d. Sensor assembly: Design for expected water flow and pipe size.

e. Seal: Teflon (PTFE).

2. Controller:

a. Integral to unit.

b. Locally display flow rate and total.

c. Output flow signal to BMCS: Digital pulse type.

3. Performance:

a. Turndown: 20:1

b. Response time: Adjustable from 1 to 100 seconds.

c. Power: 24 volt DC

4. Install flow meters according to manufacturer's recommendations. Where recommended by manufacturer because of mounting conditions, provide flow rectifier.

E. Flow switches:

1. Shall be either paddle or differential pressure type.

a. Paddle-type switches (liquid service only) shall be UL Listed, SPDT snap-acting, adjustable sensitivity with NEMA 4 enclosure.

b. Differential pressure type switches (air or water service) shall be UL listed, SPDT snap acting, NEMA 4 enclosure, with scale range and differential suitable for specified application.

F. Current Switches: Current operated switches shall be self powered, solid state with adjustable trip current as well as status, power, and relay command status LED indication. The switches shall be selected to match the current of the application and output requirements of the DDC systems.

2.10 CONTROL CABLES

A. General:

1. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with Sections 27 05 26 and 26 05 26.

2. Cable conductors to provide protection against induction in circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.

3. Minimize the radiation of RF noise generated by the System equipment so as not to interfere with any audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.
4. The as-installed drawings shall identify each cable as labeled, used cable, and bad cable pairs.
5. Label system's cables on each end. Test and certify cables in writing to the VA before conducting proof-of-performance testing. Minimum cable test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges used. Make available all cable installation and test records at demonstration to the VA. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.
6. Power wiring shall not be run in conduit with communications trunk wiring or signal or control wiring operating at 100 volts or less.

B. Analogue control cabling shall be not less than No. 18 AWG solid, with thermoplastic insulated conductors as specified in Section 26 05 19, Low-Voltage Electrical Power Conductors and Cables.

C. Copper digital communication cable between the ECC and the B-BC and B-AAC controllers shall be 100BASE-TX Ethernet, Category 5e or 6, not less than minimum 24 American Wire Gauge (AWG) solid, Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), with thermoplastic insulated conductors, enclosed in a thermoplastic outer jacket, as specified in Section 27 15 00.
   1. Other types of media commonly used within IEEE Std 802.3 LANs (e.g., 10Base-T and 10Base-2) shall be used only in cases to interconnect with existing media.

D. Optical digital communication fiber, if used, shall be Multimode or Singlemode fiber, 62.5/125 micron for multimode or 10/125 micron for singlemode micron with SC or ST connectors as specified in TIA-568-C.1. Terminations, patch panels, and other hardware shall be compatible with the specified fiber and shall be as specified in Section 27 15 00. Fiber-optic cable shall be suitable for use with the 100Base-FX or the 100Base-SX standard (as applicable) as defined in IEEE Std 802.3.

2.11 THERMOSTATS AND HUMIDISTATS

A. Room thermostats controlling unitary standalone heating and cooling devices not connected to the DDC system shall have three modes of operation (heating - null or dead band - cooling). Thermostats for patient bedrooms shall have capability of being adjusted to eliminate null or dead band. Wall mounted thermostats shall have manufacturer's recommendation white plastic finish to match existing units, setpoint range and temperature display and external adjustment:

1. Electronic Thermostats: Solid-state, microprocessor based, programmable to daily, weekend, and holiday schedules.
   a. Public Space Thermostat: Public space thermostat shall have a thermistor sensor and shall not have a visible means of set point adjustment. Adjustment shall be via the digital controller to which it is connected.
   b. Battery replacement without program loss.

B. Strap-on thermostats shall be enclosed in a dirt-and-moisture proof housing with fixed temperature switching point and single pole, double throw switch.

C. Freezestats shall have a minimum of 300 mm (one linear foot) of sensing element for each 0.093 square meter (one square foot) of coil area. A freezing condition at any increment of 300 mm (one foot) anywhere along the sensing element shall be sufficient to operate the thermostatic element. Freezestats shall be manually-reset.

D. Room Humidistats: Provide fully proportioning humidistat with adjustable throttling range for accuracy of settings and conservation. The humidistat shall have set point scales shown in percent of relative humidity located on the instrument. Systems showing moist/dry or high/low are not acceptable.

2.12 FINAL CONTROL ELEMENTS AND OPERATORS

A. Fail Safe Operation: Control valves and dampers shall provide "fail safe" operation in either the normally open or normally closed position as required for freeze, moisture, and smoke or fire protection.

B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.

C. Power Operated Control Dampers (other than VAV Boxes): Factory fabricated, balanced type dampers. All modulating dampers shall be opposed blade type and gasketed. Blades for two-position, duct-mounted

dampers shall be parallel, airfoil (streamlined) type for minimum noise generation and pressure drop.

1. Leakage: maximum leakage in closed position shall not exceed 7 L/S (15 CFMs) differential pressure for outside air and exhaust dampers and 200 L/S/ square meter (40 CFM/sq. ft.) at 50 mm (2 inches) differential pressure for other dampers.
2. Frame shall be galvanized steel channel with seals as required to meet leakage criteria.
3. Blades shall be galvanized steel or aluminum, 200 mm (8 inch) maximum width, with edges sealed as required.
4. Bearing shall be nylon, bronze sleeve or ball type.
5. Hardware shall be zinc-plated steel. Connected rods and linkage shall be non-slip. Working parts of joints shall be brass, bronze, nylon or stainless steel.
6. Maximum air velocity and pressure drop through free area the dampers:
   a. Smoke damper in air handling unit: 305 meter per minute (1000 fpm).
   b. Duct mounted damper: 600 meter per minute (2000 fpm).
   c. Maximum static pressure loss: 50 Pascal (0.20 inches water gage).

E. Control Valves:

1. Valves shall be rated for a minimum of 150 percent of system operating pressure at the valve location but not less than 900 kPa (125 psig).
2. Valves 50 mm (2 inches) and smaller shall be bronze body with threaded or flare connections.
3. Valves 60 mm (2 1/2 inches) and larger shall be bronze or iron body with flanged connections.
4. Brass or bronze seats except for valves controlling media above 100 degrees C (210 degrees F), which shall have stainless steel seats.
5. Flow characteristics:
   b. Two-way modulating valves shall be globe pattern. Position versus flow relation shall be linear for steam and equal percentage for water flow control.
   c. Two-way 2-position valves shall be ball, gate or butterfly type.
6. Maximum pressure drop:
   a. Two position steam control: 20 percent of inlet gauge pressure.

b. Modulating Steam Control: 80 percent of inlet gauge pressure (acoustic velocity limitation).

c. Modulating water flow control, greater of 3 meters (10 feet) of water or the pressure drop through the apparatus.

7. Two position water valves shall be line size.

F. Damper and Valve Operators and Relays:

1. Electric operator shall provide full modulating control of dampers and valves. A linkage and pushrod shall be furnished for mounting the actuator on the damper frame internally in the duct or externally in the duct or externally on the duct wall, or shall be furnished with a direct-coupled design. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.

a. Minimum valve close-off pressure shall be equal to the system pump’s dead-head pressure, minimum 50 psig for valves smaller than 4 inches.

3. Electronic damper operators: Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.

a. VAV Box actuator shall be mounted on the damper axle or shall be of the air valve design, and shall provide complete modulating control of the damper. The motor shall have a closure torque of 35-inch pounds minimum with full torque applied at close off to attain minimum leakage.

4. See drawings for required control operation.

2.13 AIR FLOW CONTROL

A. Airflow and static pressure shall be controlled via digital controllers with inputs from airflow control measuring stations and static pressure inputs as specified. Controller outputs shall be analog or pulse width modulating output signals. The controllers shall include the

capability to control via simple proportional (P) control, proportional plus integral (PI), proportional plus integral plus derivative (PID), and on-off. The airflow control programs shall be factory-tested programs that are documented in the literature of the control manufacturer.

B. Static Pressure Measuring Station: shall consist of one or more static pressure sensors and transmitters along with relays or auxiliary devices as required for a complete functional system. The span of the transmitter shall not exceed two times the design static pressure at the point of measurement. The output of the transmitter shall be true representation of the input pressure with plus or minus 25 Pascal (0.1 inch) W.G. of the true input pressure:
   1. Static pressure sensors shall have the same requirements as Airflow Measuring Devices except that total pressure sensors are optional, and only multiple static pressure sensors positioned on an equal area basis connected to a network of headers are required.
   2. For systems with multiple major trunk supply ducts, furnish a static pressure transmitter for each trunk duct. The transmitter signal representing the lowest static pressure shall be selected and this shall be the input signal to the controller.
   3. The controller shall receive the static pressure transmitter signal and CU shall provide a control output signal to the supply fan capacity control device. The control mode shall be proportional plus integral (PI) (automatic reset) and where required shall also include derivative mode.
   4. In systems with multiple static pressure transmitters, provide a switch located near the fan discharge to prevent excessive pressure during abnormal operating conditions. High-limit switches shall be manually-reset.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:
   1. Examine project plans for control devices and equipment locations; and report any discrepancies, conflicts, or omissions to COR for resolution before proceeding for installation.

2. Install equipment, piping, wiring /conduit parallel to or at right angles to building lines.
3. Install all equipment and piping in readily accessible locations. Do not run tubing and conduit concealed under insulation or inside ducts.
4. Mount control devices, tubing and conduit located on ducts and apparatus with external insulation on standoff support to avoid interference with insulation.
5. Provide sufficient slack and flexible connections to allow for vibration of piping and equipment.
6. Run tubing and wire connecting devices on or in control cabinets parallel with the sides of the cabinet neatly racked to permit tracing.
7. Install equipment level and plum.

B. Electrical Wiring Installation:

1. All wiring cabling shall be installed in conduits. Install conduits and wiring in accordance with Specification Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Conduits carrying control wiring and cabling shall be dedicated to the control wiring and cabling: these conduits shall not carry power wiring. Provide plastic end sleeves at all conduit terminations to protect wiring from burrs.
2. Install analog signal and communication cables in conduit and in accordance with Specification Section 26 05 19, Low-Voltage Electrical Power Conductors and Cables. Install digital communication cables in conduit and in accordance with Specification Section 27 15 00, Communications Structured Cabling.
3. Install conduit and wiring between operator workstation(s), digital controllers, electrical panels, indicating devices, instrumentation, miscellaneous alarm points, thermostats, and relays as shown on the drawings or as required under this section.
4. Install all electrical work required for a fully functional system and not shown on electrical plans or required by electrical specifications. Where low voltage (less than 50 volt) power is required, provide suitable Class B transformers.
5. Install all system components in accordance with local Building Code and National Electric Code.

a. Splices: Splices in shielded and coaxial cables shall consist of terminations and the use of shielded cable couplers. Terminations shall be in accessible locations. Cables shall be harnessed with cable ties.
b. Equipment: Fit all equipment contained in cabinets or panels with service loops, each loop being at least 300 mm (12 inches) long. Equipment for fiber optics system shall be rack mounted, as applicable, in ventilated, self-supporting, code gauge steel enclosure. Cables shall be supported for minimum sag.
c. Cable Runs: Keep cable runs as short as possible. Allow extra length for connecting to the terminal board. Do not bend flexible coaxial cables in a radius less than ten times the cable outside diameter.
d. Use vinyl tape, sleeves, or grommets to protect cables from vibration at points where they pass around sharp corners, through walls, panel cabinets, etc.

6. Conceal cables, except in mechanical rooms and areas where other conduits and piping are exposed.
7. Permanently label or code each point of all field terminal strips to show the instrument or item served. Color-coded cable with cable diagrams may be used to accomplish cable identification.
8. Grounding: ground electrical systems per manufacturer’s written requirements for proper and safe operation.

C. Install Sensors and Controls:

1. Temperature Sensors:
   a. Install all sensors and instrumentation according to manufacturer’s written instructions. Temperature sensor locations shall be readily accessible, permitting quick replacement and servicing of them without special skills and tools.
   b. Calibrate sensors to accuracy specified, if not factory calibrated.
   c. Use of sensors shall be limited to its duty, e.g., duct sensor shall not be used in lieu of room sensor.
   d. Install room sensors permanently supported on wall frame. They shall be mounted at 1.5 meter (5.0 feet) above the finished floor.

e. Mount sensors rigidly and adequately for the environment within which the sensor operates. Separate extended-bulb sensors form contact with metal casings and coils using insulated standoffs.
f. Sensors used in mixing plenum, and hot and cold decks shall be of the averaging of type. Averaging sensors shall be installed in a serpentine manner horizontally across duct. Each bend shall be supported with a capillary clip.
g. All pipe mounted temperature sensors shall be installed in wells.
h. All wires attached to sensors shall be air sealed in their conduits or in the wall to stop air transmitted from other areas affecting sensor reading.
i. Permanently mark terminal blocks for identification. Protect all circuits to avoid interruption of service due to short-circuiting or other conditions. Line-protect all wiring that comes from external sources to the site from lightning and static electricity.

2. Pressure Sensors:
   a. Install duct static pressure sensor tips facing directly downstream of airflow.
   b. Install high-pressure side of the differential switch between the pump discharge and the check valve.
   c. Install snubbers and isolation valves on steam pressure sensing devices.
3. Actuators:
   a. Mount and link damper and valve actuators according to manufacturer’s written instructions.
   b. Check operation of damper/actuator combination to confirm that actuator modulates damper smoothly throughout stroke to both open and closed position.
   c. Check operation of valve/actuator combination to confirm that actuator modulates valve smoothly in both open and closed position.
4. Flow Switches:
   a. Install flow switch according to manufacturer’s written instructions.

b. Mount flow switch a minimum of 5 pipe diameters up stream and 5 pipe diameters downstream or 600 mm (2 feet) whichever is greater, from fittings and other obstructions.

c. Assure correct flow direction and alignment.

d. Mount in horizontal piping-flow switch on top of the pipe.

D. Installation of network:

1. Ethernet:

a. The network shall employ Ethernet LAN architecture, as defined by IEEE 802.3. The Network Interface shall be fully Internet Protocol (IP) compliant allowing connection to currently installed IEEE 802.3, Compliant Ethernet Networks.

b. The network shall directly support connectivity to a variety of cabling types. As a minimum provide the following connectivity: 100 Base TX (Category 5e cabling) for the communications between the ECC and the B-BC and the B-AAC controllers.

2. Third party interfaces: Contractor shall integrate real-time data from building systems by other trades and databases originating from other manufacturers as specified and required to make the system work as one system.

E. Installation of digital controllers and programming:

1. Provide a separate digital control panel for each major piece of equipment, such as air handling unit, etc. Points used for control loop reset such as outdoor air, outdoor humidity, or space temperature could be located on any of the remote control units.

2. Provide sufficient internal memory for the specified control sequences and trend logging. There shall be a minimum of 25 percent of available memory free for future use.

3. System point names shall be modular in design, permitting easy operator interface without the use of a written point index.

4. Provide software programming for the applications intended for the systems specified, and adhere to the strategy algorithms provided.

5. Provide graphics for each piece of equipment and floor plan in the building. This includes each air handling unit, fan, terminal unit, etc. These graphics shall show all points dynamically as specified in the point list.

3.2 SYSTEM VALIDATION AND DEMONSTRATION

A. As part of final system acceptance, a system demonstration is required (see below). Prior to start of this demonstration, the contractor is to perform a complete validation of all aspects of the controls and instrumentation system.

B. Validation

1. Prepare and submit for approval a validation test plan including test procedures for the performance verification tests. Test Plan shall address all specified functions of the ECC and all specified sequences of operation. Explain in detail actions and expected results used to demonstrate compliance with the requirements of this specification. Explain the method for simulating the necessary conditions of operation used to demonstrate performance of the system. Test plan shall include a test check list to be used by the Installer’s agent to check and initial that each test has been successfully completed. Deliver test plan documentation for the performance verification tests to the owner’s representative 30 days prior to start of performance verification tests. Provide draft copy of operation and maintenance manual with performance verification test.
2. After approval of the validation test plan, installer shall carry out all tests and procedures therein. Installer shall completely check out, calibrate, and test all connected hardware and software to insure that system performs in accordance with approved specifications and sequences of operation submitted. Installer shall complete and submit Test Check List.

C. Demonstration

1. System operation and calibration to be demonstrated by the installer in the presence of the Architect or VA's representative on random samples of equipment as dictated by the Architect or VA’s representative. Should random sampling indicate improper commissioning, the owner reserves the right to subsequently witness complete calibration of the system at no addition cost to the VA.
2. Demonstrate to authorities that all required safeties and life safety functions are fully functional and complete.
3. Make accessible, personnel to provide necessary adjustments and corrections to systems as directed by balancing agency.

4. The following witnessed demonstrations of field control equipment shall be included:
   a. Observe HVAC systems in shut down condition. Check dampers and valves for normal position.
   b. Test application software for its ability to communicate with digital controllers, operator workstation, and uploading and downloading of control programs.
   c. Demonstrate the software ability to edit the control program off-line.
   d. Demonstrate reporting of alarm conditions for each alarm and ensure that these alarms are received at the assigned location, including operator workstations.
   e. Demonstrate ability of software program to function for the intended applications-trend reports, change in status etc.
   f. Demonstrate via graphed trends to show the sequence of operation is executed in correct manner, and that the HVAC systems operate properly through the complete sequence of operation, e.g., seasonal change, occupied/unoccupied mode, and warm-up condition.
   g. Demonstrate hardware interlocks and safeties functions, and that the control systems perform the correct sequence of operation after power loss and resumption of power loss.
   h. Prepare and deliver to the VA graphed trends of all control loops to demonstrate that each control loop is stable and the set points are maintained.
   i. Demonstrate that each control loop responds to set point adjustment and stabilizes within one (1) minute. Control loop trend data shall be instantaneous and the time between data points shall not be greater than one (1) minute.
5. Witnessed demonstration of ECC functions shall consist of:
   a. Running each specified report.
   b. Display and demonstrate each data entry to show site specific customizing capability. Demonstrate parameter changes.
   c. Step through penetration tree, display all graphics, demonstrate dynamic update, and direct access to graphics.
   d. Execute digital and analog commands in graphic mode.
   e. Demonstrate DDC loop precision and stability via trend logs of inputs and outputs (6 loops minimum).

f. Demonstrate EMS performance via trend logs and command trace.

g. Demonstrate scan, update, and alarm responsiveness.

h. Demonstrate spreadsheet/curve plot software, and its integration with database.

i. Demonstrate on-line user guide and help function and mail facility.

j. Demonstrate digital system configuration graphics with interactive upline and downline load and demonstrate specified diagnostics.

k. Demonstrate multitasking by showing dynamic curve plot, and graphic construction operating simultaneously via split screen.

l. Demonstrate class programming with point options of beep duration, beep rate, alarm archiving, and color banding.

--- END ---

---INTENTIONALLY BLANK---

SECTION 23 21 13
HYDRONIC PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Water piping to connect HVAC equipment, including the following:
   1. Chilled water, heating hot water and drain piping.
B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.
B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Seismic restraints for piping.
D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.
E. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
F. Section 23 07 11, HVAC AND BOILER PLANT INSULATION: Piping insulation.
G. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.
H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC: Temperature and pressure sensors and valve operators.
I. Section 23 22 13, STEAM AND CONDENSATE HEATING PIPING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.
B. American Society of Mechanical Engineers (ASME):
   B1.20.1-2013.....Pipe Threads, General Purpose (Inch)
   B16.3-2016.....Malleable Iron Threaded Fittings: Classes 150 and 300
   B16.4-2016.....Gray Iron Threaded Fittings: (Classes 125 and 250)
   B16.5-2017.....Pipe Flanges and Flanged Fittings: NPS 1/2 through NPS 24 Metric/Inch Standard
   B16.9-2018.....Factory Made Wrought Buttwelding Fittings
   B16.11-2016.....Forged Fittings, Socket-Welding and Threaded

B16.18-2018.....Cast Copper Alloy Solder Joint Pressure Fittings

B16.22-2018.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings

B16.24-2016.....Cast Copper Alloy Pipe Flanges and Flanged Fittings: Classes 150, 300, 600, 900, 1500, and 2500

B16.39-2014.....Malleable Iron Threaded Pipe Unions: Classes 150, 250, and 300

B16.42-2016.....Ductile Iron Pipe Flanges and Flanged Fittings

B31.9-2014.....Building Services Piping

B40.100-2013.....Pressure Gauges and Gauge Attachments

ASME Boiler and Pressure Vessel Code:

BPVC Section VIII-2015..Rules for Construction of Pressure Vessels

C. American Society for Testing and Materials (ASTM):

A47/A47M-2018.....Standard Specification for Ferritic Malleable Iron Castings

A53/A53M-2018.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A106/A106M-2019.....Standard Specification for Seamless Carbon Steel Pipe for High-Temperature Service

A126-2004(R2019).....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

A183-2014.....Standard Specification for Carbon Steel Track Bolts and Nuts

A216/A216M-2018.....Standard Specification for Steel Castings, Carbon, Suitable for Fusion Welding, for High-Temperature Service

A307-2016.....Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength

A536-1984(R2019).....Standard Specification for Ductile Iron Castings

B62-2017.....Standard Specification for Composition Bronze or Ounce Metal Castings

B88-2016.....Standard Specification for Seamless Copper Water Tube

D. American Welding Society (AWS):

B2.1/B2.1M-2014.....Standard for Welding Procedure and Performance Specification

E. Expansion Joint Manufacturer's Association, Inc. (EJMA):

EJMA 2017.....Expansion Joint Manufacturer's Association Standards, Tenth Edition

F. Manufacturers Standardization Society (MSS) of the Valve and Fitting Industry, Inc.:

SP-67-2017.....Butterfly Valves

SP-70-2014.....Gray Iron Gate Valves, Flanged and Threaded Ends

SP-71-2014.....Gray Iron Swing Check Valves, Flanged and Threaded Ends

SP-80-2014.....Bronze Gate, Globe, Angle, and Check Valves

SP-85-2014.....Gray Iron Globe and Angle Valves, Flanged and Threaded Ends

SP-110-2014.....Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

SP-125-2018.....Gray Iron and Ductile Iron In-line, Spring-Loaded, Center-Guided Check Valves

G. Tubular Exchanger Manufacturers Association (TEMA):

TEMA Standards 2015.....9th Edition

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 21 13, HYDRONIC PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Pipe and equipment supports.
2. Pipe and tubing, with specification, class or type, and schedule.

3. Pipe fittings, including miscellaneous adapters and special fittings.
4. Flanges, gaskets and bolting.
5. Couplings and fittings.
6. Valves of all types.
7. Strainers.
8. Flexible connectors for water service.
9. All specified hydronic system components.
10. Gauges.
11. Thermometers and test wells.
12. Electric heat tracing systems.
13. Seismic bracing details for piping.

D. Submit the welder's qualifications in the form of a current (less than one-year old) and formal certificate.

E. Coordination Drawings: Refer to paragraph, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
1. Include complete list indicating all components of the systems.
2. Include complete diagrams of the internal wiring for each item of equipment.
3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

G. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

H. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC, which includes welding qualifications.

B. Submit prior to welding of steel piping a certificate of Welder's certification. The certificate shall be current and not more than one-year old.

C. All couplings, fittings, valves, and specialties shall be the products of a single manufacturer.
   1. All castings used for coupling housings, fittings, valve bodies, etc., shall be date stamped for quality assurance and traceability.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:
   1. As-built drawings are to be provided, with a copy of them on AutoCAD version 2013 provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.
   2. As-built drawings are to be provided, with a copy of them in three-dimensional Building Information Modeling (BIM) software version Revit 2021 provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment to

include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.7 SPARE PARTS

A. For mechanical pressed sealed fittings provide tools required for each pipe size used at the facility.

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 PIPE AND TUBING

A. Chilled Water, Heating Hot Water, and Vent Piping:
   1. Steel: ASTM A53/A53M Grade B, seamless or ERW, Schedule 40.
   2. Copper water tube option: ASTM B88, Type K or L, hard drawn.
B. Cooling Coil Condensate Drain Piping:
   1. From air handling units: Copper water tube, ASTM B88, Type M, or Schedule 40 PVC plastic piping.
C. Pipe supports, including insulation shields, for above ground piping: Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.3 FITTINGS FOR STEEL PIPE

A. 50 mm (2 inches) and Smaller: Screwed or welded joints.
   1. Butt welding: ASME B16.9 with same wall thickness as connecting piping.

2. Forged steel, socket welding or threaded: ASME B16.11.
3. Screwed: 150-pound malleable iron, ASME B16.3. 125-pound cast iron, ASME B16.4, may be used in lieu of malleable iron. Bushing reduction of a single pipe size, or use of close nipples, is not acceptable.
4. Unions: ASME B16.39.
5. Water hose connection adapter: Brass, pipe thread to 20 mm (3/4 inch) garden hose thread, with hose cap nut.

B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints.
1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
2. Welding flanges and bolting: ASME B16.5:
a. Water service: Weld neck or slip-on, plain face, with 3.2 mm (1/8 inch) thick full-face neoprene gasket suitable for 104 degrees C (220 degrees F).
1) Contractor's option: Convoluted, cold formed 150-pound steel flanges, with Teflon gaskets, may be used for water service.
b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.

C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent and gauge connections.

2.4 FITTINGS FOR COPPER TUBING

A. Joints:
1. Solder Joints: Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.
2. Mechanically formed tee connection in water and drain piping: Form mechanically extracted collars in a continuous operation by drilling pilot hole and drawing out tube surface to form collar, having a height of not less than three times the thickness of tube wall. Adjustable collaring device shall ensure proper tolerance and complete uniformity of the joint. Notch and dimple joining branch tube in a single process to provide free flow where the branch tube penetrates the fitting.

B. Bronze Flanges and Flanged Fittings: ASME B16.24.

C. Fittings: ASME B16.18 cast copper or ASME B16.22 solder wrought copper.

2.5 DIELECTRIC FITTINGS

A. Provide where copper tubing and ferrous metal pipe are joined.

B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.

C. 65 mm (2-1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42. Dielectric gasket material shall be compatible with hydronic medium.

D. Temperature Rating, 99 degrees C (210 degrees F).

E. Contractor’s option: On pipe sizes 50 mm (2 inch) and smaller, screwed end brass ball valves or dielectric nipples may be used in lieu of dielectric unions.

2.6 SCREWED JOINTS

A. Pipe Thread: ASME B1.20.1.

B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

2.7 VALVES

A. Asbestos packing is not acceptable.

B. All valves of the same type shall be products of a single manufacturer.

C. Provide chain operators for valves 150 mm (6 inches) and larger when the centerline is located 2.4 m (8 feet) or more above the floor or operating platform.

D. Shut-Off Valves:

1. Ball Valves (Pipe sizes 50 mm (2 inch) and smaller): MSS SP-110, screwed or solder connections, brass or bronze body with chrome-plated ball with full port and Teflon seat at 4137 kPa (600 psig) working pressure rating. Provide stem extension to allow operation without interfering with pipe insulation.

2. Butterfly Valves (Pipe Sizes 65 mm (2-1/2 inch) and larger): Provide stem extension to allow 50 mm (2 inches) of pipe insulation without interfering with valve operation. MSS SP-67, flange lug type rated 1200 kPa (175 psig) working pressure at 93 degrees C (200 degrees F). Valves shall be ANSI Leakage Class VI and rated for bubble tight shut-off to full valve pressure rating. Valve shall be rated for dead end service and bi-directional flow capability to full rated pressure. Butterfly valves are prohibited for direct buried pipe applications.

a. Body: Cast iron, ASTM A126, Class B. Malleable iron, ASTM A47/A47M electro-plated, or ductile iron, ASTM A536, Grade 65-45-12 electro-plated.

b. Trim: Bronze, aluminum bronze, or 300 series stainless steel disc, bronze bearings, 316 stainless steel shaft and manufacturer's recommended resilient seat. Resilient seat shall be field replaceable, and fully line the body to completely isolate the body from the product. A phosphate coated steel shaft or stem is acceptable, if the stem is completely isolated from the product.

c. Actuators: Field interchangeable. Valves for balancing service shall have adjustable memory stop to limit open position.

1) Valves 150 mm (6 inches) and smaller: Lever actuator with minimum of seven locking positions, except where chain wheel is required.

2) Valves 200 mm (8 inches) and larger: Enclosed worm gear with handwheel, and where required, chain-wheel operator.

3) Gate Valves:

a) 50 mm (2 inches) and smaller: MSS SP-80, Bronze, 1035 kPa (150 psig), wedge disc, rising stem, union bonnet.

b) 65 mm (2-1/2 inches) and larger: Flanged, outside screw and yoke. MSS SP-70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.

E. Globe and Angle Valves:

1. Globe Valves:

a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig) Globe valves shall be union bonnet with metal plug type disc.

b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-85 for globe valves.

2. Angle Valves:

a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig) Angle valves shall be union bonnet with metal plug type disc.

b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-85 for angle.

F. Check Valves:
   1. Swing Check Valves:
      a. 50 mm (2 inches) and smaller: MSS SP-80, bronze, 1035 kPa (150 psig), 45-degree swing disc.
      b. 65 mm (2-1/2 inches) and larger: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS SP-71 for check valves.
   2. Non-Slam or Silent Check Valve: Spring loaded double disc swing check or internally guided flat disc lift type check for bubble tight shut-off. Provide where check valves are shown in chilled water and hot water piping. Check valves incorporating a balancing feature may be used.
      a. Body: MSS SP-125 cast iron, ASTM A126, Class B, or steel, ASTM A216/A216M, Class WCB, or ductile iron, ASTM 536, flanged or wafer type.
      b. Seat, disc and spring: 18-8 stainless steel, or bronze, ASTM B62. Seats may be elastomer material.

G. Water Flow Balancing Valves: For flow regulation and shut-off. Valves shall be line size rather than reduced to control valve size.
   1. Ball or Globe style valve.
   2. A dual-purpose flow balancing valve and adjustable flow meter, with bronze or cast-iron body, calibrated position pointer, valved pressure taps or quick disconnects with integral check valves and preformed polyurethane insulating enclosure.
   3. Provide a readout kit including flow meter, readout probes, hoses, flow charts or calculator, and carrying case.

2.8 STRAINERS

A. Y Type.
   1. Screens: Bronze, Monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows: 1.1 mm (0.045 inch) diameter perforations for 100 mm (4 inches) and larger: 3.2 mm (1/8 inch) diameter perforations.

2.9 HYDRONIC SYSTEM COMPONENTS

A. Automatic Air Vent Valves (where shown on drawings): Cast iron or semi-steel body, 1035 kPa (150 psig) working pressure, stainless steel float, valve, valve seat and mechanism, minimum 15 mm (1/2 inch) water connection and 6 mm (1/4 inch) air outlet. Air outlet shall be piped to the nearest floor drain.

2.10 GAUGES, PRESSURE AND COMPOUND

A. ASME B40.100, Accuracy Grade 1A, (pressure, vacuum, or compound for air, oil or water), initial mid-scale accuracy 1 percent of scale (Qualify grade), metal or phenolic case, 115 mm (4-1/2 inches) in diameter, 6 mm (1/4 inch) NPT bottom connection, white dial with black graduations and pointer, clear glass or acrylic plastic window, suitable for board mounting. Provide red "set hand" to indicate normal working pressure.

B. Provide brass lever handle union cock. Provide brass/bronze pressure snubber for gauges in water service.

C. Range of Gauges: Provide range equal to at least 130 percent of normal operating range.

1. For condenser water suction (compound): 101 kPa (30 inches Hg) to 690 kPa (100 psig).

2.11 PRESSURE/TEMPERATURE TEST PROVISIONS

A. Pete's Plug: 6 mm (1/4 inch) MPT by 75 mm (3 inches) long, brass body and cap, with retained safety cap, nordel self-closing valve cores, permanently installed in piping where shown, or in lieu of pressure gauge test connections shown on the drawings.

B. Provide one each of the following test items to the COR:

1. 6 mm (1/4 inch) FPT by 3.2 mm (1/8 inch) diameter stainless steel pressure gauge adapter probe for extra-long test plug.
2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gauge, 101 kPa (30 inches Hg) to 690 kPa (100 psig) range.
3. 0 to 104 degrees C (32 to 220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (1 inch) dial, 125 mm (5 inch) long stainless-steel stem, plastic case.

2.12 THERMOMETERS

A. Mercury or organic liquid filled type, red or blue column, clear plastic window, with 150 mm (6 inch) brass stem, straight, fixed or adjustable angle as required for each in reading.

B. Case: Chrome plated brass or aluminum with enamel finish.

C. Scale: Not less than 225 mm (9 inches), range as described below, two-degree graduations.

D. Separable Socket (Well): Brass, extension neck type to clear pipe insulation.

E. Scale ranges:
   1. Chilled Water: 0 to 38 degrees C (32 to 100 degrees F).
   2. Hot Water: 38 to 93 degrees C (100 to 200 degrees F).

2.13 FIRESTOPPING MATERIAL

A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.14 ELECTRICAL HEAT TRACING SYSTEMS

A. Systems shall meet requirements of NFPA 70.
B. Provide tracing for outdoor piping subject to freezing temperatures below 3.3 degrees C (38 degrees F) as follows:
   1. Make-up water.
   2. Chilled water, Hot water, piping at units, and all other areas exposed to the weather.
C. Heat tracing shall be provided to the extent shown on the drawings (Floor plans and Elevations). Heat tracing shall extend below roof into building envelope insulation.
D. Heating Cable: Flexible, parallel circuit construction consisting of a continuous self-limiting resistance, conductive inner core material between two parallel copper bus wires, designed for cut-to-length at the job site and for wrapping around valves and complex fittings. Self-regulation shall prevent overheating and burnouts even where the cable overlaps itself.
   1. Provide end seals at ends of circuits. Wire at the ends of the circuits is not to be tied together.
   2. Provide sufficient cable, as recommended by the manufacturer, to keep the pipe surface at 2.2 degrees C (36 degrees F) minimum during winter outdoor design temperature, but not less than the following:
      a. 75 mm (3 inch) pipe and smaller with 25 mm (1 inch) thick insulation: 4 watts per foot of pipe.
      b. 100 mm (4 inch) pipe and larger 40 mm (1-1/2 inch) thick insulation: 8 watts per feet of pipe.
E. Electrical Heating Tracing Accessories:
   1. Power supply connection fitting and stainless-steel mounting brackets. Provide stainless steel worm gear clamp to fasten bracket to pipe.
   2. 15 mm (1/2 inch) wide fiberglass reinforced pressure sensitive cloth tape to fasten cable to pipe at 30 cm (12 inch) intervals.

3. Pipe surface temperature control thermostat: Cast aluminum, NEMA 4 (watertight) enclosure, 15 mm (1/2 inch) NPT conduit hub, SPST switch rated 20 amps at 480 volts ac, with capillary and copper bulb sensor. Set thermostat to maintain pipe surface temperature at not less than 1 degree C (34 degrees F).
4. Signs: Manufacturer's standard (NFPA 70), stamped "ELECTRIC TRACED" located on the insulation jacket at 3 m (10 feet) intervals along the pipe on alternating sides.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

B. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, coils, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost or time to the Government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.

C. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.

D. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (1 inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise, slope drain piping down in the direction of flow not less than 25 mm (1 inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.

F. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally, locate valve stems in

overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.

G. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.

H. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.

I. Provide manual or automatic air vent at all piping system high points and drain valves at all low points. Install piping to floor drains from all automatic air vents.

J. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:

   1. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.

K. Thermometer Wells: In pipes 65 mm (2-1/2 inches) and smaller increase the pipe size to provide free area equal to the upstream pipe area.

L. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION.

M. Where copper piping is connected to steel piping, provide dielectric connections.

3.2 PIPE JOINTS

A. Welded: Beveling, spacing and other details shall conform to ASME B31.9 and AWS B2.1/B2.1M. See Welder’s qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Screwed: Threads shall conform to ASME B1.20.1; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.

C. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.

3.3 SEISMIC BRACING ABOVEGROUND PIPING

A. Provide in accordance with Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.4 LEAK TESTING ABOVEGROUND PIPING

A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary to the satisfaction of the COR. Tests may be either of those below, or a combination, as approved by the COR.

B. An operating test at design pressure, and for hot systems, design maximum temperature.

C. A hydrostatic test at 1.5 times design pressure. For water systems, the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Isolate equipment where necessary to avoid excessive pressure on mechanical seals and safety devices.

3.5 FLUSHING AND CLEANING PIPING SYSTEMS

A. Water Piping: Clean systems as recommended by equipment manufacturer.

B. Initial Flushing: Remove loose dirt, mill scale, metal chips, weld beads, rust, and like deleterious substances without damage to any system component. Provide temporary piping or hose to bypass coils, control valves, exchangers and other factory cleaned equipment unless acceptable means of protection are provided, and subsequent inspection of hide-out areas takes place. Isolate or protect clean system components, including pumps and pressure vessels, and remove any component which may be damaged. Open all valves, drains, vents and strainers at all system levels. Remove plugs, caps, spool pieces, and components to facilitate early debris discharge from system. Sectionalize system to obtain debris carrying velocity of 1.8 m/s (5.9 f/s), if possible. Connect dead-end supply and return headers as necessary. Flush bottoms of risers. Install temporary strainers where necessary to protect down-stream equipment. Supply and remove flushing water and drainage by various type hose, temporary and permanent piping and Contractor's booster pumps. Flush until clean as approved by the COR.

C. Cleaning: Circulate water through the piping systems. Circulate each section for not less than 4 hours. Blow-down all strainers or remove and clean as frequently as necessary. Drain and prepare for final flushing.

D. Final Flushing: Return systems to conditions required by initial flushing after all cleaning solution has been displaced by clean make-up. Flush all dead ends and isolated clean equipment. Gently operate all valves to dislodge any debris in valve body by throttling velocity. Flush for not less than one hour.

3.6 ELECTRIC HEAT TRACING

A. Install tracing as recommended by the manufacturer.

B. Coordinate electrical connections.

3.7 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.

D. Adjust red set hand on pressure gauges to normal working pressure.

3.8 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.9 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 23 22 13
STEAM AND CONDENSATE HEATING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Steam, condensate and vent piping inside buildings.

B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 09 91 00, PAINTING.

D. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

F. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

G. Section 23 07 11, HVAC AND BOILER PLANT INSULATION.

H. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

I. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

B1.20.1-2013.....Pipe Threads, General Purpose (Inch)

B16.5-2013.....Pipe Flanges and Flanged Fittings: NPS 1/2 through NPS 24 Metric/Inch Standard

B16.9-2012.....Factory Made Wrought Buttwelding Fittings

B16.11-2011.....Forged Fittings, Socket-Welding and Threaded

B16.42-2016.....Ductile Iron Pipe Flanges and Flanged Fittings: Classes 150 and 300

B31.1-2018.....Power Piping

B31.9-2014.....Building Services Piping

B40.100-2013.....Pressure Gauges and Gauge Attachments

ASME Boiler and Pressure Vessel Code (BPVC) -

BPVC Section II-2019 Materials

BPVC Section VIII-2019/ Rules for Construction of Pressure Vessels, Division 1

BPVC Section IX-2019 Welding, Brazing, and Fusing Qualifications

C. American Society for Testing and Materials (ASTM):

A53/A53M-2017.....Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A106/A106M-2019.....Standard Specification for Seamless Carbon Steel Pipe for High-Temperature Service

A216/A216M-2019.....Standard Specification for Steel Castings, Carbon, Suitable for Fusion Welding, for High-Temperature Service

A285/A285M-2017.....Standard Specification for Pressure Vessel Plates, Carbon Steel, Low-and Intermediate-Tensile Strength

A307-2019.....Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength

A516/A516M-2017.....Standard Specification for Pressure Vessel Plates, Carbon Steel, for Moderate- and Lower-Temperature Service

A536-1984(R2017).....Standard Specification for Ductile Iron Castings

B62-2017.....Standard Specification for Composition Bronze or Ounce Metal Castings

D. American Welding Society (AWS):

B2.1/B2.1M-2014.....Specification for Welding Procedure and Performance Qualifications

Z49.1-2012.....Safety in Welding and Cutting and Allied Processes

E. Manufacturers Standardization Society (MSS) of the Valve and Fitting Industry, Inc.:

SP-80-2013.....Bronze Gate, Globe, Angle, and Check Valves

F. Military Specifications (Mil. Spec.):

MIL-S-901D-2017.....Shock Tests, H.I. (High Impact) Shipboard Machinery, Equipment, and Systems

G. National Board of Boiler and Pressure Vessel Inspectors (NB):

Relieving Capacities of Safety Valves and Relief Valves

H. Tubular Exchanger Manufacturers Association (TEMA):
TEMA Standards-2015.....9th Edition

I. Air Conditioning, Heating, and Refrigeration Institute (AHRI):
AHRI 640.....Performance Rating of Commercial and Industrial Humidifiers (2017)

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 22 13, STEAM AND CONDENSATE HEATING PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
   1. Pipe and tubing, with specification, class or type, and schedule.
   2. Pipe fittings, including miscellaneous adapters and special fittings.
   3. Steam Humidifier.
   4. Valves of all types.
   5. All specified steam system components.
   6. Steam Dispersion panels

D. Coordination Drawings: Refer to paragraph, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. As-Built Piping Diagrams: Provide drawing as follows for steam and steam condensate piping and other central plant equipment.
   1. One wall-mounted stick file for prints. Mount stick file in the chiller plant or adjacent control room along with control diagram stick file.
   2. One set of reproducible drawings.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   1. Include complete list indicating all components of the systems.
   2. Include complete diagrams of the internal wiring for each item of equipment.

3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

G. Completed System Readiness Checklist provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

H. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

1.5 QUALITY ASSURANCE

A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC, which includes welding qualifications.

B. The products and execution of work specified in this section shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.

C. Welding Qualifications: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:

1. Qualify welding processes and operators for piping according to ASME BPVC Section IX, AWS Z49.1 and AWS B2.1/B2.1M.
2. Comply with provisions in ASME B31.1 or ASME B31.9.
3. Certify that each welder and welding operator has passed AWS qualification tests for welding processes involved and that certification is current and recent. Submit documentation to the COR.
4. All welds shall be stamped according to the provisions of the American Welding Society.

D. ASME Compliance: Comply with ASME B31.1 or ASME B31.9 for materials, products, and installation. Safety valves and pressure vessels shall bear appropriate ASME labels.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and shall provide the complete set at the time of final systems certification testing. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

   1. As-built drawings are to be provided, with a copy of them on AutoCAD version 2013 provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.
   2. As-built drawings are to be provided, with a copy of them in three-dimensional Building Information Modeling (BIM) software version Revit 2021 provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures

followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

PART 2 - PRODUCTS

2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 PIPE AND TUBING

A. Steam Piping: Steel, ASTM A53/A53M, Grade B, seamless or ERW; ASTM A106/A106M Grade B, seamless; Schedule 40.

B. As recommended by equipment manufacturers' installation instructions.

2.3 FITTINGS FOR STEEL PIPE

A. 50 mm (2 inches) and Smaller: Screwed or welded.

1. Cast iron fittings or piping is not acceptable for steam and steam condensate piping. Bushing reduction or use of close nipples is not acceptable.
2. Unions: Forged steel, 13,790 kPa (2000 psig) class or 20,685 kPa (3000 psig) class on piping 50 mm (2 inches) and under.
3. Steam line drip station and strainer quick-couple blowdown hose connection: Straight through, plug and socket, screw or cam locking type for 15 mm (1/2 inch) ID hose. No integral shut-off is required.

2.4 DIELECTRIC FITTINGS

A. Provide where dissimilar metal pipe are joined.

B. 50 mm (2 inches) and Smaller: Threaded dielectric union.

C. 65 mm (2-1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42.

D. Temperature Rating, 121 degrees C (250 degrees F) for steam condensate and as required for steam service.

E. Contractor's option: On pipe sizes 50 mm (2 inches) and smaller, dielectric nipples may be used in lieu of dielectric unions.

2.5 STEAM SYSTEM COMPONENTS

A. Steam Humidifiers, Electrode Type:

1. Provide electrode humidifier generating mineral-free, sterile steam from a potable water supply Packaged unit, wall mounted, atmospheric steam generation using an electrode steam cylinder[s]. Resistive element technology and boiler steam (pressure steam) technology not acceptable.
   a. Cylinder optimized for humidifier capacity and supply voltage. Cylinder must have welded seam to ensure watertight and have high water sensor to prevent overfilling.
   b. Durable powder coated steel cabinet with zero side clearance requirement for minimal footprint.
   c. Insulating air gap between plumbing and electrical compartment for increased electronic reliability.
   d. Integral fill cup with minimum 1-inch [25 mm] air gap to prevent back siphoning.
   e. Full cylinder indication and pre-notification of automatic shutdown at end of cylinder life.
   f. Steam outlet on top of tank configured to connect to hose, pipe, or flange connection.
2. Auto-Adaptive Control water management:
   a. Advanced water management utilizing the Proportional plus Integral Auto-Adaptive Control system for optimal energy efficiency, water usage and cylinder life.
   b. 98% thermal efficiency from startup until end of cylinder life.
   c. Drains automatically optimized to water conditions to maximize cylinder and reduce water usage.
   d. Modulating output between 20% and 100% of rated capacity.
3. Water requirements: The humidifier shall be capable of generating steam from tap, softened, or DI/RO water.
4. Drain:
   a. An electric operated drain valve shall be mounted on the humidifier assembly to allow tank to drain automatically at the end of a humidification season.
   b. Standard internal drain water tempering to ensure maximum 140° F [60° C] drain water. External drain water cooler not acceptable.

c. Automatic pulse feature to clean any obstruction from the drain solenoid valve if required.

5. Controls:

a. Control subpanel shall be factory-attached to humidifier with all wiring between subpanel and humidifier completed at factory. A wiring diagram shall be included. The controller shall be microprocessor based and shall have the following features or functions:

1) Web interface shall have same functionality as the unit keypad/display and shall allow multiple remotely located users to simultaneously view system operation and/or change system parameters. Web interface shall have password-protected secure access and shall be compatible with standard Internet browsers. Web interface shall connect directly to a personal computer or through a system network via Ethernet cable and shall be interoperable with any communication network.

2) Touchscreen controller with standard building automation:

3) Intuitive touchscreen control with color graphic user interface.

4) USB interface for new software/feature upload and download of operational information.

5) Single or dual channel analog signal acceptance, supporting both demand and transducer control. Ability to control setpoint from humidifier control when using transducer controls.

b. Alarms, unit configuration, and usage timer values shall remain in nonvolatile memory indefinitely during a power outage.

c. The controls shall monitor, control, and/or adjust the following parameters:

1) Relative humidity (RH) set point, actual conditions in the space (from humidity transmitter), RH offset.

2) Dew point set point, actual conditions in the space (from dew point transmitter), dew point offset.

3) Relative humidity (RH) duct high limit set point (switch) and actual conditions.

4) Relative humidity (RH) duct high limit set point, actual conditions (from transmitter), high limit span, and high limit offset.
5) Total system demand in % of humidifier capacity.
6) Total system output in kg/hr (lb/hr).
7) Drain/flush duration, allowed days, and frequency based on usage.
8) End-of-season drain status (on standard water systems and if ordered as a DI water option) and hours humidifier is idle before end of season draining occurs.

B. Distribution Manifold:

1. The steam dispersion manifold shall directly inject pressurized steam or evaporative, non-pressurized steam into the Air Handling Unit for humidification.
2. The manifold shall be 304 Stainless steel, composed of dispersion pipe and surrounding steam jacket, manifold shall span the width of duct or air handler, and shall be multiple manifold type under any of the following conditions:
   a) Duct section height exceeds 900 mm (36 inches).
   b) Duct air velocity exceeds 5.1 m/s (1000 feet per minute).
   c) Provide piping to connect distribution manifold to steam generator.
3. Steam, dispersion panels shall be factory-assembled and include the following components:
   a) Steam supply header/separator
   b) Condensate collection header
   c) Closely spaced steam dispersion tubes spanning the distance between the two headers
4. Each dispersion tube shall be fitted with two rows of steam discharge tubelets inserted into the tube wall, centered on the diametric line, and spaced 1.5" (38 mm) apart. Each tubelet shall be made of a thermal-resin material designed for high steam temperatures. The two rows of tubelets in each dispersion tube shall discharge steam in diametrically opposite directions, perpendicular to airflow.

5. Each tubelet shall extend through the wall of and into the center of the dispersion tube and contain a steam orifice sized for its required steam capacity.
6. All tubes and headers shall be 304 stainless steel, and welded joints shall be Heli-arc welded.
7. Tubes shall be joined to headers with slip-fit couplings to facilitate easy removal.
8. Panels shall have one or two float and thermostatic (F&T) traps.

2.6 FIRESTOPPING MATERIAL

A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.7 ELECTRICAL HEAT TRACING SYSTEMS

A. Systems shall meet requirements of NFPA 70.
B. Provide tracing for outdoor piping subject to freezing temperatures below 3.3 degrees C (38 degrees F) as follows:
   1. Steam piping exposed to weather.
C. Heat tracing shall be provided to the extent shown on the drawings (Floor Plans and Elevations.
D. Heating Cable: Flexible, parallel circuit construction consisting of a continuous self-limiting resistance, conductive inner core material between two parallel copper bus wires, designed for cut-to-length at the job site and for wrapping around valves and complex fittings. Self-regulation shall prevent overheating and burnouts even where the cable overlaps itself.
   1. Provide end seals at ends of circuits. Wires at the ends of the circuits are not to be tied together.
   2. Provide sufficient cable, as recommended by the manufacturer, to keep the pipe surface at 2.2 degrees C (36 degrees F) minimum during winter outdoor design temperature, but not less than the following:
      a. 75 mm (3 inch) pipe and smaller with 25 mm (1 inch) thick insulation: 4 watts per foot of pipe.
      b. 100 mm (4 inch) pipe and larger 40 mm (1-1/2 inch) thick insulation: 8 watts per feet of pipe.
E. Electrical Heating Tracing Accessories:
   1. Power supply connection fitting and stainless-steel mounting brackets. Provide stainless steel worm gear clamp to fasten bracket to pipe.

2. 15 mm (1/2 inch) wide fiberglass reinforced pressure sensitive cloth tape to fasten cable to pipe at 300 mm (12 inch) intervals.
3. Pipe surface temperature control thermostat: Cast aluminum, NEMA 4 (watertight) enclosure, 15 mm (1/2 inch) NPT conduit hub, SPST switch rated 20 amps at 480 volts ac, with capillary and copper bulb sensor. Set thermostat to maintain pipe surface temperature at not less than 1 degrees C (34 degrees F).
4. Signs: Manufacturer's standard (NEC Code), stamped "ELECTRIC TRACED" located on the insulation jacket at 3 m (10 feet) intervals along the pipe on alternating sides.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

B. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, radiators, etc., and to coordinate with other trades. Provide all necessary fittings, offsets and pipe runs based on field measurements and at no additional cost or time to the Government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.

C. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.

D. Support piping securely. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Install convertors and other heat exchangers at height sufficient to provide gravity flow of condensate to the flash tank and condensate pump.

E. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (1 inch) minimum clearance between adjacent piping and another surface. Unless shown otherwise, slope steam, condensate and drain piping down in the direction of flow not

less than 25 mm (1 inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.

F. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally, locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing.

G. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.

H. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.

I. Connect piping to equipment as shown on the drawings. Install components furnished by others such as flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.

J. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION.

3.2 PIPE JOINTS

A. Screwed: Threads shall conform to ASME B1.20.1; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.

B. 125 Pound Cast Steel Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast steel flange.

3.3 SEISMIC BRACING

A. Provide is accordance with Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.4 LEAK TESTING

A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary, to the satisfaction of the COR in accordance

with the specified requirements. Testing shall be performed in accordance with the specification requirements.

B. An operating test at design pressure, and for hot systems, design maximum temperature.

3.5 FLUSHING AND CLEANING PIPING SYSTEMS

A. Steam, Condensate and Vent Piping: The piping system shall be flushed clean prior to equipment connection. Cleaning includes pulling all strainer screens and cleaning all scale/dirt legs during startup operation. Contractor shall be responsible for damage caused by inadequately cleaned/flushed systems.

3.6 ELECTRIC HEAT TRACING

A. Install tracing as recommended by the manufacturer.

B. Coordinate electrical connections.

3.7 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with COR and Commissioning Agent. Provide a minimum notice of 10 working days prior to startup and testing.

D. Hand on pressure gauges to normal working pressure.

3.8 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

B. Components provided under this section of the specification will be tested as part of a larger system.

3.9 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in operation and maintenance of the system.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 23 31 00
HVAC DUCTS AND CASINGS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Ductwork and accessories for HVAC including the following:
   1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.

B. Definitions:
   1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
   2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
   3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
   4. Exposed Duct: Exposed to view in a finished room, exposed to weather.

1.2 RELATED WORK

A. Fire Stopping Material: Section 07 84 00, FIRESTOPPING.

B. Seismic Reinforcing: Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

C. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

D. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

E. Duct Insulation: Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION

F. Plumbing Connections: Section 22 11 00, FACILITY WATER DISTRIBUTION

G. Air Flow Control Valves and Terminal Units: Section 23 36 00, AIR TERMINAL UNITS.

H. Duct Mounted Coils: Section 23 82 16, AIR COILS.

I. Supply Air Fans: Section 23 74 13, PACKAGED, OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS.

J. Return Air and Exhaust Air Fans: Section 23 34 00, HVAC FANS.

K. Air Filters and Filters' Efficiencies: Section 23 40 00, HVAC AIR CLEANING DEVICES.

L. Duct Mounted Instrumentation: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

M. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

N. Smoke Detectors: Section 28 31 00, FIRE DETECTION and ALARM.

1.3 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Fire Safety Code: Comply with NFPA 90A.

C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.

D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.

E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Rectangular ducts:
   a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
   b. Sealants and gaskets.
   c. Access doors.
2. Round and flat oval duct construction details:
   a. Manufacturer's details for duct fittings.
   b. Sealants and gaskets.
   c. Access sections.
   d. Installation instructions.
3. Volume dampers.
4. Upper hanger attachments.
5. Fire dampers, fire doors, and smoke dampers with installation instructions.

6. Flexible ducts and clamps, with manufacturer's installation instructions.
7. Flexible connections.
8. Instrument test fittings.
9. Details and design analysis of alternate or optional duct systems.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11 - Common Work Results for HVAC and Steam Generation.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Civil Engineers (ASCE):

ASCE7-05.....Minimum Design Loads for Buildings and Other Structures

C. American Society for Testing and Materials (ASTM):

A167-99(2009).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A653-09.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process

A1011-09a.....Standard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C1071-05e1.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)

E84-09a.....Standard Test Method for Surface Burning Characteristics of Building Materials

D. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

96-08.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

2nd Edition – 2005.....HVAC Duct Construction Standards, Metal and Flexible

1st Edition - 1985.....HVAC Air Duct Leakage Test Manual

6th Edition – 2003.....Fibrous Glass Duct Construction Standards

F. Underwriters Laboratories, Inc. (UL):

181-08.....Factory-Made Air Ducts and Air Connectors

555-06 .....Standard for Fire Dampers

555S-06 .....Standard for Smoke Dampers

PART 2 - PRODUCTS

2.1 DUCT MATERIALS AND SEALANTS

A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.

B. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards, paragraph S1.9.

1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) compounded specifically for sealing ductwork as recommended by the manufacturer. Generally provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.
2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.
3. Gaskets in Flanged Joints: Soft neoprene.

C. Approved factory-made joints may be used.

2.2 DUCT CONSTRUCTION AND INSTALLATION

A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:

B. Duct Pressure Classification:

0 to 50 mm (2 inch)

> 50 mm to 75 mm (2 inch to 3 inch)

> 75 mm to 100 mm (3 inch to 4 inch)

C. Seal Class: All ductwork shall receive Class A Seal

D. Round and Flat Oval Ducts: Furnish duct and fittings made by the same manufacturer to insure good fit of slip joints. When submitted and approved in advance, round and flat oval duct, with size converted on the basis of equal pressure drop, may be furnished in lieu of rectangular duct design shown on the drawings.

1. Elbows: Diameters 80 through 200 mm (3 through 8 inches) shall be two sections die stamped, all others shall be gored construction, maximum 18 degree angle, with all seams continuously welded or standing seam. Coat galvanized areas of fittings damaged by welding with corrosion resistant aluminum paint or galvanized repair compound.
2. Provide bell mouth, conical tees or taps, laterals, reducers, and other low loss fittings as shown in SMACNA HVAC Duct Construction Standards.
3. Ribbed Duct Option: Lighter gage round/oval duct and fittings may be furnished provided certified tests indicating that the rigidity and performance is equivalent to SMACNA standard gage ducts are submitted.
   a. Ducts: Manufacturer's published standard gage, G90 coating, spiral lock seam construction with an intermediate standing rib.
   b. Fittings: May be manufacturer's standard as shown in published catalogs, fabricated by spot welding and bonding with neoprene base cement or machine formed seam in lieu of continuous welded seams.
4. Provide flat side reinforcement of oval ducts as recommended by the manufacturer and SMACNA HVAC Duct Construction Standard S3.13. Because of high pressure loss, do not use internal tie-rod reinforcement unless approved by the COR.

E. Casings and Plenums: Construct in accordance with SMACNA HVAC Duct Construction Standards Section 6, including curbs, access doors, pipe penetrations, eliminators and drain pans. Access doors shall be hollow metal, insulated, with latches and door pulls, 500 mm (20 inches) wide

by 1200 - 1350 mm (48 - 54 inches) high. Provide view port in the doors where shown. Provide drain for outside air louver plenum. Outside air plenum shall have exterior insulation. Drain piping shall be routed to the nearest floor drain.

F. Volume Dampers: Single blade or opposed blade, multi-louver type as detailed in SMACNA Standards. Refer to SMACNA Detail Figure 2-12 for Single Blade and Figure 2.13 for Multi-blade Volume Dampers.

G. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.

H. Ductwork in excess of 620 cm^2 (96 square inches) shall be protected unless the duct has one dimension less than 150 mm (6 inches) if it passes through the areas listed below. Refer to the Mission Critical Physical Design Manual for VA Facilities. This applies to the following:

1. Agent cashier spaces
2. Perimeter partitions of caches
3. Perimeter partitions of computer rooms
4. Perimeter of a COOP sites
5. Perimeter partitions of Entrances
6. Security control centers (SCC)

2.3 DUCT ACCESS DOORS, PANELS AND SECTIONS

A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:

1. Each duct mounted coil and humidifier.
2. Each fire damper (for link service), smoke damper and automatic control damper.
3. Each duct mounted smoke detector.

B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.

1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

2.4 FIRE DAMPERS

A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2 hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

B. Fire dampers in wet air exhaust shall be of stainless steel construction, all others may be galvanized steel.

C. Minimum requirements for fire dampers:

1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.
2. Submit manufacturer's installation instructions conforming to UL rating test.

2.5 SMOKE DAMPERS

A. Maximum air velocity, through free area of open damper, and pressure loss: Low pressure and medium pressure duct (supply, return, exhaust, outside air): 450 m/min (1500 fpm). Maximum static pressure loss: 32 Pa (0.13 inch W.G.).

B. Maximum air leakage, closed damper: 0.32 cubic meters /min/square meter (4.0 CFM per square foot) at 750 Pa (3 inch W.G.) differential pressure.

C. Minimum requirements for dampers:

1. Shall comply with requirements of Table 6-1 of UL 555S, except for the Fire Endurance and Hose Stream Test.
2. Frame: Galvanized steel channel with side, top and bottom stops or seals.
3. Blades: Galvanized steel, parallel type preferably, 300 mm (12 inch) maximum width, edges sealed with neoprene, rubber or felt, if required to meet minimum leakage. Airfoil (streamlined) type for minimum noise generation and pressure drop are preferred for duct mounted dampers.
4. Shafts: Galvanized steel.
5. Bearings: Nylon, bronze sleeve or ball type.
6. Hardware: Zinc plated.

7. Operation: Automatic open/close. No smoke damper that requires manual reset or link replacement after actuation is acceptable. See drawings for required control operation.

D. Motor operator (actuator): Provide pneumatic or electric as required by the automatic control system, externally mounted on stand-offs to allow complete insulation coverage.

2.6 COMBINATION FIRE AND SMOKE DAMPERS

Combination fire and smoke dampers: Multi-blade type units meeting all requirements of both fire dampers and smoke dampers shall be used where shown and may be used at the Contractor's option where applicable.

2.7 FIRE DOORS

Galvanized steel, interlocking blade type, UL listing and label, 71 degrees C (160 degrees F) fusible link, 3 hour rating and approved for openings in Class A fire walls with rating up to 4 hours, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

2.8 FLEXIBLE AIR DUCT

A. General: Factory fabricated, complying with NFPA 90A for connectors not passing through floors of buildings. Flexible ducts shall not penetrate any fire or smoke barrier which is required to have a fire resistance rating of one hour or more. Flexible duct length shall not exceed 1.5 m (5 feet). Provide insulated acoustical air duct connectors in supply air duct systems and elsewhere as shown.

B. Flexible ducts shall be listed by Underwriters Laboratories, Inc., complying with UL 181. Ducts larger than 200 mm (8 inches) in diameter shall be Class 1. Ducts 200 mm (8 inches) in diameter and smaller may be Class 1 or Class 2.

C. Insulated Flexible Air Duct: Factory made including mineral fiber insulation with maximum C factor of 0.25 at 24 degrees C (75 degrees F) mean temperature, encased with a low permeability moisture barrier outer jacket, having a puncture resistance of not less than 50 Beach Units. Acoustic insertion loss shall not be less than 3 dB per 300 mm (foot) of straight duct, at 500 Hz, based on 150 mm (6 inch) duct, of 750 m/min (2500 fpm).

D. Application Criteria:

1. Temperature range: -18 to 93 degrees C (0 to 200 degrees F) internal.

2. Maximum working velocity: 1200 m/min (4000 feet per minute).
3. Minimum working pressure, inches of water gage: 2500 Pa (10 inches) positive, 500 Pa (2 inches) negative.

E. Duct Clamps: 100 percent nylon strap, 80 kg (175 pounds) minimum loop tensile strength manufactured for this purpose or stainless steel strap with cadmium plated worm gear tightening device. Apply clamps with sealant and as approved for UL 181, Class 1 installation.

2.9 FLEXIBLE DUCT CONNECTIONS

Where duct connections are made to fans, air terminal units, and air handling units, install a non-combustible flexible connection of 822 g (29 ounce) neoprene coated fiberglass fabric approximately 150 mm (6 inches) wide. For connections exposed to sun and weather provide hypalon coating in lieu of neoprene. Burning characteristics shall conform to NFPA 90A. Securely fasten flexible connections to round ducts with stainless steel or zinc-coated iron draw bands with worm gear fastener. For rectangular connections, crimp fabric to sheet metal and fasten sheet metal to ducts by screws 50 mm (2 inches) on center. Fabric shall not be stressed other than by air pressure. Allow at least 25 mm (one inch) slack to ensure that no vibration is transmitted.

2.10 PREFABRICATED ROOF CURBS

Galvanized steel or extruded aluminum 300 mm (12 inches) above finish roof service, continuous welded corner seams, treated wood nailer, 40 mm (1-1/2 inch) thick, 48 kg/cubic meter (3 pound/cubic feet) density rigid mineral fiberboard insulation with metal liner, built-in cant strip (except for gypsum or tectum decks). For surface insulated roof deck, provide raised cant strip (recessed mounting flange) to start at the upper surface of the insulation. Curbs shall be constructed for pitched roof or ridge mounting as required to keep top of curb level.

2.11 FIRESTOPPING MATERIAL

Refer to Section 07 84 00, FIRESTOPPING.

2.12 SEISMIC RESTRAINT FOR DUCTWORK

Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:

1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.
2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards, Section II. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.

C. Install duct hangers and supports in accordance with SMACNA Standards, Chapter 4.

D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the COR. Install with required perimeter mounting

angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the COR.

E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.

F. Flexible duct installation: Refer to SMACNA Standards, Chapter 3. Ducts shall be continuous, single pieces not over 1.5 m (5 feet) long (NFPA 90A), as straight and short as feasible, adequately supported. Centerline radius of bends shall be not less than two duct diameters. Make connections with clamps as recommended by SMACNA. Clamp per SMACNA with one clamp on the core duct and one on the insulation jacket. Flexible ducts shall not penetrate floors, or any chase or partition designated as a fire or smoke barrier, including corridor partitions fire rated one hour or two hour. Support ducts SMACNA Standards.

G. Where diffusers, registers and grilles cannot be installed to avoid seeing inside the duct, paint the inside of the duct with flat black paint to reduce visibility.

H. Control Damper Installation:

1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.
2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.

I. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition or return to source of supply for repair or replacement, as determined by COR. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to

existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

3.2 DUCT LEAKAGE TESTS AND REPAIR

A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.

B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections. Based upon satisfactory initial duct leakage test results, the scope of the testing may be reduced by the COR on ductwork constructed to the 500 Pa (2" WG) duct pressure classification. In no case shall the leakage testing of ductwork constructed above the 500 Pa (2" WG) duct pressure classification or ductwork located in shafts or other inaccessible areas be eliminated.

C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.

D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.

E. All tests shall be performed in the presence of the COR and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the COR and identify leakage source with excessive leakage.

F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the COR.

G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.

H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

3.3 DUCTWORK EXPOSED TO WIND VELOCITY

Provide additional support and bracing to all exposed ductwork installed on the roof or outside the building to withstand wind velocity of 145 km/h (90_mph).

3.4 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.5 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 23 34 00
HVAC FANS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Fans for heating, ventilating and air conditioning.

B. Product Definitions: AMCA Publication 99, Standard l-66.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.

F. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

G. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

H. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

I. Section 23 74 13, PACKAGED, OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS.

J. Section 23 82 16, AIR COILS.

K. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

A. Refer to paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Fans and power ventilators shall be listed in the current edition of AMCA 26l and shall bear the AMCA performance seal.

C. Operating Limits for Centrifugal Fans: AMCA 99 (Class I, II, and III).

D. Fans and power ventilators shall comply with the following standards:

1. Testing and Rating: AMCA 2l0.
2. Sound Rating: AMCA 300.

E. Vibration Tolerance for Fans and Power Ventilators: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

F. Performance Criteria:

1. The fan schedule shall show the design air volume and static pressure. Select the fan motor HP by increasing the fan BHP by 10 percent to account for the drive losses and field conditions.
2. Select the fan operating point as follows:

a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point

b. Air Foil, Backward Inclined, or Tubular: At or near the peak static efficiency

G. Safety Criteria: Provide manufacturer's standard screen on fan inlet and discharge where exposed to operating and maintenance personnel.

H. Corrosion Protection:

1. All steel shall be mill-galvanized, or phosphatized and coated with minimum two coats, corrosion resistant enamel paint. Manufacturers paint and paint system shall meet the minimum specifications of: ASTM D1735 water fog; ASTM B117 salt spray; ASTM D3359 adhesion; and ASTM G152 and G153 for carbon arc light apparatus for exposure of non-metallic material.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturers Literature and Data:

1. Fan sections, motors and drives.

2. Centrifugal fans, motors, drives, accessories and coatings.

a. In-line centrifugal fans.

C. Certified Sound power levels for each fan.

D. Motor ratings types, electrical characteristics and accessories.

E. Belt guards.

F. Maintenance and Operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

G. Certified fan performance curves for each fan showing cubic feet per minute (CFM) versus static pressure, efficiency, and horsepower for design point of operation.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Movement and Control Association International, Inc. (AMCA):

99-2016.....Standards Handbook

210-2016.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating

261-2017.....Directory of Products Licensed to bear the AMCA Certified Ratings Seal - Published Annually

300-2014.....Reverberant Room Method for Sound Testing of Fans

C. American Society for Testing and Materials (ASTM):

B117-2018.....Standard Practice for Operating Salt Spray (Fog) Apparatus

D1735-2008.....Standard Practice for Testing Water Resistance of Coatings Using Water Fog Apparatus

D3359-2017.....Standard Test Methods for Measuring Adhesion by Tape Test

G152-2013.....Standard Practice for Operating Open Flame Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

G153-2013.....Standard Practice for Operating Enclosed Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

D. National Fire Protection Association (NFPA):

NFPA 96-2018.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. Underwriters Laboratories, Inc. (UL):

181-2013.....Factory Made Air Ducts and Air Connectors

1.6 EXTRA MATERIALS

A. Provide one additional set of belts for all belt-driven fans.

PART 2 - PRODUCTS

2.1 FAN SECTION (CABINET FAN)

Refer to specification Section 23 74 13, PACKAGED, OUTDOOR CENTRAL-STATION AIR-HANDLING UNITS.

2.2 CENTRIFUGAL FANS

A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE. Record factory vibration test results on the fan or furnish to the Contractor.

B. Fan arrangement, unless noted or approved otherwise:

1. DWDl fans: Arrangement 3.
2. SWSl fans: Arrangement l, 3, 9 or l0.

C. Construction: Wheel diameters and outlet areas shall be in accordance with AMCA standards.

1. Housing: Low carbon steel, arc welded throughout, braced and supported by structural channel or angle iron to prevent vibration or pulsation, flanged outlet, inlet fully streamlined. Provide lifting clips, and casing drain. Provide manufacturer's standard access door. Provide 12.5 mm (1/2 inches) wire mesh screens for fan inlets without duct connections.
2. Wheel: Steel plate with die formed blades welded or riveted in place, factory balanced statically and dynamically.
3. Shaft: Designed to operate at no more than 70 percent of the first critical speed at the top of the speed range of the fans class.
4. Bearings: Heavy duty ball or roller type sized to produce a Bl0 life of not less than 50,000 hours, and an average fatigue life of 200,000 hours. Extend filled lubrication tubes for interior bearings or ducted units to outside of housing.
5. Belts: Oil resistant, non-sparking and non-static.
6. Belt Drives: Factory installed with final alignment belt adjustment made after installation.
7. Motors and Fan Wheel Pulleys: Adjustable pitch for use with motors through 15HP, fixed pitch for use with motors larger than 15HP. Select pulleys so that pitch adjustment is at the middle of the adjustment range at fan design conditions.
8. Motor, adjustable motor base, drive and guard: Furnish from factory with fan. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC for specifications. Provide protective sheet metal enclosure for fans located outdoors.
9. Furnish variable speed fan motor controllers where shown on the drawings. Refer to Section 26 29 11, MOTOR STARTERS. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC for controller/motor combination requirements.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install fan, motor and drive in accordance with manufacturer's instructions.

B. Align fan and motor sheaves to allow belts to run true and straight.

C. Bolt equipment to curbs with galvanized lag bolts.

D. Install vibration control devices as shown on drawings and specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

3.2 PRE-OPERATION MAINTENANCE

A. Lubricate bearings, pulleys, belts and other moving parts with manufacturer recommended lubricants.

B. Rotate impeller by hand and check for shifting during shipment and check all bolts, collars, and other parts for tightness.

C. Clean fan interiors to remove foreign material and construction dirt and dust.

3.3 START-UP AND INSTRUCTIONS

A. Verify operation of motor, drive system and fan wheel according to the drawings and specifications.

B. Check vibration and correct as necessary for air balance work.

C. After air balancing is complete and permanent sheaves are in place perform necessary field mechanical balancing to meet vibration tolerance in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

- - - E N D - - -

--- INTENTIONALLY BLANK ---

SECTION 23 36 00
AIR TERMINAL UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

Air terminal units, air flow control valves.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

D. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

E. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

F. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

G. Section 23 31 00, HVAC DUCTS and CASINGS.

H. Section 23 82 16, AIR COILS.

1.3 QUALITY ASSURANCE

Refer to Article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Air Terminal Units: Submit test data.

C. Certificates:

1. Compliance with Article, QUALITY ASSURANCE.
2. Compliance with specified standards.

D. Operation and Maintenance Manuals: Submit in accordance with paragraph, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Conditioning and Refrigeration Institute (AHRI)/(ARI):
880-2017.....Performance Rating of Air Terminals

C. National Fire Protection Association (NFPA):
90A-2018.....Standard for the Installation of Air Conditioning and Ventilating Systems

D. Underwriters Laboratories, Inc. (UL):

181-2013.....Standard for Factory-Made Air Ducts and Air Connectors

E. American Society for Testing and Materials (ASTM):

C 665-2006.....Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing

1.6 GUARANTY

In accordance with the GENERAL CONDITIONS

PART 2 - PRODUCTS

2.1 GENERAL

A. Coils:

1. All Air-Handling Units: Provide aluminum fins and copper coils for all hot water reheat coils.
2. Water Heating Coils:
   a. ARI certified, continuous plate or spiral fin type, leak tested at 2070 kPa (300 PSI).
   b. Capacity: As indicated, based on scheduled entering water temperature.
   c. Headers: Copper or Brass.
   d. Fins: Aluminum, maximum 315 fins per meter (8 fins per inch).
   e. Tubes: Copper, arrange for counter-flow of heating water.
   f. Water Flow Rate: Minimum 0.032 Liters/second (0.5 GPM).
   g. Provide vent and drain connection at high and low point, respectively of each coil.
   h. Coils shall be guaranteed to drain.

B. Labeling: Control box shall be clearly marked with an identification label that lists such information as nominal CFM, maximum and minimum factory-set airflow limits, coil type and coil connection orientation, where applicable.

C. Factory calibrate air terminal units to air flow rate indicated. All settings including maximum and minimum air flow shall be field adjustable.

D. Dampers with internal air volume control: See section 23 31 00 HVAC DUCTS and CASINGS.

2.2 AIR TERMINAL UNITS (BOXES)

A. General: Factory built, pressure independent units, factory set-field adjustable air flow rate, suitable for single duct applications. Use of dual-duct air terminal units is not permitted. Clearly show on each unit the unit number and factory set air volumes corresponding to the contract drawings. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC work assumes factory set air volumes. Coordinate flow controller sequence and damper operation details with the drawings and Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. All air terminal units shall be brand new products of the same manufacturer.

B. Capacity and Performance: The Maximum Capacity of a single terminal unit shall not exceed 566 Liters/second (1,200 CFM).

C. Sound Power Levels:
Acoustic performance of the air terminal units shall be based on the design noise levels for the spaces stipulated in Section 23 05 41 (Noise and Vibration Control for HVAC Piping and Equipment). Equipment schedule shall show the sound power levels in all octave bands. Terminal sound attenuators shall be provided, as required, to meet the intent of the design.

D. Casing: Unit casing shall be constructed of galvanized steel no lighter than 0.85 mm (22 Gauge). Provide hanger brackets for attachment of supports.

1. Lining material: Suitable to provide required acoustic performance, thermal insulation and prevent sweating. Meet the requirements of NFPA 90A and comply with UL 181 for erosion as well as ASTMC 665 antimicrobial requirements. Insulation shall consist of 13 mm (1/2 IN) thick non-porous foil faced rigid fiberglass insulation of 4-lb/cu.ft, secured by full length galvanized steel z-strips which enclose and seal all edges. Tape and adhesives shall not be used. Materials shall be non-friable and with surfaces, including all edges, fully encapsulated and faced with perforated metal or coated so that the air stream will not detach material.

2. Access panels (or doors): Provide panels large enough for inspection, adjustment, and maintenance without disconnecting ducts, and for cleaning heating coils attached to unit, even if there are no moving parts. Panels shall be insulated to same standards as the

rest of the casing and shall be secured and gasketed airtight. It shall require no tool other than a screwdriver to remove.

3. Total leakage from casing: Not to exceed 2 percent of the nominal capacity of the unit when subjected to a static pressure of 750 Pa (3-inch WG), with all outlets sealed shut and inlets fully open.

E. Construct dampers and other internal devices of corrosion resisting materials which do not require lubrication or other periodic maintenance.

1. Damper Leakage: Not greater than 2 percent of maximum rated capacity, when closed against inlet static pressure of 1 kPa (4-inch WG).

F. Provide multi-point velocity pressure sensors with external pressure taps.

1. Provide direct reading air flow rate table pasted to box.

G. Provide static pressure tubes.

H. Externally powered DDC variable air volume controller and damper actuator to be furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC for factory mounting on air terminal units. The DDC controller shall be electrically actuated.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Work shall be installed as shown and according to the manufacturer’s diagrams and recommendations.

B. Handle and install units in accordance with manufacturer's written instructions.

C. Support units rigidly so they remain stationary at all times. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.

D. Locate air terminal units to provide a straight section of inlet duct for proper functioning of volume controls. See VA Standard Detail.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- - - E N D - - -

SECTION 23 37 00
AIR OUTLETS AND INLETS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Roof Curbs

B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

D. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

E. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

1.3 QUALITY ASSURANCE

A. Refer to Article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Fire Safety Code: Comply with NFPA 90A.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Diffusers, registers, grilles and accessories.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Diffusion Council Test Code:

1062 GRD-2015.....Certification, Rating, and Test Manual 4th Edition

C. American Society of Civil Engineers (ASCE):

ASCE7-2017.....Minimum Design Loads for Buildings and Other Structures

D. American Society for Testing and Materials (ASTM):

A-240/A240M-2019.....Standard Specification for Chromium, and Chromium-Nickel Stainless Steel Plate, Sheet,

and Strip for Pressure Vessels and for General Applications

B209- 2014.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

E. National Fire Protection Association (NFPA):

90A-2018.....Standard for the Installation of Air Conditioning and Ventilating Systems

F. Underwriters Laboratories, Inc. (UL):

181-2013.....UL Standard for Safety Factory-Made Air Ducts and Connectors

PART 2 - PRODUCTS

2.1 EQUIPMENT SUPPORTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 AIR OUTLETS AND INLETS

A. Materials:

1. Steel or aluminum. Use aluminum air outlets and inlets for facilities located in high-humidity areas. Exhaust air registers located in combination toilets and shower stalls shall be constructed from aluminum. Provide manufacturer's standard gasket.
2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.

B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT for NC criteria.

C. Air Supply Outlets:

1. Ceiling Diffusers: Suitable for surface mounting, exposed T-bar or special tile ceilings, off-white finish, square or round neck connection as shown on the drawings. Provide plaster frame for units in plaster ceilings.
   a. Square, louver, fully adjustable pattern: Round neck, surface mounting unless shown otherwise on the drawings. Provide equalizing or control grid and volume control damper.

b. Louver face type: Square or rectangular, removable core for 1, 2, 3, or 4-way directional pattern. Provide equalizing or control grid and opposed blade damper.

c. Perforated face type: Manual adjustment for one-, two-, three-, or four-way horizontal air distribution pattern without change of air volume or pressure. Provide equalizing or control grid and opposed blade over overlapping blade damper. Perforated face diffusers for VAV systems shall have the pattern controller on the inner face, rather than in the neck and designed to discharge air horizontally at the ceiling maintaining a Coanda effect.

4. Supply Registers: Double deflection type with horizontal face bars and opposed blade damper with removable key operator.

a. Margin: Flat, 30 mm (1-1/4 inches) wide.

b. Bar spacing: 20 mm (3/4 inch) maximum.

c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting or shall be extruded with manufacturer's standard finish.

5. Supply Grilles: Same as registers but without the opposed blade damper.

D. Return and Exhaust Registers and Grilles: Provide opposed blade damper without removable key operator for registers.

1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting or shall be extruded aluminum with manufacturer's standard aluminum finish.

2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.

3. Perforated Face Type: To match supply units.

4. Grid Core Type: 13 mm by 13 mm (1/2 inch by 1/2 inch) core with 30 mm (1-1/4 inch) margin.

5. Linear Type: To match supply units.

7. Egg Crate Grilles: Aluminum or Painted Steel 1/2 by 1/2 by 1/2-inch grid providing 90% free area.

a. Heavy extruded aluminum frame shall have countersunk screw mounting. Unless otherwise indicated, register blades and frame shall have factory applied white finish.

b. Grille shall be suitable for duct or surface mounting as indicated on drawings. All necessary appurtenances shall be provided to allow for mounting.

2.3 WIRE MESH GRILLE

A. Fabricate grille with 2 x 2 mesh 13 mm (1/2 inch) galvanized steel or aluminum hardware cloth in a spot-welded galvanized steel frame with approximately 40 mm (1-1/2 inch) margin.

B. Use grilles, where shown in unfinished areas such as mechanical rooms.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition or return to source of supply for repair or replacement, as determined by COR. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

3.2 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.3 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

- - - E N D - - -

SECTION 23 40 00
HVAC AIR CLEANING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. Air filters for heating, ventilating and air conditioning.

B. Definitions: Refer to ASHRAE Standard 52.2 for definitions of face velocity, net effective filtering area, media velocity, initial resistance (pressure drop), MERV (Minimum Efficiency Reporting Value), PSE (Particle Size Efficiency), particle size ranges for each MERV number, dust holding capacity and explanation of electrostatic media used filtration products versus mechanical filtration products. Refer to ASHRAE Standard 52.2 Appendix J for definition of MERV-A.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.

D. Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

1.3 QUALITY ASSURANCE

A. Air Filter Performance Report for Extended Surface Filters:

1. Submit a test report for each Grade of filter being offered. The report shall not be more than three (3) years old and prepared by using test equipment, method and duct section as specified by ASHRAE Standard 52.2 for type filter under test and acceptable to Resident Engineer, indicating that filters comply with the requirements of this specification. Filters utilizing partial or complete synthetic media will be tested in compliance with pre-conditioning steps as stated in Appendix J. All testing is to be conducted on filters with a nominal 24 inch by 24 inch face dimension. Test for 150 m/min (500 fpm) will be accepted for lower velocity rated filters provided the test report of an independent testing laboratory complies with all the requirements of this specification.

B. Filter Warranty for Extended Surface Filters: Guarantee the filters against leakage, blow-outs, and other deficiencies during their normal useful life, up to the time that the filter reaches the final pressure drop. Defective filters shall be replaced at no cost to the Government.

C. Comply with UL Standard 900 for flame test.

D. Nameplates: Each filter shall bear a label or name plate indicating manufacturer's name, filter size, rated efficiency, UL classification, and file number.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Extended surface filters.
2. Holding frames. Identify locations.
3. Side access housings. Identify locations, verify insulated doors.
4. Magnehelic gages.

C. Air Filter performance reports.

D. Suppliers warranty.

E. Field test results for HEPA filters as per paragraph 2.3.E.3.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. American Society of Heating, Refrigerating and Air-conditioning Engineers, Inc. (ASHRAE):

52.2-2017.....Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size, including Appendix J

C. American Society of Mechanical Engineers (ASME):

NQA-1-2017.....Quality Assurance Requirements for Nuclear Facilities Applications

D. Underwriters Laboratories, Inc. (UL):

900;Revision 15 July 2015 Test Performance of Air Filter Units

PART 2 - PRODUCTS

2.1 REPLACEMENT FILTER ELEMENTS TO BE FURNISHED

A. To allow temporary use of HVAC systems for testing and in accordance with Paragraph, TEMPORARY USE OF MECHANICAL AND ELECTRICAL SYSTEMS in Section 01 00 00, GENERAL REQUIREMENTS, provide one complete set of additional filters to the Resident Engineer.

B. The Resident Engineer will direct whether these additional filters will either be installed as replacements for dirty units or turned over to VA for future use as replacements.

2.2 EXTENDED SURFACE AIR FILTERS

A. Use factory assembled air filters of the extended surface type with supported or non-supported cartridges for removal of particulate matter in air conditioning, heating and ventilating systems. Filter units shall be of the extended surface type fabricated for disposal when the contaminant load limit is reached as indicated by maximum (final) pressure drop.

B. Filter Classification: UL listed and approved conforming to UL Standard 900.

C. HVAC Filter Types

HVAC Filter Types
Table 2.2C

MERV Value ASHRAE 52.2	MERV-A Value ASHRAE 62.2 Appendix J	Application	Particle Size	Thickness /Type
8	8-A	Pre-Filter	3 to 10 Microns	50 mm (2-inch) Throwaway
11	11-A	After-Filter	1 to 3 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
13	13-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge
14	14-A	After-Filter	0.3 to 1 Microns	150 mm (6-inch) or 300 mm (12-inch) Rigid Cartridge

2.3 MEDIUM EFFICIENCY PLEATED PANEL PRE-FILTERS (2″; MERV 8; UL 900 CLASS 2):

A. Construction: Air filters shall be medium efficiency ASHRAE pleated panels consisting of cotton and synthetic or 100% virgin synthetic media, self-supporting media with required media stabilizers, and beverage board enclosing frame. Filter media shall be lofted to a uniform depth and formed into a uniform radial pleat. The media stabilizers shall be bonded to the downstream side of the media to maintain radial pleats and prevent media oscillation. An enclosing frame of no less than 28-point high wet-strength beverage board shall provide a rigid and durable enclosure. The frame shall be bonded to the media on all sides to prevent air bypass. Integral diagonal support

members on the air entering and air exiting side shall be bonded to the apex of each pleat to maintain uniform pleat spacing in varying airflows.

B. Performance: The filter shall have a Minimum Efficiency Reporting Value of MERV 8 when evaluated under the guidelines of ASHRAE Standard 52.2. It shall also have a MERV-A of 8 when tested per Appendix J of the same standard. The media shall maintain or increase in efficiency over the life of the filter. Pertinent tolerances specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-2014 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24″ x 24″ face dimension.

Minimum Efficiency Reporting (MERV)	8
Dust Holding Capacity (Grams)	105
Nominal Size (Width x Height x Depth)	24x24x2
Rated Air Flow Capacity (Cubic Feet per Minute)	2,000
Rated Air Flow Rate (Feet per Minute)	500
Final Resistance (Inches w.g.) Maximum Recommended Change-Out Resistance (Inches w.g.)	1.0 0.66
Rated Initial Resistance (Inches w.g.)	0.33

C. The filters shall be approved and listed by Underwriters' Laboratories, Inc. as Class 2 when tested according to U. L. Standard 900 and CAN 4-5111.

2.4 HIGH EFFICIENCY EXTENDED SURFACE (INTERMEDIATE/AFTER (FINAL)) CARTRIDGE FILTERS (12″; MERV 14/13/11; UL 900 CLASS 2):

A. Construction: Air filters shall consist of 8 pleated media packs assembled into 4 V-banks within a totally plastic frame. The filters shall be capable of operating at temperatures up to 80 degrees C (176 degrees F). The filters must either fit without modification or be adaptable to the existing holding frames. The molded end panels are to be made of high impact polystyrene plastic. The center support members shall be made of ABS plastic. No metal components are to be used.

B. Media: The media shall be made of micro glass fibers with a water repellent binder. The media shall be a dual density construction, with

coarser fibers on the air entering side and finer fibers on the air leaving side. The media shall be pleated using separators made of continuous beads of low profile thermoplastic material. The media packs shall be bonded to the structural support members at all points of contact, this improves the rigidity as well as eliminates potential air bypass in the filter

C. Performance: Filters of the size, air flow capacity and nominal efficiency (MERV) shall meet the following rated performance specifications based on the ASHRAE 52.2-1999 test method. Where applicable, performance tolerance specified in Section 7.4 of the Air-Conditioning and Refrigeration Institute (ARI) Standard 850-2014 shall apply to the performance ratings. All testing is to be conducted on filters with a nominal 24"x24" header dimension.

Minimum Efficiency Reporting Value (MERV)	14	13	11
Gross Media Area (Sq. Ft.) Dust Holding Capacity (Grams)	197 486	197 430	197 465
Nominal Size (Width x Height x Depth)	24x24x12	24x24x12	24x24x12
Rated Air Flow Capacity (cubic feet per minute)	2,000	2,000	2,000
Rated Air Flow Rate (feet per minute)	500	500	500
Final Resistance (inches w.g.) Maximum Recommended Change-Out Resistance (Inches w.g.)	2.0 0.74	2.0 0.68	2.0 0.54
Rated Initial Resistance (inches w.g.)	0.37	0.34	0.27

2.5 FILTER HOUSINGS/SUPPORT FRAMES

A. Side Servicing Housings (HVAC Grade)

1. Filter housing shall be two-stage filter system consisting of 16-gauge galvanized steel enclosure, aluminum filter mounting track, universal filter holding frame, insulated dual-access doors, static pressure tap, filter gaskets and seals. In-line housing depth shall not exceed 21”. Sizes shall be as noted on enclosed drawings or other supporting materials.
2. Construction: The housing shall be constructed of 16-gauge galvanized steel with pre-drilled standing flanges to facilitate attachment to other system components. Corner posts of Z-channel construction shall ensure dimensional adherence. Where installed

outdoors, the housing shall be weatherproof and suitable for rooftop/outdoor installation. The housing shall incorporate the capability of two stages of filtration without modification to the housing. A filter track, of aluminum construction shall be an integral component of housing construction. The track shall accommodate a 2” deep prefilter, a 6” or 12” deep rigid final filter, or a pocket filter with header. Insulated dual access doors, swing-open type, shall include high-memory sponge neoprene gasket to facilitate a door-to-filter seal. Each door shall be equipped with adjustable and replaceable positive sealing UV-resistant star-style knobs and replaceable door hinges. A universal holding frame constructed of 18-gauge galvanized steel, equipped with centering dimples, multiple fastener lances, and polyurethane filter sealing gasket, shall be included to facilitate installation of high-efficiency filters. The housing shall include a pneumatic fitting to allow the installation of a static pressure gauge to evaluate pressure drop across a single filter or any combination of installed filters.

3. Performance: Leakage at rated airflow, upstream to downstream of filter, holding frame, and slide mechanism shall be less than 1% at 3.0” w.g. Leakage in to or out of the housing shall be less than one half of 1% at 3.0” w.g. Accuracy of pneumatic pressure fitting, when to evaluate a single-stage, or multiple filter stages, shall be accurate within ± 3% at 0.6” w.g.
4. Manufacturer shall provide evidence of facility certification to ISO 9001:2015.

B. Holding Frame System (HVAC Grade):

1. Air filter-holding frames shall be 16-gauge galvanized steel with filter sealing flange, centering dimples, sealing gasket and lances for appropriate air filter fasteners. Sizes shall be noted on drawings or other supporting materials.
2. Construction: Filter holding frame shall be constructed of 16-gauge galvanized steel. The frame shall be assembled from two corner sections and welded to assure a rigid and durable frame assembly. The frame shall include a variety of pre-punched lances for filter fastener attachment. Fastener shall be capable of being installed without the use of tools, nuts or bolts. Lance penetrations shall be

upstream of filter flange to assure leak-free integrity. The frame shall include filter-centering dimples on each frame wall to facilitate ease of filter installation and assure filter centering against filter sealing flange. A 3/4” filter-sealing flange shall be an integral component of the holding frame. All corners shall be flush mitered and a permanently mounted polyurethane foam gasket shall be mounted on the sealing flange to assure filter to frame sealing integrity.

2.6 INSTRUMENTATION

A. Magnehelic Differential Pressure Filter Gages: Nominal 100 mm (four inch) diameter, zero to 500 Pa (zero to two inch water gage. Gauges shall be flush-mounted in aluminum panel board, complete with static tips, copper or aluminum tubing, and accessory items to provide zero adjustment.

B. DDC static (differential) air pressure measuring station. Refer to Specification Section 23 09 23 DIRECT DIGITAL CONTROL SYSTEM FOR HVAC

C. Provide one DDC sensor across each extended surface filter. Provide Petcocks for each gauge or sensor.

D. Provide one common filter gauge for two-stage filter banks with isolation valves to allow differential pressure measurement.

2.7 HVAC EQUIPMENT FACTORY FILTERS

A. Manufacturer standard filters within fabricated packaged equipment should be specified with the equipment and should adhere to industry standard.

B. Cleanable filters are not permitted.

C. Automatic Roll Type filters are not permitted.

PART 3 – EXECUTION

3.1 INSTALLATION

A. Install supports, filters and gages in accordance with manufacturer's instructions.

3.2 START-UP AND TEMPORARY USE

A. Clean and vacuum air handling units and plenums prior to starting air handling systems.

B. Replace Pre-filters and install clean filter units prior to final inspection as directed by the Resident Engineer.

3.3 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

SECTION 23 74 13
PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Roof top air handling units including integral components specified herein.

B. Definitions: Roof Top Air Handling Unit(Roof Top Units, RTU): A factory fabricated assembly consisting of fan, coils, filters, and other necessary equipment to perform one or more of the following functions of circulating, cleaning, heating, cooling, humidifying, dehumidifying, and mixing of air. Design capacities of units shall be as scheduled on the drawings.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

C. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION EQUIPMENT.

F. Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

G. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

H. Section 23 07 11, HVAC and BOILER PLANT INSULATION.

I. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS.

J. Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

K. Section 23 21 13, HYDRONIC PIPING

L. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING.

M. Section 23 31 00, HVAC DUCTS and CASINGS.

N. Section 23 34 00, HVAC FANS.

O. Section 23 40 00, HVAC AIR CLEANING DEVICES.

P. Section 23 82 16, AIR COILS.

Q. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

A. Refer to Article, Quality Assurance, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Air Handling Units Certification
   1. Air Handling Units with Housed Centrifugal Fans: The air handling units shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
   2. Air Handling Units with Plenum Fans:
      a. Air handling Units with Multiple Fans in an Array shall be tested and rated in accordance with AHRI 430 and AHRI 260.
C. Heating, Cooling, and Air Handling Capacity and Performance Standards: AHRI 410, AHRI 430, ASHRAE 51, and AMCA 210.
D. Performance Criteria:
   1. The fan BHP shall include all system effects for all fans and v-belt drive losses for housed centrifugal fans.
   2. The fan motor shall be selected within the rated nameplate capacity, without relying upon NEMA Standard Service Factor.
   3. Select the fan operating point as follows:
      a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point.
      b. Air Foil, Backward Inclined, or Tubular Fans Including Plenum Fans: At or near the peak static efficiency but at an appropriate distance from the stall line.
   4. Operating Limits: AMCA 99 and Manufacturer’s Recommendations.
E. Units shall be factory-fabricated, assembled, and tested by a manufacturer, in business of manufacturing similar air-handling units for at least five (5) years.

1.4 SUBMITTALS:

A. The contractor shall, in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish a complete submission for all roof top units covered in the project. The submission shall include all information listed below. Partial and incomplete submissions shall be rejected without reviews.
B. Manufacturer's Literature and Data:
   1. Submittals for RTUs shall include fans, drives, motors, coils, humidifiers, mixing box with outside/return air dampers, filter housings, and all other related accessories. The contractor shall provide custom drawings showing total air handling unit assembly including dimensions, operating weight, access sections, flexible connections, door swings, controls penetrations, electrical

disconnect, lights, duplex receptacles, switches, wiring, utility connection points, unit support system, vibration isolators, drain pan, pressure drops through each component (filter, coil, etc.) and rigging points.

2. Submittal drawings of section or component only, will not be acceptable. Contractor shall also submit performance data including performance test results, charts, curves or certified computer selection data; data sheets; fabrication and insulation details; if the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements. This data shall be submitted in hard copies and in electronic version compatible to AutoCAD version used by the VA at the time of submission.
3. Submit sound power levels in each octave band for fan and at entrance and discharge of RTUs at scheduled conditions. Include sound attenuator capacities and itemized internal component attenuation. Internal lining of supply air ductwork with sound absorbing material is not permitted. In absence of sound power ratings refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
4. Provide fan curves showing Liters/Second (cubic feet per minute), static pressure, efficiency, and horsepower for design point of operation and at maximum design Liters/Second (cubic feet per minute) and 110 percent of design static pressure.
5. Submit total fan static pressure, external static pressure, for RTU including total, inlet and discharge pressures, and itemized specified internal losses and unspecified internal losses. Refer to air handling unit schedule on drawings.

C. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS. Include instructions for lubrication, filter replacement, motor and drive replacement, spare part lists, and wiring diagrams.

D. Submit written test procedures two weeks prior to factory testing. Submit written results of factory tests for approval prior to shipping.

E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician

and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

F. Submit shipping information that clearly indicates how the units will be shipped in compliance with the descriptions below.
   1. Units shall be shipped in one (1) piece where possible and in shrink wrapping to protect the unit from dirt, moisture and/or road salt.
   2. If not shipped in one (1) piece, provide manufacturer approved shipping splits where required for installation or to meet shipping clearly that the shipping splits shown in the submittals have been verified to accommodate the construction constraints for rigging as required to complete installation and removal of any section for replacement through available access without adversely affecting other sections.
   3. If shipping splits are provided, each component shall be individually shrink wrapped to protect the unit and all necessary hardware (e.g. bolts, gaskets etc.) will be included to assemble unit on site (see section 2.1.A4).
   4. Lifting lugs will be provided to facilitate rigging on shipping splits and joining of segments. If the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI):

260-2017.....Sound Rating of Ducted Air Moving and Conditioning Equipment

410-2001.....Standard for Forced-Circulation Air-Heating and Air-Cooling Coils

430-2014.....Standard for Central Station Air Handling Units

DCAACP-2008.....Directory of Certified Applied Air Conditioning Products

C. Air Moving and Conditioning Association (AMCA):

210-2016.....Laboratory Methods of Testing Fans for Rating

D. Anti-Friction Bearing Manufacturer's Association, Inc. (AFBMA):
9-2015.....Load Ratings and Fatigue life for Ball Bearings

E. American Society of Heating, Refrigerating and Air Conditioning Engineers (ASHRAE):
51-2016.....Laboratory Methods of Testing Fans for Rating

F. American Society for Testing and Materials (ASTM):
A653/653M-2019.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
B117-2018.....Salt Spray (Fog) Testing
C1071-2019.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)
D1654-2016.....Standard Method for Evaluation of Painted or Coated Specimens Subjected to Corrosive Environments
D1735-2014.....Water Resistance of Coatings Using Water Fog Apparatus
D3359-2017.....Standard Test Methods for Measuring Adhesion by Tape Test
E84-2014.....Standard Test Method for Surface Burning Characteristics of Building Materials

G. Military Specifications (Mil. Spec.):
DOD-P-21035A-2014.....Paint, High Zinc Dust Content, Galvanizing Repair

H. National Fire Protection Association (NFPA):
90A-2018.....Standard for Installation of Air Conditioning and Ventilating Systems, 2009

I. Energy Policy Act of 2005 (P.L.109-58)

PART 2 - PRODUCTS

2.1 ROOF TOP AIR HANDLING UNITS

A. General:

1. Roof top units (RTU) shall be fabricated from insulated, solid double-wall galvanized steel without any perforations in draw-through configuration. Casing is specified in paragraph 2.1.C. Galvanizing shall be hot dipped conforming to ASTM A525 and shall

provide a minimum of 0.275 kg of zinc per square meter (0.90 oz. of zinc per square foot) (G90). Aluminum constructed units may be provided subject to VA approval and documentation that structural rigidity is equal or greater than the galvanized steel specified.

2. The contractor and the RTU manufacturer shall be responsible for insuring that the unit will not exceed the allocated space shown on the drawings, including required clearances for service and future overhaul or removal of unit components. All structural, piping, wiring, and ductwork alterations of units, which are dimensionally different than those specified, shall be the responsibility of the contractor at no additional cost to the government.
3. RTUs shall be fully assembled by the manufacturer in the factory in accordance with the arrangement shown on the drawings. The unit shall be assembled into the largest sections possible subject to shipping and rigging restrictions. The correct fit of all components and casing sections shall be verified in the factory for all units prior to shipment. All units shall be fully assembled, tested and then split to accommodate shipment and job site rigging. On units not shipped fully assembled, the manufacturer shall tag each section and include air flow direction to facilitate assembly at the job site. Lifting lugs or shipping skids shall be provided for each section to allow for field rigging and final placement of unit.
4. The RTU manufacturer shall provide the necessary gasketing, caulking, and all screws, nuts, and bolts required for assembly. The manufacturer shall provide a local representative at the job site to supervise the assembly and to assure the units are assembled to meet manufacturer's recommendations and requirements noted on the drawings. Provide documentation that this representative has provided this service on similar jobs to the Contracting Officer. If a local representative cannot be provided, the manufacturer shall provide a factory representative.
5. Gaskets: All door and casing and panel gaskets and gaskets between air handling unit components, if joined in the field, shall be high quality which seal airtight and retain their structural integrity and sealing capability after repeated assembly and disassembly of bolted panels and opening and closing of hinged components. Bolted

sections may use a more permanent gasketing method provided they are not disassembled.

6. Structural Rigidity: Provide structural reinforcement when required by span or loading so that the deflection of the assembled structure shall not exceed 1/200 of the span based on a differential static pressure of 1991 Pa (8 inches water gage) or higher.
7. Corrosion Protection:
   a. Coil Treatment: Epoxy Immersion Coating-Electrically Deposited: The multi-stage corrosion-resistant coating application comprises of cleaning (heated alkaline immersion bath) and reverse-osmosis immersion rinse prior to the start of the coating process. The coating thickness shall be maintained between 0.015 mm and .030 mm (0.6-mil and 1.2-mil). Before the coils are subjected to high-temperature oven cure, they are treated to permeate immersion rinse and spray. Where the coils are subject to UV exposure, UV protection spray treatment comprising of UV-resistant urethane mastic topcoat shall be applied. Provide complete coating process traceability for each coil and minimum five years of limited warranty. The coating process shall such that uniform coating thickness is maintained at the fin edges. The quality control shall be maintained by ensuring compliance to the applicable ASTM Standards for the following:
      1) Salt Spray Resistance (Minimum 6,000 Hours)
      2) Humidity Resistance (Minimum 1,000 Hours)
      3) Water Immersion (Minimum 260 Hours)
      4) Cross-Hatch Adhesion (Minimum 4B-5B Rating)
      5) Impact Resistance (Up to 160 Inch/Pound)
   b. Casing Surfaces (Exterior and Interior): All exposed and accessible exterior and interior metal surfaces shall be protected with a water-reducible acrylic with stainless steel pigment spray-applied over the manufacturer’s standard finish. The spray coating thickness shall be 0.05-0.10 mm (2-4 mils) and provide minimum salt-spray resistance of 1,000 hours (ASTM B117) and 500 hours UV resistance (ASTM D4587).

B. Base:
1. Provide a heavy -duty steel base for supporting all major RTU components. Bases shall be constructed of wide-flange steel I-beams,

channels, or minimum 125 mm (5 inch) high 3.5 mm (10 Gauge) steel base rails. Welded or bolted cross members shall be provided as required for lateral stability. Contractor shall provide supplemental steel supports as required to obtain proper operation heights for cooling coil condensate drain trap as shown on drawings.

2. RTUs shall be completely self supporting for installation on steel support pedestals.
3. The RTU bases not constructed of galvanized material shall be cleaned, primed with a rust inhibiting primer, and finished with rust inhibiting exterior enamel.

C. Casing (including wall, floor and roof):

1. General: RTU casing shall be entirely double wall insulated panels, integral of or attached to a structural frame. Construction shall be such that removal of any panel shall not affect the structural integrity of the unit. Casing finished shall meet salt-spray test as specified in paragraph 2.1.C.10. All casing and panel sections shall be tightly butted and gasketed. No gaps of double wall construction will be allowed where panels bolt to air handling unit structural member. Structural members, not covered by the double wall panels, shall have equivalent insulated double wall construction.
2. Double wall galvanized steel panels, minimum 51 mm (2 inches) thick, constructed of minimum 1.3 mm (18 gauge) outer skin and 1.0 mm (20 gauge) solid or perforated inner skin. to limit wall, roof and floor deflection to not exceed an L/240 ratio when the unit casing is pressurized to (±1245 Pa (±5 in. w.g.). Deflection shall be measured at the midpoint of the panel height. Total housing leakage shall not exceed 1% of rated cfm when the unit casing is pressurized to ±5 in. w.g. (±1245 Pa). The outer (skin) and inner panels shall be solid.
3. Blank-Off: Provide blank-offs as required to prevent air bypass between the AHU sections, around coils, and filters.
4. Insulation: Insulation shall be injected CFC free polyurethane foam encased in double-wall casing between exterior and interior panels such that no insulation can erode to the air stream. Insulation shall be 50 mm (2 inch) thick, and 48 kg/m^3 (3.0 lb/ft^3) density with a total thermal resistance (R-value) of approximately 2.3 m.K/W (13.0 hr-ft^2 ^{O}F/BTU). Units with less than 50 mm (2 inch) of

insulation in any part of the walls, floor, roof or drain pan shall not be acceptable. The insulation shall comply with NFPA 90-A for the flame and smoke generation requirements. Also, refer to specification Section 23 07 11, HVAC and BOILER PLANT INSULATION.

Table 2.1.C.4

Outer Panel	0.8 mm (22 Gage) Minimum
Inner Panel	0.8 mm (22 Gage) Minimum
Insulation Thickness Density	Foam 50 mm (2 inch) Minimum 48 kg/m^3 (3.0 lb/ft^3) Minimum
Total R Value	2.3 m^2.K/W (13.0 ft^2.^{o}F.hr/Btu) Minimum

5. The thickness of insulation, mode of application, and thermal breaks shall be such that there is no visible condensation on the exterior panels of the AHU.
6. Casing panels shall be secured to the support structure with stainless steel or zinc-chromate plated screws and gaskets installed around the panel perimeter. Panels shall be completely removable to allow removal of fan, coils, and other internal components for future maintenance, repair, or modifications. Welded exterior panels are not acceptable.
7. Access Doors: Provide in each access section and where shown on drawings. Show single-sided and double-sided access doors with door swings on the floor plans. Doors shall be a minimum of 50 mm (2 inches) thick with same double wall construction as the unit casing. Doors shall be a minimum of 600 mm (24 inches) wide, unless shown of different size on drawings, and shall be the full casing height up to a maximum of 1.8 m (6 feet). Doors shall be gasketed, hinged, and latched to provide an airtight seal. The access doors for fan section, mixing box, humidifier, and coil section shall include a minimum 15 cm x 15 cm (6-inch x 6 inch) double thickness, with air space between glass panes tightly sealed, reinforced glass or Plexiglas window in a gasketed frame.
   a. Hinges: Manufacturers standard, designed for door size, weight and pressure classifications. Hinges shall hold door completely

rigid with minimum 45 kg (100 pound) weight hung on latch side of door.

b. Latches: Non-corrosive alloy construction, with operating levers for positive cam action, operable from either inside or outside. Doors that do not open against unit operating pressure shall allow the door to ajar and then require approximately 0.785 radian (45 degrees) further movement of the handle for complete opening. Latch shall be capable of restraining explosive opening of door with a force not less than 1991 Pa (8 inches water gage).

c. Gaskets: Neoprene, continuous around door, positioned for direct compression with no sliding action between the door and gasket. Secure with high quality mastic to eliminate possibility of gasket slipping or coming loose.

8. Provide sealed sleeves, metal or plastic escutcheons or grommets for penetrations through casing for power and temperature control wiring and pneumatic tubing. Coordinate with electrical and temperature control subcontractors for number and location of penetrations. Coordinate lights, switches, and duplex receptacles and disconnect switch location and mounting. All penetrations and equipment mounting may be provided in the factory or in the field. All field penetrations shall be performed neatly by drilling or saw cutting. No cutting by torches will be allowed. Neatly seal all openings airtight.

9. Roof of the unit shall be sloped to have a minimum pitch of 2% (1/4 inch per foot). The roof shall overhang the side panels by a minimum of 75 mm three inches) to prevent precipitation drainage from streaming down the unit side panels.

10. Casing finished shall meet ASTM B117, 500-hour salt spray test, using 20 percent sodium chloride solution. Immediately after completion of the test, the coating shall show no sign of blistering, wrinkling, or cracking, no loss of adhesion, and the specimen shall show no sign of rust creepage beyond 1/8-inch on either side of scratch mark.

D. Unit floor shall be level without offset space or gap and designed to support a minimum of 488 kg/square meter (100 pounds per square foot) distributed load without permanent deformation or crushing of internal insulation. Provide adequate structural base members beneath floor in

service access sections to support typical service foot traffic and to prevent damage to unit floor or internal insulation. Unit floors in casing sections, which may contain water or condensate, shall be watertight with drain pan.

E. Condensate Drain Pan: Drain pan shall be designed to extend entire length of cooling coils including headers and return bends. Depth of drain pan shall be at least 43 mm (1.7 inches) and shall handle all condensate without overflowing. Drain pan shall be double wall construction, Type 304 stainless steel and have a minimum of 50 mm (2 inch) insulation and shall be sloped to drain. Drain pan shall be continuous metal or welded watertight. No mastic sealing of joints exposed to water will be permitted. Drain pan shall be placed on top of casing floor or integrated into casing floor assembly. Drain pan shall be pitched in all directions to drain line.

1. An intermediate condensate drip pan shall be provided on stacked cooling coils and shall be constructed of type 304 stainless steel with copper downspouts factory piped to main condensate pan. Use of intermediate condensate drain channel on upper casing of lower coil is permissible provided it is readily cleanable. Design of intermediate condensate drain shall prevent upper coil condensate from flowing across face of lower coil.
2. Drain pan shall be piped to the exterior of the unit. Drain pan shall be readily cleanable.
3. Installation, including frame, shall be designed and sealed to prevent blow-by.

F. Housed Centrifugal Fan Sections:

1. Fans shall be minim um Class II construction, double width, double inlet centrifugal, air foil, backward inclined, or forward curved type as indicated on drawings, factory balanced and rated in accordance with AMCA 210 or ASHRAE 51. Provide self-aligning, pillow block, regreasable ball-type bearings selected for a B(10) life of not less than 40,000 hours and an L(50) average fatigue life of 200,000 hours per AFBMA Standard 9. Extend bearing grease lines to motor and drive side of fan section. Fan shall be located in airstream to assure proper air flow.
2. Provide internally vibration isolated fan, motor and drive, mounted on a common integral bolted or welded structural steel base with

adjustable motor slide rail with locking device. Provide vibration isolators and flexible duct connections at fan discharge to completely isolate fan assembly. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, for additional requirements. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC. Following fan assembly, the complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

G. Fan Motor, Drive, and Mounting Assembly (Housed Centrifugal Fans):

1. Fan Motor and Drive: Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT, on drawings and suitable for use in variable frequency drive applications on AHUs where this type of drive is indicated. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC, for additional motor and drive specifications. Refer to Specification Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.
2. Fan drive and belts shall be factory mounted with final alignment and belt adjustment to be made by the Contractor after installation. Drive and belts shall be as specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide additional drive(s) if required during balancing, to achieve desired airflow.

H. Plenum Fans – Single and/or Multiple Fans in an Array

1. General: Fans shall be Class II (minimum) construction with single inlet, aluminum wheel and stamped air-foil aluminum bladed. The fan wheel shall be mounted on the directly-driven motor shaft in AMCA

Arrangement 4. Fans shall be dynamically balanced and internally isolated to minimize the vibrations. Provide a steel inlet cone for each wheel to match with the fan inlet. Locate fan in the air stream to assure proper flow. The fan performance shall be rated in accordance with AMCA 210 or ASHRAE 51.

2. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC. The fan wheel shall meet or exceed guidelines in AMCA 801-92 for dynamic balancing requirements. The complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).
3. The plenum fans shall be driven by variable speed drives with at least one back-up drive as shown in the design documents. Use of a drive with bypass is not permitted.
4. Multiple fans shall be installed in a pre-engineered structural frame to facilitate fan stacking. All fans shall modulate in unison, above or below the synchronous speed within the limits specified by the manufacturer, by a common control sequence. Staging of the fans is not permitted. Redundancy requirement shall be met by all operating fans in an array and without the provision of an idle standby fan.
5. Fan Accessories
   a. Fan Isolation: Provide an actuator-controlled damper or an automatic back draft damper to isolate the fan not in operation due to failure.
   b. Fan Airflow Measurement: Provide an airflow measuring device integral to the fan to measure air volume within +/- 5 percent accuracy. The probing device shall not be placed in the airflow path to stay clear of turbulence and avoid loss of performance.

6. Fan Motor, Drive and Mounting Assembly: Fan Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMNT, on drawings and suitable for use in variable frequency drive applications. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC, for additional motor and drive specifications. Refer to Specification Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS

I. Mixing Boxes: Mixing box shall consist of casing and outdoor air and return air dampers in opposed blade arrangement with damper linkage for automatic operation. Coordinate damper operator with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Dampers shall be of ultra-low leak design with metal compressible bronze jamb seals and extruded vinyl edge seals on all blades. Blades shall rotate on stainless steel sleeve bearings or bronze bushings. Leakage rate shall not exceed 1.6 cubic meters/min/square meter (5 cfm per square foot) at 250 Pa (1 inch water gage) and 2.8 cubic meters/min/square meter (9 cfm per square foot) at 995 Pa (4 inches water gage) Electronic damper operators shall be furnished and mounted in an accessible and easily serviceable location by the air handling unit manufacturer at the factory. Damper operators shall be of same manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

J. Filter Section: Refer to Section 23 40 00, HVAC AIR CLEANING DEVICES, for filter requirements.

1. Filters including one complete set for temporary use at site shall be provided independent of the RTU. The RTU manufacturer shall install filter housings and racks in filter section compatible with filters furnished. The RTU manufacturer shall be responsible for furnishing temporary filters (pre-filters and after-filters, as shown on drawings) required for RTU testing.
2. Factory-fabricated filter section shall be of the same construction and finish as the RTU casing including filter racks and hinged double wall access doors. Filter housings shall be constructed in accordance with side service or holding frame housing requirements in Section 23 40 00, HVAC AIR CLEANING DEVICES.

K. Coils: Coils shall be mounted on hot dipped galvanized steel supports to assure proper anchoring of coil and future maintenance. Coils shall

be face or side removable for future replacement thru the access doors or removable panels. Each coil shall be removable without disturbing adjacent coil. Cooling coils shall be designed and installed to insure no condensate carry over. Provide factory installed extended supply, return, drain, and vent piping connections. Refer to Drawings and Section 23 82 16, AIR COILS, for additional coil requirements.

1. Water Coils.

L. Humidifier: Coordinate the humidification requirements with Section 23 22 13 STEAM AND CONDENSATE PIPING. Provide humidification section with stainless steel drain pan of adequate length to allow complete absorption of water vapor. Provide stainless steel dispersion panel or distributors as indicated, with stainless steel supports and hardware.

M. Discharge Section: Provide aerodynamically designed framed discharge openings or spun bellmouth fittings to minimize pressure loss.

N. Electrical and Lighting: Wiring and equipment specifications shall conform to Division 26, ELECTRICAL.

1. Vapor-proof lights using cast aluminum base style with glass globe and cast aluminum guard shall be installed in access sections for fan, mixing box, humidifier, and any section over 30 cm (12 inch) wide. A switch shall control the lights in each compartment with pilot light mounted outside the respective compartment access door. Wiring between switches and lights shall be factory installed. All wiring shall run in neatly installed electrical conduits and terminate in a junction box for field connection to the building system. Provide single point 115 volt - one phase connection at junction box.
2. Install compatible 100-watt bulb in each light fixture.
3. Provide a convenience duplex weatherproof receptacle next to the light switch.
4. Disconnect switch and power wiring: Provide factory or field mounted disconnect switch. Coordinate with Division 26, ELECTRICAL.

PART 3 – EXECUTION

3.1 INSTALLATION

A. Install roof top unit in conformance with ARI 435.

B. Assemble roof top unit components following manufacturer's instructions for handling, testing and operation. Repair damaged galvanized areas

with paint in accordance with Military Spec. DOD-P-21035A. Repair painted units by touch up of all scratches with finish paint material. Vacuum the interior of air-handling units clean prior to operation.

C. Install seismic restraints for roof top units. Refer to specification Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

D. Leakage and test requirements for roof top units shall be the same as specified for ductwork in Specification Section 23 31 00, HVAC DUCTS AND CASINGS except leakage shall not exceed Leakage Class (C_L) 12 listed in SMACNA HVAC Air Duct Leakage Test Manual when tested at 1.5 times the design static pressure. Repair casing air leaks that can be heard or felt during normal operation and to meet test requirements.

E. Perform field mechanical (vibration) balancing in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

F. Seal and/or fill all openings between the casing and RTU components and utility connections to prevent air leakage or bypass.

3.2 STARTUP SERVICES

A. The air handling unit shall not be operated for any purpose, temporary or permanent, until ductwork is clean, filters are in place, bearings are lubricated, and fan has been tested run under observation.

B. After the air handling unit is installed and tested, provide startup and operating instructions to VA personnel.

C. An authorized factory representative should start up, test and certify the final installation and application specific calibration of control components. Items to be verified include fan performance over entire operating range, noise and vibration testing, verification of proper alignment, overall inspection of the installation, Owner/Operator training, etc.

3.3 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 23 82 16
AIR COILS

PART 1 - GENERAL

1.1 DESCRIPTION

Heating and cooling coils for air handling unit and duct applications.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

B. Section 01 91 00, GENERAL COMMISSIONING REQUIREMENTS

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC

D. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS

E. Section 23 09 23, DDC SYSTEMS for HVAC

F. Section 23 31 00, HVAC DUCTS AND CASINGS

G. Section 23 36 00, AIR TERMINAL UNITS: Reheat coils for VAV/CV terminals.

H. Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS

1.3 QUALITY ASSURANCE

A. Refer to paragraph, QUALITY ASSURANCE, Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Unless specifically exempted by these specifications, heating and cooling coils shall be tested, rated, and certified in accordance with AHRI Standard 410 and shall bear the AHRI certification label.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data for Heating and Cooling Coils: Submit type, size, arrangements and performance details. Present application ratings in the form of tables, charts, or curves.

C. Provide installation, operating and maintenance instructions.

D. Certification Compliance: Evidence of listing in current ARI Directory of Certified Applied Air Conditioning Products.

E. Coils may be submitted with Section 23 36 00, AIR TERMINAL UNITS or Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.

F. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Conditioning and Refrigeration Institute (AHRI):
Directory of Certified Applied Air Conditioning Products
AHRI 410-2001.....Forced-Circulation Air-Cooling and Air-Heating Coils

C. American Society for Testing and Materials (ASTM):
B75/75M-2019.....Standard Specifications for Seamless Copper Tube

D. National Fire Protection Association (NFPA):
70-2017.....National Electric Code

PART 2 - PRODUCTS

2.1 HEATING AND COOLING COILS

A. Conform to ASTM B75 and AHRI 410.

B. High Humidity Locations: For air-handling unit mounted coils provide the following corrosion treatment:

1. Epoxy Immersion Coating – Electrically Deposited: The multi-stage corrosion-resistant coating application comprises of cleaning (heated alkaline immersion bath) and reverse-osmosis immersion rinse prior to the start of the coating process. The coating thickness shall be maintained between 0.6-mil and 1.2-mil. Before the coils are subjected to high-temperature oven cure, they are treated to permeate immersion rinse and spray. Where the coils are subject to UV exposure, UV protection spray treatment comprising of UV-resistant urethane mastic topcoat shall be applied. Provide complete coating process traceability for each coil and minimum five years of limited warranty.

2. The coating process shall such that uniform coating thickness is maintained at the fin edges. The quality control shall be maintained by ensuring compliance to the applicable ASTM Standards for the following:

   a. Salt Spray Resistance (Minimum 6,000 Hours)

   b. Humidity Resistance (Minimum 1,000 Hours)

   c. Water Immersion (Minimum 260 Hours)

d. Crosshatch Adhesion (Minimum 4B-5B Rating)

e. Impact Resistance (Up to 160 Inch/Pound)

D. Tubes: Minimum 16 mm (0.625 inch) tube diameter; Seamless copper tubing.

E. Fins: 0.1397 mm (0.0055 inch) aluminum or 0.1143 mm (0.0045 inch) copper mechanically bonded or soldered or helically wound around tubing.

F. Headers: Copper, welded steel or cast iron.

G. "U" Bends, Where Used: Machine die-formed, silver brazed to tube ends.

H. Coil Casing: 1.6 mm (16 gage) galvanized steel with tube supports at 1200 mm (48 inch) maximum spacing. Construct casing to eliminate air bypass and moisture carry-over. Provide duct connection flanges.

I. Pressures kPa (PSIG):

Pressure	Water Coil
Test	2070 (300)
Working	1380 (200)

J. Protection: Unless protected by the coil casing, provide cardboard, plywood, or plastic material at the factory to protect tube and finned surfaces during shipping and construction activities.

K. Vents and Drain: Coils that are not vented or drainable by the piping system shall have capped vent/drain connections extended through coil casing.

L. Cooling Coil Condensate Drain Pan: Section 23 74 13, PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS.

2.2 REHEAT COILS, DUCT MOUNTED

The coils shall be continuous circuit booster type for hot water as shown on drawings. Use the same coil material as listed in Article 2.1.

2.3 WATER COILS

A. Use the same coil material as listed in Paragraphs 2.1.

B. Drainable Type (Self Draining, Self-Venting); Manufacturer standard:

1. Cooling, all types.

2. Heating or preheat.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Follow coil manufacturer's instructions for handling, cleaning, installation and piping connections.

B. Comb fins, if damaged. Eliminate air bypass or leakage at coil sections.

3.2 STARTUP AND TESTING

A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.3 COMMISSIONING

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and as required by Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.4 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section applies to all sections of Division 26.

B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, conductors and cable, panelboards, motor controllers and other items and arrangements for the specified items are shown on the drawings.

C. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.

B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

1.3 TEST STANDARDS

A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.

B. Definitions:

1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction

and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.

2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified: Materials and equipment which:
   a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
   b. Are periodically inspected by a NRTL.
   c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

A. Manufacturer’s Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.

B. Product Qualification:
   1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
   2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt

of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.

B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

1.6 MANUFACTURED PRODUCTS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.

B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.

1.7 VARIATIONS FROM CONTRACT REQUIREMENTS

A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 MATERIALS AND EQUIPMENT PROTECTION

A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
   1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
   2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
   3. Damaged equipment shall be repaired or replaced, as determined by the COR.
   4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
   5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, OSHA Part 1910 subpart J – General Environmental Controls, OSHA Part 1910 subpart K – Medical and First Aid, and OSHA Part 1910 subpart S – Electrical, in addition to other references required by contract.

B. Job site safety and worker safety is the responsibility of the Contractor.

C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. However, energized electrical work may be performed only for the non-destructive and non-invasive diagnostic testing(s), or when scheduled outage poses an imminent hazard to patient care, safety, or physical security. In such case, all aspects of energized electrical work, such as the availability of appropriate/correct personal protective equipment (PPE) and the use of PPE, shall comply with the latest NFPA 70E, as well as the following requirements:
   1. Only Qualified Person(s) shall perform energized electrical work. Supervisor of Qualified Person(s) shall witness the work of its

entirety to ensure compliance with safety requirements and approved work plan.

2. At least two weeks before initiating any energized electrical work, the Contractor and the Qualified Person(s) who is designated to perform the work shall visually inspect, verify and confirm that the work area and electrical equipment can safely accommodate the work involved.
3. At least two weeks before initiating any energized electrical work, the Contractor shall develop and submit a job specific work plan, and energized electrical work request to the COR, and Medical Center’s Chief Engineer or his/her designee. At the minimum, the work plan must include relevant information such as proposed work schedule, area of work, description of work, name(s) of Supervisor and Qualified Person(s) performing the work, equipment to be used, procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.
4. Energized electrical work shall begin only after the Contractor has obtained written approval of the work plan, and the energized electrical work request from the COR, and Medical Center’s Chief Engineer or his/her designee. The Contractor shall make these approved documents present and available at the time and place of energized electrical work.
5. Energized electrical work shall begin only after the Contractor has invited and received acknowledgment from the COR, and Medical Center’s Chief Engineer or his/her designee to witness the work.

D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

F. Coordinate location of equipment and conduit with other trades to minimize interference.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Equipment location shall be as close as practical to locations shown on the drawings.

B. Working clearances shall not be less than specified in the NEC.

C. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as , panelboards, cabinets, motor controllers, fused and non-fused safety switches, separately enclosed circuit breakers, and motor control assemblies, control devices and other significant equipment.

B. Identification signs for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Identification signs for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 12 mm (1/2 inch) high. Identification signs shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

C. Install adhesive arc flash warning labels on all equipment as required by the latest NFPA 70E. Label shall show specific and correct information for specific equipment based on its arc flash calculations. Label shall show the followings:

1. Nominal system voltage.
2. Equipment/bus name, date prepared, and manufacturer name and address.

3. Arc flash boundary.
4. Available arc flash incident energy and the corresponding working distance.
5. Minimum arc rating of clothing.
6. Site-specific level of PPE.

1.12 SUBMITTALS

A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.

C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

E. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion.) associated with equipment or piping so that the proposed installation can be

properly reviewed. Include sufficient fabrication information so that appropriate mounting and securing provisions may be designed and attached to the equipment.

3. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
4. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.

F. Maintenance and Operation Manuals:

1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
   a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
   b. A control sequence describing start-up, operation, and shutdown.
   c. Description of the function of each principal item of equipment.
   d. Installation instructions.
   e. Safety precautions for operation and maintenance.
   f. Diagrams and illustrations.
   g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
   h. Performance data.
   i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list

shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.

j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.

1.13 SINGULAR NUMBER

A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.15 ACCEPTANCE CHECKS AND TESTS

A. The Contractor shall furnish the instruments, materials, and labor for tests.

B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the installation, testing, and adjustment of all components between various manufacturer’s representatives and technicians so that a complete, functional, and operational system is delivered to the Government.

C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment, and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

1.16 WARRANTY

A. All work performed and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the COR for the Government.

1.17 INSTRUCTION

A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.

B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety

requirements. Instructors shall be thoroughly familiar with all aspects of the installation, and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.

C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings and insulation type for each conductor and cable.
      2) Splicing materials and pulling lubricant.
2. Certifications: Two weeks prior to final inspection, submit the following:
   a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

B. American Society of Testing Material (ASTM):

D2301-10.....Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

D2304-10.....Test Method for Thermal Endurance of Rigid Electrical Insulating Materials

D3005-10.....Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

C. National Electrical Manufacturers Association (NEMA):

WC 70-09.....Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-14.....Thermoset-Insulated Wires and Cables

83-14.....Thermoplastic-Insulated Wires and Cables

467-13.....Grounding and Bonding Equipment

486A-486B-13.....Wire Connectors

486C-13.....Splicing Wire Connectors

486D-15.....Sealed Wire Connector Systems

486E-15.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables

514B-12.....Conduit, Tubing, and Cable Fittings

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.

B. All conductors shall be copper.

C. Single Conductor and Cable:

1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
2. No. 8 AWG and larger: Stranded.
3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

D. Color Code:

1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
   a. Solid color insulation or solid color coating.
   b. Stripes, bands, or hash marks of color specified.
   c. Color using 19 mm (0.75 inches) wide tape.
3. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
4. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

5. Lighting circuit “switch legs”, and 3-way and 4-way switch “traveling wires,” shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COR.
6. Color code for isolated power system wiring shall be in accordance with the NEC.

2.2 SPLICES

A. Splices shall be in accordance with NEC and UL.

B. Above Ground Splices for No. 10 AWG and Smaller:

1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper conductors.
2. The integral insulator shall have a skirt to completely cover the stripped conductors.
3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

C. Above Ground Splices for No. 8 AWG to No. 4/0 AWG:
1. Compression, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.
4. All bolts, nuts, and washers used with splices shall be zinc-plated steel.

D. Above Ground Splices for 250 kcmil and Larger:
1. Long barrel “butt-splice” or “sleeve” type compression connectors, with minimum of two compression indents per wire, listed for use with copper conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.

2.3 CONNECTORS AND TERMINATIONS

A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper conductors.

B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper conductors.

C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated steel.

2.4 CONTROL WIRING

A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG.

B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.5 WIRE LUBRICATING COMPOUND

A. Lubricating compound shall be suitable for the wire insulation and conduit and shall not harden or become adhesive.

B. Shall not be used on conductors for isolated power systems.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Install all conductors in raceway systems.

C. Splice conductors only in outlet boxes, junction boxes, or pullboxes, .

D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.

E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.

F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic ties.

G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.

H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.

I. Conductor and Cable Pulling:

J. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.

K. Use nonmetallic pull ropes.

L. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.

M. All conductors in a single conduit shall be pulled simultaneously.

N. Do not exceed manufacturer’s recommended maximum pulling tensions and sidewall pressure values.

O. No more than three branch circuits shall be installed in any one conduit.

P. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

3.2 SPLICE AND TERMINATION INSTALLATION

A. Splices and terminations shall be mechanically and electrically secure and tightened to manufacturer’s published torque values using a torque screwdriver or wrench.

B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

3.3 CONDUCTOR IDENTIFICATION

A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.

3.4 FEEDER CONDUCTOR IDENTIFICATION

A. In each interior pullbox install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

3.5 EXISTING CONDUCTORS

A. Unless specifically indicated on the plans, existing conductors shall not be reused.

3.6 CONTROL WIRING INSTALLATION

A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.

B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

3.7 CONTROL WIRING IDENTIFICATION

A. Install a permanent wire marker on each wire at each termination.

B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

C. Wire markers shall retain their markings after cleaning.

3.8 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
   1. Visual Inspection and Tests: Inspect physical condition.
   2. Electrical tests:
      a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester.
      b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
      c. Perform phase rotation test on all three-phase circuits.

---END---

---INTENTIONALLY BLANK---

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.

B. "Grounding electrode system" refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary.

C. The terms "connect" and "bond" are used interchangeably in this section and have the same meaning.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

D. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.

E. Section 26 27 26, WIRING DEVICES

F. Section 26 29 11, MOTOR CONTROLLERS

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit plans showing the location of system grounding electrodes and connections, and the routing of aboveground and underground grounding electrode conductors.
2. Test Reports:

a. Two weeks prior to the final inspection, submit ground resistance field test reports to the COR.

3. Certifications:

a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-13.....Standard Specification for Hard-Drawn Copper Wire

B3-13.....Standard Specification for Soft or Annealed Copper Wire

B8-11.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-12.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1: Normal Measurements

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-18.....National Electrical Safety Code

99-18.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-14 .....Thermoset-Insulated Wires and Cables

83-14 .....Thermoplastic-Insulated Wires and Cables

467-13 .....Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be insulated stranded copper, except that sizes No. 10 AWG and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding

conductors, except that wire sizes No. 4 AWG and larger shall be identified per NEC.

B. Bonding conductors shall be bare stranded copper, except that sizes No. 10 AWG and smaller shall be bare solid copper. Bonding conductors shall be stranded for final connection to motors, transformers, and vibrating equipment.

C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

D. Insulation: THHN-THWN and XHHW-2.

2.2GROUND CONNECTIONS

A. Inaccessible Locations: Exothermic-welded type connectors.

B. Above Grade:

1. Bonding Jumpers: Listed for use with copper conductors. For wire sizes No. 8 AWG and larger, use compression-type connectors. For wire sizes smaller than No. 8 AWG, use mechanical type lugs. Connectors or lugs shall use zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Connection to Grounding Bus Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
4. Connection to Equipment Rack and Cabinet Ground Bars: Listed for use with copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Equipment Grounding: Metallic piping, building structural steel, electrical enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are normally buried or otherwise inaccessible, by exothermic weld.

3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

A. Bond new Metallic Piping, and/or new Building Structural Steel to building ground.

B. Panelboards, Motor Controllers and other electrical equipment:

1. Connect the equipment grounding conductors to the building ground system.
2. Connect metallic conduits by grounding bushings and equipment grounding conductor to the equipment ground system.

3.4 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, shall contain an equipment grounding conductor.
3. Metallic conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Wireway Systems:

1. Bond the metallic structures of wireway to provide electrical continuity throughout the wireway system, by connecting a No. 6 AWG

bonding jumper at all intermediate metallic enclosures and across all section junctions.

2. Install insulated No. 6 AWG bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 16 M (50 feet).
3. Use insulated No. 6 AWG bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.
4. Use insulated No. 6 AWG bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 M (49 feet).

E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.

F. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.

G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.

3.5 CORROSION INHIBITORS

A. When making grounding and bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.6 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.7 ACCEPTANCE CHECKS AND TESTS

A. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized or connected to the electric utility company ground system and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall.

B. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

---END---

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.

B. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

C. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.

D. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Size and location of main feeders.
   b. Size and location of panels and pull-boxes.
   c. Layout of required conduit penetrations through structural elements.

d. Submit the following data for approval:
   1) Raceway types and sizes.
   2) Conduit bodies, connectors, and fittings.
   3) Junction and pull boxes, types, and sizes.

2. Certifications: Two weeks prior to final inspection, submit the following:
   a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Iron and Steel Institute (AISI):

S100-12.....North American Specification for the Design of Cold-Formed Steel Structural Members

C. National Electrical Manufacturers Association (NEMA):

C80.1-15.....Electrical Rigid Steel Conduit

C80.3-15.....Steel Electrical Metal Tubing

C80.6-05.....Electrical Intermediate Metal Conduit

FB1-14.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

FB2.10-13.....Selection and Installation Guidelines for Fittings for use with Non-Flexible Conduit or Tubing (Rigid Metal Conduit, Intermediate Metallic Conduit, and Electrical Metallic Tubing)

FB2.20-14.....Selection and Installation Guidelines for Fittings for use with Flexible Electrical Conduit and Cable

TC-2-13.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit

TC-3-13.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-16.....Surface Metal Raceway and Fittings

6-07.....Electrical Rigid Metal Conduit - Steel

50-15.....Enclosures for Electrical Equipment

360-13.....Liquid-Tight Flexible Steel Conduit

467-13.....Grounding and Bonding Equipment

514A-13.....Metallic Outlet Boxes

514B-12.....Conduit, Tubing, and Cable Fittings

797-07.....Electrical Metallic Tubing

1242-14.....Electrical Intermediate Metal Conduit – Steel

PART 2 - PRODUCTS

2.1 MATERIAL

A. Conduit Size: In accordance with the NEC, but not less than 19 mm (0.75-inch unless otherwise shown. Where permitted by the NEC, 19 mm (0.75-inch flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:

1. 1. Size: In accordance with the NEC, but not less than 19 mm (0.75-inch.
2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and NEMA C80.1.
3. Rigid Intermediate Steel Conduit (IMC): Shall conform to UL 1242 and NEMA C80.6.
4. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and NEMA C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.
5. Flexible Metal Conduit: Shall conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Shall conform to UL 360.
7. Surface Metal Raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid Steel and Intermediate Metallic Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
   f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Electrical Metallic Tubing Fittings:
   a. Fittings and conduit bodies shall meet the requirements of UL 514B, NEMA C80.3, and NEMA FB1.
      Only steel or malleable iron materials are acceptable.
   b. Compression Couplings and Connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
   c. Setscrew Couplings and Connectors: Use setscrews of case-hardened steel with hex head and cup point, to firmly seat in wall of conduit for positive grounding.
   d. Indent-type connectors or couplings are prohibited.
   e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible Metal Conduit Fittings:

a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
b. Clamp-type, with insulated throat.

4. Liquid-tight Flexible Metal Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
5. Surface Metal Raceway Fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
6. Expansion and Deflection Couplings:
   a. Conform to UL 467 and UL 514B.
   b. Accommodate a 19 mm (0.75-inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
   c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
   d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.

D. Conduit Supports:
1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:

1. Comply with UL-50 and UL-514A.
2. Rustproof cast metal where required by the NEC or shown on drawings.
3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.

F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:
1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COR prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by the COR where working space is limited.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. In accordance with NEC, NEMA, UL, as shown on drawings, and as specified herein.

B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.

C. Install conduit as follows:
1. In complete mechanically and electrically continuous runs before pulling in cables or wires.

2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
5. Cut conduits square, ream, remove burrs, and draw up tight.
6. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
7. Do not use suspended ceilings, suspended ceiling supporting members, lighting fixtures, other conduits, cable tray, boxes, piping, or ducts to support conduits and conduit runs.
8. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
9. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
10. Conduit installations under fume and vent hoods are prohibited.
11. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
12. Conduit bodies shall only be used for changes in direction and shall not contain splices.

D. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC, or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
   a. Where shown on the structural drawings.
   b. As approved by the COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
   a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
   b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
   c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (0.75-inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:

1. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits in the same system is prohibited.
2. Align and run conduit parallel or perpendicular to the building lines.
3. Connect recessed lighting fixtures to conduit runs with maximum 1.8 M (6 feet) of flexible metal conduit extending from a junction box to the fixture.
4. Tightening set screws with pliers is prohibited.
5. For conduits running through metal studs, limit field cut holes to no more than 70% of web depth. Spacing between holes shall be at least 457 mm (18 inches). Cuts or notches in flanges or return lips shall not be permitted.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2.4 M (8 feet) intervals.

F. Surface Metal Raceways: Use only where shown on drawings.

G. Painting:

1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

3.5 WET OR DAMP LOCATIONS

A. Use rigid steel or IMC conduits unless as shown on drawings.

B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.

C. Use rigid steel or IMC conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer and locknut. Conduits shall be attached to steel channel with conduit clamps.

3.6 MOTORS AND VIBRATING EQUIPMENT

A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.

B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.

C. Provide a green equipment grounding conductor with flexible and liquid-tight flexible metal conduit.

3.7 EXPANSION JOINTS

A. Conduits 75 mm (3 inch) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inch) with junction boxes on both sides of the expansion joint. Connect flexible metal conduits to junction boxes with sufficient slack to produce a 125 mm (5 inch) vertical drop midway between the ends of the flexible metal conduit. Flexible metal conduit shall have a green insulated copper bonding jumper installed. In lieu of this flexible metal conduit, expansion and deflection couplings as specified above are acceptable.

C. Install expansion and deflection couplings where shown.

D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 375 mm (15 inches) of slack flexible conduit. Flexible conduit shall have a copper bonding jumper installed.

3.8 CONDUIT SUPPORTS

A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an

additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
   b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).
   c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.9 BOX INSTALLATION

A. Boxes for Concealed Conduits:

1. Flush-mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90 degree bends are necessary.

C. Locate pullboxes so that covers are accessible and easily removed. Coordinate locations with piping and ductwork where installed above ceilings.

D. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

E. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 inch) center-to-center lateral spacing shall be maintained between boxes.

F. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

G. Minimum size of outlet boxes for ground fault circuit interrupter (GFCI) receptacles is 100 mm (4 inches) square x 55 mm (2.125 inches) deep, with device covers for the wall material and thickness involved.

H. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example: "SIG-FA JB No. 1."

I. On all branch circuit junction box covers, identify the circuits with black marker.

---END---

SECTION 26 05 73
OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the overcurrent protective device coordination study, related calculations and analysis, indicated as the study in this section.

B. A short-circuit and selective coordination study, and arc flash calculations and analysis shall be prepared for the electrical overcurrent devices to be installed under this project.

C. The study shall present a well-coordinated time-current analysis of each overcurrent protective device from the individual device up to the utility source and the on-site generator sources.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

C. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. The study shall be prepared by the equipment manufacturer, and performed by the equipment manufacturer’s licensed electrical engineer.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Product data on the software program to be used for the study. Software shall be in mainstream use in the industry, shall provide device settings and ratings, and shall show selective coordination by time-current drawings.
2. Complete study as described in paragraph 1.6. Submittal of the study shall be well-coordinated with submittals of the shop drawings for equipment in related specification sections.
3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the overcurrent protective devices have been set in accordance with the approved study.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. Institute of Electrical and Electronics Engineers (IEEE):

241-90.....Recommended Practice Electrical Systems in Commercial Buildings

242-03.....Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems

399-97.....Recommended Practice for Industrial and Commercial Power Systems Analysis

1584-02.....Performing Arc-Flash Hazards Calculations

1584A-04.....Performing Arc-Flash Hazards Calculations – Amendment 1

1584B-11.....Performing Arc-Flash Hazards Calculations – Amendment 2

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-18.....Standard for Electrical Safety in the Workplace

99-18.....Health Care Facilities Code

1.6 STUDY REQUIREMENTS

A. The study shall be in accordance with IEEE and NFPA standards.

B. The study shall include one line diagram, short-circuit and ground fault analysis, protective coordination plots for all overcurrent protective devices, and arc flash calculations and analysis.

C. One Line Diagram:

1. Show all electrical equipment and wiring to be protected by the overcurrent devices.
2. Show the following specific information:
   a. Calculated fault impedance, X/R ratios, and short-circuit values at each feeder and branch circuit bus.
   b. Relay, circuit breaker, and fuse ratings.

c. Generator kW/kVA and transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
d. Voltage at each bus.
e. Identification of each bus, matching the identification on the drawings.
f. Conduit, conductor, and busway material, size, length, and X/R ratios.

D. Short-Circuit Study:
1. The study shall be performed using computer software designed for this purpose. Pertinent data and the rationale employed in developing the calculations shall be described in the introductory remarks of the study.
2. Calculate the fault impedance to determine the available short-circuit and ground fault currents at each bus. Incorporate applicable motor and/or generator contribution in determining the momentary and interrupting ratings of the overcurrent protective devices.
3. Present the results of the short-circuit study in a table. Include the following:
a. Device identification.
b. Operating voltage.
c. Overcurrent protective device type and rating.
d. Calculated short-circuit current.

E. Coordination Study:
1. Prepare the coordination curves to determine the required settings of overcurrent protective devices to demonstrate selective coordination. Graphically illustrate on log-log paper that adequate time separation exists between devices, including the utility company upstream device if applicable. Plot the specific time-current characteristics of each overcurrent protective device in such a manner that all devices are clearly depicted.
2. The following specific information shall also be shown on the coordination curves:
a. Device identification.
b. Potential transformer and current transformer ratios.
c. Three-phase and single-phase ANSI damage points or curves for each cable, transformer, or generator.

d. Applicable circuit breaker or protective relay characteristic curves.
e. No-damage, melting, and clearing curves for fuses.
f. Transformer in-rush points.

3. Develop a table to summarize the settings selected for the overcurrent protective devices. Include the following in the table:
a. Device identification.
b. Protective relay or circuit breaker potential and current transformer ratios, sensor rating, and available and suggested pickup and delay settings for each available trip characteristic.
c. Fuse rating and type.

F. Arc Flash Calculations and Analysis:
1. Arc flash warning labels shall comply with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS
2. Arc flash calculations shall be based on actual over-current protective device clearing time. Maximum clearing time shall be in accordance with IEEE 1584.
3. Arc flash analysis shall be based on the lowest clearing time setting of the over-current protective device to minimize the incident energy level without compromising selective coordination.
4. Arc flash boundary and available arc flash incident energy at the corresponding working distance shall be calculated for all electrical power distribution equipment specified in the project, and as shown on the drawings.
5. Required arc-rated clothing and other PPE shall be selected and specified in accordance with NFPA 70E.

1.7 ANALYSIS

A. Analyze the short-circuit calculations, and highlight any equipment determined to be underrated as specified. Propose solutions to effectively protect the underrated equipment.

1.8 ADJUSTMENTS, SETTINGS, AND MODIFICATIONS

A. Final field settings and minor modifications of the overcurrent protective devices shall be made to conform with the study, without additional cost to the Government.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 09 23
LIGHTING CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation and connection of the lighting controls.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 24 16, PANELBOARDS: Panelboard enclosure and interior bussing used for lighting control panels.

E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

F. Section 26 51 00, INTERIOR LIGHTING: Luminaire ballast and drivers used in control of lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit the following information for each type of lighting controls.
   b. Material and construction details.
   c. Physical dimensions and description.
   d. Wiring schematic and connection diagram.
   e. Installation details.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data

sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the lighting control systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturer's Association (NEMA):

ICS-1-15.....Standard for Industrial Control and Systems General Requirements

ICS-2-08.....Standard for Industrial Control and Systems: Controllers, Contractors, and Overload Relays Rated Not More than 2000 Volts AC or 750 Volts DC: Part 8 - Disconnect Devices for Use in Industrial Control Equipment

ICS-6-16.....Standard for Industrial Controls and Systems Enclosures

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

20-10.....Standard for General-Use Snap Switches

98-16.....Enclosed and Dead-Front Switches

773A-16.....Nonindustrial Photoelectric Switches for Lighting Control

916-15.....Standard for Energy Management Equipment Systems

917-06.....Clock Operated Switches

924-16.....Emergency Lighting and Power Equipment (for use when controlling emergency circuits).

PART 2 - PRODUCTS

2.1 ELECTRONIC TIME SWITCHES

A. Electronic, solid-state programmable units with alphanumeric display; complying with UL 916 and or 917.
   1. Contact Configuration: DPST.
   2. Contact Rating: 30-A inductive or resistive120-277 volt.
   3. Astronomical Clock: Capable of switching a load on at sunset and off at sunrise, and automatically changing the settings each day in accordance with seasonal changes of sunset and sunrise. Additionally, it shall be programmable to a fixed on/off weekly schedule.
   4. Power Backup: Battery or capacitor for schedules and time clock..

2.2 CEILING-MOUNTED PHOTOELECTRIC SWITCHES

A. Solid-state, light-level sensor unit, with separate relay unit.
   1. Sensor Output: Contacts rated to operate the associated relay. Sensor shall be powered from the relay unit.
   2. Relay Unit: Dry contacts rated for 20A load at 120 volt and 277 volt,and for 1 hp at 120 volt.
   3. Monitoring Range: 108 to 2152 lx (10 to 200 fc, with an adjustment for turn-on and turn-off levels.
   4. Time Delay: Adjustable from 5 to 300 seconds, with deadband adjustment.
   5. Indicator: Two LEDs to indicate the beginning of on-off cycles.

2.3 INDOOR OCCUPANCY SENSORS

A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.
   1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.
   2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.
   3. Relay Unit: Dry contacts rated for 20A load at 120 volt and 277 volt,.
   4. Mounting:
      a. Sensor: Suitable for mounting in any position on a standard outlet box.

b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
6. Bypass Switch: Override the on function in case of sensor failure.
7. Manual/automatic selector switch.
8. Automatic Light-Level Sensor: Adjustable from 21.5 to 2152 lx (2 to 200 fc); keep lighting off when selected lighting level is present.
9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.

1. Sensitivity Adjustment: Separate for each sensing technology.
2. Detector Sensitivity: Detect occurrences of 150 mm (6-inch) minimum movement of any portion of a human body that presents a target of not less than 232 sq. cm (36 sq. in), and detect a person of average size and weight moving not less than 305 mm (12 inches) in either a horizontal or a vertical manner at an approximate speed of 305 mm/s (12 inches/s).

C. Detection Coverage: Shall be sufficient to provide coverage as required by sensor locations shown on drawing.

2.4 INDOOR VACANCY SENSOR SWITCH

A. Wall mounting, solid-state units with integral sensor and switch.

1. Operation: Manually turn lights on with switch and sensor detects vacancy to turn lights off.
2. Switch Rating: 120/277 volt, 1200 watts at 277 volt, 800 watts at 120 volt unit.
3. Mounting:
   a. Sensor: Suitable for mounting in a standard switch box.
   b. Time-Delay and Sensitivity Adjustments: Integral with switch and accessible for reprogramming without removing switch.
4. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
5. Switch: Manual operation to turn lights on and override lights off.
6. Faceplate: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, as shown on the drawings, and as specified.

B. Aim outdoor photoelectric sensor according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle turn-on.

C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer’s recommendations.

D. Set occupancy sensor "on" duration to 15 minutes.

E. Locate photoelectric sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the available light level at the typical work plane for that area.

F. Label time switches and contactors with a unique designation.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations.

B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.

C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.

D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.

E. Upon completion of the installation, the system shall be commissioned by the manufacturer’s factory-authorized technician who will verify all adjustments and sensor placements.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function in the presence of COR.

3.4 INSTRUCTION

A. Furnish the services of a factory-trained technician for one 8-hour training period for instructing personnel in the maintenance and operation of the lighting control system on the dates requested by the or COR.

B. Contractor shall submit written instructions on training and maintenance as reviewed in training session.

---END---

---INTENTIONALLY BLANK---

SECTION 26 24 13
DISTRIBUTION SWITCHBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of the low-voltage circuit-breaker distribution switchboards, indicated as switchboard(s) in this section.

1.2 RELATED WORK

A. Section 03 30 00, CAST-IN-PLACE CONCRETE: Requirements for concrete equipment pads.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit.

F. Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY: Short circuit and coordination study, and requirements for a coordinated electrical system.

G. Section 26 43 13, SURGE PROTECTIVE DEVICES: Surge protective devices for switchboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 FACTORY TESTS

A. Factory Tests shall be required.

B. Factory Tests shall be in accordance with Paragraph, MANUFACTURED PRODUCTS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirement:

1. Tests shall be conducted per NEMA PB 2.
2. Verify that circuit breaker sizes and types correspond to drawings, and the Overcurrent Protective Device Coordination Study.
3. Verify tightness of bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer’s published data.

4. Confirm correct operation and sequencing of key-type mechanical interlock systems for multiple circuit breakers by attempting closure on locked-open devices, and attempting to open locked-closed devices, and making key exchange with devices operated in off-normal positions.
5. Exercise all active components.
6. Perform an insulation-resistance test, phase to ground, on each bus section, with phases not under test grounded, in accordance with manufacturer's published data.
7. Perform insulation-resistance tests on control wiring with respect to ground. Applied potential shall be 500 V DC for 300-volt rated cable and 1000 V DC for 600-volt rated cable, or as required if solid-state components or control devices cannot tolerate the applied voltage.
8. If applicable, verify correct function of control transfer relays located in the switchboard with multiple control power sources.
9. Perform phasing checks on double-ended or dual-source switchboards to insure correct bus phasing from each source.

1.5 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
   1. Shop Drawings:
      a. Switchboard shop drawings shall be submitted simultaneously with or after the Overcurrent Protective Device Coordination Study.
      b. Submit sufficient information to demonstrate compliance with drawings and specifications.
      c. Prior to fabrication of switchboards, submit the following data for approval:
         1) Complete electrical ratings.
         2) Circuit breaker sizes.
         3) Interrupting ratings.
         4) Safety features.
         5) Accessories and nameplate data.
         6) Switchboard one line diagram, showing ampere rating, number of bars per phase and neutral in each bus run (horizontal and

vertical), bus spacing, equipment ground bus, and bus material.

7) Elementary and interconnection wiring diagrams.
8) Technical data for each component.
9) Dimensioned exterior views of the switchboard.
10) Dimensioned section views of the switchboard.
11) Floor plan of the switchboard.
12) Foundation plan for the switchboard.
13) Provisions and required locations for external conduit and wiring entrances.
14) Approximate design weights.

2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
      1) Schematic signal and control diagrams, with all terminals identified, matching terminal identification in the switchboard.
      2) Include information for testing, repair, trouble shooting, assembly, disassembly, and factory recommended/required periodic maintenance procedures and frequency.
      3) Provide a replacement and spare parts list. Include a list of tools and instruments for testing and maintenance purposes.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the switchboards conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the switchboards have been properly installed, adjusted, and tested.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by basic designation only.

B. Institute of Engineering and Electronic Engineers (IEEE):

C37.13-15.....Low Voltage AC Power Circuit Breakers Used in Enclosures

C57.13-16.....Instrument Transformers

C62.41.1-02.....Surge Environment in Low-voltage (1000V and less) AC Power Circuits

C62.45-02.....Surge Testing for Equipment connected to Low-Voltage AC Power Circuits

C. International Code Council (ICC):

IBC-15.....International Building Code

D. National Electrical Manufacturer's Association (NEMA):

PB 2-11.....Deadfront Distribution Switchboards

PB 2.1-13.....Proper Handling, Installation, Operation, and Maintenance of Deadfront Distribution Switchboards Rated 600 Volts or Less

E. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

F. Underwriters Laboratories, Inc. (UL):

67-09.....Panelboards

489-16.....Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures

891-05.....Switchboards

PART 2 - PRODUCTS

2.1 GENERAL

A. Shall be in accordance with IEEE, NEMA, NFPA, UL, as shown on the drawings, and have the following features:

1. Switchboard shall be a complete, grounded, continuous-duty, integral assembly, dead-front, dead-rear, self-supporting, indoor type switchboard assembly. Incorporate devices shown on the drawings and all related components required to fulfill operational and functional requirements.
2. Ratings shall not be less than shown on the drawings. Short circuit ratings shall not be less than the available fault current shown in the Overcurrent Protective Device Coordination Study.

3. Switchboard shall conform to the arrangements and details shown on the drawings.
4. Key-type mechanical interlocks for multiple circuit breakers shall be provided as shown on the drawings.
5. Switchboards shall be assembled, connected, and wired at the factory so that only external circuit connections are required at the construction site. Split the structure only as required for shipping and installation. Packaging shall provide adequate protection against rough handling during shipment.
6. All non-current-carrying parts shall be grounded per Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS for additional requirements.
7. Series rated switchboards are not allowed.

2.2 BASIC ARRANGEMENT

A. Type 1: Switchboard shall be front accessible with the following features:
   1. Device mounting:
      a. Main breaker: Individually mounted and compartmented or group mounted with feeder breakers.
      b. Feeder breakers: Group mounted.
   2. Section alignment: As shown on the drawings.
   3. Accessibility:
      a. Main section line and load terminals: Front and side.
      b. Distribution section line and load terminals: Front.
      c. Through bus connections: Front and end.
   4. Bolted line and load connections.
   5. Full height wiring gutter covers for access to wiring terminals.

B. Type 2: Switchboard shall be rear accessible with the following features:
   1. Device mounting:
      a. Main breaker: Individually mounted and compartmented.
      b. Feeder breakers: Individually mounted and compartmented.
   2. Section alignment: As shown on drawings.
   3. Accessibility:
      a. Main section line and load terminals: Rear.
      b. Distribution section line and load terminals: Rear.
      c. Bus connections: Rear.

4. Bolted line and load connections.
5. Full height wiring gutter covers for access to wiring terminals.

2.3 HOUSING

A. Shall have the following features:
1. Frames and enclosures:
a. The assembly shall be braced with reinforcing gussets using bolted connections to assure rectangular rigidity.
b. The enclosure shall be steel, leveled, and not less than the gauge required by applicable publications.
c. Die-pierce the holes for connecting adjacent structures to insure proper alignment, and to allow for future additions.
d. All bolts, nuts, and washers shall be zinc-plated steel.

B. Finish:
1. All metal surfaces shall be thoroughly cleaned, phosphatized and factory primed prior to applying baked enamel or lacquer finish.
2. Provide a light gray finish for indoor switchboard.

2.4 BUSES

A. Bus Bars and Interconnections:
1. Provide copper phase and neutral buses, fully rated for the amperage as shown on the drawings for the entire length of the switchboard. Bus laminations shall have a minimum of 6 mm (1/4 inch) spacing.
2. Mount the buses on appropriately spaced insulators and brace to withstand the available short circuit currents.
3. The bus and bus compartment shall be designed so that the acceptable NEMA standard temperature rises are not exceeded.
4. Install a copper ground bus the full length of the switchboard assembly.
5. Main Bonding Jumper: An un-insulated copper bus, size as shown on drawings, shall interconnect the neutral and ground buses, when the switchboard is used to establish the system common ground point.
6. All bolts, nuts, and washers shall be zinc-plated. Bolts shall be torqued to the values recommended by the manufacturer.
7. Make provisions for future bus extensions by means of bolt holes or other approved method.

2.5 MAIN CIRCUIT BREAKERS

A. Type I or Type II Switchboards: Provide molded case main circuit breakers as shown on the drawings. Circuit breakers shall be the solid state adjustable trip type.

1. Trip units shall have field adjustable tripping characteristics as follows:
   a. Long time pickup.
   b. Long time delay.
   c. Short time pickup.
   d. Short time delay.
   e. Instantaneous.
   f. Ground fault pickup.
   g. Ground fault delay.
2. Breakers with same frame size shall be interchangeable with each other.
3. Breakers shall be fully rated

2.6 FEEDER CIRCUIT BREAKERS

A. Provide molded case circuit breakers as shown on the drawings.

B. Non-adjustable Trip Molded Case Circuit Breakers:

1. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time characteristics, and instantaneous magnetic trip.
2. Breaker features shall be as follows:
   a. A rugged, integral housing of molded insulating material.
   b. Silver alloy contacts.
   c. Arc quenchers and phase barriers for each pole.
   d. Quick-make, quick-break, operating mechanisms.
   e. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
   f. Electrically and mechanically trip free.
   g. An operating handle which indicates ON, TRIPPED, and OFF positions.
   h. Line and load connections shall be bolted.
   i. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.

C. Adjustable Trip Molded Case Circuit Breakers:

1. Provide molded case, solid state adjustable trip type circuit breakers.
2. Trip units shall have field adjustable tripping characteristics as follows:
   a. Long time pickup.
   b. Long time delay.
   c. Short time pickup.
   d. Short time delay.
   e. Instantaneous.
   f. Ground fault pickup.
   g. Ground fault delay.
3. Breakers with same frame size shall be interchangeable with each other.

2.7 SURGE PROTECTIVE DEVICES

A. Refer to Section 26 43 13, SURGE PROTECTIVE DEVICES.

2.8 OTHER EQUIPMENT

A. Furnish tools and accessories required for circuit breaker and switchboard test, inspection, maintenance, and proper operation.

B. Panelboards: Requirements for panelboards shown to be installed in the switchboard shall be as shown on the drawings and in Section 26 24 16, PANELBOARDS.

2.9 CONTROL WIRING

A. Switchboard control wires shall not be less than No. 14 AWG copper 600 volt rated. Install wiring complete at the factory, adequately bundled and protected. Provide separate control circuit fuses in each breaker compartment and locate for ease of access and maintenance.

2.10 NAMEPLATES AND MIMIC BUS

A. Nameplates: For Normal Power system, provide laminated black phenolic resin with white core with 12 mm (1/2 inch) engraved lettered nameplates next to each circuit breaker. For Essential Electrical System, provide laminated red phenolic resin with white core with 12 mm (1/2 inch) engraved lettered nameplates next to each circuit breaker. Nameplates shall indicate equipment served, spaces, or spares in accordance with one line diagram shown on drawings. Nameplates shall be mounted with plated screws on front of breakers or on equipment enclosure next to breakers. Mounting nameplates only with adhesive is not acceptable.

B. Mimic Bus: Provide an approved mimic bus on front of each switchboard assembly. Color shall be black for the Normal Power system and red for the Essential Electrical System, either factory-painted plastic or metal strips. Plastic tape shall not be used. Use symbols similar to one line diagram shown on drawings. Plastic or metal strips shall be mounted with plated screws.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install switchboards in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.

B. Anchor switchboards with rustproof bolts, nuts, and washers not less than 13 mm (1/2 inch) diameter, in accordance with manufacturer’s instructions, and as shown on drawings.

C. Interior Location. Mount switchboard on concrete slab. Unless otherwise indicated, the slab shall be at least 100 mm (4 inches) thick. The top of the concrete slab shall be approximately 100 mm (4 inches) above finished floor. Edges above floor shall have 12.5 mm (1/2 inch) chamfer. The slab shall be of adequate size to project at least 200 mm (8 inches) beyond the equipment. Provide conduit turnups and cable entrance space required by the equipment to be mounted. Seal voids around conduit openings in slab with water- and oil-resistant caulking or sealant. Cut off and bush conduits 75 mm (3 inches) above slab surface. Concrete work shall be as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:
   a. Compare equipment nameplate data with specifications and approved shop drawings.
   b. Inspect physical, electrical, and mechanical condition.
   c. Verify appropriate anchorage, required area clearances, and correct alignment.
   d. Verify that circuit breaker sizes and types correspond to approved shop drawings.

e. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method or performing thermographic survey after energization.
f. Confirm correct operation and sequencing of key-type mechanical interlock systems
g. Vacuum-clean switchboard enclosure interior. Clean switchboard enclosure exterior.
h. Inspect insulators for evidence of physical damage or contaminated surfaces.
i. Verify correct shutter installation and operation.
j. Exercise all active components.
k. Verify the correct operation of all sensing devices, alarms, and indicating devices.
l. Verify that vents are clear.

2. Electrical tests:
   a. Perform insulation-resistance tests on each bus section.
   b. Perform insulation-resistance test on control wiring; do not perform this test on wiring connected to solid-state components.
   c. Perform phasing check on double-ended switchboards to ensure correct bus phasing from each source.

B. Prior to the final inspection for acceptance, a technical representative from the electric utility company shall witness the testing of the equipment to assure the proper operation of the individual components, and to confirm proper operation/coordination with electric utility company’s equipment.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the switchboard is in good operating condition and properly performing the intended function.

3.4 WARNING SIGN

A. Mount on each entrance door of the switchboard room, approximately 1500 mm (5 feet) above grade or floor, a clearly lettered warning sign for warning personnel. The sign shall be attached with rustproof metal screws.

3.5 ONE LINE DIAGRAM AND SEQUENCE OF OPERATION

A. At final inspection, an as-built one line diagram shall be laminated or mounted under acrylic glass, and installed in a frame mounted in the switchboard room or in the outdoor switchboard enclosure.

B. Furnish a written sequence of operation for the switchboard and connected line side/load side electrical distribution equipment. The sequence of operation shall be laminated or mounted under acrylic glass, and installed in a frame mounted in the switchboard room or in the outdoor switchboard enclosure.

C. Deliver an additional four copies of the as-built one line diagram and sequence of operation to the COR.

3.6 AS-LEFT TRIP UNIT SETTINGS

A. The trip unit settings shall be set in the field by an authorized representative of the switchboard manufacturer per the approved Electrical System Protective Device Study in accordance with Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY.

B. The trip unit settings of the main breaker(s) shall be reviewed by the electric utility company to assure coordination with the electric utility company primary fusing. Prior to switchboard activation, provide written verification of this review to the COR.

C. Post a durable copy of the "as-left" trip unit settings in a convenient location in the switchboard room. Deliver four additional copies of the settings to theCOR. Furnish this information prior to the activation of the switchboard.

3.7 INSTRUCTION

A. Furnish the services of a factory-trained technician for one, 4-hour training period for instructing personnel in the maintenance and operation of the switchboards, on the dates requested by the COR.

---END---

---INTENTIONALLY BLANK---

SECTION 26 24 16
PANELBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

A. Section 09 91 00, PAINTING: Painting of panelboards.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, circuit breakers, wiring and connection diagrams, accessories, and nameplate data.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering circuit breakers and replacement parts.
      1) Include schematic diagrams, with all terminals identified, matching terminal identification in the panelboards.

2) Include information for testing, repair, troubleshooting, assembly, and disassembly.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the panelboards conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the panelboards have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
IBC-15.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
PB 1-11.....Panelboards
250-14.....Enclosures for Electrical Equipment (1,000V Maximum)

D. National Fire Protection Association (NFPA):
70-17.....National Electrical Code (NEC)
70E-18.....Standard for Electrical Safety in the Workplace

E. Underwriters Laboratories, Inc. (UL):
50-15.....Enclosures for Electrical Equipment
67-09.....Panelboards
489-16.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Panelboards shall be in accordance with NEC, NEMA, UL, as specified, and as shown on the drawings.

B. Panelboards shall have main breaker or main lugs, bus size, voltage, phases, number of circuit breaker mounting spaces, top or bottom feed,

flush or surface mounting, branch circuit breakers, and accessories as shown on the drawings.

C. Panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories as shown on the drawings or specified herein.

D. Non-reduced size copper bus bars, rigidly supported on molded insulators, and fabricated for bolt-on type circuit breakers.

E. Bus bar connections to the branch circuit breakers shall be the "distributed phase" or "phase sequence" type.

F. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys listed for use with the conductors to which they shall be connected.

G. Neutral bus shall be copper and 100%rated, mounted on insulated supports.

H. Grounding bus bar shall be copper and equipped with screws or lugs for the connection of equipment grounding conductors.

I. Bus bars shall be braced for the available short-circuit current as shown on the drawings, but not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards, and 14,000 A symmetrical for 277/480 V panelboards.

J. In two-section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have field-installed cable connections to the second section as shown on the drawings. Panelboard sections with tapped bus or crossover bus are not acceptable.

K. Series-rated panelboards are not permitted.

2.2 ENCLOSURES AND TRIMS

A. Enclosures:

1. Provide galvanized steel enclosures, with NEMA rating as shown on the drawings or as required for the environmental conditions in which installed.
2. Enclosures shall not have ventilating openings.
3. Enclosures may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.
4. Provide manufacturer's standard option for prepunched knockouts on top and bottom endwalls.

5. Include removable inner dead front cover, independent of the panelboard cover.

B. Trims:

1. Hinged "door-in-door" type.
2. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
3. Outer hinged door shall be securely mounted to the panelboard enclosure with factory bolts, screws, clips, or other fasteners, requiring a key or tool for entry. Hand-operated latches are not acceptable.
4. Inner and outer doors shall open left to right.
5. Trims shall be flush or surface type as shown on the drawings.

2.3 MOLDED CASE CIRCUIT BREAKERS

A. Circuit breakers shall be per UL, NEC, as shown on the drawings, and as specified.

B. Circuit breakers shall be bolt-on type.

C. Circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:

1. 120/208 V Panelboard: 10,000 A symmetrical.
2 277/480 V Panelboard: 14,000 A symmetrical.

D. Circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for less than 400 A frame. Circuit breakers with 400 A frames and above shall have magnetic trip, adjustable from 5x to 10x. Breaker trip setting shall be set in the field, based on the approved protective device study as specified in Section 26 05 73, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY Breaker magnetic trip setting shall be set to maximum, unless otherwise noted.

E. Circuit breaker features shall be as follows:

1. A rugged, integral housing of molded insulating material.
2. Silver alloy contacts.
3. Arc quenchers and phase barriers for each pole.
4. Quick-make, quick-break, operating mechanisms.
5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.

6. Electrically and mechanically trip free.
7. An operating handle which indicates closed, tripped, and open positions.
8. An overload on one pole of a multi-pole breaker shall automatically cause all the poles of the breaker to open.
9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where shown on the drawings.
10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

2.4 SURGE PROTECTIVE DEVICES

A. Furnish new panelboards with integral surge protective devices. Refer to Section 26 43 13, SURGE PROTECTIVE DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the manufacturer's instructions, the NEC, as shown on the drawings, and as specified.
B. Locate panelboards so that the present and future conduits can be conveniently connected.
C. In seismic areas, panelboards shall be adequately anchored and braced per details on structural contract drawings to withstand the seismic forces at the location where installed.
D. Install a printed schedule of circuits in each panelboard after approval by the COR. Schedules shall reflect final load descriptions, room numbers, and room names connected to each circuit breaker. Schedules shall be printed on the panelboard directory cards and be installed in the appropriate panelboards
E. Mount panelboards such that the maximum height of the top circuit breaker above the finished floor shall not exceed 1980 mm (78 inches).
F. Provide blank cover for each unused circuit breaker mounting space.
G. Panelboard enclosures shall not be used for conductors feeding through, spliced, or tapping off to other enclosures or devices.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify appropriate anchorage and required area clearances.

d. Verify that circuit breaker sizes and types correspond to approved shop drawings.

e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.

f. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

---END---

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

E. Section 26 51 00, INTERIOR LIGHTING: Fluorescent ballasts and LED drivers for use with manual dimming controls.

1.3 QUALITY ASSURANCE:

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. National Electrical Manufacturers Association (NEMA):
   WD 1-99(R2015).....General Color Requirements for Wiring Devices
   WD 6-16 .....Wiring Devices – Dimensional Specifications

C. National Fire Protection Association (NFPA):
   70-17.....National Electrical Code (NEC)
   99-18.....Health Care Facilities

D. Underwriter’s Laboratories, Inc. (UL):
   5-16.....Surface Metal Raceways and Fittings
   20-10.....General-Use Snap Switches
   231-16.....Power Outlets
   467-13.....Grounding and Bonding Equipment
   498-17.....Attachment Plugs and Receptacles
   943-16.....Ground-Fault Circuit-Interrupters
   1449-14.....Surge Protective Devices
   1472-15.....Solid State Dimming Controls

PART 2 - PRODUCTS

2.1 RECEPTACLES

A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.
   1. Mounting straps shall be nickel plated brass, brass, nickel plated steel or galvanize steel with break-off plaster ears and shall

include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.

2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.

B. Duplex Receptacles - Hospital-grade: shall be listed for hospital grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.

1. Bodies shall be ivory in color.
2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The lower receptacle shall be unswitched.
3. Duplex Receptacles on Emergency Circuit:
   a. Emergency receptacles shall be the color RED and of the self-illuminated type in rooms without emergency powered lighting.
4. Ground Fault Current Interrupter (GFCI) Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box, with end-of-life indication and provisions to isolate the face due to improper wiring. GFCI receptacles shall be self-test receptacles in accordance with UL 943.
   a. Ground fault interrupter shall consist of a differential current transformer, self-test, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of 4-6 milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or – 1 milliampere) on the load side of the device. Device shall have a minimum nominal tripping time of 0.025 second.
   b. Self-test function shall be automatically initiated within 5 seconds after power is activated to the receptacles. Self-test function shall be periodically and automatically performed every 3 hours or less.
   c. End-of-life indicator light shall be a persistent flashing or blinking light to indicate that the GFCI receptacle is no longer in service.
5. Tamper-Resistant Duplex Receptacles:
   a. Bodies shall be gray in color.

1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
2) Screws exposed while the wall plates are in place shall be the tamperproof type.

C. Receptacles - 20, 30, and 50 ampere, 250 Volts: Shall be complete with appropriate cord grip plug.

D. Surge Protective (TVSS) Receptacles shall have integral surge suppression in line to ground, line to neutral, and neutral to ground modes.

1. TVSS Components: Multiple metal-oxide varistors; with a nominal clamp-level rating of 400 Volts, and minimum single transient pulse energy dissipation of 210 Joules.
2. Active TVSS Indication: LED, visible in face of device to indicate device is active or no longer in service.

2.2 TOGGLE SWITCHES

A. Toggle switches shall be totally enclosed tumbler type with nylon bodies. Handles shall be ivoryin color unless otherwise specified or shown on the drawings.

1. Switches installed in hazardous areas shall be explosion-proof type in accordance with the NEC and as shown on the drawings.
2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self-grounding mounting strap with break-off plasters ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
3. Switches shall be rated 20 amperes at 120-277 Volts AC.

2.3 MANUAL DIMMING CONTROL

A. Electronic full-wave manual slide dimmer with on/off switch and audible frequency and EMI/RFI suppression filters.

B. Manual dimming controls shall be fully compatible with LED dimming driver and be approved by the driver manufacturer, shall operate over full specified dimming range, and shall not degrade the performance or rated life of the electronic dimming ballast and lamp.

C. Provide single-pole, three-way or four-way, as shown on the drawings.

D. Manual dimming control and faceplates shall be ivory in color unless otherwise specified.

2.4 WALL PLATES

A. Wall plates for switches and receptacles shall be type smooth nylon. Wall plates in mechanical/HVAC spaces shall be 302 stainless. Oversize plates are not acceptable.

B. Color shall be ivory unless otherwise specified.

C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.

D. In areas requiring tamperproof wiring devices, wall plates shall be type 302 stainless steel, and shall have tamperproof screws and beveled edges.

E. Duplex Receptacles on Emergency Circuit: Wall plates shall be red nylon with the word "EMERGENCY" engraved in 6 mm (1/4 inch) white letters.

2.5 SURFACE MULTIPLE-OUTLET ASSEMBLIES

A. Shall have the following features:

1. Enclosures:

   a. Thickness of steel shall be not less than 1 mm (0.040 inch) for base and cover. Nominal dimensions shall be 40 mm x 70 mm (1-1/2 inches by 2-3/4 inches) with inside cross-sectional area not less than 2250 square mm (3-1/2 square inches). The enclosures shall be thoroughly cleaned, phosphatized, and painted at the factory with primer and the manufacturer's standard baked enamel finish.

2. Receptacles shall be duplex, hospital grade. See paragraph 'RECEPTACLES' in this Section. Device cover plates shall be the manufacturer's standard corrosion resistant finish and shall not exceed the dimensions of the enclosure.

3. Unless otherwise shown on drawings, receptacle spacing shall be 600 mm (24 inches) on centers.

4. Conductors shall be as specified in Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLE.

5. Installation fittings shall be the manufacturer’s standard bends, offsets, device brackets, inside couplings, wire clips, elbows, and other components as required for a complete system.

6. Bond the assemblies to the branch circuit conduit system.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC and as shown as on the drawings.

B. Install wiring devices after wall construction and painting is complete.

C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and connected to the branch circuit equipment grounding conductor.

D. Outlet boxes for toggle switches and manual dimming controls shall be mounted on the strike side of doors.

E. Provide barriers in multi-gang outlet boxes to comply with the NEC.

F. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.

G. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades.

H. Install wall switches 1.2 M (48 inches) above floor, with the toggle OFF position down.

I. Install wall dimmers 1.2 M (48 inches) above floor.

J. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.

K. Install horizontally mounted receptacles with the ground pin to the right.

L. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.

M. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform manufacturer’s required field checks in accordance with the manufacturer's recommendations, and the latest NFPA 99. In addition, include the following:

1. Visual Inspection and Tests:
   a. Inspect physical and electrical conditions.
   b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
   c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
   d. Test GFCI receptacles.

---END---

---INTENTIONALLY BLANK---

SECTION 26 29 11
MOTOR CONTROLLERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of motor controllers, including all low and manual motor controllers, indicated as motor controllers in this section, and low-voltage variable speed motor controllers.

B. Motor controllers, whether furnished with the equipment specified in other sections or otherwise shall meet this specification and all related specifications.

1.2 RELATED WORK

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

E. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

F. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

G. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, weights, mounting details, materials, overcurrent protection devices, overload relays, sizes of enclosures, wiring diagrams, starting characteristics, interlocking, and accessories.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including

technical data sheets, wiring diagrams, and information for ordering replacement parts.

1) Wiring diagrams shall have their terminals identified to facilitate installation, maintenance, and operation.
2) Wiring diagrams shall indicate internal wiring for each item of equipment and interconnections between the items of equipment.
3) Elementary schematic diagrams shall be provided for clarity of operation.
4) Include the catalog numbers for the correct sizes of overload relays for the motor controllers.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the motor controllers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the motor controllers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. Institute of Electrical and Electronic Engineers (IEEE):
519-14.....Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems
C37.90.1-12.....Standard Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus

C. International Code Council (ICC):
IBC-15.....International Building Code

D. National Electrical Manufacturers Association (NEMA):
ICS 1-00(R2015).....Industrial Control and Systems: General Requirements

ICS 1.1-84(R2015).....Safety Guidelines for the Application, Installation and Maintenance of Solid State Control

ICS 2-00(R2005).....Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 Volts

ICS 4-15.....Industrial Control and Systems: Terminal Blocks

ICS 6-93(R2016).....Industrial Control and Systems: Enclosures

ICS 7-14.....Industrial Control and Systems: Adjustable-Speed Drives

ICS 7.1-14.....Safety Standards for Construction and Guide for Selection, Installation, and Operation of Adjustable-Speed Drive Systems

E. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

F. Underwriters Laboratories Inc. (UL):

508A-13.....Industrial Control Panels

508C-16.....Power Conversion Equipment

1449-14.....Surge Protective Devices

PART 2 - PRODUCTS

2.1 MOTOR CONTROLLERS

A. Motor controllers shall comply with IEEE, NEMA, NFPA, UL, and as shown on the drawings.

B. Motor controllers shall be separately enclosed, unless part of another assembly.

C. Motor controllers shall be combination type, with magnetic controller per Paragraph 2.3 below and with circuit breaker disconnecting means, with external operating handle with lock-open padlocking positions and ON-OFF position indicator.

1. Circuit Breakers:

   a. Bolt-on thermal-magnetic type with a minimum interrupting rating as indicated on the drawings.

   b. Equipped with automatic, trip free, non-adjustable, inverse-time, and instantaneous magnetic trips for less than 400A. The magnetic trip shall be adjustable from 5x to 10x for breakers 400A and greater.

   c. Additional features shall be as follows:

1) A rugged, integral housing of molded insulating material.
2) Silver alloy contacts.
3) Arc quenchers and phase barriers for each pole.
4) Quick-make, quick-break, operating mechanisms.
5) A trip element for each pole, a common trip bar for all poles, and one operator for all poles.

D. Enclosures:
1. Enclosures shall be NEMA-type rated 1, 3R, or 12 as indicated on the drawings or as required per the installed environment.
2. Enclosure doors shall be interlocked to prevent opening unless the disconnecting means is open. A "defeater" mechanism shall allow for inspection by qualified personnel with the disconnect means closed. Provide padlocking provisions.
3. All metal surfaces shall be thoroughly cleaned, phosphatized, and factory primed prior to applying light gray baked enamel finish.

E. Motor control circuits:
1. Shall operate at not more than 120 Volts.
2. Shall be grounded, except where the equipment manufacturer recommends that the control circuits be isolated.
3. For each motor operating over 120 Volts, incorporate a separate, heavy duty, control transformer within each motor controller enclosure.
4. Incorporate primary and secondary overcurrent protection for the control power transformers.

F. Overload relays:
1. Thermal type. Devices shall be NEMA type.
2. One for each pole.
3. External overload relay reset pushbutton on the door of each motor controller enclosure.
4. Overload relays shall be matched to nameplate full-load current of actual protected motor and with appropriate adjustment for duty cycle.
5. Thermal overload relays shall be tamperproof, not affected by vibration, manual reset, sensitive to single-phasing, and shall have selectable trip classes of 10, 20 and 30.

G. Hand-Off-Automatic (H-O-A) switch is required unless specifically stated on the drawings as not required for a particular controller. H-

O-A switch shall be operable without opening enclosure door. H-O-A switch is not required for manual motor controllers.

H. Incorporate into each control circuit a 120 Volt, electronic time-delay relay (ON delay), minimum adjustable range from 0.3 to 10 minutes, with transient protection. Time-delay relay is not required where H-O-A switch is not required.

I. Unless noted otherwise, equip each motor controller with not less than two normally open (N.O.) and two normally closed (N.C.) auxiliary contacts.

J. Provide green (RUN) and red (STOP) pilot lights.

K. Motor controllers incorporated within equipment assemblies shall also be designed for the specific requirements of the assemblies.

L. Additional requirements for specific motor controllers, as indicated in other specification sections, shall also apply.

2.2 MANUAL MOTOR CONTROLLERS

A. Shall be in accordance with applicable requirements of 2.1 above.

B. Manual motor controllers shall have the following features:

1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for induction motors, rated in horsepower.
2. Units shall include thermal overload relays, on-off operator, green pilot light, normally open and normally closed auxiliary contacts.

C. Fractional horsepower manual motor controllers shall have the following features:

1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for fractional horsepower induction motors.
2. Units shall include thermal overload relays, red pilot light, and toggle operator.

2.3 MAGNETIC MOTOR CONTROLLERS

A. Shall be in accordance with applicable requirements of 2.1 above.

B. Controllers shall be general-purpose, Class A magnetic controllers for induction motors rated in horsepower. Minimum NEMA size 0.

C. Where combination motor controllers are used, combine controller with protective or disconnect device in a common enclosure.

D. Provide phase loss protection for each controller, with contacts to de-energize the controller upon loss of any phase.

E. Unless otherwise indicated, provide full voltage non-reversing across-the-line mechanisms for motors less than 25 HP, closed by coil action and opened by gravity. For motors 25 HP and larger, provide reduced-voltage or variable speed controllers as shown on the drawings. Equip controllers with 120 VAC coils and individual control transformer unless otherwise noted.

2.4 REDUCED VOLTAGE MOTOR CONTROLLERS

A. Shall be in accordance with applicable portions of 2.1 above.

B. Shall have closed circuit transition.

C. Shall limit inrush currents to not more than 70 percent of the locked rotor current.

D. Provide phase loss protection for each motor controller, with contacts to de-energize the motor controller upon loss of any phase.

2.5 LOW-VOLTAGE VARIABLE SPEED MOTOR CONTROLLERS (VSMC)

A. VSMC shall be in accordance with applicable portions of 2.1 above.

B. VSMC shall be electronic, with adjustable frequency and voltage, three phase output, capable of driving standard NEMA B three-phase induction motors at full rated speed. The control technique shall be pulse width modulation (PWM), where the VSMC utilizes a full wave bridge design incorporating diode rectifier circuitry. Silicon controlled rectifiers or other control techniques are not acceptable.

C. VSMC shall be suitable for variable torque loads and shall be capable of providing sufficient torque to allow the motor to break away from rest upon first application of power.

D. VSMC shall be capable of operating within voltage parameters of plus 10 to minus 15 percent of line voltage and be suitably rated for the full load amps of the maximum watts (HP) within its class.

E. Minimum efficiency shall be 95 percent at 100 percent speed and 85 percent at 50 percent speed.

F. The displacement power factor of the VSMC shall not be less than 95 percent under any speed or load condition.

G. VSMC current and voltage harmonic distortion shall not exceed the values allowed by IEEE 519.

H. Operating and Design Conditions:

1. Elevation: 115 feet Above Mean Sea Level (AMSL)
2. Temperatures: Maximum +90°F Minimum -10°F
3. Relative Humidity: 95%

4. VSMC Location: Air conditioned space

I. VSMC shall have the following features:

1. Isolated power for control circuits.
2. Manually resettable overload protection for each phase.
3. Adjustable current limiting circuitry to provide soft motor starting. Maximum starting current shall not exceed 200 percent of motor full load current.
4. Independent acceleration and deceleration time adjustment, manually adjustable from 2 to 2000 seconds. Set timers to the equipment manufacturer's recommended time in the above range.
5. Control input circuitry that will accept 4 to 20 mA current or 0-10 VDC voltage control signals from an external source.
6. Automatic frequency adjustment from 1 Hz to 300 Hz.
7. Circuitry to initiate an orderly shutdown when any of the conditions listed below occur. The VSMC shall not be damaged by any of these electrical disturbances and shall automatically restart when the conditions are corrected. The VSMC shall be able to restart into a rotating motor operating in either the forward or reverse direction and matching that frequency.
   a. Incorrect phase sequence.
   b. Single phasing.
   c. Overvoltage in excess of 10 percent.
   d. Undervoltage in excess of 15 percent.
   e. Running overcurrent above 110 percent (VSMC shall not automatically reset for this condition.)
   f. Instantaneous overcurrent above 150 percent (VSMC shall not automatically reset for this condition).
   g. Short duration power outages of 12 cycles or less (i.e., distribution line switching, generator testing, and automatic transfer switch operations.)
8. Automatic Reset/Restart: Attempt three restarts after VSMC fault or on return of power after an interruption and before shutting down for manual reset or fault correction, with adjustable delay time between restart attempts.
9. Power-Interruption Protection: To prevent motor from re-energizing after a power interruption until motor has stopped, unless "Bidirectional Autospeed Search" feature is available and engaged.

10. Bidirectional Autospeed Search: Capable of starting VSMC into rotating loads spinning in either direction and returning motor to set speed in proper direction, without causing damage to VSMC, motor, or load.

J. VSMC shall include an input circuit breaker which will disconnect all input power, interlocked with the door so that the door cannot be opened with the circuit breaker in the closed position.

K. VSMC shall include a 5% line reactor and a RFI/EMI filter.

L. Surge Suppression: Provide three-phase protection against damage from supply voltage surges in accordance with UL 1449.

M. VSMC shall include front-accessible operator station, with sealed keypad and digital display, which allows complete programming, operating, monitoring, and diagnostic capabilities.

1. Typical control functions shall include but not be limited to:
   a. HAND-OFF-AUTOMATIC-RESET, with manual speed control in HAND mode.
   b. NORMAL-BYPASS.
   c. NORMAL-TEST, which allows testing and adjusting of the VSMC while in bypass mode.
2. Typical monitoring functions shall include but not be limited to:
   a. Output frequency (Hz).
   b. Motor speed and status (run, stop, fault).
   c. Output voltage and current.
3. Typical fault and alarm functions shall include but not be limited to:
   a. Loss of input signal, under- and over-voltage, inverter overcurrent, motor overload, critical frequency rejection with selectable and adjustable deadbands, instantaneous line-to-line and line-to-ground overcurrent, loss-of-phase, reverse-phase, and short circuit.
   b. System protection indicators indicating that the system has shutdown and will not automatically restart.

N. VSMC shall include two N.O. and two N.C. dry contacts rated 120 Volts, 10 amperes, 60 Hz.

O. Hardware, software, network interfaces, gateways, and programming to control and monitor the VSMC by control systems specified in other specification sections, including but not limited to Divisions 22 and 23.

P. Network communications ports: As required for connectivity to control systems specified in other specification sections, including but not limited to Divisions 22 and 23.

Q. Communications protocols: As required for communications with control systems specified in other specification sections, including but not limited to Divisions 22 and 23.

R. Bypass controller: Provide contactor-style bypass, arranged to bypass the inverter.

1. Inverter Output Contactor and Bypass Contactor: Load-break NEMA-rated contactor.
2. Motor overload relays.
3. HAND-OFF-AUTOMATIC bypass control.

S. Bypass operation: Transfers motor between inverter output and bypass circuit, manually, automatically, or both. VSMC shall be capable of stable operation (starting, stopping, and running), and control by fire alarm and detection systems, with motor completely disconnected from the inverter output. Transfer between inverter and bypass contactor and retransfer shall only be allowed with the motor at zero speed.

T. Inverter Isolating Switch: Provide non-load-break switch arranged to isolate inverter and permit safe troubleshooting and testing of the inverter, both energized and de-energized, while motor is operating in bypass mode. Include padlockable, door-mounted handle mechanism.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motor controllers in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.

B. In seismic areas, motor controllers shall be adequately anchored and braced per details on structural contract drawings to withstand the seismic forces at the location where installed.

C. Install manual motor controllers in flush enclosures in finished areas.

D. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and electronic overload relay pickup and trip ranges.

E. Program variable speed motor controllers per the manufacturer’s instructions and in coordination with other trades so that a complete and functional system is delivered.

F. Adjust trip settings of circuit breakers and motor circuit protectors with adjustable instantaneous trip elements. Initially adjust at six times the motor nameplate full-load ampere ratings and attempt to start motors several times, allowing for motor cooldown between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficiency motors if required). Where these maximum settings do not allow starting of a motor, notify COR before increasing settings.

G. Set the taps on reduced-voltage autotransformer controllers at 80 percent of line voltage.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform manufacturer’s required field tests in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify appropriate anchorage, required area clearances, and correct alignment.

d. Verify that circuit breaker, motor circuit protector, and fuse sizes and types correspond to approved shop drawings.

e. Verify overload relay ratings are correct.

f. Vacuum-clean enclosure interior. Clean enclosure exterior.

g. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer’s published data.

h. Test all control and safety features of the motor controllers.

i. For low-voltage variable speed motor controllers, final programming and connections shall be by a factory-trained technician. Set all programmable functions of the variable speed motor controllers to meet the requirements and conditions of use.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the motor controllers are in good operating condition and properly performing the intended functions.

3.4 SPARE PARTS

A. Two weeks prior to the final inspection, provide one complete set of spare fuses for each motor controller.

3.5 INSTRUCTION

A. Furnish the services of a factory-trained technician for two 4-hour training periods for instructing personnel in the maintenance and operation of the motor controllers, on the dates requested by the COR.

---END---

---INTENTIONALLY BLANK---

SECTION 26 29 21
ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of fused and unfused disconnect switches (indicated as switches in this section), and separately-enclosed circuit breakers for use in electrical systems rated 600 V and below.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

E. Section 26 24 16, PANELBOARDS: Molded-case circuit breakers.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, fuses, circuit breakers, wiring and connection diagrams, accessories, and device nameplate data.
   c. Certification from the manufacturer that representative enclosed switches and circuit breakers have been seismically tested to International Building Code requirements. Certification shall be

based upon simulated seismic forces on a shake table or by analytical methods, but not by experience data or other methods.

2. Manuals:
   a. Submit complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering fuses, circuit breakers, and replacement parts.
      1) Include schematic diagrams, with all terminals identified, matching terminal identification in the enclosed switches and circuit breakers.
      2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the enclosed switches and circuit breakers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the enclosed switches and circuit breakers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
   IBC-15.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
   FU 1-12.....Low Voltage Cartridge Fuses
   KS 1-13.....Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum)

D. National Fire Protection Association (NFPA):
   70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

98-16.....Enclosed and Dead-Front Switches

248 1-11.....Low Voltage Fuses

489-13.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 FUSED SWITCHES RATED 600 AMPERES AND LESS

A. Switches shall be in accordance with NEMA, NEC, UL, as specified, and as shown on the drawings.

B. Shall be NEMA classified General Duty (GD) for 240 V switches, and NEMA classified Heavy Duty (HD) for 480 V switches.

C. Shall be horsepower (HP) rated.

D. Shall have the following features:

1. Switch mechanism shall be the quick-make, quick-break type.
2. Copper blades, visible in the open position.
3. An arc chute for each pole.
4. External operating handle shall indicate open and closed positions and have lock-open padlocking provisions.
5. Mechanical interlock shall permit opening of the door only when the switch is in the open position, defeatable to permit inspection.
6. Fuse holders for the sizes and types of fuses specified.
7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
8. Ground lugs for each ground conductor.
9. Enclosures:
   a. Shall be the NEMA types shown on the drawings.
   b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions.
   c. Shall be finished with manufacturer’s standard gray baked enamel paint over pretreated steel.

2.2 UNFUSED SWITCHES RATED 600 AMPERES AND LESS

A. Shall be the same as fused switches, but without provisions for fuses.

2.3 MOTOR RATED TOGGLE SWITCHES

A. Type 1, general purpose for single-phase motors rated up to 1 horsepower.

B. Quick-make, quick-break toggle switch with external reset button and thermal overload protection matched to nameplate full-load current of actual protected motor.

2.4 CARTRIDGE FUSES

A. Shall be in accordance with NEMA FU 1.

C. Feeders: Class L, time delay.

D. Motor Branch Circuits: Class RK1, time delay.

E. Other Branch Circuits: Class RK5, time delay

F. Control Circuits: Class CC, time delay.

2.6 SEPARATELY-ENCLOSED CIRCUIT BREAKERS

A. Provide circuit breakers in accordance with the applicable requirements in Section 26 24 16, PANELBOARDS.

B. Enclosures shall be the NEMA types shown on the drawings. Where the types are not shown, they shall be the NEMA type most suitable for the ambient environmental conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. In seismic areas, enclosed switches and circuit breakers shall be adequately anchored and braced per details on structural contract drawings to withstand the seismic forces at the location where installed.

C. Fused switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuses.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method.

d. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 SPARE PARTS

A. Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fused disconnect switch installed on the project. Deliver the spare fuses to the COR.

---END---

---INTENTIONALLY BLANK---

SECTION 26 43 13
SURGE PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of Type 2 Surge Protective Devices, as defined in NFPA 70, and indicated as SPD in this section.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 24 16, PANELBOARDS: For factory-installed or external SPD.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings and device nameplate data.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering replacement parts.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the SPD conforms to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the SPD has been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplement and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. Institute of Engineering and Electronic Engineers (IEEE):

IEEE C62.41.2-02.....Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

IEEE C62.45-08.....Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

UL 1283-15.....Electromagnetic Interference Filters

UL 1449-14.....Surge Protective Devices

PART 2 - PRODUCTS

2.1 PANELBOARD SPD

A. General Requirements:

1. Comply with UL 1449 and IEEE C62.41.2.
2. Modular design with field-replaceable modules, or non-modular design.
3. Fuses, rated at 200 kA interrupting capacity.
4. Bolted compression lugs for internal wiring.
5. Integral disconnect switch.
6. Redundant suppression circuits.
7. LED indicator lights for power and protection status.
8. Audible alarm, with silencing switch, to indicate when protection has failed.
9. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device.
10. Four-digit transient-event counter.

B. Surge Current per Phase: Minimum 120kA per phase.

2.2 ENCLOSURES

A. Enclosures: NEMA 1.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Factory-installed SPD: Switchgear, switchboard, or panelboard manufacturer shall install SPD at the factory.

C. Field-installed SPD: Contractor shall install SPD with conductors or buses between SPD and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.

1. Provide a circuit breaker as a dedicated disconnecting means for TVSS as shown on drawings.

D. Do not perform insulation resistance tests on switchgear, switchboards, panelboards, or feeders with the SPD connected. Disconnect SPD before conducting insulation resistance tests and reconnect SPD immediately after insulation resistance tests are complete.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify that disconnecting means and feeder size and maximum length to SPD corresponds to approved shop drawings.

d. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.

e. Vacuum-clean enclosure interior. Clean enclosure exterior.

f. Verify the correct operation of all sensing devices, alarms, and indicating devices.

3.3 FOLLOW-UP VERIFICATION

A. After completion of acceptance checks and tests, the Contractor shall show by demonstration in service that SPD are in good operating condition and properly performing the intended function.

3.4 INSTRUCTION

A. Provide the services of a factory-trained technician for one 2-hour training period for instructing personnel in the maintenance and operation of the SPD, on the date requested by the COR.

---END---

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the furnishing, installation, and connection of the interior lighting systems. The terms "lighting fixture," "fixture," and "luminaire" are used interchangeably.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION: Removal and disposal of lamps and ballasts.

B. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirement for seismic restraint for nonstructural components.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

D. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

F. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.

b. Material and construction details, include information on housing and optics system.

c. Physical dimensions and description.

d. Wiring schematic and connection diagram.

e. Installation details.

f. Energy efficiency data.

g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.

h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).

i. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.

2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the interior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

C635/C635M REV A-13.....Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings

C. Environmental Protection Agency (EPA):

40 CFR 261.....Identification and Listing of Hazardous Waste

D. Federal Communications Commission (FCC):

CFR Title 47, Part 15...Radio Frequency Devices

CFR Title 47, Part 18...Industrial, Scientific, and Medical Equipment

E. Illuminating Engineering Society of North America (IESNA):
LM-79-08.....Electrical and Photometric Measurements of Solid-State Lighting Products
LM-80-15.....Measuring Lumen Maintenance of LED Light Sources
LM-82-12.....Characterization of LED Light Engines and LED Lamps for Electrical and Photometric Properties as a Function of Temperature

F. Institute of Electrical and Electronic Engineers (IEEE):
C62.41-91(R1995).....Surge Voltages in Low Voltage AC Power Circuits

G. International Code Council (ICC):
IBC-15.....International Building Code

H. National Electrical Manufacturer's Association (NEMA):
SSL 1-16.....Electronic Drivers for LED Devices, Arrays, or Systems

I. National Fire Protection Association (NFPA):
70-17.....National Electrical Code (NEC)
101-18.....Life Safety Code

J. Underwriters Laboratories, Inc. (UL):
496-17.....Lampholders
924-16.....Emergency Lighting and Power Equipment
1598-08.....Luminaires
8750-15.....Light Emitting Diode (LED) Light Sources for Use in Lighting Products

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES

A. Shall be in accordance with NFPA, UL, as shown on drawings, and as specified.

B. Sheet Metal:
1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved), and parallel to each other as designed.
2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.

3. When installed, any exposed fixture housing surface, trim frame, door frame, and lens frame shall be free of light leaks.
4. Hinged door frames shall operate smoothly without binding. Latches shall function easily by finger action without the use of tools.

C. LED drivers and lamps shall be serviceable while the fixture is in its normally installed position. LED drivers shall not be mounted to removable reflectors or wireway covers unless so specified.

D. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.

E. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings and so forth) shall be retained in a secure manner by captive screws, chains, aircraft cable, captive hinges, or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

F. Metal Finishes:
1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion-resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
3. Exterior finishes shall be as shown on the drawings.

G. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

H. Light Transmitting Components for Fluorescent Fixtures:
1. Shall be 100 percent virgin acrylic.
2. Flat lens panels shall have not less than 3 mm (1/8 inch) of average thickness.
3. Unless otherwise specified, lenses, reflectors, diffusers, and louvers shall be retained firmly in a metal frame by clips or clamping ring in such a manner as to allow expansion and contraction without distortion or cracking.

2.2 LED EXIT LIGHT FIXTURES

A. Exit light fixtures shall meet applicable requirements of NFPA and UL.

B. Housing and door shall be die-cast aluminum.

C. For general purpose exit light fixtures, door frame shall be hinged, with latch. For vandal-resistant exit light fixtures, door frame shall be secured with tamper-resistant screws.

D. Finish shall be satin or fine-grain brushed aluminum.

E. There shall be no radioactive material used in the fixtures.

F. Fixtures:

1. Inscription panels shall be cast or stamped aluminum a minimum of 2.25 mm (0.090 inch) thick, stenciled with 150 mm (6 inch) high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass.
2. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
3. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltage: Multi-voltage (120 – 277V).

2.3 LED LIGHT FIXTURES

A. General:

1. LED light fixtures shall be in accordance with IES, NFPA, UL, as shown on the drawings, and as specified.
2. LED light fixtures shall be Reduction of Hazardous Substances (RoHS)-compliant.
3. LED drivers shall include the following features unless otherwise indicated:
   a. Minimum efficiency: 85% at full load.
   b. Minimum Operating Ambient Temperature: -20˚ C. (-4˚ F.)
   c. Input Voltage: 120 - 277V (±10%) at 60 Hz.
   d. Integral short circuit, open circuit, and overload protection.
   e. Power Factor: ≥ 0.95.
   f. Total Harmonic Distortion: ≤ 20%.
   g. Comply with FCC 47 CFR Part 15.

4. LED modules shall include the following features unless otherwise indicated:
   a. Comply with IES LM-79 and LM-80 requirements.
   b. Minimum CRI 80 and color temperature 3500˚ K unless otherwise specified in LIGHTING FIXTURE SCHEDULE.
   c. Minimum Rated Life: 50,000 hours per IES L70.
   d. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.

B. LED Downlights:
   1. Housing, LED driver, and LED module shall be products of the same manufacturer.

C. LED Troffers:
   1. LED drivers, modules, and reflector shall be accessible, serviceable, and replaceable from below the ceiling.
   2. Housing, LED driver, and LED module shall be products of the same manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, and as shown on the drawings or specified.

B. Align, mount, and level the lighting fixtures uniformly.

C. Wall-mounted fixtures shall be attached to the studs in the walls, or to a 20 gauge metal backing plate that is attached to the studs in the walls. Lighting fixtures shall not be attached directly to gypsum board.

D. Lighting Fixture Supports:
   1. Shall provide support for all of the fixtures. Supports shall be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling. Additional earthquake protection support wiring and clips shall be installed.
   2. Shall maintain the fixture positions after cleaning and relamping.
   3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
   4. Hardware for recessed lighting fixtures:
      a. All fixture mounting devices connecting fixtures to the ceiling system or building structure shall have a capacity for a

horizontal force of 100 percent of the fixture weight and a vertical force of 400 percent of the fixture weight.

b. Mounting devices shall clamp the fixture to the ceiling system structure (main grid runners or fixture framing cross runners) at four points in such a manner as to resist spreading of these supporting members. Each support point device shall utilize a screw or approved hardware to "lock" the fixture housing to the ceiling system, restraining the fixture from movement in any direction relative to the ceiling. The screw (size No. 10 minimum) or approved hardware shall pass through the ceiling member (T-bar, channel or spline), or it may extend over the inside of the flange of the channel (or spline) that faces away from the fixture, in a manner that prevents any fixture movement.

c. In addition to the above, the following is required for fixtures exceeding 9 kg (20 pounds) in weight.

1) Where fixtures mounted in ASTM Standard C635 "Intermediate Duty" and "Heavy Duty" ceilings and weigh between 9 kg and 25 kg (20 pounds and 56 pounds), provide two 12 gauge safety hangers hung slack between diagonal corners of the fixture and the building structure.

2) Where fixtures weigh over 25 kg (56 pounds), they shall be independently supported from the building structure by approved hangers. Two-way angular bracing of hangers shall be provided to prevent lateral motion.

d. Where ceiling cross runners are installed for support of lighting fixtures, they shall have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.

5. Surface mounted lighting fixtures:

a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 6 mm (1/4 inch) bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs shall be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety

hangers. Studs or bolts securing fixtures weighing in excess of 25 kg (56 pounds) shall be supported directly from the building structure.

b. Where ceiling cross runners are installed for support of lighting fixtures, they shall have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.

c. Fixtures less than 6.8 kg (15 pounds) in weight and occupying less than 3715 sq cm (two square feet) of ceiling area may, when designed for the purpose, be supported directly from the outlet box when all the following conditions are met.

1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.

2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.

3) The outlet box is supported vertically from the building structure.

6. Single or double pendant-mounted lighting fixtures:

a. Each stem shall be supported by an approved outlet box mounted swivel joint and canopy which holds the stem captive and provides spring load (or approved equivalent) dampening of fixture oscillations. Outlet box shall be supported vertically from the building structure.

7. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.

E. Furnish and install the new lamps as specified for all lighting fixtures installed under this project, and for all existing lighting fixtures reused under this project.

F. The electrical and ceiling trades shall coordinate to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges, and so forth), to match the ceiling system being installed.

G. Bond lighting fixtures to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

H. At completion of project, replace all defective components of the lighting fixtures at no cost to the Government.

I. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT, and Section 02 41 00, DEMOLITION.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform the following:

1. Visual Inspection:

a. Verify proper operation by operating the lighting controls.

b. Visually inspect for damage to fixtures, lenses, reflectors, diffusers, and louvers. Clean fixtures, lenses, reflectors, diffusers, and louvers that have accumulated dust, dirt, or fingerprints during construction.

2. Electrical tests:

a. Exercise dimming components of the lighting fixtures over full range of dimming capability by operating the control devices(s) in the presence of the Contracting Officer Representative (COR). Observe for visually detectable flicker over full dimming range, and replace defective components at no cost to the Government.

b. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless specifically recommended otherwise by the lamp manufacturer. Burn-in dimmed fluorescent and compact fluorescent lamps for at least 100 hours at full voltage, unless specifically recommended otherwise by the lamp manufacturer. Replace any lamps and ballasts which fail during burn-in.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting systems are in good operating condition and properly performing the intended function.

---END---

---INTENTIONALLY BLANK---

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes common requirements to communications installations and applies to all sections of Division 27 and Division 28.

B. Provide completely functioning communications systems.

C. Comply with VAAR 852.236.91 and FAR clause 52.236-21 in circumstance of a need for additional detail or conflict between drawings, specifications, reference standards or code.

1.2 REFERENCES

A. Abbreviations and Acronyms

1. Refer to http://www.cfm.va.gov/til/sdetail.asp for Division 00, ARCHITECTURAL ABBREVIATIONS.
2. Additional Abbreviations and Acronyms:

A	Ampere
AC	Alternating Current
AE	Architect and Engineer
AFF	Above Finished Floor
AHJ	Authority Having Jurisdiction
ANSI	American National Standards Institute
AWG	American Wire Gauge (refer to STP and UTP)
AWS	Advanced Wireless Services
BCT	Bonding Conductor for Telecommunications (also Telecommunications Bonding Conductor (TBC))
BDA	Bi-Directional Amplifier
BICSI	Building Industry Consulting Service International
BIM	Building Information Modeling
BOM	Bill of Materials
BTU	British Thermal Units
BUCR	Back-up Computer Room
BTS	Base Transceiver Station
CAD	AutoCAD
CBOPC	Community Based Out Patient Clinic
CBC	Coupled Bonding Conductor
CBOC	Community Based Out Patient Clinic (refer to CBOPC, OPC, VAMC)
CCS	TIP's Cross Connection System (refer to VCCS and HCCS)

CFE	Contractor Furnished Equipment
CFM	US Department of Veterans Affairs Office of Construction and Facilities Management
CFR	Consolidated Federal Regulations
CIO	Communication Information Officer (Facility, VISN or Region)
cm	Centimeters
CO	Central Office
COR	Contracting Officer Representative
CPU	Central Processing Unit
CSU	Customer Service Unit
CUP	Conditional Use Permit(s) - Federal/GSA for VA
dB	Decibel
dBm	Decibel Measured
dBmV	Decibel per milli-Volt
DC	Direct Current
DEA	United States Drug Enforcement Administration
DSU	Data Service Unit
EBC	Equipment Bonding Conductor
ECC	Engineering Control Center (refer to DCR, EMCR)
EDGE	Enhanced Data (Rates) for GSM Evolution
EDM	Electrical Design Manual
EMCR	Emergency Management Control Room (refer to DCR, ECC)
EMI	Electromagnetic Interference (refer to RFI)
EMS	Emergency Medical Service
EMT	Electrical Metallic Tubing or thin wall conduit
ENTR	Utilities Entrance Location (refer to DEMARC, POTS, LEC)
EPBX	Electronic Digital Private Branch Exchange
ESR	Vendor’s Engineering Service Report
FA	Fire Alarm
FAR	Federal Acquisition Regulations in Chapter 1 of Title 48 of Code of Federal Regulations
FMS	VA’s Headquarters or Medical Center Facility’s Management Service
FR	Frequency (refer to RF)
FTS	Federal Telephone Service
GFE	Government Furnished Equipment
GPS	Global Positioning System
GRC	Galvanized Rigid Metal Conduit
GSM	Global System (Station) for Mobile

HCCS	TIP's Horizontal Cross Connection System (refer to CCS & VCCS)
HDPE	High Density Polyethylene Conduit
HDTV	Advanced Television Standards Committee High-Definition Digital Television
HEC	Head End Cabinets(refer to HEIC, PA)
HEIC	Head End Interface Cabinets(refer to HEC, PA)
HF	High Frequency (Radio Band; Re FR, RF, VHF & UHF)
HSPA	High Speed Packet Access
HZ	Hertz
IBT	Intersystem Bonding Termination (NEC 250.94)
IC	Intercom
ICRA	Infectious Control Risk Assessment
IDEN	Integrated Digital Enhanced Network
IDC	Insulation Displacement Contact
IDF	Intermediate Distribution Frame
ILSM	Interim Life Safety Measures
IMC	Rigid Intermediate Steel Conduit
IRM	Department of Veterans Affairs Office of Information Resources Management
ISDN	Integrated Services Digital Network
ISM	Industrial, Scientific, Medical
IWS	Intra-Building Wireless System
LAN	Local Area Network
LBS	Location Based Services, Leased Based Systems
LEC	Local Exchange Carrier (refer to DEMARC, PBX & POTS)
LED	Light Emitting Diode
LMR	Land Mobile Radio
LTE	Long Term Evolution, or 4G Standard for Wireless Data Communications Technology
M	Meter
MAS	Medical Administration Service
MATV	Master Antenna Television
MCR	Main Computer Room
MCOR	Main Computer Operators Room
MDF	Main Distribution Frame
MH	Manholes or Maintenance Holes
MHz	Megaherts (10^6 Hz)
mm	Millimeter
MOU	Memorandum of Understanding
MW	Microwave (RF Band, Equipment or Services)
NID	Network Interface Device (refer to DEMARC)
NEC	National Electric Code

NOR	Network Operations Room
NRTL	OSHA Nationally Recognized Testing Laboratory
NS	Nurse Stations
NTIA	U.S. Department of Commerce National Telecommunications and Information Administration
OEM	Original Equipment Manufacturer
OI&T	Office of Information and Technology
OPC	VA's Outpatient Clinic (refer to CBOC, VAMC)
OSH	Department of Veterans Affairs Office of Occupational Safety and Health
OSHA	United States Department of Labor Occupational Safety and Health Administration
OTDR	Optical Time-Domain Reflectometer
PA	Public Address System (refer to HE, HEIC, RPEC)
PBX	Private Branch Exchange (refer to DEMARC, LEC, POTS)
PCR	Police Control Room (refer to SPCC, could be designated SCC)
PCS	Personal Communications Service (refer to UPCS)
PE	Professional Engineer
PM	Project Manager
PoE	Power over Ethernet
POTS	Plain Old Telephone Service (refer to DEMARC, LEC, PBX)
PSTN	Public Switched Telephone Network
PSRAS	Public Safety Radio Amplification Systems
PTS	Pay Telephone Station
PVC	Poly-Vinyl Chloride
PWR	Power (in Watts)
RAN	Radio Access Network
RBB	Rack Bonding Busbar
RE	Resident Engineer or Senior Resident Engineer
RF	Radio Frequency (refer to FR)
RFI	Radio Frequency Interference (refer to EMI)
RFID	RF Identification (Equipment, System or Personnel)
RMC	Rigid Metal Conduit
RMU	Rack Mounting Unit
RPEC	Radio Paging Equipment Cabinets(refer to HEC, HEIC, PA)
RTLS	Real Time Location Service or System
RUS	Rural Utilities Service
SCC	Security Control Console (refer to PCR, SPCC)
SMCS	Spectrum Management and Communications Security (COMSEC)

SFO	Solicitation for Offers
SME	Subject Matter Experts (refer to AHJ)
SMR	Specialized Mobile Radio
SMS	Security Management System
SNMP	Simple Network Management Protocol
SPCC	Security Police Control Center (refer to PCR, SMS)
STP	Shielded Balanced Twisted Pair (refer to UTP)
STR	Stacked Telecommunications Room
TAC	VA's Technology Acquisition Center, Austin, Texas
TCO	Telecommunications Outlet
TER	Telephone Equipment Room
TGB	Telecommunications Grounding Busbar (also Secondary Bonding Busbar (SBB))
TIP	Telecommunications Infrastructure Plant
TMGB	Telecommunications Main Grounding Busbar (also Primary Bonding Busbar (PBB))
TMS	Traffic Management System
TOR	Telephone Operators Room
TP	Balanced Twisted Pair (refer to STP and UTP)
TR	Telecommunications Room (refer to STR)
TWP	Twisted Pair
UHF	Ultra High Frequency (Radio)
UMTS	Universal Mobile Telecommunications System
UPCS	Unlicensed Personal Communications Service (refer to PCS)
UPS	Uninterruptible Power Supply
USC	United States Code
UTP	Unshielded Balanced Twisted Pair (refer to TP and STP)
UV	Ultraviolet
V	Volts
VAAR	Veterans Affairs Acquisition Regulation
VACO	Veterans Affairs Central Office
VAMC	VA Medical Center (refer to CBOC, OPC, VACO)
VCCS	TIP's Vertical Cross Connection System (refer to CCS and HCCS)
VHF	Very High Frequency (Radio)
VISN	Veterans Integrated Services Network (refers to geographical region)
VSWR	Voltage Standing Wave Radio
W	Watts
WEB	World Electronic Broadcast
WiMAX	Worldwide Interoperability (for MW Access)

WI-FI	Wireless Fidelity
WMTS	Wireless Medical Telemetry Service
WSP	Wireless Service Providers

B. Definitions:

1. Access Floor: Pathway system of removable floor panels supported on adjustable pedestals to allow cable placement in area below.
2. BNC Connector (BNC): United States Military Standard MIL-C-39012/21 bayonet-type coaxial connector with quick twist mating/unmating, and two lugs preventing accidental disconnection from pulling forces on cable.
3. Bond: Permanent joining of metallic parts to form an electrically conductive path to ensure electrical continuity and capacity to safely conduct any currents likely to be imposed to earth ground.
4. Bundled Microducts: All forms of jacketed microducts.
5. Conduit: Includes all raceway types specified.
6. Conveniently Accessible: Capable of being reached without use of ladders, or without climbing or crawling under or over obstacles such as, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
7. Distributed (in house) Antenna System (DAS): An Emergency Radio Communications System installed for Emergency Responder (or first responders and Government personnel) use while inside facility to maintain contact with each respective control point
8. DEMARC, Extended DMARC or ENTR: Service provider's main point of demarcation owned by LEC or service provider and establishes a physical point where service provider's responsibilities for service and maintenance end. This point is called NID, in data networks.
9. Effectively Grounded: Intentionally bonded to earth through connections of low impedance having current carrying capacity to prevent buildup of currents and voltages resulting in hazard to equipment or persons.
10. Electrical Supervision: Analyzing a system’s function and components (i.e. cable breaks / shorts, inoperative stations, lights, LEDs and states of change, from primary to backup) on a 24/7/365 basis; provide aural and visual emergency notification signals to minimum two remote designated or accepted monitoring stations.
11. Electrostatic Interference (ESI) or Electrostatic Discharge Interference: Refer to EMI and RFI.

12. Emergency Call Systems: Wall units (in parking garages and stairwells) and pedestal mounts (in parking lots) typically provided with a strobe, camera and two-way audio communication functions.
13. Project 25 (2014) (P25 (TIA-102 Series)): Set of standards for local, state and Federal public safety organizations and agencies digital LMR services. P25 is applicable to LMR equipment authorized or licensed under the US Department of Commerce National Telecommunications and Information Administration or FCC rules and regulations and is a required standard capability for all LMR equipment and systems.
14. Grounding Electrode Conductor: (GEC) Conductor connected to earth grounding electrode.
15. Grounding Electrode System: Electrodes through which an effective connection to earth is established, including supplementary, communications system grounding electrodes and GEC.
16. Grounding Equalizer or Backbone Bonding Conductor (BBC): Conductor that interconnects elements of telecommunications grounding infrastructure.
17. Head End (HE): Equipment, hardware and software, or a master facility at originating point in a communications system designed for centralized communications control, signal processing, and distribution that acts as a common point of connection between equipment and devices connected to a network of interconnected equipment, possessing greatest authority for allowing information to be exchanged, with whom other equipment is subordinate.
18. Microducts: All forms of air blown fiber pathways.
19. Ohm: A unit of restive measurement.
20. Received Signal Strength Indication (RSSI): A measurement of power present in a received RF signal.
21. Service Provider Demarcation Point (SPDP): Not owned by LEC or service provider but designated by Government as point within facility considered the DEMARC.
22. Sound (SND): Changing air pressure to audible signals over given time span.
23. System: Specific hardware, firmware, and software, functioning together as a unit, performing task for which it was designed.

24. Telecommunications Bonding Backbone (TBB): Conductors of appropriate size (minimum 53.49 mm2 [1/0 AWG]) stranded copper wire, that connect to Grounding Electrode System and route to telecommunications main grounding busbar (TMGB) and circulate to interconnect various TGBs and other locations shown on drawings.
25. Voice over Internet Protocol (VoIP): A telephone system in which voice signals are converted to packets and transmitted over LAN network using Transmission Control Protocol (TCP)/Internet Protocol (IP). VA'S VoIP is not listed or coded for life and public safety, critical, emergency or other protection functions. When VoIP system or equipment is provided instead of PBX system or equipment, each TR (STR) and DEMARC requires increased AC power provided to compensate for loss of PBX's telephone instrument line power; and, to compensate for absence of PBX's UPS capability.
26. Wide Area Network (WAN): A digital network that transcends localized LANs within a given geographic location. VA'S WAN/LAN is not nationally listed or coded for life and public safety, critical, emergency or other safety functions.

1.3 APPLICABLE PUBLICATIONS

A. Applicability of Standards: Unless documents include more stringent requirements, applicable construction industry standards have same force and effect as if bound or copied directly into the documents to extent referenced. Such standards are made a part of these documents by reference.
   1. Each entity engaged in construction must be familiar with industry standards applicable to its construction activity.
   2. Obtain standards directly from publication source, where copies of standards are needed to perform a required construction activity.

B. Government Codes, Standards and Executive Orders: Refer to http://www.cfm.va.gov/TIL/cPro.asp:
   1. Federal Communications Commission, (FCC) CFR, Title 47:

Part 15	Restrictions of use for Part 15 listed RF Equipment in Safety of Life Emergency Functions and Equipment Locations
Part 47	Chapter A, Paragraphs 6.1-6.23, Access to Telecommunications Service, Telecommunications Equipment and Customer Premises Equipment

Part 58	Television Broadcast Service
Part 73	Radio and Television Broadcast Rules
Part 90	Rules and Regulations, Appendix C
Form 854	Antenna Structure Registration
Chapter XXIII	National Telecommunications and Information Administration (NTIA, P/O Commerce, Chapter XXIII) the 'Red Book'- Chapters 7, 8 & 9 compliments CFR, Title 47, FCC Part 15, RF Restriction of Use and Compliance in "Safety of Life" Functions & Locations

2. US Department of Agriculture, (Title 7, USC, Chapter 55, Sections 2201, 2202 & 2203:RUS 1755 Telecommunications Standards and Specifications for Materials, Equipment and Construction:

RUS Bull 1751F-630	Design of Aerial Cable Plants
RUS Bull 1751F-640	Design of Buried Cable Plant, Physical Considerations
RUS Bull 1751F-643	Underground Plant Design
RUS Bull 1751F-815	Electrical Protection of Outside Plants,
RUS Bull 1753F-201	Acceptance Tests of Telecommunications Plants (PC-4)
RUS Bull 1753F-401	Splicing Copper and Fiber Optic Cables (PC-2)
RUS Bull 345-50	Trunk Carrier Systems (PE-60)
RUS Bull 345-65	Shield Bonding Connectors (PE-65)
RUS Bull 345-72	Filled Splice Closures (PE-74)
RUS Bull 345-83	Gas Tube Surge Arrestors (PE-80)

3. US Department of Commerce/National Institute of Standards Technology,(NIST):

FIPS PUB 1-1	Telecommunications Information Exchange
FIPS PUB 100/1	Interface between Data Terminal Equipment (DTE) Circuit Terminating Equipment for operation with Packet Switched Networks, or Between Two DTEs, by Dedicated Circuit
FIPS PUB 140/2	Telecommunications Information Security Algorithms
FIPS PUB 143	General Purpose 37 Position Interface between DTE and Data Circuit Terminating Equipment
FIPS 160/2	Electronic Data Interchange (EDI),

FIPS 175	Federal Building Standard for Telecommunications Pathway and Spaces
FIPS 191	Guideline for the Analysis of Local Area Network Security
FIPS 197	Advanced Encryption Standard (AES)
FIPS 199	Standards for Security Categorization of Federal Information and Information Systems

4. US Department of Defense, (DoD):

MIL-STD-188-110	Interoperability and Performance Standards for Data Modems
MIL-STD-188-114	Electrical Characteristics of Digital Interface Circuits
MIL-STD-188-115	Communications Timing and Synchronizations Subsystems
MIL-C-28883	Advanced Narrowband Digital Voice Terminals
MIL-C-39012/21	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series BNC (Uncabled), Socket Contact, Jam Nut Mounted, Class 2)

5. US Department of Health and Human Services:
   The Health Insurance Portability and Accountability Act of 1996 (HIPAA) Privacy, Security and Breach Notification Rules
6. US Department of Justice:
   2010 Americans with Disabilities Act Standards for Accessible Design (ADAAD).
7. US Department of Labor, (DoL) - Public Law 426-62 – CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standards):

Subpart 7	Approved NRTLs; obtain a copy at https://www.osha.gov/dts/otpca/nrtl/nrtllist.html
Subpart 35	Compliance with NFPA 101, Life Safety Code
Subpart 36	Design and Construction Requirements for Exit Routes
Subpart 268	Telecommunications
Subpart 305	Wiring Methods, Components, and Equipment for General Use

Subpart 508 Americans with Disabilities Act Accessibility Guidelines; technical requirement for accessibility to buildings and facilities by individuals with disabilities

8. US Department of Transportation, (DoT):
   a. Public Law 85-625, CFR, Title 49, Part 1, Subpart C – Federal Aviation Administration (FAA):AC 110/460-ID & AC 707 / 460-2E – Advisory Circulars Standards for Construction of Antenna Towers, and 7450 and 7460-2 – Antenna Construction Registration Forms.
9. US Department of Veterans Affairs (VA): Office of Telecommunications (OI&T), MP-6, PART VIII, TELECOMMUNICATIONS, CHAPTER 5, AUDIO, RADIO AND TELEVISION (and COMSEC) COMMUNICATIONS SYSTEMS: Spectrum Management and COMSEC Service (SMCS), AHJ for:
   a. CoG, "Continuance of Government" communications guidelines and compliance.
   b. COMSEC,"VA wide coordination and control of security classified communication assets."
   c. COOP, "Continuance of Operations" emergency communications guidelines and compliance.
   d. FAA, FCC, and US Department of Commerce National Telecommunications and Information Administration, "VA wide RF Co-ordination, Compliance and Licensing."
   e. Handbook 6100 – Telecommunications: Cyber and Information Security Office of Cyber and Information Security, and Handbook 6500 – Information Security Program.
   f. Low Voltage Special Communications Systems "Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance and Life Safety Certifications for CFM and VA Facility Low Voltage Special Communications Projects (except Fire Alarm, Telephone and Data Systems)."
   g. SATCOM, "Satellite Communications" guidelines and compliance, and Security and Law Enforcement Systems – "Coordinates the Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance, DEA and Public Safety Certification(s) for CFM and VA Facility Security

Low Voltage Special Communications and Physical Security Projects.

h. VHA's National Center for Patient Safety – Veterans Health Administration (VHA) Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.

i. VA's CEOSH, concurrence with warning identified in VA Directive 7700.

j. Wireless and Handheld Devices, "Guidelines and Compliance,"

k. Office of Security and Law Enforcement: VA Directive 0730 and Health Special Presidential Directive (HSPD)-12.

C. NRTL Standards: Refer to https://www.osha.gov/laws-regs/regulations/standardnumber/1926

1. Canadian Standards Association (CSA); same tests as presented by UL
2. Communications Certifications Laboratory (CEL); same tests as presented by UL.
3. Intertek Testing Services NA, Inc., (ITSNA), formerly Edison Testing Laboratory (ETL) same tests as presented by UL).
4. Underwriters Laboratory (UL):

1-2005	Flexible Metal Conduit
5-2011	Surface Metal Raceway and Fittings
6-2007	Rigid Metal Conduit
44-010	Thermoset-Insulated Wires and Cables
50-1995	Enclosures for Electrical Equipment
65-2010	Wired Cabinets
83-2008	Thermoplastic-Insulated Wires and Cables
96-2005	Lightning Protection Components
96A-2007	Installation Requirements for Lightning Protection Systems
360-2013	Liquid-Tight Flexible Steel Conduit
444-2008	Communications Cables
467-2013	Grounding and Bonding Equipment
486A-486B-2013	Wire Connectors
486C-2013	Splicing Wire Connectors
486D-2005	Sealed Wire Connector Systems
486E-2009	Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-2007	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
497/497A/497B/497C	
497D/497E	Protectors for Paired Conductors/Communications Circuits/Data Communications and Fire Alarm Circuits/coaxial circuits/voltage protections/Antenna Lead In
510-2005	Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
514A-2013	Metallic Outlet Boxes
514B-2012	Fittings for Cable and Conduit
514C-1996	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-2011	Schedule 40 and 80 Rigid PVC Conduit
651A-2011	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-2007	Electrical Metallic Tubing
884-2011	Underfloor Raceways and Fittings
1069-2007	Hospital Signaling and Nurse Call Equipment
1242-2006	Intermediate Metal Conduit
1449-2006	Standard for Transient Voltage Surge Suppressors
1479-2003	Fire Tests of Through-Penetration Fire Stops
1480-2003	Speaker Standards for Fire Alarm, Emergency, Commercial and Professional use
1666-2007	Standard for Wire/Cable Vertical (Riser) Tray Flame Tests
1685-2007	Vertical Tray Fire Protection and Smoke Release Test for Electrical and Fiber Optic Cables
1861-2012	Communication Circuit Accessories
1863-2013	Standard for Safety, communications Circuits Accessories
1865-2007	Standard for Safety for Vertical-Tray Fire Protection and Smoke-Release Test for Electrical and Optical-Fiber Cables
2024-2011	Standard for Optical Fiber Raceways

2024-2014	Standard for Cable Routing Assemblies and Communications Raceways
2196-2001	Standard for Test of Fire Resistive Cable
60950-1 ed. 2-2014	Information Technology Equipment Safety

D. Industry Standards:

1. Advanced Television Systems Committee (ATSC):

A/53 Part 1: 2013	ATSC Digital Television Standard, Part 1, Digital Television System
A/53 Part 2: 2011	ATSC Digital Television Standard, Part 2, RF/Transmission System Characteristics
A/53 Part 3: 2013	ATSC Digital Television Standard, Part 3, Service Multiplex and Transport System Characteristics
A/53 Part 4: 2009	ATSC Digital Television Standard, Part 4, MPEG-2 Video System Characteristics
A/53 Part 5: 2014	ATSC Digital Television Standard, Part 5, AC-3 Audio System Characteristics
A/53 Part 6: 2014	ATSC digital Television Standard, Part 6, Enhanced AC-3 Audio System Characteristics

2. American Institute of Architects (AIA): 2006 Guidelines for Design & Construction of Health Care Facilities.

3. American Society of Mechanical Engineers (ASME):

A17.1 (2013)	Safety Code for Elevators and Escalators Includes Requirements for Elevators, Escalators, Dumbwaiters, Moving Walks, Material Lifts, and Dumbwaiters with Automatic Transfer Devices
17.3 (2011)	Safety Code for Existing Elevators and Escalators
17.4 (2009)	Guide for Emergency Personnel
17.5 (2011)	Elevator and Escalator Electrical Equipment

4. American Society for Testing and Materials (ASTM):

B1 (2001)	Standard Specification for Hard-Drawn Copper Wire
B8 (2004)	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

D1557 (2012)	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort 56,000 ft-lbf/ft3 (2,700 kN-m/m3)
D2301 (2004)	Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape
B258-02 (2008)	Standard Specification for Standard Nominal Diameters and Cross-Sectional Areas of AWG Sizes of Solid Round Wires Used as Electrical Conductors
D709-01(2007)	Standard Specification for Laminated Thermosetting Materials
D4566 (2008)	Standard Test Methods for Electrical Performance Properties of Insulations and Jackets for Telecommunications Wire and Cable

5. American Telephone and Telegraph Corporation (AT&T) - Obtain following AT&T Publications at https://ebiznet.sbc.com/sbcnebs/

ATT-TP-76200 (2013)	Network Equipment and Power Grounding, Environmental, and Physical Design Requirements
ATT-TP-76300(2012)	Merged AT&T Affiliate Companies Installation Requirements
ATT-TP-76305 (2013)	Common Systems Cable and Wire Installation and Removal Requirements - Cable Racks and Raceways
ATT-TP-76306 (2009)	Electrostatic Discharge Control
ATT-TP-76400 (2012)	Detail Engineering Requirements
ATT-TP-76402 (2013)	AT&T Raised Access Floor Engineering and Installation Requirements
ATT-TP-76405 (2011)	Technical Requirements for Supplemental Cooling Systems in Network Equipment Environments
ATT-TP-76416 (2011)	Grounding and Bonding Requirements for Network Facilities
ATT-TP-76440 (2005)	Ethernet Specification
ATT-TP-76450 (2013)	Common Systems Equipment Interconnection Standards for AT&T Network Equipment Spaces
ATT-TP-76461 (2008)	Fiber Optic Cleaning
ATT-TP-76900 (2010)	AT&T Installation Testing Requirement
ATT-TP-76911 (1999)	AT&T LEC Technical Publication Notice

6. British Standards Institution (BSI):

BS EN 50109-2	Hand Crimping Tools - Tools for The Crimp Termination of Electric Cables and Wires for Low Frequency and Radio Frequency Applications – All Parts & Sections. October 1997

7. Building Industry Consulting Service International(BICSI):

ANSI/BICSI 002-2011	Data Center Design and Implementation Best Practices
ANSI/BICSI 004-2012	Information Technology Systems Design and Implementation Best Practices for Healthcare Institutions and Facilities
ANSI/NECA/BICSI 568-2006	Standard for Installing Commercial Building Telecommunications Cabling
NECA/BICSI 607-2011	Standard for Telecommunications Bonding and Grounding Planning and Installation Methods for Commercial Buildings
ANSI/BICSI 005-2013	Electronic Safety and Security (ESS) System Design and Implementation Best Practices

8. Electronic Components Assemblies and Materials Association,(ECA).

ECA EIA/RS-270 (1973)	Tools, Crimping, Solderless Wiring Devices – Recommended Procedures for User Certification
EIA/ECA 310-E (2005)	Cabinets, and Associated Equipment

9. Facility Guidelines Institute: 2010 Guidelines for Design and Construction of Health Care Facilities.

10. Insulated Cable Engineers Association (ICEA):

ANSI/ICEA S-80-576-2002	Category 1 & 2 Individually Unshielded Twisted-Pair Indoor Cables for Use in Communications Wiring Systems
ANSI/ICEA S-84-608-2010	Telecommunications Cable, Filled Polyolefin Insulated Copper Conductor, S-87-640(2011) Optical Fiber Outside Plant Communications Cable

ANSI/ICEA

S-90-661-2012	Category 3, 5, & 5e Individually Unshielded Twisted-Pair Indoor Cable for Use in General Purpose and LAN Communication Wiring Systems
S-98-688 (2012)	Broadband Twisted Pair Cable Aircore, Polyolefin Insulated, Copper Conductors
S-99-689 (2012)	Broadband Twisted Pair Cable Filled, Polyolefin Insulated, Copper Conductors
ICEA S-102-700 (2004)	Category 6 Individually Unshielded Twisted Pair Indoor Cables (With or Without an Overall Shield) for use in Communications Wiring Systems Technical Requirements

11. Institute of Electrical and Electronics Engineers (IEEE):

ISSN 0739-5175	March-April 2008 Engineering in Medicine and Biology Magazine, IEEE (Volume: 27, Issue:2) Medical Grade-Mission Critical-Wireless Networks
IEEE C2-2012	National Electrical Safety Code (NESC)
C62.41.2-2002/ Cor 1-2012 IEEE	Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits 4)
C62.45-2002	IEEE Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits
81-2012 IEEE	Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System
100-1992	IEEE the New IEEE Standards Dictionary of Electrical and Electronics Terms
602-2007	IEEE Recommended Practice for Electric Systems in Health Care Facilities
1100-2005	IEEE Recommended Practice for Powering and Grounding Electronic Equipment

12. International Code Council:

AC193 (2014)	Mechanical Anchors in Concrete Elements

13. International Organization for Standardization (ISO):

ISO/TR 21730 (2007)	Use of Mobile Wireless Communication and Computing Technology in Healthcare Facilities - Recommendations for Electromagnetic Compatibility (Management of Unintentional Electromagnetic Interference) with Medical Devices

14. National Electrical Manufacturers Association (NEMA):

NEMA 250 (2008)	Enclosures for Electrical Equipment (1,000V Maximum)
ANSI C62.61 (1993)	American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuits
ANSI/NEMA FB 1 (2012)	Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing EMT) and Cable
ANSI/NEMA OS 1 (2009)	Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
NEMA SB 19 (R2007)	NEMA Installation Guide for Nurse Call Systems
TC 3 (2004)	Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing
NEMA VE 2 (2006)	Cable Tray Installation Guidelines

15. National Fire Protection Association (NFPA):

70E-2015	Standard for Electrical Safety in the Workplace
70-2014	National Electrical Code (NEC)
72-2013	National Fire Alarm Code
75-2013	Standard for the Fire Protection of Information Technological Equipment
76-2012	Recommended Practice for the Fire Protection of Telecommunications Facilities
77-2014	Recommended Practice on Static Electricity
90A-2015	Standard for the Installation of Air Conditioning and Ventilating Systems
99-2015	Health Care Facilities Code
101-2015	Life Safety Code
241	Safeguarding construction, alternation and Demolition Operations
255-2006	Standard Method of Test of Surface Burning Characteristics of Building Materials

262 - 2011	Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces
780-2014	Standard for the Installation of Lightning Protection Systems
1221-2013	Standard for the Installation, Maintenance, and Use of Emergency Services Communications Systems
5000-2015	Building Construction and Safety Code

16. Society for Protective Coatings (SSPC):
    SSPC SP 6/NACE No.3 (2007) Commercial Blast Cleaning
17. Society of Cable Telecommunications Engineers (SCTE):

ANSI/SCTE 15 2006	Specification for Trunk, Feeder and Distribution Coaxial Cable

18. Telecommunications Industry Association (TIA):

TIA-120 Series	Telecommunications Land Mobile communications (APCO/Project 25) (January 2014)
TIA TSB-140	Additional Guidelines for Field-Testing Length, Loss and Polarity of Optical Fiber Cabling Systems (2004)
TIA-155	Guidelines for the Assessment and Mitigation of Installed Category 6 Cabling to Support 10GBASE-T (2010)
TIA TSB-162-A	Telecommunications Cabling Guidelines for Wireless Access Points (2013)
TIA-222-G	Structural Standard for Antenna Supporting Structures and Antennas (2014)
TIA/EIA-423-B	Electrical Characteristics of Unbalanced Voltage Digital Interface Circuits (2012)
TIA-455-C	General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014)
TIA-455-53-A	FOTP-53 Attenuation by Substitution Measurements for Multimode Graded-Index Optical

	Fibers in Fiber Assemblies (Long Length) (September 2001)
TIA-455-61-A	FOTP-61 Measurement of Fiber of Cable Attenuation Using an OTDR (July 2003)
TIA-472D000-B	Fiber Optic Communications Cable for Outside Plant Use (July 2007)
ANSI/TIA-492-B	62.5-µ Core Diameter/125-um Cladding Diameter Class 1a Graded-Index Multimode Optical Fibers (November 2009)
ANSI/TIA-492AAAB-A	50-um Core Diameter/125-um Cladding Diameter Class IA Graded-Index Multimode Optically Optimized American Standard Fibers (November 2009
TIA-492CAAA	Detail Specification for Class IVa Dispersion-Unshifted Single-Mode Optical Fibers (September 2002)
TIA-492E000	Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1,550 nm Window (September 2002)
TIA-526-7-B	Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant – OFSTP-7 (December 2008)
TIA-526.14-A	Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant – SFSTP-14 (August 1998)
TIA-568	Revision/Edition: C Commercial Building Telecommunications Cabling Standard Set: (TIA-568-C.0-2 Generic Telecommunications Cabling for Customer Premises (2012), TIA-568-C.1-1 Commercial Building Telecommunications Cabling Standard Part 1: General Requirements (2012), TIA-568-C.2 Commercial Building Telecommunications Cabling Standard—Part 2: Balanced Twisted Pair Cabling Components (2009), TIA-568-C.3-1 Optical Fiber Cabling Components Standard, (2011) AND TIA-568-C.4

	Broadband Coaxial Cabling and Components Standard (2011) with addendums and erratas
TIA-569	Revision/Edition C Telecommunications Pathways and Spaces (March 2013)
TIA-574	Position Non-Synchronous Interface between Data Terminal equipment and Data Circuit Terminating Equipment Employing Serial Binary Interchange (May 2003)
TIA/EIA-590-A	Standard for Physical Location and Protection of Below Ground Fiber Optic Cable Plant (July 2001)
TIA-598-D	Optical Fiber Cable Color Coding (January 2005)
TIA-604-10-B	Fiber Optic Connector Intermateablility Standard (August 2008)
ANSI/TIA-606-B	Administration Standard for Telecommunications Infrastructure (2012)
TIA-607-B	Generic Telecommunications Bonding and Grounding (Earthing) For Customer Premises (January 2013)
TIA-613	High Speed Serial Interface for Data Terminal Equipment and Data Circuit Terminal Equipment (September 2005)
ANSI/TIA-758-B	Customer-owned Outside Plant Telecommunications Infrastructure Standard (April 2012)
ANSI/TIA-854	A Full Duplex Ethernet Specification for 1000 Mb/s (1000BASE-TX) Operating over Category 6 Balanced Twisted-Pair Cabling (2001)
ANSI/TIA-862-A	Building Automation Systems Cabling Standard (April 2011)
TIA-942-A	Telecommunications Infrastructure Standard for Data Centers (March 2014)
TIA-1152	Requirements for Field Testing Instruments and Measurements for Balanced Twisted Pair Cabling (September 2009)
TIA-1179	Healthcare Facility Telecommunications Infrastructure Standard (July 2010)

1.4 SINGULAR NUMBER

A. Where any device or part of equipment is referred in singular number (such as " rack"), reference applies to as many such devices as are required to complete installation.

1.5 RELATED WORK

A. Specification Order of Precedence: FAR Clause 52.236-21, VAAR Clause 852.236-71.

1. Field Cutting and Patching: Section 09 91 00, PAINTING.
2. Additional submittal requirements: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
3. Availability and source of references and standards specified in applicable publications: Section 01 42 19, REFERENCE STANDARDS.
4. Requirements for non-hazardous building construction and demolition waste: Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
5. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction: Section 07 84 00, FIRESTOPPING.
6. Sealant and caulking materials and their application: Section 07 92 00, JOINT SEALANTS.
7. General electrical requirements that are common to more than one section of Division 26: Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
8. Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
9. Conduit and boxes: Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS.
10. Wiring devices: Section 26 27 26, WIRING DEVICES.
11. General requirements common to more than one section in Division 28: Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
12. Conductors and cables for electronic safety and security systems: Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY.
13. Low impedance path to ground for electronic safety and security system ground fault currents: Section 28 05 26, GROUNDING AND BONDING FOR SECURITY SYSTEMS.

14. Conduits and partitioned telecommunications raceways for Electronic Safety and Security systems: Section 28 05 28.33, CONDUITS AND BACK BOXES FOR ELECTRONIC SAFETY AND SECURITY.
15. Physical Access Control System field-installed controllers connected by data transmission network: Section 28 13 00, PHYSICAL ACCESS DETECTION.
16. Alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring: Section 28 31 00, FIRE DETECTION AND ALARM.

1.6 ADMINISTRATIVE REQUIREMENTS

A. Assign a single communications project manager to serve as point of contact for Government, contractor, and design professional.

B. Be proactive in scheduling work.
   1. Use of premises is restricted at times directed by COR.
   2. Movement of materials: Unload materials and equipment delivered to site. Pay costs for rigging, hoisting, lowering and moving equipment on and around site, in building or on roof.
   3. Coordinate installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
   4. Sequence, coordinate, and integrate installations of materials and equipment for efficient flow of Work.
   5. Coordinate connection of materials, equipment, and systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and controlling agencies; provide required connection for each service.
   6. Initiate and maintain discussion regarding schedule for ceiling construction and install cables to meet that schedule.

C. Contact the Office of Telecommunications, Special Communications Team (005OP2H3) (202)461-5310 to have a Government-accepted Telecommunications COR assigned to project for telecommunications review, equipment and system approval and coordination with other VA personnel.

D. Communications Project Manager Responsibilities:

1. Assume responsibility for overall telecommunications system integration and coordination of work among trades, subcontractors, and authorized system installers.
2. Coordinate with related work indicated on drawings or specified.
3. Manage work related to telecommunications system installation in a manner approved by manufacturer.

1.7 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Provide parts list including quantity of spare parts.

C. Provide manufacturer product information. Government reserves the right to require a list of installations where products have been in operation.

D. Provide Source Quality Control Submittal:

1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of warranty maintenance are authorized representatives of OEM. Include individual's legal name, contact information and OEM credentials in certification.
2. Submit written certification from OEM that wiring and connection diagrams meet Government Life Safety Guidelines, NFPA, NEC, NRTL, these specifications, and Joint Commission requirements and instructions, requirements, recommendations, and guidance set forth by OEM for the proper performance of system.
3. Pre-acceptance Certification: Certification in accordance with procedure outlined in Section 01 00 00, GENERAL REQUIREMENTS and specific Division 27 qualification documentation.

E. Installer Qualifications: Submit three installations of similar size and complexity furnished and installed by installer; include:

1. Installation location and name.
2. Owner’s name and contact information including, address, telephone and email.
3. Date of project start and date of final acceptance.
4. System project number.
5. Three paragraph description of each system related to this project; include function, operation, and installation.

F. Provide delegated design submittals (e.g. seismic support design).

G. Submittals are required for all equipment anchors and supports. Include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or conduit. Anchors and supports to resist seismic load based on seismic design categories per section 4.0 of VA seismic design requirements H-18-8 dated August 2013.

H. Test Equipment List:

1. Supply test equipment of accuracy better than parameters to be tested.
2. Submit test equipment list including make and model number:
   a. ANSI/TIA-1152 Level IIIe for Cat 6 and cat 6A and class EA twisted pair cabling test instrument.
   b. Fiber optic insertion loss power meter with light source.
   c. Optical time domain reflectometer (OTDR).
   d. Volt-Ohm meter.
   e. Digital camera.
3. Supply only test equipment with a calibration tag from Government-accepted calibration service dated not more than 12 months prior to test.
4. Provide sample test and evaluation reports.

I. Submittal Drawings:

1. Telecommunications Space Plans/Elevations: Provide enlarged floor plans of telecommunication spaces indicating layout of equipment and devices, including receptacles and grounding provisions. Submit detailed plan views and elevations of telecommunication spaces showing racks, termination blocks, and cable paths. Include following rooms:
   a. Telecommunications rooms.
   b. Building Entrance Facility/Demarcation rooms.
   c. Server rooms/Data Center.
   d. Equipment rooms.
   e. Antenna Head End rooms.
2. Logical Drawings: Provide logical riser or schematic drawings for all systems.
   a. Provide riser diagrams systems and interconnection drawings for equipment assemblies; show termination points and identify wiring connections.

3. Access Panel Schedule on Submittal Drawings: Coordinate and prepare a location, size, and function schedule of access panels required to fully service equipment.

J. Provide sustainable design submittals.

K. Furnish electronic certified test reports to COR prior to final inspection and not more than 90 days after completion of tests.

1.8 CLOSEOUT SUBMITTALS

A. Provide following closeout submittals prior to project closeout date:

1. Warranty certificate.
2. Evidence of compliance with requirements such as low voltage certificate of inspection.
3. Project record documents.
4. Instruction manuals and software that are a part of system.

B. Maintenance and Operation Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Prepare a manual for each system and equipment specified.
2. Furnish on portable storage drive in PDF format or equivalent accepted by COR.
3. Furnish complete manual as specified in specification section, fifteen days prior to performance of systems or equipment test.
4. Furnish remaining manuals prior to final completion.
5. Identify storage drive "MAINTENANCE AND OPERATION MANUAL" and system name.
6. Include name, contact information and emergency service numbers of each subcontractor installing system or equipment and local representatives for system or equipment.
7. Provide a Table of Contents and assemble files to conform to Table of Contents.
8. Operation and Maintenance Data includes:
   a. Approved shop drawing for each item of equipment.
   b. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of equipment.
   c. A control sequence describing start-up, operation, and shutdown.
   d. Description of function of each principal item of equipment.
   e. Installation and maintenance instructions.
   f. Safety precautions.
   g. Diagrams and illustrations.

h. Test Results and testing methods.

i. Performance data.

j. Pictorial "exploded" parts list with part numbers. Emphasis to be placed on use of special tools and instruments. Indicate sources of supply, recommended spare parts, and name of servicing organization.

k. Warranty documentation indicating end date and equipment protected under warranty.

l. Appendix; list qualified permanent servicing organizations for support of equipment, including addresses and certified personnel qualifications.

C. Record Wiring Diagrams:

1. Red Line Drawings: Keep one E size 91.44 cm x 121.92 cm (36 inches x 48 inches) set of floor plans, on site during work hours, showing installation progress marked and backbone cable labels noted. Make these drawings available for examination during construction meetings or field inspections.

2. General Drawing Specifications: Detail and elevation drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). ER, TR and other enlarged detail floor plan drawings to be D size 61 cm x 91.44 cm (24” x 36”) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). Building composite floor plan drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 3.175 mm = 30.48 cm (1/8 inch = 1’ 0 inch).

3. Building Composite Floor Plans: Provide building floor plans showing work area outlet locations and configuration, types of jacks, distance for each cable, and cable routing locations.

4. Floor plans to include:

a. Final room numbers and actual backbone cabling and pathway locations and labeling.

b. Inputs and outputs of equipment identified according to labels installed on cables and equipment

c. Device locations with labels.

d. Conduit.

e. Head-end equipment.

f. Wiring diagram.

g. Labeling and administration documentation.

5. Submit Record Wiring Diagrams within five business days after final cable testing.
6. Deliver Record Wiring Diagrams as CAD files in .dwg or / .rvt formats as determined by COR.
7. Deliver four complete sets of electronic record wiring diagrams to COR on portable storage drive.

D. Service Qualifications: Submit name and contact information of service organizations providing service to this installation within four hours of receipt of notification service is needed.

1.9 MAINTENANCE MATERIAL SUBMITTALS

A. After approval and prior to installation, furnish COR with the following:
1. A 300 mm (12 inch) length of each type and size of wire and cable along with tag from coils of reels from which samples were taken.
2. One coupling, bushing and termination fitting for each type of conduit.
3. Samples of each hanger, clamp and supports for conduit and pathways.
4. Duct sealing compound.

1.10 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Manufacturer must produce, as a principal product, the equipment and material specified for this project, and have manufactured item for at least three years.

B. Product and System Qualification:
1. OEM must have three installations of equipment submitted presently in operation of similar size and type as this project, that have continuously operated for a minimum of three years.
2. Government reserves the right to require a list of installations where products have been in operation before approval.
3. Authorized representative of OEM must be responsible for design, satisfactory operation of installed system, and certification.

C. Trade Contractor Qualifications: Trade contractor must have completed three or more installations of similar systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identify these installations as a part of submittal.

D. System Supplier Qualifications: System supplier must be authorized by OEM to warranty installed equipment.

E. Telecommunications technicians assigned to system must be trained and certified by OEM on installation and testing of system; provide written evidence of current OEM certifications for installers.

F. Manufactured Products:

1. Comply with FAR clause 52.236-5 for material and workmanship.
2. When more than one unit of same class of equipment is required, units must be product of a single manufacturer.
3. Equipment Assemblies and Components:
   a. Components of an assembled unit need not be products of same manufacturer.
   b. Manufacturers of equipment assemblies, which include components made by others, to assume complete responsibility for final assembled unit.
   c. Provide compatible components for assembly and intended service.
   d. Constituent parts which are similar must be product of a single manufacturer.
4. Identify factory wiring on equipment being furnished and on wiring diagrams.

G. Testing Agencies: Government reserves the option of witnessing factory tests. Notify COR minimum 15 working days prior to manufacturer performing the factory tests.

1. When equipment fails to meet factory test and re-inspection is required, contractor is liable for additional expenses, including expenses of Government.

1.11 DELIVERY, STORAGE, AND HANDLING

A. Delivery and Acceptance Requirements:

1. Government's approval of submittals must be obtained for equipment and material before delivery to job site.
2. Deliver and store materials to job site in OEM's original unopened containers, clearly labeled with OEM's name and equipment catalog numbers, model and serial identification numbers for COR to inventory cable, patch panels, and related equipment.

B. Storage and Handling Requirements:

1. Equipment and materials must be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

a. Store and protect equipment in a manner that precludes damage or loss, including theft.
b. Protect painted surfaces with factory installed removable heavy kraft paper, sheet vinyl or equivalent.
c. Protect enclosures, equipment, controls, controllers, circuit protective devices, and other like items, against entry of foreign matter during installation; vacuum clean both inside and outside before testing and operating.

C. Coordinate storage.

1.12 FIELD CONDITIONS

A. Where variations from documents are requested in accordance with GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, connecting work and related components must include additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. A contract adjustment or additional time will not be granted because of field conditions pursuant to FAR 52.236-2 and FAR 52.236-3; a contract adjustment or additional time will not be granted for additional work required for complete and usable construction and systems pursuant to FAR 52.246-12.

1.13 WARRANTY

A. Comply with FAR clause 52.246-21., except as follows:
1. Warranty material and equipment to be free from defects, workmanship, and remain so for a period of one year for Emergency Systems from date of final acceptance of system by Government; provide OEM’s equipment warranty document to COR.
2. Government maintenance personnel must have ability to contact OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time; contractor and OEM must provide this capability.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

A. Provide communications spaces and pathways conforming to TIA 569, at a minimum.

2.2 EQUIPMENT IDENTIFICATION

A. Provide laminated black phenolic resin with a white core nameplates with minimum 6 mm (1/4 inch) high engraved lettering.

B. Nameplates furnished by manufacturer as standard catalog items, unless other method of identification is indicated.

2.3 WIRE LUBRICATING COMPOUND

A. Provide non-hardening or forming adhesive coating cable lubricants suitable for cable jacket material and raceway.

2.4 FIREPROOFING TAPE

A. Provide flexible, conformable fabric tape of organic composition and coated one side with flame-retardant elastomer.

B. Tape must be self-extinguishing and cannot support combustion; arc-proof and fireproof.

C. Tape cannot deteriorate when subjected to water, gases, salt water, sewage, or fungus; and tape must be resistant to sunlight and ultraviolet light.

D. Application must withstand a 200-ampere arc for minimum 30 seconds.

E. Securing Tape: Glass cloth electrical tape minimum 0.18 mm (7 mils) thick and 19 mm (3/4 inch) wide.

2.5 ACCESS PANELS

A. Panels: 304 mm x 304 mm (12 inches by 12 inches) or size allowed by location to provide optimum access to equipment for maintenance and service.

B. Provide access panels and doors as required to allow service of materials and equipment that require inspection, replacement, repair or service.

C. Provide access panels with same fire rating classification as surface penetrated.

PART 3 - EXECUTION

3.1 PREPARATION

A. Penetrations and Sleeves:

1. Lay out penetration and sleeve openings in advance, to permit provision in work.
2. Set sleeves in forms before concrete is poured.
3. Set sleeves prior to installation of structure for passage of pipes, conduit, ducts, etc.

4. Provide sleeves and packing materials at penetrations of foundations, walls, slabs, partitions, and floors.
5. Make sleeves that penetrate outside walls, basement slabs, footings, and beams waterproof.
6. Fill slots, sleeves and other openings in floors or walls if not used.
   a. Fill spaces in openings after installation of conduit or cable.
   b. Provide fill for floor penetrations to prevent passage of water, smoke, fire, and fumes.
   c. Provide fire resistant fill in rated floors and walls, to prevent passage of air, smoke and fumes.
7. Install sleeves through floors watertight and extend minimum 50.8 mm (2 inches) above floor surface.
8. Match and set sleeves flush with adjoining floor, ceiling, and wall finishes where raceways passing through openings are exposed in finished rooms.
9. Annular space between conduit and sleeve must be minimum 6 mm (1/4 inch).
10. Do not provide sleeves for slabs-on-grade, unless specified or indicated otherwise.
11. Comply with requirements for firestopping, for sleeves through rated fire walls and smoke partitions.
12. Do not support piping risers or conduit on sleeves.
13. Identify unused sleeves and slots for future installation.
14. Provide core drilling if walls are poured or otherwise constructed without sleeves and wall penetration is required; do not penetrate structural members.

B. Core Drilling:
1. Avoid core drilling whenever possible.
2. Coordinate openings with other trades and utilities and prevent damage to structural reinforcement.
3. Investigate existing conditions in vicinity of required opening prior to coring, including an x-ray of floor if determined necessary by competent person or COR.
4. Protect areas from damage.

C. Verification of In-Place Conditions:

1. Verify location, use and status of all material, equipment, and utilities that are specified, indicated, or determined necessary for removal.
   a. Verify materials, equipment, and utilities to be removed are inactive, not required, or in use after completion of project.
   b. Replace with equivalent any material, equipment and utilities that were removed by contractor that are required to be left in place.
2. Existing Utilities: Do not interrupt utilities serving facilities occupied by Government or others unless permitted under following conditions and then only after arranging to provide temporary utility services, according to requirements indicated:
   a. Notify COR in writing at least 14 days in advance of proposed utility interruptions.
   b. Do not proceed with utility interruptions without Government's written permission.

D. Provide suspended platforms, strap hangers, brackets, shelves, stands or legs for floor, wall and ceiling mounting of equipment as required.

E. Provide steel supports and hardware for installation of hangers, anchors, guides, and other support hardware.

F. Obtain and analyze catalog data, weights, and other pertinent data required for coordination of equipment support provisions and installation.

G. Verify site conditions and dimensions of equipment to ensure access for proper installation of equipment without disassembly that would void warranty.

3.2 INSTALLATION - GENERAL

A. Coordinate systems, equipment, and materials installation with other building components.

B. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings.

C. Conform to VAAR 852.236.91 arrangements indicated, recognizing that work may be shown in diagrammatic form or have been impracticable to detail all items because of variances in manufacturers' methods of achieving specified results.

D. Install systems, materials, and equipment level and plumb, parallel and perpendicular to other building systems and components, where installed in both exposed and un-exposed spaces.
E. Install equipment according to manufacturers' written instructions.
F. Install wiring and cabling between equipment and related devices.
G. Install cabling, wiring, and equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. Connect equipment for ease of disconnecting, with minimum interference of adjacent other installations.
H. Provide access panel or doors where units are concealed behind finished surfaces.
I. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for wiring, cabling, and equipment installations.
J. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide maximum headroom and access for service and maintenance as possible.
K. Install systems, materials, and equipment giving priority to systems required to be installed at a specified slope.
L. Avoid interference with structure and with work or other trades, preserving adequate headroom and clearing doors and passageways to satisfaction of COR and code requirements.
M. Install equipment and cabling to distribute equipment loads on building structural members provided for equipment support under other sections; install and support roof-mounted equipment on structural steel or roof curbs as appropriate.
N. Provide supplementary or miscellaneous items, appurtenances, devices and materials for a complete installation.

3.3 EQUIPMENT INSTALLATION

A. Locate equipment as close as practical to locations shown on drawings.
B. Note locations of equipment requiring access on record drawings.
C. Access and Access Panels: Verify access panel locations and construction with COR.
D. Inaccessible Equipment:
   1. Where Government determines that contractor has installed equipment not conveniently accessible for operation and maintenance, equipment

must be removed and reinstalled as directed and without additional cost to Government.

2. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for communication equipment cabinet assembly.
3. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for equipment labeling.

3.4 EQUIPMENT IDENTIFICATION

A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
B. Secure identification signs with screws.

3.5 CUTTING AND PATCHING

A. Perform cutting and patching according to contract general requirements and as follows:
   1. Remove samples of installed work as specified for testing.
   2. Perform cutting, fitting, and patching of equipment and materials required to uncover existing infrastructure in order to provide access for correction of improperly installed existing or new work.
   3. Remove and replace defective work.
   4. Remove and replace non-conforming work.
B. Cut, remove, and legally dispose of selected equipment, components, and materials, including removal of material, equipment, devices, and other items indicated to be removed and items made obsolete by new work.
C. Provide and maintain temporary partitions or dust barriers adequate to prevent spread of dust and dirt to adjacent areas.
D. Protect adjacent installations during cutting and patching operations.
E. Protect structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.
F. Patch finished surfaces and building components using new materials specified for original installation and experienced installers.

3.6 FIELD QUALITY CONTROL

A. Provide work according to VAAR 852.236.91 and FAR clause 52.236-5.
B. Provide minimum clearances and work required for compliance with NFPA 70, National Electrical Code (NEC), and manufacturers' instructions; comply with additional requirements indicated for access and clearances.
C. Verify all field conditions and dimensions that affect selection and provision of materials and equipment, and provide any disassembly,

reassembly, relocation, demolition, cutting and patching required to provide work specified or indicated, including relocation and reinstallation of existing wiring and equipment.

1. Protect facility, equipment, and wiring from damage.

D. Submit written notice that:

1. Project has been inspected for compliance with documents.
2. Work has been completed in accordance with documents.

E. Non-Conforming Work: Conduct project acceptance inspections, final completion inspections, substantial completion inspections, and acceptance testing and demonstrations after verification of system operation and completeness by Contractor.

F. For project acceptance inspections, final completion inspections, substantial completion inspections, and testing/demonstrations that require more than one site visit by COR or design professional to verify project compliance for same material or equipment, Government reserves right to obtain compensation from contractor to defray cost of additional site visits that result from project construction or testing deficiencies and incompleteness, incorrect information, or non-compliance with project provisions.

1. COR will notify contractor, of hourly rates and travel expenses for additional site visits and will issue an invoice to Contractor for additional site visits.
2. Contractor is not be eligible for extensions of project schedule or additional charges resulting from additional site visits that result from project construction or testing deficiencies/incompleteness, incorrect information, or non-compliance with Project provisions.

G. Tests:

1. Interim inspection is required at approximately 50 percent of installation.
2. Request inspection ten working days prior to interim inspection start date by notifying COR in writing; this inspection must verify equipment and system being provided adheres to installation, mechanical and technical requirements of construction documents.
3. Inspection to be conducted by OEM and factory-certified contractor representative, and witnessed by COR, facility and SMCS 0050P2H3 representatives.

4. Check each item of installed equipment to ensure appropriate NRTL listing labels and markings are fixed in place.
5. Verify cabling terminations in DEMARC, MCR, TER, SCC, ECC, TRs and head end rooms, workstation locations and TCO adhere to color code for T568B pin assignments and cabling connections are in compliance with TIA standards.
6. Visually confirm minimum Category 6A cable marking at TCOs, CCSs locations, patch cords and origination locations.
7. Review entire communications circulating ground system, each TGB and grounding connection, grounding electrode and outside lightning protection system.
8. Review cable tray, conduit and path/wire way installation practice.
9. OEM and contractor to perform:
   a. Fiber optical cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.
   b. Coaxial cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.
   c. Baseband cable field inspection tests via attenuation measurements on factory reels and provide results along with OEM certification for factory reel tests.
10. Relocate failed cable reels to a secured location for inventory, as directed by COR, and then remove from project site within two working days; provide COR with written confirmation of defective cable reels removal from project site.
11. Provide results of interim inspections to COR.
12. If major or multiple deficiencies are discovered, additional interim inspections could be required until deficiencies are corrected, before permitting further system installation.
    a. Additional inspections are scheduled at direction of COR.
    b. Re-inspection of deficiencies noted during interim inspections, must be part of system’s Final Acceptance Proof of Performance Test.
    c. The interim inspection cannot affect the system’s completion date unless directed by COR.

13. Facility COR will ensure test documents become a part of system's official documentation package.

H. Pretesting: Re-align, re-balance, sweep, re-adjust and clean entire system and leave system working for a "break-in" period, upon completing installation of system and prior to Final Acceptance Proof of Performance Test. System RF transmitting equipment must not be connected to keying or control lines during "break-in" period.

1. Pretesting Procedure:
   a. Verify systems are fully operational and meet performance requirements, utilizing accepted test equipment and spectrum analyzer.
   b. Pretest and verify system functions and performance requirements conform to construction documents and, that no unwanted physical, aural and electronic effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise are present.
2. Measure and record signal, aural and control carrier levels of each DAS RF, voice and data channel, at each of the following minimum points in system:
   a. Utility provider entrance.
   b. Buried conduit duct locations.
   c. Maintenance Holes (Manholes) and hand holes.
   d. ENTR or DEMARC.
   e. PBX interconnections.
   f. MCR interconnections.
   g. MCOR interconnections.
   h. TER interconnections.
   i. TOR interconnections.
   j. Control room interconnections.
   k. TR interconnections.
   l. System interfaces in locations listed herein.
   m. HE interconnections.
   n. Antenna (outside and inside) interconnections.
   o. System and lightning ground interconnections.
   p. Communications circulating ground system.
   q. UPS areas.
   r. Emergency generator interconnections.
   s. Each general floor areas.

t. Others as required by AHJ (SMCS 005OP2H3).

3. Provide recorded system pretest measurements and certification that the system is ready for formal acceptance test to COR.

I. Acceptance Test:

1. Schedule an acceptance test date after system has been pretested, and pretest results and certification submitted to COR.
2. Give COR fifteen working days written notice prior to date test is expected to begin; include expected duration of time for test in notification.
3. Test in the presence of the following:
   a. COR.
   b. OEM representatives.
   c. VACO:
      1) CFM representative.
      2) AHJ-SMCS 005OP2H3, (202)461-5310.
   d. VISN-CIO, Network Officer and VISN representatives.
   e. Facility:
      1) FMS Service Chief, Bio-Medical Engineering and facility representatives.
      2) OI&T Service Chief and OI&T representatives.
      3) Safety Officer, Police Chief and facility safety representatives.
   f. Local Community Safety Personnel:
      1) Fire Marshal representative.
      2) Disaster Coordinator representative.
      3) EMS Representatives: Police, Sherriff, City, County or State representatives.
4. Test system utilizing accepted test equipment to certify proof of performance and Life and Public Safety compliance, FCC, NRTL, NFPA and OSHA compliance.
   a. Rate system as acceptable or unacceptable at conclusion of test; make only minor adjustments and connections required to show proof of performance.
      1) Demonstrate and verify that system complies with performance requirements under operating conditions.

2) Failure of any part of system that precludes completion of system testing, and which cannot be repaired within four hours, terminates acceptance test of that portion of system.
3) Repeated failures that result in a cumulative time of eight hours to affect repairs is cause for entire system to be declared unacceptable.
4) If system is declared unacceptable, retesting must be rescheduled at convenience of Government and costs borne by the contractor.

J. Acceptance Test Procedure:
1. Physical and Mechanical Inspection: The test team representatives must tour major areas to determine system and sub-systems are completely and properly installed and are ready for acceptance testing.
2. A system inventory including available spare parts must be taken at this time.
3. Each item of installed equipment must be re-checked to ensure appropriate NRTL (i.e. UL) certification listing labels are affixed.
4. Confirm that deficiencies reported during Interim Inspections and Pretesting are corrected prior to start of Acceptance Test.
5. Inventory system diagrams, record drawings, equipment manuals, pretest results.
6. Failure of system to meet installation requirements of specifications is grounds for terminating testing and to schedule re-testing.

K. Operational Test:
1. Government’s Condition of Acceptance of System Language:
a. Without Acceptance: Until system fully meets conditions of construction documents, system’s ownership, use, operation and warranty commences at Government’s final acceptance date.
b. With Conditional Acceptance: Stating conditions that need to be addressed by contractor or OEM and stating system’s use and operation to commence immediately while its warranty commences only at Government’s agreed final extended acceptance date.
c. With Full Acceptance: Stating system’s ownership, use, operation and warranty to immediately commence at Government’s agreed to date of final acceptance.

L. Acceptance Test Conclusion: Reschedule testing on deficiencies and shortages with COR, after COR and SMCS AHJ jointly agree to results of the test, using the generated punch list or discrepancy list. Perform retesting to comply with these specifications at contractor's expense.

M. Proof of Performance Certification:

1. If system is declared acceptable, AHJ (SMCS 005OP2H3) provides COR notice stating system processes to required operating standards and functions and is Government accepted for use by facility.
2. Validate items with COR needing to be provided to complete project contract (i.e. charts & diagrams, manuals, spare parts, system warranty documents executed, etc.). Once items have been provided, COR contacts FMS service chief to turn over system from CFM oversight for beneficial use by facility.
3. If system is declared unacceptable without conditions, rescheduled testing expenses are to be borne by contractor.

3.7 CLEANING

A. Remove debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from project site and clean work area, prior to final inspection and acceptance of work.

B. Put building and premises in neat and clean condition.

C. Remove debris on a daily basis.

D. Remove unused material, during progress of work.

E. Perform cleaning and washing required to provide acceptable appearance and operation of equipment to satisfaction of COR.

F. Clean exterior surface of all equipment, including concrete residue, dirt, and paint residue, after completion of project.

G. Perform final cleaning prior to project acceptance by COR.

H. Remove paint splatters and other spots, dirt, and debris; touch up scratches and mars of finish to match original finish.

I. Clean devices internally using methods and materials recommended by manufacturer.

J. Tighten wiring connectors, terminals, bus joints, and mountings, to include lugs, screws and bolts according to equipment manufacturer’s published torque tightening values for equipment connectors. In absence of published connection or terminal torque values, comply with torque values specified in UL 486A-486B.

3.8 TRAINING

A. Provide training in accordance with subsection, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

B. Provide training for equipment or system as required in each associated specification.

C. Develop and submit training schedule for approval by COR, at least 30 days prior to planned training.

3.9 PROTECTION

A. Protection of Fireproofing:

1. Install clips, hangers, clamps, supports and other attachments to surfaces to be fireproofed, if possible, prior to start of spray fireproofing work.
2. Install conduits and other items that would interfere with proper application of fireproofing after completion of spray fire proofing work.
3. Patch and repair fireproofing damaged due to cutting or course of work must be performed by installer of fireproofing and paid for by trade responsible for damage.

B. Maintain equipment and systems until final acceptance.

C. Ensure adequate protection of equipment and material during installation and shutdown and during delays pending final test of systems and equipment because of seasonal conditions.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 27 05 26
GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section identifies common and general grounding and bonding requirements of communication installations and applies to all sections of Divisions 27 and 28.

B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, telecommunications system grounding electrodes.

C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

A. Low voltage wiring: Section 27 10 00, CONTROL, COMMUNICATIONS & SIGNALING

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Provide plan indicating location of system grounding electrode connections and routing of aboveground and underground grounding electrode conductors.

C. Closeout Submittals: In addition to Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS provide the following:

1. Certified test reports of ground resistance.
2. Certifications: Two weeks prior to final inspection, submit following to COR:
   a. Certification materials and installation is in accordance with construction documents.
   b. Certification complete installation has been installed and tested.

PART 2 - PRODUCTS

2.1 COMPONENTS

A. Grounding and Bonding Conductors:

1. Provide UL 83 insulated stranded copper equipment grounding conductors, with the exception of solid copper conductors for sizes 6 mm² (10 AWG) and smaller. Identify all grounding conductors with

continuous green insulation color, except identify wire sizes 25 mm² (4 AWG) and larger per NEC.

2. Provide ASTM B8 bare stranded copper bonding conductors, with the exception of ASTM B1 solid bare copper for wire sizes 6 mm² (10 AWG) and smaller.

B. Splices and Termination Components: Provide components meeting or exceeding UL 467 and clearly marked with manufacturer's name, catalog number, and permitted conductor sizes.

C. Telecommunication System Ground Busbars:

1. Telecommunications Main Grounding Busbar (TMGB):
   a. 6.4 mm (1/4 inch) thick solid copper bar.
   b. Minimum 100 mm (4 inches) high and length sized in accordance application requirements and future growth of minimum 510 mm (20 inches) long.
   c. Minimum thirty predrilled attachment points (two rows of fifteen each) for attaching standard sized two-hole grounding lugs.
      1) 27 lugs with 15.8 mm (5/8 inch) hole centers.
      2) 3 lugs with 25.4 mm (1 inch) hole centers.
   d. Wall-mount stand-off brackets, assembly screws and insulators for 100 mm (4 inches) standoff from wall.
   e. Listed as grounding and bonding equipment.
2. Solid copper ground bars designed for vertical mounting to framework of open racks or enclosed equipment cabinets:
   a. 1.3 mm (0.05 inch) thick by 17 mm (0.68 inch) wide tinned copper strip.
   b. 1997 mm (78 inches) high for mounting vertically on full height racks.
   c. Holes punched on 15.875 mm-15.875 mm-12.7 mm (5/8"-5/8"-1/2") alternating vertical centers to match EIA/ECA-310-E Universal Hole Pattern for a 45 RMU rack.
   d. Three #12-24 zinc-plated thread forming hex washer head installation screws, an abrasive pad and antioxidant joint compound.
   e. NRTL listed as grounding and bonding equipment.

D. Ground Terminal Blocks: Provide screw lug-type terminal blocks at equipment mounting location (e.g. backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted.

1. Electroplated tin aluminum extrusion.
2. Accept conductors ranging from #14 AWG through 2/0.
3. Hold conductors in place by two stainless steel set screws.
4. Two 6 mm (1/4 inch) holes spaced on 15.8 mm (5/8 inch) centers to allow secure two-bolt attachment.
5. Listed as a wire connector.

E. Splice Case Ground Accessories: Provide splice case grounding and bonding accessories manufactured by splice case manufacturer when available. Otherwise, use 16 mm² (6 AWG) insulated ground wire with shield bonding connectors.

F. Irreversible Compression Lugs:
1. Electroplated tinned copper.
2. Two holes spaced on 15.8 mm (5/8 inch) or 25.4 mm (1 inch) centers.
3. Sized to fit the specific size conductor.
4. Listed as wire connectors.

G. Antioxidant Joint Compound: Oxide inhibiting joint compound for copper-to-copper, aluminum-to-aluminum or aluminum-to-copper connections.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Exterior Equipment Grounding: Bond exterior metallic components (including masts and cabinets), antennas, satellite dishes, towers, raceways, primary telecommunications protector/arresters, secondary surge protection, waveguides, cable shields, down conductors and other conductive items to directly to Intersystem Bonding Termination.

B. Install telecommunications bonding backbone conductor throughout building via telecommunications backbone pathways effectively bonding all interior telecommunications grounding busbars in telecommunications rooms, to telecommunications main grounding busbar in Demarc room after testing bond to verify bonding conductor for telecommunications from grounding electrode conductor is installed per NEC. Size telecommunications bonding backbone conductor as specified in TIA-607-B.

C. Inaccessible Grounding Connections: Utilize exothermic welding for bonding of buried or otherwise inaccessible connections with the exception of connections requiring periodic testing.

D. Conduit Systems:

1. Bond ferrous metallic conduit to ground.
2. Bond grounding conductors installed in ferrous metallic conduit at both ends of conduit using grounding bushing with #6 AWG conductor.

E. Boxes, Cabinets, and Enclosures:
1. Bond each pull box, splice box, equipment cabinet, and other enclosures through which conductors pass (except for special grounding systems for intensive care units and other critical units shown) to ground.

F. Corrosion Inhibitors: Apply corrosion inhibitor for protecting connection between metals used to contact surfaces, when making ground and ground bonding connections.

G. Telecommunications Grounding System:
1. Bond telecommunications grounding systems and equipment to facility’s electrical grounding electrode at Intersystem Bonding Termination.
2. Provide hardware as required to effectively bond metallic cable shields communications pathways, cable runway, and equipment chassis to ground.
3. Install bonding conductors without splices using shortest length of conductor possible to maintain clearances required by NEC.
4. Provide paths to ground that are permanent and continuous with a resistance of 1 ohm or less from each raceway, cable tray, and equipment connection to telecommunications grounding busbar.
5. Below-Grade Connections: When making exothermic welds, wire brush or file the point of contact to a bare metal surface. Use exothermic welding cartridges and molds in accordance with manufacturer’s recommendations. After welds have been made and cooled, brush slag from weld area and thoroughly clean joint areas. Notify COR prior to backfilling at ground connections.
6. Above-Grade Bolted or Screwed Grounding Connections:
   a. Remove paint to expose entire contact surface by grinding.
   b. Clean all connector, plate and contact surfaces.
   c. Apply corrosion inhibitor to surfaces before joining.
7. Bonding Jumpers:
   a. Assemble bonding jumpers using insulated ground wire of size and type shown on drawings or use a minimum of 16 mm^2 (6 AWG)

insulated copper wire terminated with compression connectors of proper size for conductors.

b. Use connector manufacturer's compression tool.

8. Bonding Jumper Fasteners:

a. Conduit: Connect bonding jumpers using lugs on grounding bushings or clamp pads on push-type conduit fasteners. Where appropriate, use zinc-plated external tooth lockwashers or Belleville Washers.

b. Wireway and Cable Tray: Fasten bonding jumpers using zinc-plated bolts, external tooth lockwashers or Belleville washers and nuts. Install protective cover, e.g., zinc-plated acorn nuts, on bolts extending into wireway or cable tray to prevent cable damage.

c. Grounding Busbars: Fasten bonding conductors using two-hole compression lugs. Use 300 series stainless steel bolts, Belleville Washers, and nuts.

d. Slotted Channel Framing and Raised Floor Stringers: Fasten bonding jumpers using zinc-plated, self-drill screws and Belleville washers or external tooth lock washers.

H. Telecommunications Room Bonding:

1. Telecommunications Grounding Busbars:

a. Install busbar hardware no less than 950 mm (18 inches) A.F.F.on the telephone terminal board.

b. Where other grounding busbars are located in same room, e.g. electrical panelboard for telecommunications equipment, bond busbars together as indicated on grounding riser diagrams.

c. Make conductor connections with two-hole compression lugs sized to fit busbar and conductors.

d. Attach lugs with stainless steel hardware after preparing bond according to manufacturer recommendations and treating bonding surface on busbar with anti-oxidant to help prevent corrosion.

2. Telephone-Type Cable Rack Systems:

a. Aluminum pan installed on telephone-type cable rack serves as primary ground conductor within communications room.

b. Make ground connections by installing bonding jumpers:

1) Install minimum 16 mm^2 (6 AWG) bonding between telecommunications ground busbars and the aluminum pan installed on cable rack.

2) Install 16 mm² (6 AWG) bonding jumpers across aluminum pan junctions.

I. Self-Supporting and Cabinet-Mounted Equipment Rack Ground Bars:

1. At each rack or cabinet containing active equipment or shielded cable terminations:
   a. Bond busbar to ground as part of overall telecommunications bonding and grounding system.
   b. Bond copper ground bars together using solid copper splice plates manufactured by same ground bar manufacturer, when ground bars are provided at rear of lineup of bolted together equipment racks.
   c. Bond non-adjacent ground bars on equipment racks and cabinets with 16 mm² (6 AWG) insulated copper wire bonding jumpers attached at each end with compression-type connectors and mounting bolts.
   d. Provide 16 mm² (6 AWG) bonding jumpers between rack and cabinet ground busbars and overhead cable runway or raised floor stringers, as appropriate.

J. Other Communication Room Ground Systems: Ground metallic conduit, wireways, and other metallic equipment located away from equipment racks or cabinets to cable tray or telecommunications ground busbar, whichever is closer, using insulated 16 mm² (6 AWG) ground wire bonding jumpers.

K. Communications Cable Grounding:

1. Bond all metallic cable sheaths in multi-pair communications cables together at each splicing or terminating location to provide 100 percent metallic sheath continuity throughout communications distribution system.
2. Install a cable shield bonding connector with a screw stud connection for ground wire, at terminal points. Bond cable shield connector to ground.
3. Bond all metallic cable shields together within splice closures using cable shield bonding connectors or splice case manufacturer’s splice case grounding and bonding accessories. When an external ground connection is provided as part of splice closure, connect to an effective ground source and bond all other metallic components and equipment at that location.

L. Communications Cable Tray Systems:
   1. Bond metallic structures of cable tray to provide 100 percent electrical continuity throughout cable tray systems.
   2. Where metallic cable tray systems are mechanically discontinuous:
      a. Install splice plates provided by cable tray manufacturer between cable tray sections so resistance across a bolted connection is 0.010 ohms or less, as verified by measuring across splice plate connection.
      b. Install 16 mm² (6 AWG) bonding jumpers across each cable tray splice or junction where splice plates cannot be used.
   3. Bond cable tray installed in same room as telecommunications grounding busbar to busbar.

M. Communications Raceway Grounding:
   1. Conduit: Use insulated 16 mm² (6 AWG) bonding jumpers to bond metallic conduit at both ends and intermediate metallic enclosures to ground.
   2. Cable Tray Systems: Use insulated 16 mm² (6 AWG) grounding jumpers to bond cable tray to column-mounted building ground plates (pads) at both ends and approximately 16 meters (50 feet) on centers.

N. Ground Resistance:
   1. Install telecommunications grounding system so resistance to grounding electrode system measures 5 ohms or less.
   2. Measure grounding electrode system resistance using an earth test meter, clamp-on ground tester, or computer-based ground meter as defined in IEEE 81. Record ground resistance measurements before electrical distribution system is energized.
   3. Backfill only after below-grade connection have been visually inspected by COR. Notify COR twenty-four hours before below-grade connections are ready for inspection.

3.2 LABELING

A. Comply with requirements in Division 26 Section "ELECTRICAL IDENTIFICATION" Article for instruction signs. The label or its text shall be green.

B. Install labels at the telecommunications bonding conductor and grounding equalizer and at the grounding electrode conductor where exposed.

1. Label Text: "If this connector or cable is loose or if it shall be removed for any reason, notify the facility manager."
2. All ground Busses shall be labeled “Main Ground Bus”, “Telecom Room Ground Bus.”
3. All grounding cabling shall be labeled, “Ground Cable Bonded from Main TGB,” “Ground Cable Bonded from the Main Electrical Ground Bus” “Ground Cable Bonded from Electrical Panel XXX”, “Ground Cable Bonded to the Building Steel.”

3.3 FIELD QUALITY CONTROL

A. Perform tests per BICSI’s Information Technology Systems Installation Methods Manual (ITSIMM), Recommended Testing Procedures and Criteria.

B. Perform two-point bond test using trained installers qualified to use test equipment.

C. Conduct continuity test to verify that metallic pathways in telecommunications spaces are bonded to TGB or TMGB.

D. Conduct electrical continuity test to verify that TMGB is effectively bonded to grounding electrode conductor.

E. Visually inspect to verify that screened and shielded cables are bonded to TGB or TMGB.

F. Perform a resistance test to ensure patch panel, rack and cabinet bonding connection resistance measures less than 5 Ohms to TGB or TMGB.

---END---

SECTION 27 05 33
RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for communications cabling unless shown or specified otherwise.

1.2 RELATED WORK

A. Sealing around penetrations to maintain integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.

B. Sealing around conduit penetrations through building envelope to prevent moisture migration into building: Section 07 92 00, JOINT SEALANTS.

C. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.

D. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

A. In accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS, submit the following:

1. Size and location of cabinets, splice boxes and pull boxes.
2. Layout of required conduit penetrations through structural elements.
3. Catalog cuts marked with specific item proposed and area of application identified.

B. Certification: Provide letter prior to final inspection, certifying material is in accordance with construction documents and properly installed.

PART 2 - PRODUCTS

2.1 MATERIAL

A. Minimum Conduit Size: 31 mm (1 1/4 inch).

B. Conduit:

1. Rigid Galvanized Steel: Conform to UL 6, ANSI C80.1.
2. Rigid Intermediate Steel Conduit (IMC): Conform to UL 1242, ANSI C80.6.

3. Electrical Metallic Tubing (EMT):
   a. Maximum Size: 105 mm (4 inches).
   b. Install only for cable rated 600 volts or less.
   c. Conform to UL 797, ANSI C80.3.
4. Flexible Galvanized Steel Conduit: Conform to UL 1.
5. Liquid-tight Flexible Metal Conduit: Conform to UL 360.
6. Direct Burial Plastic Conduit: Conform to UL 651 and UL 651A, heavy wall PVC, or high density polyethylene (HDPE).
7. Surface Metal Raceway: Conform to UL 5.
8. Wireway, Approved “Basket”: Provide "Telecommunications Service” rated with approved length way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.

C. Conduit Fittings:
1. Rigid Galvanized Steel and Rigid Intermediate Steel Conduit Fittings:
   a. Provide fittings meeting requirements of UL 514B and ANSI/ NEMA FB 1.
   b. Sealing: Provide threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water and vapor. In concealed work, install sealing fittings in flush steel boxes with blank cover plates having same finishes as other electrical plates in room.
   c. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   d. Locknuts: Bonding type with sharp edges for digging into metal wall of an enclosure.
   e. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into metallic body of fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   f. Erickson (union-type) and Set Screw Type Couplings:
   1) Couplings listed for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete.

2) Use set screws of case hardened steel with hex head and cup point to seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.

g. Provide OEM approved fittings.

2. Electrical Metallic Tubing Fittings:

a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.

b. Couplings and Connectors: Concrete tight and rain tight, with connectors having insulated throats.

1) Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller.

2) Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches).

3) Use set screws of case-hardened steel with hex head and cup point to seat in wall of conduit for positive grounding.

c. Indent type connectors or couplings are not permitted.

d. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are not permitted.

e. Provide OEM approved fittings.

3. Flexible Steel Conduit Fittings:

a. Conform to UL 514B; only steel or malleable iron materials are acceptable.

b. Provide clamp type, with insulated throat.

c. Provide OEM approved fittings.

4. Liquid-tight Flexible Metal Conduit Fittings:

a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.

b. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening.

c. Provide connectors with insulated throats to prevent damage to cable jacket.

d. Provide OEM approved fittings.

5. Surface Metal Raceway: Conform to UL 5 and “telecommunications service” rated with approved length-way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.

6. Surface Metal Raceway Fittings: As recommended by raceway manufacturer.
7. Expansion and Deflection Couplings:
   a. Conform to UL 467 and UL 514B.
   b. Accommodate 19 mm (3/4 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
   c. Include internal flexible metal braid sized to ensure conduit ground continuity and fault currents in accordance with UL 467, and NEC code tables for ground conductors.
   d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
8. Wireway Fittings: As recommended by wireway OEM.

D. Conduit Supports:
1. Parts and Hardware: Provide zinc-coat or equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Minimum 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 2.78 mm (12 gage) steel, cold formed, lipped channels; with minimum 9 mm (3/8 inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Splice, and Pull Boxes:
1. Conform to UL-50 and UL-514A.
2. Cast metal where required by NEC or shown and equipped with rustproof boxes.
3. Sheet Metal Boxes: Galvanized steel, except where otherwise shown.
4. Install flush mounted wall or ceiling boxes with raised covers so that front face of raised cover is flush with wall.
5. Install surface mounted wall or ceiling boxes with surface style flat or raised covers.
6. All communications outlets shall be 4-11/16 inch boxes with a minimum of 2-1/2 inches deep with single or two gang 3/4 mud ring as shown on the drawings.

F. Wireways: Equip with hinged covers, except where removable covers are shown.

G. Flexible Nonmetallic Communications Raceway (Innerduct) and Fittings:

1. General: Provide UL 910 listed plenum, riser, and general purpose corrugated pliable communications raceway for optical fiber cables and communications cable applications; select in accordance with provisions of NEC Articles 770 and 800.
2. Provide Communications Raceway with a factory installed 567 kg (1250 lb.) tensile pre-lubricated pull tape.
3. Use only metallic straps, hangers and fittings to support raceway from building structure. Cable ties are not permitted for securing raceway to building structure.
4. Provide fittings to be installed in spaces used for environmental air made of materials that do not exceed flammability, smoke generation, ignitibility, and toxicity requirements of environmental air space.
5. Size: Metric Designator 53 (trade size 2) or smaller.
6. Inside Plant: Listed and marked for installation in plenum airspaces and minimum 25 mm (1 inch) inside diameter.
7. Plenum: Non-metallic communications raceway.
   a. Constructed of low smoke emission, flame retardant PVC with corrugated construction.
   b. UL 94 V-O rating for flame spreading limitation.
8. Provide innerduct reel lengths as necessary to ensure ducts are continuous; one piece runs from ENTR to MH; MH to MH; DEMARC to MCR/TER; TR to TR. Innerduct connectors are not permitted between rooms.
9. Provide pulling accessories used for innerduct including but not limited to, inner duct lubricants, spreaders, applicators, grips, swivels, harnesses, and line missiles (blown air) compatible with materials being pulled.

H. Outlet Boxes:

1. Flush wall mounted minimum 11.9 cm (4-11/16 inches) square, 9.2 cm (3-5/8 inches) deep pressed galvanized steel with single or double gang ¾ mud ring.
2. Flush wall mounted 12.7 cm (5 inches) square x 7.3 cm (2-7/8 inches); deep pressed galvanized steel.

3. 2-Gang Tile Box:
    a. Flush backbox type for installation in block walls.
    b. Minimum 92 mm (3-5/8 inches) deep.

I. Weatherproof Outlet Boxes: Surface mount two gang, 67 mm (2-5/8 inches) deep weatherproof cast aluminum with powder coated finish internal threads on hubs 19 mm (3/4 inch) minimum.
1. Provide continuous welded top side wire to protect cable insulation and installers.
2. High strength steel wires formed into a 50 x 100 mm (2 inches by 4 inches) wire mesh pattern with intersecting wires welded together.
3. Wire Basket Sizes:
    a. Wire Diameter: 5 mm (0.195 inch) minimum on all mesh sections.
    b. Usable Loading Depth: 105 mm (4 inch).
    c. Width: 300 mm (12 inches).
4. Fittings: Field-formed, from straight sections, in accordance with manufacturer’s instructions.
5. Provide accessories to protect, support and install wire basket tray system.

J. Cable Duct: Equip with hinged covers, except where removable covers are accepted by COR.

K. Cable Duct Fittings: As recommended by cable duct OEM.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Raceways typically required for cabling systems unless otherwise indicated:

System	Specification Section	Installed Method
Grounding	27 05 26	Conduit Not Required
Control, Communication and Signal Wiring	27 10 00	Complete Conduit Allowed in Non-Partitioned Cable Tray or Cable Ladders
Grounding and Bonding for Electronic Safety and Security	28 05 26	Conduit Not Required Unless Required by Code
Physical Access Control System	28 13 00	Conduit to Cable Tray Partitioned Cable Tray
Intrusion Detection System	28 16 00	Conduit to Cable Tray, Partitioned Cable Tray
Video Surveillance	28 23 00	Complete Conduit

System	Specification Section	Installed Method
Fire Detection and Alarm	28 31 00	Complete Conduit

B. Penetrations:

1. Cutting or Holes:

a. Locate holes in advance of installation. Where they are proposed in structural sections, obtain approval of structural engineer and COR prior to drilling through structural sections.

b. Make holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not permitted; COR may grant limited permission by request, in condition of limited working space.

c. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

1) Fill and seal clearances between raceways and openings with fire stop material.

2) Install only retrofittable, non-hardening, and reusable firestop material that can be removed and reinstalled to seal around cables inside conduits.

d. Waterproofing at Floor, Exterior Wall, and Roof Conduit Penetrations:

1) Seal clearances around conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS or directed by waterproofing manufacturer.

C. Conduit Installation:

1. Minimum conduit size of 31 mm (1 1/4 inch), but not less than size required for 40 percent fill.
2. Install insulated bushings on all conduit ends.
3. Install pull boxes after every 180 degrees of bends (two 90 degree bends). Size boxes per TIA 569.

4. Extend vertical conduits/sleeves through floors minimum 75 mm (3 inches) above floor and minimum 75 mm (3 inches) below ceiling of floor below.
5. Terminate conduit runs to and from a backboard in a closet or interstitial space at top or bottom of backboard. Install conduits to enter telecommunication rooms next to wall and flush with backboard.
6. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections.
7. Seal empty conduits located in telecommunications rooms or on backboards with a standard non-hardening putty compound to prevent entrance of moisture and gases and to meet fire resistance requirements.
8. Minimum radius of communication conduit bends:

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

9. Provide 19 mm (3/4 inch) thick fire retardant plywood on wall of communication closets where shown on drawings. Mount plywood with bottom edge 300 mm (12 inches) above finished floor and top edge 2.74 m (9 feet) A.F.F.
10. Provide pull wire in all empty conduits; sleeves through floor are exceptions.
11. Complete each entire conduit run installation before pulling in cables.
12. Flattened, dented, or deformed conduit is not permitted.
13. Ensure conduit installation does not encroach into ceiling height head room, walkways, or doorways.
14. Cut conduit square with a hacksaw, ream, remove burrs, and draw tight.
15. Install conduit mechanically continuous.

16. Independently support conduit at 2.44 m (8 feet) on center; do not use other supports (i.e., suspended ceilings, suspended ceiling supporting members, luminaires, conduits, mechanical piping, or mechanical ducts).
17. Support conduit within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
18. Close ends of empty conduit with plugs or caps to prevent entry of debris, until cables are pulled in.
19. Conduit installations under fume and vent hoods are prohibited.
20. Attach conduits to cabinets, splice cases, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on inside of enclosure, made up wrench tight. Do not make conduit connections to box covers.
21. Do not use aluminum conduits in wet locations.
22. Unless otherwise indicated on drawings or specified herein, conceal conduits within finished walls, floors and ceilings.
23. Conduit Bends:
    a. Make bends with standard conduit bending machines; observe minimum bend radius for cable type and outside diameter.
    b. Conduit hickey is permitted only for slight offsets, and for straightening stubbed conduits.
    c. Bending of conduits with a pipe tee or vise is not permitted.
24. Layout and Homeruns - Deviations: Make only where necessary to avoid interferences and only after drawings showing proposed deviations have been submitted and approved by COR.

D. Concealed Work Installation:

1. In Concrete:
    a. Conduit: Rigid steel or IMC.
    b. Align and run conduit in direct lines.
    c. Install conduit through concrete beams only when the following occurs:
    1) Where shown on structural drawings.
    2) As accepted by COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
    d. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.

1) Conduit outside diameter larger than 1/3 of slab thickness is prohibited.
2) Space between Conduits in Slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
3) Install conduits approximately in center of slab to ensure a minimum of 19 mm (3/4 inch) of concrete around conduits.

e. Make couplings and connections watertight. Use thread compounds that are NRTL listed conductive type to ensure low resistance ground continuity through conduits. Tightening set screws with pliers is not permitted.

E. Furred or Suspended Ceilings and in Walls:
1. Rigid steel, IMC. Different type conduits mixed indiscriminately in same system is not permitted.
2. Align and run conduit parallel or perpendicular to building lines.
3. Tightening set screws with pliers is not permitted.

F. Exposed Work Installation:
1. Unless otherwise indicated on drawings, exposed conduit is only permitted in telecommunications rooms.
   a. Provide rigid steel, IMC..
   b. Different type of conduits mixed indiscriminately in system is not permitted.
2. Align and run conduit parallel or perpendicular to building lines.
3. Install horizontal runs close to ceiling or beams and secure with conduit straps.
4. Support horizontal or vertical runs at not over 2400 mm (96 inches) intervals.
5. Surface Metal Raceways: Use only where shown on drawings.
6. Painting:
   a. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
   b. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color.
   c. Provide labels where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

G. Each Conduit shall be labeled (Stenciled every 20 feet) with the following information for each system as follows:

1. Orange: Demarcation Point
2. Green: Network Connection.
3. Purple: Common equipment.
4. White: First Level, Terminating building backbone, MC (CD) to IC (BD)
5. Gray: Second level, IC(BD) to TR(HD)/FD)
6. Blue: Horizontal Cabling.
7. Brown: Campus Backbone.
8. Yellow: Misc, security, PACS, CATV, MATV, Nurse call.
9. Red: Fire Alarm.

H. Expansion Joints:

1. Conduits 75 mm (3 inches) and larger, that are secured to building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install couplings in accordance with manufacturer's recommendations.
2. Provide conduits smaller than 75 mm (3 inches) with pull boxes on both sides of expansion joint. Connect conduits to expansion and deflection couplings as specified.
3. Install expansion and deflection couplings where shown.

I. Seismic Areas:

1. In seismic areas, follow H-18-8 Seismic Design Requirements.
2. Rigidly secure conduit to building structure on opposite sides of a building expansion joint with pull boxes on both sides of joint.
3. Connect conduits to pull boxes with 375 mm (15 inches) of slack flexible conduit.
4. Install green copper wire minimum #6 AWG in flexible conduit for bonding jumper.

J. Conduit Supports, Installation:

1. Select AC193 code listed mechanical anchors or fastening devices with safe working load not to exceed 1/4 of proof test load.
2. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
3. Support multiple conduit runs with trapeze hangers. Use trapeze hangers designed to support a load equal or greater than sum of the weights of the conduits, wires, hanger itself, and 90 kg (200

pounds). Attach each conduit with U-bolts or other accepted fasteners.

4. Support conduit independent of pull boxes, luminaires, suspended ceiling components, angle supports, duct work, and similar items.
5. Fastenings and Supports in Solid Masonry and Concrete:
   a. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing concrete.
   b. Existing Construction:
   1) Code AC193 listed wedge type steel expansion anchors minimum 6 mm (1/4 inch) bolt size and minimum 28 mm (1-1/8 inch) embedment.
   2) Power set fasteners minimum 6 mm (1/4 inch) diameter with depth of penetration minimum 75 mm (3 inches).
   3) Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
6. Fastening to Hollow Masonry: Toggle bolts are permitted.
7. Fastening to Metal Structures: Use machine screw fasteners or other devices designed and accepted for application.
8. Bolts supported only by plaster or gypsum wallboard are not acceptable.
9. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
10. Do not support conduit from chain, wire, or perforated strap.
11. Spring steel type supports or fasteners are not permitted except horizontal and vertical supports/fasteners within walls.
12. Vertical Supports:
    a. Install riser clamps and supports for vertical conduit runs in accordance with NEC.
    b. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

K. Box Installation:
1. Boxes for Concealed Conduits:
   a. Flush mounted.
   b. Provide raised covers for boxes to suit wall or ceiling, construction and finish.

2. In addition to boxes shown, install additional boxes where needed to prevent damage to cables during pulling.
3. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
4. Stencil or install phenolic nameplates on covers of boxes identified on riser diagrams; for example "SIG-FA JB No. 1".
5. Outlet boxes mounted back-to-back in same wall are not permitted. A minimum 600 mm (24 inches) center-to-center lateral spacing must be maintained between boxes.

L. Flexible Nonmetallic Communications Raceway (Innerduct), Installation:
1. Install supports from building structure for horizontal runs at intervals not to exceed 900 mm (3 feet) and at each end.
2. Install supports from building structure for vertical runs at intervals not to exceed 1.2 m (4 feet) and at each side of joints.
3. Install only in accessible spaces not subject to physical damage or corrosive influences.
4. Make bends manually to assure internal diameter of tubing is not effectively reduced.
5. Extend each segment of innerduct minimum 300 mm (12 inches) beyond end of service conduit tie or cable tray. Restrain innerduct ends with wall mount clamps and seal when cable is installed.

3.2 EXISTING CONDUITS

A. Existing conduit can be used for new work.
B. If existing conduit is going to be used for new cables, the contractor shall clean the conduit from mud and dirt, pull all unused cables before the new cables are pulled/installed.
C. Contractor shall provide protection for the new cable while pulling it in the existing conduit.
D. Perform simple continuity test after cable installation.

3.3 TESTING

A. Examine fittings and locknuts for secureness.
B. Test RMC, IMC and EMT systems for electrical continuity.
C. Perform simple continuity test after cable installation.

- - - E N D - - -

---INTENTIONALLY BLANK---

SECTION 27 10 00
CONTROL, COMMUNICATION AND SIGNAL WIRING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes control, communication and signal wiring for a comprehensive systems infrastructure.

B. This section applies to all sections of Divisions 27 and 28.

1.2 RELATED WORK

A. Sealing around penetrations to maintain integrity of time rated construction: Section 07 84 00, FIRESTOPPING.

B. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

C. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

D. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Submit written certification from OEM:

1. Indicate wiring and connection diagrams meet National and Government Life Safety Guidelines, NFPA, NEC, NRTL, Joint Commission, OEM, this section and Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
2. Include instructions, requirements, recommendations, and guidance for proper performance of system as described herein.
3. Government shall not approve any submittal without this certification.

C. Identify environmental specifications on technical submittals; identify requirements for installation.

1. Minimum floor space and ceiling heights.
2. Minimum size of doors for cable reel passage.

D. Power: Provide specific voltage, amperage, phases, and quantities of circuits.

E. Provide conduit size requirements.

F. Closeout Submittals:
   1. Provide contact information for maintenance personnel to contact contractor for emergency maintenance and logistic assistance, and assistance in resolving technical problems at any time during warranty period.
   2. Provide certified OEM sweep test tags from each cable reel to COR.
   3. Furnish spare or unused wire and cable with appropriate connectors (female types) for installation in appropriate punch blocks, barrier strips, patch, or bulkhead connector panels.
   4. Turn over unused and opened installation kit boxes, coaxial, fiber optic, and twisted pair cable reels, conduit, cable tray, cable duct bundles, wire rolls, physical installation hardware to COR.
   5. Documentation: Include any item or quantity of items, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide system documentation required herein.

PART 2 - PRODUCTS

2.1 CONTROL WIRING

A. Provide control wiring large enough so voltage drop under in-rush conditions does not adversely affect operation of controls.
B. Provide cable meeting specifications for type of cable.
C. Outside Location (i.e. above ground, underground in conduit, ducts, pathways. Provide cables filled with a waterproofing compound between outside jacket (not touching any provided armor) and inter conductors to seal punctures in jacket and protect conductors from moisture.
D. Remote Control Cable:
   1. Multi-conductor with stranded conductors able to handle power and voltage required to control specified system equipment, from a remote location.
   2. NRTL listed and pass VW-1 vertical wire flame test (UL 83) (formerly FR-1).
   3. Color-coded Conductors: Combined multi-conductor and coaxial cables are acceptable for this installation, on condition system performance standards are met.
   4. Technical Characteristics:
      a. Length: As required, in 1K (3,000 ft.) reels minimum.

b. Connectors: As required by system design.

c. Size:

1) 18 AWG, minimum, outside.

2) 20 AWG, minimum, inside.

d. Color Coding: Required, EIA industry standard.

e. Bend Radius: 10 times cable outside diameter.

f. Impedance: As required.

g. Shield Coverage: As required by OEM specification.

h. Attenuation:

Frequency in MHz	dB per 305 Meter (1,000 feet), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
50.0	52.0

E. Distribution System Signal Wires and Cables:

1. Provide in same manner, and use construction practices, as Fire Protective and other Emergency Systems identified and defined in NFPA 101, Life Safety Code, Chapters 7, 12, and 13, NFPA 70, National Electrical Code, Chapter 7, Special Conditions.
2. Provide system able to withstand adverse environmental conditions without deterioration, in their respective location.
3. Provide entering of each equipment enclosure, console, cabinet or rack in such a manner that all doors or access panels can be opened and closed without removal or disruption of cables.
4. Terminate on an item of equipment by direct connection.

2.2 COMMUNICATION AND SIGNAL WIRING

A. Provide communications and signal wiring conforming to recommendations of manufacturers of systems; provide not less than TIA Performance Category 6e.

B. Wiring shown is for typical systems; provide wiring as required for systems being provided.

C. Provide color-coded conductor insulation for multi-conductor cables.

D. Connectors:

1. Provide connectors for transmission lines, and signal extensions to maintain uninterrupted continuity, ensure effective connection, and preserve uniform polarity between all points in system.
   a. Provide AC barrier strips with a protective cover to prevent accidental contact with wires carrying live AC current.
   b. Provide punch blocks for signal connection, not AC power. AC power twist-on wire connectors are not permitted for signal wire terminations.
2. Cables: Provide connectors designed for specific size cable and conductors being installed with OEM's approved installation tool. Typical system cable connectors include:
   a. Audio spade lug.
   b. Punch block.
   c. Wirewrap.

2.3 INSTALLATION KIT

A. Include connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, cable tray required to accomplish a neat and secure installation.

B. Terminate conductors in a spade lug and barrier strip, wire wrap terminal or punch block, so there are no unfinished or unlabeled wire connections.

C. Minimum required installation sub-kits:

1. System Grounding:
   a. Provide required cable and installation hardware for effective ground path, including the following:
      1) Control Cable Shields.
      2) Data Cable Shields.
      3) Equipment Racks.
      4) Equipment Cabinets.
      5) Conduits.
      6) Ducts.
      7) Cable Trays.

8) Power Panels.
9) Connector Panels.
10) Grounding Blocks.

b. Bond radio equipment to earth ground via internal building wiring, according to NEC.

2. Wire and Cable: Provide connectors and terminals, punch blocks, tie wraps, hangers, clamps, labels, required to accomplish termination in an orderly installation.
3. Conduit, Cable Duct, and Cable Tray: Provide conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, cable tray installation in accordance with NEC and documents.
4. Equipment Interface: Provide any items or quantity of equipment, cable, mounting hardware and materials to interface systems with identified sub-systems, according to OEM requirements and construction documents.
5. Labels: Provide any item or quantity of labels, tools, stencils, and materials to label each subsystem according to OEM requirements, as-installed drawings, and construction documents.

D. Cross-Connection System (CCS) Equipment Breakout, Termination Connector (or Bulkhead), and Patch Panels:

1. Connector Panels: Flat smooth 3.175 mm (1/8 inch) thick solid aluminum, custom designed, fitted and installed in cabinet. Install bulkhead equipment connectors on panel to enable cabinet equipment’s signal, control, and coaxial cables to be connected through panel. Match panel color to cabinet installed.

a. Voice (or Telephone):

1) Provide industry standard Type 110 (minimum) punch blocks for voice or telephone, and control wiring instead of patch panels, each being certified for category 6e.
2) IDC punch blocks (with internal RJ45 jacks) are acceptable for use in CCS when designed for Category 6e, and the size and type of cable used.
3) Secure punch block strips to OEM designed physical anchoring unit on a wall location in TRS; console, cabinet, rail, panel, mounting is permitted at OEM recommendation and as accepted by

COR. Punch blocks are not permitted for Class II or 120 VAC power wiring.

4) Technical Characteristics:
   a) Number of Horizontal Rows: Minimum 100.
   b) Number of Terminals per Row: Minimum 4.
   c) Terminal Protector: Required for each used or unused terminal.
   d) Insulation Splicing: Required between each row of terminals.

b. Digital or High Speed Data:
   1) Provide 480 mm (19 inches) horizontal EIA/ECA 310 rack mountable patch panel with EIA/ECA 310 standard spaced vertical mounting holes for digital or high-speed data service CSS, with modular female Category 6e (or on a case by case basis Category 6e for specialized powered systems accepted by SMCS 005OP2H3, (202) 461-5310, OI&T and FMS Services, and COR) RJ45 jacks designed for size and type of UTP or F/UTP cable installed in rows.
   2) Technical Characteristics:
      a) Number of Horizontal Rows: Minimum 2.
      b) Number of Jacks Per Row: Minimum 24.
      c) Type of Jacks: RJ45.
      d) Terminal Protector: Required for each used or unused jack.
      e) Insulation: Required between each row of jacks.

2.4 EXISTING WIRING

A. Reuse existing wiring only where indicated on plans and accepted by SMCS 005OP2H3.

B. Only existing wiring that conforms to specifications and applicable codes can be reused; existing wiring that does not meet these requirements cannot be reused and must be removed by contractor.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:
   1. Install wiring in cable tray or raceway.

2. Seal cable entering a building from underground, between wire and conduit where cable exits conduit, with non-hardening approved compound.
3. Wire Pulling:
   a. Provide installation equipment that prevents cutting or abrasion of insulation during pulling of cables.
   b. Use ropes made of nonmetallic material for pulling feeders.
   c. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached to conductors, as accepted by COR.
   d. Pull multiple cables into a single conduit together.

B. Control, Communication and Signal Wiring Installation:
1. Unless otherwise specified in other sections, provide wiring and connect to equipment/devices to perform required functions as indicated.
2. Install separate cables for each system so that malfunctions in any system does not affect other systems, except where otherwise required.
3. Group wires and cables according to service (i.e. AC, grounds, signal, DC, and control.) DC, control and signal cables can be included with any group.
4. Form wires and cables to not change position in group throughout the conduit run. Bundle wires and cables in accepted signal duct, conduit, cable ducts, or cable trays neatly formed, tied off in 600 mm to 900 mm (24 inch to 36 inch) lengths to not change position in group throughout run.
5. Concealed splices are not allowed.
6. Separate, organize, bundle, and route wires or cables to restrict EMI, channel crosstalk, or feedback oscillation inside any enclosure.
7. Looking at any enclosure from the rear (wall mounted enclosures, junction, pull or interface boxes from the front), locate AC power, DC and speaker wires or cables on the left; coaxial, control, microphone and line level audio and data wires or cables, on the right.
8. Provide ties and fasteners that do not damage or distort wires or cables. Limit spacing between tied points to maximum 150 mm (6 inches).

9. Install wires or cables outside of buildings in conduit, secured to solid building structures.
10. Wires or cables must be specifically accepted, on a case by case basis, to be installed outside of conduit. Bundled wires or cables shall be tied at minimum 460 mm (18 inches) intervals to a solid building structure; bundled wires or cables shall have ultraviolet protection and be waterproof (including all connections).
11. Laying wires or cables directly on roof tops, ladders, drooping down walls, walkways, floors is not permitted.
12. Wires or cables installed outside of conduit, cable trays, wireways, cable duct.
    a. Only when authorized, can wires or cables be identified and approved to be installed outside of conduit.
    b. Provide wire or cable rated plenum and OEM certified for use in air plenums.
    c. Provide wires and cables hidden, protected, fastened and tied at maximum 600 mm (24 inches) intervals, to building structure.
    d. Provide closer wire or cable fastening intervals to prevent sagging, maintain clearance above suspended ceilings.
    e. Remove unsightly wiring and cabling from view and discourage tampering and vandalism.
    f. Sleeve and seal wire or cable runs, not installed in conduit, that penetrate outside building walls, supporting walls, and two hour fire barriers, with an approved fire retardant sealant.

C. AC Power:
1. Bond to ground contractor-installed equipment and identified Government-furnished equipment, to eliminate shock hazards and to minimize ground loops, common mode returns, noise pickup, and crosstalk for total ground resistance of 0.1 Ohm or less.
2. Use of conduit, signal duct or cable trays as system or electrical ground is not permitted; use these items only for dissipation of internally generated static charges (not to be confused with externally generated lightning) that can be applied or generated outside mechanical and physical confines of system to earth ground. Discovery of improper system grounding is grounds to declare system unacceptable and termination of all system acceptance testing.

3. Cabinet Bus: Extend a common ground bus of at least #10 AWG solid copper wire throughout each equipment cabinet and bond to system ground. Provide a separate isolated ground connection from each equipment cabinet ground bus to system ground. Do not tie equipment ground busses together.
4. Equipment: Bond equipment to cabinet bus with copper braid equivalent to at least #12 AWG. Self-grounding equipment enclosures, racks or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternatives.

3.2 EQUIPMENT IDENTIFICATION

A. Control, Communication and Signal System Identification:
1. Install a permanent wire marker on each wire at each termination.
2. Identify cables with numbers and letters on the labels corresponding to those on wiring diagrams used for installing systems.
3. Install labels retaining their markings after cleaning.
4. In each maintenance hole (manhole) and handhole, install embossed brass tags to identify system served and function.

B. Labeling:
1. Industry Standard: ANSI/TIA-606-B.
2. Print lettering for voice and data circuits using laser/jet printers
3. Cable and Wires (hereinafter referred to as “cable”): Label cables at both ends in accordance with industry standard. Provide permanent labels in contrasting colors. Identify cables matching system Record Wiring Diagrams.
4. Equipment: Permanently labeled system equipment with contrasting plastic laminate or bakelite material. Label system equipment on face of unit corresponding to its source.
5. Conduit, Cable Duct, and Cable Tray: Label conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying system. Label each enclosure according to this standard.
6. Termination Hardware: Label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with industry standard and Record Wiring Diagrams.

3.3 TESTING

A. Minimum test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on cables in frequency ranges specified.

B. Tests required for data cable must be made to confirm operation of this cable at minimum 10 Mega (M) Hertz (Hz) full bandwidth, fully channel loaded and a Bit Error Rate of a minimum of 10-6 at maximum rate of speed.

C. Provide cable installation and test records at acceptance testing to COR and thereafter maintain in facility’s telephone switch room.

D. Record changes (used pair, failed pair) in these records as change occurs.

E. Test cables after installation and replace any defective cables.

---END---

SECTION 27 11 00
TELECOMMUNICATIONS ROOM FITTINGS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies equipment cabinets, interface enclosures, relay racks, patch panels, patch cords, fiber and copper, wire management, vertical and horizontal, grounding and bonding and associated hardware in service provider DEMARC, computer and telecommunications rooms.

1.2 RELATED WORK

A. Wiring devices: Section 26 27 26, WIRING DEVICES.

B. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

C. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

D. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

E. Low voltage cabling system infrastructure: Section 27 10 00, CONTROL, COMMUNICATION AND SIGNAL WIRING.

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATION.

B. Separate submittal into sections for each subsystem containing the following:

1. Pictorial layouts of each Telecommunications Room and Cross Connection Space (VCCS, and HCCS termination cabinets), each distribution cabinet layout, and TCO as each is expected to be installed and configured.
2. Equipment technical literature detailing electrical and technical characteristics of each item of equipment to be furnished.

C. Environmental Requirements: Identify environmental specifications for housing system as initial and expanded system configurations.

1. Floor loading for batteries and cabinets.
2. Minimum floor space and ceiling height.
3. Minimum door size for equipment passage.

1.4 WARRANTY

A. Work subject to term of Article "Warranty of Construction" FAR Clause 52.246.21.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. Provide components of cabinet system (cabinet, thermal, cable and power management accessories) from a single manufacturer.

B. Equipment Standards and Testing:

1. Equipment shall be listed by a NRTL where a UL standard is in existence; active and passive equipment shall conform to each UL standard in effect for equipment, on the submittal date.
2. Each item of electronic equipment shall be labeled by a NRTL that warrants equipment has been tested in accordance with, and conforms to specified standards.

C. Equipment Cabinets (Enclosures):

1. Fully enclose and physically secure internally mounted and connected, active and passive equipment.
2. Types of Equipment Enclosures accepted for specific VA Spectrum Management, FMS and OI&T applications in CFM and Facility Projects:

CABINET	FUNCTION
Communications	FMS Special Communications Equipment
Server / Router	OI&T Data/LAN/WAN Equipment
Seismic	Either FMS or OI&T use, specify need
Environmental	Either FMS or OI&T use, specify need

3. Each cabinet to be:
   a. Provided in head end, MCR, TER, PCR, EMGR, each TR and two cabinets at a minimum.
   b. Fabricated with minimum 1.59 mm (16 gauge) steel.
   c. Provided with manufacturer's standard painted finish in a color accepted by COR with concurrence from FMS Service Chief.
   d. Mounted on floor.
   e. Lockable; tubular locks keyed alike. Provide six keys to COR for each cabinet.
4. Provide equipment mounting shelves; attach to front and rear mounting rails and allowing equipment to be secured to respective mounting rails.

5. Each enclosure to include:
   a. Floor mounting.
   b. Knock out holes for conduit connections or cable entrance.
   c. Front and rear locking doors; wall mounted cabinets require only front locking door.
   d. Power outlet strips.
6. Provide quiet ventilation fan with non-disposable locally cleanable air filter.
7. Size each cabinet in order to contain and maintain internal mounted equipment items.
8. Provide OEM’s fully assembled unit.
9. Provide OEM assembled side-by-side enclosures in a single unit, at locations requiring more than two enclosures.
10. Provide minimum one cabinet with blank rack space, for additional system expansion equipment.
11. Bond to communications circulating grounding system.
12. Technical Characteristics:
    a. External:
       1) Overall Height:
          a) Communications/Server: Maximum 2,184 mm (86 inches).
          b) Seismic: Maximum 1,905 mm (75 inches).
       2) Overall Depth:
          a) Communications/Server: Maximum 914 mm (36 inches).
          b) Seismic: Maximum 762 mm (30 inches).
       3) Overall Width - All: Maximum 864 mm (34 inches).
    b. Front Panel Openings:
       1) Width:
          a) Communications: 584 mm (23 inches), per EIA. 310.
          b) Server: 762 mm (30 inches), per EIA/ECA 310.
          c) Seismic: 483 mm (19 inches), per EIA/ECA 310.
       2) Height:
          a) Communications/Server: Maximum 2,000 mm (78-3/4 inches or 45 Rack Units [RU]), per EIA/ECA 310.
          b) Seismic: Maximum 1,689 mm (66-1/2 inches or 38 RUs, per EIA/ECA 310).
    c. Heavy Duty Cycle: Maximum 544 kilograms (1,200 pounds) capacity.
    d. Certification:

1) NRTL (i.e. UL): For communications and server cabinets.
2) Telcordia Technologies: #63-GR-CORE, (2012) for seismic cabinets.
3) Seismic: Provide cabinet OEM constructed to seismic design category.

13. Cabinet Internal Components:
    a. AC Power:
        1) Standard "Quad AC Box":
            a) Power capacity: 20 Ampere, single phase, 120 VAC continuous duty.
            b) Wire gauge: #12 AWG, solid copper, connected to room's internal AC Power Panel, or as directed by COR.
            c) Number of AC power outlets: Minimum 4-20 A receptacles.
            d) Enclosure: Fully self-contained, metal 102 mm (4 inch) x 102 mm (4 inches) x 64 mm (2-1/2 inches) with cover
            e) Connection: Minimum 25.4 mm (1 inch) conduit connected to room's AC Power Panel, or as directed by COR
            f) Number of boxes: One.
            g) Compliance: NRTL (i.e. UL); NPFA - 70 (NEC).
    b. AC Power Line Surge Protector and Filter Construction:
        1) Input Voltage Range: 120 VAC + 15 percent at 50/60 Hz, single phase.
        2) Power Service Capacity: 20 AMP, 120 VAC.
        3) Voltage Output Regulation: +5.0 percent, instantaneous of input.
        4) Circuit Breaker: 15 AMP; shall be self-contained.
        5) AC Outlets: Minimum four duplex grounded NEMA 5-20R.
        6) Response Time: 5.0 nano-second.
        7) Suppression: Isolate and filter any noise, surge spikes
            a) Surge: Minimum 20,000 AMP.
            b) Noise:
                1) Common: -40 dB.
                2) Differential: -45 dB.
        8) Clamping Voltage: Minimum 300 V.
        9) Enclosure: One; self-contained.
        10) Mounting: Internal to cabinet floor or on internal mounting rail shelf, allowing two plugs from two plug strips.

11) AC Power Cord: Required; minimum 1,628 mm (6 feet), three wire (green ground); minimum #14 AWG stranded.

12) Compliance: NRTL (i.e. UL60950-1).

c. Uninterruptible Power Supply (UPS): Provide each cabinet with an internal UPS which shall be combined with surge protector and filter if system's 50 percent expansion requirement is met. Provide at least one hour continuous full load two hours if working with an emergency safety police system uninterruptible system primary AC Power, with a 50 percent reserve capacity, in the event of facility primary or emergency AC power failure.

1) UPS to include:

a) On-Off Switch: This function is required to be a part of system's electronic supervision requirements.

b) First/Fast Charge Unit: Shall provide clean predicable charge voltage/current. Function is required to be a part of system's electronic supervision requirements.

c) Over Voltage/Current Protect: Cannot short circuit AC power line at any time. This function is required to be a part of system's electronic supervision requirements.

d) Trickle Charge Unit: Shall be capable of maintaining a suitable internal battery charge without damaging batteries.

e) Mounting: Provide per OEM's direction.

f) Proper Ventilation: Do not override cabinets' ventilation system.

g) Power Change from AC Input: Accomplish change without interruption to communications link or subsystem being protected. Generate visual and aural alarms in electrical supervision system, local and remote, to annunciating panels via direct connection for trouble indication.

h) B.O.D.: APC SMT2200RM2U, 120-volt input with 20A plug, 120 volt output with 2-20 amp and 6-15A receptacles.

i) B.O.D. APC SMT3000RM2U, 120 volts input with 30A plug L5-30P and 120-volt output with 2-20A and 6-15 A receptacles.

2) Specific requirements for current and surge protection to include:

a) Voltage Protection: Threshold, line to neutral, starts at maximum 200 Volts peak. Transient voltage cannot exceed 330 Volts peak. Furnish documentation on peak clamping Voltage as a function of transient waveform.

b) Peak Power Dissipation: Minimum 35 Joules per phase, as measured for 1.0 millisecond at sub branch panels, 100 Joules per phase at branch panels and 300 Joules per phase at service entrance panels. Typically, power dissipation is 12,000 Watts (W) for 1.0 mS (or 12 Joules). Provide explanation of how ratings were measured or empirically derived.

c) Surge Protector (shall be combined with On-Off switch of UPS): Shall not short circuit AC power line at any time.

   1) Components shall be minimum silicon semi-conductors.

   2) Secondary stages, if used, shall include other types of rugged devices.

   3) Indicators: Provide visual device indicating surge suppression component is functioning.

   4) Electrical Supervision: Required; shall be audile and visual, local and remote to annunciating panels via direct connection for trouble indication.

d) Provide current and surge protection on ancillary equipment.

e) Equip each cabinet with the following:

   1) Equipment Mounting Rails (Front & Rear): Fully adjustable internal equipment mounting rails allowing front or rear equipment mounting with pre-drilled EIA/ECA 310-E Standard tapped holes. Support entire equipment by supplementary support in addition to face mounting screws on rails.

   2) Cabinet Ground: Stainless steel adjustable, lug connected to cabinet’s main structure providing an internal cabinet ground for all installed equipment properly bolted to rail and with ground wire connected.

   3) Grounding Terminals: A separate mounting hole on equipment mounting rail, with stainless steel connecting

bolt bonded by minimum #10 AWG copper wire to cabinet's internal grounding lug.

14. Ground Interconnection: Bond cabinet's common grounding lug to room's communications circulating ground busbar with a minimum #4 AWG stranded copper wire.
15. Blank Panels: Provide at every unused rack space.
    a. Match cabinet color.
    b. Provide panels of 3 mm (1/8 inch) thick aluminum with vertical dimensions in increments of one rack unit (RMU) or 45 mm (1-3/4 inch) with mounting holes spaced to correspond to EIA/ECA 310-E Standard 483 mm (19 inch) rack dimensions.
    c. Fill large unused openings with single standard large panel instead of numerous types.
    d. Leave one blank rack space (RMU), covered with a blank panel, between each item of equipment, for minimum internal air flow.
    e. Leave 356 mm (14 inches)(8.0 RMU) open space, covered with blank cover panel, for additional expansion equipment.
    f. Wire Management: System that connects each item of installed equipment to room wire management system.
    g. Knock-out Holes: Provide for cable entrance/exits via conduits, cable duct/trays.
16. Trouble Annunciator Panel: Provide trouble annunciator panel in HE cabinet as shown on drawings compatible with electrical and electronic supervising signals to continuously monitor operating condition for system HE equipment, remote equipment, and interconnecting trunks.
    a. When system's supervising system detects malfunctioning equipment or trunk line, system shall generate an audible and visual signal; provide spare panel.
    b. Technical Characteristics:
        1) Silence Button or Switch: Provide to silence audible signal. Visual signal shall continue until supervisory circuit indicating a fault is corrected.
        2) Visual Enunciators: Visually show system equipment and trunk-line operating conditions via its supervisory circuit indicating fault condition.
        3) Connect each alarm function to report to PCS Console SMS.

D. Environmental Cabinet:

1. Enclosure shall fully contain installed equipment, including electronics, in same manner as standard cabinet. Provide climate control for installed equipment as if they were in a standalone air handling area, regardless of local area air handling capabilities.
2. Provide an OEM's fully assembled unit enclosure.
3. If more than two enclosures are required in any system location, provide OEM-assembled enclosures, in a single unit, side-by-side.
4. Technical Characteristics:
   a. Environmental Control: Automatic, heating and cooling as required.
   b. Temperature Conditions (rated at 1,300 W of install equipment heat generation):
      1) Internal Range: Maintains 26.67 degree to 37.78 degree C (80 degree to 100 degree f) of internal heat conditions.
      2) External Range: Maximum 37.78 degrees + -3.89 degrees C (100 degrees + 25 degrees F).
   c. Forced Air Unit: Required with non-disposable air filter; unobstructed and uninterruptible.
   d. Air Conditioning: As required; fully internal mounted.
   e. Heater: As required; fully internal mounted.
   f. UPS: Required; fully internal mounted.
   g. Front Door: Full length, see through, EMI resistant and lockable, keyed alike with 7-pin tubular lock and Police Service SMS card access.
   h. Rear door: Full length, see through, EMI resistant, and lockable keyed alike with 7-pin tubular lock and Police Service SMS card access.
   i. Conduit Wiring Entrance: Top or bottom; fully sealed.
   j. Input Power: Minimum 2 each; maximum 120 VAC at 20A, independent circuit, conduit for fixed or armored cable for moveable installations.
   k. Dimensions:
      1) Height: Maximum 1980 mm (78 inches).
      2) Width: Maximum 635 mm (25 inches).
      3) Depth: Maximum 965 mm (38 inches).

4) Front Panel Opening: 480 mm (19 inches), w/ EIA/ECA 310 mounting hole spacing.

l. Trouble Annunciator Panel: Refer to specific requirements in equipment cabinet.

m. Audio Monitor Panel: Refer to specific requirements in equipment cabinet.

E. Wall Mounted Distribution or System Interface Cabinet:

1. Construct of minimum 1.59 mm (16 gauge) cold rolled steel, with top, side and bottom panels.
2. Provide double-hinged front door and main cabinet body allowing access to all internal equipment and wiring; mount to solid walls or internal studs.
3. Provide baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the using FMS Chief or COR.
4. Provide integral and adjustable EIA/ECA 310 standard predrilled rack mounting rails to allow front panel equipment mounting and access.
5. After equipment, doors and panels are installed, snap-in-place chrome trim strip covers all front panel screw fasteners.
6. Provide full-length vertical piano hinge to allow entire front portion of cabinet to “swing out” from wall for access to installed equipment, wires and cable; maintain minimum OSHA Safety clearances and NFPA operational functions.
7. Provide an OEM’s fully assembled unit enclosure.
8. Equip these cabinets same as equipment cabinets, except mount UPS on floor below cabinet with AC power connection in conduit to AC service panel.
9. Technical Characteristics:

a. Overall Height: Maximum 1,218 mm (48 inches).

b. Overall Depth: Maximum 558 mm (22 inches).

c. Overall Width: Maximum 610 mm (24 inches).

d. Front Panel Horizontal: Maximum width 483 mm (19 inches).

e. Capacity: Maximum 180 kilograms (400 pounds).

f. Lockable:

1) Tubular lock with 7-pin security.
Key cabinets alike.

F. Stand Alone Open two (2) post or four (4) Equipment Rack:

1. Construct of minimum 1.59 mm (16 gauge) cold rolled steel with manufacturer's standard paint finish, in a color to be selected by COR with concurrence from facility's FMS Service Chief.
2. Floor-mount as directed by COR with concurrence from facility's FMS Service Chief.
3. Equip rack same as equipment cabinet, except mount UPS with additional support for weight and AC power connection in conduit to AC service panel.
4. Provide an OEM fully assembled unit.
5. Technical Characteristics:
   a. Overall Height: Maximum 2,180 mm (85-7/8 inches).
   b. Overall Depth: Maximum 650 mm (25-1/2 inches).
   c. Overall Width: Maximum 535 mm (21-1/16 inches).
   d. Front Panel Opening: 483 mm (19 inches), EIA/ECA 310 horizontal width.
   e. Hole Spacing: Per EIA/ECA 310.
   f. Load Capacity: Maximum 680.4 kg (1,500 lbs).
   g. Certifications:
      1) EIA/ECA: 310-E.
      2) NRTL (i.e. UL): OEM specific.
6. Each stand alone open equipment rack shall have the following:
   a. Uninterruptible Power Supply (UPS): Provide each cabinet with an internal UPS which shall be combined with surge protector and filter if system's 50 percent expansion requirement is met. Provide at least one hour continuous full load two hours if working with an emergency safety police system uninterruptible system primary AC Power, with a 50 percent reserve capacity, in the event of facility primary or emergency AC power failure.
      a) B.O.D.: APC SMT2200RM2U, 120-volt in with 20A plug, 120 volt output with 2-20 amp and 6-15A receptacles.
      b) B.O.D. APC SMT3000RM2U, 120-volts input with 30A plug L5-30P and 120volt output with 2-20A and 6-15 A receptacles.
   b. AC Power:
      1) Standard "Quad AC Box":
         a) Power capacity: 20 Ampere, single phase, 120 VAC continuous duty.

b) Wire gauge: #12 AWG, solid copper, connected to room's internal AC Power Panel, or as directed by COR.
c) Number of AC power outlets: Minimum 4-20 A receptacles.
d) Enclosure: Fully self-contained, metal 102 mm (4 inch) x 102 mm (4 inches) x 64 mm (2-1/2 inches) with cover
e) Connection: Minimum 25.4 mm (1 inch) conduit connected to room's AC Power Panel, or as directed by COR
f) Number of boxes: One.
g) Compliance: NRTL (i.e. UL); NPFA - 70 (NEC).

c. AC Power Line Surge Protector and Filter Construction:
1) Input Voltage Range: 120 VAC + 15 percent at 50/60 Hz, single phase.
2) Power Service Capacity: 20 AMP, 120 VAC.
3) Voltage Output Regulation: +5.0 percent, instantaneous of input.
4) Circuit Breaker: 20 AMP; shall be self-contained.
5) AC Outlets: Minimum four duplex grounded NEMA 5-20R.
6) Response Time: 5.0 nano-second.
7) Suppression: Isolate and filter any noise, surge spikes
a) Surge: Minimum 20,000 AMP.
b) Noise:
1) Common: -40 dB.
2) Differential: -45 dB.
8) Clamping Voltage: Minimum 300 V.
9) Enclosure: One; self-contained.
10) Mounting: Internal to cabinet floor or on internal mounting rail shelf, allowing two plugs from two plug strips.
11) AC Power Cord: Required; minimum 1,628 mm (6 feet), three wire (green ground); minimum #14 AWG stranded.
12) Compliance: NRTL (i.e. UL60950-1).

d. Equipment Ground:
1) Cabinet Ground: Stainless steel adjustable, lug connected to cabinet's main structure providing an internal cabinet ground for all installed equipment properly bolted to rail and with ground wire connected.

e. Grounding Terminals: A separate mounting hole on equipment mounting rail, with stainless steel connecting bolt bonded by minimum #10 AWG copper wire to cabinet's internal grounding lug.

G. Wire Management Equipment:

1. Provide an orderly horizontal and vertical interface between outside and inside wires and cables, distribution and interface wires and cables, interconnection wires and cables and associated equipment, jumper cables, and provide a uniform connection media for system fire-retardant wires and cables and other subsystems.
2. Interface to each cable tray, duct, wireway, or conduit used in the system.
3. Interconnection or distribution wires and cables shall enter system at top (or from a wireway in the floor) via overhead protection system and be uniformly routed down both sides at same time, of the frames side protection system, then laterally for termination on rear of each respective terminating assembly.
4. Custom configure to meet 30 percent fill system design and user needs.
   a. Minimum Depth: 6".
   b. Minimum Width: 24".

H. Vertical Cable Managers:

1. Use same make, style and size of vertical cable manager on rack/frame or in between racks/frames when more than one cable manager is used on a rack/frame or group of racks/frames.
2. Match color and cover style of racks/frames and cable managers.

I. Horizontal Cable Managers:

1. Use same make and style of cable manager on rack/frame or racks/frames, when more than one horizontal cable manager is used on a rack/frame or group of racks/frames.
2. Match color of racks/frames and cable managers.

J. Telecommunication Room (TR): In hostile TR locations identified on drawings, where it has been determined (by COR or Facility Chief Engineer) that proper TR climate or external signal radiation cannot be maintained or controlled, provide a minimum of two individual and properly sized self-contained climate controlled equipment cabinet enclosures; one designated for voice service.

K. Provide gas protection devices on all circuits and cable pairs serving building distribution frames, located in buildings located, or in any area served by an unprotected distribution system (maintenance hole, manhole, aerial).

L. Provide installation hardware when enclosures or racks are attached to structural floor.

M. Provide noise filters and surge protectors for each equipment interface cabinet, switch equipment cabinet, control console, and local and remote active equipment locations to ensure protection from input primary AC power surges so as a consequence noise glitches are not induced into low voltage data circuits.

2.2 SPARE PARTS

A. Provide one standalone open equipment rack.

B. Provide one AC power strip.

C. Provide on equipment vertical ground bus.

D. Provide one 2200 VA UPS.

E. Provide one AC power line surge protector and filter.

F. Provide one vertical and 3 horizontal wire management.

PART 3 - EXECUTION

3.1 PREPARATION

A. Coordinate cabinet installation such that doors fully close and lock, with active and passive equipment installed and connected.

B. Verify equipment dimensions and brackets allow mounting with cabinet doors closed. Front door or rear door of any cabinet that does not close and lock shall result in immediate cancellation of inspections or tests.

3.2 INSTALLATION

A. Equipment Cabinets:

1. Install cabinets in a manner that complies with OEM instructions, requirements of this specification, and in a manner which does not constitute a safety hazard.
2. Provide weatherproof equipment installed outdoors or install in NEMA 3S rated enclosures with hinged doors and locks with two keys.
3. Install equipment indoors in NEMA 4 rated metal cabinets with hinged doors and locks with two keys.

B. Grounding:

1. Bond equipment, including identified Government furnished equipment, to ground so total ground resistance measures maximum 0.1 Ohm.
   a. Install lightning arrestors and grounding in accordance with NFPA.
   b. Install gas protection devices at nearest point of entrance in buildings where protection is required and on same circuits as MDF in telephone switch room.
   c. Do not use AC neutral, including in power panel or receptacle outlet, for system control, subcarrier or audio reference ground.
   d. Use of conduit, signal duct or cable trays as system or electrical ground is not permitted.
2. Connect each equipment grounding terminal to a separate mounting hole on equipment mounting rail, to right as one looks at it from rear, with a minimum #12 AWG stranded copper wire with protective green jacket.
3. Extend common ground bus of minimum #10 AWG solid copper wire throughout each equipment cabinet and bond to TGB. Provide a separate isolated ground connection from each equipment cabinet ground bus to system ground. Do not tie equipment ground buses together.
4. Bond equipment to cabinet bus with copper braid equivalent to #12 AWG. Self-grounding equipment enclosures, racks or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternatives.
5. Bond cable shields to cabinet ground bus with minimum #12 AWG stranded copper wire at only one end of cable run. Insulate cable shields from each other, faceplates, equipment racks, consoles, enclosures or cabinets, except at system common ground point. Bond coaxial and audio cables only at source; in all cases, keep cable shield ground connections to a minimum.

C. Equipment Assembly:
1. Cabinets:
   a. Install and adjust cabinet/frame accessories to position, including thermal management accessories, vertical cable managers, vertical power managers and equipment-mounting rails, using manufacturer’s installation instructions prior to baying or placing cabinet for attachment to building and before installing

any rack-mount equipment into cabinet. Shelves, horizontal cable managers and filler panels (rack-mount accessories), if used, shall be installed after cabinet is placed.

b. When used in a multi-cabinet bay, attach cabinets side-by-side using baying kits according to manufacturer's instructions.

c. Attach overhead ladder rack or cable tray to ceiling or top of cabinet. Maintain minimum 75 mm (3 inches) clearance between top of cabinet and bottom of ladder rack/cable tray. Position ladder rack/cable tray so that it does not interfere with hot air exhaust through cabinet's top panel. Use radius drops where cable enters or exits ladder rack/cable tray.

d. In seismic areas, install additional bracing as required by building codes and recommendations of a licensed structural engineer.

e. Install ladder rack with side stringers facing rack or cabinet so that ladder forms an inverted U-shape and so that welds between stringers (sides) and cross members (middle) face away from cables.

f. Secure ladder rack to tops of equipment racks or cabinets using manufacturer's recommended supports and appropriate hardware.

g. Attach bonding conductor sized per TIA-607-B between telecommunications grounding busbar and cabinet. Attach bonding conductor to cabinet using a ground terminal block according to manufacturer's installation instructions.

h. Provide bonding conductor and other hardware required to make connections between cabinet and telecommunications grounding busbar.

i. Install rack mounted equipment normally requiring adjustment or observation so operational adjustments can be conveniently made.

j. Mount heavy equipment with rack slides or rails to allow servicing from front of enclosure. Provide support in addition to front panel mounting screws for heavy equipment.

k. Provide with cable slack to permit servicing by removal of installed equipment from front of enclosure.

l. Install color-matched blank panel spacer 44 mm (1.75 inches) high between each piece of active and passive equipment to ensure

adequate air circulation for efficient equipment cooling and air ventilation.

m. Provide quiet fans and non-disposable air filters at each console or cabinet.

n. Install enclosures and racks plumb and square, permanently attached to building structure and held in place.

o. Provide 381 mm (15 inches) of front vertical space opening for additional equipment.

p. Install equipment located indoors in metal racks or enclosures with hinged doors to allow access for maintenance without causing interference to other nearby equipment.

q. Cables shall enter equipment racks or enclosures in such a manner to allow doors or access panels to open and close without disturbing or damaging cables.

r. Mount distribution hardware in a manner that allows access to connections for testing and provides room for doors or access panels to open and close without disturbing the cables.

2. Racks:

a. Assemble racks according to manufacturer’s instructions.

b. Verify that equipment mounting rails are sized properly for rack-mount equipment before attaching rack to floor.

c. Attach assembled racks to floor in four places using appropriate floor mounting anchors. When placed over a raised floor, threaded rods shall pass through raised floor tile and be secured in structural floor below.

d. Bond racks to telecommunications grounding bus bar using appropriate hardware provided by contractor.

e. In seismic areas, install additional bracing as required by building codes and recommendations of a licensed structural engineer.

f. Ladder rack shall be attached to top of rack to deliver cables to rack. Do not drill rack to attach; use appropriate hardware from rack manufacturer.

g. Provide radius drops to guide cable where cable exits or enters side of overhead ladder rack to access a rack, frame, cabinet or wall-mounted rack, cabinet or termination field.

h. Evenly distribute equipment load on rack. Place large and heavy equipment towards bottom of rack. Secure equipment to rack with equipment mounting screws. In seismic areas, secure equipment to shelves with additional bracing.

3. Vertical Cable Managers:
   a. Provide vertical managers so number of cables in each manager does not exceed OEM fill capacity.
   b. Attach vertical cable managers to side of rack/frame using manufacturer’s installation instructions and hardware.
   c. Attach vertical cable manager to both racks/frames when a single vertical cable manager is used between two racks/frames.
   d. Dress cables through openings in between T-shaped guides on manager so that cables make gradual bends as they exit or enter cable manager into rack-mount space (RMU). Do not twist, coil or make sharp bends in cables.
   e. Attach doors to cable manager in closed position after cabling is complete.
4. Horizontal Cable Managers:
   a. Attach horizontal cable managers to rack/frame with minimum four screws according to manufacturer’s installation instructions. Center each cable manager within allocated rack-mount space (RMU).
   b. Provide horizontal managers located so number of cables each manager supports is less than cable manager’s cable fill capacity.
   c. Dress cables through openings in between T-shaped guides on cable manager so that cables make gradual bends as they exit or enter cable manager into rack-mount space (RMU). Do not twist, coil or make sharp bends in cables.
   d. Attach covers to cable manager in closed position after cabling is complete.

D. Labeling: Permanently label each enclosure in accordance with TIA-606-B using a laser jet printer. Handwritten labels are not acceptable.
1. Equipment: Label system equipment with contrasting plastic laminate or bakelite material on face of unit corresponding to its source.
2. Conduit, Cable Duct, and/or Cable Tray: Label conduit, duct and tray, including utilized GFE, with permanent marking devices or

spray painted stenciling a minimum of 3 m (10 feet), identifying system.

---END---

SECTION 27 15 00
COMMUNICATIONS STRUCTURED CABLING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies a complete and operating voice and digital structured cabling distribution system and associated equipment and hardware to be installed in VA Medical Center here-in-after referred to as the "facility".

1.2 RELATED WORK

A. Wiring devices: Section 26 27 26, WIRING DEVICES.

B. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

C. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

D. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

E. Low voltage cabling system infrastructure: Section 27 10 00, CONTROL, COMMUNICATION AND SIGNAL WIRING.

1.3 SUBMITTALS

A. In addition to requirements of Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS provide:

1. Pictorial layout drawing of each telecommunications room showing termination cabinets, each distribution cabinet and rack, as each is expected to be installed and configured.
2. List of test equipment as per Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Certifications:

1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of contract maintenance are authorized representatives of OEM. Include individual's legal name and address and OEM warranty credentials in the certification.
2. Pre-acceptance Certification: Submit in accordance with test procedures.

3. Test system cables and certify to COR before proof of performance testing can be conducted. Identify each cable as labeled on as-installed drawings.
4. Provide current and qualified test equipment OEM training certificates and product OEM installation certification for contractor installation, maintenance, and supervisory personnel.

C. Closeout Submittal: Provide document from OEM certifying that each item of equipment installed conforms to OEM published specifications.

1.4 WARRANTY

A. Work subject to terms of Article "Warranty of Construction," FAR clause 52.246-21.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

A. Provide complete system including “punch down” and cross-connector blocks voice and data distribution sub-systems, and associated hardware including telecommunications outlets (TCO); copper and fiber optic distribution cables, connectors, “patch” cables, “break out” devices and equipment cabinets, interface cabinets, and radio relay equipment rack.

B. Industry Standards:

1. Cable distribution systems provided under this section are connected to systems identified as critical care performing life support functions.
2. Conform to National and Local Life Safety Codes (whichever are more stringent), NFPA, NEC, this section, Joint Commission Life Safety Accreditation requirements, and OEM recommendations, instructions, and guidelines.
3. Provide supplies and materials listed by a nationally recognized testing laboratory where such standards are established for supplies, materials or equipment.
4. Refer to industry standards and minimum requirements of Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and guidelines listed.
5. Active and passive equipment required by system design and approved technical submittal; shall conform to each UL standard in effect for equipment, when technical submittal was reviewed and approved by Government or date when COR accepted system equipment to be

replaced. Where a UL standard is in existence for equipment to be used in completion of this contract, equipment shall bear approved NRTL label.

C. System Performance: Provide complete system to meet or exceed TIA Category 6A requirements.

D. Provide continuous inter- and/or intra-facility voice, data, and analog service.

1. Provide voice and data cable distribution system based on a physical "Star" topology.
2. Provide separate cable distribution system for emergency, safety and protection systems (i.e. emergency bypass phones; police emergency voice communications from parking lots and stairwells personal protection, duress alarms and annunciation systems.)
3. Contact SMCS 005OP2H3 (202-462-5310) for specific technical assistance and approvals.

E. Specific Subsystem Requirements: Provide products necessary for a complete and functional voice, data, analog and videotele communications cabling system, including backbone cabling system, patch panels and cross-connections, horizontal cabling systems, jacks, faceplates, and patch cords.

F. Coordinate size and type of conduit, pathways and firestopping for maximum 40 percent cable fill with subcontractors.

G. Terminate all interconnecting twisted pair, fiber-optic or coaxial cables on patch panels or punch blocks. Terminate unused or spare conductors and fiber strands. Do not leave unused or spare twisted pair wire, fiber-optic or coaxial cable unterminated, unconnected, loose or unsecured.

H. Color code distribution wiring to conform to ANSI/TIA 606-B and construction documents, whichever is more stringent. Label all equipment, conduit, enclosures, jacks, and cables on record drawings, to facilitate installation and maintenance.

I. In addition to requirements in Section 27 05 11, REQUIREMENTS FOR COMMUNICATION INSTALLATIONS, provide stainless steel faceplates with plastic covers over labels.

2.2 EQUIPMENT AND MATERIALS

A. Cable Systems - Twisted Pair, Fiber optic, Coaxial and Analog:

1. General:

a. Provide cable (i.e. backbone, and horizontal cabling) conforming to accepted industry standards with regards to size, color code, and insulation.
b. Some areas can be considered “plenum”. Comply with all codes pertaining to plenum environments. It is contractor’s responsibility to review the VA’s cable requirements with COR and OI&T Service prior to installation to confirm type of environment present at each location.
c. Provide proper test equipment to confirm that cable pairs meet each OEM’s standard transmission requirements, and ensure cable carries data transmissions at required speeds, frequencies, and fully loaded bandwidth.

2. Telecommunications Rooms (TR):
   a. In TR’s served with UTP and STP ,fiber optic, coaxial and analog backbone cables, terminate UTP and STP cable on RJ-45, 10-pin connectors of separate 48-port modular patch panels, 110A or equivalent type punch down blocks that are dedicated to voice and data applications.
   b. Provide 24 port fiber optic modular patch panels with “LC” couplers dedicated for voice, data and FMS applications.
   c. Provide connecting cables required to extend backbone cables (i.e. patch cords, twenty-five pair.), to ensure complete and operational distribution systems.
   d. In TR’s, which are only served by a UTP and STP backbone cable, terminate cable on separate modular connecting devices, Type 110A punch down blocks (or equivalent), dedicated to data applications.
3. Backbone Copper Cables:
   a. Riser Cable:
      1) Provide communication riser cables listed in NEC Table 800, 154(a) for the purpose and suited for electrical connection to a communication network.
      2) Provide STP or Unshielded Twisted Pair (UTP), minimum 24 American Wire Gauge (AWG) solid, thermoplastic insulated conductors for communication (analog RF coaxial cable is not to be provided in riser systems) riser cables with a thermoplastic outer jacket.

3) Label and test complete riser cabling system.

4. Horizontal Cable: Installed from TCO jack to the TR patch panel.
   a. Tested to ANSI/TIA-568-C.2 Category 6A requirements including NEXT, ELFEXT (Pair-to-Pair and Power Sum), Insertion Loss (attenuation), Return Loss, and Delay Skew.
   b. Minimum Transmission Parameters: 600 MHz for Cat 6A .
   c. Provide four pair 0.201 mm2 (23 AWG) for Category 6A cable
   d. Terminate all four pairs on same port at patch panel in TR.
   e. Terminate all four pairs on same jack, at work area Telecommunication Outlets (TCO):
      1) Jacks: Minimum three eight-pin RJ-45 ANSI/TIA-568-C.2 Category 6 Type jacks at TCO.
         a) Top Port: RJ-45 jack compatible with RJ-11 plug for voice.
         b) Bottom Two Ports: Unkeyed RJ-45 jacks for data.
5. Fiber Optics Backbone Cable:
   a. Provide 50/125 micron OM4 multi-mode cable, containing at minimum 18 strands of fiber, unless otherwise specified.
   b. Provide loose tube cable, which separates individual fibers from the environment, or indoor/outdoor cables, for outdoor runs or any area that includes an outdoor run.
   c. Provide tight buffered interlocked armored fiber cable for indoor/outdoor cables for indoor runs.
   d. Terminate multimode fibers at both ends with LC type female connectors installed in an appropriate patch or breakout panel and secured with a cable management system. Provide minimum 610 mm (2 ft.) cable loop at each end.
   e. Provide single mode fiber optic cable 8.3 mm containing at minimum 12 strands of fiber, unless otherwise specified. Terminate single mode fibers at both ends with LC type female connectors installed in an appropriate patch or breakout panel and secured with a cable management system. Provide minimum 610 mm (2 feet) cable loop at each end to allow for future movement.
   f. Install fiber optic cables in TR’s, Voice (Telephone) Switch Room, and Main Computer Room, in rack mounted fiber optic patch panels. Provide female LC couplers in appropriate panel for termination of each strand.

g. Test all fiber optic strands' cable transmission performance in accordance with TIA standards. Measure attenuation in accordance with fiber optic test procedures TIA-455-C ('-61', or -53). Provide written results to COR for review and approval.

B. Cross-Connect Systems (CCS):

1. Copper Cables: Provide copper CCS sized to connect cables at TR and allow for a minimum of 50 percent anticipated growth.
2. Maximum DC Resistance per Cable Pair: 28.6 Ohms per 305 m (1,000 feet).
3. Fiber Optic Cables:
   a. Provide fiber CCS sized to connect cables at TR and allow for a minimum of 50 percent anticipated growth.
   b. Install fiber optic cable slack in protective enclosures.

C. Telecommunication Room (TR):

1. Terminate backbone and horizontal, copper, fiber optic, coaxial and analog cables on appropriate cross-connection systems (CCS) containing patch panels, punch blocks, and breakout devices provided in enclosures and tested, regardless of installation method, mounting, termination, or cross-connecting used. Provide cable management system as a part of each CCS.
2. Coordinate location in TR with FMS equipment (i.e. fire alarm, nurse call, code blue, video, public address, radio entertainment, intercom, and radio paging equipment).

D. Coaxial and Analog Cables: Bond equipment to ground per TIA standards, such that all grounding systems comply with all applicable National, Regional, and Local Building and Electrical codes.

1. Provide current arrester for each copper or coaxial cable that enters from outside of a building regardless if cable is installed underground or aerial.
2. Provide a gas surge protector/module and bond to earth ground.

E. Main Cross-connection Subsystem (MCCS): MCCS is common point of distribution for inter- and intra-building copper and fiber optic backbone system cables, and connections to the voice (telephone) and data cable systems.

F. Voice (or Telephone) Cable Cross-Connection Subsystem:

1. Provide Insulation Displacement Connection (IDC) hardware.

2. Provide the following for each Category 6A (or on a case by case basis Category 6A Cabling System termination; cross-connection wires, RJ-45 patch cord connector to RJ-45 patch cord connector, hybrid modular cord to IDC patch cord connector.
   a. Provide terminations to be accessible without need for disassembly of IDC wafer. Provide IDC wafers removable from their mounts to facilitate testing on either side of connector.
   b. Provide removable designation strips or labels to allow for inspection of terminations.
   c. Provide cable management system as a part of IDC.
3. Provide IDC connectors capable of re-terminations, without damage, a minimum of 200 IDC insertions or withdrawals on either side of connector panel.
4. Install using only non-impact terminating tool having both a tactile and an audible feedback to indicate proper termination.
5. Provide system outputs from MCCS to voice backbone cable distribution system on the right side of same IDC (or 110A blocks) of MCCS.
6. Do not split pairs within cables between different jacks or connections.
7. Provide UTP cross connect wire to connect each pair of terminals plus an additional 50 percent spare.

G. Data Cross-Connection Subsystems:
1. Provide angled patch panels with modular RJ45 female to 110 connectors for cross-connection of copper data cable terminations with cable management system.
2. Provide angled patch panels conforming to EIA/ECA 310-E dimensions and suitable for mounting in standard equipment racks, with 48 RJ45 jacks aligned in two horizontal rows per panel. Provide RJ45 jacks of modular design and capable of accepting and functioning with other modular (i.e. RJ11) plugs without damaging jack.
   a. Provide system inputs from servers, data LAN, bridge, or interface distribution systems on top row of jacks of appropriate patch panel.
   b. Provide backbone cable connections on bottom row of jacks of same patch panel.

c. Provide patch cords for each system pair of connection jacks with modular RJ45 connectors provided on each end to match panel's modular RJ45 female jack's being provided.

H. Fiber-Optic Cross-Connection Subsystems: Provide rack mounted patch or distribution panels installed inside a lockable cabinet or "breakout enclosure" that accommodate minimum 12 strands multimode fiber and 12 strand single mode fiber - these counts do not include 50 percent spare requirement. Provide cable management system for each panel.

1. Provide panels for minimum 24 female LC connectors, able to accommodate splices and field mountable connectors and have capacity for additional connectors to be added up to OEM's maximum standard panel size for this type of use. Protect patch panel sides, including front and back, by a cabinet or enclosure.
2. Provide panels that conform to EIA/ECA 310-E dimensions suitable for installation in standard racks, cabinets, and enclosures. Provide panels for system grounding where armored cables are installed.
3. Provide patch panels with highest OEM approved density of fiber LC termination's (maximum of 72 each), while maintaining a high level of manageability. Provide proper LC couplers installed for each pair of fiber optic cable LC connectors.
   a. Provide system inputs from interface equipment or distribution systems on top row of connectors of appropriate patch panel.
   b. Provide backbone cable connections on bottom row of connectors of same patch panel.
   c. Provide patch cords for each pair of fiber optic strands with connector to match couplers.
4. Provide field installable connectors that are pre-polished.
   a. Terminate every fiber cable with appropriate connector, and test to ensure compliance to specifications and industry standards for fiber optic LC female connector terminated with a fiber optic cable.
   b. Install a terminating cap for each unused LC connector.

I. Copper Plant Cable: Minimum of UTP, 22 AWG solid conductors, solid PVC insulation, and filled core (flex gel - waterproof Rural Electric Association (REA) listed PE 39 code) between outer armor or jacket and inner conductors protective lining.

1. Provide copper cable system as a Star Topology.

J. Horizontal Cabling (HC):

1. Horizontal cable length to farthest system outlet to be maximum of 90 m (295 ft).
2. Splitting of pairs within a cable between different jacks is not permitted.

2.3 DISTRIBUTION EQUIPMENT AND SYSTEMS

A. Telecommunication Outlet:

1. TCO consists of minimum one voice (telephone)with six port position RJ45 jack and three data RJ45 jacks, and one single mode fiber optic , and one multimode fiber optic jacks mounted in a separate steel outlet box 100 mm (4 inches) x 100 mm (4 inches) x 63 mm (2-1/2 inches) minimum with a labeled stainless steel faceplate. Where shown on drawings, provide a second steel outlet box minimum 100 mm (4 inches) x 100 mm (4 inches) x 63 mm (2-1/2 inches), with a labeled faceplate, adjacent to first box to ensure system connections and expandability requirements are met.
2. Provide RJ-45/11 compatible female type voice (telephone) multi-pin connections. Provide RJ-45 female type data multi-pin connections. Provide LC ferrule female type fiber optic connectors.
3. Provide wall outlet with a stainless steel face plate and sufficient ports to fit voice (telephone) multi-pin jack, data multi- pin jacks , fiber optic jacks , analog jacks and plastic covers for labels when mounted on outlet box provided (minimum 100mm (4 inches) x 100mm (4 inches) for single and 100mm (4 inches) x 200mm (8 inches) for dual outlet box applications. Install stainless steel face plate, for prefabricated bedside patient unit installations.

B. Backbone Distribution Cables:

1. Meet TIA transmission performance requirements of Voice Grade Category 5
2. Provide cable listed for environments where it is installed.
3. Technical Characteristics:
   a. Length: As required, in minimum 1 kilometer (3,000 ft.) reels.
   b. Size:
      1) Minimum 0.326 mm2 (22 AWG) outside plant installation.
      2) Minimum 0.205 mm2 (24 AWG) interior installations.

c. Color Coding: American Telephone and Telegraph Company Standard; Bell System Practices Outside Plant Construction and Maintenance Section G50.607.3, Issue 2 February, 1959.

d. Minimum Bend Radius: 10X cable outside diameter.

e. Impedance: 120 Ohms + 15 percent.

f. DC Resistance: Maximum 8.00 ohms/100 m

g. Maximum attenuation for 100m at 20° C:

Frequency (MHz)	Category 5e (dB)
.772	-
1	2.0
4	4.1
8	5.8
10	6.5
16	8.2
20	9.3
25	10.4
31.25	11.7
62.5	17.0
100	22.0
200	
250	
300	
400	
500	

4. Data and Voice Multi-Conductor:

a. Unshielded F/UTP cable with solid conductors.

b. Able to handle the power and voltage used over the distance required.

c. Meets TIA transmission performance requirements of Category 6A.

d. Technical Characteristics:

1) 0.326 mm2 (23 AWG) cable

2) Working Shield: 350 V.

3) Bend Radius: 10 times cable outside diameter.

4) Impedance: 100 Ohms + 15%, BAL.

5) 10Gigabit Ethernet (IEEE 802.3an)

6) 60W PoE++ (IEEE802.3bt Type 3)

7) 100W PoE++ (IEEE 802.3bt Type 4)

8) Bandwidth:600 MHz for CAT 6A

9) Cable shall have star filler an rip cord

10) DC Resistance: Maximum 9.38 Ohms/100m (328 ft.) at 20 degrees C.

11) Maximum Mutual Capacitance: 5.6 nF per 100 m (328 ft.).

12) Shield Coverage:

a) Overall Outside (if OEM specified): 100 percent.

b) Individual Pairs (if OEM specified): 100 percent.

13) Maximum attenuation for 100m (328 ft.) at 20° C:

Frequency (MHz)	Category 6A (dB)
1	2.1
4	3.8
8	5.3
10	5.9
16	7.5
20	8.4
25	9.4
31.25	10.5
62.5	15.0
100	19.1
200	27.6
250	31.1
300	34.3
400	40.1
500	45.3

5. Fiber Optic:

a. Multimode Tight Fiber:

1) Provide OM4 Type buffered interlocked armored multimode fiber optic cable installed in conduit for system locations with load-bearing support braid surrounding inner tube for strength during cable installation.

2) Technical Characteristics:

a) Bend Radius: Minimum 152 mm (6 inches); outer jacket as required.

b) Fiber Diameter: 50 microns.

c) Cladding: 125 microns.

d) Attenuation:

1) 850 nanometer: Maximum 4.0 dB per kilometer.

2) 1,300 nanometer: Maximum 2.0 dB per kilometer.

e) Bandwidth:

1) 850 nanometer: Minimum 160 MHz.

2) 1,300 nanometer: Minimum 500 MHz.

f) Connectors: Stainless steel.

b. Single mode Tight Fiber:

1) Provide OS2 Type/buffered interlocked armored Singlemode fiber optic cable installed in conduit for all system locations with load-bearing support braid surrounding inner tube for strength during cable installation.
2) Technical Characteristics:
   a) Bend Radius: Minimum 100 mm (4 inches).
   b) Outer Jacket: PVC.
   c) Fiber Diameter: 8.7 microns.
   d) Cladding: 125 microns.
   e) Attenuation at 850 nanometer: 1.0 dBm per kilometer.
   f) Connectors: Ceramic.

C. Outlet Connection Cables:

1. Voice (Telephone):
   a. Provide a connection cable for each TCO voice (telephone) jack in system with 10 percent spares able to connect voice (telephone) connection cable from voice (telephone) instrument to TCO voice (telephone) jack. Do not provide voice (telephone) instruments or equipment.
   b. Technical Characteristics:
      1) Length: Minimum 1.8 m (6 feet).
      2) Cable: Same as data.
      3) Connector: RJ-11/45 compatible male on each end.
      4) Size: Minimum 24 AWG.
      5) Color Coding: Required, telephone industry standard.
2. Data:
   a. Provide a connection cable for each TCO data jack in system with 10 percent spares to connect a data instrument to TCO data jack. Do not provide data terminals/equipment.
   b. Technical Characteristics:
      1) Length: Minimum 1.8 m (6 feet).
      2) Cable: Category 6 o.
      3) Connector: RJ-45 male on each end.
      4) Color Coding: Required, data industry standard.
      5) Size: Minimum 23 AWG.
3. Fiber Optic:
   a. Provide a connection cable for each TCO fiber optic connector in system with 10 percent spares. Provide data connection cable to

connect a fiber optic instrument to TCO fiber optic jack. Do not provide fiber optic instruments/equipment.

b. Technical Characteristics:

1) Length: Minimum 1.8 m (6 feet).

2) Cable: Flexible single conductor with jacket.

3) Connector: LC male on each end.

4) Size: To fit OS2 single mode or OM4 multimode cable.

D. System Connectors:

1. Modular (RJ-45/11 and RJ-45): Provide voice and high-speed data transmission applications type modular plugs compatible with voice (telephone) instruments, computer terminals, and other type devices requiring linking through modular telecommunications outlet to the system compatible with UTP cables.

a. Technical Characteristics:

1) Number of Pins:

a) RJ-45: Eight.

b) RJ-11/45: Compatible with RJ-45.

2) Dielectric: Surge.

3) Voltage: Minimum 1,000V RMS, 60 Hz at one minute.

4) Current: 2.2A RMS at 30 minutes or 7.0A RMS at 5.0 seconds.

5) Leakage: Maximum 100 µA.

6) Connections:

a) Initial contact resistance: Maximum 20 milli-Ohms.

b) Insulation displacement: Maximum 10 milli-Ohms.

c) Interface: shall interface with modular jacks from a variety of OEMs. RJ-11/45 plugs provide connection when used in RJ-45 jacks.

d) Durability: Minimum 200 insertions/withdrawals.

E. Fiber Optic Terminators:

1. Pre-polished crimp on type that has proper ferrule to terminate fiber optic cable.

2. Technical Characteristics:

a. Frequency: Light wave.

b. Power Blocking: As required.

c. Return Loss: 25 dB.

d. Connectors: LC

e. Construction: Ceramic.

F. Conduit and Signal Ducts:
   1. Conduit:
      a. Provide conduit or sleeves for cables penetrating walls, ceilings, floors, interstitial space, fire barriers.
      b. Minimum Conduit Size: 19 mm (3/4 inch).
      c. Provide separate conduit and signal ducts for each cable type installation.
      d. When metal (plastic covered, flexible cable protective armor.) systems are authorized to be provided for use in system, follow installation guidelines and standard specified in Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS and NEC.
      e. Maximum 40 percent conduit fill for cable installation.
   2. Signal Duct, Cable Duct, or Cable Tray: Use existing signal duct, cable duct, and cable tray, when identified and accepted by COR.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install for ease of operation, maintenance, and testing.
B. Install system to comply with NFPA 70 National Electrical Code, NFPA 99 Health Care Facilities, NFPA 101 Life Safety Code, Joint Commission Manual for Health Care Facilities, and original equipment manufacturers' (OEM) installation instructions.
C. Cable Systems Installation:
   1. Install system cables in cable duct, cable tray, cable runway, conduit or when specifically approved, flexible NEC Article 800 communications raceway. Confirm drawings show sufficient quantity and size of cable pathways. If flexible communications raceway is used, install in same manner as conduit.
   2. Coordinate outside plant and backbone cables to furnish number of cable pairs for system requirements and obtain approval of COR and IT Service prior to installation.
   3. Bond to ground metallic cable sheaths. (i.e., risers, underground, horizontal.).
   4. Install temporary cable to not present a pedestrian safety hazard and be responsible for all work associated with removal. Temporary cable installations are not required to meet Industry Standards;

but, shall be reviewed and accepted by COR, IT Service, FMS and SMCS 005OP2H3 (202-461-5310) prior to installation.

D. Patient Bedside Prefabricated Units (PBPU) Installation:

1. Under no circumstances, proceed with installing PBPU without written approval of PBPU OEM and specific instructions regarding attachment to or modifying of PBPU.
2. Maintain UL integrity of each PBPU. If installation violates UL integrity, obtain on site UL re-certification of violated PBPU at the direction of COR.

E. Labeling:

1. Industry Standard: Provide labeling in accordance with ANSI/TIA-606-B.
2. Print lettering of labels with laser jet printers; handwritten labels are not acceptable.
3. Label both ends of all cables in accordance with industry standard. Provide permanent Labels in contrasting colors and identify according to system "Record Wiring Diagrams".
4. Termination Hardware: Label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with industry standard and record on "Record Wiring Diagrams".

F. Cable Slack

1. Provide 3 m (10 ft) in TR rooms for Copper balanced twisted pair cabling.
2. Provide 6 m (20 ft) in TR rooms for Fiber optical cabling.
3. Provide 1 m (3 ft) in the work area outlet for balanced twisted pair cabling.
4. Provide 1 m (3 ft) in the work area outlet for fiber optical cabling.

3.2 FIELD QUALITY CONTROL

A. Interim Inspection:

1. Verify that equipment provided adheres to installation requirements of this section. Interim inspection shall be conducted by a factory-certified representative and witnessed by COR.
2. Check each item of installed equipment to ensure appropriate NRTL label.

3. Verify cabling terminations in telecommunications rooms and at workstations adhere to color code for T568B T568A pin assignments and cabling connections comply with TIA standards.
4. Visually confirm marking of cables, faceplates, patch panel connectors and patch cords.
5. Perform fiber optical field inspection tests via attenuation measurements on factory reels and provide results along with manufacturer certification for factory reel tests. Remove failed cable reels from project site upon attenuation test failure.
6. Notify COR of the estimated date the contractor expects to be ready for interim inspection, at least 20 working days before requested inspection date, so interim inspection does not affect systems' completion date.
7. Provide results of interim inspection to COR. If major or multiple deficiencies are discovered, COR can require a second interim inspection before permitting contractor to continue with system installation.
8. Do not proceed with installation until COR determines if an additional inspection is required. In either case, re-inspection of deficiencies noted during interim inspections shall be part of the proof of performance test.

B. Pretesting:
1. Pretest entire system upon completion of system installation.
2. Verify during system pretest, utilizing the accepted equipment, that system is fully operational and meets system performance requirements of this section.
3. Provide COR four copies of recorded system pretest measurements and the written certification that system is ready for formal acceptance test.

C. Acceptance Test:
1. After system has been pretested and the contractor has submitted pretest results and certification to COR, then schedule an acceptance test date and give COR 30 days' written notice prior to date acceptance test is expected to begin.
2. Test only in presence of a COR.
3. Test utilizing approved test equipment to certify proof of performance.

4. Verify that total system meets the requirements of this section.
5. Include expected duration of test time, with notification of the acceptance test.

D. Verification Tests:

1. Test UTP copper cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors, and between conductors and shield, if cable has an overall shield. Test cables after termination and prior to cross-connection.
2. Multi-mode Fiber Optic Cable: Perform end-to-end attenuation tests in accordance with TIA-568-B.3 and TIA-526-14A using Method A, Optical Power Meter and Light Source and Method B, OTDR . Perform verification acceptance test.
3. Single mode Fiber Optic Cable: Perform end-to-end attenuation tests in accordance with TIA-568-B.3 and TIA-526-7 using Method A, Optical Power Meter and Light Source and Method B, OTDR . Perform verification acceptance test.

E. Performance Testing:

1. Perform Category 5E (or on a case by case basis Category 6 for specialized powered systems accepted by SMCS 005OP2H3, (202) 461-5310, IT and FMS Services and COR) tests in accordance with TIA-568-B.1 and TIA-568-B.2. Include the following tests - wire map, length, insertion loss, return loss, NEXT, PSNEXT, ELFEXT, PSELFEXT, propagation delay and delay skew.
2. Fiber Optic Links: Perform end-to-end fiber optic cable link tests in accordance with TIA-568-B.3.

F. Total System Acceptance Test: Perform verification tests for UTP copper cabling systems and multi-mode and single mode fiber optic cabling systems after complete telecommunication distribution system and workstation outlet are installed.

3.3 MAINTENANCE

A. Accomplish the following minimum requirements during one-year warranty period:

1. Respond and correct on-site trouble calls, during standard work week:
   a. A routine trouble call within one working day of its report. A routine trouble is considered a trouble which causes a system outlet, station, or patch cord to be inoperable.

b. Standard work week is considered 8:00 A.M. to 5:00 P.M., Monday through Friday exclusive of Federal holidays.

2. Respond to an emergency trouble call within six hours of its report. An emergency trouble is considered a trouble which causes a subsystem or distribution point to be inoperable at any time.
3. Respond on-site to a catastrophic trouble call within four hours of its report. A catastrophic trouble call is considered total system failure.
   a. If a system failure cannot be corrected within four hours (exclusive of standard work time limits), provide alternate equipment, or cables within four hours after four-hour trouble shooting time.
   b. Routine or emergency trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units) are also be deemed as a catastrophic trouble.
4. Provide COR written report itemizing each deficiency found and the corrective action performed during each official reported trouble call. Provide COR with sample copies of reports for review and approval at beginning of total system acceptance test.

---END---

SECTION 28 05 00
COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section, Common Work Results for Electronic Safety and Security (ESS), applies to all sections of Division 28.

B. Furnish and install fully functional electronic safety and security cabling system(s), equipment and approved accessories in accordance with the specification section(s), drawing(s), and referenced publications. Capacities and ratings of cable and other items and arrangements for the specified items are shown on each system's required Bill of Materials (BOM) and verified on the approved system drawing(s). If there is a conflict between contract's specification(s) and drawings(s), the contract's specification requirements shall prevail.

C. The Contractor shall provide a fully functional and operating ESS, programmed, configured, documented, and tested as required herein and the respective Safety and Security System Specification(s). The Contractor shall provide calculations and analysis to support design and engineering decisions as specified in submittals. The Contractor shall provide and pay all labor, materials, and equipment, sales and gross receipts and other taxes. The Contractor shall secure and pay for plan check fees, permits, other fees, and licenses necessary for the execution of work as applicable for the project. Give required notices; the Contractor will comply with codes, ordinances, regulations, and other legal requirements of public authorities, which bear on the performance of work.

D. The Contractor shall provide an ESS, installed, programmed, configured, documented, and tested. The security system shall include : physical access control, video surveillance, video recording and storage, intercommunication system, fire alarm interface, and associated live camera, and uninterruptible power supplies (UPS) interface. Operator training shall not be required as part of the Security Contractors scope and shall be provided by the Owner. The Security Contractor shall still be required to provide necessary maintenance and troubleshooting manuals as well as submittals as identified herein. The work shall include the procurement and installation of electrical wire and cables,

the installation and testing of all system components. Inspection, testing, demonstration, and acceptance of equipment, software, materials, installation, documentation, and workmanship, shall be as specified herein. The Contractor shall provide all associated installation support, including the provision of primary electrical input power circuits.

E. Repair Service Replacement Parts On-site service during the warranty period shall be provided as specified under "Emergency Service". The Contractor shall guarantee all parts and labor for a term of one (1) year, unless dictated otherwise in this specification from the acceptance date of the system as described in Part 5 of this Specification. The Contractor shall be responsible for all equipment, software, shipping, transportation charges, and expenses associated with the service of the system for one (1) year. The Contractor shall provide 24-hour telephone support for the software program at no additional charge to the owner. Software support shall include all software updates that occur during the warranty period.

F. Section Includes:
   1. Description of Work for Electronic Security Systems,
   2. Electronic security equipment coordination with relating Divisions,
   3. Submittal Requirements for Electronic Security,
   4. Miscellaneous Supporting equipment and materials for Electronic Security,
   5. Electronic security installation requirements.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.

D. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

E. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.

F. Section 26 05 19 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.

G. Section 26 05 33 – RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.

H. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

I. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

J. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

K. Section 28 31 00 FIRE DETECTION AND ALARM

1.3 DEFINITIONS

A. AGC: Automatic Gain Control.

B. Basket Cable Tray: A fabricated structure consisting of wire mesh bottom and side rails.

C. BICSI: Building Industry Consulting Service International.

D. CCD: Charge-coupled device.

E. Central Station: A PC with software designated as the main controlling PC of the security access system. Where this term is presented with initial capital letters, this definition applies.

F. Channel Cable Tray: A fabricated structure consisting of a one-piece, ventilated-bottom or solid-bottom channel section.

G. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

H. CPU: Central processing unit.

I. Credential: Data assigned to an entity and used to identify that entity.

J. DGP: Data Gathering Panel – component of the Physical Access Control System capable to communicate, store and process information received from readers, reader modules, input modules, output modules, and Security Management System.

K. DTS: Digital Termination Service: A microwave-based, line-of-sight communications provided directly to the end user.

L. EMI: Electromagnetic interference.

M. EMT: Electric Metallic Tubing.

N. ESS: Electronic Security System.

O. File Server: A PC in a network that stores the programs and data files shared by users.

P. GFI: Ground fault interrupter.

Q. IDC: Insulation displacement connector.

R. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.

S. I/O: Input/Output.

T. Intrusion Zone: A space or area for which an intrusion shall be be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.

U. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

V. LAN: Local area network.

W. LCD: Liquid-crystal display.

X. LED: Light-emitting diode.

Y. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

Z. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

AA. M-JPEG: Motion – Joint Photographic Experts Group.

BB. MPEG: Moving picture experts group.

CC. NEC: National Electric Code

DD. NEMA: National Electrical Manufacturers Association

EE. NFPA: National Fire Protection Association

FF. NTSC: National Television System Committee.

GG. NRTL: Nationally Recognized Testing Laboratory.

HH. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

II. PACS: Physical Access Control System; A system comprised of cards, readers, door controllers, servers and software to control the physical ingress and egress of people within a given space

JJ. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

KK. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

LL. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

MM. RCDD: Registered Communications Distribution Designer.

NN. RFI: Radio-frequency interference.

OO. RIGID: Rigid conduit is galvanized steel tubing, with a tubing wall that is thick enough to allow it to be threaded.

PP. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

QQ. RS-485: An TIA/EIA standard for multipoint communications.

RR. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

SS. SMS: Security Management System – A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

TT. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

UU. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

VV. UPS: Uninterruptible Power Supply

WW. UTP: Unshielded Twisted Pair

XX. Workstation: A PC with software that is configured for specific limited security system functions.

1.4 QUALITY ASSURANCE

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the

equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of three (3) years' experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 4 hours of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include

appropriate diagnostic equipment to perform diagnostic procedures. The Contracting Officer of Record(COR) reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

D. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 GENERAL ARANGEMENT OF CONTRACT DOCUMENTS

A. The Contract Documents supplement to this specification indicates approximate locations of equipment. The installation and/or locations of the equipment and devices shall be governed by the intent of the design; specification and Contract Documents, with due regard to actual site conditions, recommendations, ambient factors affecting the equipment and operations in the vicinity. The Contract Documents are diagrammatic and do not reveal all offsets, bends, elbows, components, materials, and other specific elements that may be required for proper installation. If any departure from the contract documents is deemed necessary, or in the event of conflicts, the Contractor shall submit details of such departures or conflicts in writing to the owner or owner's representative for his or her comment and/or approval before initiating work.

B. Anything called for by one of the Contract Documents and not called for by the others shall be of like effect as if required or called by all, except if a provision clearly designed to negate or alter a provision contained in one or more of the other Contract Documents shall have the intended effect. In the event of conflicts among the Contract Documents, the Contract Documents shall take precedence in the

following order: the Form of Agreement; the Supplemental General Conditions; the Special Conditions; the Specifications with attachments; and the drawings.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

D. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.
3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

E. Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable

divisions to provide a complete and comprehensive submission package. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - Design Submittal Procedures, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer’s information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for COR and Contractor review stamps.
5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards CAD Standard Application Guide, and VA BIM Guide. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the COR for approval before the initiation of work.

6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.
      1) Where two (2) or more binders are necessary to accommodate data; correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and/or maintenance of the component or system.
      2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.
   b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.
   c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.
   d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches, 20-pound, white bond paper.
   e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.
      1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
      2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.

3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1) Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test and furnish the remaining manuals prior to contract completion.

2) Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.

3) The manuals shall include:

a) Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.

b) A control sequence describing start-up, operation, and shutdown.

c) Description of the function of each principal item of equipment.

d) Installation and maintenance instructions.

e) Safety precautions.

f) Diagrams and illustrations.

g) Testing methods.

h) Performance data.

i) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.

j) Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.

h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.

i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.

j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.

k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.

l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available, and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor’s manufacturer certifications.

7. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the COR to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:

a. Item Number

b. Camera Number

c. Naming Conventions

d. Description of Camera Coverage

e. Camera Location
f. Floor Plan Sheet Number
g. Camera Type
h. Mounting Type
i. Standard Detail Reference
j. Power Input & Draw
k. Power Panel Location
l. Remarks Column for Camera

8. Section II – Data Gathering Panel Documentation Package
   a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.
   b. The DGP spreadsheet shall include an entry section for the following information:
      1) DGP number
      2) First Reader Number
      3) First Monitor Point Number
      4) First Relay Number
      5) DGP, input or output Location
      6) DGP Chain Number
      7) DGP Cabinet Tamper Input Number
      8) DGP Power Fail Input Number
      9) Number of Monitor Points Reserved for Expansion Boards
      10) Number of Control Points (Relays) Reserved for Expansion Boards
   c. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
      1) System Numbers for Card Readers
      2) System Numbers for Monitor Point Inputs
      3) System Numbers for Control Points (Relays)
      4) Next DGP or input module First Monitor Point Number
      5) Next DGP or output module First Control Point Number
   d. The DGP spreadsheet shall provide the following information for each card reader:
      1) DGP Reader Number

2) System Reader Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: In Reader, Out Reader)
6) Description Field
7) DGP Input Location
8) Date Test
9) Date Passed
10) Cable Type
11) Camera Numbers (of cameras viewing the reader location)

e. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
1) DGP Monitor Point Input Number
2) System Monitor Point Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: Door Contact, Motion Detector)
6) DGP or input module Input Location
7) Date Test
8) Date Passed
9) Cable Type
10) Camera Numbers (of associated alarm event preset call-ups)

f. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
1) DGP Control Point (Relay) Number
2) System (Control Point) Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device: Lock Control, Local Sounder)
6) Description Field
7) DGP or OUTPUT MODULE Output Location
8) Date Test
9) Date Passed Cable Type
10) Camera Number (of associated alarm event preset call-ups)

g. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:

1) Header
   a) DGP Input and Output Worksheet
   b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
2) Footer
   a) File Name
   b) Date Printed
   c) Page Number

F. FIPS 201 Compliance Certificates
1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
   a. Card Readers
   b. PIV Middelware
   c. Certificate Management
      1) CAK Authentication System
      2) PIV Authentication System
      3) Certificate Validator
      4) Cryptographic Module

G. Approvals will be based on complete submission of manuals together with shop drawings.

H. After approval and prior to installation, furnish the COR with one sample of each of the following:
1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
2. Each type of conduit and pathway coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

CP-01-00.....Control Panel Standard-Features for False Alarm Reduction

PIR-01-00.....Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

D. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

E. American National Standards Institute (ANSI):

ANSI S3.2-99.....Method for measuring the Intelligibility of Speech over Communications Systems

F. American Society for Testing and Materials (ASTM)

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C1238-97 (R03).....Standard Guide for Installation of Walk-Through Metal Detectors

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

G. Architectural Barriers Act (ABA), 1968

H. Department of Justice: American Disability Act (ADA)

28 CFR Part 36-2010 ADA Standards for Accessible Design

I. Department of Veterans Affairs:

1. VHA National CAD Standard Application Guide, 2006

J. VA BIM Guide, V1.0 10

K. Federal Communications Commission (FCC):

L. (47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

M. Federal Information Processing Standards (FIPS):

FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

N. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

O. Government Accountability Office (GAO):

GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

P. Homeland Security Presidential Directive (HSPD):

HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

Q. Institute of Electrical and Electronics Engineers (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

802.3af-08.....Power over Ethernet Standard

802.3at-09 .....Power over Ethernet (PoE) Plus Standard

C2-07.....National Electrical Safety Code

C62.41-02.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

C95.1-05.....Standards for Safety Levels with Respect to Human Exposure in Radio Frequency Electromagnetic Fields

R. International Organization for Standardization (ISO):

7810.....Identification cards – Physical characteristics

7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics

7816-2.....Identification cards - Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts

7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols

7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods

7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange

14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance

15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

19794.....Information technology - Biometric data interchange formats

S. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

T. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

U. National Fire Protection Association (NFPA):

70-2017..... National Electrical Code (NEC)

731-2017.....Standards for the Installation of Electric Premises Security Systems

99-2018.....Health Care Facilities

V. National Institute of Justice (NIJ)

0601.02-03.....Standards for Walk-Through Metal Detectors for use in Weapons Detection

0602.02-03.....Hand-Held Metal Detectors for Use in Concealed Weapon and Contraband Detection

W. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-37...Guide for Applying the Risk Management Framework to Federal Information Systems

Special Pub 800-63...Electronic Authentication Guideline

Special Pub 800-73-3.Interfaces for Personal Identity Verification (4 Parts)

.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation

.....Pt. 2- PIV Card Application Card Command Interface

.....Pt. 3- PIV Client Application Programming Interface

.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification

Special Pub 800-76-1.Biometric Data Specification for Personal Identity Verification

Special Pub 800-78-2.Cryptographic Algorithms and Key Sizes for Personal Identity Verification

Special Pub 800-79-1.Guidelines for the Accreditation of Personal Identity Verification Card Issuers

Special Pub 800-85B-1 DRAFTPIV Data Model Test Guidelines

Special Pub 800-85A-2 PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)

Special Pub 800-96...PIV Card Reader Interoperability Guidelines

Special Pub 800-104A.Scheme for PIV Visual Card Topography

X. Occupational and Safety Health Administration (OSHA):

29 CFR 1910.97.....Nonionizing radiation

Y. Section 508 of the Rehabilitation Act of 1973

Z. Security Industry Association (SIA):

AG-01 .....Security CAD Symbols Standards

AA. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

44-05.....Thermoset-Insulated Wires and Cables

50-07.....Enclosures for Electrical Equipment

83-08.....Thermoplastic-Insulated Wires and Cables

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

360-09.....Liquid-Tight Flexible Steel Conduit

444-08.....Safety Communications Cables

464-09.....Audible Signal Appliances

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

51-05.....Schedule 40 and 80 Rigid PVC Conduit

609-96.....Local Burglar Alarm Units and Systems

634-07.....Standards for Connectors with Burglar-Alarm Systems

636-01.....Standard for Holdup Alarm Units and Systems

639-97.....Standard for Intrusion-Detection Units

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit
752-05.....Standard for Bullet-Resisting Equipment
797-07.....Electrical Metallic Tubing
827-08.....Central Station Alarm Services
1037-09.....Standard for Anti-theft Alarms and Devices
1635-10.....Digital Alarm Communicator System Units
1076-95.....Standards for Proprietary Burglar Alarm Units and Systems
1242-06.....Intermediate Metal Conduit
1479-03.....Fire Tests of Through-Penetration Fire Stops
1981-03.....Central Station Automation System
2058-05.....High Security Electronic Locks
60950.....Safety of Information Technology Equipment
60950-1.....Information Technology Equipment - Safety - Part 1: General Requirements

BB. Uniform Federal Accessibility Standards (UFAS) 1984

CC. United States Department of Commerce:

Special Pub 500-101 .Care and Handling of Computer Magnetic Storage Media

1.8 COORDINATION

A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
   1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
   2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
   3. To allow right of way for piping and conduit installed at required slope.
   4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.9 MAINTENANCE & SERVICE

A. General Requirements

1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel:

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The COR shall be advised in writing of the name of the designated service representative, and of any change in personnel. The COR shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

1. The work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

E. System Inspections

1. These inspections shall include:

a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor

inspections to effect quarterly inspection of alternating magnitude.

1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day, 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.
   a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from [notification] [arrival on site]. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.
   b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COR. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year’s warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer’s software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall

be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.10 MINIMUM REQUIREMENTS

A. References to industry and trade association standards and codes are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.11 DELIVERY, STORAGE, & HANDLING

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
2. Damaged equipment shall be, as determined by the COR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. 3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.
4. 4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.12 PROJECT CONDITIONS

A. Environmental Conditions: System shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:

1. Interior, Controlled Environment: System components, except central-station control unit, installed in temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of 2 to 50 deg C (36 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 1 enclosure.

2. Interior, Uncontrolled Environment: System components installed in non-temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of -18 to 50 deg C (0 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 4X enclosures.

1.13 EQUIPMENT AND MATERIALS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COR a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the COR prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.14 COMPONENT ENCLOSURES

A. Construction of Enclosures

1. Consoles, power supply enclosures, detector control and terminal cabinets, control units, wiring gutters, and other component

housings, collectively referred to as enclosures, shall be so formed and assembled as to be sturdy and rigid.

2. Thickness of metal in-cast and sheet metal enclosures of all types shall not be less than those in Tables I and II, UL 611. Sheet steel used in fabrication of enclosures shall be not less than 14 gauge. Consoles shall be 16-gauge.
3. Doors and covers shall be flanged. Enclosures shall not have pre-punched knockouts. Where doors are mounted on hinges with exposed pins, the hinges shall be of the tight pin type or the ends of hinge pins shall be tack welded to prevent removal. Doors having a latch edge length of less than 609.6 mm (24 in) shall be provided with a single construction core. Where the latch edge of a hinged door is more than 609.6 mm (24 in) or more in length, the door shall be provided with a three-point latching device with construction core; or alternatively with two, one located near each end.
4. Any ventilator openings in enclosures and cabinets shall conform to the requirements of UL 611. Unless otherwise indicated, sheet metal enclosures shall be designed for wall mounting with tip holes slotted. Mounting holes shall be in positions that remain accessible when all major operating components are in place and the door is open but shall be in accessible when the door is closed.
5. Covers of pull and junction boxes provided to facilitate initial installation of the system shall be held in place by tamper proof Torx Center post security screws. Stenciled or painted labels shall be affixed to such boxes indicating they contain no connections. These labels shall not indicate the box is part of the Electronic Security System (ESS).

B. Tamper Provisions and Tamper Switches:

1. Enclosures, cabinets, housings, boxes and fittings or every product description having hinged doors or removable covers and which contain circuits, or the integrated security system and its power supplies shall be provided with cover operated, corrosion-resistant tamper switches.
2. Tamper switches shall be arranged to initiate an alarm signal that will report to the monitoring station when the door or cover is moved. Tamper switches shall be mechanically mounted to maximize the defeat time when enclosure covers are opened or removed. It

shall take longer than 1 second to depress or defeat the tamper switch after opening or removing the cover. The enclosure and tamper switch shall function together in such a manner as to prohibit direct line of sign to any internal component before the switch activates.

3. Tamper switches shall be inaccessible until the switch is activated. Have mounting hardware concealed so the location of the switch cannot be observed from the exterior of the enclosure. Be connected to circuits which are under electrical supervision at all times, irrespective of the protection mode in which the circuit is operating. Be spring-loaded and held in the closed position by the door or cover and be wired so they break the circuit when the door cover is disturbed. Tamper circuits shall be adjustable type screw sets and shall be adjusted by the contractor to eliminate nuisance alarms associated with incorrectly mounted tamper device shall annunciate prior to the enclosure door opening (within 1/4” tolerance. The tamper device or its components shall not be visible or accessing with common tools to bypass when the enclosure is in the secured mode.
4. The single gang junction boxes for the portrait alarming and pull boxes with less than 102 square mm will not require tamper switches.
5. All enclosures over 305 square mm shall be hinged with an enclosure lock.
6. Control Enclosures: Maintenance/Safety switches on control enclosures, which must be opened to make routing maintenance adjustments to the system and to service the power supplies, shall be push/pull-set automatic reset type.
7. Provide one (1) enclosure tamper switch for each 609 linear mm of enclosure lock side opening evenly spaced.
8. All security screws shall be Torx-Post Security Screws.
9. The contractor shall provide the owner with two (2) torx-post screwdrivers.

1.15 SUBSTITUTE MATERIALS & EQUIPMENT

A. Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to

branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. In addition to this Section the Security Contractor shall also reference Section II, Products and associated divisions. The COR shall have final authority on the authorization or refusal of substitutions. If there are no proposed substitutions, a statement in writing from the Contractor shall be submitted to the COR stating same. In the preparation of a list of substitutions, the following information shall be included, as a minimum:
   1. Identity of the material or devices specified for which there is a proposed substitution.
   2. Description of the segment of the specification where the material or devices are referenced.
   3. Identity of the proposed substitute by manufacturer, brand name, catalog or model number and the manufacturer’s product name.
   4. A technical statement of all operational characteristic expressing equivalence to items to be substituted and comparison, feature-by-feature, between specification requirements and the material or devices called for in the specification; and Price differential.

C. Materials Not Listed: Furnish all necessary hardware, software, programming materials, and supporting equipment required to place the specified major subsystems in full operation. Note that some supporting equipment, materials, and hardware may not be described herein. Depending on the manufacturers selected by the COR, some equipment, materials and hardware may not be contained in either the Contract Documents or these written specifications but are required by the manufacturer for complete operation according to the intent of the design and these specifications. In such cases, the COR shall be given the opportunity to approve the additional equipment, hardware and materials that shall be fully identified in the bid and in the equipment list submittal. The COR shall be consulted in the event there is any question about which supporting equipment, materials, or hardware is intended to be included.

D. Response to Specification: The Contractor shall submit a point-by-point statement of compliance with each paragraph of the security specification. The statement of compliance shall list each paragraph by number and indicate “COMPLY” opposite the number for each paragraph

where the Contractor fully complies with the specification. Where the proposed system cannot meet the requirements of the paragraph, and does not offer an equivalent solution, the offers shall indicate "DOES NOT COMPLY" opposite the paragraph number. Where the proposed system does not comply with the paragraph as written, but the bidder feels it will accomplish the intent of the paragraph in a manner different from that described, the offers shall indicate "COMPARABLE". The offers shall include a statement fully describing the "comparable" method of satisfying the requirement. Where a full and concise description is not provided, the offered system shall be considered as not complying with the specification. Any submission that does not include a point-by-point statement of compliance, as described above, shall be disqualified. Submittals for products shall be in precise order with the product section of the specification. Submittals not in proper sequence will be rejected.

1.16 LIKE ITEMS

A. Where two or more items of equipment performing the same function are required, they shall be exact duplicates produced by one manufacturer. All equipment provided shall be complete, new, and free of any defects.

1.17 WARRANTY

A. The Contractor shall, as a condition precedent to the final payment, execute a written guarantee (warranty) to the COR certifying all contract requirements have been completed according to the final specifications. Contract drawings and the warranty of all materials and equipment furnished under this contract are to remain in satisfactory operating condition (ordinary wear and tear, abuse and causes beyond his control for this work accepted) for one (1) year from the date the Contactor received written notification of final acceptance from the COR. Demonstration and training shall be performed prior to system acceptance. All defects or damages due to faulty materials or workmanship shall be repaired or replaced without delay, to the COR's satisfaction, and at the Contractor's expense. The Contractor shall provide quarterly inspections during the warranty period. The contractor shall provide written documentation to the COR on conditions and findings of the system and device(s). In addition, the contractor shall provide written documentation of test results and stating what was done to correct any deficiencies. The first

inspection shall occur 90 calendar days after the acceptance date. The last inspection shall occur 30 calendar days prior to the end of the warranty. The warranty period shall be extended until the last inspection and associated corrective actions are complete. When equipment and labor covered by the Contractor's warranty, or by a manufacturer's warranty, have been replaced or restored because of its failure during the warranty period, the warranty period for the replaced or repaired equipment or restored work shall be reinstated for a period equal to the original warranty period, and commencing with the date of completion of the replacement or restoration work. In the event any manufacturer customarily provides a warranty period greater than one (1) year, the Contractor's warranty shall be for the same duration for that component.

1.18 SINGULAR NUMBER

A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. All equipment associated within the Security Control Room, Security Console and Security Equipment Room shall be UL 827, UL 1981, and UL 60950 compliant and rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.

B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 8 <insert hours> hours of run time in the event of a loss of primary power to the facility.

C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All equipment and materials for the system will be compatible to ensure correct operation.

2.2 EQUIPMENT ITEMS

A. The Security Management System shall provide full interface with all components of the security subsystem as follows:
   1. Shall allow for communication between the Physical Access Control System and Database Management and all subordinate work and monitoring stations, enrollment centers for badging and biometric devices as part of the PACS, local annunciation centers, the electronic Security Management System (SMS), and all other VA redundant or backup command center or other workstations locations.
   2. Shall provide automatic continuous communication with all systems that are monitored by the SMS, and shall automatically annunciate any communication failures or system alarms to the SMS operator providing identification of the system, nature of the alarm, and location of the alarm.
   3. Controlling devices shall be utilized to interface the SMS with all field devices.

B. Wires and Cables:
   1. Shall meet or exceed the manufactures recommendation for power and signals.
   2. Shall be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
   3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
   4. All conduit, pull boxes, and junction boxes shall be marked with colored permanent tape or paint that will allow it to be distinguished from all other infrastructure conduit.
   5. Conduit fills shall not exceed 50 percent unless otherwise documented.
   6. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.

7. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area.
8. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security subsystems shall be any cable or sets of cables carrying 30 VDC/VAC or higher.
9. For all equipment that is carrying digital data between the Security Control Room, Security Equipment Room, Security Console, or at a remote monitoring station, it shall not be less that 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.

PART 3 - EXECUTION

3.1 COMMON REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATION

A. Comply with NECA 1.
B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.
C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.
D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electronic safety and security equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.
E. Right of Way: Give to piping systems installed at a required slope.
F. Equipment location shall be as close as practical to locations shown on the drawings.
G. Inaccessible Equipment:
   1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.

2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, , motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

3.2 FIRESTOPPING

A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electronic safety and security installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section 07 84 00 "Firestopping."

3.3 WORK PERFORMANCE

A. Job site safety and worker safety is the responsibility of the contractor.

B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

D. Coordinate location of equipment and conduit with other trades to minimize interferences. See the GENERAL CONDITIONS.

3.4 SYSTEM PROGRAMMING

A. General Programming Requirements

1. This following section shall be used by the contractor to identify the anticipated level of effort (LOE) required setup, program, and configure the Electronic Security System (ESS). The contractor shall be responsible for providing all setup, configuration, and programming to include data entry for the Security Management System (SMS) and subsystems [(e.g., video matrix switch, intercoms, digital video recorders, intrusion devices, including integration of subsystems to the SMS (e.g., camera call up, time synchronization, intercoms)]. System programming for existing or new SMS servers shall not be conducted at the project site.

B. Level of Effort for Programming

1. The Contractor shall perform and complete system programming (including all data entry) at an offsite location using the Contractor's own copy of the SMS software. The Contractor's copy of the SMS software shall be of the Owners current version. Once system programming has been completed, the Contractor shall deliver the data to the COR on data entry forms and an approved electronic medium, utilizing data from the contract documents. The completed forms shall be delivered to the COR for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires it. The Contractor shall not upload system programming until the COR has provided written approval. The Contractor is responsible for backing up the system prior to uploading new programming data. Additional programming requirements are provided as follows:
   a. Programming for New SMS Server: The contractor shall provide all other system related programming. The contractor shall be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, personnel photos, access schedules, personnel groupings) along with coordinating with COR for device configurations, standards, and groupings. VA shall provide database to support Contractor's data entry tasks. The contractor shall anticipate a weekly coordination meeting and working with COR to ensure data uploading is performed without incident of loss of function or data loss.
   b. Programming for Existing SMS Servers: The contractor shall perform all related system programming except for personnel data as noted. The contractor will not be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, access schedules, personnel groupings). The contractor shall anticipate a weekly coordination meeting and working alongside of COR to ensure data uploading is performed without incident of loss of function or data loss. System programming for SMS servers shall be performed by using the Contractor's own server and software. These servers shall not be connected to existing devices or systems at any time.
2. The Contractor shall identify and request from the COR, any additional data needed to provide a complete and operational system as described in the contract documents.

3. Contractor and COR coordination on programming requires a high level of coordination to ensure programming is performed in accordance with VA requirements and programming uploads do not disrupt existing systems functionality. The contractor shall anticipate a minimum a weekly coordination meeting. Contractor shall ensure data uploading is performed without incident of loss of function or data loss. The following Level of Effort Chart is provided to communicate the expected level of effort required by contractors on VA ESS projects. Calculations to determine actual levels of effort shall be confirmed by the contractor before project award.

3.5 TESTING AND ACCEPTANCE

A. Performance Requirements

1. General:

a. The Contractor shall perform contract field, performance verification, and endurance testing and make adjustments of the completed security system when permitted. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing. Written notification of planned testing shall be given to the COR at least 60 calendar days prior to the test and after the Contractor has received written approval of the specific test procedures.

b. The COR shall witness all testing and system adjustments during testing. Written permission shall be obtained from the COR before proceeding with the next phase of testing. Original copies of all data produced during performance verification and endurance testing shall be turned over to the COR at the conclusion of each phase of testing and prior to COR approval of the test.

2. Test Procedures and Reports: The test procedures, compliant w/ VA standard test procedures, shall explain in detail, step-by-step actions and expected results demonstrating compliance with the requirements of the specification. The test reports shall be used to document results of the tests. The reports shall be delivered to the COR within seven (7) calendar days after completion of each test.

B. Pre-Delivery Testing

1. The purpose of the pre-delivery test is to establish that a system is suitable for installation. As such, pre-delivery test shall be a mock-up of the system as planned in the contract documents. The Contractor shall assemble the Security Test System at the Contractors local project within 50-miles of the project site, and perform tests to demonstrate the performance of the system complies with the contract requirements in accordance with the approved pre-delivery test procedures. The tests shall take place during regular daytime working hours on weekdays. Model numbers of equipment tested shall be identical to those to be delivered to the site. Original copies of all data produced during pre-delivery testing, including results of each test procedure, shall be documented and delivered to the COR at the conclusion of pre-delivery testing and prior to COR's approval of the test. The test report shall be arranged so all commands, stimuli, and responses are correlated to allow logical interpretation. For Existing System modifications, the contractor shall provide their own server with loaded applicable software to support PDT.
2. Test Setup: The pre-delivery test setup shall include the following:
   a. All console equipment.
      1) At least one of each type of data transmission media (DTM) and associated equipment to provide a fully integrated PACS.
      2) The number of local processors shall equal the amount required by the site design.
      3) Enough sensor simulators to provide alarm signal inputs to the system equal to the number of sensors required by the design. The alarm signals shall be manually or software generated.
      4) Contractor to prove to owner all systems are appropriately sized and configured as sized.
      5) Integration of VASS, intercom systems, other subsystems.
3. During the bidding process the contractor shall submit a request for information to the Owner to determine if a pre-delivery test shall be required. If a pre-delivery test is not required, the contractor shall provide a written notification that the Pre-delivery Test is not required in their shop drawings submission.

C. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a designated Government Representative and maintained on file by the COR (RE), until completion of the entire project. The results will be compared to the Acceptance Test results.

D. Contractor's Field Testing (CFT)

1. The Contractor shall calibrate and test all equipment, verify DTM operation, place the integrated system in service, and test the integrated system. Ground rods installed by this Contractor within the base of camera poles shall be tested as specified in IEEE STD 142. The Contractor shall test all security systems and equipment, and provide written proof of a 100% operational system before a date is established for the system acceptance test. Documentation package for CFT shall include completed (fully annotated details of test details) for each device and system tested, and annotated loading sheets documenting complete testing to COR approval. CFT test documentation package shall conform to submittal requirements outlined in this Section. The Contractor's field testing procedures shall be identical to the COR's acceptance testing procedures. The Contractor shall provide the COR with a written listing of all equipment and software indicating all equipment and components have been tested and passed. The Contractor shall deliver a written report to the COR stating the installed complete system has been calibrated, tested, and is ready to begin performance verification testing; describing the results of the functional tests, diagnostics, and calibrations; and the report shall also include a copy of the approved acceptance test procedure. Performance verification testing shall not take place until written notice by contractor is received certifying that a contractor's field test was successful.

E. Performance Verification Test (PVT)

1. Test team:

a. After the system has been pretested and the Contractor has submitted the pretest results and certification to the COR, then the Contractor shall schedule an acceptance test to date and give the COR written, notice as described herein, prior to the date

the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative, an OEM certified representative, representative of the Contractor and other approved by the COR. The system shall be tested utilizing the approved test equipment to certify proof of performance, FCC, UL and Emergency Service compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The Contractor shall demonstrate the completed Physical Access Control System PACS complies with the contract requirements. In addition, the Contractor shall provide written certification that the system is 100% operational prior to establishing a date for starting PVT. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The PVT will be stopped and aborted as soon as 10 technical deficiencies are found requiring correction. The Contractor shall be responsible for all travel and lodging expenses incurred for out-of-town personnel required to be present for resumption of the PVT. If the acceptance test is aborted, the re-test will commence from the beginning with a retest of components previously tested and accepted.
3. The PVT, as specified, shall not begin until receipt of written certification that the Contractors Field Testing was successful. This shall include certification of successful completion of testing as specified in paragraph “Contractor’s Field Testing”, and upon successful completion of testing at any time when the system fails to perform as specified. Upon termination of testing by the COR or Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II.
4. Upon successful completion of the acceptance test, the Contractor shall deliver test reports and other documentation, as specified, to the COR prior to commencing the endurance test.
5. Additional Components of the PVT shall include:
   a. System Inventory
      1) All Device equipment
      2) All Software

3) All Logon and Passwords
4) All Cabling System Matrices
5) All Cable Testing Documents
6) All System and Cabinet Keys

b. Inspection
1) Contractor shall record an inspection punch list noting all system deficiencies. The contractor shall prepare an inspection punch list format for CORs approval.
2) As a minimum the punch list shall include a listing of punch list items, punch list item location, description of item problem, date noted, date corrected, and details of how item was corrected.

6. Partial PVT - At the discretion of COR, the Performance Verification Test may be performed in part should a 100% compliant CFT be performed. In the event that a partial PVT will be performed instead of a complete PVT; the partial PVT shall be performed by testing 10% of the system. The contractor shall perform a test of each procedure on select devices or equipment.

F. Endurance Test
1. The Contractor shall demonstrate the specified probability of detection and false alarm rate requirements of the completed system. The endurance test shall be conducted in phases as specified below. The endurance test shall not be started until the COR notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. VA shall operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing. VA will maintain a log of all system deficiencies. The COR may terminate testing at any time the system fails to perform as specified. Upon termination of testing, the Contractor shall commence an assessment period as described for Phase II. During the last day of the test, the Contractor shall verify the appropriate operation of the system. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the COR prior to acceptance of the system.

2. Phase I (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COR. If the system experiences no failures, the Contractor may proceed directly to Phase III testing after receiving written permission from the COR.
3. Phase II (Assessment):
   a. After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing shall be resumed.
   b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COR. The meeting shall not be scheduled earlier than five (5) business days after the COR receives the report. As part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor’s report and the test review meeting, the COR will provide a written determine of either the restart date or require Phase I be repeated.
4. Phase III (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COR.
5. Phase IV (Assessment):
   a. After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.

b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COR. The meeting shall not be scheduled earlier than five (5) business days after receipt of the report by the COR. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions for the performance verification test. Based on the review meeting the test should not be scheduled earlier than five (5) business days after the COR receives the report. As a part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the COR will provide a written determine of either the restart date or require Phase III be repeated. After the conclusion of any re-testing which the COR may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.

G. Exclusions

1. The Contractor will not be held responsible for failures in system performance resulting from the following:
   a. An outage of the main power in excess of the capability of any backup power source provided the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the PACS performed as specified.
   b. Failure of an Owner furnished equipment or communications link, provided the failure was not due to Contractor furnished equipment, installation, or software.
   c. Failure of existing Owner owned equipment, provided the failure was not due to Contractor furnished equipment, installation, or software.

---END---

---INTENTIONALLY BLANK---

SECTION 28 05 13
CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification the conductors and cables required for a fully functional for electronic safety and security (ESS) system.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

D. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SECURITY AND SAFETY. Requirements for infrastructure.

1.3 DEFINITIONS

A. BICSI: Building Industry Consulting Service International.

B. EMI: Electromagnetic interference.

C. IDC: Insulation displacement connector.

D. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

E. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

F. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

G. RCDD: Registered Communications Distribution Designer.

H. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

I. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings

sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

J. UTP: Unshielded twisted pair.

1.4 QUALITY ASSURANCE

A. See Section 28 05 00 COMMON WORKS RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Paragraph 1.4.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certificates: Two weeks prior to final inspection, deliver to the Contracting Officer’s Representative (COR) four copies of the certification that the material is in accordance with the drawings and specifications and diagrams for cable management system.
3. Shop Drawings: Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
   a. Vertical and horizontal offsets and transitions.
   b. Clearances for access above and to side of cable trays.
   c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
   d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.
   e. System labeling schedules, including electronic copy of labeling schedules that are part of the cable and asset identification system of the software specified in Parts 2 and 3.
4. Wiring Diagrams. Show typical wiring schematics including the following:
   a. Workstation outlets, jacks, and jack assemblies.
   b. Patch cords.
   c. Patch panels.
5. Cable Administration Drawings: As specified in Part 3 "Identification" Article.
6. Project planning documents as specified in Part 3.
7. Maintenance Data: For wire and cable to include in maintenance manuals.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by the basic designation only.

B. American Society of Testing Material (ASTM):

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

C. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-05.....Thermoset-Insulated Wires and Cables

83-08.....Thermoplastic-Insulated Wires and Cables

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514B-04.....Fittings for Cable and Conduit

1479-03.....Fire Tests of Through-Penetration Fire Stops

1.7 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test optical fiber cable to determine the continuity of the strand end to end. Use TDR
2. Test optical fiber cable on reels. Use an optical time domain reflectometer to verify the cable length and locate cable defects, splices, and connector; include the loss value of each. Retain test data and include the record in maintenance data.

3. Test each pair of UTP cable for open and short circuits.

1.8 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install UTP, optical fiber, and coaxial cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 GENERAL

A. General: All cabling locations shall be in conduit systems as outlined in Division 28 unless a waiver is granted in writing or an exception is noted on the construction drawings.

B. Support of Open Cabling: NRTL labeled for support of Category 6 cabling, designed to prevent degradation of cable performance and pinch points that could damage cable.

1. Support brackets with cable tie slots for fastening cable ties to brackets.
2. Lacing bars, spools, J-hooks, and D-rings.
3. Straps and other devices.

C. Conduit and Boxes: Comply with requirements in Division 28 Section "Conduits and Backboxes for Electronic Safety and Security."[Flexible metal conduit shall not be used.]

1. Outlet boxes shall be no smaller than 2 inches (50 mm) wide, 3 inches (75 mm) high, and 2-1/2 inches (64 mm) deep.

2.2 BACKBOARDS

A. Backboards: Plywood, fire-retardant treated, 3/4 by 48 by 96 inches (19 by 1220 by 2440 mm). Comply with requirements for plywood backing panels in Division 06 Section "Rough Carpentry".

2.3 UTP CABLE

A. Description: 100-ohm, 4-pair UTP, formed into 25-pair binder groups covered with a blue thermoplastic jacket.

1. Comply with ICEA S-90-661 for mechanical properties.
2. Comply with TIA/EIA-568-B.1 for performance specifications.
3. Comply with TIA/EIA-568-B.2, Category 6.

4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
   a. Communications, General Purpose: Type CM or CMG ; or MPP, CMP, MPR, CMR, MP, or MPG.
   b. Communications, Plenum Rated: Type CMP ; or MPP, complying with NFPA 262.
   c. Communications, Riser Rated: Type CMR ; or MPP, CMP, or MPR, complying with UL 1666.
   d. Communications, Limited Purpose: Type CMX ; or MPP, CMP, MPR, CMR, MP, MPG, CM, or CMG.
   e. Multipurpose: Type MP or MPG ; or MPP or MPR.
   f. Multipurpose, Plenum Rated: Type MPP, complying with NFPA 262.
   g. Multipurpose, Riser Rated: Type MPR or MPP, complying with UL 1666.

2.4 UTP CABLE HARDWARE

A. UTP Cable Connecting Hardware: IDC type, using modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of the same category or higher.

2.5 CONNECTING BLOCKS: RS-232 CABLE

A. Standard Cable: NFPA 70, Type CM.
   1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
   2. Polypropylene insulation.
   3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
   4. PVC jacket.
   5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
   6. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
   1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
   2. Plastic insulation.
   3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
   4. Plastic jacket.

5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with NFPA 262.

2.6 RS-485 CABLE

A. Standard Cable: NFPA 70, Type CM or CMG.
1. Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Fluorinated ethylene propylene jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.7 LOW-VOLTAGE CONTROL CABLE

A. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with NFPA 262.

C. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. PVC insulation.

3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

D. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Plastic jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.8 CONTROL-CIRCUIT CONDUCTORS

A. Class 1 Control Circuits: Stranded copper, Type THHN-THWN, in raceway complying with UL 83.

B. Class 2 Control Circuits: Stranded copper, Type THHN-THWN, in raceway, power-limited cable, concealed in building finishes or power-limited tray cable, in cable tray complying with UL 83.

C. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type TW or TF, complying with UL 83.

2.9 FIRE ALARM WIRE AND CABLE

A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

B. Signaling Line Circuits: Twisted, shielded pair, not less than] No. 18 AWG AWG or size as recommended by system manufacturer.
1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a 2-hour rating.

C. Non-Power-Limited Circuits: Solid-copper conductors with 600-V rated, 75 deg C, color-coded insulation.
1. Low-Voltage Circuits: No. 16 AWG, minimum.
2. Line-Voltage Circuits: No. 12 AWG, minimum.
3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor with outer jacket with red identifier stripe, NTRL listed for fire alarm and cable tray installation, plenum rated, and complying with requirements in UL 2196 for a 2-hour rating.

2.10 IDENTIFICATION PRODUCTS

A. Comply with UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.11 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to evaluate cables.

B. Factory test UTP and optical fiber cables on reels according to TIA/EIA-568-B.1.

C. Factory test UTP cables according to TIA/EIA-568-B.2.

D. Factory test multimode optical fiber cables according to TIA/EIA-526-14-A and TIA/EIA-568-B.3.

E. Factory sweep test coaxial cables at frequencies from 5 MHz to 1 GHz. Sweep test shall test the frequency response, or attenuation over frequency, of a cable by generating a voltage whose frequency is varied through the specified frequency range and graphing the results.

F. Cable shall be considered defective if it does not pass tests and inspections.

G. Prepare test and inspection reports.

2.12 WIRE LUBRICATING COMPOUND

A. Suitable for the wire insulation and conduit it is used with and shall not harden or become adhesive.

B. Shall not be used on wire for isolated type electrical power systems.

2.13 FIREPROOFING TAPE

A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.

B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.

C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.

D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.

E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

PART 3 - EXECUTION

3.1 INSTALLATION OF CONDUCTORS AND CABLES

A. Comply with NECA 1.

B. General Requirements for Cabling:
   1. Comply with TIA/EIA-568-B.1.
   2. Comply with BICSI ITSIM, Ch. 6, "Cable Termination Practices."
   3. Install 110-style IDC termination hardware unless otherwise indicated.
   4. Terminate all conductors; no cable shall contain un-terminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
   5. Cables shall not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
   6. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIM, "Cabling Termination Practices" Chapter. Install lacing bars and distribution spools.
   7. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
   8. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
   9. Pulling Cable:
      a. Comply with BICSI ITSIM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
      b. Provide installation equipment that shall prevent the cutting or abrasion of insulation during pulling of cables.
      c. Use ropes made of nonmetallic material for pulling feeders.
      d. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COR.
      e. Pull in multiple cables together in a single conduit.

C. Splice cables and wires where necessary only in outlet boxes, junction boxes, or pull boxes.
   1. Splices and terminations shall be mechanically and electrically secure.

2. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

D. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.

E. Unless otherwise specified in other sections install wiring and connect to equipment/devices to perform the required functions as shown and specified.

F. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system shall not affect other systems.

G. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

H. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.

I. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.

J. UTP Cable Installation:

1. Comply with TIA/EIA-568-B.2.
2. Do not untwist UTP cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.

K. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend copper cable not in a wireway or pathway a minimum of 8 inches (200 mm) above ceilings by cable supports not more than [60 inches (1525 mm)] <Insert dimension> apart.
3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

L. Installation of Cable Routed Exposed under Raised Floors:

1. Install plenum-rated cable only.

2. Install cabling after the flooring system has been installed in raised floor areas.
3. Coil cable 72 inches (1830 mm)long shall be neatly coiled not less than 12 inches (300 mm) in diameter below each feed point.

M. Separation from EMI Sources:

1. Comply with BICSI TDMM and TIA/EIA-569-A recommendations for separating unshielded copper voice and data communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).
3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (75 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).
5. Separation between Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).

6. Separation between Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

3.2 FIRE ALARM WIRING INSTALLATION

A. Comply with NECA 1 and NFPA 72.

B. Wiring Method: Install wiring in metal raceway according to Division 28 Section "CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY."
   1. Install plenum cable in environmental air spaces, including plenum ceilings.
   2. Fire alarm circuits and equipment control wiring associated with the fire alarm system shall be installed in a dedicated raceway system. This system shall not be used for any other wire or cable.

C. Wiring Method:
   1. Cables and raceways used for fire alarm circuits, and equipment control wiring associated with the fire alarm system, shall not contain any other wire or cable.
   2. Fire-Rated Cables: Use of 2-hour, fire-rated fire alarm cables, NFPA 70, Types MI and CI, is not permitted.
   3. Signaling Line Circuits: Power-limited fire alarm cables shall not be installed in the same cable or raceway as signaling line circuits.

D. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks. Mark each terminal according to the system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes, cabinets, or equipment enclosures where circuit connections are made.

F. Color-Coding: Color-code fire alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use

different colors for visible alarm-indicating devices. Paint fire alarm system junction boxes and covers red.

G. Risers: Install at least two vertical cable risers to serve the fire alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent the receipt or transmission of signals from other floors or zones.

H. Wiring to Remote Alarm Transmitting Device: 1-inch (25-mm) conduit between the fire alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.3 CONTROL CIRCUIT CONDUCTORS

A. Minimum Conductor Sizes:

1. Class 1 remote-control and signal circuits, No. 14 AWG.
2. Class 2 low-energy, remote-control and signal circuits, No. 16 AWG.
3. Class 3 low-energy, remote-control, alarm and signal circuits, No. 12 AWG.

3.4 CONNECTIONS

A. Comply with requirements in Division 28 Section, PHYSICAL ACCESS CONTROL for connecting, terminating, and identifying wires and cables.

B. Comply with requirements in Division 28 Section "VIDEO SURVEILLANCE" for connecting, terminating, and identifying wires and cables.

C. Comply with requirements in Division 28 Section "FIRE DETECTION AND ALARM" for connecting, terminating, and identifying wires and cables.

3.5 FIRESTOPPING

A. Comply with requirements in Division 07 Section "PENETRATION FIRESTOPPING."

B. Comply with TIA/EIA-569-A, "Firestopping" Annex A.

C. Comply with BICSI TDMM, "Firestopping Systems" Article.

3.6 GROUNDING

A. For communications wiring, comply with ANSI-J-STD-607-A and with BICSI TDMM, "Grounding, Bonding, and Electrical Protection" Chapter.

B. For low-voltage wiring and cabling, comply with requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY."

3.7 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA/EIA-606-A.

B. Install a permanent wire marker on each wire at each termination.

C. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

D. Wire markers shall retain their markings after cleaning.

E. In each handhole, install embossed brass tags to identify the system served and function.

3.8 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Visually inspect UTP and optical fiber cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA/EIA-568-B.1.
2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.
   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
4. Coaxial Cable Tests: Comply with requirements in Division 27 Section "MASTER ANTENNA TELEVISION SYSTEM."

D. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.

E. End-to-end cabling shall be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

3.9 EXISTING WIRING

A. Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes shall be reused. If existing wiring does not meet these requirements, existing wiring shall not be reused and new wires shall be installed.

---END---

---INTENTIONALLY BLANK---

SECTION 28 05 26
GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification of the grounding and bonding required for a fully functional Electronic Safety and Security (ESS) system.

B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, grounding electrodes.

C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 28 05 00 - REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS. For general electrical requirements, quality assurance, coordination, and project conditions that are common to more than one section in Division 28.

C. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for low voltage power and lighting wiring.

1.3 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

B. Shop Drawings:

1. Clearly present enough information to determine compliance with drawings and specifications.
2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.

C. Test Reports: Provide certified test reports of ground resistance.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COR:

1. Certification that the materials and installation are in accordance with the drawings and specifications.
2. Certification by the contractor that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07.....National Electrical Safety Code

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

99-2018.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-05 .....Thermoset-Insulated Wires and Cables

83-08 .....Thermoplastic-Insulated Wires and Cables

467-07 .....Grounding and Bonding Equipment

486A-486B-03 .....Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be UL 83 insulated stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.

B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be ASTM B1 solid bare copper wire.

2.2 SPLICES AND TERMINATION COMPONENTS

A. Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).2.4 ground connections

B. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

C. Below Grade: Exothermic-welded type connectors.

D. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.
5. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, pressure type with at least two bolts.
   a. Pipe Connectors: Clamp type, sized for pipe.
6. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.3 EQUIPMENT RACK AND CABINET GROUND BARS

A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x ¾ inch).

2.4 GROUND TERMINAL BLOCKS

A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.5 SPLICE CASE GROUND ACCESSORIES

A. Splice case grounding and bonding accessories shall be supplied by the splice case manufacturer when available. Otherwise, use 16 mm^2 (6 AWG) insulated ground wire with shield bonding connectors.

PART 3 - EXECUTION

3.1 GENERAL

A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.

B. System Grounding:

1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 CORROSION INHIBITORS

A. When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.4 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.5 WIREWAY GROUNDING

A. Ground and Bond Metallic Wireway Systems as follows:

1. Bond the metallic structures of wireway to provide 100 percent electrical continuity throughout the wireway system by connecting a 16 mm^2 (6 AWG) bonding jumper at all intermediate metallic enclosures and across all section junctions.
2. Install insulated 16 mm^2 (6 AWG) bonding jumpers between the wireway system bonded as required in paragraph 1 above, and the closest building ground at each end and approximately every 16 meters (50 feet).

3. Use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and cross all section junctions.
4. Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 meters.

3.6 LABELING

A. Comply with requirements in Division 26 Section "ELECTRICAL IDENTIFICATION" Article for instruction signs. The label or its text shall be green.

B. Install labels at the telecommunications bonding conductor and grounding equalizer and at the grounding electrode conductor where exposed.
   1. Label Text: "If this connector or cable is loose or if it shall be removed for any reason, notify the facility manager."
   2. All ground Busses shall be labeled “Main Ground Bus”, “Telecom Room Ground Bus.”
   3. All grounding cabling shall be labeled, “Ground Cable Bonded from Main TGB,” “Ground Cable Bonded from the Main Electrical Ground Bus” “Ground Cable Bonded from Electrical Panel XXX”, “Ground Cable Bonded to the Building Steel.”

3.7 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:
   1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
   2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
   3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal at individual ground rods. Make tests at ground rods before any conductors are connected.
      a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical

treatment or other artificial means of reducing natural ground resistance.

b. Perform tests by fall-of-potential method according to IEEE 81.

---END---

SECTION 28 05 28.33
CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing certification of the conduit, fittings, and boxes to form a complete, coordinated, raceway system(s). Conduits and when approved separate UL Certified and Listed partitioned telecommunications raceways are required for a fully functional Electronic Safety and Security (ESS) system. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for sealing around penetrations to maintain the integrity of fire rated construction.

C. Section 07 92 00 - JOINT SEALANTS. Requirements for sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

D. Section 09 91 00 - PAINTING. Requirements for identification and painting of conduit and other devices.

E. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general electrical requirements, general arrangement of the contract documents, coordination, quality assurance, project conditions, equipment and materials, and items that is common to more than one section of Division 28.

F. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 DEFINITIONS

A. EMT: Electrical metallic tubing.

B. ENT: Electrical nonmetallic tubing.

C. EPDM: Ethylene-propylene-diene terpolymer rubber.

D. FMC: Flexible metal conduit.

E. IMC: Intermediate metal conduit.

F. LFMC: Liquidtight flexible metal conduit.

G. LFNC: Liquidtight flexible nonmetallic conduit.

H. NBR: Acrylonitrile-butadiene rubber.

I. RNC: Rigid nonmetallic conduit.

1.4 QUALITY ASSURANCE

A. Refer to Paragraph 1.4 Quality Assurance, in Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

1.5 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Furnish the following:

B. Shop Drawings:

1. Size and location of main feeders;
2. Size and location of panels and pull boxes
3. Layout of required conduit penetrations through structural elements.
4. The specific items proposed and its area of application shall be identified on the catalog cuts.

C. Certification: Prior to final inspection, deliver to the Contracting Officer’s Representative (COR) four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

D. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

E. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.

1. Custom enclosures and cabinets.
2. Handholes and boxes for underground wiring, including the following:
   a. Duct entry provisions, including locations and duct sizes.
   b. Frame and cover design.
   c. Grounding details.
   d. Dimensioned locations of cable rack inserts, and pulling-in and lifting irons.
   e. Joint details.

F. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:

1. Structural members in the paths of conduit groups with common supports.

2. HVAC and plumbing items and architectural features in the paths of conduit groups with common supports.

G. Manufacturer Seismic Qualification Certification: Submit certification that enclosures and cabinets and their mounting provisions, including those for internal components, shall withstand seismic forces defined in Division 16 Section "Electrical Supports and Seismic Restraints." Include the following:

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
   a. The term "withstand" means "the cabinet or enclosure shall remain in place without separation of any parts when subjected to the seismic forces specified [and the unit shall retain its enclosure characteristics, including its interior accessibility, after the seismic event]."
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

H. Source quality-control test reports.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. National Electrical Manufacturers Association (NEMA):

TC-3-04	PVC Fittings for Use with Rigid PVC Conduit and Tubing
FB1-07	Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

C. National Fire Protection Association (NFPA):

70-17	National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

1-05	Flexible Metal Conduit
5-04	Surface Metal Raceway and Fittings
6-07	Rigid Metal Conduit
50-07	Enclosures for Electrical Equipment

360-09	Liquid-Tight Flexible Steel Conduit
467-07	Grounding and Bonding Equipment
514A-04	Metallic Outlet Boxes
514B-04	Fittings for Cable and Conduit
514C-02	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-05	Schedule 40 and 80 Rigid PVC Conduit
651A-07	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-07	Electrical Metallic Tubing
1242-06	Intermediate Metal Conduit

PART 2 - PRODUCTS

2.1 GENERAL

A. Conduit Size: In accordance with the NEC, but not less than 20 mm (3/4 inch) unless otherwise shown.

2.2 CONDUIT

A. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.

B. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.

C. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 volts or less.

D. Flexible galvanized steel conduit: Shall Conform to UL 1.

E. Liquid-tight flexible metal conduit: Shall Conform to UL 360.

2.3 WIREWAYS AND RACEWAYS

A. Surface metal raceway: Shall Conform to UL 5.

2.4 CONDUIT FITTINGS

A. Rigid steel and IMC conduit fittings:

1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
3. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
4. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting.

Bushings made entirely of metal or nonmetallic material are not permitted.

5. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
6. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

B. Electrical metallic tubing fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
4. Indent type connectors or couplings are prohibited.
5. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

C. Flexible steel conduit fittings:
1. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
2. Clamp type, with insulated throat.

D. Liquid-tight flexible metal conduit fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Fittings shall incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.

E. Surface metal raceway fittings: As recommended by the raceway manufacturer.

F. Expansion and deflection couplings:
   1. Conform to UL 467 and UL 514B.
   2. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
   3. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
   4. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

2.5 CONDUIT SUPPORTS

A. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
B. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
C. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
D. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

2.6 OUTLET, JUNCTION, AND PULL BOXES

A. UL-50 and UL-514A.
B. Cast metal where required by the NEC or shown and equipped with rustproof boxes.
C. Nonmetallic Outlet and Device Boxes: NEMA OS 2.
D. Metal Floor Boxes: Cast or sheet metal, semi-adjustable, rectangular.
E. Sheet metal boxes: Galvanized steel, except where otherwise shown.
F. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

2.7 CABINETS

A. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
B. Hinged door in front cover with flush latch and concealed hinge.
C. Key latch to match panelboards.

D. Metal barriers to separate wiring of different systems and voltage.

E. Accessory feet where required for freestanding equipment.

2.8 WIREWAYS

A. Equip with hinged covers, except where removable covers are shown.

2.9 SLEEVES FOR RACEWAYS

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.

B. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.

C. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch (1.3- or 3.5-mm) thickness as indicated and of length to suit application.

D. Coordinate sleeve selection and application with selection and application of firestopping specified in Section 07 84 00 "FIRESTOPPING."

2.10 SLEEVE SEALS

A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and cable.

1. Sealing Elements: Remarks: Remarks: EPDM interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
2. Pressure Plates: Remarks: Remarks: Stainless steel. Include two for each sealing element.
3. Connecting Bolts and Nuts: Stainless steel of length required to secure pressure plates to sealing elements. Include one for each sealing element.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the COR prior to drilling through structural sections.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not

allowed, except where permitted by the COR as required by limited working space.

B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, "FIRESTOPPING", with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, "JOINT SEALANTS".

3.2 INSTALLATION, GENERAL

A. Install conduit as follows:

1. In complete runs before pulling in cables or wires.
2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
5. Mechanically continuous.
6. Independently support conduit at 2.4 m (8 foot) on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
7. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
11. Do not use aluminum conduits in wet locations.

12. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey shall be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COR.

D. Fire Alarm:
1. Fire alarm conduit shall be factory painted red (a red “top-coated” conduit from the conduit manufacturer shall be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, “FIRE DETECTION AND ALARM”.

3.3 CONCEALED WORK INSTALLATION

A. Furred or Suspended Ceilings and in Walls:
1. Conduit for conductors above 600 volts:
a. Rigid steel or rigid aluminum.
b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
2. Conduit for conductors 600 volts and below:
a. Rigid steel, IMC, rigid aluminum, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 1800 Remarks:mm (6 feet) of flexible metal conduit extending from a junction box to the fixture.
5. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 volts and below:

1. Rigid steel, IMC, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.

F. Surface metal raceways: Use only where shown.

G. Painting:

1. Paint exposed conduit as specified in Section 09 91 00, “PAINTING”.
2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, “PAINTING” for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.

C. Install expansion and deflection couplings where shown.

D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 375 mm (15 inches) of slack flexible conduit. Flexible conduit shall have a copper green ground bonding jumper installed.

3.6 CONDUIT SUPPORTS, INSTALLATION

A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
   b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
   c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts are permitted.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for

cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

A. Boxes for Concealed Conduits:
   1. Flush mounted.
   2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.

C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes).

E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 100 mm (4 inches) square by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.

F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example: "SIG-FA JB No. 1".

G. On all Branch Circuit junction box covers, identify the circuits with black marker.

3.8 ELECTRONIC SAFETY AND SECURITY CONDUIT

A. Install the electronic safety and security raceway system as shown on drawings.

B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.

C. All conduit ends shall be equipped with insulated bushings.

D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.

E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.

F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.

G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.

H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.

I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
¾	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified on the wall of communication closets where shown on drawings. Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.

K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

---END---

---INTENTIONALLY BLANK---

SECTION 28 16 00
INTRUSION DETECTION SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

A. Provide and install a complete Intrusion Detection System, hereinafter referred to as IDS, as specified in this section.

B. This Section includes the following:

1. Intrusion detection with [hard-wired] [multiplexed], modular, microprocessor-based controls, intrusion sensors and detection devices, and communication links to perform monitoring, alarm, and control functions.
2. Responsibility for integrating electronic and electrical systems and equipment is specified in the following Sections, with Work specified in this Section:
   a. Division 08 Section "DOOR HARDWARE".
   b. Division 14 Section "ELECTRIC TRACTION ELEVATORS".
   c. Division 27 Section "INTERCOMMUNICATIONS AND PROGRAM SYSTEMS".
   d. Division 28 Section "PHYSICAL ACCESS CONTROL".
   e. Division 28 Section "FIRE DETECTION AND ALARM".
   f. Division 28 Section "VIDEO SURVEILLANCE".

C. Related Sections include the following:

1. Division 28 Section "VIDEO SURVEILLANCE" for closed-circuit television cameras that are used as devices for video motion detection.
2. Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY" for cabling between central-station control units and field-mounted devices and controllers.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

D. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.

E. Section 26 05 19 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.

F. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

I. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

J. Section 28 31 00 - FIRE DETECTION AND ALARM. Requirements for integration with fire detection and alarm system.

1.3 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the IDS as shown. The Contractor shall also provide certification as required.

B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

1.4 DEFINITIONS

A. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

B. I/O: Input/Output.

C. Intrusion Zone: A space or area for which an intrusion shall be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.

D. LED: Light-emitting diode.

E. NEC: National Electric Code

F. NEMA: National Electrical Manufacturers Association

G. NFPA: National Fire Protection Association

H. NRTL: Nationally Recognized Testing Laboratory.

I. SMS: Security Management System – A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

J. PIR: Passive infrared.

K. RF: Radio frequency.

L. Standard Intruder: A person who weighs 45 kg (100 lb.) or less and whose height is 1525 mm (60 in) or less; dressed in a long-sleeved shirt, slacks, and shoes.

M. Standard-Intruder Movement: Any movement, such as walking, running, crawling, rolling, or jumping, of a "standard intruder" in a protected zone.

N. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

O. UPS: Uninterruptible Power Supply

P. UTP: Unshielded Twisted Pair

1.5 SUBMITTALS

A. Refer to Section 28 05 00, Part 1

B. Submit below items in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 02 41 00, DEMOLITION.

C. Provide certificates of compliance with Section 1.3, Quality Assurance.

D. Provide a shop drawing and as-built design package in both electronic format and on paper, minimum size 1220 x 1220 millimeters (48 x 48 inches); drawing submittals shall be per the established project schedule.

E. Shop drawing and as-built packages shall include:

1. Index Sheet that shall:

a. Define each page of the design package to include facility name, building name, floor, and sheet number.

b. Provide a list of all security abbreviations and symbols.

c. Reference all general notes that are utilized within the design package.

d. Specification and scope of work pages for all security systems that are applicable to the design package that will:

1) Outline all general and job specific work required within the design package.

2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.

2. Drawing sheets that shall be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that shall correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer’s name and part number for the wire/cable being installed.
4. A system drawing for each applicable security system shall:
   a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.
   d. Show device locations that correspond to the floor plans.
   e. All general and drawing specific notes shall be included with the system drawings.

5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the IDS, provide the sensor ID, sensor type and housing model number.
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

F. Shop drawing packages shall be reviewed by the Contractor along with the COR to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

G. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

H. Submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Security Industry Association (SIA):

PIR-01-00	Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

CP-01-00	Control Panel Standard-Features for False Alarm Reduction

C. Department of Justice American Disability Act (ADA)

28 CFR Part 36	2010 ADA Standards for Accessible Design

D. Federal Communications Commission (FCC):

(47 CFR 15) Part 15	Limitations on the Use of Wireless Equipment/Systems

E. National Electrical Manufactures Association (NEMA):

250-08	Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

70-11	National Electrical Code
731-08	Standards for the Installation of Electric Premises Security Systems

G. Underwriters Laboratories, Inc. (UL):

464-09	Audible Signal Appliances
609-96	Local Burglar Alarm Units and Systems
634-07	Standards for Connectors with Burglar-Alarm Systems
639-07	Standards for Intrusion Detection Units
1037-09	Standard for Anti-theft Alarms and Devices
1635-10	Digital Alarm Communicator System Units

H. Uniform Federal Accessibility Standards (UFAS), 19841.

1.7 COORDINATION

A. Coordinate arrangement, mounting, and support of intrusion detection system equipment:
   1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
   2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
   3. To allow right of way for piping and conduit installed at required slope.
   4. To connecting raceways, cables, wireways, cable trays, and busways shall be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.8 EQUIPMENT AND MATERIALS

A. General

1. All equipment associated within the IDS shall be rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.
2. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that shall provide a minimum of 96 hours of run time in the event of a loss of primary power to the facility.
3. The system shall be designed, installed, and programmed in a manner that shall allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.
4. All IDS components located in designated “HAZARDOUS ENVIRONMENT” areas where fire or explosion could occur due to the presence of natural gases or vapors, flammable liquids, combustible residue, or ignitable fibers or debris, shall be rated Class II, Division I, Group F, and installed in accordance with National Fire Protection Association (NFPA) 70 National Electric Code, Chapter 5.
5. All equipment and materials for the system shall be compatible to ensure functional operation in accordance with requirements.

1.9 WARRANTY OF CONSTRUCTION.

A. Warrant IDS work subject to the Article “Warranty of Construction” of FAR 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 - PRODUCTS

2.1 FUNCTIONAL DESCRIPTION OF SYSTEM

A. Supervision: System components shall be continuously monitored for normal, alarm, supervisory, and trouble conditions. Indicate deviations from normal conditions at any location in system. Indication includes identification of device or circuit in which deviation has occurred and whether deviation is an alarm or malfunction.
   1. Alarm Signal: Display at central-station control unit and actuate audible and visual alarm devices.
   2. Trouble Condition Signal: Distinct from other signals, indicating that system is not fully functional. Trouble signal shall indicate system problems such as battery failure, open or shorted transmission line conductors, or controller failure.
   3. Supervisory Condition Signal: Distinct from other signals, indicating an abnormal condition as specified for the particular device or controller.

B. System Control: Central-station control unit shall directly monitor intrusion detection units and connecting wiring.

C. System Control: Central-station control unit shall directly monitor intrusion detection devices /, perimeter detection units, controllers associated with perimeter detection units,/ and connecting wiring in a multiplexed distributed control system or as part of a network.

D. System shall automatically reboot program without error or loss of status or alarm data after any system disturbance.

E. Operator Commands:
   1. Help with System Operation: Display all commands available to operator. Help command, followed by a specific command, shall produce a short explanation of the purpose, use, and system reaction to that command.
   2. Acknowledge Alarm: To indicate that alarm message has been observed by operator.
   3. Place Protected Zone in Access: Disable all intrusion-alarm circuits of a specific protected zone. Tamper circuits shall not be disabled by operator.
   4. Place Protected Zone in Secure: Activate all intrusion-alarm circuits of a protected zone.

5. Protected Zone Test: Initiate operational test of a specific protected zone.
6. System Test: Initiate system-wide operational test.
7. Print Reports.

F. Timed Control at Central-Station Control Unit: Allow automatically timed "secure" and "access" functions of selected protected zones.

G. Automatic Control of Related Systems: Alarm or supervisory signals from certain intrusion detection devices control the following functions in related systems:
1. Switch selected lights.
2. Shift elevator control to a different mode.
3. Open a signal path between certain intercommunication stations.
4. Shift sound system to "listening mode" and open a signal path to certain system speakers.
5. Switch signal to selected monitor from closed-circuit television camera in vicinity of sensor signaling an alarm.

H. Printed Record of Events: Print a record of alarm, supervisory, and trouble events on system printer. Sort and report by protected zone, device, and function. When central-station control unit receives a signal, print a report of alarm, supervisory, or trouble condition. Report type of signal (alarm, supervisory, or trouble), protected zone description, date, and time of occurrence. Differentiate alarm signals from other indications. When system is reset, report reset event with the same information concerning device, location, date, and time. Commands shall initiate the reporting of a list of current alarm, supervisory, and trouble conditions in system or a log of past events.

I. Response Time: 2 seconds between actuation of any alarm and its indication at central-station control unit.

J. Circuit Supervision: Supervise all signal and data transmission lines, links with other systems, and sensors from central-station control unit. Indicate circuit and detection device faults with both protected zone and trouble signals, sound a distinctive audible tone, and illuminate an LED. Maximum permissible elapsed time between occurrence of a trouble condition and indication at central-station control unit is 20 seconds. Initiate an alarm in response to opening, closing, shorting, or grounding of a signal or data transmission line.

K. Programmed Secure-Access Control: System shall be programmable to automatically change status of various combinations of protected zones between secure and access conditions at scheduled times. Status changes shall be preset for repetitive, daily, and weekly; specially scheduled operations shall be preset up to a year in advance. Manual secure-access control stations shall override programmed settings.

L. Manual Secure-Access Control: Coded entries at manual stations shall change status of associated protected zone between secure and access conditions.

2.2 SYSTEM COMPONENT REQUIREMENTS

A. Compatibility: Detection devices and their communication features, connecting wiring, and central-station control unit shall be selected and configured with accessories for full compatibility with the following equipment:

1. Data Gathering Panel, Output Module, Input Module, 28 13 00 PHYSICAL ACCESS CONTROL SYSTEM.

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.

1. Minimum Protection for Power Lines 120 V and More: Auxiliary panel suppressors complying with requirements in Division 26 Section TRANSIENT-VOLTAGE SUPPRESSION FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS.
2. Minimum Protection for Communication, Signal, Control, and Low-Voltage Power Lines: Comply with requirements in Division 26 Section TRANSIENT-VOLTAGE SUPPRESSION FOR LOW-VOLTAGE ELECTRICAL POWER CIRCUITS as recommended by manufacturer for type of line being protected.

C. Interference Protection: Components shall be unaffected by radiated RFI and electrical induction of 15 V/m over a frequency range of 10 to 10,000 MHz and conducted interference signals up to 0.25-V RMS injected into power supply lines at 10 to 10,000 MHz.

D. Tamper Protection: Tamper switches on detection devices, controllers, annunciators, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or

partially disassembled and when entering conductors are cut or disconnected. Central-station control-unit alarm display shall identify tamper alarms and indicate locations.

E. Self-Testing Devices: Automatically test themselves periodically, but not less than once per hour, to verify normal device functioning and alarm initiation capability. Devices transmit test failure to central-station control unit.

F. Antimasking Devices: Automatically check operation continuously or at intervals of a minute or less, and use signal-processing logic to detect blocking, masking, jamming, tampering, or other operational dysfunction. Devices transmit detection of operational dysfunction to central-station control unit as an alarm signal.

G. Addressable Devices: Transmitter and receivers shall communicate unique device identification and status reports to central-station control unit.

H. Remote-Controlled Devices: Individually and remotely adjustable for sensitivity and individually monitored at central-station control unit for calibration, sensitivity, and alarm condition.

2.3 ENCLOSURES

A. Interior Sensors: Enclosures that protect against dust, falling dirt, and dripping noncorrosive liquids.

B. Interior Electronics: NEMA 250, Type 12.

C. Exterior Electronics: NEMA 250, Type 4X [fiberglass] [stainless steel].

D. Corrosion Resistant: NEMA 250, Type 4X [PVC] [stainless steel].

E. Screw Covers: Where enclosures are accessible to inmates, secure with security fasteners of type appropriate for enclosure.

2.4 EQUIPMENT ITEMS

A. General:

1. All requirements listed below are the minimum specifications that need to be met in order to comply with the IDS.
2. All IDS sensors shall conform to UL 639, Intrusion Detection Standard.
3. Ensure that IDS is fully integrated with other security subsystems as required to include, the CCTV, PACS, EPPS, and Physical Access Control System and Database Management. The IDS provided shall not limit the expansion and growth capability to a single manufacturer

and shall allow modular expansion with minimal equipment modifications.

B. IDS Components: The IDS shall consist of, the following components:
   1. Control Panel
   2. Exterior Detection Devices (Sensors)
   3. Interior Detection Devices (Sensors)
   4. Power Supply
   5. Enclosures

2.5 CONTROL PANEL

A. The Control panel shall be the main point of programming, monitoring, accessing, securing, and troubleshooting the IDS. Refer to American National Standards Institute (ANSI) CP-01 Control Panel Standard-Features for False Alarm Reduction.

B. The Control Panel shall provide a means of reporting alarms to an Physical Access Control System and Database Management via a computer interface or direct connection to an alarm control monitoring panel.

C. The Control panel shall utilize a Multifunctional Keypad, Input and Output Modules for expansion of alarm zones, interfacing with additional security subsystems, programming, monitoring and controlling the IDS.

D. The Control panel shall meet or exceed the following minimum functional requirements for programming outputs, system response, and user interface:
   1. Programming Outputs:
      a. 2 Amps alarm power at 12 VDC
      b. 1.4 Amps auxiliary power at 12 VDC
      c. Four alarm output patterns
      d. Programmable bell test
      e. Programmable bell shut-off timer
   2. System Response:
      a. Selectable point response time
      b. Cross point capability
      c. Alarm verification
      d. Watch mode
      e. Scheduled events arm, disarm, bypass and un-bypass points, control relays, and control authority levels
   3. User Interface:

a. Supervises up to eight command points (e.g. Up to 16 unsupervised keypads can be used)
b. Provides custom keypad text
c. Addresses full function command menu including custom functions
d. Allows user authority by defined area and 16-character name
e. Provides for 14 custom authority control levels allowing user's authority to change, add, delete pass codes, disarm, bypass points, and start system tests.

4. The Control panel shall meet or exceed the following technical characteristics:

Input Voltage via 110 VAC or 220 VAC Step-down Transformer	16 or 18 VAC
Operating Voltage	12 VDC
Output Voltage	12 VDC @ 2 A max
Direct Hardwire Zones	7
Partitions	8
Multifunctional Keypads	16 (2 per partition)
Communications Port	RJ-11

E. A multifunctional keypad shall be utilized as a user interface for arming, disarming, monitoring, troubleshooting, and programming the alarm control panel.

F. Keypads shall have the following features:

1. Multiple function keypads suitable for remote mounting, no greater than 1333 m (4000 ft), shall be provided from the control panel and have a light emitting diode (LED) readout of alarm and trouble conditions by zone.
2. An alphanumeric English language display, with keypad programmability, and EE-PROM memory, shall also be provided.
3. Trouble alarm indicators shall be distinguishable from intrusion alarms.
4. A minimum of four (4) zones selectable as entry and exit with programmable time delay.
5. Complete system test activated capability at the keypad.
6. Capability for opening and closing reports to a remote monitoring location.
7. Adjustable entry and exit delay times.

8. Capability for a minimum of two (2) multiple function keypads.
9. Capability to shunt or bypass selected interior zones while arming perimeter protection and remaining interior zones.
10. Capability for a minimum of seven assignable pass-codes that are keypad programmable from a suppressed master code.
11. The control panel shall have a communications port that shall allow for communications with a computer for programming, monitoring, and troubleshooting purposes. The communications port shall be, at a minimum, and RJ-11 or better.
12. The control panel shall have a systems success probability of 95% or better, and shall include the following success considerations:
    a. False Alarm: Shall not exceed one (1) false alarm per 30 days per sensor zone.
    b. Nuisance Alarm: Shall not exceed a rate of one (1) alarm per seven (7) days per zone within the first 60 days after installation and acceptance. Sensor adjustments shall be made and then shall not exceed one (1) alarm per 30 days.
13. The Control Panel shall be able to detect either a line fault or power loss for all supervised data cables.
    a. Line Fault Detection: Communication links of the IDS shall have an active mode for line fault detection. Fault isolation at the systems level shall have the same geographic resolutions as provided for intrusion detection. The line fault alarm shall be clearly distinguishable from other alarms.
    b. Power Loss Detection: Provide the capability to detect when critical components experience temporary or permanent loss of power and annunciate to clearly identify the component experiencing power loss.

2.6 KEYPADS

A. Keypads shall meet or exceed the following technical characteristics:

Connections	4-wire flying lead for data and power
Operating Temperature	0°C to +50°C (+32°F to +122°F)
Display Window	8-point LED
Indicators: Illuminated keys	Armed Status-LED
	Point Status-LED
	Command Mode-LED
	Power-LED

Voltage	Nominal 12 VDC

2.7 INPUT MODULE

A. An input module shall be utilized to connect additional detection devices to the control panel. This module shall meet or exceed the following technical characteristics:

Operating Voltage	8.5 to 14.5 VDC Nominal
Zone Inputs	Style A (Class B) Supervised
Operating Temperature	0 to 40 degrees C (32 to 140 degrees F)

2.8 OUTPUT MODULE

A. An output module shall be utilized to interface the control panel with other security subsystems. The output module shall meet or exceed the following technical characteristics:

Operating Voltage	8.5 to 14.5 VDC Nominal
Output Relays	"Form C" Dry Relay Contracts
Relay Contact Rating	4A @ 24 VDC
	4A @ 24 VAC
	1A @ 70 VAC
Operating Temperature	0 to 40 degrees C F (32 to 140 degrees)

2.9 EXTERIOR DETECTION DEVICES (SENSORS)

A. The IDS shall consist of interior, exterior, and other detection devices that are capable of:
   1. Locating intrusions at individually protected asset areas or at an individual portal
   2. Locating intrusions within a specific area of coverage
   3. Locating failures or tampering of individual sensors or components.

B. Audible annunciation shall meet UL 464 Audible Signal Appliance requirements as well as other stated within this specification. IDS shall provide and adjust for devices so that coverage is maximized in the space or area it is installed in. For large areas where multiple devices are required, ensure exterior device coverage is overlapping.

C. Detection sensitivity shall be set up to ensure maximum coverage of the secure area is obtained while at the same time limiting excessive false alarms due to the environment and impact of small animals. All

detection devices shall be anti-masking with exception of video motion detection.

D. Dual sensor technology shall be used when possible. Sensor technology shall not be of the same type that is easily defeated by a single method. This shall reduce the amount of false alarms.

E. Exterior sensors described in this section are intended for outdoor use for perimeter and fence control monitoring purposes. Some sensors described in the interior sensor section shall be utilized that can provide both outdoor and indoor protection.

F. External Sensors Environmental Characteristics:

Temperature	-25°F - 140°F (-32°C - 60°C)
Pressure	Sea Level to 15,000 ft. (4573m) above sea level
Solar Radiation	Six (6) hrs. exposure at dry bulb temp. 120°F (60°C)
Rain	Two (2) in. (50 mm) per hour
Humidity	5% - 95%
Fungus	Components of non-fungus nutrient materials
Salt/fog	Atmosphere 5% salinity
Snow loading	48 lbs per sq. ft. (234 kg per sq. meter)
Ice accumulation	Up to ½ in. (12.7 mm) radial ice
Wind limitations	50 mph (80 km/h) Gusts to 66 mph (106 km/h)
Acoustical Noise Suitability	> 110 decibels (dB)

G. Electromechanical Fence Sensors

1. Electromechanical Fence Sensors: Shall sense mechanical vibrations or motion associated with scaling, cutting, or attempting to lift standard security chain link fence as follows: Note: Dead zones shall not exist from a monitoring and alarm coverage perspective.
2. The sensor zone control unit shall alarm when a sufficient number of sensing unit activations surface within a specified time period.
3. Individual sensing units and the alarm thresholds shall be field adjustable (i.e., performed by an authorized technician or trained maintenance personnel). Midrange sensitivity settings shall alarm a sensor when an intruder attempts to scale or climb the fence in areas of reduced sensitivity (e.g. around poles and rigid supports)

and attempted lifting or scaling of a fence, including using assisted methods (e.g. items leaned against the fence)occur. Sensors shall allow gradual changes in fence positioning due to expansion, settling, and aging, without increased numbers of nuisance alarms taking place.

4. Exterior sensor components shall be housed in rugged, corrosion-resistant enclosures, protected from environmental impact and degradation.
5. Fence cable support hardware shall be weather-resistant. Interfacing between sensor zones and alarm enunciators, require they be installed in underground conduit and cables.
6. Fencing Cable Technical Characteristics:

Input voltage	12-30 V DC
Current requirement	4 mA quiescent 25 mA (max) in alarm
Transient suppression	On data, power input lines and on relay output
Enclosure	Weatherproof
Sensor type	Inertial band-pass-filter
Transponder	4 zone controller Output relays for dry contacts, or RS-485 communication Inputs for weather sensor
Sensor spacing	2.5 to 3 m (8.2 to 9.9 ft.)
Data I/O	RS 485 communications
Data output	• Vibration alarm (in either line) • Line alarm (in either line) • End of line action • Wind situation • Weather sensor line failure • Enclosure tamper switch • Program fail • A dry contact output with end of line resistor per each of 4 vibration inputs

H. Strain Sensitive Cable Sensors

1. Strain-Sensitive Cable Sensors: These devices shall detect movement on a standard security chain link fence associated with an intruder scaling, cutting through, or attempting to lift the fence fabric.

The entire sensor system shall be mounted directly on the fence and able to withstand the same environmental condition exposures. Note: The length of the fence shall also maintain no sensor monitoring dead zones.

a. Individual sensing units and the alarm threshold shall be field adjustable (i.e. by authorized technicians or trained maintenance personnel) for compensation of winds up to 40km/h (25 mph) or by zone without increased nuisance alarms while maintaining specified sensor performance as under ambient conditions.
b. Sensor zone control units shall provide an analog audio output for interface to an external audio amplifier to permit remote audio assessment regardless of sensor alarm status. The sensor zone control unit alarm output interface shall be a separately supervised relay contact normally open or normally closed.
c. The length of the fence shall be divided into 100m (300 ft) zones.
d. The sensing unit shall consist of transducer cable capable of achieving specified performance either by attachment directly to the fence fabric by plastic cable every 300 to 455 mm (12 to 18 inches) or by installation inside electrical metallic tubing conduit mounted on the fence.
e. The sensing unit shall have equal adjustable sensitivity throughout the entire fence length. Only conventional waterproof coaxial cable connectors shall be used for connections of the sensing unit to avoid electrical magnetic interference.
f. The entire sensor system shall be tamper resistant and capable of detecting tampering within each portion of the system by sensor zone.
g. Magnetic Sensor Cable Technical Characteristics:

Magnetic Sensor Cable	
Type cable	Four (4) conductor magnetically loaded, aluminum foil shield and ground wire
Maximum zone length	300 m (1000 ft.)
Life expectancy	10 years
Sensitivity	Uniform over length of cable
Audio Bandwidth	Five (5) kHz
Outer Cover	Black Polyurethane, Ultraviolet resistant

Insensitive Cable (remote processing)	
Type cable	2 twisted pair, individually sealed
Outer Cover	Black Polyurethane, Ultraviolet resistant
Dual Channel Signal Processor	
Input Power	10.2 – 13.8 VDC 65 mA
Alarm Output	Alarm contacts SPNC 0.75 mA, 200 VDC
Indicators	Three (3):Alarm, tamper, events
Cut processor	Sensitivity - 10 settings Time window – 0.5 – 4.5 min Event Counter – nine (9)
Climb processor	Sensitivity – 10 settings

I. Buried Electromagnetic Cable Sensor

1. The system shall be able to function as a standalone system or as an integral component of a centralized security control system.
2. The detection field shall be formed by radio-frequency (RF) signals carried by sensor cables that are buried along the perimeter.
3. The RF signals shall form an invisible electromagnetic detection field around the sensor cables that can detect the presence of an intruder passing through the field.
4. The system shall detect moving intruders that have a significant electromagnetic field (e.g. humans, vehicles, and other large conductive objects) while rejecting other environmental stimuli such as birds, small animals, weather elements.
5. A sensor module shall contain the electronics required to:
   a. Transmit and receive the RF signal without the use of an external antenna.
   b. Monitor the detection fields of two (2) zones and produce an alarm when an intruder enters the zones.
6. Field power modules shall be available for standalone systems and networked systems.
7. As a standalone system, the primary operator interface shall be a local interface module that is connected directly to the sensor module.
8. As part of a network configuration, the primary operator interface shall be a personal computer (PC) based central controller. The

central controller shall monitor the performance of the entire buried coaxial cable outdoor intrusion detection system and any auxiliary sensors. The central controller shall have the capability of acknowledging, processing and reporting alarms. A customized color site map that is displayed on the PC monitor shall be an available option for the system to monitor sensor locations.

9. Transmission and reception shall be accomplished without the use of antennae. The RF signal shall be monitored and analyzed by the sensor module for any changes in the detection field properties that would indicate the presence of an intruder.
10. Alarms generated by internal electronic processes (cables excluded) shall not exceed one (1) per zone per month. System generated alarms are averaged based on the total number of zones in the system.
11. When the system is calibrated in accordance with the manufacturers' recommendations, the detection field shall be continuous and uniform over the protected site perimeter.
12. When system sensitivity is calibrated according to manufacturers' recommendations, the detection field shall not detect a valid target that is a minimum of 2 m. (6.5 ft) from the nearest sensor cable.
13. Buried Electromagnetic Cable Sensor Technical Characteristics:

Burial Medium	Clay, sand, soil, asphalt, concrete
Snow limitation	Up to 30c. (1 foot) deep
Degradation Guaranty	Minimum 10 yr.
Detection Medium	Radio Frequency (RF)
Detection Coverage	Maximum 200m (656 ft.) per zone
Detection Capability	Human: >34 kg. (75 lbs)
Detection Speed	Human walk, crawl, run, roll, jump 2.5 cm/sec (1 in./sec.) –15 m/sec (50 ft./sec.) regardless of direction across field
Velocity Response	Programmable
Detection Probability	Human: 99% with 95% confidence factor Animal: Less than 10 kg. (22 lbs.) Less than 5% with 90% confidence factor
Terrain Detection Capabilities	Even to uneven ground with maximum (max) grade 4 m (13 ft.) Corner bend radius 6.5m (22 ft.)

Detection Field Cross Section	Upright walking; Height1m: (3.2 ft.) above ground Width: 2m (6.5 ft.) single cable 3m. (9.75 ft) double cable
Sensing Element	Ported (leaky) coaxial cables
Cable Construction	Abrasion and chemical resistant, high density polyethylene, with flooding compound
Cable Requirements	Two (2):Transmit cable, receive cable
Configurations Available	Two (2):Single cable, double cable
Cable Lengths	50 m (164 ft.), 100 m (328 ft.), 150 m (492 ft.), 200 m (656 ft.)
Zone Length Minimum	10 m (33 ft.)
Antenna Requirements	None
False alarm rate	Less than one (1) per day

14. Sensor Module: Each sensor module shall transmit, receive and process the electromagnetic detection fields independently from other sensor modules. Failure of one (1) sensor module shall not affect the remainder of the perimeter. The sensor module shall operate as either a standalone unit, or in a network configuration in conjunction with a central controller. The sensor module shall be mounted in a weatherproof enclosure when installed outdoors as follows.
    a. The sensor module shall use an adaptive filter to analyze the detection signal and adjust the signal processing to reduce nuisance alarms caused by environmental factors such as rainfall or slow-running water.
    b. The sensor module shall identify, by type, sensor, tamper, and failure alarms either locally at the sensor module, or centrally at a central controller. The sensor cables shall provide the data paths between the sensor modules, for the transmission, reception and display of alarm conditions.
    c. Each sensor module shall include an internal interface for the collection of auxiliary sensor data.

d. It shall be possible to supply power directly to each unit for applications that require either a single sensor module or multiple sensor modules with independent power sources.

e. The sensor module's response shall be demonstrated by an analog output signal that can be displayed on a voltmeter or on an analog voltage-recording device. The output signal shall be encoded to indicate the alarm trip-point, thereby showing the sensor module’s degree of detection above or below the level required to cause an alarm.

f. Sensor Module Technical Characteristics:

Sensor Module Power Output	12 VDC at 150 milliampere (mA)
Sensor Module Power Requirements	Stand-alone: 12 VDC 500 mA max Network: 48 VDC 175 mA max
Sensor capability	Two (2) zones independent of other sensor modules
Sensor coverage	400 m. (1,312 ft)
Calibration	Locally and remotely from Central Controller
Self Test	Via 4 relay drive points
Detection coverage	Unlimited expansion using multiple modules
Nuisance avoidance	Adaptive filtering
Connectivity	RS-485 twisted pair cable
Sensor Support	Dual redundant data paths
Transmission capability	Eight (8) contact-closure signals

g. The field power module shall be capable of supplying power to sensor modules as follows:

1) In a network configuration where power is supplied redundantly via the sensor cables, the sensor modules shall operate within specifications when power is removed from either of the two (2) sensor cables.

2) Each cable zone shall be capable of being calibrated either locally at the sensor module, or remotely from a central controller. Additional signal processing parameters, including high speed and low speed response, shall be capable of being set from a central controller.

3) Detection sensitivity for each zone shall be adjusted either locally at the sensor module with a local interface module, or from a central controller. Access to the local calibration controls shall require the removal of the enclosure's cover and shall cause a tamper alarm to be generated.

4) Power Module Technical Characteristics:

Output support	Nine (9) sensor modules max 2,800 m (3,063 yards)
System block configuration	1,400 m (1,531 yds.)
Power Output	Stand-alone: 12 VDC 500 mA max Network: 48 VDC 175 mA max

J. Microwave Sensors

1. The system shall be a modular microwave outdoor intrusion detection sensor based on microwave radar technology. The detection field shall be formed by radio frequency (RF) signals, in the X-band, carried between a transmitter and a receiver. The RF signals shall form an invisible electromagnetic detection field that can detect the presence of an intruder who walks, crawls, rolls, jumps, or runs through a detection field as follows.

   a. Transmitter shall create the RF signals that form the detection field. A receiver shall house the necessary electronics to monitor the detection field and to raise an alarm when an intruder enters the field. The transmitter and receiver shall be powered individually, as a standalone unit.

   b. An electromagnetic wave is emitted by the antenna of the transmitter and received by the antenna of the receiver. The receiver shall detect changes that are caused by the presence of an intruder.

   c. The system shall detect moving intruders having a significant electromagnetic cross-section (e.g. humans, vehicles, and other large conductive objects) rejecting other environmental stimuli.

   d. The system shall be capable of detecting human intruders moving through the detection field regardless of the direction of motion.

   e. Processor description: The receiver shall contain the necessary electronics to perform the signal processing for the detection

zone. The transmitter and receiver shall be operated as a standalone unit with independent power and data. Both the transmitter and receiver shall be installed in weatherproof enclosures.

f. Distributed processing: Transmitter-receiver pairs distributed along a perimeter shall provide extended range and fail-safe operation. The failure of one (1) pair shall not affect the coverage of the remainder of the perimeter.

g. Alarms: The signal processor shall identify intrusion and tamper/fail alarms locally, at the transmitter or receiver.

1) An alarm caused by opening the outer enclosure of the transmitter or receiver shall be identified as a tamper alarm. Tamper alarms shall be distinctive from intrusion alarms.

2) Alarms caused by power failure or internal electronic failure are fail alarms, distinctive from intrusion alarms.

h. Microwave Sensor System Technical Characteristics:

Operating voltage Transmitter	11 – 15 VDC 70mA max. current
Operating voltage Receiver	11 – 15 VDC 30mA max. current
Operating Environment	-30°C (-22F) and 60°C (140 F)
LEDs	POWER ON, WRONG CHANNEL, ALARM
Maximum zone length	10 m (33 ft.) and a maximum of 457 m (1500 ft.) per zone.
Detection Success Probability	34 kg (75 lbs.) 99% with a 95% confidence factor
Operating frequency	X Band 10.525 ± 0.025 gigahertz (GHz)
Type modulation	Class A2 with one (1) of six (6) selectable crystal-controlled frequencies.
Detection movement speed	5 cm/sec. (2.0 in. sec.) to 8 m/sec. (26 ft. sec.)
Audio assessment	Via 1/8 in. phone jack on receiver
Alarms	Tamper, failure, intrusion
Tamper/fail alarm	Via sealed relay rated one (1) ampere 28 VDC
Intrusion field alarm	Via sealed relay rated two (2) ampere 28 VDC.
Intrusion alarm latch time	Adjustable: 0.5 sec and 10 sec
Processing	Distributed: receiver/transmitter pairs

Perimeter Length	Single Receiver/transmitter pair: 457 m (1500 ft.) Multiple pairs: Unlimited

K. Taut-Wire Sensors

1. These sensors shall consist of a perimeter intrusion detection sensor incorporated into a wire security fence. Intrusion detection shall be achieved by sensing the cutting of any single wire or deflection of the fence, such as by climbing.
   a. Sensor zone: Includes one (1) or more 61 m (200 ft.) maximum sections of 2.3 m (seven (7) ft.) high parallel fence. Each sector shall consist of 13 horizontal barbed wires attached to the taut-wire fence posts, and three (3) strands as outriggers, and an "anti-ladder" trip wire supported by rods extending from the outriggers for a total vertical height of approximately 2.6 m (eight (8) ft.).
   b. Displacement switches for each horizontal wire shall be mounted 2within a pre-wired channel fastened to the fabric fence post at the midpoint of each section. Outrigger barbed wire and tripwire shall share the same switch in these locations.
   c. Abnormal displacement of a switch lever resulting from cutting or deflecting its attached wire, as by climbing on or through fence strands, shall initiate an alarm condition. A damping mechanism within the sensor shall reduce alarm thresholds due to slowly changing environmental phenomena such as the ground shifting, daily and seasonal temperature variations, and winds changes.
   d. Sensor switches shall be provided with electrical contact closures as a means for initiating an alarm condition.
   e. The system shall provide relay outputs to interface alarm outputs with the overall IDS.
   f. Taut-wire Sensor Technical Characteristics:

Power requirements	Input: 120 - 208 VAC
Sensor zone control unit capability	Up to 10 zones
Sensitivity	19 mm (0.75 in.)
Environment Limits	Winds up to 56 km/h (35 mph)

L. Electrostatic Field Sensors

1. These sensors generate an electrostatic field around one (1) or more horizontal wires and detect intrusion of the electrostatic field as follows.
   a. Sensors shall initiate an alarm when an intruder attempts to approach or scale a fence or physical barrier. Electrostatic field sensors shall detect human presence by generating an electric field around one (1) or more horizontal wires that detects the induced signal in parallel sensing wires.
   b. Sensors shall monitor the induced signal for changes that result from the presence of a human body, which distorts coupling between transmitting and sensor wires.
   c. Sensor components shall consist of one (1) or more signal generator field wires and mounting hardware, sensing wires, an amplifier/signal processors, power supplies, and necessary circuitry hardware. Mounting and support hardware shall be provided by the equipment manufacturer.
   d. Wires shall be spring tension-mounted and provided with end-of-line terminators to detect cutting, shorting, or breaking of the wires.
   e. Sensor configuration shall be able to detect an intruder that shall crawl under the bottom wire, through the wires, or over the top wire by divided sensor zones.
   f. Signal processing circuitry shall provide filtering to distinguish nuisance alarms.
   g. Sensor configuration shall incorporate balanced, opposed field construction to eliminate distant field noise.
   h. Sensor sensitivity shall be adjustable. Adjustment controls shall be inaccessible to operating personnel and system sensitivity controls shall be set at approximately midrange.
   i. Sensors shall provide some means of indicating an alarm condition at the protected perimeter to facilitate installation and calibration.
   j. The sensor system shall include an indicator disabling device within a tamperproof enclosure.
2. Electrostatic Field Sensor Technical Characteristics:

Power	115 -120 VAC transformer

Operating Power Requirements	16-22 VAC, 225 mA single zone 275 dual zone
Detection Sensitivity	77 lbs within 915 mm (3 ft.)-midrange setting
Detection Velocity	30 m (0.1 ft.) - 300 m (10 ft.) per sec
Supervision	AC Monitoring of fence and field wires – open, short, and grounded circuits
Tamper Switch	One (1)-pole, two (2) position
Lightening arrestor	Transistors on all relay output and power inputs
Battery Charger	Built-in
Processor Enclosure	Base plate, steel NEMA enclosure Weather resistant

M. Gate Sensors
   1. They shall be provided in accordance with specific fence sensor manufacturer's recommendations to ensure continuous fence sensor zone protection for the entire protected perimeter.
      a. When gate units are not provided by the fence sensor manufacturer, provide separately zoned Balanced Magnetic Switch (BMS) gate sensors.
      b. Sensors shall perform as specified in Section 2.3-E.6 entitled "Balanced Magnetic Switches (BMS)."

2.10 INTERIOR DETECTION DEVICES (SENSORS)

A. The IDS shall consist of interior, exterior, and other detection devices that are capable of:
   1. Locating intrusions at individually protected asset areas or at an individual portal
   2. Locating intrusions within a specific area of coverage
   3. Locating failures or tampering of individual sensors or components.
B. Provide and adjust for devices so that coverage is maximized in the space or area it is installed in. For large rooms where multiple devices are required, ensure device coverage is overlapping.
C. Detection sensitivity shall be set up to ensure maximum coverage of the secure area is obtained while at the same time limiting excessive false alarms due to the environment and impact of small animals. All

detection devices shall be anti-masking with exception of video motion detection.

D. Dual sensor technology shall be used when possible. Sensor technology shall not be of the same type that is easily defeated by a single method. This shall reduce the amount of false alarms.

E. Interior Environmental Conditions: Systems shall be able to operate in environmentally protected interior areas and shall meet operational performance requirements for the following ambient conditions:

1. If components are installed in unheated areas they shall be able to operate in temperatures as low as -17 C (0 F)
2. Interior Sensor Environmental Characteristics:

Temperatures	0 to 50 C (32F to 120 F)
Pressure	Sea Level to 4573m (15,000 ft.) above sea level
Humidity	5% - 95%
Fungus	Components of non-fungus nutrient materials
Acoustical Noise	Suitable for high noise environments above 100db

F. Balanced Magnetic Switches (BMS)

1. BMS switches shall be surface or recessed mounted according to manufacturer’s instructions. Recessed mounted is the preferred method to reduce tampering or defeating of the system. Switches shall activate when a disturbance in the balanced magnetic field occurs.
2. Switches shall have a minimum of two (2) encapsulated reed switches.
3. Contractor shall provide each BMS with a current protective device, rated to limit current to 80% of the switch capacity.
4. Surface Mounted BMS: For exterior application, components shall be housed in weatherproof enclosures.
5. BMS field adjustments in the fixed space between magnet and switch housing shall not be possible. Attempts to adjust or disturb the magnetic field shall cause a tamper alarm.
6. BMS Technical Characteristics:

Maximum current	.25 amperes
Maximum voltage	30 VDC
Maximum power	3.0 W (without internal terminating

	resistors). 1.0 W (with internal terminating resistors).
Components	Three (3) pre-adjusted reed switches Three (3) pre-adjusted magnets
Output contacts	Transfer type SPDT
Contact rating	0.5 amperes, 28 VDC
Switch mechanism	Internally adjustable ¼ - ½ in. (6-13 mm)
Wiring	Two (2) wires #22 American Wire Gauge (AWG), three (3) or 11 foot attached cable
Activation lifetime	1,000,000 activations
Enclosure	Nonferrous materials
Tamper alarm activation	Cover opened 3 mm (1/8 in.) and inaccessible until actuated

G. Window Intrusion Detection

1. These IDS devices shall detect intrusions thru inertia (shock) or by sound, and shall utilize either a Breakwire Sensor or Acoustic and Seismic Sensor.
2. Break wire Sensors (wire trap):
   a. Detect intrusion thru shock or breakage of window glazing. Also used for the protection of utility openings.
   b. Sensors shall consist of fine wire embedded in or affixed to interior of glazing. Breakage of protected glazing shall result in wire breakage.
   c. Wire shall be hard-drawn copper up to #26 AWG diameter.
   d. If sensors are affixed to glazing the sensor shall be protected by a clear coating which shall not affect sensor functioning.
   e. Sensor shall be terminated in insulated connectors which are concealed and tamper resistant.
   f. Protection of inlet openings:
      1) Shall consist of up to 26 AWG hard-drawn copper wire with a tensile strength of 17.8 N 4 pounds maximum.
      2) Wire shall be interlaced throughout the opening such that no opening between wires shall be larger than 100 mm (4 in.. on center.

3) Sensors shall be terminated so that attempts to cut the wire or otherwise enlarge openings between wires shall cause an alarm.
4) Sensors shall be terminated in insulated connectors which are concealed and tamper resistant.

H. Acoustic and Seismic Glass Break Detectors

1. Detects intrusion thru the use of audible sound and vibration emitted from the breaking of glass using a tuned frequency range and sound pattern recognition. This initiates an alarm when glass they protect is broken or cracked.
2. Detectors shall be installed in strict conformance with manufacture’s installation instructions.
3. The detector’s power circuit shall be switched via an output relay on the control panel to provide latching alarm LED reset capability.
4. Sensors shall be contained in a fire-resistant ABS plastic housing and shall be mounted in contact with a window.
5. Sensing shall be accomplished through the use of a mechanical filtered piezoelectric element.
6. Sensors shall have a sensitivity adjustment controlling output voltage from the piezoelectric element which triggers a solid-state latching device.
7. Sensors shall selectively filter input to minimize false alarms and not initiate alarm in response to ambient seismic vibrations or other ambient stimuli.
8. A manufacture’s test unit shall be used to validate the sensor by simulating glass breakage.
9. The Contractor shall provide sensors for adjusting sensitivity and two-sided polyurethane tape with acrylic adhesive for window attachment.
10. Sensor shall include exterior label to protect adhesive tape from direct sunlight.
11. Window Intrusion Detection Sensor Technical Specifications:

Power	Auxiliary power supply 12 VDC @ 25 mA (+/-) 10%
Power Input	10 – 15 VDC at 16mA protected against reverse polarity, 20 mA during relay closure
Relay Output Rating	Minimum of 25 VDC mA

Coverage Audio	6,000 Square ft.
Coverage Glass Break	7.5 m (25 ft.) wide by 7.5 m wide (25 ft.) Minimum: 7.62 m (25 feet) from the detector to the furthest point on protected glass.
Audio Output	300 – 12,000 HZ
Alarm Output	Relay NO or NC selectable
Interconnection	12 pin Panduit connector, 22 AWG
Radio Frequency Interface	No alarm or setup on between frequencies 26 – 100 MHz 50 v/m Immunity to mobile RF interference 100 watts 3 m @ (9.8 Ft.) in 27-100 MHz range
Alarm period	Two (2) to three (3)
Mounting	Ceiling, same wall, adjacent wall, opposite wall
Features	Test and alarm LEDs for acoustic seismic and alarm condition latching, Alarm LED and tamper switch on cover.
Alarm verification	Digital signal processing or dual acoustic processing technologies
Detection ability	Single and multi-pane glass, wired glass, tempered and laminated glass to 6 mm (¼ inch) or thickness

I. Screening

1. This material shall be used on windows to protect and detect intrusion as follows.
   a. Security screens shall be constructed from a maximum of 26 AWG insulated hard-drawn copper.
   b. Screens shall be connected to an alarm circuitry by means of flexible armored cords. Security screen circuitry shall provide end-of-line resistors in series or equivalent methods ensuring alarm activation if short-circuiting of the screen is attempted.
   c. If unable to install a break wire sensor (wire traps), then tamper switches shall be provided.
   d. Contractor shall provide tamper switches in the frames as required with not less than one (1) switch on each side if dimensions are 610 mm two ((2) ft. square) or less, and two (2) switches if dimensions exceed 610 mm (2 ft. square). Tamper

switches shall be corrosion-resistant, spring-operated, and shall initiate an alarm with a movement of 50 mm (two (2) in.) or less before access to the switch is possible.

e. Electrical characteristics of the switch shall match the alarm system requirements.

J. Vibration Sensors

1. These sensors shall initiate alarms upon detecting drilling, cutting, or blasting through walls, or other methods of forced entry through a structure as follows.
2. Sensors shall detect and selectively amplify signals generated by forced penetration of a protective structure.
3. Sensors shall be designed to give peak response to structurally conveyed vibrations associated with forcible attack on the protected surface.
4. Sensors shall initiate an alarm if attempts are made to remove them from the surface of the wall.
5. Sensors shall be enclosed in protective mountings.
6. Sensors shall include an adjustable alarm discriminator to prevent incidental vibrations which shall occur from triggering the alarm circuit.
7. Sensors shall be provided with a tamper switch.
8. Sensor sensitivity shall be individually adjustable unless a sensor is designed to accommodate vibration ranges of specific surface type on which it shall be mounted. Sensitivity adjustments shall not be accessible without removing the sensor cover. Also, a sensor shall not be responsive to airborne sound.
9. Vibration Sensor Technical Characteristics:

Power requirements	External DC power source Eight (8)- 14.5 VDC, two (2) volt max peak to peak ripple
Alarm output	Form C (NO/C/NC) solid state alarm relay, rated 100 mA, 28 VDC
Tamper Connection	Tamper switch and external magnetic
Current rating and alarm output	No alarm state 20mA SPDT relay contact rating (Form C)
Sensor range	Concrete (poured) 4 m (13.2 ft.) Concrete block 2 m (6.6 ft.) Brick block 1 m (3.3 ft.)

Frequency range	3kHz-20kHz (-15db) 7kHz-10kHz (-10db)
Adjustable	Sensitivity eight (8) steps Alarm response 0-30 sec

K. Passive Infrared Motion Sensors (PIR)

1. These sensors shall detect an intruder presence by monitoring the level of infrared energy emitted by objects within a protected zone and meet ANSI PIR-01 Passive Infrared Motion Detector Standards Features for Enhancing False Alarm Immunity. An alarm shall be initiated when motion and temperature changes within set patterns are detected as follows.
2. The detector shall provide multiple detection zones distributed at a variety of angles and distance.
3. Sensors shall be passive in nature; no transmitted energy shall be required for detection.
4. Sensors shall be sensitive to infrared energy emitted at wavelengths corresponding to human body and other objects at ambient temperatures.
5. Sensors shall not alarm in response to general area thermal variations and shall be immune to radio frequency interference.
6. Sensors shall not be susceptible to changes in temperature due to an air conditioner being turned on or off.
7. Sensors shall be housed in a tamper-alarmed enclosure.
8. Sensor detectors shall include motion analyzer processing, adjustable lens, and walk test LED’s visible from any angle.
9. Sensors shall provide some means of indicating an alarm condition during installation and calibration. A means of disabling the indication shall be provided within the sensor enclosure.
10. Sensor detectors shall include a motion monitoring verification circuit that shall signal trouble or alarm if the detector fails to detect motion for an extended period.
11. PIR Technical Characteristics:

Power	Six (6) – 12 VDC 25 mA continuous current draw 38 mA peaks
Alarm Velocity	1500 mm (Five (5) ft.) at a velocity of 30 mm (0.1 ft.) per second, and

	one (1) step per second, assuming 150 mm (6 in.) per step. Also, faster than 30 mm (1 foot) per second, up to 3000 mm (10 feet) per second
Maximum detection range	10.6 m (35 ft.)
Frequency range- non activation or setup use	26 to 950 MHz using a 50 watt transmitter located 1 ft. from the unit or attached wiring
Infrared detection	1 1/2°C (3°F) different from the background temperature
Detection Pattern	180 degrees for volumetric units, non PIR 360
PIR 360°Detection Pattern	Programmable 60 detection zones including one directly below
Mounting	Ceiling and walls
Ceiling heights	2.4 m (Eight (8) ft.) – 5.4 m (18 ft)
Sensitivity adjustments	Three (3) levels

L. Microwave-Passive Infrared Detector

1. This sensor shall be designed to detect the motion of a human body within a protected area by means of a combination of microwave sensing technology and passive infrared (MPIR) sensing technology as follows.
2. The sensor shall require both technologies to sense intrusion before an alarm shall occur.
3. The sensor shall be designed for wall mounting on swivel bracket. A high-security gimbaled bracket shall be provided.
4. The PIR fields of view shall be focused on the pyroelectric element by means of an internal multi-faceted mirror.
5. The sensor shall incorporate a look-down lens system that detects the passing of an intruder directly beneath the sensor.
6. The sensor shall incorporate a microwave supervision system which shall activate the trouble output if the device technology fails.
7. The sensor shall incorporate self-diagnostics which shall monitor the sensor systems and report a trouble to the control panel if any system device fails.
8. The sensor shall have compensation against loss of sensitivity as the ambient temperature nears human body temperature.

9. MPIR Technical Characteristics:

Technology	Microwave and Passive Infrared
Power	Nine (9) – 15 VDC max current consumption 22 mA at 12 VDC
Operating Temperature	0° C (32°F) – 49° C (120° F)
Detection Area	30 m (98 ft.) long by 3 m (9.8 ft.) wide or 21 m (69 ft.) long by 21m (69 ft.) wide
Electronics	Microcontroller based
Alarm Contact	Form-C rated 125 mA, 28 VDC
Tamper Contact	125 mA, 28 VDC
Trouble Contact	Form-B rated 25 mA, 30 VDC
Microwave Operating Frequency	10.525 GHz
Microwave Sensitivity	Adjustable on circuit board
Detection pattern adjustment	Changing of internal lens
Sensing element	Pyro-electric
LED Indicators	PIR, microwave, alarm
Bug and Dust protection	zero-clearance, gasket bug guard
Lens	Interchangeable: standard 18x24 m (60x80 ft.), corner mounting, ultra-wide, pet alley, long range, room and corridor combo, room and ceiling combo, creep zone

M. Photoelectric Sensors:

1. The sensor devices shall be able to detect an intruder presence by sending out a series of infrared or ultraviolet beams. Intrusion is based on disruption of the signal beams as follows.
   a. Sensors shall consist of a modulating transmitter, focusing lenses, mirrors, demodulating receiver, power supply, and interconnecting lines.
   b. Beam transmitters shall be designed to emit light. Beams shall be reflected by one (1) or more mirrors before being received and amplified.
   c. The photoelectric sensor shall initiate an alarm when the beam is interrupted with monitoring controls set at midrange.

d. Transmitted beams shall be uniquely modulated to prohibit defeat of the IDS system by shining another light source into the receiver.
e. Sensors shall provide a means of local alarm indication on the detector for use at the protected zone during installation and calibration.
f. Sensors shall include an indicator-disabling device within the sensor enclosure.
g. Sensors shall utilize automatic gain control or be provided with sensitivity adjustments to allow for various beam lengths.
h. Sensor controls shall be inaccessible to operating personnel.
i. Sensors that use multiple beams shall be tested by attempting to crawl under and jump through and over beams. Each system sensor shall provide cutoffs of at least 90% to handle a high percentage of light cutoffs prior to initiating an alarm.
j. Sensor components shall be housed in tamper-alarmed enclosure.

2. Photoelectric Sensor Technical Characteristics:

Power requirements	Nine (9)-16 VDC, protected against reverse polarity
Relay output	Normally closed. 18 ohm resister in series with contacts. 0.5 amperes resistance/24 VDC
Current	Transmitter 15 mA, Receiver 15 mA
LED	Alignment, walk-test alarm, off
Range	Indoor: 39 m (130 ft.) Outdoor19.5 m: (65 ft.)
Alarm relay contacts	Two (2) amperes at 120 VAC minimum
Enclosure	High impact acrylic
Type	Dual beam
Mounting	Wall, corner, flush
Beam width	Six (6) degrees
Receiver field of view	Six (6) degrees horizontal and vertical
Adjustments	Vertical +10 – 20 degrees Horizontal 30 degrees
Alarm period	Two (2) – three (3) sec
Infrared source	Long-life Gallium Arsenide LED
Infrared sensor	PIN photodiode

Transmitter Frequency	One (1) kHz 10 microsecond pulse width
IR Wavelength	950 nm

2.11 TAMPER ALARM SWITCHES

A. The following IDS sensors shall be used to monitor and detect potential tampering of sensors, control panels and enclosures.

1. Tamper Switches: All enclosures including cabinets, housings, boxes, raceways, and fittings with hinged doors or removable covers containing circuits and power supplies related to the IDS shall include corrosion-resistant tamper switches.
2. Tamper alarms shall be annunciated to be clearly distinguishable from IDS alarms.
3. Tamper switches shall not be in a viewable from a direct line of sight perspective. The minimum amount of time the tamper switch becomes active and sends a signal after an enclosure is opened or panel removable is attempted, shall be one (1) second.
4. Tamper switches shall initiate when enclosure doors or covers is removed as little as 6.35 mm (1/4 inch) from the closed position unless otherwise indicated. Tamper switches shall be:
   a. Push/pull automatic reset type
   b. Inaccessible until switch is activated
   c. Spring-loaded and held in closed position by door or cover
   d. Wired to break a circuit when door or cover is removed with each sensor annunciated individually at a central reporting processor.
5. Fail-Safe Mode: Shall provide the capability to detect and annunciate diminished functional capabilities and perform self-tests. Fail-safe alarms shall be annunciated to be clearly distinguishable from other types of alarms.

2.12 POWER SUPPLY

A. A power supply shall only be utilized if the control panel is unable to support the load requirements of the IDS system.

B. All power supplies shall be UL rated and able to adequately power two entry control devices on a continuous base without failure.

C. Power supplies shall meet the following minimum technical characteristics:

INPUT POWER	110 VAC 60 HZ 2 amp

OUTPUT VOLTAGE	12 VDC Nominal (13.8 VDC) 24 VDC Nominal (27.6 VDC) Filtered and Regulated
BATTERY	Dependant on Output Voltage shall provide up to [insert number]Ah, rechargeable
OUTPUT CURRENT	4 amp max. @ 13.8 VDC 3 amp max. @ 27.6 VDC
BATTERY FUSE SIZE	3.5 A @ 250 VAC
CHARGING CIRCUIT	Built-in standard

2.13 AUDIBLE AND VISUAL ALARM DEVICES

A. Bell: Central-station control unit 10 inches (254 mm) in diameter, rated to produce a minimum sound output of 84 dB at 10 feet (3 m) from central-station control unit.
   1. Enclosure: Weather-resistant steel box equipped with tamper switches on cover and on back of box.

B. Weatherproof Motor-Driven Hooter: UL listed, rated to produce a minimum sound output of 120 dB at 3 feet (1 m), plus or minus 3 dB, at a frequency of 470 Hz. Rated for intermittent use: two minutes on and five minutes off.
   1. Designed for use in industrial areas and in high noise, severe weather marine environments.

C. Siren: 30-W speaker with siren driver, rated to produce a minimum sound output of 103 dB at 10 feet (3 m) from central-station control unit.
   1. Enclosure: Weather-resistant steel box with tamper switches on cover and on back of box.

D. Strobe: Xenon light complying with UL 1638, with a clear polycarbonate lens.
   1. Light Output: 115 cd, minimum.
   2. Flash Rate: 60 per minute.

2.14 SECURITY FASTENERS

A. Security fasteners shall be operable only by tools produced for use on specific type of fastener by fastener manufacturer or other licensed fabricator. Drive system type, head style, material, and protective coating as required for assembly, installation, and strength.

B. Drive System Types: Pinned Torx or pinned hex (Allen).

C. Socket Flat Countersunk Head Fasteners:
   1. Heat-treated alloy steel, ASTM F 835 (ASTM F 835M).
   2. Stainless steel, ASTM F 879 (ASTM F 879M), Group 1 CW.
D. Socket Button Head Fasteners:
   1. Heat-treated alloy steel, ASTM F 835 (ASTM F 835M).
   2. Stainless steel, ASTM F 879 (ASTM F 879M), Group 1 CW.
E. Socket Head Cap Fasteners:
   1. Heat-treated alloy steel, ASTM A 574 (ASTM A 574M).
   2. Stainless steel, ASTM F 837 (ASTM F 837M), Group 1 CW.
F. Protective Coatings for Heat-Treated Alloy Steel:
   1. Zinc chromate, ASTM F 1135, Grade 3 or 4; for exterior applications and interior applications where indicated.
   2. Zinc phosphate with oil, ASTM F 1137, Grade I, or black oxide.

PART 3 - EXECUTION

3.1 INSTALLATION

A. IDS installation shall be in accordance with Underwriters Laboratories (UL) 639 Standards for Intrusion Detection Units and UL 634 Standards for Connectors with Burglar Alarm Systems, and appropriate manufacture’s installation manuals for each type of IDS.
B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.
C. The Contractor shall install all system components including VA furnished equipment, and appurtenances in accordance with the manufacturer's instructions and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.
D. The IDS shall be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand-alone or designed as a computer network.
E. The IDS shall be able to be integrated with other security subsystems. Integration with these security subsystems shall be achieved by computer programming and the direct hardwiring of the systems. Determination for methodology shall be outlined when the system(s) is/are being designed and engineered. For installation purposes, the IDS shall utilize an output module for integration with other security

subsystems. The Contractor shall ensure all connections are per the OEM and that any and all software upgrades required to integrate the systems are installed prior to system start-up.

F. For programming purposes, the Contractor shall refer to the manufacturer’s requirements and Contracting Officer instructions for correct system operations. This includes ensuring computers being utilized for system integration meet or exceeds the minimum system requirements outlined in the IDS software packages.

G. Lightening and power surges to the central alarm reporting and display unit shall be protected at both ends against excessive voltages. This requirement shall apply for circuits that are routed both in underground conduits and overhead runs.

H. At a minimum, the Contractor shall install primary detection devices, such as three electrode gas-type surge arresters, and secondary protectors to reduce dangerous voltages to levels that shall cause no damage. Fuses shall not be permitted as protection devices.

I. The Contractor shall provide fail-safe gas tube type surge arresters on exposed IDS data circuits. In addition, transient protection shall protect against spikes up to 1000 volts peak voltage with a one-microsecond rise time and 100-microsecond decay time, without causing false alarms. The protective device shall be automatic and self-restoring. Also, circuits shall be designed or selected assuming a maximum of 25 ohms to ground.

J. Product Delivery, Storage and Handling:

1. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name, equipment model and serial identification numbers, and UL logo. The Contracting Officer shall inventory the IDS equipment at the time of delivery and reject items that do not conform to this requirement.
2. Storage and Handling: Store and protect equipment in a manner that shall preclude damage as directed by the Contracting Officer.

K. Cleaning and Adjustments:

1. Cleaning: Subsequent to installation, clean each system component of dust, dirt, grease, or oil incurred during installation in accordance to manufacture instructions.
2. Prepare for system activation by following manufacturer’s recommended procedures for adjustment, alignment, or

synchronization. Prepare each component in accordance with appropriate provisions of the component's installation, operations, and maintenance instructions.

L. Tamper Switches

1. Install tamper switches to initiate an alarm signal when a panel, box, or component housing door or cover is moved as little as 6.35 mm (1/4 inch) from the normally closed position unless otherwise specified.
2. Locate tamper switches within enclosures, cabinets, housings, boxes, raceways, and fittings to prevent direct line of sight to any internal components and to prevent tampering with switch or circuitry.
3. Conceal tamper switch mounting hardware so that the location of the switch within the enclosure cannot be determined from the exterior.

M. Unique IDS Installation Components:

1. BMS Surface Mounted:
   a. Surface mounted BMS housing for the switch element shall have the capability to receive threaded conduit. Housing covers for surface mounted BMS, if made of cast aluminum, shall be secured by stainless steel screws. Magnet housing cover shall not be readily removable and BMS housings shall be protected from unauthorized access by a cover operated, corrosion-resistant tamper device.
   b. Conductors running from a door to alarm circuits shall be contained within a flexible armored cord constructed from corrosion-resistant metal. Each end of the armored cord shall terminate in a junction box or other enclosure. Armored cord ends shall be mechanically secured to the junction boxes by clamps or bushings. Conductors within the armored cord shall be provided with lug terminals at each end. Conductors and the armored cord shall experience no mechanical strain as the door is removed from fully open to closed position. Switch circuits shall initiate an alarm if a short circuit is applied to the door cord.
   c. For exterior application on double gates, both BMS elements shall be mounted on the gate. Flexible armored cord constructed from corrosion-resistant metal shall be used to provide electrical connection.

2. BMS Recessed Mounted:
   a. Ball bearing door trips shall be mounted within vault door headers such that when the locking mechanism is secured, the door bolt engages an actuator, mechanically closing the switch.
   b. Door bolt locking mechanisms shall be fully engaged before the ball bearing door trip is activated. Also, circuit jumpers from the door shall be provided.
3. Vibration Sensors:
   a. Mount vibration sensors directly contacting the surface to be protected.
   b. Provide at least one (1) sensor on each monolithic slab or wall section, even though spacing closer than that required for midrange sensitivity shall result.
   c. House sensors in protective mountings and fasten to surface with concealed mounting screws or an epoxy.
   d. Adjust discriminator on the job to precise needs of application. Connect sensors to an electronic control unit by means of wiring or fiber optics cable run in rigid steel conduit or electrical metallic tubing (EMT).
4. Passive Infrared Detectors: (PIR)
   a. The protective beam shall be focused in a straight line.
   b. Installed beam distance from transmitter to receiver shall not exceed 80% of the manufacturer's maximum recommended rating.
   c. Mirrors shall be used to extend the beam or to establish a network of beams. Each mirror used shall not lower the rated maximum system range by more than 50%.
   d. Mirrors and photoelectric sources used in outdoor applications shall have self-heating capability to eliminate condensation and shall be housed in weatherproof enclosures.
5. Taut-Wire:
   a. Housing for switch assembly shall be covered by a neoprene cap to retain the center bolt (lever arm), which functions as a lever to translate movement of the attached horizontal wire into contact closure. When the neoprene cap is firmly seated on the cup-shaped polycarbonate housing, it shall function as the fulcrum for the lever (bolt).

b. Upper exposed end of the lever shall be threaded to accommodate clamping to the horizontal wire. The lower end of the lever, which is fashioned to serve as the movable electrical contact, shall be held suspended in a small cup-shaped contact that floats in a plastic putty material.
c. Plastic putty used shall retain a degree of elasticity under varying temperature conditions and provide the sensor switch with a self-adjusting property. This provides the switch with a built-in compensating mechanism that ignores small, very slow changes in lever alignment (i.e. which shall result from environmental changes such as extreme temperature variations and ground seepage due to weather conditions) and to react to fast changes only, as caused by manual deflection or cutting of the wires.
d. Contractor shall provide metal slider strips having slots through which the barbed wires pass. Wires shall be prevented from leaving the slots by rivets. A slider strip shall be used to translate normal forces to the barbed wire and to the horizontal displacement of the sensor.
e. Install one (1) slider strip pair, upper and lower, on every fence post except where sensor posts or anchor strips are installed.
f. Separation between slider elements along the fence shall be 3000 mm (10 feet).
g. Attach wires of sensor to existing, specially installed fence posts, called anchor posts, located equidistant on both sides of sensor posts and at ends of sensor zone run.
h. Anchor strip shall be a strip of steel plate on which fastening plates are installed. Weld or otherwise attach the strip to anchor post and ends of tensed barbed wires wrapped around the fastening plates. Attempts to climb on fastening plates or on the attached barbed wires shall cause plates to break off, creating an alarm and making it impossible to defeat the system by climbing at the anchor post.
i. The use of barbed wire as part of the IDS system shall be suitable for installation under a preload tension of approximately 392 N 88 pounds and be flexible enough for

convenient manipulation during tensioning. Double-strand 15 1/2-gage barbed wire shall be the minimum acceptable.

6. Electromechanical Fence Sensors:
   a. The fence length shall be divided into 100m (300 ft). or zones.
   b. Sensors shall consist of individual electromechanical sensing units mounted every three-thousand and 3045mm (10 ft). on the fence fabric or posts and wired in series to a sensor zone control unit and associated power supply.
7. Electrostatic Field Sensors:
   a. Sensors shall be capable of following irregular contours and barrier bends without degrading sensitivity below the specified detection level.
   b. In no case shall a single sensor zone exceed 100m (300 ft). or be long enough to significantly degrade sensitivity.
   c. Adjacent zones shall provide continuous coverage to avoid a dead zone. Adjacent zones shall be designed to prevent crosstalk interference.
   d. Exterior components shall be housed in rugged corrosion-resistant enclosures, protected from environmental degradation and include tamper switches.
   e. Interfacing between exterior units shall be carried in underground cables.
   f. Exterior support hardware shall be stainless or galvanized to avoid tension degradation.
   g. Sensor and field wires shall be stainless steel. Wire spacing for various configurations shall be maintained constant throughout each zone and shall be uniform with respect to the ground and follow manufacturer's specifications.
   h. Signal processing equipment shall be separately mounted such that no desensitized zones are created within the zone of detection.
8. Microwave: Do not install microwave sensors where fluorescent lights shall pose a problem due to radiated ionization from lights.

3.2 WIRING INSTALLATION

A. Wiring Method: Install wiring in metal raceways according to Section 28 05 28.33 "CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY." Conceal raceway except in unfinished spaces and as indicated. Minimum

conduit size shall be 3/4 inch (20 mm). Control and data transmission wiring shall not share conduit with other building wiring systems.

B. Wiring Method: Install wiring in raceways except in accessible indoor ceiling spaces and in interior hollow gypsum board partitions where cable shall be used. Conceal raceways and wiring except in unfinished spaces and as indicated. Minimum conduit size shall be 3/4 inch (20 mm). Control and data transmission wiring shall not share conduit with other building wiring systems.

C. Wiring Method: Cable, concealed in accessible ceilings, walls, and floors when possible.

D. Wiring within Enclosures: Bundle, lace, and train conductors to terminal points. Use lacing bars and distribution spools. Separate power-limited and non-power-limited conductors as recommended in writing by manufacturer. Install conductors parallel with or at right angles to sides and back of enclosure. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with intrusion system to terminal blocks. Mark each terminal according to system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Wires and Cables:

1. Conductors: Size as recommended in writing by system manufacturer, unless otherwise indicated.
2. 120-V Power Wiring: Install according to Division 26 Section "LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES," unless otherwise indicated.
3. Control and Signal Transmission Conductors: Install unshielded, twisted-pair cable, unless otherwise indicated or if manufacturer recommends shielded cable, according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."
4. Computer and Data-Processing Cables: Install according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."
5. Television Signal Transmission Cables: Install according to Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."

F. Splices, Taps, and Terminations: Make connections only on numbered terminal strips in junction, pull, and outlet boxes; terminal cabinets; and equipment enclosures.

G. Install power supplies and other auxiliary components for detection devices at controllers, unless otherwise indicated or required by manufacturer. Do not install such items near devices they serve.

H. Identify components with engraved, laminated-plastic or metal nameplate for central-station control unit and each terminal cabinet, mounted with corrosion-resistant screws.

3.3 GROUNDING

A. Ground system components and conductor and cable shields to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments.

B. Signal Ground Terminal: Locate at main equipment rack or cabinet. Isolate from power system and equipment grounding. Provide [5] <Insert selected maximum value>-ohm ground. Measure, record, and report ground resistance.

C. Install grounding electrodes of type, size, location, and quantity indicated. Comply with installation requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY SYSTEMS."

3.4 TESTS AND TRAINING

A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

B. Provide services of manufacturer’s technical representative for [insert number] hours to instruct VA personnel in operation and maintenance of units.

---END---

SECTION 28 31 00
FIRE DETECTION AND ALARM

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section of the specifications includes the furnishing, installation, and connection of the fire alarm equipment to form a complete coordinated system ready for operation. It shall include; alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring as shown on the drawings and specified. The fire alarm system shall not be combined with other systems such as building automation, energy management, and security.

B. Provide new fire alarm devices and connect to the existing fire alarm system.

C. Contractor shall be certified in the fire alarm system installation, testing.

D. All existing fire alarm equipment, wiring, devices and sub-systems that are not shown to be reused shall be removed. All existing fire alarm wiring supervision

E. Existing reused equipment shall be covered as new equipment under the Warranty specified herein.

F. Basic Performance:

1. Alarm and trouble signals from each building fire alarm control panel shall be digitally encoded by UL listed electronic devices onto a multiplexed communication system.
2. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed 5 seconds.
3. The signaling line circuits (SLC) between building fire alarm control units shall be wired Class X in accordance with NFPA 72. Isolation shall be provided so that no more than one building can be lost due to a short circuit fault.
4. Initiating device circuits (IDC) shall be wired Style B in accordance with NFPA 72.
5. Signaling line circuits (SLC) within buildings shall be wired Class B in accordance with NFPA 72. Individual signaling line circuits shall be limited to covering 22,500 square feet (2,090 square meters) of floor space or 3 floors whichever is less.

6. Notification appliance circuits (NAC) shall be wired Class B in accordance with NFPA 72.

G. Existing Fire Protection:

1. Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections.
2. Provide fire watch for impairments more than 4 hours in a 24-hour period.
3. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COR or Government Designated Authority.
4. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center.
   a. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COR.
5. Before starting work, contractor shall test existing fire alarm system in work area and adjacent areas.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Requirements for procedures for submittals.

B. Section 07 84 00 - FIRESTOPPING. Requirements for fire proofing wall penetrations.

C. Section 08 71 00 - DOOR HARDWARE. For combination Closer-Holders.

D. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

E. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

F. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

G. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

H. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

I. Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for integration with physical access control system.

1.3 SUBMITTALS

A. General: Submit 5 copies in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Drawings:

1. Prepare drawings using AutoCAD latest Release software and include all contractors information. Layering shall be by VA criteria as provided by the Contracting Officer Representative (COR). Bid drawing files on AutoCAD shall be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.
2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions.
3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety interfaces. Show wiring Styles on the riser diagram for all circuits. Provide diagrams both on a per building and campus wide basis.
4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn

to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
   a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.
   b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
   c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
   d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturer's installation limitations including circuit length limitations.
   e. Complete listing of all digitized voice messages.
   f. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include the magnets for holding the doors open for one minute.
   g. Include information indicating who will provide emergency service and perform post contract maintenance.
   h. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
   i. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall

also be provided in the manual. Provide the disk in a pocket within the manual.

j. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.

k. A print out for all devices proposed on each signaling line circuit with spare capacity indicated.

2. Two weeks prior to final inspection, deliver 4 copies of the final updated maintenance and operating manual to the COR.

a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.

b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.

c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.

d. Certificate of Installation as required by NFPA 72 for each building. The certificate shall identify any variations from the National Fire Alarm Code.

e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

D. Certifications:

1. Together with the shop drawing submittal, submit the technician's NICET level III fire alarm certification as well as certification from the control unit manufacturer that the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name and title of the manufacturer’s representative who makes the certification.

2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.

3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.4 WARRANTY

A. All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer.

1.5 GUARANTY PERIOD SERVICES

A. Complete inspection, testing, maintenance and repair service for the fire alarm system shall be provided by a factory trained authorized representative of the manufacturer of the major equipment for a period of 5 years from the date of acceptance of the entire installation by the Contracting Officer.

B. Contractor shall provide all necessary test equipment, parts and labor to perform required inspection, testing, maintenance and repair.

C. All inspection, testing, maintenance and permanent records required by NFPA 72, and recommended by the equipment manufacturer shall be provided by the contractor. Work shall include operation of sprinkler system alarm and supervisory devices as well as all reused existing equipment connected to the fire alarm system. It shall include all interfaced equipment including; elevators, HVAC shutdown, and extinguishing systems.

D. Maintenance and testing shall be performed in accordance with NFPA 72. A computerized preventive maintenance schedule shall be provided and shall describe the protocol for preventive maintenance of equipment. The schedule shall include a systematic examination, adjustment and cleaning of all equipment.

E. Non-included Work: Repair service shall not include the performance of any work due to improper use, accidents, or negligence for which the contractor is not responsible.

F. Service and emergency personnel shall report to the Engineering Office or their authorized representative upon arrival at the hospital and again upon the completion of the required work. A copy of the work ticket containing a complete description of the work performed and parts replaced shall be provided to the VA Contracting Officer’s Representative COR or his authorized representative.

G. Emergency Service:

1. Warranty Period Service: Service other than the preventative maintenance, inspection, and testing required by NFPA 72 shall be considered emergency call-back service and covered under the warranty of the installation during the first year of the warranty period, unless the required service is a result of abuse or misuse by the Government. Written notification shall not be required for emergency warranty period service and the contractor shall respond as outlined in the following sections on Normal and Overtime Emergency Call-Back Service. Warranty period service can be required during normal or overtime emergency call-back service time periods at the discretion of the Contracting Officer's Representative COR or his authorized representative.
2. Normal and overtime emergency call-back service shall consist of an on-site response within 2 hours of notification of a system trouble.
3. Normal emergency call-back service times are between the hours of 7:30 a.m. and 4:00 p.m., Monday through Friday, exclusive of federal holidays. Service performed during all other times shall be considered to be overtime emergency call-back service. The cost of all normal emergency call-back service for years 2 through 5 shall be included in the cost of this contract.
4. Overtime emergency call-back service shall be provided for the system when requested by the Government. The cost of the first 40 manhours per year of overtime call-back service during years 2 through 5 of this contract shall be provided under this contract. Payment for overtime emergency call-back service in excess of the 40 manhours per year requirement will be handled through separate purchase orders. The method of calculating overtime emergency call-back hours is based on actual time spent on site and does not include travel time.
5. The contractor shall maintain a log at each fire alarm control unit. The log shall list the date and time of all examinations and trouble calls, condition of the system, and name of the technician. Each trouble call shall be fully described, including the nature of the trouble, necessary correction performed, and parts replaced.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to

the extent referenced. The publications are referenced in text by the basic designation only and the latest editions of these publications shall be applicable.

B. National Fire Protection Association (NFPA):

NFPA 13.....Standard for the Installation of Sprinkler Systems, 2019 edition

NFPA 14 .....Standard for the Installation of Standpipes and Hose Systems, 2019 edition

NFPA 20.....Standard for the Installation of Stationary Pumps for Fire Protection, 2019 edition

NFPA 70.....National Electrical Code (NEC), 2017 edition

NFPA 72.....National Fire Alarm Code, 2019 edition

NFPA 90A.....Standard for the Installation of Air Conditioning and Ventilating Systems, 2018 edition

NFPA 101.....Life Safety Code, 2018 edition

C. Underwriters Laboratories, Inc. (UL): Fire Protection Equipment Directory

D. Factory Mutual Research Corp (FM): Approval Guide, 2007-2011

E. American National Standards Institute (ANSI):

S3.41.....Audible Emergency Evacuation Signal, 1990 edition, reaffirmed 2008

F. International Code Council, International Building Code (IBC), 2009 edition

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS, GENERAL

A. All equipment and components shall be new and the manufacturer's current model. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturers’ requirements and that satisfactory total system operation has been achieved.

2.2 CONDUIT, BOXES, AND WIRE

A. Conduit shall be in accordance with Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY and as follows:

1. All new conduits shall be installed in accordance with NFPA 70.
2. Conduit fill shall not exceed 40 percent of interior cross-sectional area.
3. All new conduits shall be 3/4 inch (19 mm) minimum.
4. Fire alarm conduits shall be factory painted “RED”.
5. All fire alarm boxes, pull boxes, cover plates shall be factory painted “RED” and shall be labeled “Fire Alarm”.

B. Wire:

1. Wiring shall be in accordance with NEC article 760, Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, and as recommended by the manufacturer of the fire alarm system. All wires shall be color coded. Number and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification device circuits.
2. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.
3. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All boxes shall be sized and installed in accordance with NFPA 70.
3. Covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 3/4 inch (19 mm) high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the COR.

2.3 FIRE ALARM CONTROL UNIT

A. General:

1. Provide NAC panel for the new devices in the renovated area, coordinate with the COR.

2.4 STANDBY POWER SUPPLY

A. Uninterrupted Power Supply (UPS):

1. The UPS system shall be comprised of a static inverter, a precision battery float charger, and sealed maintenance free batteries.
2. Under normal operating conditions, the load shall be filtered through a ferro resonant transformer.
3. When normal AC power fails, the inverter shall supply AC power to the transformer from the battery source. There shall be no break in output of the system during transfer of the system from normal to battery supply or back to normal.
4. Batteries shall be sealed, gel cell type.
5. UPS system shall be sized to operate the central processor, CRT, printer, and all other directly connected equipment for 5 minutes upon a normal AC power failure.

B. Batteries:

1. Battery shall be of the sealed, maintenance free type, 24-volt nominal.
2. Battery shall have sufficient capacity to power the fire alarm system for not less than 24 hours plus 5 minutes of alarm to an end voltage of 1.14 volts per cell, upon a normal AC power failure.
3. Battery racks shall be steel with an alkali-resistant finish. Batteries shall be secured in seismic areas 2B, 3, or 4 as defined by the Uniform Building Code.

C. Battery Charger:

1. Shall be completely automatic, with constant potential charger maintaining the battery fully charged under all service conditions. Charger shall operate from a 120-volt, 60 hertz emergency power source.
2. Shall be rated for fully charging a completely discharged battery within 48 hours while simultaneously supplying any loads connected to the battery.
3. Shall have protection to prevent discharge through the charger.

4. Shall have protection for overloads and short circuits on both AC and DC sides.
5. A trouble condition shall actuate the fire alarm trouble signal.
6. Charger shall have automatic AC line voltage regulation, automatic current-limiting features, and adjustable voltage controls.

2.5 ANNUNCIATION

A. Existing to be modified.

2.6 VOICE COMMUNICATION SYSTEM (VCS)

A. Speaker Circuit Control Unit:

1. The speaker circuit control unit shall include switches to manually activate or deactivate speaker circuits grouped by floor in the system.
2. Speaker circuit control switches shall provide on, off, and automatic positions and indications.
3. The speaker circuit control unit shall include visual indication of active or trouble status for each group of speaker circuits in the system.
4. A trouble indication shall be provided if a speaker circuit group is disabled.
5. A lamp test switch shall be provided to test all indicator lamps.
6. A single "all call" switch shall be provided to activate all speaker circuit groups simultaneously.
   A push-to-talk microphone shall be provided for manual voice messages.

B. Speaker Circuit Arrangement:

1. Speaker circuits shall be arranged such that there is one speaker circuit per smoke zone.
2. Audio amplifiers and control equipment shall be electrically supervised for normal and abnormal conditions.
3. Speaker circuits shall be either 25 VRMS or 70.7 VRMS with a minimum of 50 percent spare power available.
4. Speaker circuits and control equipment shall be arranged such that loss of any one speaker circuit will not cause the loss of any other speaker circuit in the system.

D. Digitized Voice Module (DVM):

1. The Digitized Voice Module shall provide prerecorded digitized evacuation and instructional messages. The messages shall be professionally recorded and approved by the COR prior to programming.
2. The DVM shall be configured to automatically output to the desired circuits following a 10-second slow whoop alert tone.
3. Prerecorded magnetic taped messages and tape players are not permitted.
4. The digitized message capacity shall be no less than 15 second in length.
5. The digitized message shall be transmitted 3 times.
6. The DVM shall be supervised for operational status.
7. Failure of the DVM shall result in the transmission of a constant alarm tone.
8. The DVM memory shall have a minimum 50 percent spare capacity after those messages identified in this section are recorded. Multiple DVM's may be used to obtain the required capacity.

E. Audio Amplifiers:
1. Audio Amplifiers shall provide a minimum of 50 Watts at either 25 or 70.7 VRMS output voltage levels.
2. Amplifiers shall be continuously supervised for operational status.
3. Amplifiers shall be configured for either single or dual channel application.
4. Each audio output circuit connection shall be configurable for Style X.
5. A minimum of 50 percent spare output capacity shall be available for each amplifier.

F. Tone Generator(s):
1. Tone Generator(s) shall be capable of providing a distinctive 3-pulse temporal pattern fire alarm signal as well as a slow whoop.
2. Tone Generator(s) shall be continuously supervised for operational status.

2.7 ALARM NOTIFICATION APPLIANCES

A. Speakers:
1. Shall operate on either 25 VRMS or 70.7 VRMS with field selectable output taps from 0.5 to 2.0W and originally installed at the 1/2 watt tap. Speakers shall provide a minimum sound output of 80 dBA at 10 feet (3,000 mm) with the 1/2 watt tap.

2. Frequency response shall be a minimum of 400 HZ to 4,000 HZ.
3. Four inches (100 mm) or 8 inches (200 mm) cone type speakers ceiling mounted with white colored baffles in areas with suspended ceilings and wall mounted in areas without ceilings.

B. Strobes:

1. Xenon flash tube type minimum 15 candela in toilet rooms and 75 candela in all other areas with a flash rate of 1 HZ. Strobes shall be synchronized where required by the National Fire Alarm Code (NFPA 72).
2. Backplate shall be red with 1/2 inch (13 mm) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of 20 percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.
5. Strobe shall have 15, 35, 75, 90, 110, 150 and 170 candelas and shall be filed adjustable.

2.8 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations:

1. Shall be non-breakglass, address reporting type.
2. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.
3. Stations shall be of dual action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE."
4. Operating handles shall be constructed of a durable material. On operation, the lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting or conducting tests and drills.
5. Unless otherwise specified, all exposed parts shall be red in color and have a smooth, hard, durable finish.

B. Smoke Detectors:

1. Smoke detectors shall be photoelectric type and UL listed for use with the fire alarm control unit being furnished.

2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
4. All spot type and duct type detectors installed shall be of the photoelectric type.
5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.

C. Heat Detectors:

1. Heat detectors shall be of the addressable restorable rate compensated fixed-temperature spot type.
2. Detectors shall have a minimum smooth ceiling rating of 2,500 square feet (230 square meters).

2.9 SUPERVISORY DEVICES

A. Duct Smoke Detectors:

1. Duct smoke detectors shall be provided and connected by way of an address reporting interface device. Detectors shall be provided with an approved duct housing mounted exterior to the duct and shall have perforated sampling tubes extending across the full width of the duct (wall to wall). Detector placement shall be such that there is uniform airflow in the cross section of the duct.
2. Interlocking with fans shall be provided in accordance with NFPA 90A and as specified hereinafter under Part 3.2, "TYPICAL OPERATION".
3. Provide remote indicator lamps, key test stations and identification nameplates (e.g. "DUCT SMOKE DETECTOR AHU-X") for all duct detectors.

Locate key test stations in plain view on walls or ceilings so that they can be observed and operated from a normal standing position.

2.10 ADDRESS REPORTING INTERFACE DEVICE

A. Shall have unique addresses that reports directly to the building fire alarm panel.

B. Shall be configurable to monitor normally open or normally closed devices for both alarm and trouble conditions.

C. Shall have terminal designations clearly differentiating between the circuit to which they are reporting from and the device that they are monitoring.

D. Shall be UL listed for fire alarm use and compatibility with the panel to which they are connected.

E. Shall be mounted in weatherproof housings if mounted exterior to a building.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Provide fire alarm devices per NFPA 72.

B. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment manufacturer. Fire alarm wiring shall be installed in conduit. All conduit and wire shall be installed in accordance with, Section 28 05 13 CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 26 GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY, and all penetrations of smoke and fire barriers shall be protected as required by Section 07 84 00, FIRESTOPPING.

C. All conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas.

D. All new and reused exposed conduits shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.

E. All existing accessible fire alarm conduit not reused shall be removed.

F. Existing devices that are reused shall be properly mounted and installed. Where devices are installed on existing shallow backboxes, extension rings of the same material, color and texture of the new fire alarm devices shall be used. Mounting surfaces shall be cut and patched

in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Restoration, and be re-painted in accordance with Section 09 91 00, PAINTING as necessary to match existing.

G. All fire detection and alarm system devices, control units and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations are to be approved by the COR.

H. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas.

I. Strobes shall be flush wall mounted with the bottom of the unit located 80 inches (2,000 mm) above the floor or 6 inches (150 mm) below ceiling, whichever is lower. Locate and mount to maintain a minimum 36 inches (900 mm) clearance from side obstructions.

J. Manual pull stations shall be installed not less than 42 inches (1,050 mm) or more than 48 inches (1,200 mm) from finished floor to bottom of device and within 60 inches (1,500 mm) of a stairway or an exit door and shall be provided no more than 200 feet apart to meet NFPA.

K. Where possible, locate water flow and pressure switches a minimum of 12 inches (300 mm) from a fitting that changes the direction of the flow and a minimum of 36 inches (900 mm) from a valve.

L. Mount valve tamper switches so as not to interfere with the normal operation of the valve and adjust to operate within 2 revolutions toward the closed position of the valve control, or when the stem has moved no more than 1/5 of the distance from its normal position.

3.2 TESTS

A. Provide the service of a NICET level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the COR.

B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the COR. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract

requirements. After the system has passed the initial test and been approved by the COR, the contractor may request a final inspection.

C. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
   1. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
   2. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
   3. Open each alarm initiating and notification circuit to see if trouble signal actuates.
   4. Ground each alarm initiation and notification circuit and verify response of trouble signals.

3.3 FINAL INSPECTION AND ACCEPTANCE

A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.

B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests in Article 3.3 TESTS and those required by NFPA 72. In addition, the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a COR.

3.4 INSTRUCTION

A. The manufacturer's authorized representative shall provide instruction and training to the VA as follows:
   1. Six 1-hour sessions to engineering staff, security police and central attendant personnel for simple operation of the system. Two sessions at the start of installation, 2 sessions at the completion of installation and 2 sessions 3 months after the completion of installation.

2. Four 2-hour sessions to engineering staff for detailed operation of the system. Two sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
3. Three 8-hour sessions to electrical technicians for maintaining, programming, modifying, and repairing the system at the completion of installation and one 8-hour refresher session 3 months after the completion of installation.

B. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the VA. The sequence of operation will be shown for each input in the system in a matrix format and provided in a loose-leaf binder. When reading the sequence of operation, the reader will be able to quickly and easily determine what output will occur upon activation of any input in the system. The INPUT/OUTPUT matrix format shall be as shown in Appendix A to NFPA 72.

C. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

PART 4 - SCHEDULES

4.1 SMOKE ZONE DESCRIPTIONS: NOT USED

4.2 DIGITIZED VOICE MESSAGES:

A. Coordinate revised message with COR.

---END---