AE Restoration of Building 1 Envelope

James A. Haley VA Hospital
13000 Bruce B Downs Blvd.
Tampa, FL 33612

RDC • JPA
ARCHITECTURE

3131 Newmark Drive
Suite 200
Miamisburg, OH 45342

PENNONI
5755 Rio Vista Drive
Clearwater, FL 33760

BUILDING ENVELOPE CONSULTANTS AND SCIENTISTS, LLC (BECS)
6339 Ten Oaks Road
Suite 307
Clarksville, MD 21029-1155

ABOVE GROUP ENGINEERING
305 East Dr.,
Suite H
Melbourne, FL 32904

100% Bid Documents

VAMC #: 673-21-116
RDC / JPA #: 22004.00
January 31, 2025

DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

SECTION NO	DIVISION AND SECTION TITLES	DATE
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	11-21
01 31 00.01	Project Management and Coordination	09-19
01 32 16.15	Project Schedules (Small Projects – Design/Bid/Build	01-24
01 33 23	Shop Drawings, Product Data, and Samples	11-23
01 35 26	Safety Requirements for Major Projects	05-24
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 29	Testing Laboratory Services	11-18
01 57 19	Temporary Environmental Controls	01-21
01 74 19	Construction Waste Management	04-22
01 81 13	Sustainable Construction Requirements	10-17
	DIVISION 02 – EXISTING CONDITIONS	
02 41 00	Demolition	08-17
02 82 13.21	Exterior Asbestos Abatement	
02 82 13.21a	Asbestos Survey Report	
	DIVISION 03 – CONCRETE	
03 10 00	Concrete Repairs	
	DIVISION 04 – MASONRY	
04 01 00	Maintenance of Masonry	01-21
04 05 13	Masonry Mortaring	10-17
04 05 16	Masonry Grouting	01-21
04 05 19	Masonry Anchorage and Reinforcing	
04 20 00	Unit Masonry	08-17
04 72 00	Cast Stone Masonry	01-21
	DIVISION 05 – METALS	
05 12 00	Structural Steel Framing	11-18
05 40 00	Cold-Formed Metal Framing	01-21
	DIVISION 06 – WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17

SECTION NO	DIVISION AND SECTION TITLES	DATE
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 21 13	Thermal Insulation	01-21
07 22 00	Roof and Deck Insulation	01-21
07 27 26	Fluid-Applied Membrane Air Barrier, Vapor Permeable	01-21
07 40 00	Metal Soffit Panels	01-21
07 42 13.23	Metal Composite Material (MCM) System	01-21
07 52 16.11	Cold Adhesive Styrene-Butadiene-Styrene Modified Bituminous Membrane Roofing	12-21
07 60 00	Flashing and Sheet Metal	01-21
07 84 00	Firestopping	01-21
07 92 00	Joint Sealants	04-22
07 95 13	Expansion Joint Assemblies	01-21
	DIVISION 08 - OPENINGS	
08 44 13	Glazed Aluminum Curtain Walls	04-20
08 51 13	Aluminum Windows	01-21
08 80 00	Glazing	01-21
08 90 00	Louvers and Vents	01-21
	DIVISION 09 – FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	01-21
09 22 16	Non-Structural Metal Framing	06-18
09 26 00	Veneer Plastering	01-21
09 29 00	Gypsum Board	04-20
09 29 53	Partition Gap Closures	
09 30 13	Ceramic/Porcelain Tiling	01-21
09 51 00	Acoustical Ceilings	12-18
09 65 19	Resilient Tile Flooring	05-18
09 91 00	Painting	01-21
09 97 23	Concrete and Masonry Coatings	
	DIVISION 10 – SPECIALTIES	
	DIVISION 11 – EQUIPMENT	
	DIVISION 12 – FURNISHINGS	
12 36 00	Countertops	12-23
	DIVISION 13 - SPECIAL CONSTRUCTION	
	DIVISION 14– CONVEYING EQUIPEMENT	

SECTION NO	DIVISION AND SECTION TITLES	DATE
	DIVISION 21- FIRE SUPPRESSION	
	DIVISION 22 – PLUMBING	
22 05 11	Common Work Results for Plumbing	01-23
	DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	03-23
	DIVISION 25 – INTEGRATED AUTOMATION	
	DIVISION 26 – ELECTRICAL	
26 05 11	Requirements for Electrical Installations	11-22
26 05 19	Low-Voltage Electrical Power Conductors and Cables	11-22
26 05 26	Grounding and Bonding for Electrical Systems	11-22
26 05 33	Raceway and Boxes for Electrical Systems	11-22
26 56 00	Exterior Lighting	
	DIVISION 27 – COMMUNICATIONS	
	DIVISION 28 – ELECTRONIC SAFETY AND SECURITY	
	DIVISION 31 – EARTHWORK	
	DIVISION 32 – EXTERIOR IMPROVEMENTS	
	DIVISION 33 – UTILITIES	

SECTION 01 00 00
GENERAL REQUIREMENTS

GENERAL

1.1 SAFETY REQUIREMENTS

A. Refer to section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements.

1.2 GENERAL INTENTION

Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for AE Restoration of Building 1 Envelope as required by drawings and specifications.

A. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.

B. Offices of RDC/JPA Architecture, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

C. Before placement and installation of work subject to tests by testing laboratory retained by Department of Veterans Affairs, the Contractor shall notify the COR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three workdays unless otherwise designated by the COR.

D. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

1.3 STATEMENT OF BID ITEM(S)

A. **BID ITEM 1, BASE BID** – ALL WORK : Work will include completion of the project AE Restoration of Building 1 Envelope, at the James A. Haley Department of Veterans Affairs Medical Center, 13000 Bruce B Downs Blvd., Tampa Florida.

Work includes general construction, alterations, abatement, necessary removal of existing structures, new building components, and construction and certain other items. All work to be completed within 550 calendar days after receipt of the Notice to Proceed.

It is the intent of the Government that award will be made on BID ITEM 1 (BASE BID); however, should the bids exceed the funds available, award may be made on BID ITEM 2 based on available funding. Bidders should bid on each item listed.

B. **BID ITEM 2**: All work in BID ITEM 1, BASE BID, except DELETE all labor, material, equipment, and supervision to perform the scope listed below. All work to be completed within 495 calendar days after receipt of the Notice To Proceed.

1. All exterior wall repair, abatement, window replacement, and related interior work located within the boundaries defined in the Construction Documents.

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. Drawings and contract documents may be obtained from the website where the solicitation is posted. Additional copies will be at Contractor's expense.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor’s employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. Before starting work the General Contractor shall give one week’s notice to the Contracting Officer so that security //escort// arrangements// can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer. Patients and staff are not to be photographed at any time.
4. VA reserves the right to close down or shut down the project site and order General Contractor’s employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the Contracting officers representative (COR) for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.

D. Document Control:

1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of “sensitive information”.

2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked “Law Enforcement Sensitive” or “Sensitive Unclassified”. Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD’s and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of “sensitive information”.
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
   a) Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
   b) “Sensitive information” including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions
1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. A limitednumber of (2 to 5) permits shall be issued for General Contractor and its employees for parking in designated areas only. Contractor to coordinate with VA Medical Center Facility Manager.

1.6 OPERATIONS AND STORAGE AREAS (FAR 52.236-10)

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

D. Working space and space available for storing materials shall be as determined by the COR .

E. Workers are subject to rules of Medical Center applicable to their conduct.

F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.

G. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COR where required by limited working space.

   1. Do not store materials and equipment in other than assigned areas.
   2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days. Provide unobstructed access to Medical Center areas required to remain in operation.
   3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.

H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR . All such actions shall be coordinated with the COR or Utility Company involved:

   1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

I. Phasing:

1. The Medical Center must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service must be scheduled and coordinated with the COR to ensure that no lapses in operation occur. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks.
2. To ensure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to ensure accomplishment of this work in successive phases mutually agreeable to by COR and Contractor, as indicated on phasing drawings.

J. Building(s) No.1 will be occupied during performance of work; but immediate areas of alterations will be vacated.
   1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
   2. Immediate areas of alterations not mentioned in preceding Subparagraph 1 will be temporarily vacated while alterations are performed.

K. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by COR.

L. When a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:
   1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.

2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

M. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Medical Center Director’s prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS for additional requirements.
2. Contractor shall submit a request to interrupt any such services to COR, in writing, 7 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COR.
5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

N. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, shall be removed back to their source. Those which are indicated to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but

shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

O. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.

P. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR and a representative of VA Supply Service, of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, , to the Contracting Officer. This report shall list by rooms and spaces:

1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
3. Shall note any discrepancies between drawings and existing conditions at site.
4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur, and which have been agreed upon by Contractor and COR.

B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR and/or Supply Representative, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4).

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair

work required of Contractor to restore damage caused by Contractor's workers in executing work of this contract.

D. Protection: Provide the following protective measures:
   1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
   2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
   3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
   1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.
   2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
   3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS (FAR 52.236-9)

A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.10 RESTORATION

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workers to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.

D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

1.11 PHYSICAL DATA

A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

(FAR 52.236-4)

B. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by explorations. Bidders are expected to examine site of work and logs of borings; and, after investigation, decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

1.12 AS-BUILT DRAWINGS

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings shall be made available for the COR review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.13 WARRANTY MANAGEMENT

A. Warranty Management Plan: Develop a warranty management plan which contains information relevant to FAR 52.246-21 Warranty of Construction in at least 30 days before the planned pre-warranty conference, submit four sets of the warranty management plan. Include within the warranty management plan all required actions and documents to assure that the Government receives all warranties to which it is entitled. The plan must be in narrative form and contain sufficient detail to render it suitable for use by future maintenance and repair personnel, whether tradesman, or of engineering background, not necessarily familiar with this contract. The term “status” as indicated below must include due date and whether item has been submitted or was approved. Warranty information made available during the construction phase must be submitted to the Contracting Officer for approval prior to each monthly invoice for payment. Assemble approved information in a binder and turn over to the Government upon acceptance of the work. The construction warranty period will begin on the date of the project acceptance and continue for the product warranty period. A joint 4 month and 9 month warranty inspection will be conducted, measured from time of acceptance, by the Contactor and the Contracting Officer. Include in the warranty management plan, but not limited to, the following:

1. Roles and responsibilities of all personnel associated with the warranty process, including points of contact and telephone numbers within the company of the Contractor, subcontractors, manufacturers or suppliers involved.
2. Furnish with each warranty the name, address and telephone number of each of the guarantor’s representatives nearest project location.

3. Listing and status of delivery of all Certificates of Warranty for extended warranty items, to include roofs, HVAC balancing, pumps, motors, transformers and for all commissioned systems such as fire protection and alarm systems, sprinkler systems and lightning protection systems, etc.
4. A list for each warranted equipment item, feature of construction or system indicating:
   a. Name of item.
   b. Model and serial numbers.
   c. Location where installed.
   d. Name and phone numbers of manufacturers and suppliers.
   e. Name and phone numbers of manufacturers or suppliers.
   f. Names, addresses and phone numbers of sources of spare parts.
   g. Warranties and terms of warranty. Include one-year overall warranty of construction, including the starting date of warranty of construction. Items which have extended warranties must be indicated with separate warranty expiration dates.
   h. Starting point and duration of warranty period.
   i. Summary of maintenance procedures required to continue the warranty in force.
   j. Cross-reference to specific pertinent Operation and Maintenance manuals.
   k. Organizations, names and phone numbers of persons to call for warranty service.
   l. Typical response time and repair time expected for various warranted equipment.
5. The plans for attendance at the 4 and 9-month post construction warranty inspections conducted by the government.
6. Procedure and status of tagging of all equipment covered by extended warranties.
7. Copies of instructions to be posted near selected pieces of equipment where operation is critical for warranty and/or safety reasons.

B. Performance & Payment Bonds: The Performance & Payment Bonds //must remain effective throughout the construction period.
   1. In the event the Contractor fails to commence and diligently pursue any construction warranty work required, the Contracting Officer will have the work performed by others, and after completion of the work, will charge the remaining construction warranty funds of expenses incurred by the Government while performing the work, including, but not limited to administrative expenses.
   2. In the event sufficient funds are not available to cover the construction warranty work performed by the Government at the contractor’s expenses, the Contracting Officer will have the right to recoup expenses from the bonding company.
   3. Following oral or written notification of required construction warranty repair work, the Contractor shall respond in a timely manner. Written verification will follow oral instructions. Failure to respond will be cause for the Contracting Officer to proceed against the Contractor.

C. Pre-Warranty Conference: Prior to contract completion, and at a time designated by the Contracting Officer, the Contractor shall meet with the Contracting Officer to develop a mutual understanding with respect to the requirements of this section. Communication procedures for Contractor notification of construction warranty defects, priorities with respect to the type of defect, reasonable time required for Contractor response, and other details deemed necessary by the Contracting Officer for the execution of the construction warranty will be established/ reviewed at this meeting. In connection with these requirements and at the time of the Contractor's quality control completion inspection, furnish the name, telephone number and address of a licensed and bonded company which is authorized to initiate and pursue construction warranty work action on behalf of the Contractor. This point of contract will be located within the local service area of the warranted construction, be continuously available and be responsive to Government inquiry on warranty work action and status. This requirement does not relieve the Contractor of any of its responsibilities in conjunction with other portions of this provision.

D. Contractor's Response to Construction Warranty Service Requirements:

E. Following oral or written notification by the Contracting Officer, the Contractor shall respond to construction warranty service requirements in accordance with the "Construction Warranty Service Priority List" and the three categories of priorities listed below. Submit a report on any warranty item that has been repaired during the warranty period. Include within the report the cause of the problem, date reported, corrective action taken, and when the repair was completed. If the Contractor does not perform the construction warranty within the timeframe specified, the Government will perform the work and back charge the construction warranty payment item established.

1. First Priority Code 1. Perform onsite inspection to evaluate situation, and determine course of action within 4 hours, initiate work within 6 hours and work continuously to completion or relief.
2. Second Priority Code 2. Perform onsite inspection to evaluate situation, and determine course of action within 8 hours, initiate work within 24 hours and work continuously to completion or relief.
3. Third Priority Code 3. All other work to be initiated within 3 work days and work continuously to completion or relief.
4. The "Construction Warranty Service Priority List" is as follows:

a) <u>Code 1 Doors</u>

1) Interior, exterior personnel doors or hardware, not functioning properly, causing security, fire or safety problem

b) <u>Code 1-Electrical</u>

1) Power failure (entire area or any building operational after 1600 hours).
2) Security lights.

3) Smoke detectors.

c) Code 2-Electrical

1) Power failure (no power to a room or part of building). Receptacle and lights not operational (in a room or part of building).

d) Code 3-Electrical

1) Exterior lights not operational.

e) Code 3-Interior

1) Floors damaged.

2) Paint chipping or peeling.

3) Casework damaged.

f) Code 1-Roof Leaks

1) Damage to property is occurring.

g) Code 2-Water (Hot)

1) No hot water in portion of building listed.

h) Code 3

1) All work not listed above.

F. Warranty Tags: At the time of installation, tag each warranted item with a durable, oil and water-resistant tag approved by the Contracting Officer. Attach each tag with a copper wire and spray with a silicone waterproof coating. Also submit tworecord copies of the warranty tags showing the layout and design. The date of acceptance and the QC signature must remain blank until the project is accepted for beneficial occupancy. Show the following information on the tag.

Warranty Tags
Type of product/material
Model number
Serial number
Contract number
Warranty period from/to
Inspector’s signature
Construction Contractor
Address
Telephone number
Warranty Contact
Address
Telephone number
Warranty response time priority code

1.14 USE OF ROADWAYS

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

1.15 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:
   1. Permission to use each unit or system must be given by COR in writing. If the equipment is not installed and maintained in accordance with the written agreement and following provisions, the COR will withdraw permission for use of the equipment.
   2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2014 Edition), Article 590, *Temporary Installations.* Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
   3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
   4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
   5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
   6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor's expense.

1.16 TEMPORARY USE OF EXISTING ELEVATORS

A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the COR for use of elevators. The COR will ascertain that elevators are in proper condition. Contractor may use elevators Nos. TBD in Building Nos. 1 for exclusive use for daily use between the hours of 7am and 4pm and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor covers and provides maximum protection of following elevator components:
   a) Entrance jambs, heads soffits and threshold plates.
   b) Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
   c) Finish flooring.
3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes at the contractors expense.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining at the contractors expense.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts at the contractors expense, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

1.17 TEMPORARY TOILETS

A. Provide where directed, (for use of all Contractor's workers) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by COR, provide suitable dry closets where directed. Keep such places clean and free from flies and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1. *Contractor may have for use of Contractor's workers, such toilet accommodations as may be assigned to Contractor by Medical Center. Contractor shall keep such places clean and be responsible for any damage done thereto by Contractor's workers. Failure to maintain satisfactory condition in toilets will deprive Contractor of the privilege to use such toilets.

1.18 AVAILABILITY AND USE OF UTILITY SERVICES

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.

B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia and repair restore the infrastructure as required.

C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.

D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:

E. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.

F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COR discretion) of use of water from Medical Center's system.

G. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the Government. Fuel required for prolonged boiler-burner setup, adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished and paid by the Contractor at Contractor's expense.

1.19 INSTRUCTIONS

A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.20 RELOCATED ITEMS

A. Owner shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment, furniture systems, supplies, office and/or medical equipment as required to provide interior access to exterior windows in project scope.

B. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, at the main whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".

C. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

D. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

- - - E N D - - -

SECTION 01 31 00.01
PROJECT MANAGEMENT AND COORDINATION

PART 1 - GENERAL

1.1 RELATED DOCUMENTS

A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and other Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

A. Section includes administrative provisions for coordinating construction operations on Project, including, but not limited to, the following:
   1. Web-based Project management software package.

B. Each contractor shall participate in coordination requirements. Certain areas of responsibility are assigned to a specific contractor.

1.3 DEFINITIONS

A. BIM: Building Information Modeling.

B. RFI: Request for Information. Request from Owner, Architect, or Contractor seeking information required by or clarifications of the Contract Documents.

1.4 DIGITAL PROJECT MANAGEMENT PROCEDURES

A. Web-Based Project Management Software Package: Provide, administer, and use web-based Project management software package for purposes of hosting and managing Project communication and documentation until Final Completion.

   1. Basis of Specification: Provide Oracle Primavera Submittal Exchange or equivalent web-based project management software.

   2. Web-based Project management software includes, at a minimum, the following features:

      a. Compilation of Project data, including Contractor, subcontractors, Architect, Architect's consultants, Owner, and other entities involved in Project. Include names of individuals and contact information.
      b. Access control for each entity for each workflow process, to determine entity's digital rights to create, modify, view, and print documents.
      c. Document workflow planning, allowing customization of workflow between project entities.
      d. Creation, logging, tracking, and notification for Project communications required in other Specification Sections, including, but not limited to, RFIs, submittals, Minor Changes in the Work, Construction Change Directives, and Change Orders.

e. Track status of each Project communication in real time, and log time and date when responses are provided.
f. Procedures for handling PDFs or similar file formats, allowing markups by each entity. Provide security features to lock markups against changes once submitted.
g. Processing and tracking of payment applications.
h. Processing and tracking of contract modifications.
i. Creating and distributing meeting minutes.
j. Document management for Drawings, Specifications, and coordination drawings, including revision control.
k. Management of construction progress photographs.
l. Mobile device compatibility, including smartphones and tablets.

3. Provide Project management software user licenses for use of Owner**,** Architect, and Architect's consultants. Provide eight hours of software training for web-based Project software users.
4. At completion of Project, provide digital archive in format that is readable by common desktop software applications in format acceptable to Architect. Provide data in locked format to prevent further changes.

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION (Not Used)

END OF SECTION 01 31 00.01

SECTION 01 32 16.15
PROJECT SCHEDULES
(SMALL PROJECTS – DESIGN/BID/BUILD)

PART 1- GENERAL

1.1 DESCRIPTION:

A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COR).

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.

C. The Contractor’s representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

A. The Contractor shall submit a qualification proposal to the COR, within 10 days of bid acceptance. The qualification proposal shall include:

1. The name and address of the proposed consultant.
2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report. The COR shall identify the five different report formats that the contractor shall provide.

B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred**

during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents. These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

1.6 WORK ACTIVITY/EVENT COST DATA

A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 – //Article 70 Without NAS-CPM// //Article 71 Including NAS-CPM//for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION).

C. In accordance with FAR 52.236 – 1 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction

schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:
   1. Show activities/events as:
      a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
      b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
      c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
      d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
      e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.
   2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
   3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
   4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
   5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:
   1. The appropriate project calendar including working days and holidays.

2. The planned number of shifts per day.
3. The number of hours per shift.

Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COR's approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

A. Monthly, the contractor shall submit an application and certificate for payment using VA Form 10-6001a or the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 –Article 70 Without NAS-CPM Article 71 Including NAS-CPM for (PAYMENTS UNDER FIXED PRICE CONSTRUCTION). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

A. Monthly schedule update meetings will be held on dates mutually agreed to by the COR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COR three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.

4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
5. Completion percentage for all completed and partially completed activities/events.
6. Logic and duration revisions required by this section of the specifications.
7. Activity/event duration and percent complete shall be updated independently.

B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the COR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the COR within fourteen (14) calendar days of completing the regular schedule update. Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.

D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
   1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
   2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
   3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:
   1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
   2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
   3. The schedule does not represent the actual prosecution and progress of the project.
   4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 – 4 (Changes, and will be based on

the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the COR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 – 4 (Changes). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI’s, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

SECTION 01 33 23

SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 – GENERAL

1.1 DESCRIPTION

A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.

B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.

C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

1.2 DEFINITIONS

A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.

B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.

C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.

E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.

F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.

H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.

I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.

J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.

K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

1.3 SUBMITTAL REGISTER

A. The submittal register will list items of equipment and materials for which he contract documents but which have been omitted from the submittal register.

B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.

C. The VA will provide a blank submittal register in electronic format. Thereafter, the Contractor shall fill in the blank register with the required submittals as documented in the project spec. The Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.

D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.

E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.

B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.

C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.

D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.

C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.

D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned without review.

E. Provide a transmittal form for each submittal with the following information:

1. Project title, location and number.
2. Construction contract number.
3. Date of the drawings and revisions.
4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
7. Product identification and location in project.

F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.

G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

```
_____________________________________________________________________________
|                                CONTRACTOR                                 |
|                                                                           |
|                                (Firm Name)                                |
|                                                                           |
|                                                                           |
|                                                                           |
|_______Approved                                                            |
|                                                                           |
|                                                                           |
|_______Approved with corrections as noted on submittal data and/or         |
| attached sheets(s)                                                        |
|                                                                           |
|                                                                           |
|                                                                           |
| SIGNATURE:    ____________________________________________________________|
|                                                                           |
| TITLE:        ____________________________________________________________|
|                                                                           |
| DATE:         ____________________________________________________________|
|                                                                           |
|___________________________________________________________________________|
```

1.6 SUBMITTAL FORMAT AND TRANSMISSION

A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.

B. Compile the electronic submittal file as a single, complete document including all transmittals, cut sheets and drawings. Name the electronic submittal file specifically according to its spec section number and contents.

C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.

D. Provide electronic documents through system defined in Section 01 31 00.01 Project Management and Coordination..

E. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

1.7 SAMPLES

A. Submit two sets of physical samples showing range of variation, for each required item.
B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.
C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.
D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.
E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.
F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.
B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

COR may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.
B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.
C. Period of review for each resubmittal is the same as for initial submittal.
D. VA review period is 15 business days for submittals.
E. VA review period is 10 business days for RFIs.
F. The VA will return submittals to the Contractor with the following notations:

1. "Approved": authorizes the Contractor to proceed with the work covered.
2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.

B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.

D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

SECTION 01 35 26

SAFETY REQUIREMENTS

TABLE OF CONTENTS

1.1 APPLICABLE PUBLICATIONS: 3

1.2 DEFINITIONS: 4

1.3 SUBMITTAL REQUIRMENTS: 8

1.4 REGULATORY REQUIREMENTS: 9

1.5 ACCIDENT PREVENTION PLAN (APP): 9

1.6 ACTIVITY HAZARD ANALYSES (AHAs): 13

1.7 PRECONSTRUCTION SAFETY CONFERENCE: 15

1.8 SAFETY MEETINGS: 15

1.9 “SITE SAFETY AND HEALTH OFFICER” (SSHO) and “COMPETENT PERSON” (CP): 15

1.10 TRAINING: 16

1.11 INSPECTIONS: 18

1.12 MISHAPS, OSHA 300 LOGS, AND MAN-HOURS: 18

1.13 PERSONAL PROTECTIVE EQUIPMENT (PPE): 19

1.14 PRE-CONSTRUCTION RISK ASSESSMENT 20

1.15 DUST CONTROL 21

1.16 TUBERCULOSIS SCREENING 21

1.17 FIRE SAFETY 22

1.18 ELECTRICAL 24

1.19 FALL PROTECTION 25

1.20 SCAFFOLDS AND OTHER WORK PLATFORMS 26

1.21 CRANES 26

1.22 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT) 27

1.23 CONFINED SPACE ENTRY 28

1.24 WELDING AND CUTTING 28

1.25 LADDERS 28

1.26 FLOOR & WALL OPENINGS 29

SECTION 01 35 26

SAFETY REQUIREMENTS

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Professionals (ASSP):

A10.1-2011 .....Pre-Project & Pre-Task Safety and Health Planning

A10.34-2012 .....Protection of the Public on or Adjacent to Construction Sites

A10.38-2013 .....Basic Elements of an Employer's Program to Provide a Safe and Healthful Work Environment American National Standard Construction and Demolition Operations

Z359.0-2012 .....Definitions and Nomenclature Used for Fall Protection and Fall Arrest

Z359.1-2016 .....The Fall Protection Code

C. American Society for Testing and Materials (ASTM):

E84-2013 .....Surface Burning Characteristics of Building Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2019 .....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

70-2020.....National Electrical Code

70B-2019 .....Recommended Practice for Electrical Equipment Maintenance

70E-2018 .....Standard for Electrical Safety in the Workplace

241-2019.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

703-2024.....Standard for Fire Retardant–Treated Wood and Fire-Retardant Coatings for Building Materials

F. The Joint Commission (TJC)

TJC Manual .....Comprehensive Accreditation and Certification Manual

G. U.S. Nuclear Regulatory Commission

10 CFR 20 .....Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1904 .....Reporting and Recording Injuries & Illnesses

29 CFR 1910 .....Safety and Health Regulations for General Industry

29 CFR 1926 .....Safety and Health Regulations for Construction Industry

CPL 2-0.124.....Multi-Employer Citation Policy

I. US Army Corps of Engineers Safety and Occupational Health (SOH) Requirements Publication No. EM 385-1-1, 2024 edition

1.2 DEFINITIONS:

A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.

B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).

C. Competent Person, Confined Space
The CP, Confined Space, is a person meeting the competent person requirements as defined EM 385-1-1 Appendix Q, with thorough knowledge of OSHA's Confined Space Standard, 29 CFR 1910.146, and designated in writing to be responsible for the immediate supervision, implementation and monitoring of the confined space program, who through training,

knowledge and experience in confined space entry is capable of identifying, evaluating and addressing existing and potential confined space hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

D. Competent Person, Cranes and Rigging.
The CP, Cranes and Rigging, as defined in EM 385-1-1 Appendix Q, is a person meeting the competent person, who has been designated in writing to be responsible for the immediate supervision, implementation and monitoring of the Crane and Rigging Program, who through training, knowledge and experience in crane and rigging is capable of identifying, evaluating and addressing existing and potential hazards and, who has the authority to take prompt corrective measures regarding such hazards.

E. Competent Person, Excavation/Trenching.
A CP, Excavation/Trenching, is a person meeting the competent person requirements as defined in EM 385-1-1 Appendix Q and 29 CFR 1926, who has been designated in writing to be responsible for the immediate supervision, implementation and monitoring of the excavation/trenching program, who through training, knowledge and experience in excavation/trenching is capable of identifying, evaluating and addressing existing and potential hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

F. Competent Person, Fall Protection
The CP, Fall Protection, is a person meeting the competent person requirements as defined in EM 385-1-1 Appendix Q and in accordance with ASSE/SAFE Z359.0, who has been designated in writing by the employer to be responsible for immediate supervising, implementing and monitoring of the fall protection program, who through training, knowledge and experience in fall protection and rescue systems and equipment, is capable of identifying, evaluating and addressing existing and potential fall hazards and, who has the authority to take prompt corrective measures with regard to such hazards.

G. Competent Person, Scaffolding
The CP, Scaffolding is a person meeting the competent person requirements in EM 385-1-1 Appendix Q and designated in writing by the employer to be responsible for immediate supervising, implementing and monitoring of the scaffolding program. The CP for Scaffolding has enough training, knowledge and experience in scaffolding to correctly identify, evaluate and address existing and potential hazards and has the authority to take prompt corrective measures with regard to these hazards. CP qualifications must be documented and include experience on the specific scaffolding systems/types being used, assessment of the base material that the scaffold will be erected upon, load calculations for materials and personnel,

and erection and dismantling. The CP for scaffolding must have a documented, minimum of 8-hours of scaffold training to include training on the specific type of scaffold being used (e.g. mast-climbing, adjustable, tubular frame), in accordance with EM 385-1-1 Section 22.B.02.

H. Competent Person (CP) Trainer
A competent person trainer as defined in EM 385-1-1 Appendix Q, who is qualified in the material presented, and who possesses a working knowledge of applicable technical regulations, standards, equipment and systems related to the subject matter on which they are training Competent Persons. A competent person trainer must be familiar with the typical hazards and the equipment used in the industry they are instructing. The training provided by the competent person trainer must be appropriate to that specific industry. The competent person trainer must evaluate the knowledge and skills of the competent persons as part of the training process.

I. High Risk Activities
High Risk Activities are activities that involve work at heights, crane and rigging, excavations and trenching, scaffolding, electrical work, and confined space entry.

J. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.

K. Qualified Person, Fall Protection (QP for FP)
A QP for FP is a person meeting the requirements of EM 385-1-1 Appendix Q, and ASSE/SAFE Z359.0, with a recognized degree or professional certificate and with extensive knowledge, training and experience in the fall protection and rescue field who is capable of designing, analyzing, and evaluating and specifying fall protection and rescue systems.

L. USACE Property and Equipment
Interpret "USACE" property and equipment specified in USACE EM 385-1-1 as Government property and equipment.

M. High Visibility Accident. Any mishap which may generate publicity or high visibility.

N. Mishap: Mishap in this specification is defined according to the EM 385-1-1. A mishap is any unplanned, undesired event that occurs during the course of work being performed. This includes accidents, incidents, and near misses.

O. Mishap Criticality Categories

1. No impact/Near-Miss – near miss incidents that shall be investigated and reported to the VA within 24 hours.

2. Minor incident/impact – incidents that require first aid or result in minor equipment damage (less than $5000). These incidents must be investigated and reported to the VA within 24 hours.

3. Moderate incident/impact – Any work-related injury or illness that results in any of the following. These incidents must be investigated and are required to be reported to the VA within 2 hours.

    a. Days away from work (any time lost after day of injury/illness onset);

    b. Restricted work;

    c. Transfer to another job;

    d. Medical treatment beyond first aid;

    e. Loss of consciousness;

    f. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,

    g. any incident that leads to major equipment damage (greater than $5000).

4. Major incident/impact – Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than $20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

P. Load Handling Equipment (LHE)
LHE is a term used to describe cranes, hoists and all other hoisting equipment (hoisting equipment means equipment, including crane, derricks, hoists and power operated equipment used with rigging to raise, lower or horizontally move a load).

Q. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by physician or registered personnel.

1.3 SUBMITTAL REQUIRMENTS:

A. Government approval or concurrence is required for submittals with a "G" designation; submittals not having a "G" designation are submitted for information only.

B. Preconstruction Submittals

1. Accident Prevention Plan (APP); G

C. Reports

1. Monthly Contractor Health Safety and Environmental (HS&E) Performance Report; G
2. Notifications and Reports;
3. Mishap Reports;
4. Near-Miss Reports;
5. LHE Inspection Reports
6. Monthly Exposure Hour Reports;

D. Work Plans

1. Standard Lift Plan; G
2. Critical Lift Plan; G
3. Activity Hazard Analysis (AHA); G
4. Confined Space Entry Permit
5. Hot Work Permit
6. Radiography Operation Planning Work Sheet; G
7. Portable Gauge Operations Planning Worksheet; G

E. Certificates

1. Contractor Safety Self-Evaluation Checklist
2. Crane Operators/Riggers Certifications; G
3. Certificate of Compliance
4. Mobile Cranes Inspection Certificate
5. License Certificates

6. Machinery & Mechanized Equipment Certification Form

1.4 REGULATORY REQUIREMENTS:

A. In addition to the detailed requirements included in the provisions of this contract, comply with the most recent edition of USACE EM 385-1-1, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSP A10.34, and all applicable federal, state, and local laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer Representative.

1.5 ACCIDENT PREVENTION PLAN (APP):

A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that Mishap prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract. Specifically articulating the safety requirements found within these VA contract safety specifications and the latest version of the United States Army Corps of Engineers – Safety and Occupational Health (SOH) Requirements - EM 385-1-1 Manual. Model language and format can be found in Appendix A of the EM 385-1-1 Manual

2. Address both the Prime Contractors and the subcontractors work operations.

3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.

4. Address all the elements/sub-elements and in order as follows:

   a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:

      1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);

      2) Plan approver (company/corporate officers authorized to obligate the company);

      3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).

   b. **BACKGROUND INFORMATION**. List the following:

      1) Contractor;

      2) Contract number;

      3) Project name;

      4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).

   c. **STATEMENT OF SAFETY AND HEALTH POLICY**. Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided. The Statement of Safety and Health Policy must be signed by a company executive.

   d. **RESPONSIBILITIES AND LINES OF AUTHORITIES**. Provide the following:

      1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;

      2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.

      3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA or EM 385-1-1 Competent/Qualified Person(s) requirements must be attached.;

4) Requirements that no work shall be performed unless a designated competent person is present on the job site;

5) Requirements for pre-task Activity Hazard Analysis (AHAs);

6) Lines of authority;

7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;

e. **SUBCONTRACTORS AND SUPPLIERS.** If applicable, provide procedures for coordinating SOH activities with other employers on the job site:

1) Identification of subcontractors and suppliers (if known);

2) Safety responsibilities of subcontractors and suppliers.

f. **TRAINING.**

1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.

2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc.…) and any requirements for periodic retraining/recertification are required.

3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.

4) OSHA 10-hour Construction Outreach training within the past five years is required for all workers on site and the OSHA 30-hour Construction Outreach training within the past five years is required for Trade Competent Persons (CPs)

g. **SAFETY AND HEALTH INSPECTIONS.**

1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., “Site Safety and Health CP”), proof of inspector’s training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.

2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

h. **MISHAP INVESTIGATION & REPORTING.**

1) The APP shall include identify person(s) responsible to provide the following to the Contracting Officer Representative :

1. Monthly HS&E Performance Report (Exposure Hours Data);
2. Mishap investigation reports;
3. Project site injury and illness logs;
4. Near-Miss reports;

i. **PLANS (PROGRAMS, PROCEDURES) REQUIRED.** Based on a risk assessment of contracted activities and on mandatory OSHA and/or EM 385-1-1 compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not limited to procedures for addressing the risks associated with the following:

1) Emergency response;

2) Contingency for severe weather;

3) Fire Prevention;

4) Medical Support;

5) Posting of emergency telephone numbers;

6) Prevention of alcohol and drug abuse;

7) Site sanitation (housekeeping, drinking water, toilets);

8) Night operations and lighting;

9) Hazard communication program;

10) Welding/Cutting “Hot” work;

11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);

12) General Electrical Safety;

13) Hazardous energy control (LOTO);

14) Site-Specific Fall Protection & Prevention;

15) Asbestos abatement;

16) Lead abatement;

17) Crane Critical lift;

18) Respiratory protection;

29) Health hazard control program;

20) Radiation Safety Program;

21) Abrasive blasting;

22) Heat/Cold Stress Monitoring;

23) Demolition plan (to include engineering survey);

24) Pre-Cast Concrete;

25) Public (Mandatory compliance with ANSI/ASSP A10.34-2012);

26) Sub-contractor or cross-trade coordination;

C. Submit the APP to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction safety conference for acceptance. Work cannot proceed without an accepted APP.

D. Once accepted by the Contracting Officer Representative, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.

E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer Representative. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 2 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions to safeguard onsite personnel, visitors, the public and the environment.

1.6 ACTIVITY HAZARD ANALYSES (AHAS):

A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to

perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)

B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.

C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA, EM 385-1-1, or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.

2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).

   a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.

   b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.

3. Submit AHAs to Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.

4. The AHA list will be reviewed periodically (at least weekly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.

5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the Contracting Officer Representative or Government Designated Authority for review for compliance.

1.7 PRECONSTRUCTION SAFETY CONFERENCE:

A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the pre-construction safety conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.

B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.

1.8 SAFETY MEETINGS:

Conduct safety meetings to review past activities, plan for new or changed operations, review pertinent aspects of appropriate AHA (by trade), establish safe working procedures for anticipated hazards, and provide pertinent Safety and Occupational Health (SOH) training and motivation. Conduct meetings at least once a month for all supervisors on the project location. The SSHO, supervisors, foremen, or CDSOs must conduct meetings at least once a week for the trade workers. Document meeting minutes to include the date, persons in attendance, subjects discussed, and names of individual(s) who conducted the meeting. Maintain documentation on-site and furnish copies to the Contracting Officer on request. Notify the Contracting Officer of all scheduled meetings 7 calendar days in advance.

1.9 “SITE SAFETY AND HEALTH OFFICER” (SSHO) AND “COMPETENT PERSON” (CP):

A. The Prime Contractor shall provide a Safety oversight team that includes a minimum of one (1) person at each project site, for each shift, to function as the Site Safety and Health Officer (SSHO). The Prime Contractor shall provide a minimum of one “Full-Time” SSHO at each project site, for each shift (with no other duties) that holds as current, a professional safety certification with at least 3 years of dedicated construction safety related experience. The SSHO shall ensure that the requirements of the VA and of 29 CFR 1926.16 are met for the project. The SSHO must

be at the work site at all times, during construction activities, to implement and administer the Contractor's safety program and government-accepted Accident Prevention Plan. If the SSHO is off-site for a period longer than 8 hours, or one shift, and not exceeding 40 hours, or 5 shifts, a pre-approved Alternate Safety Officer shall be provided and shall fulfill the same roles and responsibilities as the primary SSHO. The Alternate Safety Officer shall have the required training, experience, and qualifications in accordance with EM 385-1-1 Section 01.A.17, and all associated sub-paragraphs. When the SSHO is temporarily (not to exceed 8 hours) off-site, a Designated Representative (DR) from the Prime Contractors' staff, as identified in the AHA may be used in lieu of an Alternate Safety Officer and shall be on the project site, at all times, when work is being performed. Note that the DR is a collateral duty safety position, with safety duties in addition to their full-time occupation. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.

B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).

C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations). However, the SSHO has be a separate qualified individual from the Prime Contractor's Superintendent and/or Quality Control Manager with duties only as the SSHO

D. The SSHO or an equally qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.

E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.10 TRAINING:

A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the

requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project.

B. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety Outreach class within the past five (5) years and:

1. Seven (7) years of construction industry safety related experience.

2. OR have a safety and health degree from an accredited university or college and five (5) years of construction industry safety related experience

3. OR hold as current, a Certified Safety Professional (CSP) or a Construction Health and Safety Technician (CHST) certification and five (3) years of construction industry safety related experience.

C. The Alternate Safety Officer shall meet, at a minimum, the requirements of EM 385-1-1 Section 1 and have five (5) years of construction industry safety experience If the SSHO does not have a current certification, certification must be obtained within 90 days, maximum, of contract award.

D. All designated CPs shall have completed the OSHA 30-hour Construction Safety course and/or EM 385-1-1 40-hour training within the past 5 years. In addition, all CPs with high hazard work operations (such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations) shall have a specialized formal course in the hazard recognition and control associated with those high hazard work operations. Documented “repeat” deficiencies in the execution of safety requirements will require retaking the requisite formal course.

E. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course within the past 5 years and any necessary safety training to be able to identify hazards within their work environment.

F. Submit training records associated with the above training requirements to the Contracting Officer Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction safety conference for acceptance.

G. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC

equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the COR that individuals have undergone contractor's safety briefing.

H. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

1.11 INSPECTIONS:

A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection with a written report of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to the Contracting Officer.

B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT shall be one that is not a part of the immediate site project team. The individual can be a corporate safety professional or independently contracted who is not an immediate member of the construction project site team. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.

2. The Contracting Officer Representative will be notified immediately prior to start of the inspection and invited to accompany the inspection.

3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.

4. A report of the inspection findings with status of abatement will be provided to the Contracting Officer Representative within one week of the onsite inspection.

1.12 MISHAPS, OSHA 300 LOGS, AND EXPOSURE-HOURS:

A. The prime contractor shall establish and maintain a Near-Miss and Mishap reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify and provide an initial report to the Contracting Officer Representative as soon as practical, but no more than two hours after any Moderate or Major Mishap, High Visibility Incidents, or any weight handling and hoisting equipment mishap. No Impact/Near-Miss and Minor Mishaps shall be reported within 24 hours or as soon as practical. Within the notification the sender shall include contractor name; contract title; type of contract; name of activity, installation or location

where mishap occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of mishap (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the Mishap site until the Contracting Officer Representative determines whether a government investigation will be conducted.

B. Conduct a mishap investigation for all Mishaps including mishaps resulting in at least $20,000 in damages without injury, to establish the root cause(s) of the mishap. The Mishap investigation shall include images, 5 whys, the injured person's firsthand account, any witness accounts, methods of procedures, related AHA to the task, and corrective action plan signed by the president, vice president, or appropriate corporate-level leadership identified in the company's org chart for the project. Additionally, complete the VA Form 2162 (or equivalent) and provide the report to the Contracting Officer Representative within 7 calendar days of the accident. The Contracting Officer Representative will provide copies of any required or special forms.

C. A summation of all exposure-hours worked by the contractor and associated sub-contractors for each month will be reported to Contracting Officer Representative no later than the 10th day of the following month.

D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the Contracting Officer Representative monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to Contracting Officer Representative upon request.

1.13 PERSONAL PROTECTIVE EQUIPMENT (PPE):

A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Any PPE above and beyond the Mandatory PPE identified below and determined by the Contracting Officer or their Representative to be necessary in the performance of the Governments duties relative to this contract, shall be provided to the Government upon written notification by the Contracting Officer and at no additional expense to the Government. All PPE provided to the Government shall also be accompanied by any relevant or required training necessary to ensure its proper use.

C. Mandatory Minimum PPE includes:

1. Hard Hats – unless written authorization is given by the Contracting Officer Representative in circumstances of work operations that have limited potential for falling object hazards such as

during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA and/or EM 385-1-1 regulations.

2. Safety glasses - unless written authorization is given by the Contracting Officer Representative in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.

3. Appropriate Safety Shoes – based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by Contracting Officer Representative in circumstances of no foot hazards.

4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

5. High-visibility Safety Apparel – appropriate brightly colored clothing that feature some type of reflective material on them, such as safety vests, shall be worn by personnel or visitors on construction sites.

1.14 PRE-CONSTRUCTION RISK ASSESSMENT

A. Control of all construction-associated hazards that affect VA medical facilities, their occupants, services and mission-essential functions and capabilities is critical in all medical center facilities. VHA Pre-Construction Risk Assessments (PCRAs) for construction, renovation and maintenance projects are included with this contract solicitation with required mitigations of identified hazards. VHA-PCRAs will be re-validated and updated as needed based on but not limited to changes from original designs, affected individuals, areas/locations, scope, contractor means and methods, safety requirements, phasing, contractor competencies and capabilities.

B. Infection Prevention and Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. A detailed analysis of potential risks for infectious disease transmission affecting the care, treatment or services of patients or residents has been conducted. VHA Infection Control Risk Assessments (ICRAs) are included with this contract solicitation with required mitigation actions/activities. VHA-ICRAs will be re-validated and updated as needed based on changes in original designs, affected individuals, area(s) or location(s), scope, contractor means and methods, infection prevention and control requirements, differing site conditions, phasing, contractor competencies and capabilities, and infectious disease outbreaks.

C. For work occurring at a VA medical facility, coordinate with the facility Safety Manager/Officer, as several aspects of this section directly relate to infection control risk assessments required in or adjacent to construction affecting occupied buildings accredited by The Joint Commission.

D. Products and Materials:

1. Sheet Plastic: Fire retardant polyethylene, 6-mil thickness meeting local fire codes

2. Barrier Doors: Self-Closing one-hour fire-rated solid core wood in steel frame, painted.

3. Dust proof one-hour fire-rated drywall.

4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.

5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose

6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches

7. Disinfectant: EPA-registered, Hospital-approved disinfectant or equivalent product

8. Portable Ceiling Access Module

1.15 DUST CONTROL

A. Contractor shall verify that dust will not be introduced into the facility through intake vents or building openings. HEPA filtration on intake vents is required where dust may be introduced.

B. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary.

C. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

1.16 TUBERCULOSIS SCREENING

A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be

the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.

1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.

2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.

3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

1.17 FIRE SAFETY

A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to // Resident Engineer // Project Manager // and Facility Safety // Manager // Officer // or Contracting Officer Representative // or Government Designated Authority // for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.

B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

C. For work occurring at a VA medical facility, coordinate with the facility Safety Manager/Officer, as several aspects of this section directly relate to interim life safety measures required in or adjacent to construction affecting occupied buildings accredited by The Joint Commission.

D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

E. Temporary Construction Partitions:

1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or fire-retardant treated plywood (fire-retardant treated in accordance with NFPA 703) on both sides of fire-retardant treated wood framing or metal steel studs. Extend the partitions

through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.

2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.

3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.

F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.

G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Contracting Officer Representative.

H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Contracting Officer.

I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

K Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.

L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate Contracting Officer Representative. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.

M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Contracting Officer Representative.

N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Facility Safety Office /. Obtain permits from COR at least 24 hours in

advance / . Designate contractor's responsible project-site fire prevention program manager to permit hot work.

O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative.

P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

R. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.18 ELECTRICAL

A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J – General Environmental Controls, 29 CFR Part 1910 Subpart S – Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.

B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.

C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance when achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards or is infeasible due to equipment design or operational limitations is energized work permitted. The Contracting Officer Representative with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or

circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.

2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.

3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the Contracting Officer Representative.

D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alterative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer Representative and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.

E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30- ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C)(2).

1.19 FALL PROTECTION

A. The fall protection (FP) threshold height requirement is 4ft for ALL WORK in government occupied sites, unless the OSHA 29 CFR 1926 or EM 385-1-1 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work. For work occurring at new "greenfield" sites or sites with 24/7 Contractor controlled 100% restricted access, the fall protection (FP) threshold height may be increased to 6ft unless the OSHA 29 CFR 1926 or EM 385-1-1 requirements are more stringent.

1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.

2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.

3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.

4. Fall protection while using a ladder will be governed by the more stringent of OSHA and EM 385-1-1 requirements.

1.20 SCAFFOLDS AND OTHER WORK PLATFORMS

A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.

B. The fall protection (FP) threshold height requirement is 4 ft as stated in Section 1.16.

C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.

2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.

3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.

4. Emergency descent devices shall not be used as working platforms.

D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:

1. The Competent Person’s name and signature;

2. Dates of initial and last inspections.

E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.21 CRANES

A. All crane work shall comply with 29 CFR 1926 Subpart CC and EM 385-1-1.

B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no “Phase In” date.

C. A detailed lift plan for all lifts shall be submitted to the COR 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document by COR.

D. Crane operators shall not carry loads

1. over the general public or VAMC personnel

2. over any occupied building unless

a. The top two or more floors are vacated under the lift affected area AND a Contractor provided engineering analysis, performed by a Professional Engineer, demonstrates that overhead protection provided by the roof and vacated floors is sufficient to protect against the potential loss of a load being lifted or a minimum of 300 psf of protection is provided, whichever is greater

b. OR Overhead protection is designed by a Professional Engineer and installed over the roof by the Contractor to protect the occupants below. The installed system shall be sufficient to protect against the potential loss of a load being lifted or a minimum of 300 psf of protection is provided, whichever is greater.

c. OR A formal request may be submitted to the Contracting Officer for documentation, if available, indicating the roof of the building has been previously designed and constructed using a reinforced concrete roof slab or other means to provide overhead protection from construction activities specifically associated with the vertical or horizontal expansion of the same building AND a Contractor provided engineering analysis, performed by a Professional Engineer, demonstrates that overhead protection provided by the roof is sufficient to protect against the potential loss of a load being lifted or a minimum of 300 psf of protection is provided, whichever is greater.

1.22 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete &

masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.23 CONFINED SPACE ENTRY

A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].

B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to COR.

1.24 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Obtain permits from COR at least 72 hours in advance . Designate contractor's responsible project-site fire prevention program manager to permit hot work.

1.25 LADDERS

A. All Ladder use shall comply with 29 CFR 1926 Subpart X and EM 385-1-1.

B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.

C. Manufacturer safety labels shall be in place on ladders

D. Step Ladders shall not be used in the closed position

E. Top steps or cap of step ladders shall not be used as a step

F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.

1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.

2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.

G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.26 FLOOR & WALL OPENINGS

A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M and EM 385-1-1.

B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.

C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toe boards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.

1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.

2. Covers shall be secured when installed, clearly marked with the word “HOLE”, “COVER” or “Danger, Roof Opening-Do Not Remove” or color-coded or equivalent methods (e.g., red or orange “X”). Workers must be made aware of the meaning for color coding and equivalent methods.

3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.

4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.

5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to – GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.
http://www.aluminum.org

AABC Associated Air Balance Council
https://www.aabc.com

AAMA American Architectural Manufacturer's Association
http://www.aamanet.org

ACGIH American Conference of Governmental Industrial Hygienists
http://www.acgih.org

ACI American Concrete Institute
http://www.aci-int.net

ACPA American Concrete Pipe Association
http://www.concrete-pipe.org

ADC Air Diffusion Council
http://flexibleduct.org

AGA American Gas Association
http://www.aga.org

AGC Associated General Contractors of America
http://www.agc.org

AGMA American Gear Manufacturers Association, Inc.
http://www.agma.org

AH American Hort

https://www.americanhort.org

AIA American Institute of Architects

http://www.aia.org

AISC American Institute of Steel Construction
http://www.aisc.org

AISI American Iron and Steel Institute
http://www.steel.org

AITC American Institute of Timber Construction
https://aitc-glulam.org

AMCA Air Movement and Control Association, Inc.
http://www.amca.org

ANSI American National Standards Institute, Inc.
http://www.ansi.org

APA The Engineered Wood Association
http://www.apawood.org

ARI Air-Conditioning and Refrigeration Institute
http://www.ari.org

ARPM Association for Rubber Product Manufacturers
https://arpm.com

ASABE American Society of Agricultural and Biological Engineers
https://www.asabe.org

ASCE American Society of Civil Engineers
http://www.asce.org

ASHRAE American Society of Heating, Refrigerating, and Air-Conditioning Engineers
http://www.ashrae.org

ASME American Society of Mechanical Engineers
http://www.asme.org

ASSE American Society of Sanitary Engineering International
http://www.asse-plumbing.org

ASTM American Society for Testing and Materials International
http://www.astm.org

AWI Architectural Woodwork Institute
https://www.awinet.org

AWS American Welding Society
https://www.aws.org

AWWA American Water Works Association
https://www.awwa.org

BHMA Builders Hardware Manufacturers Association
https://www.buildershardware.com

BIA The Brick Industry Association
http://www.gobrick.com

CAGI Compressed Air and Gas Institute
https://www.cagi.org

CISCA Ceilings and Interior Systems Construction Association
https://www.cisca.org

CISPI Cast Iron Soil Pipe Institute
https://www.cispi.org

CPA Composite Panel Association

https://www.compositepanel.org

CPMB Concrete Plant Manufacturers Bureau
https://www.cpmb.org

CRSI Concrete Reinforcing Steel Institute
https://www.crsi.org

CTI Cooling Technology Institute
https://www.cti.org

DHI Door and Hardware Institute
https://www.dhi.org

EPA United States Environmental Protection Agency
https://www.epa.gov

ETL ETL Testing Services
http://www.intertek.com

FCC Federal Communications Commission
https://www.fcc.gov

FPS	Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.glasswebsite.com
FM	Factory Mutual Global Insurance https://www.fmglobal.com
GA	Gypsum Association https://gypsum.org
GSA	General Services Administration https://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
ICC	International Code Council https://shop.iccsafe.org
ICEA	Insulated Cable Engineers Association https://www.icea.net
ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers https://www.ieee.org\
IGMA	Insulating Glass Manufacturers Alliance https://www.igmaonline.org
IMSA	International Municipal Signal Association http://www.imsasafety.org
MBMA	Metal Building Manufacturers Association https://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry http://msshq.org

NAAMM National Association of Architectural Metal Manufacturers
https://www.naamm.org

PHCC Plumbing-Heating-Cooling Contractors Association
https://www.phccweb.org

NBS National Bureau of Standards
See - NIST

NBBI The National Board of Boiler and Pressure Vessel Inspectors
https://www.nationalboard.org

NEC National Electric Code
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
https://www.nema.org

NFPA National Fire Protection Association
https://www.nfpa.org

NHLA National Hardwood Lumber Association
https://www.nhla.com

NIH National Institute of Health
https://www.nih.gov

NIST National Institute of Standards and Technology
https://www.nist.gov

NELMA Northeastern Lumber Manufacturers Association, Inc.
http://www.nelma.org

NPA National Particleboard Association
(See CPA, Composite Panel Association)

NSF National Sanitation Foundation
http://www.nsf.org

OSHA Occupational Safety and Health Administration
Department of Labor
https://www.osha.gov

PCA	Portland Cement Association https://www.cement.org
PPI	Plastics Pipe Institute https://www.plasticpipe.org
PEI	Porcelain Enamel Institute http://www.porcelainenamel.com
RFCI	Resilient Floor Covering Institute https://www.rfci.com
SDI	Steel Door Institute
SMACNA	Sheet Metal & Air-Conditioning Contractors' National Association https://www.smacna.org
SSPC	The Society for Protective Coatings https://www.sspc.org
SWI	Steel Window Institute https://www.steelwindows.com
TCNA	Tile Council of North America https://www.tcnatile.com
TEMA	Tubular Exchanger Manufacturers Association http://www.tema.org
TPI	Truss Plate Institute https://www.tpinst.org
UBC	The Uniform Building Code (See ICC)
UL	Underwriters' Laboratories Incorporated https://www.ul.com
WDMA	Window and Door Manufacturers Association https://www.wdma.com

WWPA Western Wood Products Association

http://www.wwpa.org

- - - E N D - - -

SECTION 01 45 00
QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies requirements for Contractor Quality Control (CQC) for Design-Bid-Build (DBB) or Design-Build (DB) construction projects. This section can be used for both project types.

1.2 APPLICABLE PUBLICATIONS

A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

B. ASTM International (ASTM)

1. E329 - (2014a) Standard Specification for Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

1.3 SUBMITTALS

Government approval is required for all submittals. CQC inspection reports shall be submitted under this Specification section and follow the Applicable Specification section] naming convention.

PART 2 PRODUCTS – NOT USED

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

Establish and maintain an effective quality control (QC) system. that complies with the FAR Clause 52.246.12 titled “Inspection of Construction”. QC consists of plans, procedures, and organization necessary to produce an end product which complies with the Contract requirements. The QC system covers all design and construction operations, both onsite and offsite, and be keyed to the proposed design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Office or Authorized designee for non-compliance with the quality requirements specified in the Contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent maintains a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer.

3.2 CQC PLAN:

A. Submit the CQC Plan no later than 30 days after receipt of Notice to Proceed (NTP) proposed to implement the requirements of the FAR Clause 52.246.12 titled “Inspection of Construction”. The Government will consider an Interim CQC Plan for the first days of operation, which must be accepted within 10 business days of NTP. Design and/or construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an Interim plan applicable to the particular feature of work to be started. Work outside of the accepted Interim CQC Plan will not be permitted to begin until acceptance of a CQC Plan or another Interim CQC Plan containing the additional work scope is accepted.

B. Content of the CQC Plan: Include, as a minimum, the following to cover all design and construction operations, both onsite and offsite, including work by subcontractors, designers of record consultants, architects/engineers (A/E), fabricators, suppliers, and purchasing agents:

1. A description of the QC organization, including a chart showing lines of authority and acknowledgement that the CQC staff will implement the three phase control system for all aspects of the work specified. Include a CQC System Manager that reports to the project superintendent.
2. The name, qualifications (in resume format) duties, responsibilities, and authorities of each person assigned a CQC function.
3. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the Contract. Letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities will be issued by the CQC System Manager. Furnish copies of these letters to the Contracting Officer or Authorized designee.
4. Procedures for scheduling, reviewing, certifying, and managing submittals including those of subcontractors, designers of record, consultants, A/E’s offsite fabricators, suppliers and purchasing agents. These procedures must be in accordance with Section 01 33 23 Shop Drawings, Product Data, and Samples.
5. Control, verification, and acceptance of testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the Contracting Officer or Authorized designee are required to be used)
6. Procedures for tracking Preparatory, Initial, and Follow-Up control phases and control, verification, and acceptance tests including documentation.

7. Procedures for tracking design and construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected.
8. Reporting procedures, including proposed reporting formats.
9. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks has separate control requirements, and is identified by different trades or disciplines, or it is work by the same trade in a different environment. Although each section of specifications can generally be considered as a definable feature of work, there are frequently more than one definable feature under a particular section. This list will be agreed upon during the Coordination meeting.

C. Additional Requirements for Design Quality Control (DQC) Plan: The following additional requirements apply to the DQC Plan for DB projects only and not DBB projects:

1. Submit and maintain a DQC Plan as an effective QC program which assures that all services required by this contract are performed and provided in a manner that meets professional architectural and engineering quality standards. As a minimum, all documents must be technically reviewed by competent, independent reviewers identified in the DQC Plan. The same element that produced the product may not perform the independent technical review (ITR). Correct errors and deficiencies in the design documents prior to submitting them to the Government.
2. Include the design schedule in the master project schedule, showing the sequence of events involved in carrying out the project design tasks within the specific Contract period. This should be at a detailed level of scheduling sufficient to identify all major design tasks, including those that control the flow of work. Include review and correction periods associated with each item. This should be a forward planning as well as a project monitoring tool. The schedule reflects calendar days and not dates for each activity. If the schedule is changed, submit a revised schedule reflecting the change within 7 calendar days. Include in the DQC Plan the discipline-specific checklists to be used during the design and quality control of each submittal. Submit at each design phase as part of the project documentation these completed discipline-specific checklists.
3. Implement the DQC Plan by a DQC Manager who has the responsibility of being cognizant of and assuring that all documents on the project have been coordinated. This individual must be a person who has verifiable engineering or architectural design experience and is a Professional Engineer or Registered Architect within the state of Construction location. Notify the Contracting Officer or Authorized designee, in writing, of the name of the individual, and the name of an alternate person assigned to the position.

D. Acceptance of Plan: Acceptance of the Contractor's plan is required prior to the start of design and construction. Acceptance is conditional and will be predicated on satisfactory performance during the design and construction. The Government reserves the right to require the Contractor to make changes in the CQC Plan and operations including removal of personnel as necessary, to obtain the quality specified.

E. Notification of Changes: After acceptance of the CQC Plan, notify the Contracting Officer or Authorized designee in writing of any proposed change. Proposed changes are subject to acceptance by the Government prior to implementation by the Contractor.

3.3 COORDINATION MEETING:

After the Preconstruction Conference Post-award Conference before start of design or construction, and prior to acceptance by the Government of the CQC Plan, meet with the Contracting Officer or Authorized designee to discuss the Contractor's quality control system. Submit the CQC Plan a minimum of 5 business days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CC operations, design activities (if applicable), control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting will be prepared by the Government, signed by both the Contractor and Contracting Officer or Authorized designee and will become a part of the contract file. There can be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

3.4 QUALITY CONTROL ORGANIZATION:

A. Personnel Requirements: The requirements for the CQC organization are a Safety and Health Manager, CQC System Manager, a Design Quality Manager (if applicable), and sufficient number of additional qualified personnel to ensure safety and Contract compliance. The Safety and Health Manager shall satisfy the requirements of Specification 01 35 26 Safety Requirements and reports directly to a senior project (or corporate) official independent from the CQC System Manager. The Safety and Health Manager will also serve as a member of the CQC Staff. Personnel identified in the technical provisions as requiring specialized skills to assure the required work is being performed properly will also be included as part of the CQC organization. The Contractor's CQC staff maintains a presence at the site at all times during progress of the work and have complete authority and responsibility to take any action necessary to ensure Contract compliance. The CQC staff will be subject to acceptance by the Contracting Officer or Authorized designee. Provide adequate office space, filing systems, and other resources as necessary to maintain an effective and fully functional CQC organization. Promptly complete and

furnish all letters, material submittals, shop drawings submittals, schedules and all other project documentation to the CQC organization. The CQC organization is responsible to maintain these documents and records at the site at all times, except as otherwise acceptable to the Government.

B. CQC System Manager: Identify as CQC System Manager an individual within the onsite work organization that is responsible for overall management of CQC and has the authority to act in all CQC matters for the Contractor. The CQC system Manager is required to be a construction person with a minimum of 10 years in related work. This CQC System manager is on the site at all times during construction and is employed by the General Contractor. // The CQC System Manager is assigned as CQC System Manager but may have duties as project superintendent in addition to quality control.

C. CQC Personnel: In addition to CQC personnel specified elsewhere in the contract, provide as part of the CQC organization specialized personnel to assist in the CQC System Manager for the following areas, as applicable: electrical, mechanical, civil, structural, environmental, architectural, materials technician submittals clerk, Commissioning Agent/LEED specialist, and low voltage systems. These individuals or specified technical companies are directly employed by the General Contractor and cannot be employed by a supplier or subcontractor on this project be responsible to the CQC System Manager; be physically present at the construction site during work on the specialized personnel's areas of responsibility; have the necessary education or experience in accordance with the Experience Matrix listed herein. These individuals can perform other duties but need to be allowed sufficient time to perform the specialized personnel's assigned quality controls duties as described in the CQC Plan. A single person can cover more than one area provided that the single person is qualified to perform QC activities in each designated and that workload allows.

EXPERIENCE MATRIX

Area	Qualifications
Civil	Graduate Civil Engineer or Construction Manager with 2 years experience in the type of work being performed on this project or technician with 5 years related experience.
Mechanical	Graduate Mechanical Engineer with 2 years experience or construction professional with 5 years of experience supervising mechanical features of work in the field with a construction company.

Area	Qualifications
Electrical	Graduate Electrical Engineer with 2 years related experience or construction professional with 5 years of experience supervising electrical features of work in the field with a construction company.
Structural	Graduate Civil Engineer (with Structural Track or Focus), Structural Engineer, or Construction Manager with 2 years experience or construction professional with 5 years experience supervising structural features of work in the field with a construction company.
Architectural	Graduate Architect with 2 years experience or construction professional with 5 years of related experience.
Environmental	Graduate Environmental Engineer with 3 years experience.
Submittals	Submittal Clerk with 1 year experience.
Concrete, Pavement, and Soils	Materials Technician with 2 years experience for the appropriate area.
Testing, Adjusting, and Balancing (TAB)	Specialist must be a member of AABC or an experienced technicaion of the firm certified by the NEBB.
Design Quality Control Manager	Registered Architect or Professional Engineer

D. Additional Requirements: In addition to the above experience and education requirements, the CQC System Manager and Alternate CQC System Manager are required to have completed the Construction Quality Management (CQM) for Construction course. If the CQC System Manager does not have a current specification, obtain the CQM for Contractors course identification within 90 days of award. This course is periodically offered by the Naval Facilities Engineering Command and the Army Corps of Engineers. Contact the Contracting Officer or Authorized designee for information on the next scheduled class.

E. Organizational Changes: Maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer or Authorized designee for acceptance.

3.5 **SUBMITTALS AND DELIVERABLES:** Submittals have to comply with the requirements in Section 01 33 23 Shop Drawings, Product Data, and Samples. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements. When Section 01 91 00 General Commissioning Requirements is included in the contract, the submittals required by the section have to be coordinated with the Section 01 33 23

Shop Drawings, Product Data, and Samples to ensure adequate time is allowed for each type of submittal required.

3.6 CONTROL:

A. CQC is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control are required to be conducted by the CQC System Manager for each definable feature of the construction work as follows:

1. Preparatory Phase: This phase is performed prior to beginning work on each definable feature of work after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase includes:
   a. A review of each paragraph of applicable specifications, references codes, and standards. Make available during the preparatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.
   b. Review of the Contract drawings.
   c. Check to assure that all materials and equipment have been tested, submitted, and approved.
   d. Review of provisions that have been made to provide required control inspection and testing.
   e. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the Contract.
   f. Examination of required materials, equipment, and sample work to assure that they are on hand conform to approved shop drawings or submitted data, and are properly stored.
   g. Review of the appropriate Activity Hazard Analysis (AHA) to assure safety requirements are met.
      i. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards – contract defined or industry standard if not contract defined - for that feature of work.
   j. Check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.
   k. Discussion of the initial control phase.
   l. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the Preparatory control phase. Include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as

applicable), and the foreman responsible for the definable feature. Document the results of the Preparatory phase actions by separate minutes prepared by the CQC System Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.

B. Initial Phase: This phase is accomplished at the beginning of a definable feature of work. Accomplish the following:

1. Check work to ensure that it is in full compliance with contract requirements. Review minutes of the Preparatory meeting.
2. Verify adequacy of controls to ensure full contract compliance. Verify the required control inspection and testing is in compliance with the contract.
3. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
4. Resolve all differences.
5. Check safety to include compliance with an upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
6. The Government needs to be notified at least 48 hours or 2 business days in advance of beginning the initial phase for definable features of work. Prepare separate minutes of this phase by the CQC System Manager and attach to the daily CQC report. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with Follow-Up phases.
7. The initial phase for each definable feature of work is repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.
8. .

C. Follow-Up Phase: Perform daily checks to assure control activities, including control testing, are providing continued compliance with contract requirements until the completion of the particular feature of work. Record the checks in the CQC documentation. Conduct final Follow-Up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work. Do not build upon nor conceal non-conforming work. Additional Preparatory and Initial Phases on the same definable features of work if: the quality ongoing work is unacceptable; if there are changes in the applicable CQC staff, onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity, or if other problems develop.

3.7 TESTS

A. Testing Procedure: Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government.

Testing includes operation and acceptance test when specified. Procure the services of a Department of Veteran Affairs approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:

1. Verify that testing procedures comply with contract requirements.
2. Verify that facilities and testing equipment are available and comply with testing standards.
3. Check test instrument calibration data against certified standards.
4. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
5. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the unique sequential control number identifying the test. If approved by the Contracting Officer or Authorized designee, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the Contracting Officer or Authorized designee. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this Contract.

3.8 COMPLETION INSPECTION

A. Punch-Out Inspection: Conduct an inspection of the work by the CQC system Manager near the end of the work, or any increment of the work established by the specifications. Prepare and include in the CQC documentation a punch list of items which do not conform to the approved drawings and specifications. Include within the list of deficiencies the estimated date by which the deficiencies will be corrected. Make a second inspection the CQC System Manager or staff to ascertain that all deficiencies have been corrected. Once this is accomplished, notify the Government that the facility is ready for the Government Pre-Final Inspection.

B. Pre-Final Inspection: The Government will perform the Pre-Final Inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. Ensure that all items on this list have been corrected before notifying the Government, so that a Final Acceptance Inspection with the customer can be scheduled. Correct any items noted on the Pre-Final Inspection in a timely manner. These inspections and any deficiency corrections required by this paragraph need to be accomplished within the time slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate construction completion dates.

C. Final Acceptance Inspection: The Contractor’s QC Inspection personnel, plus the superintendent or other primary management person, and the Contracting Officer’s Authorized designee is required to be in attendance at the Final Acceptance Inspection. Additional Government

personnel can also be in attendance. The Final Acceptance Inspection will be formally scheduled by the Contracting Officer's or Authorized designee based upon results of the Pre-Final Inspection. Notify the Contracting Officer through the Resident Engineer office at least 14 days prior to the Final Acceptance Inspection and include the Contractor's assurance that all specific items previously identified to the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date schedule for the Final Acceptance Inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with FAR Clause 52.246-12 titled "Inspection of Construction".

3.9 DOCUMENTATION

A. Quality Control Activities: Maintain current records providing factual evidence that required QC activities and tests have been performed. Include in these records the work of subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:
   1. The name and area of responsibility of the Contractor/Subcontractor
   2. Operating plant/equipment with hours worked, idle, or down for repair.
   3. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
   4. Test and control activities performed with results and references to specification/drawing requirements. Identify the Control Phase (Preparatory, Initial, and/or Follow-Up). List deficiencies noted, along with corrective action.
   5. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specification/drawing requirements.
   6. Submittals and deliverables reviewed, with Contract reference, by whom, and action taken.
   7. Offsite surveillance activities, including actions taken.
   8. Job safety evaluations stating what was checked, results, and instructions or corrective actions.
   9. Instructions given/received and conflicts in plans and specifications.
   10. Provide documentation of design quality control activities. For independent design reviews, provide, as a minimum, identification of the Independent Technical Reviewer (ITR) team, the ITR review comments, responses, and the record of resolution of the comments.

B. Verification Statement: Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the Contract. Furnish the original and one

copy of these records in report form to the Government daily with 1 week after the date covered by the report, except that reports need not be submitted for days on which no work is performed. As a minimum, prepare and submit on report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the CQC System Manager. Include copies of test reports and copies of reports prepared by all subordinate QC personnel within the CQC System Manager Report.

3.10 SAMPLE FORMS

Templates of various quality control reports can be found on the Whole Building Design Guide website at https://www.wbdg.org/FFC/NAVGRAPH/01%2045%2000.00%2020_quality_control_reports.pdf

3.11 **NOTIFICATION OF NONCOMPLIANCE:** The Contracting Officer or Authorized designee will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor should take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site will be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer can issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made the subject of claim for extension of time or for excess costs or damages by the Contractor.

--- End of Section ---

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the General Contractor.

1.2 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B.

D. American Society for Testing and Materials (ASTM):

A370-12.....Standard Test Methods and Definitions for Mechanical Testing of Steel Products

C109/C109M-11b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars

C136-06 .....Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates

C138/C138M-10b.....Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete

C140-12 .....Standard Test Methods for Sampling and Testing Concrete Masonry Units and Related Units

C143/C143M-10a.....Standard Test Method for Slump of Hydraulic Cement Concrete

C780-11 .....Standard Test Method for Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry

C1019-11 .....Standard Test Method for Sampling and Testing Grout

C1064/C1064M-11.....Standard Test Method for Temperature of Freshly Mixed Portland Cement Concrete

C1077-11c.....Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation

C1314-11a .....Standard Test Method for Compressive Strength of Masonry Prisms

E94-04(2010) .....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection

E543-09.....Standard Specification for Agencies Performing Non-Destructive Testing

E605-93(R2011).....Standard Test Methods for Thickness and Density of Sprayed Fire Resistive Material (SFRM) Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle Examination

E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

F3125/F3125M-15.....Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

E. American Welding Society (AWS):

D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to COR, Contractor, unless other arrangements are agreed to in writing by the COR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to COR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.13 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:

a. Comply with ASTM C780.

b. Obtain samples during or immediately after discharge from batch mixer.

c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.

d. Test one sample at 7 days and 2 samples at 28 days.

2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:

a. Comply with ASTM C1019.

b. Test one sample at 7 days and 2 samples at 28 days.

c. Perform test for each 230 m^2 (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:

a. Comply with ASTM C140.

b. Test 3 samples for each 460 m^2 (5000 square feet) of wall area.

D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m^2 (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.14 STRUCTURAL STEEL:

A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:

1. Review design and shop detail drawings for size, length, type and location of all welds to be made.

2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.

3. Approve welder qualifications by certification or retesting.

4. Approve procedure for control of distortion and shrinkage stresses.

5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:

1. Weld Inspection:

a. Inspect welding equipment for capacity, maintenance and working condition.

b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.

c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.

d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.

e. Measure 25 percent of fillet welds.

f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
   1) 20 percent of all shear plate fillet welds at random, final pass only.
   2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
   3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
   4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
   5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.

g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.

i. Verify that correction of rejected welds are made in accordance with AWS D1.1.

j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.

2. Bolt Inspection:
   a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
   b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
   c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
   d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
   e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
   f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.

D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COR.

3.15 STEEL DECKING:

A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.

B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."

C. Submit inspection reports, certification, and instances of noncompliance to COR.

3.16 SHEAR CONNECTOR STUDS:

A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.

B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.

C. Submit inspection reports, certification, and instances of noncompliance to COR.

3.17 SPRAYED-ON FIREPROOFING:

A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.

B. Obtain a copy of approved submittals from COR.

C. Use approved installation in test areas as criteria for inspection of work.

D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.

1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.

E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
2. Density: Take density determinations from each floor, or one test from each 930 m^2 (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to COR.

- - - E N D - - -

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.

B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:

1. Adversely effect human health or welfare,
2. Unfavorably alter ecological balances of importance to human life,
3. Effect other species of importance to humankind, or;
4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.

C. Definitions of Pollutants:

1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
7. Sanitary Wastes:
   a. Sewage: Domestic sanitary sewage and human and animal waste.
   b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

A. Establish and maintain quality control for the environmental protection of all items set forth herein.

B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. U.S. National Archives and Records Administration (NARA):
33 CFR 328 ..... Definitions

1.4 SUBMITTALS

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer's Representative (COR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
   a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
   b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
   c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
   d. Description of the Contractor's environmental protection personnel training program.
   e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
   f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
   g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
   h. Permits, licenses, and the location of the solid waste disposal area.
   i. Drawings showing locations of any proposed //temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of

excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.

j. Environmental Monitoring Plans for the job site including land, water, air, and noise.

k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.

l. Inclusion of “best management practices” and methodologies.

B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.

2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.

a. Box and protect from damage existing trees and shrubs to remain on the construction site.

b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.

c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.

3. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
4. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
5. Handle discarded materials other than those included in the solid waste category as directed by the COR.

C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.

1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.

D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.

E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Florida and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.

1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.

E. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00p.m unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	//__//
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

b. Use shields or other physical barriers to restrict noise transmission.

c. Provide soundproof housings or enclosures for noise-producing machinery.

d. Use efficient silencers on equipment air intakes.

e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.

f. Line hoppers and storage bins with sound deadening material.

g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.

3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.

G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D OF SECTION- - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

D. Waste Management Plan development and implementation.

E. Techniques to minimize waste generation.

F. Sorting and separating of waste materials.

G. Salvage of existing materials and items for reuse or resale.

H. Recycling of materials that cannot be reused or sold.

I. At a minimum the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc).
6. Metal products (eg, steel, wire, beverage containers, copper, etc).
7. Sheathings
8. Cardboard, paper and packaging.
9. Bitumen roofing materials.
10. Plastics (eg, ABS, PVC).
11. Carpet and/or pad.
12. Gypsum board.
13. Insulation.
14. Paint.
15. Fluorescent lamps.

1.2 RELATED WORK

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

C. 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS

D. Section 02 82 11, ASBESTOS ABATEMENT

1.3 QUALITY ASSURANCE

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
   1. Excess or unusable construction materials.
   2. Packaging used for construction products.
   3. Poor planning and/or layout.
   4. Construction error.
   5. Over ordering.
   6. Weather damage.
   7. Contamination.
   8. Mishandling.
   9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of //50// // // percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

   1. On-site Recycling – Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
   2. Off-site Recycling – Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

B. Prepare and submit to the //COR// //Resident Engineer// a written demolition debris management plan. The plan shall include, but not be limited to, the following information:

1. Procedures to be used for debris management.
2. Techniques to be used to minimize waste generation.
3. Analysis of the estimated job site waste to be generated:
   a. List of each material and quantity to be salvaged, reused, recycled.
   b. List of each material and quantity proposed to be taken to a landfill.
4. Detailed description of the Means/Methods to be used for material handling.
   a. On site: Material separation, storage, protection where applicable.
   b. Off site: Transportation means and destination. Include list of materials.
      1) Description of materials to be site-separated and self-hauled to designated facilities.
      2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
         a) The names and locations of mixed debris reuse and recycling facilities or sites.
         b) The names and locations of trash disposal landfill facilities or sites.
         c) Documentation that the facilities or sites are approved to receive the materials.

C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.

D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

E. Target waste diversion rate by material and an overall diversion rate.

F. Final report documenting the results of implementation of the preconstruction waste management plan.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC): LEED Green Building Rating System for New Construction

1. Green Building Initiative (GBI): Green Globes for New Construction 2019

1.7 RECORDS

A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration.

PART 2 - PRODUCTS

2.1 MATERIALS

A. List of each material and quantity to be salvaged, recycled, reused.

B. List of each material and quantity proposed to be taken to a landfill.

C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.

C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 01 81 13
SUSTAINABLE CONSTRUCTION REQUIREMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section describes general requirements and procedures to comply with federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable construction.

B. The Design Professional has selected materials and utilized integrated design processes that achieve the Government's objectives. Contractor is responsible to maintain and support these objectives in developing means and methods for performing work and in proposing product substitutions or changes to specified processes. Obtain approval from Contracting Officer for all changes and substitutions to materials or processes. Proposed changes must meet, or exceed, materials or processes specified.

1.2 RELATED WORK

A. Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.

B. Section 01 74 19 CONSTRUCTION WASTE MANANGEMENT.

1.3 DEFINITIONS

A. Recycled Content: Recycled content of materials is defined according to Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260). Recycled content value of a material assembly is determined by weight. Recycled fraction of assembly is multiplied by cost of assembly to determine recycled content value.

1. "Post-Consumer" material is defined as waste material generated by households or by commercial, industrial, and institutional facilities in their role as end users of the product, which can no longer be used for its intended purpose.
2. "Pre-Consumer" material is defined as material diverted from waste stream during the manufacturing process. Excluded is reutilization of materials such as rework, regrind, or scrap generated in a process and capable of being reclaimed within the same process that generated it.

B. Biobased Products: Biobased products are derived from plants and other renewable agricultural, marine, and forestry materials and provide an alternative to conventional petroleum derived products. Biobased products include diverse categories such as lubricants, cleaning products, inks, fertilizers, and bioplastics.

C. Low Pollutant-Emitting Materials: Materials and products which are minimally odorous, irritating, or harmful to comfort and well-being of installers and occupants.

D. Volatile Organic Compounds (VOC): Chemicals that are emitted as gases from certain solids or liquids. VOCs include a variety of chemicals, some of which may have short- and long-term adverse health effects.

1.4 REFERENCE STANDARDS

A. Carpet and Rug Institute Green Label Plus program.

B. U.S. Department of Agriculture BioPreferred program (USDA BioPreferred).

C. U.S. Environmental Protection Agency Comprehensive Procurement Guidelines (CPG).

D. Green Electronic Council EPEAT Program (EPEAT).

1.5 SUBMITTALS

A. All submittals to be provided by contractor to COR.

B. Sustainability Action Plan:

1. Submit documentation as required by this section; provide additional copies of typical submittals required under technical sections when sustainable construction requires copies of record submittals.
2. Within 30 days after Preconstruction Meeting provide a narrative plan for complying with requirements stipulated within this section.
3. Sustainability Action Plan must:
   a. Make reference to sustainable construction submittals defined by this section.
   b. Address all items listed under PERFORMANCE CRITERIA.
   c. Indicate individual(s) responsible for implementing the plan.

C. Low Pollutant-Emitting Materials Tracking Spreadsheet: Within 30 days after Preconstruction Meeting provide a preliminary Low Pollutant-Emitting Materials Tracking Spreadsheet. The Low Pollutant-Emitting Materials Tracking Spreadsheet must be an electronic file and include all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.

D. Construction Indoor Air Quality (IAQ) Management Plan:

1. Not more than 30 days after Preconstruction Meeting provide a Construction IAQ Management Plan as an electronic file including descriptions of the following:
   a. Instruction procedures for meeting or exceeding minimum requirements of ANSI/SMACNA 008-2008, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling.
   b. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage.
   c. Schedule of submission of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials.
   d. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille.
   e. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit.

f. Instruction procedures and schedule for implementing building flush-out.

E. Product Submittals:

1. Recycled Content: Submit product data from manufacturer indicating percentages by weight of post-consumer and pre-consumer recycled content for products having recycled content (excluding MEP systems equipment and components).
2. Biobased Content: Submit product data for products to be installed or used which are included in any of the USDA BioPreferred program's product categories. Data to include percentage of biobased content and source of biobased material.
3. Low Pollutant-Emitting Materials: Submit product data confirming compliance with relevant requirements for all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.

F. Sustainable Construction Progress Reports: Concurrent with each Application for Payment, submit a Sustainable Construction Progress Report to confirm adherence with Sustainability Action Plan.

1. Include narratives of revised strategies for bringing work progress into compliance with plan and product submittal data.
2. Include updated and current Low Pollutant-Emitting Materials Tracking Spreadsheet.
3. Include construction waste tracking, in tons or cubic yards, including waste description, whether diverted or landfilled, hauler, and percent diverted for comingled quantities; and excluding land-clearing debris and soil. Provide haul receipts and documentation of diverted percentages for comingled wastes.

G. Closeout Submittals: Within 14 days after Substantial Completion provide the following:

1. Final version of Low Pollutant-Emitting Materials Tracking Spreadsheet.
2. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed air handling units are used during construction.
3. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for final filtration media in air handling units.
4. Minimum 18 construction photographs including six photographs taken on three different occasions during construction of ANSI/SMACNA 008-2008, Chapter 3 approaches employed, along with a brief description of each approach, documenting implementation of IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.

1.6 QUALITY ASSURANCE

A. Preconstruction Meeting: After award of Contract and prior to commencement of Work, schedule and conduct meeting with COR and Architect to discuss the Project Sustainable Action Plan

content as it applies to submittals, project delivery, required Construction Indoor Air Quality (IAQ) Management Plan, and other Sustainable Construction Requirements. The purpose of this meeting is to develop a mutual understanding of the Sustainable Construction Requirements and coordination of contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.

B. Construction Job Conferences: Status of compliance with Sustainable Construction Requirements of these specifications will be an agenda item at regular job meetings conducted during the course of work at the site.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.

B. Green Seal Standard GS-11, Paints, 1st Edition, May 20, 1993.

C. Green Seal Standard GC-03, Anti-Corrosive Paints, 2nd Edition, January 7, 1997.

D. Green Seal Standard GC-36, Commercial Adhesives, October 19, 2000.

E. South Coast Air Quality Management District (SCAQMD) Rule 1113, Architectural Coatings, rules in effect on January 1, 2004.

F. South Coast Air Quality Management District (SCAQMD) Rule 1168, July 1, 2005 and rule amendment date of January 7, 2005.

G. Sheet Metal and Air Conditioning National Contractors' Association (SMACNA) IAQ Guidelines for Occupied Buildings under Construction, 2nd Edition (ANSI/SMACNA 008-2008), Chapter 3.

H. California Department of Public Health Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources Using Environmental Chambers, Version 1.1, Emission Testing method for California Specification 01350 (CDPH Standard Method V1.1-2010).

I. Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260).

J. ASHRAE Standard 52.2-2007.

PART 2 – PRODUCTS

2.1 PERFORMANCE CRITERIA

A. Construction waste diversion from landfill disposal must comprise at least 50 percent of total construction waste, excluding land clearing debris and soil. Alternative daily cover (ADC) does not qualify as material diverted from disposal.

B. Low Pollutant-Emitting Materials:

1. Adhesives, sealants and sealant primers applied on site within the weatherproofing membrane must comply with VOC limits of SCAQMD Rule 1168:

a. Flooring Adhesives and Sealants:

1) Indoor carpet adhesives: 50 g/L.
2) Wood Flooring Adhesive: 100 g/L.
3) Rubber Floor Adhesives: 60 g/L.
4) Subfloor Adhesives: 50 g/L.
5) Ceramic Tile Adhesives and Grout: 65 g/L.
6) Cove Base Adhesives: 50 g/L.
7) Multipurpose Construction Adhesives: 70 g/L.
8) Porous Material (Except Wood) Substrate: 50 g/L.
9) Wood Substrate: 30 g/L.
10) Architectural Non-Porous Sealant Primer: 250 g/L.
11) Architectural Porous Sealant Primer: 775 g/L.
12) Other Sealant Primer: 750 g/L.
13) Structural Wood Member Adhesive: 140 g/L.
14) Sheet-Applied Rubber Lining Operations: 850 g/L.
15) Top and Trim Adhesive: 250 g/L.
16) Architectural Sealant: 250 g/L.
17) Other Sealant: 420 g/L.

b. Non-Flooring Adhesives and Sealants:
1) Drywall and Panel Adhesives: 50 g/L.
2) Multipurpose Construction Adhesives: 70 g/L.
3) Structural Glazing Adhesives: 100 g/L.
4) Metal-to-Metal Substrate Adhesives: 30 g/L.
5) Plastic Foam Substrate Adhesive: 50 g/L.
6) Porous Material (Except Wood) Substrate Adhesive: 50 g/L.
7) Wood Substrate Adhesive: 30 g/L.
8) Fiberglass Substrate Adhesive: 80 g/L.
9) Architectural Non-Porous Sealant Primer: 250 g/L.
10) Architectural Porous Sealant Primer: 775 g/L.
11) Other Sealant Primer: 750 g/L.
12) PVC Welding Adhesives: 510 g/L.
13) CPVC Welding Adhesives: 490 g/L.
14) ABS Welding Adhesives: 325 g/L.
15) Plastic Cement Welding Adhesives: 250 g/L.
16) Adhesive Primer for Plastic: 550 g/L.
17) Contact Adhesive: 80 g/L.
18) Special Purpose Contact Adhesive: 250 g/L.
19) Structural Wood Member Adhesive: 140 g/L.

20) Sheet Applied Rubber Lining Operations: 850 g/L.
21) Top and Trim Adhesive: 250 g/L.
22) Architectural Sealants: 250 g/L.
23) Other Sealants: 420 g/L.

2. Aerosol adhesives applied on site within the weatherproofing membrane must comply with the following Green Seal GS-36.
   a. Aerosol Adhesive, General-Purpose Mist Spray: 65 percent VOCs by weight.
   b. Aerosol Adhesive, General-Purpose Web Spray: 55 percent VOCs by weight.
   c. Special-Purpose Aerosol Adhesive (All Types): 70 percent VOCs by weight.
3. Paints and coatings applied on site within the weatherproofing membrane must comply with the following criteria:
   a. VOC content limits for paints and coatings established in Green Seal Standard GS-11.
   b. VOC content limit for anti-corrosive and anti-rust paints applied to interior ferrous metal substrates of 250 g/L established in Green Seal GC-03.
   c. Clear wood finishes, floor coatings, stains, primers, sealers, and shellacs applied to interior elements must not exceed VOC content limits established in SCAQMD Rule 1113.
   d. Comply with the following VOC content limits:
      1) Anti-Corrosive/Antirust Paints: 250 g/L.
      2) Clear Wood Finish, Lacquer: 550 g/L.
      3) Clear Wood Finish, Sanding Sealer: 350 g/L.
      4) Clear Wood Finish, Varnish: 350 g/L.
      5) Floor Coating: 100 g/L.
      6) Interior Flat Paint, Coating or Primer: 50 g/L.
      7) Interior Non-Flat Paint, Coating or Primer: 150 g/L.
      8) Sealers and Undercoaters: 200 g/L.
      9) Shellac, Clear: 730 g/L.
      10) Shellac, Pigmented: 550 g/L.
      11) Stain: 250 g/L.
      12) Clear Brushing Lacquer: 680 g/L.
      13) Concrete Curing Compounds: 350 g/L.
      14) Japans/Faux Finishing Coatings: 350 g/L.
      15) Magnesite Cement Coatings: 450 g/L.
      16) Pigmented Lacquer: 550 g/L.
      17) Waterproofing Sealers: 250 g/L.
      18) Wood Preservatives: 350 g/L.
      19) Low-Solids Coatings: 120 g/L.

4. Each non-carpet flooring element installed in building interior which is not inherently non-emitting (stone, ceramic, powder-coated metals, plated or anodized metal, glass, concrete, clay brick, and unfinished or untreated solid wood flooring) must comply with one of the following:
   a. Meet requirements of the FloorScore standard as shown with testing by an independent third-party.
   b. Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at 14 day time point.
5. Composite wood and agrifiber products used within the weatherproofing membrane must contain no added urea-formaldehyde resins.
6. Laminating adhesives used to fabricate on-site and shop-applied composite wood and agrifiber assemblies must not contain added urea-formaldehyde.

C. Recycled Content:
1. Any products being installed or used that are listed on EPA Comprehensive Procurement Guidelines designated product list must meet or exceed the EPA's recycled content recommendations. The EPA Comprehensive Procurement Guidelines categories include:
   a. Building insulation.
   b. Cement and concrete.
   c. Consolidated and reprocessed latex paint.
   d. Flowable fill.
   e. Laminated paperboard.
   f. Modular threshold ramps.
   g. Nonpressure pipe.
   h. Roofing materials.
   i. Structural fiberboard.

D. Biobased Content:
1. Materials and equipment being installed or used that are listed on the USDA BioPreferred program product category list must meet or exceed USDA's minimum biobased content threshold. Refer to individual specification sections for detailed requirements applicable to that section.
   a. USDA BioPreferred program categories include:
      1) Adhesive and Mastic Removers.
      2) Cleaners.
      3) Composite Panels.
      4) Corrosion Preventatives.
      5) Dust Suppressants.
      6) Floor Cleaners and Protectors.

7) Floor Coverings (Non-Carpet).
8) Glass Cleaners.
9) Industrial Cleaners.
10) Interior Paints and Coatings.
11) Multipurpose Cleaners.
12) Packaging Films.
13) Paint Removers.
14) Plastic Insulating Foam.
15) Roof Coatings.
16) Wood and Concrete Sealers.
17) Wood and Concrete Stains.

E. Materials, products, and equipment being installed which fall into any of the following product categories must be Energy Star-labeled.
1. Applicable Energy Star product categories as of 09/14/2017 include:
a. Heating and Cooling Equipment:
1) Boilers.
2) Water Heaters.
3) Light Commercial Heating and Cooling Equipment.

F. Materials, products, and equipment being installed which fall into any of the following categories must be FEMP-designated. FEMP-designated product categories as of 09/14/2017 include:
1. Boilers (Commercial).
2. Exterior Lighting.
3. Fluorescent Ballasts.
4. Fluorescent Lamps, General Service.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

A. Construction Indoor Air Quality Management:
1. During construction, meet or exceed recommended control measures of ANSI/SMACNA 008-2008, Chapter 3.
2. Protect stored on-site and installed absorptive materials from moisture damage.
3. If permanently installed air handlers are used during construction, filtration media with a minimum efficiency reporting value (MERV) of 8 must be used at each return air grille, as determined by ASHRAE Standard 52.2-1999 (with errata but without addenda). Replace all filtration media immediately prior to occupancy.

-----END----

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

A. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).

B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.

C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.

D. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.

E. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

F. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.

G. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS.

1.3 PROTECTION:

A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.

B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.

C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.

D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.

E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
   1. No wall or part of wall shall be permitted to fall outwardly from structures.
   2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
   3 Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.

G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Resident Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Resident Engineer's approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS and Section 01 35 26, SAFETY REQUIREMENTS.

1.4 UTILITY SERVICES:

A. Demolish and remove outside utility service lines shown to be removed.

B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)

PART 3 – EXECUTION

3.1 DEMOLITION:

A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
   1. As required for installation of new utility service lines.
   2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Resident Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.

D. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall // become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the drawings, the Resident Engineer shall be notified prior to further work in that area.

3.2 CLEAN-UP:

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Resident Engineer. Clean-up shall include off the // Medical Center // Cemetery Property // disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

SECTION 02 82 13.21
EXTERIOR ASBESTOS ABATEMENT

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

A. Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

B. Extent of Work:

1. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as to the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
2. Removal, clean-up and disposal of ACM material in an appropriate regulated area in the following approximate quantities;
   <u>(45,000) square feet of exterior paint associated with window columns.</u>
   <u>(75) square feet of black waterproofing mastic on block west duct enclosure.</u>
   <u>(4-6) square feet per location (Detail #2, Sheet S3.7 relief angle locations) of black waterproofing mastic on block. See drawings for locations and field verifications for total quantities.</u>
   <u>(2) square feet (estimated 50 linear feet) per location of exterior building caulk associated with original buildings. See drawings for locations and field verifications for total quantities.</u>

C. Related Work:

1. Section 07 84 00, FIRESTOPPING.
2. Section 02 41 00, DEMOLITION.
3. Division 09, FINISHES

D. Tasks:
   1. The work tasks are summarized briefly as follows:
      a. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and standard operating procedures for OSHA and EPA Category asbestos abatement work.
      b. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
      c. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

E. Abatement Contractors Use of Premises:
   1. The Contractor and Contractor's personnel shall cooperate fully with the VA Representative/consultant to facilitate efficient use of buildings and areas within and around buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
   2. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedure. VA Design and Construction Procedure drawings of buildings will show the limits of exterior regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of ACM waste shall not be transported through the building; and the temporary waste storage area for each regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA Representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

1.2 VARIATIONS IN QUANTITY

A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimates which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 10 percent) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for additional work that is newly discovered materials and those prices will be used for additional work under the contract.

1.3 STOP ASBESTOS REMOVAL

A. If the Contracting Officer; their field representative; the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH)

presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as it is practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities if:

1. Airborne PCM analysis results equal to or greater than 0.01 f/cc above background levels outside the regulated area;
2. breach or break in regulated area containment barrier(s);
3. serious injury/death at the site;
4. fire/safety emergency at the site;
5. respiratory protection system failure;
6. power failure or loss of wetting agent; or
7. any visible emissions observed outside the regulated area.
8. failure to follow project specification requirements.

1.4 DEFINITIONS

A. General: Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

B. Glossary:

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive air sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 3, Fifth Edition is used to determine the fiber levels in air. For personal samples, area air samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis, the NIOSH Method 7402 (Issue 2, Fourth Edition) can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester (MCE) membrane for PCM (Phase Contrast Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.8 micron pore size) and MCE for TEM (Transmission Electron Microscopy, 25 mm, 3-piece with 2 inches Static Extension Cowl, 0.45 micron pore size).

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) – Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor – Some states require that any person conducting asbestos abatement air sampling, clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as doors, windows, penetrations or any other opening into the regulated area.

Primary Barrier – Plastic barriers placed over critical barriers and exposed directly to abatement work or to secondary barrier.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's Professional Industrial Hygiene Consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may report to a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace – An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

Disposal bag - Typically 6-mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance – Asbestos Operations and Maintenance Activities (OSHA Class III) that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag, which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent asbestos as determined using the method specified in 40 CFR 763, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter – An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting

asbestos abatement air sampling, clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL or Excursion Limit (EL).

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02 inch water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Non-friable Removal – All operations where Non-friable ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations utilizing non-mechanical methods.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for as an eight (8) hour time-weighted average (TWA). For asbestos fibers, the eight (8) hour time-weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit (EL) is 1.0 fibers per cubic centimeter (1 f/cc).

Personal protective equipment (PPE) – equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, fall protection, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Pipe tunnel – An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, debris or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6-mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator, respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH/CIH) or Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Subpart E, Appendix C, Part I; (B)(5).

Assigned protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-2018.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, decorative, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) – The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may report to a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

VA Total – means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) – The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

C. Referenced Standards Organizations: See Section 01 42 19 REFERENCED STANDARDS.

1.5 APPLICABLE CODES AND REGULATIONS

A. General Applicability of Codes, Regulations, and Standards:

1. All work under this contract shall be done in strict accordance with all applicable Federal, State, and Local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
2. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
3. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system and/or the Contractor's on-site Field Office. These standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 may be made available electronically.

B. Contractor Responsibility: The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE), including respiratory protection, and respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH,

including all sampling/analytical costs to assure compliance with OSHA/EPA/State/Local requirements related to failure to comply with the regulations applicable to the work.

C. Federal Requirements:
   1. Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations:
      a. Occupational Safety and Health Administration **(OSHA)**
         1) Title 29 CFR 1926.1101 - Construction Standard for Asbestos
         2) Title 29 CFR 1926 Subpart E - Personal Protective Equipment and Life Saving Equipment
         3) Title 29 CFR 1910.134 - Respiratory Protection
         4) Title 29 CFR 1926 - Construction Industry Standards
         5) Title 29 CFR 1926.33 - Access to Employee Exposure and Medical Records
         6) Title 29 CFR 1926.59 same as 1910.1200 - Hazard Communication
         7) Title 29 CFR 1926 Subpart C – General Safety and Health Provisions and Subpart D – Occupational Health and Environmental Controls
      b. Environmental Protection Agency **(EPA)**:
         1) 40 CFR 61 Subpart M - National Emission Standard for Hazardous Air Pollutants - Asbestos.
         2) 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA) and Asbestos Hazard Abatement Reauthorization Act (ASHARA)
      c. Department of Transportation **(DOT)**
         1) Title 49 CFR 171 - 180 – Transportation

D. State Requirements:
   1. State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:
      a. Chapter 62-257, Florida Administrative Code.
      b. Florida Building Code, 105.9 Asbestos
      c. Florida Statute, 469.003 Florida Department of Business and Professional Regulation (DBPR)

E. Local Requirements:
   1. If local requirements are more stringent than federal or state standards, the local standards are to be followed.
      a. Pinellas County Code, Chapter 58, sec. 58-49(d)

F. Standards:
   1. Standards which govern asbestos abatement activities include, but are not limited to, the following:

a. American National Standards Institute (ANSI)/ASSP Z9.2-2018 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI/ASSE Z88.2-2015 - Practices for Respiratory Protection.
b. Underwriters Laboratories (UL) 586-2009 - UL Standard for Safety of HEPA Filter Units, 9th Edition; ANSI Approval 2017-12-19.

2. Standards which govern encapsulation work include, but are not limited to the following:
   a. American Society for Testing and Materials International (ASTM)
3. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   a. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   b. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   c. NFPA 101 - Life Safety Code

G. EPA Guidance Documents:
1. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference.
2. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
3. Asbestos Waste Management Guidance EPA 530-SW-85-007
4. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
5. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

H. Notices:
1. State and Local agencies: Send written notification as required by State and Local regulations including the local fire department prior to beginning any work on ACM as follows:
   a. Florida Administrative Asbestos Program Code 62-257.301 Notification Procedure and Fee.
   b. Pinellas County Air Quality Asbestos Program
2. Copies of notifications shall be submitted to the VA for the facility's records at the same time frame notification is given to EPA, State, and Local authorities prior to beginning any work on ACM as follows.

I. Permits/Licenses: The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

J. Posting and Filing of Regulations: Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

K. VA Responsibilities prior to commencement of work:

1. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
2. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

L. Site Security:

1. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and Representatives, State and Local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and shall be located immediately outside the boundary of the regulated work area.
2. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately notify the VA Representative.
3. A log book shall be maintained outside the boundary of the regulated work area. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
4. Access to the regulated area shall be via scaffolding, interior stair systems, or approved equivalent. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are emergency exits. Emergency exits shall <u>not</u> be locked from the inside or outside.
5. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24-hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
6. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
7. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

M. Emergency Action Plan and Arrangements:

1. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1926, Subpart C, Standard 1926.35 Employee Emergency Action Plans.
2. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
3. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
4. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
5. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
   a. For non-life-threatening situations - employees injured or otherwise incapacitated shall be decontaminated following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
   b. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, medical personnel shall remove them from the regulated area if back or neck injury is present, and secure proper medical treatment.
6. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
7. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
8. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; extreme heat; inclement weather; high wind; and lightning. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

N. Pre-Construction Meeting:

1. Prior to commencing the work, the Contractor shall meet with the VPIH/CIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent

Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

a. Proof of Contractor licensing.
b. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
c. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
d. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
e. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101(m).
f. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926. 1101(h) and Appendix C.
g. A copy of the Contractor's Asbestos Hazard Abatement Plan for Class II Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
    1) Regulated area preparation procedures;
    2) Notification requirements procedure of Contractor as required in 29 CFR 1926.1101(d) Multi-Employer Worksites;
    3) If required, decontamination area set-up/layout and decontamination procedures for employees; extent of 6-mil polyethylene sheeting placed //25'// out from the outer perimeter of the work area to aid in cleaning roofing material debris that may fall off building; method of demarcating the regulated work area with Asbestos Danger Tape and Asbestos Danger Signs; method for fall protection; method for accessing roof; and method for bringing material to lined roll-off or approved equivalent.
    4) Abatement methods/procedures and equipment to be used;
    5) Personal protective equipment to be used.
h. At this meeting the Contractor shall provide all submittals as required.
i. Procedures for handling, packaging and disposal of asbestos waste.
j. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1. Personnel:
    a. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos

Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's Representatives responsible for compliance with these specifications and all other applicable requirements.

b. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA Representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; last four digits of social security number; qualifications; accreditation card with color picture, if required by state; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

c. Minimum qualifications for Contractor and assigned personnel are:

1) The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of Federal (and State as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the State; is licensed in applicable States; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; and has adequate materials, equipment and supplies to perform the work.

2) The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.

3) The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

4) The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

d. All personnel shall be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

A. General - Respiratory Protection Program: The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.134. ANSI Standard Z88.2-2015 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) - Respiratory Protection Program.

B. Respiratory Protection Program Coordinator: The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years of experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

C. Selection and Use of Respirators: The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit/area or in the onsite Contractor’s office, for reference by employees or authorized visitors.

D. Minimum Respiratory Protection: Shall be a ½-mask negative pressure air purifying respirator equipped with Combination P100 filters //and Organic Vapor Cartridge//, provided personal air samples in the workplace remain at or below 0.1 f/cc, //and the applicable PEL for solvents,// both// determined as an 8-hour TWA. Full face powered air purifying respirator equipped with P100 filters //and Organic Vapor Cartridge// shall be required until Contractor demonstrates that personal air samples are at or below 0.1 f/cc, //and the applicable PEL for solvents,// //both// determined as an 8-hour TWA. A higher level of respiratory protection shall be required, if fiber levels exceed 1 f/cc as an 8-hour TWA, inside the regulated work area. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h) and 29 CFR 1910.134 (d)(3)(i)(A) Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

E. Medical Written Opinion: No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically

qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

F. Respirator Fit Test: All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a failure mode.

G. Respirator Fit Check: The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from entering the regulated area until resolution of the problem.

H. Maintenance and Care of Respirators: The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

1.8 WORKER PROTECTION

A. Training of Abatement Personnel: Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

B. Medical Examinations: Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion that the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

C. Personal Protective Equipment: Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

D. Regulated Area Entry Procedure: The Competent Person shall ensure that each time workers enter the regulated area, they //remove// //place protective disposable coverall over// ALL street clothes in the clean room of the decontamination unit/area established by the competent person and put on //new disposable coveralls,// head coverings, fall protection, PPE, a clean respirator, and then proceed to the regulated work area.

E. Decontamination Procedure: The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.
   1. When exiting the regulated area, //HEPA vacuum and Wet Wipe outer disposable coveralls and respirator//, remove all disposable PPE and dispose of in a disposal bag provided at the outer boundary of the regulated area.
   2. Carefully decontaminate and clean the respirator. Put in a clean container/bag.
   3. Where containment is not required for ACM removal, an adequate washing station will be provided for the employees for removal of disposable PPE and to clean the respirator.

F. Regulated Area Requirements: The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for OSHA Class II regulated areas at 29 CFR 1926.1101 (e) and this specification are met applicable to OSHA Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

A. Description: Provide each regulated area with a fiber drum with a disposal bag in it for personnel waste materials. The Competent Person shall provide a specific area at the outer boundary of the regulated area and designate it specifically for the decontamination of personnel and respirators.

B. Waste/Equipment Decontamination Area (W/Eda)**:** The Competent Person shall provide a specific area in the regulated area designated for removal of all waste, equipment and contaminated material from the regulated area.

C. Waste/Equipment Decontamination Procedures: Contain all waste in 6-mil poly bags or approved equivalent. Clean/decontaminate bags and pass through a double 6-mil flap doorway into another bag or fiber drum. Remove to disposal dumpster/gondola/enclosed vehicle.

PART 2 - PRODUCTS

2.1 MATERIALS AND EQUIPMENT

A. General Requirements (All Abatement Projects): Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's Representative.
   1. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
   2. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.

3. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
4. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
5. Critical penetration points into the building shall be sealed with 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as ducts, windows, louvers, penetrations or any other opening into the regulated area. A perimeter drop cloth of 1-layer of 6-mil plastic sheeting will be placed around the outside perimeter of the roof to capture falling debris and to facilitate clean-up at ground level, if necessary. Fire retardant poly shall be used throughout.
6. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape, poly tape, furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
7. Polyethylene sheeting utilized for the PDF, if used, shall be opaque white or black in color, 6-mil fire retardant poly.
8. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
9. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
10. Special protection for objects in the regulated area shall be detailed to prevent damage from scaffolds, water and falling material).
11. Disposal bags – 2-layers of 6-mil poly or approved equivalent for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
12. The VA shall be provided an advance copy of the Safety Data Sheets (SDS) as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.

13. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal, State and Local regulations shall be posted at the outer boundary of the regulated area or approved equivalent.
14. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

A. General: Using critical barriers, seal off the regulated area to completely isolate the regulated area from adjacent spaces. All penetrations to the regulated area must be covered with 2-layers of 6-mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.7; FIRESTOPPING.

B. Preparation Prior to Sealing the Regulated Area: Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Lock out and tag out any HVAC systems in the regulated area.

C. Controlling Access to the Regulated Area: Access to the regulated area is allowed only at the Competent Person's designated location and shall serve as a personnel decontamination facility (PDF)/Area, if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA.

D. Critical Barriers: Critical penetration points into the building shall be sealed with 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as ducts, windows, louvers, penetrations or any other opening into the regulated area.

E. Secondary Barriers: A perimeter drop cloth of 1-layer of 6-mil plastic sheeting will be placed around the outside perimeter of the roof to capture falling debris and to facilitate clean-up at ground level, if necessary.

F. Extension of the Regulated Area: If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

G. Firestopping:
   1. Through penetrations caused by cables, cable trays, pipes, ducts, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.
   2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type

of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

H. Scope of Services of the VPIH/CIH Consultant:

1. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
   a. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
   b. Task 2: Perform representative air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
   c. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
   d. Task 4: Provide support to the VA Representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
   e. Task 5: Perform, in the presence of the VA Representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
   f. Task 6: Issue certificate of decontamination for each regulated area and project report.
2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

L. Monitoring, Inspection and Testing by Contractor CPIH/CIH: The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytical Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples and have experience in substantially similar projects in size and scope. The analytical laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for personal and area air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA Representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two (2) personal air samples or 25 percent of representative workforce per shift shall be collected, whichever is greater, in the regulated area; a minimum of three (3) area air samples at locations inside the building but immediately outside the regulated work area; one (1) area air sample shall be collected daily in the Clean Room of the PDF; and one (1) area air sample shall be collected daily at the approximate location of HEPA exhaust discharge. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.3 MONITORING, INSPECTION AND TESTING

A. General:

1. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and //insert number of samples, if any// daily area air samples inside the building, but outside the regulated area. At a minimum three (3) perimeter area air samples shall be collected daily at the ground level around the regulated area perimeter, preferably downwind of the regulated work area. Additional inspection and testing requirements are also indicated in other parts of this specification.
2. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform representative monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
3. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's Representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site,

analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's Representative.

B. Scope Of Services of the VPIH/CIH Consultant

1. The purpose of the work of the VPIH/CIH is to: assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
   a. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.//
   b. Task 2: Perform representative air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.//
   c. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
   d. Task 4: Provide support to the VA Representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
   e. Task 5: Perform, in the presence of the VA Representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
   f. Task 6: Issue certificate of decontamination for each regulated area or building and project report.
2. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
3. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

C. Monitoring, Inspection and Testing by Contractor CPIH: The Contractor’s CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor’s personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area

is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytical Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples and have experience in substantially similar projects in size and scope. The analytical laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for personal and area air monitoring for asbestos in 29 CFR 1926.1101 (f), (g) and Appendix A. This log shall be made available to the VA Representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each Representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. The CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and //insert number of samples, if any// daily area air samples inside the building, but outside the regulated area. At a minimum three (3) perimeter area air samples shall be collected daily at the ground level around the regulated area perimeter, preferably downwind of the regulated work area. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities.

2.4 ASBESTOS HAZARD ABATEMENT PLAN

A. The Contractor shall have an established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of the project. The AHAP shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

1. Minimum Personnel Qualifications
2. Contingency Plans and Arrangements
3. Security and Safety Procedures
4. Respiratory Protection/Personal Protective Equipment Program and Training
5. Medical Surveillance Program and Recordkeeping

6. Regulated Area Requirements for Abatement
7. Decontamination Entry/Exit Procedures
8. Monitoring, Inspections, and Testing
9. Disposal of ACM waste
10. Regulated Area Decontamination/Clean-up
11. Regulated Area Visual and Air Clearance
12. Project Completion/Closeout

2.5 SUBMITTALS

A. Pre-Start Meeting Submittals:

1. Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:
   a. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
   b. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
   c. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
   d. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
      1) HEPA vacuums, air monitoring pumps, calibration devices, and emergency power generating system.
      2) Waste water filtration system and containment barriers.
      3) Encapsulants, surfactants, hand held sprayers, airless sprayers, and fire extinguishers.
      4) Respirators, protective clothing, fall protection and other required personal protective equipment.
      5) Fire safety equipment to be used in the regulated area.
   e. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.

f. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

g. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101 (f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.

h. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.

   1) Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date

   2) List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution

   3) List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal, State and Local EPA), penalties, and legal actions taken against the company including the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.

i. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

   1) CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; medical opinion; and current respirator fit test.

   2) Competent Person(s)/Supervisor(s): Number; names; last four digits of social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.

3) Workers: Numbers; names; last four digits of social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.

j. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAP(s) incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical methods used.

k. Rented equipment must be decontaminated prior to returning to the rental agency.

l. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all SDS and application instructions.

B. Submittals During Abatement:

1. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; Representative air monitoring and results/TWAs/ELs. Submit this information daily to the VA’s Representative.

2. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.

a. Removal of any poly barriers.

b. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant, if used.

c. Packaging and removal of ACM waste from regulated area.

d. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's Representative on a weekly basis.

C. Submittals at Completion of Abatement: The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be

submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

A. Pre-Abatement Activities: The VA Representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person, the VA Representative, and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's Representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's Representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

B. Pre-Abatement Inspections and Preparations:

1. Before any work begins on the construction of the regulated area, the Contractor will:
   a. Conduct a space-by-space inspection with an authorized VA Representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
   b. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA AEQA 10-95 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAP (destructive) ACM inspection shall be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; //fireproofing on deck below roofing materials requires significant consideration// below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; steam line trench coverings.
   c. Inspect existing firestopping in the regulated area. Correct as needed.

C. Pre-Abatement Construction and Operations:

1. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
2. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's Representative when the work is completed in accordance with this specification. The VA's Representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, fall protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.
3. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's Representative.
4. Upon satisfactory inspection of the installation of and operation of systems the VA's Representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

3.2 REGULATED AREA PREPARATIONS

A. OSHA Danger Signs: Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

B. Shut Down - Lock Out Electrical: Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting (if working at night). Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

C. Shut Down - Lock Out HVAC:
   1. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area.
   2. Investigate the regulated area and agree on pre-abatement condition with the VA's Representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2-layers of independently installed 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

D. Sanitary Facilities: The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

E. Water for Abatement: The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower, if used, shall be supplied with backflow prevention.

3.3 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA:

A. General: Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All penetrations in the regulated area must be covered with 2-layers of independently installed 6-mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government

B. Preparation Prior To Sealing Off: Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Lock out and tag out any HVAC systems in the regulated area.

C. Controlling Access to the Regulated Area: Access to the regulated area is allowed only at the Competent Person's designated location and shall serve as a personnel decontamination facility (PDF)/Area, if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA.

D. Critical Barriers: Critical penetration points into the building shall be sealed with 2-layers of 6-mil independently installed plastic sheeting (Polyethylene) secured in place at openings such as ducts, windows, louvers, penetrations or any other opening into the regulated area.

E. Extension of the Regulated Area: If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met

3.4 REMOVAL OF <u>EXTERIOR ACM MATERIALS</u>

A. General: The VA must be notified at least 24 hours in advance of any waste removed from the containment. All applicable requirements of OSHA, EPA, State, Local and DOT shall be followed during <u>ACM removal</u> work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2-layers of 6-mil plastic for disposal or approved equivalent

B. Outdoor Work Areas: <u>A</u>ll applicable OSHA, State and Local regulations must be followed to ensure that outdoor work areas are in compliance so that workers, the general public and the environment are protected.

C. Scaffold Fall Protection: Each employee more than 10 feet above a lower level shall be protected from falls by guardrails or a fall arrest system. Fall arrest system includes harnesses, components of the harness/belt such as Dee-rings, and snap hooks, lifelines, and anchorage points. Lifelines must be independent of supports lines and suspension ropes and not attached to the same anchorage point as the support or suspension rope. OSHA's scaffolding standard defines a

competent person as “one who is capable of identifying existing and predictable hazards in the surroundings or working conditions, which are unsanitary, hazardous to employees, and who has authorization to take prompt corrective measures to eliminate them.” The competent person will determine if it is safe for employees to work on or from a scaffold or roof during storms or high winds and to ensure that a personal fall arrest system will protect the employees. The competent person will also inspect the scaffold and scaffold components for visible defects before each work shift and after any occurrence which could affect the structural integrity and to authorize prompt corrective measures.

D. Roof Fall Protection: The competent person shall determine if the walking/working surfaces on which the employees are to work have the strength and structural integrity to support the employees safely. Each employee on a walking/working surface (horizontal and vertical surface) with an unprotected side or edge which is 6 feet or more above a lower level shall be protected from falling by the use of guardrail systems, safety net systems, or personal fall arrest system.

E. Removal of Exterior Building Paint & Waterproofing Mastic:

1. Exterior ACM building paint & waterproofing mastic materials shall be removed utilizing non-friable chemical paint removal methods ~~in an intact state~~ to the extent that it is feasible.
2. Wet methods shall be used to remove ACM building paint & waterproofing mastic materials that are not intact, or that will be rendered not intact during removal, unless such wet methods are not feasible or will create safety hazards.
3. Asbestos-containing material that has been removed from a roof or scaffolding shall not be dropped or thrown to the ground. Unless the material is carried or passed to the ground by hand, it shall be lowered to the ground via covered, dust-tight chute, crane or hoist.
4. Any ACM intact shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift. While the material remains on the roof it shall either be kept wet, placed in an impermeable waste bag, or wrapped in plastic sheeting.
5. Intact ACM shall be lowered to the ground as soon as is practicable, but in any event no later than the end of the work shift.
6. Upon being lowered, unwrapped Non-ACM material shall be transferred to a closed receptacle in such manner so as to preclude the dispersion of dust.
7. Roof and lower building level heating and ventilation air intake sources shall be isolated or the ventilation system shall be shut down //or both//. The sealing of air intake sources shall be coordinated with VA Facility Engineering Personnel and occupant location to ensure acceptable IAQ is maintained within the facility as per ASHRAE Standard 1955.

F. All waste must be wrapped in two layers of 6-mil poly or approved equivalent and lowered carefully to the ground. Roofing may be lowered by way of a dust-tight chute.

3.5 DISPOSAL OF ACM WASTE MATERIAL

A. General: Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 171–180 regulations. Disposal shall be done at an approved landfill in accordance with State and Local requirements, which are generally more restrictive than Federal EPA. Disposal of non-friable ACM shall be done in accordance with applicable State and Local regulations.

3.6 PROJECT DECONTAMINATION

A. General:
   1. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
   2. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
   3. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

B. Regulated Area Clearance: Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

C. Work Description: Decontamination includes the cleaning and clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, if used.

D. Pre-Decontamination Conditions:
   1. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removal and disposed of along with any gross debris generated by the work.
   2. At the start of decontamination, the following shall be in place:
      a. Critical barriers at openings such as ducts, windows, louvers, penetrations or any other opening into the regulated area.
      b. Decontamination facilities, if required for personnel and equipment in operating condition.

E. Cleaning: Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning

until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications.

3.7 VISUAL INSPECTION AND AIR CLEARANCE TESTING

A. General: Notify the VA Representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the cleaning.

B. Visual Inspection: Final visual inspection will include the entire regulated area, all poly sheeting, seals over ducts, windows, louvers, penetrations or any other opening into the regulated area. If any debris, residue, dust or any other suspect material is detected, the cleaning shall be repeated at no additional cost to the VA. Dust/ material samples may be collected and analyzed at no additional cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

C. Air Clearance Testing:

1. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA, for this project, five (5) PCM samples shall be collected for clearance and a minimum of two field blank
2. If the results of the PCM are acceptable, remove the critical barriers. Any small quantities of residue material found upon removal of the poly shall be removed with a HEPA vacuum and localized isolation. If significant quantities are found as determined by the VPIH/CIH, then the entire area affected shall be cleaned as specified in the final cleaning.
3. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

D. Final Air Clearance Procedures:

1. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc, as measured by PCM methods.
2. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
   a. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
   b. All clearance air testing samples shall be collected on 0.8µ MCE filters for PCM analysis. Air samples will be collected in areas subject to normal air circulation. A minimum of 5 PCM samples will be collected with at least 3850 Liters of air sampled. All results must be less than 0.01 f/cc for clearance.

3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

A. Completion of Abatement Work:

1. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:
   a. Remove all equipment, materials, and debris from the project area.
   b. Package and dispose of all asbestos waste as required.
   c. Fulfill other project closeout requirements as specified elsewhere in this specification.

B. Certificate of Completion by Contractor: The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

C. Work Shifts: All work shall generally be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

ATTACHMENT #1
CERTIFICATE OF COMPLETION

DATE: _____ VA Project #:_____

PROJECT NAME:_____ Abatement Contractor:_____

VAMC/ADDRESS:_____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
   which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date:_____

CPIH/CIH Print Name:_____

Abatement Contractor Signature/Date:_____

Abatement Contractor Print Name:_____

ATTACHMENT #2
CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME:_____DATE:_____

PROJECT ADDRESS:_____

ABATEMENT CONTRACTOR'S NAME:_____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate of worker's acknowledgement you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32-hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

Physical Characteristics and Background Information on Asbestos
Potential Health Effects Related to Exposure to Asbestos
Employee Personal Protective Equipment
Establishment of a Respiratory Protection Program
State of the Art Work Practices
Personal Hygiene
Additional Safety Hazards
Medical Monitoring
Air Monitoring
Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:_____

Printed Name:_____

Social Security Number:_____

Witness:_____

ATTACHMENT #3
AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER:_____

VA MEDICAL FACILITY:_____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:_____

1. I verify that the following individual
   Name:_____ Social Security Number:_____
   who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.
   Address:_____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH:_____ Date:_____

Printed Name of CPIH/CIH:_____

Signature of Contractor:_____ Date:_____

Printed Name of Contractor:_____

ATTACHMENT #4
ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location:_____

VA Project #:_____

VA Project Description:_____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature_____Date_____

- - - E N D - - -

5755 Rio Vista Drive
Clearwater, FL 33760
T: 727-536-8772
F: 727-538-9125

www.pennoni.com

July 28, 2022

JPOEC22001

RDC/John Poe Architects
Attn: Mr. Jason Ross AIA
3131 Newmark Drive, Suite 201
Miamisburg, Ohio 45342

RE: ASBESTOS CONSULTING SERVICES
BUILDING 1 FAÇADE RESTORATION #673-21-116
JAMES A. HALEY VETERANS'S HOSPITAL
13000 BRUCE B. DOWNS BOULEVARD
TAMPA, FLORIDA 33612

Dear Mr. Ross:

Pennoni is providing this report to **RDC/Joe Poe Architects** documenting our asbestos bulk and air sampling conducted at the above referenced location. Activities completed as part of the investigation included air sampling during opening of the building façade to determine the extent of damage to the building façade and potential impact to the known asbestos-containing vapor barrier associated with the CMU block behind the brick. The following information details the results of our efforts.

BACKGROUND

In April 2022, Pennoni conducted an asbestos survey at the site in preparation for planned renovation activities. In our report, we identified four materials that were identified ACM:

- Building Caulk, Addition
- Paint
- 3rd Floor, Fireproofing
- Black Waterproofing Mastic on Block

Pennoni was requested to return to the site to conduct air sampling during an exploratory investigation which would affect the identified ACM black waterproofing mastic on CMU block. RDC/John Pope Architects subcontractors conducted openings of the façade to determine the extent of damage and potential repairs to develop a scope of work.

Pennoni conducted perimeter air sampling during exploratory activities and conducted air sampling using personal sampling pumps on workers performing the tasks.

EXPLORATORY INVESTIGATION

RDC/John Pope Architects subcontractors performed exploratory activities between July 11 and 14, 2022. Work entailed exposing the interior wall cavity by chipping out the mortar joints and keeping the brick intact using dust collection engineering controls. Pennoni's onsite industrial hygienist observed that no ACM was impacted during this activity.

During demolition, the contractors performed onsite activities in accordance with United States Environmental Protection Agency (USEPA) regulation 40 CFR Part 61, Subparts A and M - National Emission Standards for Hazardous Air Pollutants (NESHAP), and Occupational Safety and Health Administration (OSHA) regulations, 29 CFR §1910.1001 and 29 CFR §1926.1101.

EXPLORATORY INVESTIGATION OVERSIGHT AND AIR MONITORING

Quality assurance/quality control inspections and air monitoring were performed during exploratory activities by a team of Pennoni's trained Industrial Hygienists (see Appendix A – Inspector Credentials).

Phase Contrast Microscopy (PCM) air monitoring was performed during exploratory investigation activities. Air samples were collected to monitor the work zone at the building perimeter. PCM samples were transported to EMSL Analytical, Inc. (EMSL) of Tampa, Florida. EMSL is accredited by the National Institute of Standards and Technology under the National Voluntary Laboratory Accreditation Program (NVLAP) to perform airborne asbestos analysis.

PCM results revealed fiber concentrations were below 0.010 fibers per cubic centimeter (f/cc) (see Appendix B – Air Monitoring Results and Appendix C – Air Sampling Locations).

On July 11 and 12, 2022, Pennoni collected air samples using personal pumps worn by workers performing façade openings. The pumps were worn by each worker for their entire shift. At the end of the shift, the samples were transported to EMSL. The samples were calculated to determine Time Weighted Averages (TWA) based on OSHA guidelines.

Samples were analyzed for concentrations of airborne fibers by PCM via NIOSH 7400 methods. Personal air monitoring analytical results are summarized in Table 1 below and laboratory analytical certificates are included as Appendix C. Calculated TWA's indicate adequate respiratory protection.

Table 1 – Personal Air Monitoring Results
Activity: Façade Openings

Date	Sample Number	Name	OSHA PEL 0.10 f/cc	8-Hour TWA (f/cc)
			Sample Result	
7/11/22	3330	Excursion: R. Cortorreal 2072	<0.0449 f/cc	<0.003
7/11/22	3340	Personal: R. Cortorreal 2072	<0.0041 f/cc	<0.003
7/11/22	3336	Personal: Z. Votaw 9205	0.0060 f/cc	0.004

LIMITED ASBESTOS SAMPLING

During air monitoring activities, Pennoni was requested to collect samples of suspect asbestos-containing black waterproofing mastic on block identified on the building addition adjacent to East 131st Street. The samples were properly packaged, labeled and transported to EMSL. The samples were analyzed for asbestos content utilizing Polarized Light Microscopy (PLM) via EPA Method 600/R-93/116.

Results indicate that the material was identified as no asbestos detected. This analysis can only rule out asbestos content for this material located at the building addition adjacent to East 131st Street.

CONCLUSION

Based on observations of accessing the interior wall cavity associated with the brick façade, engineering controls and air sample results, Pennoni concludes the following:

1. Exposing the interior wall cavity utilizing mortar removal and brick extraction did not impact the ACM vapor barrier.
2. Perimeter and equipment air monitoring results were reported below 0.010 f/cc (USEPA clean air threshold).
3. OSHA asbestos air monitoring results were below the Permissible Exposure Limit (PEL) of 0.10 f/cc.
4. Bulk sample results of the black waterproofing mastic on block associated with the building addition adjacent to East 131st Street building were identified as no asbestos detected. Other additions to Building 1 where black waterproofing mastic on block exist are considered asbestos-containing.
5. Impacting ACM black waterproofing mastic on block during repairs should be conducted by trained personnel as required by USEPA, OSHA and VA requirements.

If you have any questions concerning this report or require additional information, please feel free to contact us at 727-325-1236.

Sincerely,

PENNONI ASSOCIATES INC.

Thomas Adams, CIEC, ENV SP
Senior Industrial Hygienist

Alan Lloyd, CIH, CSP, ENV SP
Vice President, EHS Practice Leader
Licensed Asbestos Consultant No. AX105
Licensed Asbestos Business No. ZA523

Attachments
Appendix A – Inspector Credentials
Appendix B – Air Monitoring Results
Appendix C – Air Sampling Locations

U:\Accounts\JPOEC\JPOEC22001 - VA James A. Haley Building One Envelope\DOC PREP\~Oversight\JPOEC22001 VA James A. Haley Building 1 Exterior Facade Oversight and Sampling.docx

APPENDIX A

Inspector Credentials

CERTIFICATE OF TRAINING

This certifies that

Thomas Adams

has successfully completed a(n) 4-hour training course entitled:

VIRTUAL ASBESTOS INSPECTOR REFRESHER (40 CFR 763)

Toxic Substances Control Act: Title II Accredited

on May 4, 2022

Certificate # 23-PAI-00970
Asbestos Expiration Date: May 4, 2023

Mechanicsburg Training Center
4 Kacey Court
Mechanicsburg, PA 17055
717-766-4500

APPENDIX B

Air Monitoring Results

EMSL Analytical, Inc.

5700 Memorial Highway, Suite 122 Tampa, FL 33615
Tel/Fax: (813) 280-8752 / (813) 280-8753
http://www.EMSL.com / tampalab@emsl.com

EMSL Order: 932203523
Customer ID: PENN75
Customer PO:
Project ID:

Attention: Thomas Adams
Pennoni
5755 Rio Vista Drive
Clearwater, FL 33760

Phone: (727) 325-1236
Fax:
Received Date: 07/11/2022 04:39 PM
Analysis Date: 07/12/2022
Collected Date: 07/11/2022

Project: JPOEL22001 Tampa VA

Test Report: Fiber Count by Phase Contrast Microscopy (PCM), NIOSH 7400 Method - A Rules, Revision 3, Issue 3, 6/15/2019

Sample	*Location*	*Sample Date*	*Volume (L)*	*Fibers*	*Fields*	*LOD (fib/cc)*	*Fibers/mm²*	*Fibers/cc*	*Notes*
3351	Adj ~~NW~~ NE Corner W Bldg	07/11/2022	1350	<5.5	100	0.0020	<7.01	<0.0020	
932203523-0001									
3344	Adj SE Corner W Bldg	07/11/2022	1350	6	100	0.0020	7.64	0.0022	
932203523-0002									
3349	Adj E Corner W Bldg	07/11/2022	1350	15	100	0.0020	19.1	0.0055	
932203523-0003									
3398	On High Reach	07/11/2022	1335	8.5	100	0.0020	10.8	0.0031	
932203523-0004									
3330	Fex R CORTORREAL	07/11/2022	60	<5.5	100	0.0449	<7.01	<0.0449	
932203523-0005									
3340	Per H2072	07/11/2022	660	<5.5	100	0.0041	<7.01	<0.0041	
932203523-0006									
3350	Blank	07/11/2022		<5.5	100		<7.01		Field Blank
932203523-0007									
3322	Blank	07/11/2022		<5.5	100		<7.01		Field Blank
932203523-0008									

The results reported have been blank corrected as applicable.

Analyst(s):
Gerald Iannuzzi PCM 8

Gerald Iannuzzi, Laboratory Manager
or other Approved Signatory

*Following EMSL Analytical SOP Asbestos and Other Fibers by PCM. Limit of detection is 7 fibers/mm². Intra-laboratory Sr values: 5-20 fibers = 0.35, 21-50 fibers = 0.30, 51-100 fibers = 0.20. The laboratory is not responsible for data reported in fibers/cc, which is dependent on volume collected by non-laboratory personnel. Results have been blank corrected as applicable. EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported above and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.
Samples analyzed by EMSL Analytical, Inc. Tampa, FL

Initial report from: 07/12/2022 09:05 AM

932203523

ASBESTOS

Air Monitoring Chain of Custody

LAB: _____

(if samples are not read onsite)

CODES:
1 - Diagnostic
2 - Preliminary
3 - Clearance
4 - Containment
5 - Clean Area
6 - Critical Barrier
7 - AFD Exhaust
A - Aggressive
B - Blank
R - Representative

Send invoice to:
- ☐ Haddon Heights (PENN50)
- ☐ Newark/New York (PNNJ42)
- ☐ Philadelphia (PENN54)
- ☒ Other: PENN75

Project No. JPOIEC22001
Facility: TAMPA VA
Work Area:

Samples Collected By: TADAMS — Date: 7/11/22
Samples Transported By: " — Date: 7/11/22
Samples Received By: Dawn Desiro Walker — Date: 7/11/22 4:39pm
Samples Analyzed By: — Date:

Turnaround Time (TAT): ☐ 1 hour ☐ 3 hours ☐ 6 hours ☐ 12 hours ☒ 24 hours ☐ 48 hours

Method: ☒ NIOSH 7400 ☐ AHERA ☐ TEM AIR ☐ PHILA ACR ☐ OTHER

Please Contact with Results: TOM ADAMS (Name) TADAMS@PENNONI.COM (Phone/Email) 7/11/22

Date	Sample ID #	Location	Code	Time Start	Time Stop	Total Min	Flow Rate Start	Flow Rate Stop	Flow Rate Average	Volume	Fibers/Fields	Results ☐ f/cc ☐ s/mm²
7.11.22	3351	ADJ NW corner of Bldg	R	900	330	450	3.0	3.0	3.0	1350		
"	3344	" SE "	R	902	332	450	3.0	3.0	3.0	1350		
"	3349	" E side of Bldg	R	904	334	450	3.0	3.0	3.0	1350		
"	3398	ON HIGH REACH	R	910	335	445	3.0	3.0	3.0	1335		
							~~3.0~~	~~3.0~~	~~3.0~~			
"	3330	EX R CORTORREAL	EX	930A	1000A	30	2.0	2.0	2.0	60		
"	3340	PER " #2072	OSHA	10:05	335	330	2.0	2.0	2.0	660		
"	3350	BLANK										
"	3322	"										

Signature _____ (Technician) Calibration Date: _____ Calibration Method: _____

Dawn Desiro - Walker 7/11/22 4:39pm

Pennoni

Z:\ADMIN\0311 HH Industrial Hygiene\FORMS and CHECKLISTS\Asbestos Air Chain of Custody.xlsxMain form

OrderID: 932203523

EMSL Analytical, Inc.

5700 Memorial Highway, Suite 122 Tampa, FL 33615
Tel/Fax: (813) 280-8752 / (813) 280-8753
http://www.EMSL.com / tampalab@emsl.com

EMSL Order: 932203552
Customer ID: PENN75
Customer PO:
Project ID:

Attention: Thomas Adams
Pennoni
5755 Rio Vista Drive
Clearwater, FL 33760

Phone: (727) 325-1236
Fax:
Received Date: 07/12/2022 03:16 PM
Analysis Date: 07/13/2022
Collected Date: 07/11/2022

Project: JPOEC22001 Tampa VA Hosp Ext Facade NE

Test Report: Fiber Count by Phase Contrast Microscopy (PCM), NIOSH 7400 Method - A Rules, Revision 3, Issue 3, 6/15/2019

Sample	*Location*	*Sample Date*	*Volume (L)*	*Fibers*	*Fields*	*LOD (fib/cc)*	*Fibers/mm²*	*Fibers/cc*	*Notes*
3658 *932203552-0001*	SE End at Work Zone	07/11/2022	1170	<5.5	100	0.0023	<7.01	<0.0023	
3362 *932203552-0002*	NE End at Work Zone	07/11/2022	1170	6	100	0.0023	7.64	0.0025	
3373 *932203552-0003*	On High Reach Bucket	07/11/2022	1170	<5.5	100	0.0023	<7.01	<0.0023	
3336 *932203552-0004*	Z VOT AW 9205	07/11/2022	692	8.5	100	0.0039	10.8	0.0060	
3392 *932203552-0005*	Blank	07/11/2022		<5.5	100		<7.01		Field Blank
3331 *932203552-0006*	Blank	07/11/2022		<5.5	100		<7.01		Field Blank

The results reported have been blank corrected as applicable.

Analyst(s):
Gerald Iannuzzi PCM 6

Gerald Iannuzzi, Laboratory Manager
or other Approved Signatory

*Following EMSL Analytical SOP Asbestos and Other Fibers by PCM. Limit of detection is 7 fibers/mm². Intra-laboratory Sr values: 5-20 fibers = 0.35, 21-50 fibers = 0.30, 51-100 fibers = 0.20. The laboratory is not responsible for data reported in fibers/cc, which is dependent on volume collected by non-laboratory personnel. Results have been blank corrected as applicable. EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported above and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.
Samples analyzed by EMSL Analytical, Inc. Tampa, FL

Initial report from: 07/13/2022 09:33 AM

93220 3552

ASBESTOS

Air Monitoring Chain of Custody

LAB: _____

(if samples are not read onsite)

Send invoice to:

- ☐ Haddon Heights (PENN50)
- ☐ Newark/New York (PNNJ42)
- ☐ Philadelphia (PENN54)
- ☐ Other: _____

CODES:
1 - Diagnostic
2 - Preliminary
3 - Clearance
4 - Containment
5 - Clean Area
6 - Critical Barrier
7 - AFD Exhaust
A - Aggressive
B - Blank
R - Representative

Project No. JPOEC 22001

Facility: TAMPA VA HOSP

Work Area: EXT FACADE

NE

Method: ☑ NIOSH 7400 ☐ AHERA ☐ TEM AIR ☐ PHILA ACR ☐ OTHER

Samples Collected By: T Adams Date: 7/11/22

Samples Transported By: " Date: 7/11/22

Samples Received By: Dawn Desiero Walker Date: 7/12/22 3:10pm

Samples Analyzed By: _____ Date: _____

Turnaround Time (TAT): ☐ 1 hour ☐ 3 hours ☐ 6 hours ☐ 12 hours ☑ 24 hours ☐ 48 hours

Please Contact with Results: TADAMS@PENNONI.COM

Name Phone/Email

	Date	Sample ID #	Location	Code	Time Start	Time Stop	Total Min	Flow Rate Start	Flow Rate Stop	Flow Rate Average	Volume	Fibers/Fields	Results □ f/cc □ s/mm²
7/12	3658 →		SE Exterior work zone	R	730	200		3.0	3.0	3.0			
"	3362 →		NE " " "	R	732	200		3.0	3.0	3.0			
"	3373 →	3373	OW High Reach Bucket	R	735			3.0	3.0	3.0			
				Pat									
"	3336 →	3336	Z VOTAW 9205		737	203	346	2.0	2.0	2.0	692		
		3392	BLANK	✓	✓	✓	✓	✓	✓	✓	0		
		3331	"	✓	✓	✓	✓	✓	✓	✓	0		

Signature _____ (Technician) Calibration Date: _____ Calibration Method: _____

Pennoni

Z:\ADMIN\0311 Hrl Industrial Hygiene\FORMS and CHECKLISTS\Asbestos Air Chain of Custody.xlsxMain form

OrderID: 932203552

EMSL Analytical, Inc.

5700 Memorial Highway, Suite 122 Tampa, FL 33615

Tel/Fax: (813) 280-8752 / (813) 280-8753

http://www.EMSL.com / tampalab@emsl.com

EMSL Order: 932203634
Customer ID: PENN75
Customer PO:
Project ID:

Attention: Thomas Adams
Pennoni
5755 Rio Vista Drive
Clearwater, FL 33760

Phone: (727) 325-1236
Fax:
Received Date: 07/15/2022 01:27 PM
Analysis Date: 07/15/2022
Collected Date: 07/13/2022

Project: JPOEC22001 J. A Haley VA Hospital, Tampa Ext. Facade East (3rd Floor)

Test Report: Fiber Count by Phase Contrast Microscopy (PCM), NIOSH 7400 Method - A Rules, Revision 3, Issue 3, 6/15/2019

Sample	*Location*	*Sample Date*	*Volume (L)*	*Fibers*	*Fields*	*LOD (fib/cc)*	*Fibers/mm²*	*Fibers/cc*	*Notes*
CZ549991 *932203634-0001*	On High Reach Bucket	07/13/2022	1305	<5.5	100	0.0021	<7.01	<0.0021	
CZ549975 *932203634-0002*	On High Reach Bucket	07/13/2022	1305	<5.5	100	0.0021	<7.01	<0.0021	
CZ550051 *932203634-0003*	South East	07/13/2022							Not Analyzed
CZ550013 *932203634-0004*	North East	07/13/2022							Not Analyzed
CZ549979 *932203634-0005*	Blank	07/13/2022		<5.5	100		<7.01		Field Blank
DE838676 *932203634-0006*	Blank	07/13/2022		<5.5	100		<7.01		Field Blank

The results reported have been blank corrected as applicable.

Analyst(s):
Gerald Iannuzzi PCM 4

Gerald Iannuzzi, Laboratory Manager
or other Approved Signatory

*Following EMSL Analytical SOP Asbestos and Other Fibers by PCM. Limit of detection is 7 fibers/mm². Intra-laboratory Sr values: 5-20 fibers = 0.35, 21-50 fibers = 0.30, 51-100 fibers = 0.20. The laboratory is not responsible for data reported in fibers/cc, which is dependent on volume collected by non-laboratory personnel. Results have been blank corrected as applicable. EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported above and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.
Samples analyzed by EMSL Analytical, Inc. Tampa, FL

Initial report from: 07/18/2022 04:51 PM

932203634

ASBESTOS

Air Monitoring Chain of Custody

LAB: _____
(if samples are not read onsite)

CODES: 1 - Diagnostic, 2 - Preliminary, 3 - Clearance, 4 - Containment, 5 - Clean Area, 6 - Critical Barrier, 7 - AFD Exhaust, A - Aggressive, B - Blank, R - Representative

Send Invoice to:
- ☐ Haddon Heights (PENN50)
- ☐ Newark/New York (PNNJ42)
- ☐ Philadelphia (PENN54)
- ☐ Other: Penn75

Project No. JPOEC 22001
Facility: J.A. HALEY VA HOSPITAL, TAMPA
Work Area: EXT. FACADE EAST [3rd Floor]
Method: 7/18/22 ☒ NIOSH 7400 ☐ AHERA ☐ TEM AIR ☐ PHILA ACR ☐ OTHER

Samples Collected By: Chakradhar Gondi Date: 7/13/22
Samples Transported By: " Date: 7/15/22
Samples Received By: Dawn Desiree Walker Date: 7/15/22 1:27pm
Samples Analyzed By: Date:
Turnaround Time (TAT): ☐ 1 hour ☐ 3 hours ☐ 6 hours ☐ 12 hours ☒ 24 hours ~~☐ 48 hours~~ →
Please Contact with Results: Name Phone/Email

Date	Sample ID #	Location	Code	Time Start	Time Stop	Total Min	Flow Rate Start	Flow Rate Stop	Flow Rate Average	Volume	Fibers/Fields	Results ☐ f/cc ☐ s/mm²
7/13/22	CZ549991	on High Reach Bucket	R	9:00 Am	4:17 Pm	435	3.0	3.0	3.0	1305		
7/13/22	CZ549975	On High Reach Bucket	R	9:00 Am	4:17 Pm	435	3.0	3.0	3.0	1305		
7/13/22	CZ550051	South East	R	2:44 Pm	4:00 Pm	←	3.0	3.0	3.0	do not analyze no enough volume		
7/13/22	CZ550013	North East	R	2:40 Pm	4:00 Pm	←	3.0	3.0	3.0			
7/13/22	CZ549979	BLANK										
7/13/22	DE838676	BLANK										

Signature: _____ (Technician) Calibration Date: _____ Calibration Method: _____

Pennoni

Z:\ADMIN\0311 HH Industrial Hygiene\FORMS and CHECKLISTS\Asbestos Air Chain of Custody.xlsxMain form

OrderID: 932203634

EMSL Analytical, Inc.

5700 Memorial Highway, Suite 122 Tampa, FL 33615
Tel/Fax: (813) 280-8752 / (813) 280-8753
http://www.EMSL.com / tampalab@emsl.com

EMSL Order: 932203670
Customer ID: PENN75
Customer PO:
Project ID:

Attention: Thomas Adams
Pennoni
5755 Rio Vista Drive
Clearwater, FL 33760

Phone: (727) 325-1236
Fax:
Received Date: 07/15/2022 01:27 PM
Analysis Date: 07/15/2022
Collected Date: 07/14/2022

Project: JPOEC2201 J.H. Haley VA Hospital, Tampa Ext. Facade West (3rd Floor)

Test Report: Fiber Count by Phase Contrast Microscopy (PCM), NIOSH 7400 Method - A Rules, Revision 3, Issue 3, 6/15/2019

Sample	*Location*	*Sample Date*	*Volume (L)*	*Fibers*	*Fields*	*LOD (fib/cc)*	*Fibers/mm²*	*Fibers/cc*	*Notes*
CZ550004 *932203670-0001*	On High Reach Bucket	07/14/2022	1044	<5.5	100	0.0026	<7.01	<0.0026	
CZ549932 *932203670-0002*	South West	07/14/2022	1335	<5.5	100	0.0020	<7.01	<0.0020	
CZ549974 *932203670-0003*	North West	07/14/2022	1341	<5.5	100	0.0020	<7.01	<0.0020	
CZ549925 *932203670-0004*	Blank	07/14/2022		<5.5	100		<7.01		Field Blank
CZ549951 *932203670-0005*	Blank	07/14/2022		<5.5	100		<7.01		Field Blank

The results reported have been blank corrected as applicable.

Analyst(s):
Gerald Iannuzzi PCM 5

Gerald Iannuzzi, Laboratory Manager
or other Approved Signatory

*Following EMSL Analytical SOP Asbestos and Other Fibers by PCM. Limit of detection is 7 fibers/mm². Intra-laboratory Sr values: 5-20 fibers = 0.35, 21-50 fibers = 0.30, 51-100 fibers = 0.20. The laboratory is not responsible for data reported in fibers/cc, which is dependent on volume collected by non-laboratory personnel. Results have been blank corrected as applicable. EMSL maintains liability limited to cost of analysis. This report relates only to the samples reported above and may not be reproduced, except in full, without written approval by EMSL. EMSL bears no responsibility for sample collection activities or analytical method limitations. Interpretation and use of test results are the responsibility of the client. Samples received in good condition unless otherwise noted.
Samples analyzed by EMSL Analytical, Inc. Tampa, FL

Initial report from: 07/18/2022 04:47 PM

932203670

ASBESTOS

Air Monitoring Chain of Custody

LAB: _____
(if samples are not read onsite)

CODES: 1 - Diagnostic, 2 - Preliminary, 3 - Clearance, 4 - Containment, 5 - Clean Area, 6 - Critical Barrier, 7 - AFD Exhaust, A - Aggressive, B - Blank, R - Representative

Send invoice to:
- ☐ Haddon Heights (PENN50)
- ☐ Newark/New York (PNNJ42)
- ☐ Philadelphia (PENN54)
- ☐ Other: _____

Samples Collected By: Chakradhar Gondi Date: 7/14/22
Samples Transported By: " Date: 7/15/22
Samples Received By: Dawn Dession Welkzn Date: 7/15/22 1:27pm
Samples Analyzed By: _____ Date: _____

Project No. JPOEC 22001
Facility: J.A. HALEY VA HOSPITAL, TAMPA
Work Area: EXT. FACADE WEST [3rd Floor]

Turnaround Time (TAT): ☐ 1 hour ☐ 6 hours ☐ 24 hours ☐ 3 hours ☐ 12 hours ☒ 48 hours

Method: ☒ NIOSH 7400 ☐ AHERA ☐ TEM AIR ☐ PHILA ACR ☐ OTHER

Please Contact with Results: _____
Name Phone/Email

Date	Sample ID #	Location	Code	Time Start	Time Stop	Total Min	Flow Rate Start	Flow Rate Stop	Flow Rate Average	Volume	Fibers/Fields	Results ☐ f/cc ☐ s/mm²
7/14/22	CZ550004	On High Reach bucket	R	8:12 am	2:00 Pm	348	3.0	3.0	3.0	1044		
7/14/22	CZ549932	South west	R	8:20 am	3:45 Pm	445	3.0	3.0	3.0	1335		
7/14/22	CZ549974	North west	R	8:22 am	3:45 Pm	447	3.0	3.0	3.0	1341		
7/14/22	CZ549925	BLANK										
7/14/22	CZ549951	BLANK										

Signature: C. Chakradhar (Technician)

Calibration Date: _____ Calibration Method: _____

Pennoni

2:\ADMIN\0311 HH Industrial Hygiene\FORMS and CHECKLISTS\Asbestos Air Chain of Custody xlsxMain form

OrderID: 932203670

APPENDIX C

Air Sampling Locations

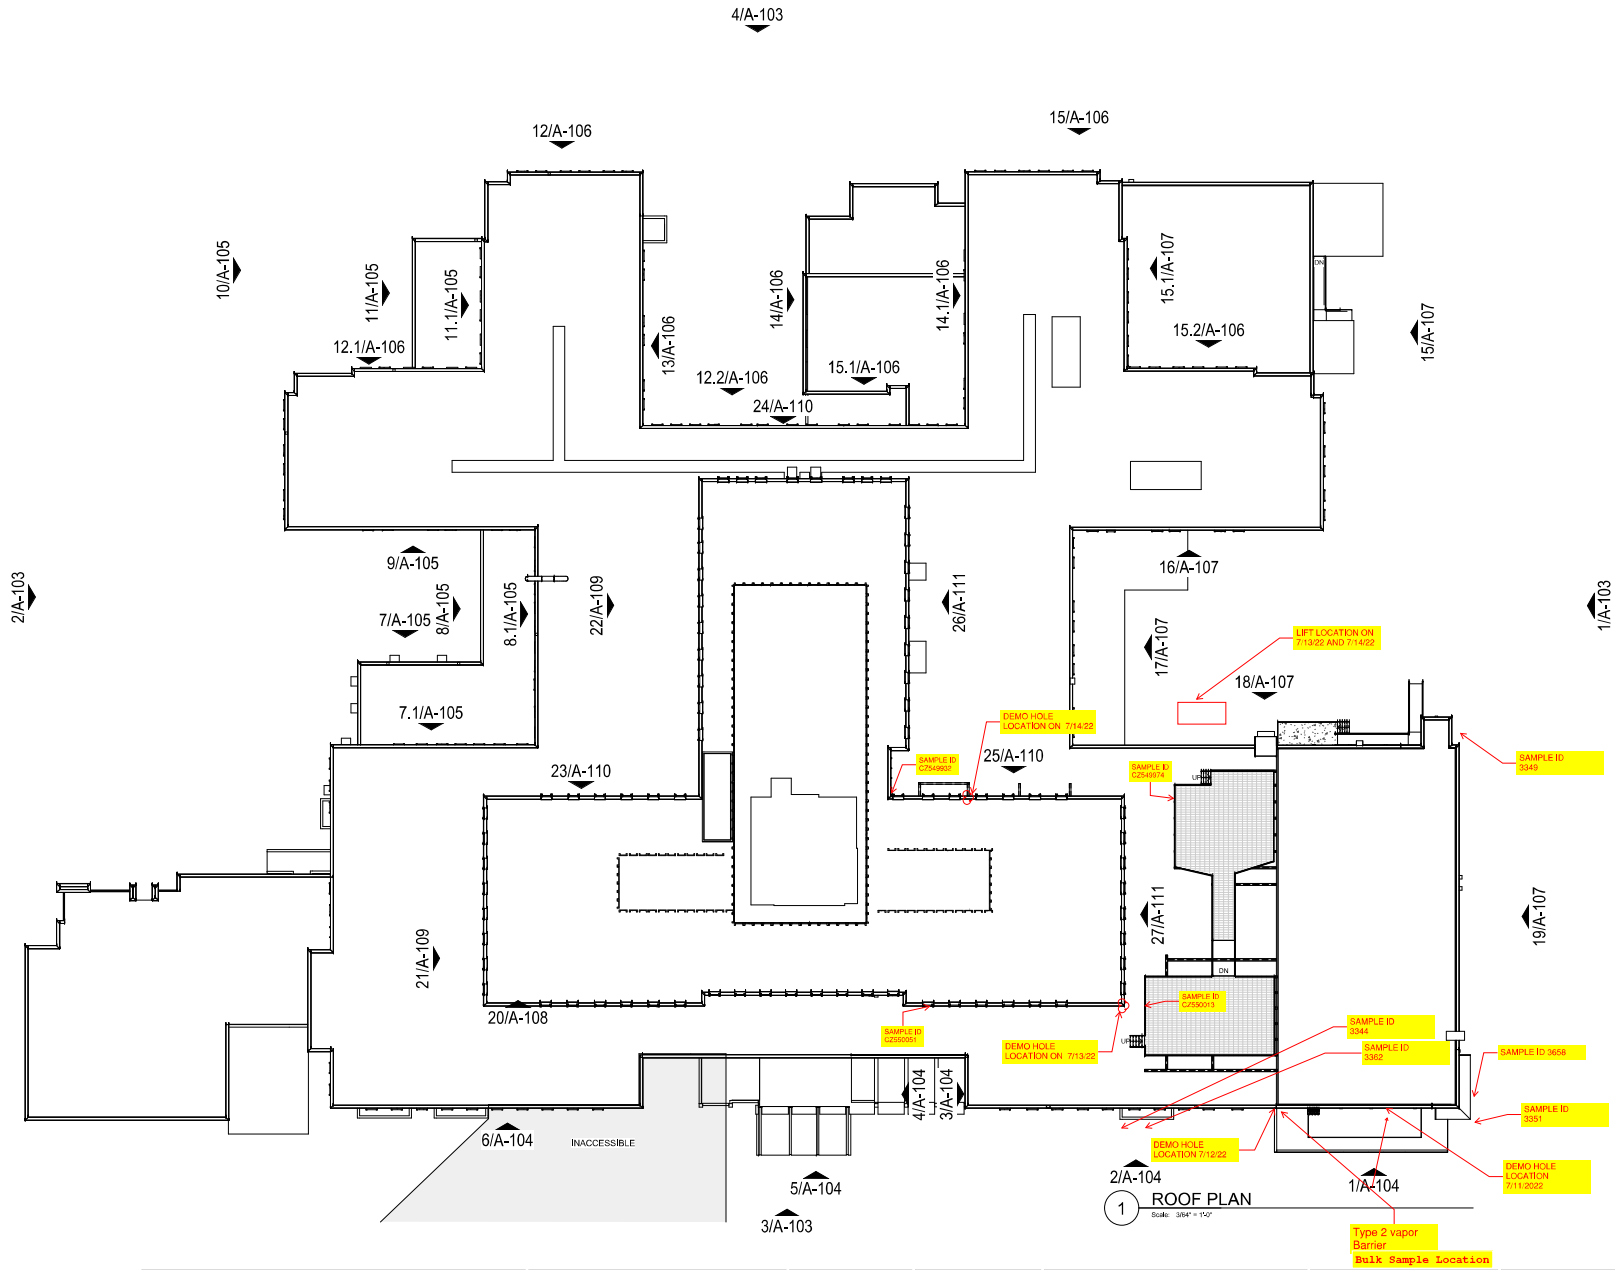

1 ROOF PLAN
Scale: 3/64" = 1'-0"

Revisions / Date	CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP	Office of Construction and Facilities Management	Drawing Title: ROOF PLAN REF.	Phase: DD1 15% NOT FOR CONSTRUCTION	Project Title: RESTORATION OF BUILDING 1 ENVELOPE	Project Number: VA Project No.: 673-21-116 RDC/JPA Project No.: 22004.00
		RDC / JOHN POE ARCHITECTS	PROGRESS PRINT NOT FOR CONSTRUCTION 7/8/2022 12:44:30 PM RDC/ JOHN POE ARCHITECTS	VA U.S. Department of Veterans Affairs	Approved: Roland Manio	FULLY SPRINKLERED	Location: JAMES A. HALEY VA HOSPITAL	Building Number: 1
							Issue Date: 05/10/22 Checked: MD Drawn: CG	Drawing Number: A-101

VA FORM 08 - 6231

7/8/2022 12:44:30 PM

SECTION 04 05 13
CONCRETE REPAIRS

PART 1 - DESCRIPTION OF WORK

1.1 SCOPE

A. The work required herein consists of all components and related accessories required to complete the work as located and detailed on the drawings and specified herein.

B. Existing structure: All information on the existing structure shown on the plans is obtained from the best available sources, but existing information does not necessarily reflect as-built construction. The contractor shall verify all information shown on these plans and notify the engineer of any variation. The contractor shall verify all existing dimensions and conditions before fabricating materials, and installation thereof.

1.2 SPECIAL CONDITIONS

A. All costs relating to temporary storage and protection shall be borne by the contractor. The contractor shall retain full responsibility for any damage or deterioration caused to surrounding surfaces.

B. Upon completion of the work, the contractor shall remove his temporary structures and sheds and remove all debris and rubbish and place the area in a clean and orderly condition.

C. Temporary toilet facilities will be provided by the contractor.

D. The owner shall furnish temporary water and electrical supply points on the site, where available. The contractor shall provide the means to deliver the water/electrical to his construction area.

E. The contractor shall be responsible for the necessary cleaning and repairing of adjacent areas resulting from said contractor's operations.

F. All work relating to the disruption of existing services shall be coordinated with the owner.

G. All protection and safety devices to include temporary safety rails shall be provided by the contractor as it relates to the safe conduct of his work in accordance with all local, state, and federal regulations.

H. The contractor shall be responsible for all field measurements prior to fabrication of materials.

I. The contractor shall be responsible for providing all blocking necessary for the installation of his work.

J. The contractor shall:

1. Clean up all waste materials, rubbish, and debris resulting from construction operations at such locations and frequencies as required, but not less than once a week, or as directed by the engineer.
2. Repair, patch, and touch-up marred surfaces to match adjacent finishes damaged by his own operations.

3. Remove from the site all waste materials, rubbish, and debris on a regular basis, but not less than once a week.
4. Do not use owner's disposal containers unless authorized in writing.

K. Construction personnel shall confine their activities to the designated construction areas and the access thereto.

1.3 GENERAL CONDITIONS

A. The AIA A107 general conditions (2007) shall be applicable, except as amended herein.

B. Provide warranties as defined in the contract, or as listed herein.

1.4 MISCELLANEOUS CRITERIA

A. Contractor is responsible for means and methods of construction to ensure the safety of the project until the work is completed. This includes, but is not limited to, the addition of whatever temporary bracing, shoring, guys, or tie-downs that may be necessary. Such material shall be removed and shall remain the property of the contractor after completion of the project. Note: temporary shoring shall be designed by a structural engineer registered in Florida.

B. Applicable building code: 2023 Florida Building Code 8th edition (FBC). 2023 Florida Existing Building Code (FBCE).

C. Coordinate all dimensions and elevations with the existing conditions.

D. Contact engineer with any questions or discrepancies found on drawings.

E. Submit shop drawings and/or product data for review by the engineer on all components and products specified for the project. Contractor is to specifically identify where submitted repair products are to be used. Allow one week review time after receipt of submittals by this firm. All submittals shall be checked and signed by the general contractor.

1.5 DESIGN CRITERIA

A. Wind Loads

1. 153 mph (Exposure "C"). Risk Category IV
2. Wind Borne Debris Zone – Large Missile Impact Type E

PART 2 - DEMOLITION

2.1 DESCRIPTION

A. Remove all items noted on the drawings, or as required to make the specified repairs.

B. All demolished materials to be removed from the site and deposited at a regulated dump site.

C. Provide all shoring necessary to protect the structure during the demolition process, and until the work is completed.

D. Contractor to minimize dust during work operations and clean adjacent areas of dust from project on a regular basis.

PART 3 - CONCRETE REPAIRS

3.1 DESCRIPTION

A. Work included: provide concrete repairs including formwork as specified herein, and as needed for a complete and proper installation.

B. Damaged reinforcing steel shall be cleaned and coated as specified below or replaced (with same size bar and mechanical splices) as directed by the Engineer.

3.2 QUALITY ASSURANCE

A. Use adequate numbers of skilled workmen who are thoroughly trained and experienced in the necessary crafts and who are completely familiar with the specified requirements and the methods needed for proper performance of the work of this section.

B. Comply with "specifications for structural concrete for buildings," ACI 301, and “concrete repair guide”, ACI 546R-04, except as modified herein.

C. Install all products in strict accordance with manufacturer's requirements.

D. Submit product data sheets on all concrete repair products to include application locations and manufacturer’s certification of application. (Provide submittals by email.)

E. Contractor to provide mock-up of the typical repair for engineer review before proceeding with the work.

3.3 SOUNDING AND SAW CUTTING

A. Sound the surface to verify the extent of the area to be repaired in accordance with the procedures specified herein. Contractor to have available (on-site) a pachometer to locate reinforcing steel in the concrete.

B. Saw cut around the area of deterioration to a minimum depth of 3/4 inch. Do not cut embedded reinforcing unless directed by the engineer.

C. Where possible, the concrete areas removed shall be rectangular in shape.

3.4 CONCRETE REMOVAL

A. Remove all delaminated, unsound, or otherwise unsuitable concrete. Contractor to have an adequate supply of Phenolphthalein on-site to check for carbonation during the excavation process.

B. If the deterioration occurs over reinforcing bars, remove all of the concrete around each bar to allow a minimum of 3/4 inch all around the bar with the exception of vertical column bars. Do not remove concrete behind vertical column bars (toward the center of the column) unless directed to do so by the engineer. Do not cut any reinforcing bars without the approval of the engineer.

C. Avoid fracturing of the aggregate at the surface of the excavation. Some “sound” concrete may have to be removed to adequately expose and clean the reinforcing for its full length.

D. Maximum care is to be taken to not damage adjacent concrete that is to remain.

E. Avoid damaging the bond of the bars that extend into the adjacent existing concrete by minimizing vibration of those bars during the concrete removal process.

F. Contractor to provide plywood covers over excavated areas at all deck surfaces until repairs are complete. Covers to be secured to the deck surface and appropriately marked per safety requirements.

3.5 FORMS

A. Design, erect, support, brace, and maintain formwork so it will safely support vertical and lateral loads which might be applied until such loads can be supported safely by the repaired concrete structure.

B. Construct forms to the exact sizes shapes, lines, and dimensions shown, and as required to obtain accurate alignment, location, grades, and level and plumb work in the finished structure.

3.6 REINFORCING STEEL (WHERE REPLACEMENT REQUIRED)

A. Provide replacement reinforcing steel as directed by the engineer with ASTM A615, Grade 60 reinforcing bars, or MMFX2 per ASTM A615, Grade 75, as noted.

B. Provide mechanical rebar splices by bar splice products, inc. (or equal) as directed by the engineer (or weld with full butt or vee weld per AWS D1.4 (preheat) with E60xx or E70xx low hydrogen electrodes. Contractor to provide welder certification before proceeding with the work.)

C. General guidelines: replace or supplement any existing reinforcing bars with a loss of area in excess of 15% with new reinforcing bars. Lap in accordance with ACI requirements. Increase laps as required for epoxy coated bars. Bars with an absence of deformations are considered deficient. Any reinforcing that in the engineer’s judgement is inadequate due to deterioration, damaged during the repair process, or is inadequate for any other reason shall be replaced. Install all other reinforcing as shown on the details.

D. Re-tie all exposed bars to exposed crossing bars at concrete repairs (100%).

E. Re-tie exposed bars to imbedded crossing bars (30%) unless otherwise directed by engineer.

3.7 SURFACE PREPARATION

A. Provide prepare concrete and reinforcing steel surfaces in accordance with the manufacturer's requirements, and ICRI Guideline No. 310-IR-2008.

B. Wire brush or mechanically chip subject areas of all loose materials.

C. Clean area of all dust, latence, or other surface contaminants.

D. All exposed steel reinforcement (if any) must be cleaned (sand blasted/ vapor blasted) and exposed 100% of its circumference. Once cleaned, and prior to the repair application, the exposed metal should be coated with an anti-corrosive agent where bars have less than one (1) inch of cover, and not protected by a waterproof membrane.

E. Dampen concrete surface to be repaired with clean water (SSD), but make sure there is no standing water.

F. All concrete surfaces should be primed with a slurry (from selected repair material) and scrubbed into the substrate. (Refer to manufacturer's specifications.)

G. Do not feather edge repair materials. Saw cut and chip back repair area to insure a minimum ½" material thickness at edge of repair area.

3.8 MATERIAL SELECTION

A. Select the appropriate patch material and method based on the criteria established in the details and/or specifications. Submit for engineer review.

B. Provide 1/4" to 1/2" aggregate in the repair areas when the depth of repair exceeds one (1) inch. Type, size, and quantity of aggregate shall be in accordance with the manufacturer's recommendations.

C. Formed and poured patches are preferred but in some instances troweled patches may be advisable for specific conditions. Confer with the engineer.

D. Install all materials in strict compliance with the manufacturer's recommendations. Concrete to concrete bonding compounds are to be used only where specifically shown on the details or approved by the engineer.

3.9 REPAIR MATERIALS

A. STO, Master Builders, or approved equal. Note: SIKA corporation is an approved equal where applicable.

B. Flexible Crack Filler: SONOALSEAL AP, STO CR216, OR MASTERSEAL NP100.

C. Bonding And Anti-Corrosion Agent: STO CR246, OR MASTEREMACO P 124

D. Repair Mesh: STO CR218, OR EQUAL (FOR HORIZONTAL MEMBRANE REINFORCING.)

E. Epoxy Binder: STO CR633, STO CR641, OR (DISCONTINUED), MASTERINJECT 1380.

F. Quick Set Epoxy Gel: STO CR634, OR MASTEREMACO ADH 327RS.

G. Epoxy Grout: STO CR639, OR MASTER FLOW MP GROUT.

H. Trowel Grade Mortar: STO CR701 OR USCP HP DOT REPAIR GRADE MORTAR(DISCONTINUED)/MASTEREMACO T 310 CI, MASTEREMACO T 1061DR.

I. Overhead Mortar: USCP US THIN PATCH V/O STO 702, STO 740, OR MASTEREMACO S488 CI, MASTEREMACO N350 CI, MASTEREMACO N 425.

J. Full Depth Repair Mortar: USCP Deck Mix FP STO CR311, MASTEREMACO S 440 for structural column repairs, or as otherwise directed by Engineer.

K. Flowable Mortar: STO CR730, STO CR745 OR MASTEREMACO T 310 CI, MASTEREMACO S 488 CI.

L. Thin Overlay: STO CR700/CR701, OR MASTEREMACO 310 CI.

M. Non-Shrink Grout: STO CR732 OR SET GROUT MASTERFLOW 100.

N. Expansive Grout: L&M PREMIER GROUT (OR) MBT MASTERFLOW #928.

O. Repair Mortar: MASTEREMACO T 430, MASTEREMACO T 1061DR.

P. Evaporation Retarder: MASTERKURE ER 50 BY MBT, OR EQUAL.

Q. Provide other materials, not specifically described but required for a complete and proper installation, as selected by the contractor subject to the approval of the engineer.

3.10 SUPPLEMENTAL ANCHORS

A. Install Type 316 stainless steel anchors and rods as shown on details or as directed by the engineer. Keep substrate surface clean and free of epoxy. Thoroughly clean off all epoxy residue from the substrate. Avoid placing the anchors or rods in contact with the reinforcing steel within the excavation. If contact is made, coat the common surfaces with STO CR246.

3.11 PLACING CONCRETE REPAIR MATERIALS:

A. Install repair materials in accordance with ICRI GUIDELINE NO. 320-1R-2019, and the manufacturer's requirements in a continuous operation, within limits of the repair areas, until the placing is completed.

B. Bring surfaces to the correct level with a straight edge, and then strike off.

C. Use floats to smooth the surface, leaving the surface free from bumps and hollows.

D. Do not sprinkle water on the plastic surface.

E. Cure repaired area by covering with visqueen sheeting, or per requirements from the manufacturer.

3.12 STRUCTURAL CRACK REPAIRS (NOT AT TOPPING):

A. Crack Injection - As directed by Engineer. (Refer to Part 4 below).

B. Rout And Seal - 1/4" x 1/2" deep (+) router cut, clean with compressed air, repair by gravity feed with STO epoxy binder (CR633), STO epoxy gel (CR 635), or VULKEM #245/255 (2 part urethane), or equal, as directed by engineer.

PART 4 - STRUCTURAL CONCRETE CRACK REPAIRS EPOXY AND URETHANE INJECTION

4.1 GENERAL REQUIREMENTS

A. Furnish all labor, materials, tools and equipment, and perform all operations necessary for the crack injection work.

B. The installation of ports and the injection of specified materials shall proceed as indicated in the sequence of work.

C. Designated cracks to be injected full length of the cracks.

D. Specified materials will be injected under such pressure so as not to damage the existing structure.

E. The work shall be in general accordance with ACI 503.7-07.

4.2 MATERIALS

A. All materials shall be delivered to the site in undamaged, unopened containers bearing the manufacturer's original labels. Materials shall be non-flammable and non-toxic

B. Cap seal - SIKADUR 31 by SIKA corporation or approved equal (at epoxy filled cracks).

C. Where specified by the engineer, the sealing materials shall be a polyurethane grout and accelerator system marketed under the name of SIKAFIX HH by Sika corporation or approved equal.

D. Where specified by the engineer, the epoxy materials shall be SIKADUR 35, SIKADUR 52, or SIKADUR injection gel by Sika corporation (or approved equal)

4.3 INSTALLING PORTS

A. Clean concrete surface at cracks as required for proper installation of the cap seal.

B. Provide surface mount or socket ports as required by the project conditions. Spacing of injection ports subject to the width of the cracks, but no less than thickness of concrete to be injected.

C. Install injection ports compatible with the injection materials.

D. Flush cracks as required by the materials manufacturer.

4.4 STORAGE, MIXING AND HANDLING

A. Storage, mixing and handling of the chemical materials and the accelerator, shall be in accordance with the recommendations of the manufacturer and all applicable safety codes, and shall be performed in such a manner as to minimize hazard to personnel.

4.5 PUMPS

A. Hand operated, air driven or electrical positive displacement pumps can be used. One to five gallons per minute delivery is normally satisfactory. Pumps must be flushed with washing agent for at least two minutes before and after the grouting operation.

B. Do not flush wash water into storm sewer system.

4.6 QUALITY CONTROL

A. Contractor to provide mock-up of typical crack injection for engineer review before proceeding with the work.

B. Epoxy injection procedures subject to icri guideline #210-1r-2016, and aci e706 rap #1.

C. Core samples shall be taken as noted below.

4.7 PROCEDURES

A. Install cap seal (1" wide x 3/16" thick, prox.) At epoxy filled cracks.

B. Inject specified materials per manufacturer’s requirements under sufficient pressure and for the length of time necessary to fill all voids.

C. Cores (2" in diameter) shall be taken to confirm the results of the injection (per locations designated by engineer).
   1. Three (3) per first 100 lf.
   2. One per 150 lf, thereafter.
   3. Patch core holes with repair grout.

D. Patch core holes with repair grout. Cracks found not to be fully injected (per core samples) shall be re-injected, and subsequently re-cored.

E. Remove injection ports and excess resin on surface of concrete (by grinding).

4.8 PAYMENT

A. The owner will pay the contractor a unit price for each lineal foot of crack injected or gravity fed, as applicable.

B. The owner will pay the contractor a unit price for each core sample taken, as requested by the engineer. The unit prices shall include the cost of patching of core holes.

PART 5 - MISCELLANEOUS

5.1 FIELD MEASUREMENT/SUBMITTALS

A. The contractor shall verify all measurements in the field prior to submittal of shop drawings.

B. All field obtained dimensions shall be reflected in the shop drawings when submitted to the engineer for review.

C. Accuracy of field dimensions shall be the complete responsibility of the contractor.

5.2 AS-BUILT DRAWINGS

A. Maintain a set of redlined as-built drawings on a daily basis, and available for review by the owner/engineer.

B. The contractor shall provide a set of as-built drawings reflecting all changes to the design documents upon completion of the project.

5.3 DRILLED ANCHORS

A. All drilled bolts and rebar into concrete shall use STO epoxy gel, or HILTI (HIT HY200) system, or approved equal. Bolts shall be AISI 316 stainless steel (U.O.N.).

B. All TAPCON type fasteners shall be ELCO with STALGARD finish, or equal. (Provide stainless steel where specified.)

C. All self-drilling screws shall be ELCO with STALGARD finish, or equal. (Provide stainless steel with specified.)

- - E N D - -

SECTION 04 01 00
MAINTENANCE OF MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Repointing existing/damaged masonry joints.
2. Replacing existing/damaged masonry units.

1.2 RELATED WORK

A. Section 04 05 13, MASONRY MORTARING: Mortars for new masonry.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

C67/C67M-20.....Sampling and Testing Brick and Structural Clay Tile.

C144-18 .....Aggregate for Masonry Mortar.

C150/C150M-20.....Specification for Portland Cement.

C207-18 - .....Hydrated Lime for Masonry Purposes

C216-19 - .....Facing Brick (Solid Masonry Units Made from Clay or Shale)

C270-19ae1 .....Mortar for Unit Masonry

C295/C295M-19.....Petrographic Examination of Aggregates for Concrete

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Replacement units indicating manufacturer recommendation for each application.

C. Samples:

1. Pointing Mortar: Molded, 150 mm (6 inches) long for each type, texture, and color.

D. Test reports:

1. Preconstruction test results of existing masonry mortar and units.
2. Recommended mortar mix and mortar materials sources.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:

1. Documented experience in completion of work, similar in design, material, and extent specified.

B. Preconstruction Testing:

1. Existing Brick: according to ASTM C67.

2. Existing Mortar: according to ASTM C295/C295M.
   a. Recommend mortar mix compatible with existing and mortar material sources required to match existing color and texture.

C. Mockups: Prepare mockup in size indicated on Drawings, demonstrating quality and aesthetics of tuck pointing, masonry unit replacement, and cleaning .

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, // color, // production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store materials covered, protected from weather, and elevated above grade.
   1. Prevent contamination of aggregates.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Cold Weather Requirements: Maintain mortar ingredients and substrate within temperature range between 4 degrees C (40 degrees F) and 49 degrees C (120 degrees F) when outside temperature is less than 4 degrees C (40 degrees F).
   2. Hot Weather Requirements: Protect mortar-joint from evaporation of moisture from mortar material. When required, provide adequately shaded work area.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Mortar Components:
   1. Hydrated Lime: ASTM C207, Type S.
   2. Aggregate: ASTM C144.
   3. Portland Cement: ASTM C150/C150M, Type I.
   4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

2.3 REPLACEMENT MASONRY UNITS

A. Face Brick:
   1. ASTM C216, Grade SW, Type FBS matching existing .
   2. Efflorescence: Rated slight efflorescent when tested according to ASTM C67.

B. Other Masonry Units: Match existing.

2.4 MIXES

A. Tuck Pointing Mortar: ASTM C270;

1. Type N

2.5 ACCESSORIES

A. Cleaning Agent:

B. After 3 days clean with water and mild detergent or cleaners recommended by brick manufacturer. Do not use muriatic acid.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

1. Protect from mortar droppings and cleaning operations.

C. Remove existing fixtures and fittings concealing masonry joints to permit repointing and repair.

3.2 EXISTING MORTAR JOINTS

A. Cut out existing bed and head mortar joints, to uniform depth equal to 2-1/2 times its width, but not less than ½", or to sound mortar without damaging edges and faces of existing masonry units to remain.

B. Remove dust and debris from joints.

1. Do not rinse when temperature is below freezing.

3.3 TUCK POINTING

A. Dampen joints immediately before tuck pointing. Allow masonry units to absorb surface water.

B. Tightly pack tuck pointing mortar into joints in thin layers, 6 mm (1/4 inch) thick, maximum.

C. Allow layer to become slightly hardened before applying next layer.

D. Pack final layer flush with surfaces of masonry units.

3.4 MASONRY UNIT REPLACEMENT

A. Cut out mortar joints surrounding masonry units requiring replacement.

1. Remove existing masonry units creating opening for replacement masonry unit installation.
2. Remove mortar, dust, and debris from opening perimeter surfaces.
3. Prevent debris from falling into cavity.

B. Dampen surfaces of surrounding existing masonry before installing replacement masonry units.

1. Allow existing masonry to absorb surface moisture before installing replacement units.
2. Butter contact surfaces of existing masonry and replacement masonry units with mortar.

3. Center replacement masonry units in opening and press into position.
4. Remove excess mortar.
5. Tuck point replacement masonry units to ensure full head and bed joints.

3.5 JOINT TOOLING

A. Tool repointed and replaced masonry joints when mortar becomes slightly hardened.

B. Produce smooth, compacted, joint matching existing.

3.6 CLEANING

A. Remove mortar splatter from exposed surfaces immediately.

B. Clean exposed masonry surfaces on completion.

C. Remove mortar droppings and other foreign substances from wall surfaces.

D. Wet surfaces with clean water.

E. Wash with cleaning agent.

F. Brush masonry surfaces with stiff fiber brushes while washing.

G. Immediately after washing, rinse with clean water.

1. Remove traces of detergent, foreign streaks or stains.

- - E N D - -

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Masonry mortar installed by other masonry sections.

1.2 RELATED REQUIREMENTS

A. Mortar used in Section:

1. Section 04 01 00, MAINTENANCE OF MASONRY.
2. Section 04 05 16, MASONRY GROUTING.
3. Section 04 20 00, UNIT MASONRY.

B. Mortar Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
2. C91/C91M-12 - Masonry Cement.
3. C144-11 -Aggregate for Masonry Mortar.
4. C150/C150M-15 - Portland Cement.
5. C207-06(2011) - Hydrated Lime for Masonry Purposes.
6. C270-14a - Mortar of Unit Masonry.
7. C780-15 - Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
8. C1329/C1329M-15 - Mortar Cement.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Mortar.
2. Admixtures.

D. Certificates: Certify each product complies with specifications.

1. Portland cement.
2. Masonry cement.

3. Mortar cement.
4. Hydrated lime.
5. Fine aggregate.

E. Qualifications: Substantiate qualifications comply with specifications.
1. Testing laboratory.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:
1. Engage independent testing laboratory to tests and submit reports.
a. Deliver samples to laboratory in number and quantity required for testing.
2. Test mortar and materials specified.
3. Mortar:
a. Test for compressive strength and water retention according to ASTM C270.
b. Minimum Mortar compressive strengths 28 days:
1) Type M: 17.2 MPa (2,500 psi)
2) Type S: 12.4 MPa (1,800 psi).
3) Type N: 5.1 MPA (750 psi).
4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store masonry materials under waterproof covers on planking clear of ground.
1. Protect loose, bulk materials from contamination.
B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Hydrated Lime: ASTM C207, Type S.
B. Aggregate for Masonry Mortar: ASTM C144 and as follows:
1. Light colored sand for mortar for laying face brick.

2. White plastering sand meeting sieve analysis for mortar joints for pointing except that 100 percent passes No. 8 sieve, and maximum 5 percent retained on No. 16 sieve.
3. Test sand for color value according to ASTM C40/C40M. Sand producing color darker than specified standard is unacceptable.

C. Masonry Cement: ASTM C91/C91M. Type N, S, Or M.
1. Use white masonry cement whenever white mortar is specified.

D. Mortar Cement: ASTM C1329/C1329M, Type N, S or M.

E. Portland Cement: ASTM C150/C150M, Type I.
1. Use white Portland cement wherever white mortar is specified.

F. Water: Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

B. Provide each product from one manufacturer and from one production run.

2.3 MIXES

A. Pointing Mortar for New Work:
1. For Cast Stone or Precast Concrete: Proportion by volume; one part white Portland cement, two parts white sand, and 1/5 part hydrated lime.

B. Tuck Pointing Mortar for Repair Work: Tuck pointing mortar specified in Section 04 01 00, MAINTENANCE OF MASONRY.

C. Masonry Mortar: ASTM C270.
1. Admixtures:
a. Do not use mortar admixtures, and color admixtures unless approved by Contracting Officer's Representative.
b. Do not use antifreeze compounds.

D. Colored Mortar:
1. Maintain uniform mortar color for exposed work, throughout.
2. Match mortar color in approved sample or sample panel specified in Section 04 20 00, UNIT MASONRY.
3. Alteration Work Mortar Color: Match existing mortar.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.2 MIXING

A. Measure ingredients by volume using known capacity container.

B. Mix for 3 to 5 minutes in a mechanically operated mortar mixer.

C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.

D. Mortar Stiffened Because of Water Loss Through Evaporation:

1. Re-temper by adding water to restore to proper consistency and workability.
2. Discard mortar reaching initial set or unused within two hours of mixing.

E. Pointing Mortar:

1. Mix dry ingredients with enough water to produce damp mixture of workable consistency retaining shape when formed into ball.
2. Allow mortar to stand in dampened condition for 60 to 90 minutes.
3. Add water to bring mortar to a workable consistency before use.

3.3 MORTARING

A. Type M Mortar: Use for masonry below grade or in contact with earth.

B. Type S Mortar: Use for masonry containing vertical reinforcing bars (non-engineered) and engineered reinforced unit masonry work and pointing items and tuck pointing specified.

C. Brick Veneer Over Frame Back Up Walls: Use Type S Portland cement-lime mortar.

D. Type N Mortar: For exterior, above-grade, load-bearing, nonload-bearing walls, parapet walls, and for other applications where another type is not indicated

3.4 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

1. Take and test samples during progress of work according to ASTM C780.

- - E N D - -

SECTION 04 05 16
MASONRY GROUTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Grout for filling hollow concrete masonry cores.

1.2 RELATED WORK

A. Section 04 20 00, UNIT MASONRY: Grout

B. Section 09 06 00, SCHEDULE FOR FINISHES: Grout Color

C. Section 09 91 00, PAINTING

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

C40/C40M-20 - .....Organic Impurities in Fine Aggregates for Concrete.

C150/C150M-20 - .....Portland Cement.

C207-18 - .....Hydrated Lime for Masonry Purposes.

C404-18 - .....Aggregates for Masonry Grout.

C476-20 - .....Grout for Masonry.

C1019-19 - .....Sampling and Testing Grout.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer’s Representative (COR) review and approval.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Grout, each type.
2. Cement.
3. Aggregate.

D. Certificates: Certify each product complies with specifications.

1. Portland cement.
2. Grout.
3. Hydrated lime.
4. Aggregate.
5. Color admixture.

1.5 QUALITY ASSURANCE

A. Preconstruction Testing:
   1. Engage independent testing laboratory to perform tests and submit reports.
      a. Deliver samples to laboratory in number and quantity required for testing.
   2. Grout:
      a. Test compressive strength according to ASTM C1019 standard for each 5000 sft of masonry Minimum compressive strength of 2500 psi at 28 days.
   3. Aggregate:
      a. Test for deleterious substances, organic impurities, soundness and grading.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

1.7 STORAGE AND HANDLING

A. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.
B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Grout Components:
   1. Hydrated Lime: ASTM C207, Type S.
   2. Aggregate For Masonry Grout: ASTM C404, Size 8.
   3. Portland Cement: ASTM C150, Type I.
   4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

2.3 MIXES

A. Grout: ASTM C476; fine grout and coarse grout.
B. Ready-Mixed Grout: ANSI A118.8.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Clean mortar from masonry cells protruding more than 13 mm (1/2 inch) to permit grout flow.

D. Remove debris from grout spaces.

E. Verify reinforcement is correctly placed before placing grout.

3.2 MIXING

A. Mix grout in mechanically operated mixer.

1. Mix grout for five minutes, minimum.

B. Measure ingredients by volume using container of known capacity.

C. Mix water with grout dry ingredients.

1. Slump Range: 200 to 275 mm (8 to 11 inches).

3.3 GROUTING

A. Install grout according to Section 04 20 00, UNIT MASONRY.

B. Use fine grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is 50 mm (2 inches) or less.

C. Use either fine grout or coarse grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is greater than 50 mm (2 inches).

D. Use grout for filling bond beam or lintel units.

- - E N D - -

SECTION 04 05 19
MASONRY ANCHORAGE AND REINFORCING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Installation of masonry repair systems.

1.2 RELATED REQUIREMENTS

A. Section 04 20 00, UNIT MASONRY:

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section. The date of the standard is that in effect as the date of receipt of bids for the project.

B. The Masonry Society (TMS):

1. TMS 402/602 Building Code Requirements and Specifications for Masonry Structures.

C. ASTM International (ASTM):

1. ASTM A580/580M – Standard Specification for Stainless Steel Wire.
2. ASTM C 1093- Standard Practice for Accreditation of Testing Agencies for Masonry.

D. The Brick Industry Association (BIA):

1. Tek Note #44b- Wall Ties for Brick Masonry.

1.4 ADMINISTRATIVE REQUIREMENTS

A. Pre-Installation Meeting: Convene before the start of work on new unit masonry, patching of existing masonry walls Require attendance of parties directly affecting work of this Section, including the Owner's Representative, Contractor, Architect, Engineer, and Installer. Meeting should only convene when required parties are present.

B. Review the following:

1. Installation procedure.
2. Quality control.
3. Coordination with other Work.

1.5 SUBMITTALS

A. Product Data:

1. Submit manufacturer's product data sheets and tested physical and performance properties for each product to be used, indicating the size and length of anchor to be used for the work.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Installer to be familiar with the specified requirements and the methods needed for proper installation of anchoring systems, including coordination with wall assembly components. Installer must have the proper equipment available to perform work within the scope of this project on a timely basis.

B. Manufacturer: Provide product design, product engineering, and technical assistance for the selection, application, and installation of an appropriate anchoring system for the project.

C. Testing Agency:

1. Field Testing: The inspector must be experienced with the proper use of calibrated test equipment.
2. Laboratory Testing: The testing agency must be qualified in accordance with ASTM C1093 for the testing indicated.

D. Mock-up: On-site, prior to the start of work within this section.

1. Require attendance of parties directly affecting work of this Section, including the Contractor, Installer, Architect, Engineer, and Owner's Representative.
2. Notify the above parties at least one week in advance of the date and time when the mock-up will be completed.
3. Install anchor for evaluation of application of workmanship
4. Perform in-situ testing of the installed anchors in the wall to be repaired to confirm the retrofit anchor performs as expected in both the veneer and backup independently.
5. Approval of mockups does not constitute approval of deviations from the Contract Documents contained in the mockups unless the Architect/Engineer specifically approves such deviations in writing.
6. Subject to compliance with requirements, an approved mockup may become part of the completed work.

1.7 DELIVERY, STORAGE AND HANDLING

A. Deliver materials to the worksite in manufacturer's original and unopened package, labeled with manufacturer's name and type of product.

B. Store materials in an environment recommended on published manufacturer's product datasheets.

PART 2 - PRODUCTS

2.1 MANUFACTURERS

A. Basis of Design: PROSOCO, Inc., (800) 255-4255, customercare@prosoco.com.

B. Substitutions: [No Substitutions] [In accordance with Section 01 25 00 – Substitution Procedures].

2.2 ANCHORS AND TIES

A. Helical ties: Provide an in-plane flexible connection between wythes of material, while maintaining a threaded connection to resist out-of-plane loading for both tension and compression resistance.

1. Material:
   a. Provide ties and anchors specified in this article that are made from materials that comply with the following, unless otherwise indicated.
      1) Stainless steel wire: ASTM A580/A580M, Type 316].

2. Application:
   a. Masonry veneer to solid concrete backup:
      1) Asymmetric Stitch-Tie by PROSOCO, Inc., 8mm diameter.
      2) Stitch-Tie by PROSOCO, Inc., 8mm diameter.
   b. Masonry veneer to hollow CMU backup:
      1) Stitch-Tie by PROSOCO, Inc., 8mm diameter.
   c. Mass brick masonry:
      1) Stitch-Tie by PROSOCO, Inc., 8mm diameter.

B. Horizontal Reinforcement: Provide supplemental joint reinforcement to reinforce cracked masonry and to create structural beams from existing brick veneers.
   1. Material:
      a. Provide ties and anchors specified in this article that are made from materials that comply with the following, unless otherwise indicated.
         1) Stainless steel wire: ASTM A580/A580M, Type 316.
         2) Grout: BS EN 998-2.
   2. Application:
      a. Crack Stitching:
         1) Stitch-Tie Bar by PROSOCO, Inc., 6mm diameter.
         2) Grout: SureGrout S (3900 psi / 27.5 Mpa) by Sure CPS.
      b. Structural helical beam reinforcement:
         1) Stitch-Tie Bar by PROSOCO, Inc., 6mm diameter.
         2) Grout: SureGrout S (3900 psi / 27.5 Mpa) by Sure CPS.

PART 3 - ANCHORS AND TIESEXECUTION

3.1 EXAMINATION

A. Examine conditions, with installer present, for compliance with requirements for installation tolerances and other conditions affecting the performance of Work.

B. Do not begin installation until unsatisfactory conditions are resolved. Beginning work constitutes acceptance of site conditions and responsibility for defective installation caused by prior observable conditions.

3.2 PREPARATION

A. Clean dirt, dust, oil, grease, and other contaminants that interfere with penetration or performance of the specified product from surfaces.

B. Locate anchors in the area to be anchored as indicated on the Drawings.

C. Do not proceed until unsatisfactory conditions have been corrected.

D. Install accessory products in accordance with the manufacturer’s published recommendations and as noted on Drawings.

3.3 INSTALLATION

A. Install anchor in accordance with manufacturer's published recommendations and mock-up.

B. Helical tie installation:

1. Select proper anchor length by field verification.
2. Drill proper pilot hole size per the anchor type. See manufacturer's product data for recommendations.
3. Install helical tie into the dry setting too mounted in an SDS drill.
4. Drive the helical tie anchor in the pilot hole and into the backup material.
5. The setting tool will recess the helical tie approximately 3/8 inch from the surface.
6. Conceal anchor with specified patching compound.
7. Space anchors in 16 inches on center vertically and 16inches on center horizontally Install additional anchors within 8 inches of openings and discontinuities per BIA Technical note 44b.

C. Horizontal Reinforcement:

1. Grind away existing mortar, 20 inches minimum on each side of the crack, 1-1/2 inch to 2 inches deep.
2. Clean with water.
3. Apply a bead of the manufacturer's recommended grout.
4. Insert the helical tie bar into the bead of the manufacturer's recommended grout.
5. Apply a bead of grout over the helical tie bar.
6. If an additional helical tie bar is required, insert it into the bead of the manufacturer's recommended grout.
7. Apply a final bead of grout over the additional helical tie bar if required.
8. Compact with an appropriate trowel.

3.4 FIELD QUALITY CONTROL

A. Site testing is encouraged for verification of helical or mechanical expansion anchor load capacity. Each construction site is unique, and the appropriate use of this product is the responsibility of the engineers, architects, and other professionals who are familiar with the specific requirements of the project.

1. Testing Agency: [Owner will engage] [Engage] a qualified testing agency to perform tests and inspections. Allow inspectors access to scaffolding and work areas as needed to perform tests and inspections. Re-testing of materials that fail to comply with specified requirements will be at the Contractor's expense.

- - E N D - -

SECTION 04 20 00
UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes: Face Brick and Concrete masonry unit (CMU) assemblies for:

1. Exterior walls.

1.2 RELATED REQUIREMENTS

A. Sealants and Sealant Installation: Section 07 92 00, JOINT SEALANTS.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Concrete Institute (ACI):

1. 315-99 - Details and Detailing of Concrete Reinforcement.
2. 530.1/ASCE 6/TMS 602-13 - Specification for Masonry Structures.

C. ASTM International (ASTM):

1. A951/A951M-14 - Steel Wire for Masonry Joint Reinforcement.
2. C62-13a - Building Brick (Solid Masonry Units Made from Clay or Shale).
3. C67-14 - Sampling and Testing Brick and Structural Clay Tile.
4. C216-15 - Facing Brick (Solid Masonry Units Made From Clay or Shale).
5. ASTM C270 - Standard Specification for Mortar for Unit Masonry.
6. ASTM C1714/C1714M - Standard Specification for Preblended Dry Mortar Mix for Unit Masonry.
7. D1056-14 - Flexible Cellular Materials - Sponge or Expanded Rubber.
8. D2240-05(2010) - Rubber Property-Durometer Hardness.
9. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.

D. American Welding Society (AWS):

1. D1.4/D1.4M-11 - Structural Welding Code - Reinforcing Steel.

E. Brick Industry Association (BIA):

1. TN 11B-88 - Guide Specifications for Brick Masonry, Part 3.

F. Federal Specifications (Fed. Spec.):

1. FF-S-107C(2) - Screws, Tapping and Drive.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies.
    a. Provide elevations indicating steel reinforcing bar placement.
    b. Provide details indicating steel reinforcing bar sizes, placement, bends, and laps dimensions.
2. Special masonry shapes, profiles, and placement.
3. Masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Installation instructions.
3. Recommendations and requirements for proper storage and handling.

D. Samples:
1. Face brick: Sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
2. Dimensions: All unit sizes are Nominal Dimensions.
3. Concrete masonry units, when exposed in finish work.
4. Anchors and Ties: Each type.
5. Joint Reinforcing: 1200 mm (48 inches) long each type.

E. Test reports: Certify products comply with specifications.

F. Certificates: Certify products comply with specifications.
1. Face brick.

1.5 QUALITY ASSURANCE

A. Welders and Welding Procedures Qualifications: AWS D1.4/D1.4M.

B. Mockups:
1. Before starting masonry, build a mockup panel minimum 1800 mm by 1800 mm (6 feet by 6 feet) with 600 mm (24 inch) 90 degree return for outside corner.
    a. Use masonry units from random cubes of units delivered on site.
    b. Include structural backup, reinforcing, ties, and anchors.
2. Mockup panel approved by Contracting Officer's Representative set workmanship and aesthetic quality for masonry work.
3. Clean sample panel to test cleaning methods.
4. Remove mockup panel when directed by Contracting Officer's Representative.

C. Follow hot weather and cold weather requirements in the masonry code and specifications, TMS 402 and TMS 602.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products above grade, protected from contamination.

B. Protect products from damage during handling and construction operations.

C. Deliver masonry materials to the site on quality wooden pallets with appropriate in-plant packaging for safe transit and handling. Store pallets in single stacks on level ground and protect from weather.

D. Deliver mortar materials in original unbroken, undamaged packages with labels intact and visible.

1.8 FIELD CONDITIONS

A. Hot and Cold Weather Requirements: Comply with ACI 530.1/ASCE 6/TMS 602.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Provide a copy of the project specific manufacturer's warranty which addresses the term of the warranty period (in years), the acceptable standards of production/performance and the agreed upon action for products that fail to meet the standards of production/performance within the specified warranty period.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Basis of Design: Subject to compliance with the requirements, provide ACME BRICK, “Glacier White” Modular, Smooth Texture or approved equal.

B. Provide each product from one manufacturer and from one production run .

2.2 UNIT MASONRY PRODUCTS

A. Brick:

1. Face Brick:

a. ASTM C216, Grade SW, Type FBS.

b. Brick when tested according to ASTM C67: Classified slightly efflorescent or better.

c. Size:

1) Modular.

2. One Face Exposed: Grade S, Type I.
3. Two Faces Exposed: Grade S, Type II.

B. Concrete Masonry Units (CMU):

1. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
   a. Unit Weight: Normal weight.
2. Sizes: Modular, 200 mm by 400 mm (8 inches by 16 inches) nominal face dimension; thickness as indicated on drawings.
3. For molded faces used as a finished surface, use concrete masonry units with uniform fine to medium surface texture unless specified otherwise.

2.3 ANCHORS, TIES, AND REINFORCEMENT

A. Steel Reinforcing Bars: ASTM A615/A615M; Grade 60, deformed bars.

B. Joint Reinforcement:

1. Form from wire complying with ASTM A951/A951M.
2. Hot dipped galvanized after fabrication.
3. Width of joint reinforcement 40 mm (1.6 inches) less than nominal thickness of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement minimum 3000 mm (10 feet) long, factory cut.
6. Joint reinforcement with crimp formed drip is not acceptable.
7. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
8. Ladder Design:
   a. Longitudinal wires deformed // 4 mm (0.16 inch) // 5 mm (0.20 inch) diameter wire //.
   b. Cross wires // 2.6 mm (0.10 inch) // 4 mm (0.16 inch) diameter //.
9. Trussed Design:
   a. Longitudinal and cross wires minimum 4 mm (0.16 inch nominal) diameter.
   b. Longitudinal wires deformed.
10. Multiple Wythes and Cavity Wall Ties:
    a. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
    b. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe minimum 75 mm (3 inches) spaced 400 mm on center (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).

11. Adjustable Cavity Wall Ties:
    a. Adjustable wall ties may be furnished at Contractor's option.
    b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.
    c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
    d. Form one piece to rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into bed joint 50 mm (2 inches).
    e. Form other piece to 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having 75 mm (3 inch) long bent section for engaging 105 mm (4-1/8 inch) wide piece to form adjustable connection.

C. Wall Ties, (Mesh or Wire):
    1. Mesh wall ties formed of ASTM A1064/A1064M, W0.5, 2 mm, (0.08 inch) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
    2. Rectangular wire wall ties formed of W1.4, 3 mm, (0.12 inch) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

D. Corrugated Wall Tie:
    1. Form from 1.5 mm (0.06 inch) thick corrugated, galvanized steel 30 mm (1-1/4 inches) wide by lengths to extend minimum 100 mm (4 inches) into joints of masonry plus 38 mm (1-1/2 inch) turn-up.
    2. Provide 5 mm (3/16 inch) hole in turn-up for fastener attachment.

E. Adjustable Steel Column Anchor:
    1. Two piece anchor consisting of a 6 mm (1/4 inch) diameter steel rod to be welded to steel with offset ends, rod to permit 100 mm (4 inch) vertical adjustment of wire anchor.
    2. Triangular shaped wire anchor 100 mm (4 inches) wide formed from 5 (3/16 inch) diameter galvanized wire, to extend minimum 75 mm (3 inches) into joints of masonry.

F. Adjustable Steel Beam Anchor:
    1. Z or C type steel strap, 30 mm (1 1/4 inches) wide, 3 mm (1/8 inch) thick.
    2. Flange hook minimum 38 mm (1 1/2 inches) long.
    3. Length to embed in masonry minimum 50 mm (2 inches) in 100 mm (4 inch) nominal thick masonry and 100 mm (4 inches) in thicker masonry.
    4. Bend masonry end minimum 40 mm (1 1/2 inches).

G. Ridge Wall Anchors:
    1. Form from galvanized steel minimum 25 mm (1 inch) wide by 5 mm (3/16 inch) thick by 600 mm (24 inches) long, plus 50 mm (2 inch) bends.
    2. Other lengths as indicated on drawings.

2.4 ACCESSORIES

A. Shear Keys:
   1. Solid extruded cross-shaped section of rubber, neoprene, or polyvinyl chloride, with durometer hardness of approximately 80 when tested according to ASTM D2240, and minimum shear strength of 3.5 MPa (500 psi).
   2. Shear Key Dimensions: Nominal 70 mm by 8 mm for long flange and 38 mm by 16 mm for short flange (2-3/4 inches by 5/16 inch for long flange, and 1-1/2 inches by 5/8 inch for short flange).

B. Weeps:
   1. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
   2. Weep Hole: Flexible PVC louvered configuration with rectangular closure strip at top.

C. Cavity Drain Material: Open mesh polyester sheets or strips to prevent mortar droppings from clogging the cavity.

D. Preformed Compressible Joint Filler:
   1. Thickness and depth to fill joint.
   2. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
   3. Non-Combustible Type: ASTM C612, Type 5, Max. Temp.1800 degrees F.

E. Box Board:
   1. Mineral Fiber Board: ASTM C612, Type 1.
   2. 25 mm (1 inch) thickness.
   3. Other spacing material having similar characteristics is acceptable subject to Contracting Officer's Representative's approval.

F. Masonry Cleaner:
   1. Detergent type cleaner selected for each type masonry.
   2. Acid cleaners are not acceptable.
   3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.

G. Fasteners:
   1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
   2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
   3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.

H. Welding Materials: AWS D1.4/D1.4M, type to suit application.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings .

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Keep finish work free from mortar smears or spatters, and leave neat and clean.

C. Wall Openings:
1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
2. When items are not available when walls are built, prepare openings for subsequent installation.

D. Tooling Joints:
1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
2. Tool while mortar is soft enough to be compressed into joints and not raked out.
3. Finish joints in exterior face masonry work with jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
4. Tool Exposed interior joints in finish work concave unless specified otherwise.

E. Partition Height:
1. Extend partitions minimum 100 mm (4 inches) above suspended ceiling or to overhead construction where no ceiling occurs.

F. Lintels:
1. Lintels are not required for openings less than 1000 mm (40 inches) wide that have hollow metal frames.
2. Openings 1025 mm (41 inches) wide to 1600 m (63 inches) wide without structural steel lintel or frames, require lintel formed of concrete masonry lintel or bond beam units // or structural facing tile lintel units // filled with grout and reinforced with one No. 16 (No. 5) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.
3. Precast concrete lintels of 25 MPa (3,000 psi) concrete, same thickness as partition, and with one No. 16 (No. 5) deformed bar top and bottom for each 100 mm (4 inches) of nominal thickness, is acceptable in lieu of reinforced CMU masonry lintels.
4. Use steel lintels, for openings greater than 1600 m (63 inches) wide, brick masonry openings, and elevator openings unless shown otherwise.
5. Doors having overhead concealed door closers require steel lintel, and pocket for closer box.
6. Lintel Bearing Length: Minimum 100 mm (4 inches) at both ends.

G. Before connecting new masonry with previously laid masonry, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.

H. Chases:

1. Do not install chases in masonry walls and partitions exposed to view in finished work, including painted or coated finishes on masonry.
2. Masonry 100 mm (4 inch) nominal thick may have electrical conduits 25 mm (1 inch) or less in diameter when covered with soaps, or other finishes.
3. Fill recess chases after installation of conduit, with mortar and finish flush.
4. When pipes or conduits, or both occur in hollow masonry unit partitions retain minimum one web of hollow masonry units.

I. Wetting and Wetting Test:
1. Test and wet brick and clay tile according to BIA TN 11B.
2. Do not wet concrete masonry units or glazed structural facing tile before laying.

J. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.

K. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and other reasonable temporary construction loads.

L. Minimum Curing Times Before Removing Shores and Forms:
1. Girders and Beams: 10 days.
2. Slabs: 7 days.
3. Reinforced Masonry Soffits: 7 days.

3.2 INSTALLATION - ANCHORAGE

A. Veneer to Framed Walls:
1. Install adjustable veneer anchors.
2. Fasten anchor to stud through sheathing with self-drilling and tapping screw, one at both ends of loop type anchor.
3. Space anchors maximum 400 mm (16 inches) on center vertically at each stud.

B. Veneer to Concrete Walls:
1. Anchor new masonry facing to existing concrete with adjustable cavity wall ties spaced at 400 mm, (16 inches) maximum vertical intervals, and at 400 mm (16 inches) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.

C. Masonry Facing to Backup and Cavity Wall Ties:
1. Use individual ties for new work.
2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 400 mm (16 inches) horizontally.
3. At openings, provide additional ties spaced maximum 900 mm (36 inches) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.

4. Anchor new masonry facing to existing masonry with adjustable cavity wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.
5. Option: Install joint reinforcing for multiple wythes and cavity wall ties spaced maximum 400 mm (16 inches) vertically.
6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals maximum 400 mm (16 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

3.3 INSTALLATION - REINFORCEMENT

A. Joint Reinforcement:
   1. Install joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
   2. Reinforcing is acceptable in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
   3. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
   4. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry.
B. Steel Reinforcing Bars:
   1. Install reinforcing bars in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for horizontal reinforcement. Install in wall cavities of reinforced masonry walls where indicated on drawings.
   2. Stack Bond:
      a. Locate additional joint reinforcement in vertical and horizontal joints as indicated on drawings.
      b. Anchor vertical reinforcement into foundation or wall or bond beam below.
      c. Provide temporary bracing for walls over 8 feet tall until permanent horizontal bracing is completed.
   3. Grout openings:
      a. Locate 75 mm by 75 mm (3 inches. by 3 inches.) min. cleanout holes at location of vertical reinforcement.
      b. Keep grout space clean of mortar accumulation and debris. Clean as work progresses and immediately before grouting.

3.4 INSTALLATION - BRICK EXPANSION AND CMU CONTROL JOINTS

A. Provide brick expansion joint (EJ) and CMU control joints (CJ) where indicated on drawings.

B. Keep joint free of mortar and other debris.

C. Joints Occur In Masonry Walls:

1. Install preformed compressible joint filler in brick wythe.

D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.

E. Interrupt joint reinforcement at expansion and control joints.

F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.5 INSTALLATION - BUILDING EXPANSION AND SEISMIC JOINTS

A. Keep expansion and seismic joints open and free of mortar. Remove mortar and other debris.

B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.

C. Fill opening in exposed face of expansion and seismic joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.6 INSTALLATION - ISOLATION JOINT

A. Where full height walls and partitions lie parallel or perpendicular to and under structural beams and shelf angles, provide minimum 9 mm (3/8 inch) separation between walls and partitions and bottom of beams and shelf angles.

B. Insert continuous full width strip of non-combustible type compressible joint filler.

C. Fill opening in exposed face of isolation joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.7 INSTALLATION - BRICKWORK

A. Lay clay brick according to BIA TN 11B.

B. Laying:

1. Lay brick in one-half running bond with bonded corners, unless indicated otherwise. // Match bond of existing building on alterations and additions. //
2. Maintain bond pattern throughout.
3. Do not use brick smaller than half-brick at any angle, corner, break, and jamb.
4. Where length of cut brick is greater than one half length, maintain vertical joint location.
5. Lay exposed brickwork joints symmetrical about center lines of openings.
6. Do not structurally bond multi-wythe brick walls, unless indicated on drawings.
7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
8. Lay brick for sills with wash and drip.
9. Build solid brickwork as required for anchorage of items.

C. Joints:
   1. Exterior And Interior Joint Widths: Lay for three equal joints in 200 mm (8 inches) vertically, unless shown otherwise.
   2. Rake joints for pointing with colored mortar when colored mortar is not full depth.

D. Weep Holes:
   1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in wall.
   2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
   3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.
   4. Insulated Cavity Type Exterior Walls:
      a. Install insulation against cavity face of inner masonry wythe.
      b. Place insulation between rows of ties or joint reinforcing. Adhere insulation to masonry surface with a bonding agent as recommended by insulation manufacturer.
      c. Lay outer masonry wythe up with air space between insulation and masonry units.
   5. Veneer Framed Walls:
      a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.
      b. Keep air space clean of mortar accumulations and debris.

3.8 INSTALLATION - CONCRETE MASONRY UNITS

A. Types and Uses:
   1. Provide special concrete masonry shapes as required,. Provide solid concrete masonry units, where full units cannot be installed, or where needed for anchorage of accessories.
   2. Provide solid load-bearing concrete masonry units or grout cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
   3. Do not install brick jambs in exposed finish work.
   4. Install concrete building brick only as filler in backup material where not exposed.
   5. Construct fire resistance in fire rated partitions meeting fire ratings indicated on drawings.

B. Laying:
   1. Lay concrete masonry units with 9 mm (3/8 inch) joints, with a bond overlap of minimum 1/4 of unit length, except where stack bond is indicated on drawings.
   2. Do not wet concrete masonry units before laying.
   3. Bond external corners of partitions by overlapping alternate courses.

4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill voids with mortar or grout.
7. Provide 6 mm (1/4 inch) open joint for sealant between existing construction, exterior walls, concrete work, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings minimum 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge masonry against steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes indicated on drawings.
12. At time of placement, ensure steel reinforcement is free of loose rust, mud, oil, and other contamination capable of affecting bond.
13. Place steel reinforcement at spacing indicated on drawings before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place vertically by centering clips, caging devices, tie wire, or other approved methods.
16. Support vertical bars near each end and at maximum 192 bar diameter on center.
17. Splice reinforcement or attach reinforcement to dowels by placing in contact and securing with wire ties.
18. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
19. Grout cells of concrete masonry units, containing reinforcing bars, solid as specified.
20. Install cavity and joint reinforcement as masonry work progresses.
21. Rake joints 6 to 10 mm (1/4 to 3/8 inch) deep for pointing with colored mortar when colored mortar is not full depth.

3.9 POINTING

A. Fill joints with pointing mortar using rubber float trowel to apply mortar solidly into raked joints.
B. Wipe off excess mortar from joints of glazed masonry units with dry cloth.
C. Tool exposed joints to smooth concave joint.
D. At joints with existing work, match existing joint.

3.10 GROUTING

A. Preparation:
   1. Clean grout space of mortar droppings before placing grout.
   2. Close cleanouts.
   3. Install vertical solid masonry dams across grout space for full height of wall at intervals of maximum 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
   4. Verify reinforcing bars are installed as indicated on drawings.

B. Placing:
   1. Place grout in grout space in lifts as specified.
   2. Consolidate each grout lift after free water has disappeared but before plasticity is lost.
   3. Do not slush with mortar or use mortar with grout.
   4. Interruptions:
      a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inches) below top of last masonry course.
      b. Grout from dam to dam on high lift method.
      c. Longitudinal run of masonry may be stopped off only by raking back one-half masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:
   1. Consolidate by puddling with grout stick during and immediately after placing.
   2. Grout cores of concrete masonry units containing reinforcing bars solid as masonry work progresses.

D. Low Lift Method:
   1. Construct masonry to 1.5 m (5 feet) maximum height before grouting.
   2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:
   1. Do not pour grout until masonry wall has cured minimum of 4 hours.
   2. Place grout in 1.5 m (5 feet) maximum lifts.
   3. Exception:
      a. Where following conditions are met, place grout in 3.86 m (12.67 feet) maximum lifts.
      b. Masonry has cured minimum of 4 hours.
      c. Grout slump is maintained between 250 and 275 mm (10 and 11 inches).
      d. No intermediate reinforced bond beams are placed between top and bottom of grout lift.
   4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into preceding lift.

3.11 PLACING REINFORCEMENT

A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on drawings or approved submittal drawings, or bars with reduced cross-section due to excessive rusting or other causes.

B. Position reinforcement accurately at spacing indicated on drawings. Support and secure vertical bars against displacement. Install horizontal reinforcement as masonry work progresses. Where vertical bars are shown in close proximity, provide clear distance between bars of minimum one bar diameter or 25 mm (1 inch), whichever is greater.

C. For columns, piers and pilasters, maintain clear distance between vertical bars as indicated on drawings, minimum 1.5 bar diameters or 38 mm (1-1/2 inches), whichever is greater. Provide lateral ties as indicated on drawings.

D. Splice reinforcement bars only where indicated on drawings, unless approved by Contracting Officer's Representative. Provide lapped splices. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.

E. Provide minimum lap as indicated on approved submittal drawings, or if not indicated, minimum 48 bar diameters.

F. Weld splices where indicated on drawings according to AWS D1.4/D1.4M.

G. Embed metal ties in mortar joints as work progresses, with minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.

H. Embed prefabricated horizontal joint reinforcement as work progresses, with minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement minimum 150 mm (6 inches) at ends. Use prefabricated “L” and “T” sections to provide continuity at corners and intersections. Cut and bend joint reinforcement for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.

I. Anchoring: Anchor reinforced masonry work to supporting structure as indicated on drawings.

J. Anchor reinforced masonry walls at intersections with non-reinforced masonry.

3.12 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

A. Do not wet concrete masonry units (CMU).

B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to distance behind face equal to thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed 9 mm (3/8 inch) joint widths.

C. Where solid CMU units are shown, lay with full mortar head and bed joints.

D. Walls:

1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontally reinforced beams (bond beams) are indicated on drawings, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Columns, Piers and Pilasters:
1. Use CMU units of size, shape and number of vertical core spaces shown. If not shown, use units which provide minimum clearances and grout coverage for number and size of vertical reinforcement bars shown.
2. Provide pattern bond shown, or if not shown, alternate head joints in vertical alignment.

F. Grouting:
1. Use fine grout for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use coarse grout for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At Contractor’s option, use either low-lift or high-lift grouting techniques.

G. Low-Lift Grouting:
1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 sq. mm (8 sq. inches) in vertical cores to be grouted.
2. Place vertical reinforcement before grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).
3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 feet) height, or if bond beam occurs below 1.5 m (5 feet) height, stop pour 38 mm (1-1/2 inches) below top of bond beam.
4. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.

5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as indicated on drawings. Place grout in bond beam course before filling vertical cores above bond beam.

H. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 sq. mm (10 sq. inches), respectively.
2. Provide cleanout holes in first course at vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour before placing grout.
5. Limit grout lifts to maximum height of 1.5 m (5 feet) and grout pour to maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, to suit application. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosen before mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.
8. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
9. Place horizontal beam reinforcement as masonry units are laid.
10. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
11. Where lateral ties are shown in contact with vertical reinforcement bars, embed additional lateral tie reinforcement in mortar joints. Place as indicated on drawings, or if not shown, provide as required to prevent grout blowout or rupture of CMU face shells, but provide minimum 4.1 mm diameter (0.16 inch) wire ties spaced 400 mm (16 inches) on center for members with 500 mm (20 inches) or less side dimensions, and 200 mm (8 inches) on center for members with side dimensions exceeding 500 mm (20 inches).
12. Preparation of Grout Spaces: Before grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.

13. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
14. Limit grout pours to sections which can be completed in one working day with maximum one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow minimum 30 minutes and maximum one hour between lifts. Mechanically consolidate each lift.
15. Place grout in lintels or beams over openings in one continuous pour.
16. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.
17. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

3.13 CONSTRUCTION TOLERANCES

A. Lay masonry units plumb, level and true to line within tolerances according to ACI 530.1/ASCE 6/TMS 602 and as follows:

B. Maximum variation from plumb:
   1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
   2. In 6000 mm (20 feet) - 9 mm (3/8 inch).
   3. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).

C. Maximum variation from level:
   1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
   2. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).

D. Maximum variation from linear building lines:
   1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
   2. In 12,000 mm (40 feet) or more - 19 mm (3/4 inch).

E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
   1. Minus 6 mm (1/4 inch).
   2. Plus 13 mm (1/2 inch).

F. Maximum variation in prepared opening dimensions:
   1. Accurate to minus 0 mm (0 inch).
   2. Plus 6 mm (1/4 inch).

3.14 CLEANING AND REPAIR

A. General:
   1. Clean exposed masonry surfaces on completion.
   2. Protect adjoining construction materials and landscaping during cleaning operations.
   3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
   4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:
   1. First wet surfaces with clean water, then wash down with detergent solution. Do not use muriatic acid.
   2. Brush with stiff fiber brushes while washing, and immediately wash with clean water.
   3. Remove traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:
   1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
   2. Allow mud to dry before brushing.

D. Glazed Structural Facing Tile or Brick Units:
   1. Clean as recommended manufacturer. Protect light colored mortar joints from discoloration during cleaning.
   2. Use on solid masonry walls.
   3. Prepare schedule of test locations.

- - E N D - -

SECTION 04 72 00
CAST STONE MASONRY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies manufactured concrete units and trim to simulate a natural stone.

B. Installation of cast stone units.

1.2 RELATED WORK

A. Section 04 05 13, MASONRY MORTARING, Setting and pointing mortar.

B. Section 07 92 00, JOINT SEALANTS, Joint sealant and application.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval.

B. Material Test Reports: For each mix required to produce cast stone, based on testing according to ASTM C1364.

1. Provide test reports based on testing within previous six months.

C. Samples:

1. Cast stone, sample panel, size 100 by 300 by 300 mm (4 by 12 by 12 inches) each color and finish.
2. Show finish on two 100 mm (4-inch) edges and 300 by 300 mm (12 by 12 inch) surface.

D. Shop Drawings:

1. Cast stone showing exposed faces, profiles, cross sections, anchorage, reinforcing, jointing and sizes.
2. Setting drawings with setting mark.

E. Certificates: Test results indicating that the cast stone meets specification requirements and proof of plant certification.

F. Submit manufacturers test results of cast stone previously made by manufacturer.

G. Laboratory Data: Description of testing laboratories facilities and qualifications of its principals and key personnel.

H. List of jobs furnished by the manufacturer, which were similar in scope and at least three (3) years of age.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING

A. Store cast stone under waterproof covers on planking clear of ground.

B. Protect from handling, dirt, stain, and water damage.

C. Mark production units with the identification marks as shown on the shop drawings.

D. Package units and protect them from staining or damage during shipping and storage.

1. Lift with wide-belt slings; do not use wire rope or ropes that might cause staining. Move cast stone units if required, using dollies with wood supports.
2. Store cast stone units on wood skids or pallets with nonstaining, waterproof covers, securely tied. Arrange to distribute weight evenly and to prevent damage to units. Ventilate under covers to prevent condensation.

E. Store cementitious materials on elevated platforms, under cover, and in a dry location. Do not use cementitious materials that have become damp.

F. Store mortar aggregates where grading and other required characteristics can be maintained and contamination can be avoided.

G. Provide an itemized list of product to support the bill of lading.

1.5 WARRANTY

A. Warranty exterior masonry walls against moisture leaks, any defects and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be two years.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by the basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.

B. Cast Stone Institute Technical Manual and Cast Stone Institute standard specifications.

C. ASTM International(ASTM):

A167-99(R2009).....Stainless and Heat Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A615/A615M-20 .....Standard Specification for Deformed and Plain Carbon Steel Bars for Concrete Reinforcement

A1064/A1064M-18a .....Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete

C33/C33M-18.....Standard Specification for Concrete Aggregates

C150/C150M-20.....Standard Specification for Portland Cement

C503/C503M-15.....Standard Specification for Marble Dimension Stone (Exterior)

C568/C568M-15.....Standard Specification for Limestone Dimension Stone

C615/C615M-18e1.....Standard Specification for Granite Dimension Stone

C616/C616M-15.....Standard Specification for Quartz-Based Dimension Stone

C979/C979M-16.....Standard Specification for Pigments for Integrally Colored Concrete

C1194-19 .....Standard Test Method for Compressive Strength of Architectural Cast Stone

C1195-19a .....Standard Test Method for Absorption of Architectural Cast Stone

C1364-19 .....Standard Specification for Architectural Cast Stone.

D2244-16 .....Standard Practice for Calculation of Color Differences from Instrumentally Measured Color Coordinates.

1.7 QUALITY ASSURANCE

A. The Manufacturer:
   1. Must have 5 years minimum continuous operating experience and have facilities for manufacturing cast stone as described herein. Manufacturer shall have sufficient plant facilities to produce the shapes, quantities and size of cast stone required in accordance with the project schedule.
   2. Must be a member of the Cast Stone Institute.
   3. Must have a certified plant (certification by the Cast Stone Institute).

B. Stone setter: Must have 5 years' experience setting cast or natural building stone.

C. Testing: One (1) sample from production units may be selected at random from the field for each 500 cubic feet (14 meters squared) delivered to the job:
   1. Three (3) field cut cube specimens from each of these sample shall have an average minimum compressive strength of not less than 85 percent with no single specimen testing less than 75 percent of design strength as specified.
   2. Three (3) field cut cube specimens from each of these samples shall have an average maximum cold-water absorption of 6 percent.
   3. Field specimens shall be tested in accordance with ASTMC 1194 and C 1195.
   4. Manufacturer shall submit a written list of projects similar and at least three (3) years of age, along with owner, architect and contractor references.

1.8 MANUFACTURING TOLERANCES

A. Cross section dimensions shall not deviate by more than + 1/8 inch (3 mm) from approved dimension.

B. Length of units shall not deviate by more than length /360 or + 1/8 inch (3mm), whichever is greater, not to exceed + 1/4 inch (6 mm). Maximum length of any unit shall not exceed 15 times the average thickness of such unit unless otherwise agreed by the manufacturer.

C. Warp bow or twist of units shall not exceed length/360 or + 1/8 inch (3 mm), whichever is greater.

D. Location of dowel holes, anchor slots, flashing grooves, false joints and similar features – On formed sides of unit, 1/8 inch (3 mm), on unformed sides of unit, 3/8 inch (9 mm) maximum deviation.

1.9 MOCK-UP

A. Provide full size unit(s) for use in construction of sample wall. The mock-up becomes the standard of workmanship for the project.

PART 2 - PRODUCTS

2.1 ARCHITECTURAL CAST STONE

A. Basis of Design: Subject to compliance with requirements, provide Old Castle Architectural; Echelon “Cordova Stone” or approved equal.
   1. Modular Precast Veneer Units:
      a. Size: 4” depth x 8” height x 24” length
      b. Texture: “Ground Face”
      c. Color: “Buff”
   2. Custom Precast Trim Units:
      a. Size: See Drawings
      b. Texture: “Ground Face”
      c. Color: “Buff”

B. Comply with ASTM C 1364

C. Physical properties: Provide the following:
   1. Compressive Strength – ASTM C 1194: 6,500 psi (45 Mpa) minimum for products at 28 days.
   2. Absorption – ASTM C 1195: 6 percent maximum by the cold water method, or 10 percent maximum by the boiling method for products as 28 days.
   3. Air Content – ASTM C173 or C231, for wet cast product shall be 4-8 percent for units exposed to freeze-thaw environments. Air entrainment is not required for vibrant dry tamp (VDT) products.
   4. Freeze thaw - ASTM C 1364L The cumulative percent weight loss (CPWL) shall be less than 5 percent after 300 cycles of freezing and thawing.
   5. Linear Shrinkage - ASTM C 426L Shrinkage shall not exceed 0.065 percent.

2.2 RAW MATERIALS

A. Portland cement – Type I or Type III, white and/or grey, ASTM C 150.

B. Hydrated Lime: ASTM C207, Type S.

C. Coarse aggregates – Granite, quartz or limestone, ASTM C 33, except for gradation, and are optional for the vibrant dry tamp (VDT) casting method.

D. Fine aggregates – Manufactured or natural sands, ASTM C 33, except for gradation.

E. Colors – Inorganic iron oxide pigments, ASTM C 979 except that carbon black pigments shall not be used.

F. Admixtures- Comply with the following:
   1. ASTM C 260 for air-entraining admixtures.
   2. ASTM C 494/C 495 M Types A-G for water reducing, retarding, accelerating and high range admixtures.

3. Other admixtures: integral water repellents and other chemicals, for which no ASTM Standard exists, shall be previously established as suitable for use in concrete by proven field performance or through laboratory testing.
4. ASTM C 618 mineral admixtures of dark and variable colors shall not be used in surfaces intended to be exposed to view.
5. ASTM C 989 granulated blast furnace slag may be used to improve physical properties. Tests are required to verify these features.

G. Water – Potable

H. Reinforcing bars:
1. ASTM A 615/A 615M. Grade 40 or 60 steel galvanized or epoxy coated when cover is less than 1.5 inch (37 mm).
2. Welded Wire Fabric: ASTM A 1064 where applicable for wet cast units.

I. All anchors, dowels and other anchoring devices and shims shall be standard building stone anchors commercially available in a non-corrosive material such as zinc plated, galvanized steel, brass, or stainless steel Type 302 or 304.

2.3 COLOR AND FINISH

A. See Paragraph 2.1,A.

B. All surfaces intended to be exposed to view shall have a fine-grained texture similar to natural stone, with no air voids in excess of 1/32 inch (0.8 mm) and the density of such voids shall be less than 3 occurrences per any 1 inch (25 mm) and not obvious under direct daylight illumination at a 5 feet (1.5 meters) distance.

C. Units shall exhibit a texture approximately equal to the approved sample when viewed under direct daylight illumination at a 10 feet (3 meters) distance.

D. ASTM D 2244 permissible variation in color between units of comparable age subjected to similar weathering exposure.
1. Total color difference – not greater than 6 units.
2. Total hue difference-not greater than 2 units.

2.4 REINFORCING

A. Reinforce the units as required by the drawings and for safe handling and structural stress.
1. Minimum reinforcing shall be 0.25 percent of the cross section area.

B. Reinforcement shall be non-corrosive where faces exposed to weather are covered with less than 1.5inch (38 mm) of concrete material. All reinforcement shall have minimum coverage of twice the diameter of the bars.
1. Deformed steel bars complying with ASTM A615/A615M, Grade 40. Use galvanized or epoxy-coated reinforcement when covered with less than 1-1/2 inches of cast stone material.
   a. Epoxy Coating: ASTM A775/A775M.

b. Galvanized Coating: ASTM A767/A767M.

2. Plain-Steel, Welded-Wire Reinforcement: ASTM A1064/A1064M, plain, fabricated from as-drawn steel wire into flat sheets.
3. Galvanized-Steel, Welded-Wire Reinforcement: ASTM A1064/A1064M, plain, fabricated from galvanized-steel wire into flat sheets.
4. Fiber Reinforcement: ASTM C1116/C1116M.

C. Minor chipping resulting from shipment and delivery shall not be grounds for rejection. Minor chips shall not be obvious under direct daylight illumination from a 20 foot (6 meter) distance.

D. The occurrence of crazing or efflorescence shall not constitute a cause for rejection.

E. Remove cement film, if required, from exposed surface prior to packaging for shipment.

2.5 CURING

A. Cure units in a warm curing chamber 100 degrees F (37.8 degrees C) at 95 percent relative humidity for approximately 12 hours, or cure in a 95 percent moist environment at a minimum 70 degrees F (21.1 degrees C) for 16 hours after casting. Additional yard curing at 95 percent relative humidity shall be 350-degree-days (i.e. 7 days @ 50 degrees F (10.0 degrees C) or 5 days @ 70 degrees F (21.0 degrees C) prior to shipping. Form cured units shall be protected from moisture evaporation with curing blankets or curing compounds after casting.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Installing contractor shall check cast stone materials for fit and finish prior to installation. Do not set unacceptable units.

3.2 SETTING TOLERANCES

A. Comply with Cast Stone Institute Technical Manual.

B. Set stones 1/8 inch (3 mm) or less, within the plane of adjacent units.

C. Joints, plus – 1/6 inch (1.5 mm), minus – 1/8 inch (3 mm).

3.3 JOINTING

A. Joint size:

1. At stone/brick joints 3/8 inch (9.5 cm).
2. At stone/stone joints in vertical position 1/4 inch (6 mm) (3/8 inch (9.5 mm) optional).
3. Stone/stone joint exposed on top 3/8 inch (.5 mm).

B. Joint Materials:

1. Mortar, Type N, ASTM C 270.
2. Use a full bed of mortar at all bed joints.
3. Flush vertical joints full with mortar.
4. Leave all joints with exposed tops or under relieving angles open for sealant.
5. Leave head joints in coping and projecting components open for sealant.

C. Location of joints:

1. As shown on shop drawings.
2. At control and expansion joints unless otherwise shown.

3.4 SETTING

A. Drench units with clean water prior to setting.

B. Fill dowel holes and anchor slots completely with mortar or non-shrink grout.

C. Set units in full bed of mortar, unless otherwise detailed.

D. Rake mortar joints 3/4 inch (18 mm) for pointing.

E. Remove excess mortar from unit faces immediately after setting.

F. Tuck point unit joints to a flush profile aligning with surrounding masonry units.

3.5 JOINT PROTECTION

A. Comply with requirements of Section 07 92 00, JOINT SEALANTS.

B. Prime ends of units, insert properly sized backing rod and install required sealant.

C. Provide sealant joints at head joints of copings and other horizontal surfaces; at expansion, control, and pressure-relieving joints; and at locations indicated.

1. Keep joints free of mortar and other rigid materials.
2. Build in compressible foam-plastic joint fillers where indicated.
3. Form joint of width indicated, but not less than [3/8 inch] [1/2 inch] <Insert dimension>.
4. Prime cast stone surfaces to receive sealant and install compressible backer rod in joints before applying sealant unless otherwise indicated.

D. Prepare and apply sealant of type and at locations indicated to comply with applicable requirements in Section 079200 "Joint Sealants."

3.6 ADJUSTING AND CLEANING

A. Remove and replace stained and otherwise damaged units and units not matching approved Samples. Cast stone may be repaired if methods and results are approved by Architect.

B. Replace units in a manner that results in cast stone matching approved Samples, complying with other requirements, and showing no evidence of replacement.

C. In-Progress Cleaning: Clean cast stone as work progresses.

1. Remove mortar fins and smears before tooling joints.
2. Remove excess sealant immediately, including spills, smears, and spatter.

D. Final Cleaning: After mortar is thoroughly set and cured, clean exposed cast stone as follows:

1. Remove large mortar particles by hand with wooden paddles and nonmetallic scrape hoes or chisels.
2. Test cleaning methods on sample; leave one sample uncleaned for comparison purposes. Obtain Architect's approval of sample cleaning before proceeding with cleaning of cast stone.
3. Protect adjacent surfaces from contact with cleaner by covering them with liquid strippable masking agent or polyethylene film and waterproof masking tape.

4. Wet surfaces with water before applying cleaners; remove cleaners promptly by rinsing thoroughly with clear water.
5. Clean cast stone by methods described in Cast Stone Institute Technical Bulletin #39.

3.7 REPAIR AND CLEANING

A. Repair chips with touchup materials furnished by manufacturer.

B. Saturate units to be cleaned prior to applying an approved masonry cleaner.

C. Consult with manufacturer for appropriate cleaners.

3.8 INSPECTION AND ACCEPTANCE

A. Inspect finished installation according to Bulletin #36 published by the Cast Stone Institute.

- - - E N D - - -

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Structural steel shapes, plates, and bars.
2. Structural pipe.
3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

A. Steel Decking: Section 05 31 00, STEEL DECKING.

B. Steel Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.

C. Steel Support: Section 10 13 00, DIRECTORIES.

D. Painting: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Institute of Steel Construction (AISC):

1. AISC Manual - Steel Construction Manual, 16th Ed.
2. 360-22: Specification for Structural Steel Buildings.

C. The American Society of Mechanical Engineers (ASME):

1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.

D. American Welding Society (AWS):

1. D1.1/D1.1M-15 - Structural Welding Code - Steel.

E. ASTM International (ASTM):

1. A36/A36M-14 - Carbon Structural Steel.
2. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
3. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
4. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
5. A992/A992M-15 - Structural Shapes.
6. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
7. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions

F. Steel Structures Painting Council (SSPC)

G. Occupational Safety and Health Administration (OSHA):

1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.

C. Test Reports: Certify products comply with specifications.
   1. Welders' qualifying tests.

D. Certificates: Certify each product complies with specifications.
   1. Structural steel.
   2. Steel connections.
   3. Welding materials.
   4. Shop coat primer paint.

E. Qualifications: Substantiate qualifications comply with specifications.
   1. Fabricator // with project experience list //.
   2. Installer // with project experience list //.
   3. Welders and welding procedures.

F. Delegated Design Drawings and Calculations: Signed and sealed by responsible Architect/Engineer.
   1. Connection calculations.

G. Record Surveys: Signed and sealed by responsible surveyor or engineer.

1.5 QUALITY ASSURANCE

A. Fabricator Qualifications: AISC Quality Certification participant designated as AISC Certified Plant, Category STD.
   1. Regularly fabricates specified products.
   2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.

B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC-Certified Erector, Category ACSE.
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.

C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.

D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where project is located.

B. Design structural steel framing connections complying with specified performance:

1. Load Capacity: Resist full capacity of supported framing member //. Account for connection and member loads and eccentricities.

a. Request additional design criteria when necessary to complete connection design.

2. Configuration: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with details shown on drawings, supplementing where necessary. The details shown on drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the Contracting Officer Representative of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the Contracting Officer's Representative. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

2.2 MATERIALS

A. W-Shapes:

1. ASTM A992/A992M.

B. Channel and Angles:

1. ASTM A36/A36M.

C. Plates and Bars:

1. ASTM A36/A36M.

D. Hollow Structural Sections:

1. ASTM A500/A500M.

E. Structural Pipe: ASTM A53/A53M, Grade B.

F. Bolts, Nuts and Washers: // Galvanized for galvanized framing // and // plain finish for other framing .

1. High-strength bolts, including nuts and washers: ASTM F3125.
2. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.
3. Anchor bolts: ASTM F1554 (55 KSI W/ S1 SUPPLEMENT) with nuts and washers. Provide hexagonal heads.

G. Welding Materials: AWS D1.1, type to suit application.

1. Electrodes for welding: Comply with AWS Code. Use E70XX electrodes.

2.3 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.

2.4 FABRICATION

A. Fabricate structural steel according to Chapter M, AISC 360.

B. Shop and Field Connections:

1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
2. Welders to have current certificates, If re-certification of welders is required, re-testing will be Contractor's responsibility.

High-Strength Bolts: High-strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Install high strength threaded fasteners in accordance with AISC "Specifications for Structural Joints Using ASTM A 325 Bolts". Use bearing type bolts with threads included in shear plane.

C. Field verify all existing dimensions and elevations prior to fabrication

D. Bolt field connections with high-strength bolts, except where welded connections are indicated.

2.5 FINISHES

A. Shop Priming:

1. Prime paint structural steel according to AISC 303, Section 6.
   a. Interstitial Space Structural Steel: Prime paint, unless indicated to receive sprayed on fireproofing.

B. Shop Finish Painting: Apply primer and finish paint as specified in Section 09 91 00, PAINTING.

C. Surface preparation: Clean steel in accordance with Steel Structures Painting Council (SSPC - SP3 Power Tool Cleaning).

D. Do not paint:

1. Surfaces within 50 mm (2 inches) of field welded joints.

E. Structural Steel Galvanizing: ASTM A123/A123M, hot dipped, after fabrication. Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

1. Galvanize structural steel framing installed at exterior locations, G90

F. Bolts, Nuts, and Washers Galvanizing: ASTM F2329, hot-dipped.

2.6 ACCESSORIES

A. General: Shop paint steel according to AISC 303, Section 6.

B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.

C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

A. Erect structural steel according to AISC 303 and AISC 360.

B. Set structural steel accurately at locations and elevations indicated on drawings.

C. Maintain erection tolerances of structural steel within AISC 303 requirements.

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

E. Temporary planking: Provide temporary planking and working platforms as necessary to effectively complete work.

F. Setting bases and bearing plates: Clean concrete and masonry bearing surfaces of bond-reducing materials and roughen to improve bond to surfaces. Clean bottom surface of base and bearing plates.

G. All anchor bolts shall be built into connections work in advance.

H. Set loose and attached base plates and bearing plates for structural members on leveling nuts. Do not use wedges of shims.

I. Tighten anchor bolts after supported members have been positioned and plumbed. Do not remove wedges or shims, but if protruding cut off flush with edge of base or bearing plate prior to packing with grout.

J. Field assembly: Set structural frame accurately to lines and elevations indicated. Align and adjust various members forming part of complete frame or structure before permanently fastening. Clean bearing surfaces and other surfaces that will be in permanent contact before assembly. Perform necessary adjustments to compensate for discrepancies in elevations and alignment.

K. All bolts, including anchor bolts, shall have enough projection to expose not less than 1-1/2 threads after nuts is tightened. Level and plumb individual members of structure within specified AISC tolerances.

L. If steel is damaged or does not fit-up, Contractor shall submit proposed corrective measures for review by Engineer.

M. Do not enlarge unfair holes in members by burning or by using drift pins. Drill or ream holes that must be enlarged to accommodate next larger fastener, where possible.

N. The use of a gas cutting torch in field for correcting fabrication errors in primary structural members will not be permitted.

O. Immediately after erection, clean field welds, bolted connections, and abraded areas where shop coat was damaged. Spot and prime areas using same material as used for shop coat.

P. Set all members so that, in their final location, level, plumbness and alignment are within the tolerances prescribed by AISC Code.

3.2 FIELD QUALITY CONTROL

A. Record Survey:

1. Engage registered land surveyor or registered civil engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS to perform survey.
2. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.
3. Identify deviations from allowable tolerances specified in AISC Manual.

B. An independent testing and inspection agency shall be retained to inspect structural steel members high strength bolted connections and welded connections.

C. Testing agency shall conduct and interpret tests, state in each report whether test specimens comply with requirements, and specifically state any deviations therefrom. Submit 3 copies of each report to Owner's representative.

D. Provide access for testing agency to places where structural steel work is begin fabricated or produced so that required inspection and testing can be accomplished.

E. Minimum required testing:

1. Visually inspect all structural steel beams, columns, etc.
2. Visually inspect all bolted and welded connections.
3. Test all beam or column splices.
4. Test a representative sample of all full or partial penetration welds.

F. Correct deficiencies in structural steel work that inspections have indicated to be not in compliance with requirements. Perform additional tests, at Contractor's expenses, as necessary to reconfirm any non-compliance of original work and to show compliance of corrected work.

- - E N D - -

SECTION 05 40 00
COLD-FORMED METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:
   1. Exterior load-bearing steel stud walls.
   2. Interior load-bearing steel stud walls.
   3. Exterior non-load-bearing steel stud curtain wall.
   4. Roof Rafter Framing

1.2 RELATED WORK

A. Section 05 12 00, STRUCTURAL STEEL FRAMING: Structural steel framing.
B. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Non-load-bearing metal stud framing assemblies.
C. Section 09 29 00, GYPSUM BOARD: Gypsum board assemblies.

1.3 DESIGN REQUIREMENTS

A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
   1. Design Loads:
      a. Gravity, wind and seismic loading as indicated on the drawings or in this specification.
   2. Design framing systems to withstand design loads without deflections greater than the following:
      a. Exterior Non-load-Bearing Curtain wall: Lateral deflection of 1/600 of the wall height.
      b. Roof Rafters: Vertical deflection of 1/240 of the span.
   3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
   4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
   5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.

6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. All items indicated below are required submittals requiring Contracting Officer's Representative (COR) review and approval

B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.

C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Iron and Steel Institute (AISI): Specification and Commentary for the Design of Cold-Formed Steel Structural Members (2016)

C. ASTM International (ASTM):

A36/A36M-19 ..... Standard Specification for Carbon Structural Steel

A123/A123M-17 ..... Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A153/A153M-16a ..... Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

A307-14e1..... Standard Specifications for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength

A653/A653M-20 ..... Standard Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc Iron Alloy Coated (Galvannealed) by the Hot Dip Process

C955-18e1 ..... Standard Specification for Cold Formed Steel Structural Framing Members

C1107/1107M-20 ..... Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Non-shrink)

E488/E488M-18 ..... Standard Test Methods for Strength of Anchors in Concrete Elements

E1190-11(2018) ..... Standard Test Methods for Strength of Power-Actuated Fasteners Installed in Structural Members

D. American Welding Society (AWS):

D1.3/D1.3M-18..... Structural Welding Code-Sheet Steel

E. Military Specifications (Mil. Spec.):

MIL-P-21035B .....Paint, High Zinc Dust Content, Galvanizing Repair

F. VA Physical Security and Resiliency Design Manual October 1, 2020.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Sheet Steel for joists, studs and accessories 16 gauge and heavier: ASTM A653, structural steel, zinc coated G90, with a yield of 340 MPa (50 ksi) minimum.

B. Sheet Steel for joists, studs and accessories 18 gauge and lighter: ASTM A653, structural steel, zinc coated G90, with a yield of 230 MPa (33 ksi) minimum.

C. Galvanizing Repair Paint: MIL-P-21035B.

D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and a 30 minute working time.

2.2 WALL FRAMING

A. Steel Studs: Complying with ASTM C 955. Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:

1. Minimum Base-Steel Thickness(uncoated): 1.72 mm (0.0677 inch.
2. Flange Width: (2-1/2 inches)
3. Web: Punched

B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel studs.
2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 FRAMING ACCESSORIES

A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).

B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:

1. Supplementary framing.
2. Bracing, bridging, and solid blocking.
3. Web stiffeners.
4. Deflection track and vertical slide clips.
5. Stud kickers and girts.
6. Joist hangers and end closures.
7. Reinforcement plates.

2.4 ANCHORS, CLIPS, AND FASTENERS

A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123. Cast-in-Place Anchor Bolts and Studs: ASTM F 1554, Grade 36, threaded carbon-steel hex headed bolts and carbon-steel nuts; and flat, hardened-steel washers; zinc coated.

B. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.

C. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.5 REQUIREMENTS

A. Welding in accordance with AWS D1.3

B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION

3.1 FABRICATION

A. Framing components may be preassembled into panels. Panels shall be square with components attached.

B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.

C. Hold members in place until fastened.

D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.

1. Comply with AWS D1.3 requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.

E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION

A. Handle and lift prefabricated panels in a manner as to not distort any member.

B. Securely anchor tracks to supports as shown.

C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.

D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.

E. All axially loaded members shall be aligned vertically to allow for full transfer of the loads down to the foundation. Vertical alignment shall be maintained at floor/wall intersections.

F. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.

G. Install headers in all openings that are larger than the stud spacing in that wall.

H. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.

I. Studs in one piece for their entire length, splices will not be permitted.

J. Provide a load distribution member at top track where joist is not located directly over bearing stud.

K. Provide joist bridging and web stiffeners at reaction points where shown.

L. Provide end blocking where joist ends are not restrained from rotation.

M. Provide an additional joist under parallel partitions, unless otherwise shown, when partition length exceeds one-half joist span and when floor and roof openings interrupt one or more spanning members.

N. Provide temporary bracing and leave in place until framing is permanently stabilized.

O. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.

P. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES

A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.

B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.

C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.

D. Prefabricated panels shall be not more than 3 mm (1/8 inch) +/- out of square within the length of that panel.

3.4 FIELD REPAIR

A. Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies wood blocking, sheathing, furring, and nailers..

1.2 RELATED WORK:

A. Sustainable design requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Milled woodwork: Section 06 20 00, FINISH CARPENTRY.

C. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.

D. Cement board sheathing: Section 06 16 63, CEMENTITIOUS SHEATHING.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
2. For composite wood products, submit documentation indicating that product contains no added urea formaldehyde.

C. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

D. Manufacturer’s Literature and Data:

1. Submit data for lumber, panels, hardware and adhesives.
2. Submit data for wood-preservative treatment from chemical treatment manufacturer and certification from treating plants that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
3. Submit data for fire retardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
4. For products receiving a waterborne treatment, submit statement that moisture content of treated materials was reduced to levels specified before shipment to project site.

E. Manufacturer’s certificate for unmarked lumber.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

A. Protect lumber and other products from dampness both during and after delivery at site.

B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.

C. Stack plywood and other board products so as to prevent warping.

D. Locate stacks on well drained areas, supported at least 152 mm (6 inches) above grade and cover with well-ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 QUALITY ASSURANCE:

A. Installer: A firm with a minimum of three (3) years' experience in the type of work required by this section.

1.6 GRADING AND MARKINGS:

A. Any unmarked lumber or plywood panel for its grade and species will not be allowed on VA Construction sites for lumber and material not normally grade marked, provide manufacturer's certificates (approved by an American Lumber Standards approved agency) attesting that lumber and material meet the specified the specified requirements.

1.7 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.

B. American Forest and Paper Association (AFPA):
NDS-15.....National Design Specification for Wood Construction
WCD1-01 .....Details for Conventional Wood Frame Construction

C. American Institute of Timber Construction (AITC):
A190.1-07.....Structural Glued Laminated Timber

D. American Society of Mechanical Engineers (ASME):
B18.2.1-12(R2013).....Square and Hex Bolts and Screws
B18.2.2-10.....Square and Hex Nuts
B18.6.1-81(R2008).....Wood Screws

E. American Plywood Association (APA):
E30-11.....Engineered Wood Construction Guide

F. ASTM International (ASTM):
A653/A653M-13 .....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
C954-11 .....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness
C1002-14 .....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs
D198-14 .....Test Methods of Static Tests of Lumber in Structural Sizes
D2344/D2344M-13.....Test Method for Short-Beam Strength of Polymer Matrix Composite Materials and Their Laminates

D2559-12a .....Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions

D3498-03(R2011) .....Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems

D6108-13 .....Test Method for Compressive Properties of Plastic Lumber and Shapes

D6109-13 .....Test Methods for Flexural Properties of Unreinforced and Reinforced Plastic Lumber and Related Products

D6111-13a .....Test Method for Bulk Density and Specific Gravity of Plastic Lumber and Shapes by Displacement

D6112-13 .....Test Methods for Compressive and Flexural Creep and Creep-Rupture of Plastic Lumber and Shapes

F844-07a(R2013).....Washers, Steel, Plan (Flat) Unhardened for General Use

F1667-13.....Nails, Spikes, and Staples

G. American Wood Protection Association (AWPA):

AWPA Book of Standards

H. Commercial Item Description (CID):

A-A-55615 .....Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)

I. Forest Stewardship Council (FSC):

FSC-STD-01-001(Ver. 4-0)FSC Principles and Criteria for Forest Stewardship

J. Military Specification (Mil. Spec.):

MIL-L-19140E .....Lumber and Plywood, Fire-Retardant Treated

K. Environmental Protection Agency (EPA):

40 CFR 59(2014) .....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

L. Truss Plate Institute (TPI):

TPI-85.....Metal Plate Connected Wood Trusses

M. U.S. Department of Commerce Product Standard (PS)

PS 1-95 .....Construction and Industrial Plywood

PS 20-10 .....American Softwood Lumber Standard

N. ICC Evaluation Service (ICC ES):

AC09 .....Quality Control of Wood Shakes and Shingles

AC174 .....Deck Board Span Ratings and Guardrail Systems (Guards and Handrails)

PART 2 - PRODUCTS

2.1 LUMBER:

A. Unless otherwise specified, each piece of lumber must bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
   1. Identifying marks are to be in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
   2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.

B. Lumber Other Than Structural:
   1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.
   2. Framing lumber: Minimum extreme fiber stress in bending of 7584 kPa (1100 PSI).
   3. Furring, blocking, nailers and similar items 101 mm (4 inches) and narrower Standard Grade; and, members 152 mm (6 inches) and wider, Number 2 Grade.
   4. Board Sub-flooring: Shiplap edge, 25 mm (1 inch) thick, not less than 203 mm (8 inches) wide.

C. Sizes:
   1. Conforming to PS 20.
   2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

D. Moisture Content:
   1. Maximum moisture content of wood products is to be as follows at the time of delivery to site.
      a. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
      b. Lumber over 50 mm (2 inches) thick: 25 percent or less.

E. Fire Retardant Treatment:
   1. Comply with Mil Spec. MIL-L-19140.
   2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

F. Preservative Treatment:
   1. Do not treat Heart Redwood and Western Red Cedar.
   2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 610 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members provided in connection with roofing and flashing materials.
   3. Treat other members specified as preservative treated (PT).

4. Preservative treat by the pressure method complying with AWPA Book use category system standards U1 and T1, except any process involving the use of Chromated Copper Arsenate (CCA) or other agents classified as carcinogenic for pressure treating wood is not permitted.

2.2 PLYWOOD:

A. Comply with PS 1.

B. Bear the mark of a recognized association or independent inspection agency that maintains continuing control over quality of plywood which identifies compliance by veneer grade, group number, span rating where applicable, and glue type.

C. Sheathing:

1. APA rated Exposure 1 or Exterior; panel grade CD or better.
2. Wall sheathing:
   a. Minimum 9 mm (11/32 inch) thick with supports 406 mm (16 inches) on center and 12 mm (15/32 inch) thick with supports 610 mm (24 inches) on center unless specified otherwise.
   b. Minimum 1200 mm (48 inches) wide at corners without corner bracing of framing.
3. Roof sheathing:
   a. Minimum 9 mm (11/32 inch) thick with span rating 24/0 or 12 mm (15/32 inch) thick with span rating for supports 406 mm (16 inches) on center unless specified otherwise.
   b. Minimum 15 mm (19/32 inch) thick or span rating of 40/20 or 18 mm (23/32 inch) thick or span rating of 48/24 for supports 610 mm (24 inches) on center.

2.3 STRUCTURAL-USE PANELS:

A. Comply with APA E30.

B. Bearing the mark of a recognized association or independent agency that maintains continuing control over quality of panel which identifies compliance by end use, Span Rating, and exposure durability classification.

C. Wall and Roof Sheathing:

1. APA Rated sheathing panels, durability classification of Exposure 1 or Exterior Span Rating of 16/0 or greater for supports 406 mm (16 inches) on center and 24/0 or greater for supports 610 mm (24 inches) on center.

2.4 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:

1. ASME B18.2.1 and ASME B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
2. Extend at least 203 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).

B. Miscellaneous Bolts: Expansion Bolts: C1D A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Provide 13 mm (1/2 inch) bolt unless shown otherwise.

C. Washers
   1. ASTM F844.
   2. Provide zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:
   1. Wood to Wood: ASME B18.6.1 or ASTM C1002.
   2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:
   1. Size and type best suited for purpose unless noted otherwise. Provide aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
   2. ASTM F1667:
      a. Common: Type I, Style 10.
      b. Concrete: Type I, Style 11.
      c. Barbed: Type I, Style 26.
      d. Underlayment: Type I, Style 25.
      e. Masonry: Type I, Style 27.
      f. Provide special nails designed for use with ties, strap anchors, framing connectors, joists hangers, and similar items. Nails not less than 32 mm (1-1/4 inches) long, 8d and deformed or annular ring shank.

G. Adhesives:
   1. For field-gluing plywood to lumber framing floor or roof systems: ASTM D3498.
   2. For structural laminated Wood: ASTM D2559.
   3. Adhesives to have a VOC content of 70 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:
   1. APA for installation of plywood or structural use panels.
      expansion and contraction in accordance with manufacturer recommendations.//

B. Fasteners:
   1. Nails.
      a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA WCD1 where detailed nailing requirements are not specified in nailing schedule. Select nail size

and nail spacing sufficient to develop adequate strength for the connection without splitting the members.

b. Use special nails with framing connectors.

c. For sheathing and subflooring, select length of nails sufficient to extend 25 mm (1 inch) into supports.

d. Use 8d or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.

e. Use 16d or larger nails for nailing through 50 mm (2 inch) thick lumber.

f. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.

2. Bolts:

a. Fit bolt heads and nuts bearing on wood with washers.

b. Countersink bolt heads flush with the surface of nailers.

c. Embed in concrete and solid masonry or provide expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.

d. Provide toggle bolts to hollow masonry or sheet metal.

e. Provide bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 610 mm (24 inch) intervals between end bolts. Provide clips to beam flanges.

3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.

a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.

b. ASTM C954 for steel over 0.84 mm (0.033 inch) thick.

4. Power actuated drive pins may be provided where practical to anchor to solid masonry, concrete, or steel.

5. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Provide metal plugs, inserts or similar fastening.

6. Screws to Join Wood:

a. Where shown or option to nails.

b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.

c. Spaced same as nails.

C. Set sills or plates level in full bed of mortar on masonry or concrete walls.

1. Space anchor bolts 1219 mm (4 feet) on centers between ends and within 152 mm (6 inches) of end. Stagger bolts from side to side on plates over 178 mm (7 inches) in width.

2. Provide shims of slate, tile or similar approved material to level wood members resting on concrete or masonry. Do not use wood shims or wedges.

3. Closely fit, and set to required lines.

D. Cut notch, or bore in accordance with AFPA WCD1 passage of ducts wires, bolts, pipes, conduits and to accommodate other work. Repair or replace miscut, misfit or damaged work.

E. Blocking Nailers, and Furring:

1. Install furring, blocking, nailers, and grounds where shown.
2. Provide longest lengths practicable.
3. Provide fire retardant treated wood blocking where shown at openings and where shown or specified.
4. Layers of Blocking or Plates:
   a. Stagger end joints between upper and lower pieces.
   b. Nail at ends and not over 610 mm (24 inches) between ends.
   c. Stagger nails from side to side of wood member over 127 mm (5 inches) in width.

F. Sheathing:

1. Provide plywood or structural-use panels for sheathing.
2. Lay panels with joints staggered, with edge and ends 3 mm (1/8 inch) apart and nailed over bearings as specified.
3. Set nails not less than 9 mm (3/8 inch) from edges.
4. Install 50 mm by 101 mm (2 inch by 4 inch) blocking spiked between joists, rafters and studs to support edge or end joints of panels.

- - - E N D - - -

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Thermal insulation.
      a. Board or block insulation at masonry cavity walls.
   2. Acoustical insulation.
      a. Batt and blanket insulation at interior framed partitions and ceilings .

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Adhesives VOC Limits.
B. Section 04 20 00, UNIT MASONRY: Insulation for Cavity Face of Masonry.
C. Section 07 84 00, FIRESTOPPING: Safing Insulation.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. ASTM International (ASTM):

C553-13(2019) ..... Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
C578-19 ..... Rigid, Cellular Polystyrene Thermal Insulation.
C591-20 ..... Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
C612-14(2019) ..... Mineral Fiber Block and Board Thermal Insulation.
E84-20 ..... Surface Burning Characteristics of Building Materials.
F1667-18a ..... Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Submittal Drawings:
   1. Show insulation type, thickness, and R-value for each location.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Adhesive indicating manufacturer recommendation for each application.
D. Sustainable Construction Submittals:
   1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
   2. Low Pollutant-Emitting Materials: Show volatile organic compound types and quantities.

1.5 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

C. Protect foam plastic insulation from UV exposure.

1.7 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL

A. Insulation Thickness:

1. Provide thickness required by R-value shown on drawings.
2. Provide thickness indicated when R-value is not shown on drawings.

B. Insulation Types:

1. Provide one insulation type for each application.

C. Sustainable Construction Requirements:

1. Insulation Recycled Content:
   a. Polyisocyanurate/polyurethane rigid foam: 9 percent recovered material.
   b. Glass fiber reinforced: 6 percent recovered material.
   c. Rock wool material: 75 percent recovered material.
2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
   a. Non-Flooring Adhesives and Sealants.

2.2 THERMAL INSULATION

A. Exterior Framing or Furring Insulation:

1. Mineral Fiber: ASTM C665, Type I (unfaced), Class C, Category I where concealed by gypsum board.
2. Mineral Fiber: ASTM C665, Type III (foil-faced), Class A at other locations.

B. Masonry Cavity Wall Insulation:

1. Aluminum-Faced, Glass Fiber-Infused, Polyisocyanurate Board: ASTM C1289, Type I, Class 2 with vapor retarder facing; maximum permeance 29 ng/Pa/s/sq. m (0.5 perms).

2.3 ACOUSTICAL INSULATION

A. Semi Rigid, Batts and Blankets:

1. Widths and lengths to fit tight against framing.

2. Mineral Fiber Batt or Blankets: ASTM C665 unfaced .
3. Maximum Surface Burning Characteristics: ASTM E84.
   a. Flame Spread Rating: 25.
   b. Smoke Developed Rating: 450.

2.4 ACCESSORIES

A. Fasteners:
   1. Staples or Nails: ASTM F1667, zinc-coated, size and type to suit application.
   2. Screws: ASTM C954 or ASTM C1002, size and length to suit application with washer minimum 50 mm (2 inches) diameter.
   3. Impaling Pins: Steel pins with head minimum 50 mm (2 inches) diameter.
      a. Length: As required to extend beyond insulation and retain cap washer when washer is placed on pin.
      b. Adhesive: Type recommended by manufacturer to suit application.
B. Insulation Adhesive: Nonflammable type recommended by insulation manufacturer to suit application.
C. Tape: Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.
C. Install board insulation with joints close and flush, in regular courses, and with end joints staggered.
D. Install batt and blanket insulation with joints tight. Fill framing voids completely. Seal penetrations, terminations, facing joints, facing cuts, tears, and unlapped joints with tape.
E. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 THERMAL INSULATION

A. Exterior Framing or Furring Insulation:
   1. General:
      a. Open voids are not acceptable.

b. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
c. Pack behind outlets, around pipes, ducts, and services encased in walls.
d. Hold insulation in place with pressure sensitive tape.
e. Lap facing flanges together over framing for continuous surface. Seal penetrations through insulation and facings.

2. Metal Studs: Fasten insulation between metal studs, framing, and furring with pressure sensitive tape continuous along flanged edges.
3. Ceilings and Soffits:
   a. Metal Framing:
      1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
      2) At metal framing and ceilings suspension systems, install insulation above suspended ceilings and metal framing at right angles to main runners and framing.
      3) Tape insulation tightly together without gaps. Cover metal framing members with insulation.
   b. Ceiling Transitions:
      1) In areas where suspended ceilings transition to structural ceiling, install blanket or batt insulation.
      2) Extend insulation from suspended ceiling to underside of structure above.
      3) Secure blanket and batt with continuous cleats to structure above.

B. Inside Face of Exterior Wall Insulation:
1. Location: On interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to face of studs to support interior wall finish where indicated.
2. Bond insulation to solid vertical surfaces with adhesive. Fill joints with adhesive cement.
3. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings maximum 300 mm (12 inches) on center. Stagger fasteners at board joints. Install fasteners at each corner.

C. Masonry Cavity Wall Insulation:
1. Install insulation on exterior faces of concrete and masonry inner wythes of cavity walls.
2. Bond polystyrene board to surfaces with adhesive.
3. Bond polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive.
4. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
5. Fill insulation joints with same material used for bonding.

3.4 ACOUSTICAL INSULATION

A. General:
1. Install insulation without voids.

2. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
3. Pack behind outlets, around pipes, ducts, and services encased in walls.
4. Hold insulation in place with pressure sensitive tape.
5. Lap facer flanges together over framing for continuous surface. Seal all penetrations through the insulation and facers.
6. Do not compress insulation below required thickness except where embedded items prevent required thickness.

B. Semi Rigid, Batts and Blankets:

1. When insulation is not full thickness of cavity, adhere insulation to one side of cavity, maintaining continuity of insulation and covering penetrations or embedments.
   a. Metal Framing:
      1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.
      2) At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing.
      3) Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.

3.5 CLEANING

A. Remove excess adhesive before adhesive sets.

3.6 PROTECTION

A. Protect insulation from construction operations.

B. Repair damage.

- - E N D - -

SECTION 07 22 00
ROOF AND DECK INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

B. Roof and deck insulation substrate board, and cover board on newmetal deck substrates ready to receive roofing or waterproofing membrane.

C. Repairs and alteration work to existing roof insulation.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Non-Flooring Adhesives and Sealants VOC Limits.

B. Section 06 10 00, ROUGH CARPENTRY: Wood Cants, Blocking, and Edge Strips.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Society of Civil Engineers

ASCE 7-16 ..... Minimum Design Loads and Associated Criteria for Buildings and Other Structures

C. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):

Standard 90.1-13 ..... Energy Standard for Buildings Except Low-Rise Residential Buildings.

D. ASTM International (ASTM):

C208-12(2017)e2 ..... Cellulosic Fiber Insulating Board.

C1177/C1177M-17 ..... Glass Mat Gypsum Substrate for Use as Sheathing.

C1278/C1278M-17 ..... Fiber-Reinforced Gypsum Panel.

C1289-19 ..... Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.

C1396/C1396M-17 ..... Gypsum Board.

D2178/D2178M-15a ..... Asphalt Glass Felt Used in Roofing and Waterproofing.

D2822/D2822M-05(2011)e1 ..... Asphalt Roof Cement, Asbestos Containing.

D4586/D4586M-07(2018) ..... Asphalt Roof Cement, Asbestos-Free.

E84-20 ..... Surface Burning Characteristics of Building Materials.

F1667-18a ..... Driven Fasteners: Nails, Spikes, and Staples.

E. National Roofing Contractors Association (NRCA):

Manual-15 ..... The NRCA Roofing Manual: Membrane Roof Systems-2019.

F. UL LLC (UL):

Listed Online Certifications Directory.

G. U.S. Department of Agriculture (USDA):

USDA BioPreferred Program Catalog.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and installation details.

a. Nailers, cants, and terminations.

b. Layout of insulation showing slopes, tapers, penetrations, and edge conditions.

C. Manufacturer's Literature and Data:

1. Description of each product.

D. Samples:

1. Roof insulation, each type.

2. Fasteners, each type.

E. Sustainable Construction Submittals:

1. Low Pollutant-Emitting Materials:

a. Show volatile organic compound types and quantities.

b. Certify each composite wood and agrifiber product contain no added urea formaldehyde.

F. Qualifications: Substantiate qualifications meet specifications.

1. Installer.

1.5 QUALITY ASSURANCE

A. Installer Qualifications: Same installer as Division 07 roofing section installer.

1.6 DELIVERY

A. Comply with recommendations of NRCA Manual.

B. Deliver products in manufacturer's original sealed packaging.

C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Comply with recommendations of NRCA Manual.

B. Store products indoors in dry, weathertight facility.

C. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment: Install products when existing and forecasted weather permit installation according to manufacturer's instructions.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty ofConstruction."

B. Manufacturer's Warranty: Warrant substrate board, vapor retarder, insulation, and cover board against material and manufacturing defects as part of Division 07 roofing system warranty.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. SPEC WRITER NOTE: On existing roofs confirm available insulation thickness and modify as required

B. Insulation Thermal Performance:

1. Overall Average R-Value: RSI-57 (R-33), minimum.
2. Any Location R-Value: RSI-17 (R-10), minimum.

C. Fire and Wind Uplift Resistance: Provide roof insulation complying with requirements specified in Division 07 roofing section.

D. Insulation on Metal Decking: UL labeled indicating compliance with one of the following:

1. UL Listed.
2. Insulation Surface Burning Characteristics: When tested according to ASTM E84.
   a. Flame Spread Rating: 75 maximum.
   b. Smoke Developed Rating: 150 maximum.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

B. Sustainable Construction Requirements:

1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
   a. Non-flooring adhesives and sealants.

2.3 ADHESIVES

A. Primer: ASTM D41/D41M.

B. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.

C. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

D. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

E. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

F. Roof Cement: Asbestos free, ASTM D2822/D2822M, Type I or Type II; or, ASTM D4586/D4586M, Type I or Type II.

2.4 ROOF AND DECK INSULATION

A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer.

B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, faced with glass fiber reinforced cellulosic felt facers on both major surfaces of the core foam.
C. Cellular Glass Board Insulation: ASTM C552, Type IV, kraft-paper sheet faced.
D. Cellulosic Fiber Board Insulation: ASTM C208, Type II, Grade 1 for built-up asphalt or modified bitumen roofing.
E. Tapered Roof Insulation System:
   1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
   2. Cut to provide high and low points with crickets and slopes as shown.
   3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
   4. Minimum slope 1/48 (1/4 inch per 12 inches).

2.5 INSULATION ACCESSORIES

A. Cants and Tapered Edge Strips:
   1. Wood Cant Strips: Refer to Section 06 10 00, ROUGH CARPENTRY.
   2. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
   3. Tapered Edge Strips: 1/12 (1 inch per 12 inches), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
      a. Cellulosic Fiberboard: ASTM C208.
      b. Mineral Fiberboard: ASTM C726.
      c. Perlite Board: ASTM C728.
B. Vapor Retarder:
   1. Glass-Fiber Felts: ASTM D2178/D2178M, Type IV, asphalt impregnated.
   2. Self-Adhering Sheet Vapor Retarder: ASTM D1970/D1970M, minimum 1.0 mm (40 mils) thick membrane of HDPE film fully coated with asphalt adhesive, or 0.76 to 1.0 mm (30 to 40 mils) thick membrane of butyl rubber based adhesive backed by a layer of high density cross-laminated polyethylene; maximum permeance rating of 6 ng/Pa/s/sq. m (0.1 perms).
C. Substrate Board:
   1. Gypsum Board: ASTM C1396/C1396M, 16 mm (5/8 inch) thick, Type X.
   2. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 13 mm (1/2 inch) thick, factory primed.
D. Cover Board:
   1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 13 mm (1/2 inch) thick, factory primed.

2.6 ACCESSORIES

A. Fasteners: Corrosion-resistant carbon steel fasteners and galvalume-coated steel or plastic round plates for fastening substrate board and insulation to roof deck.

B. Nails: ASTM F1667; type to suit application.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Comply with requirements of Division 07 roofing section.

3.2 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Comply with requirements of UL for insulated steel roof deck.

C. Attach substrate board and other products to meet requirements of Division 07 roofing section.

3.4 SUBSTRATE BOARD INSTALLATION

A. Fasten substrate board to top flanges of steel decking to resist uplift pressures according requirements for specified roofing system.

1. Locate the long dimension edge joints solidly bearing on top of decking ribs.

3.5 INSULATION INSTALLATION

A. Insulation Installation, General:

1. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate before installation of insulation.
2. Cant Strips: Install wood cant strips specified in Section 06 10 00 ROUGH CARPENTRY at junctures of roofing system with vertical construction.

B. Insulation Thickness:

1. Thickness of roof insulation shown on drawings is nominal. Provide thickness required to comply with specified thermal performance.
2. Insulation on Metal Decks: Provide insulation in minimum thickness recommended by insulation manufacturer to span deck flutes. Support edges of insulation on metal deck ribs.
3. When actual insulation thickness differs from drawings, coordinate alignment and location of roof drains, flashing, gravel stops, fascias and similar items.
4. Where tapered insulation is used, maintain insulation thickness at high points and roof edges shown on drawings.
   a. Low Point Thickness: Minimum 38 mm (1-1/2 inches).

5. Use minimum two layers of insulation when required thickness is 68 mm (2.7 inch) or greater.

C. Lay insulating units with close joints, in regular courses and with end joints staggered.

1. Stagger joints between layers minimum 150 mm (6 inches).

D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.

E. Seal cut edges at penetrations and at edges against blocking with bitumen or roof cement.

F. Cut to fit tightly against blocking or penetrations.

G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.

H. Installation Method:

1. Mechanically Fastened Insulation:

a. Fasten insulation according to requirements in Division 07 roofing section.

b. Fasten insulation to resist uplift pressures specified in Division 07 roofing section and ASCE-7.

3.6 COVER BOARD INSTALLATION

A. Install cover boards over insulation with long joints in continuous straight lines with staggered end joints.

B. Offset cover board joints from insulation joints 150 mm (6 inches), minimum.

C. Secure cover boards according to "Mechanically Fastened Insulation" requirements.

- - E N D - -

SECTION 07 27 26
FLUID-APPLIED MEMBRANE AIR BARRIERS, VAPOR PERMEABLE

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Fluid-applied vapor-permeable air barrier at exterior above grade wall assemblies.
2. Connection to adjacent air barrier components providing a durable, continuous, full building air barrier.

1.2 RELATED WORK

A. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS: General Sustainable Construction Requirements.

B. Section 04 20 00 UNIT MASONRY: Masonry Unit Air Barrier Substrates.

C. Section 07 60 00 FLASHING AND SHEET METAL: Metal Flashing Requiring Air Barrier Transitions.

D. Section 07 92 00, JOINT SEALANTS: Joint Sealants.

E. Division 08 sections for aluminum windows, glazed aluminum curtain walls: Exterior Wall Openings Requiring Air Barrier Transitions.

F. Section 09 29 00 GYPSUM BOARD: Wall Sheathings Air Barrier Substrates.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. Air Barrier Association of America (ABAA):
Quality Assurance Program.

C. ASTM International (ASTM):

C920-18 ..... Elastomeric Joint Sealants.

C1193-16 ..... Use of Joint Sealants.

D412-16 ..... Vulcanized Rubber and Thermoplastic Elastomers-Tension.

E96/E96M-16 ..... Water Vapor Transmission of Materials.

E162-16..... Surface Flammability of Materials Using a Radiant Heat Energy Source.

E783-02(2018) ..... Field Measurement of Air Leakage Through Installed Exterior Windows and Doors.

E1186-17..... Air Leakage Site Detection in Building Envelopes and Air Barrier Systems.

E2178-13..... Air Permanence of Building Materials.

E2357-18..... Determining Air Leakage of Air Barrier Assemblies.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1. Show size, configuration, and fabrication and installation details.

B. Manufacturer's Literature and Data:
1. Description of each product.
2. Installation instructions.

C. Sustainable Construction Submittals:
1. Low Pollutant-Emitting Materials:
a. Identify volatile organic compound types and quantities.

D. Test reports:
1. Submit field inspection and test reports.

E. Certificates: Certify each product complies with specifications.
1. Compatibility: Certify products are compatible with adjacent materials.

F. Qualifications: Substantiate qualifications comply with specifications.
1. Manufacturer with project experience list .
2. Installer with project experience list .
a. Include personnel qualifications.
b. Field supervisor qualifications.
c. Certify installer approval by air barrier manufacturer.

G. Installation Audit:
1. Submit audit report.

1.5 QUALITY ASSURANCE

A. Coordinate work with adjacent and related work to provide continuous, unbroken, durable air barrier system.

B. Manufacturer Qualifications:
1. Regularly and presently manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
3. Accreditation by ABAA.

C. Installer Qualifications:
1. Regularly and presently installs specified products.
2. Approved by manufacturer.
3. Accredited by ABAA.
4. Applicators certified according to ABAA Quality Assurance Program.
5. Applicators trained and certified by manufacturer of air barrier system.
6. Full time on-site field supervisor has completed three projects of similar scope within last year.

7. Field supervisor accredited by ABAA as Level 3 Accredited Installer.

D. Testing Agency Qualifications:

1. Accredited by International Accreditation Service, Inc. or American Association for Laboratory Accreditation.
2. Certified to perform ABAA Quality Assurance Program installer audits.
3. Staff experienced in installation of specified system and qualified to perform observation and inspection specified and determine compliance with project requirements.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight, conditioned facility.

B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:

1. Work Area Ambient Temperature Range: 4 to 32 degrees C (40 to 90 degrees F) continuously, beginning 48 hours before installation.
2. Surface Requirements: visibly dry, and complying with manufacturer's instructions.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Air-Barrier Assembly Air Leakage: Maximum 0.2 L/s/square meter (0.04 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure when tested according to ASTM E2357.

B. Provide full system of compatible materials under conditions of service and application required. Compatibility based on testing by material manufacturer.

C. Perform as continuous vapor permeable air barrier and moisture drainage plane.

D. Transition to adjacent flashings and discharge water to building exterior.

E. Accommodate substrate movement and seal expansion and control joints, construction material transitions, opening transitions, penetrations, and perimeter conditions without moisture deterioration and air leakage exceeding performance requirements.

2.2 PRODUCTS - GENERAL

A. Provide air barrier system components from one manufacturer.

B. Sustainable Construction Requirements:

1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13 2.1, B, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
    a. Non-Flooring Adhesives and Sealants.

2.3 AIR BARRIER

A. Fluid-Applied, Vapor-Permeable Membrane Air Barrier:
1. Elastomeric, modified bituminous or synthetic polymer membrane.
2. Air Permeance: ASTM E2178: 0.02 L/s/square meter (0.004 cfm/square feet) of surface area at 75 Pa (1.57 psf) differential pressure.
3. Vapor Permeance: ASTM E96/E96M: Minimum 580 ng/Pa/s/square meter (10 perms).
4. Elongation: Ultimate, ASTM D412, Die C: 200 percent, minimum.
5. Thickness: Minimum 1.0 mm (40 mils) dry film thickness, applied in single continuous coat.
6. Surface Burning Characteristics: When tested according to ASTM E84.
    a. Flame Spread Rating: 25 maximum.
    b. Smoke Developed Rating: 450 maximum.

2.4 ACCESSORIES

A. Primer: Waterborne primer complying with VOC requirements, recommended air barrier manufacturer to suit application.
B. Counterflashing Sheet: Modified bituminous, minimum 1.0 mm (40 mils) thick, self-adhering composite sheet consisting of minimum 0.8 mm (33 mils) of rubberized asphalt laminated to polyethylene film.
C. Substrate Patching Material: Manufacturer's standard trowel-grade filler material.
D. Sprayed Polyurethane Foam Sealant: Foamed-in-place, 24 to 32 kg/cu. m (1.5 to 2.0 pcf) density, with maximum flame-spread index of 25 when tested according to ASTM E84.
E. Flexible Opening Transition: Cured low-modulus silicone extrusion with reinforcing ribs, sized to fit opening widths, designed for adhesion to or insertion into aluminum framing extrusions, and compatible with air barrier system materials and accessories.
F. Joint Sealant: ASTM C920, single-component, neutral-curing silicone; Class 100/50 (low modulus), Grade NS, Use NT related to exposure, approved by membrane air barrier manufacturer for adhesion and compatibility with membrane air barrier and accessories.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.
C. Correct substrate deficiencies:
1. Remove projections and excess materials and fill voids with substrate patching material.
2. Remove contaminants capable of affecting subsequently installed product's performance.

D. Prepare and treat substrate joints and cracks according to ASTM C1193 and membrane air barrier manufacturer's instructions.

3.2 INSTALLATION - AIR BARRIER

A. Install products according to manufacturer's instructions // and approved submittal drawings //.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Install air barrier components according to requirements of ABAA Quality Assurance Program.
C. Apply primer.
D. Install transition strips and accessory materials.
E. Seal air barrier to adjacent components of building air barrier system.
F. Install flexible opening transition at each opening perimeter. Extend transition onto each substrate minimum 75 mm (3 inches).
   1. Fill gaps at perimeter of openings with foam sealant.
G. At penetrations, seal transition strips around penetrating objects with termination mastic.
   1. Fill gaps at perimeter of penetrations with sprayed polyurethane foam sealant.
H. At top of through-wall flashings, seal with continuous transition strip of manufacturer's recommended material to suit application.
I. Apply air barrier in full contact with substrate to produce continuous seal with transitions.
J. Apply fluid membrane in thickness recommended by manufacturer, and minimum specified thickness.
K. Leave air barrier exposed until tested and inspected and approved by Contracting Officer’s Representative.

3.3 FIELD QUALITY CONTROL

A. Field Inspections and Tests: Performed by testing laboratory .
   1. Perform inspections and tests before concealing air barrier with subsequent work.
B. Inspections:
   1. Compatibility of materials within air barrier system and adjacent materials.
   2. Suitability of substrate and support for air barrier.
   3. Suitability of conditions under which air barrier is applied.
   4. Adequacy of substrate priming.
   5. Application and treatment of joints and edges of transition strips, flexible opening transitions, and accessory materials.
   6. Continuity and gap-free installation of air barrier, transition strips, and accessory materials.
C. Inspection and Test Frequency: Determined by installed air barrier surface area.
   1. Up to 900 square meter (10,000 square feet): One inspection.
   2. 901 - 3,300 square meter (10,001 - 35,000 square feet): Two inspections.
   3. 3,300 - 7,000 square meter (35,001 - 75,000 square feet): Three inspections.

4. 7,001 - 11,600 square meter (75,001 - 125,000 square feet): Four inspections.
5. 11,601 - 19,000 square meter (125,001 - 200,000 square feet): Five inspections.
6. Over 19,000 square meter (200,000 square feet): Six inspections.

D. Submit inspection and test reports to Contracting Officer's Representative within seven calendar days of completing inspection and test.

E. Audit:
1. Provide installer and site inspections audit by ABAA.
2. Coordinate scheduling of work and associated audit inspections.
3. Cooperate with ABAA's testing agency. Allow access to work and staging areas.
4. Notify ABAA in writing of schedule for Work of this Section to allow sufficient time for testing and inspection.

F. Defective Work:
1. Correct deficiencies, make necessary repairs, and retest as required to demonstrate compliance with specified requirements.

3.4 CLEANING

A. Remove masking materials.

B. Clean spills and overspray using cleaning agents recommended by manufacturers of affected construction.

3.5 PROTECTION

A. Protect air barrier from construction operations.

B. Protect air barrier from exposure to UV light exposure exceeding manufacturer's recommendation.

C. Replace overexposed materials and retest.

- - E N D - -

SECTION 07 40 00
METAL SOFFIT PANELS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies uninsulated, vented metal soffit panels as shown on contract documents.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.

B. Section 07 92 00, JOINT SEALANTS: Sealant.

1.3 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Provide metal soffit panels products of a manufacturer regularly engaged for not less than five (5) years in the fabrication of metal panels of the type and design indicated.

B. Installer: A firm with three (3) years of successful experience with installation of roofing and siding panels of type and scope equivalent to Work of this Section. Submit installer qualifications.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Postconsumer recycled content as specified in PART 2 - PRODUCTS.

C. Samples: Metal panel, 152 mm (6 inch) square, showing finish, each color and texture.

D. Shop Drawings: Soffit panels, showing details of construction and installation. Collateral steel framing thickness and kind of material, closures, flashing, fastenings and related components and accessories. Show interfaces and relationships to work at other trades and continuity with adjacent thermal, weather, air and vapor barriers.

E. Manufacturer's Literature and Data: Soffit panels

F. Manufacturer’s Certificates: Indicating manufacturer’s qualifications specified.

G. Installer qualifications.

H. Manufacturer warranty.

1.5 QUALITY ASSURANCE

A. Approval by Contracting Officer Representative (COR) is required of products of proposed manufacturer.

B. Certify manufacturer has five (5) years continuous documented experience in fabrication of metal roofing and siding panels.

C. Source: For each material type required for work of this section, provide primary materials, which are products of one manufacturer. Provide secondary or accessory materials, which are acceptable to manufacturers of primary materials.

D. Installer: A firm with a minimum of three (3) years' experience in type of work required by this section and which is acceptable to manufacturers of primary materials.

E. Regulatory Code Agencies Requirements: Provide metal soffit system which have been evaluated and is in compliance with the following:

1. International Code Council (ICC)
2. Miami/Dade County Florida (Notice of Acceptance)
3. State of Florida (Florida Product Approval)

F. Delegated Design Engineer Qualifications: A professional engineer licensed to practice in the State of Florida where Project is located and who is experienced in providing engineering services of the type indicated.

1.6 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their metal soffit panels for a minimum of ten (10) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

C. Warranty on Panel Finishes: Manufacturer's shall warrant their soffit panel finish and provide standard agreement to repair finish or replace metal panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:
   a. Color fading more than 5 Hunter units when tested according to ASTM D2244.
   b. Chalking in excess of a No. 8 rating when testing according to ASTM D4214.
   c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.
2. Finish Warranty Period: 10 years from date of installation and final acceptance by the COR.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Architecture Manufacturers Association (AAMA):

611-14 ..... Anodized Architectural Aluminum

621-02 ..... Voluntary Specifications for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

2605-13 ..... Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels

C. American Iron and Steel Institute (AISI):

SG03-02 ..... Cold-Formed Steel Design Manual

D. ASTM International (ASTM):

A463/A463M-15..... Steel Sheet, Cold-Rolled, Aluminum-Coated, by the Hot-Dip Process

A653/A653M-20..... Steel Sheet, Zinc-Coated (Galvanized), or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.

A924/A924M-19..... Steel Sheet, Metallic Coated by the Hot-Dip Process

A1008/A1008M-18..... Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy

B209-14 ..... Aluminum and Aluminum Alloy Sheet and Plate

B209M-14 ..... Aluminum and Aluminum Alloy Sheet and Plate (Metric)

D2244-16..... Calculation of Color Tolerances and Color Differences from Instrumentally Measured Color Coordinates

D4214-07(2015) ..... Test Methods for Evaluating the Degree of Chalking of Exterior Paint Films

E119-20 ..... Fire Test of Building Construction and Materials

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS FOR SOFFIT PANELS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014500 "Quality Requirements," to design soffit panel system.

B. Structural Performance: Provide metal panel systems capable of withstanding the effects of the following loads, based on testing according to ASTM E1592.

1. Wind Loads: As indicated on Drawings.
2. Other Design Loads: All MCM products shall carry Florida Product Approvals (FPAs).
3. Minimum Panel rib depth: 3/8”.
4. Panel width: 12 inches.

2.2 METAL SOFFIT PANELS

A. General: Provide factory-formed, vented metal soffit panels designed to be installed by lapping and interconnecting side edges of adjacent panels and mechanically attaching through panel to supports using concealed fasteners in side laps. Include accessories required for weathertight installation.MCM Panel Materials:

B. Metal Soffit Panels: Vented panels formed with vertical panel edges and intermediate stiffening ribs symmetrically spaced between panel edges.

1. Material: .032 inches aluminum.
2. Panel Coverage: 12 inches (305) mm.

3. Height: 3/8 inches
4. Texture: Smooth

2.3 MANUFACTURER

A. Metal Vented Soffit Panel System.
1. Basis of Design: Subject to compliance with requirements, ATAS International, Inc., "Wind-Lok Soffit" – MPV120 or comparable product by one of the following or approved equal:
a. Berridge.
b. PAC-CLAD

2.4 ALUMINUM PLATE AND SHEET

A. ASTM B209M (B209).

2.5 FASTENERS

A. Fasteners for Aluminum Panels to be aluminum or stainless steel.
B. Fasteners of size, type and holding strength as recommended by panel manufacturer.

2.6 FABRICATION

A. General:
1. Provide panels for full depth of soffit with no horizontal joints, except at cut-outs or openings as required for the passage of pipes, conduits, vents, exposed support steel, and the like.
2. Overall thickness of panels is shown in the contract documents.
3. Provide connection between panels by interlocking male and female joints..
4. Provide collateral steel framing, metal and bituminous closures, fastenings, flashing, clip, caulking, and related components and accessories.
a. Sub-girts: 1.0 mm (0.0396 inches) thick galvanized steel hat channels designed to receive panel fasteners or clips.
b. Accessories, fastenings, and flashings to be the same material and finish as the panels. Thickness and installation of accessories and flashing to be as recommended by the panel manufacturer.

2.7 FINISH

A. For vented soffit panels, provide finishes as follows for face sheets. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
B. Provide aluminum alloy for color coating as required to produce specified color. Color for sheet aluminum to not deviate more than the colors of extrusion samples.
1. Three-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish coating not less than 70 percent PVDF resin by weight in both color coat and clear topcoat.
a. Color to be selected from manufacturer's full range of standard colors.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise.

B. Install panels in full and firm contact with supports and with each other at side and end laps.

C. Where panels are cut in the field, or where factory applied coverings or coatings are abraded or damaged in handling or installation, make finish repairs with material of the same type and color as the weather coating, before being installed.

D. Seal cut ends and edges, including those at openings through the sheets.

E. Correct defects or errors in the materials in a manner approved by the COR.

F. Replace defective materials which cannot be corrected with non-defective material.

G. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.

H. Soffitl Panels:

1. Apply panels with the joint configuration perpendicular to soffit depth. Install panels perpendicular to support framing above.
2. Seal side and end laps with joint sealing material.
3. Flash and seal soffit panels around perimeter andat other similar openings and penetrations. Install closure strips, flashings, and sealing material in an approved manner that will assure complete weather tightness.

I. Flashing:

1. Provide flashing and related closures and accessories in connection with the preformed metal panels as indicated and as necessary to provide a watertight installation.
2. Install details of installation, which are not indicated, in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings.
3. Allow for expansion and contraction of flashing.

J. Fasteners:

1. Space fasteners in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated.
2. Install fasteners in valleys or crowns as recommended by the manufacturer of the panel being used.
3. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay.
4. Drive exposed penetrating type fasteners normal to the surface, and to a uniform depth to seat gasketed washers properly, and drive so as not to damage factory applied coating.
5. Exercise care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes

prior to installing fasteners and washers. Do not torque fasteners to exceed values recommended by the manufacturer.

6. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels.
7. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

3.2 ISOLATION OF ALUMINUM

A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze, or other metal compatible with aluminum by one of the following:
   1. Painting the dissimilar metal with a prime coat of Zinc-Molybdate followed by two coats of aluminum paint.
   2. Placing a non-abrasive tape or gasket between the aluminum and the dissimilar metal.

B. Paint aluminum in contact with, or built into mortar, concrete, plaster, or other masonry materials with a coat of alkali-resistant bituminous paint.

C. Paint aluminum in contact with wood or other absorptive materials that may become repeatedly wet, with two coats of bituminous paint, or two coats of aluminum paint. Seal joints with caulking material.

3.3 PROTECTION AND CLEANING

A. Protect panels and other components from damage during and after erection, and until project is accepted by the COR.

B. After completion of work, all exposed finished surfaces of panels are to be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.

- - - E N D - - -

SECTION 07 42 13.23
METAL COMPOSITE MATERIAL (MCM) SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies exterior Metal Composite Material (MCM) System, which includes MCM, joints, attachment system components and miscellaneous materials as appropriate for the design of the project to provide a weather-resistant exterior cladding system as shown.

1.2 RELATED WORK

A. Section 05 40 00 COLD FORMED METAL FRAMING: Cold-Formed Metal Framing.

B. Section 06 10 00, ROUGH CARPENTRY: Sheathing.

C. Section 07 60 00, FLASHING AND SHEET METAL: Flashing.

D. Section 07 27 26, FLUID-APPLIED MEMBRANE AIR BARRIER: Vapor permeable barrier.

E. Section 07 92 00 JOINT SEALANTS: Joint Treatment.

1.3 REFERENCES

A. ALUMINUM ASSOCIATION (AA)

1. Aluminum Design Manual
2. AA-M12C22A41: Anodized - Clear Coating
3. AA-M12C22A44: Anodized - Color Coating
4. American Society of Civil Engineers (ASCE)
   a. ASCE/SEI 7 Minimum Design Loads for Buildings and Other Structures
5. American Society for Testing and Materials (ASTM) International:
   a. ASTM B209/209M-04 Aluminum and Aluminum Alloy Sheet and Plate
   b. ASTM D635 Standard Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position
   c. ASTM D1781 Standard Test Method for Climbing Drum Peel for Adhesives
   d. ASTM D1929 Standard Test Method for Determining Ignition Temperature of Plastics
   e. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials
6. American Architectural Manufacturers Association (AAMA):
   a. AAMA 2605 Voluntary Specification, Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels
   b. AAMA 501 Methods of Test for Exterior Walls
   c. AAMA 508 Voluntary Test Method and Specification for Pressure Equalized Rain Screen Wall Cladding Systems
   d. AMMA 509 Voluntary Test and Classification Method for Drained and Back Ventilated Rain Screen Wall Cladding Systems
7. National Fire Protection Association (NFPA):

a. NFPA 285 Standard Fire Test Method for Evaluation of Fire Propagation Characteristics of Exterior Non-Load-Bearing Wall Assemblies Containing Combustible Components

1.4 QUALITY ASSURANCE

A. MCM Manufacturer Qualifications: Company with a minimum of 10 years of continuous experience manufacturing MCM of the type specified in North America and must have completed at least five major projects in the specified MCM system.

B. MCM System Fabricator Qualifications: Approved by MCM panel manufacturer.

1. Shall have been in business under its present name for at least five (5) years prior to the start of this project.
2. MCM System Fabricator shall not have filed for protection from creditors under state or federal insolvency or debtor relief statues or codes.

C. MCM System Installer Qualifications:

1. The MCM System Installer shall have been in business under the present name for at least five (5) years prior to the start of this project and have experience with similar sized MCM system projects. The MCM System Installer must be capable of providing field service representation during construction.
2. The MCM System Installer must be an approved installer by a MCA Certified Fabricator for the installation of their MCM System and have undergone proper training for the specified system thereof.

D. Regulatory Code Agencies Requirements: Provide MCM system which have been evaluated and are in compliance with the following:

1. International Code Council (ICC)
2. Miami/Dade County Florida (Notice of Acceptance)
3. State of Florida (Florida Product Approval)

E. Delegated Design Engineer Qualifications: A professional engineer licensed to practice in the State of Florida where Project is located and who is experienced in providing engineering services of the type indicated.

F. Pre-Installation Conference

1. Prior to starting installation of glazed curtain wall system schedule conference with COR to demonstrate the following:
2. Clear understanding of construction documents.
3. Onsite inspection and acceptance of structural and pertinent structural details relating to curtain wall system.
4. Coordination of work of various trades involved. Conference is to be attended by Contractor, Architect, and AE consultants; personnel directly responsible for installation

of MCM, and manufacturer's technical field representatives. Conflicts are to be resolved and confirmed in writing.

1.5 SUBMITTALS

A. Submit in accordance with Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Product Data: Include construction details, material descriptions, dimensions of individual components and profiles, and finishes for each type of panel, system, and accessory.

1. Metal composite material (MCM) panels.
2. Metal composite material (MCM) system.

C. Shop Drawings:

1. Include fabrication and installation layouts of MCM system; details of edge conditions, joints, panel profiles, corners, anchorages, attachment assembly, trim, flashings, closures, accessories, and special details.
2. Accessories: Include details of flashing, trim, and anchorage, at a scale of not less than 1-1/2 inches per 12 inches (1:10).
3. Provide signed and sealed drawings, by a qualified design professional in Project jurisdiction, of MCM system showing compliance with performance requirements and design criteria identified for this Project.

D. Samples:

1. Composite panel, 150 mm (six inch) square, showing finish, each color, and texture.

D. Delegated Design Submittals: For MCM system, including analysis data signed and sealed by the qualified professional engineer responsible for their preparation.

1.6 WARRANTY

A. Panel Integrity Warranty: Manufacturer agrees to repair or replace components of MCM panels that fail in materials or workmanship within specified warranty period.

1. Failures include, but are not limited to, the following:
   a. Structural failures including rupturing, cracking, or puncturing.
   b. Deterioration of metals and other materials beyond normal weathering.
2. Warranty Period: **Five** years from date of Substantial Completion.

B. Panel Finish Warranty: Manufacturer agrees to repair finish or replace MCM panels that show evidence of deterioration of factory-applied finishes within specified warranty period.

1. Exposed Panel Finish: Deterioration includes, but is not limited to, the following:
   a. Color fading more than 5 Hunter units when tested in accordance with ASTM D2244.
   b. Chalking in excess of a No. 8 rating when tested in accordance with ASTM D4214.
   c. Cracking, checking, peeling, or failure of paint to adhere to bare metal.

2. Finish Warranty Period: **20** years from date of Substantial Completion.

C. MCM System Warranty: System manufacturer's standard form in which manufacturer agrees to repair or replace components of MCM systems that fail in materials or workmanship within specified warranty period.

1. Warranty Period: **Five** years from date of Substantial Completion.

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

A. Delegated Design: Engage a qualified professional engineer, as defined in Section 014500 "Quality Requirements," to design MCM system.

B. Seismic Performance: No failure or deterioration of the system when laterally racked to **3/4 inch (19 mm)** in both directions and repeated for three cycles in accordance with AAMA 501.4. System must pass the static water test as described in ASTM E331 following the seismic racking.

C. Structural Performance: MCM systems to withstand the effects of the following loads, based on testing in accordance with ASTM E330/E330M:

1. Wind Loads: As indicated on Drawings.
2. Other Design Loads: All MCM products shall carry Florida Product Approvals (FPAs).

D. Air Infiltration: Air leakage of not more than **0.06 cfm/sq. ft. (0.3 L/s per sq. m)** when tested in accordance with ASTM E283/E283M at the following test-pressure difference:

1. Test-Pressure Difference:**6.24 lbf/sq. ft. (300 Pa)**.

E. Water Penetration under Static Pressure: No water penetration when tested in accordance with ASTM E331 at the following test-pressure difference:

1. Test-Pressure Difference: **6.24 lbf/sq. ft. (300 Pa)**.

F. Water Penetration under Dynamic Pressure: No water penetration when tested in accordance with AAMA 501.1 at the following test pressure:

1. Test Pressure: **12 psf (580 Pa)**.

G. Pressure Cycling: Provide PER system with a pass rating in accordance with AAMA 508.

1. Lag between the cavity and the cyclic wind pressure to not exceed 0.08 seconds.
2. Maximum differential between the cavity and the cyclic wind pressure to not exceed 50 percent of the maximum test pressure.

H. Provide DBVC system: the air flow measurement across the MCM system (excluding jamb conditions) shall be measured to determine the V-axis classification on chart 1b fromwith AAMA 509.

I. Thermal Movements: Allow for thermal movements from ambient and surface temperature changes.

1. Temperature Change: **120 deg F (67 deg C), ambient; 180 deg F (100 deg C), material surfaces**.

J. Fire Propagation Characteristics: MCM system passes NFPA 285 testing.

2.2 METAL COMPOSITE MATERIAL (MCM) WALL PANELS

A. Metal Composite Material (MCM) Wall Panels: Provide MCM panels fabricated from two metal facings bonded to a solid, extruded thermoplastic core.

B. MCM Panel Materials:

1. Aluminum-Faced Panels : ASTM B209/B209M alloy as standard with manufacturer, temper as required to suit finish and forming operations with 0.020-inch- (0.50-mm-)thick, aluminum sheet facings.

a. Exterior Finish: **Three-coat fluoropolymer finish.**

1) Color: Black (where indicated in drawings) As selected by Architect from manufacturer's full range.
2) Color: White (where indicated in drawings) As selected by Architect from manufacturer's full range.

2.3 MANUFACTURER

A. Metal Composite Material (MCM) Manufacturers and Premium MCM System Fabricators.

1. Basis of Design: Subject to compliance with requirements, CEI Materials, LLC; FORMAS, INC R4000 Panel System or comparable product by one of the following or approved equal:

a. Kistler McDougall
b. PAC-CLAD

2.4 FASTENERS

A. Fasteners for aluminum panels shall be aluminum extrusions.
B. Fasteners shall be concealed and non-corrosive of size, type and holding strength as recommended by manufacturer.
C. Extrusions shall be continuous around panel perimeter for panel reinforcement and alignment.

2.5 FABRICATION

A. Aluminum composite metal wall system shall consist of two sheets of aluminum sandwiching a core of extruded thermoplastic formed in a continuous process without the use of glues or adhesives between dissimilar materials. Bond integrity testing shall adhere to ASTM D1781-76. Laminated products are not acceptable.

B. Wall system shall be a pressure equalized wall panel system designed on the “Rain Screen Principle” incorporating means of draining to exterior. Thickness of wall system is shown on the drawings.
   1. Aluminum face sheets (aluminum alloy 3003) of 0.51 mm (0.020 inch thickness).
   2. Total panel thickness with extruded thermoplastic core to be 4 mm (0.157 inch) thick. Panel weight shall be minimum 5.5 kg/sq.m (1.12 lbs/square foot).
   3. System shall allow no water penetration when tested under static pressure in accordance with ASTM E331 at a differential of 10% on inward acting design load, 6.3 = 24 psf (.299 kPa) minimum, after 15 minutes.
   4. Fabricate panels not exceeding the following tolerances: 1.6 mm (.062 inch) in a concave/convex direction, measured perpendicular to the normal plane.
   5. Provide plastic shims as thermal barrier between extrusions and sheathing.
   6. Joint filler strips shall be same material and color as panels. Use of caulking shall not be required.
   7. Panel system: Fully tested, dry joint (rain screen), using 12.5 mm (0.50 inch) wide panel joints. Panels shall include full-perimeter aluminum extrusions and integral weeps.

C. Provide fasteners as recommended by the panel manufacturer, concealed and non-corrosive.
   1. Extrusions and extrusion clips for attaching panels to sub-structure shall be purpose-made aluminum. Extrusions shall be full-length around perimeter of panels for panel reinforcement and alignment. Intermittent clips shall not be acceptable.
   2. Sub-girts, where required, shall be manufactured from G-90 galvanized steel and shall be designed to accommodate expansion and contraction, dynamic movements and design load requirements.
   3. Joint filler strips shall be same color and finish as panels. Use of caulking at joints shall not be acceptable.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements for installation tolerances, MCM system supports, and other conditions affecting performance of the Work.
   1. Examine wall framing to verify that girts, angles, channels, studs, and other structural panel support members and anchorage have been installed within alignment tolerances required by MCM system manufacturer.
   2. Examine wall sheathing to verify that sheathing joints are supported by framing or blocking and that installation is within flatness tolerances required by MCM system manufacturer.
      a. Verify that air- or water-resistive barriers have been installed over sheathing or backing substrate to prevent air infiltration or water penetration.

B. Examine roughing-in for components and assemblies penetrating MCM system to verify actual locations of penetrations relative to seam locations of MCM panels before installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 INSTALLATION

A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise. Panels shall be in full and firm contact with supports, free of distortion and surface imperfections and uniform in color. All cut ends and edges, including those at openings through the sheets shall be sealed completely. Replace materials which cannot be corrected in an approved manner with non-defective material.

B. Wall Panels: Apply panels with the configuration and reveals indicated in the drawings. Flashing will not be required where approved "self-flashing" panels are used.

1. Dry-Seal MCM System: Attach MCM panels by interlocking panel clips into tracks.

C. Fasteners: Fastener spacing shall be in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated. Provide concealed fastenings only.

D. Erect panels and joint filler strip in accordance with system manufacturer’s details and instructions and so as to meet specified design criteria and performance.

3.3 ISOLATION OF ALUMINUM

A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze, or other metal compatible with aluminum by one of the following:

1. Painting the dissimilar metal with a prime coat of Zinc-Molybdate followed by two coats of aluminum paint.
2. Placing a non-abrasive tape or gasket between the aluminum and the dissimilar metal.

3.4 PROTECTION AND CLEANING

A. Protect panels and other components from damage during and after erection, and until project is accepted by the Government.

B. Remove protective plastic film from panels.

C. After completion of work, all exposed finished surfaces of panels shall be cleaned of soil, discoloration and disfiguration. Touch-up minor surface damage with matching high-grade enamel.

D. Replace damaged panels and components which cannot be satisfactorily repaired.

E. Provide maintenance data for cleaning and maintenance of aluminum finishes.

- - - E N D - - -

12-01-21

SECTION 07 52 16.11
COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Modified bituminous sheet roofing and base flashing installed using cold-applied adhesive on new construction with solar reflective granular coating.
2. Repairs and alteration work, including temporary roofs.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Non-Flooring Adhesives and Sealants VOC Limits.

B. Section 07 22 00, ROOF AND DECK INSULATION: Roof Insulation.

C. Section 07 60 00, FLASHING AND SHEET METAL: Sheet Metal Components.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):

FX-1-01(R2006) ..... Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.

C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):

7-16 ..... Minimum Design Loads for Buildings and Other Structures.

D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):

90.1-13 ..... Energy Standard for Buildings Except Low-Rise Residential Buildings.

E. ASTM International (ASTM):

C1370-00(2012) ..... Determining Chemical Resistance of Aggregates for Use in Chemical-Resistant Sulfur Polymer Cement Concrete and Other Chemical-Resistant Polymer Concretes.

C1371-15 ..... Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers.

C1549-16 ..... Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer.

D146/D146M-04(2012)e1 ..... Sampling and Testing Bitumen-Saturated Felts and Woven Fabrics for Roofing and Waterproofing.

D1644-01(2017) ..... Nonvolatile Content of Varnishes.

D2523/D2523M-13(2019)e1 ..... Testing Load-Strain Properties of Roofing Membranes.

D4073/D4073M-06(2019)e1 .....Tensile-Tear Strength of Bituminous Roofing Membranes.

D4263-83(2018) .....Indicating Moisture in Concrete by the Plastic Sheet Method.

D4586/D4586M-07(2018) .....Asphalt Roof Cement, Asbestos Free.

D4601/D4601M-04(2020) .....Asphalt-Coated Glass Fiber Base Sheet Used in Roofing.

D4897/D4897M-16.....Asphalt Coated Glass Fiber Venting Base Sheet Used in Roofing.

D5147/D5147M-18.....Sampling and Testing Modified Bituminous Sheet Material.

D5201-05a(2014).....Calculating Formulation Physical Constants of Paints and Coatings.

D6162/D6162M-16.....Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using a Combination of Polyester and Glass Fiber Reinforcements.

D6163/D6163M-16.....Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using Glass Fiber Reinforcements.

D6164/D6164M-16.....Styrene Butadiene Styrene (SBS) Modified Bituminous Sheet Materials Using Polyester Reinforcements.

D6511/D6511M-18.....Solvent Bearing Bituminous Compounds.

D6866-21 .....Standard Test Methods for Determining the Biobased Content of Solid, Liquid and Gaseous Samples Using Radiocarbon Analysis.

E108-20a.....Fire Tests of Roof Coverings.

E408-13(2019) .....Total Normal Emittance of Surfaces Using Inspection-Meter Techniques.

E1918-16.....Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.

E1980-11(2019) .....Calculating Solar Reflectance of Horizontal and Low-Sloped Opaque Surfaces.

F. Cool Roof Rating Council (CRRC):

1-20 .....Product Rating Program.

G. National Roofing Contractors Association (NRCA):

Manual-19 .....The NRCA Roofing Manual: Membrane Roof Systems.

H. U.S. Department of Agriculture (USDA):

BioPreferred® Program Catalog.

I. UL LLC (UL):

580-06 .....Tests for Uplift Resistance of Roof Assemblies.

1897-20 .....Uplift Tests for Roof Covering Systems.

J. U.S. Department of Commerce National Institute of Standards and Technology (NIST):

DOC PS 1-19 ..... Structural Plywood.

DOC PS 2-18 ..... Performance Standard for Wood-Based Structural-Use Panels.

K. U.S. Environmental Protection Agency (EPA):

EPA 600/R-93/116-93 ..... Method for the Determination of Asbestos in Bulk Building Materials.

Energy Star ..... ENERGY STAR Program Requirements for Roof Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Architect/Engineer.
   c. Contractor.
   d. Installer.
   e. Manufacturer's field representative.
   f. Other installers responsible for adjacent and intersecting work, including roof deck, flashings, roof specialties, roof accessories, utility penetrations, and equipment.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Terminations.
   g. Transitions and connections to other work.
   h. Inspecting and testing.
   i. Other items affecting successful completion.
   j. Pull out test of fasteners.
   k. Material storage, including roof deck load limitations.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Roofing membrane layout.

2. Roofing membrane fastener pattern and spacing.
3. Roofing membrane seaming and joint details.
4. Roof membrane penetration details.
5. Base flashing and termination details.
6. Final approved site-specific shop drawings shall be signed and sealed by licensed engineer in the State of Florida.

C. Manufacturer's Literature and Data:
1. Description of each product.
2. Minimum fastener pullout resistance.
3. Installation instructions.
4. Warranty.

D. Samples:
1. Roofing Membrane: 150 mm (6 inch) square.
2. Base Flashing: 150 mm (6 inch) square.
3. Fasteners: Each type.
4. Roofing Membrane Seam: 300 mm (12 inches) square.

E. Sustainable Construction Submittals:
1. Solar Reflectance Index (SRI) for roofing membrane.
2. Low Pollutant-Emitting Materials:
a. Show volatile organic compound types and quantities.

F. Certificates: Certify products comply with specifications.
1. Fire and windstorm classification.
2. High wind zone design requirements
a. Submit certified independent laboratory test reports and Florida Product Approvals (FPAs) verifying compliance with Wind Load Resistance requirements per Florida Building Code.

G. Qualifications: Substantiate qualifications comply with specifications.
1. Installer, including supervisors with project experience list.
2. Manufacturer's field representative with project experience list.

H. Field quality control reports.

I. Operation and Maintenance Data:
1. Maintenance instructions.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:
1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
2. Regularly installs specified products.

3. Installed specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.
4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer's Representative and installer's personnel.

B. Manufacturer's Field Representative:
1. Manufacturer's full-time technical employee or independent roofing inspector.
2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

C. Product/Material Qualifications:
1. All roof coatings shall have a minimum biobased content of 20% in accordance with ASTM D6866 for certification purposes.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Comply with NRCA Manual storage and handling requirements.
B. Store products indoors in dry, weathertight facility.
C. Store adhesives according to manufacturer's instructions.
D. Protect products from damage during handling and construction operations.
E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

A. Environment:
1. Product Temperature: Minimum 4 degrees C (40 degrees F) for minimum 48 hours before installation.
2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
B. Manufacturer's Warranty: Warrant roofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.
1. Warranty Period: 20years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Roofing System: Modified bituminous sheet roofing and base flashing installed using cold-applied adhesive on new construction with solar reflective granular coating.

2.2 SYSTEM PERFORMANCE

A. Design roofing system meeting specified performance:
   1. Load Resistance: Design Wind Loads - Allowable Stress Design (ASD) per 2023 Florida Building Code (FBC) & ASCE/SEI 7; Design criteria: as indicated on Drawings.
      a. Uplift Pressures:
         1) Corner Uplift Pressure: 229.0 lbs. per square foot).
         2) Perimeter Uplift Pressure: 168.0 lbs. per square foot).
         3) Field-of-Roof Uplift Pressure: 107.0 lbs. per square foot)).
   2. Energy Performance:
      a. ASTM E1980; Minimum 78 Solar Reflectance Index (SRI).
      b. Three-Year Aged Performance: Minimum 0.55 solar reflectance tested in according to ASTM C1549 or ASTM E1918, and minimum 0.75 thermal emittance tested in according to ASTM C1371 or ASTM E408.
         1) Where tested aged values are not available:
            a) Calculate compliance adjusting initial solar reflectance according to ASHRAE 90.1.
            b) Provide roofing system with minimum 64 three-year aged Solar Reflectance Index calculated according to ASTM E1980 with 12 watt/square meter/degree K (2.1 BTU/hour/ square foot) convection coefficient.

B. Roofing Membrane System Load-Strain Properties: Provide a roofing membrane identical to component systems that have been successfully tested by a qualified independent testing and inspecting agency to meet the following minimum load-strain properties at membrane failure when tested according to ASTM D2523:

2.3 PRODUCTS - GENERAL

A. Provide roof system components from one manufacturer.

B. Sustainable Construction Requirements:
   1. Solar Reflectance Index: 78 minimum.
   2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
      a. Non-flooring adhesives and sealants.

2.4 MEMBRANE AND SHEET MATERIALS

A. Membrane Materials, General: Provide combination of base, ply, and cap sheet materials that have been tested in combination and comply with specified load/strain performance.

B. Base Sheet and Membrane Ply Sheet: ASTM D6163/D6163M or ASTM D6164/D6164M, Grade S, Type II or III, glass-fiber-reinforced, SBS/SEBS-modified asphalt sheet, or ASTM D6162/D6162M, Grade S, Type II or III, SBS/SEBS-modified asphalt sheet; smooth surfaced; with the following minimum properties:

1. Tensile Strength at 23 degrees C (73 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 21 kN/meter (120 pound force/inch).
2. Tear Strength at 23 degrees C (73 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 890 N (200 pound force.).
3. Elongation at 23 degrees C (73 degrees F), minimum, cross machine direction, at 5 percent maximum load ASTM D5147/D5147M: 40 percent.

C. Membrane Cap Sheet: ASTM D6162/D6162M, Grade G, Type III, composite polyester and glass-fiber-reinforced, SBS/SEBS-modified asphalt sheet; granular surfaced with a factory applied, white, reflective, acrylic coating; CRRC listed and California Title 24 Energy Code compliant; and as follows:
1. Exterior Fire-Test Exposure, ASTM E108: Class A.
2. Tensile Strength at 23 degrees C (73 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 66 kN/meter (880 pound force/inch).
3. Tear Strength at 23 degrees C (73 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 330 N (750 pound force).
4. Elongation at 23 degrees C (73 degrees F), minimum, cross machine direction, ASTM D5147/D5147M: 6 percent.
5. Low Temperature Flex, maximum, ASTM D5147/D5147M, -26 degrees C (-15 degrees F).
6. Reflectance, ASTM C1549: 75 percent.
7. Thermal Emittance, ASTM C1371: 0.86.
8. Solar Reflectance Index (SRI), ASTM E1980: 92.

D. Base Flashing Backer Sheet: ASTM D4601/D4601M, Type II.

E. Base Flashing Sheet: ASTM D6164/D6164M, Grade G, Type II, polyester-reinforced, SBS-modified asphalt sheet; with granular surface; Granule Color: White.

2.5 ADHESIVE AND ASPHALT MATERIALS

A. General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.

B. Water-Based Asphalt Primer: Water-based, polymer modified, asphalt primer with the following physical properties:
1. Asbestos Content, EPA 600/R-93/116: None.

C. Cold-Applied Adhesive for Sheet Membrane: One-part, asbestos-free, low-volatile organic compound, cold-applied adhesive compatible with specified roofing membranes and flashings, with the following physical properties:
1. Asbestos Content, EPA 600 R-93/116: None.
2. Nonvolatile Content, minimum, ASTM D6511/D6511M: 75 percent.
3. Uniformity and Consistency, ASTM D6511/D6511M: Pass.

D. Cold-Applied Adhesive for Membrane Flashing: One-part, cold-applied adhesive compatible with specified roofing membranes and flashings, with the following physical properties:
   1. Asbestos Content, EPA 600 R-93/116: None.
   2. Nonvolatile Content, minimum, ASTM D6511/D6511M: 75 percent.
   3. Uniformity and Consistency, ASTM D6511/D6511M: Pass.

E. Roof Cement: ASTM D4586/D4586M, Type II.

2.6 FASTENERS

A. Roofing Fasteners: Coated, corrosion-resistant steel fasteners and metal or plastic plates, where applicable, tested by fastener manufacturer for required uplift resistance, and recommended by roofing manufacturer for application.

B. Accessory Fasteners: Corrosion-resistant fasteners compatible with adjacent materials and recommended for application by manufacturer of component to be fastened.

2.7 ACCESSORIES

A. Temporary Protection Materials:
   1. Expanded Polystyrene (EPS) Insulation: ASTM C578.
   2. Plywood: NIST DOC PS 1, Grade CD Exposure 1.
   3. Oriented Strand Board (OSB): NIST DOC PS 2, Exposure 1.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine and verify substrates for product installation with roofing Installer and roofing inspector present.
   1. Verify roof penetrations are complete and secured against movement.
   2. Verify roof deck is adequately secured to resist wind uplift.
   3. Verify roof deck is clean, dry, and in-plane ready to receive roofing system.

B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

A. Complete roof deck construction before commencing roofing work:
   1. Curbs, blocking, edge strips, nailers, cants, and other components to which roofing and base flashing is attached, in place ready to receive insulation and roofing.
   2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
   3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of work day.

B. Dry out surfaces including roof deck flutes that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.

C. Broom clean roof decks. Remove dust, dirt and debris.

D. Remove projections capable of damaging roofing materials.

3.3 TEMPORARY PROTECTION

A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.

B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.

C. Temporarily seal exposed insulation surfaces within roofing membrane.

1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.
2. Direct water away from work. Provide drainage, preventing water accumulation.
3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.

D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.

1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.

E. Remove sandbags and store for reuse.

3.4 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Comply with NRCA Manual installation instructions.

C. Comply with UL 1897 for uplift resistance.

3.5 INSTALLATION OF MODIFIED BITUMEN MEMBRANE

A. Primer: Apply primer to substrates where recommended by roofing manufacturer, in application quantities recommended by roofing manufacturer.

B. Cold-Applied Adhesive: Apply cold-applied adhesive in application quantities recommended by roofing manufacturer at substrate, between membrane sheets, and as glaze coat where required.

C. Membrane Sheets:

1. Number of Plies: Two, minimum, including base sheet and cap sheet, and additional plies as required to meet load/strain properties specified in Part 2 of this Section.
2. Begin laying sheets at the low points.

3. Roll sheets into cold-applied adhesive brushing down to firmly embed, free of wrinkles, fishmouths, blisters, bubbles, voids, air pockets or other defects that prevent complete adhesion.
4. Cut to fit closely around pipes, roof drains, bitumen stops, and similar roof projections.
5. Lap sheets shingle fashion starting with starter strips at right angles to slope of roof.
6. Laps for Top Sheet and Base Sheet:
   a. Base sheet, lapped 75 mm (3 inches).
   b. Install 450 mm (18 inch) starting widths, lap top sheet 475 mm (19 inches).
   c. Lap end joints of sheet 150 mm (6 inches). Stagger end joints in relation to end joints in adjacent and proceeding plies.

D. Roof Edges and Terminations:
1. Where nailers occur at roof edges under gravel stops or penetrations to receive metal base flashing, apply a continuous strip of underlayment over the nailers before the first ply sheet is applied. Strip shall be installed on top of venting base sheet if any.
2. After membrane is installed, turn the underlayment back over the roofing, and secure in place with cold-applied adhesive before gravel stops or other metal flanges extending out onto the membrane are installed.
3. Where cants occur at vertical surfaces, cut off roofing sheets 50 mm (2 inches) above top of cant strips, except at prefabricated curbs, scuttles and other roof accessories having integral cants, extend membrane over cant and up vertical surface to top of curb or nailer as shown.
4. Where fascia-cant occurs at roof edges, extend membrane beyond outside cant face and cut off at outside after base flashing is installed.

3.6 BASE FLASHING

A. Provide built-up base flashing over cants and as necessary to make work watertight.
B. Prime vertical surfaces of masonry and concrete with asphalt primer except where vented base sheet is required to provide edge venting.
C. Apply flashing on top of roofing, up face of cant and up the face of the vertical surface, at least 200 mm (8 inches) above the roofing but maximum 350 mm (14 inches) above the roofing, generally full height beneath counter flashing or top of curb flashing.
1. At fascia-cants, extend to top of cant and cut off at top of cant.
2. At reglet, extend full depth into the reglet.

D. Apply two plies of modified bituminous sheet.
1. Extend the first ply 100 mm (4 inches) out on the roofing, and the second ply 75 mm (3 inches) beyond the first ply. Lap ends 75 mm (3 inches) with joints broken 450 mm (18 inches) in each ply. Use smooth surface modified bituminous sheet for first ply.
2. Use granular surfaced modified bitumen cap sheet.

E. Set base flashing in a solid application of cold-applied adhesive.

1. Set cap sheet in cold-applied adhesive with laps sealed with cold-applied adhesive.
2. Except for venting roof edges, seal the top edge of the base flashing with roof cement.

F. Except at metal fascia cants, secure top edge of base flashing with nails on a line approximately 25 mm (1 inch) below top edge, spaced maximum 200 mm (8 inches) on center.
1. Cover nail heads with roof cement.
2. Cover the top of the base flashing with counterflashing as specified in Section 07 60 00, FLASHING AND SHEET METAL. At the fascia cants secure the top edge of the flashing with fascia compression clamp as specified in Section 07 60 00, FLASHING AND SHEET METAL.

3.7 STRIPPING

A. Coordinate to set flanges of metal flashing in roof cement on top sheet of the modified bituminous roofing and mailing to blocking with Section 07 60 00, FLASHING AND SHEET METAL.
B. Cover that portion of the horizontal flanges of metal base flashings, gravel stops, and other flanges extending out onto the roofing with modified bituminous sheet.
C. Extend the sheet out on the roofing 150 mm (6 inches) beyond the edge of the metal flange. Cut edge to fit tight against vertical members of flange.
D. Prime flange before stripping, embed sheet in cold-applied adhesive.

3.8 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory provided by Contractor.
1. Fastener Pull Out Tests: ANSI/SPRI FX-1; one test for every 230 square meter (2,500 square feet) of deck. Perform tests for each combination of fastener type and roof deck type before installing roof insulation.
a. Test at locations selected by Contracting Officer's Representative.
b. Do not proceed with roofing work when pull out resistance is less than manufacturer's required resistance.
c. Test Results:
1) Repeat tests using different fastener type or use additional fasteners achieve pull out resistance required to meet specified wind uplift performance.
2) Patch cementitious deck to repair areas of fastener tests holes.
2. Examine and probe roofing membrane and flashing seams in presence of Contracting Officer's Representative and Manufacturer's field representative.
3. Probe seams to detect marginal bonds, voids, skips, and fishmouths.
4. Cut 100 mm (4 inch) wide by 300 mm (12 inch) long samples through seams where directed by Contracting Officer's Representative.
5. Cut one sample for every 450 m (1500 feet) of seams.
6. Cut samples perpendicular to seams.
7. Failure of samples to pass ASTM D1876 test will be cause for rejection of work.
8. Repair areas where samples are taken and where marginal bond, voids, and skips occur.

9. Repair fishmouths and wrinkles by cutting to lay flat. Install patch over cut area extending 100 mm (4 inches) beyond cut.

B. Manufacturer Services:

1. Inspect initial installation, installation in progress, and completed work.
2. Issue supplemental installation instructions necessitated by field conditions.
3. Prepare and submit inspection reports.
4. Certify completed installation complies with manufacturer's instructions and warranty requirements.

3.9 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed roofing surfaces. Remove contaminants and stains // to comply with specified solar reflectance performance //.

3.10 PROTECTION

A. Protect roofing system from traffic and construction operations.

1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.

B. Loose lay temporary insulation board overlaid with plywood or OSB.

1. Weight boards to secure against wind uplift.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

SECTION 07 60 00
FLASHING AND SHEET METAL

PART 1 - GENERAL

1.1 DESCRIPTION

A. Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, are specified in this section.

1.2 RELATED WORK

A. Section 07 52 16.11 COLD ADHESIVE STYRENE-BUTADIENE-STYRENE MODIFIED BITUMINOUS MEMBRANE ROOFING Membrane base flashings and stripping.

B. Section 07 92 00, JOINT SEALANTS: Joint Sealants.

C. Division 23 HVAC: Integral flashing components of manufactured roof specialties and accessories or equipment.

1.3 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.

B. Aluminum Association (AA):

AA-C22A41 ..... Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick

AA-C22A42 ..... Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick

AA-C22A44 ..... Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish

C. American National Standards Institute/Single-Ply Roofing Institute/Factory Mutual (ANSI/SPRI/FM):

4435/ES-1-11 ..... Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems

D. American Architectural Manufacturers Association (AAMA):

AAMA 620-02..... Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Aluminum

AAMA 621-02..... Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

E. ASTM International (ASTM):

A240/A240M-20 .....Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.

A653/A653M-20 .....Steel Sheet Zinc-Coated (Galvanized) or Zinc Alloy Coated (Galvanized) by the Hot- Dip Process

B32-08(2014) .....Solder Metal

B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate

B370-12(2019) .....Copper Sheet and Strip for Building Construction

D173/D173M-03(2018) .....Bitumen-Saturated Cotton Fabrics Used in Roofing and Waterproofing

D412-16 .....Vulcanized Rubber and Thermoplastic Elastomers-Tension

D1187/D1187M-97(2018) .....Asphalt Base Emulsions for Use as Protective Coatings for Metal

D1784-20 .....Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds

D3656/D3656M-13.....Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns

D4586/D4586M-07(2018) .....Asphalt Roof Cement, Asbestos Free

F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.

G. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06 .....Metal Finishes Manual

H. Federal Specification (Fed. Spec):

A-A-1925A.....Shield, Expansion; (Nail Anchors)

UU-B-790A.....Building Paper, Vegetable Fiber

I. International Code Commission (ICC): International Building Code, Current Edition

1.4 PERFORMANCE REQUIREMENTS

A. Wind Design Standard: Fabricate and install copings tested per ANSI/SPRI/FM ES-1 to resist design pressure 145 psf (Horiz.) and 240 psf (Vert) and as indicated on Drawings.

B. Manufactured Gutters: Fabricate and install gutters to comply with ANSI/SPRI GT-1 – Test Standard for Gutter Systems.

C. Certification of Florida Product Approval

1.5 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: For all specified items, including:

1. Flashings
2. Copings

3. Gravel Stop-Fascia
4. Gutter and Conductors

C. Manufacturer's Literature and Data: For all specified items, including:
1. Two-piece counterflashing
2. Thru wall flashing
3. Self-adhering, non-asphaltic copper fabric flashing.

D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

A. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or, copper sheets may be bonded between two layers of coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.

B. Aluminum Sheet: ASTM B209, alloy 3003-H14.

C. Galvanized Sheet: ASTM, A653.

D. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.

B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m²(6 pounds/100 square feet).

C. Bituminous Paint: ASTM D1187, Type I.

D. Fasteners:
1. Use copper, copper alloy, bronze, brass, or stainless steel for copper and copper clad stainless steel, and stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.
2. Nails:
a. Minimum diameter for copper nails: 3 mm (0.109 inch).
b. Minimum diameter for aluminum nails 3 mm (0.105 inch).
c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.

d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.

3. Rivets: Not less than 3 mm (1/8 inch) diameter.
4. Expansion Shields: Fed Spec A-A-1925A.

E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

F. Insect Screening: ASTM D3656, 18 by 18 regular mesh.

G. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:

B. Concealed Locations (Built into Construction):

1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
2. Galvanized steel: 0.5 mm (0.021 inch) thick.

C. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

A. Jointing:

1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
3. Joints shall conform to following requirements:
   a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
   b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
   c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
4. Flat and lap joints shall be made in direction of flow.
5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.

B. Expansion and Contraction Joints:

1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
2. Space joints as shown or as specified.
3. Space expansion and contraction joints for copper, stainless steel, and copper clad stainless steel at intervals not exceeding 7200 mm (24 feet).
4. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.
5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.

6. Fabricate joint covers of same thickness material as sheet metal served.

C. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Fabricate edge strips thickness as required per ANSI/SPRI ES-1 tested assembly.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Anchor type, size, edge distance as required per ANSI/SPRI ES-1 tested assembly.

E. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

G. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.

2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
3. Where copper gravel stops, copings and flashings will carry water onto cast stone, stone, or architectural concrete, or stainless steel.

2.5 FINISHES

A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
C. Finish exposed metal surfaces as follows, unless specified otherwise:
   1. Stainless Steel: Finish No. 2B or 2D.
   2. Aluminum:
      a. Fluorocarbon Finish: AAMA 620, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
   1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
   2. Fabricate so keying nests at overlaps.
B. For Masonry Work When Concealed Except for Drip:
   1. Either copper, stainless steel, or copper clad stainless steel.
   2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
   3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
   1. Use same metal and thickness as counter flashing.
   2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
   3. Form exposed portion as snap lock receiver for counter flashing upper edge.
D. For Flashing at Architectural Precast Concrete Panels or Stone Panels.
   1. Use plan flat sheet of stainless steel.
   2. Form exposed portions with drip as specified or receiver.
E. Window Sill Flashing and Lintel Flashing:
   1. Use either copper, stainless steel, copper clad stainless-steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
   2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.

3. Turn up back edge as shown.
4. Form exposed portion with drip as specified or receiver.

F. Door Sill Flashing:
1. Where concealed, use either 0.5 Kg (20 ounce) copper, 0.5 mm (0.018 inch) thick stainless steel, or 0.5 mm (0.018 inch) thick copper clad stainless steel.
2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use either 0.6 Kg (24 ounce) copper, 0.6 mm (0.024 inch) stainless steel, or 0.6 mm (0.024 inch) thick stainless steel.
3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.7 BASE FLASHING

A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.
1. Use either copper, or stainless steel, thickness specified unless specified otherwise.
2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) copper or 0.5 mm (0.018 inch) stainless steel.
3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
4. Use either copper, or stainless steel at pipe flashings.

B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).

C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.

D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.

E. Pipe Flashing: (Other than engine exhaust or flue stack)
1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
   a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
   b. Allow for loose fit around and into the pipe.
4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
   a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
   b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. Either copper or stainless steel, unless specified otherwise.

B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:

1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
4. Manufactured assemblies may be used.
5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.

C. One-piece Counterflashing:

1. Back edge turned up and fabricate to lock into reglet in concrete.
2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).

D. Two-Piece Counterflashing:

1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:

1. Use at existing or new surfaces where flashing cannot be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

F. Pipe Counterflashing:

1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) over lap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.6 Kg (24 oz) copper or 0.33 mm (0.013 inch) thick stainless steel or copper coated stainless steel.

4. Use stainless steel bolt on draw band tightening assembly.
5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.9 GRAVEL STOPS

A. General:
1. Fabricate in lengths not less than 2400 mm (8 feet) long and maximum of 3000 mm (10 feet).
2. Fabricate internal and external corners as one-piece with legs not less than 600 mm (2 feet) or more than 1200 mm (4 feet) long.
3. Fabricate roof flange not less than 100 mm (4 inches) wide.
4. Fabricate top edge to extend above roof not less than 25 mm (one inch) for embedded gravel aggregate and not less than 100 mm (4 inches) for loose laid ballast.
5. Fabricate lower edge outward at an angle of 45 degrees to form drip and as fascia or as counter flashing as shown:
   a. Fabricate of one-piece material of suitable width for fascia height of 250 mm (10 inch) maximum or counterflashing lap of not less than 100 mm (4 inch) over base flashing.
   b. Fabricate bottom edge of formed fascia to receive edge strip.
   c. When fascia bottom edge forms counter flashing over roofing lap roofing not less than 150 mm (6 inches).

B. Formed Flat Sheet Metal Gravel Stops and Fascia:
1. Fabricate as shown of 1.25 mm (0.050 inch) thick aluminum.
2. When fascia exceeds 150 mm (6 inches) in depth, form one or more horizontal stops not less than 13 mm (1/2 inch) high in the fascia.
3. Fabricate as two-piece fascia when fascia depth exceeds 250 mm (10 inches).
4. At joint between ends of sheets, provide a concealed clip soldered or welded near one end of each sheet to hold the adjoining sheet in lapped position. The clip shall be approximately 100 mm (4 inches) wide and shall be the full depth of the fascia less 25 mm (one inch) at top and bottom. Clip shall be of the same thickness as the fascia.
5. Provide edge strip as specified with lower hooked edge bent outward at an angle of 45 degrees.

2.10 BITUMEN STOPS

A. Fabricate bitumen stops for bituminous roofing edges for use with formed sheet metal gravel stops, pipe penetrations, and other penetrations through roof deck without a curb.

B. Fabricate with 19 mm (3/4 inch) vertical legs and 75 mm (3 inch) horizontal legs.

C. When used with gravel stop or metal base flashing use same metal for bitumen stop in thickness specified for concealed locations.

HANGING GUTTERS

D. Fabricate aluminum gutters In accordance with ANSI/SPRI GT-1 tested assembly.

E. Fabricate hanging gutters in sections not less than 2400 mm (8 feet) long, except at ends of runs where shorter lengths are required.

F. Building side of gutter shall be same height as exterior side.

G. Gutter Bead: Stiffen outer edge of gutter by folding edge over approximately 19 mm (3/4 inch) toward roof and down approximately19 mm (3/4 inch) unless shown otherwise.

H. Gutter Spacers:

1. Fabricate in accordance with ANSI/SPRI GT-1 tested assembly.

I. Gutter Brackets:

1. Fabricate of same metal as gutter in accordance with ANSI/SPRI GT-1 tested assembly.

2.11 CONDUCTORS (DOWNSPOUTS)

A. Fabricate conductors of same metal and thickness as gutters in sections approximately 3000 mm (10 feet) long [with 19 mm (3/4 inch) wide flat locked seams].

1. Fabricate open face channel shape with hemmed longitudinal edges.

B. Fabricate elbows by mitering, riveting, and soldering except seal aluminum in lieu of solder. Lap upper section to the inside of the lower piece.

C. Fabricate conductor brackets or hangers of same material as conductor, 2 mm (1/16 inch) thick by 25 mm (one inch) minimum width. Form to support conductors 25 mm (one inch) from wall surface in accordance with Architectural Sheet Metal Manual for rectangular and round shapes.

D. Conductor Heads:

1. Fabricate of same material as conductor.
2. Fabricate conductor heads to not less than 250 mm (10 inch) wide by 200 mm (8 inch) deep by 200 mm (8 inches) from front to back.
3. Form front and side edges channel shape not less than 13 mm (1/2 inch) wide flanges with edge hemmed.
4. Slope bottom to sleeve to conductor or downspout at not less than 60 degree angle.
5. Extend wall edge not less than 25 mm (one inch) above front edge.
6. Solder joints for water tight assembly.
7. Fabricate outlet tube or sleeve at bottom not less than 50 mm (2 inches) long to insert into conductor.

2.12 SPLASHPANS

A. Fabricate splashpans from the following:

1. 1.25 mm (0.050 inch) thick aluminum.

B. Fabricate in accordance with Architectural Sheet Metal Manual Plate 35 with not less than two ribs as shown in alternate section.

2.13 REGLETS

A. Fabricate reglets of one of the following materials:
   1. 0.4 Kg (16 ounce) copper.
   2. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
   3. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.
   4. Plastic, ASTM D1784, Type II, not less than 2 mm (0.075 inch) thick.

B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.

C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.

D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.

E. Fabricate mitered corners, fittings, and special shapes as may be required by details.

F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

2.14 INSULATED EXPANSION JOINT COVERS

A. Either type optional, use only one type throughout.

B. Types:
   1. Construct of two preformed, stainless steel strips, not less than 0.4 mm (0.015 inch) thick, mechanically and adhesively bonded to both sides of a 2 mm (1/16 inch) thick neoprene or butyl sheet, or to a 0.4 mm (32 mil) thick reinforced chlorinated polyethylene sheet. Adhesively attach a 10 mm (3/8 inch) thick sheet of closed cell, neoprene foam insulation, to the underside of the neoprene, butyl, or chlorinated polyethylene sheet.
   2. Constructed of a 2 mm (1/16 inch) thick vinyl sheet, flanged at both sides with stainless steel strips not less than 0.4 mm (0.015 inch) thick. Vinyl sheet locked and encased by the stainless steel strip and prepunched for nailing. A 10 mm (3/8 inch) thick closed cell polyvinyl chloride foam insulating strip shall be heat laminated to the underside of the vinyl sheet between the stainless steel strips.

C. Expansion joint covers shall have factory fabricated mitered corners, crossing tees, and other necessary accessories. Furnish in the longest available lengths.

D. Metal flange of sufficient width to extend over the top of the curb and down curb sides 50 mm (2 inches) with hemmed edge for lock to edge strip.

2.15 SCUPPERS

A. Fabricate scuppers with minimum of 100 mm (4 inch) wide flange.

B. Provide flange at top on through wall scupper to extend to top of base flashing.

C. Fabricate exterior wall side to project not less than 13 mm (1/2 inch) beyond face of wall with drip at bottom outlet edge.

D. Fabricate not less than 100 mm (4 inch) wide flange to lap behind gravel stop fascia.

E. Fabricate exterior wall flange for through wall scupper not less than 25 mm (one inch) wide on top and sides with edges hemmed.

F. Fabricate gravel stop bar of 25 mm x 25 mm (one by one inch) angle strip soldered to bottom of scupper.

G. Fabricate scupper not less than 200 mm (8 inch) wide and not less than 125 mm (5 inch) high for through wall scupper.

H. Solder joints watertight.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.

10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
    a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
    b. Paint dissimilar metal with a coat of bituminous paint.
    c. Apply an approved caulking material between aluminum and dissimilar metal.
15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
17. Bitumen Stops:
    a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
    b. Nail leg of bitumen stop at 300 mm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

3.2 THROUGH-WALL FLASHING

A. General:
1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.

7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
14. Continue flashing around columns:
    a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
    b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).

B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.

C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).

D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.

E. Flashing at Veneer Walls:
    1. Install near line of finish floors over shelf angles or where shown.
    2. Turn up against sheathing.
    3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
    4. At concrete backing, extend flashing into reglet as specified.
    5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

F. Lintel Flashing when not part of shelf angle flashing:

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Window Sill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

I. Flashing at Masonry, Stone, or Precast Concrete Copings:

1. Install flashing with drips on both wall faces unless shown otherwise.
2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

3.3 BASE FLASHING

A. Install where roof membrane type base flashing is not used and where shown.

1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.

B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with

sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.

C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. General:
   1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
   2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
   3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
   4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
   5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
   6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:
   1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
   2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
   3. Where flashing is surface mounted on flat surfaces.
      a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
         1) Locate fasteners in masonry mortar joints.
         2) Use screws to sheet metal or wood.
      b. Fill joint at top with sealant.
   4. Where flashing or hood is mounted on pipe.
      a. Secure with draw band tight against pipe.
      b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
      c. Completely fill joint at top with sealant.

C. Two-Piece Counterflashing:
   1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.

2. Surface applied type receiver:
   a. Secure to face construction in accordance, with manufacturers' instructions.
   b. Completely fill space at the top edge of receiver with sealant.
3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.

D. Where vented edge occur install so lower edge of counterflashing is against base flashing.

E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

A. Install reglets in a manner to provide a watertight installation.

B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.

C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:
   1. Coordinate reglets for anchorage into concrete with formwork construction.
   2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.6 GRAVEL STOPS

A. General:
   1. Install gravel stops and fascias with allowance for expansion at each joint; minimum of 6 mm (1/4 inch).
   2. Extend roof flange of gravel stop and splice plates not less than four inches out over roofing and nail or screw to wood nailers. Space fasteners on 75 mm (3 inch) centers in staggered pattern.
   3. Install continuous cleat for fascia drip edge. Secure with fasteners as close to lower edge as possible on 75 mm (3 inch) centers.
   4. Where ends of gravel stops and fascias abut a vertical wall, provide a watertight, flashed and sealant filled joint.
   5. Set flange in roof cement when installed over built-up roofing.
   6. Edge securement for low-slope roofs: Low-slope membrane roof systems metal edge securement, except gutters, shall be designed in accordance with ANSI/SPRI/FM ES-1, except the basic wind speed shall be determined from Figure 1609, of IBC 2003.

B. Sheet metal gravel stops and fascia:
   1. Install with end joints of splice plates sheets lapped three inches.
   2. Hook the lower edge of fascia into a continuous edge strip.
   3. Lock top section to bottom section for two-piece fascia.

C. Corrugated sheet gravel stops and fascia:
   1. Install 300 mm (12 inch) wide sheet flashing centered under joint. A combination bottom and cover plate, extending above and beneath the joint, may be used.

2. Hook lower edge of fascia into a continuous edge strip.

D. Scuppers:

1. Install scupper with flange behind gravel stops; leave 6 mm (1/4 inch) joint to gravel stop.
2. Set scupper at roof water line and fasten to wood blocking.
3. Use sealant to seal joint with fascia gravel stops at ends.
4. Coordinate to lap over conductor head and to discharge water into conductor head.

3.7 COPINGS

A. General:

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

3.8 EXPANSION JOINT COVERS, INSULATED

A. Install insulated expansion joint covers at locations shown on curbs not less than 200 mm (8 inch) high above roof surface.

B. Install continuous edge strips of same metal as expansion joint flange, nailed at not less than 75 mm (3 inch) centers.

C. Install insulated expansion joint covers in accordance with manufacturer's directions locking edges to edge strips.

3.9 HANGING GUTTERS

A. Hang gutters with high points equidistant from downspouts. Slope at not less than 1:200 (1/16 inch per foot).

B. Lap joints, except for expansion joints, at least 25 mm (one inch) in the direction of flow. Rivet and seal or solder lapped joints.

C. Support gutters in brackets spaced not more than 600 mm (24 inch) on centers, brackets attached to facial or wood nailer by at least two screws or nails.

1. For aluminum gutters use aluminum brackets or stainless steel brackets.
2. Use brass or stainless steel screws.

D. Secure brackets to gutters in such a manner as to allow free movement of gutter due to expansion and contraction.

E. Gutter Expansion Joint:

1. Locate expansion joints midway between outlet tubes.

2. Provide at least a 25 mm (one inch) expansion joint space between end baffles of gutters.
3. Install a cover plate over the space at expansion joint.
4. Fasten cover plates to gutter section on one side of expansion joint only.
5. Secure loose end of cover plate to gutter section on other side of expansion joint by a loose-locked slip joint.

F. Outlet Tubes: Set bracket strainers loosely into gutter outlet tubes.

3.10 CONDUCTORS (DOWNSPOUTS)

A. Where scuppers discharge into downspouts install conductor head to receive discharge with back edge up behind drip edge of scupper. Fasten and seal joint. Sleeve conductors to gutter outlet tubes and fasten joint and joints between sections.

B. Set conductors plumb and clear of wall, and anchor to wall with two anchor straps, located near top and bottom of each section of conductor. Strap at top shall be fixed to downspout, intermediate straps and strap at bottom shall be slotted to allow not less than 13 mm (1/2 inch) movement for each 3000 mm (10 feet) of downspout.

C. Install elbows, offsets and shoes where shown and required. Slope not less than 45 degrees.

3.11 SPLASH PANS

A. Install where downspouts discharge on low slope roofs unless shown otherwise.

B. Set in roof cement prior to pour coat installation or sealant compatible with single ply roofing membrane.

3.12 GOOSENECK ROOF VENTILATORS

A. Install on structural curb not less than 200 mm (8 inch) high above roof surface.

B. Securely anchor ventilator curb to structural curb with fasteners spaced not over 300 mm (12 inch) on center.

C. Anchor gooseneck to curb with screws having neoprene washers at 150 mm (6 inch) on center.

- - - E N D - - -

SECTION 07 84 00
FIRESTOPPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.

B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.

B. Section 07 92 00, JOINT SEALANTS: Sealants and application.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Installer qualifications.

D. Inspector qualifications.

E. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.

F. List of FM, UL, or WH classification number of systems installed.

G. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

H. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

1.4 DELIVERY AND STORAGE

A. Deliver materials in their original unopened containers with manufacturer's name and product identification.

B. Store in a location providing protection from damage and exposure to the elements.

1.5 QUALITY ASSURANCE

A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements." Submit qualification data.

C. Inspector Qualifications: Contractor to engage a qualified inspector to perform inspections and final reports. The inspector to meet the criteria contained in ASTM E699 for agencies involved in quality assurance and to have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. The inspector to be completely independent of, and divested from, the Contractor, the installer, the manufacturer, and the supplier of material or item being inspected. Submit inspector qualifications.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

E84-20.....Surface Burning Characteristics of Building Materials

E699-16.....Standard Specification for Agencies Involved in Testing, Quality Assurance, and Evaluating of Manufactured Building Components

E814-13a(2017) .....Fire Tests of Penetration Firestop Systems

E2174-20a.....Standard Practice for On-Site Inspection of Installed Firestop Systems

E2393-20.....Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers

C. FM Global (FM):

Annual Issue Approval Guide Building Materials

4991-13 .....Approval of Firestop Contractors

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

E. Annual Issue Fire Resistance Directory

723-Edition 11(2018).....Standard for Test for Surface Burning Characteristics of Building Materials

1479-04(2015).....Fire Tests of Penetration Firestops

F. Intertek Testing Services - Warnock Hersey (ITS-WH):

Annual Issue Certification Listings

G. Environmental Protection Agency (EPA):

40 CFR 59(2014) .....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS

A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and

stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.

B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 inches) nominal pipe or 0.01 square meter (16 square inches) in overall cross sectional area.

C. Firestop sealants used for firestopping or smoke sealing to have the following properties:
   1. Contain no flammable or toxic solvents.
   2. Release no dangerous or flammable out gassing during the drying or curing of products.
   3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
   4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
   5. VOC Content: Firestopping sealants and sealant primers to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
      a. Sealants: 250 g/L.
      b. Sealant Primers for Nonporous Substrates: 250 g/L.
      c. Sealant Primers for Porous Substrates: 775 g/L.

D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:
   1. Classified for use with the particular type of penetrating material used.
   2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.

E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.

F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.

G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.

H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.
   1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
   2. For floor penetrations with annular spaces exceeding 101 mm (4 inches) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the

floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.

3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS

A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.

B. Provide mineral fiber filler and bond breaker behind sealant.

C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.

D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.

B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer’s recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.

D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION

A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP

A. As work on each floor is completed, remove materials, litter, and debris.

B. Clean up spills of liquid type materials.

C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.

D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK

A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).

B. Furnish service of approved inspector to inspect firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Masonry Control and Expansion Joint: Section 04 20 00, UNIT MASONRY.

C. Masonry Sealant Joints: Section 04 01 00, MAINTENANCE OF MASONRY.

C. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING.

D. Glazing: Section 08 80 00, GLAZING.

E. Glazed Aluminum Curtain Wall: Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS.

1.3 QUALITY ASSURANCE:

A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.

B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.

C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.

1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

D. Lab Tests: Submit samples of materials that will be in contact or affect joint sealants to joint sealant manufacturers for tests as follows:

1. Adhesion Testing: Before installing elastomeric sealants, test their adhesion to protect joint substrates according to the method in ASTM C794 to determine if primer or other specific joint preparation techniques are required.

2. Compatibility Testing: Before installing elastomeric sealants, determine compatibility when in contact with glazing and gasket materials.
3. Stain Testing: Perform testing per ASTM C1248 on interior and exterior sealants to determine if sealants or primers will stain adjacent surfaces. No sealant work is to start until results of these tests have been submitted to the Contracting Officer Representative (COR) and the COR has given written approval to proceed with the work.

E. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1.1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
1. Conduct field tests for each application indicated below:
a. Each type of elastomeric sealant and joint substrate indicated.
b. Each type of non-elastomeric sealant and joint substrate indicated.
2. Notify COR seven (7) days in advance of dates and times when test joints will be erected.

F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections and to demonstrate aesthetic effects and qualities of materials and execution:
1. Joints in mockups of assemblies that are indicated to receive elastomeric joint sealants.

1.4 CERTIFICATION:

A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Sustainable Design Submittals, as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
C. Installer qualifications.
D. Contractor certification.
E. Manufacturer's installation instructions for each product used.
F. Cured samples of exposed sealants for each color.
G. Manufacturer's Literature and Data:
1. Primers
2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.
H. Manufacturer warranty.

1.6 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
   a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
   b. When joint substrates are wet.

B. Joint-Width Conditions:
   1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:
   1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.7 DELIVERY, HANDLING, AND STORAGE:

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.8 DEFINITIONS:

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Backing Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

1.9 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.10 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International (ASTM):

C509-06 .....Elastomeric Cellular Preformed Gasket and Sealing Material
C612-14 .....Mineral Fiber Block and Board Thermal Insulation
C717-14a .....Standard Terminology of Building Seals and Sealants
C734-06(R2012) .....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
C794-10 .....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
C919-12. .....Use of Sealants in Acoustical Applications.

C920-14a .....Elastomeric Joint Sealants.

C1021-08(R2014) .....Laboratories Engaged in Testing of Building Sealants

C1193-13 .....Standard Guide for Use of Joint Sealants.

C1248-08(R2012) .....Test Method for Staining of Porous Substrate by Joint Sealants

C1330-02(R2013) .....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants

C1521-13 .....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints

D217-10 .....Test Methods for Cone Penetration of Lubricating Grease

D1056-14 .....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber

E84-09.....Surface Burning Characteristics of Building Materials

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

D. Environmental Protection Agency (EPA):

40 CFR 59(2014) .....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

A. Exterior Sealants:

1. S-#1 Vertical surfaces, provide non-staining ASTM C920, Type S or M, Grade NS, Class 25, Use NT.
2. S-#2 Horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T.
3. S-#3 Masonry Ledge angle Sealant, provide silicone sealant ASTM C920, Type S, Grade NS, Class 50, Use NT,G, A, and O. TT-S 001 543A (COM-NBS) Class A.
4. Provide location(s) of exterior sealant as follows:
   a. Joints formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Provide sealant at exterior surfaces of exterior wall penetrations.
   b. Metal to metal.
   c. Masonry to masonry or stone.
   d. Cast stone to cast stone.
   e. Masonry expansion and control joints.
   f. Masonry joints where shelf angles occur.
   g. Voids where items penetrate exterior walls.
   h. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.

.

B. Interior Sealants:

1. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system are to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
   a. Architectural Sealants: 250 g/L.
   b. Sealant Primers for Nonporous Substrates: 250 g/L.
   c. Sealant Primers for Porous Substrates: 775 g/L.//
2. S-#4 Vertical and Horizontal Surfaces: ASTM C920, Type S or M, Grade NS, Class 25, Use NT.
3. S-#5 Food Service: Use a Vinyl Acetate Homopolymer, or other low VOC, non-toxic sealant approved for use in food preparation areas.
4. Provide location(s) of interior sealant as follows:
   a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.
   b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.
   c. Interior surfaces of exterior wall penetrations.
   d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.
   e. Exposed isolation joints at top of full height walls.

2.2 COLOR:

A. Sealants used with exposed masonry are to match color of mortar joints.
B. Sealants used with unpainted concrete are to match color of adjacent concrete.
C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
   1. Type C: Closed-cell material with a surface skin.
C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint

surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 FILLER:

A. Mineral fiberboard: ASTM C612, Class 1.

B. Thickness same as joint width.

C. Depth to fill void completely behind back-up rod.

2.5 PRIMER:

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

2.6 CLEANERS-NON POROUS SURFACES:

A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.

4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:
   a. Metal.
   b. Glass.
   c. Porcelain enamel.
   d. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
   1. Do not leave gaps between ends of sealant backings.
   2. Do not stretch, twist, puncture, or tear sealant backings.
   3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.
   1. Apply primer prior to installation of back-up rod or bond breaker tape.
   2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.

B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.

C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.

D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.

E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:
   1. Apply sealants and caulking only when ambient temperature is between

5 degrees C and 38 degrees C (40 degrees and 100 degrees F).

2. Do not install polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to “skin” over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
11. Replace sealant which is damaged during construction process.

C. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.

D. Interior Sealants: Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.

1. Extent of Testing: Test completed elastomeric sealant joints as follows:
   a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
   b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.

B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.

C. Inspect tested joints and report on following:

1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
3. Whether sealants filled joint cavities and are free from voids.
4. Whether sealant dimensions and configurations comply with specified requirements.

D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.

E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.

F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.

B. Leave adjacent surfaces in a clean and unstained condition.

- - - E N D - - -

SECTION 07 95 13
EXPANSION JOINT ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Prefabricated building expansion joint assemblies.

a. Exterior wall joints.

1.2 RELATED WORK

A. Section 05 50 00, METAL FABRICATIONS: Steel Plate Expansion Joint Covers.

B. Section 07 60 00, FLASHING AND SHEET METAL: Sheet Metal Expansion Joint Seals.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.

B. American Society of Civil Engineers (ASCE):

ASCE/SEI 7-10 - Minimum Design Loads For Buildings and Other Structures.

C. ASTM International (ASTM):

A36/A36M-19 - Structural Steel.

A240/A240M-20 - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.

A283/A283M-18 - Low and Intermediate Tensile Strength Carbon Steel Plates.

A786/A786M-15 - Hot-Rolled Carbon, Low-Alloy, High-Strength Low-Alloy, and Alloy Steel Floor Plates.

B36/B36M-18 - Brass, Plate, Sheet, Strip, and Rolled Bar.

B121/B121M-16 - Leaded Brass Plate, Sheet, Strip and Rolled Bar.

B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).

B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).

B455/B455M-20 - Copper-Zinc-Lead Alloy (Leaded-Brass) Extruded Shapes.

C864-05(2019) - Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.

D1187/D1187M-97(2018) - Asphalt-Base Emulsions for Use as Protective Coatings for Metal.

E1399/E1399M-97(2017) - Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems.

E1966-15(2019) - Standard Test Method for Fire-Resistive Joint Systems.

D. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06 - Metal Finishes Manual.

E. UL LLC (UL):

2079-15 - Standard for Tests for Fire Resistance of Building Joint Systems.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this Section.

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Architect/Engineer.
   c. Contractor.
   d. Installer.
   e. Manufacturer's field representative.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Terminations.
   g. Transitions and connections to other work.
   h. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Include large-scale details indicating profiles of each type of expansion joint cover, splice joints between joint sections, transitions to other assemblies, terminations, anchorages, fasteners, and relationship to adjoining work and finishes.
2. Show size, configuration, and fabrication and installation details.
3. Include composite drawings showing work specified in other Sections coordinated with expansion joints.

C. Manufacturer's Literature and Data:

1. Description of each product specified.
2. Show movement capability of each cover assembly and suitability of material used in exterior seals for ultraviolet exposure .
3. Description of materials and finishes.

4. Installation instructions.

D. Samples: Submit 300 mm (12 inch) long samples.

1. Each type and color of metal finish for each required thickness and alloy.
2. Each type and color of flexible seal.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Low Pollutant-Emitting Materials:
   a. Identify volatile organic compound types and quantities.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list .

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
   a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting expansion joint cover assembly fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Provide joint cover assemblies that permit unrestrained movement of joint without disengagement of cover, and, where applicable, maintain moisture, watertight and fire-rated protection.

B. Provide templates to related trades for location of support and anchorage items.

2.2 SYSTEM PERFORMANCE

A. Design expansion joint cover assemblies complying with specified performance.

B. Joint Movement: ASTM E1399.

1. Nominal Joint Width: 25 mm (1 inch).
2. Minimum Movement Capability: 50 percent.
3. Movement Type: Thermal and wind and seismic .

2.3 MATERIALS

A. Elastomeric Sealant: As specified in Section 07 92 00, JOINT SEALANTS.

B. Elastomeric Seals:

1. Flexible extruded polyvinyl chloride, meeting a Shore A hardness of 75 with UV stabilizer. Manufacturer's standard colors.

C. Thermoplastic Rubber:

1. ASTM C864.
2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.

D. Compression Seals: Pre-compressed secondary sealant using preformed expanding foam sealant; open-cell polyurethane foam impregnated with polymer-modified acrylic adhesive.

2.4 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

1. Provide expansion joint cover assembly designs, profiles, materials and configuration indicated, as required to accommodate joint size variations in adjacent surfaces, and anticipated movement.

B. Sustainable Construction Requirements:

1. Low Pollutant-Emitting Materials: Maximum VOC content by weight.
   a. Non-Flooring Adhesives and Sealants.

2.5 FABRICATION

A. Fabricate Expansion Joint Cover Assemblies:

1. As complete assembly ready for installation.
2. In longest practicable lengths to minimize number of end joints.
3. With factory mitered corners where joint changes directions or abuts other materials.
   a. With closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
4. Where floor slab is fire rated provide ceramic blanket at joints.
5. Seal Strip: Factory-formed and bonded to metal frames and anchor members.
6. Compression Seals: Fabricate from expanding foam as secondary seal and elastomeric sealant to sizes and profiles shown.

B. Exterior Wall Joint Assemblies:
   1. Design seal for variable movement and prevention of water and air infiltration.
   2. Water Seal: Vinyl seal strip as secondary seal behind primary seal.
   3. Seismic: As required by Code.
   4. Finish: As specified from Manufacturer’s full color range.

2.6 ACCESSORIES

A. General: Manufacturer's standard anchors, fasteners, set screws, spaces, protective coating, and filler materials, adhesive and other accessories required for installation.
B. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.
C. Fasteners: Type and size recommended by expansion joint cover assembly manufacturer.
   1. Exterior Applications: Stainless steel.
   2. Fasteners for Aluminum: Stainless steel.
   3. Other Applications: Galvanized steel or stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Provide items embedded in concrete and masonry in time for building into work without delaying work.
B. Protect existing construction and completed work from damage.
C. Apply barrier coating to surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings .
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Apply sealant where required to prevent water and air infiltration.
C. Extruded Thermoplastic Rubber or Seals:
   1. For straight sections, install preformed seals in continuous lengths.
   2. Vulcanize or heat-seal field spliced joints to provide watertight joints as recommended by manufacturer.
D. Preformed Elastomeric Sealant Joint:
   1. Locate joint directly over joints in wall and floor substrates.
   2. Fasten full length to substrate using construction adhesive.
   3. Install flush or slightly below finish material.

3.3 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed metal surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Cover floor joints with plywood where wheel traffic occurs before Substantial completion.

B. Remove protective covering when adjacent work areas are completed. Clean exposed surfaces in compliance with manufacture's printed instructions.

- - E N D - -

SECTION 08 44 13
GLAZED ALUMINUM CURTAIN WALLS

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies outside-glazed impact resistant aluminum curtain wall system.

1. Thermally isolated, pressure equalized on interior.
2. Type: Stick system to include following:
   a. Glass and Glass Spandrel Panels.
   b. Integral reinforcing.
   c. Closures, trim, subsills and flashings.
   d. Column covers.
   e. Fasteners, anchors, and related reinforcement.

1.2 RELATED WORK:

A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Structural Steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.

C. Firestopping between Curtain Wall and Structure: Section 07 84 00, FIRESTOPPING.

D. Sheet Metal Flashing and Trim: Section 07 60 00, FLASHING AND SHEET METAL.

E. Joint Sealants: Section 07 92 00, JOINT SEALANTS.

F. Aluminum Windows: Section 08 51 13, ALUMINUM WINDOWS.

G. Glazing: Section 08 80 00, GLAZING.

1.3 QUALITY ASSURANCE:

A. Qualifications:

1. Approval by Contracting Officer Representative (COR) is required of products or service of proposed manufacturer, suppliers and installers, and will be based upon submission by Contractor of certification that:
   a. Manufacturers Qualifications: Manufacturer with five (5) years continuous documented experience in design, fabrication, and installation of glazed aluminum curtain wall systems of similar type and for projects of equivalent size.
   b. Installer: Manufacturer approved in writing who has continuously installed glazed aluminum curtain walls systems of similar type and for projects of equivalent size for previous five (5) years.
   c. Manufacturer is to provide technical field representation at project site, as a minimum, at start of project, during middle, towards end of project, and during field testing of field mockup panel.

d. Manufacturers Professional Engineer Qualifications: A Professional Engineer who is legally qualified to practice in state where Project is located and who is experienced in providing engineering services of kind indicated. Engineering services are defined as those performed for installations of glazed aluminum curtain walls that are similar to those indicated for this Project in material, design, and extent.

e. Testing Laboratory: Contractor is to retain AAMA accredited commercial testing laboratory to perform tests specified. Submit information regarding testing laboratory's facilities and qualifications of technical personnel to perform testing specified in this section.

f. Product Options: Information on construction documents establishes requirements for aesthetic effects and performance characteristics of glazed aluminum curtain wall system. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, one another, and adjoining construction. Performance characteristics are indicated by criteria subject to verification by one (1) or more methods including preconstruction testing, field testing, or in-service performance.

1) Do not modify intended aesthetic effects. If modifications are proposed, submit comprehensive explanatory data for review.

g. Qualification of Welders:

1) Welding is to be performed by certified welders qualified in accordance with AWS D1.2/D1.2M, using procedures, materials, and equipment of the type required for this work.

B. Pre-Installation Conference

1. Prior to starting installation of glazed curtain wall system schedule conference with COR to demonstrate the following:

a. Clear understanding of construction documents.

b. Onsite inspection and acceptance of structural and pertinent structural details relating to curtain wall system.

c. Coordination of work of various trades involved. Conference is to be attended by Contractor, Architect, and AE consultants; personnel directly responsible for installation of curtain wall system, flashing and sheet metal work, firestopping system and curtain wall manufacturer and their technical field representatives. Conflicts are to be resolved and confirmed in writing.

1.4 SUBMITTALS:

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Product Data:

1. Manufacturer's standard details and fabrication methods.
2. Data on finishing, components, and accessories.
3. Instructions: Submit descriptive literature, detail specifications, performance test data and instructions for installation, and adjustments.
4. Recommendations for maintenance and cleaning of exterior surfaces.

C. Shop Drawings:

1. Show elevations of glazed curtain wall system at 1:48 (1/4 inch) scale, metal gages, details of construction, methods of anchorage, flashing and coping details, glazing details, firestopping assemblies at edge of slabs and details of installation. Show interfaces and relationships to work of other trades and continuity with adjacent thermal, weather, air and vapor barriers.
2. Submit for curtain wall system and accessories . Tentative approval of drawings is to be received before fabrication of mock-up. Final approval of drawings is to be deferred pending approval of mock-up and accessories.
3. Final approved site-specific shop drawings shall be signed and sealed by a FL licensed engineer.
4. Operation and Maintenance Manuals
   a. Submit cleaning and maintenance instructions.

D. Samples:

1. Submit pairs of samples of each specified color and finish on 305 mm (12-inch) long section by width of each tubular, or extruded shape section or 305 mm by 305 mm (12-inch by 12-inch) wide sections of sheet shapes.
2. Submit corner section of framing members showing fasteners, panels, glazing methods, glazing materials, and weather-stripping. Submit one (1) sample minimum 305 mm by 305 mm (12 inches by 12 inches). In lieu of submitting separate samples for corner section, intermediate section, and panel, one (1) composite sample incorporating all components and features listed may be submitted.
3. Where normal color variations are anticipated, include two (2) or more units of each sample indicating extreme limits of color variations.

E. Glass:

1. Specified in Section 08 80 00, GLAZING.

F. Quality Assurance Submittals:

1. Design Data:
   a. Submit structural and thermal calculations for complete wall assembly. Structural calculations and design shop drawings signed and sealed by a Professional Engineer (PE).
2. Factory Test Reports:

a. Test Reports: Submit certified test reports, for each of following listed tests, from a qualified independent testing laboratory showing that glazed aluminum curtain wall system assembly has been tested in accordance with specified test procedures and complies with performance characteristics as indicated by manufacturer's testing procedures. Submit factory tests required except that where a curtain wall system or component of similar type, size, and design as specified for this project has been previously tested within last year, under conditions specified herein, resulting test reports may be submitted in lieu of listed testing. Submit appropriate testing reports for specific tests indicated below:

1) Deflection and structural tests.
2) Water penetration tests.
3) Air infiltration tests.
4) Delamination tests.
5) Thermal conductance tests.
6) Certified independent laboratory test reports approved under Florida Product Approvals verifying compliance with all Hurricane Impacts requirements.

G. Manufacturer's Certificates:

1. Submit Certificates of Compliance, with specification requirements, for the following:
   a. Metal extrusions.
   b. Metal accessories.
   c. Statement(s) that aluminum has been given specified thickness of anodizing or organic coating finish.
   d. Statement(s) indicating manufacturers and installers conform with qualifications as specified.
   e. Submit list (minimum of five (5)) of equivalent project size installations for both manufacturer and installer.

H. Manufacturer's Field Reports:

1. Submit field reports of manufacturer's field representative observations of curtain wall installation indicating observations made during inspection at beginning of project, during middle of installation and at conclusion of project.

I. Welders: Submit welders qualifications as specified.

J. Testing Laboratory: Submit Testing Laboratory qualifications.

1.5 DELIVERY, STORAGE AND HANDLING:

A. Refer to AAMA CW 10 for care and handling of architectural aluminum from shop to site.

B. Prior to packaging for shipment from factory, mark wall components to correspond with shop and erection drawings and their placement location and erection sequence.

C. Prior to shipment from factory, place knocked-down lineal curtain wall members in cardboard containers and cover finished surfaces of members with protective covering of adhesive paper, waterproof tape, or strippable plastic. Do not cover metal surfaces that will be in contact with sealants after installation.

D. Inspect materials delivered to site for damage; unload and store with ventilation, free from heavy dust, not subject to combustion products or sources of water, and to permit easy access for inspection and handling. Sealing and caulking compounds, including handling, is to be in accordance with requirements of Section 07 92 00, JOINT SEALANTS.

1.6 PROJECT CONDITIONS:

A. Field Measurements: Where glazed aluminum curtain wall systems are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on shop drawings. Coordinate fabrication schedule with construction progress to avoid delaying Work.

1.7 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referred to in text by basic designation only.

B. American Architectural Manufacturers Association (AAMA):

CWM-1-19 ..... Metal Curtain Wall Manual
CW 10-15 ..... Care and Handling of Architectural Aluminum from Shop to Site
CW 11-85 ..... Design Windloads for Buildings and Boundary Layer Wind Tunnel Testing
CW 13-85 ..... Structural Sealant Glazing Systems (A Design Guide)
TIR A11-15 ..... Maximum Allowable Deflection of Framing Systems for Building Cladding Components of Design Wind Loads
501-15 ..... Methods of Test for Exterior Walls
501.2- 15 ..... Quality Assurance and Diagnostic Water Leakage Field Check of Installed Storefronts, Curtain Walls and Sloped Glazing Systems503-24 Field Testing of Metal Storefronts, Curtain walls and Sloped Glazing Systems
1503-09 ..... Thermal Transmittance and Condensation Resistance of Windows, Doors and Glazed Wall Sections
2605-22 ..... High Performance Organic Coatings on Architectural Extrusions and Panels

C. American Society of Civil Engineers (ASCE):

ASCE 7-22..... Minimum Design Loads for Buildings and Other Structures

D. ASTM International (ASTM):

A36/A36M-14..... Structural Steel

A123/A123M-13.....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A193/A193M-14a.....Alloy-Steel and Stainless Steel Bolting Materials for High Temperature Service
A307-14 .....Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
B209-14 .....Aluminum and Aluminum Alloy Sheet and Plate
B209M-14 .....Aluminum and Aluminum Alloy Sheet and Plate (Metric)
B211-12 .....Aluminum and Aluminum Alloy Bar, Rod, Wire
B211M-12 .....Aluminum and Aluminum Alloy Bar, Rod, Wire (Metric)
B221-14 .....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes and Tubes
B221M-13 .....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes and Tubes (Metric)
B316/B316M-10.....Aluminum and Aluminum Alloy Rivet and Cold-Heading, Wire, and Rods
C578-18 .....Rigid Cellular Polystyrene Thermal Insulation
C612-14 .....Mineral Fiber Block and Board Thermal Insulation
C920-18 .....Elastomeric Joint Sealants
C794-01 .....Standard Test Method for Adhesion-In-Peel of Elastomeric Joint Sealants.
C1193-16 .....Guide for Use of Joint Sealants
C1363-19 .....Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus
C1521-19 .....Practice for Evaluating Adhesion of Installed Weatherproofing
E84-18b .....Surface Burning Characteristics of Building Materials
E330/E330M-14.....Structural Performance of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference
E331-00(R2009) .....Water Penetration of Exterior Windows, Curtain Walls, and Doors By Uniform Static Air Pressure Difference
E413-10 .....Classification for Rating Sound Insulation
E783-02(R2018) .....Test Method for Field Measurement of Air Leakage Through Installed Exterior Windows and Doors
E1105-00(R2023) .....Field Determination of Water Penetration of Installed Exterior Windows, Curtain Walls, and Doors By Uniform or Cyclic Static Air Pressure Differences
E1996-20……Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes.

E. American Welding Society, Inc. (AWS):

D1.2/D.1.2M-06(R2014).....Structural Welding Code-Aluminum

F. Florida Building Commission:

FBC…… 2023 Florida Building Code

G. Military Specifications (MIL):

MIL-C-18480.....(Rev. B) Coating Compound, Bituminous Solvent, Coal Tar Base

H. National Association of Architectural Metal Manufacturers (NAAMM):

500 Series (2006).....Metal Finishes Manual

I. National Fenestration Rating Council

NFRC 102-2023[E0A1] Procedure for Measuring the Steady-State Thermal Transmittance of Fenestration Systems

J. Society for Protective Coatings (SSPC)

Paint 25-97 (2004).....Zinc Oxide, Alkyd, Linseed Oil Primer for Use Over Hand Cleaned Steel Type 1 and Type II

Paint 20-82 (2019).....Zinc-Rich Coating, Type I-Inorganic, and Type II-Organic.

K. U.S. Veterans Administration:

Physical Security Design Manual for VA Facilities (VAPSDG); Life Safety Protected
Physical Security Design Manual for VA Facilities (VAPSDG); Mission Critical Facilities
Architectural Design Manual for VA Facilities (VASDM)

L. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

1.8 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21, “Warranty of Construction”.

B. Manufacturer Warranty: Manufacturer shall warranty their glazed aluminum curtain wall system for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION:

A. Aluminum Curtain Wall System – Basis of Design: Subject to compliance with requirements, provide YKK AP Series YHC 300 OG (Outside Glazed) Impact Resistant Aluminum Curtain Wall System or a comparable product by an approved equal.

B. Design Requirements:

1. Curtain Wall System: Tubular aluminum sections with thermally improved condition self-supporting framing, factory prefinished, vision glass, and spandrel infill,; related flashings, anchorage and attachment devices.
2. System Assembly: Shop unitized assembly.

3. Maximum wall framing member deflection, in a direction normal to plane of wall: Designed in accordance with requirements of AAMA TIR A11-15 and tested in accordance with ASTM E330/E330M.
   a. AAMA TIR-A11 establishes a deflection limit of L/175 for spans less than 13 feet 6 inches and L/240 + ¼ inch for spans greater than that.
4. Maximum wall framing member deflection when a gypsum wallboard surface is affected: 1/360 of span.
5. Maximum Framing Member Permanent Deformation: 0.2 percent of its clear span when tested in accordance with ASTM E330/E330M for a minimum test period of 10 seconds at 1.5 times design wind pressures indicated as part of structural drawing wind load requirements.

C. No glass breakage, or damage to fasteners, hardware or accessories is permitted due to deformation design requirements indicated.
   a. Provide system complete with framing, mullions, trim, fasteners, anchors, accessories, concealed auxiliary members, and attachment devices for securing wall to structure as specified or indicated. Unless noted otherwise, comply with AAMA CWM-19.
   b. Obtain all components of curtain wall system, including framing, and spandrel panels, from single manufacturer.
   c. Fully coordinate system accessories directly incorporated and adjacent to contiguous related work and ensure materials compatibility, deflection limitations, thermal movements, and clearances and tolerances as indicated or specified. Coordinate continuity with adjacent thermal, weather, air and vapor barriers.
   d. Provide system with adequate allowances for expansion and contraction of components and fastenings to prevent buckling damage, joint seal failure, glass breakage, undue stress on fastenings or other detrimental effects. For design purposes, base provisions for thermal movement on assumed ambient temperature range of from -18 degrees C to 49 degrees C (0 degrees F to 120 degrees F).
   e. Provide wall system to accommodate tolerances in building frame and other contiguous work as indicated or specified.

D. Calculations: Submit professionally prepared calculations to indicate how design requirements for structural loading, thermal, and other performance criteria have been satisfied.

2.2 PERFORMANCE REQUIREMENTS:

A. Delegated Design: Engage a qualified Professional Engineer, to design glazed aluminum curtain walls.

B. Conform with system performance requirements specified.

C. Provide curtain wall components tested in accordance with requirements below and meeting performance requirements specified:

1. All test unit sizes and configurations shall conform to the minimum sizes in accordance with; Florida Product Approvals for large and small missile including Florida High Velocity Hurricane Zone (HVHZ) Protocols, ASTM E 1886, ASTM E 1996, and meet all requirements of TAS 201, TAS 202, and TAS 203.
   a. All products shall be “large missile” tested to minimize the potential for non-uniformity in glass appearance that can result from different “small missile” glass make-ups on upper levels of the building (higher than 30 feet above grade).
   b. All products shall be “large missile” tested to minimize the potential for non-uniformity in glass appearance that can result from different “small missile” glass make-ups on upper levels of the building (higher than 30 feet above grade).
   c. Size and configuration, glass type, glazing, framing, hardware, anchorage and accessories shall be as detailed in Miami-Dade NOAs. Acceptability of any substitutions or deviations therefrom shall be handled in accordance with the requirements of the authority having jurisdiction for the project site.
2. System Design: Design and size components to withstand dead loads and live loads caused by positive and negative wind loads acting normal to plane of wall as calculated in accordance with code and as calculated in accordance with ASCE 7. as measured in accordance with ASTM E330/E330M.
3. Seismic Loads: Design and size components to withstand seismic loads and sway displacement as calculated in accordance with the following codes.
   a. International Building Code – 2021.
   b. 2023 Florida Building Code.
   c. ASCE 7 – Minimum Design Loads for Buildings and Other Structures.
   d. VA Seismic Design Requirements (H-18-8, 2023).
4. Water Penetration:
   a. No water penetration is to occur when wall is tested in accordance with ASTM E331 at a differential static test pressure of 20 percent of inward acting design wind pressure as indicated on structural drawings, but not less than 958 Pa (20 psf).
   b. Make provision in wall construction for adequate drainage to outside of water leakage or condensation that occurs within outer face of wall. Leave drainage and weep openings in members and wall open during test.
5. Air Infiltration: Test glazed aluminum curtain wall system according toASTM E283.
   a. Static-Air-Differential: 300 Pa (6.27 lbs/sq. ft.) minimum.
   b. Air Leakage: 0.03 L/s per sq. m (0.06 cfm/sq. ft.) of surface maximum.
6. Deflections Test: ASTM E330/E330M, Procedure B:

a. No member is to deflect in a direction parallel to plane of wall, when carrying its full design load, more than an amount which will reduce edge cover or glass bite below 75 percent of design dimension. No member after deflection under full design load, is to have a clearance between itself and top of panel, glass, sash, or other part immediately below it less than 3 mm (1/8 inch); clearance between member and an operable window or door is to be minimum 1.5 mm (1/16 inch).

7. Thermal Conductance Tests: AAMA 1503.1 and NFRC 102..
   a. The thermal transmittance of opaque panels are not to exceed a U-value, Btu/hr./sq. ft./ degree F, as required and indicated on construction documents for exterior wall system, when tested in accordance with AAMA 1503.1 and NFRC 102.
   b. Average calculated thermal transmittance of complete wall assembly including panels, windows, and all other components are not to exceed a U-value of 0.44.
   c. Condensation Resistance Factor: Minimum CRF of 58
      1) Based on the following conditions:
         Outdoor Air Temperature: ASHRAE 99.6% HDB Temperature of 36.6F for Tampa, FL
         Indoor Air Temperature: 72F for sterile environments per The Joint Commission
         Maximum Relative Humidity: 60%

8. Physical Security Mission Critical Facilities:
   a. Provide glazed aluminum curtain walls designed to meet or exceed the design and construction standards as provided in the Physical Security Design Manual for VA Facilities: Mission Critical Facilities.
      1) Blast Resistance: Meet the design requirements of Section 6.3.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2020 rev 2024).

2.3 MATERIALS:

A. Extruded Aluminum Framing Members: ASTM B221M (B221); 6063-T5 extruded aluminum for non-structural components or 6063-T6 extruded aluminum for structural members; temper and alloy as recommended by manufacturer.

B. Sheet Aluminum: ASTM B209M (B209); 6065-T5 temper and alloy as recommended by manufacturer.
   1. Formed flashing and closures: Minimum 1.58 mm (0.062 inch) thick aluminum, in finish as selected.
   2. Extruded sill members: Minimum 1.58 mm (0.062 inch) thick aluminum, in finish as selected.

C. Steel Sections: ASTM A36/A36M.

D. Primer: TS TT-P-645; red, for shop application and field touch-up.

E. Fasteners:

1. For Exterior Cap Retainers: ASTM A193/A193M B8 300 series, stainless steel screws.
2. For Framework Connections: ASTM B211M (B211) 2024-T4 aluminum, ASTM A193/A193M B8 300 series, stainless steel, and ASTM B316 aluminum rivets, as required by connection.
3. For Anchoring Glazed Aluminum Curtain Wall to Support Structure: ASTM A307 zinc plated steel fasteners.

F. Shims: Metal or plastic.

G. Joint Sealants and Accessories:

1. In accordance with requirements specified in Section 07 92 00, JOINT SEALANTS.
2. Structural Flush Glazed Joints: High performance silicone sealant applied in accordance with manufacturer's recommendations.
3. Non-structural Flush Glazed Joints and Weather Seal Joints: Silicone sealants applied in accordance with manufacturer's recommendations.
4. Sealants used inside the weatherproofing system are to have a VOC content of 250g/L or less when calculated according to 40 CFR 59, (EPA Method 24).
5. Structural silicone sealant performance requirements: ASTM C920.
   a. Hardness: Type A, 30 durometer.
   b. Ultimate Tensile Strength: 1172 kPa (170 psi).
   c. Tensile at 150% Elongation (of original bench mark distance): 55 kPa (80 psi).
   d. Joint Movement Capability after 14 Day Cure: +/- 50%.
   e. Peel Strength Aluminum, After 21 Day Cure: 599 g/mm (34 pounds per inch).
6. Structural silicone is not be used to support dead weight of vertical glass or panels.
7. Comply with recommendations of sealant manufacturer for specific sealant selections.
8. Provide only sealants that have been tested per ASTM C794 to exhibit adequate adhesion to samples of glass and metal equivalent to those required for project.
9. Exposed Metal to Metal Joints: Silicone sealant selected from manufacturer’s standard colors.

H. Glazing Materials:

1. As specified under Section 08 80 00, GLAZING.
2. Glazing Gaskets:
   a. Exterior: Continuous EPDM gaskets at each glass and spandrel panel.
   b. Interior: Continuous, closed cell PVC foam sealant tape, sealed at corners.
3. Glass Sizes and Clearances:
   a. Accommodate up to 33 mm (1-5/16 inch) glazing.
   b. Sizes indicated are nominal. Verify actual sizes required by measuring frames. Coordinate dimensions for glass and glass holding members to meet applicable minimum clearances as recommended by glass manufacturer. Do not nip glass to remove flares or to reduce oversized dimensions. All cutting is to occur in factory.

4. Glass Setting Materials:
   a. Provide head bead and drive wedge required for glass installation to suit curtain wall system in accordance with manufacture's recommendations.

2.4 FABRICATION:

A. Curtain wall components are to be of materials and thickness indicated in construction documents. Details indicated are representative of required design and profiles. Maintain sightlines. Unless specifically indicated or specified otherwise, methods of fabrication and assembly are to be at discretion of curtain wall manufacturer. Perform fitting and assembling of components in shop to maximum extent practicable. Anchorage devices are to permit adjustment in three directions. No exposed fasteners are permitted.

B. Joints: Joints exceeding +1.5 mm (+1/16") are to be mechanically fastened.

C. Ventilation and Drainage: Direct water leakage to exterior by means of concealed drainage system and weeps. Flashings and other materials used internally are to be nonstaining, noncorrosive, and nonbleeding.

D. Protection and Treatment of Metals:
   1. Remove from metal surfaces lubricants used in fabrication and clean off other extraneous material before leaving shop.
   2. Provide protection against galvanic action wherever dissimilar metals are in contact, except in case of aluminum in permanent contact with galvanized steel, zinc, stainless steel, or relatively small areas of white bronze. Paint contact surfaces with one coat bituminous paint conforming to MIL-C-18480 or apply appropriate caulking material or nonabsorptive, noncorrosive, and nonstaining tape or gasket between contact surfaces.

E. Metal sills and Closures: Fabricate accessories, spandrel panels, trim closures of sizes and shapes indicated from similar materials and finish as specified for wall system.

F. Concealed Interior Mullion Reinforcing: ASTM A36/A36M steel shapes as required for strength and mullion size limitations, hot dip galvanized after fabrication in accordance with ASTM A123/A123M.

2.5 METAL FINISHES:

A. In accordance with AAMA 612.

B. Anodized Aluminum:
   1. AA-C22A41 Chemically etched medium matte, with clear anodic coating, Class 1 Architectural, 0.7-mil thick (min.).

C. Apply one (1) coat of bituminous paint to concealed aluminum and steel surfaces in contact with cementitious or dissimilar materials.

PART 3 - EXECUTION

3.1 EXAMINATION:

A. Prior to installation of glazed curtain wall system, arrange for representative(s) of manufacturer to examine structure and substrate to determine that they are properly prepared, and ready to receive glazed curtain wall work included herein.

B. Verifying Conditions and Adjacent Surfaces: After establishment of lines and grades and prior to system installation examine supporting structural elements. Verify governing dimensions, including floor elevations, floor to floor heights, minimum clearances between curtain wall and structural frames, and other permissible dimensional tolerances in building frame.

3.2 PREPARATION:

A. Take field dimensions and examine condition of substrates, supports, and other conditions under which work of this section is to be performed to verify that work may properly commence. Do not proceed with installation until unsatisfactory conditions have been corrected.

B. Contact between aluminum and dissimilar metals are to receive a protective coating of bituminous paint for prevention of electrolytic action and corrosion.

3.3 INSTALLATION:

A. Install and erect glazed curtain wall system and all components in accordance with written directions of curtain wall manufacturer. Match profiles, sizes, and spacing indicated on approved shop drawings.

B. Bench Marks and Reference Points: Establish and permanently mark bench marks for elevations and building line offsets for alignment at convenient points on each floor level. Should any error or discrepancy be discovered in location of marks, stop erection work in that area until discrepancies have been corrected.

C. Ensure that drainage system operates properly in accord with AAMA 501 procedures.

D. Do not proceed with structural silicone work when metal temperature is below 0 degrees C (32 degrees F).

E. Isolate between aluminum and dissimilar metals with protective coating or plastic strip to prevent electrolytic corrosion.

F. Install glazed aluminum curtain wall system so as to maintain a virtually flat face cap, with no visible bowing.

G. Install entire system so that fasteners are not visible.

H. Tolerances:

1. Maximum variation from plane or location shown on approved shop drawings: 3 mm per 3657 mm (1/8 inch per 12 feet) of length up to not more than 13 mm (1/2 inch) in any total length.
2. Maximum offset from true alignment between two (2) identical members abutting end to end in line: 0.8 mm (1/32 inch).

3. Sealant Space Between Curtain Wall Mullion and Adjacent Construction: Maximum of 19 mm (3/4 inch) and minimum of 6 mm (1/4 inch).

I. Joint Sealants:

1. Joint Sealants: Are to be in accordance with requirements of Section 07 92 00, JOINT SEALANTS.
2. Surfaces to be primed and sealed are to be clean, dry to touch, free from frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter. Enclose joints on three sides. Clean out grooves to proper depth. Joint dimensions are to conform to approved detail drawings with a tolerance of plus 3 mm (1/8 inch). Do not apply compound unless ambient temperature is between 5 and 35 degrees C (40 and 90 degrees F). Clean out loose particles and mortar just before sealing. Remove protective coatings or coverings from surfaces in contact with sealants before applying sealants or tapes. Solvents used to remove coatings are to be of type that leave no residue on metals.
3. Match approved sample. Force compound into grooves with sufficient pressure to fill grooves solidly. Sealing compound is to be uniformly smooth and free of wrinkles and, unless indicated otherwise, is to be tooled and left sufficiently convex to result in a flush joint when dry. Do not trim edges of sealing material after joints are tooled. Mix only amount of multi-component sealant which can be installed within four (4) hours, but at no time is this amount exceed 19 liters (5 gallons).
4. Apply primer to masonry, concrete, wood, and other surfaces as recommended by sealant manufacturer. Do not apply primer to surfaces which will be exposed after sealant work is completed.
5. Tightly pack backing in bottom of joints which are over 13 mm (1/2 inch) in depth with specified backing material to depth indicated in construction documents. Roll backing material of hose or rod stock into joints to prevent lengthwise stretching.
6. Install bond preventive material at back or bottom of joint cavities in which no backstop material is required, covering full width and length of joint cavities.
7. Remove compound smears from surfaces of materials adjacent to sealed joints as work progresses. Use masking tape on each side of joint where texture of adjacent material will be difficult to clean. Remove masking tape immediately after filling joint. Scrape off fresh compound from adjacent surfaces immediately and rub clean with solvent approved by sealant and curtain wall manufacturers. Upon completion of sealing, remove remaining smears, stains, and other soiling, and leave work in clean neat condition.//

J. Glass:

1. Refer to Section 08 80 00, GLAZING, and drawings for glass types. Install in accordance with manufacturer's recommendations as modified herein.

2. Before installing glass, inspect sash and frames to receive glass for defects such as dimensional variations, glass clearances, open joints, or other conditions that will prevent satisfactory glass installation. Do not proceed with installation until defects have been corrected.
3. Clean sealing surfaces at perimeter of glass and sealing surfaces of rebates and stop beads before applying glazing compound, sealing compound, glazing tape, or gaskets.
4. Use only approved solvents and cleaning agents recommended by compound or gasket manufacturer and by curtain wall manufacturer.
5. Provide sashes designed for outside glazing.
6. Provide continuous snap in glazing beads to suit glass as specified.
7. Insulating and tempered glass, and glass of other types that exceed 2540 mm (100 united inches) in size: Provide void space at head and jamb to allow glass to expand or move without exuding sealant. Provide perimeter frames and ventilator sections with glazing rebates for unobstructed glazing surface 19 mm (3/4 inch) in height. Glazing rebate surfaces must be sloped to shed water.
8. Provide adequate means to weep incidental water and condensation away from sealed edges of insulated glass units and out of wall system. Provide weeping of lock-strip gaskets in accordance with recommendation of glass manufacturer.

3.4 ADJUSTING:

A. Adjust windows and doors to provide a tight fit at contact points and operate easily.
B. Adjust weather-stripping to make even contact with surfaces.
C. /Adjust operating hardware and moving parts.

3.5 CLEANING:

A. Install curtain wall frame and associated metal to avoid soiling or smudging finish.
B. Clean metal surfaces promptly after installation, exercising care to avoid damage to coatings.
C. Remove excess glazing and sealant compounds, dirt, and other substances.
D. Follow recommendations of manufacturer in selection of cleaning agents. Do not use cleaning agents containing ammonia or other compounds that might damage finished metal surfaces.
E. Replace cracked, broken, and defective glass with new glass at no additional cost to Government. Just prior to final acceptance of curtain wall system clean glass surfaces on both sides, remove labels, paint spots, compounds, and other defacements, and clean metal fixed panels. Remove and replace components that cannot be cleaned successfully.

3.6 FIELD QUALITY CONTROL:

A. Testing Agency: Engage an AAMA accredited commercial qualified independent testing and inspecting agency to perform field quality-control tests specified, and to prepare test reports:

Submit information regarding testing laboratory's facilities and qualifications of technical personnel to COR for approval.

B. Conduct field check test for water leakage on designated wall areas after erection to comply with AAMA AAMA 501.2. Conduct test on two (2) wall areas, two (2) bays wide by two (2) stories high where directed. Conduct test and take necessary remedial action as directed by COR.

C. Test Specimen:
   1. Test specimen is to include curtain wall assembly and construction. Test chamber, if applicable, is to be affixed to exterior side of test specimen and test is to be conducted using positive static air pressure.
   2. Test specimens are to be selected by COR after curtain wall system has been installed in accordance with construction documents.

D. Sealant Adhesion Tests: Test installed sealant, in presence of sealant manufacturer’s field representative, in a minimum of two (2) areas and as follows:
   1. Test structural silicone sealant according to field adhesion test method described in AAMA CW 13.
   2. Test weatherseal sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.

E. Air Infiltration: Test glazed aluminum curtain wall system according to AAMA 503, which requires testing according to ASTM E783 and to values indicated below, whichever is more stringent.
   1. Field air leakage testing is not required for continuous curtain wall systems.
   2. Static-Air-Pressure Differential: 300 Pa (6.27 lbf/sq. ft.) minimum.
   3. Air Leakage: 0.03 L/s per sq. m (0.06 cfm/sq. ft.) of surface maximum.

F. Water Penetration: Test glazed aluminum curtain wall system for compliance with requirements according to AAMA 503, which requires testing according to ASTM E1105.
   1. Uniform Static-Air-Pressure Difference: 20 percent of positive design wind load, but not less than 958 Pa (20 psf). No uncontrolled water is to be present.

G. Retesting:
   1. Should system fail field test, system may be modified or repaired, and retested.
   2. Should system fail second field test, system may be additionally modified or repaired, and retested.
   3. All modifications and repairs made to tested areas are to be recorded, and same modifications and repairs made to all system and adjacent construction on project.
   4. Should second test fail, COR may require testing of additional areas of the curtain wall.

H. Rejection:
   1. Failure of any of specimens to meet test requirements of third test is cause for rejection of wall system and adjacent construction on project.

3.7 PROTECTION:

A. After installation, protect windows, and other exposed surfaces from disfiguration, contamination, contact with harmful materials, and from other construction hazards that will interfere with their operation, or damage their appearance or finish. Protection methods are to be in accordance with recommendations of product manufacturers or of respective trade association. Remove paper or tape factory applied protection immediately after installation. Clean surfaces of mortar, plaster, paint, smears of sealants, and other foreign matter to present neat appearance and prevent fouling of operation. In addition, wash with a stiff fiber brush, soap and water, and thoroughly rinse. Where surfaces become stained or discolored, clean or restore finish in accordance with recommendations of product manufacturer or respective trade association.

- - - END - - -

SECTION 08 51 13
ALUMINUM WINDOWS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Aluminum windows for renovation work .

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS: Sealing Joints.

B. Section 08 80 00, GLAZING: Glazing.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American Architectural Manufacturers Associations (AAMA):

AAMA/WDMA/CSA 101/I.S.2/A440-17 Windows, Doors, and Skylights.

AAMA 505-17 ..... Dry Shrinkage and Composite Performance Thermal Cycle Test Procedures.

AAMA 2605-20 ..... Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.

AAMA TIR A8-16 ..... Structural Performance of Composite Thermal Barrier Framing System.

A. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):

7-22 ..... Minimum Design Loads for Buildings and Other Structures.

B. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):

90.1-19 ..... Energy Standard for Buildings Except Low-Rise Residential Buildings.

C. ASTM International (ASTM):

B209-14 ..... Aluminum and Aluminum-Alloy Sheet and Plate.

B209M-14 ..... Aluminum and Aluminum-Alloy Sheet and Plate (Metric).

B221-14 ..... Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.

B221M-13 ..... Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).

E283-19 ..... Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.

E331-00(2016) ..... Water Penetration of Exterior Windows, Skylights, Doors, and Curtain Walls by Uniform Static Air Pressure Difference.

E1996-20……Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Architect/Engineer.
      c. Contractor.
      d. Installer.
      e. Manufacturer's field representative.
   2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
      a. Installation schedule.
      b. Installation sequence.
      c. Preparatory work.
      d. Protection before, during, and after installation.
      e. Installation.
      f. Transitions and connections to other work.
      g. Other items affecting successful completion.
   3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTAL

A. Submit according to Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

A. Submittal Drawings:
   1. Indicate window types required for project.
   2. Identify window unit components by name and type of metal or material, show construction, locking systems, mechanical operators, trim, installation and anchorages.
   3. Include glazing details and standards for factory glazed units.
   4. Final approved site-specific shop drawings shall be signed and sealed by a licensed engineer in the State of Florida.

B. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.
   3. Warranty.

C. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

D. Samples:
1. Window Frame: 150 mm (6 inch) long samples showing finishes, specified.

E. Test reports: Indicate each product complies with specifications.
1. Windows. Submit certified independent laboratory test reports and Florida Product Approvals (FPAs) verifying compliance with all Hurricane Impacts requirements.
2. Operating hardware.

F. Certificates: Indicate each product complies with requirements (window characteristics may be on window schedule or other drawings).

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:
1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

B. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

C. Quality Certified Labels or Certificates:
1. AAMA Label affixed to each window indicating compliance with specification.

1.7 STORAGE AND HANDLING

A. Protect windows from damage during handling and construction operations before, during and after installation.

B. Store windows under cover, setting upright.

C. Do not stack windows flat.

D. Do not lay building materials or equipment on windows.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant windows against material and manufacturing defects.
1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design windows complying with specified performance:
1. Load Resistance: Design Wind Loads - Allowable Stress Design (ASD) per 2023 Florida Building Code (FBC) & ASCE/SEI 7-16. Design criteria as indicated on Drawings.
a. Performance Grade: AW100 per AAMA/WDMA/CSA 101/I.S.2/A440 required to resist maximum positive and negative wind load.

2. Thermal Transmittance: Maximum U-value watt/square meter/degree K (Btu/square foot/hour/degree F).
   a. Insulating Glass Windows: U-0.41 .
3. Solar Heat Gain Coeficient (SHGC) for the overall window area shall not exceed 0.207.
4. Condensation Resistance (CR): NFRC 500 Minimum CR of CR 50.
   a. Based on the following conditions:
      1) Outdoor Air Temperature: ASHRAE 99.6% HDB Temperature of 36.6F for Tampa, FL
      2) Indoor Air Temperature: 72F for sterile environments per The Joint Commission
      3) Maximum Relative Humidity: 60%
5. Water Resistance: ASTM E331; No uncontrolled penetration at 719 Pa (15.00 pound square foot) , minimum, pressure differential.
6. Air Infiltration Resistance: ASTM E283; 0.5 liter/second/square meter (0.1 cubic foot/minute/square foot.), maximum at 300 Pa (6.24 pound square foot) /, minimum, pressure differential.
7. Hurricane Impact Requirements
   a. In addition to meeting the requirements of NAFS for AW-100 Architectural Class, hurricane impact-resistant windows shall be designed and hurricane impact tested at the project-specific Allowable Stress Design Wind Loads, meeting the following requirements:
   b. All window products shall be tested to ASTM E 1996 and Miami-Dade TAS protocols, and carry Florida Product Approvals (FPAs).
      1) All products shall be “large missile” tested to minimize the potential for non-uniformity in glass appearance that can result from different “small missile” glass make-ups on upper levels of the building (higher than 30 feet above grade).
      2) Products shall be tested using a nine-pound “D missile” at 50 feet per second (or a nine-pound “E missile” at 80 feet per second) per ASTM E1996 and TAS protocols.
      3) Cyclical pressure testing per ASTM E1996 and TAS protocols shall follow impacts.
   c. Size and configuration, glass type, glazing, framing, hardware, anchorage and accessories shall be as detailed in Miami-Dade NOAs. Acceptability of any substitutions or deviations therefrom shall be handled in accordance with the requirements of the authority having jurisdiction for the project site.

B. Provide the following operation types for locations indicated on the Drawings.
   1. Fixed Windows:
      a. Performance Class and Grade: AAMA/WDMA/CSA 101/I.S.2/A440, minimum AW-100.

2.2 MATERIALS

A. Aluminum Extrusions: ASTM B221M (ASTM B221); 6063 alloy, T5 temper.

B. Aluminum Sheet: ASTM B209M (ASTM B209); 5005 alloy, H15 or H34 temper.

2.3 PRODUCTS - GENERAL

A. Fixed Aluminum Exterior Windows - Basis of Design: Subject to compliance with requirements, provide Wausau Window and Wall Systems; 4250i-XLT HP Series or a comparable product by one of the following or approved equal:.

1. Graham Architectural Products Corporation.
2. Oldcastle Building Envelope (OBE); CRH Americas.
3. YKK AP America Inc.

B. Operable Aluminum Interior Windows – Basis of Design: Subject to compliance with requirements, provide Wausau Window and Wall Systems; 1297 S.E.A.L Series or a comparable product by one of the following or approved equal:

1. Graham Architectural Products Corporation.
2. Oldcastle Building Envelope (OBE); CRH Americas.
3. YKK AP America Inc.

C. Provide windows from one manufacturer.

D. Sustainable Construction Requirements:

1. Aluminum Recycled Content: 80 total recycled content, minimum.

2.4 ALUMINUM WINDOWS

A. Frames and Sashes: Aluminum extrusions, AAMA/WDMA/CSA 101/I.S.2/A440.

A. Thermal-Break Window Construction:

1. Manufacturer's Standard.
2. Low conductance thermal barrier.
3. Capable of structurally holding sash in position and together.
4. Thermal Break Assemblies: Tested according to AAMA TIR A8 and AAMA 505.
   a. Continuous extruded polyamide with 25% glass fiber reinforcing, mechanically crimped into cross-knurled cavities.
5. Design location of thermal break so that, in closed position, outside air does not come in direct contact with interior frame of window.

B. Mullions: Match window units.

C. Provide anchors and other related accessories required for installation.

2.5 GLAZING

A. Glass and Glazing: As specified in Section 08 80 00, GLAZING.

1. Factory-glazed windows and field-glazed (as indicated in drawings).
   a. Dual Glazing system:
      1) Interior Lite: Lift-out tempered glazing
      2) Exterior Lite: Insulated laminated glass unit as required for D / E Missile impact rating.

2. Weep holes through glazed areas are not acceptable.

2.6 HARDWARE

A. Hardware, General: Provide manufacturer's standard hardware on interior lite unit for manual "Lift-out" operation. Provide manufacturer's standard hardware fabricated from aluminum, stainless steel, carbon steel complying with AAMA 907, or other corrosion-resistant material compatible with adjacent materials; designed to smoothly operate, tightly close, and securely lock windows, and sized to accommodate sash weight and dimensions.
   1. All hardware shall be tamper-resistant, custodial-operated.

B. Locking Device Strikes: Locate adjustable strikes in frame jamb. Fabricate strikes from Type 304 stainless steel.

C. Guide Blocks: Fabricate guide blocks of injection molded nylon. Install guide block fully concealed in vent/frame sill.

D. Weather Stripping: AAMA/WDMA/CSA 101/I.S.2/A440; leaf type weather-stripping is not acceptable.

E. Provide wrenches, keys, or removable locking operating handles, as specified to operate windows.

2.7 FABRICATION

A. Fabricate windows to comply specified performance class and grade.
   1. Assemble frame and sash so fasteners are concealed when window is closed.
   2. Attach locking and hold-open devices to windows with concealed fasteners.
   3. Where extrusion wall thickness is less than 3 mm (0.125 inch) thick, provide backup plates or similar reinforcements for fasteners.
   4. Use stainless steel fasteners to secure Venetian blind hanger clips, vent guide blocks, friction adjuster, and limit opening device.

B. Aluminum Trim:
   1. Trim includes casings, closures, and panning.
   2. Fabricate to shapes shown, minimum 1.6 mm (0.062 inch) thick.
   3. Extruded or formed sections, straight, true, and smooth on exposed surfaces.
   4. Exposed external corners mitered and internal corners coped; fitted with hairline joints.
   5. Reinforce 1.6 mm (0.062 inch) thick members with minimum 3 mm (1/8 inch) thick aluminum.
   6. Except for strap anchors, provide reinforcing for fastening near ends and spaced maximum 300 mm (12 inches) on center.
   7. Design to allow unrestricted expansion and contraction of members and window frames.
   8. Secure to window frames with machine screws or expansion rivets.
   9. Exposed screws, fasteners or pop rivets are not acceptable on exterior of casing or trim cover system.

C. Aluminum Subsills and Stools:

1. Fabricate to shapes shown, minimum 2 mm (0.080 inch) thick extrusion.
2. One piece full length of opening with concealed anchors.
3. Sills turned up back edge minimum 6 mm (1/4 inch). Front edge provide with drip.
4. Sill back edge behind face of window frame. Do not extend to interior surface or bridge thermal breaks.
5. Do not perforate for anchorage, clip screws, or other requirements.

2.8 FINISHES

A. Finish window units according to AAMA 612.

B. Anodized Aluminum:

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.

C. Hardware: Finish hardware exposed when window is in closed position to match window.

2.9 ACCESSORIES

A. Fasteners: AAMA/WDMA/CSA 101/I.S.2/A440; non-magnetic stainless steel.

B. Horizontal Louver Blinds: Provide manufacturer's standard, removable, integral, horizontal louver blinds with aluminum slats and polyester fiber cords that are operated by hardware located on inside face of sash.

1. Slat Size: 5/8” wide.
2. Blinds to be integrally mounted between the dual glazing.
3. Operation: Tilt only.
   a. Louver Blind controls shall be tilt-control located on the room face on all window units unless noted otherwise.
4. Color: As selected by Architect from manufacturer's full range.

C. Interior Trim: Extruded-aluminum profiles in sizes and configurations indicated on Drawings.

D. Panning Trim: Extruded-aluminum profiles in sizes and configurations indicated on Drawings.

E. Receptor System: Two-piece, snap-together, thermally broken, extruded-aluminum receptor system that anchors windows in place.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation. Verify that building substrates permit installation of window wall according to the manufacturer's instructions, approved shop drawings, calculations and contract documents.

1. Verify openings are within acceptable tolerances.

B. Protect existing construction and completed work from damage.

C. Remove existing windows to permit new installation when replacement window is available, and ready for immediate installation.

1. Remove existing work carefully; avoid damage to existing work indicated to remain.

2. Perform other operations as necessary to prepare openings for proper installation and operation of new windows.
3. Do not leave openings uncovered at end of working day, during precipitation or temperatures below 16 degrees C (60 degrees F).

3.2 INSTALLATION, GENERAL

A. Install products according to manufacturer's instructions // and approved submittal drawings //.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

B. Where type, size or spacing of fastenings for securing window accessories or equipment to building construction is not shown or specified, provide expansion or toggle bolts or screws, as best suited to construction material.
   1. Provide bolts or screws minimum 6 mm (1/4 inch) in diameter.
   2. Sized and spaced to resist tensile and shear loads imposed.
   3. Do not install exposed fasteners on exterior, except when unavoidable for application of hardware.
   4. Provide non-magnetic stainless steel Phillips flat-head machine screws for exposed fasteners, where required, or special tamper-proof fasteners.
   5. Locate fasteners to avoid disturbing window thermal break.

C. Set windows plumb, level, true, and in alignment; without warp or rack of frames or sash.

D. Anchor windows on four sides with anchor clips or fin trim.
   1. Do not allow anchor clips to bridge thermal breaks.
   2. Use separate clips for both sides of thermal breaks.
   3. Make connections to allow for thermal and other movements.
   4. Do not allow building load to bear on windows.
   5. Use manufacturer's standard clips at corners and maximum 600 mm (24 inches) on center.
   6. Where fin trim anchorage is indicated build into adjacent construction, anchoring at corners and maximum 600 mm (24 inches) on center.
   7. Install insulated, laminated glazing units in aluminum frame with structural silicone sealant.

E. Sills and Stools:
   1. Set in bed of mortar or other compound to fully support, true to line shown.
   2. Do not extend sill to inside window surface or past thermal break.
   3. Leave space for sealants at ends and to window frame unless indicated otherwise.

3.3 MULLIONS CLOSURES, TRIM, AND PANNING

A. Closures, Trim, and Panning: External corners mitered and internal corners coped, fitted with hairline, tightly closed joints.
   1. Secure to concrete and solid masonry with expansion bolts, expansion rivets, split shank drive bolts, or powder actuated drive pins.

2. Toggle bolt to hollow masonry units.
3. Screw to wood and metal.

B. Fasten except for strap anchors, near ends and corners and maximum 300 mm (12 inches) on center.

C. Seal units following installation to provide weathertight system.

3.4 FIELD TESTING

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

A. Test Method: ASTM E1105 Water Penetration testing..

3.5 CLEANING

A. Lubricate hardware and moving parts.

A. Remove excess glazing and sealant compounds.

B. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.

C. Keep windows locked except while adjusting and testing.

- - E N D - -

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the following:
   1. Glass.
   2. Glazing materials and accessories for both factory and field glazed assemblies.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS: Sustainable Design Requirements.
B. Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.
C. Section 08 51 13, ALUMINUM WINDOWS: Aluminum Windows.
D. Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS Glazed Curtain Walls: Glazed Curtain Walls.

1.3 LABELS

A. Temporary labels:
   1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
   2. Label in accordance with NFRC label requirements.
   3. Temporary labels are to remain intact until glass is approved by Contracting Officer Representative (COR).
B. Permanent labels:
   1. Locate in corner for each pane.
   2. Label in accordance with ANSI Z97.1 and SGCC label requirements.
      a. Tempered glass.
      b. Laminated glass or have certificate for panes without permanent label.
      c. Organic coated glass.

1.4 PERFORMANCE REQUIREMENTS

A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual, and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing system; deflections beyond specified limits; or other defects in construction.

B. Glazing Unit Design: Design glass, including engineering analysis meeting requirements of authorities having jurisdiction. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.
   1. Design glass in accordance with ASTM E1300, and for conditions beyond the scope of ASTM E1300, by a properly substantiated structural analysis.

   2. Design Wind Pressures: As indicated on construction documents, In accordance with ASCE 7 and and in accordance with Florida Building Code.
   3. Wind Design Data: // As indicated on construction documents and in accordance with ASCE 7 and in accordance with Florida Building Code.

   4. Maximum Lateral Deflection: For glass supported on all four edges, limit center-of-glass deflection at design wind pressure to not more than the structural capacity of the glazing unit, the threshold at which frame engagement is no longer safely assured, 1/100 times the short-side length, or 19 mm (0.75 inch), whichever is less.

C. Ballistic- and Blast- resistant glass or plastic glazing assemblies:
   1. For blast-resistant units comply with requirements in Physical Security Design Manual for VA Mission Critical Protected Facilities, and project-specific criteria provided on the drawings and specifications.
      a. Meet the design requirements of Section 6.3.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2020 rev 2024)
   2. Spall Resistance: Laminated glazing is not permitted to produce spall to interior (protected side) when impacted with scheduled ballistics.
   3. Tolerances:
      a. Outside dimensions: Overall outside dimensions (height and width) of laminated security glazing is to maintain tolerance of ± 3 mm (± 0.12 inch).
      b. Warpage: Out-of-flat (warpage or bowing) condition of laminates is not to exceed 2.5 mm per lineal meter (0.10 inch per 3.3 lineal foot). The condition, if present, is to be localized to extent not greater than 0.75 mm (0.03 inch) for any 0.3 meter (0.98 feet) section.

D. Windborne-Debris-Impact Resistance: Comply with enhanced-protection testing requirements in ASTM E1996 for project wind zone when tested according to ASTM E1886, based upon testing of specimens not less than the size required for project and utilizing installation method identical to that specified for project.
   1. Project Wind Zone: Wind Zone 3 and modified requirements of ASTM E1996 according to 2023 FBC Section 1609.1.2.2..
   2. Large-Missile Test: For glazing located within 9.1 m (30 feet) of grade.
   3. Small-Missile Test: For glazing located more than 9.1 m (30 feet) above grade. //

E. Building Enclosure Vapor Retarder and Air Barrier:
   1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
   2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Manufacturer's Certificates:
   1. Certificate stating that fire-protection and fire-resistive glazing units meet code requirements for fire-resistance-rated assembly and applicable safety glazing requirements.
   2. Certificate on solar heat gain coefficient when value is specified.
   3. Certificate on "R" value when value is specified.
   4. Certificate test reports confirming compliance with specified bullet resistive rating.
   5. Certificate that blast resistant glass meets the specified requirements.
C. Manufacturer Warranty.
D. Manufacturer's Literature and Data:
   1. Glass, each kind required.
   2. Insulating glass units.
   3. Glazing cushion.
   4. Sealing compound.
E. Samples:
   1. Size: 305 mm by 305 mm (12 inches by 12 inches).
   2. Tinted glass.
   3. Reflective glass.
F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer’s test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.
D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":

1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling to comply with manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.
2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
3. Edge protection: To cushion and protect glass clad edges from contamination or foreign matter, the four (4) edges are to be sealed the depth of glazing with continuous standard-thickness thermoplastic rubber tape. Alternatively, continuous channel shaped extrusion of thermoplastic rubber are to be used, with flanges extending into face sides of glazing.
4. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 degrees C (60 to 75 degrees F), during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS:

A. Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY

A. Construction Warranty: Comply with the FAR clause 52.246-21 “Warranty of Construction”.

B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows. Submit manufacturer warranty.

1. Insulating glass units to remain sealed for ten (10) years.
2. Laminated glass units to remain laminated for five (5) years.

1.9 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Architectural Manufacturers Association (AAMA):

800 .....Test Methods for Sealants

810.1-77 .....Expanded Cellular Glazing Tape

C. American National Standards Institute (ANSI):

Z97.1-15 ..... Safety Glazing Material Used in Building - Safety Performance Specifications and Methods of Test

D. American Society of Civil Engineers (ASCE):

7-10 ..... Wind Load Provisions

E. ASTM International (ASTM):

C542-05(2017) ..... Lock-Strip Gaskets

C716-06(2020) ..... Installing Lock-Strip Gaskets and Infill Glazing Materials

C794-18 ..... Adhesion-in-Peel of Elastomeric Joint Sealants

C864-05(2019) ..... Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers

C920-18 ..... Elastomeric Joint Sealants

C964-20 ..... Standard Guide for Lock-Strip Gasket Glazing

C1036-16 ..... Flat Glass

C1048-18 ..... Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.

C1172-19 ..... Laminated Architectural Flat Glass

C1376-15 ..... Pyrolytic and Vacuum Deposition Coatings on Flat Glass

E84-20 ..... Surface Burning Characteristics of Building Materials

E119-20 ..... Standard Test Methods for Fire Test of Building Construction and Material

E1300-16 ..... Load Resistance of Glass in Buildings

E1886-19 ..... Standard Test Method for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missile(s) and Exposed to Cyclic Pressure Differentials

E1996-20 ..... Standard Specification for Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Windborne Debris in Hurricanes

E2190-19 ..... Insulating Glass Unit

F1233-08(2019) ..... Standard Test Method for Security Glazing Materials and Systems

F1642/F1642M-17 ..... Test Method for Glazing and Glazing Systems Subject to Airblast Loadings

F. Code of Federal Regulations (CFR):

16 CFR 1201-24 ..... Safety Standard for Architectural Glazing Materials

G. Florida Building Commission:

FBC ..... 2023 Florida Building Code

H. Glass Association of North America (GANA):

2022 Edition .....GANA Glazing Manual

2008 Edition .....GANA Sealant Manual

2019 Edition .....GANA Laminated Glazing Reference Manual

2010 Edition .....GANA Protective Glazing Reference Manual

I. International Code Council (ICC):

IBC .....International Building Code

J. Insulating Glass Certification Council (IGCC)

K. Insulating Glass Manufacturer Alliance (IGMA):

TB-3001-13 .....Guidelines for Sloped Glazing

TM-3000 .....North American Glazing Guidelines for Sealed Insulating Glass Units for Commercial and Residential Use

L. Intertek Testing Services – Warnock Hersey (ITS-WHI)

M. National Fire Protection Association (NFPA):

80-16 .....Fire Doors and Windows

252-12 .....Fire Tests of Door Assemblies

257-12 .....Standard on Fire Test for Window and Glass Block Assemblies

N. National Fenestration Rating Council (NFRC)

O. Safety Glazing Certification Council (SGCC):

Certified Products Directory (Issued Semi-Annually).

P. Underwriters Laboratories, Inc. (UL):

9-08(R2009) .....Fire Tests of Window Assemblies

263-14 .....Fire Tests of Building Construction and Materials

752-11 .....Bullet-Resisting Equipment.

Q. Department of Veterans Affairs:

R. Physical Security Design Manual for VA Mission Critical Protected Facilities January 2020 (rev 2024)

S. Architectural Design Manual for VA Facilities (VASDM)

S. Environmental Protection Agency (EPA):

40 CFR 59(2014) .....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCT

2.1 GLASS

A. Provide minimum thickness stated and as additionally required to meet performance requirements.

1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.

B. Obtain glass units from single source from single manufacturer for each glass type.

C. Clear Glass:
   1. ASTM C1036, Type I, Class 1, Quality q3.
D. Tinted Heat reflective and low emissivity coated glass:
   1. ASTM C1036, Type I, Class 2, Quality q3.

2.2 HEAT-TREATED GLASS

A. Clear Heat Strengthened Glass:
   1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.
B. Tinted Heat Strengthened Glass:
   1. ASTM C1048, Kind HS, Condition A, Type I, Class 2, Quality q3.
C. Clear Tempered Glass:
   1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
D. Tinted Tempered Glass.
   1. ASTM C1048, Kind FT, Condition A, Type I, Class 2, Quality q3.

2.3 COATED GLASS

A. Ceramic Enamel Frit Coated Spandrel Glass:
   1. ASTM C1048, Kind HS or FT, Condition B (spandrel glass, one-surface ceramic coated), Type I, Quality q3 with ceramic coating applied over glass surface.
   2. Pattern: 100% opaque.

2.4 LAMINATED GLASS

A. Laminated Glass: ASTM C1172. Two or more lites of heat treated glass bonded with polyvinyl butyral, ionomeric polymer, or cast-in-place and cured-transparent-resin interlayer complying with interlayer manufacturer's written instructions. Minimum total laminated thickness of 1/4” for blast resistant glazing.
B. Interlayer: Use 4.57 mm (0.18 inch) thick interlayer for:
   1. Miami-Dade NOA - Level “E” Missile Rating.
C. Interlayer: Use 2.28 mm (0.09 inch) thick interlayer for:
   1. Miami-Dade NOA - Level “D” Missile Rating.
D. Interlayer Color: Clear.

2.5 SECURITY GLAZING ASSEMBLY

A. Blast Resistance: Provide exterior glazing units that meet the specified blast pressures and impulses providing protection based upon hazard rating as scheduled, in accordance with Physical Security and Resilience Design Manual for Mission Critical Protected Facilities) October 2020.

2.6 INSULATING GLASS UNITS

A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190.

2.7 GLAZING ACCESSORIES

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer's installation instructions.

B. Setting Blocks: ASTM C864:
   1. Silicone type.
   2. Channel shape; having 6 mm (1/4 inch) internal depth.
   3. Shore A hardness of 80 to 90 Durometer.
   4. Block lengths: 50 mm (2 inches) except 100 to 150 mm (4 to 6 inches) for insulating glass.
   5. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
   6. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:
   1. Channel shape having a 6 mm (1/4 inch) internal depth.
   2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
   3. Lengths: 25 to 76 mm (1 to 3 inches).
   4. Shore A hardness of 40 to 50 Durometer.

D. Glazing Tapes:
   1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
   2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
   3. Complying with AAMA 800 for the following types:
      a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
      b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.

E. Glazing Gaskets: ASTM C864:
   1. Firm dense wedge shape for locking in sash.
   2. Soft, closed cell with locking key for sash key.
   3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.

F. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.

G. Glazing Sealants: ASTM C920, silicone neutral cure:
   1. Type S.
   2. Class 25 or 50 as recommended by manufacturer for application.
   3. Grade NS.
   4. Shore A hardness of 25 to 30 Durometer.

5. VOC Content: For sealants used inside the weatherproofing system, not more than 250 g/L or less when calculating according to 40 CFR 59, (EPA Method 24).

H. Structural Sealant: ASTM C920, silicone acetoxy cure:
1. Type S.
2. Class 25.
3. Grade NS.
4. Shore a hardness of 25 to 30 Durometer.

I. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.
1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.
2. Designed for dry glazing.

J. Color:
1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames to match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted are to be black, gray, or neutral color.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:
1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.

B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units.

3.2 PREPARATION

A. For sealant glazing, prepare glazing surfaces in accordance with GANA Sealant Manual.

B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.

C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.

D. Verify that components used are compatible.

E. Clean and dry glazing surfaces.

F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION – GENERAL

A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.

B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.

C. Set glazing without bending, twisting, or forcing of units.

D. Do not allow glass to rest on or contact any framing member.

E. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.

F. Laminated Glass:

1. Tape edges to seal interlayer and protect from glazing sealants.
2. Do not use putty or glazing compounds.

G. Insulating Glass Units:

1. Glaze in compliance with glass manufacturer's written instructions.
2. When glazing gaskets are used, they are to be of sufficient size and depth to cover glass seal or metal channel frame completely.
3. Do not use putty or glazing compounds.
4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
5. Install with tape or gunnable sealant in wood sash.

3.4 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT)

A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.

B. Place setting blocks at 1/3 points with edge block no more than 150 mm (6 inches) from corners.

C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.

D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.

E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line. Sealant type is to be compatible with glazing tape.

F. Trim protruding tape edge.

3.5 REPLACEMENT AND CLEANING

A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.

B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.

C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.6 PROTECTION

A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.7 MONOLITHIC GLASS SCHEDULE

A. Glass Type MG#1: Clear fully tempered float glass.
   1. Unit Thickness: 6 mm (0.23 inch).
   2. Safety glazing label required.

3.8 INSULATING LAMINATED GLASS SCHEDULE (IMPACT RESISTANT):

A. Glass Type L#1: Low-E-coated, tinted insulating, Level E impact-resistant glass.
   1. Overall Unit Thickness: 36.5 mm (1-7/16 inch).
   2. Outdoor Lite: Tinted heat-strengthened float glass where required, and fully tempered float glass where indicated.
      a. Minimum Thickness of Outdoor Lite: 6 mm (0.23 inch).
      b. Tint Color: Gray to match existing (Solar gray).
   3. Interspace Content: Air .
   4. Indoor Lite: Clear laminated glass with two lites of heat-strengthened float glass.
      a. Minimum thickness of Each Glass Lite: 5 mm (0.19 inch).
      b. Interlayer Thickness: 4.5 mm (0.18 inch)
      c. Secured in frame with structural silicone sealant.
   5. Low-E Coating: Sputtered on second surface of Outdoor Lite.
   6. Visible Light Transmittance: 29.6 percent minimum.
   7. Solar Heat Gain Coefficient: 0.216 maximum.
   8. U-Value (Winter Nightime): 0.407 Btu/ (Hrx SqFt x ºF) maximum.
   9. Safety glazing label required.
   10. Windborne debris-resistant glazing unit required.
      a. Miami-Dade County, Florida – Notice of Acceptance (NOA) for Level “E” Impact rating.
   11. Blast Resistance: Provide units meeting the following:
      a. Glazing system shall meet the design requirements of Section 6.2.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2015).

B. Glass Type IL#2: Ceramic-coated, low-E coated, tinted insulating, Level E impact-resistant spandrel glass.
   1. Overall Unit Thickness: 36.5 (1-7/16 inch).
   2. Outdoor Lite: Tinted heat-strengthened float glass where required, and fully tempered float glass where indicated.
      a. Minimum Thickness of Outdoor Lite: 6 mm (0.23 inch).
      b. Tint Color: Gray to match existing (Solar gray).

3. Interspace Content: Air.
4. Indoor Lite: Clear laminated glass with two lites of heat-strengthened float glass.
   a. Minimum thickness of Each Glass Lite: 5 mm (0.19 inch).
   b. Interlayer Thickness: 4.5 mm (0.18 inch)
   c. Secured in frame with structural silicone sealant.
   d. Ceramic Enamel Frit Coating
      1) Location: #6 surface
      2) Coating Color: Black
5. Low-E Coating: Sputtered on second surface of Outdoor Lite.
6. Visible Light Transmittance: 0 percent minimum.
7. Solar Heat Gain Coefficient: 0.216 maximum.
8. U- Value (Winter Nightime): 0.407 Btu/ (Hrx SqFt x ºF) maximum.
9. Safety glazing label required.
10. Windborne debris-resistant glazing unit required.
    a. Miami-Dade County, Florida – Notice of Acceptance (NOA) for Level “E” Impact rating.
11. Blast Resistance: Provide units meeting the following:
    a. Glazing system shall meet the design requirements of Section 6.2.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2015).

C. Glass Type IL#3: Low-E coated, tinted insulating,Level D impact-resistant glass.
1. Overall Unit Thickness: // 33.3 mm (1-5/16 inch).
2. Outdoor Lite:heat-strengthened float glass where required, and fully tempered float glass where indicated.
   a. Minimum Thickness of Outdoor Lite: 6 mm (0.23 inch).
   b. Tint Color: Gray to match existing (Solar gray).
3. Interspace Content: Air.
4. Indoor Lite: Clear laminated glass with two lites of heat-strengthened float glass.
   a. Minimum thickness of Each Glass Lite: 5 mm (0.19 inch).
   b. Interlayer Thickness: 2.3 mm (0.090 inch)
   c. Secured in frame with structural silicone sealant.
5. Low-E Coating: Sputtered on second surface of Outdoor Lite.
6. Visible Light Transmittance: 29.6 percent minimum.
7. Solar Heat Gain Coefficient: 0.216 maximum.
8. U-Value (Winter Nightime): 0.407 Btu/ (Hrx SqFt x ºF) maximum.
9. Safety glazing label required.
10. Windborne debris-resistant glazing unit required.
    a. Miami-Dade County, Florida – Notice of Acceptance (NOA) for Level “D” Impact rating.
11. Blast Resistance: Provide units meeting the following:

a. Glazing system shall meet the design requirements of Section 6.2.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2015).

D. Glass Type IL#4: Ceramic-coated, low-E coated, tinted insulating Level D impact-resistant spandrel glass.

1. Overall Unit Thickness: 33.3 mm (1-5/16 inch).
2. Outdoor Lite: Clear heat-strengthened float glass where required, and fully tempered float glass where indicated.
3. Interspace Content: Air.
4. Indoor Lite: Clear laminated glass with two lite of heat-strengthened float glass..
   a. Minimum thickness of Each Glass Lite: 5 mm (0.19 inch).
   b. Interlayer Thickness: 2.3 mm (0.090 inch)
   c. Secured in frame with structural silicone sealant.
   d. Ceramic Enamel Frit Coating
      1) Location: #6 surface
      2) Coating Color: Black
5. Low-E Coating: Sputtered on second surface of Outdoor Lite.
6. Visible Light Transmittance: 0 percent minimum.
7. Solar Heat Gain Coefficient: 0.216 maximum
8. U- Value (Winter Nightime): 0.407 Btu/ (Hrx SqFt x ºF) maximum.
9. Safety glazing label required.
10. Windborne debris-resistant glazing unit required.
    a. Miami-Dade County, Florida – Notice of Acceptance (NOA) for Level “D” Impact rating.
11. Blast Resistance: Provide units meeting the following:
    a. Glazing system shall meet the design requirements of Section 6.2.2 of the VA Physical Security Design Manual for Mission Critical Facilities (2015).

- - - E N D - - -

SECTION 08 90 00
LOUVERS AND VENTS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies fixed and operable wall louvers, door louvers and wall vents.

1.2 RELATED WORK

A. Section 08 51 13, ALUMINUM WINDOWS: Louvers in infill panels.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings:

1. Each type, showing material, finish, size of members, method of assembly, and installation and anchorage details.

C. Manufacturer's Literature and Data:

1. Each type of louver and vent.

D. Color samples.

E. Test reports: Indicate each product complies with specifications:

1. Submit certified independent laboratory test reports and Florida Product Approvals (FPAs) verifying compliance with all requirements for Wind-Borne Debris Impact and High Velocity Wind-Driven Rain.

1.4 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. The Master Painters Institute (MPI):
Approved Product List – Updated Monthly

C. ASTM International (ASTM):

A240/A240M-20 ..... Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications

A653/A653M-20 ..... Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

A1008/A1008M-20 ..... Steel, Sheet, Carbon, Cold Rolled, Structural, and High Strength Low-Alloy with Improved Formability

B209-14..... Aluminum and Aluminum Alloy, Sheet and Plate

B209M-14..... Aluminum and Aluminum Alloy, Sheet and Plate (Metric)

B221-14..... Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes

B221M-13.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)

D1187/D1187M-97(2018) .....Asphalt-Base Emulsions for Use as Protective Coatings for Metal

D. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06 .....Metal Finishes Manual

E. National Fire Protection Association (NFPA):

90A-15.....Installation of Air Conditioning and Ventilating Systems

F. American Architectural Manufacturers Association (AAMA):

2605-13 .....High Performance Organic Coatings on Architectural Extrusions and Panels

G. Air Movement and Control Association, Inc. (AMCA):

500-L-07 Testing Louvers

540 Wind-Borne Debris Impact

550 High Velocity Wind-Driven Rain.

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Aluminum, Extruded: ASTM B221M (B221).

B. Stainless Steel: ASTM A240/A240M, Type 302B.

C. Galvanized Steel Sheet: ASTM A653/A653M; G90 min.

D. Aluminum, Plate and Sheet: ASTM B209M (B209); alloy 3003 or 5005 with temper as required for forming.

E. Fasteners: Fasteners for securing louvers and wall vents to adjoining construction, except as otherwise specified or indicated in construction documents, to be toggle or expansion bolts of size and type as required for each specific type of installation and service condition.

1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
2. Fasteners for louvers, louver frames, and wire guards to be of stainless steel or aluminum with same finish as louvers.
3. Fasteners for louvers, louver frames and wire guards within mental health areas to be non-removable/tamper-proof type.

2.2 EXTERIOR WALL LOUVERS:

A. General:

1. Provide fixed type louvers of size and design shown.
2. Heads, sills and jamb sections are to have formed caulking slots or be designed to retain caulking. Head sections are to have exterior drip lip, and sill sections an integral water stop.
3. Furnish louvers with sill extension or separate sill as shown.

4. Frame is to be mechanically fastened or welded construction with welds dressed smooth and flush.

B. Performance Characteristics:

1. Weather louvers are to have a minimum of 50 percent free area and to pass 5.5 mm/s (1083 fpm) free area velocity at a pressure drop not exceeding 4 mm (0.16 inch) water gauge and carry not more than 3 g (0.01 ounces) of water per square foot of free area for 15 minutes when tested per AMCA Standard 500-L.
2. Louvers are to bear AMCA certified rating seals for air performance and water penetration ratings.
3. Hurricane Impact Requirements:
   a. Exterior louvers shall meet requirements for High Velocity Wind-Driven rain (per AMCA 550) and Wind-Borne Debris Impact (per AMCA 540). Louver shall comply with Level D impact requirements above 30’ above grade.
   b. Product must have Florida Product Approval (FPA).

C. Aluminum Louvers:

1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.078-inch) thick extruded 6063-T5 or –T52 aluminum. Blades to be drainable type and have reinforcing bosses.
2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames are not to exceed 1676 mm (66 inches) wide. When openings exceed 1676 mm (66 inches), provide twin louvers separated by mullion members.
3. Louvers are to withstand the effects or gravity loads and the wind loads and stresses within limits and under conditions indicated without permanent deformation of louver components, noise or metal fatigue caused by louver-blade rattle or flutter, or permanent damage to fasteners and anchors.

2.3 CLOSURE ANGLES AND CLOSURE PLATES:

A. Fabricate from 2 mm (0.078-inch) thick stainless steel or aluminum.

B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.

C. Secure angles and plates to louver frames with screws, and to structural steel framing with fasteners as indicated in construction documents.

2.4 BLANK-OFF PANELS:

A. Uninsulated panels attached with clips or screws as follows: Panel finish is to be same finish type applied to louvers but black color.

1. Aluminum sheet for aluminum louvers, 1.27 mm (0.050 inch) minimum thickness.

B. Insulated laminated panels consisting of an insulating core surfaced on back and front with metal sheets and attached to back of louver with clips on screws and gasketed or sealant sealed

perimeter. Panel finish is to be // same finish applied to louvers // //same type of finish applied to louvers but black color //.

1. Thickness: 25 mm (1 inch).
2. Aluminum sheet for aluminum louver 0.81 mm (0.032 inch) minimum.
3. Insulating Core: Rigid, glass-fiber-board insulation .

2.5 WALL VENTS:

A. Fabricate exterior wall vents from either 4.7 mm (0.185-inch) thick aluminum plate or 6 mm (1/4-inch) thick cast iron, perforated in diamond lattice pattern, with not over 19 mm (3/4-inch) openings.

B. Vents are to have aluminum screen frame with aluminum alloy insect screening mounted on back of vent by means of 19 mm x 5 mm (3/4-inch by 3/16-inch) top and bottom bars screwed to grille.

2.6 FINISH:

A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505

B. Aluminum Louvers:

1. Anodized finish
   a. AA-M10C22A41, Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.17 mm (0.7 mils) thick.

2.7 PROTECTION:

A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous coating (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.

B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.

C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work. Strippable plastic coating on anodized finish is not approved.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Set work accurately, in alignment and where indicated in construction documents. Install plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.

B. Provide anchoring devices and fasteners as shown and as necessary for securing louvers to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.

C. Set wall louvers in walls during progress of the work. If wall louvers are not delivered to job in time for installation in prepared openings, make provision for later installation.

3.2 CLEANING AND ADJUSTING:

A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum are to be cleaned as recommended by the manufacturer and protected from damage until completion of the project.

B. All movable parts, including hardware, are to be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components.

C. Restore louvers and vents damaged during installation and construction so no evidence remains of corrective work. If results of restoration are unsuccessful, as determined by Contracting Officer Representative (COR) damaged units and replace with new units.

- - - E N D - - -

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies subsurface preparation requirements for areas to receive the installation of applied flooring. This section includes removal of existing floor coverings, testing concrete for moisture and pH, remedial floor coating for concrete floor slabs having unsatisfactory moisture or pH conditions, floor leveling and repair as required.

1.2 RELATED WORK

A. Section 07 92 00, JOINT SEALANTS.

B. Section 09 65 19, RESILIENT TILE FLOORING.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.

B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer

C. Product Data:

1. Moisture remediation system
2. Underlayment Primer
3. Cementitious Self-Leveling Underlayment
4. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)

D. Test Data:

1. Moisture test and pH results performed by a qualified independent testing agency or warranty holding manufacturer's technical representative.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.

B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. ASTM International(ASTM):

D638-14(2014) ..... Standard Test Method for Tensile Properties of Plastics

D4259-18(2019) ..... Standard Practice for Preparation of Concrete by Abrasion Prior to Coating Application.

C109/C109M-20b(2020) ..... Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or [50-mm] Cube Specimens

7234-19(2020).....Standard Test Method for Pull-Off Adhesion Strength of Coatings on Concrete Using Portable Pull-Off Adhesion Testers

E96/E96M-16(2016).....Standard Test Methods for Water Vapor Transmission of Materials

F710-1e1(2020) .....Standard Practice for Preparing Concrete Floors to Receive Resilient Flooring

F1869-16a.....Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

F2170-19a(2020) .....Standard Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in situ Probes

C348-20(2020).....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars

C191-19(2020).....Standard Test Method for Time of Setting of Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING

A. System Descriptions:
   1. High-solids, epoxy system designed to suppress excess moisture in concrete prior to an overlayment. For use under resinous products, VCT, tile and carpet where issues caused by moisture vapor are a concern.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.

C. System Components: Verify specific requirements as systems vary by manufacturer. Verify build up layers and installation method. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
   1. Liquid applied coating:
      a. Resin: epoxy.
      b. Formulation Description: Multiple component high solids.
      c. Application: Per manufacturer's written installation requirements.
      d. Thickness: minimum 10 mils

D. Material Vapor Permeance: Application shall achieve a permeance rating of less than 0.1 perm in accordance with ASTM E96/E96M.

E. Maximum RH requirement: 100% testing in accordance with ASTM F2170.

Property	Test	Value
Tensile Strength	ASTM D638	4,400 psi

Property	Test	Value
Volatile Organic Compound Limits (V.O.C.)	SCAMD Rule 1113 (Ammended 02/05/2016)	25 grams per liter
Permeance	ASTM E96	0.1 perms
Tensile Modulus	ASTM D638	$1.9X10^5$ psi
Percent Elongation	ASTM D638	12%
Cure Rate	Per manufacture's Data	4 hours Tack free with 24hr recoat window
Bond Strength	ASTM D7234	100% bond to concrete failure

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

A. System Descriptions:
   1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

C. System Characteristics:
   1. Wearing Surface: smooth
   2. Thickness: Per architectural drawings, ranging from feathered edge to 1", per application. Applications greater than 1" require additional 3/8" aggregate to mix or as recommended by manufacturer.

D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348

G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours, floor coverings in 16 hours, and resinous flooring in 3-7 days.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:
   1. Primer:

a. Resin: copolymer
b. Formulation Description: single component ready to use.
c. Application Method: Squeegee and medium nap roller.
d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
e. Number of Coats: (1) one.

2. Grout Resurfacing Base:
   a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.
   b. Application Method: colloidal mix pump, cam rake, spike roll.
      1) Thickness of Coats: Per architectural scope, 1" lifts.
      2) Number of Coats: More than one if needed.
   c. Aggregates: for applications greater than 1inch, require additional 3/8" aggregate to mix.

J.

Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
B. Compressive Strength: Minimum 4000 psi in 28 days
C. Trowel-applied underlayment shall not contain silica quartz (sand).
D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

A. Existing concrete slabs with existing floor coverings:
   1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
   2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.

B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.

C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.

D. Prepare concrete substrates per ASTM D4259 as follows:
   1. Dry abrasive blasting.
   2. Wet abrasive blasting.
   3. Vacuum-assisted abrasive blasting.
   4. Centrifugal-shot abrasive blasting.
   5. Comply with manufacturer's written instructions.

E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.

F. Verify that concrete substrates are dry.

G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.

H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture’s formal and project specific written recommendation.

I. Provide a written report showing test placement and results.

J. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer’s instructions.

K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer’s technical representative.

L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer. Tolerance shall also not to exceed 1/4” deviation in 10’. As required, install underlayment to achieve required tolerance.

M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING

A. Where results of relative humidity testing (ASTM F2170) exceed the requirements of the specified flooring manufacturer, apply remedial coating as specified to correct excessive moisture condition.

B. Prior to remedial floor coating installation mechanically prepare the concrete surface to provide a concrete surface profile in accordance with ASTM D4259.

C. Mix and apply moisture remediation coating in accordance with manufacturer’s instructions.

3.4 CEMENTITOUS UNDERLAYMENT

A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.

B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

1.2 RELATED WORK

A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.

B. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS and Section 09 29 00, GYPSUM BOARD.

1.3 TERMINOLOGY

A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.

C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Studs, runners and accessories.
2. Hanger inserts.
3. Channels (Rolled steel).
4. Furring channels.
5. Screws, clips and other fasteners.

C. Shop Drawings:

1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

A653/653M-11.....Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by Hot-Dip Process.

C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems

C635-07 .....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings

C636-08 .....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

C645-09 .....Non-Structural Steel Framing Members

C754-11 .....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C841-03(R2008) .....Installation of Interior Lathing and Furring

C954-10 .....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

E580-11.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G40 or equivalent.

2.2 STEEL STUDS AND RUNNERS (TRACK)

A. ASTM C645, modified for thickness specified and sizes as shown.

1. Use C 645 steel, 0.75 mm (0.0296-inch) minimum base-metal (30 mil).
2. Runners same thickness as studs.
3. Exception: Members that can show certified third party testing with gypsum board in accordance with ICC ES AC86 (Approved May 2012) need not meet the minimum thickness limitation or minimum section properties set forth in ASTM C 645. The submission of an

evaluation report is acceptable to show conformance to this requirement. Use C 645 steel, 0.48mm (0.019 inch) minimum base-metal (19 mil).

B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.

C. Doubled studs for openings and studs for supporting concrete backer-board.

D. Studs 3600 mm (12 feet) or less in length shall be in one piece.

E. Shaft Wall Framing:

1. Conform to rated wall construction.
2. C-H Studs or C-T Studs.
3. E Studs.
4. J Runners.
5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

A. Rigid furring channels (hat shape): ASTM C645.

B. Resilient furring channels:

1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

C. "Z" Furring Channels:

1. Not less than 0.45 mm (0.0179-inch)-thick base metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
2. Web furring depth to suit thickness of insulation.

D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:

1. ASTM A641, soft temper, Class 1 coating.

2. Gage (diameter) as specified in ASTM C754 or ASTM C841.

G. Attachments for Wall Furring:

1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.

B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.

B. Space studs not more than 610 mm (24 inches) on center.

C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.

D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.

E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions and insulated exterior wall furring.

G. Openings:

1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

H. Fastening Studs:
   1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
   2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

I. Chase Wall Partitions:
   1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
   2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

J. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:
   1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
   2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
   3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
   1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
   2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
   3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
   4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
   5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
   6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.

D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.

B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

A. Conform to UL Design No. U438 for two-hour fire rating. Provide one hour fire rating Shaft wall where shown.

B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.

C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.

D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.

E. Suitably frame all openings to maintain structural support for wall:

1. Provide necessary liner fillers and shims to conform to label frame requirements.
2. Frame openings cut within a liner panel with E studs around perimeter.
3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.

1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.

B. New exposed concrete slabs:

1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
2. Furnish for installation under Division 3, CONCRETE.
3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.

C. Concrete slabs on steel decking composite construction:

1. Use pull down tabs when available.
2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.

D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.

E. Existing concrete construction exposed or concrete on steel decking:
1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.

F. Steel decking without concrete topping:
1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.

G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
1. Install only for ceilings to receive screw attached gypsum board.
2. Install in accordance with ASTM C636.
   a. Install main runners spaced 1200 mm (48 inches) on center.
   b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
   c. Install wall track channel at perimeter.

H. Installing Ceiling Bracing System:
1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and over head construction. Lap channels not less than 600 mm (2 feet) at midpoint back to back. Screw or bolt lap together with two fasteners.
2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.
3. Brace suspended ceiling or soffit framing in seismic areas in accordance with ASTM E580.

3.7 TOLERANCES

A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.

B. Plumb and align vertical members within 3 mm (1/8-inch.)

C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

SECTION 09 26 00
VENEER PLASTERING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies veneer plaster and veneer plaster base.

1.2 RELATED WORK:

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.

B. Section 07 92 00, JOINT SEALANTS: Application of Sealants.

C. Section 09 29 00, GYPSUM BOARD: Gypsum Backing Board on Multi-Layer Systems.

1.3 TERMINOLOGY

A. Definitions and description of terms in accordance with ASTM C11, ASTM C843, ASTM C844, and as specified.

B. Underside of Structure Overhead: Where steel trusses or bar joists are shown, the underside of structure overhead is the underside of the floor or roof construction supported by the trusses or bar joists.

C. Yoked: Gypsum Board cut out for opening with no joint at the opening corners.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Postconsumer and preconsumer recycled content as specified in PART 2 - PRODUCTS.
2. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Manufacturer's Literature and Data:

1. Gypsum veneer plaster.
2. Accessories.
3. Joint reinforcing materials.
4. Laminating adhesive.

D. Shop Drawings:

1. Typical veneer plaster installation, showing corner details, casing details, control joint details, and other similar details.

E. Installers qualifications.

1.5 DELIVERY AND STORAGE

A. Deliver and store plaster materials in the manufacturer's original unopened containers.

B. Store materials off the ground within a completely enclosed structure or enclosed within a weathertight covering. Store gypsum base and gypsum backing board flat to prevent warping and protect from excessive exposure to sunlight.

1.6 SCHEDULING

A. Commence application only after the area scheduled for veneer plaster work is completely weathertight.

B. The heating, ventilating, and air-conditioning systems should be complete and in operation prior to application of the plaster. If the mechanical system cannot be activated before veneer plastering is begun, the plastering may proceed in accordance with an approved plan to maintain the environmental conditions specified below.

C. Apply plaster prior to the installation of finish flooring and acoustic ceiling.

1.7 ENVIRONMENTAL REQUIREMENTS

A. Do not expose the gypsum base to excessive sunlight prior to plaster application, as bond failure of the plaster may result.

B. Maintain a continuous uniform temperature of not less than 10 degrees C (50 degrees F) and not more than 27 degrees C (80 degrees F) for at least one (1) week prior to the application of veneer plaster, while the plastering is being done, and for at least one (1) week after the plaster is set.

C. Shield air supply and distribution devices to prevent any uneven flow of air across the plastered surfaces.

D. Provide ventilation to exhaust moist air to the outside during plaster application and set, and until plaster is dry.

E. In glazed areas, keep windows open top and bottom or side to side 76 to 101 mm (3 to 4 inches). Openings can be reduced by 50 percent when temperature is less than 4 degrees C (40 degrees F).

F. For enclosed areas lacking natural ventilation, provide temporary mechanical means for ventilation.

G. In unglazed areas subjected to hot, dry winds or temperature differentials from day to night of 10 degrees C (20 degrees F) or more, screen openings with cheesecloth or similar materials.

H. During periods of low indoor humidity, provide minimum air circulation following plastering operations and until plaster is dry.

1.8 QUALITY ASSURANCE

A. Installers Qualifications: Work is to be performed by installer having a minimum of three (3) years' experience for work relating to this Section. Submit installer qualifications.

1.9 PERFORMANCE REQUIREMENTS

A. Where indicated on construction documents, provide veneer plaster assemblies identical to those of assemblies tested for fire resistance according to ASTM E119 by a qualified testing agency.

B. Where indicated on construction documents, provide veneer plaster assemblies identical to those of assemblies tested for STC ratings according to ASTM E90 and classified according to ASTM E413 by a qualified testing agency.

1.10 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

C11-18b ..... Terminology Relating to Gypsum and Related Building Materials and Systems

C472-20 ..... Physical Testing of Gypsum, Gypsum Plasters and Gypsum Concrete

C475/C475M-17 ..... Joint Compound and Joint Tape for Finish Gypsum Board Construction

C587-04(2018) ..... Gypsum Veneer Plaster

C631-09(2020) ..... Bonding Compounds for Interior Plastering

C840-20 ..... Application and Finishing of Gypsum Board

C843-17 ..... Application of Gypsum Veneer Plaster

C844-15 ..... Application of Gypsum Base to Receive Gypsum Veneer Plaster

C954-18 ..... Steel Drill Screws for the Application of Gypsum Panel Products Board or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in thickness

C1002-18 ..... Steel Drill Screws for the Applications of Gypsum Panel Products Board or Metal Plaster Bases

C1047-19 ..... Accessories for Gypsum Wallboard and Gypsum Veneer Base

C1396/C1396M-17 ..... Specification Gypsum Board

D3678-19 ..... Rigid Poly (Vinyl Chloride) (PVC) Interior-Profile Extrusions

E90-09(2016) ..... Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements

E119-20..... Test Methods for Fire Tests of Building Construction and Materials

E413-16..... Rating Sound Insulation

C. Code of Federal Regulation (CFR):

40 CFR 59..... Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

PART 2 - PRODUCTS

2.1 GYPSUM VENEER PLASTER

A. ASTM C587. Minimum compressive strength of finish coat plaster to be 17.2 MPa (2500 psi) in accordance with ASTM C472.

2.2 ACCESSORIES

A. Corner Bead, Edge Trim and Control Joints: ASTM C1047 or ASTM D3678, except as specified.

B. Corner bead and edge trim (casings): Minimum 0.38 mm (0.015-inch) thick zinc-coated steel sheet or rigid PVC plaster.

1. Recycled Content of Metal Products: Post consumer content plus one-half of preconsumer content not less than 30 percent.

C. Flanges not less than 22 mm (7/8-inch) wide with punch-outs or deformations as required to provide plaster bond.

2.3 JOINT REINFORCING TAPE

A. ASTM C475/C475M, paper tape.

2.4 LAMINATING ADHESIVE

A. ASTM C475/C475M joint compound chemical setting type or as recommended by veneer base manufacturer. VOC not to exceed 20 g/L; free of antifreeze and other deleterious impurities.

1. Sealant adhesive shall have a VOC content of 250 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).

2.5 FASTENERS

A. Screws: ASTM C1002 or ASTM C954.

B. Staples: Flattened zinc-coated steel wire, minimum 15 mm (9/16-inch) leg for securing corner beads or casing and minimum 9 mm (3/8-inch) leg for securing joint reinforcement.

2.6 BONDING COMPOUND

A. ASTM C631.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, construction to match that used in fire rating test and as shown on construction documents.

B. Sound Rated Assemblies and Materials: Construct as indicated on construction documents.

C. Ventilate unheated spaces above veneer plaster ceilings as per ASTM C844.

3.2 VENEER PLASTER APPLICATION OVER GYPSUM BASE:

A. Apply gypsum veneer plaster in accordance with ASTM C843, and with the manufacturer's approved installation instructions where such instructions are additional to or more restrictive than the requirements of ASTM C843. Apply plaster to match existing system. Provide minimum plaster thickness as recommended by the manufacturer, but in no case less than 1.6 mm (1/16 inch) for one-component system. 1.6 mm (1/16 inch) for base coat and 0.8 mm (1/32 inch) for finish coat of a two-component system.

B. Joint Reinforcement: ASTM C843.

C. Apply smooth-trowel finish.

D. Extend finish to underside of structure overhead for fire partitions, smoke partitions, shafts, and sound rated partitions. Seal penetrations and edges for fire, smoke or acoustical requirements.

E. At new suspended ceilings, extend finish not less than 101 mm (4 inches) above suspended ceiling.

F. At existing ceilings, finish may terminate at ceiling except for fire, smoke, or sound rated partitions conditions stated above.

G. Seal and reinforce all joints and fastener heads above ceilings.

3.3 CLEANUP AND PATCHING:

A. Remove any plaster splashes from adjacent surfaces. Repair defects in veneer plaster. Plaster surfaces are to be smooth, clean, and in condition to receive the finishing materials that will be applied.

- - - E N D - - -

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

C. Gypsum base for veneer plaster: Section 09 26 00, VENEER PLASTERING.

D. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

1.3 TERMINOLOGY

A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.

C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Cornerbead and edge trim.
2. Finishing materials.
3. Laminating adhesive.
4. Gypsum board, each type.

C. Shop Drawings:

1. Typical gypsum board installation, showing corner details, edge trim details and the like.
2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
3. Typical shaft wall assembly.
4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

F. Certificates: Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos material.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

C11-15.....Terminology Relating to Gypsum and Related Building Materials and Systems

C475-15 .....Joint Compound and Joint Tape for Finishing Gypsum Board

C840-13 .....Application and Finishing of Gypsum Board

C919-12 .....Sealants in Acoustical Applications

C954-15 .....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness

C1002-14 .....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C1047-14 .....Accessories for Gypsum Wallboard and Gypsum Veneer Base

C1177-13 .....Glass Mat Gypsum Substrate for Use as Sheathing

C1178/C1178M-18.....Specification for Coated Glass Mat Water Resistant Backing Panel

C1658-13 .....Glass Mat Gypsum Panels

C1396-14 .....Gypsum Board

C. Underwriters Laboratories Inc. (UL):

Latest Edition .....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.
2. ASTM C1658: Glass Mat Gypsum Panels,
3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C1178, Type X, 16 mm (5/8 inch) thick.

D. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

B. ASTM C1177, Type X.

2.3 ACCESSORIES

A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

C. Select screws of size and type recommended by the manufacturer of the material being fastened.

D. For fire rated construction, type and size same as used in fire rating test.

E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:

1. Two sides of partitions:
   a. Fire rated partitions.
   b. Smoke partitions.
   c. Sound rated partitions.

d. Full height partitions shown (FHP).

e. Corridor partitions.

2. One side of partitions or furring:
   a. Inside of exterior wall furring or stud construction.
   b. Room side of room without suspended ceilings.
   c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.

B. In locations other than those specified, extend gypsum board from floor to heights as follows:
   1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
   2. At ceiling of suspended gypsum board ceilings.
   3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

A. Coordinate installation of gypsum board with other trades and related work.

B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.

C. Moisture and Mold–Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.

D. Use gypsum boards in maximum practical lengths to minimize number of end joints.

E. Bring gypsum board into contact, but do not force into place.

F. Ceilings:
   1. For single-ply construction, use perpendicular application.
   2. For two-ply assembles:
      a. Use perpendicular application.
      b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.

G. Walls (Except Shaft Walls):
   1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
   2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
   3. Stagger screws on abutting edges or ends.
   4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.

5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
   a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
   b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
   a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
   b. Not required for wall lengths less than 9000 mm (30 feet).
   c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

I. Electrical and Telecommunications Boxes:
1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

J. Accessories:
1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:

a. Install at all vertical and horizontal external corners and where shown.
b. Use screws only. Do not use crimping tool.

4. Edge Trim (casings Beads):
   a. At both sides of expansion and control joints unless shown otherwise.
   b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
   c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
   d. Where shown.

3.3 INSTALLING GYPSUM SHEATHING

A. Install in accordance with ASTM C840, except as otherwise specified or shown.
B. Use screws of sufficient length to secure sheathing to framing.
C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

3.4 CAVITY SHAFT WALL

A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR (Nonbearing for two-hour fire rating.
C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
   1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
   2. Stagger joints top and bottom in adjacent panels.
D. Gypsum Board:
   1. Two hour wall:
      a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
      b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.

c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.

E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.5 FINISHING OF GYPSUM BOARD

A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for al finished areas open to public view.

B. Before proceeding with installation of finishing materials, assure the following:
1. Gypsum board is fastened and held close to framing or furring.
2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated and sound rated construction/ Sanding is not required of non decorated surfaces.

3.6 REPAIRS

A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.

B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.

C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.

D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide // smoke tight construction // fire protection equivalent to the fire rated construction // and STC equivalent to the sound rated construction //.

3.7 UNACCESSIBLE CEILINGS

At Mental Health and Behavioral Nursing Units, areas accessible to patients and not continuously observable by staff (e.g., patient bedrooms, day rooms), ceilings should be a solid material such as gypsum board. This will limit patient access. Access doors are needed to access electrical and

mechanical equipment above the ceiling. These doors should be locked to prevent unauthorized access and secured to ceiling using tamper resistant fasteners.

- - - E N D - - -

SECTION 09 29 53
PARTITION GAP CLOSURES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Prefabricated extruded aluminum partition gap closure assemblies at interior glass surfaces.

1.2 RELATED WORK

A. Section 07 92 19, JOINT SEALANTS: Acoustical joint sealants installed in gypsum board assemblies.
B. Section 08 51 13, ALUMINUM WINDOWS: Aluminum Window Construction.
C. Section 09 22 16, NON-STRUCTURAL METAL FRAMING: Non-structural steel framing and suspension systems that support gypsum board panels.
D. Section 09 26 00, VENEER PLASTERING: Gypsum base for veneer plaster and for other components of gypsum-veneer-plaster finishes.
E. Section 092900 GYPSUM BOARD: interior gypsum board, accessories, trim, and finishes.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this Section.
B. American Architectural Manufacturers Association (AAMA):
   1. AAMA 2604 – Specification for Performance Requirements and Test Procedures for High Performance Organic Coatings on Aluminum Extrusions and Panels
C. American Society for Testing and Materials (ASTM)
   1. ASTM D2247 Standard Practice for Testing Water Resistance of Coatings in 100% Relative Humidity
   2. ASTM E84 Standard Test Method for Surface Burning Characteristics of Building Materials
   3. ASTM E1399/E1399M-97 Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems
   4. ASTM E90-2016 Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.
D. National Association of Architectural Metal Manufacturers (NAAMM)
   1. Metal Finishes Manual for Architectural and Metal Products
E. UL LLC (UL):
   2079-15 - Standard for Tests for Fire Resistance of Building Joint Systems.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting minimum 30 days before beginning Work of this Section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Architect/Engineer.

c. Contractor.

d. Installer.

e. Other installers responsible for adjacent and intersecting work.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

a. Installation schedule.

b. Installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Installation.

f. Terminations.

g. Transitions and connections to other work.

h. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Include installation drawings with large-scale details indicating profiles of each type gap closure assembly between joint sections, transitions to other assemblies, terminations, anchorages, fasteners, and relationship to adjoining work and finishes.

2. Show size, configuration, and fabrication and installation details.

3. Include composite drawings showing work specified in other Sections coordinated with expansion joints.

C. Manufacturer's Literature and Data:

1. Description of each product specified.

2. Show movement capability of each gap closure assembly.

3. Description of materials and finishes.

4. Installation instructions.

D. Samples: Submit 300 mm (12 inch) long samples.

1. Each type and color of metal finish for each required thickness and alloy.

2. Each type and color of flexible seal.

E. Sustainable Construction Submittals:

1. Low Pollutant-Emitting Materials:

a. Identify volatile organic compound types and quantities.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Installer with project experience list.

G. Certificates: Indicate products comply with specifications.

H. Operation and Maintenance Data:
   1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer must have manufacturing and delivery capacity required for the project and shall have successfully completed at least ten (10) projects within the past five (5) years, utilizing systems, materials, and techniques as herein specified.

B. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility away from uncured concrete and masonry, and protected from the weather, moisture, soiling, abrasion, extreme temperatures, and humidity.

B. Maintain environmental conditions (temperature, humidity, and ventilation) within limits recommend by Manufacturer for optimum results. Do not install products under environmental conditions outside Manufacturer’s recommendations.

C. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting partition gap closure assembly fabrication and installation. Show field measurements on Submittal Drawings.
   1. Coordinate field measurement and fabrication schedule to avoid delay.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Provide extruded aluminum partition gap closure assemblies that can accommodate lateral movements caused by seismic, thermal and wind sway, while providing acoustical value up-to 62 STC.

B. Pre-assembled, spring-loaded closure to provide tight fit for vertical joints between integral partition end cap and face of glass surface.

2.2 SYSTEM PERFORMANCE

A. Partition Gap Closure shall meet specified performance requirements listed in ASTM E1399/E1399M-97 for the joint width minimum and maximum dimension verification as well as the cyclic movement performance for Class IV – Combined movement which encompasses Seismic, Thermal and Wind Sway, movement at a cycling rate greater than or equal to 10 cycles per minute.

B. Sound Transmission Class (STC) for Extruded Aluminum Partition Gap Closure per ASTM E90-2016.

C. All materials are Class A rated per ASTM E84.

2.3 MATERIALS

A. Aluminum:

1. Extruded: alloy 6063-T5, or 6063-T6.
2. Plate and Sheet: 3000 series alloy.

B. Elastomeric Sealant: As specified in Section 07 92 00, JOINT SEALANTS.

C. Elastomeric Seals:

1. Flexible extruded polyvinyl chloride, meeting a Shore A hardness of 75 with UV stabilizer. Manufacturer's standard colors.

2.4 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

B. Prefabricated extruded aluminum partition gap closure assemblies – Basis of Design: Subject to compliance with requirements, provide Gordon, Inc. “Mullion Mate Plus – Against Glass” or a comparable product.

C. Sustainable Construction Requirements:

1. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.5 FABRICATION

A. Provide extruded aluminum partition gap closures in specified lengths and size to fit specified openings. Include sound attenuation fill within gap assembly.

B. Provide integral wall end cap at lengths and widths to fit specified wall conditions.

2.6 FINISHES

A. Aluminum Anodized Finish: NAAMM AMP 500.

1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.7 ACCESSORIES

A. General: Manufacturer's standard anchors, fasteners, set screws, spaces, protective coating, and filler materials, adhesive and other accessories required for installation.

B. Barrier Coating: ASTM D1187/D1187M.

C. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.

D. Fasteners: Type and size recommended by expansion joint cover assembly manufacturer.
   1. Exterior Applications: Stainless steel.
   2. Fasteners for Aluminum: Stainless steel.
   3. Other Applications: Galvanized steel or stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
B. Clean surfaces thoroughly prior to installation.
C. Prepare surfaces using the methods recommended by the Manufacturer to achieve the best result for the project conditions.
D. Verify that field measurements and block-out dimensions are as shown on Shop Drawings.
E. Protect existing construction and completed work from damage.

3.2 INSTALLATION

A. Install products according to manufacturer's instructions and approved submittal drawings.
   1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
B. Extruded aluminum partition gap closures shall be inspected before installation to be free from dents, scratches, and other defects.
C. Do not install any work until space is enclosed and weatherproofed, wet-work in space is completed and nominally dry, work above ceilings is complete, and temperature and humidity shall be continuously maintained at values near those of final occupancy.
D. Install anchorage devices and fasteners for securing partition gap closures to in-place construction where anchors are not embedded in concrete and masonry.
   1. Secure with metal fasteners, type and size to suit application.
E. Perform cutting, drilling and fitting required for installation of partition gap closures assemblies.

3.3 CLEANING

A. Remove excess adhesive before adhesive sets.
B. Clean exposed metal surfaces. Remove contaminants and stains.

3.4 PROTECTION

A. Remove protective covering when adjacent work areas are completed. Clean exposed surfaces in compliance with manufacture's printed instructions.

- - E N D - -

SECTION 09 30 13
CERAMIC/PORCELAIN TILING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies interior ceramic, porcelain and quarry tile, marble thresholds and window stools, terrazzo divider strips, waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.

B. Section 07 92 00, JOINT SEALANTS: Sealing of Joints.

C. Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES: Preformed expansion joints in tile flooring.

D. CONSTRUCTION DRAWINGS: FINISH LEGEND: Color, Texture, Pattern, and Size of Field Tile and Trim Shapes, and Color of Grout Specified.

E. Section 09 23 00, GYPSUM PLASTERING: Metal and Gypsum Lathing and Gypsum Plaster: Lathing and Portland.

F. Section 09 65 19, RESILIENT TILE FLOORING: Metal and Resilient Edge Strips at Joints with New Resilient Flooring.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Samples:

1. Base tile, each type, each color, each size.
2. Mosaic floor tile panels, 228 by 228 mm (9 by 9 inches), each type, color, size and pattern.
3. Paver tile, each size, type, color and pattern.
4. Quarry tile, each type, color, and size.
5. Porcelain tile, each type, color, patterns and size.
6. Wall (or wainscot) tile, each color, size and pattern.
7. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
8. Therapeutic pool tile, panels 305 mm (12 inches) square, each type, size, color, typical lettering and special shapes.

D. Product Data:

1. Ceramic and porcelain tile, marked to show each type, size, and shape required.

2. Chemical resistant mortar and grout (epoxy and furan).
3. Cementitious backer unit.
4. Dry-set portland cement mortar and grout.
5. Divider strip.
6. Elastomeric membrane and bond coat.
7. Reinforcing tape.
8. Leveling compound.
9. Latex-portland cement mortar and grout.
10. Commercial portland cement grout.
11. Organic adhesive.
12. Slip resistant tile.
13. Waterproofing isolation membrane.
14. Fasteners.

E. Certification:
1. Master grade certificate, ANSI A137.1.
2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
   a. Chemical resistant mortar and grout (epoxy and furan).
   b. Modified epoxy emulsion.
   c. Commercial portland cement grout.
   d. Cementitious backer unit.
   e. Dry-set portland cement mortar and grout.
   f. Elastomeric membrane and bond coat.
   g. Reinforcing tape.
   h. Latex-portland cement mortar and grout.
   i. Leveling compound.
   j. Organic adhesive.
   k. Waterproof isolation membrane.
   l. Factory back mounted tile documentation for suitability for application in wet area.

F. Installer Qualifications:
1. Submit letter stating installer’s experience.

1.4 DELIVERY AND STORAGE

A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
B. Store material to prevent damage or contamination.

1.5 QUALITY ASSURANCE

A. Installers to be from a company specializing in performing installation of products specified and have a minimum of three (3) years’ experience.

B. Each type and color of tile to be provided from a single source.

C. Each type and color of mortar, adhesive, and grout to be provided from the same source.

1.6 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21, “Warranty of Construction”.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

A10.20-06(R2016).....Safe Operating Practices for Tile, Terrazzo and Marble Work

A108/A118/A136.1:2019.....Installation of Ceramic Tile

A108.01-18.....Subsurfaces and Preparations by Other Trades

A108.02-19.....Materials, Environmental, and Workmanship

A108.1A-17 .....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar

A108.1B-17 .....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

A108.1C-17 .....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

A108.4-09.....Ceramic Tile with Organic Adhesives or Water Cleanable Tile-Setting Epoxy Adhesive

A108.5-10 .....Ceramic Tile with Dry-Set Portland Cement Mortar or Latex-Portland Cement Mortar

A108.6-10.....Ceramic Tile with Chemical Resistant, Water Cleanable Tile-Setting and -Grouting Epoxy

A108.8-10.....Ceramic Tile with Chemical Resistant Furan Resin Mortar and Grout

A108.9-10.....Ceramic Tile with Modified Epoxy Emulsion Mortar/Grout

A108.10-17.....Grout in Tilework

A108.11-18.....Interior Installation of Cementitious Backer Units

A108.12-10.....Installation of Ceramic Tile with EGP (Exterior Glue Plywood) Latex-Portland Cement Mortar

A108.13-16.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone

A108.14-10.....Paper-Faced Glass Mosaic Tile

A108.15-19.....Alternate Method: Paper-Faced Glass Mosaic Tile

A108.17-16.....Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone
A118.1-19.....Dry-Set Portland Cement Mortar
A118.3-13.....Chemical Resistant, Water Cleanable Tile-Setting and –Grouting Epoxy and Water Cleanable Tile-Setting Epoxy Adhesive
A118.4-19.....Modified Dry-Set Cement Mortar
A118.5-16.....Chemical Resistant Furan Mortars and Grouts
A118.6-19.....Standard Cement Grouts for Tile Installation
A118.7-1.....High Performance Cement Grouts for Tile Installation
A118.8-16.....Modified Epoxy Emulsion Mortar/ Grout
A118.9-19.....Cementitious Backer Units
A118.10-14.....Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation
A118.11-17.....EGP (Exterior Glue Plywood) Modified Dry-set Mortar
A118.12-14.....Crack Isolation Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation
A118.13-14.....Bonded Sound Reduction Membranes for Thin-Set Ceramic Tile Installation
A118.15-19.....Improved Modified Dry-Set Cement Mortar
A136.1-13.....Organic Adhesives for Installation of Ceramic Tile
A137.1-17.....American National Standard Specifications for Ceramic Tile

C. ASTM International (ASTM):

A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate and Flat Bar
A1064/A1064M-18a .....Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
C109/C109M-20b.....Standard Test Method for Compressive Strength of Hydraulic Cement Mortars (Using 2 inch. or [50-mm] Cube Specimens)
C241/C241M-15e1.....Abrasion Resistance of Stone Subjected to Foot Traffic
C348-20 .....Standard Test Method for Flexural Strength of Hydraulic-Cement Mortars
C627-18 .....Evaluating Ceramic Floor Tile Installation Systems Using the Robinson-Type Floor Tester
C954-18 .....Steel Drill Screws for the Application of Gypsum Board on Metal Plaster Base to Steel Studs from 0.033 in (0.84 mm) to 0.112 in (2.84 mm) in thickness
C979/C979M-16.....Pigments for Integrally Colored Concrete

C1002-18 .....Steel Self-Piercing Tapping Screws for the Application of Panel Products
C1027-19 .....Test Method for Determining Visible Abrasion Resistance of Glazed Ceramic Tile
C1127/C1127M-15.....Standard Guide for Use of High Solids Content, Cold Liquid-Applied Elastomeric Waterproofing Membrane with an Integral Wearing Surface
C1178/C1178M-18.....Standard Specification for Coated Glass Mat Water-Resistant Gypsum Backing Panel
C1325-19 .....Non-Asbestos Fiber-Mat Reinforced Cementitious Backer Units
C1353/C1353M-20e1.....Abrasion Resistance of Dimension Stone Subjected to Foot Traffic Using a Rotary Platform, Double-Head Abraser
D1204-14(2020).....Test Method for Linear Dimensional Changes of Nonrigid Thermoplastic Sheeting or Film at Elevated Temperature
D2240-15e1 .....Test Method for Rubber Property – Durometer Hardness
D2497-07(2018).....Tolerances for Manufactured Organic-Base Filament Single Yarns
D3045-2018 .....Heat Aging of Plastics Without Load
D4397-16 .....Standard Specification for Polyethylene Sheeting for Construction, Industrial and Agricultural Applications
D5109-12(Withdrawn2020).....Standard Test Methods for Copper-Clad Thermosetting Laminates for Printed Wiring Boards (recommend deletion)

D. Code of Federal Regulation (CFR):
40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Marble Institute of America (MIA)/ Building Stone Institute (BSI): Dimension Stone Design Manual VIII-2016

F. Tile Council of North America, Inc. (TCNA):
Handbook for Ceramic Tile Installation (2020)G. TCNA DCOF AcuTest-2012,Dynamic Coefficient of Friction Test

PART 2 - PRODUCTS

2.1 TILE

A. Comply with ANSI A137.1, Standard Grade, except as modified:
   1. Inspection procedures listed under the Appendix of ANSI A137.1.
   2. Abrasion Resistance Classification:
      a. Tested in accordance with values listed in Table 1, ASTM C1027.

b. Class V, 12000 revolutions for floors in Corridors, Kitchens, Storage including Refrigerated Rooms
c. Class IV, 6000 revolutions for remaining areas.

3. Slip Resistant Tile for Floors:
   a. Coefficient of friction, when tested in accordance with ANSI A137.1 and measured per the TCNA DCOF AcuTest.
      1) Equal to or greater than .42 for level interior tile floors that will be walked on when wet.
   b. Tile Having Abrasive Grains:
      1) Unglazed Ceramic Mosaic Tile: Abrasive grains throughout body of the tile.
      2) Quarry Tile: Abrasive grains uniformly embedded in face at rate of approximately 7.5 percent of surface area.
   c. Porcelain Paver Tile: Matte surface finish with raised ridges spaced uniformly over tile surface.
4. Mosaic tile may be mounted or joined by a resinous bonding material along tile edges.
5. Back mounted tiles in showers. Provide certification that the factory mounted tile has been used successfully in service at three (3) projects and is suitable for wet locations.
6. Factory Blending: For tile with color variations, within the ranges selected during sample submittals blend tile in the factory and package so tile units taken from one (1) package show the same range in colors as those taken from other packages and match approved samples.
7. Factory-Applied Temporary Protective Coating:
   a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of hot applied petroleum paraffin wax.
   b. Do not coat unexposed tile surfaces.
   c. Pre-wax tiles set or grouted with furan or epoxy or latex modified mortars.

B. Unglazed Ceramic Mosaic Tile: Nominal 6 mm (1/4 inch) thick with cushion edges.
C. Unglazed Quarry Tile: Nominal 13 mm (1/2 inch) thick, square edges.
D. Glazed Wall Tile: Cushion edges, glazing.
E. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion edges. Porcelain tile produced by the dust pressed method are to be made of approximately 50 percent feldspar; the remaining 50 percent is to be made up of various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5 percent or less and a breaking strength of between 176 to 181 kg (390 to 400 pounds).
F. Trim Shapes:
   1. Conform to applicable requirements of adjoining floor and wall tile.
   2. Use slip resistant trim shapes for horizontal surfaces of showers, overflow ledges, recessed steps, shower curbs, drying area curbs, and seats.

3. Use trim shapes sizes conforming to size of adjoining field wall tile including existing spaces unless detailed on construction documents or specified otherwise.
4. Internal and External Corners:
   a. Square internal and external corner joints are not acceptable.
   b. External corners including edges: Use bullnose shapes.
   c. Internal corners: Use cove shapes.
   d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
   e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
   f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
   g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
   h. For unglazed ceramic mosaic and glazed wall tile installed in portland cement mortar setting bed, use cove and bullnose shapes as applicable. When ceramic mosaic wall and base tile is required, use C Series cove and bullnose shapes.
   i. For unglazed ceramic mosaic and glazed wall tile installed in dry-set portland cement mortar, latex-portland cement mortar, and organic adhesive (thin set methods), use cove and surface bullnose shapes as applicable.
   j. For quarry tile work, use cove and bullnose shapes as applicable.
   k. Provide cove and bullnose shapes for countertops, stools, saddles, where indicated in construction documents, and required to complete tile work.

2.2 BACKER UNITS

A. Cementitious Backer Units:
   1. Use in showers or wet areas.
   2. Conform to ASTM C1325; Type A.
   3. Use in maximum lengths available to minimize end to end butt joints.
B. Glass Mat Water Resistant Backing Board:
   1. Use in showers or wet areas.
   2. Conform to ASTM C1178/C1178M.
   3. Use in maximum lengths available to minimize end to end butt joints.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
B. Tape Embedding Material: Latex-portland cement mortar complying with ANSI A108.01.

C. Joint material, including reinforcing tape, and tape embedding material, are to be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

A. Screws for Cementitious Backer Units.
   1. Standard screws for gypsum board are not acceptable.
   2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
   3. ASTM C954 for steel 1 mm (0.033 inch) thick.
   4. ASTM C1002 for steel framing less than 0.0329 inch thick.

B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

A. Conform to TCNA Handbook for Ceramic Tile Installation.

B. Portland Cement Mortar: ANSI A108.02.

C. Latex-Portland Cement Mortar: ANSI A118.4.
   1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.4.
   2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.

D. Dry-Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.1.

E. Organic Adhesives: ANSI A136.1, Type 1.

F. Chemical-Resistant Bond Coat:
   1. Epoxy Resin Type: ANSI A118.3.
   2. Furan Resin Type: ANSI A118.5.

G. Elastomeric Waterproofing Membrane and Bond Coat:
   1. TCNA F122-14 (on ground concrete) and TCNA F112A-14 (above ground concrete).
   2. ANSI A118.10.
   3. One component polyurethane, liquid applied material having the following additional physical properties:
      a. Hardness: Shore "A" between 40-60.
      b. Elongation: Between 300-600 percent.
      c. Tensile strength: Between .27 - .41 Newton per square millimeter (40-60 pounds per square inch gauge).
      d. No volatile compounds (VOC).
   4. Coal tar modified urethanes are not acceptable.

H. Waterproofing Isolation Membrane:

1. Sheet System TCNA F122-14 (on-ground concrete) and TCNA F122A-14 (above-ground concrete).
2. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
3. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
4. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature -37 degrees C (-35 degrees F)	ASTM D2497 13 mm (1/2-inch) Mandrel Bend
Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours

5. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
6. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.6 GROUTING MATERIALS

A. Coloring Pigments:
   1. Pure mineral pigments, lime proof and nonfading, complying with ASTM C979/C979M.
   2. Coloring pigments may only be added to grout by the manufacturer.
   3. Job colored grout is not acceptable.
   4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.

B. Sand-Portland Cement Grout: ANSI A108.10, consisting of white or gray cement and white or colored aggregate as required to produce color indicated. Zero VOC content.

C. Standard Cement Grout: ANSI A118.6.

D. High Performance Tile Grout: ANSI A118.7 with a VOC content of 65 g/L or less when calculated according to 40 CFR 59 (EPA Method 24).

1. Polymer Type: Ethylene vinyl acetate or acrylic additive, in dry, redispersible form, prepackaged with other dry ingredients.
2. Polymer Type: Acrylic resin or styrene-butadiene rubber in liquid-latex form for addition to prepackaged dry-grout mix.

E. Water-Cleanable Epoxy Grout: ANSI A118.3, with a VOC content of 65 g/L or less when calculated according to 40 CFR 59 (EPA Method 24).
1. Provide product capable of withstanding continuous and intermittent exposure to temperatures of up to 60 and 100 degrees C (140 and 212 degrees F), respectively, and certified by manufacturer for intended use.

2.7 PATCHING AND LEVELING COMPOUND

A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.
B. Provide a patching and leveling compound with the following minimum physical properties:
1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
3. Tensile strength – 4.1 MPa (600 psi) per ANSI 118.7.
4. Density – 1.9.

C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 101 mm (4 inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
E. Ready for use in 48 hours after application.

2.8 MARBLE

A. Soundness Classification in accordance with MIA Design Manual III Groups.
B. Thresholds:
1. Group A, Minimum abrasive hardness (Ha) of 10.0 per ASTM C1353/C1353M or ASTM C241/C241M.
2. Honed finish on exposed faces.
3. Thickness and contour as indicated in construction documents.
4. Fabricate from one piece without holes, cracks, or open seams; full depth of wall or frame opening by full width of wall or frame opening; 19 mm (3/4-inch) minimum thickness and 6 mm (1/4-inch) minimum thickness at beveled edge.
5. Set not more than 13 mm (1/2-inch) above adjoining finished floor surfaces, with transition edges beveled on a slope of no greater than 1:2. On existing floor slabs provide 13 mm (1/2-inch) above ceramic tile surface with bevel edge joint top flush with adjacent floor.
6. One piece full width of door opening. Notch thresholds to match profile of doorjambs.

C. Window Stools:
   1. Group A or B.
   2. Polished finish on exposed faces.
   3. Size and thickness as indicated in construction documents.

2.9 METAL DIVIDER STRIPS

A. Terrazzo type divider strips.
B. Heavy top type strip with 5 mm (3/16 inch) wide top and 38 mm (1 1/2 inch) long leg. Height to match tile and setting-bed thickness.
C. Embedded leg perforated and deformed for keying to mortar.
D. Half-hard brass or white zine alloy or nickel silver or stainless-steel, ASTM A666, 300 Series exposed-edge material.

2.10 WATER

A. Clean, potable and free from salts and other injurious elements to mortar and grout materials.

2.11 CLEANING COMPOUNDS

A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
B. Materials containing acid or caustic Material are not acceptable.

2.12 FLOOR MORTAR BED REINFORCING

A. ASTM A1064/A1064M welded wire fabric without backing, MW3 x MW3 (2 x 2-W0.5 x W0.5).

2.13 POLYETHYLENE SHEET

A. Polyethylene sheet conforming to ASTM D4397.
B. Nominal thickness: 0.15 mm (6 mils).

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

A. Maintain ambient temperature of work areas at not less than 16 degrees C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three (3) days after installation.
B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.
C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after third day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:

1. Not more than 6 mm in 3048 mm (1/4 inch in 10 feet) from required elevation where portland cement mortar setting bed is used.
2. Not more than 3 mm in 3048 mm (1/8 inch in 10 feet) where dry-set portland cement, and latex-portland cement mortar setting beds and chemical-resistant bond coats are used.

B. Variation in Plane of Wall Surfaces:
1. Not more than 6 mm in 2438 mm (1/4 inch in 8 feet) from required plane where portland cement mortar setting bed is used.
2. Not more than 3 mm in 2438 mm (1/8 inch in 8 feet) where dry-set or latex-portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

A. Cleaning New Concrete or Masonry:
1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.

B. Patching and Leveling:
1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
   a. Thickness of compound as required to bring finish tile system to elevation shown on construction documents.
   b. Float finish except finish smooth for elastomeric waterproofing.
   c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.

C. Mortar Bed for Slopes to Drains:
1. Slope compound to drain where drains are shown on construction documents.
2. Install mortar bed in depressed slab sloped to drains not less than 3.2 mm in 305 mm (1/8 inch per foot).
3. Allow not less than 50 mm (2 inch) depression at edge of depressed slab.

4. Screed for slope to drain and float finish.
5. Cure mortar bed for not less than seven (7) days. Do not use curing compounds or coatings.
6. Perform flood test to verify mortar bed slopes to drain before installing tile. Contracting Officer Representative (COR) to be present during flood test.

D. Additional preparation of concrete floors for tile set with epoxy, or furan-resin is to be in accordance with the manufacturer's printed instructions.

E. Cleavage Membrane:
1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
2. Turn up at edge of depressed floor slab to top of floor.

F. Walls:
1. In showers or other wet areas cover studs with polyethylene sheet.
2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
4. Apply metal lath to framing in accordance with ANSI A108.1:
   a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
   b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1C.
   c. Total thickness of scratch and leveling coats:
      1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
      2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.
      3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.
   d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick in two (2) coats.

G. Existing Floors and Walls:
1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles, cut channel in floor slab and expose rough wall construction sufficiently to accommodate new tile base and setting material.

3.4 CEMENTITIOUS BACKER UNITS

A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.

B. Install in accordance with ANSI A118.9 except as specified otherwise.

C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a “V” joint for joint treatment.

D. Secure cementitious backer units to each framing member with screws spaced not more than 203 mm (8 inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.

E. Where backer unit joins shower pans or waterproofing, lap backer unit over turned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.

F. Do not install joint treatment for seven (7) days after installation of cementitious backer unit.

G. Joint Treatment:

1. Fill horizontal and vertical joints and corners with latex-portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 GLASS MAT WATER-RESISTANT BACKING BOARD

A. Install in accordance with manufacturer’s instructions. TCNA Systems W245-1.

B. Treat joints with tape and latex-portland cement mortar or adhesive.

3.6 MARBLE

A. Secure thresholds and stools in position with minimum of two stainless steel dowels.

B. Set in dry-set portland cement mortar or latex-portland cement mortar bond coat.

C. Set threshold to finish 13 mm (1/2 inch) above ceramic tile floor unless shown otherwise on construction documents, with bevel edge joint top flush with adjacent floor similar to TCNA detail TR611-14.

3.7 METAL DIVIDER STRIPS

A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other materials where the finish floors are flush unless shown otherwise on construction documents.

B. Set divider strip in mortar bed to line and level centered under doors or in openings.

C. At preformed sealant joint: Refer to Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.

1. Comply with recommendations in TCNA for Vertical and Horizontal Joint Design Essentials. TCNA Systems EJ 171.

a. Locate joint in tile surfaces directly above joint in sub-floor or where indicated when used with isolation membranes to allow off-setting of joint location from sub-floor joint.
b. Fasten full length to sub-floor using a construction adhesive.
c. Trowel setting material with full coverage over the entire leg.

2. Set tile up against the joint ensuring that the top edge of the joint is flush or slightly below the top of the tile.

3.8 CERAMIC TILE – GENERAL

A. Comply with ANSI A108/A118/A136 series of tile installation standards applicable to methods of installation and TCNA Installation Guidelines.

B. Installing Mortar Beds for Floors:

1. Install mortar bed in a manner that does not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
2. Install floor mortar bed reinforcing centered in mortar fill.
3. Screed finish to level plane or slope to drains shown on construction documents, float finish.
4. For thin set systems cure mortar bed not less than seven (7) days. Do not use curing compounds or coatings.
5. For tile set with portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

C. Setting Beds or Bond Coats:

1. Where recessed or depressed floor slabs are filled with portland cement mortar bed, set ceramic mosaic floor tile in either portland cement paste over plastic mortar bed or latex-portland cement mortar over cured mortar bed except as specified otherwise, ANSI A108-1C, TCNA System F121-14 or F111-14.
2. Use quarry tile in chemical-resistant bond coat, except in floor of walk-in refrigerator rooms use: TCNA System R612-11.
   a. Portland cement paste over plastic mortar bed. ANSI A108.1A.
   b. Dry-set portland cement mortar over cured mortar bed. ANSI A108.1B.
3. Pools Holding Water: ANSI A108.1C. Do not use latex portland cement mortar.
4. Set floor tile in elastomeric bond coat over elastomeric membrane per ANSI 108.13, TCNA System F122-14 where indicated on construction documents.
5. Set wall tile installed over concrete or masonry in dry-set portland cement mortar, or latex-portland cement mortar, ANSI 108.1B and TCNA System W211-14, W221-14 or W222-14.
6. Set wall tile installed over concrete backer board in latex-portland cement mortar, ANSI A108.1B.

7. Set wall tile installed over portland cement mortar bed on metal lath base in portland cement paste over plastic mortar bed, or dry-set portland cement mortar or latex-portland cement mortar over a cured mortar bed, ANSI A108.1C, TCNA System W231-14, W241-14.
8. Set tile over concrete in therapeutic pools in portland cement paste or dry set portland cement mortar, ANSI A108.1C, TCNA System P601MB-14.
9. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.1, TCNA System W242-14.
10. Set trim shapes in same material specified for setting adjoining tile.

D. Workmanship:
1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field. Align new tile work scheduled for existing spaces to the existing tile work unless specified otherwise.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise on construction documents.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
   a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
   b. Seal tile joints water tight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work is to be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
   a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
   b. Align finish surface of new tile work flush with other and existing adjoining floor finish where indicated in construction documents.
   c. In areas where floor drains occur, slope tile to drains.
   d. Push and vibrate tiles over 203 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
   a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights as indicated in construction documents with tile.

b. Finish reveals of openings with tile, except where other finish materials are indicated in construction documents.
c. At window openings, provide tile stools and reveals.
d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.

10. Joints:
    a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise on construction documents.
    b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
    c. Make joints in quarry tile work not less than 6 mm (1/4 inch) nor more than 9 mm (3/8 inch) wide. Finish joints flush with surface of tile.
    d. Make joints in paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108/A118/A136 series of tile installation standards:
    a. Tile wall installations in wet areas, including showers, tub enclosures, laundries and swimming pools.
    b. Tile installed with chemical-resistant mortars and grouts.
    c. Tile wall installations composed of tiles 203 by 203 mm (8 by 8 inches) or larger.
    d. Exterior tile wall installations.

3.9 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR

A. Mortar Mixes for Floor, Wall and Base Tile (including Showers): ANSI A108.1A. except specified otherwise.
B. Installing Wall and Base Tile: ANSI A108.1A, except specified otherwise.
C. Installing Floor Tile: ANSI A108.1A, except as specified otherwise. Slope mortar beds to floor drains at a minimum of 3 mm in 305 mm (1/8 inch per foot).

3.10 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR

A. Due to the denseness of porcelain tile use latex portland cement bonding mortar that meets the requirements of ANSI A108.01. Mix bonding mortars in accordance with manufacturer's instructions. Provide liquid ratios and comply with dwell times during the placement of bonding mortar and tile.

3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

A. Installation of Tile: ANSI A108.1B, except as specified otherwise.
B. Slope tile work to drains at not less than 3 mm in 305 mm (1/8 inch per foot).

3.12 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH ORGANIC ADHESIVE

A. Installation of Tile: ANSI A108.4.

3.13 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT

A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.6.

B. Furan Resin Type: Proportion, mix and place in accordance with the manufacturer's printed instructions. Set tile in accordance with ANSI A108.8.

3.14 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT

A. Surface Preparation: Prepare surfaces as specified.

B. Installation of Elastomeric Membrane: ANSI A108.10 and TCNA F122-14 (on ground concrete) and F122A-14 (above-ground concrete).

1. Prime surfaces, where required, in accordance with manufacturer's instructions.
2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.76 to 1.3 mm (30 to 50 mils).
3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 101 mm (4 inches) above finish floor surface.
4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).
5. After curing test for leaks with 25 mm (1 inch) of water for 24 hours.

C. Installation of Tile in Elastomeric Membrane:

1. Spread no more material than can be covered with tile before material starts to set.
2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu at aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.15 GROUTING

A. Grout Type and Location:

1. Grout for glazed wall and base tile, paver tile and unglazed mosaic tile portland cement grout, latex-portland cement grout, dry-set grout, or commercial portland cement grout.
2. Grout for quarry tile floor and base:
   a. Grout for floors of walk-in refrigerated rooms: Epoxy grout.
   b. Therapeutic pool areas: Portland cement grout.
   c. Grout for Kitchens:
      1) Chemical-resistant grout as specified and recommended by manufacturer of bond coat.
      2) Use only furan resin grout within 609 mm (2 feet) of ovens, steam kettles, water heaters, steam pipes, and in rooms.
      3) Epoxy grout designed for equivalent heat resistance to furan resin grout may be used for furan resin grout.

3. Grout for tile of therapeutic pools: Portland cement grout.

B. Workmanship:

1. Install and cure grout in accordance with the applicable standard.
2. Sand Portland Cement Grout: ANSI A108.10.
3. Standard Cement Grout: ANSI A118.6.
4. High Performance Grout: ANSI A118.7.
5. Epoxy Grout: ANSI A108.6.
6. Water-Cleanable Epoxy Grout: ANSI A118.3.
7. Furan and Commercial Portland Cement Grout: ANSI A118.5 and in accordance with the manufacturer's printed instructions.

3.16 MOVEMENT JOINTS

A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.

B. TCNA details EJ 171-14.

C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.

D. Rake out grout at joints between tile, tub, service sink, at toe of base, and where indicated in construction documents not less than 6 mm (1/4 inch) deep.

3.17 CLEANING:

A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.

B. Methods and materials used are not permitted to damage or impair appearance of tile surfaces.

C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.

D. Clean tile grouted with epoxy, furan and commercial portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

3.18 PROTECTION

A. Keep traffic off tile floor, until grout and setting material is fully set and cured.

B. Where traffic occurs over tile floor is unavoidable, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.19 TESTING FINISH FLOOR

A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

B. Test kitchen and storage rooms.

- - - E N D - - -

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical units.
2. Metal ceiling suspension system for acoustical ceilings.
3. Adhesive application.

1.2 RELATED REQUIREMENTS

A. Adhesive VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Color, pattern, and location of each type of acoustical unit: CONSTRUCTION DRAWINGS: FINISH LEGEND.

C. Lay in gypsum board ceiling panels: Section 09 29 00, GYPSUM BOARD.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. A641/A641M-09a(2014) - Zinc-coated (Galvanized) Carbon Steel Wire.
2. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process.
3. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
4. C634-13 - Terminology Relating to Environmental Acoustics.
5. C635/C635M-13a - Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
6. C636/C636M-13 - Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
7. D1779-98(2011) - Adhesive for Acoustical Materials.
8. E84-15b - Surface Burning Characteristics of Building Materials.
9. E119-16 - Fire Tests of Building Construction and Materials.
10. E413-16 - Classification for Rating Sound Insulation.
11. E580/E580M-14 - Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions.
12. E1264-14 - Classification for Acoustical Ceiling Products.

C. International Organization for Standardization (ISO):

1. ISO 14644-1 - Classification of Air Cleanliness.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section..

1. Required Participants:
   a. Contracting Officer's Representative.
   b. Architect/Engineer and Interior Designer.
   c. VA Interior Designer.
   d. Inspection and Testing Agency.
   e. Contractor.
   f. Installer.
   g. Manufacturer's field representative.
   h. Other installers responsible for adjacent and intersecting work, including sprinkler, HVAC and lighting installers.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Terminations.
   g. Transitions and connections to other work.
   h. Inspecting and testing.
   i. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Ceiling suspension system indicating manufacturer recommendation for each application.
3. Installation instructions.
4. Warranty.

D. Samples:

1. Acoustical units, 150 mm (6 inches) in size, each type, including units specified to match existing.
    a. Submit quantity required to show full color and texture range.
2. Suspension system, trim and molding, 300 mm (12 inches) long.
3. Colored markers for access service.
4. Approved samples may be incorporated into work.

E. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
    a. Show type and quantity for each product.
    b. Show volatile organic compound types and quantities.

F. Certificates: Certify each product complies with specifications.
1. Acoustical units, each type.

G. Qualifications: Substantiate qualifications comply with specifications.
1. Manufacturer with project experience list.

H. Operation and Maintenance Data:
1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:
1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
    a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.

B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Ceiling System: Acoustical ceilings units on exposed and concealed grid suspension systems.

2.2 SYSTEM PERFORMANCE

A. Design product complying with specified performance:
   1. Maximum Deflection: 1/360of span, maximum.
B. Fire Resistance: ASTM E119; as component of 1 or 2 hour rated floor-ceiling, roof-ceiling assembly.
C. Surface Burning Characteristics: When tested according to ASTM E84.
   1. Flame Spread Rating: 75 maximum.
   2. Smoke Developed Rating: 450 maximum.

2.3 PRODUCTS - GENERAL

A. Basis of Design: To match existing.
B. Provide acoustical units from one manufacturer.
   1. Provide each product exposed to view from one production run.
C. Provide suspension system from same manufacturer.
D. Sustainable Construction Requirements:
   1. Mineral Base Recycled Content: 65 percent recycled content, minimum. Select products with recycled content to achieve overall Project recycled content requirement.
   2. Steel Recycled Content: 30 percent total recycled content, minimum.
   3. Aluminum Recycled Content: 50 percent total recycled content, minimum.
   4. Biobased Content: 37 percent by weight biobased material, minimum.
   5. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
      a. Non-flooring adhesives and sealants.

2.4 ACOUSTICAL UNITS

A. General:

1. Ceiling Panel and Tile: ASTM E1264, bio-based content according to USDA Bio-Preferred Product requirements.
   a. Mineral Fiber: 3.6 kg/sq. m (3/4 psf) weight, minimum.
2. Classification: Provide type and form as follows:
   a. Type III Units - Mineral base with water-based painted finish maximum 10 g/l VOC; Form 2 - Water felted, minimum 16 mm (5/8 inch) thick.
   b. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply poly (vinyl) chloride over paint coat.
   c. Type V Units - Perforated steel facing (pan) with mineral or glass fiber base backing.
      1) Steel: Galvanized steel, ASTM A653, with G30 coating. minimum 0.38 mm (0.015 inch) thick.
      2) Bonderize both sides. Apply two coats of baked-on enamel finish on surfaces exposed to view and one coat on concealed surfaces.
   d. Type VI Units - Perforated stainless steel facing (pan) with mineral or glass fiber base backing.
   e. Type VII Units - Perforated aluminum facing (pan) with mineral or glass fiber base backing.
      1) Aluminum sheets, minimum 0.635 mm (0.025 inch) thick.
      2) Apply two coats of baked-on enamel finish, free from gloss or sheen, on face and flanges.
   f. NRC (Noise Reduction Coefficient): ASTM C423, minimum 0.55 unless specified otherwise.
   g. CAC (Ceiling Attenuation Class): ASTM E413, 40-44 range unless specified otherwise.
   h. LR (Light Reflectance): Minimum 0.75.
3. Lay-in panels: Sizes as indicated on Drawings.
   a. Sizes:
      1) Concealed Grid Upward Access System: to match existing.
      2) Cross Score: to match existing.
      3) Edge and Joint Detail: to match existing.
4. Adhesive Applied Tile:
   a. Size: to match existing.
   b. Edges: to match existing.

B. SPECIAL FACED ACOUSTICAL TILE UNITS AT(SP): Anti-microbial coated surfaces suitable for use in Class 5 Clean Rooms per ISO 14644-1. Special faced acoustical tile units shall meet all general requirements stated in this specification.

1. Type XX-A Units - Perforated Ceramic Units for Wet Service.
   a. Mineral wool material, fired in kiln to produce a stable panel, totally unaffected by moisture when submerged in water.
   b. No damage when subjected to 10 cycles of steam at 135 degrees C (275 degrees F) and cooling to 10 degrees C (50 degrees F).
   c. Minimum of 16 mm (5/8 inch) thick.
   d. Not affected when immersed in five percent chlorine solution, except for paint finish.
2. Type III-A Units - Mineral base with painted finish.
   a. Form 1, modular, cast or molded.
   b. NRC: 0.75 minimum.
   c. Thickness: 19 mm (3/4 inch) minimum.
   d. Weight, 4.9 kg/sq. m (one pound per square foot).
3. Type XX-B Units - Combination mineral base and glass fiber with fabric finish.
   a. Back Half of Panel: Perforated water felted mineral fiber.
   b. Face Half of Panel: Glass fiber with glass cloth face.
   c. NRC: 0.75 minimum.
   d. Thickness: 28 mm (1 1/8 inches) minimum.

2.5 METAL SUSPENSION SYSTEM

A. General: ASTM C635, to match existing.
   1. Suspension System: Provide the following:
      a. To match existing.
   2. Main and Cross Runner: Use same construction Do not use lighter-duty sections for cross runners.
B. Exposed Grid Suspension System: Support of lay-in panels.
      a. To match existing.
C. Concealed Grid Suspension System: Mineral base acoustical tile support.
      a. To match existing.
D. Suspension System Support of Metal Type V, VI, and VII Tiles: Concealed grid type with runners for snap-in attachment of metal tile (pans).
E. Carrying Channels Secondary Framing: Cold-rolled or hot-rolled steel, black asphaltic paint finish, rust free.
   1. Weight per 300 m (per thousand linear feet), minimum:

Size		Cold-rolled		Hot-rolled	
mm	inches	kg	pound	kg	pound
38	1-1/2	215.4	475	508	1120

Size		Cold-rolled		Hot-rolled	
50	2	267.6	590	571.5	1260

F. Anchors and Inserts: Provide anchors or inserts to support twice the loads imposed by hangers.
   1. Hanger Inserts: Steel, zinc-coated (galvanized after fabrication).
      a. Nailing type option for wood forms:
         1) Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
         2) Lower portion provided with minimum 8 mm (5/16 inch) hole to permit attachment of hangers.
      b. Flush ceiling insert type:
         1) Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
         2) Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
         3) Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.
G. Clips: Galvanized steel, designed to secure framing member in place.
H. Tile Splines: ASTM C635.
I. Wire: ASTM A641.
   1. Size:
      a. Wire Hangers: Minimum diameter 2.68 mm (0.1055 inch).
      b. Bracing Wires: Minimum diameter 3.43 mm (0.1350 inch).

2.6 ACCESSORIES

A. Adhesives: Low pollutant-emitting, water based type recommended by adhered product manufacturer for each application.
B. Perimeter Seal: Vinyl, polyethylene or polyurethane open cell sponge material, density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
   1. Thickness: As required to fill voids between back of wall molding and finish wall.
   2. Size: Minimum 9 mm (3/8 inch) wide strip.
C. Access Identification Markers: Colored markers with pressure sensitive adhesive on one side, paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) diameter.
   1. Color Code: Provide the following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls

Color	Service
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls
Black	Gas: Laboratory, Medical, Air and Vacuum

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Remove existing acoustical panels and suspension system to permit new installation.

1. Retain existing acoustical panels and suspension system for reuse.
2. Dispose of other removed materials.

3.2 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 ACOUSTICAL UNIT INSTALLATION

A. Applications:

1. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.

B. Layout acoustical unit symmetrically, with minimum number of joints.

C. Installation:

1. Install acoustic tiles after wet finishes have been installed and solvents have cured.
2. Install lay-in acoustic panels in exposed grid with minimum 6 mm (1/4 inch) bearing at edges on supports.
   a. Install tile to lay level and in full contact with exposed grid.
   b. Replace cracked, broken, stained, dirty, or tile.
3. Tile in concealed grid upward access suspension system:
   a. Install acoustical tile with joints close, straight and true to line, and with exposed surfaces level and flush at joints.
   b. Make corners and arises full, and without worn or broken places.
   c. Locate acoustical units providing access to service systems.
4. Adhesive applied tile:

a. Condition of surface according to ASTM D1779, Note 1, Cleanliness of Surface, and Note 4, Rigidity of Base Surface.
b. Size or seal surface as recommended by manufacturer of adhesive and allow to dry before installing units.

5. Markers:
a. Install color coded markers to identify the various concealed piping, mechanical, and plumbing systems.
b. Attach colored markers to exposed grid on opposite sides of the units providing access.
c. Attach marker on exposed ceiling surface of upward access acoustical unit.

D. Touch up damaged factory finishes.
1. Repair painted surfaces with touch up primer.

3.4 CEILING SUSPENSION SYSTEM INSTALLATION

A. General: Install according to ASTM C636.
1. Use direct or indirect hung suspension system or combination of both.
2. Support a maximum area of 1.48 sq. m (16 sq. ft.) of ceiling per hanger.
3. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
4. Provide additional hangers located at each corner of support components.
5. Provide minimum 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown.
6. Provide main runners minimum 1200 mm (48 inches) in length.
7. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Direct Hung Suspension System: ASTM C635.
1. Support main runners by hanger wires attached directly to the structure overhead.
2. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

C. Anchorage to Structure:
1. Concrete:
a. Install hanger inserts and wire loops required for support of hanger // and bracing // wire. Install hanger wires with looped ends through steel deck when steel deck does not have attachment device.
b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger // and bracing // wire. Install in sides of concrete beams or joists at mid height.

2. Steel:
   a. Install carrying channels for attachment of hanger wires.
      1) Size and space carrying channels to support load within performance limit.
      2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
   b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fireproofing is installed. Weld or use steel clips for beam attachment.
   c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

D. Indirect Hung Suspension System: ASTM C635.
   1. Space carrying channels for indirect hung suspension system maximum 1200 mm (4 feet) on center. Space hangers for carrying channels maximum 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) or center so as to insure that specified requirements are not exceeded.
   2. Support main runners by specially designed clips attached to carrying channels.

3.5 CEILING TREATMENT

A. Moldings:
   1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
   2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

B. Perimeter Seal:
   1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
   2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

C. Existing ceiling:
   1. Where extension of existing ceilings occurs, match existing.
   2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
   3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

D. Fire-Rated System:

1. Total assembly, consisting of the ceiling suspension system, acoustical units, penetrations, structural components and floor or roof construction above, shall have a 1 hour or 2 hour fire rating based on tests conducted in conformance with ASTM E119.
2. Provide concealed fire protection around penetrations in ceilings for electric and mechanical work, and other penetrations as required to maintain the integrity of the fire-rated assembly.
3. Install fire rated ceiling systems to conform to tested assembly.

3.6 CLEANING

A. Remove excess adhesive before adhesive sets.

B. Clean exposed surfaces. Remove contaminants and stains.

- - - E N D - - -

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the installation vinyl composite tile and accessories required for a complete installation.

1.2 RELATED WORK:

A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

C. Removal of Existing Construction Containing Asbestos: Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

D. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: CONSTRUCTION DRAWINGS: FINISH LEGEND.

1.3 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Volatile organic compounds per volume as described in PART 2 - PRODUCTS.
2. Postconsumer and preconsumer recycled content as described in PART 2 - PRODUCTS.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Resilient material manufacturer’s recommendations for adhesives, underlayment, primers, and polish.
3. Application, installation and maintenance instructions.

D. Samples:

1. Tile: Each type, color, thickness and finish.
2. Edge Strips: Each type, color, thickness and finish.
3. Feature Strips: Each type, color, thickness and finish.

E. Shop Drawings:

1. Layout of patterns as shown on the construction documents.
2. Edge strip locations showing types and detail cross sections.

F. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.

2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.4 DELIVERY:

A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.

B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE:

A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they will be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE:

A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.

1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:

a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.

b. Career long training.

c. Manufacturer endorsed training.

d. Fundamental journeyman skills certification.

B. Mockup: Build floor tile mockup to verify selections made under sample submittals and to demonstrate aesthetic effects and set quality standards for materials and execution.

1. Size: 9.3 sq. m (100 sq. ft.) for each type, color, and pattern. Locations as indicated on construction documents.

2. Contracting Officer Representative (COR) approved mockup may become part of the completed Project if undisturbed at time of Substantial Completion.

C. Furnish product type materials from the same production run.

1.7 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

D2047-11 .....Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine

D2240-05(R2010) .....Test Method for Rubber Property—Durometer Hardness
D4078-02(R2008) .....Water Emulsion Floor Finish
E648-14c.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source
E662-14.....Specific Optical Density of Smoke Generated by Solid Materials
E1155/E1155M-14 .....Determining Floor Flatness and Floor Levelness Numbers
F510/F510M-14.....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method
F710-11 .....Preparing Concrete Floors to Receive Resilient Flooring
F925-13 .....Test Method for Resistance to Chemicals of Resilient Flooring
F1344-12(R2013).....Rubber Floor Tile
F1700-13a .....Solid Vinyl Floor Tile
F1869-11 .....Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
F2170-11 .....Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in Situ Probes
F2195-13 .....Linoleum Floor Tile

C. Code of Federal Regulation (CFR):
40 CFR 59 .....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

D. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS:

A. Provide adhesives, underlayment, primers, and polish recommended by resilient floor material manufacturer.

B. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.

C. Smoke Density: Less than 450 per ASTM E662.

D. Slip Resistance – Not less than 0.5 when tested with ASTM D2047.

2.2 VINYL COMPOSITE TILE:

A. Tile Standard: to match existing.

B. Guage: to match existing.

C. Static Load: to match existing.

D. Color and Pattern: to match existing.

E. Size: to match existing.

2.6 ADHESIVES:

A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. VOC content to be less than the 50 grams/L when

calculated according to 40 CFR 59 (EPA Method 24). Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

2.7 PRIMER FOR CONCRETE SUBFLOORS:

A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.8 LEVELING COMPOUND FOR CONCRETE FLOORS:

A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.9 POLISH AND CLEANERS:

A. Cleaners: As recommended in writing by floor tile manufacturer.

B. Polish: ASTM D4078.

2.10 MOULDING:

A. Provide tapered mouldings of vinyl or rubber-colored anodized aluminum, clear anodized aluminum and types as indicated on the construction documents for both edges and transitions of flooring materials specified. Provide vertical lip on moulding of maximum 6 mm (1/4 inch). Provide bevel change in level between 6 and 13 mm (1/4 and 1/2 inch) with a slope no greater than 1:2.

B. Fasteners for Aluminum Mouldings: Stainless steel of type required for substrate condition.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS:

A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.

B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR TESTING AND PREPARATION:

A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1. Remove existing resilient floor and existing adhesive.

B. Prepare concrete substrates in accordance with ASTM F710.

C. Perform work regarding removal of flooring and adhesive containing asbestos as specified in Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

3.3
INSTALLATION:

A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.

B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.

C. Tile Layout:

1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary. Match tile installation to approved mockup.

D. Application:

1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
4. Roll tile floor with a minimum 45 kg (100 pound) roller.

E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.

F. Installation of Edge Strips:

1. Locate edge strips under center line of doors unless otherwise shown on construction documents.
2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

3.4 CLEANING AND PROTECTION:

A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.

B. Keep traffic off resilient material for a minimum 72 hours after installation.

C. Clean flooring as recommended in accordance with manufacturer’s printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the

recommended number of coats and type of polish and/or finish in accordance with manufacturer's written instructions.

D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.

E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and mouldings, re-clean resilient materials.

3.5 LOCATION:

A. Unless otherwise indicated in construction documents, install tile flooring, under areas where casework, laboratory and pharmacy furniture and other equipment occur.

B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:

1. Prime coats which may be applied in shop under other sections.
2. Prime painting unprimed surfaces to be painted under this Section.
3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
4. Painting ferrous metal (except stainless steel) exposed to view.
5. Painting galvanized ferrous metals exposed to view.
6. Painting interior concrete block exposed to view.
7. Painting gypsum drywall exposed to view.
8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers lighting fixtures, and the like, which are exposed to view through these items.
11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 RELATED WORK

A. Section 01 35 26, SAFETY REQUIREMENTS: Activity Hazard Analysis.

B. Section 01 81 13, SUSTAINABLE CONSTUCTION REQUIREMENTS: Sustainable Design Requirements.

C. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL: Lead Paint Removal.

D. Section 04 05 13, MASONRY MORTARING: Masonry Repairs

E. Section 04 05 16, MASONRY GROUTING: Masonry Repairs.

F. Division 05 METALS: Shop prime painting of steel and ferrous metals.

G. Division 08 OPENINGS: Shop prime painting of steel and ferrous metals.

H. CONSTRUCTION DRAWINGS: FINISH LEGEND: Type of Finish, Color, and Gloss Level of Finish Coat.

I. Division 12 FURNISHINGS: Shop prime painting of steel and ferrous metals.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

C. Painter qualifications.

D. Manufacturer's Literature and Data:

1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

E. Sample Panels:

1. After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified.
2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
   a. Federal Specification Number or manufacturers name and product number of paints used.
   b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
   c. Product type and color.
   d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

F. Sample of identity markers if used.

G. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
2. High temperature aluminum paint.
3. Epoxy coating.
4. Intumescent clear coating or fire-retardant paint.
5. Plastic floor coating.

1.4 DELIVERY AND STORAGE

A. Deliver materials to site in manufacturer's sealed container marked to show following:
   1. Name of manufacturer.
   2. Product type.
   3. Batch number.
   4. Instructions for use.
   5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:
   1. Federal Specification Number, where applicable, and name of material.
   2. Surface upon which material is to be applied.
   3. Specify Coat Types: Prime; body; finish; etc.

C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 QUALITY ASSURANCE

A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.

B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 MOCK-UP PANEL

A. In addition to the samples specified herein to be submitted for approval, apply in the field, at their final location, each type and color of approved paint materials, applied 3.05 m (10 feet) wide, floor to

ceiling of wall surfaces, before proceeding with the remainder of the work, for approval by the COR. Paint mock-ups to include one (1) door and frame assembly.

B. Finish and texture approved by COR will be used as a standard of quality and workmanship for remainder of work.

C. Repaint individual areas which are not approved, as determined by the COR, until approval is received.

1.7 REGULATORY REQUIREMENTS

A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
2. Lead-Base Paint:
   a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
   b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
   c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
   d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
3. Asbestos: Provide materials that do not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints.

1.8 SAFETY AND HEALTH

A. Apply paint materials using safety methods and equipment in accordance with the following:

1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.

C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
   1. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
   2. 29 CFR 1910.1000.
   3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.9 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):
   ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
   ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

C. ASME International (ASME):
   A13.1-07(R2013).....Scheme for the Identification of Piping Systems

D. Code of Federal Regulation (CFR):
   40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

E. Commercial Item Description (CID):
   A-A-1272A.....Plaster Gypsum (Spackling Compound)

F. Federal Specifications (Fed Spec):
   TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Master Painters Institute (MPI):
   1 .....Aluminum Paint
   3 .....Primer, Alkali Resistant, Water Based
   4 .....Interior/ Exterior Latex Block Filler
   5 .....Exterior Alkyd Wood Primer
   6 .....Exterior, Latex for Exterior Wood Primer
   7 .....Exterior Oil Wood Primer
   8 .....Exterior Alkyd, Flat MPI Gloss Level 1
   9 .....Exterior Alkyd Enamel MPI Gloss Level 6
   10 .....Exterior Latex, Flat
   11 .....Exterior Latex, Semi-Gloss
   15 .....Exterior Latex, Low Sheen (MPI Gloss Level 3-4)
   17 .....Primer, Bonding, Waterbased
   18 .....Organic Zinc Rich Primer

22 .....Aluminum Paint, High Heat (up to 590% - 1100F)
23 .....Primer, Metal, Surface Tolerant

27 .....Exterior / Interior Alkyd Floor Enamel, Gloss
31 .....Polyurethane, Moisture Cured, Clear Gloss
36 .....Knot Sealer
39 .....Primer, Latex, for Interior Wood
40 .....Exterior, Latex High Build
42 .....Textured Coating, Latex, Flat
43 .....Interior Satin Latex, MPI Gloss Level 4
44 .....Interior Low Sheen Latex, MPI Gloss Level 2
45 .....Interior Primer Sealer
46 .....Interior Enamel Undercoat
47 .....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
48 .....Interior Alkyd, Gloss, MPI Gloss Level 6
50 .....Interior Latex Primer Sealer
51 .....Interior Alkyd, Eggshell, MPI Gloss Level 3
52 .....Interior Latex, MPI Gloss Level 3
53 .....Interior Latex, Flat, MPI Gloss Level 1
54 .....Interior Latex, Semi-Gloss, MPI Gloss Level 5
59 .....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss
60 .....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
66 .....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved)
67 .....Interior Latex Fire Retardant, Top-Coat (ULC Approved)
68 .....Interior/ Exterior Latex Porch & Floor Paint, Gloss
71 .....Polyurethane, Moisture Cured, Clear, Flat
77 .....Epoxy Cold Cured, Gloss
79 .....Marine Alkyd Metal Primer
90 .....Interior Wood Stain, Semi-Transparent
91 .....Wood Filler Paste
94 .....Exterior Alkyd, Semi-Gloss
95 .....Fast Drying Metal Primer
98 .....High Build Epoxy Coating
99 .....Sealer, Water-based, for Concrete Floors
101 .....Epoxy Anti-Corrosive Metal Primer
107 .....Primer, Rust-Inhibitive, Water-based

108 .....High Build Epoxy Coating, Low Gloss
113 .....Elastomeric, Pigmented, Exterior, Water-based, Flat
114 .....Interior Latex, Gloss
115 .....Epoxy-Modified Latex, Interior Gloss (MPI gloss level 6)
118 .....Dry Fall, Latex Flat
119 .....Exterior Latex, High Gloss (acrylic)
134 .....Galvanized Water Based Primer
135 .....Non-Cementitious Galvanized Primer
138 .....Interior High Performance Latex, MPI Gloss Level 2
139 .....Interior High Performance Latex, MPI Gloss Level 3
140 .....Interior High Performance Latex, MPI Gloss Level 4
141 .....Interior High Performance Latex (SG) MPI Gloss Level 5
144 .....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 2)
145 .....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 3)
146 .....Latex, Interior, Institutional Low Odor / VOC, (MPI Gloss Level 4)
151 .....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 3)
153 .....Light Industrial Coating, Interior, Water-based, (MPI Gloss Level 4)
163 .....Exterior Water Based Semi-Gloss Light Industrial Coating, MPI Gloss Level 5
164 .....Exterior, Water Based, Gloss, Light Industrial Coating, MPI Gloss Level 6

H. Society for Protective Coatings (SSPC):
SSPC SP 1-82(R2004) .....Solvent Cleaning
SSPC SP 2-82(R2004) .....Hand Tool Cleaning
SSPC SP 3-28(R2004) .....Power Tool Cleaning
SSPC SP 10/NACE No.2.....Near-White Blast Cleaning
SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. Maple Flooring Manufacturer's Association (MFMA):

J. U.S. National Archives and Records Administration (NARA):
29 CFR 1910.1000.....Air Contaminants

K. Underwriter's Laboratory (UL)

PART 2 - PRODUCTS

2.1 **MATERIALS:**

A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

2.2 PAINT PROPERTIES:

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer and use only to recommended limits.

D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:

1. Flat Paints and Coatings: 50 gram/liter.
2. Non-flat Paints and Coatings: 150 gram/liter.
3. Dry-Fog Coatings: 400 gram/liter.
4. Primers, Sealers, and Undercoaters: 200 gram/liter.
5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 gram/liter.
6. Zinc-Rich Industrial Maintenance Primers: 340 gram/liter.
7. Pretreatment Wash Primers: 420 gram/liter.
8. Shellacs, Clear: 730 gram/liter.
9. Shellacs, Pigmented: 550 gram/liter.

E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 PLASTIC TAPE:

A. Pigmented vinyl plastic film in colors to match existing.

B. Pressure sensitive adhesive back.

C. Snap on coil plastic markers.

D. Widths as shown on construction documents.

2.4 BIOBASED CONTENT

A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content

Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer- Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer- Penetrating Liquid	79 percent biobased content

B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION

3.1 JOB CONDITIONS:

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
   1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
   2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.

B. Atmospheric and Surface Conditions:
   1. Do not apply coating when air or substrate conditions are:
      a. Less than 3 degrees C (5 degrees F) above dew point.
      b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
      c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
   2. Maintain interior temperatures until paint dries hard.
   3. Do no exterior painting when it is windy and dusty.
   4. Do not paint in direct sunlight or on surfaces that the sun will warm.
   5. Apply only on clean, dry and frost-free surfaces except as follows:
      a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
      b. Concrete and masonry when permitted by manufacturer's recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
   6. Varnishing:
      a. Apply in clean areas and in still air.
      b. Before varnishing vacuum and dust area.
      c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 INSPECTION:

A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 GENERAL WORKMANSHIP REQUIREMENTS:

A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.

B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.

C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.

D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.

E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.

F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.

G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.

H. All coats are to be dry to manufacturer's recommendations before applying succeeding coats.

I. All suction spots or "hot spots" in plaster after the application of the first coat are to be touched up before applying the second coat.

J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

3.4 SURFACE PREPARATION:

A. General:

1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
2. See other sections of specifications for specified surface conditions and prime coat.

3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
   a. Concrete: 12 percent.
   b. Fiber-Cement Board: 12 percent.
   c. Masonry (Clay and CMU's): 12 percent.
   d. Wood: 15 percent.
   e. Gypsum Board: 12 percent.
   f. Plaster: 12 percent.

B. Wood:
1. Sand to a smooth even surface and then dust off.
2. Sand surfaces showing raised grain smooth between each coat.
3. Wipe surface with a tack rag prior to applying finish.
4. Surface painted with an opaque finish:
   a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
   b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
   a. Thin filler in accordance with manufacturer's instructions for application.
   b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

C. Ferrous Metals:
1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). // Where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.//

3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
   a. Fill flat head countersunk screws used for permanent anchors.
   b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:
1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING // Section 04 05 16, MASONRY GROUTING //. Do not fill weep holes. Finish to match adjacent surfaces.
5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three (3) days and brush thoroughly free of crystals.
6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in Division 03, CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

E. Gypsum Plaster and Gypsum Board:
1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 PAINT PREPARATION:

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.

C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.

D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.

E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 APPLICATION:

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.

B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.

C. Apply each coat evenly and cover substrate completely.

D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.

E. Apply by brush or roller. Spray application for new or existing occupied spaces only upon approval by acceptance from COR in writing.

1. Apply painting materials specifically required by manufacturer to be applied by spraying.
2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in “Building and Structural Work Field Painting”; “Work not Painted”; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.

F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 PRIME PAINTING:

A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.

B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.

D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.

E. Wood and Wood Particleboard:

a. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.

2. Apply two (2) coats of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
3. Apply one (1) coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
5. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (UL Approved) to wood for fire retardant finish.

F. Gypsum Board and Hardboard:
1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI Gloss Level 1, MPI 52 (Interior Latex, MPI Gloss Level 3), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5), MPI 53 (Interior Latex, MPI Gloss Level 3), MPI 52 (Interior Latex, MPI Gloss Level 3), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5).
2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) in shower and bathrooms.
3. Surfaces scheduled to receive vinyl coated fabric wall covering:
   a. Use MPI 45 (Interior Primer Sealer).

G. Gypsum Plaster and Veneer Plaster:
1. Surfaces scheduled to receive vinyl coated fabric wall covering: Use MPI 45 (Interior Primer Sealer).
2. MPI 45 (Interior Primer Sealer), except use MPI 50 (Interior Latex Primer Sealer) when an alkyd flat finish is specified.

H. Concrete Masonry Units except glazed or integrally colored and decorative units:
1. MPI 4 (Block Filler) on interior surfaces.
2. Prime exterior surface as specified for exterior finishes.

3.8 **INTERIOR FINISHES:**

A. Apply following finish coats over prime coats in spaces or on surfaces to match existing.

B. Metal Work:
1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.

C. Gypsum Board:

1. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3).
2. Two (2) coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2).
3. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5) or MPI 114 (Interior Latex, Gloss).
4. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 48 (Interior Alkyd Gloss).

D. Plaster:
1. One (1) coat of MPI 45 (Interior Primer Sealer) MPI 50 (Interior Latex Primer Sealer) plus one (1) coat of MPI 139 (Interior High Performance Latex, MPI Gloss level 3).
2. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).
3. One (1) coat of MPI 45 (Interior Primer Sealer) or MPI 50 (Interior Latex Primer Sealer) plus one (1) coat of 139 (Interior High Performance Latex, MPI Gloss level 3).
4. One (1) coat MPI 101 (Cold Curing Epoxy Prime).

E. Masonry and Concrete Walls:
1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
2. Two (2) coats of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1) or MPI 52 (Interior Latex, MPI Gloss Level 3) or MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5) or MPI 114 (Interior Latex, Gloss).
3. Two (2) coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2) or MPI 139 (Interior High Performance Latex, MPI Gloss Level 3) or MPI 140 (Interior High Performance Latex MPI Gloss Level 4) or MPI 141 (Interior High Performance Latex MPI Gloss Level 5) or MPI 114 (Interior Latex, Gloss).

F. Wood:
1. Sanding:
   a. Use 220-grit sandpaper.
   b. Sand sealers and varnish between coats.
   c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.
2. Sealers:
   a. MPI 31 (gloss) or MPI 71 (flat) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
   b. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
   c. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
   d. Sand as specified.

3. Paint Finish:
   a. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 47 (Interior Alkyd, Semi-Gloss.
   b. One (1) coat of // MPI 45 Interior Primer Sealer) plus one (1) coat of MPI 48 (Interior Alkyd Gloss).
   c. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).

G. Cement Board: One (1) coat of // MPI 138 (Interior High Performance Latex, MPI Gloss Level 2) or MPI 139 (Interior High Performance Latex, MPI Gloss Level 3) or MPI 140 (Interior High Performance Latex MPI Gloss Level 4) or MPI 141 (Interior High Performance Latex, MPI Gloss Level 5).

3.9 REFINISHING EXISTING PAINTED SURFACES:

A. Clean, patch and repair existing surfaces as specified under “Surface Preparation”. No “telegraphing” of lines, ridges, flakes, etc., through new surfacing is permitted. Where this occurs, sand smooth and re-finish until surface meets with COR’s approval.

B. Remove and reinstall items as specified under “General Workmanship Requirements”.

C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.

D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.

E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.

F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one (1) coat of MPI 31 (Polyurethane, Moisture Cured, Clear Gloss) or MPI 71 (Polyurethane, Moisture Cured, Clear Flat).

G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.

H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.

I. Sand or dull glossy surfaces prior to painting.

J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.10 PAINT COLOR:

A. Color and gloss of finish coats is to match existing.

B. For additional requirements regarding color see Articles, “REFINISHING EXISTING PAINTED SURFACE” and “MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE”.

C. Coat Colors:
   1. Color of priming coat: Lighter than body coat.
   2. Color of body coat: Lighter than finish coat.

3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
1. Paint to match color of casework where casework has a paint finish.
2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING:

A. Painting and finishing of interior and exterior work except as specified here-in-after.
1. Painting and finishing of new // and existing // work including colors and gloss of finish selected is to match existing.
2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
3. Painting of ferrous metal and galvanized metal.
4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
5. Identity painting and safety painting.

3.12 IDENTITY PAINTING SCHEDULE:

A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.
1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
3. Locate Legends clearly visible from operating position.
4. Use arrow to indicate direction of flow using black stencil paint.
5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:
   a. High Pressure - 414 kPa (60 psig) and above.
   b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
   c. Low Pressure - 103 kPa (14 psig) and below.
   d. Add Fuel oil grade numbers.
6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off	Green		White	Blow-off
Boiler Feedwater	Green		White	Blr Feed
A/C Condenser Water Supply	Green		White	A/C Cond Wtr Sup
A/C Condenser Water Return	Green		White	A/C Cond Wtr Ret
Chilled Water Supply	Green	White		Ch. Wtr Sup
Chilled Water Return	Green	White		Ch. Wtr Ret
Shop Compressed Air	Blue	White		Shop Air
Air-Instrument Controls	Green	White		Air-Inst Cont
Drain Line	Green		White	Drain
Emergency Shower	Green		White	Emg Shower
High Pressure Steam	Green	White		H.P. _____*
High Pressure Condensate Return	Green		White	H.P. Ret ____*
Medium Pressure Steam	Green		White	M. P. Stm ____*
Medium Pressure Condensate Return	Green		White	M.P. Ret _____*
Low Pressure Steam	Green		White	L.P. Stm _____*
Low Pressure Condensate Return	Green		White	L.P. Ret _____*
High Temperature Water Supply	Green		White	H. Temp Wtr Sup
High Temperature Water Return	Green		White	H. Temp Wtr Ret
Hot Water Heating Supply	Green		White	H. W. Htg Sup
Hot Water Heating Return	Green		White	H. W. Htg Ret
Gravity Condensate Return	Green	White		Gravity Cond Ret
Pumped Condensate Return	Green		White	Pumped Cond Ret
Vacuum Condensate Return	Green		White	Vac Cond Ret
Fuel Oil - Grade // //	Brown	White		Fuel Oil-Grade // //
(Diesel Fuel included under Fuel Oil)				
Boiler Water Sampling	Green	White		Sample
Chemical Feed	Green		White	Chem Feed
Continuous Blow-Down	Green	White		Cont. B D
Pumped Condensate	Green		White	Pump Cond
Pump Recirculating	Green		White	Pump-Recirc.
Vent Line	Green		White	Vent
Alkali	Orange		Black	Alk
Bleach	Orange		Black	Bleach

Detergent			Yellow	Black	Det
Liquid Supply			Yellow	Black	Liq Sup
Reuse Water			Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom	
Hot Water (Domestic)					
Supply	White	Yellow	Black	H.W. Dom	
Return	White	Yellow	Black	H.W. Dom Ret	
Tempered Water	White	Yellow	Black	Temp. Wtr	
Ice Water					
Supply	White	Green	White	Ice Wtr	
Return	White	Green	White	Ice Wtr Ret	
Reagent Grade Water		Green	White	RG	
Reverse Osmosis			Green	White	RO
Sanitary Waste			Green	White	San Waste
Sanitary Vent			Green	White	San Vent
Storm Drainage			Green	White	St Drain
Pump Drainage			Green	White	Pump Disch
Chemical Resistant Pipe					
Waste			Orange	Black	Acid Waste
Vent			Orange	Black	Acid Vent
Atmospheric Vent			Green	White	ATV
Silver Recovery			Green	White	Silver Rec
Oral Evacuation			Green	White	Oral Evac
Fuel Gas			Yellow	Black	Gas
Fire Protection Water					
Sprinkler	Red		Red	White	Auto Spr
Standpipe	Red		Red	White	Stand
Sprinkler	Red		Red	White	Drain
Hot Water Supply Dom.					
Solar Water			Green	White	H.W. Sup Dom/SW
Hot Water Return Dom.					
Solar Water			Green	White	H.W. Ret Dom/SW

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.

2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.

C. Identify columns in pipe basements and interstitial space:
1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (18 inches) below overhead structural slab.
3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
4. Color:
a. Use black on concrete columns.
b. Use white or contrasting color on steel columns.

3.13 PROTECTION CLEAN UP, AND TOUCH-UP:

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

SECTION 09 97 23
CONCRETE AND MASONRY COATINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Water-based high-build, 100 percent acrylic waterproof coating for exterior vertical and horizontal, above-grade surfaces (Base coat).
2. Water-based, 100 percent acrylic, smooth, waterproof coating for exterior vertical and horizontal, above-grade vertical surfaces (Top coat).

1.2 RELATED REQUIREMENTS

A. Section 01 45 00 QUALITY CONTROL.

B. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS.

C. Concrete: Section 03 10 00 CONCRETE REPAIRS.

D. Section 04 20 00 UNIT MASONRY.

E. Section 04 72 00 CAST STOME MASONRY

F. Joint Sealants: Section 07 92 00 JOINT SEALANTS.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

C920-18 ..... Elastomeric Joint Sealants.

C1193-16 ..... Use of Joint Sealants.

D 522 / D 522M ..... Standard Test Methods for Mandrel Bend Test of Attached Organic Coatings.

D 1475..... Standard Test Method for Density of Liquid Coatings, Inks, and Related Products.

D 3359..... Standard Test Methods for Measuring Adhesion by Tape Test.

D 3719..... Standard Test Method for Quantifying Dirt Collection on Coated Exterior Panels.

D 4541..... Standard Test Method for Pull-Off Strength of Coatings Using

D 5201..... Standard Practice for Calculating Formulation Physical Constants of Paints and Coatings.

D 5590..... Standard Test Method for Determining the Resistance of Paint Films and Related Coatings to Fungal Defacement by Accelerated Four-Week Agar Plate Assay.

E 96..... Standard Test Methods for Water Vapor Transmission of Materials.

G 155.....Standard Practice for Operating Xenon Arc Light Apparatus for Exposure of Non-Metallic Materials.

C. ICRI 310.2R - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, Polymer Overlays, and Concrete Repair.

D. ISO 9001:2008 – Quality Management Systems – Requirements.

E. Miami/Dade TAS 143-95 – Dirt Pickup Resistance.

F. U.S. Environmental Protection Agency (EPA):

40 CFR 59, Subpart D National Volatile Organic Compound Emission Standards for Consumer and Commercial Products.

1.4 PREINSTALLATION MEETINGS

A. Convene pre-application meeting 2 weeks before start of application of waterproof coating.

B. Require attendance of parties directly affecting work of this section, including Contractor, COR, applicator, and manufacturer’s representative.

C. Review the Following:

1. Mock-ups.
2. Materials.
3. Protection of in-place conditions.
4. Surface preparation.
5. Mixing.
6. Application.
7. Protection.
8. Coordination with other work.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1. Indicate size, configuration, and fabrication and installation details.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

C. Samples: Submit manufacturer’s samples of standard colors of waterproof coating.

1. Sample Size: Minimum 3 inches by 3 inches.

D. Cleaning Instructions: Submit manufacturer’s cleaning instructions.

E. Sustainable Construction Submittals:

1. Low Pollutant-Emitting Materials:

a. Show volatile organic compound types and quantities.

F. Test reports:

1. Submit field inspection and test reports.

G. Certificates: Submit manufacturer's certification that materials comply with specified requirements and are suitable for intended application.

H. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.
   a. Submit manufacturer's list of successfully completed waterproof coating projects, including project name and location, name of architect, and type and quantity of waterproof coatings furnished
2. Installer with project experience list.
   a. Submit applicator's list of successfully completed waterproof coating projects, including project name and location, name of architect, and type and quantity of waterproof coatings applied.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly and presently manufactures specified products for a minimum of 10 years, in the manufacturing of waterproof coatings of similar type to that specified.
2. ISO 9001:2008 certified.

B. Installer Qualifications:

1. Regularly and presently installs specified products.
2. Approved by manufacturer.
3. Full time on-site field supervisor has completed three projects of similar scope within last year.
4. Field Supervisor: Holds Sealant, Waterproofing, and Restoration Institute (SWRI) Wall Coating Validation Program Certificate, or similar qualification acceptable to Contracting Officer's Representative.

C. Mock-ups:

1. Apply materials to 4-foot by 4-foot (1.2-m by 1.2-m) mock-up to verify acceptable color, texture, and adhesion.
2. Measure adhesion in accordance with ASTM D 3359, Method A.
3. Required Minimum Adhesion Rating, 0 to 5 Scale: 4A.
4. Construct mock-ups using same materials, surface preparation, mixing, and application for use in the Work.
5. Construct mock-ups at locations determined by COR.
6. Do not proceed until mock-ups are approved by COR.
7. Retain approved mock-ups.

1.7 DELIVERY

A. Deliver products in manufacturer's original, unopened containers and packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

A. Store and handle materials in accordance with manufacturer’s instructions.

B. Keep materials in manufacturer’s original, unopened containers and packaging until installation.

C. Store materials in clean, dry area.

D. Store materials out of direct sunlight.

E. Keep materials from freezing.

F. Protect products from damage during storage, handling and construction operations to prevent contamination or damage.

1.9 FIELD CONDITIONS

A. Environment:

1. Work Area Ambient Temperature Range: Do not apply materials when substrate or ambient temperatures are 40 degrees F (4 degrees C) or below during application or within 24 hours after application.

B. Surface Requirements: visibly dry and complying with manufacturer's instructions. Do not apply materials when rain or excessive moisture is expected during application or within 24 hours after application.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Water-based, high-build, 100 percent acrylic, waterproof coating (Base coat).

1. Resistance to Wind-Driven Rain, Federal Specification ASTM D 6904: Meets requirement. No water penetration.
2. Accelerated Weathering, ASTM G152, 5,000 hours: Passes.
3. Visual Color Change, ASTM D1729, 5,000 hours: Passes.
4. Chalking, ASTM D4214, 5,000 hours: Passes.
5. Freeze/Thaw Resistance, DOT Methods A and B, 50 cycles: Passes.
6. Water-Vapor Permeance, ASTM D1653: 13 perms.
7. Moisture Resistance, Federal Specification TT-C-555B: Meets requirement. No blistering, loss of adhesion, or discoloration.
8. Salt Spray (Fog) Resistance, ASTM B117, 300 hours: Passes.
9. Carbon-Dioxide Diffusion, PR EN 1062-6:
   a. R (equivalent air-layer thickness): 1,318 feet (402 m).
   b. Sc (equivalent concrete thickness): 39 inches (100 cm).

10. Flexibility, ASTM D1737, 1-inch mandrel: No cracking.
11. Dirt Pick-Up, ASTM D3719, after 6 months exposure: 92 percent. Passes.
12. Sand Abrasion Resistance, ASTM D968, Method A, at 3,000 L: Passes.
13. Impact Resistance, ASTM D2794, at 30 in-lbs.: Passes.
14. Fungus Resistance, ASTM D3273: No growth. Meets requirement.
15. Mildew Resistance, Federal Specification TT-P-29 (Federal Standard 141, Method 6152 and 6271.1):
16. Aspergillus Oryzae, 7 days: No growth.
17. Aspergillus Niger, 21 days: No growth.
18. Surface Burning Characteristics, ASTM E84:
    a. Flame Spread: 1.
    b. Smoke: 4.
    c. Fuel Contribution: 7
19. Flash point, Greater than 200 degrees F (93 degrees C) ASTM D 56 Tag Closed Tester
20. Approximate Coverage Rate: 75 to 100 sq ft per gal (1.84 to 2.46 m2/L).
21. Wet Film Thickness (WFT):
    a. Smooth: 16 to 22 mils (406 to 559 microns).
    b. Fine: 16 to 22 mils (406 to 559 microns).
    c. Coarse: 16 to 22 mils (406 to 559 microns).
22. Dry Film Thickness (DFT):
    a. Smooth: 6 to 8 mils (152 to 203 microns).
    b. Fine: 8 to 11 mils (203 to 279 microns).
    c. Coarse: 8 to 11 mils (203 to 279 microns).

B. Water-based, 100 percent acrylic, smooth, easy-cleaning waterproof coating for exterior vertical and horizontal, above-grade vertical surfaces (Top coat). Hydrophobic. Breathable. UV resistant.
1. VOC Content: Less than 50 g/L, less water and exempt solvents.
2. Density, ASTM D 1475: 11.8 lbs/gal (1.41 kg/L).
3. Solids by Volume, ASTM D 5201: 41 percent.
4. Adhesion to Concrete, ASTM D 4541, 28 Days: 500 psi.
5. Dirt Pickup Resistance, Miami/Dade TAS 14395, Section 7.8 (Modified): Greater than 90 percent retention of reflectance.
6. Dirt Collection, ASTM D 3719, 61 Days, 45-Degree Angle, Southern Exposure, Dc Index: 0.98.
7. Artificial Weathering and UV Resistance, ASTM G 155, Xenon Arc, Type B, 2,000 Hours: No deleterious effect.
8. Water-Vapor Permeance, ASTM E 96, Wet Cup Test: 20 perms.

9. Flexibility, ASTM D 522, 7 Wet Mils, 1/2-Inch Mandrel, 40 Degrees F (4 Degrees C) and 70 Degrees F (21 Degrees C): No cracking.
10. Fungus Resistance, ASTM D 5590, 30-Day Exposure: No growth.
11. Miami Dade County: ASTM D3719 Standard Method for Qualifying Dirt Collection on Coated Exterior Panels

2.2 PRODUCTS - GENERAL

A. Provide exterior coating system components from one manufacturer.

B. Base Coat: Water-based, high-build, 100 percent acrylic, waterproof coating – Basis of Design: subject to compliance with requirements, provide SIKA "Thorocoat – 400 Fine" or comparable product.

C. Top Coat: Water-based, 100 percent acrylic, smooth, waterproof coating – Basis of Design: subject to compliance with requirements, provide SIKA "Thorocoat – 350 Aquasol" or comparable product.

1. Color to be selected from Manufacturer's full range of custom colors to match existing.

2.3 ACCESSORIES

A. Patching Compound:.

1. Description: 100 percent acrylic-emulsion patching compound.
2. Use: Crack repair.
3. Basis-of Design: SIKA "Thorocoat 748, smooth" or comparable equal.

B. Block Filler:

1. Description: Acrylic copolymer-based block filler.
2. Use: Base coat for new concrete masonry units.
3. Basis-of Design: SIKA "Thorocoat 749" or comparable equal.

C. Base Coat:

1. Description: Water-based, 100 percent acrylic, waterproof coating.
2. Use: Base coat for waterproof coating.
3. Basis-of Design: SIKA "Thorocoat 400" or comparable equal.

D. Primer:

1. Description: Clear, water-based, modified acrylic.
2. Use: Primer for base coatings.
3. Basis-of Design: SIKA "Thorocoat 100 Primer" or comparable equal.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine surfaces to receive waterproof coating and verify substrate suitability for product installation

B. Notify COR of conditions that would adversely affect application or subsequent use.

C. Do not begin surface preparation or application until unacceptable conditions are corrected.

3.2 PROTECTION OF IN-PLACE CONDITIONS

A. Protect adjacent surfaces and landscaping from contact with waterproof coating.

B. Protect existing construction and completed work from damage.

3.3 PREPARATION

A. Prepare surfaces in accordance with manufacturer's instructions.

B. Ensure surfaces are sound, clean, dry, and free of bond-inhibiting contaminants.

C. Ensure concrete substrates are fully cured.

D. Repair Materials: Repair holes, spalled areas, and damaged concrete with appropriate repair materials from same manufacturer as waterproof coating.

1. Apply repair materials in accordance with manufacturer's instructions.
2. Ensure repair materials are compatible with waterproof coating.
3. Allow repair materials to fully cure.

E. Remove protruding concrete accessories.

F. Smooth out surface irregularities.

G. Roughen concrete surfaces in accordance with manufacturer's instructions to achieve surface profile of CSP 3 in accordance with ICRI 310.2R.

H. Use chemical cleaning compounds in accordance with manufacturer's instructions, if necessary to remove stains.

I. Existing Coatings:

1. Check adhesion of existing coatings in accordance with ASTM D 3359, Method A.
2. Remove blisters and delaminated areas.
3. Sand edges to smooth rough areas and provide transition to existing coating areas.

J. Crack Repair:

1. Treat cracks larger than 1/32 inch with patching compound from same manufacturer as waterproof coating.
   a. Apply patching compound in accordance with manufacturer's instructions.
   b. Ensure patching compound is compatible with waterproof coating.
   c. Allow patching compound to fully cure.
2. Treat cracks larger than 1/4 inch as expansion joints and fill with appropriate sealant from same manufacturer as waterproof coating.
   a. Apply sealant in accordance with manufacturer's instructions.
   b. Ensure sealant is compatible with waterproof coating.
   c. Allow sealant to fully cure.

K. Priming:

1. If applying to bare concrete, prime surface with manufacturer's recommended primer prior to coating.

3.4 MIXING

A. Mix waterproof coating in accordance with manufacturer's instructions.

B. Mix waterproof coating to ensure uniform color and texture.

C. Mix waterproof coating to minimize air entrapment.

3.5 APPLICATION

A. Apply waterproof coating in accordance with manufacturer's instructions at locations indicated on the Drawings.

B. Apply one coat of Top Coat product over one coat of Base Coat product.

C. Maintain proper uniform wet-film thickness (WFT) during application.

D. Work to natural break and maintain wet edge during application.

E. Apply waterproof coating using consistent techniques to achieve uniform thickness, consistent appearance, and uniform color and texture.

F. Do not thin waterproof coating.

3.6 PROTECTION

A. Protect applied waterproof coating to ensure that, except for normal weathering, coating will be without damage or deterioration at time of Substantial Completion.

- - E N D - -

SECTION 12 36 00
COUNTERTOPS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies windowsill countertops with integral accessories.

1.2 RELATED WORK

A. Equipment Reference Manual for SECTION 12 36 00, COUNTERTOPS.

1.3 SUBMITTALS

A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings

1. Show dimensions of section and method of assembly.
2. Show details of construction at a scale of ½ inch to a foot.

C. Samples:

1. 150 mm (6 inch) square samples each top.
2. Front edge, back splash, end splash and core with surface material and booking.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Hardboard Association (AHA):

A135.4-95.....Basic Hardboard

C. Composite Panel Association (CPA):

A208.1-09.....Particleboard

D. American Society of Mechanical Engineers (ASME):

A112.18.1-12.....Plumbing Supply Fittings

A112.1.2-12.....Air Gaps in Plumbing System

A112.19.3-08(R2004).....Stainless Steel Plumbing Fixtures (Designed for Residential Use)

E. American Society for Testing and Materials (ASTM):

A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

A1008-10.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength, Low Alloy

D256-10 .....Pendulum Impact Resistance of Plastic

D570-98(R2005) .....Water Absorption of Plastics

D638-10 .....Tensile Properties of Plastics

D785-08 .....Rockwell Hardness of Plastics and Electrical Insulating Materials

D790-10 .....Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials

D4690-99(2005) .....Urea-Formaldehyde Resin Adhesives

F. Federal Specifications (FS):

A-A-1936 .....Adhesive, Contact, Neoprene Rubber

G. U.S. Department of Commerce, Product Standards (PS):

PS 1-95 .....Construction and Industrial Plywood

H. National Electrical Manufacturers Association (NEMA):

LD 3-05.....High Pressure Decorative Laminates

PART 2 - PRODUCTS

2.1 MATERIALS

A. Type, color and size is specified in CONSTRUCTION DRAWINGS: FINISH LEGEND.

B. Fasteners:

1. Metals used for welding same metal as materials joined.
2. Use studs, bolts, spaces, threaded rods with nuts or screws suitable for materials being joined with metal splice plates, channels or other supporting shape.

C. Solid Polymer Material:

1. Filled Methyl Methacrylic Polymer.
2. Performance properties required:

Property	Result	Test
Elongation	0.3% min.	ASTM D638
Hardness	90 Rockwell M	ASTM D785
Gloss (60^0 Gordon)	5-20	NEMA LD3.1
Color stability	No change	NEMA LD3 except 200 hour
Abrasion resistance	No loss of pattern Max wear depth 0.0762 mm (0.003 in) - 10000 cycles	NEMA LD3
Water absorption weight (5 max)	24 hours 0.9	ASTM D-570
Izod impact	14 N·m/m (0.25 ft-lb/in)	ASTM D256 (Method A)
Impact resistance	No fracture	NEMA LD-3 900 mm (36") drop 1 kg (2 lb.) ball
Boiling water surface resistance	No visible change	NEMA LD3

Property	Result	Test
High temperature resistance	Slight surface dulling	NEMA LD3

3. Cast into sheet form and bowl form.
4. Color throughout with subtle veining through thickness.
5. Joint adhesive and sealer: Manufacturers silicone adhesive and sealant for joining methyl methacrylic polymer sheet.
6. Bio-based products will be preferred.

2.10 COUNTERTOPS / WINDOWSILLS

A. Fabricate in largest sections practicable.

B. Fabricate with joints flush on top surface.

C. Fabricate countertops to overhang front of cabinets and end of assemblies 25 mm (one inch) except where against walls or cabinets.

D. Provide 1 mm (0.039 inch) thick metal plate connectors or fastening devices (except epoxy resin tops).

E. Join edges in a chemical resistant waterproof cement or epoxy cement, except weld metal tops.

F. Fabricate with end splashes where against walls or cabinets.

G. Splash Backs and End Splashes:

1. Not less than 19 mm (3/4 inch) thick.
2. Height 100 mm (4 inches) unless noted otherwise.
3. Laboratories and pharmacy heights or where fixtures or outlets occur: Not less than 150 mm (6 inches) unless noted otherwise.
4. Fabricate epoxy splash back in maximum lengths practical of the same material.

H. Countertop products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Composite Panel	89 percent biobased material
Hardwood	89 percent biobased material
Particleboard	89 percent biobased material
Plywood	89 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

I. Windowsills to meet requirements to match existing.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Before installing countertops verify that wall surfaces have been finished as specified and that mechanical and electrical service locations are as required.

B. Secure countertops to supporting rails of cabinets with metal fastening devices, or screws through pierced slots in rails.

1. Where type, size or spacing of fastenings is not shown or specified, submit shop drawings showing proposed fastenings and method of installation.
2. Use round head bolts or screws.
3. Use epoxy or silicone to fasten the epoxy resin countertops to the cabinets.
4. Use wood or sheet metal screws for wood or plastic laminate tops; minimum penetration into top 16 mm (5/8 inch), screw size No 8, or 10.

3.2 PROTECTION AND CLEANING

A. Tightly cover and protect against dirt, water, and chemical or mechanical injury.

B. Clean at completion of work.

- - - E N D - - -

SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section will apply to all sections of Division 22.

B. Definitions:
   1. Exposed: Piping and equipment exposed to view in finished rooms.
   2. Exterior: Piping and equipment exposed to weather be it temperature, humidity, precipitation, wind or solar radiation.

C. Abbreviations/Acronyms:
   1. ABS: Acrylonitrile Butadiene Styrene
   2. AC: Alternating Current
   3. ACR: Air Conditioning and Refrigeration
   4. A/E: Architect/Engineer
   5. AFF: Above Finish Floor
   6. AFG: Above Finish Grade
   7. AI: Analog Input
   8. AISI: American Iron and Steel Institute
   9. AO: Analog Output
   10. ASHRAE: American Society of Heating Refrigeration, Air Conditioning Engineers
   11. ASJ: All Service Jacket
   12. ASME: American Society of Mechanical Engineers
   13. ASPE: American Society of Plumbing Engineers
   14. AWG: American Wire Gauge
   15. BACnet: Building Automation and Control Network
   16. BAg: Silver-Copper-Zinc Brazing Alloy
   17. BAS: Building Automation System
   18. BCuP: Silver-Copper-Phosphorus Brazing Alloy
   19. bhp: Brake Horsepower
   20. Btu: British Thermal Unit
   21. Btu/h: British Thermal Unit per Hour
   22. BSG: Borosilicate Glass Pipe
   23. C: Celsius
   24. CA: Compressed Air
   25. CD: Compact Disk
   26. CDA: Copper Development Association
   27. CGA: Compressed Gas Association
   28. CFM: Cubic Feet per Minute
   29. CI: Cast Iron
   30. CLR: Color
   31. CO: Contracting Officer
   32. COR: Contracting Officer’s Representative
   33. CPVC: Chlorinated Polyvinyl Chloride
   34. CR: Chloroprene
   35. CRS: Corrosion Resistant Steel
   36. CWP: Cold Working Pressure
   37. CxA: Commissioning Agent
   38. dB: Decibels
   39. db(A): Decibels (A weighted)
   40. DCW: Domestic Cold Water
   41. DDC: Direct Digital Control

42. DFU: Drainage Fixture Units
43. DHW: Domestic Hot Water
44. DHWR: Domestic Hot Water Return
45. DHWS: Domestic How Water Supply
46. DI: Digital Input
47. DI: Deionized Water
48. DISS: Diameter Index Safety System
49. DN: Diameter Nominal
50. DO: Digital Output
51. DOE: Department of Energy
52. DVD: Digital Video Disc
53. DWG: Drawing
54. DWH: Domestic Water Heater
55. DWS: Domestic Water Supply
56. DWV: Drainage, Waste and Vent
57. ECC: Engineering Control Center
58. EL: Elevation
59. EMCS: Energy Monitoring and Control System
60. EPA: Environmental Protection Agency
61. EPACT: Energy Policy Act
62. EPDM: Ethylene Propylene Diene Monomer
63. EPT: Ethylene Propylene Terpolymer
64. ETO: Ethylene Oxide
65. F: Fahrenheit
66. FAR: Federal Acquisition Regulations
67. FD: Floor Drain
68. FDC: Fire Department (Hose) Connection
69. FED: Federal
70. FG: Fiberglass
71. FNPT: Female National Pipe Thread
72. FOR: Fuel Oil Return
73. FOS: Fuel Oil Supply
74. FOV: Fuel Oil Vent
75. FPM: Fluoroelastomer Polymer
76. FSK: Foil-Scrim-Kraft Facing
77. FSS: VA Construction & Facilities Management, Facility Standards Service
78. FU: Fixture Units
79. GAL: Gallon
80. GCO: Grade Cleanouts
81. GPD: Gallons per Day
82. GPH: Gallons per Hour
83. GPM: Gallons per Minute
84. HDPE: High Density Polyethylene
85. HEFP: Healthcare Environment and Facilities Program (replacement for OCAMES)
86. HEX: Heat Exchanger
87. Hg: Mercury
88. HOA: Hands-Off-Automatic
89. HP: Horsepower
90. HVE: High Volume Evacuation
91. Hz: Hertz
92. ID: Inside Diameter
93. IE: Invert Elevation

94. INV: Invert
95. IPC: International Plumbing Code
96. IPS: Iron Pipe Size
97. IW: Indirect Waste
98. IWH: Instantaneous Water Heater
99. Kg: Kilogram
100. kPa: Kilopascal
101. KW: Kilowatt
102. KWH: Kilowatt Hour
103. lb: Pound
104. lbs/hr: Pounds per Hour
105. LNG: Liquid Natural Gas
106. L/min: Liters per Minute
107. LOX: Liquid Oxygen
108. L/s: Liters per Second
109. m: Meter
110. MA: Medical Air
111. MAWP: Maximum Allowable Working Pressure
112. MAX: Maximum
113. MBH: 1000 Btu per Hour
114. MED: Medical
115. MER: Mechanical Equipment Room
116. MFG: Manufacturer
117. mg: Milligram
118. mg/L: Milligrams per Liter
119. ml: Milliliter
120. mm: Millimeter
121. MIN: Minimum
122. MV: Medical Vacuum
123. N2: Nitrogen
124. N20: Nitrogen Oxide
125. NC: Normally Closed
126. NF: Oil Free Dry (Nitrogen)
127. NG: Natural Gas
128. NIC: Not in Contract
129. NO: Normally Open
130. NOM: Nominal
131. NPTF: National Pipe Thread Female
132. NPS: Nominal Pipe Size
133. NPT: Nominal Pipe Thread
134. NTS: Not to Scale
135. O2: Oxygen
136. OC: On Center
137. OD: Outside Diameter
138. OSD: Open Sight Drain
139. OS&Y: Outside Stem and Yoke
140. PA: Pascal
141. PBPU: Prefabricated Bedside Patient Units
142. PD: Pressure Drop or Difference
143. PDI: Plumbing and Drainage Institute
144. PH: Power of Hydrogen
145. PID: Proportional-Integral-Differential

146. PLC: Programmable Logic Controllers
147. PP: Polypropylene
148. ppb: Parts per Billion
149. ppm: Parts per Million
150. PSI: Pounds per Square Inch
151. PSIA: Pounds per Square Inch Atmosphere
152. PSIG: Pounds per Square Inch Gauge
153. PTFE: Polytetrafluoroethylene
154. PVC: Polyvinyl Chloride
155. PVDF: Polyvinylidene Fluoride
156. RAD: Radians
157. RO: Reverse Osmosis
158. RPM: Revolutions Per Minute
159. RTD: Resistance Temperature Detectors
160. RTRP: Reinforced Thermosetting Resin Pipe
161. SAN: Sanitary Sewer
162. SCFM: Standard Cubic Feet per Minute
163. SDI: Silt Density Index
164. SMACNA: Sheet Metal and Air Conditioning Contractors National Association
165. SPEC: Specification
166. SPS: Sterile Processing Services
167. SQFT/SF: Square Feet
168. SS: Stainless Steel
169. STD: Standard
170. SUS: Saybolt Universal Second
171. SWP: Steam Working Pressure
172. TD: Temperature Difference
173. TDH: Total Dynamic Head
174. TEFC: Totally Enclosed Fan-Cooled
175. TEMP: Temperature
176. TFE: Tetrafluoroethylene
177. THERM: 100,000 Btu
178. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
179. THWN: Thermoplastic Heat & Water Resistant Nylon Coated Wire
180. TIL: Technical Information Library http//www.cfm.va.gov/til/indes.asp
181. T/P: Temperature and Pressure
182. TYP: Typical
183. USDA: U.S. Department of Agriculture
184. V: Vent
185. V: Volt
186. VA: Veterans Administration
187. VA CFM: VA Construction & Facilities Management
188. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
189. VAC: Vacuum
190. VAC: Voltage in Alternating Current
191. VAMC: Veterans Administration Medical Center
192. VHA OCAMES: This has been replaced by HEFP.
193. VSD: Variable Speed Drive
194. VTR: Vent through Roof
195. W: Waste
196. WAGD: Waste Anesthesia Gas Disposal
197. WC: Water Closet

198. WG: Water Gauge
199. WOG: Water, Oil, Gas
200. WPD: Water Pressure Drop
201. WSFU: Water Supply Fixture Units

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.
B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
D. Section 05 50 00, METAL FABRICATIONS.
E. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
F. Section 07 84 00, FIRESTOPPING.
G. Section 07 92 00, JOINT SEALANTS.
H. Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below will form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

B31.1-2020	Power Piping
ASME Boiler and Pressure Vessel Code	
BPVC Section IX-2021	Welding, Brazing, and Fusing Qualifications

C. American Society for Testing and Materials (ASTM):

A36/A36M-2019	Standard Specification for Carbon Structural Steel
A575-2020	Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades
E84-2021a	Standard Test Method for Surface Burning Characteristics of Building Materials
E119-2020	Standard Test Methods for Fire Tests of Building Construction and Materials

D. International Code Council, (ICC):

IBC-2021	International Building Code
IPC-2021	International Plumbing Code

E. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:

SP-58-2018	Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application and Installation

F. Military Specifications (MIL):

P-21035B	Paint High Zinc Dust Content, Galvanizing Repair (Metric)

G. National Electrical Manufacturers Association (NEMA):

MG 1-2019	Motors and Generators

H. National Fire Protection Association (NFPA):

51B-2019	Standard for Fire Prevention During Welding, Cutting and Other Hot Work
54-2021	National Fuel Gas Code
70-2020	National Electrical Code (NEC)
99-2021	Healthcare Facilities Code

I. Department of Veterans Affairs (VA):

PG-18-102014(R18)	Plumbing Design Manual
PG-18-13-2017(R18)	Barrier Free Design Guide

1.4 SUBMITTALS

A. Submittals, including number of required copies, will be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section will be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.

C. Contractor will make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor will correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical will be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor will certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, will be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient installation. Final review and approvals will be made only by groups.

G. Manufacturer's Literature and Data including: Manufacturer's literature will be submitted under the pertinent section rather than under this section.
   1. Equipment and materials identification.
   2. Firestopping materials.
   3. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
   4. Wall, floor, and ceiling plates.

H. Coordination/Shop Drawings:
   1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
   2. The coordination/shop drawings will include plan views, elevations and sections of all systems and will be on a scale of not less than 1:32 (3/8-inch equal to 1 foot). Clearly

identify and dimension the proposed locations of the principal items of equipment. The drawings will clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.

3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for plumbing systems, provide details of the following:
   a. Hangers, inserts, supports, and bracing.
   b. Pipe sleeves.
   c. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

I. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan will include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

J. Plumbing Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   a. Include complete list indicating all components of the systems.
   b. Include complete diagrams of the internal wiring for each item of equipment.
   c. Diagrams will have their terminals identified to facilitate installation, operation and maintenance.
3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical, and associated systems will be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems will be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel will be experienced and qualified specialists in industrial and institutional plumbing.

B. Products Criteria:
1. Standard Products: Material and equipment will be the standard products of a manufacturer regularly engaged in the manufacture, supply and servicing of the specified products for at least 5 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, will be the current generation of technology and basic design that has a proven satisfactory service record of at least 5 years.
2. Equipment Service: There will be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations will come to the site and provide acceptable service to restore operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, compressors, water heaters, critical instrumentation, computer workstation and programming will be submitted for project record and inserted into the operations and maintenance manual.

3. All items furnished will be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 22 will conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official will be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code will apply. Any conflicts will be brought to the attention of the Contracting Officers Representative (COR).
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units will be of the same manufacturer and model number, or if different models are required they will be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
6. Assembled Units: Performance and warranty of all components that make up an assembled unit will be the responsibility of the manufacturer of the completed assembly.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark will be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos is prohibited.
9. Bio-Based Materials: For products designated by the USDA’s bio - based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

C. Welding: Before any welding is performed, Contractor will submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME BPVC, Section IX, "Welding and Brazing Qualifications". Provide proof of current certification to CO.
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds will be stamped according to the provisions of the AWS or ASME as required herein and by the association code.

D. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations will be furnished to the COR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

E. Execution (Installation, Construction) Quality:
1. All items will be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract documents will be referred to the COR for resolution. Printed copies or electronic files of manufacturer’s installation instructions will be provided to the COR at least 10 working days prior to commencing installation of any item.
2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, will be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include but are not limited to: all types of valves, filters and strainers, transmitters, and control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to COR for resolution. Failure of the Contractor to resolve or call attention to any discrepancies or deficiencies to the COR will result in the Contractor correcting at no additional cost or time to the Government.

3. Complete layout drawings will be required by Paragraph, SUBMITTALS. Construction work will not start on any system until the layout drawings have been approved by VA.
4. Installer Qualifications: Installer will be licensed and will provide evidence of the successful completion of at least five projects of equal or greater size and complexity. Provide tradesmen skilled in the appropriate trade.
5. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work will be removed and done again at no additional cost or time to the Government.

F. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

G. Guaranty: Warranty of Construction, FAR clause 52.246-21.

H. Plumbing Systems: IPC, International Plumbing Code. Unless otherwise required herein, perform plumbing work in accordance with the latest version of the IPC. For IPC codes referenced in the contract documents, advisory provisions will be considered mandatory, the word “should” will be interpreted as “will”. Reference to the “code official” or “owner” will be interpreted to mean the COR.

I. Cleanliness of Piping and Equipment Systems:
1. Care will be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping will be removed.
2. Piping systems will be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks will be cleaned prior to delivery and beneficial use by the Government. All piping will be tested in accordance with the specifications and the International Plumbing Code (IPC). All filters, strainers, fixture faucets will be flushed of debris prior to final acceptance.
4. Contractor will be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:
1. Equipment and material placed on the job site will remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Damaged equipment will be replaced with an identical unit as determined and directed by the COR. Such replacement will be at no additional cost or additional time to the Government.
3. Interiors of new equipment and piping systems will be protected against entry of foreign matter. Both inside and outside will be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor will be under the custody and responsibility of the Contractor and will be protected as required for new work.
5. Protect plastic piping and tanks from ultraviolet light (sunlight) while in pre-construction. Plastic piping and tanks will not be installed exposed to sunlight without metal jacketing to block ultraviolet rays.

PART 2 - PRODUCTS

2.1 MATERIALS FOR VARIOUS SERVICES

A. Non-pressure PVC pipe will contain a minimum of 25 percent recycled content. Steel pipe will contain a minimum of 25 percent recycled content.

B. Plastic pipe, fittings and solvent cement will meet NSF 14 and will bear the NSF seal “NSF-PW”. Polypropylene pipe and fittings will comply with NSF 14 and NSF 61. Solder or flux containing lead will not be used with copper pipe.

C. Material or equipment containing a weighted average of greater than 0.25 percent lead will not be used in any potable water system intended for human consumption and will be certified in accordance with NSF 61 or NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components will be maximized to reduce spare part requirements.

B. Manufacturers of equipment assemblies that include components made by others will assume complete responsibility for final assembled unit.
   1. All components of an assembled unit need not be products of same manufacturer.
   2. Constituent parts that are alike will be products of a single manufacturer.
   3. Components will be compatible with each other and with the total assembly for intended service.
   4. Contractor will guarantee performance of assemblies of components and will repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly at no additional cost or time to the Government.

C. Components of equipment will bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, will be the same make and model.

2.3 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed will be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.4 LIFTING ATTACHMENTS

A. Equipment will be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments will withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.5 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 22 07 11, PLUMBING INSULATION, for pipe insulation.

2.6 GALVANIZED REPAIR COMPOUND

A. Mil. Spec. DOD-P-21035B, paint.

2.7 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC)// and Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

B. Type Numbers Specified: For materials, design, manufacture, selection, application, and installation refer to MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.

C. For Attachment to Concrete Construction:
   1. Concrete insert: Type 18, MSS SP-58.

2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

D. For Attachment to Steel Construction: MSS SP-58.
1. Welded attachment: Type 22.
2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.

E. For Attachment to Wood Construction: Wood screws or lag bolts.

F. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 22 07 11, PLUMBING INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.
1. General Types (MSS SP-58):
a. Standard clevis hanger: Type 1; provide locknut.
b. Riser clamps: Type 8.
c. Wall brackets: Types 31, 32 or 33.
d. Roller supports: Type 41, 43, 44 and 46.
e. Saddle support: Type 36, 37 or 38.
f. Turnbuckle: Types 13 or 15.
g. U-bolt clamp: Type 24.
h. Copper Tube:
1) Hangers, clamps and other support material in contact with tubing will be painted with copper colored epoxy paint, copper-coated, plastic coated or taped with isolation tape to prevent electrolysis.
2) For vertical runs use epoxy painted, copper-coated or plastic coated riser clamps.
3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
2. Plumbing Piping (Other Than General Types):
a. Horizontal piping: Type 1, 5, 7, 9, and 10.
b. Chrome plated piping: Chrome plated supports.
c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action, to hold piping, prevent vibration and compensate for all static and operational conditions.
d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gauge) minimum.

G. Seismic Restraint of Piping: Refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

2.8 PIPE PENETRATIONS

A. Pipe penetration sleeves will be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.

B. Pipe penetration sleeve materials will comply with all firestopping requirements for each penetration.

C. To prevent accidental liquid spills from passing to a lower level, provide the following:
1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.

2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

D. Penetrations are prohibited through beams or ribs, but may be installed in concrete beam flanges, with structural engineer prior approval. Any deviation from these requirements must receive prior approval of COR.

E. Sheet metal, plastic, or moisture resistant fiber sleeves will be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

F. Cast iron or zinc coated pipe sleeves will be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe will be made watertight with a modular or link rubber seal. The link seal will be applied at both ends of the sleeve.

G. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves will be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel sleeve will be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves will be connected with a floor plate.

H. Brass Pipe Sleeves will be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve will be connected with a floor plate.

I. Sleeve clearance through floors, walls, partitions, and beam flanges will be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation will be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings will be caulked tight with firestopping material and sealant to prevent the spread of fire, smoke, water and gases.

J. Sealant and Adhesives: Will be as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials will be utilized when possible.

K. Pipe passing through roof will be installed through a 4.9 kg per square meter copper flashing with an integral skirt or flange. Skirt or flange will extend not less than 200 mm (8 inches) from the pipe and set in a solid coating of bituminous cement. Extend flashing a minimum of 250 mm (10 inches) up the pipe. Pipe passing through a waterproofing membrane will be provided with a clamping flange. The annular space between the sleeve and pipe will be sealed watertight.

2.9 TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the COR.

D. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application. Bio-based materials will be utilized when possible.

2.10 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch) pipe, 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates will be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint will be provided in spaces where brass or steel pipe sleeves are specified.

2.11 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions will be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment will be located clear of windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings will be prepared to coordinate proper location and personnel access of all facilities. The drawings will be submitted for review.

B. Manufacturer's published recommendations will be followed for installation methods not otherwise specified.

C. Operating Personnel Access and Observation Provisions: All equipment and systems will be arranged to provide clear view and easy access, without use of portable ladders, for maintenance, testing and operation of all devices including, but not limited to: all equipment items, valves, backflow preventers, filters, strainers, transmitters, sensors, meters and control devices. All gauges and indicators will be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown in the drawings will not be changed nor reduced.

D. Structural systems necessary for pipe and equipment support will be coordinated to permit proper installation.

E. Location of pipe sleeves, trenches and chases will be accurately coordinated with equipment and piping locations.

F. Cutting Holes:
   1. Holes will be located to avoid interference with structural members such as beams or grade beams. Holes will be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter will be referred to COR for approval.
   2. Waterproof membrane will not be penetrated. Pipe floor penetration block outs will be provided outside the extents of the waterproof membrane.
   3. Holes through concrete and masonry will be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COR where working area space is limited.

G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other services are not shown but must be provided.

3.2 RIGGING

A. Openings in building structures will be planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.

C. All openings in the building will be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor will provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures will be Contractor's full responsibility.

E. Contractor will check all clearances, weight limitations and will provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, will be at Contractor's cost, time and responsibility.

F. Rigging plan and methods will be referred to COR for evaluation prior to actual work.

3.3 PIPE AND EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes will be drilled or burned in structural steel ONLY with the prior written approval of the COR.

B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above will not be permitted. Rusty products will be replaced.

C. Hanger rods will be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work will be provided.

D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC) and these specifications.

E. Overhead Supports:
   1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
   2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
   3. Tubing and capillary systems will be supported in channel troughs.

3.4 PLUMBING SYSTEMS DEMOLITION

A. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work will be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings will be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system will be maintained. Reference will also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

B. All valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells will remain Government property and will be removed and delivered to COR and stored as directed. The Contractor will remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material will be removed from Government property expeditiously and will not be allowed to accumulate. Coordinate with the COR and Infection Control.

3.5 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems will be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:
   1. Cleaning will be thorough. Solvents, cleaning materials and methods recommended by the manufacturers will be used for the specific tasks. All rust will be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions will be repaired prior to applying prime and finish coats.
   2. The following Material and Equipment will NOT be painted:

a. Motors, controllers, control switches, and safety switches.
b. Control and interlock devices.
c. Regulators.
d. Pressure reducing valves.
e. Control valves and thermostatic elements.
f. Lubrication devices and grease fittings.
g. Copper, brass, aluminum, stainless steel and bronze surfaces.
h. Valve stems and rotating shafts.
i. Pressure gauges and thermometers.
j. Glass.
k. Name plates.

3. Control and instrument panels will be cleaned and damaged surfaces repaired. Touch-up painting will be made with matching paint type and color obtained from manufacturer or computer matched.
4. Pumps, motors, steel and cast-iron bases, and coupling guards will be cleaned, and will be touched-up with the same paint type and color as utilized by the pump manufacturer.
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats per Section 09 91 00, Painting.
6. The final result will be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment will be repainted, if necessary, to achieve this. Lead based paints will not be used.

3.6 IDENTIFICATION SIGNS

A. Laminated plastic signs, with engraved lettering not less than 7 mm (3/16 inch) high, will be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols will correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, and performance data will be placed on factory-built equipment.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

END OF SECTION

SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23, HEATING, VENTILATING, AND AIR CONDITIONING (HVAC).

B. Definitions:
   1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
   2. Exterior: Piping, ductwork, and equipment exposed to weather be it temperature, humidity, precipitation, wind, or solar radiation.

C. Abbreviations/Acronyms:
   1. ac: Alternating Current
   2. AC: Air Conditioning
   3. ACU: Air Conditioning Unit
   4. ACR: Air Conditioning and Refrigeration
   5. AI: Analog Input
   6. AISI: American Iron and Steel Institute
   7. AO: Analog Output
   8. ASJ: All Service Jacket
   9. AWG: American Wire Gauge
   10. BACnet: Building Automation and Control Networking Protocol
   11. BAg: Silver-Copper-Zinc Brazing Alloy
   12. BAS: Building Automation System
   13. BCuP: Silver-Copper-Phosphorus Brazing Alloy
   14. bhp: Brake Horsepower
   15. Btu: British Thermal Unit
   16. Btu/h: British Thermal Unit Per Hour
   17. CDA: Copper Development Association
   18. C: Celsius
   19. CD: Compact Disk
   20. CFM: Cubic Foot Per Minute
   21. CH: Chilled Water Supply
   22. CHR: Chilled Water Return
   23. CLR: Color
   24. CO: Carbon Monoxide
   25. COR: Contracting Officer’s Representative
   26. CPD: Condensate Pump Discharge
   27. CPM: Cycles Per Minute
   28. CPVC: Chlorinated Polyvinyl Chloride
   29. CRS: Corrosion Resistant Steel
   30. CTPD: Condensate Transfer Pump Discharge
   31. CTPS: Condensate Transfer Pump Suction
   32. CW: Cold Water
   33. CWP: Cold Working Pressure
   34. CxA: Commissioning Agent
   35. dB: Decibels
   36. dB(A): Decibels (A weighted)
   37. DDC: Direct Digital Control
   38. DI: Digital Input
   39. DO: Digital Output
   40. DVD: Digital Video Disc

41. DN: Diameter Nominal
42. DWV: Drainage, Waste and Vent
43. EPDM: Ethylene Propylene Diene Monomer
44. EPT: Ethylene Propylene Terpolymer
45. ETO: Ethylene Oxide
46. F: Fahrenheit
47. FAR: Federal Acquisition Regulations
48. FD: Floor Drain
49. FED: Federal
50. FG: Fiberglass
51. FGR: Flue Gas Recirculation
52. FOS: Fuel Oil Supply
53. FOR: Fuel Oil Return
54. FSK: Foil-Scrim-Kraft facing
55. FWPD: Feedwater Pump Discharge
56. FWPS: Feedwater Pump Suction
57. GC: Chilled Glycol Water Supply
58. GCR: Chilled Glycol Water Return
59. GH: Hot Glycol Water Heating Supply
60. GHR: Hot Glycol Water Heating Return
61. gpm: Gallons Per Minute
62. HDPE: High Density Polyethylene
63. Hg: Mercury
64. HOA: Hands-Off-Automatic
65. hp: Horsepower
66. HPS: High Pressure Steam (414 kPa (60 psig) and above)
67. HPR: High Pressure Steam Condensate Return
68. HW: Hot Water
69. HWH: Hot Water Heating Supply
70. HWHR: Hot Water Heating Return
71. Hz: Hertz
72. ID: Inside Diameter
73. IPS: Iron Pipe Size
74. kg: Kilogram
75. klb: 1000 lb
76. kPa: Kilopascal
77. lb: Pound
78. lb/hr: Pounds Per Hour
79. L/s: Liters Per Second
80. L/min: Liters Per Minute
81. LPS: Low Pressure Steam (103 kPa (15 psig) and below)
82. LPR: Low Pressure Steam Condensate Gravity Return
83. MAWP: Maximum Allowable Working Pressure
84. MAX: Maximum
85. MBtu/h: 1000 Btu/h
86. MBtu: 1000 Btu
87. MED: Medical
88. m: Meter
89. MFG: Manufacturer
90. mg: Milligram
91. mg/L: Milligrams Per Liter
92. MIN: Minimum

93. MJ: Megajoules
94. ml: Milliliter
95. mm: Millimeter
96. MPS: Medium Pressure Steam (110 kPa (16 psig) through 414 kPa (60 psig))
97. MPR: Medium Pressure Steam Condensate Return
98. MW: Megawatt
99. NC: Normally Closed
100. NF: Oil Free Dry (Nitrogen)
101. Nm: Newton Meter
102. NO: Normally Open
103. NOx: Nitrous Oxide
104. NPT: National Pipe Thread
105. NPS: Nominal Pipe Size
106. OD: Outside Diameter
107. OSD: Open Sight Drain
108. OS&Y: Outside Stem and Yoke
109. PC: Pumped Condensate
110. PID: Proportional-Integral-Differential
111. PLC: Programmable Logic Controllers
112. PP: Polypropylene
113. PPE: Personal Protection Equipment
114. ppb: Parts Per Billion
115. ppm: Parts Per Million
116. PRV: Pressure Reducing Valve \
117. PSIA: Pounds Per Square Inch Absolute
118. psig: Pounds Per Square Inch Gauge
119. PTFE: Polytetrafluoroethylene
120. PVC: Polyvinyl Chloride
121. PVDC: Polyvinylidene Chloride Vapor Retarder Jacketing, White
122. PVDF: Polyvinylidene Fluoride
123. rad: Radians
124. RH: Relative Humidity
125. RO: Reverse Osmosis
126. rms: Root Mean Square
127. RPM: Revolutions Per Minute
128. RS: Refrigerant Suction
129. RTD: Resistance Temperature Detectors
130. RTRF: Reinforced Thermosetting Resin Fittings
131. RTRP: Reinforced Thermosetting Resin Pipe
132. SCFM: Standard Cubic Feet Per Minute
133. SPEC: Specification
134. SPS: Sterile Processing Services
135. STD: Standard
136. SDR: Standard Dimension Ratio
137. SUS: Saybolt Universal Second
138. SW: Soft water
139. SWP: Steam Working Pressure
140. TAB: Testing, Adjusting, and Balancing
141. TDH: Total Dynamic Head
142. TEFC: Totally Enclosed Fan-Cooled
143. TFE: Tetrafluoroethylene
144. THERM: 100,000 Btu

145. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
146. THWN: Thermoplastic Heat & Water-Resistant Nylon Coated Wire
147. T/P: Temperature and Pressure
148. USDA: U.S. Department of Agriculture
149. V: Volt
150. VAC: Vacuum
151. VA: Veterans Administration
152. VAC: Voltage in Alternating Current
153. VA CFM: VA Construction & Facilities Management
154. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
155. VAMC: Veterans Administration Medical Center
156. VHA OCAMES: Veterans Health Administration – Office of Capital Asset Management Engineering and Support
157. VR: Vacuum condensate return
158. WCB: Wrought Carbon Steel, Grade B
159. WG: Water Gauge or Water Column
160. WOG: Water, Oil, Gas

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

D. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

E. Section 05 50 00, METAL FABRICATIONS.

F. Section 07 84 00, FIRESTOPPING.

G. Section 07 92 00, JOINT SEALANTS.

H. Section 09 91 00, PAINTING.

I. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI):

430-2020	Performance Rating of Central Station Air Handling Unit Supply Fans

C. Air Movement and Control Association (AMCA):

410-1996	Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

D. American Society of Mechanical Engineers (ASME):

B31.1-2020	Power Piping
B31.9-2020	Building Services Piping
	ASME Boiler and Pressure Vessel Code:
BPVC Section IX-2021	Welding, Brazing, and Fusing Qualifications

E. American Society for Testing and Materials (ASTM):

A36/A36M-2019	Standard Specification for Carbon Structural Steel
A575-1996(2020)	Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

F. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc.(MSS):

SP-58-2018	Pipe Hangers and Supports-Materials, Design, Manufacture, Selection, Application, and Installation
SP-127-2014a	Bracing for Piping Systems: Seismic–Wind–Dynamic Design, Selection, and Application

G. Military Specifications (MIL):

MIL-P-21035B-2021	Paint High Zinc Dust Content, Galvanizing Repair (Metric)

H. National Fire Protection Association (NFPA):

70-2020	National Electrical Code (NEC)
101-2021	Life Safety Code

I. Department of Veterans Affairs (VA):

PG-18-10-2020(R2021)	Physical Security and Resiliency Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked “SUBMITTED UNDER SECTION 23 05 11, COMMON WORK RESULTS FOR HVAC”, with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor’s responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor’s responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed contract documents, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together. Coordinate and properly integrate materials and

equipment to provide a completely compatible and efficient installation.

G. Coordination/Shop Drawings:
   1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
   2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8 inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.
   3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
   4. In addition, for HVAC systems, provide details of the following:
      a. Hangers, inserts, supports, and bracing.
      b. Pipe sleeves.
      c. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

H. Manufacturer's Literature and Data Including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity. Submit under the pertinent section rather than under this section.
   1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COR.
   2. Submit electric motor data and variable speed drive data with the driven equipment.
   3. Equipment and materials identification.
   4. Fire-stopping materials.
   5. Hangers, inserts, supports and bracing. Provide complete stress analysis for variable spring and constant support hangers.
   6. Wall, floor, and ceiling plates.

I. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan shall include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC.

B. Products Criteria:
   1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
   2. Refer to all other sections for quality assurance requirements for systems and equipment specified therein.

3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 23 sections shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Use of asbestos products or equipment or materials containing asbestos is prohibited.

C. HVAC Mechanical Systems Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
1. HVAC mechanical systems welding shall meet ASME BPVC Section IX. Provide proof of current certification.
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the associated code.

D. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract documents to the COR for resolution. Provide written hard copies and computer files on CD or DVD of manufacturer’s installation instructions to the COR with submittals prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received and approved by the VA. Failure to furnish these recommendations is a cause for rejection of the material.
2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to, all types of valves, filters and strainers, transmitters, control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to the COR for resolution. Failure of the Contractor to resolve, or point out any issues will result in the Contractor correcting at no additional cost or time to the Government.
3. Complete coordination/shop drawings shall be required in accordance with paragraph SUBMITTALS. Construction work shall not start on any system until the coordination/shop drawings have been approved by VA.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

E. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

F. Guaranty: Warranty of Construction, FAR Clause 52.246-21.

G. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specification section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

H. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:
   1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
   2. Large equipment such as boilers, chillers, cooling towers, fans, and air handling units if shipped on open trailer trucks shall be covered with shrink on plastics or water proof tarpaulins that provide protection from exposure to rain, road salts and other transit hazards. Protection shall be kept in place until equipment is moved into a building or installed as designed.
   3. Repair damaged equipment in first class, new operating condition and appearance; or, replace same as determined and directed by the COR. Such repair or replacement shall be at no additional cost or time to the Government.
   4. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
   5. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
   6. Protect plastic piping and tanks from ultraviolet light (sunlight).

B. Cleanliness of Piping and Equipment Systems:
   1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
   2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
   3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
   4. Boilers shall be left clean following final internal inspection by Government, insurance representative, or inspector.
   5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

PART 2 - PRODUCTS

2.1 FACTORY ASSEMBLED PRODUCTS

A. Provide maximum standardization of components to reduce spare part requirements.

B. Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
   1. All components of an assembled unit need not be products of same manufacturer.
   2. Constituent parts that are alike shall be products of a single manufacturer.
   3. Components shall be compatible with each other and with the total assembly for intended service.
   4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

C. Equipment and components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a nameplate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, shall be the same make and model. Exceptions must be approved by the VA, but may be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.4 GALVANIZED REPAIR COMPOUND

A. Mil-P-21035B, paint form.

2.5 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

B. Supports for Roof Mounted Items:
   1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory-installed 50 by 100 mm (2 by 4 inches) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 279 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
   2. Pipe/Duct Pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.

C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.

D. Attachment to Concrete Building Construction:
   1. Concrete Insert: MSS SP-58, Type 18.
   2. Self-Drilling Expansion Shields and Machine Bolt Expansion Anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
   3. Power-Driven Fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

E. Attachment to Steel Building Construction:
   1. Welded Attachment: MSS SP-58, Type 22.
   2. Beam Clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp shall be used for individual copper tubing up to 22 mm (7/8 inch) outside diameter.

F. //Attachment to Existing Structure: Support from existing floor/roof frame.//

G. Attachment to Wood Construction: Wood screws or lag bolts.

H. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15

turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

I. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 by 41 mm (1-5/8 by 1-5/8 inches), 2.7 mm (12 gauge), designed to accept special spring held, hardened steel nuts. Trapeze hangers are prohibited for use for steam supply and condensate piping.
   1. Allowable Hanger Load: Manufacturers rating less 91 kg (200 pounds).
   2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13 mm (1/2 inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

J. Supports for Piping Systems:
   1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
   2. Piping Systems Except High and Medium Pressure Steam (MSS SP-58):
      a. Standard Clevis Hanger: Type 1; provide locknut.
      b. Riser Clamps: Type 8.
      c. Wall Brackets: Types 31, 32 or 33.
      d. Roller Supports: Type 41, 43, 44 and 46.
      e. Saddle Support: Type 36, 37 or 38.
      f. Turnbuckle: Types 13 or 15. Preinsulate.
      g. U-bolt Clamp: Type 24.
      h. Copper Tube:
         1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non-adhesive isolation tape to prevent electrolysis.
         2) For vertical runs use epoxy painted or plastic-coated riser clamps.
         3) For Supporting Tube to Strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
         4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
      i. Supports for Plastic Piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.

2.6 PIPE PENETRATIONS

A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.

B. To prevent accidental liquid spills from passing to a lower level, provide the following:
   1. For Sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
   2. For Blocked Out Floor Openings: Provide 38 mm (1-1/2 inch) angle set in silicone adhesive around opening.
   3. For Drilled Penetrations: Provide 38 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

C. Penetrations through beams or ribs are prohibited but may be installed in concrete beam flanges. Any deviation from these requirements shall receive prior approval of COR.

D. Sheet Metal, Plastic, or Moisture-Resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

E. Cast-Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.

F. Galvanized Steel or an Alternate Black Iron Pipe with Asphalt Coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.

G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.

H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.

I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.7 DUCT PENETRATIONS

A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 457 mm (18 inches) high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.

B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.8 SPECIAL TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.

D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the COR.

E. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.9 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch pipe), 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.10 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. The coordination/shop drawings shall be submitted for review. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Equipment coordination/shop drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Follow manufacturer's published recommendations for installation methods not otherwise specified.

B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to, all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown in the contract documents.

C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.

D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

E. Cutting Holes:
   1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill is prohibited, except as permitted by COR where working area space is limited.
   2. Locate holes to avoid interference with structural members such as slabs, columns, ribs, beams or reinforcing. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
   3. Do not penetrate membrane waterproofing.

F. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but shall be provided.

G. Protection and Cleaning:
   1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced.
   2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

3.3 RIGGING

A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service requirements as well as structural integrity of the building.

C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.

E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Follow approved rigging plan.

G. Restore building to original condition upon completion of rigging work.

3.4 PIPE AND EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels designed by a structural engineer, secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the COR.

B. Use of chain pipe supports; wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above are prohibited. Replace or thoroughly clean rusty products and paint with zinc primer.

C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 13 mm (1/2 inch) clearance between pipe or piping covering and adjacent work.

D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-58. Provide additional supports at valves, strainers, inline pumps and other heavy components. Provide a support within one foot of each elbow.

E. HVAC Vertical Pipe Supports:
   1. Up to 152 mm (6 inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
   2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.

F. Overhead Supports:
   1. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
   2. Tubing and capillary systems shall be supported in channel troughs.

3.5 MECHANICAL DEMOLITION

A. Rigging access, other than indicated in the contract documents, shall be provided by the Contractor after approval for structural integrity by the COR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Debris accumulated in the area to the detriment of plant operation is prohibited. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VAMC, and Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with contract documents where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the contract documents of the other disciplines in the project for additional facilities to be demolished or handled.

D. All indicated valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these contract documents. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.6 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:
   1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.
   2. The following material and equipment shall not be painted:
      a. Motors, controllers, control switches, and safety switches.
      b. Control and interlock devices.
      c. Regulators.
      d. Pressure reducing valves.
      e. Control valves and thermostatic elements.
      f. Lubrication devices and grease fittings.
      g. Copper, brass, aluminum, stainless-steel and bronze surfaces.
      h. Valve stems and rotating shafts.
      i. Pressure gauges and thermometers.
      j. Glass.
      k. Nameplates.
   3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
   4. Pumps, fans, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump and fan manufacturer.
   5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats. This may include painting exposed metals where hangers were removed or where equipment was moved or removed.
   6. Paint shall withstand the following temperatures without peeling or discoloration:
      a. Condensate and Feedwater: 38 degrees C (100 degrees F) on insulation jacket surface and 121 degrees C (250 degrees F) on metal pipe surface.
      b. Steam: 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (374 degrees F) on metal pipe surface.
   7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.
   8. Lead based paints are prohibited.

3.7 IDENTIFICATION SIGNS

A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16 inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

D. Attach ceiling grid label on ceiling grid location directly underneath above ceiling air terminal, control system component, valve, filter unit, fan etc.

3.8 LUBRICATION

A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. Field-check all devices for proper lubrication.

B. All devices and equipment shall be equipped with required lubrication fittings or devices. A minimum of 0.95 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COR in unopened containers that are properly identified as to application.

C. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

D. All lubrication points shall be extended to one side of the equipment.

END OF SECTION

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section applies to all sections of Division 26.

B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of conductors and cable,and other items and arrangements for the specified items are shown on the drawings.

C. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.

B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

1.3 TEST STANDARDS

A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.

B. Definitions:
   1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
   2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
   3. Certified: Materials and equipment which:
      a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
      b. Are periodically inspected by a NRTL.
      c. Bear a label, tag, or other record of certification.
   4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

A. Manufacturer’s Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.

B. Product Qualification:

1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.

B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

1.6 MANUFACTURED PRODUCTS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.

B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:
1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.

1.7 VARIATIONS FROM CONTRACT REQUIREMENTS

A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 MATERIALS AND EQUIPMENT PROTECTION

A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold, freeze and rain.
1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
3. Damaged equipment shall be repaired or replaced, as determined by the COR.
4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, NFPA 780, OSHA Part 1910 subpart J – General Environmental Controls, OSHA Part 1910 subpart K – Medical and First Aid, and OSHA Part 1910 subpart S – Electrical, in addition to other references required by contract.

B. Job site safety and worker safety is the responsibility of the Contractor.

C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. However, energized electrical work may be performed only for the non-destructive and non-invasive diagnostic testing(s), or when scheduled outage poses an imminent hazard to patient care, safety, or physical security. In such case, all aspects of energized electrical work, such as the availability of appropriate/correct personal protective equipment (PPE) and the use of PPE, shall comply with the latest NFPA 70E, as well as the following requirements:

1. Only Qualified Person(s) shall perform energized electrical work. Supervisor of Qualified Person(s) shall witness the work of its entirety to ensure compliance with safety requirements and approved work plan.
2. At least two weeks before initiating any energized electrical work, the Contractor and the Qualified Person(s) who is designated to perform the work shall visually inspect, verify and confirm that the work area and electrical equipment can safely accommodate the work involved.
3. At least two weeks before initiating any energized electrical work, the Contractor shall develop and submit a job specific work plan, and energized electrical work request to the COR, and Medical Center's Chief Engineer or his/her designee. At the minimum, the work plan must include relevant information such as proposed work schedule, area of work, description of work, name(s) of Supervisor and Qualified Person(s) performing the work, equipment to be used, procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.
4. Energized electrical work shall begin only after the Contractor has obtained written approval of the work plan, and the energized electrical work request from the COR, and Medical Center's Chief Engineer or his/her designee. The Contractor shall make these approved documents present and available at the time and place of energized electrical work.
5. Energized electrical work shall begin only after the Contractor has invited and received acknowledgment from the COR, and Medical Center's Chief Engineer or his/her designee to witness the work.

D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

F. Coordinate location of equipment and conduit with other trades to minimize interference.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Equipment location shall be as close as practical to locations shown on the drawings.

B. Working spaces or working clearances shall comply with NEC's requirements, at a minimum.

C. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards,

transformers, piping, ductwork, conduit and raceways.

1.11 SUBMITTALS

A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.

C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
   1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
   2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
   3. Submit each section separately.

E. The submittals shall include the following:
   1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
   2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion, etc.) associated with equipment or piping so that the proposed installation can be properly reviewed. Include sufficient fabrication information so that appropriate mounting and securing provisions may be designed and attached to the equipment.
   3. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
   4. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.

F. Maintenance and Operation Manuals:
   1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
   2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
   3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
   4. The manuals shall include:
      a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
      b. A control sequence describing start-up, operation, and shutdown.
      c. Description of the function of each principal item of equipment.
      d. Installation instructions.
      e. Safety precautions for operation and maintenance.

f. Diagrams and illustrations.
g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
h. Performance data.
i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.
j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.

H. After approval and prior to installation, furnish the COR with one sample of each of the following:
1. A minimum 300 mm (12 inches) length of each type and size of wire and cable along with the tag from the coils or reels from which the sample was taken. The length of the sample shall be sufficient to show all markings provided by the manufacturer.
2. Each type of conduit coupling, bushing, and termination fitting.
3. Conduit hangers, clamps, and supports.
4. Duct sealing compound.
5. Each type of receptacle, toggle switch, lighting control sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.12 SINGULAR NUMBER

A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.13 ACCEPTANCE CHECKS AND TESTS

A. The Contractor shall furnish the instruments, materials, and labor for tests.

B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the installation, testing, and adjustment of all components between various manufacturer’s representatives and technicians so that a complete, functional, and operational system is delivered to the Government.

C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment, and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

1.14 WARRANTY

A. All work performed and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer for the Government.

1.15 INSTRUCTION

A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.

B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety requirements. Instructors shall be thoroughly familiar with all aspects of the installation, and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.

C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

END OF SECTION

SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
   1. Shop Drawings:
      a. Submit sufficient information to demonstrate compliance with drawings and specifications.
      b. Submit the following data for approval:
         1) Electrical ratings and insulation type for each conductor and cable.
         2) Splicing materials and pulling lubricant.
   2. Certifications: Two weeks prior to final inspection, submit the following.
      a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.
      b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

B. American Society of Testing Material (ASTM):

D2301-10	Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape
D2304-18	Test Method for Thermal Endurance of Rigid Electrical Insulating Materials
D3005-17	Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

C. National Electrical Manufacturers Association (NEMA):

WC 70-21	Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

D. National Fire Protection Association (NFPA):

70-23	National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-18	Thermoset-Insulated Wires and Cables
83-17	Thermoplastic-Insulated Wires and Cables
467-13	Grounding and Bonding Equipment
486A-486B-18	Wire Connectors
486C-18	Splicing Wire Connectors
486D-15	Sealed Wire Connector Systems
486E-15	Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-18	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables
514B-12	Conduit, Tubing, and Cable Fittings

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.

B. Conductors shall be copper.

C. Single Conductor:
1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
2. No. 8 AWG and larger: Stranded.
3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

D. Conductor Color Code:
1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
   a. Solid color insulation or solid color coating.
   b. Stripes, bands, or hash marks of color specified.
   c. Color using 19 mm (0.75 inches) wide tape.
3. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
4. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

5. Lighting circuit “switch legs”, and 3-way and 4-way switch “traveling wires,” shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the /COR.
6. Color code for isolated power system wiring shall be in accordance with the NEC.

2.2 SPLICES

A. Splices shall be in accordance with NEC and UL.

B. Above Ground Splices for No. 10 AWG and Smaller:
   1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper and aluminum conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped conductors.
   3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

C. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

2.3 CONNECTORS AND TERMINATIONS

A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.

B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.

C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be cadmium-plated steel.

2.4 WIRE LUBRICATING COMPOUND

A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

B. Shall not be used on conductors for isolated power systems.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Install conductors in raceway systems.

C. Splice conductors only in outlet boxes, junction boxes, pullboxes, manholes, or handholes.

D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.

E. For conductors installed in vertical raceways, provide conductor support (also known as cable support), to counter gravity pull on conductor weight. Conductor support shall be split-wedge conductor support type. Prior to installing the conductor support plug, remove all pulling compound from conductors where they pass through the conductor support body. After installing the conductor support plug, tap the conductor support plug firmly in the conductor support body.

F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic “zip” ties.

G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.

H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.

I. Conductor Pulling:
   1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
   2. Use nonmetallic pull ropes.
   3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.
   4. All conductors in a single conduit shall be pulled simultaneously.
   5. Do not exceed manufacturer’s recommended maximum pulling tensions and sidewall pressure values.

J. Number of conductors for branch circuits shall not exceed more than three branch circuits in any one conduit.

K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

3.2 SPLICE AND TERMINATION INSTALLATION

A. Splices and terminations shall be mechanically and electrically secure, and tightened to manufacturer’s published torque values using a torque screwdriver or wrench.

B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

3.3 CONDUCTOR IDENTIFICATION

A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where markings are covered by tape, apply tags to conductors, stating size and insulation type.

3.4 FEEDER CONDUCTOR IDENTIFICATION

A. In each interior pullbox and each underground manhole and handhole, install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

3.5 EXISTING CONDUCTORS

A. Unless specifically indicated on the plans, existing conductors shall not be reused.

3.6 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
   1. Visual Inspection and Tests: Inspect physical condition.
   2. Electrical tests:
      a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
      b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
      c. Perform phase rotation test on all three-phase circuits.

END OF SECTION

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.

B. “Grounding electrode system” refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.

C. The terms “connect” and “bond” are used interchangeably in this section and have the same meaning.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
   1. Shop Drawings:
      a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   2. Certifications:
      a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-13	Standard Specification for Hard-Drawn Copper Wire
B3-13(R2018)	Standard Specification for Soft or Annealed Copper Wire
B8-11(R2017)	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-12	IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1:

	Normal Measurements

D. National Fire Protection Association (NFPA):

70-23	National Electrical Code (NEC)
70E-21	National Electrical Safety Code
99-21	Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-18	Thermoset-Insulated Wires and Cables
83-17	Thermoplastic-Insulated Wires and Cables
467-13	Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors.

B. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Equipment Grounding: Raceways, junction boxes, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 RACEWAYS

A. Conduit Systems:
   1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
   2. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and all branch circuits.

C. Boxes:
   1. Bond the equipment grounding conductor to each junction box,through which the conductor passes.
   2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.

END OF SECTION

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.

B. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.

C. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

D. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.

E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

F. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QAULITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
   1. Shop Drawings:
      a. Size and location of main feeders.
      b. Size and location of panels and pull-boxes.
      c. Layout of required conduit penetrations through structural elements.
      d. Submit the following data for approval:
         1) Raceway types and sizes.
         2) Conduit bodies, connectors and fittings.
         3) Junction and pull boxes, types and sizes.
   2. Certifications: Two weeks prior to final inspection, submit the following:
      a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
      b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Iron and Steel Institute (AISI):

S100-16	North American Specification for the Design of Cold-Formed Steel Structural Members

C. National Electrical Manufacturers Association (NEMA):

C80.1-20	Electrical Rigid Steel Conduit
C80.3-20	Steel Electrical Metal Tubing
C80.6-18	Electrical Intermediate Metal Conduit
FB1-14	Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable
FB2.10-21	Selection and Installation Guidelines for Fittings for use with Non-Flexible Conduit or Tubing (Rigid Metal Conduit, Intermediate Metallic Conduit, and Electrical Metallic Tubing)
FB2.20-21	Selection and Installation Guidelines for Fittings for use with Flexible Electrical Conduit and Cable
TC-2-20	Electrical Polyvinyl Chloride (PVC) Tubing and Conduit
TC-3-21	PVC Fittings for Use with Rigid PVC Conduit and Tubing

D. National Fire Protection Association (NFPA):

70-23	National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

1-05	Flexible Metal Conduit
5-16	Surface Metal Raceway and Fittings
6-07	Electrical Rigid Metal Conduit - Steel
50-15	Enclosures for Electrical Equipment
360-13	Liquid-Tight Flexible Steel Conduit
467-13	Grounding and Bonding Equipment
514A-13	Metallic Outlet Boxes
514B-12	Conduit, Tubing, and Cable Fittings
514C-14	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-11	Schedule 40 and 80 Rigid PVC Conduit and Fittings
651A-11	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-07	Electrical Metallic Tubing
1242-14	Electrical Intermediate Metal Conduit - Steel

PART 2 - PRODUCTS

2.1 MATERIAL

A. Conduit Size: In accordance with the NEC, but not less than 13 mm (0.5-inch) unless otherwise shown. Where permitted by the NEC, 13 mm (0.5-inch) flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:
   1. Size: In accordance with the NEC, but not less than 13 mm (0.5-inch).
   2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and NEMA C80.1.
   3. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and NEMA C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.

C. Conduit Fittings:
   1. Rigid Steel and Intermediate Metallic Conduit Fittings:
      a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
      b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
      c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
      d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
      e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
      f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
   2. Electrical Metallic Tubing Fittings:
      a. Fittings and conduit bodies shall meet the requirements of UL 514B, NEMA C80.3, and NEMA FB1.
      b. Only steel or malleable iron materials are acceptable.
      c. Compression Couplings and Connectors: Concrete-tight and rain-tight, with connectors having insulated throats.//
      d. Set Screw Couplings and Connectors: Use setscrews of case-hardened steel with hex head and cup point, to firmly seat in wall of conduit for positive grounding. Connector shall have insulated throat.//
      e. Indent-type connectors or couplings are prohibited.
      f. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

D. Conduit Supports:
   1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.
   2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
   3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
   4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:
   1. Comply with UL-50 and UL-514A.
   2. Rustproof cast metal where required by the NEC or shown on drawings.
   3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.

F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to

match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:
   1. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by theCOR where working space is limited.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. In accordance with NEC, NEMA, UL, as shown on drawings, and as specified herein.

B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.

C. Install conduit as follows:
   1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
   2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
   3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
   4. Cut conduits square, ream, remove burrs, and draw up tight.
   5. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
   6. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
   7. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
   8. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
   9. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
   10. Conduit bodies shall only be used for changes in direction, and shall not contain splices.

D. Conduit Bends:
   1. Make bends with standard conduit bending machines.
   2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
   3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:
   1. Install conduit with wiring, including homeruns, as shown on drawings.
   2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

3.3 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2.4 M (8 feet) intervals.

F. Surface Metal Raceways: Use only where shown on drawings.

G. Painting:
   1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
   2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

3.4 WET OR DAMP LOCATIONS

A. Use rigid steel or IMC conduits unless as shown on drawings.

B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.

C. Use rigid steel or IMC conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer and locknut. Conduits shall be attached to steel channel with conduit clamps.

3.5 CONDUIT SUPPORTS

A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:
   1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
   2. Existing Construction:
      a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
      b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).
      c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

H. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

I. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.6 BOX INSTALLATION

A. Boxes for Concealed Conduits:
   1. Flush-mounted.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90 degree bends are necessary.

C. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

D. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "ELECTRICAL PB No. 1."

E. On all branch circuit junction box covers, identify the circuits with black marker.

END OF SECTION

SECTION 26 56 00
EXTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of exterior fixtures, poles, and supports. The terms “lighting fixtures”, “fixture” and “luminaire” are used interchangeably.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage power and lighting wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits, fittings, and boxes for raceway systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.
   b. Material and construction details, include information on housing and optics system.
   c. Physical dimensions and description.
   d. Wiring schematic and connection diagram.
   e. Installation details.
   f. Energy efficiency data.
   g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.
   h. Fixture lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).
   i. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.
   j. Submit site plan showing all exterior lighting fixtures with fixture tags consistent with Lighting Fixture Schedule as shown on drawings. Site plan shall show computer generated point–by-point illumination calculations. Include lamp lumen and light loss factors used in calculations.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the Contractor that the exterior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American National Standards Institute (ANSI):

H35.1/H35 1M-17	American National Standard Alloy and Temper Designation Systems for Aluminum

C. American Society for Testing and Materials (ASTM):

A123/A123M-17	Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A153/A153M-16	Zinc Coating (Hot-Dip) on Iron and Steel Hardware
B108/B108M-19	Aluminum-Alloy Permanent Mold Castings

D. Illuminating Engineering Society of North America (IESNA):

RP-8-21	
LM-72-20	Directional Positioning of Photometric Data
LM-79-19	Approved Method for the Electrical and Photometric Measurements of Solid-Sate Lighting Products
LM-80-21	Approved Method for Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules
TM-15-20	Luminaire Classification System for Outdoor Luminaires

E. National Fire Protection Association (NFPA):

70-23	National Electrical Code (NEC)
101-21	Life Safety Code

F. Underwriters Laboratories, Inc. (UL):

1598-21	Luminaires
8750-15	Light Emitting Diode (LED) Equipment for Use in Lighting Products

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Luminaires, materials and equipment shall be in accordance with NEC, UL, ANSI, and as shown on the drawings and specified.

B. Basis of design products are indicated on the LIGHTING FIXTURE SCHEDULE included on the Drawings.

2.2 LED DRIVERS

A. LED drivers shall meet the following requirements:
   1. Drivers shall have a minimum efficiency of 85%.

2. Starting Temperature: -40 degrees C (-40 degrees F).
3. Input Voltage: 120 to 480 (±10%) volt.
4. Power Supplies: Class I or II output.
5. Surge Protection: The system must survive 250 repetitive strikes of “C Low” (C Low: 6kV/1.2 x 50 µs, 10kA/8 x 20 µs) waveforms at 1-minute intervals with less than 10% degradation in clamping voltage. “C Low” waveforms are as defined in IEEE/ASNI C62.41.2-2002, Scenario 1 Location Category C.
6. Power Factor (PF): ≥ 0.90.
7. Total Harmonic Distortion (THD): ≤ 20%.
8. Comply with FCC Title 47 CFR Part 18 Non-consumer RFI/EMI Standards.
9. Drivers shall be reduction of hazardous substances (ROHS)-compliant.

2.3 EXISTING LIGHTING SYSTEMS

A. For modifications or additions to existing lighting systems, the new components shall be compatible with the existing systems.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install lighting in accordance with the NEC, as shown on the drawings, and in accordance with manufacturer’s recommendations.

3.2 GROUNDING

A. Ground noncurrent-carrying parts of equipment as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS. Where copper grounding conductor is connected to a metal other than copper, provide specially-treated or lined connectors suitable and listed for this purpose.

3.3 ACCEPTANCE CHECKS AND TESTS

A. Verify operation after installing luminaires and energizing circuits.

END OF SECTION