WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1459

20.14.15.2.9020 (September 2024) ICN: 3819P22115 KeyOp: A01

TGI NO:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CHG/VER:
	CMPT 8-76-0-E	**MS**	**A**	**2**	**1/1**

SHIP/HULL NO:	SHIP/HULL NAME:	PROJECT:	SYSTEM:	PLANT ID:	CASREP CAT:
LCC-19	**USS BLUE RIDGE**	19P	**13011**		

CU PHASE TITLE: *(BIRMIS) F/O - PRESERVE BILGE AREA AND FOUNDATION IN 8-76-0-E

PREPARING ACTIVITY:	STATUS: APP	WORKING STATUS:	
PREPARED BY: MAEDA, MITSUO	CODE: 231B	PHONE: 3152436101	DATE: 22-JAN-2025
APPROVED BY: NAKANO, SEIICHI	CODE: 231B	PHONE: 3152434519	DATE: 22-JAN-2025
CONCURRED BY:	CODE:	PHONE:	DATE:

REASON FOR WORK/NEED FOR CHANGE:
EM02L192

JCN:
EM02-L192

SPECIAL REQUIREMENTS:
TGI Short Form

CU PHASE DESCRIPTION:

1 SCOPE/PURPOSE:

1.1 Title: Bilge Area and Foundation in 8-76-0-E; preserve

1.2 Location of Work:

1.2.1 Fire Room (8-76-0-E)

1.3 Identification:

1.3.1 Quantity (743 SF), Bilge Area including Boiler Foundation in 8-76-0-E, Frame between 75 and 81, Port

Remarks: The area is surface where mechanical tool, roller, and brush can be reachable and the area except chock and fastener.

See Sketch Enclosure-01 for location detail.

1.4 Security Classification: None.

ZONE MANAGER:	ZONE:	COMPARTMENT:	LEVEL:	FRAME:	SIDE:
TAKAHASHI, YASUHIKO		8-76-0-E	8		U

JOB SUMMARY ID:	TOT MAN HR.:	TOT DUR:	TOT JML COST:	PLANNING ACCEPTANCE:
221A1115				

WORK CERTIFICATION SIGNATURES:	DLs													

COMPLETION OF WORK REVIEW:	BADGE NO:	SHOP/CODE:	PHONE:	DATE:
RECORDS REVIEW:	BADGE NO:	SHOP/CODE:	PHONE:	DATE:

TGI NO:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CHG/VER:
	CMPT 8-76-0-E	**MS**	**A**	**2**	**1/1**

SHIP/HULL NO:	SHIP/HULL NAME:	PROJECT:	SYSTEM:	PLANT ID:	CASREP CAT:
LCC-19	**USS BLUE RIDGE**	**19P**	**13011**		

CU PHASE TITLE: *(BIRMIS) F/O - PRESERVE BILGE AREA AND FOUNDATION IN 8-76-0-E

CU PHASE DESCRIPTION (Cont.)

1.5 Initial Condition:

1.5.1 Potential Lead Hazard

1.5.2 Critical Coated Area: CCNY-LCC19-069-25 for the area listed in 1.3.1.

1.6 Contractor Work start date: 7/21/2026

1.7 Contractor Work completion date: 11/21/2027

2 PROCEDURE:

2.1 Pump out, clean, and dry each space located in 1.2.1 to free from oil, debris, and other foreign matter.

2.2 Accomplish the requirements of 009-32 of Ref. No One, including Table 3, Line(s) 13, for each area listed in 1.3.1.

2.3 Notes:

2.3.1 Planner: Code 231B M. Maeda, 243-6101

2.3.2 Work Integration Manager (WIM): Code 333 T. Yaginuma, 080-5419-0598

2.3.3 Provision of oily/chemical water barge will be coordinated by Project Team.

2.3.4 This TGI is response to Boiler Inspection and Repair Management Information System (BIRMIS) for 1B Boiler report dated 17 OCT 2024, Line Item(s) D74C-01, E-01, and E-02.

2.3.5 JCN EM02-L192 is related to this TGI.

2.4 Government Furnished Material (GFM): None.

2.5 SRF-JRMC will provide the following service work: (TGI No. 3819P22115S02)

2.5.1 [C740] Crane and crane rigger service.

2.5.2 [X99E] Utility service, electrical.

2.5.3 [X99M] Utility service, including low pressure air supply, water supply, and steam supply.

2.5.4 [C106.1] Safety inspection for SRF-JRMC employees.

2.5.5 [C106.2] Gas free inspection for SRF-JRMC employees.

2.5.6 [C133] QA inspection for (G) symbol(s) and review coating application data.

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT

WebAIM Short Form TASK GROUP INSTRUCTION

04-MAR-2025 1459

20.14.15.2.9020 (September 2024) (Continued) ICN: 3819P22115 KeyOp: A01

TGI NO:	COMPONENT NAME:	TYPE:	PHASE:	REPEAT:	CHG/VER:
	CMPT 8-76-0-E	**MS**	**A**	**2**	**1/1**

SHIP/HULL NO:	SHIP/HULL NAME:	PROJECT:	SYSTEM:	PLANT ID:	CASREP CAT:
LCC-19	**USS BLUE RIDGE**	**19P**	**13011**		

CU PHASE TITLE: *(BIRMIS) F/O - PRESERVE BILGE AREA AND FOUNDATION IN 8-76-0-E

Ref. No.	Document/Drawing Number	DOCUMENT/DRAWING TITLE	REV	CHG NO.	CPY REQ	PARAGRAPH	SECT	PG	CHPT
1	NSI FY-25	NAVSEA Standard Items	-	ORG	N				
2	LI FY-25	Local Standard Items	-	ORG	N				

TASK NAME / TASK DESCRIPTION	SHOP/ TSD	TS	SF WC	CREW #	MHRS	RWRK
2.1 LBR: HRs	22/KE	PC				N
2.2 PNTR: HRs, SFTR: HRs, QA: HRs	22/KE	PC				N
Preservation Work CFM for all paints, thinners, sampler/analyze for lead, and MISC such as covering material and other consumable	22/MQ	CS				N
Process Funding Document	10/CT	OM				N
Version-01: correct paragraph 2.3.5. C231B S. Nakano, 01/22/2025. -/-/N.	/		V-01			N

MATERIAL REFERENCES

REF NO.	DOCUMENT/DRAWING NUMBER	DOCUMENT/DRAWING TITLE	REV

ICN: 3819P22115	KEY OP: A01

MATERIAL LIST

ITEM NO.	PC NO.	REF NO.	M / C	DESCRIPTION	STOCK NUMBER	GENERIC MATL TYPE	LVL	QA	HAZ MAT	DOC NO.	QTY REQD/ UNIT	QTY USED/ UNIT

ATTACHMENT LIST

TITLE	FILE NAME	SAVED DATE
ENCLOSURE-01	3819P22115A01-Sketch.pdf	21-JAN-2025 0000

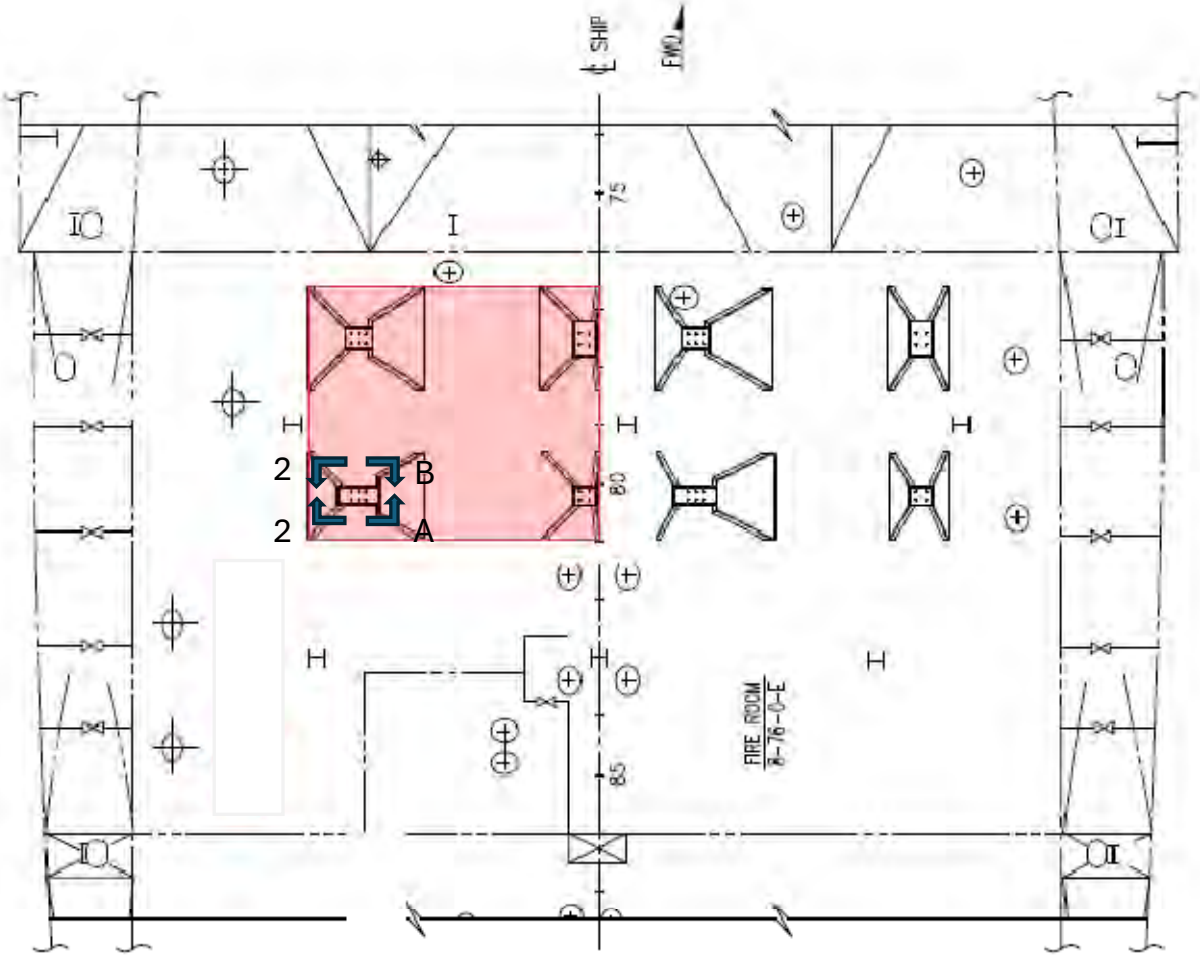

KEY PLAN

INNER BOTTOM

Sketch

Enclosure-01

DET 2-A

CHOCK AND FASTENER

LKG FWD

DET 2-B

CHOCK AND FASTENER

LKG AFT

3819P22115A01

Sketch

Enclosure-01