VA | U.S. Department of Veterans Affairs

Specifications

Buffalo VA Medical Center

3495 Bailey Avenue | Buffalo, NY 14215

Civil Engineer
MJ Engineering, Architecture, Landscape Architecture, and Land Surveying, P.C.
Registration Expires 10.31.2026

Parking Ramp Expansion
Building Number 29

VA Contract No. 36C24222C0022
Station Project No. 528-18-375
Bancroft-AE Project No. 21-113

Issue for Bid

Volume 2 of 2
Divisions 21-34

08-09-2024

BANCROFT ARCHITECTS + ENGINEERS
700 Nicholas Blvd. Suite 300 | Elk Grove Village, IL 60007
847.952.9362 | www.bancroft-ae.com

DIVISION 21

SECTION 21 12 00
MANUAL DRY STANDPIPE SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Design, materials, equipment and installation, inspection and testing of a manual dry standpipe system as required by NFPA 14, 2019 and the VA Fire Protection Design Manual, 8th Edition June 2021.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Section 07 84 00, FIRESTOPPING.

C. Section 09 91 00, PAINTING.

D. Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 DESIGN CRITERIA

A. Design Basis Information: Provide design, materials, equipment, installation, and testing of the manual dry standpipe system in accordance with NFPA 14,.

1. For hydraulic calculations, calculated demand shall not fall less than 10 percent below the water supply curve.
2. Water Supply: Base water supply on a fire pumper truck being able to provide 1000 gpm at 150 psi and 700 gpm at 200 psi at the fire department connection.
3. Size standpipes to provide 100 psi at the most remote connections.

1.4 SUBMITTALS

A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Prepare detailed working drawings that are signed by a NICET Level III or Level IV Sprinkler Technician or stamped by a Registered Professional Engineer licensed in the field of Fire Protection Engineering. As the Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and provide index referencing the appropriate specification section. In addition to the hard copies, provide submittal items in Paragraphs 1.3(C)1 through 1.3(C)5 electronically in pdf format on a

compact disc or as directed by the COR. Submittals shall include, but not be limited to, the following:

1. Qualifications:
   a. Provide a copy of the installing contractors fire sprinkler contractor's license.
   b. Provide a copy of the NICET certification for the NICET Level III or Level IV Sprinkler Technician who prepared and signed the detailed working drawings unless the drawings are stamped by a Registered Professional Engineer licensed in the field of Fire Protection Engineering.
   c. Provide documentation showing that the installer has been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.
2. Drawings: Submit detailed 1:100 (1/8 inch) scale (minimum) working drawings conforming to the Plans and Calculations chapter of NFPA 14. Drawings shall include graphical scales that allow the user to determine lengths when the drawings are reduced in size. Include a plan showing the piping to the water supply test location.
3. Manufacturer's Data Sheets: Provide data sheets for all materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheets describe items in addition to those proposed to be used for the system, clearly identify the proposed items on the sheet.
4. Calculation Sheets: (NOT USED)
5. Valve Charts: Provide a valve chart that identifies the location of each control valve. Coordinate nomenclature and identification of control valves with COR. Where existing nomenclature does not exist, the chart shall include no less than the following: Tag ID No., Valve Size, Service (control valve, main drain, aux. drain, inspectors test valve, etc.), and Location.
6. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. In addition, submittals shall include, but not be limited to, the following:

a. A complete set of as-built drawings showing the installed system with the specific interconnections between the system switches and the fire alarm equipment. Provide a complete set in the formats as follows. Submit items 2 and 3 below on a compact disc or as directed by the COR.
   1) One full size (or size as directed by the COR) printed copy.
   2) One complete set in electronic pdf format.
   3) One complete set in AutoCAD format or a format as directed by the COR.

b. Material and Testing Certificate: Upon completion of the standpipe system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 14. Certificates shall be provided to document all parts of the installation.

c. Operations and Maintenance Manuals that include step-by-step procedures required for system startup, operation, shutdown, and routine maintenance and testing. The manuals shall include the manufacturer's name, model number, parts list, and tools that should be kept in stock by the owner for routine maintenance, including the name of a local supplier, simplified wiring and controls diagrams, troubleshooting guide, and recommended service organization, including address and telephone number, for each item of equipment.

d. One paper copy of the Material and Testing Certificates and the Operations and Maintenance Manuals above shall be provided in a binder. In addition, these materials shall be provided in pdf format on a compact disc or as directed by the COR.

e. Provide one additional copy of the Operations and Maintenance Manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser or as directed by the COR.

1.5 QUALITY ASSURANCE

A. Installer Reliability: The installer shall possess a valid State of fire sprinkler contractor’s license. The installer shall have been

actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.

B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL or approved by FM, or other nationally recognized testing laboratory for the specific purpose for which it is used. All materials, devices, and equipment shall be approved by the VA. All materials and equipment shall be free from defect. All materials and equipment shall be new unless specifically indicated otherwise on the contract drawings.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. National Fire Protection Association (NFPA):
NFPA 14(2024) and 13(2022) Installation of Standpipe and Hose Systems
NFPA 101-15(2024).....Life Safety Code
NFPA 170-15(2024).....Fire Safety Symbols

C. Underwriters Laboratories, Inc. (UL):
Fire Protection Equipment Directory (2022)

D. Factory Mutual Engineering Corporation (FM):
Approval Guide (2023)

PART 2 - PRODUCTS

2.1 PIPING & FITTINGS:

A. Piping and fitting shall be in accordance with NFPA 14. Do not use plain end pipe and fittings with locking lugs or shear bolts.

2.2 VALVES

A. Valves shall be in accordance with NFPA 14.

B. Do not use quarter turn ball valves for 50 mm (2 inches) or larger drain valves.

C. Standpipe Hose Valves: 65 mm (2-1/2 inches) screwed, brass hose angle valve, male hose threads same as local fire protection service, 65 mm (2-1/2 inches) by 40 mm (1-1/2 inches) reducer, with permanently attached polished brass cap and chain.

D. Automatic Ball Drips: Cast brass 20 mm (3/4-inch) in-line automatic ball drip with both ends threaded with iron pipe threads.

2.3 FIRE DEPARTMENT SUPPLY CONNECTION:

A. Brass, flush wall type, exterior fire department connection with brass escutcheon plate, without sill cock, and a minimum of two 65 mm (2-1/2 inches) connections, or a configuration acceptable to the responding fire department. Connections shall be threaded to match those on the local fire protection service, with polished brass caps and chains. Provide escutcheon with integral raised letters “Dry Standpipe System”. Install an automatic ball drip between fire department connection and check valve with drain piping routed to the exterior of the building or a floor drain.

2.4 IDENTIFICATION SIGNS:

A. Rigid plastic, steel or aluminum signs with white lettering on a red background with holes for easy attachment. Standpipe system signage shall be attached to the valve or piping with chain. Signage lettering shall include the zones it supplies

2.5 STANDPIPE HOSE VALVE CABINETS: (NOT USED)

2.7 PIPE SUPPORTS:

A. Pipe hangers, supports, and restraint of system piping shall be in accordance with NFPA 14.

2.8 WALL, FLOOR AND CEILING PLATES:

A. Provide chrome plated steel escutcheon plates.

2.9 VALVE TAGS

Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19 gage, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook, brass chain, or nylon twist tie.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Installation shall be accomplished by the licensed contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.

B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In any situations where bending of the pipe is required, use a standard pipe-bending template. Conceal piping in all spaces which have finished ceilings. In stairways, locate piping as near to the ceiling as possible to prevent tampering by unauthorized personnel and to provide a minimum headroom clearance of 2250 mm (seven feet six inches). Piping shall not obstruct the minimum means of egress clearances required by NFPA 101. Pipe hangers, supports, and restraint of system piping, shall be installed accordance with NFPA 13.

C. Face fire department hose connections in valve cabinets outward in a manner which prevents crimping of the hose.

D. Drains: Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drips and drains where necessary and as required by NFPA 14.

F. Provide escutcheon plates for exposed piping passing through walls, floors or ceilings.

G. Clearances: For systems requiring seismic protection, piping that passes through floors or walls shall have penetrations sized 50 mm (2 inches) nominally larger than the penetrating pipe for pipe sizes 25 mm (1 inch) to 90 mm (3 ½ inches) and 100 mm (4 inches) nominally larger for penetrating pipe sizes 100 mm (4 inches) and larger.

H. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is used in lieu of sleeves, also seal space around penetrations. Seal penetrations of walls, floors and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.

I. Paint all piping Fire Safety Red in accordance with Section 09 91 00 or a color designated by the Contracting Officers Technical Representative (COR).

J. For each fire department supply connection, provide the symbolic sign given in NFPA 170 located 2400 to 3000 mm (8 to 10 feet) above each connection. The sign shall be 450 by 450 mm (18 by 18 inches) with the symbol being at least 350 by 350 mm (14 by 14 inches).

K. Securely attach identification signs to control valves, drain valves, and test valves.

L. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the Contracting Officers Technical Representative (COR). Permission shall be requested in writing at least one (1) week prior to the planned interruption. Any interruption shall be limited to 4 hours for final connections or repairs.

M. Welding: All welding shall conform to the requirements and recommendations of NFPA 14.

3.2 INSPECTION AND TEST:

A. Hydrostatic Testing: Hydrostatically test the system including the fire department connections, as specified in NFPA 14, in the presence of the Contracting Officers Technical Representative (COR) or his designated representative.

B. Final Inspection and Testing: Test the system in accordance with NFPA 14 when all necessary corrections have been accomplished. Advise the Contracting Officers Technical Representative (COR) who will then schedule the final inspection and test. Furnish all instruments, labor and materials required for the tests and provide the services of the installation foreman or other competent representative of the installer to perform the tests. Correct any deficiencies found and retest the system. Include the operation of all features of the systems under normal conditions in the test.

- - - E N D - - -

DIVISION 22

SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section shall apply to all sections of Division 22.

B. Definitions:

1. Exposed: Piping and equipment exposed to view in finished rooms.
2. Exterior: Piping and equipment exposed to weather be it temperature, humidity, precipitation, wind or solar radiation.

C. Abbreviations/Acronyms:

1. ABS: Acrylonitrile Butadiene Styrene
2. AC: Alternating Current
3. ACR: Air Conditioning and Refrigeration
4. A/E: Architect/Engineer
5. AFF: Above Finish Floor
6. AFG: Above Finish Grade
7. AI: Analog Input
8. AISI: American Iron and Steel Institute
9. AO: Analog Output
10. ASHRAE: American Society of Heating Refrigeration, Air Conditioning Engineers
11. ASJ: All Service Jacket
12. ASME: American Society of Mechanical Engineers
13. ASPE: American Society of Plumbing Engineers
14. AWG: American Wire Gauge
15. BACnet: Building Automation and Control Network
16. BAg: Silver-Copper-Zinc Brazing Alloy
17. BAS: Building Automation System
18. BCuP: Silver-Copper-Phosphorus Brazing Alloy
19. bhp: Brake Horsepower
20. Btu: British Thermal Unit
21. Btu/h: British Thermal Unit per Hour
22. BSG: Borosilicate Glass Pipe
23. C: Celsius
24. CA: Compressed Air
25. CD: Compact Disk

26. CDA: Copper Development Association
27. CGA: Compressed Gas Association
28. CFM: Cubic Feet per Minute
29. CI: Cast Iron
30. CLR: Color
31. CO: Contracting Officer
32. COR: Contracting Officer’s Representative
33. CPVC: Chlorinated Polyvinyl Chloride
34. CR: Chloroprene
35. CRS: Corrosion Resistant Steel
36. CWP: Cold Working Pressure
37. CxA: Commissioning Agent
38. dB: Decibels
39. db(A): Decibels (A weighted)
40. DCW: Domestic Cold Water
41. DDC: Direct Digital Control
42. DFU: Drainage Fixture Units
43. DHW: Domestic Hot Water
44. DHWR: Domestic Hot Water Return
45. DHWS: Domestic How Water Supply
46. DI: Digital Input
47. DI: Deionized Water
48. DISS: Diameter Index Safety System
49. DN: Diameter Nominal
50. DO: Digital Output
51. DOE: Department of Energy
52. DVD: Digital Video Disc
53. DWG: Drawing
54. DWH: Domestic Water Heater
55. DWS: Domestic Water Supply
56. DWV: Drainage, Waste and Vent
57. ECC: Engineering Control Center
58. EL: Elevation
59. EMCS: Energy Monitoring and Control System
60. EPA: Environmental Protection Agency
61. EPACT: Energy Policy Act

62. EPDM: Ethylene Propylene Diene Monomer
63. EPT: Ethylene Propylene Terpolymer
64. ETO: Ethylene Oxide
65. F: Fahrenheit
66. FAR: Federal Acquisition Regulations
67. FD: Floor Drain
68. FDC: Fire Department (Hose) Connection
69. FED: Federal
70. FG: Fiberglass
71. FNPT: Female National Pipe Thread
72. FOR: Fuel Oil Return
73. FOS: Fuel Oil Supply
74. FOV: Fuel Oil Vent
75. FPM: Fluoroelastomer Polymer
76. FSK: Foil-Scrim-Kraft Facing
77. FSS: VA Construction & Facilities Management, Facility Standards Service
78. FU: Fixture Units
79. GAL: Gallon
80. GCO: Grade Cleanouts
81. GPD: Gallons per Day
82. GPH: Gallons per Hour
83. GPM: Gallons per Minute
84. HDPE: High Density Polyethylene
85. HEFP: Healthcare Environment and Facilities Program (replacement for OCAMES)
86. HEX: Heat Exchanger
87. Hg: Mercury
88. HOA: Hands-Off-Automatic
89. HP: Horsepower
90. HVE: High Volume Evacuation
91. Hz: Hertz
92. ID: Inside Diameter
93. IE: Invert Elevation
94. INV: Invert
95. IPC: International Plumbing Code

96. IPS: Iron Pipe Size
97. IW: Indirect Waste
98. IWH: Instantaneous Water Heater
99. Kg: Kilogram
100. kPa: Kilopascal
101. KW: Kilowatt
102. KWH: Kilowatt Hour
103. lb: Pound
104. lbs/hr: Pounds per Hour
105. LNG: Liquid Natural Gas
106. L/min: Liters per Minute
107. LOX: Liquid Oxygen
108. L/s: Liters per Second
109. m: Meter
110. MA: Medical Air
111. MAWP: Maximum Allowable Working Pressure
112. MAX: Maximum
113. MBH: 1000 Btu per Hour
114. MED: Medical
115. MER: Mechanical Equipment Room
116. MFG: Manufacturer
117. mg: Milligram
118. mg/L: Milligrams per Liter
119. ml: Milliliter
120. mm: Millimeter
121. MIN: Minimum
122. MV: Medical Vacuum
123. N2: Nitrogen
124. N20: Nitrogen Oxide
125. NC: Normally Closed
126. NF: Oil Free Dry (Nitrogen)
127. NG: Natural Gas
128. NIC: Not in Contract
129. NO: Normally Open
130. NOM: Nominal
131. NPTF: National Pipe Thread Female

132. NPS: Nominal Pipe Size
133. NPT: Nominal Pipe Thread
134. NTS: Not to Scale
135. O2: Oxygen
136. OC: On Center
137. OD: Outside Diameter
138. OSD: Open Sight Drain
139. OS&Y: Outside Stem and Yoke
140. PA: Pascal
141. PBPU: Prefabricated Bedside Patient Units
142. PD: Pressure Drop or Difference
143. PDI: Plumbing and Drainage Institute
144. PH: Power of Hydrogen
145. PID: Proportional-Integral-Differential
146. PLC: Programmable Logic Controllers
147. PP: Polypropylene
148. ppb: Parts per Billion
149. ppm: Parts per Million
150. PSI: Pounds per Square Inch
151. PSIA: Pounds per Square Inch Atmosphere
152. PSIG: Pounds per Square Inch Gauge
153. PTFE: Polytetrafluoroethylene
154. PVC: Polyvinyl Chloride
155. PVDF: Polyvinylidene Fluoride
156. RAD: Radians
157. RO: Reverse Osmosis
158. RPM: Revolutions Per Minute
159. RTD: Resistance Temperature Detectors
160. RTRP: Reinforced Thermosetting Resin Pipe
161. SAN: Sanitary Sewer
162. SCFM: Standard Cubic Feet per Minute
163. SDI: Silt Density Index
164. SMACNA: Sheet Metal and Air Conditioning Contractors National Association
165. SPEC: Specification
166. SPS: Sterile Processing Services

167. SQFT/SF: Square Feet
168. SS: Stainless Steel
169. STD: Standard
170. SUS: Saybolt Universal Second
171. SWP: Steam Working Pressure
172. TD: Temperature Difference
173. TDH: Total Dynamic Head
174. TEFC: Totally Enclosed Fan-Cooled
175. TEMP: Temperature
176. TFE: Tetrafluoroethylene
177. THERM: 100,000 Btu
178. THHN: Thermoplastic High-Heat Resistant Nylon Coated Wire
179. THWN: Thermoplastic Heat & Water Resistant Nylon Coated Wire
180. TIL: Technical Information Library
     http//www.cfm.va.gov/til/indes.asp
181. T/P: Temperature and Pressure
182. TYP: Typical
183. USDA: U.S. Department of Agriculture
184. V: Vent
185. V: Volt
186. VA: Veterans Administration
187. VA CFM: VA Construction & Facilities Management
188. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
189. VAC: Vacuum
190. VAC: Voltage in Alternating Current
191. VAMC: Veterans Administration Medical Center
192. VHA OCAMES: This has been replaced by HEFP.
193. VSD: Variable Speed Drive
194. VTR: Vent through Roof
195. W: Waste
196. WAGD: Waste Anesthesia Gas Disposal
197. WC: Water Closet
198. WG: Water Gauge
199. WOG: Water, Oil, Gas
200. WPD: Water Pressure Drop

201. WSFU: Water Supply Fixture Units

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

D. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

E. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout.

F. Section 05 31 00, STEEL DECKING: Building Components for Attachment of Hangers.

G. Section 05 36 00, COMPOSITE METAL DECKING: Building Components for Attachment of Hangers.

H. Section 05 50 00, METAL FABRICATIONS.

I. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.

J. Section 07 84 00, FIRESTOPPING.

K. Section 07 92 00, JOINT SEALANTS.

L. Section 09 91 00, PAINTING.

M. Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.

N. Section 22 07 11, PLUMBING INSULATION.

O. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

P. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

Q. Section 26 29 11, MOTOR CONTROLLERS.

R. Section 31 20 00, EARTH MOVING: Excavation and Backfill.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):
B31.1-2013.....Power Piping
ASME Boiler and Pressure Vessel Code -
BPVC Section IX-2019.... Welding, Brazing, and Fusing Qualifications

C. American Society for Testing and Materials (ASTM):
A36/A36M-2019.....Standard Specification for Carbon Structural Steel

A575-96(2013)e1.....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

E84-2013a.....Standard Test Method for Surface Burning Characteristics of Building Materials

E119-2012a.....Standard Test Methods for Fire Tests of Building Construction and Materials

D. International Code Council, (ICC):

IBC-2018.....International Building Code

IPC-2018.....International Plumbing Code

E. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:

SP-58-2018.....Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application and Installation

F. Military Specifications (MIL):

P-21035B.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

G. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

H. National Fire Protection Association (NFPA):

51B-2019.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

54-2018.....National Fuel Gas Code

70-2020.....National Electrical Code (NEC)

99-2018.....Healthcare Facilities Code

I. NSF International (NSF):

5-2019.....Water Heaters, Hot Water Supply Boilers, and Heat Recovery Equipment

14-2019.....Plastic Piping System Components and Related Materials

61-2019.....Drinking Water System Components – Health Effects

372-2016.....Drinking Water System Components – Lead Content

J. Department of Veterans Affairs (VA):

PG-18-102014(R18).....Plumbing Design Manual

PG-18-13-2017(R18).....Barrier Free Design Guide

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and

complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient installation. Final review and approvals will be made only by groups.

G. Manufacturer's Literature and Data including: Manufacturer’s literature shall be submitted under the pertinent section rather than under this section.
   1. Electric motor data and variable speed drive data shall be submitted with the driven equipment.
   2. Equipment and materials identification.
   3. Firestopping materials.
   4. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
   5. Wall, floor, and ceiling plates.

H. Coordination/Shop Drawings:
   1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
   2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to 1 foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.
   3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
   4. In addition, for plumbing systems, provide details of the following:
      a. Mechanical equipment rooms.
      b. Hangers, inserts, supports, and bracing.
      c. Pipe sleeves.

d. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

I. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan shall include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

J. Plumbing Maintenance Data and Operating Instructions:

1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
   a. Include complete list indicating all components of the systems.
   b. Include complete diagrams of the internal wiring for each item of equipment.
   c. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.
3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

K. Provide copies of approved plumbing equipment submittals to the TAB Subcontractor.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical, and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional plumbing.

B. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture,

supply and servicing of the specified products for at least 5 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least 5 years.

2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the project): pumps, compressors, water heaters, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Contracting Officers Representative (COR).
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).

6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Asbestos products or equipment or materials containing asbestos is prohibited.
9. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

C. Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME BPVC, Section IX, "Welding and Brazing Qualifications". Provide proof of current certification to CO.
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the association code.

D. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

E. Execution (Installation, Construction) Quality:

1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract documents shall be referred to the COR for resolution. Printed copies or electronic files of manufacturer’s installation instructions shall be provided to the COR at least 10 working days prior to commencing installation of any item.
2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing on permanent platforms, without the use of portable ladders. Examples of these items include but are not limited to: all types of valves, filters and strainers, transmitters, and control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to COR for resolution. Failure of the Contractor to resolve or call attention to any discrepancies or deficiencies to the COR will result in the Contractor correcting at no additional cost or time to the Government.
3. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved by VA.
4. Installer Qualifications: Installer shall be licensed and shall provide evidence of the successful completion of at least five projects of equal or greater size and complexity. Provide tradesmen skilled in the appropriate trade.
5. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

F. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

G. Guaranty: Warranty of Construction, FAR clause 52.246-21.

H. Plumbing Systems: IPC, International Plumbing Code. Unless otherwise required herein, perform plumbing work in accordance with the latest

version of the IPC. For IPC codes referenced in the contract documents, advisory provisions shall be considered mandatory, the word "should" shall be interpreted as "shall". Reference to the "code official" or "owner" shall be interpreted to mean the COR.

I. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC). All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the COR. Such replacement shall be at no additional cost or additional time to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
5. Protect plastic piping and tanks from ultraviolet light (sunlight) while in pre-construction. Plastic piping and tanks shall not be

installed exposed to sunlight without metal jacketing to block ultraviolet rays.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVDinserted into a three—ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

1. Red-lined, hand-marked drawings are to be provided, with one paper copy and a scanned PDF version of the hand-marked drawings provided on CD or DVD.
2. As-built drawings are to be provided, with a copy of them on AutoCAD version 13 / provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.
3. As-built drawings are to be provided, with a copy of them in three-dimensional Building Information Modeling (BIM) software version 2022 provided on CD or DVD.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics_), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.8 JOB CONDITIONS – WORK IN EXISTING BUILDING

A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities that serve the VAMC.

B. Maintenance of Service: Schedule all work to permit continuous service as required by the VAMC.

C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COR during periods when the demands are not critical to the operation of the VAMC. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least 10 working days advance notice to the COR. The request shall include a detailed plan on the proposed shutdown and the intended work to be done along with manpower levels. All equipment and materials must be onsite and verified with plan 5 calendarwork days prior to the shutdown or it will need to be rescheduled.

D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. Storm water or ground water leakage is prohibited. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA. Maintain all egress routes and safety systems/devices.

E. Acceptance of Work for Government Operation: As new equipment, systems and facilities are made available for operation and these items are deemed of beneficial use to the Government, inspections and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

F. Temporary Facilities: Refer to Paragraph, TEMPORARY PIPING AND EQUIPMENT in this section.

PART 2 - PRODUCTS

2.1 MATERIALS FOR VARIOUS SERVICES

A. Steel pipe shall contain a minimum of 25 percent recycled content.

B. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption and shall be certified in accordance with NSF 61 or NSF 372.

C. In-line devices such as water meters, building valves, check valves, stops, valves, fittings, tanks and backflow preventers shall comply with NSF 61 and NSF 372.

D. End point devices such as drinking fountains, lavatory faucets, kitchen and bar faucets, ice makers supply stops, and end-point control valves used to dispense drinking water must meet requirements of NSF 61 and NSF 372.

2.2 FACTORY-ASSEMBLED PRODUCTS

A. Standardization of components shall be maximized to reduce spare part requirements.

B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
   1. All components of an assembled unit need not be products of same manufacturer.
   2. Constituent parts that are alike shall be products of a single manufacturer.
   3. Components shall be compatible with each other and with the total assembly for intended service.
   4. Contractor shall guarantee performance of assemblies of components and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly at no additional cost or time to the Government.

C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, shall be the same make and model.

2.3 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.4 SAFETY GUARDS

A. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gauge sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 8 mm (1/4 inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.

B. B. All Equipment shall have moving parts protected from personal injury.

2.5 LIFTING ATTACHMENTS

A. Equipment shall be provided with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered,

without bending or distortion of shape, such as rapid lowering and braking of load.

2.6 ELECTRIC MOTORS, MOTOR CONTROL, CONTROL WIRING

A. All material and equipment furnished and installation methods used shall conform to the requirements of Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT; Section 26 29 11, MOTOR CONTROLLERS; and, Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. All electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems shall be provided. Premium efficient motors shall be provided. Unless otherwise specified for a particular application, electric motors shall have the following requirements.

B. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 at no additional cost or time to the Government.
2. Assemblies of motors, starters, and controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
   a. Wiring material located where temperatures can exceed 71° C (160° F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers and water heaters.
   b. Other wiring at boilers and water heaters, and to control panels, shall be NFPA 70 designation THWN.
   c. Shielded conductors or wiring in separate conduits for all instrumentation and control systems shall be provided where recommended by manufacturer of equipment.
4. Motor sizes shall be selected so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated “inverter-ready” per NEMA Standard, MG1.

C. Motor Efficiency and Power Factor: All motors, when specified as "high efficiency or Premium Efficiency" by the project specifications on driven equipment, shall conform to efficiency and power factor requirements in Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT, with no consideration of annual service hours. Motor manufacturers generally define these efficiency requirements as "NEMA premium efficient" and the requirements generally exceed those of the Energy Policy Act (EPACT), revised 2005. Motors not specified as "high efficiency or premium efficient" shall comply with EPACT.

D. Single-phase Motors: Capacitor-start type for hard starting applications. Motors for centrifugal pumps may be split phase or permanent split capacitor (PSC).

E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type. Each two-speed motor shall have two separate windings. A time delay (20 seconds minimum) relay shall be provided for switching from high to low speed.

F. Rating: Rating shall be continuous duty at 100 percent capacity in an ambient temperature of 40° C (104° F); minimum horsepower as shown on drawings; maximum horsepower in normal operation shall not exceed nameplate rating without service factor.

G. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame shall be measured at the time of final inspection.

2.7 VARIABLE SPEED MOTOR CONTROLLERS

A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, MOTOR CONTROLLERS for specifications.

B. The combination of controller and motor shall be provided by the respective pump manufacturer and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. pumps, shall be product of a single manufacturer.

C. Motors shall be premium efficient type, "invertor duty", and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor sheaves shall be fixed pitch.

D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical

equipment, etc., nor shall be affected from other devices on the AC power system.

2.8 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown in the drawings, or shown in the maintenance manuals. Coordinate equipment and valve identification with local VAMC shops. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.

B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 7 mm (3/16 inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING shall be permanently fastened to the equipment. Unit components such as water heaters, tanks, coils, filters, etc. shall be identified.

C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 7 mm (3/16 inch) high riveted or bolted to the equipment.

D. Control Items: All temperature, pressure, and controllers shall be labeled and the component’s function identified. Identify and label each item as they appear on the control diagrams.

E. Valve Tags and Lists:

1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
2. Valve tags: Engraved black filled numbers and letters not less than 15 mm (1/2 inch) high for number designation, and not less than 8 mm (1/4 inch) for service designation on 19 gauge, 40 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic-coated valve list card(s), sized 215 mm (8-1/2 inches) by 275 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. An additional copy of the valve list

shall be mounted in picture frames for mounting to a wall. COR shall instruct Contractor where frames shall be mounted.

4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided in the 3-ring binder notebook. Each valve location shall be identified with a color-coded sticker or thumb tack in ceiling or access door.

2.9 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 22 07 11, PLUMBING INSULATION, for pipe insulation.

2.10 GALVANIZED REPAIR COMPOUND

A. Mil. Spec. DOD-P-21035B, paint.

2.11 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC) Submittals based on the International Building Code (IBC) requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in the state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the COR in all cases. See the above specifications for lateral force design requirements.

B. Type Numbers Specified: For materials, design, manufacture, selection, application, and installation refer to MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.

C. For Attachment to Concrete Construction:

1. Concrete insert: Type 18, MSS SP-58.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

D. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

E. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 43 mm by 43 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gauge), designed to accept special spring held, hardened steel nuts.

1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 8 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2 inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.

F. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 22 07 11, PLUMBING INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.

1. General Types (MSS SP-58):
   a. Standard clevis hanger: Type 1; provide locknut.
   b. Riser clamps: Type 8.
   c. Wall brackets: Types 31, 32 or 33.
   d. Roller supports: Type 41, 43, 44 and 46.
   e. Saddle support: Type 36, 37 or 38.
   f. Turnbuckle: Types 13 or 15.
   g. U-bolt clamp: Type 24.
   h. Copper Tube:
      1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, copper-coated, plastic coated or taped with isolation tape to prevent electrolysis.

2) For vertical runs use epoxy painted, copper-coated or plastic coated riser clamps.
3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.

i. Spring hangers are required on all plumbing system pumps one horsepower and greater.

2. Plumbing Piping (Other Than General Types):
   a. Horizontal piping: Type 1, 5, 7, 9, and 10.
   b. Chrome plated piping: Chrome plated supports.
   c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action, to hold piping, prevent vibration and compensate for all static and operational conditions.
   d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gauge) minimum.

G. Pre-insulated Calcium Silicate Shields:
1. Provide 360-degree water resistant high density 965 kPa (140 psig) compressive strength calcium silicate shields encased in galvanized metal.
2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
   a. Shields for supporting cold water shall have insulation that extends a minimum of 25 mm (1 inch) past the sheet metal.
   b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS SP-58. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psig) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36/A36M) wear plates welded to the bottom sheet metal jacket.

5. Shields may be used on steel clevis hanger type supports, trapeze hangers, roller supports or flat surfaces.

2.12 PIPE PENETRATIONS

A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.

B. Pipe penetration sleeve materials shall comply with all firestopping requirements for each penetration.

C. To prevent accidental liquid spills from passing to a lower level, provide the following:
   1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
   2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
   3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

D. Penetrations are prohibited through beams or ribs, but may be installed in concrete beam flanges, with structural engineer prior approval. Any deviation from these requirements must receive prior approval of COR.

E. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

F. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.

G. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel sleeve shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.

H. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve shall be connected with a floor plate.

I. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with firestopping material and sealant to prevent the spread of fire, smoke, water and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

K. Pipe passing through roof shall be installed through a 4.9 kg per square meter copper flashing with an integral skirt or flange. Skirt or flange shall extend not less than 200 mm (8 inches) from the pipe and set in a solid coating of bituminous cement. Extend flashing a minimum of 250 mm (10 inches) up the pipe. Pipe passing through a waterproofing membrane shall be provided with a clamping flange. The annular space between the sleeve and pipe shall be sealed watertight.

2.13 TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the COR.

D. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application. Bio-based materials shall be utilized when possible.

2.14 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 75 mm (3 inch) pipe, 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

PART 3 - ASBESTOS (NOT USED)EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review.

B. Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.

C. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance, testing and operation of all devices including, but not limited to: all equipment items, valves, backflow preventers, filters, strainers, transmitters, sensors, meters and control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown in the drawings shall not be changed nor reduced.

D. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.

E. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

F. Cutting Holes:

1. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.

2. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
3. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by COR where working area space is limited.

G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other services are not shown but must be provided.

H. Protection and Cleaning:
1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced at no additional cost or time to the Government.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, shall be used for all pad or floor mounted equipment.

J. Gauges, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gauges shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

K. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control

devices, control and instrumentation panels, alarms, instruments and computer workstations. Comply with NFPA 70.

L. Domestic cold and hot water systems interface with the HVAC control system for the temperature, pressure and flow monitoring requirements to mitigate legionella. See the HVAC control points list and Section 23 09 23, DIRECT DIGITAL CONTROL SYSTEM FOR HVAC and Section 23 09 24, WATER QUALITY MONITORING.

M. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will cause the least interfere with normal operation of the facility.

N. Work in Animal Research Areas: Seal all pipe penetrations with silicone sealant to prevent entrance of insects.

O. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers’ putty.

P. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above data equipment, and electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Drain valve shall be provided in low point of casement pipe.

Q. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or additional time to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.

B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of paragraph 3.1 shall apply.

C. Temporary facilities and piping shall be completely removed back to the nearest active distribution branch or main pipe line and any openings in structures sealed. Dead legs are prohibited in potable water systems. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

A. Openings in building structures shall be planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.

C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.

E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Rigging plan and methods shall be referred to COR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the COR.

B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.

C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work shall be provided.

D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC) and these specifications.

E. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

F. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.

3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

3.5 LUBRICATION

A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. All devices and equipment shall be field checked for proper lubrication.

B. All devices and equipment shall be equipped with required lubrication fittings. A minimum of 1 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided. All materials shall be delivered to COR in unopened containers that are properly identified as to application.

C. A separate grease gun with attachments for applicable fittings shall be provided for each type of grease applied.

D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

E. All lubrication points shall be extended to one side of the equipment.

3.6 PLUMBING SYSTEMS DEMOLITION

A. Rigging access, other than indicated in the drawings, shall be provided after approval for structural integrity by the COR. Such access shall be provided at no additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire

safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards including NFPA 51B. Inspections will be made by personnel of the VAMC, and the Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

D. All valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate. Coordinate with the COR and Infection Control.

3.7 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces

to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.

2. The following Material and Equipment shall NOT be painted:
   a. Motors, controllers, control switches, and safety switches.
   b. Control and interlock devices.
   c. Regulators.
   d. Pressure reducing valves.
   e. Control valves and thermostatic elements.
   f. Lubrication devices and grease fittings.
   g. Copper, brass, aluminum, stainless steel and bronze surfaces.
   h. Valve stems and rotating shafts.
   i. Pressure gauges and thermometers.
   j. Glass.
   k. Name plates.
3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint type and color obtained from manufacturer or computer matched.
4. Pumps, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats per Section 09 91 00, Painting.
6. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be repainted, if necessary, to achieve this. Lead based paints shall not be used.

3.8 IDENTIFICATION SIGNS

A. Laminated plastic signs, with engraved lettering not less than 7 mm (3/16 inch) high, shall be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, and performance data shall be placed on factory-built equipment.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.9 STARTUP AND TEMPORARY OPERATION

A. Startup of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.

C. When completion of certain work or systems occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings during the first actual seasonal use of the respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

3.11 OPERATION AND MAINTENANCE MANUALS

A. All new and temporary equipment and all elements of each assembly shall be included.

B. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.

C. Manufacturer’s installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.

D. Lubrication instructions, type and quantity of lubricant shall be included.

E. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.

F. Set points of all interlock devices shall be listed.

G. Trouble-shooting guide for the control system troubleshooting shall be inserted into the Operations and Maintenance Manual.

H. The control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.

I. Emergency procedures for shutdown and startup of equipment and systems.

3.12 COMMISSIONING (NOT USED)

3.13 DEMONSTRATION AND TRAINING (NOT USED)

- - - E N D - - -

SECTION 22 05 12
GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the general motor requirements for plumbing equipment and applies to all sections of Division 22.

B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

F. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

G. Section 26 24 19, MOTOR-CONTROL CENTERS: Motor Control Centers.

H. Section 26 29 11, MOTOR CONTROLLERS: Starters, control and protection of motors.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and VHA standard will govern.

B. American Bearing Manufacturers Association (ABMA):

ABMA 9-2015.....Load Ratings and Fatigue Life for Ball Bearings

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

112-2017.....IEEE Standard Test Procedure for Polyphase Induction Motors and Generators

841-2018.....IEEE Standard for Petroleum and Chemical Industry-Premium-Efficiency, Severe-Duty, Totally Enclosed Fan-Cooled (TEFC) Squirrel Cage Induction Motors--Up to and Including 370 kW (500 HP)

D. International Code Council (ICC):

IPC-2018.....International Plumbing Code

E. National Electrical Manufacturers Association (NEMA):

MG 1-2016.....Motors and Generators

MG 2-2014.....Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators

250-2018.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

70-2020.....National Electrical Code (NEC)

1.4 **SUBMITTALS**

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT", with applicable paragraph identification.

C. Submit motor submittals with drive equipment.

D. Shop Drawings:

1. Provide documentation to demonstrate compliance with contract documents.
2. Motor nameplate information shall be submitted including electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
3. Motor parameters required for the determination of the Reed Critical Frequency of vertical hollow shaft motors shall be submitted.

E. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts and troubleshooting guide:
   1. Include complete list indicating all components of the systems.
   2. Include complete diagrams of the internal wiring for each item of equipment.
   3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

G. Certification: Two weeks prior to final inspection, unless otherwise noted, the following certification shall be submitted to the Contracting Officer's Representative (COR).
   1. Certification shall be submitted stating that the motors have been properly applied, installed, adjusted, lubricated, and tested.

1.5 **QUALITY ASSURANCE**

A. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

B. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

1.6 **AS-BUILT DOCUMENTATION**

A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS

2.1 **MOTORS**

A. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, MOTOR CONTROLLERS; and Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors.

Unless otherwise specified for a particular application, use electric motors with the following requirements.

B. For alternating current, fractional and integral horsepower motors, NEMA MG 1 and NEMA MG 2 shall apply.

C. For severe duty totally enclosed motors, IEEE 841 shall apply. For severe duty totally enclosed motors, IEEE 841 shall apply.

D. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.

E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.

1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.

F. Voltage ratings shall be as follows:

1. Single phase:
   a. Motors connected to 120-volt systems: 115 volts.
   b. Motors connected to 208-volt systems: 200 volts.
   c. Motors connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
2. Three phase:
   a. Motors connected to 208-volt systems: 200 volts.
   b. Motors, less than 74.6 kW (100 HP), connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
   c. Motors, 74.6 kW (100 HP) or greater, connected to 240-volt systems: 230 volts.
   d. Motors, 74.6 kW (100 HP) or greater, connected to 480-volt systems: 460 volts.
   e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA MG 1 for connection to the nominal system voltage shown in the drawings.

G. Number of phases shall be as follows:

1. Motors, less than 373 W (1/2 HP): Single phase.
2. Motors, 373 W (1/2 HP) and greater: 3 phase.
3. Exceptions:
   a. Hermetically sealed motors.

b. Motors for equipment assemblies, less than 746 W (1 HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.

H. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.

I. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting, acceleration and running torque without exceeding nameplate ratings or considering service factor.

J. Motor Enclosures:

1. Shall be the NEMA types as specified and/or shown in the Contract Documents.
2. Where the types of motor enclosures are not shown in the drawings, they shall be the NEMA types per NEMA 250, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
   a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
   b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
   c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

K. Electrical Design Requirements:

1. Motors shall be continuous duty.
2. The insulation system shall be rated minimum of Class B, 130 degrees C (266 degrees F).
3. The maximum temperature rise by resistance at rated power shall not exceed Class B limits, 80 degrees C (144 degrees F).

4. The speed/torque and speed/current characteristics shall comply with NEMA Design A or B, as specified.
5. Motors shall be suitable for full voltage starting, unless otherwise noted. Coordinate motor features with applicable motor controllers.
6. Motors for variable frequency drive applications shall adhere to NEMA MG 1, Part 30, Application Considerations for Constant Speed Motors Used on a Sinusoidal Bus with Harmonic Content and General Purpose Motors Used with Adjustable Voltage or Adjustable Frequency Controls, or both, or NEMA MG 1, Part 31, Definite Purpose Inverter Fed Polyphase Motors.

L. Mechanical Design Requirements:

1. Bearings shall be rated for a minimum fatigue life of 26,280 hours for belt-driven loads and 100,000 hours for direct-drive loads based on L10 (Basic Rating Life) at full load direct coupled, except vertical high thrust motors which require a 40,000 hour rating. A minimum fatigue life of 40,000 hours is required for VFD drives.
2. Vertical motors shall be capable of withstanding a momentary up thrust of at least 30 percent of normal down thrust.
3. Grease lubricated bearings shall be designed for electric motor use. Grease shall be capable of the temperatures associated with electric motors and shall be compatible with Polyurea based greases.
4. Grease fittings, if provided, shall be Alemite type or equivalent.
5. Oil lubricated bearings, when specified, shall have an externally visible sight glass to view oil level.
6. Vibration shall not exceed 3.8 mm (0.15 inch) per second, unfiltered peak.
7. Noise level shall meet the requirements of the application.
8. Motors on 180 frames and larger shall have provisions for lifting eyes or lugs capable of a safety factor of 5.
9. All external fasteners shall be corrosion resistant.
10. Condensation heaters, when specified, shall keep motor windings at least 5 degrees C (9 degrees F) above ambient temperature.

11. Winding thermostats, when specified shall be normally closed, connected in series.
12. Grounding provisions shall be in the main terminal box.

M. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional cost or time to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
   a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
   b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
   c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated “inverter-duty” per NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

N. Additional requirements for specific motors, as indicated in other sections, shall also apply.

O. NEMA Premium Efficiency Electric Motors, Motor Efficiencies: All permanently wired polyphase motors of 746 W (1 HP) or greater shall meet the minimum full-load efficiencies as indicated in the

following table, and as specified in this specification. Motors of 746 W (1 HP) or greater with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Efficiencies Open Drip-Proof				Minimum Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

P. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM. Power factor correction capacitors shall be provided unless the motor meets the 0.9 requirement without it or if the motor is controlled by a variable frequency drive. The power factor correction capacitors shall be able to withstand high voltage transients and power line variations without breakdown.

Q. Energy Efficiency of Small Motors (Motor Efficiencies): All motors under 746 W (1 hp) shall meet the requirements of the DOE Small Motor Regulation.

Polyphase Open Motors Average full load efficiency				**Capacitor-start capacitor-run and capacitor-start induction run open motors Average full load efficiency**			
Rating kW (hp)	**6 poles**	**4 poles**	**2 poles**	**Rating kW (hp)**	**6 poles**	**4 poles**	**2 poles**
0.18 (0.25)	67.5	69.5	65.6	0.18 (0.25)	62.2	68.5	66.6
0.25 (0.33)	71.4	73.4	69.5	0.25 (0.33)	66.6	72.4	70.5
0.37 (0.5)	75.3	78.2	73.4	0.37 (0.5)	76.2	76.2	72.4
0.55 (0.75)	81.7	81.1	76.8	0.55 (0.75)	80.2	81.8	76.2

PART 3 - EXECUTION

3.1 **INSTALLATION**

A. Install motors in accordance with manufacturer’s recommendations, the NEC, NEMA, as shown in the drawings and/or as required by other sections of these specifications.

B. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 **FIELD TESTS**

A. All tests shall be witnessed by the CxA or by the COR.

B. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before startup. All shall test free from grounds.

C. Perform Load test in accordance with IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.

D. Insulation Resistance: Not less than 1/2 meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

E. All test data shall be complied into a report form for each motor and provided to the contracting officer or their representative.

3.3 **STARTUP AND TESTING (NOT USED)**

3.4 **COMMISSIONING (NOT USED)**

3.5 **DEMONSTRATION AND TRAINING (NOT USED)**

- - - E N D - - -

SECTION 22 05 23
GENERAL-DUTY VALVES FOR PLUMBING PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the requirements for general-duty valves for domestic water and sewer systems.

B. A complete listing of common acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. American Society of Mechanical Engineers (ASME):

A112.14.1-2003.....Backwater Valves

C. American Society of Sanitary Engineering (ASSE):

1001-2017.....Performance Requirements for Atmospheric Type Vacuum Breakers

1003-2009.....Performance Requirements for Water Pressure Reducing Valves for Domestic Water Distribution Systems

1011-2017.....Performance Requirements for Hose Connection Vacuum Breakers

1013-2011.....Performance Requirements for Reduced Pressure Principle Backflow Preventers and Reduced Pressure Principle Fire Protection Backflow Preventers

1015-2011.....Performance Requirements for Double Check Backflow Prevention Assemblies and Double Check Fire Protection Backflow Prevention Assemblies

1017-2009.....Performance Requirements for Temperature Actuated Mixing Valves for Hot Water Distribution Systems

1020-2004.....Performance Requirements for Pressure Vacuum Breaker Assembly

1035-2008.....Performance Requirements for Laboratory Faucet Backflow Preventers

1069-2005.....Performance Requirements for Automatic Temperature Control Mixing Valves

1070-2015.....Performance Requirements for Water Temperature Limiting Devices

1071-2012.....Performance Requirements for Temperature Actuated Mixing Valves for Plumbed Emergency Equipment

D. American Society for Testing and Materials (ASTM):

A126-2004(R2019).....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

A276/A276M-2017.....Standard Specification for Stainless Steel Bars and Shapes

A536-1984(R2019e).....Standard Specification for Ductile Iron Castings

B62-2017.....Standard Specification for Composition Bronze or Ounce Metal Castings

B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

E. International Code Council (ICC):

IPC-2018.....International Plumbing Code

F. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):

SP-25-2018.....Standard Marking Systems for Valves, Fittings, Flanges and Unions

SP-67-2017.....Butterfly Valves

SP-70-2011.....Gray Iron Gate Valves, Flanged and Threaded Ends

SP-71-2018.....Gray Iron Swing Check Valves, Flanged and Threaded Ends

SP-80-2019.....Bronze Gate, Globe, Angle, and Check Valves

SP-85-2011.....Gray Iron Globe & Angle Valves, Flanged and Threaded Ends

SP-110-2010.....Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

G. National Environmental Balancing Bureau (NEBB):

8th Edition 2015 Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems

H. NSF International (NSF):

61-2019.....Drinking Water System Components – Health Effects

372-2016.....Drinking Water System Components – Lead Content

I. University of Southern California Foundation for Cross Connection Control and Hydraulic Research (USC FCCCHR):

10th Edition.....Manual of Cross-Connection Control

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Ball Valves.
2. Gate Valves.
3. Butterfly Valves.
4. Balancing Valves.
5. Check Valves.
6. Globe Valves.
7. Water Pressure Reducing Valves and Connections.
8. Backwater Valves.
9. Backflow Preventers.
10. Chainwheels.
11. Thermostatic Mixing Valves.

D. Test and Balance reports for balancing valves.

E. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replaceable parts and troubleshooting guide:
   1. Include complete list indicating all components of the systems.
   2. Include complete diagrams of the internal wiring for each item of equipment.
   3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.
   4. Piping diagrams of thermostatic mixing valves to be installed.

1.5 DELIVERY, STORAGE, AND HANDLING

A. Valves shall be prepared for shipping as follows:
   1. Protect internal parts against rust and corrosion.
   2. Protect threads, flange faces, grooves, and weld ends.
   3. Set angle, gate, and globe valves closed to prevent rattling.
   4. Set ball and plug valves open to minimize exposure of functional surfaces.
   5. Set butterfly valves closed or slightly open.
   6. Block check valves in either closed or open position.

B. Valves shall be prepared for storage as follows:
   1. Maintain valve end protection.
   2. Store valves indoors and maintain at higher than ambient dew point temperature.

C. A sling shall be used for large valves. The sling shall be rigged to avoid damage to exposed parts. Hand wheels or stems shall not be used as lifting or rigging points.

1.6 AS BUILT DOCUMENTATION

A. Comply with requirements in Paragraph “AS-BUILT DOCUMENTATION” of Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

PART 2 - PRODUCTS

2.1 VALVES, GENERAL

A. Asbestos packing and gaskets are prohibited.

B. Bronze valves shall be made with dezincification resistant materials. Bronze valves made with copper alloy (brass) containing greater than 15 percent zinc shall not be permitted.

C. Valves in insulated piping shall have 50 mm or DN50 (2 inch) stem extensions and extended handles of non-thermal conductive material that

allows operating the valve without breaking the vapor seal or disturbing the insulation. Memory stops shall be fully adjustable after insulation is applied.

D. Exposed Valves over 65 mm or DN65 (2-1/2 inches) installed at an elevation over 3.6 m (12 feet) shall have a chain-wheel attachment to valve hand-wheel, stem, or other actuator.

E. All valves used to supply potable water shall meet the requirements of NSF 61 and NSF 372.

F. Bio-Based Materials: For products designated by the USDA's bio-based Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

G. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

2.2 SHUT-OFF VALVES

A. Cold, Hot and Re-circulating Hot Water:

1. 50 mm or DN50 (2 inches) and smaller: Ball, MSS SP-110, Ball valve shall be full port three piece or two piece with a union design with adjustable stem package. Threaded stem designs are not allowed. The ball valve shall have a SWP rating of 1035 kPa (150 psig) and a CWP rating of 4138 kPa (600 psig). The body material shall be Bronze ASTM B584, Alloy C844. The ends shall be non-lead solder.
2. Less than 100 mm DN100 (4 inches): Butterfly shall have an iron body with EPDM seal and aluminum bronze disc. The butterfly valve shall meet MSS SP-67, type I standard. The butterfly valve shall have a SWP rating of 1380 kPa (200 psig). The valve design shall be lug type suitable for bidirectional dead-end service at rated pressure. The body material shall meet ASTM A536, ductile iron.
3. 100 mm DN100 (4 inches) and greater:
   a. Class 125, OS&Y, Cast Iron Gate Valve. The gate valve shall meet MSS SP-70 type I standard. The gate valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall meet ASTM A126, grey iron with bolted bonnet, flanged ends, bronze trim, and positive-seal resilient solid wedge disc. The gate valve shall be

gear operated for sizes under 200 mm or DN200 (8 inches) and crank operated for sizes 200 mm or DN200 (8 inches) and greater.

b. Single flange, ductile iron butterfly valves: The single flanged butterfly valve shall meet the MSS SP-67 standard. The butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The butterfly valve shall be lug type, suitable for bidirectional dead-end service at rated pressure without use of downstream flange. The body material shall comply with ASTM A536 ductile iron. The seat shall be EPDM with stainless steel disc and stem.

c. Grooved end, ductile iron butterfly valves. The grooved butterfly valve shall meet the MSS SP-67 standard. The grooved butterfly valve shall have a CWP rating of 1380 kPa (200 psig). The valve materials shall be epoxy coated ductile iron conforming to ASTM A536 with two-piece stainless-steel stem, Buna-Nencapsulated ductile iron disc, and EPDM seal. The butterfly valve shall be gear operated.

B. Reagent Grade Water: Valves for reagent grade, reverse osmosis, or deionized water service shall be ball type of same material as used for pipe.

2.3 MANUAL BALANCING VALVES (NOT USED)

2.4 THERMOSTATIC BALANCING VALVES (NOT USED)

2.5 CHECK VALVES

A. 75 mm or DN75 (3 inches) and smaller shall be Class 125, bronze swing check valves with non-metallic disc suitable for type of service. The check valve shall meet MSS SP-80 Type 4 standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a Y pattern horizontal body design with bronze body material conforming to ASTM B62, solder joints, and PTFE or TFE disc.

B. 100 mm or DN100 (4 inches) and greater:

1. Check valves shall be Class 125, iron swing check valve with lever and weight closure control. The check valve shall meet MSS SP-71 Type I standard. The check valve shall have a CWP rating of 1380 kPa (200 psig). The check valve shall have a clear or full waterway body design with gray iron body material conforming to ASTM A126, bolted bonnet, flanged ends, bronze trim.

2. All check valves on the discharge side of submersible sump pumps shall have factory installed exterior level and weight with sufficient weight to prevent the check valve from hammering against the seat when the sump pump stops.

2.6 GLOBE VALVES

A. 75 mm or DN75 (3 inches) or smaller: Class 150, bronze globe valve with non-metallic disc. The globe valve shall meet MSS SP-80, Type 2 standard. The globe valve shall have a CWP rating of 2070 kPa (300 psig). The valve material shall be bronze with integral seal and union ring bonnet conforming to ASTM B62 with solder ends, copper-silicon bronze stem, PTFE or TFE disc, and malleable iron hand wheel.

B. Greater than 75 mm or DN75 (3 inches): Similar to above, except with cast iron body and bronze trim, Class 125, iron globe valve. The globe valve shall meet MSS SP-85, Type 1 standard. The globe valve shall have a CWP rating of 1380 kPa (200 psig). The valve material shall be gray iron with bolted bonnet conforming to ASTM A126 with flanged ends, bronze trim, and malleable iron handwheel.

2.7 WATER PRESSURE REDUCING VALVE AND CONNECTIONS (NOT USED)

2.8 BACKWATER VALVE (NOT USED)

2.9 BACKFLOW PREVENTERS (NOT USED)

2.10 CHAINWHEELS (NOT USED)

2.11 THERMOSTATIC MIXING VALVES (NOT USED)

PART 3 - EXECUTION

3.1 EXAMINATION

A. Valve interior shall be examined for cleanliness, freedom from foreign matter, and corrosion. Special packing materials shall be removed, such as blocks, used to prevent disc movement during shipping and handling.

B. Valves shall be operated in positions from fully open to fully closed. Guides and seats shall be examined and made accessible by such operations.

C. Threads on valve and mating pipe shall be examined for form and cleanliness.

D. Mating flange faces shall be examined for conditions that might cause leakage. Bolting shall be checked for proper size, length, and material. Gaskets shall be verified for proper size and that its

material composition is suitable for service and free from defects and damage.

E. Do not attempt to repair defective valves; replace with new valves.

3.2 INSTALLATION

A. Install valves with unions or flanges at each piece of equipment arranged to allow service, maintenance, and equipment removal without system shutdown.

B. Valves shall be located for easy access and shall be provide with separate support. Valves shall be accessible with access doors when installed inside partitions or above hard ceilings.

C. Valves shall be installed in horizontal piping with stem at or above center of pipe.

D. Valves shall be installed in a position to allow full stem movement.

E. Check valves shall be installed for proper direction of flow and as follows:

1. Swing Check Valves: In horizontal position with hinge pin level and on top of valve.

F. Install backflow preventers in each water supply to mechanical equipment and systems and to other equipment and water systems that shall be sources of contamination. Comply with authorities having jurisdiction. Locate backflow preventers in same room as connected equipment or system.

1. Install drain for backflow preventers with atmospheric-vent drain connection with air-gap fitting, fixed air-gap fitting, or equivalent positive pipe separation of at least two pipe diameters in drain piping and pipe to floor drain. Locate air-gap device attached to or under backflow preventer. Simple air breaks are prohibited for this application.

G. Install pressure gauges on outlet of backflow preventers.

H. Do not install bypass piping around backflow preventers.

I. Install temperature-actuated water mixing valves with check stops or shutoff valves on inlets.

1. Install thermometers if specified.
2. Install cabinet-type units recessed in or surface mounted on wall as specified.

J. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

K. Install thermostatic balancing valves with inlet strainer and inlet and outlet isolation valves.

3.3 LABELING AND IDENTIFYING

A. Equipment Nameplates and Signs: Install engraved plastic-laminate equipment nameplate or sign on or near each of the following:

1. Calibrated balancing valves.
2. Master, thermostatic, water mixing valves.
3. Manifold, thermostatic, water-mixing-valve assemblies.

B. Distinguish among multiple units, inform operator of operational requirements, indicate safety and emergency precautions, and warn of hazards and improper operations, in addition to identifying unit.

3.4 ADJUSTING

A. Valve packing shall be adjusted or replaced after piping systems have been tested and put into service but before final adjusting and balancing. Valves shall be replaced if persistent leaking occurs.

B. Set field-adjustable flow set points of balancing valves and record data. Ensure recorded data represents actual measured or observed conditions. Permanently mark settings of valves and other adjustment devices allowing settings to be restored. Set and lock memory stops. After adjustment, take measurements to verify balance has not been disrupted or that such disruption has been rectified.

C. Set field-adjustable temperature set points of temperature-actuated water mixing valves.

D. Testing and adjusting of balancing valves shall be performed by an independent NEBB Accredited Test and Balance Contractor. A final settings and flow report shall be submitted to the VA Contracting Officer’s Representative (COR).

3.5 STARTUP AND TESTING (NOT USED)

3.6 COMMISSIONING (NOT USED)

3.7 DEMONSTRATION AND TRAINING (NOT USED)

- - E N D - - -

SECTION 22 14 00
FACILITY STORM DRAINAGE

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section describes the requirements for storm drainage systems, including piping and all necessary accessories as designated in this section.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

E. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.

F. Section 07 92 00, JOINT SEALANTS.

G. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.

I. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.

J. Section 22 05 33, HEAT TRACING FOR PLUMBING PIPING.

K. Section 22 07 11, PLUMBING INSULATION.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Mechanical Engineers (ASME):

A112.6.4-2003 (R2012) ..Roof, Deck, and Balcony Drains
A13.1-2007 (R2013).....Scheme for Identification of Piping Systems
B1.20.1-2013.....Pipe Threads, General Purpose, Inch
B16.3-2011.....Malleable Iron Threaded Fittings: Classes 150 and 300
B16.9-2012.....Factory-Made Wrought Buttwelding Fittings
B16.11-2011.....Forged Fittings, Socket-Welding and Threaded
B16.12-2009 (R2014).....Cast Iron Threaded Drainage Fittings
B16.15-2013.....Cast Copper Alloy Threaded Fittings: Classes 125 and 250

B16.18-2012.....Cast Copper Alloy Solder-Joint Pressure Fittings

B16.22-2013.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings

B16.23-2011.....Cast Copper Alloy Solder Joint Drainage Fittings - DWV

B16.29-2012.....Wrought Copper and Wrought Copper Alloy Solder-Joint Drainage Fittings – DWV

C. American Society of Sanitary Engineering (ASSE)

1079-2012.....Performance Requirements for Dielectric Pipe Unions

D. American Society for Testing and Materials (ASTM):

A47/A47M-1999 (R2014)...Standard Specification for Ferritic Malleable Iron Castings

A53/A53M-2012.....Standard Specification for Pipe, Steel, Black And Hot-Dipped, Zinc-coated Welded and Seamless

A74-2013a.....Standard Specification for Cast Iron Soil Pipe and Fittings

A183-2014.....Standard Specification for Carbon Steel Track Bolts and Nuts

A312/A312M-2015.....Standard Specification for Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes

A536-1984(R2014).....Standard Specification for Ductile Iron Castings

A733-2013.....Standard Specification for Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples

A888-2013a.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

B32-2008 (R2014).....Standard Specification for Solder Metal

B61-2008 (R2013).....Standard Specification for Steam or Valve Bronze Castings

B62-2009.....Standard Specification for Composition Bronze or Ounce Metal Castings

B75/B75M-2011.....Standard Specification for Seamless Copper Tube

B88-2014.....Standard Specification for Seamless Copper Water Tube

B306-2013.....Standard Specification for Copper Drainage Tube (DWV)

B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

B687-1999 (R2011).....Standard Specification for Brass, Copper, and Chromium-Plated Pipe Nipples

B828-2002 (R2010).....Standard Practice for Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings

B813-2010.....Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube

C564-2014.....Standard Specification for Rubber Gaskets for Cast Iron Soil Pipe and Fittings

C1173-2010 (R2014).....Standard Specification for Flexible Transition Couplings for Underground Piping Systems

D1785-2012.....Standard Specification for Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80 and 120

D2000-2012.....Standard Classification System for Rubber Products in Automotive Applications

D2321-2014e1.....Standard Practice for Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2564-2012.....Standard Specification for Solvent Cements for Poly (Vinyl Chloride) (PVC) Plastic Piping Systems

D2665-2014.....Standard Specification for Poly (Vinyl Chloride) (PVC) Plastic Drain, Waste, and Vent Pipe and Fittings

D2855-1996 (R2010).....Standard Practice for Making Solvent-Cemented Joints with Poly (Vinyl Chloride) (PVC) Pipe and Fittings

D4101-2014.....Standard Specification for Polypropylene Injection and Extrusion Materials

D5926-2011.....Standard for Poly (Vinyl Chloride) (PVC) Gaskets for Drain, Waste, and Vent (DWV), Sewer, Sanitary, and Storm Plumbing Systems

F477-2014.....Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe

F656-2010.....Standard Specification for Primers for Use in Solvent Cement Joints of Poly (Vinyl Chloride) (PVC) Plastic Pipe and Fittings

F1545-2015.....Standard Specification for Plastic-Lined Ferrous Metal Pipe, Fittings, and Flanges

E. American Welding Society (AWS):

A5.8M/A5.8 AMD1-2011....Specification for Filler Metals for Brazing and Braze Welding

F. Copper Development Association (CDA):

A4015-2011.....Copper Tube Handbook

G. Cast Iron Soil Pipe Institute (CISPI):

301-2012.....Standard Specification for Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

310-2012.....Standard Specification for Coupling for Use in Connection with Hubless Cast Iron Soil Pipe and Fittings for Sanitary and Storm Drain, Waste, and Vent Piping Applications

H. International Code Council (ICC):

IPC-2012.....International Plumbing Code

I. Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS):

SP-72-2010a.....Ball Valves with Flanged or Butt-Welding Ends for General Service

SP-110-2010.....Ball Valves Threaded, Socket-Welding, Solder Joint, Grooved and Flared Ends

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 14 00, FACILITY STORM DRAINAGE", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

1. Pipe and Fittings.
2. Specialty Pipe Fittings.
3. Cleanouts.
4. Roof Drains.
5. Expansion Joints.
6. Downspout Nozzles.
7. Sleeve Flashing Devices.

D. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation

shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CAD version __13__ provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 STORM WATER DRAIN PIPING

A. Cast Iron Storm Pipe and Fittings:

1. Cast iron storm pipe and fittings shall be used for the following applications:
   a. Pipe buried in or in contact with earth.
   b. Extension of pipe to a distance of approximately 1500 mm (5 feet) outside of building walls.
   c. Interior storm piping above grade.
   d. All mechanical equipment rooms or other areas containing mechanical air handling equipment.
2. The cast iron storm pipe shall be bell and spigot, or hubless (plain end or no-hub) as required by selected jointing method.

3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI 301, ASTM A888, or ASTM A74.
4. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM C564.

2.2 PUMPED DRAIN PIPING

A. Pumped drain piping 75 mm (3 inches) and less shall be copper tube conforming to ASTM B88, type K or L. For pumped drain piping 100 mm (4 inches) and greater, galvanized steel conforming to ASTM A53/A53M, seamless, schedule 40 may be used.

B. Pumped drain pipe fittings shall comply with the following:
   1. Wrought copper or bronze castings for use with copper tube conforming to ASME B16.18 and B16.22.
   2. Unions, for use with copper tube up to 50 mm (2 inches) shall be cast with bronze, conforming to ASME B16.18 and ASTM B584 with solder or braze joints.
   3. Grooved fittings, for use with copper tube 65 mm to 100 mm (2-1/2 to 4 inch) shall be wrought copper conforming to ASTM B75/B75M, alloy C12200, 125 to 150 mm (5 to 6 inch) bronze castings conforming to ASTM B584.
   4. Mechanical grooved couplings shall have a ductile iron housing conforming to ASTM A536 (Grade 65-45-12) elastomer gasket suitable for potable water service and process temperature and steel track head bolts conforming to ASTM A183, housing shall be coated with colored alkyd enamel paint.

C. Adapters shall be provided for joining pipe with different end connections.

D. The solder shall be lead free using a water flushable, non-corrosive flux conforming to ASTM B32.

E. Dielectric fittings and specialties shall be provided when joining pipe of dissimilar metals.

2.3 SPECIALTY PIPE FITTINGS

A. Transition pipe couplings shall join piping with small differences in outside diameters or be of different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be unshielded, elastomeric, sleeve type reducing or transition pattern conforming with ASTM C1173 and include shear ring and corrosion resistant metal tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:
   1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
   2. For PVC soil pipes, the sleeve material shall be elastomeric seal conforming to ASTM F477 or PVC conforming to ASTM D5926.
   3. dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.

B. Dielectric fittings shall conform to ASSE 1079 with a pressure rating of 1035 kPa (150 psigat a minimum temperature of 82 degrees C (180 degrees F). The end connection shall be solder joint copper alloy and threaded ferrous.

C. Dielectric flanges shall conform to ASSE 1079 with a pressure rating of 1035 kPa (150 psig. The flange shall be a factory fabricated, bolted, companion flange assembly. The end connection shall be threaded or solder-joint copper alloy and threaded ferrous.

D. Dielectric flange insulating kits shall be of non-conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.

E. Dielectric nipples shall be electroplated steel and shall conform with ASTM F1545 with a pressure ratings of 2070 kPa (300 psig) at 107 degrees C (225 degrees F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene. Bio-based materials shall be utilized when possible.

2.4 CLEANOUTS

A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. A minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged storm sewer line.

B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside caulk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts shall be provided where indicated on the drawings and at each building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty.

C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel bronze square frame and stainless steel cover with minimum opening of 150 mm by 150 mm (6 inch by 6 inch) shall be provided at each wall cleanout.

D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/no hub cast iron ferrule. Plain end (no-hub) piping in interstitial space or above ceiling may use plain end (no-hub) blind plug and clamp.

2.5 ROOF DRAINS AND CONNECTIONS

A. Roof Drains: Roof Drains (RD) shall be cast iron with clamping device for making watertight connection and shall conform with ASME A112.6.4. Free openings through strainer shall be twice area of drain outlet. For

roof drains not installed in connection with a waterproof membrane, a soft copper membrane shall be provided 300 mm (12 inches) in diameter greater than outside diameter of drain collar. An integral gravel stop shall be provided for drains installed on roofs having built up roofing covered with gravel or slag. Integral no-hub, soil pipe gasket or threaded outlet connection shall be provided.

1. Flat Roofs: The roof drain shall have a beehive or dome shaped strainer with integral flange not less than 300 mm (12 inches) in diameter. For an insulated roof, a roof drain with an adjustable drainage collar shall be provided, which can be raised or lowered to meet required insulation heights, sump receiver and deck clamp. The bottom section shall serve as roof drain during construction before insulation is installed.
2. Canopy Roofs: The roof drain shall have a beehive or dome shaped strainer with the integral flange no greater than 200 mm (8 inches) in diameter. For an insulated roof, the roof drain shall be provided with an adjustable drainage collar, which can be raised or lowered to meet the required insulation heights, sump receiver and deck clamp. Bottom section shall serve as roof drain during construction before insulation is installed.
3. Promenade Decks: the roof drain shall be the same as for canopy roofs, except decks shall have flat, round, loose, non-slip, bronze grate set in square, non-slip, bronze frame.
4. Portico Roofs and Gutters: Roof drains shall be horizontal angle type drain with flat bottom and horizontal outlet at the same elevation as the pipe to which it is connected. Strainer shall be removable angle grate type.
5. Protective Roof Membrane Insulation Assembly: The roof drain shall have a perforated stainless steel extension filter, non-puncturing clamp ring, large sump with extra wide roof flange and deck clamp.
   a. Non pedestrian Roofs: The roof drain shall have large polypropylene or aluminum locking dome.
   b. Pedestrian Roof: The roof drain shall have a bronze promenade top 356 mm (14 inches) square, set in square secured frame support collar.

6. Roof Drains, Overflow or Secondary (Emergency): Roof Drains identified as overflow or secondary (emergency) drains shall have a 50 mm (2 inch) water dam integral to the drain body.
7. Roof drains in areas subject to freezing shall have heat tape and shall be insulated.

B. Expansion Joints: Expansions joints shall be heavy cast iron with cast brass or PVC expansion sleeve having smooth bearing surface working freely against a packing ring held in place and under pressure of a bolted gland ring, forming a water and air tight flexible joint. Asbestos packing is prohibited.

C. Interior Downspouts: An expansion joint shall be provided, specified above, at top of run on straight, vertical runs of downspout piping 12 m (40 feet) long or greater.

D. Downspout Nozzle: The downspout nozzle fitting shall be of brass, unfinished, with internal pipe thread for connection to downspout.

2.6 WATERPROOFING

A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting that will extend through the floor slab. A waterproofed caulked joint shall be provided at the top hub.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

A. The pipe installation shall comply with the requirements of the IPC and these specifications.

B. Branch piping shall be installed from the piping system and connect to all drains and outlets.

C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, except for glass, shall be reamed to remove burrs and a clean smooth finish restored to full pipe inside diameter.

D. All pipe runs shall be laid out to avoid interference with other work/trades.

E. The piping shall be installed above accessible ceilings to allow for ceiling panel removal.

F. Unless otherwise stated on the documents, minimum horizontal slope shall be one inch for every 2.44 m (8 feet) (1 percent slope) of pipe length.

G. The piping shall be installed free of sags and bends.

H. Seismic restraint shall be installed where required by code.

I. Changes in direction for storm drainage piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep ¼ bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and 1/8 bend fittings shall be used if two drains are installed back to back or side by side with common drain pipe. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.

J. Buried storm drainage piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer’s written instruction for use of lubricants, cements, and other installation requirements. Bio-based materials shall be utilized when possible.

K. Cast iron piping shall be installed according to CISPI’s “Cast Iron Soil Pipe and Fittings Handbook,” Chapter IV, “Installation of Cast Iron Soil Pipe and Fittings”

L. Aboveground copper tubing shall be installed according to CDA A4015.

3.2 JOINT CONSTRUCTION

A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI’s “Cast Iron Soil Pipe and Fittings Handbook” for compression joints.

B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI’s “Cast Iron Soil Pipe and Fittings Handbook” for lead and oakum calked joints.

C. Hubless, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.

D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:

1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service
2. Pipe sections with damaged threads shall be replaced with new undamaged sections of pipe at no additional time or cost to Government.

E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.

3.3 SPECIALTY PIPE FITTINGS

A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.

B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES

A. All piping shall be supported according to the IPC, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications.

B. Hangers, supports, rods, inserts and accessories used for Pipe supports shall be shop coated with zinc Chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.

C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.

D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:

1. NPS 1-1/2 to NPS 2 (DN 40 to DN 50): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
2. NPS 3 (DN 80): 1500 mm (60 inches) with 15 mm (1/2 inch) rod.

3. NPS 4 to NPS 5 (DN 100 to DN 125): 1500 mm (60 inches) with 18 mm (5/8 inch) rod.
4. NPS 6 to NPS 8 (DN 150 to DN 200): 1500 mm (60 inches) with 20 mm (3/4 inch) rod.
5. NPS 10 to NPS 12 (DN 250 to DN 300): 1500 mm (60 inches) with 23 mm (7/8 inch) rod.

E. The maximum support spacing for horizontal plastic shall be 1.22 m (4 feet).

F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.6 m (15 feet).

G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, floor, wall and ceiling plates shall have the following characteristics:
   1. Solid or split unplated cast iron.
   2. All plates shall be provided with set screws.
   3. Height adjustable clevis type pipe hangers.
   4. Adjustable Floor Rests and Base Flanges shall be steel.
   5. Hanger Rods shall be low carbon steel, fully threaded or threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
   6. Riser Clamps shall be malleable iron or steel.
   7. Roller shall be cast iron.
   8. Hangers and supports utilized with insulated pipe and tubing shall have 180 degree (minimum) metal protection shield centered on and welded to the hanger and support. The shield shall be 100 mm (4 inches) in length and be 1.6 mm (16 gage) steel. The shield shall be sized for the insulation.

H. Miscellaneous materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6.1 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.

I. Cast escutcheon with set screw shall be installed at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.

J. Penetrations:

1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
2. Water proofing: At floor penetrations, Clearances around the pipe shall be completely sealed and made watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS. Bio-based materials shall be utilized when possible.

3.5 INSULATION (NOT USED)

3.6 TESTS

A. Storm sewer system shall be tested either in its entirety or in sections.

B. Storm Water Drain tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.

1. If entire system is tested with water, tightly close all openings in pipes except the highest opening, and fill system with water to point of overflow. If system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
2. For an air test, an air pressure of 34 kPa (5 psig) gage shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gage shall be used for the test.
3. Final Tests: While either one of the following tests may be used, Contractor shall check with VA as to which test will be performed.
   a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with

smoke under pressure of 0.25 kPa (1 inch of water) with a smoke machine. **Chemical smoke is prohibited.**

b. Peppermint Test: Introduce .06 liters (2 ounces) of peppermint into each line or stack.

C. COR shall witness all tests. Contractor shall coordinate schedules with the COR and CxA. Contractor shall provide a minimum of 10 working days prior to flushing, disinfection/sterilization, startup, and testing.

3.7 COMMISSIONING (NOT USED)

3.8 DEMONSTRATION AND TRAINING (NOT USED)

- - - E N D - - -

SECTION 22 14 29
SUMP PUMPS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Sump pumps. See schedule on Drawings for pump capacity and head.

B. A complete listing of all acronyms and abbreviations are included in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

F. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

G. Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.

H. Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING

J. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standard Institute (ANSI)/Hydraulic Institute (HI):

1.1-1.2-2014.....Rotodynamic Centrifugal Pumps for Nomenclature and Definitions

1.3-2013.....Rotodynamic Centrifugal Pumps for Design and Application

1.4-2014.....Rotodynamic Centrifugal Pumps for Manuals Describing Installation, Operation, and Maintenance

C. ASTM International (ASTM):

A48/A48M-2003 (R2012)...Standard Specification for Gray Iron Castings

A532/A532M-2010 (R2014).Standard Specification for Abrasion-Resistant Cast Irons

B584-2014.....Standard Specification for Copper Alloy Sand Castings for General Applications

D. National Electrical Manufacturers Association (NEMA):

ICS 6-1993 (R2001, R2006) Industrial Control and Systems: Enclosures

250-2014.....Enclosures for Electrical Equipment (1000 Volts Maximum)

E. Underwriters' Laboratories, Inc. (UL):
508-1999 (R2013).....Standards for Industrial Control Equipment

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 14 29, SUMP PUMPS", with applicable paragraph identification.

C. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
   1. Pump:
      a. Manufacturer and model.
      b. Operating speed (rpm).
      c. Capacity.
      d. Characteristic performance curves.
   2. Electric Motor:
      a. Manufacturer, frame and type.
      b. Speed.
      c. Current Characteristics and W (HP).
      d. Efficiency.
   3. Control panel.
   4. Sensors.

D. Certified copies of all the factory and construction site test data sheets and reports.

E. Complete operating and maintenance manuals including wiring diagrams, technical data sheets and information for ordering replacement parts:
   1. Include complete list which indicates all components of the system.
   2. Include complete diagrams of the internal wiring for each item of equipment.
   3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance, and troubleshooting.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

1.6 AS-BUILT DOCUMENTATION

A. Submit manufacturer's literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, substitutions and construction revisions shall be in electronic version on compact disc or DVD inserted into a three ring binder. All aspects of system operation and maintenance procedures, including piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices such as damper and door closure interlocks shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. As-built drawings are to be provided, and a copy of them in Auto-CADD version __13__provided on compact disk or DVD. Should the installing contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement.

D. Certification documentation shall be provided to COR 10 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures

followed for all tests, and a certification that all results of tests were within limits specified.

PART 2 - PRODUCTS

2.1 SUMP PUMP

A. Centrifugal, vertical, submersible pump and motor, designed for maximum water service. Driver shall be electric motor. Support shall be rigid type. Provide perforated, suction strainer. Systems may include one, two, or more pumps with alternator as required by Contract Documents. Pumpshall be capable of continuous duty cycle.
   1. Pump housings may be cast iron, bronze, aluminum or stainless steel. Cast iron and aluminum housings for submersible pumps shall be epoxy coated. Bio-based materials shall be utilized when possible.

B. Impeller: Statically and dynamically balanced, keyed and secured to shaft, cast iron ASTM A532/A532M.

C. Shaft: Stainless steel or other approved corrosion-resisting metal.

D. Bearings: As required to hold shaft alignment, anti-friction type for thrust permanently lubricated. Bio-based materials shall be utilized when possible.

E. Seal: Mechanical.

F. Motor: Maximum 40 degrees C (104 degrees F) ambient temperature rise above the maximum fluid temperature being pumped , drip-proof hermitically sealed, lifting eye, capacitor start type, voltage and phase as shown in schedule on Electrical drawings conforming to NEMA. Size the motor capacity to operate pump without overloading the motor at any point on the pump curve. Refer to Section 22 05 12, GENERAL MOTOR REQUIREMENTS FOR PLUMBING EQUIPMENT.

G. Starting Switch: Manually-operated, tumbler type, as specified in Section 26 29 11, MOTOR CONTROLLERS.

H. Automatic Control and Level Alarm: Furnish a control panel in a NEMA 1 enclosure for indoors or in a NEMA 4X enclosure for outdoors. The controls shall be suitable for operation with the electrical characteristics listed on the Electrical drawings. The control panel shall have a level control system with switches to start and stop pumps automatically, and to activate a high water alarm. The level control system shall include sensors in the sump that detect the level of the liquid. The pump is also connected to a control which has the ability

to prevent oil from being pumped. The same unit shall activate an alarm when oil is detected. The sensors may be float type switches, ultrasonic level sensors, or transducers. The high water alarm shall have a red beacon light at the control panel and a buzzer, horn, or bell. The alarm shall have a silencing switch. Provide auxiliary contacts for remote communication with, and alarm monitoring to, the BAS using a BACnet compatible open-protocol type interface to DDC Controls System.

1. The circuitry of the control panel shall include:
   a. Power switch to turn on/off the automatic control mechanism
   b. HOA switches to manually override automatic control mechanism
   c. Run lights to indicate when pumps are powered up
   d. Level status lights to indicate when water in sump has reached the predetermined on/off and alarm levels
   e. Magnetic motor contactors
   f. Disconnect/breaker for each pump
   g. Automatic motor overload protection
   h. Wiring terminal block
   i. Dead front
   j. Auxiliary contacts
   k. Control circuit protection
   l. Fused control step down transformer
2. Sensors that detect the level of water in the sump shall be so arranged as to allow the accumulation of enough volume of liquid below the normal on-level that the pump will run for a minimum cycle time as recommended by the pump manufacturer. Sensors shall be located to activate the alarm adequately before the water level rises to the inlet pipe.
3. Provide two separate power supplies to the control panel, one for the control/alarm circuitry and one for power to the pump motors. Each power supply is to be fed from its own breaker so that if a pump overload trips a breaker, the alarm system shall still function. Each power supply is to be wired in its own conduit.
4. Wiring from the sump to the control panel shall have separate conduits for the pump power and for the sensor switches. All conduits are to be sealed at the basin and at the control panel to

prevent the intrusion of moisture and of flammable and/or corrosive gases.

I. Sump: Furnish fiberglass basin with gas tight covers. Cover shall have 275 mm by 381 mm (11 inch by 15 inch) manhole with bolted cover, vent connection, openings for pumps and controls. Sump shall be sized to allow an adequate volume of water to accumulate for a minimum one minute cycle of pump operation.

J. Provide a check and ball valve in the discharge of each pump. Refer to Section 22 05 23, GENERAL-DUTY VALVES FOR PLUMBING PIPING.

K. Removal/Disconnect System: In a system utilizing a submersible pump, where sump depth, pump size, or other conditions make removal of the pump unusually difficult or unsafe, a manufacturer’s removal/disconnect system shall be provided. The system shall consist of a discharge fitting mounted on vertical guide rails attached to the sump or quick connect pipe fitting connection to piping. The pump shall be fitted with an adapter fitting that easily connects to/disconnects from the discharge fitting as the pump is raised from or lowered into the sump. The discharge piping shall connect to the discharge fitting so that it is disconnected without workers entering the pit. Where the sump depth is greater than five feet or other conditions exist to make the removal of the pump difficult or hazardous, the system shall include a rail guided quick disconnect apparatus to allow the pump to be pulled up out of the sump.

PART 3 - EXECUTION

3.1 STARTUP AND TESTING

A. Pump installation to comply with ANSI/HI 1.4 for sump pumps.

B. Leak Test: Charge piping system and test for leaks. Test until there are no leaks. Make tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

C. The tests shall include system capacity and all control and alarm functions.

D. When any defects are detected, correct defects and repeat test.

E. The CxA will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the COR and CxA. Contractor shall provide a minimum of 10 working days prior to startup and testing.

3.2 COMMISSIONING (NOT USED)

3.3 DEMONSTRATION AND TRAINING (NOT USED)

- - - E N D - - -

DIVISION 23

HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. Definitions:

1. Exposed: equipment exposed to view in finished rooms.

C. Abbreviations/Acronyms:

1. ac: Alternating Current
2. AC: Air Conditioning
3. ACU: Air Conditioning Unit
4. AI: Analog Input
5. AISI: American Iron and Steel Institute
6. AO: Analog Output
7. AWG: American Wire Gauge
8. BACnet: Building Automation and Control Networking Protocol
9. BAg: Silver-Copper-Zinc Brazing Alloy
10. BAS: Building Automation System
11. BCuP: Silver-Copper-Phosphorus Brazing Alloy
12. bhp: Brake Horsepower
13. Btu: British Thermal Unit
14. Btu/h: British Thermal Unit Per Hour
15. CDA: Copper Development Association
16. CD: Compact Disk
17. CFM: Cubic Foot Per Minute
18. CLR: Color
19. COR: Contracting Officer’s Representative
20. CW: Cold Water
21. dB: Decibels
22. dB(A): Decibels (A weighted)
23. DDC: Direct Digital Control
24. DI: Digital Input
25. DO: Digital Output
26. F: Fahrenheit
27. FAR: Federal Acquisition Regulations
28. FD: Floor Drain

29. FED: Federal
30. FG: Fiberglass
31. FSK: Foil-Scrim-Kraft facing
32. HDPE: High Density Polyethylene
33. HOA: Hands-Off-Automatic
34. hp: Horsepower
35. Hz: Hertz
36. ID: Inside Diameter
37. IPS: Iron Pipe Size
38. kg: Kilogram
39. klb: 1000 lb
40. kPa: Kilopascal
41. lb: Pound
42. lb/hr: Pounds Per Hour
43. L/s: Liters Per Second
44. L/min: Liters Per Minute
45. MAWP: Maximum Allowable Working Pressure
46. MAX: Maximum
47. MBtu/h: 1000 Btu/h
48. MBtu: 1000 Btu
49. MED: Medical
50. m: Meter
51. MFG: Manufacturer
52. mg: Milligram
53. mg/L: Milligrams Per Liter
54. MIN: Minimum
55. MJ: Megajoules
56. ml: Milliliter
57. mm: Millimeter
58. MW: Megawatt
59. NC: Normally Closed
60. Nm: Newton Meter
61. NO: Normally Open
62. NPT: National Pipe Thread
63. NPS: Nominal Pipe Size
64. OD: Outside Diameter

65. OSD: Open Sight Drain
66. OS&Y: Outside Stem and Yoke
67. PPE: Personal Protection Equipment
68. ppb: Parts Per Billion
69. ppm: Parts Per Million
70. PSIA: Pounds Per Square Inch Absolute
71. psig: Pounds Per Square Inch Gauge
72. rad: Radians
73. RH: Relative Humidity
74. RO: Reverse Osmosis
75. rms: Root Mean Square
76. RPM: Revolutions Per Minute
77. SCFM: Standard Cubic Feet Per Minute
78. SPEC: Specification
79. STD: Standard
80. SDR: Standard Dimension Ratio
81. TAB: Testing, Adjusting, and Balancing
82. USDA: U.S. Department of Agriculture
83. V: Volt
84. VA: Veterans Administration
85. VAC: Voltage in Alternating Current
86. VA CFM: VA Construction & Facilities Management
87. VA CFM CSS: VA Construction & Facilities Management, Consulting Support Service
88. VAMC: Veterans Administration Medical Center
89. VHA OCAMES: Veterans Health Administration – Office of Capital Asset Management Engineering and Support
90. VR: Vacuum condensate return
91. WCB: Wrought Carbon Steel, Grade B
92. WG: Water Gauge or Water Column
93. WOG: Water, Oil, Gas

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

D. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

E. Section 03 30 00, CAST-IN-PLACE CONCRETE.

F. Section 05 50 00, METAL FABRICATIONS.

G. Section 07 84 00, FIRESTOPPING.

H. Section 07 92 00, JOINT SEALANTS.

I. Section 09 91 00, PAINTING.

J. Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

K. Section 23 82 00, CONVECTION HEATING AND COOLING UNITS.

L. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

M. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES.

N. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standard will govern.

B. Air Movement and Control Association (AMCA):

410-1996.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

C. American Society of Mechanical Engineers (ASME):

B31.1-2018.....Power Piping

B31.9-2014.....Building Services Piping

ASME Boiler and Pressure Vessel Code:

BPVC Section IX-2019 Welding, Brazing, and Fusing Qualifications

D. American Society for Testing and Materials (ASTM):

A36/A36M-2014.....Standard Specification for Carbon Structural Steel

A575-1996(R2018).....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades

E. Association for Rubber Products Manufacturers (ARPM):

IP-20-2015.....Specifications for Drives Using Classical V-Belts and Sheaves

IP-21-2016.....Specifications for Drives Using Double-V (Hexagonal) Belts

IP-24-2016.....Specifications for Drives Using Synchronous Belts

IP-27-2015.....Specifications for Drives Using Curvilinear Toothed Synchronous Belts

F. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc.:

SP-58-2018.....Pipe Hangers and Supports-Materials, Design, Manufacture, Selection, Application, and Installation

SP-127-2014a.....Bracing for Piping Systems: Seismic-Wind-Dynamic Design, Selection, and Application

G. Military Specifications (MIL):

MIL-P-21035B-2013.....Paint High Zinc Dust Content, Galvanizing Repair (Metric)

H. National Fire Protection Association (NFPA):

70-2017.....National Electrical Code (NEC)

101-2018.....Life Safety Code

I. Department of Veterans Affairs (VA):

PG-18-10-2016.....Physical Security and Resiliency Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 11, COMMON WORK RESULTS FOR HVAC", with applicable paragraph identification.

C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements, and all equipment that requires regular maintenance, calibration, etc are accessable from the floor or permanent work platform. It is the Contractor's responsibility to ensure all submittals meet the VA specifications and requirements and it is assumed by the VA that all submittals do meet the VA specifications unless the Contractor has requested a variance in writing and approved by COR prior to the submittal. If at any time during the project it is found that any item does not meet the VA specifications and there was no variance approval the Contractor shall

correct at no additional cost or time to the Government even if a submittal was approved.

D. If equipment is submitted which differs in arrangement from that shown, provide documentation proving equivalent performance, design standards and drawings that show the rearrangement of all associated systems. Additionally, any impacts on ancillary equipment or services such as foundations, piping, and electrical shall be the Contractor's responsibility to design, supply, and install at no additional cost or time to the Government. VA approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

E. Prior to submitting shop drawings for approval, Contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed contract documents, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

F. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together. Coordinate and properly integrate materials and equipment to provide a completely compatible and efficient installation.

G. Coordination/Shop Drawings:

1. Submit complete consolidated and coordinated shop drawings for all new systems, and for existing systems that are in the same areas.
2. The coordination/shop drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed coordination/shop drawings of all piping and duct systems. The drawings should include all lockout/tagout points for all energy/hazard sources for each piece of equipment. Coordinate lockout/tagout procedures and practices with local VA requirements.

3. Do not install equipment foundations, equipment or piping until coordination/shop drawings have been approved.
4. In addition, for HVAC systems, provide details of the following:
   a. Hangers, inserts, supports, and bracing.
   b. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

H. Manufacturer's Literature and Data: Include full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity. Submit under the pertinent section rather than under this section.
   1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the COR.
   2. Submit electric motor data and variable speed drive data with the driven equipment.
   3. Equipment and materials identification.
   4. Fire-stopping materials.
   5. Hangers, inserts, supports and bracing. Provide complete stress analysis for variable spring and constant support hangers.
   6. Wall, floor, and ceiling plates.

I. Rigging Plan: Provide documentation of the capacity and weight of the rigging and equipment intended to be used. The plan shall include the path of travel of the load, the staging area and intended access, and qualifications of the operator and signal person.

J. HVAC Maintenance Data and Operating Instructions:
   1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
   2. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
      a. Include complete list indicating all components of the systems.
      b. Include complete diagrams of the internal wiring for each item of equipment.
      c. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

3. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

1.5 QUALITY ASSURANCE

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC.

B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

C. Equipment Vibration Tolerance:

1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.

D. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.

2. Refer to all other sections for quality assurance requirements for systems and equipment specified therein.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
4. The products and execution of work specified in Division 23 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments shall be enforced, along with requirements of local utility companies. The most stringent requirements of these specifications, local codes, or utility company requirements shall always apply. Any conflicts shall be brought to the attention of the COR.
5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be of the same manufacturer and model number, or if different models are required they shall be of the same manufacturer and identical to the greatest extent possible (i.e., same model series).
6. Assembled Units: Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.
7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
8. Use of asbestos products or equipment or materials containing asbestos is prohibited.

E. HVAC Equipment Service Providers: Service providers shall be authorized and trained by the manufacturers of the equipment supplied. These providers shall be capable of responding onsite and provide acceptable service to restore equipment operations within 4 hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shutdown of equipment; or within 24 hours in a non-emergency. Submit names, mail and e-mail addresses and phone numbers of service personnel and companies providing service under these conditions for (as applicable to the project): fans, air handling units, chillers,

cooling towers, control systems, pumps, critical instrumentation, computer workstation and programming.

F. HVAC Mechanical Systems Welding: Before any welding is performed, Contractor shall submit a certificate certifying that welders comply with the following requirements:
   1. Qualify welding processes and operators for piping according to ASME BPVC Section IX. Provide proof of current certification.
   2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
   3. Certify that each welder and welding operator has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
   4. All welds shall be stamped according to the provisions of the AWS or ASME as required herein and by the associated code.

G. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the COR with submittals. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material and removal by the Contractor and no additional cost or time to the Government.

H. Execution (Installation, Construction) Quality:
   1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract documents to the COR for resolution. Provide written hard copies and computer files on CD or DVD of manufacturer’s installation instructions to the COR with submittals prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received and approved by the VA. Failure to furnish these recommendations is a cause for rejection of the material.
   2. All items that require access, such as for operating, cleaning, servicing, maintenance, and calibration, shall be easily and safely accessible by persons standing at floor level, or standing

on permanent platforms, without the use of portable ladders. Examples of these items include, but are not limited to, all types of valves, filters and strainers, transmitters, control devices. Prior to commencing installation work, refer conflicts between this requirement and contract documents to the COR for resolution. Failure of the Contractor to resolve, or point out any issues will result in the Contractor correcting at no additional cost or time to the Government.

3. Complete coordination/shop drawings shall be required in accordance with Article, SUBMITTALS. Construction work shall not start on any system until the coordination/shop drawings have been approved by VA.
4. Workmanship/craftsmanship will be of the highest quality and standards. The VA reserves the right to reject any work based on poor quality of workmanship this work shall be removed and done again at no additional cost or time to the Government.

I. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with current telephone numbers and e-mail addresses.

J. Guaranty: Warranty of Construction, FAR Clause 52.246-21.

1.6 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage or theft.
2. Large equipment such as fansif shipped on open trailer trucks shall be covered with shrink on plastics or water proof tarpaulins that provide protection from exposure to rain, road salts and other transit hazards. Protection shall be kept in place until equipment is moved into a building or installed as designed.
3. Repair damaged equipment in first class, new operating condition and appearance; or, replace same as determined and directed by the COR. Such repair or replacement shall be at no additional cost or time to the Government.

4. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
5. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
6. Protect plastic piping from ultraviolet light (sunlight).

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.7 AS-BUILT DOCUMENTATION

A. Submit manufacturer’s literature and data updated to include submittal review comments and any equipment substitutions.

B. Submit operation and maintenance data updated to include submittal review comments, VA approved substitutions and construction revisions shall be in electronic version on CD or DVD inserted into a three-ring binder. All aspects of system operation and maintenance procedures, including applicable piping isometrics, wiring diagrams of all circuits, a written description of system design, control logic, and sequence of operation shall be included in the operation and maintenance manual. The operations and maintenance manual shall include troubleshooting techniques and procedures for emergency situations. Notes on all special systems or devices shall be included. A List of recommended spare parts (manufacturer, model number, and quantity) shall be furnished. Information explaining any special knowledge or tools the owner will be required to employ shall be inserted into the As-Built documentation.

C. The installing Contractor shall maintain as-built drawings of each completed phase for verification; and, shall provide the complete set at the time of final systems certification testing. Should the installing Contractor engage the testing company to provide as-built or any portion thereof, it shall not be deemed a conflict of interest or breach of the 'third party testing company' requirement. Provide record drawings as follows:

1. As-built drawings are to be provided, with a copy of them on AutoCAD version 2014 or newer provided on CD or DVD. The CAD drawings shall use multiple line layers with a separate individual layer for each system.

D. The as-built drawings shall indicate the location and type of all lockout/tagout points for all energy sources for all equipment and pumps to include breaker location and numbers, valve tag numbers, etc. Coordinate lockout/tagout procedures and practices with local VA requirements.

E. Certification documentation shall be provided to COR 21 working days prior to submitting the request for final inspection. The documentation shall include all test results, the names of individuals performing work for the testing agency on this project, detailed procedures followed for all tests, and provide documentation/certification that all results of tests were within limits specified. Test results shall contain written sequence of test procedure with written test results annotated at each step along with the expected outcome or setpoint. The results shall include all readings, including but not limited to data on device (make, model and performance characteristics_), normal pressures, switch ranges, trip points, amp readings, and calibration data to include equipment serial numbers or individual identifications, etc.

1.8 JOB CONDITIONS – WORK IN EXISTING BUILDING

A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities that serve the VAMC.

B. Maintenance of Service: Schedule all work to permit continuous service as required by the VAMC.

C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the COR during periods when the demands are not critical to the operation of the VAMC. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least 10 working days advance notice to the COR. The request shall include a detailed plan on the proposed shutdown and the intended work to be done along with manpower levels. All equipment and materials must be onsite and verified with plan 5 days prior to the shutdown or it will need to be rescheduled.

D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. Storm water or ground water leakage is prohibited. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA. Maintain all egress routes and safety systems/devices.

E. Acceptance of Work for Government Operation: As new equipment, systems and facilities are made available for operation and these items are deemed of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

A. Provide maximum standardization of components to reduce spare part requirements.

B. Performance and warranty of all components that make up an assembled unit shall be the responsibility of the manufacturer of the completed assembly.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

C. Equipment and components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a nameplate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions must be approved by the VA, but may be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 V-BELT DRIVES (NOT USED)

2.4 SYNCHRONOUS BELT DRIVES (NOT USED)

2.5 DRIVE GUARDS (NOT USED)

2.6 LIFTING ATTACHMENTS

A. Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.7 ELECTRIC MOTORS

A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR

REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, MOTOR CONTROLLERS; and, Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.8 VARIABLE SPEED MOTOR CONTROLLERS

A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, MOTOR CONTROLLERS for specifications.

B. Coordinate variable speed motor controller communication protocol with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

C. Provide variable speed motor controllers with or without a bypass contactor as indicated in contract drawings.

D. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.

E. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.

F. Controller shall not add any current or voltage transients to the input ac power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the ac power system.

2.9 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents and shown in the maintenance manuals. Identification for piping is specified in Section 09 91 00, PAINTING.

B. Use symbols, nomenclature and equipment numbers specified, shown on the contract documents and shown in the maintenance manuals. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system

for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING.

C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 5 mm (3/16 inch) high riveted or bolted to the equipment.

D. Control Items: Label all instrumentation, temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

2.10 FIRESTOPPING

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.11 GALVANIZED REPAIR COMPOUND

A. Mil-P-21035B, paint form.

2.12 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

B. Supports for Roof Mounted Items:

1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 by 100 mm (2 by 4 inches) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 275 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.

C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-58. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.

D. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.

2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 100 mm (4 inches) thick when approved by the COR for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 100 mm (4 inches) thick when approved by the COR for each job condition.

E. Attachment to Steel Building Construction:
1. Welded attachment: MSS SP-58, Type 22.
2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8 inch) outside diameter.

F. Attachment to existing structure: Support from existing floor/roof frame.

G. Hanger Rods: Hot-rolled steel, ASTM A36/A36M or ASTM A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 40 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

H. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (12 gauge), designed to accept special spring held, hardened steel nuts. Trapeze hangers are prohibited for use for steam supply and condensate piping.
1. Allowable hanger load: Manufacturers rating less 91 kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4 inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 15 mm (1/2 inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

2.13 PIPE PENETRATIONS (NOT USED)

2.14 DUCT PENETRATIONS

A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 450 mm (18 inches) high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.

B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.15 SPECIAL TOOLS AND LUBRICANTS

A. Furnish, and turn over to the COR, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.

D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the COR.

E. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.16 WALL, FLOOR AND CEILING PLATES

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32 inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025 inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035 inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.17 ASBESTOS

A. Materials containing asbestos are prohibited.

PART 3 - EXECUTION

3.1 GENERAL

A. If an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

A. Location of hangers and equipment, access provisions shall be coordinated with the work of all trades. The coordination/shop drawings shall be submitted for review. Locate hangers and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Equipment coordination/shop drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review. Follow manufacturer's published recommendations for installation methods not otherwise specified.

B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gauges and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the contract documents.

C. Equipment Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.

D. Cutting Holes:

1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill is prohibited, except as permitted by COR where working area space is limited.
2. Locate holes to avoid interference with structural members such as slabs, columns, ribs, beams or reinforcing. Holes shall be laid out in advance and drilling done only after approval by COR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to COR for approval.
3. Do not penetrate membrane waterproofing.

E. Electrical Interconnection of Instrumentation or Controls: This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer

workstations. Devices shall be located so they are easily accessible for testing, maintenance, calibration, etc. The COR has the final determination on what is accessible and what is not. Comply with NFPA 70.

F. Protection and Cleaning:
   1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the COR. Damaged or defective items in the opinion of the COR, shall be replaced.
   2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

G. Concrete and Grout: Use concrete and non-shrink grout 20 MPa (3000 psig) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

H. Install gauges, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gauges to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

I. Install steam piping expansion joints as per manufacturer’s recommendations.

J. Work in Existing Building:
   1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
   2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.

K. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance or inspections, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost or time to the Government.
2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to motors, fans, pumps, belt guards, transformers, high voltage lines, conduit and raceways, piping, hot surfaces, and ductwork. The COR has final determination on whether an installation meets this requirement or not.

3.3 TEMPORARY PIPING AND EQUIPMENT (NOT USED)

3.4 RIGGING

A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service requirements as well as structural integrity of the building.

C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.

E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Follow approved rigging plan.

G. Restore building to original condition upon completion of rigging work.

3.5 EQUIPMENT SUPPORTS

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels designed by a structural engineer, secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the COR.

B. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2 inch) clearance between pipe or piping covering and adjacent work.

C. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

3.6 MECHANICAL DEMOLITION

A. Rigging access, other than indicated on the contract documents, shall be provided by the Contractor after approval for structural integrity by the COR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Debris accumulated in the area to the detriment of plant operation is prohibited. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times.

Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VAMC, and Contractor shall follow all directives of the COR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property per Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT. This includes all concrete pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with contract documents where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the contract documents of the other disciplines in the project for additional facilities to be demolished or handled.

D. All indicated valves including gate, globe, ball, butterfly and check, all pressure gauges and thermometers with wells shall remain Government property and shall be removed and delivered to COR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these contract documents. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.

2. The following material and equipment shall not be painted:
   a. Motors, controllers, control switches, and safety switches.
   b. Control and interlock devices.
   c. Regulators.
   d. Pressure reducing valves.
   e. Control valves and thermostatic elements.
   f. Lubrication devices and grease fittings.
   g. Copper, brass, aluminum, stainless steel and bronze surfaces.
   h. Valve stems and rotating shafts.
   i. Pressure gauges and thermometers.
   j. Glass.
   k. Nameplates.
3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
4. Pumps, motors, steel and cast-iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same paint type and color as utilized by the pump manufacturer.
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats. This may include painting exposed metals where hangers were removed or where equipment was moved or removed.
6. Paint shall withstand the following temperatures without peeling or discoloration:
   a. Condensate and Feedwater: 38 degrees C (100 degrees F) on insulation jacket surface and 121 degrees C (250 degrees F) on metal pipe surface.
   b. Steam: 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (374 degrees F) on metal pipe surface.
7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.
8. Lead based paints are prohibited.

3.8 IDENTIFICATION SIGNS

A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16 inch) high, designating functions, for all equipment,

switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.

B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.

C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

D. Attach ceiling grid label on ceiling grid location directly underneath above-ceiling air terminal, control system component, valve, filter unit, fan etc.

3.9 MOTOR AND DRIVES

A. Use synchronous belt drives only on equipment controlled by soft starters or variable frequency drive motor controllers without a bypass contactor. Use V-belt drives on all other applications.

B. Alignment of V-Belt Drives: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.

C. Alignment of Synchronous Belt Drives: Set driving and driven shafts parallel and align so that the corresponding pulley flanges are in the same plane.

D. Alignment of Direct-Connect Drives: Securely mount motor in accurate alignment so that shafts are per coupling manufacturer’s tolerances when both motor and driven machine are operating at normal temperatures.

3.10 LUBRICATION

A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. Field-check all devices for proper lubrication.

B. All devices and equipment shall be equipped with required lubrication fittings or devices. A minimum of 0.95 liter (1 quart) of oil and 0.45 kg (1 pound) of grease of manufacturer's recommended grade and type for each different application shall be provided; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to COR in unopened containers that are properly identified as to application.

C. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

D. All lubrication points shall be extended to one side of the equipment.

3.11 STARTUP, TEMPORARY OPERATION AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

C. Startup of equipment shall be performed as described in equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS Article, TESTS, and in individual Division 23 specification sections and submit the test reports and records to the COR.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost or time to the Government.

C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then conduct such performance tests and finalize control settings for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work. Rescheduling of these tests shall be requested in writing to COR for approval.

D. No adjustments may be made during the acceptance inspection. All adjustments shall have been made by this point.

3.13 COMMISSIONING (NOT USED)

3.14 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4/ hours to instruct each VA personnel responsible in operation and maintenance of the system.

- - - E N D - - -

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of motors for HVAC and steam generation equipment.

B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

F. Section 26 29 11, MOTOR CONTROLLERS.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standards will govern.

B. American Bearing Manufacturers Association (ABMA):

9-2015.....Load Ratings and Fatigue Life for Ball Bearings

11-2014.....Load Ratings and Fatigue Life for Roller Bearings

C. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):

90.1-2019.....Energy Efficient Design of New Buildings Except Low-Rise Residential Buildings

D. Institute of Electrical and Electronics Engineers (IEEE):

112-2017.....Standard Test Procedure for Polyphase Induction Motors and Generators

841-2009.....IEEE Standard for Petroleum and Chemical Industry-Premium-Efficiency, Severe-Duty, Totally Enclosed Fan-Cooled (TEFC) Squirrel Cage Induction Motors--Up to and Including 370 kW (500 hp)

E. National Electrical Manufacturers Association (NEMA):
MG 1-2016 (R2019).....Motors and Generators
MG 2-2014.....Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators
250-2020.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):
70-2020.....National Electrical Code (NEC)

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT", with applicable paragraph identification.

C. Submit motor submittals with driven equipment.

D. Shop Drawings:
1. Provide documentation to demonstrate compliance with contract documents.
2. Motor nameplate information shall be submitted including electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.

E. Manufacturer's Literature and Data including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.

F. Complete operating and maintenance manuals including wiring diagrams, technical data sheets, information for ordering replacement parts, and troubleshooting guide:
1. Include complete list indicating all components of the systems.

2. Include complete diagrams of the internal wiring for each item of equipment.
3. Diagrams shall have their terminals identified to facilitate installation, operation and maintenance.

G. Certification: Two weeks prior to final inspection, unless otherwise noted, certification shall be submitted to the COR stating that the motors have been properly applied, installed, adjusted, lubricated, and tested.

1.5 AS-BUILT DOCUMENTATION

A. Comply with requirements in Paragraph "AS-BUILT DOCUMENTATION" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

PART 2 - PRODUCTS

2.1 MOTORS

A. For alternating current, fractional and integral horsepower motors, NEMA MG 1 and NEMA MG 2 shall apply.

B. For severe duty TEFC motors, IEEE 841 shall apply.

C. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, MOTOR CONTROLLERS; and Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES. Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors. Unless otherwise specified for a particular application, use electric motors with the following requirements.

D. Single-phase Motors:

1. Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.
   a. In order to meet ASHRAE 90.1 requirements, motors for small packaged HVAC equipment may be Electrically Commutated motor (EC type). Motor shall be brushless DC type specifically designed for applications with heavy duty ball bearings and electronic communication. The motor shall be speed controllable down to 20 percent of full speed and 85 percent efficient at all speeds.

E. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.

1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.

F. Voltage ratings shall be as follows:
   1. Single phase:
      a. Motors connected to 120-volt systems: 115 volts.
      b. Motors connected to 208-volt systems: 200 volts.
      c. Motors connected to 240-volt or 480-volt systems: 230/460 volts, dual connection.
   2. Three phase:
      a. Motors connected to 208-volt systems: 200 volts.
      b. Motors, less than 74.6 kW (100 hp), connected to 240-volt or 480-volt systems: 208-230/460 volts, dual connection.
      c. Motors, 74.6 kW (100 hp) or greater, connected to 240-volt systems: 230 volts.
      d. Motors, 74.6 kW (100 hp) or greater, connected to 480-volt systems: 460 volts.
      e. Motors connected to high voltage systems (Over 600V): Shall conform to NEMA MG 1 for connection to the nominal system voltage shown in the contract documents.

G. Number of phases shall be as follows:
   1. Motors, less than 373 W (1/2 hp): Single phase.
   2. Motors, 373 W (1/2 hp) and greater: 3 phase.
   3. Exceptions:
      a. Hermetically sealed motors.
      b. Motors for equipment assemblies, less than 746 W (1 hp), shall be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.

H. Horsepower ratings shall be adequate for operating the connected loads continuously in the prevailing ambient temperatures in areas where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation.

I. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting,

acceleration, and running torque without exceeding nameplate ratings or considering service factor.

J. Motor Enclosures:
   1. Shall be the NEMA types as specified and/or shown in the contract documents.
   2. Where the types of motor enclosures are not shown in the contract documents, they shall be the NEMA types per NEMA 250, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
      a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
      b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
      c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
   3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

K. Electrical Design Requirements:
   1. Motors shall be continuous duty.
   2. The insulation system shall be rated minimum of Class B, 130 degrees C (266 degrees F).
   3. The maximum temperature rise by resistance at rated power shall not exceed Class B limits, 80 degrees C (176 degrees F).
   4. The speed/torque and speed/current characteristics shall comply with NEMA Design A or B, as specified.
   5. Motors shall be suitable for full voltage starting, unless otherwise noted. Coordinate motor features with applicable motor controllers.
   6. Motors for variable frequency drive applications shall adhere to NEMA MG 1, Part 30, Application Considerations for Constant Speed Motors Used on a Sinusoidal Bus with Harmonic Content and General-Purpose Motors Used with Adjustable-Voltage or Adjustable-Frequency Controls or Both, or NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors.

L. Mechanical Design Requirements:

1. Bearings shall be rated in accordance with ABMA 9 or ABMA 11 for a minimum fatigue life of 26,280 hours for belt-driven loads and 100,000 hours for direct-drive loads based on L10 (Basic Rating Life) at full load direct coupled, except vertical high thrust motors which require a 40,000 hours rating. A minimum fatigue life of 40,000 hours is required for VFD drives.
2. Vertical motors shall be capable of withstanding a momentary up thrust of at least 30 percent of normal down thrust.
3. Grease lubricated bearings shall be designed for electric motor use. Grease shall be capable of the temperatures associated with electric motors and shall be compatible with Polyurea based greases.
4. Grease fittings, if provided, shall be Alemite type or equivalent.
5. Oil lubricated bearings, when specified, shall have an externally visible sight glass to view oil level.
6. Vibration shall not exceed 3.8 mm (0.15 inch) per second, unfiltered peak.
7. Noise level shall meet the requirements of the application.
8. Motors on 180 frames and greater shall have provisions for lifting eyes or lugs capable of a safety factor of 5.
9. All external fasteners shall be corrosion resistant.
10. Grounding provisions shall be in the main terminal box.

M. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional cost or time to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
   a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.

b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.

c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.

4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.

5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA MG 1, Part 31, Definite-Purpose Inverter-Fed Polyphase Motors. Provide motor shaft grounding apparatus that shall protect bearings from damage from stray currents.

N. Additional requirements for specific motors, as indicated in the other sections listed in Article, RELATED SECTIONS shall also apply.

O. NEMA Premium Efficiency Electric Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 W (1 hp) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 W (1 hp) or more with open, drip-proof, or TEFC enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section.

Minimum Premium Efficiencies Open Drip-Proof				**Minimum Premium Efficiencies Totally Enclosed Fan-Cooled (TEFC)**			
Rating kW (hp)	**1200 RPM**	**1800 RPM**	**3600 RPM**	**Rating kW (hp)**	**1200 RPM**	**1800 RPM**	**3600 RPM**
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%
1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%

11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

P. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM, and 3600 RPM. Power factor correction capacitors shall be provided unless the motor meets the 0.90 requirement without it or if the motor is controlled by a variable frequency drive. The power factor correction capacitors shall be able to withstand high voltage transients and power line variations without breakdown.

Q. Energy Efficiency of Small Motors (Motor Efficiencies): All motors under 746 W (1 hp) shall meet the requirements of the DOE Small Motor Regulation.

Polyphase Open Motors Average full load efficiency				**Capacitor-start capacitor-run and capacitor-start induction run open motors Average full load efficiency**			
Rating kW (hp)	**6 poles**	**4 poles**	**2 poles**	**Rating kW (hp)**	**6 poles**	**4 poles**	**2 poles**
0.18 (0.25)	67.5	69.5	65.6	0.18 (0.25)	62.2	68.5	66.6
0.25 (0.33)	71.4	73.4	69.5	0.25 (0.33)	66.6	72.4	70.5
0.37 (0.5)	75.3	78.2	73.4	0.37 (0.5)	76.2	76.2	72.4
0.55 (0.75)	81.7	81.1	76.8	0.55 (0.75)	80.2	81.8	76.2

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown in the contract documents and/or as required by other sections of these specifications.

B. If in the substantiated evaluation of the COR, the installation fails to meet the requirements of the construction documents with respect to function and maintainability, an installation is unsatisfactory to the COR, the Contractor shall correct the installation at no additional cost or time to the Government.

3.2 FIELD TESTS

A. All tests shall be witnessed by the CxA or by the COR.

B. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before startup. All shall test free from grounds.

C. Perform Load test in accordance with IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.

D. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

E. All test data shall be complied into a report form for each motor and provided to the contracting officer or their representative.

3.3 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

3.4 COMMISSIONING(NOT USED)

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer's technical representative for

B. 1 hour to instruct each VA personnel responsible in operation and maintenance of the system.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the application of noise control measures, tolerance and vibration isolation for HVAC work, and vibration control techniques fans, motors.

B. A complete listing of common acronyms and abbreviations are included in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and SAMPLES.

C. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standards will govern.

B. American Society of Civil Engineers (ASCE):

ASCE 7-2016.....Minimum Design Loads for Buildings and Other Structures

C. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):

Handbook-2019.....ASHRAE Handbook – HVAC Applications

Handbook-2021.....ASHRAE Handbook - Fundamentals, Chapter 8, Sound and Vibration

D. American Society for Testing and Materials (ASTM):

A123/A123M-2017.....Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A307-2021.....Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength

B117-2019.....Standard Practice for Operating Salt Spray (Fog) Apparatus

D2240-2015(R2021).....Standard Test Method for Rubber Property - Durometer Hardness

E. International Code Council (ICC):
IBC-2021.....International Building Code

F. Manufacturers Standardization Society (MSS):
SP-58-2018.....Pipe Hangers and Supports - Materials, Design, Manufacture, Selection, Application, and Installation

G. Occupational Safety and Health Administration (OSHA):
29 CFR 1910.95.....Occupational Noise Exposure

H. Sheet Metal and Air Conditioning Contractor's National Association (SMACNA):
001-2008.....Seismic Restraint Manual: Guidelines for Mechanical Systems, 3rd Edition

I. Department of Veterans Affairs (VA):
H-18-8-2019(R2020).....Seismic Design Requirements
PG-18-10-2017(R2021)....HVAC Design Manual

1.4 SUBMITTALS

A. Submittals, including number of required copies, shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 XX XX, SECTION TITLE", with applicable paragraph identification.

C. Manufacturer's Literature and Data Including: Full item description and optional features and accessories. Include dimensions, weights, materials, applications, standard compliance, model numbers, size, and capacity.
   1. Vibration isolators:
   2. Bases
   3. Acoustical enclosures.

D. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.

1.5 QUALITY ASSURANCE

A. Bio-Based Materials: For products designated by the USDA's Bio-Preferred Program, provide products that meet or exceed USDA recommendations for bio-based content, so long as products meet all performance requirements in this specifications section. For more information regarding the product categories covered by the Bio-Preferred Program, visit http://www.biopreferred.gov.

B. Refer to Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for additional sustainable design requirements.

C. Noise Criteria:

1. Perform an acoustic analysis to demonstrate that the specified room noise levels are achieved in all octave bands for all air-handling units, heating and ventilating units, fans, chillers, boilers, generators, and outdoor noise producing equipment, such as cooling towers and chillers. Refer to VA HVAC Design Manual Chapter 6 Room Data Sheets for the required Noise Criteria (NC) levels. If the necessary room type is not listed in Chapter 6 of VA HVAC Design Manual then consult the ASHRAE Handbook - HVAC Applications. The analysis shall consider both air duct borne noise and noise transmission through walls, floors and roofs and shall be completed for all duct systems and all HVAC equipment.
2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA 29 CFR 1910.95 requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Handbook - Fundamentals, Chapter 8, Sound and Vibration.
3. An allowance, not to exceed 5 db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.

4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal, and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

1.6 AS-BUILT DOCUMENTATION

A. Comply with requirements in paragraph AS-BUILT DOCUMENTATION of Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer. Refer to ASHRAE Handbook - HVAC Applications Chapter 49, Noise and Vibration Control, Table 47 for selection guide for Vibration Isolation.

B. Elastomeric isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.

C. Exposure to Weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition, provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with Section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.

D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.

E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENT (NOT USED)

2.3 VIBRATION ISOLATORS

A. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.

1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
2. Hanger supports for piping 50 mm (2 inches) and greater shall have a pointer and scale deflection indicator.

B. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm (1/4 inch). Air gap between hard and resilient material shall be not less than 3.2 mm (1/8 inch) nor greater than 6 mm (1/4 inch). Restraints shall be capable of withstanding design load without permanent deformation.

C. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension but not less than 100 mm (4 inches). Where rails are used with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.

B. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS (NOT USED)

2.6 ACOUSTICAL ENCLOSURES IN MECHANICAL ROOMS (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION

A. If an installation is unsatisfactory to the COR, the contractor shall correct the installation at no additional cost or time to the Government.

B. Vibration Isolation:

1. No metal-to-metal contact will be permitted between fixed and floating parts.
2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (l00 degrees F).
5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as

the isolation hangers or support of the pipe connected to the equipment.

C. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.

B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

C. Attach thrust limits at centerline of thrust and adjust to a maximum of 6 mm (1/4 inch) movement during start and stop.

D. Adjust active height of spring isolators.

E. Adjust snubbers according to manufacturer's recommendations.

F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.

G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

- - - E N D - - -

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.
9. Document critical paths of flow on reports.

B. Definitions:

1. Basic TAB used in this Section: Chapter 39, "Testing, Adjusting and Balancing" of 2019 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. TABB: Testing Adjusting and Balancing Bureau
6. SMACNA: Sheet Metal Contractors National Association
8. Air Systems: Includes exhaust air and relief air systems.
9. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flow rate from values (design) in the contract documents.

1.2 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

1.3 QUALITY ASSURANCE

A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR.

B. Qualifications:

1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
2. The TAB agency shall be either a certified member of AABC, NEEB, TABB or NEBB to perform TAB service for HVAC, water balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the COR and submit another qualified TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC, TABB or NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency's review shows unsatisfactory work performed by the predecessor agency.
3. TAB Specialist: The TAB specialist shall be either a member of AABC or TABB or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the Contracting Officer's Representative and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.
4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling and reporting all TAB work and related activities and will provide necessary information as required by the

Contracting Officer's Representative. The responsibilities would specifically include:

a. Shall directly supervise all TAB work.
b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC, TABB or NEBB.
c. Would follow all TAB work through its satisfactory completion.
d. Shall provide final markings of settings of all HVAC adjustment devices.
e. Permanently mark location of duct test ports.
f. Shall document critical paths from the fan or pump. These critical paths are ones in which are 100% open from the fan or pump to the terminal device. This will show the least amount of restriction is being imposed on the system by the TAB firm.

5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC, TABB or NEBB

C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards, TABB/SMACNA International Standards, or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose.

D. TAB Criteria:

1. One or more of the applicable AABC, NEBB,TABB or SMACNA publications, supplemented by ASHRAE Handbook "2019 HVAC Applications" Chapter 39, and requirements stated herein shall be the basis for planning, procedures, and reports.
2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow 2011 ASHRAE Handbook "2019 HVAC Applications", Chapter 39, as a guideline. Air Filter resistance during tests, artificially imposed if necessary, shall be

at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.

a. Fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.

3. Systems shall be adjusted for energy efficient operation as described in PART 3.
4. Typical TAB procedures and critical path results shall be demonstrated to the Contracting Officer's Representative for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the COR one of which shall be a critical path) and one hydronic system (pumps and three coils) as follows:
   a. When field TAB work begins.
   b. During each partial final inspection and the final inspection for the project if requested by VA.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.

C. For use by the Contracting Officer's Representative staff, submit one complete set of applicable AABC,NEBB or TABB publications that will be the basis of TAB work.

D. Submit Following for Review and Approval:
   1. Design Review Report within 90 days for conventional design projects after the system layout on air and water side is completed by the Contractor.
   2. Systems inspection report on equipment and installation for conformance with design.
   3. Duct Air Leakage Test Report.
   4. Systems Readiness Report.
   5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.

6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
7. Include in each report the critical path for each balanced branch (air and hydronic. Every branch shall have at least one terminal device damper 100% open.

E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area with noted critical paths.

1.5 APPLICABLE PUBLICATIONS

A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.

B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
Handbook 2019.....HVAC Applications ASHRAE Handbook, Chapter 39, Testing, Adjusting, and Balancing and Chapter 49, Sound and Vibration Control

C. Associated Air Balance Council (AABC):
7th Edition 2016 .....AABC National Standards for Total System Balance

D. National Environmental Balancing Bureau (NEBB):
9th Edition 2019 .....Procedural Standards for Testing, Adjusting, Balancing of Environmental Systems
3rd Edition 2015 .....Procedural Standards for the Measurement of Sound and Vibration
2rd Edition 2019 ... Standard for Whole Building Technical Commissioning of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):
3rd Edition 2005 .....HVAC SYSTEMS Testing, Adjusting and Balancing
TABB- TAB Procedural Guide Current Edition

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC and BOILER PLANT INSULATION Provide for repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

A. Refer to TAB Criteria in Article, Quality Assurance.

B. Obtain applicable contract documents and copies of approved submittals for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications and advise the Contracting Officer’s Representative of any design deficiencies that would prevent the HVAC systems from effectively operating in accordance with the sequence of operation specified or prevent the effective and accurate TAB of the system. The TAB Specialist shall provide a report individually listing each deficiency and the corresponding proposed corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

A. Inspect equipment and installation for conformance with design.

B. The inspection and report is to be done after air distribution equipment is on site and duct installation has begun, but well in advance of performance testing and balancing work. The purpose of the inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.

C. Reports: Follow check list format developed by AABC, NEBB or SMACNA (TABB), supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT (NOT USED)

3.5 SYSTEM READINESS REPORT (NOT USED)

3.6 TAB REPORTS

B. The TAB contractor shall provide raw data immediately in writing to the Contracting Officer’s Representative if there is a problem in achieving intended results before submitting a formal report.

C. If over 20 percent of readings in the intermediate report fall outside the acceptable range, the TAB report shall be considered invalid and all contract TAB work shall be repeated after engineering and construction have been evaluated and re-submitted for approval at no additional cost to the owner.

D. Do not proceed with the remaining systems until intermediate report is approved by the Contracting Officer's Representative.

3.7 TAB PROCEDURES

A. TAB shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC, TABB or NEBB. Balancing shall be done proportionally to all applicable systems.

1. At least one trunk damper shall be 100% open.
2. At least one branch damper shall be 100%open per trunk.
3. At least one terminal device duct be 100% open per branch.

B. General: During TAB all related system components shall be in full operation. Fan and pump rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set controls and/or block off parts of distribution systems to simulate design operation of variable volume air or water systems for test and balance work.

C. Allow 7 days time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.

E. Air Balance and Equipment Test: Include air handling units, fans, terminal units, fan coil units, room diffusers/outlets/inlets, computer room AC units, and laboratory fume hoods and biological safety cabinets.

2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC .
3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other HVAC controls function properly.

3.8 VIBRATION TESTING

A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11,

COMMON WORK RESULTS FOR HVAC . Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger.

B. Record initial measurements for each unit of equipment on test forms and submit a report to the Contracting Officer's Representative. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the Contracting Officer's Representative.

3.9 SOUND TESTING

A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC, TABB or NEBB.

C. Sound reference levels, formulas and coefficients shall be according to 2019 ASHRAE Handbook, "HVAC Applications", Chapter 49, SOUND AND VIBRATION CONTROL.

D. Determine compliance with specifications as follows:

1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:

   a. Reduce the background noise as much as possible by shutting off unrelated audible equipment.

   b. Measure octave band sound pressure levels with specified equipment "off."

   c. Measure octave band sound pressure levels with specified equipment "on."

   d. Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.

e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.

2. When sound power levels are specified:
   a. Perform steps 1.a. thru 1.d., as above.
   c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use 30 feet for sound level location.

E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the Contracting Officer’s Representative and the necessary sound tests shall be repeated.

F. Test readings for sound testing could go higher than 15 percent if determination is made by the Contracting Officer’s Representative based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the Contracting Officer’s Representative.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 PHASING

A. Phased Projects: Testing and Balancing Work to follow project with areas shall be completed per the project phasing. Upon completion of the project all areas shall have been tested and balanced per the contract documents.

3.13 COMMISSIONING (NOT USED)

3.14 CRITICAL FLOW PATH

A. Provide a documented critical path for all fluid flows. There shall be at least one terminal device that can be traced back to the fan or pump where there is no damper or valves that are less than 100% open.

- - E N D - - -

SECTION 23 09 23
DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. General Contractor shall provide direct-digital control system(s) as indicated on the project documents, point list, interoperability tables, drawings and as described in these specifications. Include a complete and working direct-digital control system. Include all engineering, programming, configuration/setup hardware and software, controls and installation materials, installation labor and startup, training, final project documentation and warranty.

1. The direct-digital control system(s) shall consist of high-speed, peer-to-peer network of DDC controllers, a control system server, all configuration and setup software and hardware devices, and an Engineering Control Center. Provide a remote user using to access the control system graphics and change adjustable setpoints with the proper password.
2. All new building controllers shall be native BACnet. All new BACnet workstations, controllers, devices and components shall be listed by BACnet Testing Laboratories. All new BACnet workstations, controllers, devices and components shall be accessible using a HTML5 Web browser interface. Browsers shall not require the use of an extension or add on software in order to access aforementioned workstations, controllers, devices, and components.
   a. If used, gateways shall be BTL listed.
   b. If used, gateways shall provide all object properties and read/write services shown on VA-approved interoperability schedules.
3. The work administered by this Section of the technical specifications shall include all labor, materials, special tools, equipment, enclosures, power supplies, software, software licenses, Project specific software configurations and database entries, interfaces, wiring, tubing, installation, labeling, engineering, calibration, documentation, submittals, testing, verification, training services, permits and licenses, transportation, shipping, handling, administration, supervision, management, insurance,

Warranty, specified services and any other items required for a complete and fully functional Controls System.

4. The control systems shall be designed such that each mechanical system shall operate under stand-alone mode. The A/E shall designate what each "mechanical systems" is composed of. The contractor administered by this Section of the technical specifications shall provide controllers for each mechanical system. In the event of a network communication failure, or the loss of any other controller, the control system shall continue to operate independently. Failure of the ECC shall have no effect on the field controllers, including those involved with global strategies.

B. Some products are furnished but not installed by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the installation of the products. These products include but are not limited to the following:

1. Control valves.
2. Flow switches.
3. Flow meters.
4. Sensor wells and sockets in piping.
5. Terminal unit controllers.

C. Some products are installed but not furnished by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the procurement of the products. These products include but are not limited to the following:

1. Factory-furnished accessory thermostats and sensors furnished with unitary equipment.

D. Some products are not provided by, but are nevertheless integrated with the work executed by, the contractor administered by this Section of the technical specifications. These products include but are not limited to the following:

1. Fire alarm systems. If zoned fire alarm is required by the project-specific requirements, this interface shall require multiple relays,

which are provided and installed by the fire alarm system contractor, to be monitored.

E. Responsibility Table:

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Control system low voltage and communication wiring	23 09 23	23 09 23	23 09 23	N/A
Terminal units	23	23	N/A	26
Controllers for terminal units	23 09 23	23	23 09 23	16
LAN conduits and raceway	23 09 23	23 09 23	N/A	N/A
Automatic dampers (not furnished with equipment)	23 09 23	23	N/A	N/A
Automatic damper actuators	23 09 23	23 09 23	23 09 23	23 09 23
Manual valves	23	23	N/A	N/A
Automatic valves	23 09 23	23	23 09 23	23 09 23
Pipe insertion devices and taps, flow and pressure stations.	23	23	N/A	N/A
Thermowells	23 09 23	23	N/A	N/A
Current Switches	23 09 23	23 09 23	23 09 23	N/A
Control Relays	23 09 23	23 09 23	23 09 23	N/A
Power distribution system monitoring interfaces	23 09 23	23 09 23	23 09 23	26
All control system nodes, equipment, housings, enclosures and panels.	23 09 23	23 09 23	23 09 23	26
Unit Heater controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26

F. The contractor administered by this Section of the technical specifications shall observe the capabilities, communication network, services, spare capacity of the existing control system and its ECC prior to beginning work.

1. Leave existing direct-digital control system intact and in place. Provide a new ASHRAE Standard 135 BACnet-compliant ECC in the same

room as the existing system's ECC, and provide a new standalone BACnet-compliant control system serving the work in this project. No interoperability is required.

G. This campus has standardized on an existing standard ASHRAE Standard 135, BACnet/IP Control System supported by a preselected controls service company. This entity is referred to as the "Control System Integrator" in this Section of the technical specifications. The Control system integrator is responsible for ECC system graphics and expansion. It also prescribes control system-specific verification procedures to the contractor administered by this Section of the technical specification. It lastly provides limited assistance to the contractor administered by this Section of the technical specification in its commissioning/verification work.

1. The General Contractor of this project shall directly hire the Control System Integrator in a contract separate from the contract procuring the controls contractor administered by this Section of the technical specifications.
2. The contractor administered by this Section of the technical specifications shall coordinate all work with the Control System Integrator. The contractor administered by this Section of the technical specifications shall integrate the ASHRAE Standard 135, BACnet/IP control network(s) with the Control System Integrator's B-AWS through an Ethernet connection provided by either the Control System Integrator or VA.
3. The contractor administered by this Section of the technical specifications shall provide a peer-to-peer networked, stand-alone, distributed control system. This direct digital control (DDC) system at least shall include one portable operator terminal - laptop, one digital display unit, microprocessor-based controllers, instrumentation, end control devices, wiring, piping, software, and related systems. This contractor is responsible for all device mounting and wiring.
4. Responsibility Table:

Item/Task	Section 23 09 23 contactor	Control system integrator	VA
ECC expansion		X	

ECC programming		X	
Devices, controllers, control panels and equipment	X		
Point addressing: all hardware and software points including setpoint, calculated point, data point(analog/ binary), and reset schedule point	X		
Point mapping		X	
Network Programming	X		
ECC Graphics		X	
Controller programming and sequences	X		
Integrity of LAN communications			X
Electrical wiring	X		
Operator system training		X	
LAN connections to devices			X
LAN connections to ECC			X
IP addresses			X
Overall system verification (Cx)		X	
Controller and system verification	X		

H. Unitary standalone systems including Unit Heaters, Cabinet Unit Heaters, and thermal comfort ventilation fans, and similar units for control of room environment conditions may be equipped with integral controls furnished and installed by the equipment manufacturer or field mounted. Refer to equipment specifications and as indicated in project documents. Application of standalone unitary controls is limited to at least those systems wherein remote monitoring, alarm and startup are not necessary. Examples of such systems include:

1. Light-switch-operated toilet exhaust
2. Vestibule heater
3. Exterior stair heater
4. Attic heating and ventilation
5. Mechanical or electrical room heating and ventilation.

I. The direct-digital control system shall start and stop equipment, move (position) damper actuators and valve actuators, and vary speed of equipment to execute the mission of the control system. Use electricity as the motive

force for all damper and valve actuators, unless use of pneumatics as motive force is specifically granted in writing by the VA.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Section 13 21 29, Constant Temperature Rooms.

C. Section 23 09 11, Instrumentation and Control for Boiler Plant.

D. Section 23 21 13, Hydronic Piping.

E. Section 23 22 13, Steam and Condensate Heating Piping.

F. Section 23 31 00, HVAC Ducts and Casings.

G. Section 23 36 00, Air Terminal Units.

H. Section 23 38 13, Commercial-Kitchen Hoods.

I. Section 23 52 33, Water-Tube Boilers.

J. Section 23 52 39, Fire-Tube Boilers.

K. Section 23 64 00, Packaged Water Chillers.

L. Section 23 73 00, Indoor Central-Station Air-Handling Units.

M. Section 23 74 13, Packaged, Outdoor, Central-Station Air-Handling Units.

N. Section 23 81 00, Decentralized Unitary HVAC Equipment.

O. Section 23 81 23, Computer-Room Air-Conditioners.

P. Section 23 81 43, Air-Source Unitary Heat Pumps.

Q. Section 23 81 46, Water-Source Unitary Heat Pumps.

R. Section 23 84 00, Humidity Control Equipment.

S. Section 25 10 10, Advanced Utility Metering System.

T. Section 26 05 11, Requirements for Electrical Installations.

U. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).

V. Section 26 05 26, Grounding and Bonding for Electrical Systems.

W. Section 26 05 33, Raceway and Boxes for Electrical Systems.

X. Section 26 09 23, Lighting Controls.

Y. Section 26 22 21, Specialty Transformers.

Z. Section 26 27 26, Wiring Devices.

AA. Section 26 29 11, Motor Starters.

BB. Section 26 32 13, Engine Generators.

CC. Section 27 15 00, Communications Horizontal Cabling

DD. Section 28 31 00, Fire Detection and Alarm.

1.3 DEFINITION

A. Algorithm: A logical procedure for solving a recurrent mathematical problem; A prescribed set of well-defined rules or processes for the solution of a problem in a finite number of steps.

B. Analog: A continuously varying signal value (e.g., temperature, current, velocity etc.

C. BACnet: A Data Communication Protocol for Building Automation and Control Networks -as defined by ANSI/ASHRAE Standard 135. This communications protocol allows diverse building automation devices to communicate data and services over a network.

D. BACnet/IP: Annex J of Standard 135. It defines and allows for using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP sub-networks that share the same BACnet network number.

E. BACnet Internetwork: Two or more BACnet networks connected with routers. The two networks may use different LAN technologies.

F. BACnet Network: One or more BACnet segments that have the same network address and are interconnected by bridges at the physical and data link layers.

G. BACnet Segment: One or more physical segments of BACnet devices on a BACnet network, connected at the physical layer by repeaters.

H. BACnet Broadcast Management Device (BBMD): A communications device which broadcasts BACnet messages to all BACnet/IP devices and other BBMDs connected to the same BACnet/IP network.

I. BACnet Interoperability Building Blocks (BIBBs): BACnet Interoperability Building Blocks (BIBBs) are collections of one or more BACnet services. These are prescribed in terms of an "A" and a "B" device. Both of these devices are nodes on a BACnet internetwork.

J. BACnet Testing Laboratories (BTL). The organization responsible for testing products for compliance with the BACnet standard, operated under the direction of BACnet International.

K. Baud: It is a signal change in a communication link. One signal change can represent one or more bits of information depending on type of transmission scheme. Simple peripheral communication is normally one bit per Baud. (e.g., Baud rate = 78,000 Baud/sec is 78,000 bits/sec, if one signal change = 1 bit).

L. Binary: A two-state system where a high signal level represents an "ON" condition and an "OFF" condition is represented by a low signal level.

M. BMP or bmp: Suffix, computerized image file, used after the period in a DOS-based computer file to show that the file is an image stored as a series of pixels.

N. Bus Topology: A network topology that physically interconnects workstations and network devices in parallel on a network segment.

O. Control Unit (CU): Generic term for any controlling unit, stand-alone, microprocessor based, digital controller residing on secondary LAN or Primary LAN, used for local controls or global controls

P. Deadband: A temperature range over which no heating or cooling is supplied, i.e., 22-25 degrees C (72-78 degrees F), as opposed to a single point change over or overlap).

Q. Device: a control system component that contains a BACnet Device Object and uses BACnet to communicate with other devices.

R. Device Object: Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.

S. Device Profile: A specific group of services describing BACnet capabilities of a device, as defined in ASHRAE Standard 135, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing which service and BIBBs are supported by the device.

T. Diagnostic Program: A software test program, which is used to detect and report system or peripheral malfunctions and failures. Generally, this system is performed at the initial startup of the system.

U. Direct Digital Control (DDC): Microprocessor based control including Analog/Digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices in order to achieve a set of predefined conditions.

V. Distributed Control System: A system in which the processing of system data is decentralized and control decisions can and are made at the subsystem level. System operational programs and information are provided to the remote subsystems and status is reported back to the Engineering Control Center. Upon the loss of communication with the Engineering Control center, the subsystems shall be capable of operating in a stand-alone mode using the last best available data.

W. Download: The electronic transfer of programs and data files from a central computer or operation workstation with secondary memory devices to remote computers in a network (distributed) system.

X. DXF: An AutoCAD 2-D graphics file format. Many CAD systems import and export the DXF format for graphics interchange.

Y. Electrical Control: A control circuit that operates on line or low voltage and uses a mechanical means, such as a temperature sensitive bimetal or bellows, to perform control functions, such as actuating a switch or positioning a potentiometer.

Z. Electronic Control: A control circuit that operates on low voltage and uses a solid-state components to amplify input signals and perform control functions, such as operating a relay or providing an output signal to position an actuator.

AA. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.

BB. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.

CC. Firmware: Firmware is software programmed into read only memory (ROM) chips. Software may not be changed without physically altering the chip.

DD. Gateway: Communication hardware connecting two or more different protocols. It translates one protocol into equivalent concepts for the other protocol. In BACnet applications, a gateway has BACnet on one side and non-BACnet (usually proprietary) protocols on the other side.

EE. GIF: Abbreviation of Graphic interchange format.

FF. Graphic Program (GP): Program used to produce images of air handler systems, fans, chillers, pumps, and building spaces. These images can be animated and/or color-coded to indicate operation of the equipment.

GG. Graphic Sequence of Operation: It is a graphical representation of the sequence of operation, showing all inputs and output logical blocks.

HH. I/O Unit: The section of a digital control system through which information is received and transmitted. I/O refers to analog input (AI, digital input (DI), analog output (AO) and digital output (DO). Analog signals are continuous and represent temperature, pressure, flow rate etc., whereas digital signals convert electronic signals to digital pulses (values), represent motor status, filter status, on-off equipment etc.

II. I/P: a method for conveying and routing packets of information over LAN paths. User Datagram Protocol (UDP) conveys information to “sockets” without confirmation of receipt. Transmission Control Protocol (TCP) establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.

JJ. JPEG: A standardized image compression mechanism stands for Joint Photographic Experts Group, the original name of the committee that wrote the standard.

KK. Local Area Network (LAN): A communication bus that interconnects operator workstation and digital controllers for peer-to-peer communications, sharing resources and exchanging information.

LL. Network Repeater: A device that receives data packet from one network and rebroadcasts to another network. No routing information is added to the protocol.

MM. MS/TP: Master-slave/token-passing (ISO/IEC 8802, Part 3). It uses twisted-pair wiring for relatively low speed and low cost communication.

NN. Native BACnet Device: A device that uses BACnet as its primary method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.

OO. Network Number: A site-specific number assigned to each network segment to identify for routing. This network number must be unique throughout the BACnet internetwork.

PP. Object: The concept of organizing BACnet information into standard components with various associated properties. Examples include analog input objects and binary output objects.

QQ. Object Identifier: An object property used to identify the object, including object type and instance. Object Identifiers must be unique within a device.

RR. Object Properties: Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.

SS. Operating system (OS): Software, which controls the execution of computer application programs.

TT. PCX: File type for an image file. When photographs are scanned onto a personal computer they can be saved as PCX files and viewed or changed by a special application program as Photo Shop.

UU. Peripheral: Different components that make the control system function as one unit. Peripherals include monitor, printer, and I/O unit.

VV. Peer-to-Peer: A networking architecture that treats all network stations as equal partners- any device can initiate and respond to communication with other devices.

WW. PICS: Protocol Implementation Conformance Statement, describing the BACnet capabilities of a device. All BACnet devices have published PICS.

XX. PID: Proportional, integral, and derivative control, used to control modulating equipment to maintain a setpoint.

YY. Repeater: A network component that connects two or more physical segments at the physical layer.

ZZ. Router: a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN.

AAA. Sensors: devices measuring state points or flows, which are then transmitted back to the DDC system.

BBB. Thermostats : devices measuring temperatures, which are used in control of standalone or unitary systems and equipment not attached to the DDC system.

1.4 QUALITY ASSURANCE

A. Criteria:

1. Single Source Responsibility of subcontractor: Either the DDC Contractor or the System Integrator shall obtain hardware and software supplied under this Section and delegate the responsibility

to a single source controls installation subcontractor. The Integration subcontractor shall be responsible for the complete design, installation, integration of the system. The controls subcontractor shall be in the business of design, installation and service of such building automation control systems similar in size and complexity.

2. Equipment and Materials: Equipment and materials shall be cataloged products of manufacturers regularly engaged in production and installation of HVAC control systems. Products shall be manufacturer's latest standard design and have been tested and proven in actual use.
3. The controls subcontractor shall provide a list of no less than five similar projects which have building control systems as specified in this Section. These projects must be on-line and functional such that the Department of Veterans Affairs (VA) representative could observe the control systems in full operation.
4. The controls subcontractor shall have an in-place facility within 50 miles with technical staff, spare parts inventory for the next five (5) years, and necessary test and diagnostic equipment to support the control systems.
5. The controls subcontractor shall have minimum of three years of experience in design and installation of building automation systems similar in performance to those specified in this Section.
6. Provide a competent and experienced Project Manager employed by the Controls Contractor. The Project Manager shall be supported as necessary by other Contractor employees in order to provide professional engineering, technical and management service for the work. The Project Manager shall attend scheduled Project Meetings as required and shall be empowered to make technical, scheduling and related decisions on behalf of the Controls Contractor.

B. Codes and Standards:

1. All work shall conform to the applicable Codes and Standards.
2. Electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference, and be so labeled.

1.5 PERFORMANCE

A. The system shall conform to the following:

1. Graphic Display: The system shall display up to four (4) graphics on a single screen with a minimum of twenty (20) dynamic points per graphic. All current data shall be displayed within ten (10) seconds of the request.
2. Graphic Refresh: The system shall update all dynamic points with current data within eight (8) seconds. Data refresh shall be automatic, without operator intervention.
3. Object Command: The maximum time between the command of a binary object by the operator and the reaction by the device shall be two(2) seconds. Analog objects shall start to adjust within two (2) seconds.
4. Object Scan: All changes of state and change of analog values shall be transmitted over the high-speed network such that any data used or displayed at a controller or work-station will be current, within the prior six (6) seconds.
5. Alarm Response Time: The maximum time from when an object goes into alarm to when it is annunciated at the workstation shall not exceed (10) seconds.
6. Program Execution Frequency: Custom and standard applications shall be capable of running as often as once every (5) seconds. The Contractor shall be responsible for selecting execution times consistent with the mechanical process under control.
7. Multiple Alarm Annunciations: All workstations on the network shall receive alarms within five (5) seconds of each other.
8. Performance: Programmable Controllers shall be able to execute DDC PID control loops at a selectable frequency from at least once every one (1) second. The controller shall scan and update the process value and output generated by this calculation at this same frequency.

9. Reporting Accuracy: Listed below are minimum acceptable reporting end-to-end accuracies for all values reported by the specified system:

Measured Variable	Reported Accuracy

Space temperature	±0.5 degrees C (±1 degrees F)
Ducted air temperature	±0.5 degrees C [±1 degrees F]
Outdoor air temperature	±1.0 degrees C [±2 degrees F]
Dew Point	±1.5 degrees C [±3 degrees F]
Water temperature	±0.5 degrees C [±1 degrees F]
Relative humidity	±2 percent RH
Water flow	±1 percent of reading
Air flow (terminal)	±10 percent of reading
Air flow (measuring stations)	±5 percent of reading
Carbon Monoxide (CO)	±5 percent of reading
Carbon Dioxide (CO_2)	±50 ppm
Air pressure (ducts)	±25 Pa [±0.1 inch wg]
Air pressure (space)	±0.3 Pa [±0.001 inch wg]
Water pressure	±2 percent of full scale *Note 1
Electrical Power	±0.5 percent of reading

Note 1: for both absolute and differential pressure

10. Control stability and accuracy: Control sequences shall maintain measured variable at setpoint within the following tolerances:

Controlled Variable	Control Accuracy	Range of Medium
Air Pressure	±50 Pa (±0.2 inch wg)	0-1.5 kPa (0-6 inch wg)
Air Pressure	±3 Pa (±0.01 inch wg)	-25 to 25 Pa (-0.1 to 0.1 inch wg)
Airflow	±10 percent of full scale	
Space Temperature	±1.0°C (±2.0 degrees F)	
Duct Temperature	±1.5°C (±3 degrees F)	
Humidity	±5 percent RH	MRI, SPS, PHARMACY
Fluid Pressure	±10 kPa (±1.5 psig)	0-1 MPa (1-150 psig)
Fluid Pressure	±250 Pa (±1.0 inch wg)	0-12.5 kPa (0-50 inch wg) differential

11. Extent of direct digital control: control design shall allow for at least the points indicated on the points lists on the drawings.

1.6 WARRANTY

A. Labor and materials for control systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.

B. Control system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and control devices.

C. The on-line support service shall allow the Controls supplier to dial out over telephone lines to or connect via (through password-limited access) VPN through the internet to monitor and control the facility's building automation system. This remote connection to the facility shall be within two (2) hours of the time that the problem is reported. This coverage shall include normal business hours, after business hours, weekend and holidays. If the problem cannot be resolved with on-line support services, the Controls supplier shall dispatch the qualified personnel to the job site to resolve the problem within 8 hours after the problem is reported.

D. Controls subcontractor shall be responsible for temporary operations and maintenance of the control systems during the construction period until training of facility operators and acceptance of the project by VA.

1.7 SUBMITTALS

A. Submit shop drawings in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC", with applicable paragraph identification.

C. Manufacturer's Literature and Data Including:

1. A wiring diagram for each type of input device and output device including DDC controllers, modems, repeaters, etc. Diagram shall show how the device is wired and powered, showing typical connections at the digital controllers and each power supply, as well as the device itself. Show for all field connected devices, including but not limited to, control relays, motor starters, electric or electronic actuators, and temperature pressure, flow and humidity sensors and transmitters.

2. A diagram of each terminal strip, including digital controller terminal strips, terminal strip location, termination numbers and the associated point names.
3. Control dampers and control valves schedule, including the size and pressure drop.
4. Control air-supply components, and computations for sizing compressors, receivers and main air-piping, if pneumatic controls are furnished.
5. Catalog cut sheets of all equipment used. This includes, but is not limited to software (by manufacturer and by third parties), DDC controllers, panels, peripherals, airflow measuring stations and associated components, and auxiliary control devices such as sensors, actuators, and control dampers. When manufacturer's cut sheets apply to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted. Each submitted piece of literature and drawings should clearly reference the specification and/or drawings that it supposed to represent.
6. Sequence of operations for each system and the associated control diagrams. Equipment and control labels shall correspond to those shown on the drawings.
7. Color prints of proposed graphics with a list of points for display.
8. Furnish a BACnet Protocol Implementation Conformance Statement (PICS) for each BACnet-compliant device.
9. Schematic wiring diagrams for all control, communication and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer manufacturers' model numbers and functions. Show all interface wiring to the control system.
10. An instrumentation list for each controlled system. Each element of the controlled system shall be listed in table format. The table shall show element name, type of device, manufacturer, model number, and product data sheet number.
11. Riser diagrams of wiring between central control unit (CCU) and all control panels.

12. Plan drawings showing routing of LAN and locations of control panels, controllers, routers, gateways, ECC, and larger controlled devices.
13. Construction details for all installed conduit, cabling, raceway, cabinets, and similar. Construction details of all penetrations and their protection.
14. Quantities of submitted items may be reviewed but it is the responsibility of the contractor administered by this Section of the technical specifications to provide sufficient quantities for a complete and working system.

D. Product Certificates: Compliance with Article, QUALITY ASSURANCE.

E. Validation Test Plan: Along with manufacturer's literature, product certificates, wiring and functional diagrams, and sequence of operations, submit for review and approval a Validation Test Plan which is specific to the work of this project and which references the specific controls component nomenclatures found in the control contractor's wiring and functional diagrams and the specific sequences of controls for this project and which describes how the contractor will implement the controls system validation and demonstration as specified in paragraph 3.2 SYSTEM VALIDATION AND DEMONSTRATION found in this section.

F. Licenses: Provide licenses for all software residing on and used by the Controls Systems, ECC, and portable OWS and transfer these licenses to the Owner prior to completion.

G. As Built Control Drawings:

1. Furnish three (3) copies of as-built drawings for each control system. The documents shall be submitted for approval prior to final completion.
2. Furnish one (1) set of applicable control system prints for each mechanical system for wall mounting. The documents shall be submitted for approval prior to final completion.
3. Furnish one (1) CD-ROM in CAD DWG and/or .DXF format for the drawings noted in subparagraphs above.

H. Operation and Maintenance (O/M) Manuals):

1. Submit in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS.
2. Include the following documentation:

a. General description and specifications for all components, including logging on/off, alarm handling, producing trend reports, overriding computer control, and changing set points and other variables.
b. Detailed illustrations of all the control systems specified for ease of maintenance and repair/replacement procedures, and complete calibration procedures.
c. One copy of the final version of all software provided including operating systems, programming language, operator workstation software, and graphics software.
d. Complete troubleshooting procedures and guidelines for all systems.
e. Complete operating instructions for all systems.
f. Recommended preventive maintenance procedures for all system components including a schedule of tasks for inspection, cleaning and calibration. Provide a list of recommended spare parts needed to minimize downtime.
g. Training Manuals: Submit the course outline and training material to the Owner for approval three (3) weeks prior to the training to VA facility personnel. These persons will be responsible for maintaining and the operation of the control systems, including programming. The Owner reserves the right to modify any or all of the course outline and training material.
h. Licenses, guaranty, and other pertaining documents for all equipment and systems.

I. Submit Performance Report to COR prior to final inspection.

1.8 INSTRUCTIONS

A. Instructions to VA operations personnel: Perform in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS, and as noted below.

1. First Phase: Formal instructions to the VA facilities personnel for a total of 16 hours, given in multiple training sessions (each no longer than four hours in length), conducted sometime between the completed installation and prior to the performance test period of the control system, at a time mutually agreeable to the Contractor and the VA.

2. Second Phase: This phase of training shall comprise of on the job training during startup, checkout period, and performance test period. VA facilities personnel will work with the Contractor's installation and test personnel on a daily basis during startup and checkout period. During the performance test period, controls subcontractor will provide 8 hours of instructions, given in multiple training sessions (each no longer than four hours in length), to the VA facilities personnel.
3. The O/M Manuals shall contain approved submittals as outlined in Article 1.7, SUBMITTALS. The Controls subcontractor will review the manual contents with VA facilities personnel during second phase of training.
4. Training shall be given by direct employees of THE CONTROLS system subcontractor.

1.9 PROJECT CONDITIONS (ENVIRONMENTAL CONDITIONS OF OPERATION)

A. The ECC and peripheral devices and system support equipment shall be designed to operate in ambient condition of 20 to 35 degrees C (65 to 90 degrees F) at a relative humidity of 20 to 80 percent non-condensing.

B. The Controllers used outdoors shall be mounted in NEMA 4 waterproof enclosures, and shall be rated for operation at -40 to 65 degrees C (-40 to 150 degrees F).

C. All electronic equipment shall operate properly with power fluctuations of plus 10 percent to minus 15 percent of nominal supply voltage.

D. Sensors and controlling devices shall be designed to operate in the environment, which they are sensing or controlling.

1.10 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Where conflicts occur these specifications and the VHA standards will govern.

B. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):

135-2020.....BACnet A Data Communication Protocol for Building Automation and Control Networks

147-2019.....Reducing the Release of Halogenated Refrigerants from Refrigerating and Air-Conditioning Equipment and Systems

C. Federal Communication Commission (FCC):

Rules and Regulations Title 47 Chapter 1-2014 Part 15: Radio Frequency Devices

D. Institute of Electrical and Electronic Engineers (IEEE):

802.3-2018.....Standard for Ethernet

E. National Fire Protection Association (NFPA):

70-2020.....National Electric Code

PART 2 - PRODUCTS

2.1 MATERIALS

A. Use new products that the manufacturer is currently manufacturing and that have been installed in a minimum of 25 installations. Spare parts shall be available for at least five years after completion of this contract.

2.2 CONTROLS SYSTEM ARCHITECTURE

A. General

1. The Controls Systems shall consist of multiple Nodes and associated equipment connected by industry standard digital and communication network arrangements.
2. The ECC, building controllers and principal communications network equipment shall be standard products of recognized major manufacturers available through normal PC and computer vendor channels – not "Clones" assembled by a third-party subcontractor.
3. The networks shall, at minimum, comprise, as necessary, the following:
   a. A fixed ECC and a portable operator’s terminal.
   b. Network computer processing, data storage and BACnet-compliant communication equipment including Servers and digital data processors.
   c. BACnet-compliant routers, bridges, switches, hubs, modems, gateways, interfaces and similar communication equipment.
   d. Active processing BACnet-compliant building controllers connected to other BACnet-compliant controllers together with their power supplies and associated equipment.
   e. Addressable elements, sensors, transducers and end devices.

f. Third-party equipment interfaces and gateways as described and required by the Contract Documents.

g. Other components required for a complete and working Control Systems as specified.

B. The Specifications for the individual elements and component subsystems shall be minimum requirements and shall be augmented as necessary by the Contractor to achieve both compliance with all applicable codes, standards, and to meet all requirements of the Contract Documents.

C. Network Architecture

1. The Controls communication network shall utilize BACnet communications protocol operating over a standard Ethernet LAN and operate at a minimum speed of 100 Mb/sec.
2. The networks shall utilize only copper and optical fiber communication media as appropriate and shall comply with applicable codes, ordinances and regulations. They may also utilize digital wireless technologies as appropriate to the application and if approved by the VA.
3. All necessary telephone lines, ISDN lines and internet Service Provider services and connections will be provided by the VA.

D. Third Party Interfaces:

1. The contractor administered by this Section of the technical specifications shall include necessary hardware, equipment, software and programming to allow data communications between the controls systems and building systems supplied by other trades.
2. Other manufacturers and contractors supplying other associated systems and equipment shall provide their necessary hardware, software and startup at their cost and shall cooperate fully with the contractor administered by this Section of the technical specifications in a timely manner and at their cost to ensure complete functional integration.

E. Servers:

1. Provide data storage server(s) to archive historical data including trends, alarm and event histories and transaction logs.
2. Equip these server(s) with the same software tool set that is located in the BACnet building controllers for system configuration and custom logic definition and color graphic configuration.

3. Access to all information on the data storage server(s) shall be through the same browser functionality used to access individual nodes. When logged onto a server the operator will be able to also interact with any other controller on the control system as required for the functional operation of the controls systems. The contractor administered by this Section of the technical specifications shall provide all necessary digital processor programmable data storage server(s).
4. These server(s) shall be utilized for controls systems application configuration, for archiving, reporting and trending of data, for operator transaction archiving and reporting, for network information management, for alarm annunciation, for operator interface tasks, for controls application management and similar.
5. These server(s) shall utilize IT industry standard data base platforms which utilize a database declarative language designed for managing data in relational database management systems (RDBMS) such as SQL.

2.3 COMMUNICATION

A. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135, BACnet.

1. The Data link / physical layer protocol between the ECC and all B-BC’s (for communication) acceptable to the VA throughout its facilities is Ethernet (ISO 8802-3) and BACnet/IP.
2. The MS/TP data link / physical layer protocol is prohibited to the VA in any new BACnet network or sub-network in its healthcare or lab facilities.

B. Each controller shall have a communication port for connection to an operator interface.

C. ECCs and Controllers with real-time clocks shall use the BACnet Time Synchronization service. The system shall automatically synchronize system clocks daily from an operator-designated device via the internetwork. The system shall automatically adjust for daylight savings and standard time as applicable.

2.4 ENGINEERING CONTROL CENTER (ECC)

A. The ECC shall reside on a high-speed network with controllers as shown on system drawings. The ECC and each standard browser connected to server shall be able to access all system information.

B. ECC and controllers shall communicate using BACnet protocol. ECC and control network backbone shall communicate using ISO 8802-3 (Ethernet) Data Link/Physical layer protocol and BACnet/IP addressing as specified in ASHRAE/ANSI 135, BACnet Annex J.

C. Hardware: ECC shall conform to the BACnet Advanced Workstation (B-AWS) Profile and shall be BTL-Listed as a B-AWS device.

1. ECC shall be based on commercially available server grade hardware. Computers based on desktop architectures shall not be permitted. ECC shall have remote management capabilities.
2. Processor(s):
   a. Processors shall be either Intel Xeon or AMD EPYC chips sets designed specifically for server use. Desktop processors will not be allowed.
   b. Minimum core count shall be 16 cores. Each Core shall be capable of executing 2 threads simultaneously.
   c. Minimum base clock speed shall be 3.0 GHz
3. Memory:
   a. Engineering Control Center shall be equipped with a minimum of 32G of DDR4 Error Correcting Code (ECC) memory. After installation of required 32G of RAM, the motherboard must still have a minimum of 2 DIMM slots open for expansion. Motherboard shall be capable of minimum of 64GB of ECC memory.
   b. Minimum speed shall be 2133MHz for memory
4. Storage:
   a. ECC shall be equipped with a RAID capable drive controller capable of handling at least 8 internal, hot swappable drives.
   b. All installed drives shall be “Enterprise Class” drives designed specifically for server use.
   c. Minimum configuration shall consist of 6 drives in 2 separate RAID arrays:

1) The operating system shall be stored on a RAID 1 array compromising of 2 drives with each drive having a minimum capacity of 1TB each.
2) The B-AWS software and all its related databases shall be stored in RAID 5 array consisting of 4 drives with each drive have a minimum of 4TB capacity for a minimum storage capacity of 12TB's.
3) An alternative configuration for the 2 RAID arrays described above is 8 drives arrayed in a RAID 10 configuration. In this case the OS RAID array would consist of 4 drives of 1TB minimum each, and the B-AWS RAID array consisting of 4 drives of 16TB minimum each. This configuration would provide faster write times and much quicker rebuild times in the event of a drive failure.

d. ECC will include an 16X DVD R/W drive

5. Case:

a. Case shall have space for a minimum of 8 hot swap 3.5 inch hard drives and one internal optical drive

b. Real-time clock:

1) Accuracy: Plus or minus 1 minute per month.
2) Time Keeping Format: 24-hour time format including seconds, minutes, hours, date, day, and month; automatic reset by software.
3) Clock shall function for one year without power.
4) Provide automatic time correction once every 24 hours by synchronizing clock with the Time Service Department of the U.S. Naval Observatory.

c. Serial ports: Four USB ports and two RS-232-F serial ports for general use, with additional ports as required. Data transmission rates shall be selectable under program control.

d. Parallel port: Enhanced.

e. Sound card: For playback and recording of digital WAV sound files associated with audible warning and alarm functions.

f. Color monitor: PC compatible, not less than 22 inches, LCD type, with a minimum resolution of 1280 by 1024 pixels, non-interlaced, and a maximum dot pitch of 0.28 mm.

g. Keyboard: Minimum of 64 characters, standard ASCII character set based on ANSI INCITS 154.
h. Mouse: Standard, compatible with installed software.
i. Removable disk storage: Include the following, each with appropriate controller:
   1) Minimum 1 TB removable hard disk, maximum average access time of 10 ms.
j. Network interface card (NIC): integrated 10-100-1000 Base-TX Ethernet NIC with an RJ45 connector or a 100Base-FX Ethernet NIC with an SC/ST connector.

6. Cable modem: 42.88 MBit/s, DOCSIS 2.0 Certified, also backwards compatible with DOCSIS 1.1/1.0 standards. Provide Ethernet or USB connectivity.
7. Audible Alarm: Manufacturer's standard.
8. Printers:
   a. Provide a dedicated, minimum resolution 600 dpi, color laser printer, connected to the ECC through a USB interface.
      1) If a network printer is used instead of this dedicated printer, it shall have a 100Base-T interface with an RJ45 connection and shall have a firmware print spooler compatible with the Operating System print spooler.
      2) RAM: 512 MB, minimum.
      3) Printing Speed: Minimum twenty-six pages per minute (color); minimum 30 pages per minute (black/white).
      4) Paper Handling: Automatic sheet feeder with 250-sheet x 8.5 inch x 11 inch paper cassette and with automatic feed.
   b. Provide a dedicated black/white tractor-feed dot matrix printer for status/alarm message printing, minimum 10 characters per inch, minimum 160 characters per second, connected to the ECC through a USB interface.
      1) Paper: One box of 2000 sheets of 8-1/2 x 11 inch multi-fold type printer paper
9. RS-232 ASCII Interface
   a. ASCII interface shall allow RS-232 connections to be made between a meter or circuit monitor operating as the host PC and any

equipment that will accept RS-232 ASCII command strings, such as local display panels, dial-up modems, and alarm transmitters.

1) Pager System Interface: Alarms shall be able to activate a pager system with customized message for each input alarm.

b. Alarm System Interface: RS-232 output shall be capable of transmitting alarms from other monitoring and alarm systems to workstation software.

c. RS-232 output shall be capable of connection to a pager interface that can be used to call a paging system or service and send a signal to a portable pager. System shall allow an individual alphanumeric message per alarm input to be sent to paging system. This interface shall support both numeric and alphanumeric pagers.

d. Cables: provide Plenum-Type, RS-232 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, plastic insulation, and individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage; plastic jacket. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.

1) NFPA 70, Type CMP.

2) Flame Resistance: NFPA 262, Flame Test.

D. ECC Software:

1. Provide for automatic system database save and restore on the ECC's hard disk a copy of the current database of each Controller. This database shall be updated whenever a change is made in any system panel. In the event of a database loss in a building management panel, the ECC shall automatically restore the database for that panel. This capability may be disabled by the operator.

2. Provide for manual database save and restore. An operator with proper clearance shall be able to save the database from any system panel. The operator also shall be able to clear a panel database and manually initiate a download of a specified database to any panel in the system.

3. Provide a method of configuring the system. This shall allow for future system changes or additions by users with proper clearance.

4. Operating System. Furnish a concurrent multi-tasking operating system. The operating system also shall support the use of other common software applications. Acceptable operating systems are Windows Server.
5. System Graphics. The operator workstation software shall be graphically oriented. The system shall allow display of up to 10 graphic screens at once for comparison and monitoring of system status. Provide a method for the operator to easily move between graphic displays and change the size and location of graphic displays on the screen. The system graphics shall be able to be modified while on-line. An operator with the proper password level shall be able to add, delete, or change dynamic objects on a graphic. Dynamic objects shall include analog and binary values, dynamic text, static text, and animation files. Graphics shall have the ability to show animation by shifting image files based on the status of the object.
6. Custom Graphics. Custom graphic files shall be created with the use of a graphics generation package furnished with the system. The graphics generation package shall be a graphically based system that uses the mouse to create and modify graphics that are saved in industry standard formats such as PCX, TIFF, and GEM. The graphics generation package also shall provide the capability of capturing or converting graphics from other programs such as Designer or AutoCAD.
7. Graphics Library. Furnish a complete library of standard HVAC equipment graphics such as chillers, boilers, air handlers, terminals, fan coils, and unit ventilators. This library also shall include standard symbols for other equipment including fans, pumps, coils, valves, piping, dampers, and ductwork. The library shall be furnished in a file format compatible with the graphics generation package program.
8. The Controls Systems Operator Interfaces shall be user friendly, readily understood and shall make maximum use of colors, graphics, icons, embedded images, animation, text based information and data visualization techniques to enhance and simplify the use and understanding of the displays by authorized users at the ECC. The

operating system shall be Windows 10 latest version, or better, and shall support the third party software.

9. Provide graphical user software, which shall minimize the use of keyboard through the use of the mouse and "point and click" approach to menu selection.
10. The software shall provide a multi-tasking type environment that will allow the user to run several applications simultaneously. The mouse or Alt-Tab keys shall be used to quickly select and switch between multiple applications. The operator shall be able automatically export data to and work in Microsoft Word, Excel, and other Windows based software programs, while concurrently on-line system alarms and monitoring information.
11. On-Line Help. Provide a context-sensitive, on-line help system to assist the operator in operating and editing the system. On-line help shall be available for all applications and shall provide the relevant data for that particular screen. Additional help information shall be available through the use of hypertext.
12. User access shall be protected by a flexible and Owner re-definable software-based password access protection. Password protection shall be multi-level and partition able to accommodate the varied access requirements of the different user groups to which individual users may be assigned. Provide the means to define unique access privileges for each individual authorized user. Provide the means to on-line manage password access control under the control of a project specific Master Password. Provide an audit trail of all user activity on the Controls Systems including all actions and changes.
13. The system shall be completely field-programmable from the common operator’s keyboard thus allowing hard disk storage of all data automatically. All programs for the CUs shall be able to be downloaded from the hard disk. The software shall provide the following functionality as a minimum:
    a. Point database editing, storage and downloading of controller databases.
    b. Scheduling and override of building environmental control systems.
    c. Collection and analysis of historical data.

d. Alarm reporting, routing, messaging, and acknowledgement.
e. Definition and construction of dynamic color graphic displays.
f. Real-time graphical viewing and control of environment.
g. Scheduling trend reports.
h. Program editing.
i. Operating activity log and system security.
j. Transfer data to third party software.

14. Provide functionality such that using the least number of steps to initiate the desired event may perform any of the following simultaneously:
    a. Dynamic color graphics and graphic control.
    b. Alarm management.
    c. Event scheduling.
    d. Dynamic trend definition and presentation.
    e. Program and database editing.
    f. Each operator shall be required to log on to the system with a username and password to view, edit or delete the data. System security shall be selectable for each operator, and the password shall be able to restrict the operator's access for viewing and changing the system programs. Each operator shall automatically be logged off the system if no keyboard or mouse activity is detected for a selected time.
15. Graphic Displays:
    a. The workstation shall allow the operator to access various system schematics and floor plans via a graphical penetration scheme, menu selection, or text-based commands. Graphic software shall permit the importing of AutoCAD or scanned pictures in the industry standard format (such as PCX, BMP, GIF, and JPEG) for use in the system.
    b. System Graphics shall be project specific and schematically correct for each system. (i.e.: coils, fans, dampers located per equipment supplied with project.) Standard system graphics that do not match equipment or system configurations are prohibited. Operator shall have capability to manually operate the entire system from each graphic screen at the ECC. Each system graphic

shall include a button/tab to a display of the applicable sequence of operation.

c. Dynamic temperature values, humidity values, flow rates, and status indication shall be shown in their locations and shall automatically update to represent current conditions without operator intervention and without pre-defined screen refresh values.

d. Color shall be used to indicate status and change in status of the equipment. The state colors shall be user definable.

e. A clipart library of HVAC equipment, such as chillers, boilers, air handling units, fans, terminal units, pumps, coils, standard ductwork, piping, valves and laboratory symbols shall be provided in the system. The operator shall have the ability to add custom symbols to the clipart library.

f. A dynamic display of the site-specific architecture showing status of the controllers, the ECC and network shall be provided.

g. The windowing environment of the workstation shall allow the user to simultaneously view several applications at a time to analyze total building operation or to allow the display of graphic associated with an alarm to be viewed without interrupting work in progress. The graphic system software shall also have the capability to split screen, half portion of the screen with graphical representation and the other half with sequence of operation of the same HVAC system.

16. Trend reports shall be generated on demand or pre-defined schedule and directed to monitor display, printers or disk. As a minimum, the system shall allow the operator to easily obtain the following types of reports:

a. A general list of all selected points in the network.

b. List of all points in the alarm.

c. List of all points in the override status.

d. List of all disabled points.

e. List of all points currently locked out.

f. List of user accounts and password access levels.

g. List of weekly schedules.

h. List of holiday programming.

i. List of limits and dead bands.
j. Custom reports.
k. System diagnostic reports, including, list of digital controllers on the network.
l. List of programs.

17. ASHRAE Standard 147 Report: Provide a daily report that shows the operating condition of each chiller as recommended by ASHRAE Standard 147. At a minimum, this report shall include:
    a. Chilled water (or other secondary coolant) inlet and outlet temperature
    b. Chilled water (or other secondary coolant) flow
    c. Chilled water (or other secondary coolant) inlet and outlet pressures
    d. Evaporator refrigerant pressure and temperature
    e. Condenser refrigerant pressure and liquid temperature
    f. Condenser water inlet and outlet temperatures
    g. Condenser water flow
    h. Refrigerant levels
    i. Oil pressure and temperature
    j. Oil level
    k. Compressor refrigerant discharge temperature
    l. Compressor refrigerant suction temperature
    m. Addition of refrigerant
    n. Addition of oil
    o. Vibration levels or observation that vibration is not excessive
    p. Motor amperes per phase
    q. Motor volts per phase
    r. PPM refrigerant monitor level
    s. Purge exhaust time or discharge count
    t. Ambient temperature (dry-bulb and wet-bulb)
    u. Date and time logged
18. Electrical, Gas, and Weather Reports
    a. Electrical Meter Report: Provide a monthly report showing the daily electrical consumption and peak electrical demand with time and date stamp for each building meter.

b. Provide an annual (12-month) summary report showing the monthly electrical consumption and peak demand with time and date stamp for each meter.

c. Gas Meter Report: Provide a monthly report showing the daily natural gas consumption for each meter. Provide an annual (12-month) report that shows the monthly consumption for each meter.

d. Weather Data Report: Provide a monthly report showing the daily minimum, maximum, and average outdoor air temperature, as well as the number of heating and cooling degree-days for each day. Provide an annual (12-month) report showing the minimum, maximum, and average outdoor air temperature for the month, as well as the number of heating and cooling degree-days for the month.

19. Scheduling and Override:

a. Provide override access through menu selection from the graphical interface and through a function key.

b. Provide a calendar type format for time-of-day scheduling and overrides of building control systems. Schedules reside in the ECC. The digital controllers shall ensure equipment time scheduling when the ECC is off-line. The ECC shall not be required to execute time scheduling. Provide the following spreadsheet graphics as a minimum:

1) Weekly schedules.
2) Zone schedules, minimum of 100 zones.
3) Scheduling up to 365 days in advance.
4) Scheduled reports to print at workstation.

20. Collection and Analysis of Historical Data:

a. Provide trending capabilities that will allow the operator to monitor and store records of system activity over an extended period. Points may be trended automatically on time-based intervals or change of value, both of which shall be user definable. The trend interval could be five (5) minutes to 120 hours. Trend data may be stored on hard disk for future diagnostic and reporting. Additionally trend data may be archived to network drives or removable disk media for off-site retrieval.

b. Reports may be customized to include individual points or predefined groups of at least six points. Provide additional

functionality to allow pre-defined groups of up to 250 trended points to be easily accessible by other industry standard word processing and spreadsheet packages. The reports shall be time and date stamped and shall contain a report title and the name of the facility.

c. System shall have the set up to generate spreadsheet reports to track energy usage and cost based on weekly or monthly interval, equipment run times, equipment efficiency, and/or building environmental conditions.

d. Provide additional functionality that will allow the operator to view real time trend data on trend graph displays. A minimum of 20 points may be graphed regardless of whether they have been predefined for trending. In addition, the user may pause the graph and take snapshots of the screens to be stored on the workstation disk for future reference and trend analysis. Exact point values may be viewed, and the graph may be printed. Operator shall be able to command points directly on the trend plot by double clicking on the point.

21. Alarm Management:

a. Alarm routing shall allow the operator to send alarm notification to selected printers or operator workstation based on time of day, alarm severity, or point type.

b. Alarm notification shall be provided via two alarm icons, to distinguish between routine, maintenance type alarms and critical alarms. The critical alarms shall display on the screen at the time of its occurrence, while others shall display by clicking on their icon.

c. Alarm display shall list the alarms with highest priority at the top of the display. The alarm display shall provide selector buttons for display of the associated point graphic and message in English language. The operator shall be able to sort out the alarms.

d. Alarm messages shall be customized for each point to display detailed instructions to the operator regarding actions to take in the event of an alarm.

e. An operator with proper security level access may acknowledge and clear the alarm. All that have not been cleared shall be archived at workstation disk.

22. Remote Communications: The system shall have the ability to dial out in the event of an alarm. Receivers shall include operator workstations, e-mail addresses, and alpha-numeric pagers. The alarm message shall include the name of the calling location, the device that generated the alarm, and the alarm message itself.
23. System Configuration:
    a. Network control strategies shall not be restricted to a single digital controller but shall be able to include data from all other network devices to allow the development of global control strategies.
    b. Provide automatic backup and restore of all digital controller databases on the workstation hard disk. In addition to all backup data, all databases shall be performed while the workstation is on-line without disturbing other system operations.

2.5 PORTABLE OPERATOR'S TERMINAL (POT)

A. Provide a portable operator's terminal (POT) that shall be capable of accessing all system data. POT may be connected to any point on the system network or may be connected directly to any controller for programming, setup, and troubleshooting. POT shall communicate using BACnet protocol. POT may be connected to any point on the system network or it may be connected directly to controllers using the BACnet PTP (Point-To-Point) Data Link/ Physical layer protocol. The terminal shall use the Read (Initiate) and Write (Execute) BACnet Services. POT shall be an IBM-compatible notebook-style PC including all software and hardware required.

B. Hardware: POT shall conform to the BACnet Advanced Workstation (B-AWS) Profile and shall be BTL-Listed as a B-AWS device.

1. POT shall be commercial standard with supporting 32- or 64-bit hardware (as limited by the direct-digital control system software) and software enterprise server. Internet Explorer v6.0 SP1 or higher, Windows Script Hosting version 5.6 or higher, Windows Message Queuing, Windows Internet Information Services (IIS) v5.0 or higher, minimum 2.8 GHz processor, minimum 500 GB 7200 rpm SATA hard drive with 16 MB cache, minimum 2GB DDR3 SDRAM (minimum 1333 Mhz)

memory, 512 MB video card, minimum 16 inch (diagonal) screen, 10-100-1000 Base-TX Ethernet NIC with an RJ45 connector or a 100Base-FX Ethernet NIC with an SC/ST connector, 56,600 bps modem, an ASCII RS-232 interface, and a 16 speed high density DVD-RW+/- optical drive.

C. Software: POT shall include software equal to the software on the ECC.

2.6 BACnet PROTOCOL ANALYZER

A. For ease of troubleshooting and maintenance, provide a BACnet protocol analyzer. Provide its associated fittings, cables and appurtenances, for connection to the communications network. The BACnet protocol analyzer shall be able to, at a minimum: capture and store to a file all data traffic on all network levels; measure bandwidth usage; filter out (ignore) selected traffic.

2.7 NETWORK AND DEVICE NAMING CONVENTION

A. Network Numbers

1. BACnet network numbers shall be based on a "facility code, network" concept. The "facility code" is the VAMC’s or VA campus’ assigned numeric value assigned to a specific facility or building. The "network" typically corresponds to a "floor" or other logical configuration within the building. BACnet allows 65535 network numbers per BACnet internet work.
2. The network numbers are thus formed as follows: "Net #" = "FFFNN" where:
   a. FFF = Facility code (see below)
   b. NN = 00-99 This allows up to 100 networks per facility or building

B. Device Instances

1. BACnet allows 4194305 unique device instances per BACnet internet work. Using Agency's unique device instances are formed as follows: "Dev #" = "FFFNNDD" where
   a. FFF and N are as above and
   b. DD = 00-99, this allows up to 100 devices per network.
2. Note Special cases, where the network architecture of limiting device numbering to DD causes excessive subnet works. The device number can be expanded to DDD and the network number N can become a single digit. In NO case shall the network number N and the device number D exceed 4 digits.

3. Facility code assignments:
4. 000-400 Building/facility number
5. Note that some facilities have a facility code with an alphabetic suffix to denote wings, related structures, etc. The suffix will be ignored. Network numbers for facility codes greater than 400 will be assigned in the range 000-399.

C. Device Names

1. Name the control devices based on facility name, location within a facility, the system or systems that the device monitors and/or controls, or the area served. The intent of the device naming is to be easily recognized. Names can be up to 254 characters in length, without embedded spaces. Provide the shortest descriptive, but unambiguous, name. For example, in building #123 prefix the number with a "B" followed by the building number, if there is only one chilled water pump "CHWP-1", a valid name would be "B123.CHWP. 1.STARTSTOP". If there are two pumps designated "CHWP-1", one in a basement mechanical room (Room 0001) and one in a penthouse mechanical room (Room PH01), the names could be "B123.R0001.CHWP.1. STARTSTOP" or "B123.RPH01.CHWP.1.STARTSTOP". In the case of unitary controllers, for example a VAV box controller, a name might be "B123.R101.VAV". These names should be used for the value of the "Object_Name" property of the BACnet Device objects of the controllers involved so that the BACnet name and the EMCS name are the same.

2.8 BACnet DEVICES

A. All BACnet Devices – controllers, gateways, routers, actuators, Operator Displays, and sensors shall conform to BACnet Device Profiles and shall be BACnet Testing Laboratories (BTL) -Listed as conforming to those Device Profiles. Protocol Implementation Conformance Statements (PICSs), describing the BACnet capabilities of the Devices shall be published and available for the Devices through links in the BTL website.

1. BACnet Building Controllers, shall conform to the BACnet B-BC Device Profile, and shall be BTL-Listed as conforming to the B-BC Device Profile. The Device's PICS shall be submitted.

2. BACnet Advanced Application Controllers shall conform to the BACnet B-AAC Device Profile and shall be BTL-Listed as conforming to the B-AAC Device Profile. The Device's PICS shall be submitted.
3. BACnet Application Specific Controllers shall conform to the BACnet B-ASC Device Profile and shall be BTL-Listed as conforming to the B-ASC Device Profile. The Device's PICS shall be submitted.
4. BACnet Smart Actuators shall conform to the BACnet B-SA Device Profile and shall be BTL-Listed as conforming to the B-SA Device Profile. The Device's PICS shall be submitted.
5. BACnet Smart Sensors shall conform to the BACnet B-SS Device Profile and shall be BTL-Listed as conforming to the B-SS Device Profile. The Device's PICS shall be submitted.
6. BACnet routers and gateways shall conform to the BACnet B-OTH Device Profile, and shall be BTL-Listed as conforming to the B-OTH Device Profile. The Device's PICS shall be submitted.

2.9 CONTROLLERS

A. General. Provide an adequate number of BTL listed B-BC building controllers, BTL listed B-AAC, BTL listed B-ASC, BTL listed B-SA, and BTL listed B-SS's to achieve the performance specified in the Part 1 Article on "System Performance." Each of these controllers shall meet the following requirements.

1. Communication.
   a. Each B-BC controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications.
   b. Each B-BC controller shall provide a service communication port using BACnet Data Link/Physical layer protocol for connection to a portable operator's terminal. If this port is not available built into the controller, contractor is to install a 4 port unmanaged switch inside the B-BC control cabinet.
2. Keypad. A local keypad and display shall be provided for each controller. The keypad shall be provided for interrogating and editing data. Provide a system security password to prevent unauthorized use of the keypad and display.
3. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-

removable, modular terminal strips or to a termination card connected by a ribbon cable.

4. Memory. The controller shall maintain all BIOS and programming information in the event of a power loss for at least 72 hours.
5. The controller shall be able to operate at 90 percent to 110 percent of nominal voltage rating and shall perform an orderly shutdown less than 80 percent nominal voltage. Controller operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 watt at 1 meter (3 feet).
6. Transformer. Power supply for the ASC must be rated at a minimum of 125 percent of B-ASC power consumption and shall be of the fused or current limiting type.

B. Provide BTL-Listed B-ASC application specific controllers for each piece of equipment for which they are constructed. Application specific controllers shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute) Property service.

1. Each B-ASC shall be capable of stand-alone operation and shall continue to provide control functions without being connected to the network.
2. Each B-ASC will contain sufficient I/O capacity to control the target system.
3. Communication.
   a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
   b. Each controller shall have a BACnet Data Link/Physical layer compatible connection for a laptop computer or a portable operator’s tool. This connection shall be extended to a space temperature sensor port where shown.
4. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.

5. Memory. The application specific controller shall use nonvolatile memory and maintain all BIOS and programming information in the event of a power loss.
6. Immunity to power and noise. Controllers shall be able to operate at 90 percent to 110 percent of nominal voltage rating and shall perform an orderly shutdown below 80 percent. Operation shall be protected against electrical noise of 5-120 Hz and from keyed radios up to 5 watts at 1 meter (3 feet).

C. Direct Digital Controller Software

1. The software programs specified in this section shall be commercially available, concurrent, multi-tasking operating system and support the use of software application that operates under Microsoft Windows.
2. All points shall be identified by up to 30-character point name and 16-character point descriptor. The same names shall be used at the ECC.
3. All control functions shall execute within the stand-alone control units. All new controllers installed will also include all software and/or hardware required to program, commission, or alter the sequence of operation of said controller(s). Controllers requiring software or hardware that is not commercially available will not be allowed. Installation of software and/or hardware for controller configuration will be the responsibility of the DDC contractor. COR will direct to install said hardware and/or software on either the B-AWS or portable operator terminal. The VA shall be able to customize control strategies and sequences of operations defining the appropriate control loop algorithms and choosing the optimum loop parameters without requiring the services of a DDC contractor.
4. All controllers shall be capable of being programmed to utilize stored default values for assured fail-safe operation of critical processes. Default values shall be invoked upon sensor failure or, if the primary value is normally provided by the central or another CU, or by loss of bus communication. Individual application software packages shall be structured to assume a fail-safe condition upon loss of input sensors. Loss of an input sensor shall result in output of a sensor-failed message at the ECC. Each ACU and RCU shall

have capability for local readouts of all functions. The UCUs shall be read remotely.

5. All DDC control loops shall be able to utilize any of the following control modes:
   a. Two position (on-off, slow-fast) control.
   b. Proportional control.
   c. Proportional plus integral (PI) control.
   d. Proportional plus integral plus derivative (PID) control. All PID programs shall automatically invoke integral wind up prevention routines whenever the controlled unit is off, under manual control of an automation system or time-initiated program.
   e. Automatic tuning of control loops.
6. System Security: Operator access shall be secured using individual password and operator’s name. Passwords shall restrict the operator to the level of object, applications, and system functions assigned to him. A minimum of three (3)or a maximum of six (6) levels of security for operator access shall be provided.
7. Application Software: The controllers shall provide the following programs as a minimum for the purpose of optimizing energy consumption while maintaining comfortable environment for occupants. All application software shall reside and run in the system digital controllers. Editing of the application shall occur at the ECC or via a portable operator’s terminal, when it is necessary, to access directly the programmable unit.

   a. Power Demand Limiting (PDL): Power demand limiting program shall monitor the building power consumption and limit the consumption of electricity to prevent peak demand charges. PDL shall continuously track the electricity consumption from a pulse input generated at the kilowatt-hour/demand electric meter. PDL shall sample the meter data to continuously forecast the electric demand likely to be used during successive time intervals. If the forecast demand indicates that electricity usage will likely to exceed a user preset maximum allowable level, then PDL shall automatically shed electrical loads. Once the demand load has met, loads that have been shed shall be restored and returned to normal mode. Control system shall be capable of demand limiting

by resetting the HVAC system set points to reduce load while maintaining indoor air quality.

b. Night Setback/Morning Warm up Control: The system shall provide the ability to automatically adjust set points for this mode of operation.

c. Optimum Start/Stop (OSS): Optimum start/stop program shall automatically be coordinated with event scheduling. The OSS program shall start HVAC equipment at the latest possible time that will allow the equipment to achieve the desired zone condition by the time of occupancy, and it shall also shut down HVAC equipment at the earliest possible time before the end of the occupancy period and still maintain desired comfort conditions. The OSS program shall consider both outside weather conditions and inside zone conditions. The program shall automatically assign longer lead times for weekend and holiday shutdowns. The program shall poll all zones served by the associated AHU and shall select the warmest and coolest zones. These shall be used in the start time calculation. It shall be possible to assign occupancy start times on a per air handler unit basis. The program shall meet the local code requirements for minimum outdoor air while the building is occupied. Modification of assigned occupancy start/stop times shall be possible via the ECC.

d. Event Scheduling: Provide a comprehensive menu driven program to automatically start and stop designated points or a group of points according to a stored time. This program shall provide the capability to individually command a point or group of points. When points are assigned to one common load group it shall be possible to assign variable time advances/delays between each successive start or stop within that group. Scheduling shall be calendar based and advance schedules may be defined up to one year in advance. Advance schedule shall override the day-to-day schedule. The operator shall be able to define the following information:

1) Time, day.

2) Commands such as on, off, auto.

3) Time delays between successive commands.
4) Manual overriding of each schedule.
5) Allow operator intervention.

e. Alarm Reporting: The operator shall be able to determine the action to be taken in the event of an alarm. Alarms shall be routed to the ECC based on time and events. An alarm shall be able to start programs, login the event, print and display the messages. The system shall allow the operator to prioritize the alarms to minimize nuisance reporting and to speed operator's response to critical alarms. A minimum of six (6) priority levels of alarms shall be provided for each point.

f. Remote Communications: The system shall have the ability to dial out in the event of an alarm to the ECC and alpha-numeric pagers. The alarm message shall include the name of the calling location, the device that generated the alarm, and the alarm message itself. The operator shall be able to remotely access and operate the system using dial up communications. Remote access shall allow the operator to function the same as local access.

g. Maintenance Management (PM): The program shall monitor equipment status and generate maintenance messages based upon the operators defined equipment run time, starts, and/or calendar date limits. A preventative maintenance alarm shall be printed indicating maintenance requirements based on pre-defined run time. Each preventive message shall include point description, limit criteria and preventative maintenance instruction assigned to that limit. A minimum of 480-character PM shall be provided for each component of units such as air handling units.

2.10 SPECIAL CONTROLLERS (NOT USED)

2.11 SENSORS (AIR)

A. Sensors' measurements shall be read back to the DDC system, and shall be visible by the ECC.

B. Temperature Sensors shall be electronic, vibration and corrosion resistant for wall, immersion, and/or duct mounting. Provide all remote sensors as required for the systems.

1. Temperature Sensors: thermistor type for terminal units and Resistance Temperature Device (RTD) with an integral 4-20 mA or 0-10 VDC transmitter type for all other sensors.
   a. All space sensors shall be equipped with in-space User set-point adjustment, override switch, numerical temperature display on sensor cover, and BACnet communication port. Match room thermostats. Provide a tooled-access cover.
      1) Public space sensor: setpoint adjustment shall be only through the ECC or through the DDC system's diagnostic device/laptop. Do not provide in-space User set-point adjustment. Provide an opaque keyed-entry cover if needed to restrict in-space User set-point adjustment.
   b. Wire: Twisted, shielded-pair cable.
   c. Output Signal: 4-20 mA or 0-10 VDC.

2.12 CONTROL CABLES

A. General:

1. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with Sections 27 05 26 and 26 05 26.
2. Cable conductors to provide protection against induction in circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.
3. Minimize the radiation of RF noise generated by the System equipment so as not to interfere with any audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.
4. The as-installed drawings shall identify each cable as labeled, used cable, and bad cable pairs.
5. Label system's cables on each end. Test and certify cables in writing to the VA before conducting proof-of-performance testing. Minimum cable test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges used. Make available all cable installation and

test records at demonstration to the VA. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.

6. Power wiring shall not be run in conduit with communications trunk wiring or signal or control wiring operating at 100 volts or less.

B. Analogue control cabling shall be not less than No. 18 AWG solid or stranded, with thermoplastic insulated conductors as specified in Section 26 05 21.

C. Copper digital communication cable between the ECC and the B-BC and B-AAC controllers shall be 100BASE-TX Ethernet, Category 5e or 6, not less than minimum 24 American Wire Gauge (AWG) solid, Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), with thermoplastic insulated conductors, enclosed in a thermoplastic outer jacket, as specified in Section 27 15 00.

1. Other types of media commonly used within IEEE Std 802.3 LANs (e.g., 10Base-T and 10Base-2) shall be used only in cases to interconnect with existing media.

D. All MS/TP communications cables for devices utilizing the EIA-485 standard must be listed for use on EIA-485 networks by the manufacturer of the cable. This requirement overrides any cable recommendation by the controller manufacturer. The use of EIA-485 communication cables shall not affect the warranty from the installing DDC contractor. Cables shall have the following characteristic:

1. Nominal Impedance: 100-130 Ohms
2. Twisted/shielded construction of 1, 1.5, or 2 pairs depending on controller requirements.
3. Be plenum rated when required
4. Cables designated for use by the cable manufacturer for use in PA or Speaker systems shall not be allowed, regardless of recommendations by the controller manufacturer.

E. Optical digital communication fiber, if used, shall be Multimode or Single mode fiber, 62.5/125 micron for multimode or 10/125 micron for single mode micron with SC or ST connectors as specified in TIA-568-C.1. Terminations, patch panels, and other hardware shall be compatible with the specified fiber and shall be as specified in Section 27 15 00. Fiber-optic cable shall be suitable for use with the 100Base-FX or the 100Base-SX standard (as applicable) as defined in IEEE Std 802.3.

2.13 THERMOSTATS

A. Room thermostats controlling unitary standalone heating and cooling devices not connected to the DDC system shall have three modes of operation (heating - null or dead band - cooling). Thermostats for patient bedrooms shall have capability of being adjusted to eliminate null or dead band. Wall mounted thermostats shall have manufacturer's recommendation finish, setpoint range and temperature display and external adjustment:

1. Electronic Thermostats: Solid-state, microprocessor based, BACnet enabled programmable to daily, weekend, and holiday schedules.
   a. Public Space Thermostat: Public space thermostat shall have a thermistor sensor and shall not have a visible means of set point adjustment. Adjustment shall be via the digital controller to which it is connected.
   b. Battery replacement without program loss.

2.14 FINAL CONTROL ELEMENTS AND OPERATORS

A. Fail Safe Operation: Control valves and dampers shall provide "fail safe" operation in either the normally open or normally closed position as required for freeze, moisture, and smoke or fire protection.

B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.

C. Power Operated Control Dampers (other than VAV Boxes): Factory fabricated, balanced type dampers. All modulating dampers shall be opposed blade type and gasketed. Blades for two-position, duct-mounted dampers shall be parallel, airfoil (streamlined) type for minimum noise generation and pressure drop.

1. Leakage: maximum leakage in closed position shall not exceed 7 L/S (15 CFMs) differential pressure for outside air and exhaust dampers and 200 L/S/ square meter (40 CFM/square feet) at 50 mm (2 inches) differential pressure for other dampers.
2. Frame shall be galvanized steel channel with seals as required to meet leakage criteria.
3. Blades shall be galvanized steel or aluminum, 200 mm (8 inch) maximum width, with edges sealed as required.
4. Bearing shall be nylon, bronze sleeve or ball type.

5. Hardware shall be zinc-plated steel. Connected rods and linkage shall be non-slip. Working parts of joints shall be brass, bronze, nylon or stainless steel.

D. Damper Operators and Relays:

1. Electric operator shall provide full modulating control of dampers and valves. For dampers a linkage and pushrod shall be furnished for mounting the actuator on the damper frame internally in the duct, externally in the duct, externally on the duct wall, or shall be furnished with a direct-coupled design. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motor(s) shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.
   a. Minimum valve close-off pressure shall be equal to the system pump’s dead-head pressure, minimum 50 psig for valves smaller than 4 inches.
2. Electronic damper operators: Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure of valve or damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.
   a. VAV Box actuator shall be mounted on the damper axle or shall be of the air valve design, and shall provide complete modulating control of the damper. The motor shall have a closure torque of 35-inch pounds minimum with full torque applied at close off to attain minimum leakage.

3. See and coordinate drawings for required control operation.

2.15 AIR FLOW CONTROL (NOT USED)

2.16 SAFETY

A. Provide hard-wired interlocked connections for such all safety devices, such as freeze stats, smoke detectors, smoke dampers, and refrigerant leak detection devices. All safety devises shall be provided with additional dry

contacts and shall be connected to the DDC system for monitoring and sequencing.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Examine project plans for control devices and equipment locations; and report any discrepancies, conflicts, or omissions to COR for resolution before proceeding for installation.
2. Install equipment, piping, wiring /conduit parallel to or at right angles to building lines.
3. Install all equipment and piping in readily accessible locations. Do not run tubing and conduit concealed under insulation or inside ducts.
4. Mount control devices, tubing and conduit located on ducts and apparatus with external insulation on standoff support to avoid interference with insulation.
5. Provide sufficient slack and flexible connections to allow for vibration of piping and equipment.
6. Run tubing and wire connecting devices on or in control cabinets parallel with the sides of the cabinet neatly racked to permit tracing.
7. Install equipment level and plumb.

B. Electrical Wiring Installation:

1. All wiring and cabling shall be installed in conduits. Install conduits and wiring in accordance with Specification Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Conduits carrying control wiring and cabling shall be dedicated to the control wiring and cabling: these conduits shall not carry power wiring. Provide plastic end sleeves at all conduit terminations to protect wiring from burrs.
2. Install analog signal and communication cables in conduit and in accordance with Specification Division 27 – COMMINICATIONS. Install digital communication cables in conduit and in accordance with Specification Section 27 15 00, COMMINICATIONS STRUCTURED CABLING.
3. Install conduit and wiring between operator workstation(s), digital controllers, electrical panels, indicating devices, instrumentation,

miscellaneous alarm points, thermostats, and relays as shown on the drawings or as required under this section.

4. Install all electrical work required for a fully functional system and not shown on electrical plans or required by electrical specifications. Where low voltage (less than 50 volt) power is required, provide suitable Class B transformers.
5. Install all system components in accordance with local Building Code and National Electric Code.
   a. Splices: Splices in shielded and coaxial cables shall consist of terminations and the use of shielded cable couplers. Terminations shall be in accessible locations. Cables shall be harnessed with cable ties.
   b. Equipment: Fit all equipment contained in cabinets or panels with service loops, each loop being at least 300 mm (12 inches) long. Equipment for fiber optics system shall be rack mounted, as applicable, in ventilated, self-supporting, code gauge steel enclosure. Cables shall be supported for minimum sag.
   c. Cable Runs: Keep cable runs as short as possible. Allow extra length for connecting to the terminal board. Do not bend flexible coaxial cables in a radius less than ten times the cable outside diameter.
   d. Use vinyl tape, sleeves, or grommets to protect cables from vibration at points where they pass around sharp corners, through walls, panel cabinets, etc.
6. Conceal cables, except in mechanical rooms and areas where other conduits and piping are exposed.
7. Permanently label or code each point of all field terminal strips to show the instrument or item served. Color-coded cable with cable diagrams may be used to accomplish cable identification.
8. Grounding: ground electrical systems per manufacturer’s written requirements for proper and safe operation.

C. Install Sensors and Controls:

1. Temperature Sensors:
   a. Install all sensors and instrumentation according to manufacturer’s written instructions. Temperature sensor locations

shall be readily accessible, permitting quick replacement and servicing of them without special skills and tools.

b. Calibrate sensors to accuracy specified, if not factory calibrated.

c. Use of sensors shall be limited to its duty, e.g., duct sensor shall not be used in lieu of room sensor.

d. Install room sensors permanently supported on wall frame. They shall be mounted at 1.5 meter (5.0 feet) above the finished floor unless otherwise noted on the plans or drawings.

e. Mount sensors rigidly and adequately for the environment within which the sensor operates. Separate extended-bulb sensors form contact with metal casings and coils using insulated standoffs.

f. All wires attached to sensors shall be air sealed in their conduits or in the wall to stop air transmitted from other areas affecting sensor reading.

g. Permanently mark terminal blocks for identification. Protect all circuits to avoid interruption of service due to short-circuiting or other conditions. Line-protect all wiring that comes from external sources to the site from lightning and static electricity.

2. Pressure Sensors:

a. Install duct static pressure sensor tips facing directly downstream of airflow.

b. Install high-pressure side of the differential switch between the pump discharge and the check valve.

c. Install snubbers and isolation valves on steam pressure sensing devices.

3. Actuators:

a. Mount and link damper and valve actuators according to manufacturer’s written instructions.

b. Check operation of damper/actuator combination to confirm that actuator modulates damper smoothly throughout stroke to both open and closed position.

c. Check operation of valve/actuator combination to confirm that actuator modulates valve smoothly in both open and closed position.

D. Installation of network:

1. Ethernet:
   a. The network shall employ Ethernet LAN architecture, as defined by IEEE 802.3. The Network Interface shall be fully Internet Protocol (IP) compliant allowing connection to currently installed IEEE 802.3, Compliant Ethernet Networks.
   b. The network shall directly support connectivity to a variety of cabling types. As a minimum provide the following connectivity: 100 Base TX (Category 5e cabling) for the communications between the ECC and the B-BC and the B-AAC controllers.
2. Third party interfaces: Contractor shall integrate real-time data from building systems by other trades and databases originating from other manufacturers as specified and required to make the system work as one system.

E. Installation of digital controllers and programming:

1. Provide a separate digital control panel for each major piece of equipment, such as air handling unit, chiller, pumping unit etc. Points used for control loop reset such as outdoor air, outdoor humidity, or space temperature could be located on any of the remote control units.
2. Provide sufficient internal memory for the specified control sequences and trend logging. There shall be a minimum of 25 percent of available memory free for future use.
3. System point names shall be human readable, permitting easy operator interface without the use of a written point index.
4. Provide graphics for each piece of equipment and floor plan in the building. This includes each chiller, cooling tower, air handling unit, fan, terminal unit, boiler, pumping unit etc. These graphics shall show all points dynamically as specified in the point list.

3.2 SYSTEM VALIDATION AND DEMONSTRATION

A. As part of final system acceptance, a system demonstration is required (see below). Prior to start of this demonstration, the contractor is to perform a complete validation of all aspects of the controls and instrumentation system.

B. Validation

1. Prepare and submit for approval a validation test plan including test procedures for the performance verification tests. Test Plan shall be submitted for review with the control system submittal as indicated in paragraph 1.7 Submittals. Test Plan address all specified functions of the ECC and all specified sequences of operation. Explain in detail actions and expected results used to demonstrate compliance with the requirements of this specification. Explain the method for simulating the necessary conditions of operation used to demonstrate performance of the system. Test plan shall include a test check list to be used by the Installer's agent to check and initial that each test has been successfully completed. Deliver test plan documentation for the performance verification tests to the owner's representative 30 days prior to start of performance verification tests. Provide draft copy of operation and maintenance manual with performance verification test.
2. After approval of the validation test plan, installer shall carry out all tests and procedures therein. Installer shall completely check out, calibrate, and test all connected hardware and software to ensure that system performs in accordance with approved specifications and sequences of operation submitted. Installer shall complete and submit Test Check List.

C. Demonstration

1. System operation and calibration to be demonstrated by the installer in the presence of the Architect, CxA or COR on random samples of equipment as dictated by the COR. Should random sampling indicate improper work, the owner reserves the right to subsequently witness complete calibration of the system at no addition cost to the VA.
2. Make accessible, personnel to provide necessary adjustments and corrections to systems as directed by balancing agency.
3. The following witnessed demonstrations of field control equipment shall be included:
   a. Observe HVAC systems in shut down condition. Check dampers and valves for normal position.
   b. Test application software for its ability to communicate with digital controllers, operator workstation, and uploading and downloading of control programs.

c. Demonstrate the software ability to edit the control program off-line.
d. Demonstrate reporting of alarm conditions for each alarm and ensure that these alarms are received at the assigned location, including operator workstations.
e. Demonstrate ability of software program to function for the intended applications-trend reports, change in status etc.
f. Demonstrate via graphed trends to show the sequence of operation is executed in correct manner, and that the HVAC systems operate properly through the complete sequence of operation, e.g., seasonal change, occupied/unoccupied mode, and warm-up condition.
g. Demonstrate hardware interlocks and safeties functions, and that the control systems perform the correct sequence of operation after power loss and resumption of power loss.
h. Prepare and deliver to the VA graphed trends of all control loops to demonstrate that each control loop is stable and the set points are maintained.
i. Demonstrate that each control loop responds to set point adjustment and stabilizes within one (1)minutes. Control loop trend data shall be instantaneous and the time between data points shall not be greater than one (1) minute.

3.3 STARTUP AND TESTING

A. Perform tests as recommended by product manufacturer and listed standards and under actual or simulated operating conditions and prove full compliance with design and specified requirements. Tests of the various items of equipment shall be performed simultaneously with the system of which each item is an integral part.

B. When any defects are detected, correct defects and repeat test at no additional cost or time to the Government.

3.4 COMMISSIONING (NOT USED)

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for 4 hours to instruct each VA personnel responsible in the operation and maintenance of the system.

----- END -----

SECTION 23 34 00
HVAC FANS

PART 1 - GENERAL

1.1 DESCRIPTION

A. Fans for heating, ventilating and air conditioning.

B. Product Definitions: AMCA Publication 99, Standard l-66.

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

D. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

E. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

1.3 QUALITY ASSURANCE

A. Refer to paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Fans and power ventilators shall be listed in the current edition of AMCA 26l, and shall bear the AMCA performance seal.

C. Operating Limits for Centrifugal Fans: AMCA 99 (Class I, II, and III).

D. Fans and power ventilators shall comply with the following standards:

1. Testing and Rating: AMCA 2l0.
2. Sound Rating: AMCA 300.

E. Vibration Tolerance for Fans and Power Ventilators: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

F. Performance Criteria:

1. The fan schedule shall show the design air volume and static pressure. Select the fan motor HP by increasing the fan BHP by 10 percent to account for the drive losses and field conditions.
2. Select the fan operating point as follows:
   a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point
   b. Air Foil, Backward Inclined, or Tubular: At or near the peak static efficiency

G. Safety Criteria: Provide manufacturer's standard screen on fan inlet and discharge where exposed to operating and maintenance personnel.

H. Corrosion Protection:

1. All steel shall be mill-galvanized, or phosphatized and coated with minimum two coats, corrosion resistant enamel paint. Manufacturers

paint and paint system shall meet the minimum specifications of: ASTM D1735 water fog; ASTM B117 salt spray; ASTM D3359 adhesion; and ASTM G152 and G153 for carbon arc light apparatus for exposure of non-metallic material.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturers Literature and Data:

1. Fan sections, motors and drives.
2. Centrifugal fans, motors, drives, accessories and coatings.
   a. Utility fans and vent sets.
3. Prefabricated roof curbs.

C. Certified Sound power levels for each fan.

D. Motor ratings types, electrical characteristics and accessories.

E. Roof curbs.

F. Belt guards.

G. Maintenance and Operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

H. Certified fan performance curves for each fan showing cubic feet per minute (CFM) versus static pressure, efficiency, and horsepower for design point of operation.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Movement and Control Association International, Inc. (AMCA):

99-2016.....Standards Handbook

210-2016.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating

261-2017.....Directory of Products Licensed to bear the AMCA Certified Ratings Seal - Published Annually

300-2014.....Reverberant Room Method for Sound Testing of Fans

C. American Society for Testing and Materials (ASTM):

B117-2018.....Standard Practice for Operating Salt Spray (Fog) Apparatus

D1735-2008.....Standard Practice for Testing Water Resistance of Coatings Using Water Fog Apparatus

D3359-2017.....Standard Test Methods for Measuring Adhesion by Tape Test

G152-2013.....Standard Practice for Operating Open Flame Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

G153-2013.....Standard Practice for Operating Enclosed Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

D. National Fire Protection Association (NFPA):

NFPA 96-2018.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. National Sanitation Foundation (NSF):

37-2017 .....Air Curtains for Entrance Ways in Food and Food Service Establishments

F. Underwriters Laboratories, Inc. (UL):

181-2013.....Factory Made Air Ducts and Air Connectors

1.6 EXTRA MATERIALS

A. Provide one additional set of belts for all belt-driven fans.

PART 2 - PRODUCTS

2.1 FAN SECTION (CABINET FAN)(NOT USED)

2.2 CENTRIFUGAL FANS (NOT USED)

2.3 POWER ROOF VENTILATOR

A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.

B. Type: Centrifugal fan, backward inclined blades. Provide down-blast or up-blast type as indicated.

C. Construction: Steel or aluminum, completely weatherproof, for curb mounting, exhaust cowl or entire drive assembly readily removable for servicing, aluminum bird screen on discharge, UL approved safety disconnect switch, conduit for wiring, vibration isolators for wheel, motor and drive assembly. Provide self acting back draft damper.

D. Motor and Drive: Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Bearings shall be pillow block ball type with a minimum L-50 life of 200,000 hours. Motor shall be located out of air stream.

E. Prefabricated Roof Curb: As specified in paragraph 2.3 of this section.

2.4 POWER wall VENTILATOR(not used)

2.5 PACKAGED HOOD MAKE-UP AIR UNITS(NOT USED)

2.6 CENTRIFUGAL CEILING FANS (SMALL CABINET FAN) (NOT USED)

2.7 PROPELLER FANS(NOT USED)

2.8 VANE AXIAL FANS (NOT USED)

2.9 AIR CURTAIN UNITS(NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install fan, motor and drive in accordance with manufacturer's instructions.

B. Align fan and motor sheaves to allow belts to run true and straight.

C. Bolt equipment to curbs with galvanized lag bolts.

3.2 PRE-OPERATION MAINTENANCE

A. Lubricate bearings, pulleys, belts and other moving parts with manufacturer recommended lubricants.

B. Rotate impeller by hand and check for shifting during shipment and check all bolts, collars, and other parts for tightness.

C. Clean fan interiors to remove foreign material and construction dirt and dust.

3.3 START-UP AND INSTRUCTIONS

A. Verify operation of motor, drive system and fan wheel according to the drawings and specifications.

B. Check vibration and correct as necessary for air balance work.

C. After air balancing is complete and permanent sheaves are in place perform necessary field mechanical balancing to meet vibration tolerance in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

- - - E N D - - -

SECTION 23 82 00
CONVECTION HEATING AND COOLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies unit heaters

1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

C. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.

D. Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: Flow rates adjusting and balancing.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC. Provide guarantee in accordance with FAR clause 52.246-21

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Unit heaters.

C. Certificates:

1. Compliance with Article, QUALITY ASSURANCE.
2. Compliance with specified standards.

D. Operation and Maintenance Manuals: Submit in accordance with Article, INSTRUCTIONS, in Section 01 00 00, GENERAL REQUIREMENTS.

1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute / Air Conditioning, Heating and Refrigeration Institute (ANSI/AHRI):

440-2019.....Performance Rating of Room Fan Coils

National Fire Protection Association (NFPA):

90A-2018.....Standard for the Installation of Air Conditioning and Ventilating Systems

70-2017.....National Electrical Code

C. Underwriters Laboratories, Inc. (UL):

181-2013.....Standard for Factory-Made Air Ducts and Air Connectors

1995-2015.....Heating and Cooling Equipment

PART 2 - PRODUCTS

2.1 INDUCTION UNITS (NOT USED)

2.2 ROOM FAN-COIL UNITS(NOT USED)

2.3 UNIT HEATERS

A. General: Horizontal or vertical discharge type for electric heating medium, as indicated.

B. Casing: Steel sheet, phosphatized to resist rust and finished in baked enamel. Provide hanger supports.

C. Fan: Propeller type, direct driven by manufacturer's standard electric motor. Provide resilient mounting. Provide fan guard for horizontal discharge units.

D. Discharge Air Control:

1. Horizontal discharge: Horizontal, adjustable louvers.
2. Vertical discharge: Radial louver diffuser.

E. Electric Units: UL listed, factory wired to terminal strips for field connection of power and control wiring.

1. Heating elements: Nickel chromium alloy resistance wire embedded in a magnesium oxide insulating refractory and sealed in corrosion resisting metallic sheath with fins. Three phase heaters shall have balanced phases.
2. Thermal cutout: Manual reset type, which disconnects elements, and motor in the event normal operating temperatures are exceeded.
3. Magnetic contactor: Factory installed with low voltage relay for remote pilot duty thermostat operation.

G. Controls: Provide field installed unit mounted return air thermostats, where shown or specified to control the unit fan.

2.4 CABINET UNIT HEATERS (NOT USED)

2.5 WALL-MOUNTED UNIT HEATERS (NOT USED)

2.6 CONVECTORS(NOT USED)

2.7 FINNED-TUBE RADIATION UNITS(NOT USED)

2.8 RADIANT CEILING PANELS(NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION

A. Work shall be installed as shown and according to the manufacturer’s diagrams and recommendations.

B. Handle and install units in accordance with manufacturer's written instructions.

C. Support units rigidly so they always remain stationary. Cross-bracing or other means of stiffening shall be provided as necessary. Method of support shall be such that distortion and malfunction of units cannot occur.

D. Install fiberglass blanket insulation with a minimum R value of 8 above hydronic radiant panels.

3.2 OPERATIONAL TEST

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

3.3 STARTUP AND TESTING (NOT USED)

3.4 COMMISSIONING (NOT USED)

3.5 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

- - - E N D - - -

DIVISION 26

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section applies to all sections of Division 26.

B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, conductors and cable, switchboards, switchgear, panelboards, motor control centers, generators, automatic transfer switches, and other items and arrangements for the specified items are shown on the drawings.

C. Electrical service entrance equipment and arrangements for temporary and permanent connections to the electric utility company’s system shall conform to the electric utility company's requirements. Coordinate fuses, circuit breakers and relays with the electric utility company’s system, and obtain electric utility company approval for sizes and settings of these devices.

D. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.

B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

1.3 TEST STANDARDS

A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts,

certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.

B. Definitions:

1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified: Materials and equipment which:
   a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
   b. Are periodically inspected by a NRTL.
   c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

A. Manufacturer’s Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.

B. Product Qualification:

1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within eight hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.

B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

1.6 MANUFACTURED PRODUCTS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.

B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Tests are specified, Factory Tests shall be performed in the factory by the equipment manufacturer, and witnessed by the contractor. In addition, the following requirements shall be complied with:

1. The Government shall have the option of witnessing factory tests. The Contractor shall notify the Government through the COR a minimum of thirty (30) days prior to the manufacturer's performing of the factory tests.
2. When factory tests are successful, contractor shall furnish four (4) copies of the equipment manufacturer's certified test reports to the COR fourteen (14) days prior to shipment of the equipment, and not more than ninety (90) days after completion of the factory tests.
3. When factory tests are not successful, factory tests shall be repeated in the factory by the equipment manufacturer, and witnessed by the Contractor. The Contractor shall be liable for all additional expenses for the Government to witness factory re-testing.

1.7 VARIATIONS FROM CONTRACT REQUIREMENTS

A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.8 MATERIALS AND EQUIPMENT PROTECTION

A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.

1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.

3. Damaged equipment shall be repaired or replaced, as determined by the COR.
4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, OSHA Part 1910 subpart J – General Environmental Controls, OSHA Part 1910 subpart K – Medical and First Aid, and OSHA Part 1910 subpart S – Electrical, in addition to other references required by contract.

B. Job site safety and worker safety is the responsibility of the Contractor.

C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. However, energized electrical work may be performed only for the non-destructive and non-invasive diagnostic testing(s), or when scheduled outage poses an imminent hazard to patient care, safety, or physical security. In such case, all aspects of energized electrical work, such as the availability of appropriate/correct personal protective equipment (PPE) and the use of PPE, shall comply with the latest NFPA 70E, as well as the following requirements:

1. Only Qualified Person(s) shall perform energized electrical work. Supervisor of Qualified Person(s) shall witness the work of its entirety to ensure compliance with safety requirements and approved work plan.
2. At least two weeks before initiating any energized electrical work, the Contractor and the Qualified Person(s) who is designated to perform the work shall visually inspect, verify and confirm that the work area and electrical equipment can safely accommodate the work involved.
3. At least two weeks before initiating any energized electrical work, the Contractor shall develop and submit a job specific work plan, and energized electrical work request to the COR, and Medical

Center's Chief Engineer or his/her designee. At the minimum, the work plan must include relevant information such as proposed work schedule, area of work, description of work, name(s) of Supervisor and Qualified Person(s) performing the work, equipment to be used, procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.

4. Energized electrical work shall begin only after the Contractor has obtained written approval of the work plan, and the energized electrical work request from the COR, and Medical Center's Chief Engineer or his/her designee. The Contractor shall make these approved documents present and available at the time and place of energized electrical work.
5. Energized electrical work shall begin only after the Contractor has invited and received acknowledgment from the COR, and Medical Center's Chief Engineer or his/her designee to witness the work.

D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

F. Coordinate location of equipment and conduit with other trades to minimize interference.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Equipment location shall be as close as practical to locations shown on the drawings.

B. Working clearances shall not be less than specified in the NEC.

C. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.

2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers, fused and non-fused safety switches, generators, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards, switchgear and motor control assemblies, control devices and other significant equipment.

B. Identification signs for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Identification signs for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 12 mm (1/2 inch) high. Identification signs shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

C. Install adhesive arc flash warning labels on all equipment as required by the latest NFPA 70E. Label shall show specific and correct information for specific equipment based on its arc flash calculations. Label shall show the followings:

1. Nominal system voltage.
2. Equipment/bus name, date prepared, and manufacturer name and address.
3. Arc flash boundary.
4. Available arc flash incident energy and the corresponding working distance.
5. Minimum arc rating of clothing.
6. Site-specific level of PPE.

1.12 SUBMITTALS

A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.

C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

E. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
3. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.

F. Maintenance and Operation Manuals:

1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.

2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
   a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
   b. A control sequence describing start-up, operation, and shutdown.
   c. Description of the function of each principal item of equipment.
   d. Installation instructions.
   e. Safety precautions for operation and maintenance.
   f. Diagrams and illustrations.
   g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
   h. Performance data.
   i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.
   j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.

H. After approval and prior to installation, furnish the COR with one sample of each of the following:
   1. A minimum 300 mm (12 inches) length of each type and size of wire and cable along with the tag from the coils or reels from which the

sample was taken. The length of the sample shall be sufficient to show all markings provided by the manufacturer.

2. Each type of conduit coupling, bushing, and termination fitting.
3. Conduit hangers, clamps, and supports.
4. Duct sealing compound.
5. Each type of receptacle, toggle switch, lighting control sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.15 ACCEPTANCE CHECKS AND TESTS

A. The Contractor shall furnish the instruments, materials, and labor for tests.

B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the installation, testing, and adjustment of all components between various manufacturer’s representatives and technicians so that a complete, functional, and operational system is delivered to the Government.

C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment, and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

1.16 WARRANTY

A. All work performed and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer for the Government.

1.17 INSTRUCTION

A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.

B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety requirements. Instructors shall be thoroughly familiar with all aspects of the installation, and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.

C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 05 19
LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.

E. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Installation of conductors and cables in manholes and ducts.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings and insulation type for each conductor and cable.
      2) Splicing materials and pulling lubricant.
2. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.

b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

B. American Society of Testing Material (ASTM):

D2301-10.....Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

D2304-10.....Test Method for Thermal Endurance of Rigid Electrical Insulating Materials

D3005-10.....Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

C. National Electrical Manufacturers Association (NEMA):

WC 70-09.....Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-14.....Thermoset-Insulated Wires and Cables

83-14.....Thermoplastic-Insulated Wires and Cables

467-13.....Grounding and Bonding Equipment

486A-486B-13.....Wire Connectors

486C-13.....Splicing Wire Connectors

486D-15.....Sealed Wire Connector Systems

486E-15.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables

514B-12.....Conduit, Tubing, and Cable Fittings

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.

B. All conductors shall be copper.

C. Single Conductor and Cable:

1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
2. No. 8 AWG and larger: Stranded.
3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

D. Color Code:

1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
   a. Solid color insulation or solid color coating.
   b. Stripes, bands, or hash marks of color specified.
   c. Color using 19 mm (0.75 inches) wide tape.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
5. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

6. Lighting circuit “switch legs”, and 3-way and 4-way switch “traveling wires,” shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COR.

7. Color code for isolated power system wiring shall be in accordance with the NEC.

2.2 SPLICES

A. Splices shall be in accordance with NEC and UL.

B. Above Ground Splices for No. 10 AWG and Smaller:
   1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped conductors.
   3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

C. Above Ground Splices for No. 8 AWG to No. 4/0 AWG:
   1. Compression, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper conductors.
   2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
   3. Splice and insulation shall be product of the same manufacturer.
   4. All bolts, nuts, and washers used with splices shall be zinc-plated steel.

D. Above Ground Splices for 250 kcmil and Larger:
   1. Long barrel “butt-splice” or “sleeve” type compression connectors, with minimum of two compression indents per wire, listed for use with copper conductors.
   2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
   3. Splice and insulation shall be product of the same manufacturer.

E. Underground Splices for No. 10 AWG and Smaller:
   1. Solderless, screw-on, reusable pressure cable type, with integral insulation. Listed for wet locations, and approved for copper conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped conductors.

3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

F. Underground Splices for No. 8 AWG and Larger:

1. Mechanical type, of high conductivity and corrosion-resistant material. Listed for wet locations, and approved for copper conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.

G. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

2.3 CONNECTORS AND TERMINATIONS

A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper conductors.

B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper conductors.

C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated steel.

2.4 CONTROL WIRING

A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG.

B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.5 WIRE LUBRICATING COMPOUND

A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

B. Shall not be used on conductors for isolated power systems.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Install all conductors in raceway systems.

C. Splice conductors only in outlet boxes, junction boxes, pullboxes, manholes, or handholes.

D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.

E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.

F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic ties.

G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.

H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.

I. Conductor and Cable Pulling:

1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
2. Use nonmetallic pull ropes.
3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.
4. All conductors in a single conduit shall be pulled simultaneously.
5. Do not exceed manufacturer’s recommended maximum pulling tensions and sidewall pressure values.

J. No more than three branch circuits shall be installed in any one conduit.

K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

3.2 INSTALLATION IN MANHOLES (NOT USED)

3.3 SPLICE AND TERMINATION INSTALLATION

A. Splices and terminations shall be mechanically and electrically secure, and tightened to manufacturer’s published torque values using a torque screwdriver or wrench.

B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

3.4 CONDUCTOR IDENTIFICATION

A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.

3.5 FEEDER CONDUCTOR IDENTIFICATION

A. In each interior pullbox and each underground manhole and handhole, install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

3.6 EXISTING CONDUCTORS

A. Unless specifically indicated on the plans, existing conductors shall not be reused.

3.7 CONTROL WIRING INSTALLATION

A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.

B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

3.8 CONTROL WIRING IDENTIFICATION

A. Install a permanent wire marker on each wire at each termination.

B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

C. Wire markers shall retain their markings after cleaning.

D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

3.9 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests: Inspect physical condition.
2. Electrical tests:
   a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
   b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
   c. Perform phase rotation test on all three-phase circuits.

---END---

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.

B. "Grounding electrode system" refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.

C. The terms "connect" and "bond" are used interchangeably in this section and have the same meaning.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

D. Section 26 22 00, LOW-VOLTAGE TRANSFORMERS: Low-voltage transformers.

E. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit plans showing the location of system grounding electrodes and connections, and the routing of aboveground and underground grounding electrode conductors.
2. Test Reports:

a. Two weeks prior to the final inspection, submit ground resistance field test reports to the COR.

3. Certifications:

a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-13.....Standard Specification for Hard-Drawn Copper Wire

B3-13.....Standard Specification for Soft or Annealed Copper Wire

B8-11.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-12.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1: Normal Measurements

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-15.....National Electrical Safety Code

99-15.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-14 .....Thermoset-Insulated Wires and Cables

83-14 .....Thermoplastic-Insulated Wires and Cables

467-13 .....Grounding and Bonding Equipment

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be insulated stranded copper, except that sizes No. 10 AWG and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding

conductors, except that wire sizes No. 4 AWG and larger shall be identified per NEC.

B. Bonding conductors shall be bare stranded copper, except that sizes No. 10 AWG and smaller shall be bare solid copper. Bonding conductors shall be stranded for final connection to motors, transformers, and vibrating equipment.

C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

D. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

2.2 GROUND RODS

A. Steel or copper clad steel, 19 mm (0.75 inch) diameter by 3 M (10 feet) long.

B. Quantity of rods shall be as shown on the drawings, and as required to obtain the specified ground resistance.

2.3 CONCRETE ENCASED ELECTRODE

A. Concrete encased electrode shall be No. 4 AWG bare copper wire, installed per NEC.

2.4 GROUND CONNECTIONS

A. Below Grade and Inaccessible Locations: Exothermic-welded type connectors.

B. Above Grade:

1. Bonding Jumpers: Listed for use with aluminum and copper conductors. For wire sizes No. 8 AWG and larger, use compression-type connectors. For wire sizes smaller than No. 8 AWG, use mechanical type lugs. Connectors or lugs shall use zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Connection to Grounding Bus Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
4. Connection to Equipment Rack and Cabinet Ground Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with

zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.5 EQUIPMENT RACK AND CABINET GROUND BARS

A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks. Ground bars shall have minimum dimensions of 6.3 mm (0.25 inch) thick x 19 mm (0.75 inch) wide, with length as required or as shown on the drawings. Provide insulators and mounting brackets.

2.6 GROUND TERMINAL BLOCKS

A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide mechanical type lugs, with zinc-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

2.7 GROUNDING BUS BAR

A. Pre-drilled rectangular copper bar with stand-off insulators, minimum 6.3 mm (0.25 inch) thick x 100 mm (4 inches) high in cross-section, length as shown on the drawings, with hole size, quantity, and spacing per detail shown on the drawings. Provide insulators and mounting brackets.

PART 3 - EXECUTION

3.1 GENERAL

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. System Grounding:

1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformer.
2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic piping, building structural steel, electrical enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are normally buried or otherwise inaccessible, by exothermic weld.

3.3 MEDIUM-VOLTAGE EQUIPMENT AND CIRCUITS (NOT USED)

3.4 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS

A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.

B. Metallic Piping, Building Structural Steel, and Supplemental Electrode(s):

1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems, building structural steel, and supplemental or made electrodes. Provide jumpers across insulating joints in the metallic piping.
2. Provide a supplemental ground electrode as shown on the drawings and bond to the grounding electrode system.

C. Panelboards, and other electrical equipment:

1. Connect the equipment grounding conductors to the ground bus.
2. Connect metallic conduits by grounding bushings and equipment grounding conductor to the equipment ground bus.

D. Transformers:

1. Exterior: Exterior transformers supplying interior service equipment shall have the neutral grounded at the transformer secondary. Provide a grounding electrode at the transformer.
2. Separately derived systems (transformers downstream from service equipment): Ground the secondary neutral at the transformer. Provide a grounding electrode conductor from the transformer to the nearest component of the grounding electrode system.

3.5 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Metallic conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.

4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.

E. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.

F. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.

3.6 OUTDOOR METALLIC FENCES AROUND ELECTRICAL EQUIPMENT (NOT USED)

3.7 CORROSION INHIBITORS (NOT USED)

3.8 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.9 LIGHTNING PROTECTION SYSTEM (NOT USED)

3.10 MAIN ELECTRICAL ROOM GROUNDING (NOT USED)

3.11 EXTERIOR LIGHT POLES

A. Provide 6.1 M (20 feet) of No. 4 AWG bare copper coiled at bottom of pole base excavation prior to pour, plus additional un-spliced length in and above foundation as required to reach pole ground stud.

3.12 GROUND RESISTANCE

A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

B. Grounding system resistance shall comply with the electric utility company ground resistance requirements.

3.13 GROUND ROD INSTALLATION

A. For outdoor installations, drive each rod vertically in the earth, until top of rod is 610 mm (24 inches) below final grade.

B. For indoor installations, leave 100 mm (4 inches) of each rod exposed.

C. Where buried or permanently concealed ground connections are required, make the connections by the exothermic process, to form solid metal joints. Make accessible ground connections with mechanical pressure-type ground connectors.

D. Where rock or impenetrable soil prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified ground resistance.

3.14 ACCEPTANCE CHECKS AND TESTS

A. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized or connected to the electric utility company ground system, and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall.

B. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

C. Below-grade connections shall be visually inspected by the COR prior to backfilling. The Contractor shall notify the COR 24 hours before the connections are ready for inspection.

---END---

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 06 10 00, ROUGH CARPENTRY: Mounting board for telephone closets.

B. Section 07 60 00, FLASHING AND SHEET METAL: Fabrications for the deflection of water away from the building envelope at penetrations.

C. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.

D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

E. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.

F. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

H. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Underground conduits.

I. Section 31 20 00, EARTHWORK: Bedding of conduits.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Size and location of main feeders.
   b. Size and location of panels and pull-boxes.
   c. Layout of required conduit penetrations through structural elements.
   d. Submit the following data for approval:
      1) Raceway types and sizes.
      2) Conduit bodies, connectors and fittings.
      3) Junction and pull boxes, types and sizes.
2. Certifications: Two weeks prior to final inspection, submit the following:
   a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Iron and Steel Institute (AISI):
S100-12.....North American Specification for the Design of Cold-Formed Steel Structural Members

C. National Electrical Manufacturers Association (NEMA):
C80.1-15.....Electrical Rigid Steel Conduit
C80.3-15.....Steel Electrical Metal Tubing
C80.6-05.....Electrical Intermediate Metal Conduit

FB1-14.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

FB2.10-13.....Selection and Installation Guidelines for Fittings for use with Non-Flexible Conduit or Tubing (Rigid Metal Conduit, Intermediate Metallic Conduit, and Electrical Metallic Tubing)

FB2.20-14.....Selection and Installation Guidelines for Fittings for use with Flexible Electrical Conduit and Cable

TC-2-13.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit

TC-3-13.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-16.....Surface Metal Raceway and Fittings

6-07.....Electrical Rigid Metal Conduit - Steel

50-15.....Enclosures for Electrical Equipment

360-13.....Liquid-Tight Flexible Steel Conduit

467-13.....Grounding and Bonding Equipment

514A-13.....Metallic Outlet Boxes

514B-12.....Conduit, Tubing, and Cable Fittings

514C-14.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

651-11.....Schedule 40 and 80 Rigid PVC Conduit and Fittings

651A-11.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

1242-14.....Electrical Intermediate Metal Conduit - Steel

PART 2 - PRODUCTS

2.1 MATERIAL

A. Conduit Size: In accordance with the NEC, but not less than 19 mm (0.75-inch) unless otherwise shown. Where permitted by the NEC, 19 mm (0.75-inch) flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:

1. Size: In accordance with the NEC, but not less than 19 mm (0.75-inch).
2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and NEMA C80.1.
3. Rigid Intermediate Steel Conduit (IMC): Shall conform to UL 1242 and NEMA C80.6.
4. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and NEMA C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.
5. Flexible Metal Conduit: Shall conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Shall conform to UL 360.
7. Direct Burial Plastic Conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
8. Surface Metal Raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid Steel and Intermediate Metallic Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-

hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.

f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

3. Electrical Metallic Tubing Fittings:
   a. Fittings and conduit bodies shall meet the requirements of UL 514B, NEMA C80.3, and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Compression Couplings and Connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
   d. Indent-type connectors or couplings are prohibited.
   e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
4. Flexible Metal Conduit Fittings:
   a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
   b. Clamp-type, with insulated throat.
5. Liquid-tight Flexible Metal Conduit Fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
6. Direct Burial Plastic Conduit Fittings: Fittings shall meet the requirements of UL 514C and NEMA TC3.
7. Surface Metal Raceway Fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
8. Expansion and Deflection Couplings:
   a. Conform to UL 467 and UL 514B.

b. Accommodate a 19 mm (0.75-inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.

c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.

d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.

D. Conduit Supports:

1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:

1. Comply with UL-50 and UL-514A.
2. Rustproof cast metal where required by the NEC or shown on drawings.
3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.

F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COR prior to drilling through structural elements.

2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by the COR where working space is limited.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

A. In accordance with NEC, NEMA, UL, as shown on drawings, and as specified herein.

B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.

C. Install conduit as follows:

1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
5. Cut conduits square, ream, remove burrs, and draw up tight.
6. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
7. Do not use suspended ceilings, suspended ceiling supporting members, lighting fixtures, other conduits, cable tray, boxes, piping, or ducts to support conduits and conduit runs.
8. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.

9. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
10. Conduit installations under fume and vent hoods are prohibited.
11. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
12. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
13. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
14. Do not use aluminum conduits.

D. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:
1. Conduit: Rigid steel, or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
   a. Where shown on the structural drawings.
   b. As approved by the COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.

a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (0.75-inch) of concrete around the conduits.

5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:
1. Conduit for Conductors 600 V and Below: Rigid steel, IMC. Mixing different types of conduits in the same system is prohibited.
2. Align and run conduit parallel or perpendicular to the building lines.
3. Connect recessed lighting fixtures to conduit runs with maximum 1.8 M (6 feet) of flexible metal conduit extending from a junction box to the fixture.
4. Tightening set screws with pliers is prohibited.
5. For conduits running through metal studs, limit field cut holes to no more than 70% of web depth. Spacing between holes shall be at least 457 mm (18 inches). Cuts or notches in flanges or return lips shall not be permitted.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on drawings, exposed conduit is only permitted in mechanical and electrical rooms.
C. Conduit for Conductors 600 V and Below: Rigid steel, IMC. Mixing different types of conduits in the system is prohibited.
D. Align and run conduit parallel or perpendicular to the building lines.
E. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
F. Support horizontal or vertical runs at not over 2.4 M (8 feet) intervals.
G. Surface Metal Raceways: Use only where shown on drawings.

H. Painting:

1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

3.5 DIRECT BURIAL INSTALLATION

Refer to Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.

3.6 HAZARDOUS LOCATIONS (NOT USED)

3.7 WET OR DAMP LOCATIONS

A. Use rigid steel conduits unless as shown on drawings.

B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.

C. Use rigid steel conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer and locknut. Conduits shall be attached to steel channel with conduit clamps.

3.8 MOTORS AND VIBRATING EQUIPMENT

A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.

B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.

C. Provide a green equipment grounding conductor with flexible and liquid-tight flexible metal conduit.

3.9 EXPANSION JOINTS

A. Conduits 75 mm (3 inch) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inch) with junction boxes on both sides of the expansion joint. Connect flexible metal conduits to junction boxes with sufficient slack to produce a 125 mm (5 inch) vertical drop midway between the ends of the flexible metal conduit. Flexible metal conduit shall have a green insulated copper bonding jumper installed. In lieu of this flexible metal conduit, expansion and deflection couplings as specified above are acceptable.

C. Install expansion and deflection couplings where shown.

3.10 CONDUIT SUPPORTS

A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
   b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).

c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.11 BOX INSTALLATION

A. Boxes for Concealed Conduits:

1. Flush-mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90 degree bends are necessary.

C. Locate pullboxes so that covers are accessible and easily removed. Coordinate locations with piping and ductwork where installed above ceilings.

D. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

E. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 inch) center-to-center lateral spacing shall be maintained between boxes.

F. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall.

Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

G. Minimum size of outlet boxes for ground fault circuit interrupter (GFCI) receptacles is 100 mm (4 inches) square x 55 mm (2.125 inches) deep, with device covers for the wall material and thickness involved.

H. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."

I. On all branch circuit junction box covers, identify the circuits with black marker.

- - - E N D - - -

SECTION 26 05 73
OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the overcurrent protective device coordination study, related calculations and analysis, indicated as the study in this section.

B. A short-circuit and selective coordination study, and arc flash calculations and analysis shall be prepared for the electrical overcurrent devices to be installed under this project.

C. The study shall present a well-coordinated time-current analysis of each overcurrent protective device from the individual device up to the utility source and the on-site generator sources.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 23 00, LOW-VOLTAGE SWITCHGEAR: Low-voltage switchgear.

C. Section 26 24 16, PANELBOARDS: Low-voltage panelboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. The study shall be prepared by the equipment manufacturer, and performed by the equipment manufacturer’s licensed electrical engineer.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Product data on the software program to be used for the study. Software shall be in mainstream use in the industry, shall provide device settings and ratings, and shall show selective coordination by time-current drawings.
2. Complete study as described in paragraph 1.6. Submittal of the study shall be well-coordinated with submittals of the shop drawings for equipment in related specification sections.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the Contractor that the overcurrent protective devices have been set in accordance with the approved study.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. Institute of Electrical and Electronics Engineers (IEEE):

241-90.....Recommended Practice Electrical Systems in Commercial Buildings

242-03.....Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems

399-97.....Recommended Practice for Industrial and Commercial Power Systems Analysis

1584-02.....Performing Arc-Flash Hazards Calculations

1584A-04.....Performing Arc-Flash Hazards Calculations – Amendment 1

1584B-11.....Performing Arc-Flash Hazards Calculations – Amendment 2

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-18.....Standard for Electrical Safety in the Workplace

99-18.....Health Care Facilities Code

1.6 STUDY REQUIREMENTS

A. The study shall be in accordance with IEEE and NFPA standards.

B. The study shall include one line diagram, short-circuit and ground fault analysis, protective coordination plots for all overcurrent protective devices, and arc flash calculations and analysis.

C. One Line Diagram:
   1. Show all electrical equipment and wiring to be protected by the overcurrent devices.
   2. Show the following specific information:

a. Calculated fault impedance, X/R ratios, and short-circuit values at each feeder and branch circuit bus.
b. Relay, circuit breaker, and fuse ratings.
c. Generator kW/kVA and transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
d. Voltage at each bus.
e. Identification of each bus, matching the identification on the drawings.
f. Conduit, conductor, and busway material, size, length, and X/R ratios.

D. Short-Circuit Study:
1. The study shall be performed using computer software designed for this purpose. Pertinent data and the rationale employed in developing the calculations shall be described in the introductory remarks of the study.
2. Calculate the fault impedance to determine the available short-circuit and ground fault currents at each bus. Incorporate applicable motor and/or generator contribution in determining the momentary and interrupting ratings of the overcurrent protective devices.
3. Present the results of the short-circuit study in a table. Include the following:
   a. Device identification.
   b. Operating voltage.
   c. Overcurrent protective device type and rating.
   d. Calculated short-circuit current.

E. Coordination Study:
1. Prepare the coordination curves to determine the required settings of overcurrent protective devices to demonstrate selective coordination. Graphically illustrate on log-log paper that adequate time separation exists between devices, including the utility company upstream device if applicable. Plot the specific time-current characteristics of each overcurrent protective device in such a manner that all devices are clearly depicted.
2. The following specific information shall also be shown on the coordination curves:

a. Device identification.
b. Potential transformer and current transformer ratios.
c. Three-phase and single-phase ANSI damage points or curves for each cable, transformer, or generator.
d. Applicable circuit breaker or protective relay characteristic curves.
e. No-damage, melting, and clearing curves for fuses.
f. Transformer in-rush points.

3. Develop a table to summarize the settings selected for the overcurrent protective devices. Include the following in the table:
   a. Device identification.
   b. Protective relay or circuit breaker potential and current transformer ratios, sensor rating, and available and suggested pickup and delay settings for each available trip characteristic.
   c. Fuse rating and type.

F. Arc Flash Calculations and Analysis:
1. Arc flash warning labels shall comply with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
2. Arc flash calculations shall be based on actual over-current protective device clearing time. Maximum clearing time shall be in accordance with IEEE 1584.
3. Arc flash analysis shall be based on the lowest clearing time setting of the over-current protective device to minimize the incident energy level without compromising selective coordination.
4. Arc flash boundary and available arc flash incident energy at the corresponding working distance shall be calculated for all electrical power distribution equipment specified in the project, and as shown on the drawings.
5. Required arc-rated clothing and other PPE shall be selected and specified in accordance with NFPA 70E.

1.7 ANALYSIS

A. Analyze the short-circuit calculations, and highlight any equipment determined to be underrated as specified. Propose solutions to effectively protect the underrated equipment.

1.8 ADJUSTMENTS, SETTINGS, AND MODIFICATIONS

A. Final field settings and minor modifications of the overcurrent protective devices shall be made to conform with the study, without additional cost to the Government.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION (NOT USED)

---END---

SECTION 26 09 23
LIGHTING CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of the lighting controls.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 24 16, PANELBOARDS: Panelboard enclosure and interior bussing used for lighting control panels.

E. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

F. Section 26 51 00, INTERIOR LIGHTING: Luminaire ballast and drivers used in control of lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit the following information for each type of lighting controls.
   b. Material and construction details.
   c. Physical dimensions and description.
   d. Wiring schematic and connection diagram.
   e. Installation details.
2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the lighting control systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturer's Association (NEMA):

C136.10-10.....American National Standard for Roadway and Area Lighting Equipment—Locking-Type Photocontrol Devices and Mating Receptacles—Physical and Electrical Interchangeability and Testing

ICS-1-15.....Standard for Industrial Control and Systems General Requirements

ICS-2-05.....Standard for Industrial Control and Systems: Controllers, Contractors, and Overload Relays Rated Not More than 2000 Volts AC or 750 Volts DC: Part 8 - Disconnect Devices for Use in Industrial Control Equipment

ICS-6-16.....Standard for Industrial Controls and Systems Enclosures

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

20-10.....Standard for General-Use Snap Switches

98-16.....Enclosed and Dead-Front Switches

773-16.....Standard for Plug-In Locking Type Photocontrols for Use with Area Lighting

773A-16.....Nonindustrial Photoelectric Switches for Lighting Control

916-15.....Standard for Energy Management Equipment Systems

917-06.....Clock Operated Switches

924-16.....Emergency Lighting and Power Equipment (for use when controlling emergency circuits).

PART 2 - PRODUCTS

2.1 ELECTRONIC TIME SWITCHES (NOT USED)

2.2 ELECTROMECHANICAL-DIAL TIME SWITCHES (NOT USED)

2.3 OUTDOOR PHOTOELECTRIC SWITCHES (NOT USED)

2.4 TIMER SWITCHES (NOT USED)

2.5 CEILING-MOUNTED PHOTOELECTRIC SWITCHES

A. Solid-state, light-level sensor unit, with separate relay unit.

1. Sensor Output: Contacts rated to operate the associated relay. Sensor shall be powered from the relay unit.
2. Relay Unit: Dry contacts rated for 20A ballast and/or LED driver load at 120 volt and 277 volt.
3. Monitoring Range: 108 to 2152 lx (10 to 200 fc, with an adjustment for turn-on and turn-off levels.
4. Time Delay: Adjustable from 5 to 300 seconds, with deadband adjustment.
5. Indicator: Two LEDs to indicate the beginning of on-off cycles.

2.6 SKYLIGHT PHOTOELECTRIC SENSORS (NOT USED)

2.7 INDOOR OCCUPANCY SENSORS

A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.

1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.
2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.

3. Relay Unit: Dry contacts rated for 20A ballast load at 120 volt and 277 volt, for 13A tungsten at 120 volt, and for 1 hp at 120 volt.
4. Mounting:
   a. Sensor: Suitable for mounting in any position on a standard outlet box.
   b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
6. Bypass Switch: Override the on function in case of sensor failure.
7. Manual/automatic selector switch.
8. Automatic Light-Level Sensor: Adjustable from 21.5 to 2152 lx (2 to 200 fc); keep lighting off when selected lighting level is present.
9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.

B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
   1. Sensitivity Adjustment: Separate for each sensing technology.
   2. Detector Sensitivity: Detect occurrences of 150 mm (6-inch) minimum movement of any portion of a human body that presents a target of not less than 232 sq. cm (36 sq. in), and detect a person of average size and weight moving not less than 305 mm (12 inches) in either a horizontal or a vertical manner at an approximate speed of 305 mm/s (12 inches/s).

C. Detection Coverage: Shall be sufficient to provide coverage as required by sensor locations shown on drawing.

2.8 INDOOR VACANCY SENSOR SWITCH (NOT USED)

2.9 OUTDOOR MOTION SENSOR (PIR)

A. Suitable for operation in ambient temperatures ranging from minus 40 to plus 130 degrees F (minus 40 to plus 54 degrees C).
   1. Operation: Turn lights on when sensing infrared energy changes between background and moving body in area of coverage; with a 1 to 15 minute adjustable time delay for turning lights off.
   2. Mounting:

a. Sensor: Suitable for mounting in any position on a standard outdoor junction box.
b. Relay: Internally mounted in a standard weatherproof electrical enclosure.
c. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.

3. Bypass Switch: Override the on function in case of sensor failure.
4. Automatic Light-Level Sensor: Adjustable from 11 to 215 lx (1 to 20 fc); keep lighting off during daylight hours.

B. Detector Sensitivity: Detect occurrences of 150 mm (6-inch) minimum movement of any portion of a human body that presents a target of not less than 232 sq. cm (36 sq. in).

C. Detection Coverage: Shall be sufficient to provide coverage as required by sensor locations shown on drawing.

D. Individually Mounted Sensor: Contacts rated to operate the connected relay, complying with UL 773A. Sensor shall be powered from the relay unit.

1. Relay Unit: Dry contacts rated for 20A ballast load at 120 volt and 277 volt, and for 1 hp at 120 volt.
2. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.

2.11 LIGHTING CONTROL SYSTEM – RELAY PANEL TYPE (STAND ALONE)

A. System Description:

1. The lighting control system shall be with lighting relay panels. Lighting control devices connect to the relay panels and communicate via the panel controller. System includes all interfaces and wiring, relay panels, control modules, input modules, panel processors, relays, photocells, switches, dimmers, time clock, and occupancy sensors.
2. System shall include the capability of BACnet IP communication with other systems as described. System communication protocol shall be compatible with the building automation system specified in Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
3. Panel Controller shall provide programmable operation of lights connected via system relays and controlled with system devices. System software shall provide control of relays and control devices,

time and sequence scheduling, timed out and blink light operation and monitoring and reporting of system events and components. Initial programming shall be as shown on plans and schedules.

B. Panel Controller: Comply with UL 508; programmable, solid-state, astronomic 365-day control unit with non-volatile memory, mounted in preassembled relay panel with low-voltage-controlled, latching-type, single-pole lighting circuit relays. Controller shall be capable of receiving inputs from control devices and other sources. Where indicated, a limited number of digital or analog, low-voltage control-circuit outputs shall be supported by control unit and circuit boards associated with relays.

C. Cabinet: Steel with hinged, locking door. Barriers separate low-voltage and line-voltage components.

D. Directory: Identifies each relay as to load controlled.

E. System Power Supply: Transformer and full-wave rectifier with filtered dc output for panel, controllers and control devices. Feed from an equipment emergency circuit at a minimum.

F. Single-Pole Relays: Mechanically held unless otherwise indicated; split-coil, momentary-pulsed type, rated 20 A, 125 volt AC for tungsten filaments and 20 A, 277 volt AC for electronic ballasts, 50,000 cycles at rated capacity.

G. Control Devices: All occupancy sensors (Ultrasonic, IR and Dual Technology type), photocells, switches and timers shall be provided with system and designed to operate on system network. Supplemental power packs shall be provided as required for multiple control devices. This equipment shall be identified in shop drawing submission.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, as shown on the drawings, and as specified.

B. Aim outdoor photoelectric sensor according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle turn-on.

C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer’s recommendations.

D. Set occupancy sensor "on" duration to 10 minutes.

E. Locate photoelectric sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the available light level at the typical work plane for that area.

F. Label time switches and contactors with a unique designation.

G. Program lighting control panels per schedule on drawings.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations.

B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.

C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.

D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function in the presence of COR.

3.4 INSTRUCTION

A. Furnish the services of a factory-trained technician for one 8-hour training period for instructing personnel in the maintenance and operation of the lighting control system on the dates requested by the COR.

B. Contractor shall submit written instructions on training and maintenance as reviewed in training session.

- - - E N D - - -

SECTION 26 24 16
PANELBOARDS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

A. Section 09 91 00, PAINTING: Painting of panelboards.

D. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

E. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

F. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

G. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

H. Section 26 05 73, OVERCURRENT PROTECTIVE DEVICE COORDINATION STUDY: Short circuit and coordination study, and requirements for a coordinated electrical system.

I. Section 26 09 23, LIGHTING CONTROLS: Lighting controls integral to panelboards.

J. Section 26 43 13, SURGE PROTECTIVE DEVICES: Surge protective devices integral to panelboards.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, circuit

breakers, wiring and connection diagrams, accessories, and nameplate data.

2. Manuals:
   a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering circuit breakers and replacement parts.
      1) Include schematic diagrams, with all terminals identified, matching terminal identification in the panelboards.
      2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the panelboards conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the panelboards have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
   IBC-15.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
   PB 1-11.....Panelboards
   250-14.....Enclosures for Electrical Equipment (1,000V Maximum)

D. National Fire Protection Association (NFPA):
   70-17.....National Electrical Code (NEC)
   70E-18.....Standard for Electrical Safety in the Workplace

E. Underwriters Laboratories, Inc. (UL):
   50-15.....Enclosures for Electrical Equipment

67-09.....Panelboards

489-16.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

A. Panelboards shall be in accordance with NEC, NEMA, UL, as specified, and as shown on the drawings.

B. Panelboards shall have main breaker or main lugs, bus size, voltage, phases, number of circuit breaker mounting spaces, top or bottom feed, flush or surface mounting, branch circuit breakers, and accessories as shown on the drawings.

C. Panelboards shall be completely factory-assembled with molded case circuit breakers and integral accessories as shown on the drawings or specified herein.

D. Non-reduced size copper bus bars, rigidly supported on molded insulators, and fabricated for bolt-on type circuit breakers.

E. Bus bar connections to the branch circuit breakers shall be the "distributed phase" or "phase sequence" type.

F. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys listed for use with the conductors to which they will be connected.

G. Neutral bus shall be 200% rated, mounted on insulated supports.

H. Grounding bus bar shall be equipped with screws or lugs for the connection of equipment grounding conductors.

I. Bus bars shall be braced for the available short-circuit current as shown on the drawings, but not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards, and 14,000 A symmetrical for 277/480 V panelboards.

J. In two-section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have field-installed cable connections to the second section as shown on the drawings. Panelboard sections with tapped bus or crossover bus are not acceptable.

K. Series-rated panelboards are not permitted.

2.2 ENCLOSURES AND TRIMS

A. Enclosures:

1. Provide galvanized steel enclosures, with NEMA rating as shown on the drawings or as required for the environmental conditions in which installed.
2. Enclosures shall not have ventilating openings.
3. Enclosures may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.
4. Provide manufacturer's standard option for prepunched knockouts on top and bottom endwalls.
5. Include removable inner dead front cover, independent of the panelboard cover.

B. Trims:

1. Hinged "door-in-door" type.
2. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
3. Outer hinged door shall be securely mounted to the panelboard enclosure with factory bolts, screws, clips, or other fasteners, requiring a key or tool for entry. Hand-operated latches are not acceptable.
4. Inner and outer doors shall open left to right.
5. Trims shall be flush or surface type as shown on the drawings.

2.3 MOLDED CASE CIRCUIT BREAKERS

A. Circuit breakers shall be per UL, NEC, as shown on the drawings, and as specified.

B. Circuit breakers shall be bolt-on type.

C. Circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:

1. 120/208 V Panelboard: 10,000 A symmetrical.
2. 120/240 V Panelboard: 10,000 A symmetrical.
3. 277/480 V Panelboard: 14,000 A symmetrical.

D. Circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for less than 400 A frame. Circuit breakers with 400 A frames and above shall have magnetic

trip, adjustable from 5x to 10x. Breaker trip setting shall be set in the field, based on the approved protective device study as specified in Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY

E. Circuit breaker features shall be as follows:
   1. A rugged, integral housing of molded insulating material.
   2. Silver alloy contacts.
   3. Arc quenchers and phase barriers for each pole.
   4. Quick-make, quick-break, operating mechanisms.
   5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
   6. Electrically and mechanically trip free.
   7. An operating handle which indicates closed, tripped, and open positions.
   8. An overload on one pole of a multi-pole breaker shall automatically cause all the poles of the breaker to open.
   9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where shown on the drawings.
   10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

2.4 SURGE PROTECTIVE DEVICES

A. Where shown on the drawings, furnish panelboards with integral surge protective devices. Refer to Section 26 43 13, SURGE PROTECTIVE DEVICES.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the manufacturer’s instructions, the NEC, as shown on the drawings, and as specified.

B. Locate panelboards so that the present and future conduits can be conveniently connected.

D. Install a printed schedule of circuits in each panelboard after approval by the COR. Schedules shall reflect final load descriptions, room numbers, and room names connected to each circuit breaker.

Schedules shall be printed on the panelboard directory cards and be installed in the appropriate panelboards

E. Mount panelboards such that the maximum height of the top circuit breaker above the finished floor shall not exceed 1980 mm (78 inches).

F. Provide blank cover for each unused circuit breaker mounting space.

G. For panelboards located in areas accessible to the public, paint the exposed surfaces of the trims with finishes to match surrounding surfaces after the panelboards have been installed. Do not paint nameplates.

H. Rust and scale shall be removed from the inside of existing enclosures where new interior components are to be installed. Paint inside of enclosures with rust-preventive paint before the new interior components are installed. Provide new trim. Trim shall fit tight to the enclosure.

I. Panelboard enclosures shall not be used for conductors feeding through, spliced, or tapping off to other enclosures or devices.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify appropriate anchorage and required area clearances.

d. Verify that circuit breaker sizes and types correspond to approved shop drawings.

e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.

f. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

---END---

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

E. Section 26 51 00, INTERIOR LIGHTING: Fluorescent ballasts and LED drivers for use with manual dimming controls.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. National Electrical Manufacturers Association (NEMA):
WD 1-99(R2015).....General Color Requirements for Wiring Devices
WD 6-16 .....Wiring Devices – Dimensional Specifications

C. National Fire Protection Association (NFPA):
70-17.....National Electrical Code (NEC)
99-18.....Health Care Facilities

D. Underwriter's Laboratories, Inc. (UL):
5-16.....Surface Metal Raceways and Fittings
20-10.....General-Use Snap Switches
231-16.....Power Outlets
467-13.....Grounding and Bonding Equipment
498-17.....Attachment Plugs and Receptacles
943-16.....Ground-Fault Circuit-Interrupters
1449-14.....Surge Protective Devices
1472-15.....Solid State Dimming Controls

PART 2 - PRODUCTS

2.1 RECEPTACLES

A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.
   1. Mounting straps shall be nickel plated brass, brass, nickel plated steel or galvanize steel with break-off plaster ears, and shall

include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.

2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.

B. Duplex Receptacles - Hospital-grade: shall be listed for hospital grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.

1. Bodies shall be ivory in color.
2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The lower receptacle shall be unswitched.
3. Duplex Receptacles on Emergency Circuit:
   a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
4. Ground Fault Current Interrupter (GFCI) Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box, with end-of-life indication and provisions to isolate the face due to improper wiring. GFCI receptacles shall be self-test receptacles in accordance with UL 943.
   a. Ground fault interrupter shall consist of a differential current transformer, self-test, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of 4-6 milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or – 1 milliampere) on the load side of the device. Device shall have a minimum nominal tripping time of 0.025 second.
   b. Self-test function shall be automatically initiated within 5 seconds after power is activated to the receptacles. Self-test function shall be periodically and automatically performed every 3 hours or less.
   c. End-of-life indicator light shall be a persistent flashing or blinking light to indicate that the GFCI receptacle is no longer in service.
5. Tamper-Resistant Duplex Receptacles:
   a. Bodies shall be /gray in color.

1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
2) Screws exposed while the wall plates are in place shall be the tamperproof type.

C. Duplex Receptacles – Non-hospital Grade: shall be the same as duplex receptacles – hospital grade in accordance with sections 2.1A and 2.1B of this specification, except for the hospital grade listing.
   1. Bodies shall be brown nylon.

D. Receptacles - 20, 30, and 50 ampere, 250 Volts: Shall be complete with appropriate cord grip plug.

E. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.

F. Surge Protective (TVSS) Receptacles shall have integral surge suppression in line to ground, line to neutral, and neutral to ground modes.
   1. TVSS Components: Multiple metal-oxide varistors; with a nominal clamp-level rating of 400 Volts, and minimum single transient pulse energy dissipation of 210 Joules.
   2. Active TVSS Indication: LED, visible in face of device to indicate device is active or no longer in service.

2.2 TOGGLE SWITCHES

A. Toggle switches shall be totally enclosed tumbler type with nylon bodies. Handles shall be ivory in color unless otherwise specified or shown on the drawings.
   1. Switches installed in hazardous areas shall be explosion-proof type in accordance with the NEC and as shown on the drawings.
   2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plasters ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.

3. Switches shall be rated 20 amperes at 120-277 Volts AC.

2.3 MANUAL DIMMING CONTROL (NOT USED)

2.4 WALL PLATES

A. Wall plates for switches and receptacles shall be type 302 stainless steel. Oversize plates are not acceptable.

C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.

D. In areas requiring tamperproof wiring devices, wall plates shall be type 302 stainless steel, and shall have tamperproof screws and beveled edges.

E. Duplex Receptacles on Emergency Circuit: Wall plates shall be type 302 stainless steel, with the word “EMERGENCY” engraved in 6 mm (1/4 inch) red letters.

2.5 SURFACE MULTIPLE-OUTLET ASSEMBLIES

A. Shall have the following features:

1. Enclosures:

a. Thickness of steel shall be not less than 1 mm (0.040 inch) for base and cover. Nominal dimensions shall be 40 mm x 70 mm (1-1/2 inches by 2-3/4 inches) with inside cross sectional area not less than 2250 square mm (3-1/2 square inches). The enclosures shall be thoroughly cleaned, phosphatized, and painted at the factory with primer and the manufacturer's standard baked enamel finish.

2. Receptacles shall be duplex, hospital grade. See paragraph 'RECEPTACLES' in this Section. Device cover plates shall be the manufacturer's standard corrosion resistant finish and shall not exceed the dimensions of the enclosure.

3. Unless otherwise shown on drawings, receptacle spacing shall be 600 mm (24 inches) on centers.

4. Conductors shall be as specified in Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLE.

5. Installation fittings shall be the manufacturer’s standard bends, offsets, device brackets, inside couplings, wire clips, elbows, and other components as required for a complete system.

6. Bond the assemblies to the branch circuit conduit system.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC and as shown as on the drawings.

B. Install wiring devices after wall construction and painting is complete.

C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the branch circuit equipment grounding conductor.

D. Outlet boxes for toggle switches and manual dimming controls shall be mounted on the strike side of doors.

E. Provide barriers in multi-gang outlet boxes to comply with the NEC.

F. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.

G. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades.

H. Install wall switches 1.2 M (48 inches) above floor, with the toggle OFF position down.

I. Install wall dimmers 1.2 M (48 inches) above floor.

J. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.

K. Install horizontally mounted receptacles with the ground pin to the right.

L. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.

M. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform manufacturer’s required field checks in accordance with the manufacturer's recommendations, and the latest NFPA 99. In addition, include the following:

1. Visual Inspection and Tests:
   a. Inspect physical and electrical conditions.
   b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
   c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
   d. Test GFCI receptacles.

---END---

SECTION 26 29 11
MOTOR CONTROLLERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, connection, and testing of motor controllers, including all low- and medium-voltage motor controllers and manual motor controllers, indicated as motor controllers in this section, and low-voltage variable speed motor controllers.

B. Motor controllers, whether furnished with the equipment specified in other sections or otherwise (with the exception of elevator motor controllers specified in Division 14 and fire pump controllers specified in Division 21), shall meet this specification and all related specifications.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings, dimensions, weights, mounting details, materials, overcurrent protection devices, overload

relays, sizes of enclosures, wiring diagrams, starting characteristics, interlocking, and accessories.

2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
      1) Wiring diagrams shall have their terminals identified to facilitate installation, maintenance, and operation.
      2) Wiring diagrams shall indicate internal wiring for each item of equipment and interconnections between the items of equipment.
      3) Elementary schematic diagrams shall be provided for clarity of operation.
      4) Include the catalog numbers for the correct sizes of overload relays for the motor controllers.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the motor controllers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the motor controllers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. Institute of Electrical and Electronic Engineers (IEEE):

519-14.....Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems

C37.90.1-12.....Standard Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus

C. International Code Council (ICC):

IBC-15.....International Building Code

D. National Electrical Manufacturers Association (NEMA):

ICS 1-00(R2015).....Industrial Control and Systems: General Requirements

ICS 1.1-84(R2015).....Safety Guidelines for the Application, Installation and Maintenance of Solid State Control

ICS 2-00(R2005).....Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 Volts

ICS 4-15.....Industrial Control and Systems: Terminal Blocks

ICS 6-93(R2016).....Industrial Control and Systems: Enclosures

ICS 7-14.....Industrial Control and Systems: Adjustable-Speed Drives

ICS 7.1-14.....Safety Standards for Construction and Guide for Selection, Installation, and Operation of Adjustable-Speed Drive Systems

E. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

F. Underwriters Laboratories Inc. (UL):

508A-13.....Industrial Control Panels

508C-16.....Power Conversion Equipment

1449-14.....Surge Protective Devices

PART 2 - PRODUCTS

2.1 MOTOR CONTROLLERS

A. Motor controllers shall comply with IEEE, NEMA, NFPA, UL, and as shown on the drawings.

B. Motor controllers shall be separately enclosed, unless part of another assembly. For installation in motor control centers, provide plug-in, draw-out type motor controllers up through NEMA size 4. NEMA size 5 and above require bolted connections.

C. Motor controllers shall be combination type, with magnetic controller per Paragraph 2.3 below and with circuit breaker and/or fused switch disconnecting means, with external operating handle with lock-open padlocking positions and ON-OFF position indicator.

1. Circuit Breakers:

a. Bolt-on thermal-magnetic type with a minimum interrupting rating as indicated on the drawings.

b. Equipped with automatic, trip free, non-adjustable, inverse-time, and instantaneous magnetic trips for less than 400A. The magnetic trip shall be adjustable from 5x to 10x for breakers 400A and greater.

c. Additional features shall be as follows:

1) A rugged, integral housing of molded insulating material.

2) Silver alloy contacts.

3) Arc quenchers and phase barriers for each pole.

4) Quick-make, quick-break, operating mechanisms.

5) A trip element for each pole, a common trip bar for all poles, and one operator for all poles.

2. Fused Switches:

a. Quick-make, quick-break type.

b. Minimum duty rating shall be NEMA classification General Duty (GD) for 240 Volts and NEMA classification Heavy Duty (HD) for 480 Volts.

c. Horsepower rated, and shall have the following features:

1) Copper blades, visible in the OFF position.

2) An arc chute for each pole.

3) Fuse holders for the sizes and types of fuses specified or as shown on the drawings.

D. Enclosures:

1. Enclosures shall be NEMA-type rated 1, 3R, or 12 as indicated on the drawings or as required per the installed environment.

2. Enclosure doors shall be interlocked to prevent opening unless the disconnecting means is open. A "defeater" mechanism shall allow for inspection by qualified personnel with the disconnect means closed. Provide padlocking provisions.

3. All metal surfaces shall be thoroughly cleaned, phosphatized, and factory primed prior to applying light gray baked enamel finish.

E. Motor control circuits:

1. Shall operate at not more than 120 Volts.

2. Shall be grounded, except where the equipment manufacturer recommends that the control circuits be isolated.

3. For each motor operating over 120 Volts, incorporate a separate, heavy duty, control transformer within each motor controller enclosure.
4. Incorporate primary and secondary overcurrent protection for the control power transformers.

F. Overload relays:
1. Thermal Temperature Probe Thermal Relay Electronic type. Devices shall be NEMA type.
2. One for each pole.
3. External overload relay reset pushbutton on the door of each motor controller enclosure.
4. Overload relays shall be matched to nameplate full-load current of actual protected motor and with appropriate adjustment for duty cycle.

G. Hand-Off-Automatic (H-O-A) switch is required unless specifically stated on the drawings as not required for a particular controller. H-O-A switch shall be operable without opening enclosure door. H-O-A switch is not required for manual motor controllers.

H. Incorporate into each control circuit a 120 Volt, electronic time-delay relay (ON delay), minimum adjustable range from 0.3 to 10 minutes, with transient protection. Time-delay relay is not required where H-O-A switch is not required.

I. Unless noted otherwise, equip each motor controller with not less than two normally open (N.O.) and two normally closed (N.C.) auxiliary contacts.

J. Provide green (RUN) and red (STOP) pilot lights.

K. Motor controllers incorporated within equipment assemblies shall also be designed for the specific requirements of the assemblies.

L. Additional requirements for specific motor controllers, as indicated in other specification sections, shall also apply.

2.2 MANUAL MOTOR CONTROLLERS

A. Shall be in accordance with applicable requirements of 2.1 above.

B. Manual motor controllers shall have the following features:
1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for induction motors, rated in horsepower.

2. Units shall include thermal overload relays, on-off operator, red and green pilot light, normally open and/ornormally closed auxiliary contacts.

C. Fractional horsepower manual motor controllers shall have the following features:

1. Controllers shall be general-purpose Class A, manually operated type with full voltage controller for fractional horsepower induction motors.
2. Units shall include thermal overload relays, red pilot light, and toggle operator.

2.3 MAGNETIC MOTOR CONTROLLERS

A. Shall be in accordance with applicable requirements of 2.1 above.

B. Controllers shall be general-purpose, Class A magnetic controllers for induction motors rated in horsepower. Minimum NEMA size 0.

C. Where combination motor controllers are used, combine controller with protective or disconnect device in a common enclosure.

D. Provide phase loss protection for each controller, with contacts to de-energize the controller upon loss of any phase.

E. Unless otherwise indicated, provide full voltage non-reversing across-the-line mechanisms for motors less than 75 HP, closed by coil action and opened by gravity. For motors 75 HP and larger, provide reduced-voltage or variable speed controllers as shown on the drawings. Equip controllers with 120 VAC coils and individual control transformer unless otherwise noted.

2.4 REDUCED VOLTAGE MOTOR CONTROLLERS

A. Shall be in accordance with applicable portions of 2.1 above.

B. Shall have closed circuit transition.

C. Shall limit inrush currents to not more than 70 percent of the locked rotor current.

D. Provide phase loss protection for each motor controller, with contacts to de-energize the motor controller upon loss of any phase.

2.5 MEDIUM-VOLTAGE MOTOR CONTROLLERS (NOT USED)

2.6 LOW-VOLTAGE VARIABLE SPEED MOTOR CONTROLLERS (VSMC)(NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install motor controllers in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.

C. Install manual motor controllers in flush enclosures in finished areas.

D. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and electronic overload relay pickup and trip ranges.

E. Program variable speed motor controllers per the manufacturer’s instructions and in coordination with other trades so that a complete and functional system is delivered.

F. Adjust trip settings of circuit breakers and motor circuit protectors with adjustable instantaneous trip elements. Initially adjust at six times the motor nameplate full-load ampere ratings and attempt to start motors several times, allowing for motor cooldown between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficiency motors if required). Where these maximum settings do not allow starting of a motor, notify COR before increasing settings.

G. Set the taps on reduced-voltage autotransformer controllers at 80 percent of line voltage.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform manufacturer’s required field tests in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify appropriate anchorage, required area clearances, and correct alignment.

d. Verify that circuit breaker, motor circuit protector, and fuse sizes and types correspond to approved shop drawings.

e. Verify overload relay ratings are correct.

f. Vacuum-clean enclosure interior. Clean enclosure exterior.

g. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data.

h. Test all control and safety features of the motor controllers.

i. For low-voltage variable speed motor controllers, final programming and connections shall be by a factory-trained technician. Set all programmable functions of the variable speed motor controllers to meet the requirements and conditions of use.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the motor controllers are in good operating condition and properly performing the intended functions.

3.4 SPARE PARTS

A. Two weeks prior to the final inspection, provide one complete set of spare fuses for each motor controller.

3.5 INSTRUCTION

A. Furnish the services of a factory-trained technician for two 4-hour training periods for instructing personnel in the maintenance and operation of the motor controllers, on the dates requested by the COR.

---END---

SECTION 26 29 21
ENCLOSED SWITCHES AND CIRCUIT BREAKERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of fused and unfused disconnect switches (indicated as switches in this section), and separately-enclosed circuit breakers for use in electrical systems rated 600 V and below.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

E. Section 26 24 16, PANELBOARDS: Molded-case circuit breakers.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Submit the following data for approval:
      1) Electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, fuses, circuit breakers, wiring and connection diagrams, accessories, and device nameplate data.
2. Manuals:

a. Submit complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering fuses, circuit breakers, and replacement parts.
   1) Include schematic diagrams, with all terminals identified, matching terminal identification in the enclosed switches and circuit breakers.
   2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.
   a. Certification by the manufacturer that the enclosed switches and circuit breakers conform to the requirements of the drawings and specifications.
   b. Certification by the Contractor that the enclosed switches and circuit breakers have been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. International Code Council (ICC):
IBC-15.....International Building Code

C. National Electrical Manufacturers Association (NEMA):
FU l-12.....Low Voltage Cartridge Fuses
KS l-13.....Heavy Duty Enclosed and Dead-Front Switches (600 Volts Maximum)

D. National Fire Protection Association (NFPA):
70-17.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):
98-16.....Enclosed and Dead-Front Switches
248 1-11.....Low Voltage Fuses

489-13.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

PART 2 - PRODUCTS

2.1 FUSED SWITCHES RATED 600 AMPERES AND LESS

A. Switches shall be in accordance with NEMA, NEC, UL, as specified, and as shown on the drawings.

B. Shall be NEMA classified General Duty (GD) for 240 V switches, and NEMA classified Heavy Duty (HD) for 480 V switches.

C. Shall be horsepower (HP) rated.

D. Shall have the following features:

1. Switch mechanism shall be the quick-make, quick-break type.
2. Copper blades, visible in the open position.
3. An arc chute for each pole.
4. External operating handle shall indicate open and closed positions, and have lock-open padlocking provisions.
5. Mechanical interlock shall permit opening of the door only when the switch is in the open position, defeatable to permit inspection.
6. Fuse holders for the sizes and types of fuses specified.
7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
8. Ground lugs for each ground conductor.
9. Enclosures:
   a. Shall be the NEMA types shown on the drawings.
   b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions.
   c. Shall be finished with manufacturer’s standard gray baked enamel paint over pretreated steel.

2.2 UNFUSED SWITCHES RATED 600 AMPERES AND LESS

A. Shall be the same as fused switches, but without provisions for fuses.

2.3 FUSED SWITCHES RATED OVER 600 AMPERES TO 1200 AMPERES (NOT USED)

2.4 MOTOR RATED TOGGLE SWITCHES

A. Type 1, general purpose for single-phase motors rated up to 1 horsepower.

B. Quick-make, quick-break toggle switch with external reset button and thermal overload protection matched to nameplate full-load current of actual protected motor.

2.5 CARTRIDGE FUSES

A. Shall be in accordance with NEMA FU 1.

B. Feeders: Class RK1, time delay.

D. Motor Branch Circuits: Class RK1, time delay.

E. Other Branch Circuits: Class RK1, time delay.

F. Control Circuits: Class CC, fast acting.

2.6 SEPARATELY-ENCLOSED CIRCUIT BREAKERS

A. Provide circuit breakers in accordance with the applicable requirements in Section 26 24 16, PANELBOARDS.

B. Enclosures shall be the NEMA types shown on the drawings. Where the types are not shown, they shall be the NEMA type most suitable for the ambient environmental conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Fused switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuses.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

a. Compare equipment nameplate data with specifications and approved shop drawings.

b. Inspect physical, electrical, and mechanical condition.

c. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method.

d. Vacuum-clean enclosure interior. Clean enclosure exterior.

3.3 SPARE PARTS

A. Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fused disconnect switch installed on the project. Deliver the spare fuses to the COR.

---END---

SECTION 26 43 13
SURGE PROTECTIVE DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of Type 2 Surge Protective Devices, as defined in NFPA 70, and indicated as SPD in this section.

1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

B. Section 26 23 00, LOW-VOLTAGE SWITCHGEAR: For factory-installed or external SPD.

C. Section 26 24 13, DISTRIBUTION SWITCHBOARDS: For factory-installed or external SPD.

D. Section 26 24 16, PANELBOARDS: For factory-installed or external SPD.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit sufficient information to demonstrate compliance with drawings and specifications.
   b. Include electrical ratings and device nameplate data.
2. Manuals:
   a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering replacement parts.
   b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the manufacturer that the SPD conforms to the requirements of the drawings and specifications.

b. Certification by the Contractor that the SPD has been properly installed.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplement and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. Institute of Engineering and Electronic Engineers (IEEE):

IEEE C62.41.2-02.....Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

IEEE C62.45-08.....Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits

C. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

UL 1283-15.....Electromagnetic Interference Filters

UL 1449-14.....Surge Protective Devices

PART 2 - PRODUCTS

2.1 SWITCHGEAR/SWITCHBOARD SPD

A. General Requirements:

1. Comply with IEEE and UL.
2. Modular design with field-replaceable modules, or non-modular design.
3. Fuses, rated at 200 kA interrupting capacity.
4. Bolted compression lugs for internal wiring.
5. Integral disconnect switch.
6. Redundant suppression circuits.
7. LED indicator lights for power and protection status.
8. Audible alarm, with silencing switch, to indicate when protection has failed.
9. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device.

10. Four-digit transient-event counter.

B. Surge Current per Phase: Minimum 240kA per phase.

2.2 PANELBOARD SPD

A. General Requirements:

1. Comply with UL 1449 and IEEE C62.41.2.
2. Modular design with field-replaceable modules, or non-modular design.
3. Fuses, rated at 200 kA interrupting capacity.
4. Bolted compression lugs for internal wiring.
5. Integral disconnect switch.
6. Redundant suppression circuits.
7. LED indicator lights for power and protection status.
8. Audible alarm, with silencing switch, to indicate when protection has failed.
9. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device.
10. Four-digit transient-event counter.

B. Surge Current per Phase: Minimum 120kA per phase.

2.3 ENCLOSURES

A. Enclosures: NEMA 1.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer’s instructions.

B. Factory-installed SPD: Switchgear, switchboard, or panelboard manufacturer shall install SPD at the factory.

C. Field-installed SPD: Contractor shall install SPD with conductors or buses between SPD and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.

1. Provide a circuit breaker as a dedicated disconnecting means for TVSS as shown on drawings.

D. Do not perform insulation resistance tests on switchgear, switchboards, panelboards, or feeders with the SPD connected. Disconnect SPD before

conducting insulation resistance tests, and reconnect SPD immediately after insulation resistance tests are complete.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:
   a. Compare equipment nameplate data with specifications and approved shop drawings.
   b. Inspect physical, electrical, and mechanical condition.
   c. Verify that disconnecting means and feeder size and maximum length to SPD corresponds to approved shop drawings.
   d. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.
   e. Vacuum-clean enclosure interior. Clean enclosure exterior.
   f. Verify the correct operation of all sensing devices, alarms, and indicating devices.

3.3 FOLLOW-UP VERIFICATION

A. After completion of acceptance checks and tests, the Contractor shall show by demonstration in service that SPD are in good operating condition and properly performing the intended function.

3.4 INSTRUCTION

A. Provide the services of a factory-trained technician for one 2-hour training period for instructing personnel in the maintenance and operation of the SPD, on the date requested by the COR.

---END---

SECTION 26 51 00
INTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the furnishing, installation, and connection of the interior lighting systems. The terms "lighting fixture," "fixture," and "luminaire" are used interchangeably.

1.2 RELATED WORK

A. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT: Disposal of lamps.

B. Section 02 41 00, DEMOLITION: Removal and disposal of lamps and ballasts.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

D. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

F. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:
   a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.
   b. Material and construction details, include information on housing and optics system.
   c. Physical dimensions and description.
   d. Wiring schematic and connection diagram.
   e. Installation details.

f. Energy efficiency data.

g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.

h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).

i. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts, and total harmonic distortion (THD).

j. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.

2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the interior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

C635/C635M REV A-13.....Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings

C. Environmental Protection Agency (EPA):

40 CFR 261.....Identification and Listing of Hazardous Waste

D. Federal Communications Commission (FCC):

CFR Title 47, Part 15...Radio Frequency Devices

CFR Title 47, Part 18...Industrial, Scientific, and Medical Equipment

E. Illuminating Engineering Society of North America (IESNA):

LM-79-08.....Electrical and Photometric Measurements of Solid-State Lighting Products

LM-80-15.....Measuring Lumen Maintenance of LED Light Sources

LM-82-12.....Characterization of LED Light Engines and LED Lamps for Electrical and Photometric Properties as a Function of Temperature

F. Institute of Electrical and Electronic Engineers (IEEE):

C62.41-91(R1995).....Surge Voltages in Low Voltage AC Power Circuits

G. International Code Council (ICC):

IBC-15.....International Building Code

H. National Electrical Manufacturer's Association (NEMA):

C78.376-14.....Chromaticity of Fluorescent Lamps

C82.1-04(R2015).....Lamp Ballasts – Line Frequency Fluorescent Lamp Ballasts

C82.2-02(R2016).....Method of Measurement of Fluorescent Lamp Ballasts

C82.4-17.....Lamp Ballasts - Ballasts for High-Intensity Discharge and Low-Pressure Sodium (LPS) Lamps (Multiple-Supply Type)

C82.11-17.....Lamp Ballasts - High Frequency Fluorescent Lamp Ballasts

LL 9-11.....Dimming of T8 Fluorescent Lighting Systems

SSL 1-16.....Electronic Drivers for LED Devices, Arrays, or Systems

I. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

101-18.....Life Safety Code

J. Underwriters Laboratories, Inc. (UL):

496-17.....Lampholders

542-05.....Fluorescent Lamp Starters

844-12.....Luminaires for Use in Hazardous (Classified) Locations

924-16.....Emergency Lighting and Power Equipment

935-01.....Fluorescent-Lamp Ballasts

1029-94.....High-Intensity-Discharge Lamp Ballasts

1029A-06.....Ignitors and Related Auxiliaries for HID Lamp Ballasts

1598-08.....Luminaires

1574-04.....Track Lighting Systems

2108-15.....Low-Voltage Lighting Systems

8750-15.....Light Emitting Diode (LED) Light Sources for Use in Lighting Products

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES

A. Shall be in accordance with NFPA, UL, as shown on drawings, and as specified.

B. Sheet Metal:

1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved), and parallel to each other as designed.
2. Wireways and fittings shall be free of burrs and sharp edges, and shall accommodate internal and branch circuit wiring without damage to the wiring.
3. When installed, any exposed fixture housing surface, trim frame, door frame, and lens frame shall be free of light leaks.
4. Hinged door frames shall operate smoothly without binding. Latches shall function easily by finger action without the use of tools.

C. Ballasts and lamps shall be serviceable while the fixture is in its normally installed position. Ballasts shall not be mounted to removable reflectors or wireway covers unless so specified.

D. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.

E. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, aircraft cable, captive hinges, or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

F. Metal Finishes:

1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion-resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
3. Exterior finishes shall be as shown on the drawings.

G. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

H. Compact fluorescent fixtures shall be manufactured specifically for compact fluorescent lamps with ballast integral to the fixture. Assemblies designed to retrofit incandescent fixtures are prohibited except when specifically indicated for renovation of existing fixtures.

2.2 BALLASTS (NOT USED)

2.3 FLUORESCENT EMERGENCY BALLAST (NOT USED)

2.4 EMERGENCY LIGHTING UNIT (NOT USED)

2.5 LAMPS (NOT USED)

2.6 RADIO-INTERFERENCE-FREE FLUORESCENT FIXTURES (NOT USED)

2.7 WALL MOUNTED FLUORESCENT BEDLIGHT FIXTURES (NOT USED)

2.8 X-RAY FILM ILLUMINATORS (NOT USED)

2.9 LED EXIT LIGHT FIXTURES

A. Exit light fixtures shall meet applicable requirements of NFPA and UL.

B. Housing and door shall be die-cast aluminum.

C. For general purpose exit light fixtures, door frame shall be hinged, with latch. For vandal-resistant exit light fixtures, door frame shall be secured with tamper-resistant screws.

D. Finish shall be satin or fine-grain brushed aluminum.

E. There shall be no radioactive material used in the fixtures.

F. Fixtures:

1. Inscription panels shall be cast or stamped aluminum a minimum of 2.25 mm (0.090 inch) thick, stenciled with 150 mm (6 inch) high

letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass.

2. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
3. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltage: Multi-voltage (120 – 277V).

2.10 LED LIGHT FIXTURES

A. General:

1. LED light fixtures shall be in accordance with IES, NFPA, UL, as shown on the drawings, and as specified.
2. LED light fixtures shall be Reduction of Hazardous Substances (RoHS)-compliant.
3. LED drivers shall include the following features unless otherwise indicated:
   a. Minimum efficiency: 85% at full load.
   b. Minimum Operating Ambient Temperature: -20˚ C. (-4˚ F.)
   c. Input Voltage: 120 - 277V (±10%) at 60 Hz.
   d. Integral short circuit, open circuit, and overload protection.
   e. Power Factor: ≥ 0.95.
   f. Total Harmonic Distortion: ≤ 20%.
   g. Comply with FCC 47 CFR Part 15.
4. LED modules shall include the following features unless otherwise indicated:
   a. Comply with IES LM-79 and LM-80 requirements.
   b. Minimum CRI 80 and color temperature 3000˚ K unless otherwise specified in LIGHTING FIXTURE SCHEDULE.
   c. Minimum Rated Life: 50,000 hours per IES L70.
   d. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.

B. LED Downlights:

1. Housing, LED driver, and LED module shall be products of the same manufacturer.

C. LED Troffers:
   1. LED drivers, modules, and reflector shall be accessible, serviceable, and replaceable from below the ceiling.
   2. Housing, LED driver, and LED module shall be products of the same manufacturer.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Installation shall be in accordance with the NEC, manufacturer's instructions, and as shown on the drawings or specified.
B. Align, mount, and level the lighting fixtures uniformly.
C. Wall-mounted fixtures shall be attached to the studs in the walls, or to a 20 gauge metal backing plate that is attached to the studs in the walls. Lighting fixtures shall not be attached directly to gypsum board.
D. Lighting Fixture Supports:
   1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
   2. Shall maintain the fixture positions after cleaning and relamping.
   3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
   4. Hardware for recessed fixtures:
      a. Where the suspended ceiling system is supported at the four corners of the fixture opening, hardware devices shall clamp the fixture to the ceiling system structural members, or plaster frame at not less than four points in such a manner as to resist spreading of the support members and safely lock the fixture into the ceiling system.
      b. Where the suspended ceiling system is not supported at the four corners of the fixture opening, hardware devices shall independently support the fixture from the building structure at four points.
   5. Hardware for surface mounting fixtures to suspended ceilings:
      a. In addition to being secured to any required outlet box, fixtures shall be bolted to a grid ceiling system at four points spaced

near the corners of each fixture. The bolts shall be not less than 6 mm (1/4 inch) secured to channel members attached to and spanning the tops of the ceiling structural grid members. Non-turning studs may be attached to the ceiling structural grid members or spanning channels by special clips designed for the purpose, provided they lock into place and require simple tools for removal.

b. In addition to being secured to any required outlet box, fixtures shall be bolted to ceiling structural members at four points spaced near the corners of each fixture. Pre-positioned 6 mm (1/4 inch) studs or threaded plaster inserts secured to ceiling structural members shall be used to bolt the fixtures to the ceiling. In lieu of the above, 6 mm (1/4 inch) toggle bolts may be used on new or existing ceiling provided the plaster and lath can safely support the fixtures without sagging or cracking.

7. Surface mounted lighting fixtures:

a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 6 mm (1/4 inch) bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety hangers. Studs or bolts securing fixtures weighing in excess of 25 kg (56 pounds) shall be supported directly from the building structure.

b. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.

c. Fixtures less than 6.8 kg (15 pounds) in weight and occupying less than 3715 sq cm (two square feet) of ceiling area may, when designed for the purpose, be supported directly from the outlet box when all the following conditions are met.

1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.

2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.
3) The outlet box is supported vertically from the building structure.

d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.

8. Single or double pendant-mounted lighting fixtures:
   a. Each stem shall be supported by an approved outlet box mounted swivel joint and canopy which holds the stem captive and provides spring load (or approved equivalent) dampening of fixture oscillations. Outlet box shall be supported vertically from the building structure.
9. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.

E. Furnish and install the new lamps as specified for all lighting fixtures installed under this project, and for all existing lighting fixtures reused under this project.

F. The electrical and ceiling trades shall coordinate to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges, etc.), to match the ceiling system being installed.

G. Bond lighting fixtures to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

H. At completion of project, replace all defective components of the lighting fixtures at no cost to the Government.

I. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT, and Section 02 41 00, DEMOLITION.

3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform the following:
   1. Visual Inspection:
      a. Verify proper operation by operating the lighting controls.

b. Visually inspect for damage to fixtures, lenses, reflectors, diffusers, and louvers. Clean fixtures, lenses, reflectors, diffusers, and louvers that have accumulated dust, dirt, or fingerprints during construction.

2. Electrical tests:

a. Exercise dimming components of the lighting fixtures over full range of dimming capability by operating the control devices(s) in the presence of the COR. Observe for visually detectable flicker over full dimming range, and replace defective components at no cost to the Government.

b. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless specifically recommended otherwise by the lamp manufacturer. Burn-in dimmed fluorescent and compact fluorescent lamps for at least 100 hours at full voltage, unless specifically recommended otherwise by the lamp manufacturer. Replace any lamps and ballasts which fail during burn-in.

3.3 FOLLOW-UP VERIFICATION

A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting systems are in good operating condition and properly performing the intended function.

---END---

SECTION 26 56 00
EXTERIOR LIGHTING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of exterior fixtures, poles, and supports. The terms "lighting fixtures", "fixture" and "luminaire" are used interchangeably.

1.2 RELATED WORK

A. Section 03 30 00, CAST-IN-PLACE CONCRETE.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage power and lighting wiring.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits, fittings, and boxes for raceway systems.

F. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: Underground handholes and conduits.

G. Section 26 09 23, LIGHTING CONTROLS: Controls for exterior lighting.

1.3 QUALITY ASSURANCE

A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:

1. Shop Drawings:

   a. Submit the following information for each type of lighting fixture designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of lighting fixture designation.

   b. Material and construction details, include information on housing and optics system.

   c. Physical dimensions and description.

d. Wiring schematic and connection diagram.

e. Installation details.

f. Energy efficiency data.

g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.

h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).

i. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts, and total harmonic distortion (THD).

j. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.

k. Submit site plan showing all exterior lighting fixtures with fixture tags consistent with Lighting Fixture Schedule as shown on drawings. Site plan shall show computer generated point-by-point illumination calculations. Include lamp lumen and light loss factors used in calculations.

2. Manuals:

a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.

3. Certifications: Two weeks prior to final inspection, submit the following.

a. Certification by the Contractor that the exterior lighting systems have been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

LRFDLTS-17.....Structural Supports for Highway Signs, Luminaires and Traffic Signals

C. American Concrete Institute (ACI):

318-14 .....Building Code Requirements for Structural Concrete

D. American National Standards Institute (ANSI):

H35.1/H35 1M-17.....American National Standard Alloy and Temper Designation Systems for Aluminum

E. American Society for Testing and Materials (ASTM):

A123/A123M-17 .....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A153/A153M-16.....Zinc Coating (Hot-Dip) on Iron and Steel Hardware

B108/B108M-15 .....Aluminum-Alloy Permanent Mold Castings

C1089-13 .....Spun Cast Prestressed Concrete Poles

F. Federal Aviation Administration (FAA):

AC 70/7460-IL-15.....Obstruction Lighting and Marking

AC 150/5345-43H-16.....Obstruction Lighting Equipment

G. Illuminating Engineering Society of North America (IESNA):

HB-9-00.....Lighting Handbook

RP-8-14.....Roadway Lighting

LM-52-03.....Photometric Measurements of Roadway Sign Installations

LM-72-97(R2010).....Directional Positioning of Photometric Data

LM-79-08.....Approved Method for the Electrical and Photometric Measurements of Solid-Sate Lighting Products

LM-80-15.....Approved Method for Measuring Luminous Flux and Color Maintenance of LED Packages, Arrays and Modules

TM-15-11.....Luminaire Classification System for Outdoor Luminaires

H. National Electrical Manufacturers Association (NEMA):

C78.41-16.....Electric Lamps – Guidelines for Low-Pressure Sodium Lamps

C78.42-09(R2016) .....Electric Lamps – Guidelines for High-Pressure Sodium Lamps

C78.43-13 .....Electric Lamps – Single-Ended Metal-Halide Lamps

C78.1381-98.....Electric Lamps – 70-Watt M85 Double-Ended Metal-Halide Lamps

C81.61-17 .....Electrical Lamp Bases – Specifications for Bases (Caps) for Electric Lamps

C82.4-17 .....Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps (Multiple-Supply Type)

C136.3-14 .....For Roadway and Area Lighting Equipment – Luminaire Attachments

C136.17-05(R2010)(S2017) Roadway and Area Lighting Equipment – Enclosed Side-Mounted Luminaires for Horizontal-Burning High-Intensity-Discharge Lamps – Mechanical Interchangeability of Refractors

ICS 2-00(R2005) .....Controllers, Contactors and Overload Relays Rated 600 Volts

ICS 6-93(R2016) .....Enclosures

I. National Fire Protection Association (NFPA):

70-17 .....National Electrical Code (NEC)

101-18.....Life Safety Code

J. Underwriters Laboratories, Inc. (UL):

496-17 .....Lampholders

773-16.....Plug-In, Locking Type Photocontrols for Use with Area Lighting

773A-16 .....Nonindustrial Photoelectric Switches for Lighting Control

1029-94.....High-Intensity-Discharge Lamp Ballasts

1598-08 .....Luminaires

8750-15.....Light Emitting Diode (LED) Equipment for Use in Lighting Products

1.6 DELIVERY, STORAGE, AND HANDLING

Provide manufacturer's standard provisions for protecting pole finishes during transport, storage, and installation. Do not store poles on ground. Store poles so they are at least 305 mm (12 inches) above ground level and growing vegetation. Do not remove factory-applied pole wrappings until just before installing pole.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

Luminaires, materials and equipment shall be in accordance with NEC, UL, ANSI, and as shown on the drawings and specified.

2.2 POLES

A. General:

1. Poles shall be as shown on the drawings, and as specified. Finish shall be as specified on the drawings.
2. The pole and arm assembly shall be designed for wind loading of 161 km/hr (100 mph) minimum, as required by wind loading conditions at project site, with an additional 30% gust factor and supporting luminaire(s) and accessories such as shields, banner arms, and banners that have the effective projected areas indicated. The effective projected area of the pole shall be applied at the height of the pole base, as shown on the drawings.
3. Poles shall be embeddedtype designed for use with underground supply conductors. Poles shall have handhole having a minimum clear opening of 65 x 125 mm (2.5 x 5 inches). Handhole covers shall be secured by stainless steel captive screws.
4. Provide a steel-grounding stud opposite handhole openings, designed to prevent electrolysis when used with copper wire.
5. Provide a base cover that matches the pole in material and color to conceal the mounting hardware pole-base welds and anchor bolts.
6. Hardware and Accessories: All necessary hardware and specified accessories shall be the product of the pole manufacturer.
7. Provide manufacturer's standard finish, as scheduled on the drawings.

B. Types:

1. Concrete: Provide roundmulti-sided concrete poles conforming to ASTM C1089 with integral cast bases. Poles shall have hollow core

suitable as a raceway. Coordinate with architect for exact color and finishes.

2.3 FOUNDATIONS FOR POLES

A. Foundations shall be cast-in-place concrete, having 3000 psi minimum 28-day compressive strength.

B. Foundations shall support the effective projected area of the specified pole, arm(s), luminaire(s), and accessories, such as shields, banner arms, and banners, under wind conditions previously specified in this section.

C. Place concrete in spirally-wrapped treated paper forms for round foundations, and construct forms for square foundations.

D. Rub-finish and round all above-grade concrete edges to approximately 6 mm (0.25-inch) radius.

E. Anchor bolt assemblies and reinforcing of concrete foundations shall be as shown on the drawings. Anchor bolts shall be in a welded cage or properly positioned by the tiewire to stirrups.

F. Prior to concrete pour, install electrode per Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

2.4 LUMINAIRES

A. Luminaires shall be weatherproof, heavy duty, outdoor types designed for efficient light utilization, adequate dissipation of lamp and ballast heat, and safe cleaning and relamping.

B. Illumination distribution patterns, BUG ratings and cutoff types as defined by the IESNA shall be as shown on the drawings.

C. Incorporate ballasts in the luminaire housing, except where otherwise shown on the drawings.

D. Lenses shall be frame-mounted, heat-resistant, borosilicate glass, with prismatic refractors, unless otherwise shown on the drawings. Attach the frame to the luminaire housing by hinges or chain. Use heat and aging-resistant, resilient gaskets to seal and cushion lenses and refractors in luminaire doors.

E. Pre-wire internal components to terminal strips at the factory.

F. Bracket-mounted luminaires shall have leveling provisions and clamp-type adjustable slip-fitters with locking screws.

G. Materials shall be rustproof. Latches and fittings shall be non-ferrous metal.

H. Provide manufacturer's standard finish, as scheduled on the drawings. Where indicated on drawings, match finish process and color of pole or support materials.

I. Luminaires shall carry factory labels, showing complete, specific lamp and ballast information.

2.5 LAMPS

A. Install the proper lamps in every luminaire installed as shown on the drawings.

B. Lamps shall be general-service, outdoor lighting types.

C. LED sources shall meet the following requirements:

1. Operating temperature rating shall be between -40 degrees C (-40 degrees F) and 50 degrees C (120 degrees F).
2. Correlated Color Temperature (CCT): 5000K.
3. Color Rendering Index (CRI): ≥ 85.
4. The manufacturer shall have performed reliability tests on the LEDs luminaires complying with Illuminating Engineering Society (IES) LM79 for photometric performance and LM80 for lumen maintenance and L70 life.

D. Mercury vapor lamps shall not be used.

2.6 HIGH INTENSITY DISCHARGE BALLASTS (NOT USED)

2.7 METAL HALIDE CORE AND COIL BALLASTS (NOT USED)

2.8 METAL HALIDE ELECTRONIC BALLASTS (NOT USED)

2.9 LED DRIVERS

A. LED drivers shall meet the following requirements:

1. Drivers shall have a minimum efficiency of 85%.
2. Starting Temperature: -40 degrees C (-40 degrees F).
3. Input Voltage: 120 to 480 (±10%) volt.
4. Power Supplies: Class I or II output.
5. Surge Protection: The system must survive 250 repetitive strikes of “C Low” (C Low: 6kV/1.2 x 50 µs, 10kA/8 x 20 µs) waveforms at 1-minute intervals with less than 10% degradation in clamping voltage. “C Low” waveforms are as defined in IEEE/ASNI C62.41.2-2002, Scenario 1 Location Category C.
6. Power Factor (PF): ≥ 0.90.
7. Total Harmonic Distortion (THD): ≤ 20%.
8. Comply with FCC Title 47 CFR Part 18 Non-consumer RFI/EMI Standards.

9. Drivers shall be reduction of hazardous substances (ROHS)-compliant.

2.10 EXISTING LIGHTING SYSTEMS

A. For modifications or additions to existing lighting systems, the new components shall be compatible with the existing systems.

B. New poles and luminaires shall have approximately the same configurations, dimensions, lamping and reflector type as the existing poles and luminaires, except where otherwise shown on the drawings.

2.11 OBSTRUCTION LIGHTING

A. Refer to Section 26 09 23, LIGHTING CONTROLS for control devices.

B. For Buildings:

1. LED type luminaires shall comply with FAA, AC 70/7460-1K, and AC 150/5345-53, and be Type L-810 duplex units with red steady burning light from and LED light source with minimum 50,000 hour lamp life and employing Night Vision Goggles (NVG) friendly technology.
2. Mount the luminaires on galvanized rigid steel pipe masts attached to the roof of the buildings so the luminaires extend 305 mm (12 inches) above the level of the highest item on the building, including items attached to the roof.
3. Locate luminaires in accordance with the applicable FAA Standards.

C. For Smoke Stacks: Luminaires shall be in accordance with the referenced details shown on the drawings. All lamps shall be the type shown on the drawings.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install lighting in accordance with the NEC, as shown on the drawings, and in accordance with manufacturer’s recommendations.

B. Pole Foundations:

1. Excavate only as necessary to provide sufficient working clearance for installation of forms and proper use of tamper to the full depth of the excavation. Prevent surface water from flowing into the excavation. Thoroughly compact backfill with compacting arranged to prevent pressure between conductor, jacket, or sheath, and the end of conduit.
2. Set anchor bolts according to anchor-bolt templates furnished by the pole manufacturer.

3. Install poles as necessary to provide a permanent vertical position with the bracket arm in proper position for luminaire location.
4. After the poles have been installed, shimmed, and plumbed, grout the spaces between the pole bases and the concrete base with non-shrink concrete grout material. Provide a plastic or copper tube, of not less than 9 mm (0.375-inch) inside diameter through the grout, tight to the top of the concrete base to prevent moisture weeping from the interior of the pole.

C. Install lamps in each luminaire.

D. Adjust luminaires that require field adjustment or aiming.

3.2 GROUNDING

A. Ground noncurrent-carrying parts of equipment, including metal poles, luminaires, mounting arms, brackets, and metallic enclosures, as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS. Where copper grounding conductor is connected to a metal other than copper, provide specially-treated or lined connectors suitable and listed for this purpose.

3.3 ACCEPTANCE CHECKS AND TESTS

A. Verify operation after installing luminaires and energizing circuits.

- - - E N D - - -

DIVISION 27

SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes common requirements to communications installations and applies to all sections of Division 27 and Division 28.

B. Provide completely functioning communications systems.

C. Comply with VAAR 852.236.91 and FAR clause 52.236-21 in circumstance of a need for additional detail or conflict between drawings, specifications, reference standards or code.

1.2 REFERENCES

A. Abbreviations and Acronyms

1. Refer to http://www.cfm.va.gov/til/sdetail.asp for Division 00, ARCHITECTURAL ABBREVIATIONS.
2. Additional Abbreviations and Acronyms:

A	Ampere
AC	Alternating Current
AE	Architect and Engineer
AFF	Above Finished Floor
AHJ	Authority Having Jurisdiction
ANSI	American National Standards Institute
AWG	American Wire Gauge (refer to STP and UTP)
AWS	Advanced Wireless Services
BCT	Bonding Conductor for Telecommunications (also Telecommunications Bonding Conductor (TBC))
BDA	Bi-Directional Amplifier
BICSI	Building Industry Consulting Service International
BIM	Building Information Modeling
BOM	Bill of Materials
BTU	British Thermal Units
BUCR	Back-up Computer Room
BTS	Base Transceiver Station

CAD	AutoCAD
CBOPC	Community Based Out Patient Clinic
CBC	Coupled Bonding Conductor
CBOC	Community Based Out Patient Clinic (refer to CBOPC, OPC, VAMC)
CCS	TIP's Cross Connection System (refer to VCCS and HCCS)
CFE	Contractor Furnished Equipment
CFM	US Department of Veterans Affairs Office of Construction and Facilities Management
CFR	Consolidated Federal Regulations
CIO	Communication Information Officer (Facility, VISN or Region)
cm	Centimeters
CO	Central Office
COR	Contracting Officer Representative
CPU	Central Processing Unit
CSU	Customer Service Unit
CUP	Conditional Use Permit(s) - Federal/GSA for VA
dB	Decibel
dBm	Decibel Measured
dBmV	Decibel per milli-Volt
DC	Direct Current
DEA	United States Drug Enforcement Administration
DSU	Data Service Unit
EBC	Equipment Bonding Conductor
ECC	Engineering Control Center (refer to DCR, EMCR)
EDGE	Enhanced Data (Rates) for GSM Evolution
EDM	Electrical Design Manual
EMCR	Emergency Management Control Room (refer to DCR, ECC)
EMI	Electromagnetic Interference (refer to RFI)

EMS	Emergency Medical Service
EMT	Electrical Metallic Tubing or thin wall conduit
ENTR	Utilities Entrance Location (refer to DEMARC, POTS, LEC)
EPBX	Electronic Digital Private Branch Exchange
ESR	Vendor's Engineering Service Report
FA	Fire Alarm
FAR	Federal Acquisition Regulations in Chapter 1 of Title 48 of Code of Federal Regulations
FMS	VA's Headquarters or Medical Center Facility's Management Service
FR	Frequency (refer to RF)
FTS	Federal Telephone Service
GFE	Government Furnished Equipment
GPS	Global Positioning System
GRC	Galvanized Rigid Metal Conduit
GSM	Global System (Station) for Mobile
HCCS	TIP's Horizontal Cross Connection System (refer to CCS & VCCS)
HDPE	High Density Polyethylene Conduit
HDTV	Advanced Television Standards Committee High-Definition Digital Television
HEC	Head End Cabinets(refer to HEIC, PA)
HEIC	Head End Interface Cabinets(refer to HEC, PA)
HF	High Frequency (Radio Band; Re FR, RF, VHF & UHF)
HSPA	High Speed Packet Access
HZ	Hertz
IBT	Intersystem Bonding Termination (NEC 250.94)
IC	Intercom
ICRA	Infectious Control Risk Assessment
IDEN	Integrated Digital Enhanced Network

IDC	Insulation Displacement Contact
IDF	Intermediate Distribution Frame
ILSM	Interim Life Safety Measures
IMC	Rigid Intermediate Steel Conduit
IRM	Department of Veterans Affairs Office of Information Resources Management
ISDN	Integrated Services Digital Network
ISM	Industrial, Scientific, Medical
IWS	Intra-Building Wireless System
LAN	Local Area Network
LBS	Location Based Services, Leased Based Systems
LEC	Local Exchange Carrier (refer to DEMARC, PBX & POTS)
LED	Light Emitting Diode
LMR	Land Mobile Radio
LTE	Long Term Evolution, or 4G Standard for Wireless Data Communications Technology
M	Meter
MAS	Medical Administration Service
MATV	Master Antenna Television
MCR	Main Computer Room
MCOR	Main Computer Operators Room
MDF	Main Distribution Frame
MH	Manholes or Maintenance Holes
MHz	Megahertz (10^6 Hz)
mm	Millimeter
MOU	Memorandum of Understanding
MW	Microwave (RF Band, Equipment or Services)
NID	Network Interface Device (refer to DEMARC)
NEC	National Electric Code
NOR	Network Operations Room
NRTL	OSHA Nationally Recognized Testing Laboratory

NS	Nurse Stations
NTIA	U.S. Department of Commerce National Telecommunications and Information Administration
OEM	Original Equipment Manufacturer
OI&T	Office of Information and Technology
OPC	VA's Outpatient Clinic (refer to CBOC, VAMC)
OSH	Department of Veterans Affairs Office of Occupational Safety and Health
OSHA	United States Department of Labor Occupational Safety and Health Administration
OTDR	Optical Time-Domain Reflectometer
PA	Public Address System (refer to HE, HEIC, RPEC)
PBX	Private Branch Exchange (refer to DEMARC, LEC, POTS)
PCR	Police Control Room (refer to SPCC, could be designated SCC)
PCS	Personal Communications Service (refer to UPCS)
PE	Professional Engineer
PM	Project Manager
PoE	Power over Ethernet
POTS	Plain Old Telephone Service (refer to DEMARC, LEC, PBX)
PSTN	Public Switched Telephone Network
PSRAS	Public Safety Radio Amplification Systems
PTS	Pay Telephone Station
PVC	Poly-Vinyl Chloride
PWR	Power (in Watts)
RAN	Radio Access Network
RBB	Rack Bonding Busbar
RE	Resident Engineer or Senior Resident Engineer
RF	Radio Frequency (refer to FR)
RFI	Radio Frequency Interference (refer to EMI)

RFID	RF Identification (Equipment, System or Personnel)
RMC	Rigid Metal Conduit
RMU	Rack Mounting Unit
RPEC	Radio Paging Equipment Cabinets(refer to HEC, HEIC, PA)
RTLS	Real Time Location Service or System
RUS	Rural Utilities Service
SCC	Security Control Console (refer to PCR, SPCC)
SMCS	Spectrum Management and Communications Security (COMSEC)
SFO	Solicitation for Offers
SME	Subject Matter Experts (refer to AHJ)
SMR	Specialized Mobile Radio
SMS	Security Management System
SNMP	Simple Network Management Protocol
SPCC	Security Police Control Center (refer to PCR, SMS)
STP	Shielded Balanced Twisted Pair (refer to UTP)
STR	Stacked Telecommunications Room
TAC	VA’s Technology Acquisition Center, Austin, Texas
TCO	Telecommunications Outlet
TER	Telephone Equipment Room
TGB	Telecommunications Grounding Busbar (also Secondary Bonding Busbar (SBB))
TIP	Telecommunications Infrastructure Plant
TMGB	Telecommunications Main Grounding Busbar (also Primary Bonding Busbar (PBB))
TMS	Traffic Management System
TOR	Telephone Operators Room
TP	Balanced Twisted Pair (refer to STP and UTP)
TR	Telecommunications Room (refer to STR)
TWP	Twisted Pair

UHF	Ultra High Frequency (Radio)
UMTS	Universal Mobile Telecommunications System
UPCS	Unlicensed Personal Communications Service (refer to PCS)
UPS	Uninterruptible Power Supply
USC	United States Code
UTP	Unshielded Balanced Twisted Pair (refer to TP and STP)
UV	Ultraviolet
V	Volts
VAAR	Veterans Affairs Acquisition Regulation
VACO	Veterans Affairs Central Office
VAMC	VA Medical Center (refer to CBOC, OPC, VACO)
VCCS	TIP’s Vertical Cross Connection System (refer to CCS and HCCS)
VHF	Very High Frequency (Radio)
VISN	Veterans Integrated Services Network (refers to geographical region)
VSWR	Voltage Standing Wave Radio
W	Watts
WEB	World Electronic Broadcast
WiMAX	Worldwide Interoperability (for MW Access)
WI-FI	Wireless Fidelity
WMTS	Wireless Medical Telemetry Service
WSP	Wireless Service Providers

B. Definitions:

1. Access Floor: Pathway system of removable floor panels supported on adjustable pedestals to allow cable placement in area below.
2. BNC Connector (BNC): United States Military Standard MIL-C-39012/21 bayonet-type coaxial connector with quick twist mating/unmating, and two lugs preventing accidental disconnection from pulling forces on cable.

3. Bond: Permanent joining of metallic parts to form an electrically conductive path to ensure electrical continuity and capacity to safely conduct any currents likely to be imposed to earth ground.
4. Bundled Microducts: All forms of jacketed microducts.
5. Conduit: Includes all raceway types specified.
6. Conveniently Accessible: Capable of being reached without use of ladders, or without climbing or crawling under or over obstacles such as, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
7. Distributed (in house) Antenna System (DAS): An Emergency Radio Communications System installed for Emergency Responder (or first responders and Government personnel) use while inside facility to maintain contact with each respective control point; refer to Section 27 53 19, DISTRIBUTED RADIO ANTENNA (WITHIN BUILDING) EQUIPMENT AND SYSTEMS.
8. DEMARC, Extended DMARC or ENTR: Service provider's main point of demarcation owned by LEC or service provider and establishes a physical point where service provider's responsibilities for service and maintenance end. This point is called NID, in data networks.
9. Effectively Grounded: Intentionally bonded to earth through connections of low impedance having current carrying capacity to prevent buildup of currents and voltages resulting in hazard to equipment or persons.
10. Electrical Supervision: Analyzing a system’s function and components (i.e. cable breaks / shorts, inoperative stations, lights, LEDs and states of change, from primary to backup) on a 24/7/365 basis; provide aural and visual emergency notification signals to minimum two remote designated or accepted monitoring stations.
11. Electrostatic Interference (ESI) or Electrostatic Discharge Interference: Refer to EMI and RFI.
12. Emergency Call Systems: Wall units (in parking garages and stairwells) and pedestal mounts (in parking lots) typically provided with a strobe, camera and two-way audio communication functions. Additional units are typically provided in facility’s emergency room, designated nurses stations, director’s office, Disaster Control Center, SCC, ECC.

13. Project 25 (2014) (P25 (TIA-102 Series)): Set of standards for local, state and Federal public safety organizations and agencies digital LMR services. P25 is applicable to LMR equipment authorized or licensed under the US Department of Commerce National Telecommunications and Information Administration or FCC rules and regulations, and is a required standard capability for all LMR equipment and systems.
14. Grounding Electrode Conductor: (GEC) Conductor connected to earth grounding electrode.
15. Grounding Electrode System: Electrodes through which an effective connection to earth is established, including supplementary, communications system grounding electrodes and GEC.
16. Grounding Equalizer or Backbone Bonding Conductor (BBC): Conductor that interconnects elements of telecommunications grounding infrastructure.
17. Head End (HE): Equipment, hardware and software, or a master facility at originating point in a communications system designed for centralized communications control, signal processing, and distribution that acts as a common point of connection between equipment and devices connected to a network of interconnected equipment, possessing greatest authority for allowing information to be exchanged, with whom other equipment is subordinate.
18. Microducts: All forms of air blown fiber pathways.
19. Ohm: A unit of restive measurement.
20. Received Signal Strength Indication (RSSI): A measurement of power present in a received RF signal.
21. Service Provider Demarcation Point (SPDP): Not owned by LEC or service provider, but designated by Government as point within facility considered the DEMARC.
22. Sound (SND): Changing air pressure to audible signals over given time span.
23. System: Specific hardware, firmware, and software, functioning together as a unit, performing task for which it was designed.
24. Telecommunications Bonding Backbone (TBB): Conductors of appropriate size (minimum 53.49 mm2 [1/0 AWG]) stranded copper wire, that connect to Grounding Electrode System and route to

telecommunications main grounding busbar (TMGB) and circulate to interconnect various TGBs and other locations shown on drawings.

25. Voice over Internet Protocol (VoIP): A telephone system in which voice signals are converted to packets and transmitted over LAN network using Transmission Control Protocol (TCP)/Internet Protocol (IP). VA'S VoIP is not listed or coded for life and public safety, critical, emergency, or other protection functions. When VoIP system or equipment is provided instead of PBX system or equipment, each TR (STR) and DEMARC requires increased AC power provided to compensate for loss of PBX's telephone instrument line power; and, to compensate for absence of PBX's UPS capability.
26. Wide Area Network (WAN): A digital network that transcends localized LANs within a given geographic location. VA'S WAN/LAN is not nationally listed or coded for life and public safety, critical, emergency, or other safety functions.

1.3 APPLICABLE PUBLICATIONS

A. Applicability of Standards: Unless documents include more stringent requirements, applicable construction industry standards have same force and effect as if bound or copied directly into the documents to extent referenced. Such standards are made a part of these documents by reference.
   1. Each entity engaged in construction must be familiar with industry standards applicable to its construction activity.
   2. Obtain standards directly from publication source, where copies of standards are needed to perform a required construction activity.

B. Government Codes, Standards and Executive Orders: Refer to http://www.cfm.va.gov/TIL/cPro.asp:
   1. Federal Communications Commission, (FCC) CFR, Title 47:

Part 15	Restrictions of use for Part 15 listed RF Equipment in Safety of Life Emergency Functions and Equipment Locations
Part 47	Chapter A, Paragraphs 6.1-6.23, Access to Telecommunications Service, Telecommunications Equipment and Customer Premises Equipment
Part 58	Television Broadcast Service

Part 73	Radio and Television Broadcast Rules
Part 90	Rules and Regulations, Appendix C
Form 854	Antenna Structure Registration
Chapter XXIII	National Telecommunications and Information Administration (NTIA, P/O Commerce, Chapter XXIII) the 'Red Book'- Chapters 7, 8 & 9 compliments CFR, Title 47, FCC Part 15, RF Restriction of Use and Compliance in "Safety of Life" Functions & Locations

2. US Department of Agriculture, (Title 7, USC, Chapter 55, Sections 2201, 2202 & 2203:RUS 1755 Telecommunications Standards and Specifications for Materials, Equipment and Construction:

RUS Bull 1751F-630	Design of Aerial Cable Plants
RUS Bull 1751F-640	Design of Buried Cable Plant, Physical Considerations
RUS Bull 1751F-643	Underground Plant Design
RUS Bull 1751F-815	Electrical Protection of Outside Plants,
RUS Bull 1753F-201	Acceptance Tests of Telecommunications Plants (PC-4)
RUS Bull 1753F-401	Splicing Copper and Fiber Optic Cables (PC-2)
RUS Bull 345-50	Trunk Carrier Systems (PE-60)
RUS Bull 345-65	Shield Bonding Connectors (PE-65)
RUS Bull 345-72	Filled Splice Closures (PE-74)
RUS Bull 345-83	Gas Tube Surge Arrestors (PE-80)

3. US Department of Commerce/National Institute of Standards Technology,(NIST):

FIPS PUB 1-1	Telecommunications Information Exchange
FIPS PUB 100/1	Interface between Data Terminal Equipment (DTE) Circuit Terminating Equipment for operation with Packet Switched Networks, or Between Two DTEs, by Dedicated Circuit
FIPS PUB 140/2	Telecommunications Information Security Algorithms
FIPS PUB 143	General Purpose 37 Position Interface between DTE and Data Circuit Terminating Equipment
FIPS 160/2	Electronic Data Interchange (EDI),

FIPS 175	Federal Building Standard for Telecommunications Pathway and Spaces
FIPS 191	Guideline for the Analysis of Local Area Network Security
FIPS 197	Advanced Encryption Standard (AES)
FIPS 199	Standards for Security Categorization of Federal Information and Information Systems

4. US Department of Defense, (DoD):

MIL-STD-188-110	Interoperability and Performance Standards for Data Modems
MIL-STD-188-114	Electrical Characteristics of Digital Interface Circuits
MIL-STD-188-115	Communications Timing and Synchronizations Subsystems
MIL-C-28883	Advanced Narrowband Digital Voice Terminals
MIL-C-39012/21	Connectors, Receptacle, Electrical, Coaxial, Radio Frequency, (Series BNC (Uncabled), Socket Contact, Jam Nut Mounted, Class 2)

5. US Department of Health and Human Services:
   The Health Insurance Portability and Accountability Act of 1996 (HIPAA) Privacy, Security and Breach Notification Rules
6. US Department of Justice:
   2010 Americans with Disabilities Act Standards for Accessible Design (ADAAD).
7. US Department of Labor, (DoL) - Public Law 426-62 – CFR, Title 29, Part 1910, Chapter XVII - Occupational Safety and Health Administration (OSHA), Occupational Safety and Health Standards):

Subpart 7	Approved NRTLs; obtain a copy at https://www.osha.gov/dts/otpca/nrtl/nrtllist.html
Subpart 35	Compliance with NFPA 101, Life Safety Code
Subpart 36	Design and Construction Requirements for Exit Routes
Subpart 268	Telecommunications
Subpart 305	Wiring Methods, Components, and Equipment for General Use

Subpart 508 Americans with Disabilities Act Accessibility Guidelines; technical requirement for accessibility to buildings and facilities by individuals with disabilities

8. US Department of Transportation, (DoT):
   a. Public Law 85-625, CFR, Title 49, Part 1, Subpart C – Federal Aviation Administration (FAA):AC 110/460-ID & AC 707 / 460-2E – Advisory Circulars Standards for Construction of Antenna Towers, and 7450 and 7460-2 – Antenna Construction Registration Forms.
9. US Department of Veterans Affairs (VA): Office of Telecommunications (OI&T), MP-6, PART VIII, TELECOMMUNICATIONS, CHAPTER 5, AUDIO, RADIO AND TELEVISION (and COMSEC) COMMUNICATIONS SYSTEMS: Spectrum Management and COMSEC Service (SMCS), AHJ for:
   a. CoG, "Continuance of Government" communications guidelines and compliance.
   b. COMSEC,"VA wide coordination and control of security classified communication assets."
   c. COOP, "Continuance of Operations" emergency communications guidelines and compliance.
   d. FAA, FCC, and US Department of Commerce National Telecommunications and Information Administration, "VA wide RF Co-ordination, Compliance and Licensing."
   e. Handbook 6100 – Telecommunications: Cyber and Information Security Office of Cyber and Information Security, and Handbook 6500 – Information Security Program.
   f. Low Voltage Special Communications Systems "Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance and Life Safety Certifications for CFM and VA Facility Low Voltage Special Communications Projects (except Fire Alarm, Telephone and Data Systems)."
   g. SATCOM, "Satellite Communications" guidelines and compliance, and Security and Law Enforcement Systems – "Coordinates the Design, Engineering, Construction Contract Specifications and Drawings Conformity, Proof of Performance Testing, VA Compliance, DEA and Public Safety Certification(s) for CFM and VA Facility Security

Low Voltage Special Communications and Physical Security Projects.

h. VHA's National Center for Patient Safety – Veterans Health Administration (VHA) Warning System, Failure of Medical Alarm Systems using Paging Technology to Notify Clinical Staff, July 2004.

i. VA's CEOSH, concurrence with warning identified in VA Directive 7700.

j. Wireless and Handheld Devices, "Guidelines and Compliance,"

k. Office of Security and Law Enforcement: VA Directive 0730 and Health Special Presidential Directive (HSPD)-12.

C. NRTL Standards: Refer to https://www.osha.gov/laws-regs/regulations/standardnumber/1926

1. Canadian Standards Association (CSA); same tests as presented by UL
2. Communications Certifications Laboratory (CEL); same tests as presented by UL.
3. Intertek Testing Services NA, Inc., (ITSNA), formerly Edison Testing Laboratory (ETL) same tests as presented by UL).
4. Underwriters Laboratory (UL):

1-2023	Flexible Metal Conduit
5-2016	Surface Metal Raceway and Fittings
6-2022	Rigid Metal Conduit
44-2018	Thermoset-Insulated Wires and Cables
50-2015	Enclosures for Electrical Equipment
65-2010	Wired Cabinets
83-2017	Thermoplastic-Insulated Wires and Cables
96-2016	Lightning Protection Components
96A-2022	Installation Requirements for Lightning Protection Systems
360-2013	Liquid-Tight Flexible Steel Conduit
444-2017	Communications Cables
467-2022	Grounding and Bonding Equipment
486A-486B-2018	Wire Connectors
486C-2018	Splicing Wire Connectors
486D-2015	Sealed Wire Connector Systems

486E-2015	Standard for Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-2023	Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
497/497A/497B/497C	
497D/497E	Protectors for Paired Conductors/Communications Circuits/Data Communications and Fire Alarm Circuits/coaxial circuits/voltage protections/Antenna Lead In
510-2022	Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
514A-2013	Metallic Outlet Boxes
514B-2012	Fittings for Cable and Conduit
514C-2014	Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-2011	Schedule 40 and 80 Rigid PVC Conduit
651A-2011	Type EB and A Rigid PVC Conduit and HDPE Conduit
797-2007	Electrical Metallic Tubing
884-2016	Underfloor Raceways and Fittings
1069-2022	Hospital Signaling and Nurse Call Equipment
1242-2006	Intermediate Metal Conduit
1449-2022	Standard for Transient Voltage Surge Suppressors
1479-2015	Fire Tests of Through-Penetration Fire Stops
1480-2016	Speaker Standards for Fire Alarm, Emergency, Commercial and Professional use
1666-2007	Standard for Wire/Cable Vertical (Riser) Tray Flame Tests
1685-2015	Vertical Tray Fire Protection and Smoke Release Test for Electrical and Fiber Optic Cables
1861-2021	Communication Circuit Accessories
1863-2019	Standard for Safety, communications Circuits Accessories

1865-2019	Standard for Safety for Vertical-Tray Fire Protection and Smoke-Release Test for Electrical and Optical-Fiber Cables
2024-2014	Standard for Cable Routing Assemblies and Communications Raceways
2196-2017	Standard for Test of Fire Resistive Cable
60950-1 ed. 8-2015	Information Technology Equipment Safety

D. Industry Standards:

1. Advanced Television Systems Committee (ATSC):

A/53 Part 1: 2013	ATSC Digital Television Standard, Part 1, Digital Television System
A/53 Part 2: 2011	ATSC Digital Television Standard, Part 2, RF/Transmission System Characteristics
A/53 Part 3: 2013	ATSC Digital Television Standard, Part 3, Service Multiplex and Transport System Characteristics
A/53 Part 4: 2009	ATSC Digital Television Standard, Part 4, MPEG-2 Video System Characteristics
A/53 Part 5: 2014	ATSC Digital Television Standard, Part 5, AC-3 Audio System Characteristics
A/53 Part 6: 2014	ATSC digital Television Standard, Part 6, Enhanced AC-3 Audio System Characteristics

2. American Institute of Architects (AIA): 2006 Guidelines for Design & Construction of Health Care Facilities.
3. American Society of Mechanical Engineers (ASME):

A17.1 (2019)	Safety Code for Elevators and Escalators Includes Requirements for Elevators, Escalators, Dumbwaiters, Moving Walks, Material Lifts, and Dumbwaiters with Automatic Transfer Devices
17.3 (2020)	Safety Code for Existing Elevators and Escalators
17.4 (2015)	Guide for Emergency Personnel
17.5 (2019)	Elevator and Escalator Electrical Equipment

4. American Society for Testing and Materials (ASTM):

B1 (2013)	Standard Specification for Hard-Drawn Copper Wire
B8 (2011)	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
D1557 (2012)	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort 56,000 ft-lbf/ft3 (2,700 kN-m/m3)
D2301 (2010)	Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape
B258-02 (2018)	Standard Specification for Standard Nominal Diameters and Cross-Sectional Areas of AWG Sizes of Solid Round Wires Used as Electrical Conductors
D709 (2017)	Standard Specification for Laminated Thermosetting Materials
D4566 (2020)	Standard Test Methods for Electrical Performance Properties of Insulations and Jackets for Telecommunications Wire and Cable
E84 (2023)	Standard Test Method for Surface Burning Characteristics of Building Materials

5. American Telephone and Telegraph Corporation (AT&T) - Obtain following AT&T Publications at https://ebiznet.sbc.com/sbcnebs/

ATT-TP-76200 (2013)	Network Equipment and Power Grounding, Environmental, and Physical Design Requirements
ATT-TP-76300(2012)	Merged AT&T Affiliate Companies Installation Requirements
ATT-TP-76305 (2013)	Common Systems Cable and Wire Installation and Removal Requirements - Cable Racks and Raceways
ATT-TP-76306 (2009)	Electrostatic Discharge Control
ATT-TP-76400 (2012)	Detail Engineering Requirements
ATT-TP-76402 (2013)	AT&T Raised Access Floor Engineering and Installation Requirements
ATT-TP-76405 (2011)	Technical Requirements for Supplemental Cooling Systems in Network Equipment Environments

ATT-TP-76416 (2011) Grounding and Bonding Requirements for Network Facilities

ATT-TP-76440 (2005) Ethernet Specification

ATT-TP-76450 (2013) Common Systems Equipment Interconnection Standards for AT&T Network Equipment Spaces

ATT-TP-76461 (2008) Fiber Optic Cleaning

ATT-TP-76900 (2010) AT&T Installation Testing Requirement

ATT-TP-76911 (1999) AT&T LEC Technical Publication Notice

6. British Standards Institution (BSI):

BS EN 50109-2 Hand Crimping Tools - Tools for The Crimp Termination of Electric Cables and Wires for Low Frequency and Radio Frequency Applications – All Parts & Sections. February 2013 (CRGD)

7. Building Industry Consulting Services International(BICSI):

ANSI/BICSI 002-2019 Data Center Design and Implementation Best Practices

ANSI/BICSI 004-2012 Information Technology Systems Design and Implementation Best Practices for Healthcare Institutions and Facilities

BICSI N1 2019

Standard for Installing Commercial Building Telecommunications Cabling

NECA/BICSI 607-2011 Standard for Telecommunications Bonding and Grounding Planning and Installation Methods for Commercial Buildings

ANSI/BICSI 005-2016 Electronic Safety and Security (ESS) System Design and Implementation Best Practices

8. Electronic Components Assemblies and Materials Association,(ECA).

ECA EIA/RS-270 (2013)Tools, Crimping, Solderless Wiring Devices – Recommended Procedures for User Certification

EIA/ECA 310-E (2005) Cabinets, and Associated Equipment

9. Facility Guidelines Institute: 2018 Guidelines for Design and Construction of Health Care Facilities.

10. Insulated Cable Engineers Association (ICEA):

ANSI/ICEA

S-84-608-2017	Telecommunications Cable, Filled Polyolefin Insulated Copper Conductor, S-87-640(2011) Optical Fiber Outside Plant Communications Cable
ANSI/ICEA	
S-90-661-2021	Category 3, & 5e Individually Unshielded Twisted-Pair Indoor Cable for Use in General Purpose and LAN Communication Wiring Systems
S-98-688 (2012)	Broadband Twisted Pair Cable Aircore, Polyolefin Insulated, Copper Conductors
S-99-689 (2012)	Broadband Twisted Pair Cable Filled, Polyolefin Insulated, Copper Conductors
ICEA S-102-700	
(2004)	Category 6 Individually Unshielded Twisted Pair Indoor Cables (With or Without an Overall Shield) for use in Communications Wiring Systems Technical Requirements

11. Institute of Electrical and Electronics Engineers (IEEE):

ISSN 0739-5175	March-April 2008 Engineering in Medicine and Biology Magazine, IEEE (Volume: 27, Issue:2) Medical Grade-Mission Critical-Wireless Networks
IEEE C2-2023	National Electrical Safety Code (NESC)
C62.41.2-2002/	
Cor 1-2012 IEEE	Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits 4)
C62.45-2002	IEEE Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits
81-2012 IEEE	Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Grounding System
100-2000	IEEE the New IEEE Standards Dictionary of Electrical and Electronics Terms

602-2007	IEEE Recommended Practice for Electric Systems in Health Care Facilities
1100-2005	IEEE Recommended Practice for Powering and Grounding Electronic Equipment

12. International Code Council:

AC193 (2015)	Mechanical Anchors in Concrete Elements

13. International Organization for Standardization (ISO):

ISO/TR 21730 (2007)	Use of Mobile Wireless Communication and Computing Technology in Healthcare Facilities - Recommendations for Electromagnetic Compatibility (Management of Unintentional Electromagnetic Interference) with Medical Devices

14. National Electrical Manufacturers Association (NEMA):

NEMA 250 (2020)	Enclosures for Electrical Equipment (1,000V Maximum)
ANSI C62.61 (1993)	American National Standard for Gas Tube Surge Arresters on Wire Line Telephone Circuits
ANSI/NEMA FB 1 (2014)	Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing EMT) and Cable
ANSI/NEMA OS 1 (2013)	Sheet-Steel Outlet Boxes, Device Boxes, Covers, and Box Supports
NEMA SB 19 (R2007)	NEMA Installation Guide for Nurse Call Systems
TC 3 (2004)	Polyvinyl Chloride (PVC) Fittings for Use with Rigid PVC Conduit and Tubing
NEMA VE 2 (2018)	Cable Tray Installation Guidelines

15. National Fire Protection Association (NFPA):

70E-2021	Standard for Electrical Safety in the Workplace
70-2023	National Electrical Code (NEC)
72-2022	National Fire Alarm Code
75-2020	Standard for the Fire Protection of Information Technological Equipment
76-2020	Recommended Practice for the Fire Protection of Telecommunications Facilities
77-2019	Recommended Practice on Static Electricity

90A-2021	Standard for the Installation of Air Conditioning and Ventilating Systems
99-2021	Health Care Facilities Code
101-2021	Life Safety Code
241-2022	Safeguarding construction, alternation and Demolition Operations
262 - 2023	Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces
780-2023	Standard for the Installation of Lightning Protection Systems
1221-2019	Standard for the Installation, Maintenance, and Use of Emergency Services Communications Systems
5000-2021	Building Construction and Safety Code

16. Society for Protective Coatings (SSPC):
    SSPC SP 6/NACE No.3 (2007) Commercial Blast Cleaning
17. Society of Cable Telecommunications Engineers (SCTE):

ANSI/SCTE 15 2022	Specification for Trunk, Feeder and Distribution Coaxial Cable

18. Telecommunications Industry Association (TIA):

TIA-120 Series	Telecommunications Land Mobile communications (APCO/Project 25) (April 2019)
TIA TSB-140	Additional Guidelines for Field-Testing Length, Loss and Polarity of Optical Fiber Cabling Systems (2004)
TIA-155	Guidelines for the Assessment and Mitigation of Installed Category 6 Cabling to Support 10GBASE-T (2010)(R2014)
TIA TSB-162-B	Telecommunications Cabling Guidelines for Wireless Access Points (2021)
TIA-22	Structural Standard for Antenna Supporting Structures and Antennas (2018)
TIA/EIA-423-B	Electrical Characteristics of Unbalanced Voltage Digital Interface Circuits (2012)

TIA-455-C	General Requirements for Standard Test Procedures for Optical Fibers, Cables, Transducers, Sensors, Connecting and Terminating Devices, and other Fiber Optic Components (August 2014)
TIA-455-53-B	FOTP-53 Attenuation by Substitution Measurements for Multimode Graded-Index Optical Fibers in Fiber Assemblies (Long Length) (July 2009)
TIA-455-78	IEC-60793-1-40 Optical Fibres - Part 1-40: Measurement Methods and Test Procedures-Attenuation (December 2020)
TIA-472D000-B	Fiber Optic Communications Cable for Outside Plant Use (July 2007)
ANSI/TIA-492AAAB-A	50-um Core Diameter/125-um Cladding Diameter Class IA Graded-Index Multimode Optically Optimized American Standard Fibers (November 2009
TIA-492CAAA	Detail Specification for Class IVa Dispersion-Unshifted Single-Mode Optical Fibers (November 2009)
TIA-492E000	Sectional Specification for Class IVd Nonzero-Dispersion Single-Mode Optical Fibers for the 1,550 nm Window (September 2002)
TIA-526-7-A	Measurement of Optical Power Loss of Installed Single-Mode Fiber Cable Plant, Adoption of IEC 61280-4-2 edition 2: Fibre-Optic Communications Subsystem Test Procedures – Part 4-2: Installed Cable Plant – Single-Mode Attenuation and Optical Return Loss Measurement (July 2015)(R2011)
TIA-526.14-D	Optical Power Loss Measurements of Installed Multimode Fiber Cable Plant – SFSTP-14 (January 2023)
TIA-568	Revision/Edition: E Commercial Building Telecommunications Cabling Standard Set: (TIA-

	568-C.0-2 Generic Telecommunications Cabling for Customer Premises (2012), TIA-568-C.1-1 Commercial Building Telecommunications Cabling Standard Part 1: General Requirements (2012), TIA-568-C.2 Commercial Building Telecommunications Cabling Standard—Part 2: Balanced Twisted Pair Cabling Components (2009), TIA-568-C.3-1 Optical Fiber Cabling Components Standard, (2011) AND TIA-568-C.4 Broadband Coaxial Cabling and Components Standard (2020) (RJuly 2022)
TIA-569	Revision/Edition E Telecommunications Pathways and Spaces (May 2019)
TIA-574	Position Non-Synchronous Interface between Data Terminal equipment and Data Circuit Terminating Equipment Employing Serial Binary Interchange (May 2003) (R December 2012)
TIA/EIA-590-A	Standard for Physical Location and Protection of Below Ground Fiber Optic Cable Plant (January 1997)
TIA-598-D	Optical Fiber Cable Color Coding (July 2014) (Addendum August 2018)
TIA-604-10-C	Fiber Optic Connector Intermateablility Standard (July 2021)
ANSI/TIA-606-D	Administration Standard for Telecommunications Infrastructure (2021)
TIA-607-D	Generic Telecommunications Bonding and Grounding (Earthing) For Customer Premises (July 2019) (Addendum July 201*)
TIA-613	High Speed Serial Interface for Data Terminal Equipment and Data Circuit Terminal Equipment (R July 2014)
ANSI/TIA-758-B	Customer-owned Outside Plant Telecommunications Infrastructure Standard (April 2012)
ANSI/TIA-862-A	Building Automation Systems Cabling Standard (April 2011)

TIA-942-B	Telecommunications Infrastructure Standard for Data Centers (July 2017)
TIA-1152-A	Requirements for Field Testing Instruments and Measurements for Balanced Twisted Pair Cabling (November 2016) (R July 2021)
TIA-1179-A	Healthcare Facility Telecommunications Infrastructure Standard (August 2017)

1.4 SINGULAR NUMBER

A. Where any device or part of equipment is referred in singular number (such as " rack"), reference applies to as many such devices as are required to complete installation.

1.5 RELATED WORK

A. Specification Order of Precedence: FAR Clause 52.236-21, VAAR Clause 852.236-71.

1. Field Cutting and Patching: Section 09 91 00, PAINTING.
2. Additional submittal requirements: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
3. Availability and source of references and standards specified in applicable publications: Section 01 42 19, REFERENCE STANDARDS.
4. Control of environmental pollution and damage for air, water, and land resources: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
5. Requirements for non-hazardous building construction and demolition waste: Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.
6. General requirements and procedures to comply with various federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable design: Section 01 81 13,SUSTAINABLE DESIGN REQUIREMENTS.
7. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction: Section 07 84 00, FIRESTOPPING.
8. Sealant and caulking materials and their application: Section 07 92 00, JOINT SEALANTS.
9. General electrical requirements that are common to more than one section of Division 26: Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

10. Electrical conductors and cables in electrical systems rated 600 V and below: Section 26 05 21, LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
11. Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
12. Conduit and boxes: Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS.
13. Wiring devices: Section 26 27 26, WIRING DEVICES.
14. Underground ducts, raceways, precast manholes and pull boxes: Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.
15. Lightning protection: Section 26 41 00, FACILITY LIGHTNING PROTECTION.
16. General requirements common to more than one section in Division 28: Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
17. Conductors and cables for electronic safety and security systems: Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY.
18. Low impedance path to ground for electronic safety and security system ground fault currents: Section 28 05 26, GROUNDING AND BONDING FOR SECURITY SYSTEMS.
19. Conduits and partitioned telecommunications raceways for Electronic Safety and Security systems: Section 28 05 28.33, CONDUITS AND BACK BOXES FOR ELECTRONIC SAFETY AND SECURITY.
20. Physical Access Control System field-installed controllers connected by data transmission network: Section 28 13 00, PHYSICAL ACCESS DETECTION.
21. Detection and screening systems: Section 28 13 53, SECURITY ACCESS DETECTION.
22. Intrusion sensors and detection devices, and communication links to perform monitoring, alarm, and control functions: Section 28 16 11, INTRUSION DETECTION EQUIPMENT AND SYSTEMS.
23. Video surveillance system cameras, data transmission wiring, and control stations with associated equipment: Section 28 23 00, VIDEO SURVEILLANCE EQUIPMENT AND SYSTEMS.

24. Duress-panic alarms, emergency phones or call boxes, intercom systems, data transmission wiring and associated equipment: Section 28 26 00, ELECTRONIC PERSONAL PROTECTION EQUIPMENT AND SYSTEMS.
25. Alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring: Section 28 31 00, FIRE DETECTION AND ALARM.
26. Emergency Call telephones, intercom systems, with blue strobe light and equipment: Section 28 52 31, SECURITY EMERGENCY CALL/DURESS ALARM/COMMUNICATIONS SYSTEM AND EQUIPMENT.

1.6 ADMINISTRATIVE REQUIREMENTS

A. Assign a single communications project manager to serve as point of contact for Government, contractor, and design professional.

B. Be proactive in scheduling work.
   1. Use of premises is restricted at times directed by COR.
   2. Movement of materials: Unload materials and equipment delivered to site. Pay costs for rigging, hoisting, lowering and moving equipment on and around site, in building or on roof.
   3. Coordinate installation of required supporting devices and sleeves to be set in poured-in-place concrete and other structural components, as they are constructed.
   4. Sequence, coordinate, and integrate installations of materials and equipment for efficient flow of Work. Plan for large equipment requiring positioning prior to closing in building.
   5. Coordinate connection of materials, equipment, and systems with exterior underground and overhead utilities and services. Comply with requirements of governing regulations, franchised service companies, and controlling agencies; provide required connection for each service.
   6. Initiate and maintain discussion regarding schedule for ceiling construction and install cables to meet that schedule.

C. Contact the Office of Telecommunications, Special Communications Team (005OP2H3) (202)461-5310 to have a Government-accepted Telecommunications COR assigned to project for telecommunications review, equipment and system approval and coordination with other VA personnel.

D. Communications Project Manager Responsibilities:

1. Assume responsibility for overall telecommunications system integration and coordination of work among trades, subcontractors, and authorized system installers.
2. Coordinate with related work indicated on drawings or specified.
3. Manage work related to telecommunications system installation in a manner approved by manufacturer.

1.7 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Additional and more stringent requirements for Division 27 and Division 28 sections listed below:
   1. Submittals for Division 27 and Division 28 specification sections shall be submitted as a complete package including all devices, parts, pieces, etc., that make up that section.
      a. A Section, for the purpose of this direction, shall include the complete text included under a single specification number, example: 27 10 00 – Structured Cabling, including:
         1) Part 1: General
         2) Part 2: Products
         3) Part 3: Execution
      b. Failure to submit a complete Div 27 or Div 28 section shall result in the entire specification section being returned as "Not Reviewed – Incomplete Submittal" and instructions to resubmit.
   2. Each submittal section that includes wording to the affect that "all products must be provided by the same manufacturer" shall have all Products within that section provided by a recognized OEM (or OEM and OEM Partner with written agreement in place to warrant the other's products when installed as a system).

B. No substitution of a product within a given section shall void the overall warranty of the products within that section or any other section contained herein the contract or project as a whole.

C. Provide parts list including quantity of spare parts.

D. Provide manufacturer product information. Government reserves the right to require a list of installations where products have been in operation.

E. Provide Source Quality Control Submittal:

1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of warranty maintenance are authorized representatives of OEM. Include individual's legal name, contact information and OEM credentials in certification.
2. Submit written certification from OEM that wiring and connection diagrams meet Government Life Safety Guidelines, NFPA, NEC, NRTL, these specifications, and Joint Commission requirements and instructions, requirements, recommendations, and guidance set forth by OEM for the proper performance of system.
3. Pre-acceptance Certification: Certification in accordance with procedure outlined in Section 01 00 00, GENERAL REQUIREMENTS and specific Division 27 qualification documentation.

F. Installer Qualifications: Submit three installations of similar size and complexity furnished and installed by installer; include:
1. Installation location and name.
2. Owner’s name and contact information including address, telephone, and email.
3. Date of project start and date of final acceptance.
4. System project number.
5. Three paragraph description of each system related to this project; include function, operation, and installation.

G. Provide delegated design submittals (e.g., seismic support design).

H. Submittals are required for all equipment anchors and supports. Include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations, and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or conduit. Anchors and supports to resist seismic load based on seismic design categories per section 4.0 of VA seismic design requirements H-18-8 dated August 2013.

I. Test Equipment List:
1. Supply test equipment of accuracy better than parameters to be tested.
2. Submit test equipment list including make and model number:
   a. ANSI/TIA-1152 Level IV twisted pair cabling test instrument.
   b. Fiber optic insertion loss power meter with light source.
   c. Optical time domain reflectometer (OTDR).

d. Volt-Ohm meter.

e. Digital camera.

f. Signal level meter.

g. Time domain reflectometer (TDR) with strip chart recorder (Data and Optical Measuring).

h. Spectrum analyzer.

3. Supply only test equipment with a calibration tag from Government-accepted calibration service dated not more than 12 months prior to test.

4. Provide sample test and evaluation reports.

J. Submittal Drawings:

1. Telecommunications Space Plans/Elevations: Provide enlarged floor plans of telecommunication spaces indicating layout of equipment and devices, including receptacles and grounding provisions. Submit detailed plan views and elevations of telecommunication spaces showing racks, termination blocks, and cable paths. Include following rooms:

a. Telecommunications rooms.

b. Building Entrance Facility/Demarcation rooms.

c. Server rooms/Data Center.

d. Equipment rooms.

e. Antenna Head End rooms.

2. Logical Drawings: Provide logical riser or schematic drawings for all systems.

a. Provide riser diagrams systems and interconnection drawings for equipment assemblies; show termination points and identify wiring connections.

3. Access Panel Schedule on Submittal Drawings: Coordinate and prepare a location, size, and function schedule of access panels required to fully service equipment.

K. Provide sustainable design submittals.

L. Furnish electronic certified test reports to COR prior to final inspection and not more than 90 days after completion of tests.

1.8 CLOSEOUT SUBMITTALS

A. Provide following closeout submittals prior to project closeout date:

1. Warranty certificate.

2. Evidence of compliance with requirements such as low voltage certificate of inspection.
3. Project record documents.
4. Instruction manuals and software that are a part of system.

B. Maintenance and Operation Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Prepare a manual for each system and equipment specified.
2. Furnish on portable storage drive in PDF format or equivalent accepted by COR.
3. Furnish complete manual as specified in specification section, fifteen days prior to performance of systems or equipment test.
4. Furnish remaining manuals prior to final completion.
5. Identify storage drive "MAINTENANCE AND OPERATION MANUAL" and system name.
6. Include name, contact information and emergency service numbers of each subcontractor installing system or equipment and local representatives for system or equipment.
7. Provide a Table of Contents and assemble files to conform to Table of Contents.
8. Operation and Maintenance Data includes:
   a. Approved shop drawing for each item of equipment.
   b. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of equipment.
   c. A control sequence describing start-up, operation, and shutdown.
   d. Description of function of each principal item of equipment.
   e. Installation and maintenance instructions.
   f. Safety precautions.
   g. Diagrams and illustrations.
   h. Test Results and testing methods.
   i. Performance data.
   j. Pictorial "exploded" parts list with part numbers. Emphasis to be placed on use of special tools and instruments. Indicate sources of supply, recommended spare parts, and name of servicing organization.
   k. Warranty documentation indicating end date and equipment protected under warranty.

l. Appendix; list qualified permanent servicing organizations for support of equipment, including addresses and certified personnel qualifications.

C. Record Wiring Diagrams:

1. Red Line Drawings: Keep one E size 91.44 cm x 121.92 cm (36 inches x 48 inches) set of floor plans, on site during work hours, showing installation progress marked and backbone cable labels noted. Make these drawings available for examination during construction meetings or field inspections.
2. General Drawing Specifications: Detail and elevation drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). ER, TR and other enlarged detail floor plan drawings to be D size 61 cm x 91.44 cm (24” x 36”) with a minimum scale of 0.635 cm = 30.48 cm (1/4 inch = 12 inches). Building composite floor plan drawings to be D size 61 cm x 91.44 cm (24 inches x 36 inches) with a minimum scale of 3.175 mm = 30.48 cm (1/8 inch = 1’ 0 inch).
3. Building Composite Floor Plans: Provide building floor plans showing work area outlet locations and configuration, types of jacks, distance for each cable, and cable routing locations.
4. Floor plans to include:
   a. Final room numbers and actual backbone cabling and pathway locations and labeling.
   b. Inputs and outputs of equipment identified according to labels installed on cables and equipment
   c. Device locations with labels.
   d. Conduit.
   e. Head-end equipment.
   f. Wiring diagram.
   g. Labeling and administration documentation.
5. Submit Record Wiring Diagrams within five business days after final cable testing.
6. Deliver Record Wiring Diagrams as CAD files in .dwg or .rvt formats as determined by COR.
7. Deliver four complete sets of electronic record wiring diagrams to COR on portable storage drive.

D. Service Qualifications: Submit name and contact information of service organizations providing service to this installation within four hours of receipt of notification service is needed.

1.9 MAINTENANCE MATERIAL SUBMITTALS

A. After approval and prior to installation, furnish COR with the following:
   1. A 300 mm (12 inch) length of each type and size of wire and cable along with tag from coils of reels from which samples were taken.
   2. One coupling, bushing and termination fitting for each type of conduit.
   3. Samples of each hanger, clamp and supports for conduit and pathways.
   4. Duct sealing compound.

1.10 QUALITY ASSURANCE

A. Manufacturer’s Qualifications: Manufacturer must produce, as a principal product, the equipment and material specified for this project, and have manufactured item for at least three years.

B. Product and System Qualification:
   1. OEM must have three installations of equipment submitted presently in operation of similar size and type as this project, that have continuously operated for a minimum of three years.
   2. Government reserves the right to require a list of installations where products have been in operation before approval.
   3. Authorized representative of OEM must be responsible for design, satisfactory operation of installed system, and certification.

C. Trade Contractor Qualifications: Trade contractor must have completed three or more installations of similar systems of comparable size and complexity with regards to coordinating, engineering, testing, certifying, supervising, training, and documentation. Identify these installations as a part of submittal.

D. System Supplier Qualifications: System supplier must be authorized by OEM to warranty installed equipment.

E. Telecommunications technicians assigned to system must be trained, and certified by OEM on installation and testing of system; provide written evidence of current OEM certifications for installers.

F. Manufactured Products:

1. Comply with FAR clause 52.236-5 for material and workmanship.
2. When more than one unit of same class of equipment is required, units must be product of a single manufacturer.
3. Equipment Assemblies and Components:
   a. Components of an assembled unit need not be products of same manufacturer.
   b. Manufacturers of equipment assemblies, which include components made by others, to assume complete responsibility for final assembled unit.
   c. Provide compatible components for assembly and intended service.
   d. Constituent parts which are similar must be product of a single manufacturer.
4. Identify factory wiring on equipment being furnished and on wiring diagrams.

G. Testing Agencies: Government reserves the option of witnessing factory tests. Notify COR minimum 15 working days prior to manufacturer performing the factory tests.
   1. When equipment fails to meet factory test and re-inspection is required, contractor is liable for additional expenses, including expenses of Government.

1.11 DELIVERY, STORAGE, AND HANDLING

A. Delivery and Acceptance Requirements:
   1. Government's approval of submittals must be obtained for equipment and material before delivery to job site.
   2. Deliver and store materials to job site in OEM's original unopened containers, clearly labeled with OEM's name and equipment catalog numbers, model and serial identification numbers for COR to inventory cable, patch panels, and related equipment.

B. Storage and Handling Requirements:
   1. Equipment and materials must be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
      a. Store and protect equipment in a manner that precludes damage or loss, including theft.
      b. Protect painted surfaces with factory installed removable heavy kraft paper, sheet vinyl or equivalent.

c. Protect enclosures, equipment, controls, controllers, circuit protective devices, and other like items, against entry of foreign matter during installation; vacuum clean both inside and outside before testing and operating.

C. Coordinate storage.

1.12 FIELD CONDITIONS

A. Where variations from documents are requested in accordance with GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, connecting work and related components must include additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. A contract adjustment or additional time will not be granted because of field conditions pursuant to FAR 52.236-2 and FAR 52.236-3; a contract adjustment or additional time will not be granted for additional work required for complete and usable construction and systems pursuant to FAR 52.246-12.

1.13 WARRANTY

A. Comply with FAR clause 52.246-21 except as follows:

1. Warranty material and equipment to be free from defects, workmanship, and remain so for a period of one year for Emergency Systems from date of final acceptance of system by Government; provide OEM’s equipment warranty document to COR.
2. Government maintenance personnel must have ability to contact OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time; contractor and OEM must provide this capability.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

A. Provide communications spaces and pathways conforming to TIA 569, at a minimum.

B. In cases of renovations in historic or otherwise restrictive buildings, where it has been determined as impossible to follow above stated guidelines, exceptions must not modify maximum distances set forth in TIA 568 and 569; and exceptions must not in any way effect performance of entire TIP system.

C. Modification to administrative issues requires written approvals from COR with concurrence from SMCS 005OP2H3, OEM, contractor, and local authorities.

2.2 EQUIPMENT IDENTIFICATION

A. Provide laminated black phenolic resin with white core nameplates with minimum 6 mm (1/4 inch) high engraved lettering.

B. Nameplates furnished by manufacturer as standard catalog items unless other method of identification is indicated.

2.3 UNDERGROUND WARNING TAPE

A. Underground Warning: Standard 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type; red with black letters imprinted with "CAUTION BURIED ELECTRIC LINE BELOW", orange with black letters imprinted with "CAUTION BURIED TELEPHONE LINE BELOW" or orange with black letters imprinted with "CAUTION BURIED FIBER OPTIC LINE BELOW", as applicable.

2.4 WIRE LUBRICATING COMPOUND

A. Provide non-hardening or forming adhesive coating cable lubricants suitable for cable jacket material and raceway.

2.5 FIREPROOFING TAPE

A. Provide flexible, conformable fabric tape of organic composition and coated one side with flame-retardant elastomer.

B. Tape must be self-extinguishing and cannot support combustion; arc-proof and fireproof.

C. Tape cannot deteriorate when subjected to water, gases, salt water, sewage, or fungus; and tape must be resistant to sunlight and ultraviolet light.

D. Application must withstand a 200-ampere arc for minimum 30 seconds.

E. Securing Tape: Glass cloth electrical tape minimum 0.18 mm (7 mils) thick and 19 mm (3/4 inch) wide.

2.6 ACCESS PANELS

A. Panels: 304 mm x 304 mm (12 inches by 12 inches) or size allowed by location to provide optimum access to equipment for maintenance and service.

B. Provide access panels and doors as required to allow service of materials and equipment that require inspection, replacement, repair, or service.

C. Provide access panels where items installed require access and are concealed in floor, wall, furred space or above ceiling; ceilings consisting of lay-in or removable splined tiles do not require access panels.

D. Provide access panels with same fire rating classification as surface penetrated.

PART 3 - EXECUTION

3.1 PREPARATION

A. Penetrations and Sleeves:

1. Lay out penetration and sleeve openings in advance, to permit provision in work.
2. Set sleeves in forms before concrete is poured.
3. Set sleeves prior to installation of structure for passage of pipes, conduit, ducts, etc.
4. Provide sleeves and packing materials at penetrations of foundations, walls, slabs, partitions, and floors.
5. Make sleeves that penetrate outside walls, basement slabs, footings, and beams waterproof.
6. Fill slots, sleeves and other openings in floors or walls if not used.
   a. Fill spaces in openings after installation of conduit or cable.
   b. Provide fill for floor penetrations to prevent passage of water, smoke, fire, and fumes.
   c. Provide fire resistant fill in rated floors and walls, to prevent passage of air, smoke, and fumes.
7. Install sleeves through floors watertight and extend minimum 50.8 mm (2 inches) above floor surface.
8. Match and set sleeves flush with adjoining floor, ceiling, and wall finishes where raceways passing through openings are exposed in finished rooms.
9. Annular space between conduit and sleeve must be minimum 6 mm (1/4 inch).
10. Do not provide sleeves for slabs-on-grade, unless specified or indicated otherwise.

11. Comply with requirements for firestopping, for sleeves through rated fire walls and smoke partitions.
12. Do not support piping risers or conduit on sleeves.
13. Identify unused sleeves and slots for future installation.
14. Provide core drilling if walls are poured or otherwise constructed without sleeves and wall penetration is required; do not penetrate structural members.

B. Core Drilling:
1. Avoid core drilling whenever possible.
2. Coordinate openings with other trades and utilities and prevent damage to structural reinforcement.
3. Investigate existing conditions in vicinity of required opening prior to coring, including an x-ray of floor if determined necessary by competent person or COR.
4. Protect areas from damage.

C. Verification of In-Place Conditions:
1. Verify location, use and status of all material, equipment, and utilities that are specified, indicated, or determined necessary for removal.
   a. Verify materials, equipment, and utilities to be removed are inactive, not required, or in use after completion of project.
   b. Replace with equivalent any material, equipment and utilities that were removed by contractor that are required to be left in place.
2. Existing Utilities: Do not interrupt utilities serving facilities occupied by Government or others unless permitted under following conditions and then only after arranging to provide temporary utility services, according to requirements indicated:
   a. Notify COR in writing at least 14 days in advance of proposed utility interruptions.
   b. Do not proceed with utility interruptions without Government’s written permission.

D. Provide suspended platforms, strap hangers, brackets, shelves, stands or legs for floor, wall and ceiling mounting of equipment as required.

E. Provide steel supports and hardware for installation of hangers, anchors, guides, and other support hardware.

F. Obtain and analyze catalog data, weights, and other pertinent data required for coordination of equipment support provisions and installation.

G. Verify site conditions and dimensions of equipment to ensure access for proper installation of equipment without disassembly that would void warranty.

3.2 INSTALLATION - GENERAL

A. Coordinate systems, equipment, and materials installation with other building components.

B. Install systems, materials, and equipment to conform with approved submittal data, including coordination drawings.

C. Conform to VAAR 852.236.91 arrangements indicated, recognizing that work may be shown in diagrammatic form or have been impracticable to detail all items because of variances in manufacturers' methods of achieving specified results.

D. Install systems, materials, and equipment level and plumb, parallel, and perpendicular to other building systems and components, where installed in both exposed and un-exposed spaces.

E. Install equipment according to manufacturers' written instructions.

F. Install wiring and cabling between equipment and related devices.

G. Install cabling, wiring, and equipment to facilitate servicing, maintenance, and repair or replacement of equipment components. Connect equipment for ease of disconnecting, with minimum interference of adjacent other installations.

H. Provide access panel or doors where units are concealed behind finished surfaces.

I. Arrange for chases, slots, and openings in other building components during progress of construction, to allow for wiring, cabling, and equipment installations.

J. Where mounting heights are not detailed or dimensioned, install systems, materials, and equipment to provide maximum headroom and access for service and maintenance as possible.

K. Install systems, materials, and equipment giving priority to systems required to be installed at a specified slope.

L. Avoid interference with structure and with work or other trades, preserving adequate headroom and clearing doors and passageways to satisfaction of COR and code requirements.

M. Install equipment and cabling to distribute equipment loads on building structural members provided for equipment support under other sections; install and support roof-mounted equipment on structural steel or roof curbs as appropriate.

N. Provide supplementary or miscellaneous items, appurtenances, devices and materials for a complete installation.

3.3 EQUIPMENT INSTALLATION

A. Locate equipment as close as practical to locations shown on drawings.

B. Note locations of equipment requiring access on record drawings.

C. Access and Access Panels: Verify access panel locations and construction with COR.

D. Inaccessible Equipment:

1. Where Government determines that contractor has installed equipment not conveniently accessible for operation and maintenance, equipment must be removed and reinstalled as directed and without additional cost to Government.
2. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for communication equipment cabinet assembly.
3. Refer to Section 27 11 00, TELECOMMUNICATIONS ROOM FITTINGS for equipment labeling.

3.4 EQUIPMENT IDENTIFICATION

A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.

B. Secure identification signs with screws.

3.5 CUTTING AND PATCHING

A. Perform cutting and patching according to contract general requirements and as follows:

1. Remove samples of installed work as specified for testing.
2. Perform cutting, fitting, and patching of equipment and materials required to uncover existing infrastructure in order to provide access for correction of improperly installed existing or new work.
3. Remove and replace defective work.

4. Remove and replace non-conforming work.

B. Cut, remove, and legally dispose of selected equipment, components, and materials, including removal of material, equipment, devices, and other items indicated to be removed and items made obsolete by new work.

C. Provide and maintain temporary partitions or dust barriers adequate to prevent the spread of dust and dirt to adjacent areas.

D. Protect adjacent installations during cutting and patching operations.

E. Protect structure, furnishings, finishes, and adjacent materials not indicated or scheduled to be removed.

F. Patch finished surfaces and building components using new materials specified for original installation and experienced installers.

3.6 FIELD QUALITY CONTROL

A. Provide work according to VAAR 852.236.91 and FAR clause 52.236-5.

B. Provide minimum clearances and work required for compliance with NFPA 70, National Electrical Code (NEC), and manufacturers' instructions; comply with additional requirements indicated for access and clearances.

C. Verify all field conditions and dimensions that affect selection and provision of materials and equipment, and provide any disassembly, reassembly, relocation, demolition, cutting, and patching required to provide work specified or indicated, including relocation and reinstallation of existing wiring and equipment.

1. Protect facility, equipment, and wiring from damage.

D. Submit written notice that:

1. Project has been inspected for compliance with documents.
2. Work has been completed in accordance with documents.

E. Non-Conforming Work: Conduct project acceptance inspections, final completion inspections, substantial completion inspections, and acceptance testing and demonstrations after verification of system operation and completeness by Contractor.

F. For project acceptance inspections, final completion inspections, substantial completion inspections, and testing/demonstrations that require more than one site visit by COR or design professional to verify project compliance for same material or equipment, Government reserves right to obtain compensation from contractor to defray cost of additional site visits that result from project construction or testing

deficiencies and incompleteness, incorrect information, or non-compliance with project provisions.

1. COR will notify contractor, of hourly rates and travel expenses for additional site visits and will issue an invoice to Contractor for additional site visits.
2. Contractor is not eligible for extensions of project schedule or additional charges resulting from additional site visits that result from project construction or testing deficiencies/incompleteness, incorrect information, or non-compliance with Project provisions.

G. Tests:

1. Interim inspection is required at approximately 50 percent of installation.
2. Request inspection ten working days prior to interim inspection start date by notifying COR in writing; this inspection must verify equipment and system being provided adheres to installation, mechanical and technical requirements of construction documents.
3. Inspection to be conducted by OEM and factory-certified contractor representative, and witnessed by COR, facility and SMCS 0050P2H3 representatives.
4. Check each item of installed equipment to ensure appropriate NRTL listing labels and markings are fixed in place.
5. Verify cabling terminations in DEMARC, MCR, TER, SCC, ECC, TRs and head end rooms, workstation locations and TCO adhere to color code for T568B pin assignments and cabling connections are in compliance with TIA standards.
6. Visually confirm minimum Category 6A cable marking at TCOs, CCSs locations, patch cords and origination locations.
7. Review entire communications circulating ground system, each TGB and grounding connection, grounding electrode and outside lightning protection system.
8. Review cable tray, conduit, and path/wire way installation practice.
9. OEM and contractor to perform:
   a. Fiber optical cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.

b. Coaxial cable field inspection tests via attenuation measurements on factory reels; provide results along with OEM certification for factory reel tests.

c. Baseband cable field inspection tests via attenuation measurements on factory reels and provide results along with OEM certification for factory reel tests.

10. Relocate failed cable reels to a secured location for inventory, as directed by COR, and then remove from project site within two working days; provide COR with written confirmation of defective cable reels removal from project site.

11. Provide results of interim inspections to COR.

12. If major or multiple deficiencies are discovered, additional interim inspections could be required until deficiencies are corrected, before permitting further system installation.

    a. Additional inspections are scheduled at direction of COR.

    b. Re-inspection of deficiencies noted during interim inspections, must be part of system's Final Acceptance Proof of Performance Test.

    c. The interim inspection cannot affect the system's completion date unless directed by COR.

13. Facility COR will ensure test documents become a part of system's official documentation package.

H. Pretesting: Re-align, re-balance, sweep, re-adjust and clean entire system and leave system working for a "break-in" period, upon completing installation of system and prior to Final Acceptance Proof of Performance Test. System RF transmitting equipment must not be connected to keying or control lines during "break-in" period.

1. Pretesting Procedure:

    a. Verify systems are fully operational and meet performance requirements, utilizing accepted test equipment and spectrum analyzer.

    b. Pretest and verify system functions and performance requirements conform to construction documents and, that no unwanted physical, aural and electronic effects, such as signal distortion, noise pulses, glitches, audio hum, poling noise are present.

2. Measure and record signal, aural and control carrier levels of each DAS RF, voice, and data channel, at each of the following minimum points in system:
   a. Utility provider entrance.
   b. Buried conduit duct locations.
   c. Maintenance Holes (Manholes) and hand holes.
   d. ENTR or DEMARC.
   e. PBX interconnections.
   f. MCR interconnections.
   g. MCOR interconnections.
   h. TER interconnections.
   i. TOR interconnections.
   j. Control room interconnections.
   k. TR interconnections.
   l. System interfaces in locations listed herein.
   m. HE interconnections.
   n. Antenna (outside and inside) interconnections.
   o. System and lightning ground interconnections.
   p. Communications circulating ground system.
   q. UPS areas.
   r. Emergency generator interconnections.
   s. Each general floor areas.
   t. Others as required by AHJ (SMCS 005OP2H3).
3. Provide recorded system pretest measurements and certification that the system is ready for formal acceptance test to COR.

I. Acceptance Test:
1. Schedule an acceptance test date after system has been pretested, and pretest results and certification submitted to COR.
2. Give COR fifteen working days written notice prior to date test is expected to begin; include expected duration of time for test in notification.
3. Test in the presence of the following:
   a. COR.
   b. OEM representatives.
   c. VACO:
      1) CFM representative.

2) AHJ-SMCS 005OP2H3, (202)461-5310.

d. VISN-CIO, Network Officer and VISN representatives.

e. Facility:

1) FMS Service Chief, Bio-Medical Engineering and facility representatives.

2) OI&T Service Chief and OI&T representatives.

3) Safety Officer, Police Chief and facility safety representatives.

f. Local Community Safety Personnel:

1) Fire Marshal representative.

2) Disaster Coordinator representative.

3) EMS Representatives: Police, Sherriff, City, County or State representatives.

4. Test system utilizing accepted test equipment to certify proof of performance and Life and Public Safety compliance, FCC, NRTL, NFPA and OSHA compliance.

a. Rate system as acceptable or unacceptable at conclusion of test; make only minor adjustments and connections required to show proof of performance.

1) Demonstrate and verify that system complies with performance requirements under operating conditions.

2) Failure of any part of system that precludes completion of system testing, and which cannot be repaired within four hours, terminates acceptance test of that portion of system.

3) Repeated failures that result in a cumulative time of eight hours to affect repairs is cause for entire system to be declared unacceptable.

4) If system is declared unacceptable, retesting must be rescheduled at convenience of Government and costs borne by the contractor.

J. Acceptance Test Procedure:

1. Physical and Mechanical Inspection: The test team representatives must tour major areas to determine system and sub-systems are completely and properly installed and are ready for acceptance testing.

2. A system inventory including available spare parts must be taken at this time.
3. Each item of installed equipment must be re-checked to ensure appropriate NRTL (i.e., UL) certification listing labels are affixed.
4. Confirm that deficiencies reported during Interim Inspections and Pretesting are corrected prior to start of Acceptance Test.
5. Inventory system diagrams, record drawings, equipment manuals, pretest results.
6. Failure of system to meet installation requirements of specifications is grounds for terminating testing and to schedule re-testing.

K. Operational Test:
1. Individual Item Test: VACO AHJ representative (SMCS 005OP2H3) may select individual items of equipment for detailed proof of performance testing until 100 percent of system has been tested and found to meet requirements of the construction documents.
2. Government’s Condition of Acceptance of System Language:
   a. Without Acceptance: Until system fully meets conditions of construction documents, system’s ownership, use, operation and warranty commences at Government’s final acceptance date.
   b. With Conditional Acceptance: Stating conditions that need to be addressed by contractor or OEM and stating system’s use and operation to commence immediately while its warranty commences only at Government’s agreed final extended acceptance date.
   c. With Full Acceptance: Stating system’s ownership, use, operation and warranty to immediately commence at Government’s agreed to date of final acceptance.

L. Acceptance Test Conclusion: Reschedule testing on deficiencies and shortages with COR, after COR and SMCS AHJ jointly agree to results of the test, using the generated punch list or discrepancy list. Perform retesting to comply with these specifications at contractor's expense.

M. Proof of Performance Certification:
1. If system is declared acceptable, AHJ (SMCS 005OP2H3) provides COR notice stating system processes to required operating standards and functions and is Government accepted for use by facility.

2. Validate items with COR needing to be provided to complete project contract (i.e., charts & diagrams, manuals, spare parts, system warranty documents executed, etc.). Once items have been provided, COR contacts FMS service chief to turn over system from CFM oversight for beneficial use by facility.
3. If system is declared unacceptable without conditions, rescheduled testing expenses are to be borne by contractor.

3.7 CLEANING

A. Remove debris, rubbish, waste material, tools, construction equipment, machinery and surplus materials from project site and clean work area, prior to final inspection and acceptance of work.
B. Put building and premises in neat and clean condition.
C. Remove debris on a daily basis.
D. Remove unused material, during progress of work.
E. Perform cleaning and washing required to provide acceptable appearance and operation of equipment to satisfaction of COR.
F. Clean exterior surface of all equipment, including concrete residue, dirt, and paint residue, after completion of project.
G. Perform final cleaning prior to project acceptance by COR.
H. Remove paint splatters and other spots, dirt, and debris; touch up scratches and mars of finish to match original finish.
I. Clean devices internally using methods and materials recommended by manufacturer.
J. Tighten wiring connectors, terminals, bus joints, and mountings, to include lugs, screws and bolts according to equipment manufacturer’s published torque tightening values for equipment connectors. In absence of published connection or terminal torque values, comply with torque values specified in UL 486A-486B.

3.8 TRAINING

A. Provide training in accordance with subsection, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
B. Provide training for equipment or system as required in each associated specification.
C. Develop and submit training schedule for approval by COR, at least 30 days prior to planned training.

3.9 PROTECTION

A. Protection of Fireproofing:
   1. Install clips, hangers, clamps, supports and other attachments to surfaces to be fireproofed, if possible, prior to start of spray fireproofing work.
   2. Install conduits and other items that would interfere with proper application of fireproofing after completion of spray fire proofing work.
   3. Patch and repair fireproofing damaged due to cutting or course of work must be performed by installer of fireproofing and paid for by trade responsible for damage.

B. Maintain equipment and systems until final acceptance.

C. Ensure adequate protection of equipment and material during installation and shutdown and during delays pending final test of systems and equipment because of seasonal conditions.

- - - E N D - - -

SECTION 27 05 26
GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section identifies common and general grounding and bonding requirements of communication installations and applies to all sections of Divisions 27 and 28.

1.2 RELATED WORK

A. Requirements for a lightning protection system: Section 26 41 00, FACILITY LIGHTNING PROTECTION.

B. Low voltage wiring: Section 27 10 00, STRUCTURED CABLING.

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Provide a plan indicating the location of system grounding electrode connections and routing of aboveground and underground grounding electrode conductors.

C. Closeout Submittals: In addition to Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS provide the following:

1. Certified test reports of ground resistance.
2. Certifications: Two weeks prior to final inspection, submit following to COR:
   a. Certification materials and installation is in accordance with construction documents.
   b. Certification complete installation has been installed and tested.

PART 2 - PRODUCTS

2.1 COMPONENTS

A. Grounding and Bonding Conductors:

1. Provide UL 83 insulated stranded copper equipment grounding conductors, except for solid copper conductors for sizes 6 mm² (10 AWG) and smaller. Identify all grounding conductors with continuous green insulation color, except identify wire sizes 25 mm² (4 AWG) and larger per NEC.

2. Provide ASTM B8 bare stranded copper bonding conductors, with the exception of ASTM B1 solid bare copper for wire sizes 6 mm² (10 AWG) and smaller.

B. Ground Rods:

1. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.
2. Provide quantity of rods required to obtain specified ground resistance.

C. Splices and Termination Components: Provide components meeting or exceeding UL 467 and clearly marked with manufacturer's name, catalog number, and permitted conductor sizes.

D. Telecommunication System Ground Busbars:

1. Telecommunications Main Grounding Busbar (TMGB):
   a. 6.4 mm (1/4 inch) thick solid copper bar.
   b. Minimum 100 mm (4 inches) high and length sized in accordance application requirements and future growth of minimum 510 mm (20 inches) long.
   c. Minimum thirty predrilled attachment points (two rows of fifteen each) for attaching standard sized two-hole grounding lugs.
      1) 27 lugs with 15.8 mm (5/8 inch) hole centers.
      2) 3 lugs with 25.4 mm (1 inch) hole centers.
   d. Wall-mount stand-off brackets, assembly screws and insulators for 100 mm (4 inches) standoff from wall.
   e. Listed as grounding and bonding equipment.
2. Telecommunications Grounding Busbar (TGB):
   a. 6.4 mm (1/4 inch) thick solid copper bar.
   b. Minimum 50 mm (2 inches) high and length sized in accordance application requirements and future growth of minimum 300 mm long (12 inches) long.
   c. Minimum nine predrilled attachment points (one row) for attaching standard sized two-hole grounding lugs.
      1) 6 lugs with 15.8 mm (5/8 inch) hole centers.
      2) 3 lugs with 25.4 mm (1 inch) hole centers.
   d. Wall-mount stand-off brackets, assembly screws and insulators for 100 mm (4 inches) standoff from wall.
   e. Listed as grounding and bonding equipment.

E. Equipment Rack and Cabinet Ground Bars:
   1. Solid copper ground bars designed for horizontal mounting to framework of open racks or enclosed equipment cabinets:
      a. 4.7 mm (3/16 inch) thick by 19.1 mm (3/4 inch) high hard-drawn electrolytic tough pitch 110 alloy copper bar.
      b. 482 mm (19 inches) or 584 mm (23 inches) EIA/ECA-310-E rack mounting width (as required) for mounting on racks or cabinets.
      c. Eight 6-32 tapped ground mounting holes on 25.4 mm (1 inch) intervals.
      d. Four 7.1 mm (0.281 inch) holes for attachment of two-hole grounding lugs.
      e. Copper splice bar of same material to transition between adjoining racks.
      f. Two each 12-24 x 19.1 mm (3/4 inch) copper-plated steel screws and flat washers for attachment to rack or cabinet.
      g. Listed as grounding and bonding equipment.
   2. Solid copper ground bars designed for vertical mounting to framework of open racks or enclosed equipment cabinets:
      a. 1.3 mm (0.05 inch) thick by 17 mm (0.68 inch) wide tinned copper strip.
      b. 1997 mm (78 inches) high for mounting vertically on full height racks.
      c. Holes punched on 15.875 mm-15.875 mm-12.7 mm (5/8”-5/8”-1/2”) alternating vertical centers to match EIA/ECA-310-E Universal Hole Pattern for a 45 RMU rack.
      d. Three #12-24 zinc-plated thread forming hex washer head installation screws, an abrasive pad and antioxidant joint compound.
      e. NRTL listed as grounding and bonding equipment.
F. Ground Terminal Blocks: Provide screw lug-type terminal blocks at equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted.
   1. Electroplated tin aluminum extrusion.
   2. Accept conductors ranging from #14 AWG through 2/0.
   3. Hold conductors in place by two stainless steel set screws.

4. Two 6 mm (1/4 inch) holes spaced on 15.8 mm (5/8 inch) centers to allow secure two-bolt attachment.
5. Listed as a wire connector.

G. Splice Case Ground Accessories: Provide splice case grounding and bonding accessories manufactured by splice case manufacturer when available. Otherwise, use 16 mm^2 (6 AWG) insulated ground wire with shield bonding connectors.

H. Irreversible Compression Lugs:
1. Electroplated tinned copper.
2. Two holes spaced on 15.8 mm (5/8 inch) or 25.4 mm (1 inch) centers.
3. Sized to fit the specific size conductor.
4. Listed as wire connectors.

I. Antioxidant Joint Compound: Oxide inhibiting joint compound for copper-to-copper, aluminum-to-aluminum or aluminum-to-copper connections.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Exterior Equipment Grounding: Bond exterior metallic components (including masts and cabinets), antennas, satellite dishes, towers, raceways, primary telecommunications protector/arresters, secondary surge protection, waveguides, cable shields, down conductors and other conductive items to directly to Intersystem Bonding Termination.

B. Install telecommunications bonding backbone conductor throughout building via telecommunications backbone pathways effectively bonding all interior telecommunications grounding busbars in telecommunications rooms and telecommunications enclosures to telecommunications main grounding busbar in Demarc room after testing bond to verify bonding conductor for telecommunications from grounding electrode conductor is installed per NEC. Size telecommunications bonding backbone conductor as specified in TIA-607-B.

C. Inaccessible Grounding Connections: Utilize exothermic welding for bonding of buried or otherwise inaccessible connections with the exception of connections requiring periodic testing.

D. Conduit Systems:
1. Bond ferrous metallic conduit to ground.

2. Bond grounding conductors installed in ferrous metallic conduit at both ends of conduit using grounding bushing with #6 AWG conductor.

E. Boxes, Cabinets, and Enclosures:

1. Bond each pull box, splice box, equipment cabinet, and other enclosures through which conductors pass (except for special grounding systems for intensive care units and other critical units shown) to ground.

F. Corrosion Inhibitors: Apply corrosion inhibitor for protecting connection between metals used to contact surfaces, when making ground and ground bonding connections.

G. Telecommunications Grounding System:

1. Bond telecommunications grounding systems and equipment to facility's electrical grounding electrode at Intersystem Bonding Termination.
2. Provide hardware as required to effectively bond metallic cable shields communications pathways, cable runway, and equipment chassis to ground.
3. Install bonding conductors without splices using the shortest length of conductor possible to maintain clearances required by NEC.
4. Provide paths to ground that are permanent and continuous with a resistance of 1 ohm or less from each raceway, cable tray, and equipment connection to telecommunications grounding busbar.
5. Below-Grade Connections: When making exothermic welds, wire brush or file the point of contact to a bare metal surface. Use exothermic welding cartridges and molds in accordance with manufacturer's recommendations. After welds have been made and cooled, brush slag from weld area and thoroughly clean joint areas. Notify COR prior to backfilling at ground connections.
6. Above-Grade Bolted or Screwed Grounding Connections:
   a. Remove paint to expose the entire contact surface by grinding.
   b. Clean all connector, plate, and contact surfaces.
   c. Apply corrosion inhibitor to surfaces before joining.
7. Bonding Jumpers:
   a. Assemble bonding jumpers using insulated ground wire of size and type shown on drawings or use a minimum of 16 mm^2 (6 AWG)

insulated copper wire terminated with compression connectors of proper size for conductors.

b. Use connector manufacturer's compression tool.

8. Bonding Jumper Fasteners:

a. Conduit: Connect bonding jumpers using lugs on grounding bushings or clamp pads on push-type conduit fasteners. Where appropriate, use zinc-plated external tooth lock washers or Belleville Washers.

b. Wireway and Cable Tray: Fasten bonding jumpers using zinc-plated bolts, external tooth lock washers or Belleville washers and nuts. Install protective covers, e.g., zinc-plated acorn nuts, on bolts extending into wireway or cable tray to prevent cable damage.

c. Grounding Busbars: Fasten bonding conductors using two-hole compression lugs. Use 300 series stainless steel bolts, Belleville Washers, and nuts.

d. Slotted Channel Framing and Raised Floor Stringers: Fasten bonding jumpers using zinc-plated, self-drill screws and Belleville washers or external tooth lock washers.

H. Telecommunications Room Bonding:

1. Telecommunications Grounding Busbars:

a. Install busbar hardware no less than 950 mm (18 inches) A.F.F.

b. Where other grounding busbars are located in same room, e.g., electrical panelboard for telecommunications equipment, bond busbars together as indicated on grounding riser diagrams.

c. Make conductor connections with two-hole compression lugs sized to fit busbar and conductors.

d. Attach lugs with stainless steel hardware after preparing bond according to manufacturer recommendations and treating bonding surface on busbar with antioxidant to help prevent corrosion.

2. Telephone-Type Cable Rack Systems:

a. Aluminum pan installed on telephone-type cable rack serves as primary ground conductor within communications room.

b. Make ground connections by installing bonding jumpers:

1) Install minimum 16 mm² (6 AWG) bonding between telecommunications ground busbars and the aluminum pan installed on cable rack.
2) Install 16 mm² (6 AWG) bonding jumpers across aluminum pan junctions.

I. Self-Supporting and Cabinet-Mounted Equipment Rack Ground Bars:
1. Install rack-mount horizontal busbar or vertical busbar to provide multiple bonding points,
2. At each rack or cabinet containing active equipment or shielded cable terminations:
   a. Bond busbar to ground as part of overall telecommunications bonding and grounding system.
   b. Bond copper ground bars together using solid copper splice plates manufactured by same ground bar manufacturer when ground bars are provided at rear of lineup of bolted together equipment racks.
   c. Bond non-adjacent ground bars on equipment racks and cabinets with 16 mm² (6 AWG) insulated copper wire bonding jumpers attached at each end with compression-type connectors and mounting bolts.
   d. Provide 16 mm² (6 AWG) bonding jumpers between rack and cabinet ground busbars and overhead cable runway or raised floor stringers, as appropriate.

J. Backboards: Provide a screw lug-type terminal block or drilled and tapped copper strip near top of backboards used for communications cross-connect systems. Connect backboard ground terminals to cable runway using an insulated 16 mm² (6 AWG) bonding jumper.

K. Other Communication Room Ground Systems: Ground metallic conduit, wireways, and other metallic equipment located away from equipment racks or cabinets to cable tray or telecommunications ground busbar, whichever is closer, using insulated 16 mm² (6 AWG) ground wire bonding jumpers.

L. Communications Cable Grounding:
1. Bond all metallic cable sheaths in multi-pair communications cables together at each splicing or terminating location to provide 100 percent metallic sheath continuity throughout communications distribution system.

2. Install a cable shield bonding connector with a screw stud connection for ground wire, at terminal points. Bond cable shield connector to ground.
3. Bond all metallic cable shields together within splice closures using cable shield bonding connectors or splice case manufacturer's splice case grounding and bonding accessories. When an external ground connection is provided as part of splice closure, connect to an effective ground source and bond all other metallic components and equipment at that location.

M. Communications Cable Tray Systems:
1. Bond metallic structures of cable tray to provide 100 percent electrical continuity throughout cable tray systems.
2. Where metallic cable tray systems are mechanically discontinuous:
   a. Install splice plates provided by cable tray manufacturer between cable tray sections so resistance across a bolted connection is 0.010 ohms or less, as verified by measuring across splice plate connection.
   b. Install 16 mm^2 (6 AWG) bonding jumpers across each cable tray splice or junction where splice plates cannot be used.
3. Bond cable tray installed in same room as telecommunications grounding busbar to busbar.

N. Communications Raceway Grounding:
1. Conduit: Use insulated 16 mm^2 (6 AWG) bonding jumpers to bond metallic conduit at both ends and intermediate metallic enclosures to ground.
2. Cable Tray Systems: Use insulated 16 mm^2 (6 AWG) grounding jumpers to bond cable tray to column-mounted building ground plates (pads) at both ends and approximately 16 meters (50 feet) on centers.

O. Ground Resistance:
1. Install telecommunications grounding system so resistance to grounding electrode system measures 5 ohms or less.
2. Measure grounding electrode system resistance using an earth test meter, clamp-on ground tester, or computer-based ground meter as defined in IEEE 81. Record ground resistance measurements before electrical distribution system is energized.

3. Backfill only after below-grade connection have been visually inspected by COR. Notify COR twenty-four hours before below-grade connections are ready for inspection.

3.2 FIELD QUALITY CONTROL

A. Perform tests per BICSI's Information Technology Systems Installation Methods Manual (ITSIMM), Recommended Testing Procedures and Criteria.

B. Perform two-point bond test using trained installers qualified to use test equipment.

C. Conduct continuity test to verify that metallic pathways in telecommunications spaces are bonded to TGB or TMGB.

D. Conduct an electrical continuity test to verify that TMGB is effectively bonded to grounding electrode conductor.

E. Visually inspect to verify that screened and shielded cables are bonded to TGB or TMGB.

F. Perform a resistance test to ensure patch panel, rack and cabinet bonding connection resistance measures less than 5 Ohms to TGB or TMGB.

- - - E N D - - -

SECTION 27 05 33
RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for communications cabling unless shown or specified otherwise.

1.2 RELATED WORK

A. Bedding of conduits: Section 31 20 00, EARTH MOVING.

B. Mounting board for Telecommunication Rooms: Section 06 10 00, ROUGH CARPENTRY.

C. Sealing around penetrations to maintain integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.

D. Fabrications for deflection of water away from building envelope at penetrations: Section 07 60 00, FLASHING AND SHEET METAL.

E. Sealing around conduit penetrations through building envelope to prevent moisture migration into building: Section 07 92 00, JOINT SEALANTS.

F. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.

G. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

A. In accordance with Section 27 50 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS, submit the following:

1. Size and location of cabinets, splice boxes and pull boxes.
2. Layout of required conduit penetrations through structural elements.
3. Catalog cuts marked with specific item proposed and area of application identified.

B. Certification: Provide letter prior to final inspection, certifying material is in accordance with construction documents and properly installed.

PART 2 - PRODUCTS

2.1 MATERIAL

A. Minimum Conduit Size: 19 mm (3/4 inch).

B. Conduit:

1. Rigid Galvanized Steel: Conform to UL 6, ANSI C80.1.
2. Rigid Aluminum: Conform to UL 6A, ANSI C80.5.
3. Rigid Intermediate Steel Conduit (IMC): Conform to UL 1242, ANSI C80.6.
4. Electrical Metallic Tubing (EMT):
   a. Maximum Size: 105 mm (4 inches).
   b. Install only for cable rated 600 volts or less.
   c. Conform to UL 797, ANSI C80.3.
5. Flexible Galvanized Steel Conduit: Conform to UL 1.
6. Liquid-tight Flexible Metal Conduit: Conform to UL 360.
7. Direct Burial Plastic Conduit: Conform to UL 651 and UL 651A, heavy wall PVC, or high-density polyethylene (HDPE).
8. Surface Metal Raceway: Conform to UL 5.
9. Wireway, Approved “Basket”: Provide "Telecommunications Service” rated with approved length way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.

C. Conduit Fittings:

1. Rigid Galvanized Steel and Rigid Intermediate Steel Conduit Fittings:
   a. Provide fittings meeting requirements of UL 514B and ANSI/ NEMA FB 1.
   b. Sealing: Provide threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water and vapor. In concealed work, install sealing fittings in flush steel boxes with blank cover plates having same finishes as other electrical plates in room.
   c. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   d. Locknuts: Bonding type with sharp edges for digging into metal wall of an enclosure.
   e. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into metallic body of fitting. Bushings made entirely of metal or nonmetallic material are not permitted.

f. Erickson (union-type) and Set Screw Type Couplings:
   1) Couplings listed for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete.
   2) Use set screws of case-hardened steel with hex head and cup point to seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
g. Provide OEM approved fittings.

2. Rigid Aluminum Conduit Fittings:
   a. Standard Threaded Couplings, Locknuts, Bushings, and Elbows: Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are not permitted.
   b. Locknuts and Bushings: As specified for rigid steel and IMC conduit.
   c. Set Screw Fittings: Not permitted for use with aluminum conduit.
3. Electrical Metallic Tubing Fittings:
   a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.
   b. Couplings and Connectors: Concrete tight and rain tight, with connectors having insulated throats.
      1) Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller.
      2) Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches).
      3) Use set screws of case-hardened steel with hex head and cup point to seat in wall of conduit for positive grounding.
   c. Indent type connectors or couplings are not permitted.
   d. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are not permitted.
   e. Provide OEM approved fittings.
4. Flexible Steel Conduit Fittings:
   a. Conform to UL 514B; only steel or malleable iron materials are acceptable.
   b. Provide clamp type, with insulated throat.
   c. Provide OEM approved fittings.
5. Liquid-tight Flexible Metal Conduit Fittings:

a. Conform to UL 514B and ANSI/ NEMA FB1; only steel or malleable iron materials are acceptable.
b. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening.
c. Provide connectors with insulated throats to prevent damage to cable jacket.
d. Provide OEM approved fittings.

6. Direct Burial Plastic Conduit Fittings: Provide fittings meeting requirements of UL 514C and NEMA TC3, and as recommended by conduit manufacturer.
7. Surface Metal Raceway: Conform to UL 5 and "telecommunications service" rated with approved length-way partitions and cable straps to prevent wires and cables from changing from one partitioned pathway to another.
8. Surface Metal Raceway Fittings: As recommended by raceway manufacturer.
9. Expansion and Deflection Couplings:
   a. Conform to UL 467 and UL 514B.
   b. Accommodate 19 mm (3/4 inch) deflection, expansion, or contraction in any direction, and allow 30-degree angular deflections.
   c. Include internal flexible metal braid sized to ensure conduit ground continuity and fault currents in accordance with UL 467, and NEC code tables for ground conductors.
   d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
10. Rigid Aluminum Fittings:
    a. Provide malleable iron, steel or aluminum alloy materials; zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.
    b. Locknuts and Bushings: As specified for rigid steel and IMC conduit.
    c. Set Screw Fittings: Not permitted for use with aluminum conduit.
    d. Indent type connectors or couplings are prohibited.

e. Die-cast or pressure-cast zinc-alloy fit-tings or fittings made of "pot metal" are not permitted.

f. Provide OEM approved fittings.

11. Wireway Fittings: As recommended by wireway OEM.

D. Conduit Supports:

1. Parts and Hardware: Provide zinc-coat or equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose of having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple Conduit (Trapeze) Hangers: Minimum 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 2.78 mm (12 gage) steel, cold formed, lipped channels; with minimum 9 mm (3/8 inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Splice, and Pull Boxes:

1. Conform to UL-50 and UL-514A.
2. Cast metal where required by NEC or shown and equipped with rustproof boxes.
3. Sheet Metal Boxes: Galvanized steel, except where otherwise shown.
4. Install flush mounted wall or ceiling boxes with raised covers so that front face of raised cover is flush with wall.
5. Install surface mounted wall or ceiling boxes with surface style flat or raised covers.

F. Wireways: Equip with hinged covers, except where removable covers are shown.

G. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with "CAUTION BURIED COMMUNICATIONS CABLE BELOW".

H. Flexible Nonmetallic Communications Raceway (Innerduct) and Fittings:

1. General: Provide UL 910 listed plenum, riser, and general purpose corrugated pliable communications raceway for optical fiber cables and communications cable applications; select in accordance with provisions of NEC Articles 770 and 800.
2. Provide Communications Raceway with a factory installed 567 kg (1250 lb.) tensile pre-lubricated pull tape.

3. Use only metallic straps, hangers, and fittings to support raceway from building structure. Cable ties are not permitted for securing raceway to building structure.
4. Provide fittings to be installed in spaces used for environmental air made of materials that do not exceed flammability, smoke generation, ignitibility, and toxicity requirements of environmental air space.
5. Size: Metric Designator 53 (trade size 2) or smaller.
6. Outside Plant: Plenum-rated where each innerduct is 75 mm (3 inches) and larger.
7. Inside Plant: Listed and marked for installation in plenum airspaces and minimum 25 mm (1 inch) inside diameter.
8. Plenum: Non-metallic communications raceway.
   a. Constructed of low smoke emission, flame retardant PVC with corrugated construction.
   b. UL 94 V-O rating for flame spreading limitation.
9. Provide innerduct reel lengths as necessary to ensure ducts are continuous; one piece runs from ENTR to MH; MH to MH; DEMARC to MCR/TER; TR to TR. Innerduct connectors are not permitted between rooms.
10. Provide pulling accessories used for innerduct including but not limited to, inner duct lubricants, spreaders, applicators, grips, swivels, harnesses, and line missiles (blown air) compatible with materials being pulled.

I. Outlet Boxes:
   1. Flush wall mounted minimum 11.9 cm (4-11/16 inches) square, 9.2 cm (3-5/8 inches) deep pressed galvanized steel.
   2. 2-Gang Tile Box:
      a. Flush backbox type for installation in block walls.
      b. Minimum 92 mm (3-5/8 inches) deep.

J. Weatherproof Outlet Boxes: Surface mount two gang, 67 mm (2-5/8 inches) deep weatherproof cast aluminum with powder coated finish internal threads on hubs 19 mm (3/4 inch) minimum.

K. Cable Tray:
   1. Provide wire basket type of sizes indicated, with all required splicing and mounting hardware.

2. Materials and Finishes:
   a. Electro-plated zinc galvanized (post plated) made from carbon steel and plated to ASTM B 633, Type III, SC-1.
   b. Remove soot, manufacturing residue/oils, or metallic particles after fabrication.
   c. Rounded edges and smooth surfaces.
3. Provide continuous welded top side wire to protect cable insulation and installers.
4. High strength steel wires formed into a 50 x 100 mm (2 inches by 4 inches) wire mesh pattern with intersecting wires welded together.
5. Wire Basket Sizes:
   a. Wire Diameter: 5 mm (0.195 inch) minimum on all mesh sections.
   b. Usable Loading Depth: 105 mm (4 inch).
   c. Width: 450 mm (18 inches).
6. Fittings: Field-formed, from straight sections, in accordance with manufacturer’s instructions.
7. Provide accessories to protect, support and install wire basket tray system.

L. Cable Duct: Equip with hinged covers, except where removable covers are accepted by COR.

M. Cable Duct Fittings: As recommended by cable duct OEM.

PART 3 - EXECUTION

3.1 EQUIPMENT INSTALLATION AND REQUIREMENTS

A. Raceways typically required for cabling systems unless otherwise indicated:

System	Specification Section	Installed Method
Grounding	27 05 26	Conduit Not Required
Control, Communication and Signal Wiring	27 10 00	Complete Conduit Allowed in Non-Partitioned Cable Tray or Cable Ladders
Communications Structured Cabling	27 15 00	Conduit to Cable Tray Partitioned Cable Tray
Intercommunications and Program systems	27 51 23	Conduit to Cable Tray, Partitioned Cable Tray
Security Emergency Call, Duress Alarm, and Telecommunications	27 52 31	Conduit to Cable Tray, Partitioned Cable Tray

System	Specification Section	Installed Method
Grounding and Bonding for Electronic Safety and Security	28 05 26	Conduit Not Required Unless Required by Code
Physical Access Control System	28 13 00	Conduit to Cable Tray Partitioned Cable Tray
Video Surveillance	28 23 00	Complete Conduit
Fire Detection and Alarm	28 31 00	Complete Conduit

B. Penetrations:

1. Cutting or Holes:

a. Locate holes in advance of installation. Where they are proposed in structural sections, obtain approval of structural engineer and COR prior to drilling through structural sections.

b. Make holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not permitted; COR may grant limited permission by request, in condition of limited working space.

c. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

1) Fill and seal clearances between raceways and openings with fire stop material.

2) Install only retrofittable, non-hardening, and reusable firestop material that can be removed and reinstalled to seal around cables inside conduits.

d. Waterproofing at Floor, Exterior Wall, and Roof Conduit Penetrations:

1) Seal clearances around conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS or directed by waterproofing manufacturer.

C. Conduit Installation:

1. Minimum conduit size of 19 mm (3/4 inch), but not less than size required for 40 percent fill.
2. Install insulated bushings on all conduit ends.
3. Install pull boxes after every 180 degrees of bends (two 90-degree bends). Size boxes per TIA 569.
4. Extend vertical conduits/sleeves through floors minimum 75 mm (3 inches) above floor and minimum 75 mm (3 inches) below ceiling of floor below.
5. Terminate conduit runs to and from a backboard in a closet or interstitial space at top or bottom of backboard. Install conduits to enter telecommunication rooms next to wall and flush with backboard.
6. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections.
7. Seal empty conduits located in telecommunications rooms or on backboards with a standard non-hardening putty compound to prevent entrance of moisture and gases and to meet fire resistance requirements.
8. Minimum radius of communication conduit bends:

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
3/4	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

9. Provide 19 mm (3/4 inch) thick fire-retardant plywood specified in Section 06 10 00, ROUGH CARPENTRY on wall of communication closets where shown on drawings. Mount plywood with bottom edge 300 mm (12 inches) above finished floor and top edge 2.74 m (9 feet) A.F.F.

10. Provide pull wire in all empty conduits; sleeves through floor are exceptions.
11. Complete each entire conduit run installation before pulling in cables.
12. Flattened, dented, or deformed conduit is not permitted.
13. Ensure conduit installation does not encroach into ceiling height head room, walkways, or doorways.
14. Cut conduit square with a hacksaw, ream, remove burrs, and draw tight.
15. Install conduit mechanically continuous.
16. Independently support conduit at 2.44 m (8 feet) on center; do not use other supports (i.e., suspended ceilings, suspended ceiling supporting members, luminaires, conduits, mechanical piping, or mechanical ducts).
17. Support conduit within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
18. Close ends of empty conduit with plugs or caps to prevent entry of debris, until cables are pulled in.
19. Conduit installations under fume and vent hoods are prohibited.
20. Attach conduits to cabinets, splice cases, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on inside of enclosure, made up wrench tight. Do not make conduit connections to box covers.
21. Do not use aluminum conduits in wet locations.
22. Unless otherwise indicated on drawings or specified herein, conceal conduits within finished walls, floors, and ceilings.
23. Conduit Bends:
    a. Make bends with standard conduit bending machines; observe minimum bend radius for cable type and outside diameter.
    b. Conduit hickey is permitted only for slight offsets, and for straightening stubbed conduits.
    c. Bending of conduits with a pipe tee or vise is not permitted.
24. Layout and Homeruns - Deviations: Make only where necessary to avoid interferences and only after drawings showing proposed deviations have been submitted and approved by COR.

D. Concealed Work Installation:

1. In Concrete:
   a. Conduit: Rigid steel or IMC.
   b. Align and run conduit in direct lines.
   c. Install conduit through concrete beams only when the following occurs:
      1) Where shown on structural drawings.
      2) As accepted by COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
   d. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
      1) Conduit outside diameter larger than 1/3 of slab thickness is prohibited.
      2) Space between Conduits in Slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
      3) Install conduits approximately in center of slab to ensure a minimum of 19 mm (3/4 inch) of concrete around conduits.
   e. Make couplings and connections watertight. Use thread compounds that are NRTL listed conductive type to ensure low resistance ground continuity through conduits. Tightening set screws with pliers is not permitted.

E. Furred or Suspended Ceilings and in Walls:
   1. Rigid steel, IMC, or rigid aluminum. Different type conduits mixed indiscriminately in same system is not permitted.
   2. Align and run conduit parallel or perpendicular to building lines.
   3. Tightening set screws with pliers is not permitted.

F. Exposed Work Installation:
   1. Unless otherwise indicated on drawings, exposed conduit is only permitted in telecommunications rooms.
      a. Provide rigid steel, IMC or rigid aluminum.
      b. Different types of conduits mixed indiscriminately in system is not permitted.
   2. Align and run conduit parallel or perpendicular to building lines.
   3. Install horizontal runs close to ceiling or beams and secure with conduit straps.

4. Support horizontal or vertical runs at not over 2400 mm (96 inches) intervals.
5. Surface Metal Raceways: Use only where shown on drawings.
6. Painting:
   a. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
   b. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color.
   c. Provide labels where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

G. Expansion Joints:
1. Conduits 75 mm (3 inches) and larger, that are secured to building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install couplings in accordance with manufacturer's recommendations.
2. Provide conduits smaller than 75 mm (3 inches) with pull boxes on both sides of expansion joint. Connect conduits to expansion and deflection couplings as specified.
3. Install expansion and deflection couplings where shown.

H. Seismic Areas:
1. In seismic areas, follow H-18-8 Seismic Design Requirements.
2. Rigidly secure conduit to building structure on opposite sides of a building expansion joint with pull boxes on both sides of joint.
3. Connect conduits to pull boxes with 375 mm (15 inches) of slack flexible conduit.
4. Install green copper wire minimum #6 AWG in flexible conduit for bonding jumper.

I. Conduit Supports, Installation:
1. Select AC193 code listed mechanical anchors or fastening devices with safe working load not to exceed 1/4 of proof test load.
2. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
3. Support multiple conduit runs with trapeze hangers. Use trapeze hangers designed to support a load equal or greater than sum of the weights of the conduits, wires, hanger itself, and 90 kg (200

pounds). Attach each conduit with U-bolts or other accepted fasteners.

4. Support conduit independent of pull boxes, luminaires, suspended ceiling components, angle supports, duct work, and similar items.
5. Fastenings and Supports in Solid Masonry and Concrete:
   a. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing concrete.
   b. Existing Construction:
      1) Code AC193 listed wedge type steel expansion anchors minimum 6 mm (1/4 inch) bolt size and minimum 28 mm (1-1/8 inch) embedment.
      2) Power set fasteners minimum 6 mm (1/4 inch) diameter with depth of penetration minimum 75 mm (3 inches).
      3) Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
6. Fastening to Hollow Masonry: Toggle bolts are permitted.
7. Fastening to Metal Structures: Use machine screw fasteners or other devices designed and accepted for application.
8. Bolts supported only by plaster or gypsum wallboard are not acceptable.
9. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
10. Do not support conduit from chain, wire, or perforated strap.
11. Spring steel type supports or fasteners are not permitted except horizontal and vertical supports/fasteners within walls.
12. Vertical Supports:
    a. Install riser clamps and supports for vertical conduit runs in accordance with NEC.
    b. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

J. Box Installation:
1. Boxes for Concealed Conduits:
   a. Flush mounted.
   b. Provide raised covers for boxes to suit wall or ceiling, construction, and finish.

2. In addition to boxes shown, install additional boxes where needed to prevent damage to cables during pulling.
3. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
4. Stencil or install phenolic nameplates on covers of boxes identified on riser diagrams; for example "SIG-FA JB No. 1".
5. Outlet boxes mounted back-to-back in same wall are not permitted. A minimum 600 mm (24 inches) center-to-center lateral spacing must be maintained between boxes.

K. Flexible Nonmetallic Communications Raceway (Innerduct), Installation:
1. Install supports from building structure for horizontal runs at intervals not to exceed 900 mm (3 feet) and at each end.
2. Install supports from building structure for vertical runs at intervals not to exceed 1.2 m (4 feet) and at each side of joints.
3. Install only in accessible spaces not subject to physical damage or corrosive influences.
4. Make bends manually to assure internal diameter of tubing is not effectively reduced.
5. Extend each segment of innerduct minimum 300 mm (12 inches) beyond end of service conduit tie or cable tray. Restrain innerduct ends with wall mount clamps and seal when cable is installed.

3.2 TESTING

A. Examine fittings and locknuts for secureness.
B. Test RMC, IMC and EMT systems for electrical continuity.
C. Perform simple continuity test after cable installation.

- - - E N D - - -

SECTION 27 10 00
CONTROL, COMMUNICATION AND SIGNAL WIRING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section includes control, communication and signal wiring for a comprehensive systems infrastructure.

B. This section applies to all sections of Divisions 27 and 28.

1.2 RELATED WORK

A. Excavation and backfill for cables that are installed in conduit: Section 31 20 00, EARTH MOVING.

B. Sealing around penetrations to maintain integrity of time rated construction: Section 07 84 00, FIRESTOPPING.

C. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

D. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

E. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Submit written certification from OEM:

1. Indicate wiring and connection diagrams meet National and Government Life Safety Guidelines, NFPA, NEC, NRTL, Joint Commission, OEM, this section and Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
2. Include instructions, requirements, recommendations, and guidance for proper performance of system as described herein.
3. Government will not approve any submittal without this certification.

C. Identify environmental specifications on technical submittals; identify requirements for installation.

1. Minimum floor space and ceiling heights.
2. Minimum size of doors for cable reel passage.

D. Power: Provide specific voltage, amperage, phases, generator equipment and quantities of circuits.

E. Provide conduit size requirements.

F. Closeout Submittals:

1. Provide contact information for maintenance personnel to contact contractor for emergency maintenance and logistic assistance, and assistance in resolving technical problems at any time during warranty period.
2. Provide certified OEM sweep test tags from each cable reel to COR.
3. Furnish spare or unused wire and cable with appropriate connectors (female types) for installation in appropriate punch blocks, barrier strips, patch, or bulkhead connector panels.
4. Turn over unused and opened installation kit boxes, coaxial, fiber optic, and twisted pair cable reels, conduit, cable tray, cable duct bundles, wire rolls, physical installation hardware to COR.
5. Documentation: Include any item or quantity of items, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide system documentation required herein.

PART 2 - PRODUCTS

2.1 CONTROL WIRING

A. Provide control wiring large enough so voltage drop under in-rush conditions does not adversely affect operation of controls.

B. Provide cable meeting specifications for type of cable.

C. Outside Location (i.e., above ground, underground in conduit, ducts, pathways, etc.): Provide cables filled with a waterproofing compound between outside jacket (not touching any provided armor) and inter conductors to seal punctures in jacket and protect conductors from moisture.

D. Remote Control Cable:

1. Multi-conductor with stranded conductors able to handle power and voltage required to control specified system equipment, from a remote location.
2. NRTL listed and pass VW-1 vertical wire flame test (UL 83) (formerly FR-1).

3. Color-coded Conductors: Combined multi-conductor and coaxial cables are acceptable for this installation, on condition system performance standards are met.
4. Technical Characteristics:
   a. Length: As required, in 1K (3,000 ft.) reels minimum.
   b. Connectors: As required by system design.
   c. Size:
      1) 18 AWG, minimum, Outside.
      2) 20 AWG, minimum, Inside.
   d. Color Coding: Required, EIA industry standard.
   e. Bend Radius: 10 times cable outside diameter.
   f. Impedance: As required.
   g. Shield Coverage: As required by OEM specification.
   h. Attenuation:

Frequency in MHz	dB per 305 Meter (1,000 feet), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0
31.0	36.0
50.0	52.0

E. Distribution System Signal Wires and Cables:
1. Provide in same manner, and use construction practices, as Fire Protective and other Emergency Systems identified and defined in NFPA 101, Life Safety Code, Chapters 7, 12, and 13, NFPA 70, National Electrical Code, Chapter 7, Special Conditions.
2. Provide system able to withstand adverse environmental conditions without deterioration, in their respective location.
3. Provide entering of each equipment enclosure, console, cabinet, or rack in such a manner that all doors or access panels can be opened and closed without removal or disruption of cables.
4. Terminate on an item of equipment by direct connection.

2.2 COMMUNICATION AND SIGNAL WIRING

A. Provide communications and signal wiring conforming to recommendations of manufacturers of systems; provide not less than TIA Performance Category 6A.

B. Wiring shown is for typical systems; provide wiring as required for systems being provided.

C. Provide color-coded conductor insulation for multi-conductor cables.

D. Connectors:

1. Provide connectors for transmission lines, and signal extensions to maintain uninterrupted continuity, ensure effective connection, and preserve uniform polarity between all points in system.
   a. Provide AC barrier strips with a protective cover to prevent accidental contact with wires carrying live AC current.
   b. Provide punch blocks for signal connection, not AC power. AC power twist-on wire connectors are not permitted for signal wire terminations.
2. Cables: Provide connectors designed for specific size cable and conductors being installed with OEM's approved installation tool. Typical system cable connectors include:
   a. Audio spade lug.
   b. Punch block.
   c. Wirewrap.

2.3 INSTALLATION KIT

A. Include connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, cable tray, etc., required to accomplish a neat and secure installation.

B. Terminate conductors in a spade lug and barrier strip, wire wrap terminal or punch block, so there are no unfinished or unlabeled wire connections.

C. Minimum required installation sub-kits:

1. System Grounding:
   a. Provide required cable and installation hardware for effective ground path, including the following:
      1) Control Cable Shields.

2) Data Cable Shields.
3) Equipment Racks.
4) Equipment Cabinets.
5) Conduits.
6) Ducts.
7) Cable Trays.
8) Power Panels.
9) Connector Panels.
10) Grounding Blocks.

b. Bond radio equipment to earth ground via internal building wiring, according to NEC.

2. Wire and Cable: Provide connectors and terminals, punch blocks, tie wraps, hangers, clamps, labels, etc. required to accomplish termination in an orderly installation.
3. Conduit, Cable Duct, and Cable Tray: Provide conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, cable tray installation in accordance with NEC and documents.
4. Equipment Interface: Provide any items or quantity of equipment, cable, mounting hardware and materials to interface systems with identified sub-systems, according to OEM requirements and construction documents.
5. Labels: Provide any item or quantity of labels, tools, stencils, and materials to label each subsystem according to OEM requirements, as-installed drawings, and construction documents.

D. Cross-Connection System (CCS) Equipment Breakout, Termination Connector (or Bulkhead), and Patch Panels:

1. Connector Panels: Flat smooth 3.175 mm (1/8 inch) thick solid aluminum, custom designed, fitted and installed in cabinet. Install bulkhead equipment connectors on panel to enable cabinet equipment’s signal, control, and coaxial cables to be connected through panel. Match panel color to cabinet installed.

a. Voice (or Telephone):

1) Provide industry standard Type 110 (minimum) punch blocks for voice or telephone, and control wiring instead of patch panels, each being certified for category 6A.
2) IDC punch blocks (with internal RJ45 jacks) are acceptable for use in CCS when designed for Category 6A and the size and type of cable used.
3) Secure punch block strips to OEM designed physical anchoring unit on a wall location in TRS; console, cabinet, rail, panel, etc. mounting is permitted at OEM recommendation and as accepted by COR. Punch blocks are not permitted for Class II or 120 VAC power wiring.
4) Technical Characteristics:
   a) Number of Horizontal Rows: Minimum 100.
   b) Number of Terminals per Row: Minimum 4.
   c) Terminal Protector: Required for each used or unused terminal.
   d) Insulation Splicing: Required between each row of terminals.

b. Digital or High Speed Data:
1) Provide 480 mm (19 inches) horizontal EIA/ECA 310 rack mountable patch panel with EIA/ECA 310 standard spaced vertical mounting holes for digital or high-speed data service CSS, with modular female Category 6A for specialized powered systems accepted by SMCS 005OP2H3, (202) 461-5310, OI&T and FMS Services, and COR) RJ45 jacks designed for size and type of UTP or F/UTP cable installed in rows.
2) Technical Characteristics:
   a) Number of Horizontal Rows: Minimum 2.
   b) Number of Jacks Per Row: Minimum 24.
   c) Type of Jacks: RJ45.
   d) Terminal Protector: Required for each used or unused jack.
   e) Insulation: Required between each row of jacks.

2.4 EXISTING WIRING

A. Reuse existing wiring only where indicated on plans and accepted by SMCS 005OP2H3.

B. Only existing wiring that conforms to specifications and applicable codes can be reused; existing wiring that does not meet these requirements cannot be reused and must be removed by contractor.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:
   1. Install wiring in cable tray or raceway.
   2. Seal cable entering a building from underground, between wire and conduit where cable exits conduit, with non-hardening approved compound.
   3. Wire Pulling:
      a. Provide installation equipment that prevents cutting or abrasion of insulation during pulling of cables.
      b. Use ropes made of nonmetallic material for pulling feeders.
      c. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached to conductors, as accepted by COR.
      d. Pull multiple cables into a single conduit together.

B. Installation in Maintenance or Man holes:
   1. Install and support cables in maintenance holes on steel racks with porcelain or equal insulators.
   2. Train cables around maintenance hole walls, but do not bend to a radius less than six times overall cable diameter.
   3. Fireproofing:
      a. Install fireproofing where low voltage cables are installed in same maintenance holes with high voltage cables; also cover low voltage cables with arc proof and fireproof tape.
      b. Use tape of same type used for high voltage cables, and apply tape in a single layer, one-half lapped or as recommended by manufacturer. Install tape with coated side towards the cable and extend minimum 25 mm (1 inch) into each duct.
      c. Secure tape in place by a random wrap of glass cloth tape.

C. Control, Communication and Signal Wiring Installation:
   1. Unless otherwise specified in other sections, provide wiring and connect to equipment/devices to perform required functions as indicated.

2. Install separate cables for each system so that malfunctions in any system do not affect other systems, except where otherwise required.
3. Group wires and cables according to service (i.e., AC, grounds, signal, DC, control, etc.); DC, control and signal cables can be included with any group.
4. Form wires and cables to not change position in group throughout the conduit run. Bundle wires and cables in accepted signal duct, conduit, cable ducts, or cable trays neatly formed, tied off in 600 mm to 900 mm (24 inch to 36 inch) lengths to not change position in group throughout run.
5. Concealed splices are not allowed.
6. Separate, organize, bundle, and route wires or cables to restrict EMI, channel crosstalk, or feedback oscillation inside any enclosure.
7. Looking at any enclosure from the rear (wall mounted enclosures, junction, pull or interface boxes from the front), locate AC power, DC and speaker wires or cables on the left; coaxial, control, microphone and line level audio and data wires or cables, on the right.
8. Provide ties and fasteners that do not damage or distort wires or cables. Limit spacing between tied points to maximum 150 mm (6 inches).
9. Install wires or cables outside of buildings in conduit, secured to solid building structures.
10. Wires or cables must be specifically accepted, on a case-by-case basis, to be installed outside of conduit. Bundled wires or cables must be tied at minimum 460 mm (18 inches) intervals to a solid building structure; bundled wires or cables must have ultraviolet protection and be waterproof (including all connections).
11. Laying wires or cables directly on roof tops, ladders, drooping down walls, walkways, floors, etc. is not permitted.
12. Wires or cables installed outside of conduit, cable trays, wireways, cable duct, etc.:
    a. Only when authorized, can wires or cables be identified and approved to be installed outside of conduit.

b. Provide wire or cable rated plenum and OEM certified for use in air plenums.
c. Provide wires and cables hidden, protected, fastened, and tied at maximum 600 mm (24 inches) intervals, to building structure.
d. Provide closer wire or cable fastening intervals to prevent sagging, maintain clearance above suspended ceilings.
e. Remove unsightly wiring and cabling from view and discourage tampering and vandalism.
f. Sleeve and seal wire or cable runs, not installed in conduit, that penetrate outside building walls, supporting walls, and two-hour fire barriers, with an approved fire retardant sealant.

D. AC Power:
1. Bond to ground contractor-installed equipment and identified Government-furnished equipment, to eliminate shock hazards and to minimize ground loops, common mode returns, noise pickup, crosstalk, etc. for total ground resistance of 0.1 Ohm or less.
2. Use of conduit, signal duct or cable trays as system or electrical ground is not permitted; use these items only for dissipation of internally generated static charges (not to be confused with externally generated lightning) that can be applied or generated outside mechanical and physical confines of system to earth ground. Discovery of improper system grounding is grounds to declare system unacceptable and termination of all system acceptance testing.
3. Cabinet Bus: Extend a common ground bus of at least #10 AWG solid copper wire throughout each equipment cabinet and bond to system ground. Provide a separate isolated ground connection from each equipment cabinet ground bus to system ground. Do not tie equipment ground busses together.
4. Equipment: Bond equipment to cabinet bus with copper braid equivalent to at least #12 AWG. Self-grounding equipment enclosures, racks or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternatives.

3.2 EQUIPMENT IDENTIFICATION

A. Control, Communication and Signal System Identification:
1. Install a permanent wire marker on each wire at each termination.

2. Identify cables with numbers and letters on the labels corresponding to those on wiring diagrams used for installing systems.
3. Install labels retaining their markings after cleaning.
4. In each maintenance hole (manhole) and handhole, install embossed brass tags to identify system served and function.

B. Labeling:

1. Industry Standard: ANSI/TIA-606-B.
2. Print lettering for voice and data circuits using laser printers; handwritten labels are not acceptable.
3. Cable and Wires (hereinafter referred to as "cable"): Label cables at both ends in accordance with industry standard. Provide permanent labels in contrasting colors. Identify cables matching system Record Wiring Diagrams.
4. Equipment: Permanently labeled system equipment with contrasting plastic laminate or Bakelite-type material. Label system equipment on face of unit corresponding to its source.
5. Conduit, Cable Duct, and Cable Tray: Label conduit, duct, and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying system. Label each enclosure according to this standard.
6. Termination Hardware: Label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with industry standard and Record Wiring Diagrams.

3.3 TESTING

A. Minimum test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on cables in frequency ranges specified.

B. Tests required for data cable must be made to confirm operation of this cable at minimum 10 Mega (M) Hertz (Hz) full bandwidth, fully channel loaded and a Bit Error Rate of a minimum of 10-6 at maximum rate of speed.

C. Provide cable installation and test records at acceptance testing to COR and thereafter maintain in facility's telephone switch room.

D. Record changes (used pair, failed pair, etc.) in these records as change occurs.

E. Test cables after installation and replace any defective cables.

- - - E N D - - -

SECTION 27 11 00
TELECOMMUNICATIONS ROOM FITTINGS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies equipment cabinets, interface enclosures, relay racks, and associated hardware in service provider DEMARC, computer and telecommunications rooms.

B. Telephone systems are defined as an Emergency Critical Care Communication System by the National Fire Protection Association (NFPA). Adhere to Seismic reference standards for systems connecting to or extending telephone system and cabling.

1.2 RELATED WORK

A. Wiring devices: Section 26 27 26, WIRING DEVICES.

B. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

C. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

D. Lightning protection system: Section 26 41 00, FACILITY LIGHTNING PROTECTION.

E. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

F. Low voltage cabling system infrastructure: Section 27 10 00, CONTROL, COMMUNICATION AND SIGNAL WIRING.

1.3 SUBMITTALS

A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATION.

B. Separate submittal into sections for each subsystem containing the following:

1. Pictorial layouts of each Telecommunications Room and Cross Connection Space (VCCS, and HCCS termination cabinets), each distribution cabinet layout, and TCO as each is expected to be installed and configured.
2. Equipment technical literature detailing electrical and technical characteristics of each item of equipment to be furnished.

C. Environmental Requirements: Identify environmental specifications for housing system as initial and expanded system configurations.
   1. Floor loading for batteries and cabinets.
   2. Minimum floor space and ceiling height.
   3. Minimum door size for equipment passage.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. Provide components of cabinet system (cabinet, thermal, cable and power management accessories) from a single manufacturer.

B. Equipment Standards and Testing:
   1. Equipment must be listed by a NRTL where a UL standard is in existence; active and passive equipment must conform with each UL standard in effect for equipment, on the submittal date.
   2. Each item of electronic equipment must be labeled by a NRTL that warrants equipment has been tested in accordance with, and conforms to specified standards.

C. Equipment Cabinets (Enclosures):
   1. Fully enclose and physically secure internally mounted and connected, active and passive equipment.
   2. Types of Equipment Enclosures accepted for specific VA Spectrum Management, FMS and OI&T applications in CFM and Facility Projects:

CABINET	FUNCTION
Communications	FMS Special Communications Equipment
Server / Router	OI&T Data/LAN/WAN Equipment
Seismic	Either FMS or OI&T use, specify need
Environmental	Either FMS or OI&T use, specify need

   3. Each cabinet to be:
      a. Provided in each TR and each TE location at a minimum.
      b. Fabricated with minimum 1.59 mm (16 gauge) steel.
      c. Provided with manufacturer's standard painted finish in a color accepted by COR with concurrence from FMS Service Chief.
      d. Mounted on floor or wall.
      e. Lockable; tubular locks keyed alike. Provide six keys to COR for each cabinet.

f. TRs and TE (Telecommunications Enclosure not located in a TR) will have controlled access compliant with facility's SMS card access system.

4. Provide equipment mounting shelves; attach to front and rear mounting rails and allowing equipment to be secured to respective mounting rails.
5. Each enclosure to include:
   a. Floor or wall mounting.
   b. Knock out holes for conduit connections or cable entrance.
   c. Front and rear locking doors; wall mounted cabinets require only front locking door.
   d. Power outlet strips.
6. Provide quiet ventilation fan with non-disposable locally cleanable air filter.
7. Size each cabinet in order to contain and maintain internal mounted equipment items.
8. Provide OEM's fully assembled unit.
9. Provide OEM assembled side-by-side enclosures in a single unit, at locations requiring more than two enclosures.
10. Bond to communications circulating grounding system.
11. Technical Characteristics:
    a. External:
       1) Overall Height:
          a) Communications/Server: Maximum 2,184 mm (86 inches).
          b) Seismic: Maximum 1,905 mm (75 inches).
       2) Overall Depth:
          a) Communications/Server: Maximum 914 mm (36 inches).
          b) Seismic: Maximum 762 mm (30 inches).
       3) Overall Width - All: Maximum 864 mm (34 inches).
    b. Front Panel Openings:
       1) Width:
          a) Communications: 482.6 mm (19 inches), per EIA.
          b) Seismic: 483 mm (19 inches), per EIA/ECA 310.
       2) Height:

a) Communications/Server: Maximum 2,000 mm (78-3/4 inches or 45 Rack Units [RU]), per EIA/ECA 310.

b) Seismic: Maximum 1,689 mm (66-1/2 inches or 38 RUs, per EIA/ECA 310).

c. Heavy Duty Cycle: Maximum 544 kilograms (1,200 pounds) capacity.

d. Certification:

1) NRTL (i.e. UL): For communications and server cabinets.

2) Telcordia Technologies: #63-GR-CORE, (2012) for seismic cabinets.

3) Seismic: Provide cabinet OEM constructed to seismic design category.

12. Cabinet Internal Components:

a. AC Power:

1) Standard "Quad AC Box":

a) Power capacity: 20 Ampere, single phase, 120 VAC continuous duty.

b) Wire gauge: #12 AWG, solid copper, connected to room's internal AC Power Panel, or as directed by COR.

c) Number of AC power outlets: Minimum 4 receptacles.

d) Enclosure: Fully self-contained, metal 102 mm (4 inch) x 102 mm (4 inches) x 64 mm (2-1/2 inches) with cover

e) Connection: Minimum 25.4 mm (1 inch) conduit connected to room's AC Power Panel, or as directed by COR

f) Number of boxes: One.

g) Compliance: NRTL (i.e., UL); NPFA - 70 (NEC).

b. AC Outlet Strips:

1) Power Capacity: 15 Ampere, single phase, 120 VAC continuous duty.

2) Wire Gauge: Minimum #12 AWG, solid copper.

3) Number of AC Power Outlets: Minimum 10 "U" grounded.

4) Enclosure: Fully self-contained; typically metal.

5) Connecting Wire: Minimum 2 m (6 feet) long, with three prong self-grounding AC plug connected to cabinet's internal AC "Quad" box.

6) Number of Strips: 2.

7) Certification: NRTL (i.e., UL).

c. AC Power Line Surge Protector and Filter Construction:
   1) Input Voltage Range: 120 VAC + 15 percent at 50/60 Hz, single phase.
   2) Power Service Capacity: 20 AMP, 120 VAC.
   3) Voltage Output Regulation: +5.0 percent, instantaneous of input.
   4) Circuit Breaker: 15 AMP; may be self-contained.
   5) AC Outlets: Minimum four duplex grounded NEMA 5-20R.
   6) Response Time: 5.0 nanosecond.
   7) Suppression: Isolate and filter any noise, surge spikes
      a) Surge: Minimum 20,000 AMP.
      b) Noise:
         1) Common: -40 dB.
         2) Differential: -45 dB.
   8) Clamping Voltage: Minimum 300 V.
   9) Enclosure: One; self-contained.
   10) Mounting: Internal to cabinet floor or on internal mounting rail shelf, allowing two plugs from two plug strips.
   11) AC Power Cord: Required; minimum 1,628 mm (6 feet), three wire (green ground); minimum #14 AWG stranded.
   12) Compliance: NRTL (i.e., UL60950-1).

d. Uninterruptible Power Supply (UPS): Provide each cabinet with an internal UPS which may be combined with surge protector and filter if system’s 50 percent expansion requirement is met. Provide at least one-hour continuous full load two hours if working with a critical, emergency, safety, or police system uninterruptible system primary AC Power, with a 50 percent reserve capacity, in the event of facility primary or emergency AC power failure.
   1) UPS to include:
      a) On-Off Switch: This function is required to be a part of system’s electronic supervision requirements.
      b) First/Fast Charge Unit: Must provide clean predicable charge voltage/current. Function is required to be a part of system’s electronic supervision requirements.

c) Over Voltage/Current Protect: Cannot short circuit AC power line at any time. This function is required to be a part of system's electronic supervision requirements.

d) Trickle Charge Unit: Must be capable of maintaining a suitable internal battery charge without damaging batteries.

e) Mounting: Provide per OEM's direction.

f) Proper Ventilation: Do not override cabinets' ventilation system.

g) Power Change from AC Input: Accomplish change without interruption to communications link or subsystem being protected. Generate visual and aural alarms in electrical supervision system, local and remote, to annunciating panels via direct connection for trouble indication.

2) Specific requirements for current and surge protection to include:

a) Voltage Protection: Threshold, line to neutral, starts at maximum 200 Volts peak. Transient voltage cannot exceed 330 Volts peak. Furnish documentation on peak clamping Voltage as a function of transient waveform.

b) Peak Power Dissipation: Minimum 35 Joules per phase, as measured for 1.0 millisecond at subbranch panels, 100 Joules per phase at branch panels and 300 Joules per phase at service entrance panels. Typically, power dissipation is 12,000 Watts (W) for 1.0 mS (or 12 Joules). Provide explanation of how ratings were measured or empirically derived.

c) Surge Protector (may be combined with On-Off switch of UPS): Must not short circuit AC power line at any time.

1) Components must be minimum silicon semi-conductors.

2) Secondary stages, if used, may include other types of rugged devices.

3) Indicators: Provide visual device indicating surge suppression component is functioning.

4) Electrical Supervision: Required; must be audile and visual, local and remote to annunciating panels via direct connection for trouble indication.

d) Provide current and surge protection on ancillary equipment.

e) Equip each cabinet with the following:

1) Equipment Mounting Rails (Front & Rear): Fully adjustable internal equipment mounting rails allowing front or rear equipment mounting with pre-drilled EIA/ECA 310-E Standard tapped holes. Support entire equipment by supplementary support in addition to face mounting screws on rails.

2) Cabinet Ground: Stainless steel adjustable, lug connected to cabinet's main structure providing an internal cabinet ground for all installed equipment properly bolted to rail and with ground wire connected.

3) Grounding Terminals: A separate mounting hole on equipment mounting rail, with stainless steel connecting bolt bonded by minimum #10 AWG copper wire to cabinet's internal grounding lug.

13. Ground Interconnection: Bond cabinet's common grounding lug to room's communications circulating ground busbar with a minimum #4 AWG stranded copper wire.

14. Blank Panels: Provide at every unused rack space.

a. Match cabinet color.

b. Provide panels of 3 mm (1/8 inch) thick aluminum with vertical dimensions in increments of one rack unit (RMU) or 45 mm (1-3/4 inch) with mounting holes spaced to correspond to EIA/ECA 310-E Standard 483 mm (19 inch) rack dimensions.

c. Fill large unused openings with single standard large panel instead of numerous types.

d. Leave one blank rack space (RMU), covered with a blank panel, between each item of equipment, for minimum internal air flow.

e. Leave 356 mm (14 inches)(8.0 RMU) open space, covered with blank cover panel, for additional expansion equipment.

f. Wire Management: System that connects each item of installed equipment to room wire management system.

g. Knock-out Holes: Provide for cable entrance/exits via conduits, cable duct/trays.

D. Wall Mounted Distribution or System Interface Cabinet:

1. Construct of minimum 1.59 mm (16 gauge) cold rolled steel, with top, side and bottom panels.
2. Provide double-hinged front door and main cabinet body allowing access to all internal equipment and wiring; mount to solid walls or internal studs.
3. Provide baked-on iron phosphate primer and baked enamel paint finish in a color to be selected by the using FMS Chief or COR.
4. Provide integral and adjustable EIA/ECA 310 standard predrilled rack mounting rails to allow front panel equipment mounting and access.
5. After equipment, doors and panels are installed, snap-in-place chrome trim strip covers all front panel screw fasteners.
6. Provide full-length vertical piano hinge to allow entire front portion of cabinet to “swing out” from wall for access to installed equipment, wires and cable; maintain minimum OSHA Safety clearances and NFPA operational functions.
7. Provide an OEM’s fully assembled unit enclosure.
8. Equip these cabinets same as equipment cabinets, except mount UPS on floor below cabinet with AC power connection in conduit to AC service panel.
9. Technical Characteristics:
   a. Overall Height: Maximum 1,218 mm (48 inches).
   b. Overall Depth: Maximum 558 mm (22 inches).
   c. Overall Width: Maximum 610 mm (24 inches).
   d. Front Panel Horizontal: Maximum width 483 mm (19 inches).
   e. Capacity: Maximum 180 kilograms (400 pounds).
   f. Lockable:
      1) Tubular lock with 7-pin security.
      2) Key cabinets alike.
      3) Security/Police SMS access card system.

E. Stand Alone Open Equipment Rack:

1. Construct of minimum 1.59 mm (16 gauge) cold rolled steel with manufacturer's standard paint finish, in a color to be selected by COR with concurrence from facility’s FMS Service Chief.
2. Floor-mount as directed by COR with concurrence from facility’s FMS Service Chief.
3. Equip rack same as equipment cabinet, except mount UPS with additional support for weight and AC power connection in conduit to AC service panel.
4. Provide an OEM fully assembled unit.
5. Technical Characteristics:
   a. Overall Height: Maximum 2,180 mm (85-7/8 inches).
   b. Overall Depth: Maximum 650 mm (25-1/2 inches).
   c. Overall Width: Maximum 535 mm (21-1/16 inches).
   d. Front Panel Opening: 483 mm (19 inches), EIA/ECA 310 horizontal width.
   e. Hole Spacing: Per EIA/ECA 310.
   f. Load Capacity: Maximum 680.4 kg (1,500 lbs).
   g. Certifications:
      1) EIA/ECA: 310-E.
      2) NRTL (i.e., UL): OEM specific.

F. Wire Management Equipment:
1. Provide an orderly horizontal and vertical interface between outside and inside wires and cables, distribution and interface wires and cables, interconnection wires and cables and associated equipment, jumper cables, and provide a uniform connection media for system fire-retardant wires and cables and other subsystems.
2. Interface to each cable tray, duct, wireway, or conduit used in the system.
3. Interconnection or distribution wires and cables must enter system at top (or from a wireway in the floor) via overhead protection system and be uniformly routed down either or both sides at same time, of the frames side protection system, then laterally for termination on rear of each respective terminating assembly.
4. Custom configure to meet 30 percent fill system design and user needs.
   a. Minimum Height: match rack or enclosure.

b. Minimum Depth: 10-inches

c. Minimum Width: 6--inches

G. Vertical Cable Managers:

1. Use same make, style and size of vertical cable manager on rack/frame or in between racks/frames when more than one cable manager is used on a rack/frame or group of racks/frames.
2. Match color and cover style of racks/frames and cable managers.

H. Horizontal Cable Managers:

1. Use same make and style of cable manager on rack/frame or racks/frames, when more than one horizontal cable manager is used on a rack/frame or group of racks/frames.
2. Match color of racks/frames and cable managers.

I. Provide installation hardware when enclosures or racks are attached to structural floor.

J. Provide noise filters and surge protectors for each equipment interface cabinet, switch equipment cabinet, control console, and local and remote active equipment locations to ensure protection from input primary AC power surges so as a consequence noise glitches are not induced into low voltage data circuits.

PART 3 - EXECUTION

3.1 PREPARATION

A. Coordinate cabinet installation such that doors fully close and lock, with active and passive equipment installed and connected.

B. Verify equipment dimensions and brackets allow mounting with cabinet doors closed. Front door or rear door of any cabinet that does not close and lock may result in immediate cancellation of inspections or tests.

3.2 INSTALLATION

A. Equipment Cabinets:

1. Install cabinets in a manner that complies with OEM instructions, requirements of this specification, and in a manner which does not constitute a safety hazard.
2. Provide weatherproof equipment installed outdoors or install in NEMA 3S rated enclosures with hinged doors and locks with two keys.

3. Install equipment indoors in NEMA 4 rated metal cabinets with hinged doors and locks with two keys.

B. Grounding:

1. Bond equipment, including identified Government furnished equipment, to ground so total ground resistance measures maximum 0.1 Ohm.
   a. Install lightning arrestors and grounding in accordance with NFPA.
   b. Install gas protection devices at nearest point of entrance in buildings where protection is required and on same circuits as MDF in telephone switch room.
   c. Do not use AC neutral, including in power panel or receptacle outlet, for system control, subcarrier or audio reference ground.
   d. Use of conduit, signal duct or cable trays as system or electrical ground is not permitted.
2. Connect each equipment grounding terminal to a separate mounting hole on equipment mounting rail, to right as one looks at it from rear, with a minimum #12 AWG stranded copper wire with protective green jacket.
3. Extend common ground bus of minimum #10 AWG solid copper wire throughout each equipment cabinet and bond to TGB. Provide a separate isolated ground connection from each equipment cabinet ground bus to system ground. Do not tie equipment ground buses together.
4. Bond equipment to cabinet bus with copper braid equivalent to #12 AWG. Self-grounding equipment enclosures, racks, or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternatives.
5. Bond cable shields to cabinet ground bus with minimum #12 AWG stranded copper wire at only one end of cable run. Insulate cable shields from each other, faceplates, equipment racks, consoles, enclosures, or cabinets, except at system common ground point. Bond coaxial and audio cables only at source; in all cases, keep cable shield ground connections to a minimum.

C. Equipment Assembly:

1. Cabinets:

a. Install and adjust cabinet/frame accessories to position, including thermal management accessories, vertical cable managers, vertical power managers and equipment-mounting rails, using manufacturer's installation instructions prior to baying or placing cabinet for attachment to building and before installing any rack-mount equipment into cabinet. Shelves, horizontal cable managers and filler panels (rack-mount accessories), if used, may be installed after the cabinet is placed.
b. When used in a multi-cabinet bay, attach cabinets side-by-side using baying kits according to manufacturer's instructions.
c. Attach overhead ladder rack or cable tray to ceiling or top of cabinet. Maintain minimum 75 mm (3 inches) clearance between top of cabinet and bottom of ladder rack/cable tray. Position ladder rack/cable tray so that it does not interfere with hot air exhaust through cabinet's top panel. Use radius drops where cable enters or exits ladder rack/cable tray.
d. In seismic areas, install additional bracing as required by building codes and recommendations of a licensed structural engineer.
e. Install ladder rack with side stringers facing rack or cabinet so that ladder forms an inverted U-shape and so that welds between stringers (sides) and cross members (middle) face away from cables.
f. Secure ladder rack to tops of equipment racks or cabinets using manufacturer's recommended supports and appropriate hardware.
g. Attach bonding conductor sized per TIA-607-B between telecommunications grounding busbar and cabinet. Attach bonding conductor to cabinet using a ground terminal block according to manufacturer's installation instructions.
h. Provide bonding conductor and other hardware required to make connections between cabinet and telecommunications grounding busbar.
i. Install rack mounted equipment normally requiring adjustment or observation so operational adjustments can be conveniently made.

j. Mount heavy equipment with rack slides or rails to allow servicing from front of enclosure. Provide support in addition to front panel mounting screws for heavy equipment.
k. Provide with cable slack to permit servicing by removal of installed equipment from front of enclosure.
l. Install color-matched blank panel spacer 44 mm (1.75 inches) high between each piece of active and passive equipment to ensure adequate air circulation for efficient equipment cooling and air ventilation.
m. Provide quiet fans and non-disposable air filters at each console or cabinet.
n. Install enclosures and racks plumb and square, permanently attached to building structure and held in place.
o. Provide 381 mm (15 inches) of front vertical space opening for additional equipment.
p. Install equipment located indoors in metal racks or enclosures with hinged doors to allow access for maintenance without causing interference to other nearby equipment.
q. Cables must enter equipment racks or enclosures in such a manner to allow doors or access panels to open and close without disturbing or damaging cables.
r. Mount distribution hardware in a manner that allows access to connections for testing and provides room for doors or access panels to open and close without disturbing the cables.

2. Racks:
   a. Assemble racks according to manufacturer’s instructions.
   b. Verify that equipment mounting rails are sized properly for rack-mount equipment before attaching rack to floor.
   c. Attach assembled racks to floor in four places using appropriate floor mounting anchors. When placed over a raised floor, threaded rods should pass through raised floor tile and be secured in structural floor below.
   d. Bond racks to telecommunications grounding busbar using appropriate hardware provided by contractor.

e. In seismic areas, install additional bracing as required by building codes and recommendations of a licensed structural engineer.
f. Ladder rack may be attached to top of rack to deliver cables to rack. Do not drill rack to attach; use appropriate hardware from rack manufacturer.
g. Provide radius drops to guide cable where cable exits or enters side of overhead ladder rack to access a rack, frame, cabinet or wall-mounted rack, cabinet, or termination field.
h. Evenly distribute equipment load on rack. Place large and heavy equipment towards bottom of rack. Secure equipment to rack with equipment mounting screws. In seismic areas, secure equipment to shelves with additional bracing.

3. Vertical Cable Managers:
   a. Provide vertical managers so the number of cables in each manager does not exceed OEM fill capacity.
   b. Attach vertical cable managers to side of rack/frame using manufacturer’s installation instructions and hardware.
   c. Attach vertical cable manager to both racks/frames when a single vertical cable manager is used between two racks/frames.
   d. Dress cables through openings in between T-shaped guides on manager so that cables make gradual bends as they exit or enter cable manager into rack-mount space (RMU). Do not twist, coil or make sharp bends in cables.
   e. Attach doors to cable manager in closed position after cabling is complete.
4. Horizontal Cable Managers:
   a. Attach horizontal cable managers to rack/frame with minimum four screws according to manufacturer’s installation instructions. Center each cable manager within allocated rack-mount space (RMU).
   b. Provide horizontal managers located so number of cables each manager supports is less than cable manager’s cable fill capacity.
   c. Dress cables through openings in between T-shaped guides on cable manager so that cables make gradual bends as they exit or enter

cable manager into rack-mount space (RMU). Do not twist, coil or make sharp bends in cables.

d. Attach covers to cable manager in closed position after cabling is complete.

D. Labeling: Permanently label each enclosure in accordance with TIA-606-B using laser printers handwritten labels are not acceptable.

1. Equipment: Label system equipment with contrasting plastic laminate or Bakelite-Type material on face of unit corresponding to its source.
2. Conduit, Cable Duct, and/or Cable Tray: Label conduit, duct, and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 m (10 feet), identifying system.

- - - E N D - - -

SECTION 27 15 00
COMMUNICATIONS STRUCTURED CABLING

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies a complete and operating voice and digital structured cabling distribution system and associated equipment and hardware to be installed in VA Medical Center, here-in-after referred to as the "facility".

1.2 RELATED WORK

A. Wiring devices: Section 26 27 26, WIRING DEVICES.

B. Lightning protection system: Section 26 41 00, FACILITY LIGHTNING PROTECTION.

C. General electrical requirements that are common to more than one section in Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

D. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

E. Conduits for cables and wiring: Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.

F. Low voltage cabling system infrastructure: Section 27 10 00, CONTROL, COMMUNICATION AND SIGNAL WIRING.

1.3 SUBMITTALS

A. In addition to requirements of Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS provide:

1. Pictorial layout drawing of each telecommunications room and telecommunications enclosure showing termination cabinets, each distribution cabinet and rack, as each is expected to be installed and configured.
2. List of test equipment as per 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

B. Certifications:

1. Submit written certification from OEM indicating that proposed supervisor of installation and proposed provider of contract maintenance are authorized representatives of OEM. Include

individual's legal name and address and OEM warranty credentials in the certification.

2. Pre-acceptance Certification: Submit in accordance with test procedures.
3. Test system cables and certify to COR before proof of performance testing can be conducted. Identify each cable as labeled on as-installed drawings.
4. Provide current and qualified test equipment OEM training certificates and product OEM installation certification for contractor installation, maintenance, and supervisory personnel.

C. Closeout Submittal: Provide document from OEM certifying that each item of equipment installed conforms to OEM published specifications.

1.4 WARRANTY

A. Work subject to terms of Article "Warranty of Construction," FAR clause 52.246-21.

PART 2 - PRODUCTS

2.1 PERFORMANCE AND DESIGN CRITERIA

A. Provide complete system including “punch down” and cross-connector blocks voice and data distribution sub-systems, and associated hardware including telecommunications outlets (TCO); copper and fiber optic distribution cables, connectors, “patch” cables, “break out” devices and equipment cabinets, interface cabinets, and radio relay equipment rack.

B. Industry Standards:

1. Cable distribution systems provided under this section are connected to systems identified as critical care performing life support functions.
2. Conform to National and Local Life Safety Codes (whichever are more stringent), NFPA, NEC, this section, Joint Commission Life Safety Accreditation requirements, and OEM recommendations, instructions, and guidelines.
3. Provide supplies and materials listed by a nationally recognized testing laboratory where such standards are established for supplies, materials, or equipment.

4. Refer to industry standards and minimum requirements of Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and guidelines listed.
5. Active and passive equipment required by system design and approved technical submittal; must conform to each UL standard in effect for equipment when technical submittal was reviewed and approved by Government or date when COR accepted system equipment to be replaced. Where a UL standard is in existence for equipment to be used in completion of this contract, equipment must bear an approved NRTL label.

C. System Performance: Provide complete system to meet or exceed TIA Category 6A requirements.

D. Provide continuous inter- and/or intra-facility voice, data, and analog service.
   1. Provide voice and data cable distribution system based on a physical "Star" topology.
   2. Provide separate cable distribution system for emergency, safety and protection systems (i.e., emergency bypass phones; police emergency voice communications from parking lots and stairwells personal protection, duress alarms and annunciation systems; etc.)
   3. Contact SMCS 005OP2H3 (202-462-5310) for specific technical assistance and approvals.

E. Specific Subsystem Requirements: Provide products necessary for a complete and functional voice, data, analog and videotele communications cabling system, including backbone cabling system, patch panels and cross-connections, horizontal cabling systems, jacks, faceplates, and patch cords.

F. Coordinate size and type of conduit, pathways and firestopping for maximum 40 percent cable fill with subcontractors.

G. Terminate all interconnecting twisted pair, fiber-optic or coaxial cables on patch panels or punch blocks. Terminate unused or spare conductors and fiber strands. Do not leave unused or spare twisted pair wire, fiber-optic or coaxial cable unterminated, unconnected, loose or unsecured.

H. Color code distribution wiring to conform to ANSI/TIA 606-B and construction documents, whichever is more stringent. Label all

equipment, conduit, enclosures, jacks, and cables on record drawings, to facilitate installation and maintenance.

I. In addition to requirements in Section 27 05 11, REQUIREMENTS FOR COMMUNICATION INSTALLATIONS, provide stainless steel faceplates with plastic covers over labels.

2.2 EQUIPMENT AND MATERIALS

A. Cable Systems - Twisted Pair, Fiber optic, Coaxial and Analog:

1. General:
   a. Provide cable (i.e., backbone, outside plant, and horizontal cabling) conforming to accepted industry standards with regards to size, color code, and insulation.
   b. Some areas can be considered “plenum”. Comply with all codes pertaining to plenum environments. It is contractor’s responsibility to review the VA’s cable requirements with COR and OI&T Service prior to installation to confirm type of environment present at each location.
   c. Provide proper test equipment to confirm that cable pairs meet each OEM’s standard transmission requirements, and ensure cable carries data transmissions at required speeds, frequencies, and fully loaded bandwidth.
2. Telecommunications Rooms (TR):
   a. In TR’s served with UTP, fiber optic, terminate UTP cable on RJ-45, 8-pin connectors of separate 48-port modular patch panels, 110A or equivalent type punch down blocks that are dedicated to voice and data applications.
   b. Provide 24 port fiber optic modular patch panels with “LC” couplers dedicated for voice, data and FMS applications.
   c. Provide connecting cables required to extend backbone cables (i.e., patch cords, twenty-five pair, etc.), to ensure complete and operational distribution systems.
   d. In TR’s, which are only served by a UTP backbone cable, terminate cable on separate modular connecting devices, Type 110A punch down blocks (or equivalent), dedicated to data applications.
3. Backbone Copper Cables:
   a. Riser Cable:

1) Provide communication riser cables listed in NEC Table 800, 154(a) for the purpose and suited for electrical connection to a communication network.
2) Provide STP or Unshielded Twisted Pair (UTP), minimum 24 American Wire Gauge (AWG) solid, thermoplastic insulated conductors for communication (analog RF coaxial cable is not to be provided in riser systems) riser cables with a thermoplastic outer jacket.
3) Label and test complete riser cabling system.

4. Horizontal Cable: Installed from TCO jack to the TR patch panel.
   a. Tested to ANSI/TIA-568-C.2 Category 6A requirements including NEXT, ELFEXT (Pair-to-Pair and Power Sum), Insertion Loss (attenuation), Return Loss, and Delay Skew.
   b. Minimum Transmission Parameters: 500 MHz.
   c. Provide four pair 0.326 mm2 (22 AWG) cable
   d. Terminate all four pairs on same port at patch panel in TR.
   e. Terminate all four pairs on same jack, at work area Telecommunication Outlets (TCO):
      1) Jacks: Minimum three eight-pin RJ-45 ANSI/TIA-568-C.2 Category 6A Type jacks at TCO.
         a) Top Port: RJ-45 jack compatible with RJ-11 plug for voice.
         b) Bottom Two Ports: Unkeyed RJ-45 jacks for data.
5. Fiber Optics Backbone Cable:
   a. Provide 50/125 micron OM4 multi-mode cable, containing at minimum 18 strands of fiber, unless otherwise specified.
   b. Provide loose tube cable, which separates individual fibers from the environment, or indoor/outdoor cables, for outdoor runs or any area that includes an outdoor run.
   c. Provide tight buffered fiber cable or indoor/outdoor cables for indoor runs.
   d. Terminate multimode fibers at both ends with LC type female connectors installed in an appropriate patch or breakout panel and secured with a cable management system. Provide minimum 610 mm (2 ft.) cable loop at each end.
   e. Provide single mode fiber optic cable 8.3 mm containing at minimum 12 strands of fiber, unless otherwise specified.

Terminate single mode fibers at both ends with LC type female connectors installed in an appropriate patch or breakout panel and secured with a cable management system. Provide minimum 610 mm (2 feet) cable loop at each end to allow for future movement.

f. Install fiber optic cables in TR's, Voice (Telephone) Switch Room, and Main Computer Room, in rack mounted fiber optic patch panels. Provide female LC couplers in appropriate panel for termination of each strand.

g. Test all fiber optic strands' cable transmission performance in accordance with TIA standards. Measure attenuation in accordance with fiber optic test procedures TIA-455-C ('-61', or -53). Provide written results to COR for review and approval.

B. Cross-Connect Systems (CCS):

1. Copper Cables: Provide copper CCS sized to connect cables at TR and allow for a minimum of 50 percent anticipated growth.
2. Maximum DC Resistance per Cable Pair: 28.6 Ohms per 305 m (1,000 feet).
3. Fiber Optic Cables:
   a. Provide fiber CCS sized to connect cables at TR and allow for a minimum of 50 percent anticipated growth.
   b. Install fiber optic cable slack in protective enclosures.

C. Telecommunication Room (TR):

1. Terminate backbone and horizontal, copper, fiber optic, coaxial and analog cables on appropriate cross-connection systems (CCS) containing patch panels, punch blocks, and breakout devices provided in enclosures and tested, regardless of installation method, mounting, termination, or cross-connecting used. Provide cable management system as a part of each CCS.
2. Coordinate location in TR with FMS equipment (i.e., fire alarm, nurse call, code blue, video, public address, radio entertainment, intercom, and radio paging equipment).

D. Coaxial and Analog Cables: Bond equipment to ground per TIA standards, such that all grounding systems comply with all applicable National, Regional, and Local Building and Electrical codes.

1. Provide current arrester for each copper or coaxial cable that enters from outside of a building regardless if cable is installed underground or aerial.
2. Provide a gas surge protector/module and bond to earth ground.

E. Main Cross-connection Subsystem (MCCS): MCCS is common point of distribution for inter- and intra-building copper and fiber optic backbone system cables, and connections to the voice (telephone) and data cable systems.

F. Voice (or Telephone) Cable Cross-Connection Subsystem:
1. Provide Insulation Displacement Connection (IDC) hardware.
2. Provide the following for each Category 6A Cabling System termination; cross-connection wires, RJ-45 patch cord connector to RJ-45 patch cord connector , hybrid modular cord to IDC patch cord connector.
   a. Provide terminations to be accessible without need for disassembly of IDC wafer. Provide IDC wafers removable from their mounts to facilitate testing on either side of connector.
   b. Provide removable designation strips or labels to allow for inspection of terminations.
   c. Provide cable management system as a part of IDC.
3. Provide IDC connectors capable of re-terminations, without damage, a minimum of 200 IDC insertions or withdrawals on either side of connector panel.
4. Install using only non-impact terminating tool having both a tactile and an audible feedback to indicate proper termination.
5. Provide inputs from PBX, FTS, Local Voice (Telephone) System, or diverse routed voice distribution systems on left side of IDC (110A blocks with RJ45 connections are acceptable alternates to IDC) of MCCS.
6. Provide system outputs from MCCS to voice backbone cable distribution system on the right side of same IDC (or 110A blocks) of MCCS.
7. Do not split pairs within cables between different jacks or connections.
8. Provide UTP cross connect wire to connect each pair of terminals plus an additional 50 percent spare.

G. Data Cross-Connection Subsystems:
   1. Provide patch panels with modular RJ45 female to 110 connectors for cross-connection of copper data cable terminations cable management system.
   2. Provide patch panels conforming to EIA/ECA 310-E dimensions and suitable for mounting in standard equipment racks, with 48 RJ45 jacks aligned in two horizontal rows per panel. Provide RJ45 jacks of modular design and capable of accepting and functioning with other modular (i.e., RJ11) plugs without damaging jack.
      a. Provide system inputs from servers, data LAN, bridge, or interface distribution systems on top row of jacks of appropriate patch panel.
      b. Provide backbone cable connections on bottom row of jacks of same patch panel.
      c. Provide patch cords for each system pair of connection jacks with modular RJ45 connectors provided on each end to match panel's modular RJ45 female jack's being provided.

H. Fiber-Optic Cross-Connection Subsystems: Provide rack mounted patch or distribution panels installed inside a lockable cabinet or "breakout enclosure" that accommodate minimum 12 strands multimode fiber and 12 strand single mode fiber - these counts do not include 50 percent spare requirement. Provide cable management system for each panel.
   1. Provide panels for minimum 24 female LC connectors, able to accommodate splices and field mountable connectors and have capacity for additional connectors to be added up to OEM's maximum standard panel size for this type of use. Protect patch panel sides, including front and back, by a cabinet or enclosure.
   2. Provide panels that conform to EIA/ECA 310-E dimensions suitable for installation in standard racks, cabinets, and enclosures.
   3. Provide patch panels with highest OEM approved density of fiber LC termination's (maximum of 72 each), while maintaining a high level of manageability. Provide proper LC couplers installed for each pair of fiber optic cable LC connectors.
      a. Provide system inputs from interface equipment or distribution systems on top row of connectors of appropriate patch panel.

b. Provide backbone cable connections on bottom row of connectors of same patch panel.

c. Provide patch cords for each pair of fiber optic strands with connector to match couplers.

4. Provide field installable connectors that are pre-polished.

a. Terminate every fiber cable with appropriate connector, and test to ensure compliance to specifications and industry standards for fiber optic LC female connector terminated with a fiber optic cable.

b. Install a terminating cap for each unused LC connector.

I. Horizontal Cabling (HC):

1. Horizontal cable length to farthest system outlet to be maximum of 90 m (295 ft).

2. Splitting of pairs within a cable between different jacks is not permitted.

J. Air Blown Fiber: Alternative fiber optic cable installation method.

1. Air blown fiber installation process (also referred to as air blown cable, air assisted cable, high pressure air blowing, cable jetting, and referred to as air blown fiber herein) typically uses separate optical fiber cables along with separate flexible protective microducts installed where optical fiber cables can be blown in using specific equipment, trained installation personnel and practices.

2. Indoor Microducts:

a. Provide empty bundled microducts comprising an inner layer of microducts optimized for air blown fiber system and an outer jacket layer of plenum rated material with product identification and sequential length marking on outer layer at minimum one-meter (three feet) intervals.

b. Provide microduct allowing multiple fibers to be installed simultaneously into each microduct using air blown fiber installation technique and fibers to also be removed from microduct using same technique.

c. Size each microduct for 50 percent unoccupied microducts after initial fiber bundle installation.

d. Furnish microducts that maintain minimum bend radius of 20 times cable diameter.

e. Provide quantity of plugs or end-caps so all unoccupied microducts are plugged on both ends per manufacturer's specifications. Provide plugs or end-caps that can be easily installed or removed from duct connectors as needed over the lifetime of the installation.

3. Outdoor Enclosure/Splice Case: Provide outdoor NEMA-rated enclosure, or splice case suitable for site environmental conditions of outside plant microduct distribution and routing.

   a. Splice Cases: Water-tight, and air-tight re-enterable splice cases that do not require re-entry kits.

   b. Material: Stainless steel.

   c. Select enclosure/splice case hardware to meet site conditions.

      1) Provide NEMA-4 and 4X enclosures or splice cases in areas where hosing and splashing environmental conditions exist.

      2) Provide NEMA-6 and 6P enclosures splice cases in areas where temporary or long term flooded environmental conditions exist.

4. Fiber Termination Units: Provide at locations where fiber is to be terminated.

   a. Provide for strain relief of incoming microducts.

   b. Provide connector panels and connector couplings adequate to accommodate the number of fibers to be terminated.

   c. Incorporate radius control mechanisms to limit bending of fibers to manufacturer's recommended minimum or 76 mm (3 inches), whichever is larger.

   d. Where rack-mount fiber termination hardware is required, provide wall-mount microduct distribution unit near rack and provide individual microducts to route and connect fiber bundle passing through microduct distribution units to fiber termination hardware.

   e. Provide LC connectors mounted on a coupler panel that snaps into patch panel housing assembly.

5. Fiber Bundles or Cables:

   a. Provide fiber bundles or cables designed and manufactured to facilitate:

1) Rapid installation of fiber using air blown fiber installation process without risk or damage to fibers.
2) Re-installation without degradation of the optical specifications and performance of fiber.
3) Transition points from indoor to outdoor environments without splices.

b. Provide jacketed optical fibers manufactured so that the jacketed fiber strands meet GR409 and meet either UL 1666 for riser rated cables or UL 910 for plenum rated cables and are specific to the purpose of being blown throughout the bundled microduct system.

c. Provide fiber designed to be stripped and terminated with standard tools.

d. Provide fiber designed to be terminated with standard fiber optic connectors.

e. Provide maximum 72 strands of fiber to be blown within each microduct; if fiber counts higher than 72 strands are required, provide microcore fiber with counts to 432 strands in larger size microducts.

2.3 DISTRIBUTION EQUIPMENT AND SYSTEMS

A. Telecommunication Outlet:

1. TCO consists of minimum one Category 6A RJ45 jack mounted in a separate steel outlet box 100 mm (4 inches) x 100 mm (4 inches) x 63 mm (2-1/2 inches) minimum with a labeled stainless steel faceplate. Where shown on drawings, provide a second steel outlet box minimum 100 mm (4 inches) x 100 mm (4 inches) x 63 mm (2-1/2 inches), (or a single port biscuit-style box as indicated on design drawings) with a labeled faceplate, adjacent to first box to ensure system connections and expandability requirements are met.
2. Provide RJ-45/11 compatible female type voice (telephone) multi-pin connections. Provide RJ-45 female type data multi-pin connections.
3. Provide wall outlet with a stainless steel face plate and sufficient ports to fit voice (telephone) multi-pin jack, data multi- pin jacks and plastic covers for labels when mounted on outlet box provided (minimum 100mm (4 inches) x 100mm (4 inches) for single and 100mm (4 inches) x 200mm (8 inches) for dual outlet box applications. Install

stainless steel face plate, for prefabricated bedside patient unit installations.

4. Interface fiber optic LC jacks to appropriate patch panels in associated TR, but do not cross-connect fiber optic cables fiber optic equipment or install fiber optic equipment.

B. Backbone Distribution Cables:

1. Meet TIA transmission performance requirements of Voice Grade Category 5E.
2. Provide cable listed for environments where it is installed.
3. Technical Characteristics:
   a. Length: As required, in minimum 1 kilometer (3,000 ft.) reels.
   b. Size:
      1) Minimum 0.326 mm2 (22 AWG) outside plant installation.
      2) Minimum 0.205 mm2 (24 AWG) interior installations.
   c. Color Coding: American Telephone and Telegraph Company Standard; Bell System Practices Outside Plant Construction and Maintenance Section G50.607.3, Issue 2 February, 1959.
   d. Minimum Bend Radius: 10X cable outside diameter.
   e. Impedance: 120 Ohms + 15 percent.
   f. DC Resistance: Maximum 8.00 ohms/100 m
   g. Shield Coverage: As required by drawing notes
   h. Maximum attenuation for 100m at 20° C:

Frequency (MHz)	Category 5e (dB)
.772	-
1	2.0
4	4.1
8	5.8
10	6.5
16	8.2
20	9.3
25	10.4

Frequency (MHz)	Category 5e (dB)
31.25	11.7
62.5	17.0
100	22.0
200	
250	
300	
400	
500	

4. Data Multi-Conductor:
   a. Unshielded UTP cable with solid conductors.
   b. Able to handle the power and voltage used over the distance required.
   c. Meets TIA transmission performance requirements of Category 6A.
   d. Technical Characteristics:
      1) 0.205 mm2 (24 AWG) - 0.326 mm2 (22 AWG) cable
      2) Bend Radius: 10 times cable outside diameter.
      3) Impedance: 100 Ohms + 15%, BAL.
      4) Bandwidth: 500 MHz.
      5) DC Resistance: Maximum 9.38 Ohms/100m (328 ft.) at 20 degrees C.
      6) Maximum Mutual Capacitance: 5.6 nF per 100 m (328 ft.).
      7) Shield Coverage:
         a) Overall Outside (if OEM specified): 100 percent.
         b) Individual Pairs (if OEM specified): 100 percent.
      8) Maximum attenuation for 100m (328 ft.) at 20° C:

Frequency (MHz)	Category 6A (dB)
1	2.1
4	3.8

Frequency (MHz)	Category 6A (dB)
8	5.3
10	5.9
16	7.5
20	8.4
25	9.4
31.25	10.5
62.5	15.0
100	19.1
200	27.6
250	31.1
300	34.3
400	40.1
500	45.3

5. Fiber Optic:
   a. Multimode Fiber:
      1) Provide OM4 Type general purpose multimode fiber optic cable installed in conduit for system locations with load-bearing support braid surrounding inner tube for strength during cable installation.
      2) Technical Characteristics:
         a) Bend Radius: Minimum 152 mm (6 inches); outer jacket as required.
         b) Fiber Diameter: 50 microns.
         c) Cladding: 125 microns.
         d) Attenuation:
            1) 850 nanometer: Maximum 4.0 dB per kilometer.
            2) 1,300 nanometer: Maximum 2.0 dB per kilometer.
         e) Bandwidth:

1) 850 nanometer: Minimum 160 MHz.
2) 1,300 nanometer: Minimum 500 MHz.

f) Connectors: Stainless steel.

b. Single mode Fiber:

1) Provide OS1 Type general purpose single mode fiber optic cable installed in conduit for all system locations with load-bearing support braid surrounding inner tube for strength during cable installation.
2) Technical Characteristics:

a) Bend Radius: Minimum 100 mm (4 inches).
b) Outer Jacket: PVC.
c) Fiber Diameter: 8.7 microns.
d) Cladding: 125 microns.
e) Attenuation at 850 nanometer: 1.0 dBm per kilometer.
f) Connectors: Ceramic.

C. Outlet Connection Cables:

1. Voice (Telephone):

a. Provide a connection cable for each TCO voice (telephone) jack in system with 10 percent spares able to connect voice (telephone) connection cable from voice (telephone) instrument to TCO voice (telephone) jack. Do not provide voice (telephone) instruments or equipment.

b. Technical Characteristics:

1) Length: Minimum 1.8 m (6 feet).
2) Cable: Category 6A.
3) Connector: RJ-11/45 compatible male on each end.
4) Size: Minimum 24 AWG.
5) Color Coding: Required, telephone industry standard.

2. Data:

a. Provide a connection cable for each TCO data jack in system with 10 percent spares to connect a data instrument to TCO data jack. Do not provide data terminals/equipment.

b. Technical Characteristics:

1) Length: Minimum 1.8 m (6 feet).
2) Cable: Category 6A
3) Connector: RJ-45 male on each end.

4) Color Coding: Required, data industry standard.
5) Size: Minimum 24 AWG.

3. Fiber Optic:
   a. Provide a connection cable for each TCO fiber optic connector in system with 10 percent spares. Provide data connection cable to connect a fiber optic instrument to TCO fiber optic jack. Do not provide fiber optic instruments/equipment.
   b. Technical Characteristics:
      1) Length: Minimum 1.8 m (6 feet).
      2) Cable: Flexible single conductor with jacket.
      3) Connector: LC male on each end.
      4) Size: To fit OS1 single mode or OM4 multimode cable.

D. System Connectors:
1. Modular (RJ-45/11 and RJ-45): Provide voice and high-speed data transmission applications type modular plugs compatible with voice (telephone) instruments, computer terminals, and other type devices requiring linking through modular telecommunications outlet to the system compatible with UTP cables.
   a. Technical Characteristics:
      1) Number of Pins:
         a) RJ-45: Eight.
         b) RJ-11/45: Compatible with RJ-45.
      2) Dielectric: Surge.
      3) Voltage: Minimum 1,000V RMS, 60 Hz at one minute.
      4) Current: 2.2A RMS at 30 minutes or 7.0A RMS at 5.0 seconds.
      5) Leakage: Maximum 100 µA.
      6) Connections:
         a) Initial contact resistance: Maximum 20 milli-Ohms.
         b) Insulation displacement: Maximum 10 milli-Ohms.
         c) Interface: Must interface with modular jacks from a variety of OEMs. RJ-11/45 plugs provide connection when used in RJ-45 jacks.
         d) Durability: Minimum 200 insertions/withdrawals.

E. Fiber Optic Terminators:
1. Pre-polished crimp on type that has proper ferrule to terminate fiber optic cable.

2. Technical Characteristics:
   a. Frequency: Light wave.
   b. Power Blocking: As required.
   c. Return Loss: 25 dB.
   d. Connectors: LC.
   e. Construction: Ceramic.

F. Conduit and Signal Ducts:
   1. Conduit:
      a. Provide conduit or sleeves for cables penetrating walls, ceilings, floors, interstitial space, fire barriers, etc.
      b. Minimum Conduit Size: 19 mm (3/4 inch).
      c. Provide separate conduit and signal ducts for each cable type installation.
      d. When metal (plastic covered, flexible cable protective armor, etc.) systems are authorized to be provided for use in system, follow installation guidelines and standard specified in Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS and NEC.
      e. Maximum 40 percent conduit fill for cable installation.
   2. Signal Duct, Cable Duct, or Cable Tray: Use existing signal duct, cable duct, and cable tray, when identified and accepted by COR.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install for ease of operation, maintenance, and testing.

B. Install system to comply with NFPA 70 National Electrical Code, NFPA 99 Health Care Facilities, NFPA 101 Life Safety Code, Joint Commission Manual for Health Care Facilities, and original equipment manufacturers' (OEM) installation instructions.

C. Cable Systems Installation:
   1. Install system cables in cable duct, cable tray, cable runway, conduit or when specifically approved, flexible NEC Article 800 communications raceway. Confirm drawings show sufficient quantity and size of cable pathways. If flexible communications raceway is used, install in same manner as conduit.

2. Coordinate outside plant and backbone cables to furnish number of cable pairs for system requirements and obtain approval of COR and IT Service prior to installation.
3. Bond to ground metallic cable sheaths, etc. (i.e., risers, underground, horizontal, etc.).
4. Install temporary cable to not present a pedestrian safety hazard and be responsible for all work associated with removal. Temporary cable installations are not required to meet Industry Standards; but must be reviewed and accepted by COR, IT Service, FMS and SMCS 005OP2H3 (202-461-5310) prior to installation.

D. Patient Bedside Prefabricated Units (PBPU) Installation:
1. Under no circumstances, proceed with installing PBPU without written approval of PBPU OEM and specific instructions regarding attachment to or modifying of PBPU.
2. Maintain UL integrity of each PBPU. If installation violates UL integrity, obtain on site UL re-certification of violated PBPU at the direction of COR.

E. Labeling:
1. Industry Standard: Provide labeling in accordance with ANSI/TIA-606-B.
2. Print lettering of labels with laser printers handwritten labels are not acceptable.
3. Label both ends of all cables in accordance with industry standards. Provide permanent Labels in contrasting colors and identify according to system “Record Wiring Diagrams”.
4. Termination Hardware: Label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with industry standard and record on “Record Wiring Diagrams”.

3.2 FIELD QUALITY CONTROL

A. Interim Inspection:
1. Verify that equipment provided adheres to installation requirements of this section. Interim inspection must be conducted by a factory-certified representative and witnessed by COR.
2. Check each item of installed equipment to ensure appropriate NRTL label.

3. Verify cabling terminations in telecommunications rooms and at workstations adhere to color code for T568B pin assignments and cabling connections comply with TIA standards.
4. Visually confirm marking of cables, faceplates, patch panel connectors and patch cords.
5. Perform fiber optical field inspection tests via attenuation measurements on factory reels and provide results along with manufacturer certification for factory reel tests. Remove failed cable reels from project site upon attenuation test failure.
6. Notify COR of the estimated date the contractor expects to be ready for interim inspection, at least 20 working days before requested inspection date, so interim inspection does not affect systems' completion date.
7. Provide results of interim inspection to COR. If major or multiple deficiencies are discovered, COR can require a second interim inspection before permitting contractor to continue with system installation.
8. Do not proceed with installation until COR determines if an additional inspection is required. In either case, re-inspection of deficiencies noted during interim inspections must be part of the proof of performance test.

B. Pretesting:
1. Pretest entire system upon completion of system installation.
2. Verify during system pretest, utilizing the accepted equipment, that system is fully operational and meets system performance requirements of this section.
3. Provide COR four copies of recorded system pretest measurements and the written certification that system is ready for formal acceptance test.

C. Microduct Tests:
1. Furnish COR, obstruction and pressure test data for each microduct installed. Complete pressure and obstruction tests per manufacturer's recommended procedures prior to installing fiber and ensure 100 percent of all microducts are compliant with manufacturer.

2. Complete microduct pressure testing before proceeding with end-to-end microduct obstruction testing.
3. Notify COR at least one week in advance of test date so that Government and design professional may be present to witness testing.
4. Maintain close contact with chosen and technically approved OEM and SMCS 005OP2H3 throughout installation, testing and certification process.

D. Acceptance Test:

1. After system has been pretested and the contractor has submitted pretest results and certification to COR, then schedule an acceptance test date and give COR 30 days' written notice prior to date acceptance test is expected to begin.
2. Test only in presence of a COR.
3. Test utilizing approved test equipment to certify proof of performance.
4. Verify that total system meets the requirements of this section.
5. Include expected duration of test time, with notification of the acceptance test.

E. Verification Tests:

1. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors, and between conductors and shield, if cable has an overall shield. Test cables after termination and prior to cross-connection.
2. Multi-mode Fiber Optic Cable: Perform end-to-end attenuation tests in accordance with TIA-568-B.3 and TIA-526-14A using Method A, Optical Power Meter and Light Source. Perform verification acceptance test.
3. Single mode Fiber Optic Cable: Perform end-to-end attenuation tests in accordance with TIA-568-B.3 and TIA-526-7 using Method A, Optical Power Meter and Light Source. Perform verification acceptance test.

F. Performance Testing:

1. Perform Category 6A: Include the following tests - wire map, length, insertion loss, return loss, NEXT, PSNEXT, ELFEXT, PSELFEXT, propagation delay and delay skew.

2. Fiber Optic Links: Perform end-to-end fiber optic cable link tests in accordance with TIA-568-B.3.

G. Total System Acceptance Test: Perform verification tests for UTP cabling systems, multi-mode, single mode fiber optic cabling systems after complete telecommunication distribution system and workstation outlet are installed.

3.3 MAINTENANCE

A. Accomplish the following minimum requirements during one year warranty period:

1. Respond and correct on-site trouble calls, during standard work week:
   a. A routine trouble call within one working day of its report. A routine trouble is considered a trouble which causes a system outlet, station, or patch cord to be inoperable.
   b. Standard work week is considered 8:00 A.M. to 5:00 P.M., Monday through Friday exclusive of Federal holidays.
2. Respond to an emergency trouble call within six hours of its report. An emergency trouble is considered a trouble which causes a subsystem or distribution point to be inoperable at any time.
3. Respond on-site to a catastrophic trouble call within four hours of its report. A catastrophic trouble call is considered total system failure.
   a. If a system failure cannot be corrected within four hours (exclusive of standard work time limits), provide alternate equipment, or cables within four hours after four-hour trouble shooting time.
   b. Routine or emergency trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) are also deemed as a catastrophic trouble.
4. Provide COR written report itemizing each deficiency found and the corrective action performed during each official reported trouble call. Provide COR with sample copies of reports for review and approval at the beginning of total system acceptance test.

- - - E N D - - -

DIVISION 28

SECTION 28 05 00
COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY
PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section, Common Work Results for Electronic Safety and Security (ESS), applies to all sections of Division 28.

B. Furnish and install fully functional electronic safety and security cabling system(s), equipment, and approved accessories in accordance with the specification section(s), drawing(s), and referenced publications. Capacities and ratings of cable and other items and arrangements for the specified items are shown on each system's required Bill of Materials (BOM) and verified on the approved system drawing(s). If there is a conflict between contract's specification(s) and drawings(s), the contract's specification requirements shall prevail.

C. The Contractor shall provide a fully functional and operating ESS, programmed, configured, documented, and tested as required herein and the respective Safety and Security System Specification(s). The Contractor shall provide calculations and analysis to support design and engineering decisions as specified in submittals. The Contractor shall provide and pay all labor, materials, and equipment, sales and gross receipts and other taxes. The Contractor shall secure and pay for plan check fees, permits, other fees, and licenses necessary for the execution of work as applicable for the project. Give required notices; the Contractor will comply with codes, ordinances, regulations, and other legal requirements of public authorities, which bear on the performance of work.

D. The Contractor shall provide an ESS, installed, programmed, configured, documented, and tested. The security system shall include but not limited to: physical access control, intrusion detection, duress alarms, elevator control interface, video assessment and surveillance, video recording and storage, delayed egress, personal protection system, intercommunication system, fire alarm interface, equipment cabinetry, dedicated photo badging system and associated live camera, report printer, photo badge printer, and uninterruptible power supplies (UPS) interface. Operator training shall not be required as part of

the Security Contractors scope and shall be provided by the Owner. The Security Contractor shall still be required to provide necessary maintenance and troubleshooting manuals as well as submittals as identified herein. The work shall include the procurement and installation of electrical wire and cables, the installation and testing of all system components. Inspection, testing, demonstration, and acceptance of equipment, software, materials, installation, documentation, and workmanship, shall be as specified herein. The Contractor shall provide all associated installation support, including the provision of primary electrical input power circuits.

E. Repair Service Replacement Parts On-site service during the warranty period shall be provided as specified under "Emergency Service". The Contractor shall guarantee all parts and labor for a term of one (1) year, unless dictated otherwise in this specification from the acceptance date of the system as described in Part 5 of this Specification. The Contractor shall be responsible for all equipment, software, shipping, transportation charges, and expenses associated with the service of the system for one (1) year. The Contractor shall provide 24-hour telephone support for the software program at no additional charge to the owner. Software support shall include all software updates that occur during the warranty period.

F. Section Includes:
   1. Description of Work for Electronic Security Systems,
   2. Electronic security equipment coordination with relating Divisions,
   3. Submittal Requirements for Electronic Security,
   4. Miscellaneous Supporting equipment and materials for Electronic Security,
   5. Electronic security installation requirements.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 08 11 73 - SLIDING METAL FIRE DOORS. Requirements for door installation.

D. Section 08 35 13.13 - ACCORDIAN FOLDING DOORS. Requirements for door installation.

E. Section 08 34 59 - VAULT DOORS AND DAY GATES. Requirements for door and gate installation.

F. Section 08 51 13 - ALUMINUM WINDOWS. Requirements for window installation.

G. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.

H. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

I. Section 14 21 00 - ELECTRIC TRACTION ELEVATORS. Requirements for elevators.

J. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.

K. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.

L. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.

M. Section 26 05 33 – RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.

N. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.

O. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.

P. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

Q. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

R. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

S. Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS. Requirements for Commissioning.

T. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). For physical access control integration.

X. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.

1.3 DEFINITIONS

A. AGC: Automatic Gain Control.

B. Basket Cable Tray: A fabricated structure consisting of wire mesh bottom and side rails.

C. BICSI: Building Industry Consulting Service International.

D. CCD: Charge-coupled device.

E. Central Station: A PC with software designated as the main controlling PC of the security access system. Where this term is presented with initial capital letters, this definition applies.

F. Channel Cable Tray: A fabricated structure consisting of a one-piece, ventilated-bottom or solid-bottom channel section.

G. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

H. CPU: Central processing unit.

I. Credential: Data assigned to an entity and used to identify that entity.

J. DGP: Data Gathering Panel – component of the Physical Access Control System capable to communicate, store and process information received from readers, reader modules, input modules, output modules, and Security Management System.

K. DTS: Digital Termination Service: A microwave-based, line-of-sight communications provided directly to the end user.

L. EMI: Electromagnetic interference.

M. EMT: Electric Metallic Tubing.

N. ESS: Electronic Security System.

O. File Server: A PC in a network that stores the programs and data files shared by users.

P. GFI: Ground fault interrupter.

Q. IDC: Insulation displacement connector.

R. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.

S. I/O: Input/Output.

T. Intrusion Zone: A space or area for which an intrusion must be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.

U. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

V. LAN: Local area network.

W. LCD: Liquid-crystal display.

X. LED: Light-emitting diode.

Y. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

Z. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

AA. M-JPEG: Motion – Joint Photographic Experts Group.

BB. MPEG: Moving picture experts group.

CC. NEC: National Electric Code

DD. NEMA: National Electrical Manufacturers Association

EE. NFPA: National Fire Protection Association

FF. NTSC: National Television System Committee.

GG. NRTL: Nationally Recognized Testing Laboratory.

HH. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

II. PACS: Physical Access Control System; A system comprised of cards, readers, door controllers, servers and software to control the physical ingress and egress of people within a given space

JJ. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

KK. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

LL. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

MM. RCDD: Registered Communications Distribution Designer.

NN. RFI: Radio-frequency interference.

OO. RIGID: Rigid conduit is galvanized steel tubing, with a tubing wall that is thick enough to allow it to be threaded.

PP. RS-232: A TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

QQ. RS-485: A TIA/EIA standard for multipoint communications.

RR. Solid-Bottom or Non-ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

SS. SMS: Security Management System – A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

TT. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

UU. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

VV. UPS: Uninterruptible Power Supply

WW. UTP: Unshielded Twisted Pair

XX. Workstation: A PC with software that is configured for specific limited security system functions.

1.4 QUALITY ASSURANCE

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System's (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within [60] <insert number> miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The Contracting Officer's Representative reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.
2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry

Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination, and testing.

D. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 GENERAL ARANGEMENT OF CONTRACT DOCUMENTS

A. The Contract Documents supplement to this specification indicates approximate locations of equipment. The installation and/or locations of the equipment and devices shall be governed by the intent of the design; specification and Contract Documents, with due regard to actual site conditions, recommendations, ambient factors affecting the equipment and operations in the vicinity. The Contract Documents are diagrammatic and do not reveal all offsets, bends, elbows, components, materials, and other specific elements that may be required for proper installation. If any departure from the contract documents is deemed necessary, or in the event of conflicts, the Contractor shall submit details of such departures or conflicts in writing to the owner or owner’s representative for his or her comment and/or approval before initiating work.

B. Anything called for by one of the Contract Documents and not called for by the others shall be of like effect as if required or called by all, except if a provision clearly designed to negate or alter a provision contained in one or more of the other Contract Documents shall have the intended effect. In the event of conflicts among the Contract Documents, the Contract Documents shall take precedence in the following order: the Form of Agreement; the Supplemental General Conditions; the Special Conditions; the Specifications with attachments; and the drawings.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

D. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.

2. Submittals are required for all equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity, standard connections, manufacturer's recommendations, and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.
3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

E. Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth of these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with

specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - Design Submittal Procedures, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer’s information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for Contracting Officer’s Representative and Contractor review stamps.
5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards CAD Standard Application Guide, and VA BIM Guide. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the Contracting Officer’s Representative for approval before the initiation of work.
6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders,

sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.

1) Where two (2) or more binders are necessary to accommodate data; correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and/or maintenance of the component or system.
2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.

b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.

c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.

d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20-pound white bond paper.

e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.

1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.
3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1) Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
2) Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3) The manuals shall include:
   a) Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
   b) A control sequence describing start-up, operation, and shutdown.
   c) Description of the function of each principal item of equipment.
   d) Installation and maintenance instructions.
   e) Safety precautions.
   f) Diagrams and illustrations.
   g) Testing methods.
   h) Performance data.
   i) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
   j) Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.
h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.
i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.
j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.
k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.
l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to

identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor’s manufacturer certifications.

7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer’s catalog numbers and conformance of submittal with requirements of contract documents. Return non-conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor’s stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.

8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.

9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract document section number, paragraph number, and the referenced standards for each listed product.

F. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization. Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:
   a. General – Drawings shall conform to VA CAD Standards Guide. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings.
   b. Cover Sheet – Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
   c. General Information Sheets – General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
   d. Floor Plans – Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
      1) Security devices by symbol,
      2) The associated device point number (derived from the loading sheets),
      3) Wire & cable types and counts
      4) Conduit sizing and routing
      5) Conduit riser systems
      6) Device and area detail call outs
   e. Architectural details – Architectural details shall be produced for each device mounting type (door details for EECS and IDS,

Intrusion Detection system (motion sensor, vibration, microwave Motion Sensor and Camera mounting,

f. Riser Diagrams – Contractor shall provide a riser diagram indicating riser architecture and distribution of the SMS throughout the facility (or area in scope).

g. Block Diagrams – Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., electronic entry control, intrusion detection, closed circuit television, intercom, and other associated subsystems) integration, and data transmission and media conversion methodologies.

h. Interconnection Diagrams – Contractor shall provide interconnection diagram for each sensor, and device component. Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:

1) Panel Assembly Detail – For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.

2) Panel Details – Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.

3) Device Mounting Details – Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.

4) Details of connections to power supplies and grounding

5) Details of surge protection device installation

6) Sensor detection patterns – Each system sensor shall have associated detection patterns.

7) Equipment Rack Detail – For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCI wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include the use of vertical and horizontal latter rack system.
8) Security Control Room – The contractor shall provide a layout plan for the Security Control Room. The layout plan shall identify all equipment and details associated with the installation.
9) Operator Console – The contractor shall provide a layout plan for the Operator Console. The layout plan shall identify all equipment and details associated with the installation. Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.
10) Equipment Room – Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and associated equipment and device placements both vertical and horizontally.

j. Electrical Panel Schedule – Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.

k. Door Schedule – A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:
   1) Item Number
   2) Door Number (Derived from A/E Drawings)
   3) Floor Plan Sheet Number
   4) Standard Detail Number
   5) Door Description (Derived from Loading Sheets)
   6) Data Gathering Panel Input Number

7) Door Position or Monitoring Device Type & Model Number
8) Lock Type, Model Number & Power Input/Draw (standby/active)
9) Card Reader Type & Model Number
10) Shunting Device Type & Model Number
11) Sounder Type & Model Number
12) Manufacturer
13) Misc. devices as required
    a) Delayed Egress Type & Model Number
    b) Intercom
    c) Camera
    d) Electric Transfer Hinge
    e) Electric Pass-through device
14) Remarks column indicating special notes or door configurations

2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the Contracting Officer's Representative to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:
   a. Item Number
   b. Camera Number
   c. Naming Conventions
   d. Description of Camera Coverage
   e. Camera Location
   f. Floor Plan Sheet Number
   g. Camera Type
   h. Mounting Type
   i. Standard Detail Reference
   j. Power Input & Draw
   k. Power Panel Location
   l. Remarks Column for Camera
3. Section II – Data Gathering Panel Documentation Package
   a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing

submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.

b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.

c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.

d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.

e. The DGP spreadsheet shall include an entry section for the following information:

   1) DGP number
   2) First Reader Number
   3) First Monitor Point Number
   4) First Relay Number
   5) DGP, input or output Location
   6) DGP Chain Number
   7) DGP Cabinet Tamper Input Number
   8) DGP Power Fail Input Number
   9) Number of Monitor Points Reserved For Expansion Boards
   10) Number of Control Points (Relays) Reserved For Expansion Boards

f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
   1) System Numbers for Card Readers
   2) System Numbers for Monitor Point Inputs
   3) System Numbers for Control Points (Relays)
   4) Next DGP or input module First Monitor Point Number
   5) Next DGP or output module First Control Point Number
g. The DGP spreadsheet shall provide the following information for each card reader:
   1) DGP Reader Number
   2) System Reader Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
   6) Description Field
   7) DGP Input Location
   8) Date Test
   9) Date Passed
   10) Cable Type
   11) Camera Numbers (of cameras viewing the reader location)
h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
   1) DGP Monitor Point Input Number
   2) System Monitor Point Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
   7) DGP or input module Input Location
   8) Date Test
   9) Date Passed
   10) Cable Type
   11) Camera Numbers (of associated alarm event preset call-ups)

i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
   1) DGP Control Point (Relay) Number
   2) System (Control Point) Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device: Lock Control, Local Sounder, etc.)
   6) Description Field
   7) DGP or OUTPUT MODULE Output Location
   8) Date Test
   9) Date Passed Cable Type
   10) Camera Number (of associated alarm event preset call-ups)

j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
   1) Header
      a) DGP Input and Output Worksheet
      b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
   2) Footer
      a) File Name
      b) Date Printed
      c) Page Number

4. Section III - Construction Mock-up: In areas with exposed EMT/Conduit Raceways, contractor shall conceal raceway as much as practical and unobtrusively. In addition, historic significance must be considered to determine installation means and methods for approval by the owner.
5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system

to meet the performance requirements of this specification. The data package shall include the following:

a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.

b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.

c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.

7. Section VI - Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

G. Group II Technical Data Package

1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the Contracting Officer's Representative documenting changes to the site, particularly those conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the COTR.

2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:

a. Baseline configuration

b. Access levels

c. Schedules (intrusion detection, physical access control, holidays, etc.)

d. Badge database

e. System monitoring and reporting (unit level and central control)

f. Naming conventions and descriptors

H. Group III Technical Data Package

1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and be customized to the contract requirements. The Contractor will deliver the test procedures to the Contracting Officer's Representative for approval at least 60 calendar days prior to the requested test date.

I. Group IV Technical Data Package

1. Performance Verification Test

a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the Contracting Officer's Representative for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.

2. Training Documentation

a. New Facilities and Major Renovations: Familiarization training shall be provided for new equipment or systems. Training can include site familiarization training for VA technicians and administrative personnel. Training shall include general information on new system layout including closet locations, turnover of the completed system including all documentation, including manuals, software, key systems, and full system administration rights. Lesson plans and training manuals training shall be oriented to type of training to be provided.

b. New Unit Control Room:

1) Provide the security personnel with training in the use, operation, and maintenance of the entire control room system (Unit Control and Equipment Rooms). The training documentation must include the operation and maintenance. The first of the training sessions shall take place prior to system turnover and the second immediately after turnover. Coordinate the training sessions with the Owner. Completed classroom sessions will be witnessed and documented by the Architect/Engineer, and approved by the Contracting Officer's Representative. Instruction is not to begin until the system is operational as designed.
2) The training documents will cover the operation and the maintenance manuals and the control console operators' manuals and service manuals in detail, stressing all important operational and service diagnostic information necessary for the maintenance and operations personnel to efficiently use and maintain all systems.
3) Provide an illustrated control console operator's manual and service manual. The operator's manual shall be written in laymen's language and printed so as to become a permanent reference document for the operators, describing all control panel switch operations, graphic symbol definitions and all indicating functions and a complete explanation of all software.
4) The service manual shall be written in laymen's language and printed so as to become a permanent reference document for maintenance personnel, describing how to run internal self diagnostic software programs, troubleshoot head end hardware and field devices with a complete scenario simulation of all possible system malfunctions and the appropriate corrective measures.
5) Provide a professional color DVD instructional recording of all the operational procedures described in the operator's manual. All charts used in the training session shall be clearly presented on the video. Any DVD found to be inferior in recording or material content shall be reproduced at no

cost until an acceptable DVD is submitted. Provide four copies of the training DVD, one to the architect/engineer and three to the owner.

3. System Configuration and Data Entry:
   a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines. The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:
      1) Physical Access control system components,
      2) All intrusion detection system components,
      3) Video surveillance, control and recording systems,
      4) Intercom systems components,
      5) All other security subsystems shown in the contract documents.
   b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.
   c. Refer to Part 3 for system programming requirements and planning guidelines.
4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor’s field surveys, and all other pertinent information in the Contractor’s possession to complete the graphics.

The Contractor shall identify and request from the COTR, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the Contracting Officer's Representative for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

J. Group V Technical Data Package: Final copies of the manuals shall be delivered to the Contracting Officer's Representative as part of the acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or systems, as well as the nearest service representatives for each item of equipment for each system. The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on CD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:
   a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings; system schematics and layout drawings; alignment and calibration

procedures; manufacturer's repair list indicating sources of supply; and interface definition.

3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
   a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data formats, command characters, and a sample of each type of data transfer.
4. Operator's Manual: The operator's manual shall fully explain all procedures and instructions for the operation of the system, including:
   a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands' alarm messages, and printing formats; and system access requirements.
5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the Contracting Officer's Representative a complete list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.
7. Operation, Maintenance & Service Manuals: The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable

sets of manageable size. Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.

8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
   a. Equipment and/or system function.
   b. Operating characteristics.
   c. Limiting conditions.
   d. Performance curves.
   e. Engineering data and test.
   f. Complete nomenclature and number of replacement parts.
   g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
   h. Provide information detailing essential maintenance procedures including the following: routine operations, troubleshooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.
   i. Provide information on equipment and system operating procedures, including the following: start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.
   j. Manufacturer equipment and systems maintenance manuals are permissible.
9. Project Redlines: During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words 'Master Redlines' on the cover sheet and be maintained by the Contractor in the project office. The Contractor will provide access to redline documents anytime during the project for review and inspection by the Contracting Officer's Representative or authorized Office of Protection Services representative. Master redlines shall be neatly

maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in strict accordance with the drawings shall be noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the Contracting Officer's Representative for review and approval of all changes or modifications to the documents. Each sheet shall have Contracting Officer's Representative initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline documents daily. Field drawings shall not be considered "master redlines".

10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the COTR. As with master relines, Contractor shall maintain record specifications for Contracting Officer's Representative review and inspection at any time.
11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later.

Note related Change Orders and mark up of Record Construction Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the COTR.

12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements resulting in miscellaneous records include a minimum of the following:
    a. Certificates received instead of labels on bulk products.
    b. Testing and qualification of tradesmen. ("Contractor's Qualifications")
    c. Documented qualification of installation firms.
    d. Load and performance testing.
    e. Inspections and certifications.
    f. Final inspection and correction procedures.
    g. Project schedule
13. Record Construction Documents (Record As-Built)
    a. Upon project completion, the contractor shall submit the project master redlines to the Contracting Officer's Representative prior to development of Record construction documents. The Contracting Officer's Representative shall be given a minimum of a thirty (30) day review period to determine the adequacy of the master redlines. If the master redlines are found suitable by the Contracting Officer's Representative, the Contracting Officer's Representative will initial and date each sheet and turn redlines over to the contractor for as built development.
    b. The Contractor shall provide the Contracting Officer's Representative a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on CD or DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number

as applicable. All corrective notations made by the Contractor shall be legible when submitted to the COTR. If, in the opinion of the COTR, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover sheets with suitable titles, dates, and other identifications printed on the cover. The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.

c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the COTR. The Contractor shall organize into bound and labeled sets for the COTR's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown. All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).

K. FIPS 201 Compliance Certificates

1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
   a. Fingerprint Capture Station
   b. Card Readers
   c. Facial Image Capturing Camera
   d. PIV Middleware
   e. Template Matcher
   f. Electromagnetically Opaque Sleeve
   g. Certificate Management

1) CAK Authentication System
2) PIV Authentication System
3) Certificate Validator
4) Cryptographic Module

h. <list devices and software>

L. Approvals will be based on complete submission of manuals together with shop drawings.

M. After approval and prior to installation, furnish the Contracting Officer's Representative with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
2. Each type of conduit and pathway coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.

N. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

O. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

CP-01-00.....Control Panel Standard-Features for False Alarm Reduction

PIR-01-00.....Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

D. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

E. American National Standards Institute (ANSI):

ANSI S3.2-99.....Method for measuring the Intelligibility of Speech over Communications Systems

F. American Society for Testing and Materials (ASTM)

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C1238-97 (R03).....Standard Guide for Installation of Walk-Through Metal Detectors

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

G. Architectural Barriers Act (ABA), 1968

H. Department of Justice: American Disability Act (ADA)

28 CFR Part 36-2010 ADA Standards for Accessible Design

I. Department of Veterans Affairs:
VHA National CAD Standard Application Guide, 2006
VA BIM Guide, V1.0 10

J. Federal Communications Commission (FCC):
(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

K. Federal Information Processing Standards (FIPS):
FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

L. Federal Specifications (Fed. Spec.):
A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

M. Government Accountability Office (GAO):
GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

N. Homeland Security Presidential Directive (HSPD):
HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

O. Institute of Electrical and Electronics Engineers (IEEE):
81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
802.3af-08.....Power over Ethernet Standard
802.3at-09 .....Power over Ethernet (PoE) Plus Standard
C2-07.....National Electrical Safety Code
C62.41-02.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits
C95.1-05.....Standards for Safety Levels with Respect to Human Exposure in Radio Frequency Electromagnetic Fields

P. International Organization for Standardization (ISO):
7810.....Identification cards – Physical characteristics
7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics

7816-2.....Identification cards - Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts

7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols

7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods

7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange

14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance

15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

19794.....Information technology - Biometric data interchange formats

Q. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

R. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

S. National Fire Protection Association (NFPA):

70-11..... National Electrical Code (NEC)

731-08.....Standards for the Installation of Electric Premises Security Systems

99-2005.....Health Care Facilities

T. National Institute of Justice (NIJ)

0601.02-03.....Standards for Walk-Through Metal Detectors for use in Weapons Detection

0602.02-03.....Hand-Held Metal Detectors for Use in Concealed Weapon and Contraband Detection

U. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-37.....Guide for Applying the Risk Management Framework to Federal Information Systems

Special Pub 800-63.....Electronic Authentication Guideline

Special Pub 800-73-3....Interfaces for Personal Identity Verification (4 Parts)

.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation

.....Pt. 2- PIV Card Application Card Command Interface

.....Pt. 3- PIV Client Application Programming Interface

.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification

Special Pub 800-76-1....Biometric Data Specification for Personal Identity Verification

Special Pub 800-78-2....Cryptographic Algorithms and Key Sizes for Personal Identity Verification

Special Pub 800-79-1....Guidelines for the Accreditation of Personal Identity Verification Card Issuers

Special Pub 800-85B-1...DRAFTPIV Data Model Test Guidelines

Special Pub 800-85A-2...PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-104A....Scheme for PIV Visual Card Topography

V. Occupational and Safety Health Administration (OSHA):

29 CFR 1910.97.....Nonionizing radiation

W. Section 508 of the Rehabilitation Act of 1973

X. Security Industry Association (SIA):

AG-01 .....Security CAD Symbols Standards

Y. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

44-05.....Thermoset-Insulated Wires and Cables

50-07.....Enclosures for Electrical Equipment

83-08.....Thermoplastic-Insulated Wires and Cables

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

360-09.....Liquid-Tight Flexible Steel Conduit

444-08.....Safety Communications Cables

464-09.....Audible Signal Appliances

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

51-05.....Schedule 40 and 80 Rigid PVC Conduit

609-96.....Local Burglar Alarm Units and Systems

634-07.....Standards for Connectors with Burglar-Alarm Systems

636-01.....Standard for Holdup Alarm Units and Systems

639-97.....Standard for Intrusion-Detection Units
651-05.....Schedule 40 and 80 Rigid PVC Conduit
651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit
752-05.....Standard for Bullet-Resisting Equipment
797-07.....Electrical Metallic Tubing
827-08.....Central Station Alarm Services
1037-09.....Standard for Anti-theft Alarms and Devices
1635-10.....Digital Alarm Communicator System Units
1076-95.....Standards for Proprietary Burglar Alarm Units and Systems
1242-06.....Intermediate Metal Conduit
1479-03.....Fire Tests of Through-Penetration Fire Stops
1981-03.....Central Station Automation System
2058-05.....High Security Electronic Locks
60950.....Safety of Information Technology Equipment
60950-1.....Information Technology Equipment - Safety - Part 1: General Requirements

Z. Uniform Federal Accessibility Standards (UFAS) 1984

AA. United States Department of Commerce:
Special Pub 500-101 ....Care and Handling of Computer Magnetic Storage Media

1.8 COORDINATION

A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
   1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
   2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
   3. To allow right of way for piping and conduit installed at required slope.
   4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.9 MAINTENANCE & SERVICE

A. General Requirements

1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The Contracting Officer’s Representative shall be advised in writing of the name of the designated service representative, and of any change in personnel. The Contracting Officer’s Representative shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

1. The work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

E. System Inspections

1. These inspections shall include:

   a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.

      1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.

      2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.

   a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from [notification] [arrival on site]. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.

b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date, and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the Contracting Officer’s Representative. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the Contracting Officer’s Representative. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.10 MINIMUM REQUIREMENTS

A. References to industry and trade association standards and codes are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.11 DELIVERY, STORAGE, & HANDLING

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.
2. Damaged equipment shall be, as determined by the Contracting Officer's Representative, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.

4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

B. Central Station, Workstations, and Controllers:

1. Store in temperature and humidity-controlled environment in original manufacturer's sealed containers. Maintain ambient temperature between 10 to 30 deg C (50 to 85 deg F), and not more than 80 percent relative humidity, non-condensing.
2. Open each container; verify contents against packing list, and file copy of packing list, complete with container identification for inclusion in operation and maintenance data.
3. Mark packing list with designations which have been assigned to materials and equipment for recording in the system labeling schedules generated by cable and asset management system.
4. Save original manufacturer's containers and packing materials and deliver as directed under provisions covering extra materials.

1.12 PROJECT CONDITIONS

A. Environmental Conditions: System shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:

1. Interior, Controlled Environment: System components, except central-station control unit, installed in temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of 2 to 50 deg C (36 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 1 enclosure.
2. Interior, Uncontrolled Environment: System components installed in non-temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of -18 to 50 deg C (0 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 4X enclosures.
3. Exterior Environment: System components installed in locations exposed to weather shall be rated for continuous operation in ambient conditions of -34 to 50 deg C (-30 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, condensing. Rate for continuous operation where exposed to rain as specified in NEMA 250,

winds up to 137 km/h (85 mph) and snow cover up to 610 mm (24 in) thick. NEMA 250, Type 4X enclosures.

4. Hazardous Environment: System components located in areas where fire or explosion hazards may exist because of flammable gases or vapors, flammable liquids, combustible dust, or ignitable fibers shall be rated, listed, and installed according to NFPA 70.
5. Corrosive Environment: For system components subjected to corrosive fumes, vapors, and wind-driven salt spray in coastal zones, provide NEMA 250, Type 4X enclosures.

B. Security Environment: Use vandal resistant enclosures in high-risk areas where equipment may be subject to damage.

C. Console: All console equipment shall, unless noted otherwise, be rated for continuous operation under ambient environmental conditions of 15.6 to 29.4 deg C (60 to 85 deg F) and a relative humidity of 20 to 80 percent.

1.13 EQUIPMENT AND MATERIALS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests.

The contractor shall notify the VA through the Contracting Officer's

Representative a minimum of 15 working days prior to the manufacturers making the factory tests.

2. Four copies of certified test reports containing all test data shall be furnished to the Contracting Officer's Representative prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.14 ELECTRICAL POWER

A. Electrical power of 120 Volts Alternating Current (VAC) shall be indicated on the Division 26 drawings. Additional locations requiring primary power required by the security system shall be shown as part of these contract documents. Primary power for the security system shall be configured to switch to emergency backup sources automatically if interrupted without degradation of any critical system function. Alarms shall not be generated as a result of power switching, however, an indication of power switching on (on-line source) shall be provided to the alarm monitor. The Security Contractor shall provide an interface (dry contact closure) between the PACS and the Uninterruptible Power Supply (UPS) system so the UPS trouble signals and main power fail appear on the PACS operator terminal as alarms.

B. Failure of any on-line battery shall be detected and reported as a fault condition. Battery backed-up power supplies shall be provided sized for [8] hours of operation at actual connected load. Requirements for additional power or locations shall be included with the contract to support equipment and systems offered. The following minimum requirements shall be provided for power sources and equipment.

1. Emergency Generator
   a. Report Printers: Unit Control Room
   b. Video Monitors: Unit Control Room
   c. Intercom Stations
   d. Radio System
   e. Lights: Unit Control Room, Equipment Rooms, & Security Offices
   f. Outlets: Security Outlets dedicated to security equipment racks or security enclosure assemblies.

g. Security Device Power Supplies (DGP, VASS, Card Access, Lock Power, etc.) powered from the security closets or remotely: various locations
h. Telephone/Radio Recording Equipment: Unit Control Room.
i. VASS Camera Power Supplies: Security Closets
j. VASS Pan/Tilt Units: Various Locations
k. VASS Outdoor Housing Heaters and Blowers: Various Sites
l. Intercom Master Control System
m. Fiber Optic Receivers/Transmitters
n. Security office Weapons Storage
o. Outlets that charge handheld radios

2. Uninterruptible Power Supply (UPS) on Emergency Power
   a. The following 120VAC circuits shall be provided by others. The Security Contractor shall coordinate exact locations with the Electrical Contractor:
      1) Security System Monitors and Keyboards: Control Room
      2) CPU: Control Equipment Room
      3) Communications equipment: Control Equipment Room and various sites.
      4) VASS Matrix Switcher: Control Equipment Room
      5) VASS: Control Equipment Room
      6) Digital Video Recorders, encoders & decoders: Control Room
      7) All equipment Room racked equipment.
      8) Network switches

1.15 TRANSIENT VOLTAGE SUPPRESSION, POWER SURGE SUPPLESION, & GROUNDING

A. Transient Voltage Surge Suppression: All cables and conductors extending beyond building façade, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage Surge Suppression (TVSS) protection. The TVSS device shall be UL listed in accordance with Standard TIA 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 914.4 mm (3 ft) of the building cable entrance. Fuses shall not be used for

surge protection. The inputs and outputs shall be tested in both normal mode and common mode to verify there is no interference.

1. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
2. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
3. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B.
4. Operating Temperature and Humidity: -40 to 85 deg C (-40 to 185 deg F), 0 to 95 percent relative humidity.

B. Grounding and Surge Suppression

1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. To ensure the operation of over current devices, such as fuses, circuit breakers, and relays, under ground-fault conditions.
2. Security Contractor shall engineer and provide proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards referenced in this document.
3. Principal grounding components and features. Include main grounding buses and grounding and bonding connections to service equipment.
4. Details of interconnection with other grounding systems. The lightning protection system shall be provided by the Security Contractor.
5. Locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with the best practices of the trade and manufactures installation instructions.
8. Protection should be provided at both ends of cabling.

1.16 COMPONENT ENCLOSURES

A. Construction of Enclosures

1. Consoles, power supply enclosures, detector control and terminal cabinets, control units, wiring gutters, and other component

housings, collectively referred to as enclosures, shall be so formed and assembled as to be sturdy and rigid.

2. Thickness of metal in-cast and sheet metal enclosures of all types shall not be less than those in Tables I and II, UL 611. Sheet steel used in fabrication of enclosures shall be not less than 14 gauge. Consoles shall be 16-gauge.
3. Doors and covers shall be flanged. Enclosures shall not have pre-punched knockouts. Where doors are mounted on hinges with exposed pins, the hinges shall be of the tight pin type, or the ends of hinge pins shall be tack welded to prevent removal. Doors having a latch edge length of less than 609.6 mm (24 in) shall be provided with a single construction core. Where the latch edge of a hinged door is more than 609.6 mm (24 in) or more in length, the door shall be provided with a three-point latching device with construction core; or alternatively with two, one located near each end.
4. Any ventilator openings in enclosures and cabinets shall conform to the requirements of UL 611. Unless otherwise indicated, sheet metal enclosures shall be designed for wall mounting with tip holes slotted. Mounting holes shall be in positions that remain accessible when all major operating components are in place and the door is open but shall be inaccessible when the door is closed.
5. Covers of pull and junction boxes provided to facilitate initial installation of the system shall be held in place by tamper proof Torx Center post security screws. Stenciled or painted labels shall be affixed to such boxes indicating they contain no connections. These labels shall not indicate the box is part of the Electronic Security System (ESS).

B. Consoles & Equipment Racks: All consoles and vertical equipment racks shall include a forced air-cooling system to be provided by others.

1. Vertical Equipment Racks:
   a. The forced air blowers shall be installed in the vented top of each cabinet and shall not reduce usable rack space.
   b. The forced air fan shall consist of one fan rated at 105 CFM per rack bay and noise level shall not exceed 55 decibels.

c. d. Vertical equipment racks are to be provided with full sized clear plastic locking doors and vented top panels as shown on contract drawings.

2. Console racks:

a. Forced air fans shall be installed in the top rear of each console bay. The forced air fan shall consist of one fan rated at 105 CFM mounted to a 133mm vented blank panel the noise level of each fan shall not exceed 55 decibels. The fans shall be installed so air is pulled from the bottom of the rack or cabinet and exhausted out the top.

b. Console racks are to be provided with flush mounted hinged rear doors with recessed locking latch on the bottom and middle sections of the consoles. Provide code access to support wiring for devices located on the work surfaces.

C. Tamper Provisions and Tamper Switches:

1. Enclosures, cabinets, housings, boxes and fittings or every product description having hinged doors or removable covers and which contain circuits, or the integrated security system and its power supplies shall be provided with cover operated, corrosion-resistant tamper switches.

2. Tamper switches shall be arranged to initiate an alarm signal that will report to the monitoring station when the door or cover is moved. Tamper switches shall be mechanically mounted to maximize the defeat time when enclosure covers are opened or removed. It shall take longer than 1 second to depress or defeat the tamper switch after opening or removing the cover. The enclosure and tamper switch shall function together in such a manner as to prohibit direct line of sign to any internal component before the switch activates.

3. Tamper switches shall be inaccessible until the switch is activated. Have mounting hardware concealed so the location of the switch cannot be observed from the exterior of the enclosure. Be connected to circuits which are under electrical supervision at all times, irrespective of the protection mode in which the circuit is operating. Be spring-loaded and held in the closed position by the door or cover and be wired so they break the circuit when the door

cover is disturbed. Tamper circuits shall be adjustable type screw sets and shall be adjusted by the contractor to eliminate nuisance alarms associated with incorrectly mounted tamper device shall annunciate prior to the enclosure door opening (within 1/4 " tolerance. The tamper device or its components shall not be visible or accessing with common tools to bypass when the enclosure is in the secured mode.

4. The single gang junction boxes for the portrait alarming and pull boxes with less than 102 square mm will not require tamper switches.
5. All enclosures over 305 square mm shall be hinged with an enclosure lock.
6. Control Enclosures: Maintenance/Safety switches on control enclosures, which must be opened to make routing maintenance adjustments to the system and to service the power supplies, shall be push/pull-set automatic reset type.
7. Provide one (1) enclosure tamper switch for each 609 linear mm of enclosure lock side opening evenly spaced.
8. All security screws shall be Torx-Post Security Screws.
9. The contractor shall provide the owner with two (2) torx-post screwdrivers.

1.17 ELECTRONIC COMPONENTS

A. All electronic components of the system shall be of the solid-state type, mounted on printed circuit boards conforming to UL 796. Boards shall be plug-in, quick-disconnect type. Circuitry shall not be so densely placed as to impede maintenance. All power-dissipating components shall incorporate safety margins of not less than 25 percent with respect to dissipation ratings, maximum voltages, and current-carrying capacity.

1.18 SUBSTITUTE MATERIALS & EQUIPMENT

A. Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. In addition to this Section the Security Contractor shall also reference Section II, Products and associated divisions. The Contracting Officer's Representative shall have final authority on the authorization or refusal of substitutions. If there are no proposed substitutions, a statement in writing from the Contractor shall be submitted to the Contracting Officer's Representative stating same. In the preparation of a list of substitutions, the following information shall be included, as a minimum:

1. Identity of the material or devices specified for which there is a proposed substitution.
2. Description of the segment of the specification where the material or devices are referenced.
3. Identity of the proposed substitute by manufacturer, brand name, catalog or model number and the manufacturer's product name.
4. A technical statement of all operational characteristic expressing equivalence to items to be substituted and comparison, feature-by-feature, between specification requirements and the material or devices called for in the specification; and Price differential.

C. Materials Not Listed: Furnish all necessary hardware, software, programming materials, and supporting equipment required to place the specified major subsystems in full operation. Note that some supporting equipment, materials, and hardware may not be described herein. Depending on the manufacturers selected by the COTR, some equipment, materials and hardware may not be contained in either the Contract Documents or these written specifications, but are required by the manufacturer for complete operation according to the intent of the design and these specifications. In such cases, the Contracting Officer's Representative shall be given the opportunity to approve the additional equipment, hardware and materials that shall be fully identified in the bid and in the equipment list submittal. The Contracting Officer's Representative shall be consulted in the event there is any question about which supporting equipment, materials, or hardware is intended to be included.

D. Response to Specification: The Contractor shall submit a point-by-point statement of compliance with each paragraph of the security specification. The statement of compliance shall list each paragraph

by number and indicate "COMPLY" opposite the number for each paragraph where the Contractor fully complies with the specification. Where the proposed system cannot meet the requirements of the paragraph, and does not offer an equivalent solution, the offers shall indicate "DOES NOT COMPLY" opposite the paragraph number. Where the proposed system does not comply with the paragraph as written, but the bidder feels it will accomplish the intent of the paragraph in a manner different from that described, the offers shall indicate "COMPARABLE". The offers shall include a statement fully describing the "comparable" method of satisfying the requirement. Where a full and concise description is not provided, the offered system shall be considered as not complying with the specification. Any submission that does not include a point-by-point statement of compliance, as described above, shall be disqualified. Submittals for products shall be in precise order with the product section of the specification. Submittals not in proper sequence will be rejected.

1.19 LIKE ITEMS

A. Where two or more items of equipment performing the same function are required, they shall be exact duplicates produced by one manufacturer. All equipment provided shall be complete, new, and free of any defects.

1.20 WARRANTY

A. The Contractor shall, as a condition precedent to the final payment, execute a written guarantee (warranty) to the COTR certifying all contract requirements have been completed according to the final specifications. Contract drawings and the warranty of all materials and equipment furnished under this contract are to remain in satisfactory operating condition (ordinary wear and tear, abuse and causes beyond his control for this work accepted) for one (1) year from the date the Contactor received written notification of final acceptance from the COTR. Demonstration and training shall be performed prior to system acceptance. All defects or damages due to faulty materials or workmanship shall be repaired or replaced without delay, to the COTR's satisfaction, and at the Contractor's expense. The Contractor shall provide quarterly inspections during the warranty period. The contractor shall provide written documentation to the COTR

on conditions and findings of the system and device(s). In addition, the contractor shall provide written documentation of test results and stating what was done to correct any deficiencies. The first inspection shall occur 90 calendar days after the acceptance date. The last inspection shall occur 30 calendar days prior to the end of the warranty. The warranty period shall be extended until the last inspection and associated corrective actions are complete. When equipment and labor covered by the Contractor's warranty, or by a manufacturer's warranty, have been replaced or restored because of its failure during the warranty period, the warranty period for the replaced or repaired equipment or restored work shall be reinstated for a period equal to the original warranty period, and commencing with the date of completion of the replacement or restoration work. In the event any manufacturer customarily provides a warranty period greater than one (1) year, the Contractor's warranty shall be for the same duration for that component.

1.22 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

PART 2 – PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. All equipment associated within the Security Control Room, Security Console and Security Equipment Room shall be UL 827, UL 1981, and UL 60950 compliant and rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.

B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of [8] <insert hours> hours of run time in the event of a loss of primary power to the facility.

C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All equipment and materials for the system will be compatible to ensure correct operation.

2.2 EQUIPMENT ITEMS

A. The Security Management System shall provide full interface with all components of the security subsystem as follows:

1. Shall allow for communication between the Physical Access Control System and Database Management and all subordinate work and monitoring stations, enrollment centers for badging and biometric devices as part of the PACS, local annunciation centers, the electronic Security Management System (SMS), and all other VA redundant or backup command center or other workstations locations.
2. Shall provide automatic continuous communication with all systems that are monitored by the SMS, and shall automatically annunciate any communication failures or system alarms to the SMS operator providing identification of the system, nature of the alarm, and location of the alarm.
3. Controlling devices shall be utilized to interface the SMS with all field devices.
4. The Security control room and security console will be supported by an uninterrupted power supply (UPS) or dedicated backup generator power circuit.
5. The Security Equipment room, Security Control Room, and Security Operator Console shall house the following equipment i.e. refer to individual master specifications for each security subsystem’s specific requirements:
   a. Security Console Bays and Equipment Racks
   b. Security Network Server and Workstation
   c. CCTV Monitoring, Controlling, and Recording Equipment
   d. PACS Monitoring and Controlling Equipment
   e. IDS Monitoring and Controlling Equipment
   f. Security Access Detection Monitoring Equipment
   g. EPPS Monitoring and Controlling Equipment
   h. Main Panels for all Security Systems

i. Power Supply Units (PSU) for all field devices
j. Life safety and power monitoring equipment
k. All other building systems deemed necessary by the VA to include, but not limited to, heating, ventilation and air conditioning (HVAC), elevator control, portable radio, fire alarm monitoring, and other potential systems.
l. Police two-way radio control consoles/units.

B. Security Console Bays - shall be EIA 310D compliant and:
1. Utilize stand-up, sit-down, and vertical equipment racks in any combination to monitor and control the security subsystems.
2. Shall be wide enough for equipment that requires a minimum 19 inch (47.5 cm) mounting area.
3. Shall be made of metal, furnished with wire ways, a power strip, a thermostatic controlled bottom or top mounted fan units, a hinge mounted rear door, a hinge mounted front door made of Plexiglas, and a louvered top. When possible, pre-fabricated (standard off-the-shelf) security console equipment shall be used in place of customized designed consoles.
4. A wire management system shall be designed and installed so that all cables are mounted in a manner that they do not interfere with day-to-day operations, are labeled for quick identification, and so that high voltage power cables do not cause signal interference with low voltage and data carrying cables.
5. Shall be mounted on lockable casters.
6. Shall be ergonomically designed so that all devices requiring repetitive interaction with by the operator can be easily accessed, observed, and accomplished.
7. Controls and displays shall be located so that they are not obscured during normal operation. Control and display units installed with a work bench shall be a minimum of 3 in. (7.5 cm) from all edges of the work bench area.
8. All security subsystem controls shall be installed within the same operating console bay of their associated equipment.
9. Video monitors shall be mounted above all controls within a console bay and positioned in a manner that minimum strain is placed on the operator viewing them at the console.

10. At least one workbench for every three (3) console bays shall be provided free of control equipment to allow for appropriate operator workspace.
11. All console devices shall be labeled and marked with a minimum of quarter inch bold print.
12. All non-security related equipment that is required to be monitored shall be installed in a console bay separate from the security subsystem equipment and clearing be identified as such.
13. Console bays and related equipment shall be arranged in priority order and sequenced based upon their pre-defined security subsystem operations criticality established by the Contracting Officer.
14. The following minimum console technical characteristics shall be taken into consideration when designing for and installing the security console and equipment racks:

	Stand-Up	Sit-Down	Vertical Equipment Rack
Workstation Height	No Greater than 84 in. (210 cm)	No greater than 72 in. (150 cm)	No greater than 96 in. (240 cm)
Bench board Slope	21 in. (52.5 cm)	25 in. (62.5 cm)	N/A
Bench board Angle	15 degrees	15 degrees	N/A
Depth of Console	24 in. (60 cm)	24 in. (60 cm)	N/A
Leg and Feet Clearance	6 sq. ft. from center of Console Slope front	6 sq. ft. from center of Console Slope front	6 sq. ft. from center of Console Slope front
Distance Between Console Rows	96 in. (240 cm)	96 in. (240 cm)	96 in. (240 cm)
Distance Between Console and Wall	36 in. (90 cm) from the rear and/or side of console or rack	36 in. (90 cm) from the rear and/or side of console or rack	36 in. (90 cm) from the rear and/or side of console or rack

C. Security Console Configuration:

1. The size shall be defined by the number of console bays required to house and operate the security subsystems, as well as any other factors that may influence the overall design of the space. A small Access Control System and Database Management shall contain no more than four (4) security console bays. A large Access Control System and Database Management shall contain no less than five (5) and no more than eight (8) security console bays.
2. Shall meet the following minimum spacing requirements to ensure that a Access Control System and Database Management is provided to house existing and future security subsystems and other equipment listed in paragraph 2.3.C:
   a. 500 square feet for a large Access Control System and Database Management.
   b. 300 square feet for a small Access Control System and Database Management.
   c. If office, training room and conference space, is a processing area as well as holding cell space is to be located adjacent to the Access Control System and Database Management, these space requirements also need to be considered.
3. Shall be located in an area within, at a minimum, the first level/line of security defense defined by the VA. If the Access Control System and Database Management is to be located outside the first level of security, then the area shall be constructed or retrofit to meet or exceed those requirements outlined in associated VA Master Specifications.
4. Shall not be located within or near an area with little to no blast mitigation standoff space protection, adjacent to an outside wall exposed to vehicle parking and traffic, within a basement or potential flood zone area, in close approximately to major utility areas, or near an exposed air intake(s).
5. Access shall meet UFAS and ADA accessibility requirements.
6. Construction shall be slab to slab and free of windows, with the exception of a service window. All penetrations into the room shall be sealed with fire stopping materials. This material shall apply in accordance with Section 07 84 00, FIRESTOPPING.

7. A service window shall be installed in the wall next to the main entrance of the Access Control System and Database Management or where it best can be monitored and accessed by the security console operator. The window shall meet all requirements set forth in UL 752, to include at a minimum, Class III ballistic level protection. The windows shall be set in a minimum or four (4) inches (100 mm) solid concrete units to ceiling height with either masonry or gypsum wall board to the underside of the slab above. It shall also contain a service tray constructed in a manner that only objects no larger than 3 inches (7.5 cm) in width may pass through it.
8. The walls making up or surrounding the Access Control System and Database Management shall be made of materials that at a minimum offer Class III ballistic level protection for the security console operator(s).
9. There will be a main power cut-off button/switch located inside the Access Control System and Database Management in the event of an electrical fire or related event occurs.
10. Shall have a fire alarm detection unit that is tied into the main building fire alarm system and have at least two fire extinguishers located within it.
11. Shall utilize a fire suppression system similar to that used by the VA’s computer and telecommunications room operating areas.
12. The floor shall be raised a minimum of 4 inches (10 cm) from the concrete floor base. Wire ways shall be utilized under the raised floor for separation of signal and power wires and cables.
13. Access shall be monitored and controlled by the PACS via card reader and fixed camera that utilizes a wide angle lens. A 1 in. (2.5 cm) deadbolt shall be utilized as a mechanical override for the door in the event of electrical failure of the PACS, card reader, or locking mechanism.
14. There shall only be one point of ingress and egress to and from the Security Control Room. The door shall be made of solid core wood or better. If a window is required for the door, then the window shall be ballistic resistant with a Millar covering.
15. A two-way intercom shall be placed at the point of entry into the Security Control Room for access-communication control purposes.

16. A remote push-button door unlocking device shall not be installed for the electronic PACS locking mechanism providing access control into the Security Control Room.
17. All controlling equipment and power supplies that must be wall mounted shall be mounted in a manner that maximizes usability of the Security Control Room wall space. All equipment shall be mounted to three quarter inch fire retardant plywood. The plywood shall be fastened to the wall from slab to slab and fixed to the existing walls supports.

D. Security Control Room Ventilation

1. Shall meet or exceed all requirements laid out in VA Master Specification listed in Division 23, HEATING, VENTILATION, AND AIR CONDITIONING.
2. Controls shall be via a separate air handling system that provides an isolated supply and return system. The Security Control Room shall have a dedicated thermostat control unit and cut-off switch to be able to shut off ventilation to the control room in the event of a chemical, biological, or radiological (CBR) event or other related emergency.
3. There shall be a louver installed in the control room door to assist with ventilation of the room. The louver shall be exactly 12 x 12 inches (30 x 30 cm) and closeable.

E. Security Control Room and Security Console Lighting:

1. The following factors shall be taken into consideration for lighting of the Security Control Room and console area:
   a. Shadows: To reduce eye strain and fatigue, shadows shall be avoided.
   b. Glare: The readability of all display panels, labels, and equipment shall not be interfered with or create visibility problems.
2. The following table shall provide guidance on the amount of footcandles required per work area and type of task performed:

Work Area/Type of Task	Footcandles
Main Operating Panels	50
Secondary Display Panels	50
Seated Workstations	100

Reading	Handwriting	100
	Typed Documents	50
	Visual Display Units	10
Logbook Recording		100
Maintenance Area		50
Emergency/Back-up Lighting		10

F. Remote security console access: For facilities that have a remote, secondary back-up control console or workstation shall apply the following requirements:
   1. The secondary stations shall the requirements outlined in Sections 2.2.A-G.
   2. Installation of an intercom station or telephone line shall be installed and provide direct one touch call-up for communications between the primary Security Control Console and secondary Security Control Console.
   3. Secondary stations shall not have priority over a primary Security Control Console.
   4. The primary Access Control System and Database Management shall have the ability to shut off power and a signal to a secondary control station in the event the area has been compromised.

G. Wires and Cables:
   1. Shall meet or exceed the manufactures recommendation for power and signals.
   2. Shall be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
   3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
   4. All conduit, pull boxes, and junction boxes shall be marked with colored permanent tape or paint that will allow it to be distinguished from all other infrastructure conduit.
   5. Conduit fills shall not exceed 50 percent unless otherwise documented.

6. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.
7. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area.
8. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security subsystems shall be any cable or sets of cables carrying 30 VDC/VAC or higher.
9. For all equipment that is carrying digital data between the Security Control Room, Security Equipment Room, Security Console, or at a remote monitoring station, it shall not be less that 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.

2.3 FIBER OPTIC EQUIPMENT

A. 8 Channel Fiber Optic Transceivers (Video & PTZ Control)

1. The field-located and central-located fiber optic transceivers shall utilize wave division multiplexing to transmit and receive video and data pan-tilt-zoom control signals over two standard 62.5/125 multimode fibers.
2. The units shall be capable of operating over a range of 2 km.
3. The units shall be NTSC color compatible.
4. The units shall support data rates up to 64 Kbps.
5. The units shall be surface or rack mountable.
6. The units shall be UL listed.
7. The units shall meet or exceed the following specifications:
   a. Video
      1) Input/Output: 1 volt pk-pk (75 ohms)
      2) Input/Output Channels: 8
      3) Bandwidth: 10 Hz - 6.5 MHZ per channel
      4) Differential Gain: <2%
      5) Differential Phase: <0.7°
      6) Tilt: <1%
      7) Signal to Noise Ratio: 60 dB

b. Data (Control)

1) Data Channels: 2

2) Data Format: RS-232, RS-422, 2 wire or 4 wire RS-485 with Tri-State Manchester Bi-Phase and Sensornet

3) Data Rate: DC - 100 kbps (NRZ)

4) Bit Error Rate: < 1 in 10-9 @ Maximum Optical Loss Budget

5) Operating Mode: Simplex or Full-Duplex

6) Wavelength: 1310/1550 nm, Multimode or Singlemode

7) Optical Emitter: Laser Diode

8) Number of Fibers: 1

c. Connectors

1) Optical: ST

2) Power and Data: Terminal Block with Screw Clamps

3) Video: BNC (Gold Plated Center-Pin)

d. Electrical and Mechanical

1) Power: 12 VDC @ 500 mA (stand-alone)

3) Current Protection: Automatic Resettable Solid-State Current Limiters

e. Environmental

1) MTBF: > 100,000 hours

2) Operating Temp: -40 to 74 deg C (-40 to 165 deg F)

3) Storage Temp: -40 to 85 deg C (-40 to 185 deg F)

4) Relative Humidity: 0% to 95% (non-condensing)

B. Fiber Optic Transmitters: The central-located fiber optic transmitters shall utilize wave division multiplexing to transmit video and signals over standard 62.5/125 multimode fibers.

1. The units shall be capable of operating over a range of 4.8 km.
2. The units shall be NTSC color compatible.
3. The units shall support data rates up to 64 Kbps.
4. The units shall be surface or rack mountable.
5. The units shall be UL listed.
6. The units shall meet or exceed the following specifications:

a. Video

1) Input: 1 volt pk-pk (75 ohms)

2) Bandwidth: 5H2 - 10 MHZ

3) Differential Gain: <5%

4) Tilt: <1%
5) Signal-Noise: 60db
6) Wavelength: 850nm
7) Number of Fibers: 1
8) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
9) Connectors:
   a) Power: Female plug with screw clamps
   b) Video: BNC
   c) Optical: ST
10) Power: 12 VDC

C. Fiber Optic Receivers: The field-located fiber optic receivers shall utilize wave division multiplexing to receive video signals over standard 62.5/125 multimode fiber.
1. The units shall be capable of operating over a range of 4.8 km.
2. The units shall be NTSC color compatible.
3. The units shall support data rates up to 64 Kbps.
4. The units shall be surface or rack mountable.
5. The units shall be UL listed.
6. The units shall meet or exceed the following specifications:
   a. Video
      1) Output: 1 volt pk-pk (75 ohms)
      2) Bandwidth: 5H2 - 10 MHZ
      3) Differential Gain: <5%
      4) Tilt: <1%
      5) Signal-Noise: 60dB
      6) Wavelength: 850nm
      7) Number of Fibers: 1
      8) Surface Mount: 106.7 x 88.9 x 25.4 mm (4.2 x 3.5 x 1 in)
      9) Operating Temp: -20 to 70 deg C (-4 to 158 deg F)
      10) Connectors:
      11) Power: Female plug block with screw clamps
      12) Video: BNC
      13) Optical: ST
      14) Power: 12 VAC8 Channel Fiber Optic Transceivers (Video & PTZ Control)

D. Fiber Optic Sub Rack with Power Supply

1. The Card Cage Rack shall provide high-density racking for fiber-optic modules. The unit shall be designed to mount in standard 483 mm (19 in) instrument racks and to accommodate the equivalent of 15 1-inch modules.
   a. Specifications
      1) Card Orientation: Vertical
      2) Construction: Aluminum
      3) Current Consumption: 0.99 A
      4) Humidity: 95.0 % RH
      5) Input Power: 100-240 VAC, 60/50 Hz
      6) Mounting: Mounts in standard 483 mm (19 in) rack using four (4) screws (optional wall brackets purchased separately)
      7) Number of Outputs: 1.0
      8) Number of Slots 15.0
      9) Operating Temperature: -40 to +75 deg C (-40.0 to 167.0 deg F)
      10) Ouput Voltage: 13.5 V
      11) Output Current 6.0 A
      12) Power Dissipation: 28.0 W
      13) Power Factor: 48.0
      14) Power Supply: (built-in)
      15) Rack Units: 3RU
      16) Redundant Capability: Yes
      17) Weight: 2.43 kg (5.35 lb)
      18) Width: 483 mm (19.0 in)

2.4 TRANSIENT VOLTAGE SURGE SUPPRESSION DEVICES (TVSS) AND SURGE SUPPRESION

A. Transient Voltage Surge Suppression

1. All cables and conductors extending beyond building perimeter, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage surge suppression protection (TVSS) UL listed in accordance with Standard 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 915

mm (36 in) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode using the following waveforms:

a. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.

b. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.

c. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B or approved equivalent.

d. Operating Temperature and Humidity: -40 to + 85 deg C (-40 to 185 deg F), and 0 to 95 percent relative humidity, non-condensing.

B. Physical Access Control Systems

1. Suppressors shall be installed on AC power at the point of service and shall meet the following criteria:

   a. UL1449 2nd Edition, 2007, listed

   b. UL1449 S.V.R. of 400 Volts or lower

   c. Status Indicator Light(s)

   d. Minimum Surge Current Capacity: 40,000 Amps (8 x 20 µsec)

   e. Maximum Continuous Current: 15 Amps

   f. MCOV: 125 VAC

   g. Service Voltage: 110-120 VAC

2. Suppressors shall be installed on the Low Voltage circuit at both the point of entrance and exit of the building. Suppressors shall meet the following criteria:

   a. UL 497B

   b. Minimum Surge Current Capacity: 2,000 Amps per pair

   c. Maximum Continuous Current: 5 Amps

   d. MCOV: 33 Volts

   e. Service Voltage: 24Volts

3. Suppressors shall be installed on the communication circuit between the access controller and card reader at both the entrance and exit of the building. Suppressors shall meet the following criteria:

a. Conforms with UL497B standards (where applicable)
b. Clamp level for 12 and 24V power: 18VDC / 38VDC
c. Clamp level for Data/LED: 6.8VDC
d. Service Voltage for Power: 12VDC/24VDC
e. Service Voltage for Data/LED: <5VDC
f. Clamp level – PoE Access Power: 72V
g. Clamp level – PoE Access Data: 7.9V
h. Service Voltage – PoE Access: 48VAC – 54VAC
i. Service Voltage – PoE Data: <5VDC

C. Intercom Systems
1. Suppressors shall be installed on the AC power at the point of service and shall meet the following criteria:
a. UL 1449 Listed
b. UL 1449 S.V.R. of 400 Volts or lower
c. Diagnostic Indicator Light(s)
d. Integrated ground terminating post (where case/chassis ground exists)
e. Minimum Surge Current Capacity of 13,000 Amps (8 x 20 µSec)
2. Suppressors shall be installed on incoming central office lines and shall meet the following criteria:
a. UL 497A Listed
b. Multi Stage protection design
c. Auto-reset current protection not to exceed 2 Amps per pair
d. Minimum Surge Current of 500 Amps per pair (8 x 20 µSec)
3. Suppressors shall be installed on all telephone/intercom circuits that enter or leave separate buildings and shall meet the following criteria:
a. UL 497A Listed (where applicable)
b. UL 497B Listed (horns, strobes, speakers or communication circuits over 300 feet)
c. Multi Stage protection design
d. Auto-reset over-current protection not to exceed 5 Amps per pair
e. Minimum Surge Current of 1000 Amps per pair (8 x 20 µSec)

D. Intrusion Detection Systems
1. Suppressors shall be installed on AC at the point of service and shall meet the following criteria:

a. UL 1449, 2nd Edition 2007, listed
b. UL 1449 S.V.R. of 400 Volts or lower
c. Status Indicator Lights
d. Center screw for terminating Class II transformers
e. Minimum Surge Current Capacity of 32,000 Amps (8 x 20 µSec)

2. Suppressors shall be installed on all Telephone Communication Interface circuits and shall meet the following criteria:
   a. UL 497A Listed
   b. Multi Stage protection design
   c. Surge Current Capacity: 9,000 Amps (8x20 µSec)
   d. Clamp Voltage: 130Vrms
   e. Auto reset current protection not to exceed 150 milliAmps
3. Suppressors shall be installed on all burglar alarm initiating and signaling loops and addressable circuits which enter or leave separate buildings. The following criteria shall be met:
   a. UL 497B for data communications or annunciation (powered loops)
   b. Fail-short/fail-safe mode.
   c. Surge Current Capacity: 9,000 Amps (8x20 µSec)
   d. Clamp Voltage: 15 Vrms
   e. Joule Rating: 76 Joules per pair (10x1000 µSec)
   f. Auto-reset current protection not to exceed 150 milliAmps for UL 497A devices.

E. Video Surveillance System

1. Protectors shall be installed on coaxial cable systems on points of entry and exit from separate buildings. Suppressors shall be installed at each exterior camera location and include protection for 12 and/or 24 volt power, data signal and motor controls (for Pan, Tilt and Zoom systems). SPDs shall protect all modes herein mentioned and contain all modes in a single unit system. Protection for all systems mentioned above shall be incorporated at the head end equipment. Additionally a minimum 450VA battery backup shall be used to protect the DVR or VCR and monitor. Protectors shall meet the following criteria:
   a. Head-End Power
      1) UL 1778, cUL (Battery Back Up)

2) Minimum Surge Current Capacity: 65,000 Amps (8x20µsec)
3) Minimum of two (2) NEMA 5-15R Receptacles (one (1) AC power only, one (1) with UPS)
4) All modes protected (L-N, L-G, N-G)
5) EMI/RFI Filtering
6) Maximum Continuous Current: 12 Amps

b. Camera Power
1) Minimum Surge Current Capacity: 1,000 Amps (8X20µsec); 240 Amps for IP Video/PoE cameras
2) Screw Terminal Connection
3) All protection modes L-G (all Lines)
4) MCOV <40VAC

c. Video And Data
1) Surge Current Capacity 1,000 Amps per conductor
2) "BNC" Connection (Coax)
3) Protection modes: L-G (Data), Center Pin-G, Shield-G (Coax)
4) Band Pass 0-2GHz
5) Insertion Loss <0.3dB

F. Grounding and Surge Suppression
1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. This is to ensure the operation of over current devices, such as fuses, circuit breakers, and relays, underground-fault conditions.
2. The Contractor shall engineer, provide, ad install proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards, referenced in this document.
3. Principal grounding components and features shall include: main grounding buses, grounding, and bonding connections to service equipment.
4. The Contractor shall provide detail drawings of interconnection with other grounding systems including lightning protection systems.
5. The Contractor shall provide details of locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.

7. Any cable that is shielded shall require a ground in accordance with applicable codes, the best practices of the trade, and all manufactures' installation instructions.

G. 120 VAC Surge Suppression

1. Continuous Current: Unlimited (parallel connection)
2. Max Surge Current: 13,500 Amps
3. Protection Modes: L - N, L - G, N - G
4. Warranty: Ten Year Limited Warranty
5. Dimension: 73.7 x 41.1 x 52.1 mm (2.90 x 1.62 x 2.05 in)
6. Weight: 2.88 g (0.18 lbs.)
7. Housing: ABS

2.5 INSTALLATION KIT

A. General:

1. The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware shall be turned over to the Contracting Officer. The following sections outline the minimum required installation sub-kits to be used:
2. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Coaxial Cable Shields
      2) Control Cable Shields
      3) Data Cable Shields
      4) Equipment Racks

5) Equipment Cabinets
6) Conduits
7) Cable Duct blocks
8) Cable Trays
9) Power Panels
10) Grounding
11) Connector Panels

3. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.
4. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
5. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
6. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
7. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each subsystem according to the OEM requirements, as-installed drawings, and this document.
8. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to provide the system documentation as required by this document and explained herein.

PART 3 – EXECUTION

3.1 COMMON REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATION

A. Comply with NECA 1.

B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.

C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.

D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electronic safety and security equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.

E. Right of Way: Give to piping systems installed at a required slope.

F. Equipment location shall be as close as practical to locations shown on the drawings.

G. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

3.2 FIRESTOPPING

A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electronic safety and security installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section 07 84 00 "Firestopping."

3.3 COMMISIONING (NOT USED)

3.4 DEMONSTRATION AND TRAINING

A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

B. Training shall be provided for the particular equipment or system as required in each associated specification.

C. A training schedule shall be developed and submitted by the contractor and approved by the Contracting Officer's Representative at least 30 days prior to the planned training.

D. Provide services of manufacturer's technical representative for <insert hours> hours to instruct VA personnel in operation and maintenance of units.

E. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

3.5 WORK PERFORMANCE

A. Job site safety and worker safety is the responsibility of the contractor.

B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

D. Coordinate location of equipment and conduit with other trades to minimize interferences. See the GENERAL CONDITIONS.

3.6 SYSTEM PROGRAMMING

A. General Programming Requirements

1. This following section shall be used by the contractor to identify the anticipated level of effort (LOE) required setup, program, and configure the Electronic Security System (ESS). The contractor shall be responsible for providing all setup, configuration, and programming to include data entry for the Security Management System (SMS) and subsystems [(e.g., video matrix switch, intercoms, digital video recorders, intrusion devices, including integration of subsystems to the SMS (e.g., camera call up, time synchronization,

intercoms)]. System programming for existing or new SMS servers shall not be conducted at the project site.

B. Level of Effort for Programming

1. The Contractor shall perform and complete system programming (including all data entry) at an offsite location using the Contractor's own copy of the SMS software. The Contractor's copy of the SMS software shall be of the Owners current version. Once system programming has been completed, the Contractor shall deliver the data to the Contracting Officer's Representative on data entry forms and an approved electronic medium, utilizing data from the contract documents. The completed forms shall be delivered to the Contracting Officer's Representative for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires it. The Contractor shall not upload system programming until the Contracting Officer's Representative has provided written approval. The Contractor is responsible for backing up the system prior to uploading new programming data. Additional programming requirements are provided as follows:
   a. Programming for New SMS Server: The contractor shall provide all other system related programming. The contractor will be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, personnel photos, access schedules, personnel groupings) along with coordinating with Contracting Officer's Representative for device configurations, standards, and groupings. VA shall provide database to support Contractor's data entry tasks. The contractor shall anticipate a weekly coordination meeting and working with Contracting Officer's Representative to ensure data uploading is performed without incident of loss of function or data loss.
   b. Programming for Existing SMS Servers: The contractor shall perform all related system programming except for personnel data as noted. The contractor will not be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, access schedules, personnel groupings). The contractor shall anticipate a weekly coordination meeting and working alongside of Contracting Officer's Representative to

ensure data uploading is performed without incident of loss of function or data loss. System programming for SMS servers shall be performed by using the Contractor's own server and software. These servers shall not be connected to existing devices or systems at any time.

2. The Contractor shall identify and request from the Contracting Officer's Representative, any additional data needed to provide a complete and operational system as described in the contract documents.
3. Contractor and Contracting Officer's Representative coordination on programming requires a high level of coordination to ensure programming is performed in accordance with VA requirements and programming uploads do not disrupt existing systems functionality. The contractor shall anticipate a minimum a weekly coordination meeting. Contractor shall ensure data uploading is performed without incident of loss of function or data loss. The following Level of Effort Chart is provided to communicate the expected level of effort required by contractors on VA ESS projects. Calculations to determine actual levels of effort shall be confirmed by the contractor before project award.

	Description of Tasks						
Description of Systems	Develop System Loading Sheets	Coordination	Initial Set-up Configuration	Graphic Maps	System Programming	Final Checks	Level of Effort (Typical Tasks)

SMS Setup & Configuration	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., retrieve IP addresses, naming conventions, standard event descriptions, programming templates, coordinate special system needs	e.g., Load system Operating System and Application software, general system configurations	e.g., develop naming conventions, develop file folders, confirming accuracy of AutoCAD Floor Plans, convert file into jpeg file	e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization	e.g., check all system diagnostics (e.g., clients, panels)	Load and set-up 4-6 CDs and configure servers (to configure Loading and Configuring software Administrative account, audit log, Keystrokes, mouse clicks, multi-screen configuration

Electronic Entry Control Systems	e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., setup of device, door groups & schedules, REX, Locks, link graphics	e.g., performing entry testing to confirm correct set-up and configuration	e.g., creating a door, door configuration, adding request to exit, door monitors and relays, door timers, door related events (e.g., access, access denied, forced open, held open), linkages, controlled areas, advanced door monitoring, time zones, sequence of operations

Intrusion Detection Systems	e.g., enter door groups & schedules, link devices - REX, lock, & graphics	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., enter door groups & schedules, link devices - REX, lock, & graphics	e.g., walk test, device position, and masking	e.g., setting up monitoring and control points (e.g., motion sensors, glassbreaks, vibration sensor, strobes, sounders) creating intrusion zones, creating arm/disarm panel, timed sequences, time zones, icon placements on graphic maps, clearance levels, events (e.g., armed, disarmed, zone violation, device alarm activations), LCD reader messages,

CCTV Systems	e.g., programming call-ups recording	e.g., confirming device configurations, naming conventions	e.g., enter data from loading sheets; camera naming convention, sequences, configure components)		e.g., programming call-ups recording	e.g., confirm area of coverage, call-up per event generated and recording rates	e.g., setting up cameras points, recording ratios (e.g., normal, alarm event) timed recording, linkages, maps placements, call-ups
Intercoms Systems	e.g., programming events & call-ups	e.g., confirming device configurations, naming conventions, event description and narratives	e.g., enter data from loading sheets; configure components, link events, cameras, and graphics		e.g., programming events & call-ups	e.g., confirm operation, SMS event generation and camera call-up	e.g., setup linkages, events for activations, device troubles, land devices on graphic maps
Console Monitoring Components	N/A	per monitor	per monitor	per graphic map	N/A	per monitor	N/A

Note: Programming tasks are supported through the contractor's development of the Technical Data Package Submittals.	

Table 1 Contractor Level of Effort

3.7 TESTING AND ACCEPTANCE

A. Performance Requirements

1. General:

a. The Contractor shall perform contract field, performance verification, and endurance testing and make adjustments of the completed security system when permitted. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing. Written notification of planned testing shall be given to the Contracting Officer's Representative at least 60 calendar days prior to the test and after the Contractor has received written approval of the specific test procedures.

b. The COTR shall witness all testing and system adjustments during testing. Written permission shall be obtained from the Contracting Officer's Representative before proceeding with the next phase of testing. Original copies of all data produced during performance verification and endurance testing shall be turned over to the Contracting Officer's Representative at the conclusion of each phase of testing and prior to Contracting Officer's Representative approval of the test.

2. Test Procedures and Reports: The test procedures, compliant w/ VA standard test procedures, shall explain in detail, step-by-step actions and expected results demonstrating compliance with the requirements of the specification. The test reports shall be used to document results of the tests. The reports shall be delivered to the Contracting Officer's Representative within seven (7) calendar days after completion of each test.

B. Pre-Delivery Testing

1. The purpose of the pre-delivery test is to establish that a system is suitable for installation. As such, pre-delivery test shall be a mock-up of the system as planned in the contract documents. The

Contractor shall assemble the Security Test System at the Contractors local project within 50-miles of the project site, and perform tests to demonstrate the performance of the system complies with the contract requirements in accordance with the approved pre-delivery test procedures. The tests shall take place during regular daytime working hours on weekdays. Model numbers of equipment tested shall be identical to those to be delivered to the site. Original copies of all data produced during pre-delivery testing, including results of each test procedure, shall be documented and delivered to the Contracting Officer's Representative at the conclusion of pre-delivery testing and prior to Contracting Officer's Representative's approval of the test. The test report shall be arranged so all commands, stimuli, and responses are correlated to allow logical interpretation. For Existing System modifications, the contractor shall provide their own server with loaded applicable software to support PDT.

2. Test Setup: The pre-delivery test setup shall include the following:
   a. All console equipment.
      1) At least one of each type of data transmission media (DTM) and associated equipment to provide a fully integrated PACS.
      2) The number of local processors shall equal the amount required by the site design.
      3) Enough sensor simulators to provide alarm signal inputs to the system equal to the number of sensors required by the design. The alarm signals shall be manually or software generated.
      4) Contractor to prove to owner all systems are appropriately sized and configured as sized.
      5) Integration of VASS, intercom systems, other subsystems.
3. During the bidding process the contractor shall submit a request for information to the Owner to determine if a pre-delivery test will be required. If a pre-delivery test is not required, the contractor shall provide a written notification that the Pre-delivery Test is not required in their shop drawings submission.

C. Intermediate Testing

1. After completion of 30-50 percent of the installation of ESS cabinet(s) and equipment, one local and remote control stations and prior to any further work, this portion of the system must be pretested, inspected, and certified. Each item of installed equipment shall be checked to ensure appropriate FCC listing & UL certification labels are affixed, NFPA, Emergency, Safety, and JCAHCO guidelines are followed, and proper installation practices are followed. The intermediate test shall include a full operational test.

D. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a designated Government Representative and maintained on file by the Contracting Officer's Representative (COR), until completion of the entire project. The results will be compared to the Acceptance Test results.

E. Contractor's Field Testing (CFT)

1. The Contractor shall calibrate and test all equipment, verify DTM operation, place the integrated system in service, and test the integrated system. Ground rods installed by this Contractor within the base of camera poles shall be tested as specified in IEEE STD 142. The Contractor shall test all security systems and equipment, and provide written proof of a 100% operational system before a date is established for the system acceptance test. Documentation package for CFT shall include completed (fully annotated details of test details) for each device and system tested, and annotated loading sheets documenting complete testing to Contracting Officer's Representative approval. CFT test documentation package shall conform to submittal requirements outlined in this Section. The Contractor's field testing procedures shall be identical to the Contracting Officer's Representative's acceptance testing procedures. The Contractor shall provide the Contracting Officer's Representative with a written listing of all equipment and software indicating all equipment and components have been tested and passed. The Contractor shall deliver a written report to the Contracting Officer's Representative stating the installed complete system has

been calibrated, tested, and is ready to begin performance verification testing; describing the results of the functional tests, diagnostics, and calibrations; and the report shall also include a copy of the approved acceptance test procedure. Performance verification testing shall not take place until written notice by contractor is received certifying that a contractors field test was successful.

F. Performance Verification Test (PVT)

1. Test team:

   a. After the system has been pretested and the Contractor has submitted the pretest results and certification to the Contracting Officer's Representative, then the Contractor shall schedule an acceptance test to date and give the Contracting Officer's Representative written, notice as described herein, prior to the date the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative, an OEM certified representative, representative of the Contractor and other approved by the Contracting Officer's Representative. The system shall be tested utilizing the approved test equipment to certify proof of performance, FCC, UL and Emergency Service compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The Contractor shall demonstrate the completed Physical Access Control System PACS complies with the contract requirements. In addition, the Contractor shall provide written certification that the system is 100% operational prior to establishing a date for starting PVT. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The PVT will be stopped and aborted as soon as 10 technical deficiencies are found requiring correction. The Contractor shall be responsible for all travel and lodging expenses incurred for out-of-town personnel required to be present for resumption of the PVT. If the acceptance test is aborted, the re-test will commence from

the beginning with a retest of components previously tested and accepted.

3. The PVT, as specified, shall not begin until receipt of written certification that the Contractors Field Testing was successful. This shall include certification of successful completion of testing as specified in paragraph "Contractor's Field Testing", and upon successful completion of testing at any time when the system fails to perform as specified. Upon termination of testing by the Contracting Officer's Representative or Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II.
4. Upon successful completion of the acceptance test, the Contractor shall deliver test reports and other documentation, as specified, to the Contracting Officer's Representative prior to commencing the endurance test.
5. Additional Components of the PVT shall include:
   a. System Inventory
      1) All Device equipment
      2) All Software
      3) All Logon and Passwords
      4) All Cabling System Matrices
      5) All Cable Testing Documents
      6) All System and Cabinet Keys
   b. Inspection
      1) Contractor shall record an inspection punch list noting all system deficiencies. The contractor shall prepare an inspection punch list format for Contracting Officer's Representatives approval.
      2) As a minimum the punch list shall include a listing of punch list items, punch list item location, description of item problem, date noted, date corrected, and details of how item was corrected.
6. Partial PVT - At the discretion of Contracting Officer's Representative, the Performance Verification Test may be performed in part should a 100% compliant CFT be performed. In the event that a partial PVT will be performed instead of a complete PVT; the

partial PVT shall be performed by testing 10% of the system. The contractor shall perform a test of each procedure on select devices or equipment.

G. Endurance Test

1. The Contractor shall demonstrate the specified probability of detection and false alarm rate requirements of the completed system. The endurance test shall be conducted in phases as specified below. The endurance test shall not be started until the Contracting Officer's Representative notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. VA shall operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing. VA will maintain a log of all system deficiencies. The Contracting Officer's Representative may terminate testing at any time the system fails to perform as specified. Upon termination of testing, the Contractor shall commence an assessment period as described for Phase II. During the last day of the test, the Contractor shall verify the appropriate operation of the system. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the Contracting Officer's Representative prior to acceptance of the system.
2. Phase I (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the Contracting Officer's Representative. If the system experiences no failures, the Contractor may proceed directly to Phase III testing after receiving written permission from the Contracting Officer's Representative.
3. Phase II (Assessment):
   a. After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the Contracting Officer's Representative. The report shall explain in detail the

nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.

b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the Contracting Officer's Representative. The meeting shall not be scheduled earlier than five (5) business days after the Contracting Officer's Representative receives the report. As part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Contracting Officer's Representative will provide a written determine of either the restart date or require Phase I be repeated.

4. Phase III (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the COTR.
5. Phase IV (Assessment):
   1. After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the COTR. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
   2. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the COTR. The meeting shall not be scheduled earlier than five (5) business days after receipt of the report by the COTR. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions for the performance verification test. Based on the review meeting the test should not be scheduled earlier than five (5) business days after the

Contracting Officer's Representative receives the report. As a part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Contracting Officer's Representative will provide a written determine of either the restart date or require Phase III be repeated. After the conclusion of any re-testing which the Contracting Officer's Representative may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.

H. Exclusions

1. The Contractor will not be held responsible for failures in system performance resulting from the following:
   a. An outage of the main power in excess of the capability of any backup power source provided the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the PACS performed as specified.
   b. Failure of an Owner furnished equipment or communications link, provided the failure was not due to Contractor furnished equipment, installation, or software.
   c. Failure of existing Owner owned equipment, provided the failure was not due to Contractor furnished equipment, installation, or software.

- - - E N D - - -

SECTION 28 05 13
CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification the conductors and cables required for a fully functional for electronic safety and security (ESS) system.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

D. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SECURITY AND SAFETY. Requirements for infrastructure.

F. Section 31 20 00 - EARTH MOVING. For excavation and backfill for cables that are installed in conduit.

1.3 DEFINITIONS

A. BICSI: Building Industry Consulting Service International.

B. EMI: Electromagnetic interference.

C. IDC: Insulation displacement connector.

D. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

E. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

F. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

G. RCDD: Registered Communications Distribution Designer.

H. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

I. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

J. UTP: Unshielded twisted pair.

1.4 QUALITY ASSURANCE

A. See section 28 05 00, Paragraph 1.4.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certificates: Two weeks prior to final inspection, deliver to the Contracting Officer’s Representative four copies of the certification that the material is in accordance with the drawings and specifications and diagrams for cable management system.
3. Shop Drawings: Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
   a. Vertical and horizontal offsets and transitions.
   b. Clearances for access above and to the sides of cable trays.
   c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
   d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.
   e. System labeling schedules, including electronic copy of labeling schedules that are part of the cable and asset identification system of the software specified in Parts 2 and 3.
4. Wiring Diagrams. Show typical wiring schematics including the following:
   a. Workstation outlets, jacks, and jack assemblies.
   b. Patch cords.
   c. Patch panels.
5. Cable Administration Drawings: As specified in Part 3 "Identification" Article.
6. Project planning documents as specified in Part 3.

7. Maintenance Data: For wire and cable to include in maintenance manuals.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society of Testing Material (ASTM):

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

C. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

D. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-05.....Thermoset-Insulated Wires and Cables

83-08.....Thermoplastic-Insulated Wires and Cables

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514B-04.....Fittings for Cable and Conduit

1479-03.....Fire Tests of Through-Penetration Fire Stops

1.7 DELIVERY, STORAGE, AND HANDLING

A. Test cables upon receipt at Project site.

1. Test optical fiber cable to determine the continuity of the strand end to end. Use optical loss test set

2. Test optical fiber cable on reels. Use an optical time domain reflectometer to verify the cable length and locate cable defects, splices, and connector; include the loss value of each. Retain test data and include the record in maintenance data.
3. Test each pair of UTP cable for open and short circuits.

1.8 PROJECT CONDITIONS

A. Environmental Limitations: Do not deliver or install UTP, optical fiber, and coaxial cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

PART 2 - PRODUCTS

2.1 GENERAL

A. General: All cabling locations shall be in conduit systems as outlined in Division 28 unless a waiver is granted in writing or an exception is noted on the construction drawings.

B. Support of Open Cabling: NRTL labeled for support of [Category 6A] cabling, designed to prevent degradation of cable performance and pinch points that could damage cable.
   1. Support brackets with cable tie slots for fastening cable ties to brackets.
   2. Lacing bars and spools.
   3. Straps and other devices.

C. Cable Trays:
   1. Cable Tray Materials: Metal, suitable for indoors, and protected against corrosion by [electroplated zinc galvanizing, complying with ASTM B 633, Type 1, not less than 0.000472 inch (0.012 mm) thick] [hot-dip galvanizing, complying with ASTM A 123/A 123M Grade 0.55, not less than 0.002165 inch (0.055 mm) thick].
   2. Basket Cable Trays: [6 inches (150 mm) wide and 2 inches (50 mm) deep. Wire mesh spacing shall not exceed 2 by 4 inches (50 by 100 mm).
   3. Trough Cable Trays: [Nominally 6 inches (150 mm)] wide.
   4. Ladder Cable Trays: [Nominally 18 inches (455 mm)] <Insert dimension> wide, and a rung spacing of [12 inches (305 mm)]

5. Channel Cable Trays: One-piece construction, [nominally 4 inches (100 mm)] wide. Slot spacing shall not exceed 4-1/2 inches (115 mm) o.c.
6. Solid-Bottom Cable Trays: One-piece construction, [nominally 12 inches (305 mm)] > wide. Provide [with] solid covers.

D. Conduit and Boxes: Comply with requirements in Division 28 Section "Conduits and Backboxes for Electrical Systems."[Flexible metal conduit shall not be used.]
1. Outlet boxes shall be no smaller than 2 inches (50 mm) wide, 3 inches (75 mm) high, and 2-1/2 inches (64 mm) deep.

2.2 BACKBOARDS

A. Backboards: Plywood, [fire-retardant treated,] 3/4 by 48 by 96 inches (19 by 1220 by 2440 mm). Comply with requirements for plywood backing panels in Division 06 Section "Rough Carpentry".

2.3 UTP CABLE

A. Description: 100-ohm, 4-pair UTP, formed into 25-pair binder groups covered with a blue thermoplastic jacket.
1. Comply with ICEA S-90-661 for mechanical properties.
2. Comply with TIA/EIA-568-B.1 for performance specifications.
3. Comply with TIA/EIA-568-B.2, [Category 5e] [Category 6].
4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
   a. Communications, General Purpose: Type CM or CMG [; or MPP, CMP, MPR, CMR, MP, or MPG].
   b. Communications, Plenum Rated: Type CMP [; or MPP], complying with NFPA 262.
   c. Communications, Riser Rated: Type CMR [; or MPP, CMP, or MPR], complying with UL 1666.
   d. Communications, Limited Purpose: Type CMX[; or MPP, CMP, MPR, CMR, MP, MPG, CM, or CMG].
   e. Multipurpose: Type MP or MPG [; or MPP or MPR].
   f. Multipurpose, Plenum Rated: Type MPP, complying with NFPA 262.
   g. Multipurpose, Riser Rated: Type MPR [or MPP], complying with UL 1666.

2.4 UTP CABLE HARDWARE

A. UTP Cable Connecting Hardware: IDC type, using modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of the same category or higher.

B. Connecting Blocks: [110-style for Category 5e] . Provide blocks for the number of cables terminated on the block, plus [25] <Insert percentage> percent spare. Integral with connector bodies, including plugs and jacks where indicated.

2.5 OPTICAL FIBER CABLE

A. Description: Multimode, [50/125]-micrometer, [24]-fiber, [nonconductive,] tight buffer, optical fiber cable.

1. Comply with ICEA S-83-596 for mechanical properties.
2. Comply with TIA/EIA-568-B.3 for performance specifications.
3. Comply with [TIA/EIA-492AAAA-B] [detailed specifications.
4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:
   a. General Purpose, Nonconductive: Type OFN or OFNG [, or OFNR, OFNP].
   b. Plenum Rated, Nonconductive: Type OFNP, complying with NFPA 262.
   c. Riser Rated, Nonconductive: Type OFNR [or OFNP], complying with UL 1666.
   d. General Purpose, Conductive: Type OFC or OFCG [; or OFNG, OFN, OFCR, OFNR, OFCP, or OFNP].
   e. Plenum Rated, Conductive: Type OFCP [or OFNP], complying with NFPA 262.
   f. Riser Rated, Conductive: Type OFCR [; or OFNR, OFCP, or OFNP], complying with UL 1666.
5. Conductive cable shall be [aluminum] armored type.
6. Maximum Attenuation: [3.50] dB/km at 850 nm; [1.5] dB/km at 1300 nm.
7. Minimum Modal Bandwidth: 160 MHz-km at 850 nm; 500 MHz-km at 1300 nm.

B. Jacket:

1. Jacket Color: [Aqua for 50/125-micrometer cable]
2. Cable cordage jacket, fiber, unit, and group color shall be according to TIA/EIA-598-B.

3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

2.6 OPTICAL FIBER CABLE HARDWARE

A. Cable Connecting Hardware: Meet the Optical Fiber Connector Intermateability Standards (FOCIS) specifications of TIA/EIA-604-2, TIA/EIA-604-3-A, and TIA/EIA-604-12. Comply with TIA/EIA-568-D.2.
   1. Quick-connect, simplex and duplex, [Type LC] connectors. Insertion loss shall be not more than 0.75 dB.
   2. Type SFF connectors may be used in termination racks, panels, and equipment packages.

2.7 COAXIAL CABLE

A. General Coaxial Cable Requirements: Broadband type, recommended by cable manufacturer specifically for broadband data transmission applications. Coaxial cable and accessories shall have 75-ohm nominal impedance with a return loss of 20 dB maximum from 7 to 806 MHz.

B. RG-11/U: NFPA 70, Type CATV.
   1. No. [14] AWG, solid, copper-covered steel conductor.
   2. Gas-injected, foam-PE insulation.
   3. Double shielded with 100 percent aluminum polyester tape and 60 percent aluminum braid.
   4. Jacketed with sunlight-resistant, black PVC or PE.
   5. Suitable for outdoor installations in ambient temperatures ranging from minus 40 to plus 85 deg C.

C. RG59/U: NFPA 70, Type CATVR.
   1. No. [20] AWG, solid, silver-plated, copper-covered steel conductor.
   2. Gas-injected, foam-PE insulation.
   3. Triple shielded with 100 percent aluminum polyester tape and 95 percent aluminum braid; covered by aluminum foil with grounding strip.
   4. Color-coded PVC jacket.

D. RG-6/U: NFPA 70, Type CATV or CM.
   1. No. [16] AWG, solid, copper-covered steel conductor; gas-injected, foam-PE insulation.
   2. Double shielded with 100 percent aluminum-foil shield and 60 percent aluminum braid.
   3. Jacketed with black PVC or PE.

4. Suitable for indoor installations.

E. RG59/U: NFPA 70, Type CATV.

1. No. [20] AWG, solid, copper-covered steel conductor; gas-injected, foam-PE insulation.
2. Double shielded with 100 percent aluminum polyester tape and 40 percent aluminum braid.
3. PVC jacket.

F. RG59/U (Plenum Rated): NFPA 70, Type CMP.

1. No. [20] AWG, solid, copper-covered steel conductor; foam fluorinated ethylene propylene insulation.
2. Double shielded with 100 percent aluminum-foil shield and 65 percent aluminum braid.
3. Copolymer jacket.

G. NFPA and UL compliance, listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 1655, and with NFPA 70 "Radio and Television Equipment" and "Community Antenna Television and Radio Distribution" Articles. Types are as follows:

1. CATV Cable: Type CATV[, or CATVP or CATVR].
2. CATV Plenum Rated: Type CATVP, complying with NFPA 262.
3. CATV Riser Rated: Type CATVR[; or CATVP, CATVR, or CATV], complying with UL 1666.
4. CATV Limited Rating: Type CATVX.

2.8 COAXIAL CABLE HARDWARE

A. Coaxial-Cable Connectors: Type BNC, 75 ohms.

2.9 RS-232 CABLE

A. Standard Cable: NFPA 70, Type CM.

1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Polypropylene insulation.
3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
4. PVC jacket.
5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.

1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Plastic insulation.
3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
4. Plastic jacket.
5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with NFPA 262.

2.10 RS-485 CABLE

A. Standard Cable: NFPA 70, Type CM[or CMG].
1. Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Fluorinated ethylene propylene jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.11 LOW-VOLTAGE CONTROL CABLE

A. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.

3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with NFPA 262.

C. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

D. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Plastic jacket.
5. Flame Resistance: NFPA 262, Flame Test.

2.12 CONTROL-CIRCUIT CONDUCTORS

A. Class 1 Control Circuits: Stranded copper, Type THHN-THWN, in raceway complying with UL 83.

B. Class 2 Control Circuits: Stranded copper, [Type THHN-THWN, in raceway] [power-limited cable, concealed in building finishes] [power-limited tray cable, in cable tray] complying with UL 83.

C. Class 3 Remote-Control and Signal Circuits: Stranded copper, Type TW or TF, complying with UL 83.

2.13 FIRE ALARM WIRE AND CABLE

A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

B. Signaling Line Circuits: Twisted, shielded pair, [not less than] [No. 18 AWG]] [size as recommended by system manufacturer].
1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a 2-hour rating.

C. Non-Power-Limited Circuits: Solid-copper conductors with 600-V rated, 75 deg C, color-coded insulation.

1. Low-Voltage Circuits: No. 16 AWG, minimum.
2. Line-Voltage Circuits: No. 12 AWG, minimum.
3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor[with outer jacket] with red identifier stripe, NTRL listed for fire alarm and cable tray installation, plenum rated, and complying with requirements in UL 2196 for a 2-hour rating.

2.14 IDENTIFICATION PRODUCTS

A. Comply with UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

2.15 SOURCE QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to evaluate cables.
B. Factory test UTP and optical fiber cables on reels according to TIA/EIA-568-B.1.
C. Factory test UTP cables according to TIA/EIA-568-B.2.
D. Factory test multimode optical fiber cables according to TIA/EIA-526-14-A and TIA/EIA-568-B.3.
E. Factory sweep test coaxial cables at frequencies from 5 MHz to 1 GHz. Sweep test shall test the frequency response, or attenuation over frequency, of a cable by generating a voltage whose frequency is varied through the specified frequency range and graphing the results.
F. Cable will be considered defective if it does not pass tests and inspections.
G. Prepare test and inspection reports.

2.16 WIRE LUBRICATING COMPOUND

A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.
B. Shall not be used on wire for isolated type electrical power systems.

2.17 FIREPROOFING TAPE

A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.
B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.
C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.

D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.

E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

PART 3 - EXECUTION

3.1 INSTALLATION OF CONDUCTORS AND CABLES

A. Comply with NECA 1.

B. General Requirements for Cabling:

1. Comply with TIA/EIA-568-B.1.
2. Comply with BICSI ITSIM, Ch. 6, "Cable Termination Practices."
3. Install 110-style IDC termination hardware unless otherwise indicated.
4. Terminate all conductors; no cable shall contain un-terminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
5. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
6. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIM, "Cabling Termination Practices" Chapter. Install lacing bars and distribution spools.
7. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
8. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
9. Pulling Cable:
   a. Comply with BICSI ITSIM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
   b. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
   c. Use ropes made of nonmetallic material for pulling feeders.

d. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the Contracting Officer's Representative

e. Pull in multiple cables together in a single conduit.

C. Splice cables and wires where necessary only in outlet boxes, junction boxes, or pull boxes.

1. Splices and terminations shall be mechanically and electrically secure.
2. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

D. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.

E. Unless otherwise specified in other sections install wiring and connect to equipment/devices to perform the required functions as shown and specified.

F. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.

G. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

H. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.

I. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.

J. UTP Cable Installation:

1. Comply with TIA/EIA-568-C.
2. Do not untwist UTP cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.

K. Optical Fiber Cable Installation:

1. Comply with TIA/EIA-568-D.2.

2. Cable shall be terminated on connecting hardware that is rack or cabinet mounted.

L. Open-Cable Installation:

1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
2. Suspend copper cable not in a wireway or pathway a minimum of 8 inches (200 mm) above ceilings by cable supports not more than [60 inches (1525 mm)] apart.
3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.

M. Installation of Cable Routed Exposed under Raised Floors:

1. Install plenum-rated cable only.
2. Install cabling after the flooring system has been installed in raised floor areas.
3. Coil cable [72 inches (1830 mm)] long shall be neatly coiled not less than [12 inches (300 mm)] in diameter below each feed point.

N. Outdoor Coaxial Cable Installation:

1. Install outdoor connections in enclosures complying with NEMA 250, Type 4X. Install corrosion-resistant connectors to keep out moisture.
2. Attach antenna lead-in cable to support structure at intervals not exceeding 36 inches (915 mm).

O. Separation from EMI Sources:

1. Comply with BICSI TDMM and TIA/EIA-569-A recommendations for separating unshielded copper voice and data communication cable from potential EMI sources, including electrical power lines and equipment.
2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).

c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).

3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (75 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).
5. Separation between Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).
6. Separation between Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

3.2 FIRE ALARM WIRING INSTALLATION

A. Comply with NECA 1 and NFPA 72.

B. Wiring Method: Install wiring in metal raceway according to Division 28 Section CONDUITS AND BACKBOXES FOR ELECTRICAL SYSTEMS."
   1. Install plenum cable in environmental air spaces, including plenum ceilings.
   2. Fire alarm circuits and equipment control wiring associated with the fire alarm system shall be installed in a dedicated raceway system. This system shall not be used for any other wire or cable.

C. Wiring Method:
   1. Cables and raceways used for fire alarm circuits, and equipment control wiring associated with the fire alarm system, may not contain any other wire or cable.

2. Fire-Rated Cables: Use of 2-hour, fire-rated fire alarm cables, NFPA 70, Types MI and CI, is[not] permitted.
3. Signaling Line Circuits: Power-limited fire alarm cables [may] [shall not] be installed in the same cable or raceway as signaling line circuits.

D. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks. Mark each terminal according to the system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes, cabinets, or equipment enclosures where circuit connections are made.

F. Color-Coding: Color-code fire alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use different colors for visible alarm-indicating devices. Paint fire alarm system junction boxes and covers red.

G. Risers: Install at least two vertical cable risers to serve the fire alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent the receipt or transmission of signals from other floors or zones.

H. Wiring to Remote Alarm Transmitting Device: 1-inch (25-mm) conduit between the fire alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

3.3 CONTROL CIRCUIT CONDUCTORS

A. Minimum Conductor Sizes:

1. Class 1 remote-control and signal circuits, No. 14 AWG.
2. Class 2 low-energy, remote-control and signal circuits, No. 16 AWG.

3. Class 3 low-energy, remote-control, alarm and signal circuits, No. 12 AWG.

3.4 CONNECTIONS

A. Comply with requirements in Division 28 Section, PHYSICAL ACCESS CONTROL for connecting, terminating, and identifying wires and cables.

B. Comply with requirements in Division 28 Section "INTRUSION DETECTION" for connecting, terminating, and identifying wires and cables.

C. Comply with requirements in Division 28 Section "VIDEO SURVEILLANCE" for connecting, terminating, and identifying wires and cables.

D. Comply with requirements in Division 28 Section "ELECTRONIC PERSONAL PROTECTION SYSTEMS" for connecting, terminating, and identifying wires and cables.

E. Comply with requirements in Division 28 Section "FIRE DETECTION AND ALARM" for connecting, terminating, and identifying wires and cables.

3.5 FIRESTOPPING

A. Comply with requirements in Division 07 Section "PENETRATION FIRESTOPPING."

B. Comply with TIA/EIA-569-A, "Firestopping" Annex A.

C. Comply with BICSI TDMM, "Firestopping Systems" Article.

3.6 GROUNDING

A. For communications wiring, comply with ANSI-J-STD-607-A and with BICSI TDMM, "Grounding, Bonding, and Electrical Protection" Chapter.

B. For low-voltage wiring and cabling, comply with requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY."

3.7 IDENTIFICATION

A. Identify system components, wiring, and cabling complying with TIA/EIA-606-A.

B. Install a permanent wire marker on each wire at each termination.

C. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

D. Wire markers shall retain their markings after cleaning.

E. In each handhole, install embossed brass tags to identify the system served and function.

3.8 FIELD QUALITY CONTROL

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Visually inspect UTP and optical fiber cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA/EIA-568-B.1.
2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.
   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
4. Optical Fiber Cable Tests:
   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.1. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
   b. Link End-to-End Attenuation Tests:
      1) Multimode Link Measurements: Test at 850 or 1300 nm in 1 direction according to TIA/EIA-526-14-A, Method B, One Reference Jumper.
      2) Attenuation test results for links shall be less than 2.0 dB. Attenuation test results shall be less than that calculated according to equation in TIA/EIA-568-B.1.
5. Coaxial Cable Tests: Comply with requirements in Division 27 Section "Master Antenna Television System."

D. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.

E. End-to-end cabling will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

3.9 EXISITNG WIRING

A. Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

SECTION 28 05 26
GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY
PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification of the grounding and bonding required for a fully functional Electronic Safety and Security (ESS) system.

B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, grounding electrodes.

C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 26 41 00 - FACILITY LIGHTNING PROTECTION. Requirements for a lightning protection system.

C. Section 28 05 00 - REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS. For general electrical requirements, quality assurance, coordination, and project conditions that are common to more than one section in Division 28.

D. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for low voltage power and lighting wiring.

1.3 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

B. Shop Drawings:

1. Clearly present enough information to determine compliance with drawings and specifications.
2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.

C. Test Reports: Provide certified test reports of ground resistance.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the Contracting Officer's Representative:

1. Certification that the materials and installation are in accordance with the drawings and specifications.
2. Certification by the contractor that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Society for Testing and Materials (ASTM):

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07.....National Electrical Safety Code

D. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

99-2005.....Health Care Facilities

E. Underwriters Laboratories, Inc. (UL):

44-05 .....Thermoset-Insulated Wires and Cables

83-08 .....Thermoplastic-Insulated Wires and Cables

467-07 .....Grounding and Bonding Equipment

486A-486B-03 .....Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

A. Equipment grounding conductors shall be UL 83 insulated stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.

B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be ASTM B1 solid bare copper wire.

2.2 GROUND RODS

A. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.

B. Quantity of rods shall be as required to obtain the specified ground resistance.

2.3 SPLICES AND TERMINATION COMPONENTS

A. Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).2.4 ground connections

B. Listed and labeled by an NRTL acceptable to authorities having jurisdiction for applications in which used and for specific types, sizes, and combinations of conductors and other items connected.

C. Below Grade: Exothermic-welded type connectors.

D. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.
5. Bolted Connectors for Conductors and Pipes: Copper or copper alloy, pressure type with at least two bolts.
   a) Pipe Connectors: Clamp type, sized for pipe.
6. Welded Connectors: Exothermic-welding kits of types recommended by kit manufacturer for materials being joined and installation conditions.

2.4 EQUIPMENT RACK AND CABINET GROUND BARS

A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x ¾ inch).

2.5 GROUND TERMINAL BLOCKS

A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.6 SPLICE CASE GROUND ACCESSORIES

A. Splice case grounding and bonding accessories shall be supplied by the splice case manufacturer when available. Otherwise, use 16 mm² (6 AWG) insulated ground wire with shield bonding connectors.

2.7 COMPUTER ROOM GROUND

A. Provide 50mm2 (1/0 AWG) bare copper grounding conductors bolted at mesh intersections to form an equipotential grounding grid. The equipotential grounding grid shall form a 600mm (24 inch) mesh pattern. The grid shall be bonded to each of the access floor pedestals.

2.8 SECURITY CONTROL ROOM GROUND

A. Provide 50mm2 (1/0 AWG) stranded copper grounding conductor(s) color coded with a green jacket, bolted at the Room's Communications System Grounding Electrode Cooper Plate and circulate to each equipment rack ground buss bar through the wire management system. Connect each equipment rack, wire management system's cable tray, ladder, etc. to the circulating ground wire with a minimum 25mm2 (4AWG) stranded Cooper Wire, color coded with a green jacket.
   1. Connect each equipment rack ground buss bar to the circulating ground wire a indicated in 2.9.A, and
   2. Connect each additional room item to the circulating ground wire as indicated in 2.9.A.

PART 3 - EXECUTION

3.1 GENERAL

A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.

B. System Grounding:
   1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
   2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

A. Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 CORROSION INHIBITORS

A. When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.4 CONDUCTIVE PIPING

A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

3.5 COMPUTER ROOM/SECURITY EQUIPMENT ROOM GROUNDING

A. Conduit: Ground and bond metallic conduit systems as follows:
   1. Ground metallic service conduit and any pipes entering or being routed within the computer room at each end using 16 mm² (6AWG) bonding jumpers.
   2. Bond at all intermediate metallic enclosures and across all joints using 16 mm² (6 AWG) bonding jumpers.

3.6 WIREWAY GROUNDING

A. Ground and Bond Metallic Wireway Systems as follows:
   1. Bond the metallic structures of wireway to provide 100 percent electrical continuity throughout the wireway system by connecting a 16 mm² (6 AWG) bonding jumper at all intermediate metallic enclosures and across all section junctions.
   2. Install insulated 16 mm² (6 AWG) bonding jumpers between the wireway system bonded as required in paragraph 1 above, and the closest building ground at each end and approximately every 16 meters (50 feet).
   3. Use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and cross all section junctions.
   4. Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 meters.

3.7 LIGHTNING PROTECTION SYSTEM

A. Bond the lightning protection system to earth ground externally to the building. Under no condition shall the electrical system's third of fourth ground electrode system, or the telecommunications system circulating ground system be connected to the lightning protection system. The Facility's structural steel may be used to connect the lightning protection system at the direction of the Contracting Officer's Representative certified by an independent certified grounding contractor.

3.8 EXTERIOR LIGHT/CAMERA POLES

A. Provide 20 ft [6.1 M] of No. 4 bare copper coiled at bottom of pole base excavation prior to pour, plus additional unspliced length in and above foundation as required to reach pole ground stud.

3.9 GROUND RESISTANCE

A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

C. Services at power company interface points shall comply with the power company ground resistance requirements.

D. Below-grade connections shall be visually inspected by the Contracting Officer's Representative prior to backfilling. The contractor shall notify the Contracting Officer's Representative 24 hours before the connections are ready for inspection.

3.10 GROUND ROD INSTALLATION

A. Drive each rod vertically in the earth, not less than 3000 mm (10 feet) in depth.

B. Where permanently concealed ground connections are required, make the connections by the exothermic process to form solid metal joints. Make accessible ground connections with mechanical pressure type ground connectors.

C. Where rock prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified resistance.

3.11 GROUNDING FOR RF/EMI CONTROL

A. Install bonding jumpers to bond all conduit, cable trays, sleeves and equipment for low voltage signaling and data communications circuits. Bonding jumpers shall consist of 100 mm (4 inches) wide copper strip or two 6 mm² (10 AWG) copper conductors spaced minimum 100 mm (4 inches) apart. Use 16 mm² (6 AWG) copper where exposed and subject to damage.

B. Comply with the following when shielded cable is used for data circuits.

1. Shields shall be continuous throughout each circuit.
2. Connect shield drain wires together at each circuit connection point and insulate from ground. Do not ground the shield.
3. Do not connect shields from different circuits together.
4. Shield shall be connected at one end only. Connect shield to signal reference at the origin of the circuit. Consult with equipment manufacturer to determine signal reference.

3.12 LABELING

A. Comply with requirements in Division 26 Section "ELECTRICAL IDENTIFICATION" Article for instruction signs. The label or its text shall be green.

B. Install labels at the telecommunications bonding conductor and grounding equalizer and at the grounding electrode conductor where exposed.

1. Label Text: "If this connector or cable is loose or if it must be removed for any reason, notify the facility manager."

3.13 FIELD QUALITY CONTROL

A. Perform tests and inspections.

B. Tests and Inspections:
   1. After installing grounding system but before permanent electrical circuits have been energized, test for compliance with requirements.
   2. Inspect physical and mechanical condition. Verify tightness of accessible, bolted, electrical connections with a calibrated torque wrench according to manufacturer's written instructions.
   3. Test completed grounding system at each location where a maximum ground-resistance level is specified, at service disconnect enclosure grounding terminal at individual ground rods. Make tests at ground rods before any conductors are connected.
      a. Measure ground resistance no fewer than two full days after last trace of precipitation and without soil being moistened by any means other than natural drainage or seepage and without chemical treatment or other artificial means of reducing natural ground resistance.
      b. Perform tests by fall-of-potential method according to IEEE 81.
C. Grounding system will be considered defective if it does not pass tests and inspections.
D. Prepare test and inspection reports.
E. Report measured ground resistances that exceed the following values:
   1. Power Distribution Units or Panel boards Serving Electronic Equipment: 3 ohm(s).
   2. Manhole Grounds: 10 ohms.
F. Excessive Ground Resistance: If resistance to ground exceeds specified values, notify Architect promptly and include recommendations to reduce ground resistance.

- - - E N D - - -

SECTION 28 05 28.33
CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY
PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing certification of the conduit, fittings, and boxes to form a complete, coordinated, raceway system(s). Conduits and when approved separate UL Certified and Listed partitioned telecommunications raceways are required for a fully functional Electronic Safety and Security (ESS) system. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 06 10 00 - ROUGH CARPENTRY. Requirements for mounting board for communication closets.

C. Section 07 84 00 - FIRESTOPPING. Requirements for sealing around penetrations to maintain the integrity of fire rated construction.

D. Section 07 60 00 - FLASHING AND SHEET METAL. Requirements for fabrications for the deflection of water away from the building envelope at penetrations.

E. Section 07 92 00 - JOINT SEALANTS. Requirements for sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

F. Section 09 91 00 - PAINTING. Requirements for identification and painting of conduit and other devices.

G. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general electrical requirements, general arrangement of the contract documents, coordination, quality assurance, project conditions, equipment and materials, and items that is common to more than one section of Division 28.

H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

I. Section 31 20 00 - EARTH MOVING. For bedding of conduits.

1.3 DEFINITIONS

A. EMT: Electrical metallic tubing.

B. ENT: Electrical nonmetallic tubing.

C. EPDM: Ethylene-propylene-diene terpolymer rubber.

D. FMC: Flexible metal conduit.

E. IMC: Intermediate metal conduit.

F. LFMC: Liquidtight flexible metal conduit.

G. LFNC: Liquidtight flexible nonmetallic conduit.

H. NBR: Acrylonitrile-butadiene rubber.

I. RNC: Rigid nonmetallic conduit.

1.4 QUALITY ASSURANCE

A. Refer to Paragraph 1.4 Quality Assurance, in Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

1.5 SUBMITTALS

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Furnish the following:

B. Shop Drawings:

1. Size and location of main feeders;
2. Size and location of panels and pull boxes
3. Layout of required conduit penetrations through structural elements.
4. The specific item proposed and its area of application shall be identified on the catalog cuts.

C. Certification: Prior to final inspection, deliver to the Contracting Officer’s Representative four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

D. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

E. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.

1. Custom enclosures and cabinets.
2. Handholes and boxes for underground wiring, including the following:
   a. Duct entry provisions, including locations and duct sizes.
   b. Frame and cover design.
   c. Grounding details.

d. Dimensioned locations of cable rack inserts, and pulling-in and lifting irons.

e. Joint details.

F. Coordination Drawings: Conduit routing plans, drawn to scale, on which the following items are shown and coordinated with each other, based on input from installers of the items involved:

1. Structural members in the paths of conduit groups with common supports.
2. HVAC and plumbing items and architectural features in the paths of conduit groups with common supports.

G. Manufacturer Seismic Qualification Certification: Submit certification that enclosures and cabinets and their mounting provisions, including those for internal components, will withstand seismic forces defined in Division 16 Section "Electrical Supports and Seismic Restraints." Include the following:

1. Basis for Certification: Indicate whether withstand certification is based on actual test of assembled components or on calculation.
   a. The term "withstand" means "the cabinet or enclosure will remain in place without separation of any parts when subjected to the seismic forces specified [and the unit will retain its enclosure characteristics, including its interior accessibility, after the seismic event]."
2. Dimensioned Outline Drawings of Equipment Unit: Identify center of gravity and locate and describe mounting and anchorage provisions.
3. Detailed description of equipment anchorage devices on which the certification is based and their installation requirements.

I. Source quality-control test reports.

1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. National Electrical Manufacturers Association (NEMA):

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

C. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

50-07.....Enclosures for Electrical Equipment

360-09.....Liquid-Tight Flexible Steel Conduit

467-07.....Grounding and Bonding Equipment

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

514C-02.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

1242-06.....Intermediate Metal Conduit

PART 2 - PRODUCTS

2.1 GENERAL

A. Conduit Size: In accordance with the NEC, but not less than 20 mm (3/4 inch) unless otherwise shown.

2.2.CONDUIT

A. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.

B. Rigid aluminum: Shall Conform to UL 6A, ANSI C80.5.

C. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.

D. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 volts or less.

E. Flexible galvanized steel conduit: Shall Conform to UL 1.

F. Liquid-tight flexible metal conduit: Shall Conform to UL 360.

G. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high-density polyethylene (PE).

2.3.WIREWAYS AND RACEWAYS

A. Surface metal raceway: Shall Conform to UL 5.

2.4.CONDUIT FITTINGS

A. Rigid steel and IMC conduit fittings:
   1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   2. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   3. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   4. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   5. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
   6. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

B. Rigid aluminum conduit fittings:
   1. Standard threaded couplings, locknuts, bushings, and elbows: Malleable iron, steel, or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.
   2. Locknuts and bushings: As specified for rigid steel and IMC conduit.
   3. Set screw fittings: Not permitted for use with aluminum conduit.

C. Electrical metallic tubing fittings:
   1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   2. Only steel or malleable iron materials are acceptable.

3. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
4. Indent type connectors or couplings are prohibited.
5. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

D. Flexible steel conduit fittings:
1. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
2. Clamp type, with insulated throat.

E. Liquid-tight flexible metal conduit fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.

F. Direct burial plastic conduit fittings:
1. Fittings shall meet the requirements of UL 514C and NEMA TC3.
2. As recommended by the conduit manufacturer.

G. Surface metal raceway fittings: As recommended by the raceway manufacturer.

H. Expansion and deflection couplings:
1. Conform to UL 467 and UL 514B.
2. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30-degree angular deflections.
3. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
4. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

2.5 CONDUIT SUPPORTS

A. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.

B. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.

C. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.

D. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

2.6 OUTLET, JUNCTION, AND PULL BOXES

A. UL-50 and UL-514A.

B. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.

C. Nonmetallic Outlet and Device Boxes: NEMA OS 2.

D. Metal Floor Boxes: Cast or sheet metal, semi-adjustable, rectangular.

E. Sheet metal boxes: Galvanized steel, except where otherwise shown.

F. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

2.7 CABINETS

A. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.

B. Hinged door in front cover with flush latch and concealed hinge.

C. Key latch to match panelboards.

D. Metal barriers to separate wiring of different systems and voltage.

E. Accessory feet where required for freestanding equipment.

2.8 WIREWAYS

A. Equip with hinged covers, except where removable covers are shown.

2.9 WARNING TAPE

A. Standard, 4-Mil polyethylene 76 mm (3 inches) wide tape non-detectable type, red with black letters, and imprinted with “CAUTION BURIED ELECTRONIC SAFETY AND SECURITY CABLE BELOW”.

2.10 HANDHOLES AND BOXES FOR EXTERIOR UNDERGROUND WIRING

A. Description: Comply with SCTE 77.
   1. Color of Frame and Cover: Gray.
   2. Configuration: Units shall be designed for flush burial and have closed bottom, unless otherwise indicated.
   3. Cover: Weatherproof, secured by tamper-resistant locking devices and having structural load rating consistent with enclosure.
   4. Cover Finish: Nonskid finish shall have a minimum coefficient of friction of 0.50.
   5. Cover Legend: Molded lettering, as indicated for each service.
   6. Conduit Entrance Provisions: Conduit-terminating fittings shall mate with entering ducts for secure, fixed installation in enclosure wall.
   7. Handholes 300 mm wide by 600 mm long (2 inches wide by 24 inches long) and larger shall have inserts for cable racks and pulling-in irons installed before concrete is poured.

B. Polymer-Concrete Handholes and Boxes with Polymer-Concrete Cover: Molded of sand and aggregate, bound together with polymer resin, and reinforced with steel or fiberglass or a combination of the two.

C. Fiberglass Handholes and Boxes with Polymer-Concrete Frame and Cover: Sheet-molded, fiberglass-reinforced, polyester-resin enclosure joined to polymer-concrete top ring or frame.

D. Fiberglass Handholes and Boxes: Molded of fiberglass-reinforced polyester resin, with covers of [polymer concrete].

2.11 SLEEVES FOR RACEWAYS

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.

B. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.

C. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch (1.3- or 3.5-mm) thickness as indicated and of length to suit application.

D. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 84 00 "FIRESTOPPING."

2.12 SLEEVE SEALS

A. Description: Modular sealing device, designed for field assembly, to fill annular space between sleeve and cable.

1. Sealing Elements: [NBR] interlocking links shaped to fit surface of cable or conduit. Include type and number required for material and size of raceway or cable.
2. Pressure Plates: [[Carbon steel] Include two for each sealing element.
3. Connecting Bolts and Nuts: [Carbon steel with corrosion-resistant coating] [of length required to secure pressure plates to sealing elements. Include one for each sealing element.

2.13 GROUT

A. Nonmetallic, Shrinkage-Resistant Grout: ASTM C 1107, factory-packaged, nonmetallic aggregate grout, noncorrosive, non staining, mixed with water to consistency suitable for application and a 30-minute working time. WIRELINE DATA TRANSMISSION MEDIA FOR SECURITY SYSTEMS

PART 3 - EXECUTION

3.1 PENETRATIONS

A. Cutting or Holes:

1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the Contracting Officer’s Representative prior to drilling through structural sections.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the Contracting Officer’s Representative as required by limited working space.

B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, "JOINT SEALANTS".

3.2 INSTALLATION, GENERAL

A. Install conduit as follows:

1. In complete runs before pulling in cables or wires.
2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
5. Mechanically continuous.
6. Independently support conduit at 2.4 m (8 foot) on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
7. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, "FLASHING AND SHEET METAL".
12. Do not use aluminum conduits in wet locations.
13. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:

1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.

3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as shown.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Contracting Officer's Representative.

D. Fire Alarm:

1. Fire alarm conduit shall be painted red (a red "top-coated" conduit from the conduit manufacturer may be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, "FIRE DETECTION AND ALARM".

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only when the following occurs:
   a. Where shown on the structural drawings.
   b. As approved by the Contracting Officer's Representative prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inch) thick is prohibited.
   a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
   b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
   c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

B. Furred or Suspended Ceilings and in Walls:
   1. Conduit for conductors above 600 volts:
      a. Rigid steel or rigid aluminum.
      b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
   2. Conduit for conductors 600 volts and below:
      a. Rigid steel, IMC, rigid aluminum, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
   3. Align and run conduit parallel or perpendicular to the building lines.
   4. Connect recessed lighting fixtures to conduit runs with maximum 1800 mm (6 feet) of flexible metal conduit extending from a junction box to the fixture.
   5. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
B. Conduit for Conductors 600 volts and below:
   1. Rigid steel, IMC, rigid aluminum, or EMT. Different types of conduits mixed indiscriminately in the system is prohibited.
C. Align and run conduit parallel or perpendicular to the building lines.
D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
F. Surface metal raceways: Use only where shown.
G. Painting:
   1. Paint exposed conduit as specified in Section09 91 00, “PAINTING”.
   2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, “PAINTING” for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.

C. Install expansion and deflection couplings where shown.

D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 375 mm (15 inches) of slack flexible conduit. Flexible conduit shall have a copper green ground bonding jumper installed.

3.6 CONDUIT SUPPORTS, INSTALLATION

A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:

a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts are permitted.
G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.
L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

A. Boxes for Concealed Conduits:
1. Flush mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes).

E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 100 mm (4 inches) square by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.

F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".

G. On all Branch Circuit junction box covers, identify the circuits with black marker.

3.8 ELECTRONIC SAFETY AND SECURITY CONDUIT

A. Install the electronic safety and security raceway system as shown on drawings.

B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.

C. All conduit ends shall be equipped with insulated bushings.

D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.

E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.

F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.

G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.

H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.

I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
¾	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified on the wall of communication closets where shown on drawings. Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.

K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

3.9 COMMISSIONING (NOT USED)

- - - E N D - - -

SECTION 28 13 00
PHYSICAL ACCESS CONTROL SYSTEM

PART 1 – GENERAL

1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification of a complete and fully operating Physical Access Control System, hereinafter referred to as the PACS.

B. This Section includes a Physical Access Control System consisting of a system server, [one or more networked workstation computers,] operating system and application software, and field-installed Controllers connected by a high-speed electronic data transmission network. The PACS shall have the following:

1. Physical Access Control:
   a. Regulating access through doors and Telecommunications Enclosures (TEs)
2. Security:
   a. Video and camera control.

C. System Architecture:

1. Criticality, operational requirements, and/or limiting points of failure may dictate the development of an enterprise and regional server architecture as opposed to system capacity. Provide server and workstation configurations with all necessary connectors, interfaces and accessories as shown.

D. PACS shall provide secure and reliable identification of Federal employees and contractors by utilizing credential authentication per FIPS-201.

E. Physical Access Control System (PACS) shall consist of:

1. Head-End equipment server,
2. One or more networked PC-based workstations,
3. Physical Access Control System and Database Management Software,
4. Credential validation software/hardware,
5. Field installed controllers,
6. PIV Middleware,
7. Card readers,
8. Biometric identification devices,
9. PIV

10. Supportive information system,
11. Door locks and sensors,
12. Power supplies,
13. Interfaces with:
    a. Video Surveillance and Assessment System,
    f. Fire Protection System,
    h. Building Management System,
    i. Elevator Controls,

F. Head-End equipment server, workstations and controllers shall be connected by a high-speed electronic data transmission network.

G. Information system supporting PACS, Head-End equipment server, workstations, network switches, routers and controllers shall comply with FIPS 200 requirements (Minimum Security Requirements for Federal Information and Information Systems) and NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems).

H. PACS system shall support:
1. Multiple credential authentication modes,
2. Bidirectional communication with the reader,
3. Incident response policy implementation capability; system shall have capability to automatically change access privileges for certain user groups to high security areas in case of incident/emergency.
4. Visitor management,

I. All security relevant decisions shall be made on “secure side of the door”. Secure side processing shall include;
1. Challenge/response management,
2. PKI path discovery and validation,
3. Credential identifier processing,
4. Authorization decisions.

J. For locations where secure side processing is not applicable the tamper switches and certified cryptographic processing shall be provided per FIPS-140-2.

K. System Software: Based on Lenel central-station, workstation operating system, server operating system, and application software.

L. Software and controllers shall be capable of matching full 56-bit FASC-N plus minimum of 32 bits of public key certificate data.

M. Software shall have the following capabilities:
   1. Multiuser multitasking to allow for independent activities and monitoring to occur simultaneously at different workstations.
   2. Support authentication and enrollment;
      a. PIV verification,
      b. Expiration date check,
      c. Biometric check,
      d. Digital photo display/check,
      e. Validate digital signatures of data objects (Objects are signed by the Trusted Authority
      f. Private key challenge (CAK & PAK to verify private key public key pairs exist and card is not a clone)
   3. Support CRL validation via OCSP or SCVP on a scheduled basis and automatically deny access to any revoked credential in the system.
   4. Graphical user interface to show pull-down menus and a menu tree format that complies with interface guidelines of Microsoft Windows operating system.
   5. System license shall be for the entire system and shall include capability for future additions that are within the indicated system size limits specified in this Section.
   6. System shall have open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with <insert operating system> operating system.
   7. Operator login and access shall be utilized via integrated smart card reader and password protection.

N. Systems Networks:
   1. A standalone system network shall interconnect all components of the system. This network shall include communications between a central station and any peer or subordinate workstations, enrollment stations, local annunciation stations, portal control stations or redundant central stations.

O. Security Management System Server Redundancy:
   1. The SMS shall support multiple levels of fault tolerance and SMS redundancy listed and described below:
      a. Hot Standby Servers
      b. Clustering

c. Disk Mirroring

d. RAID Level 10

e. Distributed Intelligence

P. Number of points:

1. PACS shall support multiple autonomous regional servers that can connect to a master command and controller server.
2. Unlimited number of access control readers, unlimited number of inputs or outputs, unlimited number of client workstations, unlimited number of cardholders.
3. Total system solution to enable enterprise-wide, networked, multi-user access to all system resources via a wide range of options for connectivity with the customer’s existing LAN and WAN.

Q. Console Network:

1. Console network, if required, shall provide communication between a central station and any subordinate or separate stations of the system. Where redundant central or parallel stations are required, the console network shall allow the configuration of stations as master and slave. The console network may be a part of the field device network or may be separate depending upon the manufacturer's system configuration.

R. Network(s) connecting PCs and Controllers shall comply with NIST Special Publication 800-53 (Recommended Security Controls for Federal Information Systems) and consist of one or more of the following:

1. Local area, IEEE 802.3 Fast Ethernet 100 BASE-TX, star topology network based on TCP/IP.
2. Direct-connected, RS-232 cable from the COM port of the Central Station to the first Controller, then RS-485 to interconnect the remainder of the Controllers at that Location.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 08 34 59 - VAULT DOORS AND DAY GATES. Requirements for door and gate installation.

D. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.

E. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

F. Section 14 21 00 ELECTRIC TRACTION ELEVATORS. Requirements for elevators.
G. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.
H. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
I. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
J. Section 26 05 33 – RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.
K. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.
L. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.
M. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general requirements that are common to more than one section in Division 28.
N. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
O. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
P. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.
Q. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.
R. Section 28 31 00 - FIRE DETECTION AND ALARM. Requirements for integration with fire detection and alarm system.

1.3 QUALITY ASSURANCE

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1
B. The Contractor shall be responsible for providing, installing, and the operation of the PACS as shown. The Contractor shall also provide certification as required.
C. The security system will be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is

stand-alone or a part of a complete Information Technology (IT) computer network.

D. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

E. Product Qualifications:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

F. Contractor Qualifications:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System’s (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner’s permission and representative, to verify the quality of installation and the references’ level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical

experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The Contracting Officer's Representative reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

a. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
b. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 SUBMITTALS

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1
B. Submit the items below in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, Section 02 41 00, DEMOLITION, and Section 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.
C. Provide certificates of compliance with Section 1.3, Quality Assurance.
D. Provide a complete and thorough pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (1220 x 1220 millimeters); drawing submittals shall be per the established project schedule.
E. Shop drawing and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
   a. Define each page of the design package to include facility name, building name, floor, and sheet number.
   b. Provide a complete list of all security abbreviations and symbols.
   c. Reference all general notes that are utilized within the design package.
   d. Specification and scope of work pages for all individual security systems that are applicable to the design package that will:
      1) Outline all general and job specific work required within the design package.
      2) Provide a detailed device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Clearly define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A detailed riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1

Pair Twisted, Unshielded). This schedule shall also provide the manufacturer's name and part number for the wire/cable being installed.

4. A detailed system drawing for each applicable security system shall:
   a. Clearly identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide a full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.
   d. Show device locations that correspond to the floor plans.
   e. All general and drawing specific notes shall be included with the system drawings.
5. A detailed schedule for all the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g., site, building, floor, room number, location, and description).
   c. Mounting type (e.g., flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the PACS, provide the door ID, door type (e.g., wood or metal), locking mechanism (e.g., strike or electromagnetic lock) and control device (e.g., card reader or biometrics).
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

F. Pre-installation design packages shall go through a full review process conducted by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

G. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

H. Submit manufacture's certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per Section 01 00 00, GENERAL REQUIREMENTS, and Section 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

I. General: Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - DESIGN SUBMITTAL PROCEDURES, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer's information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for Contracting Officer's Representative and Contractor review stamps.

5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED. The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the Contracting Officer’s Representative for approval before the initiation of work.
6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.
      1) Where two (2) or more binders are necessary to accommodate data, correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and or maintenance of the component or system.
      2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.
   b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.
   c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.
   d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20-pound white bond paper.

e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.
   1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
   2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.
   3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: In each manual include information specified in the individual Specification section, and the following information for each major component of building equipment and controls:
   1) General system or equipment description.
   2) Design factors and assumptions.
   3) Copies of applicable Shop Drawings and Product Data.
   4) System or equipment identification including: manufacturer, model and serial numbers of each component, operating instructions, emergency instructions, wiring diagrams, inspection and test procedures, maintenance procedures and schedules, precautions against improper use and maintenance, repair instructions, sources of required maintenance materials and related services, and a manual index.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.

h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address

of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.

i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.

j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.

k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.

l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual,

prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor's manufacturer certifications.

7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer's catalog numbers and conformance of submittal with requirements of contract documents. Return non-conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor's stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.

8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.

9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract document section number, paragraph number, and the referenced standards for each listed product.

K. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization. Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:
   a. General – Drawings shall conform to VA Special Conditions and CAD Standards Documents. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings.
   b. Cover Sheet – Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
   c. General Information Sheets – General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
   d. Floor Plans – Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
      1) security devices by symbol,
      2) the associated device point number (derived from the loading sheets),
      3) wire & cable types and counts
      4) conduit sizing and routing
      5) conduit riser systems
      6) device and area detail call outs
   e. Architectural details – Architectural details shall be produced for each device mounting type (door details for doors with physical access control, reader pedestals and mounts, security panel and power supply details).
   f. Riser Diagrams – Contractor shall provide a riser diagram indicating riser architecture and distribution of the physical access control system throughout the facility (or area in scope).
   g. Block Diagrams – Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., physical access control, intrusion detection, closed circuit television, intercom, and other associated subsystems)

integration; and data transmission and media conversion methodologies.

h. Interconnection Diagrams – Contractor shall provide interconnection diagram for each sensor, and device component. Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:

1) Panel Assembly Detail – For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.
2) Panel Details – Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.
3) Device Mounting Details – Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.
4) Details of connections to power supplies and grounding
5) Details of surge protection device installation
6) Sensor detection patterns – Each system sensor shall have associated detection patterns.
7) Equipment Rack Detail – For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCI wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include use vertical and horizontal latter rack system.
8) Security Control Room – The contractor shall provide a layout plan for the Security Control Room. The layout plan shall identify all equipment and details associated with the installation.

9) Operator Console – The contractor shall provide a layout plan for the Operator Console. The layout plan shall identify all equipment and details associated with the installation. Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.
10) Equipment Room – Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and associated equipment and device placements both vertical and horizontally.

j. Electrical Panel Schedule – Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.

k. Door Schedule – A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:
1) Item Number
2) Door Number (Derived from A/E Drawings)
3) Floor Plan Sheet Number
4) Standard Detail Number
5) Door Description (Derived from Loading Sheets)
6) Data Gathering Panel Input Number
7) Door Position or Monitoring Device Type & Model Number
8) Lock Type, Model Number & Power Input/Draw (standby/active)
9) Card Reader Type & Model Number
10) Shunting Device Type & Model Number
11) Sounder Type & Model Number
12) Manufacturer
13) Misc. devices as required
a) Delayed Egress Type & Model Number
b) Intercom
c) Camera

d) Electric Transfer Hinge

e) Electric Pass-through device

14) Remarks column indicating special notes or door configurations

2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the Contracting Officer's Representative to determine camera starting numbers and naming conventions. All drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:
   a. Item Number
   b. Camera Number
   c. Naming Conventions
   d. Description of Camera Coverage
   e. Camera Location
   f. Floor Plan Sheet Number
   g. Camera Type
   h. Mounting Type
   i. Standard Detail Reference
   j. Power Input & Draw
   k. Power Panel Location
   l. Remarks Column for Camera
3. Section II – Data Gathering Panel Documentation Package
   a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.
   b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.

c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.

d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.

e. The DGP spreadsheet shall include an entry section for the following information:
   1) DGP number
   2) First Reader Number
   3) First Monitor Point Number
   4) First Relay Number
   5) DGP, input or output Location
   6) DGP Chain Number
   7) DGP Cabinet Tamper Input Number
   8) DGP Power Fail Input Number
   9) Number of Monitor Points Reserved For Expansion Boards
   10) Number of Control Points (Relays) Reserved For Expansion Boards

f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
   1) System Numbers for Card Readers
   2) System Numbers for Monitor Point Inputs
   3) System Numbers for Control Points (Relays)
   4) Next DGP or input module First Monitor Point Number
   5) Next DGP or output module First Control Point Number

g. The DGP spreadsheet shall provide the following information for each card reader:
   1) DGP Reader Number

2) System Reader Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
6) Description Field
7) DGP Input Location
8) Date Test
9) Date Passed
10) Cable Type
11) Camera Numbers (of cameras viewing the reader location)

h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
1) DGP Monitor Point Input Number
2) System Monitor Point Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
6) DGP or input module Input Location
7) Date Test
8) Date Passed
9) Cable Type
10) Camera Numbers (of associated alarm event preset call-ups)

i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
1) DGP Control Point (Relay) Number
2) System (Control Point) Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device: Lock Control, Local Sounder, etc.)
6) Description Field
7) DGP or OUTPUT MODULE Output Location
8) Date Test
9) Date Passed Cable Type
10) Camera Number (of associated alarm event preset call-ups)

j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
   1) Header
      a) DGP Input and Output Worksheet
      b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
   2) Footer
      a) File Name
      b) Date Printed
      c) Page Number

4. Section III - Construction Mock-up: In areas with exposed EMT/Conduit Raceways, contractor shall conceal raceway as much as practical and unobtrusively. In addition, historic significance must be considered to determine installation means and methods for approval by the owner.
5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance requirements of this specification. The data package shall include the following:
   a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.
   b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.

c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.

7. Section VI – Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

L. Group II Technical Data Package

1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the Contracting Officer's Representative documenting changes to the site, particularly those conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the COTR.
2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:
   a. Baseline configuration
   b. Access levels
   c. Schedules (intrusion detection, physical access control, holidays, etc.)
   d. Badge database
   e. System monitoring and reporting (unit level and central control)
   f. Naming conventions and descriptors

M. Group III Technical Data Package

1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and be customized to the contract requirements. The Contractor will deliver the test procedures to the Contracting Officer's Representative for approval at least 60 calendar days prior to the requested test date.

N. Group IV Technical Data Package

1. Performance Verification Test
   a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the Contracting Officer's Representative for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.
2. Training Documentation
   a. New Facilities and Major Renovations: Familiarization training shall be provided for new equipment or systems. Training can include site familiarization training for VA technicians and administrative personnel. Training shall include general information on new system layout including closet locations, turnover of the completed system including all documentation, including manuals, software, key systems, and full system administration rights. Lesson plans and training manuals training shall be oriented to type of training to be provided.
   b. New Unit Control Room:
      1) Provide the security personnel with training in the use, operation, and maintenance of the entire control room system (Unit Control and Equipment Rooms). The training documentation must include the operation and maintenance. The first of the training sessions shall take place prior to system turnover and the second immediately after turnover. Coordinate the training sessions with the Owner. Completed classroom sessions will be witnessed and documented by the Architect/Engineer, and approved by the Contracting Officer's Representative. Instruction is not to begin until the system is operational as designed.

2) The training documents will cover the operation and the maintenance manuals and the control console operators' manuals and service manuals in detail, stressing all important operational and service diagnostic information necessary for the maintenance and operations personnel to efficiently use and maintain all systems.
3) Provide an illustrated control console operator's manual and service manual. The operator's manual shall be written in laymen's language and printed so as to become a permanent reference document for the operators, describing all control panel switch operations, graphic symbol definitions and all indicating functions and a complete explanation of all software.
4) The service manual shall be written in laymen's language and printed so as to become a permanent reference document for maintenance personnel, describing how to run internal self diagnostic software programs, troubleshoot head end hardware and field devices with a complete scenario simulation of all possible system malfunctions and the appropriate corrective measures.
5) Provide a professional color DVD instructional recording of all the operational procedures described in the operator's manual. All charts used in the training session shall be clearly presented on the video. Any DVD found to be inferior in recording or material content shall be reproduced at no cost until an acceptable DVD is submitted. Provide four copies of the training DVD, one to the architect/engineer and three to the owner.

3. System Configuration and Data Entry:
   a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines. The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be

established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:

1) Physical Access control system components,
2) All intrusion detection system components,
3) Video surveillance, control and recording systems,
4) Intercom systems components,
5) All other security subsystems shown in the contract documents.

b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.

c. Refer to Part 3 for system programming requirements and planning guidelines.

4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor’s field surveys, and all other pertinent information in the Contractor’s possession to complete the graphics. The Contractor shall identify and request from the COTR, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the Contracting Officer’s Representative for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

O. Group V Technical Data Package: Final copies of the manuals shall be delivered to the Contracting Officer’s Representative as part of the

acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or systems, as well as the nearest service representatives for each item of equipment for each system. The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on CD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:
   a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings; system schematics and layout drawings; alignment and calibration procedures; manufacturer's repair list indicating sources of supply; and interface definition.
3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
   a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data

formats, command characters, and a sample of each type of data transfer.

4. Operator's Manual: The operator's manual shall fully explain all procedures and instructions for the operation of the system, including:
   a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands' alarm messages, and printing formats; and system access requirements.
5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the Contracting Officer's Representative a complete list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.
7. Operation, Maintenance & Service Manuals: The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable sets of manageable size. Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.
8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
   a. Equipment and/or system function.
   b. Operating characteristics.
   c. Limiting conditions.
   d. Performance curves.
   e. Engineering data and test.

f. Complete nomenclature and number of replacement parts.
g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
h. Provide information detailing essential maintenance procedures including the following: routine operations, trouble shooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.
i. Provide information on equipment and system operating procedures, including the following; start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.
j. Manufacturer equipment and systems maintenance manuals are permissible.

9. Project Redlines: During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words 'Master Redlines' on the cover sheet and be maintained by the Contractor in the project office. The Contractor will provide access to redline documents anytime during the project for review and inspection by the Contracting Officer's Representative or authorized Office of Protection Services representative. Master redlines shall be neatly maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in strict accordance with the drawings shall be so noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the Contracting Officer's Representative for review and approval of all changes or modifications to the documents. Each sheet shall have Contracting Officer's Representative initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline

documents daily. Field drawings shall not be considered "master redlines".

10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the COTR. As with master relines, Contractor shall maintain record specifications for Contracting Officer's Representative review and inspection at anytime.
11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later. Note related Change Orders and mark up of Record Construction Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the COTR.
12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements

resulting in miscellaneous records include, a minimum of the following:

a. Certificates received instead of labels on bulk products.
b. Testing and qualification of tradesmen. ("Contractor's Qualifications")
c. Documented qualification of installation firms.
d. Load and performance testing.
e. Inspections and certifications.
f. Final inspection and correction procedures.
g. Project schedule

13. Record Construction Documents (Record As-Built)
    a. Upon project completion, the contractor shall submit the project master redlines to the Contracting Officer's Representative prior to development of Record construction documents. The Contracting Officer's Representative shall be given a minimum of a thirty (30) day review period to determine the adequacy of the master redlines. If the master redlines are found suitable by the Contracting Officer's Representative, the Contracting Officer's Representative will initial and date each sheet and turn redlines over to the contractor for as built development.
    b. The Contractor shall provide the Contracting Officer's Representative a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on CD or DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number as applicable. All corrective notations made by the Contractor shall be legible when submitted to the COTR. If, in the opinion of the COTR, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover sheets with suitable titles, dates, and other identifications printed on the cover. The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.

c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the COTR. The Contractor shall organize into bound and labeled sets for the COTR's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown. All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).

P. FIPS 201 Compliance Certificates

1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
   a. Fingerprint Capture Station
   b. Card Readers
   c. Facial Image Capturing Camera
   d. PIV Middleware
   e. Template Matcher
   f. Electromagnetically Opaque Sleeve
   g. Certificate Management
      1) CAK Authentication System
      2) PIV Authentication System
      3) Certificate Validator
      4) Cryptographic Module

Q. Approvals will be based on complete submission of manuals together with shop drawings.

1.5 APPLICABLE PUBLICATIONS

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

B. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

D. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

E. Department of Justice American Disability Act (ADA)

28 CFR Part 36.....ADA Standards for Accessible Design 2010

F. Department of Veterans Affairs (VA):

PACS-R: Physical Access Control System (PACS) Requirements

VA Handbook 0730 Security and Law Enforcement

G. Government Accountability Office (GAO):

GAO-03-8-02 Security Responsibilities for Federally Owned and Leased Facilities

H. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

I. National Electrical Manufactures Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

J. National Fire Protection Association (NFPA):

70-11..... National Electrical Code

K. Underwriters Laboratories, Inc. (UL):

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

639-97.....Standard for Intrusion-Detection Units

752-05.....Standard for Bullet-Resisting Equipment

827-08.....Central Station Alarm Services

1076-95.....Standards for Proprietary Burglar Alarm Units and Systems

1981-03.....Central Station Automation System

2058-05.....High Security Electronic Locks

L. Homeland Security Presidential Directive (HSPD):

HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

M. Federal Communications Commission (FCC):

(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

N. Federal Information Processing Standards (FIPS):

FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

O. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-63.....Electronic Authentication Guideline

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-73-3....Interfaces for Personal Identity Verification (4 Parts)

.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation

.....Pt. 2- PIV Card Application Card Command Interface

.....Pt. 3- PIV Client Application Programming Interface

.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification

Special Pub 800-76-1....Biometric Data Specification for Personal Identity Verification

Special Pub 800-78-2....Cryptographic Algorithms and Key Sizes for Personal Identity Verification

Special Pub 800-79-1....Guidelines for the Accreditation of Personal Identity Verification Card Issuers

Special Pub 800-85B-1...DRAFTPIV Data Model Test Guidelines

Special Pub 800-85A-2...PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-37.....Guide for Applying the Risk Management Framework to Federal Information Systems

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

Special Pub 800-104A....Scheme for PIV Visual Card Topography

Special Pub 800-116.....Recommendation for the Use of PIV Credentials in Physical Access Control Systems (PACS)

P. Institute of Electrical and Electronics Engineers (IEEE):

C62.41.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

Q. International Organization for Standardization (ISO):

7810.....Identification cards – Physical characteristics

7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics

7816-2.....Identification cards - Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts

7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols

7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods

7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange

14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance

15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

19794.....Information technology - Biometric data interchange formats

R. Uniform Federal Accessibility Standards (UFAS) 1984

S. ADA Standards for Accessible Design 2010

T. Section 508 of the Rehabilitation Act of 1973

1.6 DEFINITIONS

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

B. ABA Track: Magnetic stripe that is encoded on track 2, at 75-bpi density in binary-coded decimal format; for example, 5-bit, 16-character set.

C. Access Control List: A list of (identifier, permissions) pairs associated with a resource or an asset. As an expression of security policy, a person may perform an operation on a resource or asset if and only if the person’s identifier is present in the access control list (explicitly or implicitly), and the permissions in the (identifier, permissions) pair include the permission to perform the requested operation.

D. Access Control: A function or a system that restricts access to authorized persons only.

E. API Application Programming Interface

F. Assurance Level (or E-Authentication Assurance Level): A measure of trust or confidence in an authentication mechanism defined in OMB Memorandum M-04-04 and NIST Special Publication (SP) 800-63, in terms of four levels: [M-04-04]

1. Level 1: LITTLE OR NO confidence
2. Level 2: SOME confidence
3. Level 3: HIGH confidence
4. Level 4: VERY HIGH confidence

G. Authentication: A process that establishes the origin of information, or determines an entity’s identity. In this publication, authentication often means the performance of a PIV authentication mechanism.

H. Authenticator: A memory, possession, or quality of a person that can serve as proof of identity, when presented to a verifier of the appropriate kind. For example, passwords, cryptographic keys, and fingerprints are authenticators.

I. Authorization: A process that associates permission to access a resource or asset with a person and the person's identifier(s).

J. BIO or BIO-A: A FIPS 201 authentication mechanism that is implemented by using a Fingerprint data object sent from the PIV Card to the PACS. Note that the short-hand "BIO (-A)" is used throughout the document to represent both BIO and BIO-A authentication mechanisms.

K. Biometric: An authenticator produced from measurable qualities of a living person.

L. CAC EP – CAC End Point with end point PIV applet

M. CAC NG – CAC Next Generation with transitional PIV applet

N. Card Authentication Key (CAK): A PIV authentication mechanism (or the PIV Card key of the same name) that is implemented by an asymmetric or symmetric key challenge/response protocol. The CAK is an optional mechanism defined in NIST SP 800-73. [SP800-73] NIST strongly recommends that every PIV Card contain an asymmetric CAK and corresponding certificate, and that agencies use the asymmetric CAK protocol, rather than a symmetric CAK protocol, whenever the CAK authentication mechanism is used with PACS.

O. CCTV: Closed-circuit television.

P. Central Station: A PC with software designated as the main controlling PC of the PACS. Where this term is presented with initial capital letters, this definition applies.

Q. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.

R. CPU: Central processing unit.

S. Credential: Data assigned to an entity and used to identify that entity.

T. File Server: A PC in a network that stores the programs and data files shared by users.

U. FIPS Federal Information Processing Standards

V. FRAC – First Responder Authentication Credential

W. HSPD Homeland Security Presidential Directive

X. I/O: Input/Output.

Y. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.

Z. IEC International Electrotechnical Commission

AA. ISO International Organization for Standardization

BB. KB Kilobyte

CC. kbit/s Kilobits / second

DD. LAN: Local area network.

EE. LED: Light-emitting diode.

FF. Legacy CAC – Contact only Common Access Card with v1 and v2 applets

GG. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

HH. NIST: National Institute of Standards and Technology

II. PACS: Physical Access Control System

JJ. PC/SC: Personal Computer / Smart Card

KK. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

LL. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

MM. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

NN. PIV: Personal Identification Verification

OO. PIV-I – PIV Interoperable credential

PP. PPS: Protocol and Parameters Selection

QQ. RF: Radio frequency.

RR. ROM: Read-only memory. ROM data are maintained through losses of power.

SS. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

TT. RS-485: An TIA/EIA standard for multipoint communications.

UU. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

VV. TPDU: Transport Protocol Data Unit

WW. TWIC – Transportation Worker Identification Credential

XX. UPS: Uninterruptible power supply.

YY. Vcc: Voltage at the Common Collector

ZZ. WAN: Wide area network.

AAA. WAV: The digital audio format used in Microsoft Windows.

BBB. Wiegand: Patented magnetic principle that uses specially treated wires embedded in the credential card.

CCC. Windows: Operating system by Microsoft Corporation.

DDD. Workstation: A PC with software that is configured for specific limited security system functions.

1.7 COORDINATION

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

B. Coordinate arrangement, mounting, and support of electronic safety and security equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.
4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

C. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

D. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

1.8 MAINTENANCE & SERVICE

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

B. General Requirements

1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

C. Description of Work

1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

D. Personnel

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The Contracting Officer’s Representative shall be advised in writing of the name of the designated service representative, and of any change in personnel. The Contracting Officer’s Representative shall be provided copies of system manufacturer certification for the designated service representative.

E. Schedule of Work

1. The work shall be performed during regular working ours, Monday through Friday, excluding federal holidays. These inspections shall include:

a) The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.

1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.

2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.

a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from [notification] [arrival on site]. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.

b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the COTR. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the COTR. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at

least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

1.9 PERFORMANCE REQUIREMENTS

A. PACS shall provide support for multiple authentication modes and bidirectional communication with the reader. PACS shall provide implementation capability for enterprise security policy and incident response.

B. All processing of authentication information must occur on the "safe side" of a door

C. Physical Access Control System shall provide access to following Security Areas:
   1. Controlled
   2. Limited
   3. Exclusion

D. PACS shall provide:
   1. One authentication factor for access to Controlled security areas
   2. Two authentication factors for access to Limited security areas
   3. Three authentication factors for access to Exclusion security areas

E. PACS shall provide Credential Validation and Path Validation per NIST 800-116.

F. The PACS System shall have an Enterprise Path Validation Module (PVM) component that processes X.509 certification paths composed of X.509 v3 certificates and X.509 v2 CRLs. The PVM component MUST support the following features:
   1. Name chaining;
   2. Signature chaining;
   3. Certificate validity;

4. Key usage, basic constraints, and certificate policies certificate extensions;
5. Full CRLs; and
6. CRLs segmented on names.

G. Distributed Processing: System shall be a fully distributed processing system so that information, including time, date, valid codes, access levels, and similar data, is downloaded to Controllers so that each Controller makes access-control decisions for that Location. Do not use intermediate Controllers for physical access control. If communications to Central Station are lost, all Controllers shall automatically buffer event transactions until communications are restored, at which time buffered events shall be uploaded to the Central Station.

H. Number of Locations: Support unlimited number of separate Locations using a single PC with combinations of direct-connect, dial-up, or TCP/IP LAN connections to each Location.
   1. Each Location shall have its own database and history in the Central Station. Locations may be combined to share a common database.

I. Data Capacity:
   1. [130] different card-reader formats.
   2. [999] comments.
   3. [16] graphic file types for importing maps.

J. Location Capacity:
   1. [128] reader-controlled doors.
   2. [50,000] total access credentials.
   3. [2048] supervised alarm inputs.
   4. [2048] programmable outputs.
   5. [32,000] custom action messages per Location to instruct operator on action required when alarm is received.

K. System Network Requirements:
   1. Interconnect system components and provide automatic communication of status changes, commands, field-initiated interrupts, and other communications required for proper system operation.

2. Communication shall not require operator initiation or response, and shall return to normal after partial or total network interruption such as power loss or transient upset.
3. System shall automatically annunciate communication failures to the operator and identify the communication link that has experienced a partial or total failure.
4. Communications Controller may be used as an interface between the Central Station display systems and the field device network. Communications Controller shall provide functions required to attain the specified network communications performance.

L. Central Station shall provide operator interface, interaction, display, control, and dynamic and real-time monitoring. Central Station shall control system networks to interconnect all system components, including workstations and field-installed Controllers.

M. Field equipment shall include Controllers, sensors, and controls. Controllers shall serve as an interface between the Central Station and sensors and controls. Data exchange between the Central Station and the Controllers shall include down-line transmission of commands, software, and databases to Controllers. The up-line data exchange from the Controller to the Central Station shall include status data such as intrusion alarms, status reports, and entry-control records. Controllers are classified as alarm-annunciation or entry-control type.

N. System Response to Alarms: Field device network shall provide a system end-to-end response time of [1] <Insert number> second(s) or less for every device connected to the system. Alarms shall be annunciated at the Central Station within 1 second of the alarm occurring at a Controller or device controlled by a local Controller, and within 100 ms if the alarm occurs at the Central Station. Alarm and status changes shall be displayed within 100 ms after receipt of data by the Central Station. All graphics shall be displayed, including graphics-generated map displays, on the console monitor within 5 seconds of alarm receipt at the security console.[This response time shall be maintained during system heavy load.]

O. False Alarm Reduction: The design of Central Station and Controllers shall contain features to reduce false alarms. Equipment and software shall comply with SIA CP-01.

P. Error Detection: A cyclic code error detection method shall be used between Controllers and the Central Station, which shall detect single- and double-bit errors, burst errors of eight bits or less, and at least 99 percent of all other multibit and burst error conditions. Interactive or product error detection codes alone will not be acceptable. A message shall be in error if one bit is received incorrectly. System shall retransmit messages with detected errors. A two-digit decimal number shall be operator assignable to each communication link representing the number of retransmission attempts. When the number of consecutive retransmission attempts equals the assigned quantity, the Central Station shall print a communication failure alarm message. System shall monitor the frequency of data transmission failure for display and logging.

Q. Data Line Supervision: System shall initiate an alarm in response to opening, closing, shorting, or grounding of data transmission lines.

R. Door Hardware Interface: Coordinate with Division 08 Sections that specify door hardware required to be monitored or controlled by the PACS. The Controllers in this Section shall have electrical characteristics that match the signal and power requirements of door hardware. Integrate door hardware specified in Division 08 Sections to function with the controls and PC-based software and hardware in this Section.

S. References to industry and trade association standards and codes are minimum installation requirement standards.

T. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.10 EQUIPMENT AND MATERIALS

A. Refer to 25 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY, Part 1

B. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

C. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

D. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

E. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

F. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the Contracting Officer's Representative a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the Contracting Officer's Representative prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.11 WARRANTY OF CONSTRUCTION.

A. Warrant PACS work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

1.12 GENERAL REQUIREMENTS

A. For general requirements that are common to more than one section in Division 28 refer to Section 28 05 00, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS.

B. General requirements applicable to this section include:

1. General Arrangement Of Contract Documents,
2. Delivery, Handling and Storage,
3. Project Conditions,

4. Electrical Power,
5. Lightning, Power Surge Suppression, and Grounding,
6. Electronic Components,
7. Substitute Materials and Equipment, and
8. Like Items.

PART 2 – PRODUCTS

2.1 GENERAL

A. All equipment and materials for the system will be compatible to ensure correct operation as outlined in FIPS 201, March 2006 and HSPD-12.

B. The security system characteristics listed in this section will serve as a guide in selection of equipment and materials for the PACS. If updated or more suitable versions are available then the Contracting Officer will approve the acceptance of prior to an installation.

C. PACS equipment shall meet or exceed all requirements listed below.

D. A PACS shall be comprised of, but not limited to, the following components:

1. Physical Access Control System
2. Application Software
3. System Database
4. Surge and Tamper Protection
5. Standard Workstation Hardware
6. Communications Workstation
7. Controllers (Data Gathering Panel)
8. Secondary Alarm Annunciator
9. Keypads
10. Card Readers
11. Credential Cards
12. Biometric Identity Verification Equipment
13. EnrolLment Center (To be provided in accordance with the VA PIV enrollment and issuance system.)
14. System Sensors and Related Equipment
15. Push Button Switches
16. Interfaces
17. Door and Gate Hardware interface

18. RS-232 ASCII Interface
19. Floor Select Elevator Control
20. After-Hours HVAC Control
21. Real Time Guard Tour
22. Video and Camera Control
23. Cables
24. Transformers

2.2 SECURITY MANAGEMENT SYSTEM (SMS)

A. Shall allow the configuration of an enrollment and badging, alarm monitoring, administrative, asset management, digital video management, intrusion detection, visitor enrollment, remote access level management, and integrated client workstations or any combination of all or some.

B. Shall be expandable to support an unlimited number of individual modules or integrated client workstations. All access control field hardware, including Data Gathering Panels (DGP), shall be connected to all physical access control system workstation on the network.

C. Shall have the ability to compose, file, maintain, update, and print reports for either individuals or the system as follows.
   1. Individual reports that consist of an employee’s name, office location, phone number or direct extension, and normal hours of operation. The report shall provide a detailed listing of the employee’s daily events in relation to accessing points within a facility.
   2. System reports shall be able to produce information on a daily/weekly/monthly basis for all events, alarms, and any other activity associated with a system user.

D. All reports shall be in a date/time format and all information shall be clearly presented. Shall be designed to allow it to work with any industry standard network protocol and topology listed below:
   1. Transmission Control Protocol (TCP)/IP
   2. Novell Netware (IPX/SPX)
   3. Banyan VINES
   4. IBM LAN Server (NetBEUI)
   5. Microsoft LAN Manager (NetBEUI)

6. Network File System (NFS) Networks
7. Remote Access Service (RAS) via ISDN, x.25, and standard phone lines.

E. Shall provide full interface and control of the PACS to include the following subsystems within the PACS:
1. Public Key Infrastructure
2. Card Management
3. Identity and Access Management
4. Personal Identity Verification

F. Shall have the following features or compatibilities:
1. The ability to be operated locally or remotely via a LAN, WAN, internet, or intranet.
2. Event and Alarm Monitoring
3. Database Partitioning
4. Ability to fully integrate with all other security subsystems
5. Enhanced Monitoring Station with Split Screen Views
6. Alternate and Extended Shunt by Door
7. Escort Management
8. Enhanced IT-based Password Protection
10. N-man Rule and Occupancy Restrictions
11. Open Journal Data Format for Enhanced Reporting
12. Automated Personnel Import
13. ODBC Support
14. Windows 2000 Professional, Windows Server 2003, Windows XP Professionals for Servers, Windows 7
15. Field-Level Audit Trail
16. Cardholder Access Events

2.3 APPLICATION SOFTWARE

A. System Software: Based on [32] bit, [Microsoft Windows] central-station and workstation operating system and application software. Software shall have the following features:
1. Multiuser multitasking to allow independent activities and monitoring to occur simultaneously at different workstations.
2. Graphical user interface to show pull-down menus and a menu tree format.

3. Capability for future additions within the indicated system size limits.
4. Open architecture that allows importing and exporting of data and interfacing with other systems that are compatible with operating system.
5. Password-protected operator and smart card login and access.

B. Peer Computer Control Software: Shall detect a failure of a central computer and shall cause the other central computer to assume control of all system functions without interruption of operation. Drivers shall be provided in both central computers to support this mode of operation.

C. Application Software: Interface between the alarm annunciation and entry-control Controllers, to monitor sensors [and DTS links], operate displays, report alarms, generate reports, and help train system operators. Software shall have the following functions:

1. Resides at the Central Station, workstations, and Controllers as required to perform specified functions.
2. Operate and manage peripheral devices.
3. Manage files for disk I/O, including creating, deleting, and copying files; and automatically maintain a directory of all files, including size and location of each sequential and random-ordered record.
4. Import custom icons into graphics views to represent alarms and I/O devices.
5. Globally link I/O so that any I/O can link to any other I/O within the same Location, without requiring interaction with the host PC. This operation shall be at the Controller.
6. Globally code I/O links so that any access-granted event can link to any I/O with the same Location without requiring interaction with the host PC. This operation shall be at the Controller.
7. Messages from PC to Controllers and Controllers to Controllers shall be on a polled network that utilizes check summing and acknowledgment of each message. Communication shall be automatically verified, buffered, and retransmitted if message is not acknowledged.

8. Selectable poll frequency and message time-out settings shall handle bandwidth and latency issues for TCP/IP, RF, and other PC-to-Controller communications methods by changing the polling frequency and the amount of time the system waits for a response.
9. Automatic and encrypted backups for database and history backups shall be automatically stored at [the central control PC] [a selected workstation] and encrypted with a nine-character alphanumeric password, which must be used to restore or read data contained in backup.
10. Operator audit trail for recording and reporting all changes made to database and system software.

D. Workstation Software:

1. Password levels shall be individually customized at each workstation to allow or disallow operator access to program functions for each Location.
2. Workstation event filtering shall allow user to define events and alarms that will be displayed at each workstation. If an alarm is unacknowledged (not handled by another workstation) for a preset amount of time, the alarm will automatically appear on the filtered workstation.

E. Controller Software:

1. Controllers shall operate as an autonomous intelligent processing unit. Controllers shall make decisions about physical access control, alarm monitoring, linking functions, and door locking schedules for its operation, independent of other system components. Controllers shall be part of a fully distributed processing control network. The portion of the database associated with a Controller and consisting of parameters, constraints, and the latest value or status of points connected to that Controller, shall be maintained in the Controller.
2. Functions: The following functions shall be fully implemented and operational within each Controller:
   a. Monitoring inputs.
   b. Controlling outputs.
   c. Automatically reporting alarms to the Central Station.

d. Reporting of sensor and output status to Central Station on request.
e. Maintaining real time, automatically updated by the Central Station at least once a day.
f. Communicating with the Central Station.
g. Executing Controller resident programs.
h. Diagnosing.
i. Downloading and uploading data to and from the Central Station.

3. Controller Operations at a Location:
   a. Location: Up to [64] <Insert number> Controllers connected to RS-485 communications loop. Globally operating I/O linking and anti-passback functions between Controllers within the same Location without central-station or workstation intervention. Linking and anti-passback shall remain fully functional within the same Location even when the Central Station or workstations are offline.
   b. In the event of communications failure between the Central Station and a Location, there shall be no degradation in operations at the Controllers at that Location. The Controllers at each Location shall be connected to a memory buffer with a capacity to store up to 10,000 events; there shall be no loss of transactions in system history files until the buffer overflows.
   c. Buffered events shall be handled in a first-in-first-out mode of operation.
4. Individual Controller Operation:
   a. Controllers shall transmit alarms, status changes, and other data to the Central Station when communications circuits are operable. If communications are not available, Controllers shall function in a stand-alone mode and operational data, including the status and alarm data normally transmitted to the Central Station, shall be stored for later transmission to the Central Station. Storage capacity for the latest 1024 events shall be provided at each Controller.
   b. Card-reader ports of a Controller shall be custom configurable for at least [120] different card-reader or keypad formats.

Multiple reader or keypad formats may be used simultaneously at different Controllers or within the same Controller.

c. Controllers shall provide a response to card-readers or keypad entries in less than 0.25 seconds, regardless of system size.

d. Controllers that are reset, or powered up from a nonpowered state, shall automatically request a parameter download and reboot to its proper working state. This shall happen without any operator intervention.

e. Initial Startup: When Controllers are brought on-line, database parameters shall be automatically downloaded to them. After initial download is completed, only database changes shall be downloaded to each Controller.

f. Failure Mode: On failure for any reason, Controllers shall perform an orderly shutdown and force Controller outputs to a predetermined failure mode state, consistent with the failure modes shown and the associated control device.

g. Startup After Power Failure: After power is restored, startup software shall initiate self-test diagnostic routines, after which Controllers shall resume normal operation.

h. Startup After Controller Failure: On failure, if the database and application software are no longer resident, Controllers shall not restart, but shall remain in the failure mode until repaired. If database and application programs are resident, Controllers shall immediately resume operation. If not, software shall be restored automatically from the Central Station.

5. Communications Monitoring:

a. System shall monitor and report status of RS-485 communications loop [TCP/IP communication status] of each Location.

b. Communication status window shall display which Controllers are currently communicating, a total count of missed polls since midnight, and which Controller last missed a poll.

c. Communication status window shall show the type of CPU, the type of I/O board, and the amount of RAM memory for each Controller.

6. Operating systems shall include a real-time clock function that maintains seconds, minutes, hours, day, date, and month. The real-time clock shall be automatically synchronized with the Central

Station at least once a day to plus or minus 10 seconds. The time synchronization shall be automatic, without operator action and without requiring system shutdown.

F. PC-to-Controller Communications:

1. Central-station or workstation communications shall use the following:
   a. Direct connection using serial ports of the PC.
   b. TCP/IP LAN network interface cards.
   c. Dial-up modems for connections to Locations.
2. Serial Port Configuration: Each serial port used for communications shall be individually configurable for "direct communications," "modem communications incoming and outgoing," or "modem communications incoming only"; or as an ASCII output port.
3. Multiport Communications Board: Use if more than two serial ports are needed.
   a. Expandable and modular design. Use a 4-, 8-, or 16-serial port configuration that is expandable to 32 or 64 serial ports.
   b. Connect the first board to an internal PCI bus adapter card.
4. Direct serial, TCP/IP, and dial-up communications shall be alike in the monitoring or control of system, except for the connection that must first be made to a dial-up Location.
5. TCP/IP network interface card shall have an option to set the poll frequency and message response time-out settings.
6. PC-to-Controller and Controller-to-Controller communications (direct, dial-up, or TCP/IP) shall use a polled-communication protocol that checks sum and acknowledges each message. All communications shall be verified and buffered and retransmitted if not acknowledged.

G. Direct Serial or TCP/IP PC-to-Controller Communications:

1. Communication software on the PC shall supervise the PC-to-Controller communications link.
2. Loss of communications to any Controller shall result in an alarm at all PCs running the communications software.
3. When communications are restored, all buffered events shall automatically upload to the PC, and any database changes shall be automatically sent to the Controller.

H. Dial-up Modem PC-to-Controller Communications:

1. Communication software on the PC shall supervise the PC-to-Controller communications link during dial-up modem connect times.
2. Communication software shall be programmable to routinely poll each of the remote dial-up modem Locations, collecting event logs and verifying phone lines at time intervals that are operator selectable for each Location.
3. System shall be programmable for dialing and connecting to all dial-up modem Locations and for retrieving the accrued history transactions on an automatic basis as often as once every [10] <Insert number> minutes and up to once every [9999] <Insert number> minutes.
4. Failure to communicate to a dial-up Location three times in a row shall result in an alarm at the PC.
5. Time offset capabilities shall be present so that Locations in a different geographical time zone than the host PC will be set to, and maintained at, the proper local time. This feature shall allow for geographical time zones that are ahead of or behind the host PC.
6. The Controller connected to a dial-up modem shall automatically buffer all normal transactions until its buffer reaches 80 percent of capacity. When the transaction buffer reaches 80 percent, the Controller shall automatically initiate a call to the Central Station and upload all transactions.
7. Alarms shall be reported immediately.
8. Dial-up modems shall be provided by manufacturer of the system. Modems used at the Controller shall be powered by the Controller. Power to the modem shall include battery backup if the Controller is so equipped.

I. Controller-to-Controller Communications:

1. Controller-to-Controller Communications: RS-485, 4-wire, point-to-point, regenerative (repeater) communications network methodology.
2. RS-485 communications signal shall be regenerated at each Controller.

J. Database Downloads:

1. All data transmissions from PCs to a Location, and between Controllers at a Location, shall include a complete database

checksum to check the integrity of the transmission. If the data checksum does not match, a full data download shall be automatically retransmitted.

2. If a Controller is reset for any reason, it shall automatically request and receive a database download from the PC. The download shall restore data stored at the Controller to their normal working state and shall take place with no operator intervention.
3. Software shall provide for setting downloads via dial-up connection to once per 24-hour period, with time selected by the operator.
4. Software shall provide for setting delays of database downloads for dial-up connections. Delays change the download from immediately to a delay ranging from 1 to 999 minutes.

K. Operator Interface:

1. Inputs in system shall have two icon representations, one for the normal state and one for the abnormal state.
2. When viewing and controlling inputs, displayed icons shall automatically change to the proper icon to display the current system state in real time. Icons shall also display the input's state, whether armed or bypassed, and if the input is in the armed or bypassed state due to a time zone or a manual command.
3. Outputs in system shall have two icon representations, one for the secure (locked) state and one for the open (unlocked) state.
4. Icons displaying status of the I/O points shall be constantly updated to show their current real-time condition without prompting by the operator.
5. The operator shall be able to scroll the list of I/Os and press the appropriate toolbar button, or right click, to command the system to perform the desired function.
6. Graphic maps or drawings containing inputs, outputs, and override groups shall include the following:
   a. Database to import and store full-color maps or drawings and allow for input, output, and override group icons to be placed on maps.
   b. Maps to provide real-time display animation and allow for control of points assigned to them.

c. System to allow inputs, outputs, and override groups to be placed on different maps.

d. Software to allow changing the order or priority in which maps will be displayed.

7. Override Groups Containing I/Os:

a. System shall incorporate override groups that provide the operator with the status and control over user-defined "sets" of I/Os with a single icon.

b. Icon shall change automatically to show the live summary status of points in that group.

c. Override group icon shall provide a method to manually control or set to time zone points in the group.

d. Override group icon shall allow the expanding of the group to show icons representing the live status for each point in the group, individual control over each point, and the ability to compress the individual icons back into one summary icon.

8. Schedule Overrides of I/Os and Override Groups:

a. To accommodate temporary schedule changes that do not fall within the holiday parameters, the operator shall have the ability to override schedules individually for each input, output, or override group.

b. Each schedule shall be composed of a minimum of two dates with separate times for each date.

c. The first time and date shall be assigned the override state that the point shall advance to, when the time and date become current.

d. The second time and date shall be assigned the state that the point shall return to, when the time and date become current.

9. Copy command in database shall allow for like data to be copied and then edited for specific requirements, to reduce redundant data entry.

L. Operator Access Control:

1. Control operator access to system controls through [three] <Insert number> password-protected operator levels. System operators and managers with appropriate password clearances shall be able to change operator levels for operators.

2. Three successive attempts by an operator to execute functions beyond their defined level during a 24-hour period shall initiate a software tamper alarm.
3. A minimum of [32] passwords shall be available with the system software. System shall display the operator's name or initials in the console's first field. System shall print the operator's name or initials, action, date, and time on the system printer at login and logoff.
4. The password shall not be displayed or printed.
5. Each password shall be definable and assignable for the following:
   a. Commands usable.
   b. Access to system software.
   c. Access to application software.
   d. Individual zones that are to be accessed.
   e. Access to database.

M. Operator Commands:
1. Command Input: Plain-language words and acronyms shall allow operators to use the system without extensive training or data-processing backgrounds. System prompts shall be a word, a phrase, or an acronym.
2. Command inputs shall be acknowledged and processing shall start in not less than [1] second.
3. Tasks that are executed by operator's commands shall include the following:
   a. Acknowledge Alarms: Used to acknowledge that the operator has observed the alarm message.
   b. Place Zone in Access: Used to remotely disable intrusion alarm circuits emanating from a specific zone. System shall be structured so that console operator cannot disable tamper circuits.
   c. Place Zone in Secure: Used to remotely activate intrusion alarm circuits emanating from a specific zone.
   d. System Test: Allows the operator to initiate a system-wide operational test.
   e. Zone Test: Allows the operator to initiate an operational test for a specific zone.

f. Print reports.

g. Change Operator: Used for changing operators.

h. Security Lighting Controls: Allows the operator to remotely turn on/off security lights.

i. Display Graphics: Used to display any graphic displays implemented in the system. Graphic displays shall be completed within 20 seconds from time of operator command.

j. Run system tests.

k. Generate and format reports.

l. Request help with the system operation.

1) Include in main menus.

2) Provide unique, descriptive, context-sensitive help for selections and functions with the press of one function key.

3) Provide navigation to specific topic from within the first help window.

4) Help shall be accessible outside the applications program.

m. Entry-Control Commands:

1) Lock (secure) or unlock (open) each controlled entry and exit up to four times a day through time-zone programming.

2) Arm or disarm each monitored input up to four times a day through time-zone programming.

3) Enable or disable readers or keypads up to twice a day through time-zone programming.

4) Enable or disable cards or codes up to four times per day per entry point through access-level programming.

4. Command Input Errors: Show operator input assistance when a command cannot be executed because of operator input errors. Assistance screen shall use plain-language words and phrases to explain why the command cannot be executed. Error responses that require an operator to look up a code in a manual or other document are not acceptable. Conditions causing operator assistance messages include the following:

a. Command entered is incorrect or incomplete.

b. Operator is restricted from using that command.

c. Command addresses a point that is disabled or out of service.

d. Command addresses a point that does not exist.

e. Command is outside the system's capacity.

N. Alarms:

1. System Setup:
   a. Assign manual and automatic responses to incoming point status change or alarms.
   b. Automatically respond to input with a link to other inputs, outputs, operator-response plans, unique sound with use of WAV files, and maps or images that graphically represent the point location.
   c. 60-character message field for each alarm.
   d. Operator-response-action messages shall allow message length of at least 65,000 characters, with database storage capacity of up to 32,000 messages. Setup shall assign messages to access point, zone, and sensor.
   e. Secondary messages shall be assignable by the operator for printing to provide further information and shall be editable by the operator.
   f. Allow 25 secondary messages with a field of 4 lines of 60 characters each.
   g. Store the most recent 1000 alarms for recall by the operator using the report generator.
2. Software Tamper:
   a. Annunciate a tamper alarm when unauthorized changes to system database files are attempted. Three consecutive unsuccessful attempts to log onto system shall generate a software tamper alarm.
   b. Annunciate a software tamper alarm when an operator or other individual makes three consecutive unsuccessful attempts to invoke functions beyond their authorization level.
   c. Maintain a transcript file of the last 5000 commands entered at each Central Station to serve as an audit trail. System shall not allow write access to system transcript files by any person, regardless of their authorization level.
   d. Allow only acknowledgment of software tamper alarms.

3. Read access to system transcript files shall be reserved for operators with the highest password authorization level available in system.
4. Animated Response Graphics: Highlight alarms with flashing icons on graphic maps; display and constantly update the current status of alarm inputs and outputs in real time through animated icons.
5. Multimedia Alarm Annunciation: WAV files to be associated with alarm events for audio annunciation or instructions.
6. Alarm Handling: Each input may be configured so that an alarm cannot be cleared unless it has returned to normal, with options of requiring the operator to enter a comment about disposition of alarm. Allow operator to silence alarm sound when alarm is acknowledged.
7. Alarm Automation Interface: High-level interface to Central Station alarm automation software systems. Allows input alarms to be passed to and handled by automation systems in same manner as burglar alarms, using an RS-232 ASCII interface.
8. CCTV Alarm Interface: Allow commands to be sent to CCTV systems during alarms (or input change of state) through serial ports.
9. Camera Control: Provides the operator with the ability to select and control cameras from graphic maps.

O. Alarm Monitoring: Monitor sensors, Controllers, and DTS circuits and notify operators of an alarm condition. Display higher-priority alarms first and, within alarm priorities, display the oldest unacknowledged alarm first. Operator acknowledgment of one alarm shall not be considered acknowledgment of other alarms nor shall it inhibit reporting of subsequent alarms.

1. Displayed alarm data shall include type of alarm, location of alarm, and secondary alarm messages.
2. Printed alarm data shall include type of alarm, location of alarm, date and time (to nearest second) of occurrence, and operator responses.
3. Maps shall automatically display the alarm condition for each input assigned to that map, if that option is selected for that input location.

4. Alarms initiate a status of "pending" and require the following two handling steps by operators:
   a. First Operator Step: "Acknowledged." This action shall silence sounds associated with the alarm. The alarm remains in the system "Acknowledged" but "Un-Resolved."
   b. Second Operator Step: Operators enter the resolution or operator comment, giving the disposition of the alarm event. The alarm shall then clear.
5. Each workstation shall display the total pending alarms and total unresolved alarms.
6. Each alarm point shall be programmable to disallow the resolution of alarms until the alarm point has returned to its normal state.
7. Alarms shall transmit to Central Station in real time, except for allowing connection time for dial-up locations.
8. Alarms shall be displayed and managed from a minimum of four different windows.
   a. Input Status Window: Overlay status icon with a large red blinking icon. Selecting the icon will acknowledge the alarm.
   b. History Log Transaction Window: Display name, time, and date in red text. Selecting red text will acknowledge the alarm.
   c. Alarm Log Transaction Window: Display name, time, and date in red. Selecting red text will acknowledge the alarm.
   d. Graphic Map Display: Display a steady colored icon representing each alarm input location. Change icon to flashing red when the alarm occurs. Change icon from flashing red to steady red when the alarm is acknowledged.
9. Once an alarm is acknowledged, the operator shall be prompted to enter comments about the nature of the alarm and actions taken. Operator's comments may be manually entered or selected from a programmed predefined list, or a combination of both.
10. For locations where there are regular alarm occurrences, provide programmed comments. Selecting that comment shall clear the alarm.
11. The time and name of the operator who acknowledged and resolved the alarm shall be recorded in the database.

12. Identical alarms from same alarm point shall be acknowledged at same time the operator acknowledges the first alarm. Identical alarms shall be resolved when the first alarm is resolved.
13. Alarm functions shall have priority over downloading, retrieving, and updating database from workstations and Controllers.
14. When a reader-controlled output (relay) is opened, the corresponding alarm point shall be automatically bypassed.

P. Monitor Display: Display text and graphic maps that include zone status integrated into the display. Colors are used for the various components and current data. Colors shall be uniform throughout the system.

1. Color Code:
   a. FLASHING RED: Alerts operator that a zone has gone into an alarm or that primary power has failed.
   b. STEADY RED: Alerts operator that a zone is in alarm and alarm has been acknowledged.
   c. YELLOW: Advises operator that a zone is in access.
   d. GREEN: Indicates that a zone is secure and that power is on.
2. Graphics:
   a. Support 32,000 graphic display maps and allow import of maps from a minimum of 16 standard formats from another drawing or graphics program.
   b. Allow I/O to be placed on graphic maps by the drag-and-drop method.
   c. Operators shall be able to view the inputs, outputs, and the point's name by moving the mouse cursor over the point on graphic map.
   d. Inputs or outputs may be placed on multiple graphic maps. The operator shall be able to toggle to view graphic map associated with inputs or outputs.
   e. Each graphic map shall have a display-order sequence number associated with it to provide a predetermined order when toggled to different views.
   f. Camera icons shall have the ability to be placed on graphic maps that, when selected by an operator, will open a video window,

display the camera associated with that icon, and provide pan-tilt-zoom control.

g. Input, output, or camera placed on a map shall allow the ability to arm or bypass an input, open or secure an output, or control the pan-tilt-zoom function of the selected camera.

Q. System test software enables operators to initiate a test of the entire system or of a particular portion of the system.

1. Test Report: The results of each test shall be stored for future display or printout. The report shall document the operational status of system components.

R. Report Generator Software: Include commands to generate reports for displaying, printing, and storing on disk and tape. Reports shall be stored by type, date, and time. Report printing shall be the lowest priority activity. Report generation mode shall be operator selectable but set up initially as periodic, automatic, or on request. Include time and date printed and the name of operator generating the report. Report formats may be configured by operators.

1. Automatic Printing: Setup shall specify, modify, or inhibit the report to be generated; the time the initial report is to be generated; the time interval between reports; the end of period; and the default printer.
2. Printing on Requests: An operator may request a printout of any report.
3. Alarm Reports: Reporting shall be automatic as initially set up. Include alarms recorded by system over the selected time and information about the type of alarm such as door alarm, intrusion alarm, tamper alarm, etc., the type of sensor, the location, the time, and the action taken.
4. Access and Secure Reports: Document zones placed in access, the time placed in access, and the time placed in secure mode.
5. Custom Reports: Reports tailored to exact requirements of who, what, when, and where. As an option, custom report formats may be stored for future printing.
6. Automatic History Reports: Named, saved, and scheduled for automatic generation.

7. Cardholder Reports: Include data, or selected parts of the data, as well as the ability to be sorted by name, card number, imprinted number, or by any of the user-defined fields.
8. Cardholder by Reader Reports: Based on who has access to a specific reader or group of readers by selecting the readers from a list.
9. Cardholder by Access-Level Reports: Display everyone that has been assigned to the specified access level.
10. Who Is In (Muster) Report:
    a. Emergency Muster Report: One click operation on toolbar launches report.
    b. Cardholder Report. Contain a count of persons that are "In" at a selected Location and a count with detailed listing of name, date, and time of last use, sorted by the last reader used or by the group assignment.
11. Panel Labels Reports: Printout of control-panel field documentation including the actual location of equipment, programming parameters, and wiring identification. Maintain system installation data within system database so that they are available on-site at all times.
12. Activity and Alarm On-Line Printing: Activity printers for use at workstations; prints all events or alarms only.
13. History Reports: Custom reports that allows the operator to select any date, time, event type, device, output, input, operator, Location, name, or cardholder to be included or excluded from the report.
    a. Initially store history on the hard disk of the host PC.
    b. Permit viewing of the history on workstations or print history to any system printer.
    c. The report shall be definable by a range of dates and times with the ability to have a daily start and stop time over a given date range.
    d. Each report shall depict the date, time, event type, event description, device, or I/O name, cardholder group assignment, and cardholder name or code number.
    e. Each line of a printed report shall be numbered to ensure that the integrity of the report has not been compromised.

f. Total number of lines of the report shall be given at the end of the report. If the report is run for a single event such as "Alarms," the total shall reflect how many alarms occurred during that period.

14. Reports shall have the following four options:
    a. View on screen.
    b. Print to system printer. Include automatic print spooling and "Print To" options if more than one printer is connected to system.
    c. "Save to File" with full path statement.
    d. System shall have the ability to produce a report indicating status of system inputs and outputs or of inputs and outputs that are abnormal, out of time zone, manually overridden, not reporting, or in alarm.
15. Custom Code List Subroutine: Allow the access codes of system to be sorted and printed according to the following criteria:
    a. Active, inactive, or future activate or deactivate.
    b. Code number, name, or imprinted card number.
    c. Group, Location, access levels.
    d. Start and stop code range.
    e. Codes that have not been used since a selectable number of days.
    f. In, out, or either status.
    g. Codes with trace designation.
16. The reports of system database shall allow options so that every data field may be printed.
17. The reports of system database shall be constructed so that the actual position of the printed data shall closely match the position of the data on the data-entry windows.

S. Anti-Passback:

1. System shall have global and local anti-passback features, selectable by Location. System shall support hard and soft anti-passback.
2. Hard Anti-Passback: Once a credential holder is granted access through a reader with one type of designation (IN or OUT), the credential holder may not pass through that type of reader

designation until the credential holder passes though a reader of opposite designation.

3. Soft Anti-Passback: Should a violation of the proper IN or OUT sequence occur, access shall be granted, but a unique alarm shall be transmitted to the control station, reporting the credential holder and the door involved in the violation. A separate report may be run on this event.
4. Timed Anti-Passback: A Controller capability that prevents an access code from being used twice at the same device (door) within a user-defined amount of time.
5. Provide four separate zones per Location that can operate without requiring interaction with the host PC (done at Controller). Each reader shall be assignable to one or all four anti-passback zones. In addition, each anti-passback reader can be further designated as "Hard," "Soft," or "Timed" in each of the four anti-passback zones. The four anti-passback zones shall operate independently.
6. The anti-passback schemes shall be definable for each individual door.
7. The Master Access Level shall override anti-passback.
8. System shall have the ability to forgive (or reset) an individual credential holder or the entire credential holder population anti-passback status to a neutral status.

T. Visitor Assignment:

1. Provide for and allow an operator to be restricted to only working with visitors. The visitor badging subsystem shall assign credentials and enroll visitors. Allow only access levels that have been designated as approved for visitors.
2. Provide an automated log of visitor name, time and doors accessed, and whom visitor contacted.
3. Allow a visitor designation to be assigned to a credential holder.
4. PACS shall be able to restrict the access levels that may be assigned to credentials that are issued to visitors.
5. Allow operator to recall visitors' credential holder file, once a visitor is enrolled in the system.

6. The operator may designate any reader as one that deactivates the credential after use at that reader. The history log shall show the return of the credential.
7. System shall have the ability to use the visitor designation in searches and reports. Reports shall be able to print all or any visitor activity.

U. Time and Attendance:

1. Time and attendance reporting shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
2. Shall be provided to match IN and OUT reads and display cumulative time in for each day and cumulative time in for length of the report.
3. System software setup shall allow designation of selected access-control readers as time and attendance hardware to gather the clock-in and clock-out times of the users at these readers.
   a. Reports shall show in and out times for each day, total in time for each day, and a total in time for period specified by the user.
   b. Allow the operator to view and print the reports, or save the report to a file.
   c. Alphabetically sort reports on the person's last name, by Location or location group. Include all credential holders or optionally select individual credential holders for the report.

V. Training Software: Enables operators to practice system operation including alarm acknowledgment, alarm assessment, response force deployment, and response force communications. System shall continue normal operation during training exercises and shall terminate exercises when an alarm signal is received at the console.

W. Entry-Control Enrollment Software: Database management functions that allow operators to add, delete, and modify access data as needed.

1. The enrollment station shall not have alarm response or acknowledgment functions.
2. Provide multiple, password-protected access levels. Database management and modification functions shall require a higher operator access level than personnel enrollment functions.

3. The program shall provide means to disable the enrollment station when it is unattended to prevent unauthorized use.
4. The program shall provide a method to enter personnel identifying information into the entry-control database files through enrollment stations. In the case of personnel identity verification subsystems, this shall include biometric data. Allow entry of personnel identifying information into the system database using menu selections and data fields. The data field names shall be customized during setup to suit user and site needs. Personnel identity verification subsystems selected for use with the system shall fully support the enrollment function and shall be compatible with the entry-control database files.
5. Cardholder Data: Provide 99 user-defined fields. System shall have the ability to run searches and reports using any combination of these fields. Each user-defined field shall be configurable, using any combination of the following features:
   a. MASK: Determines a specific format that data must comply with.
   b. REQUIRED: Operator is required to enter data into field before saving.
   c. UNIQUE: Data entered must be unique.
   d. DEACTIVATE DATE: Data entered will be evaluated as an additional deactivate date for all cards assigned to this cardholder.
   e. NAME ID: Data entered will be considered a unique ID for the cardholder.
6. Personnel Search Engine: A report generator with capabilities such as search by last name, first name, group, or any predetermined user-defined data field; by codes not used in definable number of days; by skills; or by seven other methods.
7. Multiple Deactivate Dates for Cards: User-defined fields to be configured as additional stop dates to deactivate any cards assigned to the cardholder.
8. Batch card printing.
9. Default card data can be programmed to speed data entry for sites where most card data are similar.
10. Enhanced ACSII File Import Utility: Allows the importing of cardholder data and images.

11. Card Expire Function: Allows readers to be configured to deactivate cards when a card is used at selected devices.

X. System Redundancy & High Availability: The system shall provide multiple levels of communications redundancy and failover for all PACS hosted controllers, digital video recorders, and client workstations. The PACS shall be capable of automatically re-routing communications to alternate computers across the system without operator intervention.

1. PACS system configuration with a single application/ database server shall provide at a minimum the following redundancy and failover capability:
   a. The PACS shall provide communications redundancy and failover for network-attached devices. Each network attached device shall have one or more alternative communication server(s) that can provide hosting in case of primary communications server failure.
   b. In case of primary communications server failure, the system shall automatically re-route network-attached devices to their designated backup communications servers to allow continuous system operations without loss of alarm and event transaction processing during failover.
   c. Network-attached devices which transition to backup communications servers, shall be able to be redirected back to their default primary servers, once the primary communications servers have been restored.
2. PACS system configuration with multiple regional application/ database servers shall provide at a minimum the following redundancy and failover capability:
   a) The PACS shall support the same level of communications redundancy and failover for network-attached devices per regional application/database server, allowable to span across regional application/database servers in the event of a regional application/database server failure.
   b) In case of a regional application/database server failure, client workstations shall be able to failover to their designated backup regional application/database server to allow continuous system operations.

c) In case of a regional application/database server failure, upon server restoration, the ISMS shall automatically update and synchronize the regional application/database server.

d) Client workstations which transition to a backup regional application/database server, shall be able to be redirected back to their default regional application/database server, once the regional application/database server functions have been restored.

2.4 SURGE AND TAMPER PROTECTION

A. Refer to 28 05 00 COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor-entry connection to components.

1. Minimum Protection for Power Connections 120 V and More: Auxiliary panel suppressors complying with requirements in Division 26 Section "Transient-Voltage Suppression for Low-Voltage Electrical Power Circuits."

2. Minimum Protection for Communication, Signal, Control, and Low-Voltage Power Connections: Comply with requirements in Division 26 Section "Transient-Voltage Suppression for Low-Voltage Electrical Power Circuits" as recommended by manufacturer for type of line being protected.

C. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially disassembled. Control-station control-unit alarm display shall identify tamper alarms and indicate locations.

2.5 PACS SERVER HARDWARE

A. SMS Server Computer: Standard unmodified PC of modular design. The CPU word size shall be [64] bytes or larger; the CPU operating speed shall be at least [3.4] [GHz].

1. Processor family: [Intel® Xeon® E5640 (4 core, 2.66 GHz, 12MB L3, 80W)].

2. Number of processors: 2
3. Memory: [12] GB RAM , expandable to a minimum of [192] GB without additional chassis or power supplies. Memory protection [Mirrored Memory, Online Spare, Advanced ECC, Memory Lock Step Mode]
4. Input/Output: 2 expansions slots, Network Controller (2) 1GbE NC382i Multifunction 4 Ports.
5. Power Supply: Dual - minimum capacity of [460] W hot plug.
6. Real-Time Clock:
   a. Accuracy: Plus or minus 1 minute per month.
   b. Time Keeping Format: 24-hour time format including seconds, minutes, hours, date, day, and month; resettable by software.
   c. Clock shall function for 1 year without power.
   d. Provide automatic time correction once every 24 hours by synchronizing clock with the Time Service Department of the U.S. Naval Observatory.
7. Serial Ports: Provide two RS-232-F serial ports for general use, with additional ports as required. Data transmission rates shall be selectable under program control.
8. Parallel Port: An enhanced parallel port.
9. The server shall have a 1 GB NIC or greater network card, rated at 100/1000 MB/sec.
10. The server shall have dual [100] GB hard disk drives at [7200] RPM.
11. The server shall have a CD / DVD combo drive.
12. The server operating system shall be either:
    a. Windows 2003 Server, 32 bit native mode, with Service Pack 2 or later with default services enabled.
    b. Windows XP Professional Service Pack 2 or later and default services enabled.
    c. Windows 2008.
13. The Web Server shall be [IIS 7.0] or better.
14. The Database shall be SQL Server 2005 (Express, Standard, Data Center, or Enterprise).
15. Sound Card: For playback and recording of digital WAV sound files that are associated with audible warning and alarm functions.

16. Color Monitor: [17”] or larger SVGA (1024 x 768) monitor with true color support. The server shall have a dedicated 256 MB SVGA accelerated video card with at least 64 MB onboard RAM.
17. Keyboard: With a minimum of 64 characters, standard ASCII character set based on ANSI X3.154.
18. Mouse: Standard, compatible with the installed software.
19. Special function keyboard attachments or special function keys to facilitate data input of the following operator tasks:
    a. Help.
    b. Alarm Acknowledge.
    c. Place Zone in Access.
    d. Place Zone in Secure.
    e. System Test.
    f. Print Reports.
    g. Change Operator.
20. CD-ROM Drive:
    a. Nominal storage capacity of [650] MB.
    b. Data Transfer Rate: [1.2] Mbps.
    c. Average Access Time: [150] ms.
    d. Cache Memory: [256] KB.
    e. Data Throughput: [1] MB/second, minimum.
21. Dot Matrix Alarm Printer:
    a. Connected to the Central Station.
    b. Minimum of 96 characters, standard ASCII character set based on ANSI X3.154, and with graphics capability and programmable control of top-of-form.
    c. Prints in both red and black without ribbon change.
    d. Adjustable sprockets for paper width up to 11 inches.
    e. 80 columns per line, minimum speed of 200 characters per second.
    f. Character Spacing: Selectable at 10, 12, or 17 characters per inch.
    g. Paper: Sprocket-fed fan fold paper.
22. Report Printer:
    a. Connected to the Central Station and designated workstations.
    b. Laser printer with minimum resolution of [1200] <Insert number> dpi.

c. RAM: [2] MB, minimum.

d. Printing Speed: Minimum [12] pages per minute.

e. Paper Handling: Automatic sheet feeder with [250] sheet paper cassette and with automatic feed.

f. Interface: Bidirectional parallel and universal serial bus.

B. Redundant Central Computer: One identical redundant central computer, connected in a hot standby, peer configuration. This computer shall automatically maintain its own copies of system software, application software, and data files. System transactions and other activities that alter system data files shall be updated to system files of redundant computer in near real-time. If central computer fails, redundant computer shall assume control immediately and automatically.

C. PACS controllers clustering shall support the following features:

1. Assignment of Master and alternate master controllers for cluster communication to the SMS server
2. Primary and backup communication paths to the SMS server
3. Encrypted communications
4. Up to [16] controllers per cluster
5. Logical event linking between controllers in a cluster independent of SMS server communication
6. Asynchronous communication via TCP/IP (Polled devices shall not be acceptable)

D. UPS: Self-contained; complying with requirements in Division 26 Section "Static Uninterruptible Power Supply."

1. Size: Provide a minimum of [15] hours of operation of the central-station equipment, including 2 hours of alarm printer operation.
2. Batteries: Sealed, valve regulated, recombinant, lead calcium.
3. Accessories:

a. Transient voltage suppression.

b. Input-harmonics reduction.

c. Rectifier/charger.

d. Battery disconnect device.

e. Static bypass transfer switch.

f. Internal maintenance bypass/isolation switch.

g. External maintenance bypass/isolation switch.

h. Output isolation transformer.

i. Remote UPS monitoring.

j. Battery monitoring.

k. Remote battery monitoring.

l. <Insert accessories.>

2.6 STANDARD WORKSTATION HARDWARE

A. Workstation shall consist of a standard unmodified PC, with accessories and peripherals that configure the workstation for a specific duty.

B. Workstation Computer: Standard unmodified PC of modular design. The CPU word size shall be [32] <Insert number> bytes or larger; the CPU operating speed shall be at least [66] <Insert number> [MHz] [GHz].

1. Memory: [256] MB of usable installed memory, expandable to a minimum of [1024] MB without additional chassis or power supplies.
2. Power Supply: Minimum capacity of [250] W.
3. Real-Time Clock:
   a. Accuracy: Plus or minus 1 minute per month.
   b. Time Keeping Format: 24-hour time format including seconds, minutes, hours, date, day, and month; resettable by software.
   c. Provide automatic time correction once every [24 hours] by synchronizing clock with the Central Station.
4. Serial Ports: Provide two RS-232-F serial ports for general use, with additional ports as required. Data transmission rates shall be selectable under program control.
5. Parallel Port: An enhanced parallel port.
6. LAN Adapter Card: [10/100] Mbps PCI bus, internal network interface card.
7. Sound Card: For playback and recording of digital WAV sound files that are associated with audible warning and alarm functions.
8. Color Monitor: Not less than [17 inches (430 mm)] with a minimum resolution of [1280 by 1024] pixels, noninterlaced, and a maximum dot pitch of [0.28] mm. The video card shall support at least [256] colors at a resolution of [1280 by 1024] at a minimum refresh rate of [70] Hz.
9. Keyboard: With a minimum of 64 characters, standard ASCII character set based on ANSI X3.154.
10. Mouse: Standard, compatible with the installed software.

11. Disk storage shall include the following, each with appropriate controller:
    a. Minimum [10] GB hard disk, maximum average access time of [10] ms.
    b. Floppy Disk Drive: High density, 3-1/2-inch (90-mm) size.
12. CD-ROM Drive:
    a. Nominal storage capacity of [650] MB.
    b. Data Transfer Rate: [1.2] Mbps.
    c. Average Access Time: [150] ms.
    d. Cache Memory: [256] KB.
    e. Data Throughput: [1] MB/second, minimum.
13. Printer:
    a. Connected to the Central Station and designated workstations.
    b. Laser printer with minimum resolution of [600] <Insert number> dpi.
    c. RAM: [2] MB, minimum.
    d. Printing Speed: Minimum [12] pages per minute.
    e. Paper Handling: Automatic sheet feeder with [250] sheet paper cassette and with automatic feed.
14. Interface: Bidirectional parallel, and universal serial bus.
15. LAN Adapter Card: [10/100] <Insert number> Mbps internal network interface card.

C. Redundant Workstation: One identical redundant workstation, connected in a hot standby, peer configuration. This workstation shall automatically maintain its own copies of system software, application software, and data files. System transactions and other activities that alter system data files shall be updated to system files of redundant workstation in near real time. If its associated workstation fails, redundant workstation shall assume control immediately and automatically.

D. UPS: Self-contained, complying with requirements in Division 26 Section "Static Uninterruptible Power Supply."
    1. Size: Provide a minimum of [6] hours of operation of the central-station equipment, including 2 hours of alarm printer operation.
    2. Batteries: Sealed, valve regulated, recombinant, lead calcium.
    3. Accessories:

a. Transient voltage suppression.
b. Input-harmonics reduction.
c. Rectifier/charger.
d. Battery disconnect device.
e. Static bypass transfer switch.
f. Internal maintenance bypass/isolation switch.
g. External maintenance bypass/isolation switch.
h. Output isolation transformer.
i. Remote UPS monitoring.
j. Battery monitoring.
k. Remote battery monitoring.
l. <Insert accessories.>

2.7 COMMUNICATIONS WORKSTATION

A. Standard workstation, modified as follows:
1. (2) two additional RS-232-F serial ports. The CPU word size shall be [32] bytes or larger; the CPU operating speed shall be at least [66] MHz. Multiplexed serial ports shall be expandable with [8] character transmit and receive buffers for each port. Total buffer size shall be a minimum of [1] MB.
2. Redundant workstation is [not] required.
3. Printer is [not] required.

2.8 CONTROLLERS

A. Controllers: Intelligent peripheral control unit, complying with UL 294, that stores time, date, valid codes, access levels, and similar data downloaded from the Central Station or workstation for controlling its operation.
B. Subject to compliance with requirements in this Article, manufacturers may use multipurpose Controllers.
C. Battery Backup: Sealed, lead acid; sized to provide run time during a power outage of 90 minutes, complying with UL 924.
D. Alarm Annunciation Controller:
1. The Controller shall automatically restore communication within 10 seconds after an interruption with the field device network [with dc line supervision on each of its alarm inputs].
a. Inputs: Monitor dry contacts for changes of state that reflect alarm conditions. Provides at least eight alarm inputs, which

are suitable for wiring as normally open or normally closed contacts for alarm conditions.

b. Alarm-Line Supervision:

1) Supervise the alarm lines by monitoring each circuit for changes or disturbances in the signal [, and for conditions as described in UL 1076 for line security equipment] [by monitoring for abnormal open, grounded, or shorted conditions] using dc change measurements. System shall initiate an alarm in response to an abnormal current, which is a dc change of [10] percent or more for longer than 500 ms.

2) Transmit alarm-line-supervision alarm to the Central Station during the next interrogation cycle after the abnormal current condition.

c. Outputs: Managed by Central Station software.

2. Auxiliary Equipment Power: A GFI service outlet inside the Controller enclosure.

E. Entry-Control Controller:

1. Function: Provide local entry-control functions including one- and two-way communications with access-control devices such as card readers, keypads, biometric personal identity verification devices, door strikes, magnetic latches, gate and door operators, and exit push-buttons.

a. Operate as a stand-alone portal Controller using the downloaded database during periods of communication loss between the Controller and the field-device network.

b. Accept information generated by the entry-control devices; automatically process this information to determine valid identification of the individual present at the portal:

1) On authentication of the credentials or information presented, check privileges of the identified individual, allowing only those actions granted as privileges.

2) Privileges shall include, but not be limited to, time of day control, day of week control, group control, and visitor escort control.

c. Maintain a date-, time-, and Location-stamped record of each transaction. A transaction is defined as any successful or

unsuccessful attempt to gain access through a controlled portal by the presentation of credentials or other identifying information.

2. Inputs:
   a. Data from entry-control devices; use this input to change modes between access and secure.
   b. Database downloads and updates from the Central Station that include enrollment and privilege information.
3. Outputs:
   a. Indicate success or failure of attempts to use entry-control devices and make comparisons of presented information with stored identification information.
   b. Grant or deny entry by sending control signals to portal-control devices [and mask intrusion alarm annunciation from sensors stimulated by authorized entries].
   c. Maintain a date-, time-, and Location-stamped record of each transaction and transmit transaction records to the Central Station.
   d. Door Prop Alarm: If a portal is held open for longer than listed in a schedule, alarm sounds.
4. With power supplies sufficient to power at voltage and frequency required for field devices and portal-control devices.
5. Data Line Problems: For periods of loss of communications with Central Station, or when data transmission is degraded and generating continuous checksum errors, the Controller shall continue to control entry by accepting identifying information, making authentication decisions, checking privileges, and controlling portal-control devices.
   a. Store up to [1000] transactions during periods of communication loss between the Controller and access-control devices for subsequent upload to the Central Station on restoration of communication.
6. Controller Power: NFPA 70, Class II power supply transformer, with 12- or 24-V ac secondary, backup battery and charger.
   a. Backup Battery: Premium, valve-regulated, recombinant-sealed, lead-calcium battery; spill proof; with a full 1-year warranty

and a pro rata 19-year warranty. With single-stage, constant-voltage-current, limited battery charger, comply with battery manufacturer's written instructions for battery terminal voltage and charging current recommendations for maximum battery life.

b. Backup Battery: Valve-regulated, recombinant-sealed, lead-acid battery; spill proof. With single-stage, constant-voltage-current, limited battery charger, comply with battery manufacturer's written instructions for battery terminal voltage and charging current recommendations for maximum battery life.

c. Backup Power Supply Capacity: [90] minutes of battery supply. Submit battery and charger calculations.

d. Power Monitoring: Provide manual dynamic battery load test, initiated and monitored at the control center; with automatic disconnection of the Controller when battery voltage drops below Controller limits. Report by using local Controller-mounted LEDs and by communicating status to Central Station. Indicate normal power on and battery charger on trickle charge. Indicate and report the following:

1) Trouble Alarm: Normal power offload assumed by battery.

2) Trouble Alarm: Low battery.

3) Alarm: Power off.

2.9 PIV MIDDLEWARE

A. PIV Middleware shall provide three-factor authentication, including biometric matching using a fingerprint capture device capable of single fingerprint capture. Unit shall enable digital certificates can to be verified by security personnel using the issuer's certificate authority, SCVP, OCSP responder/repeater, or the TSA hot list for TWIC cardholders. All cards shall be validated using FIPS-201 challenge-response protocol in order to identify forged or cloned cards. PIV Middleware solution shall validate all PIV, TWIC, NG CAC, and FRAC cards. TWIC card FASC-Ns shall also be verified against a live or cached TSA hot list.

B. PIV Middleware shall have ability to:

1. Verify cardholder identity and validates FIPS 201-compliant PIV-II, next-generation (NG) CAC, TWIC, or FRAC credentials in real-time

2. Perform three-factor authentication of cardholder using PIN, biometrics, and certificate (or serial numbers) detecting forged or cloned cards
3. Enroll FASC-N, photo, and pertinent cardholder information into PACS software
4. Automatically suspend a cardholder’s badge if his or her PIV, TWIC, or CAC card certificate serial number is on the Certificate Revocation List (CRL)
5. Upload a cardholder transaction audit trail to central database or exports it to a .csv file for centralized transaction management
6. Be compatible with biometric mobile terminal for off-site verification and enrollment
7. Re-validate imported cardholder certificates on a periodic basis via the Internet
8. Operate with commercial, off-the-shelf (COTS) FIPS 201 PIV-II and ANSI INCITS 378-compliant fingerprint capture devices
9. Revalidate imported cardholder certificates at regular intervals, ensuring that the credentials used in PACS system are backed by a valid set of digital certificates. Digital certificates are verified against local OCSP repeater/validation authority using the issuer's validation authority, or Microsoft Crypto Application Programming Interface (API) on Windows XP SP3 or Vista.
10. Certificate Manager shall fully support SCVP and OCSP for fast, online validation.
11. Provide verification of TWIC credentials against a live TSA hot list.
12. Support uploading local transactions to a central database for consolidated activity reporting. This application shall support a variety of ODBC- or ADO-compliant databases, including Oracle, SQL Server 2005, Informix, DB2, and Firebird.
13. Provide user with ability to produce canned transaction log queries as well as creating queries directly from the SQL database.

C. PIV Middleware PC requirements:

1. PIV Middleware software shall operate on Intel-based PC with minimum 1.8 GHz CPU, 1 GB RAM, 40 GB hard disk, and Microsoft Windows XP SP2 with Microsoft .NET Framework 2.0

2. Unit shall fingerprint capture devices and smart card reader.

D. PIV Middleware shall be FIPS 201 approved product.

2.10 CARD READERS

A. Power: Card reader shall be powered from its associated Controller, including its standby power source.

B. Response Time: Card reader shall respond to passage requests by generating a signal that is sent to the Controller. Response time shall be [800] ms or less, from the time the card reader finishes reading the credential card until a response signal is generated.

C. Enclosure: Suitable for surface, semi flush, or pedestal mounting. Mounting types shall additionally be suitable for installation in the following locations:

1. Indoors, controlled environment.
2. Indoors, uncontrolled environment.
3. Outdoors, with built-in heaters or other cold-weather equipment to extend the operating temperature range as needed for operation at the site.

D. Display: LED or other type of visual indicator display shall provide visual[and audible] status indications and user prompts. Indicate power on/off, whether user passage requests have been accepted or rejected, and whether the door is locked or unlocked.

E. Shall be utilized for controlling the locking hardware on a door and allows for reporting back to the main control panel with the time/date the door was accessed, the name of the person accessing the point of entry, and its location.

F. Will be fully programmable and addressable, locally, and remotely, and hardwired to the system.

G. Shall be individually home run to the main panel.

H. Shall be installed in a manner that they comply with:

1. The Uniform Federal Accessibility Standards (UFAS)
2. The Americans with Disabilities Act (ADA)
3. The ADA Standards for Accessible Design

I. Shall support a variety of card readers that must encompass a wide functional range. The PACS may combine any of the card readers described below for installations requiring multiple types of card reader capability (i.e., card only, card and/or PIN, card and/or

biometrics, card and/or pin and/or biometrics, supervised inputs, etc.). These card readers shall be available in the approved technology to meet FIPS 201, and is ISO 14443 A or B, ISO/IEC 7816 compliant. The reader output can be Wiegand, RS-22, 485 or TCP/IP.

J. Shall be housed in an aluminum bezel with a wide lead-in for easy card entry.

K. Shall contain read head electronics, and a sender to encode digital door control signals.

L. LED’s shall be utilized to indicate card reader status and access status.

M. Shall be able to support a user defined downloadable off-line mode of operation (e.g., locked, unlocked), which will go in effect during loss of communication with the main control panel.

N. Shall provide audible feedback to indicate access granted/denied decisions. Upon a card swipe, two audible tones or beeps shall indicate access granted and three tones or beeps shall indicate access denied. All keypad buttons shall provide tactile audible feedback.

O. Shall have a minimum of two programmable inputs and two programmable outputs.

P. All card readers that utilize keypad controls along with a reader and shall meet the following specifications:

   1. Entry control keypads shall use a unique combination of alphanumeric and other symbols as an identifier. Keypads shall contain an integral alphanumeric/special symbols keyboard with symbols arranged in ascending ASCII code ordinal sequence. Communications protocol shall be compatible with the local processor.

Q. Shall include a Light Emitting Diode (LED) or other type of visual indicator display and provide visual or visual and audible status indications and user prompts. The display shall indicate power on/off, and whether user passage requests have been accepted or rejected. The design of the keypad display, or keypad enclosure shall limit the maximum horizontal and vertical viewing angles of the keypad. The maximum horizontal viewing angle shall be plus and minus five (5) degrees or less off a vertical plane perpendicular to the plane of the face of the keypad display. The maximum vertical viewing angle shall be

plus and minus 15 degrees or less off a horizontal plane perpendicular to the plane of the face of the keypad display.

1. Shall respond to passage requests by generating a signal to the local processor. The response time shall be 800 milliseconds or less from the time the last alphanumeric symbol is entered until a response signal is generated.
2. Shall be powered from the source as designed and shall not dissipate more than 150 Watts.
3. Shall be suitable for surface, semi-flush, pedestal, or weatherproof mounting as required.
4. Shall provide a means for users to indicate a duress situation by entering a special code.

R. PIV Contact Card Reader

1. Application Protocol Data Unit (APDU) Support: At a minimum, the contact interface shall support all card commands for contact-based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.
2. Buffer Size: The reader must contain a buffer large enough to receive the maximum size frame permitted by International Organization for Standardization International Electrotechnical Commission (ISO/IEC) 7816-3:1997, Section 9.4.
3. Programming Voltage: PIV Readers shall not generate a Programming Voltage.
4. Support for Operating Class: PIV Readers shall support cards with Class A Vccs as defined in ISO/IEC 7816-3:1997 and ISO/IEC 7816-3:1997/Amd 1:2002.
5. Retrieval Time: Retrieval time[1] for 12.5 kilobytes (KB) of data through the contact interface of the reader shall not exceed 2.0 seconds.
6. Transmission Protocol: The PIV Reader shall support both the character-based T=0 protocol and block-based T=1 protocol as defined in ISO/IEC 7816-3:1997.

7. Support for PPS Procedure: The reader shall support Protocol and Parameters Selection (PPS) procedure by having the ability to read character TA1 of the Answer to Reset (ATR) sent by the card as defined in ISO/IEC 7816-3:1997.

S. Contactless Smart Cards and Readers

1. Smart card readers shall read credential cards whose characteristics of size and technology meet those defined by ISO/IEC 7816, 14443, 15693.
2. The readers shall have "flash" download capability to accommodate card format changes.
3. The card reader shall have the capability of reading the card data and transmitting the data to the main monitoring panel.
4. The card reader shall be contactless and meet or exceed the following technical characteristics:
   a. Data Output Formats: FIPS 201 low outputs the FASC-N in an assortment of Wiegand bit formats from 40 – 200 bits. FIPS 201 medium outputs a combination FASC-N and HMAC in an assortment of Wiegand bit formats from 32 – 232 bits. All Wiegand formats or the upgradeability from Low to Medium Levels can be field configured with the use of a command card.
   b. FIPS 201 readers shall be able to read, but not be limited to, DESfire and iCLASS cards.
   c. Reader range shall comply with ISO standards 7816, 14443, and 15693, and also take into consideration conditions, are at a minimum 1” to 2” (2.5 – 5 cm).
   d. APDU Support: At a minimum, the contactless interface shall support all card commands for contactless based access specified in Section 7, End-point PIV Card Application Card Command Interface of SP 800-73-1, Interfaces for Personal Identity Verification.
   e. Buffer Size: The reader shall contain a buffer large enough to receive the maximum size frame permitted by ISO/IEC 7816-3, Section 9.4.
   f. ISO 14443 Support: The PIV Reader shall support parts (1 through 4) of ISO/IEC 14443 as amended in the References of this publication.

g. Type A and B Communication Signal Interfaces: The contactless interface of the reader shall support both the Type A and Type B communication signal interfaces as defined in ISO/IEC 14443-2:2001.
h. Type A and B Initialization and Anti-Collision The contactless interface of the reader shall support both Type A and Type B initialization and anti-collision methods as defined in ISO/IEC 14443-3:2001.
i. Type A and B Transmission Protocols: The contactless interface of the reader shall support both Type A and Type B transmission protocols as defined in ISO/IEC 14443-4:2001.
j. Retrieval Time: Retrieval time for 4 KB of data through the contactless interface of the reader shall not exceed 2.0 seconds.
k. Transmission Speeds: The contactless interface of the reader shall support bit rates of fc/128 (~106 kbits/s), fc/64(~212 kbits/s), and configurable to allow activation/deactivation.
l. Readability Range: The reader shall not be able to read PIV card more than 10cm(4inch) from the reader

2.11 KEYPADS

A. Designed for use with unique combinations of alphanumeric and other symbols as an Identifier. Keys of keypads shall contain an integral alphanumeric/special symbol keyboard with symbols arranged in [ascending ASCII-code ordinal sequence] [random scrambled order]. Communications protocol shall be compatible with Controller.
1. Keypad display or enclosure shall limit viewing angles of the keypad as follows:
a. Maximum Horizontal Viewing Angle: 5 degrees or less off in either direction of a vertical plane perpendicular to the plane of the face of the keypad display.
b. Maximum Vertical Viewing Angle: 15 degrees or less off in either direction of a horizontal plane perpendicular to the plane of the face of the keypad display.
2. Duress Codes: Provide duress situation indication by entering a special code.

2.12 CREDENTIAL CARDS

A. Personal Identity Verification (PIV) credential cards shall comply to Federal Information Processing Standards Publication (FIPS) 201.

B. Visual Card Topography shall be compliant with NIST 800-104.

C. PIV logical credentials shall contain multiple data elements for the purpose of verifying the cardholder's identity at graduated assurance levels. These mandatory data elements shall collectively comprise the data model for PIV logical credentials, and include the following:

1. CHUID
2. PIN

D. The credential card (PIV) shall be an ISO 14443 type smart card with contactless interface that operates at 13.56 MHZ.

2.13 SYSTEM SENSORS AND RELATED EQUIPMENT

A. The PACS (Physical Access Control System) and related Equipment provided by the Contractor shall meet or exceed the following performer specifications:

B. Request to Exit Detectors:

1. Passive Infrared Request to Exit Motion Detector (REX PIR) (1) The Contractor shall provide a surface mounted motion detector to signal the physical access control system request to exit input. The motion detector shall be a passive infrared sensor designed for wall or ceiling mounting 2134 to 4572 mm (7 to 15 ft) height. The detector shall provide two (2) form “C” (SPDT) relays rated one (1) Amp. @ 30 VDC for DC resistive loads. The detectors relays shall be user adjustable with a latch time from 1-60 seconds. The detector shall also include a selectable relay reset mode to follow the timer or absence of motion. The detection pattern shall be adjustable plus or minus fourteen (± 14) degrees. The detector shall operate on 12 VDC with approximately 26 mA continuous current draw. The detector shall have an externally visible activation LED. The motion detector shall measure approximately 38 mm H x 158 mm W x 38 mm D (1.5 x 6.25 x 1.5 in). The detector shall be immune to radio frequency interference. The detector shall not activate or set-up on critical frequencies in the range 26 to 950 Megahertz using a 50 watt transmitter located 30.5 cm (1 ft) from the unit or attached wiring. The detector shall be available on gray or black

enclosures. The color of the housing shall be coordinated with the surrounding surface.

2.17 INTERFACES

A. CCTV System Interface

1. An RS232 [Ethernet] interface associated driver, and controller shall be provided for connection of the SMS Central Computer to the CCTV Alarm interface and switcher. The interface shall provide alarm data to the CCTV Alarm interface for automatic camera call-up. If required the Security Contractor shall be responsible for programming the command strings into the SMS Server.

B. Intercom System Interface

1. The CCTV call-up from intercom stations shall be through the intercom unit via RS232 [Ethernet] communications interface to the SMS system, then through the matrix switcher.
   a. Application Software
      1) Provides the interface between the Alarm Annunciation System and Operator; all sensors, local processors and data links, drive displays, report alarms, and report generation.
      2) Software is categorized as System Software and Application Software. System Software must consist of software to support set-up, operation, hard drive back-ups and maintenance processor. Application Software must consist of software to provide the completion of Physical Access Control System.

C. Power Supplies:

1. Shall be UL rated and able to adequately power (enter number) entry control devices on a continuous base without failure.
2. Shall meet the following minimum technical characteristics:

INPUT POWER	110 VAC 60 HZ (enter amperage)A
OUTPUT VOLTAGE	12 VDC Nominal (13.8 VDC) 24 VDC Nominal (27.6 VDC) Filtered and Regulated
BATTERY	Dependant on Output Voltage shall provide up to <__> Ah
OUTPUT CURRENT	[10] amp max. [@ 13.8] VDC [5] amp max. [@ 27.6] VDC

PRIMARY FUSE SIZE	6.3 amp (non-removable)
BATTERY FUSE SIZE	12 amp, 3AG
CHARGING CIRCUIT	Built-in standard

2.21 VIDEO AND CAMERA CONTROL

A. Control station or designated workstation displays live video from a CCTV source.
   1. Control Buttons: On the display window, with separate control buttons to represent Left, Right, Up, Down, Zoom In, Zoom Out, Scan, and a minimum of two custom command auxiliary controls.
   2. Provide at least seven icons to represent different types of cameras, with ability to import custom icons. Provide option for display of icons on graphic maps to represent their physical location.
   3. Provide the alarm-handling window with a command button that will display the camera associated with the alarm point.

B. Display mouse-selectable icons representing each camera source, to select source to be displayed. For CCTV sources that are connected to a video switcher, control station shall automatically send control commands through a COM port to display the requested camera when the camera icon is selected.

C. Allow cameras with preset positioning to be defined by displaying a different icon for each of the presets. Provide control with Next and Previous buttons to allow operator to cycle quickly through the preset positions.

2.22 WIRES AND CABLES

A. Refer to section 280513 "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY".

A. Comply with Division 28 Section "CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY."

B. PVC-Jacketed, RS-232 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, and individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage; PVC jacket. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
   1. NFPA 70, Type CM.

2. Flame Resistance: UL 1581 Vertical Tray.

C. Plenum-Type, RS-232 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, plastic insulation, and individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage; plastic jacket. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.

1. NFPA 70, Type CMP.
2. Flame Resistance: NFPA 262 Flame Test.

D. RS-485 communications require 2 twisted pairs, with a distance limitation of 4000 feet (1220 m).

E. PVC-Jacketed, RS-485 Cable: Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, PVC insulation, unshielded, PVC jacket, and NFPA 70, Type CMG.

F. Plenum-Type, RS-485 Cable: Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and fluorinated-ethylene-propylene jacket.

1. NFPA 70, Type CMP.
2. Flame Resistance: NFPA 262 Flame Test.

G. Multiconductor, Readers and Wiegand Keypads Cables: No. 22 AWG, paired and twisted multiple conductors, stranded (7x30) tinned copper conductors, semirigid PVC insulation, overall aluminum foil-polyester tape shield with 100 percent shield coverage, plus tinned copper braid shield with 65 percent shield coverage, and PVC jacket.

1. NFPA 70, Type CMG.
2. Flame Resistance: UL 1581 Vertical Tray.
3. For TIA/EIA-RS-232 applications.

H. Paired Readers and Wiegand Keypads Cables: Paired, 3 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, individual aluminum foil-polyester tape shielded pairs each with No. 22 AWG, stranded tinned copper drain wire, 100 percent shield coverage, and PVC jacket.

1. NFPA 70, Type CM.
2. Flame Resistance: UL 1581 Vertical Tray.

I. Paired Readers and Wiegand Keypads Cable: Paired, 3 pairs, twisted, No. 20 AWG, stranded (7x28) tinned copper conductors, polyethylene (polyolefin) insulation, individual aluminum foil-polyester tape

shielded pairs each with No. 22 AWG, stranded (19x34) tinned copper drain wire, 100 percent shield coverage, and PVC jacket.

1. NFPA 70, Type CM.
2. Flame Resistance: UL 1581 Vertical Tray.

J. Plenum-Type, Paired, Readers and Wiegand Keypads Cable: Paired, 3 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors, plastic insulation, individual aluminum foil-polypropylene tape shielded pairs each with No. 22 AWG, stranded tinned copper drain wire, 100 percent shield coverage, and fluorinated-ethylene-propylene jacket.

1. NFPA 70, Type CMP.
2. Flame Resistance: NFPA 262 Flame Test.

K. Plenum-Type, Multiconductor, Readers and Keypads Cable: 6 conductors, No. 20 AWG, stranded (7x28) tinned copper conductors, fluorinated-ethylene-propylene insulation, overall aluminum foil-polyester tape shield with 100 percent shield coverage plus tinned copper braid shield with 85 percent shield coverage, and fluorinated-ethylene-propylene jacket.

1. NFPA 70, Type CMP.
2. Flame Resistance: NFPA 262 Flame Test.

L. Paired Lock Cable: 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.

1. NFPA 70, Type CMG.
2. Flame Resistance: UL 1581 Vertical Tray.

M. Plenum-Type, Paired Lock Cable: 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.

1. NFPA 70, Type CMP.
2. Flame Resistance: NFPA 262 Flame Test.

N. Paired Lock Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.

1. NFPA 70, Type CMG.
2. Flame Resistance: UL 1581 Vertical Tray.

O. Plenum-Type, Paired Lock Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and plastic jacket.

1. NFPA 70, Type CMP.

2. Flame Resistance: NFPA 262 Flame Test.

P. Paired Input Cable: 1 pair, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, polypropylene insulation, overall aluminum foil-polyester tape shield with No. 22 AWG, stranded (7x30) tinned copper drain wire, 100 percent shield coverage, and PVC jacket.
   1. NFPA 70, Type CMR.
   2. Flame Resistance: UL 1666 Riser Flame Test.

Q. Plenum-Type, Paired Input Cable: 1 pair, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, aluminum foil-polyester tape shield (foil side out), with No. 22 AWG drain wire, 100 percent shield coverage, and plastic jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

R. Paired AC Transformer Cable: 1 pair, twisted, No. 18 AWG, stranded (7x26) tinned copper conductors, PVC insulation, unshielded, and PVC jacket.
   1. NFPA 70, Type CMG.

S. Plenum-Type, Paired AC Transformer Cable: 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors, fluorinated-ethylene-propylene insulation, unshielded, and plastic jacket.
   1. NFPA 70, Type CMP.
   2. Flame Resistance: NFPA 262 Flame Test.

T. Elevator Travel Cable: Steel center core, with shielded, twisted pairs, No. 20 AWG conductor size.
   1. Steel Center Core Support: Preformed, flexible, low-torsion, zinc-coated, steel wire rope; insulated with 60 deg C flame-resistant PVC and covered with a nylon or cotton braid.
   2. Shielded Pairs: Insulated copper conductors; color-coded, insulated with 60 deg C flame-resistant PVC; each pair shielded with bare copper braid for 85 percent coverage.
   3. Jute Filler: Electrical grade, dry.
   4. Binder: Helically wound synthetic fiber.
   5. Braid: Rayon or cotton braid applied with 95 percent coverage.
   6. Jacket: 60 deg C PVC specifically compounded for flexibility and abrasion resistance. UL VW-1 and CSA FT1 flame rated.

U. LAN (Ethernet) Cabling: Comply with Division 28 Section "Conductors and Cables for Electronic Safety and Security."

PART 3 - EXECUTION

3.1 GENERAL

A. The Contractor shall install all system components and appurtenances in accordance with the manufacturers' instructions, ANSI C2, and shall furnish all necessary interconnections, services, and adjustments required for a complete and operable system as specified. Control signals, communications, and data transmission lines grounding shall be installed as necessary to preclude ground loops, noise, and surges from affecting system operation. Equipment, materials, installation, workmanship, inspection, and testing shall be in accordance with manufacturers' recommendations and as modified herein.

B. Consult the manufacturers' installation manuals for all wiring diagrams, schematics, physical equipment sizes, etc., before beginning system installation. Refer to the Riser/Connection diagram for all schematic system installation/termination/wiring data.

C. All equipment shall be attached to walls and ceiling/floor assemblies and shall be held firmly in place (e.g., sensors shall not be supported solely by suspended ceilings). Fasteners and supports shall be adequate to support the required load.

3.2 CURRENT SITE CONDITIONS

A. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions which will affect performance of the system to the Owner in a report as defined in paragraph Group II Technical Data Package. The Contractor shall not take any corrective action without written permission from the Owner.

3.3 EXAMINATION

A. Examine pathway elements intended for cables. Check raceways, cable trays, and other elements for compliance with space allocations, installation tolerances, hazards to cable installation, and other conditions affecting installation.

B. Examine roughing-in for LAN and control cable conduit systems to PCs, Controllers, card readers, and other cable-connected devices to verify actual locations of conduit and back boxes before device installation.

C. Proceed with installation only after unsatisfactory conditions have been corrected.

3.4 PREPARATION

A. Comply with recommendations in SIA CP-01.

B. Comply with EIA/TIA-606, "Administration Standard for the Telecommunications Infrastructure of Commercial Buildings."

C. Obtain detailed Project planning forms from manufacturer of access-control system; develop custom forms to suit Project. Fill in all data available from Project plans and specifications and publish as Project planning documents for review and approval.

1. Record setup data for control station and workstations.
2. For each Location, record setup of Controller features and access requirements.
3. Propose start and stop times for time zones and holidays, and match up access levels for doors.
4. Set up groups, linking, and list inputs and outputs for each Controller.
5. Assign action message names and compose messages.
6. Set up alarms. Establish interlocks between alarms, intruder detection, and video surveillance features.
7. Prepare and install alarm graphic maps.
8. Develop user-defined fields.
9. Develop screen layout formats.
10. Propose setups for guard tours and key control.
11. Discuss badge layout options; design badges.
12. Complete system diagnostics and operation verification.
13. Prepare a specific plan for system testing, startup, and demonstration.
14. Develop acceptance test concept and, on approval, develop specifics of the test.
15. Develop cable and asset management system details; input data from construction documents. Include system schematics and Technical Drawings.

D. In meetings with Architect and Owner, present Project planning documents and review, adjust, and prepare final setup documents. Use final documents to set up system software.

3.5 CABLING

A. Comply with NECA 1, "Good Workmanship in Electrical Contracting."

B. Install cables and wiring according to requirements in Division 28 Section "Conductors and Cables for Electronic Safety and Security."

C. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters. Conceal raceway and wiring except in unfinished spaces.

D. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces and in gypsum board partitions where unenclosed wiring method may be used. Use NRTL-listed plenum cable in environmental air spaces, including plenum ceilings. Conceal raceway and cables except in unfinished spaces.

E. Install LAN cables using techniques, practices, and methods that are consistent with Category 5E rating of components and that ensure Category 5E performance of completed and linked signal paths, end to end.

F. Install cables without damaging conductors, shield, or jacket.

G. Boxes and enclosures containing security system components or cabling, and which are easily accessible to employees or to the public, shall be provided with a lock. Boxes above ceiling level in occupied areas of the building shall not be considered to be accessible. Junction boxes and small device enclosures below ceiling level and easily accessible to employees or the public shall be covered with a suitable cover plate and secured with tamperproof screws.

H. Install end-of-line resistors at the field device location and not at the Controller or panel location.

3.6 CABLE APPLICATION

A. Comply with EIA/TIA-569, "Commercial Building Standard for Telecommunications Pathways and Spaces."

B. Cable application requirements are minimum requirements and shall be exceeded if recommended or required by manufacturer of system hardware.

C. RS-232 Cabling: Install at a maximum distance of 50 feet (15 m).

D. RS-485 Cabling: Install at a maximum distance of 4000 feet (1220 m).

E. Card Readers and Keypads:

1. Install number of conductor pairs recommended by manufacturer for the functions specified.
2. Unless manufacturer recommends larger conductors, install No. 22 AWG wire if maximum distance from Controller to the reader is 250 feet (75 m), and install No. 20 AWG wire if maximum distance is 500 feet (150 m).
3. For greater distances, install "extender" or "repeater" modules recommended by manufacturer of the Controller.
4. Install minimum No. 18 AWG shielded cable to readers and keypads that draw 50 mA or more.

F. Install minimum No. 16 AWG cable from Controller to electrically powered locks. Do not exceed [250 feet (75 m)] [500 feet (150 m)] <Insert distance>.

G. Install minimum No. 18 AWG ac power wire from transformer to Controller, with a maximum distance of [25 feet (8 m)] <Insert distance>.

3.7 GROUNDING

A. Comply with Division 26 Section "Grounding and Bonding for Electrical Systems."

B. Comply with IEEE 1100, "Power and Grounding Sensitive Electronic Equipment."

C. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments.

D. Signal Ground:

1. Terminal: Locate in each equipment room and wiring closet; isolate from power system and equipment grounding.
2. Bus: Mount on wall of main equipment room with standoff insulators.
3. Backbone Cable: Extend from signal ground bus to signal ground terminal in each equipment room and wiring closet.

3.8 INSTALLATION

A. System installation shall be in accordance with UL 294, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.

B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.

C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a operable system.

D. The PACS will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a network.

E. For integration purposes, the PACS shall be integrated where appropriate with the following associated security subsystems:

1. CCTV:
   a. Provide 24-hour coverage of all entry points to the perimeter and agency buildings. As well as all emergency exits utilizing a fixed color camera.
   b. Be able to monitor, control and record cameras on a 24-hour basis.
   c. Be programmed to automatically call up a camera when an access point is but into an alarm state.
   d. For additional PACS system requirements as they relate to the CCTV, refer to Section 28 23 00, VIDEO SURVEILLANCE.

F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

G. For programming purposes refer to the manufacturers’ requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.

H. The Contractor shall visit the site and verify that site conditions are in agreement with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system. The Contractor shall not take any corrective action without written permission from the Government.

I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect

performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

J. Existing Equipment:

1. The Contractor shall connect to and utilize existing door equipment, control signal transmission lines, and devices as outlined in the design package. Door equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing door equipment and signal lines intended to be incorporated into the PACS, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or improper installation of equipment.
5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

L. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

M. Control Panels:
   1. Connect power and signal lines to the controller.
   2. Program the panel as outlined by the design and per the manufacturer’s programming guidelines.

N. SMS:
   1. Coordinate with the VA agency’s IT personnel to place the computer on the local LAN or Intranet and provide the security system protection levels required to insure only authorized VA personnel have access to the system.
   2. Program and set-up the SMS to ensure it is in fully operation.

O. Card Readers:
   1. Connect all signal inputs and outputs as shown and specified.
   2. Terminate input signals as required.
   3. Program and address the reader as per the design package.
   4. Readers shall be surface or flush-mounted and all appropriate hardware shall be provided to ensure the unit is installed in an enclosed conduit system.

P. Biometrics:
   1. Connect all signal input and output cables along with all power cables.
   2. Program and ensure the device is in operating order.

Q. Portal Control Devices:

1. Install all signal input and output cables as well as all power cables.
2. Devices shall be surface or flush mounted as per the design package.
3. Program all devices and ensure they are working.

R. Door Status Indicators:

1. Install all signal input and output cables as well as all power cables.
2. RTE’s shall be surface mounted and angled in a manner that they cannot be compromised from the non-secure side of a windowed door, or allow for easy release of the locking device from a distance no greater than 6 feet from the base of the door.
3. Door position sensors shall be surface or flush mounted and wide gap with the ability to operate at a maximum distance of up to 2” (5 cm).

S. Entry Control Devices:

1. Install all signal input and power cables.
2. Strikes and bolts shall be mounted within the door frame.
3. Mortise locks shall be mounted within the door and an electric transfer hinge shall be utilized to transfer the wire from within the door frame to the mortise lock inside the door.
4. Electromagnetic locks shall be installed with the mag-lock mounted to the door frame and the metal plate mounted to the door.

T. System Start-Up:

1. The Contractor shall not apply power to the PACS until the following items have been completed:
   a. PACS equipment items and have been set up in accordance with manufacturer's instructions.
   b. A visual inspection of the PACS has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
   c. System wiring has been tested and verified as correctly connected as indicated.
   d. All system grounding and transient protection systems have been verified as installed and connected as indicated.
   e. Power supplies to be connected to the PACS have been verified as the correct voltage, phasing, and frequency as indicated.

2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.
3. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Contracting Officer’s Representative and Commissioning Agent. Provide a minimum of 7 days prior notice.

U. Supplemental Contractor Quality Control:
1. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed PACS; and are approved by the Contracting Officer.
2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.9 SYSTEM SOFTWARE

A. Install, configure, and test software and databases for the complete and proper operation of systems involved. Assign software license to Owner.

3.10 FIELD QUALITY CONTROL

A. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect[, test, and adjust] field-assembled components and equipment installation, including connections[, and to assist in field testing]. Report results in writing.
B. Testing Agency: Engage a qualified testing and inspecting agency to perform field tests and inspections and prepare test reports:
C. Perform the following field tests and inspections and prepare test reports:

1. LAN Cable Procedures: Inspect for physical damage and test each conductor signal path for continuity and shorts. Use Class 2, bidirectional, Category 5 tester. Test for faulty connectors, splices, and terminations. Test according to TIA/EIA-568, "Commercial Building Telecommunications Cabling Standards - Part 1 General Requirements." Link performance for UTP cables must comply with minimum criteria in TIA/EIA-568.
2. Test each circuit and component of each system. Tests shall include, but are not limited to, measurements of power supply output under maximum load, signal loop resistance, and leakage to ground where applicable. System components with battery backup shall be operated on battery power for a period of not less than 10 percent of the calculated battery operating time. Provide special equipment and software if testing requires special or dedicated equipment.
3. Operational Test: After installation of cables and connectors, demonstrate product capability and compliance with requirements. Test each signal path for end-to-end performance from each end of all pairs installed. Remove temporary connections when tests have been satisfactorily completed.

3.11 PROTECTION

A. Maintain strict security during the installation of equipment and software. Rooms housing the control station, and workstations that have been powered up shall be locked and secured, with an activated burglar alarm and access-control system reporting to a Central Station complying with UL 1610, "Central-Station Burglar-Alarm Units," during periods when a qualified operator in the employ of Contractor is not present.

3.12 COMMISSIONING (NOT USED)

3.13 DEMONSTRATION AND TRAINING

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

C. Develop separate training modules for the following:

1. Computer system administration personnel to manage and repair the LAN and databases and to update and maintain software.
2. Operators who prepare and input credentials to man the control station and workstations and to enroll personnel.
3. Security personnel.
4. Hardware maintenance personnel.
5. Corporate management.

D. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

-----END----

SECTION 28 23 00
VIDEO SURVEILLANCE

PART 1 – GENERAL

1.1 DESCRIPTION

A. Provide and install a complete Video Surveillance System, which is identified as the Video Assessment and Surveillance System hereinafter referred to as the VASS System as specified in this section.

B. This Section includes video surveillance system consisting of cameras, data transmission wiring, and a control station with its associated equipment.

C. Video surveillance system Video assessment & surveillance system shall be integrated with monitoring and control system specified in Division 28 Section [INTRUSION DETECTION] [PHYSICAL ACCESS CONTROL] [SECURITY ACCESS DETECTION] [ELECTRONIC PERSONAL PROTECTION SYSTEM] that specifies systems integration.

1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.

D. Section 14 21 00 - ELECTRIC TRACTION ELEVATORS. Requirements for elevators.

E. Section 14 24 00 - HYDRAULIC ELEVATORS. Requirements for elevators.

F. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.

G. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.

H. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.

I. Section 26 56 00 - EXTERIOR LIGHTING. Requirements for perimeter lighting.

J. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

K. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

L. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

M. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

N. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEM. Requirements for physical access control system integration.

1.3 DEFINITIONS

A. AGC: Automatic gain control.

B. B/W: Black and white.

C. CCD: Charge-coupled device.

D. CIF: Common Intermediate Format CIF images are 352 pixels wide and 88/240 (PAL/NTSC) pixels tall (352 x 288/240).

E. 4CIF: resolution is 704 pixels wide and 576/480 (PAL/NTSC) pixels tall (704 x 576/480).

F. H.264 (also known as MPEG4 Part 10): a encoding format that compresses video much more effectively than older (MPEG4) standards.

G. ips: Images per second.

H. MPEG: Moving picture experts group.

I. MPEG4: a video encoding and compression standard that uses inter-frame encoding to significantly reduce the size of the video stream being transmitted.

J. NTSC: National Television System Committee.

K. UPS: Uninterruptible power supply.

L. PTZ: refers to a movable camera that has the ability to pan left and right, tilt up and down, and zoom or magnify a scene.

1.4 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the VASS System as shown. The Contractor shall also provide certification as required.

B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

D. Manufacturers' Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

E. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

F. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Video Assessment and Surveillance System's (VASS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the VASS. The Contractor shall only utilize factory-trained technicians to install, terminate and service cameras, control, and recording

equipment. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The COTR reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

G. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 SUBMITTALS

A. Submit below items in conjunction with Master Specification Sections 01 33 23, Shop Drawings, Product Data, and Samples, and Section 02 41 00, Demolition Drawings.
B. Provide certificates of compliance with Section 1.4, Quality Assurance.
C. Provide a pre-installation and as-built design package in both electronic format and on paper, minimum size 1220 x 1220 millimeters (48 x 48 inches); drawing submittals shall be per the established project schedule.
D. Pre-installation design and as-built packages shall include, but not be limited to:
   1. Index Sheet that shall:

a. Define each page of the design package to include facility name, building name, floor, and sheet number.
b. Provide a list of all security abbreviations and symbols.
c. Reference all general notes that are utilized within the design package.
d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
   1) Outline all general and job specific work required within the design package.
   2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.

2. Floor plans, site plans, and enlarged plans shall:
   a. Include a title block as defined above.
   b. Define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.
   f. Address all general and drawing specific notes for a particular drawing sheet.
3. A riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer’s name and part number for the wire/cable being installed.
4. A system drawing for each applicable security system shall:

a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
b. Provide full detail of all system components wiring from point-to-point.
c. Identify wire types utilized for connection, interconnection with associate security subsystems.
d. Show device locations that correspond to the floor plans.
e. All general and drawing specific notes shall be included with the system drawings.

5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g., site, building, floor, room number, location, and description).
   c. Mounting type (e.g., flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the VASS Systems, provide the camera ID, camera type (e.g. fixed or pan/tilt/zoom (P/T/Z), lens type (e.g. for fixed cameras only) and housing model number.
6. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture's certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

C. Institute of Electrical and Electronics Engineers (IEEE):

C62.41-02.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

802.3af-08.....Power over Ethernet Standard

D. Federal Communications Commission (FCC):

(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

E. National Electrical Contractors Association (NECA):

303-2005.....Installing Closed Circuit Television (CCTV) Systems

F. National Fire Protection Association (NFPA):

70-08.....Article 780-National Electrical Code

G. Federal Information Processing Standard (FIPS):

140-2-02.....Security Requirements for Cryptographic Modules

H. Underwriters Laboratories, Inc. (UL):

983-06.....Standard for Surveillance Camera Units

3044-01.....Standard for Surveillance Closed Circuit Television Equipment

1.7 COORDINATION

A. Coordinate arrangement, mounting, and support of video surveillance equipment:

1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.
4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for video surveillance items that are behind finished surfaces or otherwise concealed.

1.8 WARRANTY OF CONSTRUCTION

A. Warrant VASS System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

B. Demonstration and training shall be performed prior to system acceptance.

PART 2 – PRODUCTS

2.1 GENERAL

A. Video signal format shall comply with the NTSC standard composite video, interlaced. Composite video signal termination shall be 75 ohms.

B. Surge Protection: Protect components from voltage surges originating external to equipment housing and entering through power, communication, signal, control, or sensing leads. Include surge protection for external wiring of each conductor entry connection to components.

C. Power Connections: Comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2, as recommended by manufacturer for type of line being protected.

D. Tamper Protection: Tamper switches on enclosures, control units, pull boxes, junction boxes, cabinets, and other system components shall initiate a tamper-alarm signal when unit is opened or partially

disassembled. Control-station, control-unit alarm display shall identify tamper alarms and indicate locations.

2.2 CAMERAS

A. All Cameras will be EIA 330 and UL 1 Minimum Protection for Power Connections 120 V and more: Auxiliary panel suppressors shall comply with requirements in Section 28 05 00 COMMON WORK REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY, Part 2.

B. Minimum Protection for Communication, Signal, Control, and Low-Voltage 983 compliant as well as:

1. Will be charge-coupled device (CCD cameras and shall conform to National Television System Committee (NTSC) formatting.
2. Fixed cameras shall be color and the primary choice for monitoring following the activities described below. Pan/Tilt/Zoom (P/T/Z) cameras shall be color and are to be utilized to complement the fixed cameras.
3. Shall be powered by either 12 volts direct current (VDC) or 24 volts alternate current (VAC). Power supplies shall be Class 2 and UL compliant and have a back-up power source to ensure cameras are still operational in the event of loss of primary power to the VASS System.
4. Shall be powered over Ethernet. Network switches supporting PoE cameras shall have a back-up power source to ensure cameras are still operational in the event of loss of primary power to the VASS System.
5. Shall be rated for continuous operation under the environmental conditions listed in Part 1, Project Conditions.
6. Will be home run to a monitoring and recording device via a controlling device such as a matrix switcher or network server and monitored on a 24-hour basis at a designated Security Management System location.
7. Each function and activity shall be addressed within the system by a unique user-defined name, with minimum of twenty (20) characters. The use of codes or mnemonics identifying the VASS action shall not be accepted.
8. Shall come with built-in video motion detection that shall automatically monitor and process information from each camera. The

camera motion detection shall detect motion within the camera's field of view and provide automatic visual, remote alarms as a result of detected motion.

9. Shall be programmed to digitally flip from color to black and white at dusk and vice versa at low light conditions.
10. Will be fitted with AI/DC lenses to ensure image quality under different light conditions.
11. P/T/Z cameras shall be utilized in a manner that they complement fixed cameras and shall not be used as a primary means of monitoring activity.
12. Dummy or fake cameras will not be utilized at any time.
13. Appropriate signage shall be designed, provided, and posted that notifies people that an area is under camera surveillance.

2.3 VIDEO MANAGEMENT SYSTEM (ANALOG)

A. The Video Management System (VMS)shall provide features and functions as specified below:
   1. Supports minimum of [20] client connections.
   2. The Video Management System shall be capable of recording more than [32] days on [1.6] TB of internal hard drive storage using the following parameters:
      a. Resolution – 4CIF
      b. Video Mode – NTSC
      c. Quality – Normal
      d. Sensitivity – Normal
      e. Number of Cameras – 16
      f. Record Audio – On
      g. Motion [50%]
   3. The Digital Video Management System shall, at a minimum, combine multiplexing, alarm detection, video motion detection, video, audio, and text recording.

B. System Chassis
   1. The Video Management System must utilize a chassis no larger than [three] rack units in height, and be suitable for either desktop or rack mount installations. The unit must fit within a standard video rack as well as a server rack.

2. The Video Management System's chassis shall include three indicator lights easily viewed from the front panel. These indicator lights must be colored red, yellow, and green to signify system status.
3. The Video Management System's chassis shall incorporate a minimum of four front accessible, swappable drive bays. The bays must be behind a locking front cover that restricts access not only to the drives, but also to the power switch and reset switch.

C. Operating System

1. The Video Management System's operating system and application must be installed on a separate solid-state system drive (flash memory card), with no moving parts to wear out or fail, to reduce the risk of system failure. Units with the operating system and/or application installed on a hard drive are not acceptable.

D. Recording

1. The Digital Video Management System shall use record mode settings as continuous or event activated.
2. The Digital Video Management System shall provide for simultaneous recording, playback, transmitting, database searching and archiving.
3. One channel of audio and up to sixteen text inputs shall be supported with required hardware properly installed and set up according to manufacturer's instructions. Live audio shall be available for listening while viewing live video. Up to 15 cameras shall be configurable as visible or covert by the authorized user.
4. The unit must simultaneously record, play back and archive video, text and audio while using sophisticated search functions to define and find only those important events that meet certain criteria. The system must also have the ability to host multiple remote users, archive data, and search for data, all while recording multiple video and text streams.
5. The Video Management System shall offer recording rates of up to 480 ips at 1CIF, 480 ips at 2CIF, and 480 ips at 4CIF. The unit shall be able to mix record speeds and quality settings on a "per camera" basis.
6. The Video Management System shall have the ability to capture critical information with higher frame rates for certain cameras and

assign the remainder of the available images per second (ips) to non-critical cameras.

7. The Video Management System shall be available with up to [4] TB of internal hard drive storage. A RAID 5 version shall be available with up to [3] TB of internal hard drive storage.
8. The Video Management System's recording format must give each image a unique identification "stamp" to ensure even though the file structure is PC compatible, the original video images cannot be altered or modified, enabling a solid chain of evidence.
9. The Video Management System shall be able to store recorded video on the RAID Storage System (RSS) via an iSCSI interface.
10. The Video Management System shall be able to manage storage of video, audio and text by exporting to Network Attached Storage (NAS), Storage Area Network (SAN) and Direct Attached Storage (DAS) devices using optional software.
11. The system shall provide option to set up the Video Management System in advanced security mode to enable both IT and security managers to collectively integrate the unit into existing IT network without compromising the security protocols in place.

E. Network Access

1. The Video Management System shall provide network access through two internal network connections that support [1/10] GB network operation.

F. User Interface

1. The Video Management System's user interface must be easy to use, allowing the user to access all operations using one-click buttons, pull-down menus, adjustable sliders, and tabbed screens.
2. The Video Management System shall include the ability to accept text through a network connection, as well as through a serial input with an RS-232 connection. The unit shall be able to mix serial inputs and TCP/IP inputs in any combination up to 16 channels of text.
3. The system shall provide ability for user to specify text criteria, such as a specific ASCII text stream, to schedule recording and search for video, allowing for recording only the video associated with the specified text.

G. Live Video Display

1. The Digital Video Management System's live video display must provide real-time motion in any screen format (full, 2x2, 3x3, and 4x4). The operator shall have the ability to expand any view to full screen with a single click of the mouse.

H. Self-Monitoring Analysis

1. The Digital Video Management System must incorporate Self-Monitoring Analysis and Reporting Technology (S.M.A.R.T.), incorporating a suite of advanced diagnostics that monitor the internal operation of a drive and provide early warning for many types of potential problems. This shall allow for the drive to be repaired or replaced before any data is lost or damaged.

I. External Storage

1. Using the integrated CD/DVD writer (CD-RW or DVD-RW), the Digital Video Management System shall allow users to save video, audio, and text to a standard recordable CD or DVD. The option to include the player software on the CD or DVD shall be available so that no additional software needs to be purchased. The unit must include the ability to export the latest video, audio, and text to a CD or DVD until the CD or DVD is full.

J. Alarm Recording Settings:

1. The Digital Video Management System shall allow for the following Alarm Recording settings:
   a. Image Rate
   b. Quality
   c. Sensitivity

K. Adjustable Alarm Duration

1. The Digital Video Management System shall incorporate an adjustable alarm duration with the pre-alarm and minimum alarm duration programmable from five seconds to five minutes. The units must also allow programmable recording times (alarm schedules) for each day of the week, in thirty-minute increments.

L. Supported Dome Camera handlers

1. The Digital Video Management System shall work with the following dome camera handlers: AD168, MP48, AD1024 matrix, VM96RTT, RS422 Dome Control, VM16/ADTT16, VM16E/ADTT16E, Pelco Matrix Switch

(models 6700, 6800, 8500, 9500, 9750 or 9760 Pelco P, Pelco D, Bosh, Autodome, BBV Starcard and USB-CCTV.

M. Alarm-Triggered Dome Events

1. The Digital Video Management System must include alarm-triggered dome events, allowing the operator to configure domes to respond to alarm conditions via Network Client™ or Intellex GUI (using supported dome control handlers). The event can be a motion filter (motion detection, perimeter protection, light change and motion exception), a wired alarm, video loss, or a manually generated alarm. The unit must have the ability to move a single dome, or multiple domes, to preset positions or patterns. This feature must be supported by the dome.

N. Email Support

1. The Digital Video Management System must include the ability to send an email via an email server to anyone, or any group, based upon an event. The events must include, but not necessarily limited to, the following:
   a. System Event
   b. Video Loss
   c. Generated Alarm
   d. Any Filter Alarm
   e. Any Input Alarm
   f. Individual Camera Alarm

O. API Support

1. The Digital Video Management System shall easily integrate with third party software application using an Application Programmers Interface (API). The manufacturer of the unit shall offer a Software Developers Kit (SDK) to select third party manufactures, in addition to sample modular programs with their source codes in both Visual Basic and Visual C++, allowing programmers to develop their own software to control the unit’s functions.
2. The Digital Video Management System’s API must be backwards compatible with previous versions of the software equal to or greater than v3.2

P. Recorded Event Search

1. In order to instantly retrieve recorded video of any event, the Digital Video Management System shall use a patented search feature to filter through hours of video to find only the essential events. The operator must have the ability to isolate video containing motion, and find video where perimeters were crossed, lights were turned on or off, alarms were triggered, and numerous additional scenarios.
2. In addition to the standard motion-based mode, using advanced video analysis tools, the Digital Video Management System shall enable the user to schedule recording and search for video if the movement of an object meets specified size, speed, direction and Motion Exception criteria.

Q. Covert Camera Operation:

1. The Digital Video Management System shall include the ability to configure up to 15 cameras for "covert" operation, restricting their use to only those who are authorized.

R. Activity Log:

1. To provide for more effective security management, the Digital Video Management System must also allow for audits of the activity log to monitor changes to the settings and configurations. The activity log shall include, but not necessarily be limited to, the following information:
   a. User Name – Login name of the user
   b. Date/Time – Date and Time the action was performed
   c. Access Loc – Whether the action was local to the unit or done through remote software
   d. Category – The actions category
   e. Activity – The action performed within the category
   f. Data – Description of the action
2. The operator shall have the ability to export the entire log file, export the displayed log file, print the log file, or print the displayed log file locally and remotely through Network Client v4.3 software.

S. Antivirus Protection

1. The Digital Video Management System shall be compatible with the leading brands of anti-virus software in order to detect and deactivate malicious software that may attempt to attack the system.

T. Remote Configuration and Management software:

1. The Digital Video Management System must include support for Remote Configuration and Management software to allow a user to remotely configure the unit, view live video, or select video segments by time, date, alarm, or search results. The operator must have the ability to save, annotate, and organize copied video into "incident folders" to aid with investigations.
2. The remote management software must allow for up to 64 live video sessions, allowing the operator to view up to sixty-four different cameras, from up to 64 different remote sites, simultaneously.
3. The remote management software shall also allow the exporting of video clips to an .avi file to play on any Microsoft Windows based PC. The software shall have the ability to enhance, print, or convert the individual images to standard formats.
4. The remote management software shall allow an operator to select units, cameras, and timeframes for automatic retrieval of video clips to an operator's PC. This allows for downloads to be scheduled during times that network traffic restrictions are not an issue.

U. Playback and Multi-screen Playback

1. The Digital Video Management System shall incorporate playback and multi-screen playback functionality to allow the user to locate and select a single stored image to be enhanced using tools. The tools shall include, but not necessarily be limited to, the following:
   a. Brightness
   b. Contrast
   c. Hue
   d. Saturation
   e. Lightness
   f. Balance Light
   g. Edge Detect
   h. Enhance Light
   i. Noise Reduction

j. Sharpen

k. Sharpen More

l. Smooth

m. Smooth More

n. Brightness Chart

V. Browser Client

1. A browser-based viewer (Browser Client) must also be available free of charge, enabling users to host and customize their own website to provide live viewing of the Digital Video Management System through a standard browser interface. Multiple viewers shall have the ability to access video and control domes remotely.

W. Minimum Performance Specifications

Power Supply	100-240 VAC, 50/60 Hz, 3.0/1.5A
Physical Characteristics:	Rack Mount Chassis Version Unit Dimensions (HxWxD) 130 mm (5.125”) High , 429 mm (16.895”) Wide, 546 mm (21.5”) Deep Rack Height Three (3) units Desktop Chassis Version(HxWxD) 130 mm (5.125”) High429 mm (16.895”) Wide546 mm (21.5”) Deep
Environmental Requirements	Operating Temperature 5° to 35° C (41° to 95° F) Humidity 5%-95% RH non-condensing
Regulatory	Immunity EN50130-4 (1996) (An Uninterruptable Power Supply must be used to fully comply with EN50130-4)

X. MATRIX SWITCHER

1. The matrix switcher shall meet the following minimum requirements:
   a. Take multiple camera inputs and route them to multiple monitoring stations.
   b. Allow for centralized user management controlling configurations.
   c. Provide live viewing of all cameras.
   d. Provide P/T/Z, focus, and iris control of all unitized cameras.

e. Be expandable to allow for the addition of multiple cameras and monitoring stations over the life of the system visual identification system by utilizing input and output video and controller cards.
f. Input cards shall allow for the addition of a minimum of four (4) camera inputs per card.
g. Output cards shall allow for the addition of a minimum of eight (8) outputs per card.
h. Have the ability to be programmed either locally or remotely.
i. Remotely operate multiple cameras from multiple stations.
j. Be able to fully interface with a digital video recorder (DVR) for recording of all events.
k. Utilize RS-232 or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.
l. Shall have an alarm interface that is compatible with all associated security subsystems. Alarm inputs shall be via either a relay or an EIA ANSI/EIA/TIA-232-F interface. The interface shall allow for a minimum of 24 alarm inputs and 12 alarm outputs.
m. The switcher response time to an alarm input shall not be less than 200 milliseconds from the time an alarm is sensed until a picture is displayed on a monitor.
n. The switcher shall have a built-in buffer to allow for back-log of alarms. These alarms shall be viewable by an operator.
o. Be addressable in the event multiple matrix switchers are connected to the SMS.
p. Be configured, i.e., camera names, monitor names, sequences, alarms and alarm actions, etc. utilizing the configuration program and tools provided by the matrix manufacturer.

2. The matrix switcher shall meet the following minimum input/output requirements:

Camera inputs	16
Video outputs	4
Keyboard/Controller Outputs	4
Alarm inputs	323

3. The matrix switcher will have the following components and technical characteristics:

   a. Main Unit:

Functions	Monitor control Camera selection, tour sequence, group sequence, group preset, OSD display, Camera/Receiver control via coaxial or RS-485 cable communication, Recorder control
Alarm control	Alarm event, Alarm Acknowledge, Alarm reset, Alarm suspension, Alarm History Display, Timer event, and Camera event
RS-485 (Camera)Port	6-conductor modular jack x 12 (2- wire or 4-wire communication, With termination switches (MODE 1 to 4))
Extension Port	6-conductor modular jack x 2(With a (EXTENSION 1 IN, OUT) termination switch (TERM: ON, OFF))
Extension Port	37-pin D-sub connector x 2(EXTENSION IN 2 or 3)
Extension Port	37-pin D-sub connector x 2(EXTENSION OUT 2 or 3)

   b. Input Board:

Camera Input	1 V [P-P]/75 Ohm (BNC), composite video signal 0.5 V [P- P]/75 Ohm data signal and 2.5 V [P-P]/75 Ohm (25 pin D sub connector x 4)
Alarm Input	N.O. (Normally Open contact) or N.C. (Normally Close contact) selectable x 32 (37 pin D sub connector)

   c. Output Board:

Monitor Output	1 V [P-P]/75 Ohm (BNC)
Alarm Output	Open collector output x 32, Max. 24 VDC, 100 mA
Extension Port	6-conductor modular jack x 2
Serial Port	9-pin D-sub connector x 2

Y. IP Network Encoder

1. The units shall be used for video monitoring and surveillance over IP networks. IP Network Encoder shall encode analog video to MPEG-4 digital video.
2. The encoder shall use MPEG-4 compression for distribution of images over a network.

3. The encoder shall be rack mounted unit.
4. The encoder shall include, but not be limited to the following:
   a. The encoder shall use “hybrid” technology in providing both analog and network connections with the purpose of allowing users to integrate existing equipment and digital IP products.
      1) The encoder shall provide [one] composite video input.
      2) The encoder shall provide one Ethernet connection.
   b. The encoder shall have the following digital resolution:
      a) D1: 720x576 (NTSC); 720x480 (PAL)
      b) CIF: 352 x 288 (NTSC); 352 x 240 (PAL)
      c) QCIF: 160 x 144 (NTSC); 160 x 112 (PAL)
   c. The encoder shall have a digital frame rate of up to 30 frames per second (NTSC) at 720x480 resolution or 25 fps (PAL) at 720x586 resolution.
   d. The encoder/decoder shall use the following protocols:
      1) TCP/IP
      2) UDP/IP
      3) DHCP
      4) Multicast
      5) Data Throttle
      6) Heartbeat
   e. The encoder shall have the following connectors:
      1) Power connector: 3-pin male – for connecting the external power supply
      2) I/O connector: 16-pin male – for connecting alarm, audio, RS-232, RS-485 input and output
      3) Video I/O connector: SVHS style – for input and output connection of two composite monitors
      4) Ethernet port: RJ-45 – for connecting to a network
   f. The encoder/decoder shall have the following indicators:
      1) Power LED
      2) Link – indicates activity on the Ethernet port
      3) Tx activity
      4) Rx activity
   g. The encoder shall have the following additional specifications:
      1) Video

a) Video signal input: 1 V p-p ±10% 75 ohms, autosensing
b) Input termination: 75 ohm
c) Video compression standard: MPEG-4
d) Audio compression standard: MPEG-1 Layer 2

2) Audio
a) Audio input: 315 mV, 40 kOhms, unbalanced
b) Audio output: 315 mV, 600 ohms, unbalanced

3) Electrical
a) External power supply: 100 to 240 VAC
b) Output voltage: 13.5 V, 1.33 A
c) Power consumption: 0.5 W maximum

2.3 DIGITAL BASED VIDEO MANAGEMENT SYSTEM

A. Key Features

1. Open Platform: Open API/SDK, supports seamless integration with third party applications.
2. Multi-server and multi-site video surveillance solution: Unlimited recording of video from IP cameras, IP video encoders and selected DVRs with analog cameras.
3. Optimized Recording Storage Management: Unique data storage and archiving solution that combines superior performance and scalability and cost-efficient long-term video storage
4. Wide IP camera and device support: Supports connection of more than 839 IP cameras, IP video encoders and selected DVR models from over 79 different vendors through dedicated device integration
5. ONVIF™ and PSIA compliant: Supports ONVIF™ and PSIA compliant cameras and devices
6. Wide compression technology support: Supports the news compression methods; MPEG4 ASP, MxPEG and H.264, besides MJEPG and MPEG4
7. System configuration wizards: Guides the user through the process of adding cameras, configuring video and recording, adjustment of motion detection and user configuration
8. Sequence Explorer: Displaying sequences and time intervals in thumbnail pre-views, the Sequence Explorer gives unparalleled visual overview of recorded video combined with smooth navigation
9. Overlay buttons: Intuitive control of cameras, camera-integrated devices and other integrated systems- directly from the camera view

10. Independent Playback: Instant and independent playback function allows you to independently playback recorded video for one or more cameras, while in live viewing or playback mode
11. Built-in Video Motion Detection: Independent of camera model and supporting up to 64 cameras simultaneously per server
12. Multiple language support: Let operators use the system in their native language with support for 20 different languages
13. Multi-channel, two-way audio: Communicate with people at gates/entrances or broadcast messages to many people at once with multichannel, two-way audio
14. Fast evidence export: Quickly deliver authentic evidence to public authorities by exporting video to various formats, including video from multiple cameras with viewer, logs, and user notes included

B. Administration Features

1. Single Management Application: A new Management Application provides a consolidated single point management access to Recording Servers.
2. System configuration wizards: Guides the user through the process of adding cameras, configuring video and recording, adjustment of motion detection and user configuration.
3. Automated device discovery: Enables fast discovery of camera devices using methods such as Universal Plug And Play, Broadcast and IP Range scanning.
4. Smart bulk configuration option: Change settings across multiple devices simultaneously and in a very few clicks.
5. Adaptable application behavior: Guides novice users, while expert users can optimize the application for efficient use.
6. Export/import of system and user configuration data: System backup for reliable system operation and fast system recovery. System cloning for efficient rollout of multiple systems with the same, or similar, configuration.
7. Import of off-line configuration data: Enabling off-line editing of configuration data, including camera and device definitions.
8. Automatic system restore points: A 'Restore Point' is created each time a configuration change is confirmed.

9. Enables easy rollback to previously defined system configuration points and enables cancelation of undesired configuration changes and restoration of earlier valid configurations.

C. Integration Options

1. Open Software Development Kit (SDK) makes it possible to video enable your business processes, through seamless integration of third-party applications, such as video analytics, access systems, etc.
2. Compatible with Central for alarm overviews and operational status in larger video surveillance installations.
3. Integrate with physical access control systems, alarms, gates, building management systems, etc. using hardware I/O, internal events and TCP/IP events
4. Create, import and use HTML pages for navigation between views or to trigger a Smart Wall preset
5. Develop third party plug-ins for the Smart Client to expand with new functionality

D. Server Modules

1. Recording Server
   a. Simultaneous digital multi-channel video and audio recording and live viewing (relaying).
   b. Two-way audio enables integrated control of microphones and speakers connected to IP devices.
   c. Bandwidth optimized multi-streaming by splitting a single camera video stream to differentiated streams for live view and recording, where each can be optimized independently with respect to frame rate and resolution.
   d. Connectivity to cameras, video encoders and selected DVRs supports MJPEG, MPEG4, MPEG4 ASP*, H.264* and MxPEG.
   e. Auto-detect camera models during setup.
2. Flexible multi-site, multi-server license structure charged per camera.
3. Unlimited number of installed cameras; simultaneous recording and live view of up to 64 cameras per server.
4. Recording technology: secure high speed database holding JPEG images or MPEG4 and MxPEG streams including audio.

5. Recording speed: 30+ frames per second per camera, limited only by hardware.
6. Recording quality depends entirely on camera and video encoder capabilities: no software limitation.
7. Start cameras on live view requests from clients.
8. Unlimited recording capacity with multiple archives possible per day.
9. Hourly to daily database archiving with optional automatic move to network drive saves storage capacity on the local server – with images still available transparently for playback
10. Built-in, real-time, camera independent motion detection (VMD); fully adjustable sensitivity, zone exclusions, recording activation with frame rate speed up, and alert activation through email or SMS.
11. Start recording on event.
12. Client initiated start of recording based on pre-defined recording time and access privileges.
13. Pan Tilt Zoom (PTZ) preset positions, up to 50 per camera.
14. Absolute* and relative PTZ positioning.
15. PTZ go-to preset position on events.
16. Combine PTZ patrolling and go-to positions on events.
17. Set multiple patrolling schedules per camera per day: i.e., different for day/night/weekend.
18. PTZ scanning on supported devices: viewing or recording while moving slowly between PTZ positions.
19. VMD-sensitive PTZ patrolling among selected presets allows sending of Wipe and Wash commands to supported PTZ models.
20. On pre-defined events Matrix remote commands are automatically sent to display live video remotely on computers running the Matrix Monitor or the Smart
21. Client with Matrix Plug-in.
    a. Flexible notification (sound, e-mail and SMS) and camera patrolling scheduling, triggered by time or event.

E. Recording Server Manager

1. Local console management of the Recording Server accessible from the notification area.
2. Start and stop Recording Server service.

3. Access to Recording Server configuration settings.
4. Access to Recording Server help system.
5. View system status and log information.

F. Image Server

1. Remote access for Smart and Remote Clients.
2. Built-in web server for download and launch of clients and plug-ins.
3. Set up one Master and multiple Slave Servers.
4. Authenticate access based on Microsoft Active Directory user account, or username and password.
5. Authorize access privileges per Microsoft Active Directory user account/group, user profile or grant full access.
6. User profiles control access to: Live view, PTZ, PTZ presets, Output control, Events, Listen to microphone, Talk to speaker, Manual recording; Playback, AVI export, JPG export, DB export, Sequences, Smart Search and audio. As well as Set up views, Edit private views and Edit shared public views.
7. Audit logs of exported evidence by user and file.
8. Audit logs of client user activity by time, locations, and cameras.

G. Recording Viewer

1. Playback recorded video and audio locally on the

H. Recording Server.

1. View up to 16 cameras time-synched during playback.
2. Scrollable activity timeline with magnifying feature.
3. Instant search on recordings based on date/time and activity/alarm (Video Motion Detection).
4. ‘Smart Search’ for highlighted image zones and objects.
5. Evidence can be generated as a printed report, a JPEG image, an AVI film or in the native database format.
6. Export audio recordings in WAV or AVI format.
7. Export video digitally zoomed to view area of interest only and to minimize export footprint size.
8. Export ‘Evidence CD’ containing native database and Recording Viewer for instant, easy viewing by authorities.
9. Encryption & password protection option for exported recordings and files.
10. Ability to add comments to exported evidence, also encrypted.

11. Option to send email.
12. De-interlacing of video from analog cameras.
13. IPIX technology for PTZ in 360° recorded images.

I. PDA Server

1. Remote access for PDA Client.
2. Handle login and session requests between PDA clients and Image Server.
3. Resize video surveillance images to fit the screen layout of PDA Client.

J. Smart Client Module

1. Smart Client includes all the features of Remote Client plus more:
2. Installed per default on Recording Server for local viewing and playback of video and audio.
3. Start recording on cameras for a pre-defined time (default 5 minutes). Subject to privileges set by administrator.
4. • Independent Playback capability allows for instant playback of recorded video for one or more cameras, while in live and playback mode
5. Live view digital zoom allows zoomed-out recordings while the operator digitally can zoom in to see details.
6. ’Update On Motion Only’ optimizes CPU usage by letting motion detection control whether the image should be decoded and displayed or not. The visual effect is a still image in the view until motion is detected.
7. Shared and private camera views offer 1x1 up to 10x10 layouts in addition to asymmetric views.
8. Views optimized for both 4:3 and 16:9 screen ratios.
9. Multiple computer monitor support with a main window and any number of either windowed or full screen views.
10. Hotspot function for working in details with a camera selected from a view containing multiple cameras.
11. Carousel function allows a specified view to rotate between pre-defined cameras with individual timing and order with multiple appearances. Carousel function can be controlled allowing the operator to pause carousel function and to switch to previous or next camera.

12. Overlay buttons provides intuitive control of cameras, camera-integrated devices and other integrated systems- directly from the camera view
13. Matrix function to view live video from multiple cameras through the Image Server in any view layout with customizable rotation path, remotely controlled by Smart
14. Clients or Recording Servers sending Matrix remote commands
15. Send Matrix remote commands to display live video remotely on computers running the Matrix Monitor or the Smart Client with Matrix Plug-in.
16. Cameras' built-in audio sources available in live and in playback.
17. Separate pop-up window displaying sequences and time intervals in thumbnail pre-views, the Sequence Explorer gives unparalleled visual overview of recorded video combined with smooth navigation
18. Presents recorded sequences for individual cameras, or all cameras in a view
19. Seamlessly available in both Live and Playback modes
20. Smooth navigation with sliding preview and "drag-and throw" function for video thumbnails
21. Instant playback of video sequences
22. Application Options allows users to adapt the layout and personalize the application to their particular preferences

K. Remote Client

1. View live video or playback recordings for 1-16 cameras simultaneously; from the same or different servers.
2. Advanced video navigation including fast/slow playback, jump to date/time, single step and video motion search.
3. Individual views can be user-defined in various layouts: view or playback camera images from multiple servers simultaneously in the same view.
4. Shared views can be managed centrally via the server with admin/user rights and user groups.
5. Import static or active HTML maps for fast navigation to cameras and good premise overviews.
6. Control output port relay operation, for example control of gates.
7. Quick overview of sequences with detected motion and preview window.

8. Quick overview of events/alerts.
9. Control PTZ cameras remotely, also using preset positions.
10. Remote PTZ Point-and-Click control
11. Remote PTZ zoom to a marked rectangle.
12. Take manual control over a PTZ camera that runs a patrolling scheme; after a timeout with no activity the camera reverts to its scheduled patrolling.
13. IPIX 1x2 or 2x2 'Quad View' for viewing all 360° at once.
14. Optional video compression in streaming from server to client gives better use of bandwidth.
15. Create AVI files or save JPEG images.
16. Print incident reports with free-text user comments.
17. System logon using username and password.
18. System logon using Microsoft Active Directory user accounts.

L. PDA Client

1. View live or playback video from a single server or from multiple servers in half-screen or full-screen formats.
2. In live view you can control Pan/Tilt/Zoom cameras manually or use preset positions, and control the cameras' output relays to trigger external actions like opening doors or gates, turning on lights, etc.
3. To find recordings, you can jump to specific time/date or to next detected motion or use motion detection sequence overviews.
4. When viewing recordings, you can playback at variable speed or single step image by image.
5. The PDA client shall connect to the VMS server using any IP connection; typically wireless LAN, GPRS, etc.
6. Video compression from the server to PDA optimizes bandwidth usage.
7. System logon using username and password.

M. Matrix Monitor

1. Virtual Matrix showing live video directly from up to 4 cameras at a time triggered remotely by Matrix remote commands.
2. Camera view shifts by FIFO (first-in-first-out)
3. Multiple events can control a single Matrix monitor and single events can control multiple monitors.

N. Minimum System Requirements VMS Server

1. HW Platform:
   a. Minimum 2.4 GHz CPU and 1 GB RAM (2.4 GHz dual core processor and 2 GB RAM or more recommended).
   b. Minimum 1 GB disk space available, excluding space needed for recordings.
2. OS:
   a. Microsoft® Windows® XP Professional (32 bit or 64 bit*), Windows Server 2003 (32 bit or 64 bit*), Windows Server 2008 R1/R2 (32 bit or 64 bit*), Windows Vista™ Business (32 bit or 64 bit*), Windows Vista Enterprise (32 bit or 64 bit*), Windows Vista Ultimate (32 bit or 64 bit*), Windows 7 Professional (32 bit or 64 bit*), Windows 7 Enterprise (32 bit or 64 bit*) and Windows 7 Ultimate (32 bit or 64 bit*).
3. Software:
   a. Microsoft .NET 3.5 Framework SP1, or newer.
   b. DirectX 9.0 or newer required to run Playback Viewer application.

O. Minimum System Requirements PDA Server
1. HW Platform:
   a. Minimum 2.4 GHz CPU and 1 GB RAM (2.4 GHz dual core processor and 2 GB RAM or more recommended).
   b. Minimum 1 GB disk space available.
2. OS:
   a. Microsoft Windows XP Professional (32 bit or 64 bit*), Windows Server 2003 (32 bit or 64 bit*).
3. Software:
   a. Microsoft .NET 2.0 (not compatible with newer versions). Internet Information Server (IIS) 5.1.

P. Minimum System Requirements VMS Client
1. HW Platform:
   a. Minimum 2.4 GHz CPU, 1 GB RAM (more powerful CPU and higher RAM recommended for Smart Clients running high number of cameras and multiple views and displays).
2. Graphics Card:

a. AGP or PCI-Express, minimum 1024 x 768 (1280 x 1024 recommended), 16 bit colors.

3. OS:

a. Microsoft Windows XP Professional (32 bit or 64 bit*), Windows Server 2003 (32 bit or 64 bit*), Windows Server 2008 R1/R2 (32 bit or 64 bit*), Windows Vista Business (32 bit or 64 bit*), Windows Vista Enterprise (32 bit or 64

b. bit*), Windows Vista Ultimate (32 bit or 64 bit*), Windows 7 Professional (32 bit or 64 bit*), Windows 7 Enterprise (32 bit or 64 bit*) and Windows 7 Ultimate (32 bit or 64 bit*).

4. Software:

a. DirectX 9.0 or newer required to run Playback Viewer application.

b. Microsoft .NET 3.5 Framework SP1, or newer.

Q. Minimum System Requirements VMS Remote Client

1. HW Platform:

a. Minimum 2.4 GHz CPU, RAM 1 GB (2 GB or higher recommended on Microsoft Windows Vista).

2. OS:

a. Microsoft Windows XP Professional (32 bit or 64 bit*), Windows Server 2003 (32 bit or 64 bit*), Windows Server 2008 R1/R2 (32 bit or 64 bit*), Windows Vista Business (32 bit or 64 bit*), Windows Vista Enterprise (32 bit or 64 bit*) and Windows Vista Ultimate (32 bit or 64 bit*), Windows 7 Professional (32 bit or 64 bit*), Windows 7 Enterprise (32 bit or 64 bit*) and Windows 7 Ultimate (32 bit or 64 bit*).

3. Software:

a. DirectX 9.0 or newer required to run Playback Viewer Application Microsoft Internet Explorer 6.0, or newer, 32 bit version required

R. Licensing Structure

1. Base Server License

a. An VMS Base Server license is mandatory for installing the product.

2. The Base Server license contains:

a. Unlimited numbers of Recording Server licenses

b. Unlimited numbers of Smart Clients, Remote Clients, PDA Clients and Matrix Monitor licenses

3. Camera License
   a. To connect to a camera, a Device License per camera channel is required
   b. In total, for all copies of the product installed under a given Base Server license, the product may only be used with as many cameras as you have purchased camera licenses for • Video encoders and DVRs with multiple analog cameras require a license per channel to operate
   c. Camera Licenses can be purchased in any numbers. To extend the installation with additional Camera Licenses, the Base Server License number (SLC) is required when ordering.
4. Client License:
   a. All client modules are not licensed and can be installed and used on any number of computers.

S. IP NETWORK DECODER

1. The unit shall be used for video monitoring and surveillance over IP networks. Network decoder shall decode MPEG-4 digital video to analog video.
2. The decoder shall use MPEG-4 compression for efficient distribution of images over a network.
3. The decoder shall be available as a standalone unit that can be horizontally or vertically mounted.
4. The decoder shall include, but not be limited to the following:
   a. The decoder shall use “hybrid” technology in providing both analog and network connections with the purpose of allowing users to integrate existing equipment and digital IP products.
      1) The decoder shall provide one composite video input and output connection.
      2) The decoder shall provide one Ethernet connection.
   b. The decoder shall have the following digital resolution:
      1) D1: 720x576 (NTSC); 720x480 (PAL)
      2) CIF: 352 x 288 (NTSC); 352 x 240 (PAL)
      3) QCIF: 160 x 144 (NTSC); 160 x 112 (PAL)

c. The decoder shall have a digital frame rate of up to 30 frames per second (NTSC) at 720x480 resolution or 25 fps (PAL) at 720x586 resolution.

d. The decoder shall use the following protocols:
   1) TCP/IP
   2) UDP/IP
   3) DHCP
   4) Multicast
   5) Data Throttle
   6) Heartbeat

e. The decoder shall have the following connectors:
   1) Power connector: 3-pin male – for connecting the external power supply
   2) I/O connector: 16-pin male – for connecting alarm, audio, RS-232, RS-485 input and output
   3) Video I/O connector: SVHS style – for input and output connection of two composite monitors
   4) Ethernet port: RJ-45 – for connecting to a network

f. The decoder shall have the following indicators:
   1) Power LED
   2) Link – indicates activity on the Ethernet port
   3) Tx activity
   4) Rx activity

5. The decoder shall have the following additional specifications:

a. Video
   1) Video signal output: 1 V p-p into 75 ohms
   2) Input termination: 75 ohm
   3) Video compression standard: MPEG-4
   4) Audio compression standard: MPEG-1 Layer 2

b. Audio
   1) Audio input: 315 mV, 40 kOhms, unbalanced
   2) Audio output: 315 mV, 600 ohms, unbalanced

c. Electrical
   1) External power supply: 100 to 240 VAC
   2) Output voltage: 13.5 V, 1.33 A
   3) Power consumption: 0.5 W maximum

2.4 VIDEO DISPLAY EQUIPMENT

A. Video Display Equipment

1. Will consist of color monitors and shall be EIA 375A compliant.
2. Shall be able to display analog, digital, and other images in either NTSC or MPEG format associated with the operation of the Security Management System (SMS).
3. Shall:
   a. Have front panel controls that provide for power on/off, horizontal and vertical hold, brightness, and contrast.
   b. Accept multiple inputs, either directly or indirectly.
   c. Have the capabilities to observe and program the VASS System.
   d. Be installed in a manner that they cannot be witnessed by the general public.

B. Color Video Monitors Technical Characteristics:

Sync Format	PAL/NTSC
Display Tube	90° deflection angle
Horizontal Resolution	250 TVL minimum, 300 TVL typical
Video Input	1.0 Vp-p, 75 Ohm
Front Panel Controls	Volume, Contrast, Brightness, Color
Connectors	BNC

C. Liquid Crystal Display (LCD) Flat Panel Display Monitor

D. The [17] -inch color LCD monitor shall have a flat screen and [17] -inch diagonal viewing area and consists of an LCD panel, bezel, and stand.

E. The monitor shall meet or exceed the following specifications:

1. The monitor shall incorporate a [17.1] -inch active matrix TFT LCD panel.
   a. The pixel pitch of the monitor’s LCD panel shall be 0.264 mm horizontal and 0.264 mm vertical.
   b. The monitor shall have a maximum resolution of <500> television lines.
   c. The contrast ratio shall be 500:1.

d. The typical brightness shall be 250 cd/m²
e. The monitor shall display at least 16.7 million colors.
f. The light source for the LCD panel shall have a lifetime of [50,000] hours.
g. The scan frequency horizontal shall be 30 K to 80 KHz and the scan frequency vertical shall be 56 to 75 Hz.
h. The viewing angle for the monitor shall be 170 degrees horizontal and 170 degrees vertical.

2. The monitor shall have automatic NTSC or PAL recognition.
4. The monitor shall use the following signal connectors:
   a. Video 1.0 V peak-to-peak at 75 ohms
   b. BNC in/out
   c. Y/C (S-video) in/out
   d. Audio in/out
   e. VGA 15-pin D-Sub
5. The monitor shall have [one/two] <insert number> audio speaker(s).
   a. The speaker shall be 0.5 W minimum.
6. The monitor shall have the following front control panel buttons:
   a. Power on/off
   b. LED indicator
   c. Mode
   d. Increase (volume)
   e. Decrease (volume)
   f. Up (contrast adjustment)
   g. Down (brightness adjustment)
   h. Menu
   i. Auto
7. The monitor shall have the following options for adjustment in an onscreen display menu:
   a. Color
   b. Tint
      1) NTSC mode only
         a) Brightness
         b) Contrast
         c) Sharpness
         d) Volume

e) Language

f) Scan

g) Color Temp

h) H-Position

i) Recall

F. The electrical specifications for the monitor shall be as follows:

1. Input voltage shall be 12 VDC/3 A.
2. Power consumption shall be 50 W maximum.

G. The environmental specifications for the monitor shall be as follows:

1. Operating temperature shall be 32 to 104 degrees Fahrenheit or 0 to 40 degrees Celsius.
2. Operating humidity shall be 10 to 85 percent.

H. The physical specifications for the monitor shall be as follows:

I. The monitor shall conform to these compliance standards:

1. FCC
2. CE (EMC/LVD)3. UL

2.5 CONTROLLING EQUIPMENT

A. Shall be utilized to call up, operate, and program all cameras associated VASS System components.

B. Will have the ability to operate the cameras locally and remotely. A matrix switcher or a network server shall be utilized as the VASS System controller.

C. The controller shall be able to fit into a standard 47.5 cm (19 inch) equipment rack.

D. Control and programming keyboards shall be provided with its own type of switcher. All keyboards shall:

1. Be located at each monitoring station.
2. Be addressable for programming purposes.
3. Provide interface between the operator and the VASS System.
4. Provide full control and programming of the switcher.
5. Have the minimum following controls:
   a. programming
   b. switching
   c. lens function
   d. P/T/Z

e. environmental housing

f. annotation

2.6 VIDEO CAMERAS

A. The cameras shall be high-resolution color video cameras with wide dynamic range capturing capability.

B. The camera shall meet or exceed the following specifications:

1. The image capturing device shall be a 1/3-inch image sensor designed for capturing wide dynamic images.
   a. The image capturing device shall have a separate analog-to-digital converter for every pixel.
   b. The image capturing device shall sample each pixel multiple times per second.
   c. The dynamic range shall be 95 dB typical and 120 dB maximum.
3. The camera shall optimize each pixel independently.
4. The camera shall have onscreen display menus for programming of the camera’s settings.
5. The signal system shall be NTSC.

C. The camera shall have composite video output.

D. The camera shall come with a manual varifocal lens.

E. The video output shall be composite: 1.0 volts peak-to-peak at 75-ohm load.

H. Fixed Color Camera

1. The camera shall be a high-resolution color video camera with wide dynamic range capturing capability.
2. Comply with UL 639.
3. Pickup Device: 1/3 CCD interline transfer.
4. Signal-to-Noise Ratio: Not less than 50 dB, with the camera AGC off.
5. With AGC, manually selectable on or off.
6. Manually selectable modes for backlight compensation or normal lighting.
7. Scanning Synchronization: Determined by external synch over the coaxial cable. Camera shall revert to internally generated synchronization on loss of external synch signal.
8. White Balance: Auto-tracing white balance, with manually selectable fixed balance option.

9. Fixed Color Cameras Technical Characteristics:

Pickup device	1/3" interline transfer CCD
Total pixels	NTSC: 811(H) x 508(V)
Effective pixels	NTSC: 768(H) x 494(V)
Resolution	500 TV lines
Sync. System	Internal Sync
Scanning system	NTSC: 525 Lines/60 Fields
S/N ratio	More than 48 dB
Electronic shutter	Auto 1/60 (1/50) ~1/100,000 sec.
Min. illumination	0.2 lux F2.0
Video output	Composite 1.0 Vp-p/75 ohm
White balance	Auto
Automatic gain control	ON
Frequency horizontal	NTSC: 15.734 KHz
Frequency vertical	NTSC: 59.94Hz
Lens type	Board lens/[DC]/[AI] varifocal lens
Focal length	[3-12mm]<insert values>
Power source	DC12V/500mA or AC24/500mA
Power consumption	< 3W (Max)

10. [Fixed color camera shall be enclosed in dome and have board mounted varifocal lens].
11. Camera accessories shall include:
    a. Surface mount adapter
    b. Wall mount adapter
    c. Flush mount adapter
    d. <list>

2.7 AUTOMATIC COLOR DOME CAMERA - ANALOG

A. The camera shall be a high-resolution color video camera with wide dynamic range capturing capability.
B. Comply with UL 639.
C. Pickup Device: 1/3 CCD interline transfer.
D. Horizontal Resolution: 480 lines.
E. Signal-to-Noise Ratio: Not less than 50 dB, with the camera AGC off.
F. With AGC, manually selectable on or off.

G. Sensitivity: Camera shall provide usable images in low-light conditions, delivering an image at a scene illumination of <.1 lux at f1.6 with the camera AGC off.

H. Sensitivity: Camera shall deliver 1-V peak-to-peak video signal at the minimum specified light level. The illumination for the test shall be with lamps rated at approximately 2200-K color temperature, and with the camera AGC off.

I. Manually selectable modes for backlight compensation or normal lighting.

J. Pan and Tilt: Direct-drive motor, 360-degree rotation angle, and 180-degree tilt angle. Pan-and-tilt speed shall be variable controlled by operator. Movement from preset positions shall be not less than 300 degrees per second.

K. Preset positioning: 64 user-definable scenes. Controls shall include the following:

1. In "sequence mode," camera shall continuously sequence through preset positions, with dwell time and sequencing under operator control.
2. Motion detection shall be available at each camera position.

L. Scanning Synchronization: Determined by external synch over the coaxial cable. Camera shall revert to internally generated synchronization on loss of external synch signal.

M. White Balance: Auto-tracing white balance, with manually settable fixed balance option.

N. Motion Detector: Built-in digital.

O. Dome shall support multiplexed control communications using coaxial cable recommended by manufacturer.

P. Automatic Color Dome Camera Technical Characteristics:

Effective Pixels	768 (H) x 494 (V)
Scanning Area	1/4-type CCD
Synchronization	Internal/Line-lock/Multiplexed Vertical Drive (VD2)
Video Output	1.0 v[p-p] NTSC composite/75 ohm
H. Resolution	570-line at B/W, or 480-line at color imaging
Signal-to-noise Ratio	50dB (AGC off, weight on)

Super Dynamic II	64 times (36dB) (selectable on/off)
Minimum Illumination	0.06 lx (0.006 fc) at B/W, 1 lx(0.1 fc)
Zoom Speed	Approx. 2.1s (TELE/WIDE) in sequence mode
Focus Speed	Approx. 2s (FAR/NEAR) in sequence mode
Iris	Automatic (Open/Close is possible)/manual
Maximum Aperture Ratio	1:1.6 (Wide) ~ 3.0 (Tele)
Focal Length	3.79 ~ 83.4 mm
Angular Field of View	H 2.6° ~ 51.7° V 2.0° ~ 39.9°
Electronic Shutter	1/60 (off), 1/100, 1/250, 1/500, 1/1,000, 1/2,000, 1/4,000, 1/10,000 s
Zoom Ratio	Optical 22x w/10x electronic zoom
Iris Range	F1.6 ~ 64, Close
Panning Range	360° endless
Panning Speed	Manual: Approx. 0.1°/s ~ 120°/s 16 steps
Tilting Range	0 ~ 90° (Digital Flip off), 0 ~180° (Digital Flip on)
Tilting Speed	Manual: Approx. 0.1°/s ~ 120°/s. 16 steps
Pan/Tilt	Manual/Sequential position/Auto Pan
Controls	Pan/Tilt, Lens, 64 Preset Positions, Home Position
Video Connector	BNC
Controller I/F	Multiplex-coaxial

Q. Camera accessories shall include:

1. Surface mount adapter
2. Wall mount adapter
3. Flush mount adapter
4. <list>

R. Indoor/Outdoor Fixed Mini Dome System (IP)

1. The indoor/outdoor fixed mini dome system shall include a built-in 100Base-TX network interface for live streaming to a standard Web browser.

2. The network mini dome shall be integrated into the back box design to accept multiple camera options without modification. The network mini dome shall operate in open architecture connectivity for third-party software recording solutions.
3. The indoor/outdoor fixed mini dome system shall meet or exceed the following design and performance specifications.

Imaging Device	1/3-inch imager
Picture Elements	NTSC/PAL 720 (H) x 540 (V) 720 (H) x 540 (V)
Dynamic Range	102 dB typical/120 dB maximum (DW/CW models only)
Scanning System	2:1 interlace (progressive option on CW/DW models only
Synchronization	Internal
Electronic Shutter Range	Auto (1/15-1/22,000)
Lens Type	Varifocal with auto iris
Format Size	1/3-inch
Focal Length	3.0 mm-9.5 mm 9.0 mm-22.0 mm <list>
Operation	Iris Auto (DC-drive) Focus Manual Zoom Manual
Minimum Illumination	Color (day): 0.8 lux, SENS 8X: 0.2 lux, B-W (night): 0.08 lux, SENS 8X: 0.02 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.15 lux, B-W (night): 0.015 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.8 lux, SENS 8X: 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance)
Compression	MPEG-4, MJPEG in Web viewing mode
Video Streams	3, simultaneous
Video Resolutions	NTSC PAL 4CIF 704 x 480 704 x 576 2CIF 704 x 240 704 x 288

	CIF 352 x 240 352 x 288 QCIF 176 x 120 176 x 144
Bit Rate	Configurable, 20 kbps to 2 Mpbs per stream
Web User Interface	
Environment	Low temperature, indoor/outdoor
Connectors	RJ-45 for 100BASE-TX, Auto MDI/MDI-X
Cabling	CAT5 cable or better for 100BASE-TX
Input Voltage	24 VAC (18-36) or PoE input voltage
Power Consumption	<7.5 Watts,<13 Watts with heaters 24VAC: <0.5 Amps, <0.9 Amps with heaters
Alarm Input	10 VDC maximum, 5 mA maximum
Alarm Output	0 to 15 VDC maximum, 75 mA maximum
Service Connector	Internal to housing for 2.5 mm connector for NTSC/PAL video outputs
Service Connector	3-conductor, 2.5 mm connector for video output to optional (IS-SC cable)
Pan/Tilt Adjustment	Pan 360°, tilt 80° (20° to 100° range), and rotation 360°
Light Attenuation	smoked bubble, f/1.5 light loss; clear bubble, zero light loss
CERTIFICATIONS	CE, Class B UL Listed Meets NEMA Type 4X and IP66 standards

3. Accessories
   a. Pendant mount
   b. Wall mount for pendant
   c. Corner adapter for wall mount
   d. Pole adapter for wall mount
   e. <list accessories>

S. Megapixel High Definition Integrated Digital Network Camera
1. The network camera shall offer dual video streams with up to 3.1 megapixel resolution (2048 x 1536) in progressive scan format.

2. An alarm input and relay output shall be built in for integration with hard wired external sensors.
3. The network camera shall be capable of firmware upgrades through a network using a software-based device utility.
4. The network camera shall offer auto back focus (ABF) functionality through a push button on the camera. ABF parameters shall also be configurable through a standard Web browser interface.
5. The network camera shall offer a video output port providing an NTSC/PAL analog video output signal for adjusting field of view and focus at the camera.
6. The network camera shall provide advanced low-light capabilities for color and day/night models with sensitivity down to 0.12 lux in color and 0.03 lux in black-white (B-W).
7. The network camera shall have removable IR cut filter mechanism for increased sensitivity in low-light installations. The sensitivity of IR cut filter removal shall be configurable through a Web browser.
8. The network camera shall support two simultaneous, configurable video streams. H.264 and MJPEG compression formats shall be available for primary and secondary streams with selectable unicast and multicast protocols. The streams shall be configurable in a variety of frame rates and bit rates.
9. The network camera shall support industry standard Power over Ethernet (PoE)
10. IEEE 802.3af to supply power to the camera over the network. The network camera shall also offer a 24 VAC power input for optional use.
11. The network camera shall use a standard Web browser interface for remote administration and configuration of camera parameters.
12. The network camera shall have a window blanking feature to conceal user-defined privacy areas that cannot be viewed by an operator. The network camera shall support up to four blanked windows. A blanked area shall appear on the screen as a solid gray window.
13. The network camera shall support standard IT protocols.

14. The network camera shall support open architecture best practices with a published API available to third-party network video recording and management systems.
15. Megapixel High Definition Integrated Digital Network Camera Technical Specifications:

Imaging Device	1/3-inch, effective
Imager Type	CMOS, Progressive scan
Maximum Resolution	2048 x 1536
Signal-to-Noise Ratio	50 dB
Auto Iris Lens Type	DC drive
Electronic Shutter Range	1~1/100,000 sec
Wide Dynamic Range	60 dB
White Balance Range	2,000° to 10,000°K
Sensitivity	f/1.2; 2,850K; SNR >24dB Color (1x/33ms) 0.50 lux Color SENS (15x/500 ms) 0.12 lux Mono SENS (15x/500 ms) Mono (1x/33ms)0.25 lux 0.03 lux
Dome Attenuation	Clear Zero light loss Smoke f/1.0 light loss
Compression	H.264 in base profile and MJPEG
Video Streams	Up to 2 simultaneous streams, the second Stream variable based on the setup of the primary stream
Frame Rate	Up to 30, 25, 24, 15, 12.5, 12, 10, 8, 7.5, 6.5, 4, 3, 2, and 1 (depending upon coding, resolution, and stream configuration
Available Resolutions	3.1 MPx2048 x 1536; 4:3 aspect ratio; 2.0 ips max., 10.0 Mbps bit rate for MJPEG; 3.0 ips max., 2.6 Mbps bit rate H.264 2.1 MPx1920 x 1080; 16:9 aspect ratio: 15.0 ips max.,10.0 Mbps bit rate for MJPEG; 5.0 ips max., 2.7 Mbps bit rate H.264 3.1.9 MPx1600 x 1200; 4:3 aspect ratio; 15.0 ips max.,10.0 Mbps bit rate for MJPEG; 6.0 ips max., 2.6 Mbps bit rate H.264 1.3 MPx1280 x 1024; 5:4 aspect ratio; 15.0 ips max.,10.0 Mbps bit

	rate for MJPEG; 8.0 ips max., 2.5 Mbps bit rate H.264 1.2 MPx1280 x 960; 4:3 aspect ratio; 15.0 ips max., 9.8 Mbps bit rate for MJPEG; 9.8 ips max., 8.5 Mbps bit rate H.264 6.0.9 MPx1280 x 720; 16:9 aspect ratio; 30.0 ips max.,10.0 Mbps bit rate for MJPEG; 12.5 ips max., 2.5 Mbps bit rate H.264 0.5 MPx800 x 600; 4:3 aspect ratio; 30.0 ips max., 5.8 Mbps bit rate for MJPEG; 25.0 ips max., 2.0 Mbps bit rate H.264 8.0.3 MPx640 x 480; 4:3 aspect ratio; 30.0 ips max., 3.7 Mbps bit rate for MJPEG; 30.0 ips max.,1.6 Mbps bit rate H.264 0.1 MPx320 x 240; 4:3 aspect ratio; 30.0 ips max., 0.9 Mbps bit rate for MJPEG; 30.0 ips max., 0.4 Mbps bit rate H.264 Additional640 x 512, 640 x 352, 480 x 368, 480 x 272, 320 x 256, 320 x 176
Supported Protocols	TCP/IP, UDP/IP (Unicast, Multicast IGMP), UPnP, DNS, DHCP, RTP, RTSP, NTP,IPv4, SNMP, QoS, HTTP, HTTPS, LDAP(client), SSH, SSL, STMP, FTP, MDNS(Bonjour), and 802.1x (EAP)
Security Access	Password protected
Software Interface	Web browser view and setup, up to 16 cameras
Connectors	RJ-45 for 100Base-TX, Auto MDI/MDI-X
Cable	Cat5 cable or better for 100Base-TX
Input Voltage	24 VAC or PoE (IEEE802.3af class 3)
Power Consumption	6 W
Current Consumption	PoE <200 mA maximum 24 VAC <295 mA nominal; <390 mA maximum
Alarm Input	10 VDC maximum, 5 mA maximum
Alarm Output	0 to 15 VDC maximum, 75 mA maximum
Lens Mount	CS mount, adjustable
Pan/Tilt Adjustment	Pan 368° Tilt 160° (10° to 170°)

	Rotate 355°

16. Accessories
    a. Pendant mount
    b. Wall mount for pendant
    c. Corner adapter for wall mount
    d. Pole adapter for wall mount
    e. <list accessories>
17. Recommended Lenses
    a. Megapixel lens, varifocal, 2.2~6.0 mm, f/1.3~2.0
    b. Megapixel lens, varifocal, 2.8~8.0 mm,f/1.1~1.9
    c. Megapixel lens, varifocal, 2.8~12.0 mm, f/1.4~2.7
    d. Megapixel lens, varifocal, 15.0~50.0 mm, f/1.5~2.1
    e. <list megapixel lenses>

T. Indoor/Outdoor Camera Dome System
1. The indoor/outdoor camera dome system shall include a built-in 100Base-TX network interface for live streaming to a standard Web browser.
2. The indoor/outdoor camera dome system shall operate in openv architecture connectivity for third-party software recording solutions.
3. The indoor/outdoor VASS camera dome system shall be a discreet camera dome system consisting of a dome drive with a variable speed/high speed pan/tilt drive unit with continuous 360° rotation; 1/4-inch high resolution color, or color/black-white CCD camera; motorized zoom lens with optical and digital zoom; auto focus; and an enclosure consisting of a back box, lower dome, and a quick-install mounting.
4. Indoor/Outdoor fixed dome system technical specifications:

Imaging Device	1/4-inch CCD
Picture Elements	NTSC/PAL 768 x 494/752 x 582
Dynamic Range	102 dB typical/120 dB maximum (DW/CW models only)
Scanning System	2:1 interlace
Synchronization	Internal

Electronic Shutter Range	Auto (1/15-1/22,000)
Lens Type	Lens f/1.4 (focal length, 3.4~119 mm; 35X optical zoom, 12X digital zoom)
Focus	Automatic with manual override
Pan Speed	Variable between 400□ per second continuous pan to 0.1° per second
Vertical Tilt	Unobstructed tilt of +2□ to -92□
Manual Control Speed	Pan speed of 0.1□ to 80□ per second, and pan at 150□ per second in turbo mode. Tilt operation shall range from 0.1□ to 40□ per second
Automatic Preset Speed	Pan speed of 400□ and a tilt speed of 200□ per second
Presets	256 positions with a 20-character label available for each position; programmable camera settings, including selectable auto focus modes, iris level, LowLight™ limit, and backlight compensation for each preset; command to copy camera settings from one preset to another; and preset programming through control keyboard or through dome system on-screen menu 128 positions with a 20-character label available for each position; programmable camera settings, including selectable auto focus modes, iris level, LowLight limit, and backlight compensation for each preset; command to copy camera settings from one preset to another; and preset programming through control keyboard or through dome system on-screen menu
Preset Accuracy	± 0.1□
Zones	8 zones with up to 20-character labeling for each, with the ability to blank the video in the zone
Limit Stops	Programmable for manual panning, auto/random scanning, and frame scanning
Alarm Inputs	7
Alarm Output Programming	Auxiliary outputs can be alternately programmed to operate

	on alarm
Alarm Action	Individually programmed for 3 priority levels, initiating a stored pattern or going to a preassigned preset position
Resume after Alarm	After completion of alarm, dome returns to previously programmed state or its previous position
Window Blanking	8, four-sided user-defined shapes, each side with different lengths; window blanking setting to turn off at user-defined zoom ratio; window blanking set to opaque gray or translucent smear; blank all video above user-defined tilt angle; blank all video below user-defined tilt angle
Patterns	8 user-defined programmable patterns including pan/tilt/zoom and preset functions, and pattern programming through control keyboard or through dome system on-screen menu
Scheduler	Internal scheduling system for programming presets, patterns, window blanks, alarms, and auxiliary functions based on internal clock settings
Auto Flip	Rotates dome 180° at bottom of tilt travel
Password Protection	Programmable settings with optional password protection
Compass Display	On-screen display of compass heading and user-definable compass setup
Camera Title Overlay	20 user-definable characters on the screen camera title display
Video Output Level	User-selectable for normal or high output levels to compensate for long video wire runs
Motion Detection	User-definable motion detection settings for each preset scene, can activate auxiliary outputs, and contains three sensitivity levels per zone
Electronic Image Stabilization	Electronic compensation for external vibration sources that

	cause image blurring; user selectable for 2 frequency ranges, 5 Hz (3-7 Hz) and 10 Hz (8-12 Hz)
Wide Dynamic Range	128X
Video Output	1 Vp-p, 75 ohms
Minimum Illumination	NTSC/EIA 0.55 lux at 1/60 sec shutter speed (color), 0.063 lux at 1/4 sec shutter speed (color), 0.00018 lux at 1/2 sec shutter speed (B-W) PAL/CCIR 0.55 lux at 1/50 sec shutter speed (color), 0.063 lux at 1/3 sec shutter speed (color), 0.00018 lux at 1/1.5 sec shutter speed (B-W)
Compression	MPEG-4, MJPEG
Video Streams	3, simultaneous
Video Resolutions	NTSC PAL 4CIF 704 x 480 704 x 576 2CIF 704 x 240 704 x 288 CIF 352 x 240 352 x 288 QCIF 176 x 120 176 x 144
Bit Rate	Configurable, MPEG-4 30 ips, 2 Mbps for primary stream, MJPEG 15 ips, 3 Mbps, MJPEG
Web User Interface	
Environment	Low temperature, indoor/outdoor
Connectors	RJ-45 for 100BASE-TX, Auto MDI/MDI-X
Cabling	CAT5 cable or better for 100BASE-TX
Input Voltage	18 to 32 VAC; 24 VAC nominal 22 to 27 VDC; 24 VDC nominal
Power Consumption	24 VAC 23 VA nominal (without heater);73 VA nominal (with heater) 24 VDC 0.7 A nominal (without heater);3 A nominal (with heater)
Alarm Input	7
Alarm Output	1
CERTIFICATIONS	CE, Class B UL Listed Meets NEMA Type 4X and IP66 standards

5. Accessories
   a. Pendant mount
   b. Wall mount for pendant
   c. Corner adapter for wall mount
   d. Pole adapter for wall mount
   e. <list accessories>

U. Reinforced Fixed Dome Camera
1. The dome camera shall be a high-resolution color video camera with wide dynamic range capturing capability.
2. The camera shall meet or exceed the following specifications:
   a. The camera shall have the form factor as typical of a traditional VASS dome video camera.
   b. The image capturing device shall be a 1/3-inch image sensor designed for capturing wide dynamic images.
3. The camera shall optimize each pixel independently.
4. The camera shall have onscreen display menus for programming the camera’s settings.
5. The signal system shall be NTSC or PAL selectable.
6. The resolution that the camera provides shall be [470] television lines horizontal and [460] television lines vertical.
7. The camera shall have [720] horizontal and 540 vertical picture elements.
8. The scanning system shall be 525/60 lines NTSC or 625/50 lines PAL.
9. The synchronizing system shall be internal/AC line-lock.
10. The sensitivity shall be 0.6 lux at f1.2, 30 IRE.
11. The signal-to-noise ratio shall be 50 dB.
12. The electronic shutter shall have automatic adjustment, and operate from 1/60 NTSC to 1/100,000 second, automatic.
13. The camera shall have an automatic white balance range of 2800 to 11000 K.
14. The camera shall have automatic gain control.
15. The camera shall include a shroud to conceal the camera’s position inside the dome.
16. The camera shall have composite video output.
17. The housing shall have the following specifications:
    a. Construction: Aluminum

b. The housing shall be heavy duty and tamper resistant.

c. Dome housing construction: 0.13-in polycarbonate.

d. Finish: Powder coat

18. The camera shall come with a manual varifocal [4 to 9]mm lens.
19. The electrical specifications for the camera shall be as follows:
    a. Input voltage shall be 24 VAC or 12 VDC.
    b. Power consumption shall be 12 VDC, 455 mA; or 24 VAC, 160 mA.
    c. Power source shall be universal 18 to 30 VAC or 10 to 30 VDC.
    d. Video output shall be composite: 1.0 volts peak-to-peak at 75-ohm load.
20. The environmental specifications for the camera shall be as follows: Operating temperature shall be -10 to 45 degrees Celsius or 14 to 113 degrees Fahrenheit.
21. Accessories shall include:
    a. Surface mount adapter
    b. Wall mount adapter
    c. Flush mount adapter

V. Indoor/Outdoor Fixed Mini Dome System

1. The indoor/outdoor fixed mini dome system shall include a built-in 100Base-TX network interface for live streaming to a standard Web browser.
2. The network mini dome shall be integrated into the back box design to accept multiple camera options without modification. The network mini dome shall operate in open architecture connectivity for third-party software recording solutions.
3. The indoor/outdoor fixed mini dome system shall meet or exceed the following design and performance specifications.

Imaging Device	1/3-inch imager
Picture Elements	NTSC/PAL 720 (H) x 540 (V) 720 (H) x 540 (V)
Dynamic Range	102 dB typical/120 dB maximum (DW/CW models only)
Scanning System	2:1 interlace (progressive option on CW/DW models only
Synchronization	Internal
Electronic Shutter Range	Auto (1/15-1/22,000)

Lens Type	Varifocal with auto iris
Format Size	1/3-inch
Focal Length	3.0 mm–9.5 mm 9.0 mm–22.0 mm <list>
Operation	Iris Auto (DC-drive) Focus Manual Zoom Manual
Minimum Illumination	Color (day): 0.8 lux, SENS 8X: 0.2 lux, B-W (night): 0.08 lux, SENS 8X: 0.02 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.15 lux, B-W (night): 0.015 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) Color (day): 0.8 lux, SENS 8X: 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance) 0.2 lux (F1.0, 40 IRE, AGC on, 75% scene reflectance)
Compression	MPEG-4, MJPEG in Web viewing mode
Video Streams	3, simultaneous
Video Resolutions	NTSC PAL 4CIF 704 x 480 704 x 576 2CIF 704 x 240 704 x 288 CIF 352 x 240 352 x 288 QCIF 176 x 120 176 x 144
Bit Rate	Configurable, 20 kbps to 2 Mpbs per stream
Web User Interface	
Environment	Low temperature, indoor/outdoor
Connectors	RJ-45 for 100BASE-TX, Auto MDI/MDI-X
Cabling	CAT5 cable or better for 100BASE-TX
Input Voltage	24 VAC (18-36) or PoE input voltage
Power Consumption	<7.5 Watts,<13 Watts with heaters 24VAC: <0.5 Amps, <0.9 Amps with heaters
Alarm Input	10 VDC maximum, 5 mA maximum
Alarm Output	0 to 15 VDC maximum, 75 mA maximum
Service Connector	Internal to housing for 2.5 mm

	connector for NTSC/PAL video outputs
Service Connector	3-conductor, 2.5 mm connector for video output to optional (IS-SC cable)
Pan/Tilt Adjustment	Pan 360°, tilt 80° (20° to 100° range), and rotation 360°
Light Attenuation	smoked bubble, f/1.5 light loss; clear bubble, zero light loss
CERTIFICATIONS	CE, Class B UL Listed Meets NEMA Type 4X and IP66 standards

4. Accessories
   a. Pendant mount
   b. Wall mount for pendant
   c. Corner adapter for wall mount
   d. Pole adapter for wall mount
   e. <list accessories>

W. Megapixel High Definition Integrated Digital Network Camera
1. The network camera shall offer dual video streams with up to 3.1 megapixel resolution (2048 x 1536) in progressive scan format.
2. An alarm input and relay output shall be built in for integration with hard wired external sensors.
3. The network camera shall be capable of firmware upgrades through a network using a software-based device utility.
4. The network camera shall offer auto back focus (ABF) functionality through a push button on the camera. ABF parameters shall also be configurable through a standard Web browser interface.
5. The network camera shall offer a video output port providing an NTSC/PAL analog video output signal for adjusting field of view and focus at the camera.
6. The network camera shall provide advanced low-light capabilities for color and day/night models with sensitivity down to 0.12 lux in color and 0.03 lux in black-white (B-W).
7. The network camera shall have removable IR cut filter mechanism for increased sensitivity in low-light installations. The sensitivity

of IR cut filter removal shall be configurable through a Web browser.

8. The network camera shall support two simultaneous, configurable video streams. H.264 and MJPEG compression formats shall be available for primary and secondary streams with selectable unicast and multicast protocols. The streams shall be configurable in a variety of frame rates and bit rates.
9. The network camera shall support industry standard Power over Ethernet (PoE)
10. IEEE 802.3af to supply power to the camera over the network. The network camera shall also offer a 24 VAC power input for optional use.
11. The network camera shall use a standard Web browser interface for remote administration and configuration of camera parameters.
12. The network camera shall have a window blanking feature to conceal user-defined privacy areas that cannot be viewed by an operator. The network camera shall support up to four blanked windows. A blanked area shall appear on the screen as a solid gray window.
13. The network camera shall support standard IT protocols.
14. The network camera shall support open architecture best practices with a published API available to third-party network video recording and management systems.

X. Megapixel High Definition Integrated Digital Network Camera Technical Specifications:

Imaging Device	1/3-inch, effective
Imager Type	CMOS, Progressive scan
Maximum Resolution	2048 x 1536
Signal-to-Noise Ratio	50 dB
Auto Iris Lens Type	DC drive
Electronic Shutter Range	1~1/100,000 sec
Wide Dynamic Range	60 dB
White Balance Range	2,000° to 10,000°K
Sensitivity	f/1.2; 2,850K; SNR >24dB Color (1x/33ms) 0.50 lux Color SENS (15x/500 ms) 0.12 lux Mono SENS (15x/500 ms) Mono

	(1x/33ms)0.25 lux 0.03 lux
Dome Attenuation	Clear Zero light loss Smoke f/1.0 light loss
Compression	H.264 in base profile and MJPEG
Video Streams	Up to 2 simultaneous streams, the second Stream variable based on the setup of the primary stream
Frame Rate	Up to 30, 25, 24, 15, 12.5, 12, 10, 8, 7.5, 6.5, 4, 3, 2, and 1 (depending upon coding, resolution, and stream configuration
Available Resolutions	3.1 MPx2048 x 1536; 4:3 aspect ratio; 2.0 ips max., 10.0 Mbps bit rate for MJPEG; 3.0 ips max., 2.6 Mbps bit rate H.264 2.1 MPx1920 x 1080; 16:9 aspect ratio: 15.0 ips max.,10.0 Mbps bit rate for MJPEG; 5.0 ips max., 2.7 Mbps bit rate H.264 3.1.9 MPx1600 x 1200; 4:3 aspect ratio; 15.0 ips max.,10.0 Mbps bit rate for MJPEG; 6.0 ips max., 2.6 Mbps bit rate H.264 1.3 MPx1280 x 1024; 5:4 aspect ratio; 15.0 ips max.,10.0 Mbps bit rate for MJPEG; 8.0 ips max., 2.5 Mbps bit rate H.264 1.2 MPx1280 x 960; 4:3 aspect ratio; 15.0 ips max., 9.8 Mbps bit rate for MJPEG; 9.8 ips max., 8.5 Mbps bit rate H.264 6.0.9 MPx1280 x 720; 16:9 aspect ratio; 30.0 ips max.,10.0 Mbps bit rate for MJPEG; 12.5 ips max., 2.5 Mbps bit rate H.264 0.5 MPx800 x 600; 4:3 aspect ratio; 30.0 ips max., 5.8 Mbps bit rate for MJPEG; 25.0 ips max., 2.0 Mbps bit rate H.264 8.0.3 MPx640 x 480; 4:3 aspect ratio; 30.0 ips max., 3.7 Mbps bit rate for MJPEG; 30.0 ips max.,1.6 Mbps bit rate H.264 0.1 MPx320 x 240; 4:3 aspect ratio; 30.0 ips max., 0.9 Mbps bit rate for MJPEG; 30.0 ips max., 0.4 Mbps bit rate H.264 Additional640 x 512, 640 x 352, 480 x 368, 480 x 272, 320 x 256, 320 x 176

Supported Protocols	TCP/IP, UDP/IP (Unicast, Multicast IGMP), UPnP, DNS, DHCP, RTP, RTSP, NTP,IPv4, SNMP, QoS, HTTP, HTTPS, LDAP(client), SSH, SSL, STMP, FTP, MDNS(Bonjour), and 802.1x (EAP)
Security Access	Password protected
Software Interface	Web browser view and setup, up to 16 cameras
Connectors	RJ-45 for 100Base-TX, Auto MDI/MDI-X
Cable	Cat5 cable or better for 100Base-TX
Input Voltage	24 VAC or PoE (IEEE802.3af class 3)
Power Consumption	6 W
Current Consumption	PoE <200 mA maximum 24 VAC <295 mA nominal; <390 mA maximum
Alarm Input	10 VDC maximum, 5 mA maximum
Alarm Output	0 to 15 VDC maximum, 75 mA maximum
Lens Mount	CS mount, adjustable
Pan/Tilt Adjustment	Pan 368° Tilt 160° (10° to 170°) Rotate 355°

1. Accessories
   a. Pendant mount
   b. Wall mount for pendant
   c. Corner adapter for wall mount
   d. Pole adapter for wall mount
   e. <list accessories>
2. Recommended Lenses
   a. Megapixel lens, varifocal, 2.2~6.0 mm, f/1.3~2.0
   b. Megapixel lens, varifocal, 2.8~8.0 mm,f/1.1~1.9
   c. Megapixel lens, varifocal, 2.8~12.0 mm, f/1.4~2.7
   d. Megapixel lens, varifocal, 15.0~50.0 mm, f/1.5~2.1
   e. <list megapixel lenses>

Y. NETWORK CAMERAS
1. Shall be IEEE 802.3af compliant.
   a. Shall be utilized for interior and exterior purposes.

b. A Category 6A cable will be the primary source for carrying signals up to 100 m(300 ft.) from a switch hub or network server. If any camera is installed greater than 100 m (300 ft.) from the controlling device then the following will be required:
   1) A local or remote 12 VDC or 24 VAC power source will be required from a Class 2, UL compliant power supply.
   2) A signal converter will be required to convert from a Category 6A cable over to a fiber optic or standard signal cable. The signal will need to be converted back to a Category 6A cable at the controlling device using a signal converter card.
c. Shall be routed to a controlling device via a network switch.
d. Shall be of hybrid design with both an Internet Protocol (IP) output and a monitor video output which produces a picture equivalent to an analog camera and allows simultaneous output of both.
e. Shall be a programmable IP address that allows for installation of multiple units in the same Local Area Network (LAN) environment.
d. Incorporate a minimum of Transmission Control Protocol (TCP)/IP, User Datagram Protocol (UDP), Hypertext Transfer Protocol (HTTP), File Transfer Protocol (FTP), Internet Control Message Protocol (ICMP0, Address Resolution Protocol (ARP), Real-Time Transport Protocol (RTP), Dynamic Host Configuration Protocol (DHCP), Network Time Protocol (NTP), Simple Mail Transfer Protocol (SMTP), Internet Group Management Protocol (IGMP), and Differentiated Service Code Point (DSCP) protocols for various network applications.

Z. Fixed Network Camera
   1. The fixed network camera shall have following technical characteristics:

Video Standards	MPEG-4; M-JPEG
Video Data Rate	9.6 Kbps - 6 Mbps Constant & variable
Image Resolution	768x494 (NTSC)
Video Resolution	704 x 576/480 (4CIF: 25/30 IPS) 704 x 288/240 (2CIF: 25/30 IPS)

	352 x 288/240 (CIF: 25/30 IPS) 176 x 144/120 (QCIF: 25/30 IPS)
Select Frame Rate	1-25/30 IPS (PAL/NTSC);Field/frame based coding
Network Protocols	RTP, Telnet, UDP, TCP, IP, HTTP, IGMP, ICMP
Software Update	Flash ROM, remote programmable
Configuration	Via web browser, built-in web server interfaces
Video Out	1x Analog composite: NTSC or PAL; BNC connector 75 Ohm
Sensitivity	1 0.65 lux (color) 0.26 lux (NightSense)
Minimum Illumination	0.30 lux (color)0.12 lux (NightSense)
Video Signal-to-Noise Ratio	50 dB
Video Signal Gain	21 dB, (max) Electronic Shutter Automatic, up to 1/150000 sec. (NTSC)
Alarm In	Automatic sensing (2500 - 9000 K)
Input Voltage	+5 V nominal, +40 VDC max VDC: 11-36 V (700 mA) VAC: 12-28 V (700 mA) PoE: IEEE 802.3af compliant

2. Camera accessories shall include:
   a. Surface mount adapter
   b. Wall mount adapter
   c. Flush mount adapter
   d. <list>

AA. Wireless Cameras
1. Prior to installation of any wireless camera, ensure operating frequency is given full approval by the VA controlling authority. Wireless cameras shall be utilized as either part of a VASS network or a standard analog system.
2. Power for a wireless camera will be 110 VAC tied into a dedicated circuit breaker on a power panel that is dedicated to the security

system and is fed from a power source with back-up in the event primary power to the VASS System is lost. Power will be run to the camera and connected at both ends in accordance with Division 26 of the VA Master Specification FOR NCA Projects, and the VA Electrical Manual. In addition, wireless systems are line of sight dependant and all considerations for environmental layout must be taken into consideration prior to design, engineering, and installation of this type of camera system. Proximity to transmitting and receiving devices, cell phone towers, and any and all electrical devices can also cause interference with the camera signal and must be considered in advance.

3. Shall be located within a minimum of one quarter of a mile from the receiving unit. Repeaters shall be used as required to ensure the strongest possible signal between transmitters and receivers.
4. Shall be Federal Communication Commission (FCC) approved and compliant.
5. If using wireless cameras, the following equipment shall be utilized to ensure operation of the system:
   a. Receiver
   b. Receiver antenna as required
   c. Repeater as required
   d. Mounting Hardware
6. Receivers shall only handle up to four (4) cameras per unit.
7. Technical Characteristics
   a. Wireless Cameras:

Imaging Device	1/3-inch interline transfer CCD
Picture Elements	NTSC 510 (H) x 492 (V)
Sensing Area	6 mm diagonal
Scanning System	NTSC 525 lines, 21 interlace
Synchronization System	AC line lock/internal
Horizontal Resolution	330 TV lines
Iris Control	Selectable on/off
Electronic Shutter Range NTSC	1/60-1/100,000 second
Frequency range	2.41-2.47GHz
Modulation	FM

Video signal/noise ratio	48dB
Audio signal/noise ratio	45db
Minimum Illumination	0.6 lux
Signal to Noise Ratio	>50 dB
Automatic Gain Control	On/off switchable
Backlight Compensation	On/off switchable
Auto White Balance	On/off switchable
Video Output	1 Vp-p, 75 ohms
Lens Mount	C/CS mount (adjustable)

b. Receivers

Frequency range	2.4-2.49GHz
Video output	1Vp-p
Signal/noise ratio	38dB

BB. LENSES

1. Camera Field of View shall be set by the Contractor to produce full view of door or window opening and anyone entering or leaving through it. Follow the project construction drawings for design intent.
2. Camera Lenses shall be of the type supplied with the camera from the manufacturer. All cameras which are not supplied with lenses from the factory are specified in this specification. The lens shall be equipped with an auto-iris mechanism unless otherwise specified. Lenses having auto-iris, DC iris, or motor zoom functions shall be supplied with connectors, wiring, receiver/drivers, and controls as needed to operate the lens functions. Lenses shall have sufficient circle of illumination to cover the image sensor evenly. Lenses shall not be used on a camera with an image format larger than the lens is designed to cover. Lenses shall be provided with pre-set capability.
3. Lenses shall have optical-quality coated optics, designed specifically for video surveillance applications, and matched to specified camera. Provide color-corrected lenses with color cameras, megapixel lenses for megapixel cameras, and lenses with day/night for color/b&w cameras.

4. Auto-Iris Lens: Electrically controlled iris with circuit set to maintain a constant video level in varying lighting conditions.
5. Zoom Lenses: Motorized, remote-controlled units, rated as "quiet operating." Features include the following:
   a. Electrical Leads: Filtered to minimize video signal interference.
   b. Motor Speed: Variable.
   c. Lens shall be available with preset positioning capability to recall the position of specific scenes.
6. Lenses: Shall be utilized in a manner that provides maximum coverage of the area being monitored by the camera. The lenses shall:
   a. Be 1/3” to fit CCD fixed camera.
   b. Be all glass with coated optics.
   c. Have mounts that are compatible with the camera selected.
   d. Be packaged and supplied with the camera.
   e. Have a maximum f-stop of f/1.3 for fixed lenses, and a maximum f-stop of f/1.6 for variable focus lenses.
   f. Be equipped with an auto-iris mechanism.
   g. Have sufficient circle of illumination to cover the image sensor evenly.
   h. Not be used on a camera with an image format larger than the lens is designed to cover.
   i. Be provided with pre-set capability.
7. Two types of lenses shall be utilized for both interior and exterior fixed cameras:
   a. Manual Variable Focus
   b. Auto Iris Fixed
8. Manual Variable Focus:
   a. Shall be utilized in large areas that are being monitored by the camera. Examples of this are perimeter fence lines, vehicle entry points, parking areas, etc.
   b. Shall allow for setting virtually any angle of field, which maximizes surveillance effects.
   c. Technical Characteristics:

Image format	1/3 inch
Focal length	5-50mm

Iris range	F1.4 to close
Focus range	1m (3.3 ft)
Back focus distance	10.05 mm (0.4 in)
Angle view Wide (1/3 in)	53.4 x 40.1
Angle view Tele (1/3 in)	5.3 x 4.1
Iris control	manual
Focus ctrl	manual
Zoom ctrl	manual

CC. CAMERA HOUSINGS AND MOUNTS

1. This section pertains to all interior and exterior housings, domes, and applicable wall, ceiling, corner, pole, and rooftop mounts associated with the housing. Housings and mounts shall be specified in accordance to the type of cameras used.
2. All cameras and lenses shall be enclosed in a tamper resistant housing. Any additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
3. The camera and lens contained inside the housing shall be installed on a camera mount. All additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
4. Shall be manufactured in a manner that are capable of supporting a maximum of three (3) cameras with housings and meet environmental requirements for the geographical area the camera support equipment is being installed on or within.
5. Environmentally Sealed
   a. Shall be designed in a manner that it provides a condensation free environment for correct camera operation.
   b. Shall be operated in a 100 percent condensing humidity atmosphere.
   c. Shall be constructed in a manner that:
      1) Has a fill valve to allow for the introduction of nitrogen into the housing to eliminate existing atmospheric air and pressurize the housing to create moisture free conditions.

2) Has an overpressure valve to prevent damage to the housing in the event of over pressurization.
3) Is equipped with a humidity indicator that is visible to the eye to ensure correct atmospheric conditions at all times.
4) The leak rate of the housing is not to be greater than 13.8kPa or 2 pounds per square inch at sea level within a 90-day period.
5) It shall contain camera mounts or supports as needed to allow for correct positioning of the camera and lens.
6) The housing and sunshield are to be white in color.

6. All electrical and signal cables required for correct operations shall be supplied in a hardened carrier system from the controller to the camera.
7. The mounting bracket shall be adjustable to allow for the housing weight of the camera and the housing unit it is placed in.
8. Accessibility to the camera and mounts shall be taken into consideration for maintenance and service purposes.

DD. Indoor Mounts

1. Ceiling Mounts:
   a. This enclosure and mount shall be installed in a finished or suspended ceiling.
   b. The enclosure and mount shall be fastened to the finished ceiling, and shall not depend on the ceiling tile grid for complete support.
   c. Suspended ceiling mounts shall be low profile and shall be suitable for replacement of 610mm x 610mm (2 foot by 2 foot) ceiling tiles.
2. Wall Mounts:
   a. The enclosure shall be installed in a manner that it matches the existing décor and placed at a height that it will be unobtrusive, unable to cause personal harm, and prevents tampering and vandalism.
   b. The mount shall contain a manual pan/tilt head that will provide 360 degrees of horizontal and vertical positioning from a horizontal position and has a locking bar or screw to maintain its fixed position once it has been adjusted.

EE. Interior Domes

1. The interior dome shall be a pendant mount, pole mount, ceiling mount, surface mount, or corner mounted equipment.
2. The lower portion of the dome that provides camera viewing shall be made of black opaque acrylic and shall have a light attenuation factor of no more than 1 f-stop.
3. The housing shall be equipped with integral pan/tilt capabilities complete with wiring, wiring harness, connectors, receiver/driver, pan/tilt control system, pre-position cards, or any other hardware and equipment as needed to fully provide a fully functional pan/tilt dome.
4. The pan/tilt mechanism shall be:
   a. Constructed of heavy duty bearings and hardened steel gears.
   b. Permanently lubricated to ensure smooth and consistent movement of all parts throughout the life of the product.
   c. Equipped with motors that are thermally or impedance protected against overload damage.
   d. Pan movements shall be 360 degrees and tilt movement shall not be less than +/- 90 degrees.
   e. Pan speed shall be a minimum of 10 degrees per second.

FF. Exterior Domes

1. The exterior dome shall meet all requirements outlined in the interior dome paragraph above.
2. The housing shall be constructed to be dust and watertight, and fully operational in 100 percent condensing humidity.

GG. Exterior Wall Mounts

1. Shall have an adjustable head for mounting the camera.
2. Shall be constructed of aluminum, stainless steel, or steel with a corrosion-resistant finish.
3. The head shall be adjustable for not less than plus and minus 90 degrees of pan, and not less than plus and minus 45 degrees of tilt. If the bracket is to be used in conjunction with a pan/tilt, the bracket shall be supplied without the adjustable mounting head and shall have a bolt-hole pattern to match the pan/tilt base.
4. Shall be installed at a height that allows for maximum coverage of the area being monitored.

HH. Explosion Proof Housing

1. This housing shall meet or exceed all requirements of NEMA four (4) standards for hazardous locations.
2. It shall be supplied with the mounting brackets for the specified camera and lens.

2.8 POWER SUPPLIES

A. Power supplies shall be a low-voltage power supplies matched for voltage and current requirements of cameras and accessories, type as recommended by camera[and lens manufacturer.

B. Technical specifications:

1. Input: 115VAC, 50/60Hz, 2.7 amps
2. Outputs:
   a. Number of outputs, [16] <insert number of outputs>
   b. PTC protected, power limited
   c. Output voltage & power:
      1) 24VAC @ 12.5 amps (300VA) or 28VAC @ 10 amp (280VA) supply current
3. Illuminated power disconnect circuit breaker with manual reset
4. Surge suppression
5. Camera synchronization
6. [Wall/Rack] mount.
7. Enclosure: NEMA 250, Type 3

2.9 INFRARED ILLUMINATORS

A. Lighting fixtures that emit light only in the infrared spectrum, suitable for use with cameras indicated, for nighttime surveillance, without emitting visible light.

1. Field-Selectable Beam Patterns: Narrow, medium, and wide.
2. Rated Lamp Life: More than 8000 hours
3. Power Supply: [12-VAC/DC] [120-VAC].

B. Area Coverage: Illumination to 50 m (150 feet) in a narrow beam pattern.

C. Exterior housings shall be suitable for same environmental conditions as associated camera.

2.10 NETWORK SERVER

A. Allow for the transmission of live video, data, and audio over either an existing Ethernet network or a dedicated security system network,

requiring an IP address or Internet Explorer 5.5 or higher, or shall work as an analog-to-Ethernet "bridge" controlling matrices, multiplexers, and pan/tilt/zoom cameras. The network shall operate in a box-to-box configuration allowing for encoded video to be decoded and displayed on an analog monitor.

B. If a VASS System network is going to be utilized as the primary means of monitoring, operating, and recording cameras then the following equipment shall be required as part of the system:
   1. System Server
   2. Computer Workstation
   3. Recording Device
   4. Encoder/Decoder
   5. Monitor
   6. Hub/Switch
   7. Router
   8. Encryptor

C. Shall provide overall control, programming, monitoring, and recording of all cameras and associated devices within the VASS System.

D. All equipment on the network shall be IP addressable.

E. The VASS System network shall meet or exceed the following design and performance specifications:
   1. Two MPEG-4 video streams for a total of 40 images per second will be provided.
   2. PC Software that manages the installation and maintenance of all hardware transmitters and receivers on the network shall be provided.
   3. Video Source that supports any NTSC video source to the computer network shall be addressed.
   4. Receivers that could be used to display the video on a standard analog NTSC or PAL monitor will be addressed.

F. The system shall support the following network protocols:
   1. Internet connections: RTP, Real Time Control Protocol (RTCP), UDP, IP, TCP, ICMP, HTTP, Simple Network Management Protocol (SNMP), IGMP, DHCP, and ARP.
   2. Video Display: MPEG-4, M-JPEG in server push mode only.
   3. Have the ability to adjust bandwidth, image quality and image rate.

4. Support image sizes of either 704 x 576 pixels or 352 x 288 pixels.
5. Have an audio coding format of G.711 or G.728.
6. Provide a video frame rate of at least 30 images per second.
7. Support LAN Interface Ethernet 10/100BaseT and be auto sensing.
8. Have a LAN Data Rate of 9.6 Kbps to 5.0 Mbps.
9. Utilize data interface RS-232/RS-422/RS-485.

G. All connections within the system shall be via CAT-5 cable and RJ-45 jacks. If analog equipment is used as part of the system, then either an encoder or a decoder will be utilized to convert the analog signal to a digital one.

H. The VASS network system shall conform to all VA agency wide security standards for administrator and operator use.

I. Server Technical Characteristics:

Hardware	Personal Computer
CPU	Pentium IV, 3.0 GHz or better
Hard Disk Interface	IDE or better
RAM	256 MB
OS	Windows XP Home/XP Professional
Graphic Card	NVIDIA GeForce 6600 NVIDIA Quadro FX 1400 ATI RADEON X600/X800 or better
Ethernet Card	100 Mb
Software	DirectX 9.0c
Free Memory	120 MB

J. Network Switch Technical Characteristics

Protocol and standard	IEEE802.3 IEEE802.3u IEEE802.3ab
Ports	24 10/100/1000M auto-negotiation RJ-45 ports with auto MDI/MDI-X
Network media	Cat 5 UTP for 1,000Mbps Cat 3 UTP for 10Mbps
Transmission method	store-and-forward
LED	indicator power, act/link, speed

K. Router Technical Characteristics

Network Standards	IEEE 802.3, 802.3u 10Base-T Ethernet (WAN) 100Base-T Ethernet (LAN)

	IEEE 802.3x Flow Control IEEE802.1p Priority Queue ANS/IEEE 802.3 NWay auto-negotiation
Protocol	CSMA/CD, TCP, IP, UDP, PPPoE, AND DHCP (client and server)
VPN Supported	PPTP, IPSec pass-through
Management	Browser
Ports	4 x 10/100Base-T Auto sensing RJ45 ports, and an auto uplink RJ45port(s) 1 x 10Base-T RJ45 port, WAN
LEDs	Power, WAN Activity, LAN Link (10/100), LAN Activity

L. Encryptor Technical Characteristics:

Cryptography	Standard - Triple DES 168-bit (ANSI 9.52) Rijndael - AES (128, 192, 256)
Performance	Throughput (end-to-end) @ 100 Mbps line speed: >188 Mbps full duplex (large frames) >200 kfps full duplex (small frames) Latency (end-to-end) @ 100 Mbps
Key Management	Automatic KEK/DEK Exchange Using Signed Diffie-Hellman Unit Authentication Using X.509 Certificates
Physical Interfaces	10BaseT or 10/100BaseT Ethernet (Host and Network Ports) 10BaseT Ethernet Management Port Back and Front-Panel Serial Control Port
Device Management	THALES Element Manager, Front Panel Viewer, and Certificate Manager 10Base T (RJ-45) or 9-pin Serial Control Port SNMP Network Monitoring
Security Features	Tamper Proof Cryptographic Envelope Tamper Evident Chassis Hardware Random Number Generator
Management	Channel Encrypted Using Same Algorithm as Data Traffic
Security Certifications	FIPS 140-2 Level 3 CAPS Baseline and Enhanced Grades Common Criteria EAL4 and EAL5 (under evaluation)
Regulatory	EN60950, FCC, UL, CE, EN 50082-1, and EN 55022

2.11 RECORDING DEVICES

A. All cameras on the VASS System shall be recorded in real time using a Digital Video Recorder (DVR), Network Video Recorder (NVR), or attached storage. The type of recording device utilized should be determined by the size and type of VASS System designed and installed, and to what extent the system is to be utilized.

B. All recording devices shall be 47.5 cm (19 inch) rack-mountable.

C. All DVR's and NVR's that are viewable over an Intranet or Internet will be routed through an encryptor.

D. Encryptors shall:

1. Comply with FIPS PUB 140-2.
2. Support TCP/IP.
3. Directly interfaces to low-cost commercial routers.
4. Provide packet-based crypto synchronization.
5. Encrypt source and destination IP addresses.
6. Support web browser based management requiring no additional software.
7. Have a high data sustained throughput — 1.544 Mbps (T1) full duplex data rate.
8. Provide for both bridging and routing network architecture support.
9. Support Electronic Key Management System (EKMS) compatible.
10. Have remote management ability.
11. Automatically reconfigure when secure network or wide area network changes.

E. Digital Video Recorder (DVR)

1. Shall record video to a hard drive-based digital storage medium in either NTSC or MPEG format.
2. Shall meet the following minimum requirements:
   a. Record at minimum rate of 30 images per second (IPS).
   b. Have a minimum of eight (8) to 16 looping inputs.
   c. Have a minimum of eight (8) to 16 alarm inputs and two (2) relay outputs.
   d. Shall provide instantaneous playback of all recorded images.
   e. Be IP addressable, if part of a VASS network.
   f. Have built-in digital motion detection with masking and sensitivity adjustments.

g. Provide easy playback and forward/reverse search capabilities.
h. Complete audit trail database, with minimum of a six-month history that tracks all events related to the alarm; specifically who, what, where and when.
i. DVR management capability providing automatic video routing to a back-up spare recorder in case of failure.
j. Accessible locally and remotely via the Internet, Intranet, or a personal digital assistant (PDA).
k. Records all alarm events in real time, ensuring 60 seconds before and after the event are included in the recording.
l. Utilize RS-232 or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.
m. Allow for independently adjustable frame rate settings.
n. Be compatible with the matrix switcher utilized to operate the cameras. The DVR could be utilized as a matrix switcher only if it meets all of the requirements listed in the matrix switcher section.

3. Technical Characteristics:

Compression	MPEG-4
Internal Storage Capacities.	[160] GB, [320] GB, [500] GB, [1] TB, and 2 TB. Available USB hard drive up to 250 GB. Optional internal DVD available
Digital Recording	Up to [16] video and [8] audio channels, or [8] video and [4] audio channels.
Full real-time video recording	Up to 400 IPS@352 x 288: PAL Up to 200 IPS@352 x 288: PAL
Multiple simultaneous functions	Live viewing, Recording, playback, network transmission, back-up
Search functions	Date/time search, event search, bookmark search, smart (pixel) Search
PTZ Control	Third party PTZ control
User ID security	3 levels
Connectivity to external devices:	Eight [8] or sixteen [16] video input and looping output channels. VGA and dual monitor BNC outputs.

	Four [4] or eight [8] audio inputs and one [1] audio output. Ethernet 10/100BaseT network connection. Eight [8] to sixteen [16] alarm inputs and four [4] or eight [8] relay outputs. Biphase connection to control Bosch PTZ cameras. Third party PTZ control via RS-422/RS-485 connection. Front and back USB connectors to connect to a PC mouse, or archive video to a USB memory stick or similar device.
PC requirements	Windows 2000 or above; DirectX 8.1 or above. Intel Pentium III or above, AMD Athlon with 800 MHz or faster CPU. 512 MB or more RAM. 50 MB hard drive. AGP VGA with 64 MB video RAM or above. 10/100-BaseT network interface.
Electrical	Power Input: 100 to 240 VAC; 50/60 Hz Power consumption: [120W] Max. [1.2] A
Video	Video standard: PAL or NTSC selectable. Resolution: 704 x 576 PAL, 704 x 480 NTSC Compression: MPEG-4 Inputs: 8 or 16 composite video 0.5-2 Vpp, 75 Ohm automatic termination. Outputs 8 or 16 composite video 1 Vpp, 75 Ohm.
Audio	Inputs: 4 or 8 line in, 30 kOhm Output: 1 line, 100 kOhm
Monitors	VGA: analog RGB 800x600 MON A: CVBS 1 Vpp□0.1 V, 75 Ohm, BNC Monitor A multi-screen (VGA or CVBS) MON B: CVBS 1 Vpp□0.1 V, 75 Ohm, BNC Monitor B spot/alarm
Frame Rate and Resolution	[16]-channels PAL: Up to 400 IPS@352x288, up to 200 IPS@704x288, up to 100 IPS@704x576.

Alarm inputs	[8] [16] configurable NO/NC, max. input 5 VDC.
Alarm outputs	[4] or [8] relay outputs, configurable NO/NC, max. rated 1A, 125 VAC.
Connections	Ethernet: RJ45 modular jack 8 pins shielded, 10/100 Base-T. Biphase: Screw terminal connector (5 outputs). Maximum 5 controllable cameras per Biphase output. PTZ control interfaces: RS485/RS422. Serial interface: RS232 output signal, DB9 male connector Keyboard: RJ11 modular jack 6 pins
Network:	Transmission speed: up to 120 IPS@352x240 Bandwidth control: Automatic Remote users: Maximum 5 simultaneous connected Control Center users.

Processor	Intel Pentium III 750 MHz
Memory	256 MB RAM
Operating System	Windows 98, NT, ME, 2000, and XP
Video Card	4 MB of RAM capable of 24-bit true color display
Free Hard Disk Space	160 MB for software installation
Network Card	10Base-T network for LAN operation
Archiving	80 GB, 160 GB, 320 GB and 640 GB Hard Drive; CD-RW
Video Input	1.0 Vpp (signal 714mV, sync 286mV) 75 ohms (BNC unbalanced)
Video Output Level	1.0 Vpp +/-10%,75 ohms(BNC unbalanced)
Impedance	75 ohms/Hi- impedance x 16 switchable
Network Interface	Ethernet (RJ-45, 10/100M)
Network Protocol	TCP/IP, DHCP, HTTP, UDP
Network Capabilities	Live/Playback/P/T/Z control
Recording Rate	30 ips for 720 x 240 (NTSC)
Password Protection	Menu Setup, Remote Access

Recording Capacity	160 (1 or 2 fixed HDD) 1 CD-RW
Power Interrupt	Auto recovered to recording mode

F. Network Video Recorder (NVR)

1. Shall record video to a hard drive-based digital storage medium in MPEG, MPEG4 or H.264 format.
2. Shall meet the following minimum requirements:
   a. Record at minimum rate of 30 IPS.
   b. Have a minimum of eight (8) to 16 looping inputs.
   c. Have a minimum of eight (8) to 16 alarm inputs and two (2) relay outputs.
   d. Shall provide instantaneous playback of all recorded images.
   e. Be IP addressable, if part of a VASS network.
   f. Have built-in digital motion detection with masking and sensitivity adjustments.
   g. Easy playback and forward/reverse search capabilities.
   h. Complete audit trail database, with minimum of a six-month history that tracks all events related to the alarm; specifically, who, what, where and when.
   i. NVR management capability providing automatic video routing to a back-up spare recorder in case of failure.
   j. Accessible locally and remotely via the internet, intranet, or a personal digital assistant (PDA).
   k. Records all alarm events in real time, ensuring 60 seconds before and after the event are included in the recording.
   l. Utilize RS-232 or fiber optic connections for integration with the SMS computer station via a remote port on a network hub.
   m. Allow for independently adjustable frame rate settings.
   n. Be compatible with the matrix switcher utilized to operate the cameras.
3. Technical Characteristics:

Hardware/CPU	Pentium III Xeon or IV, 1.8 GHz
HDD Interface	IDE or better; optional: SCSI II, SCSI Ultra, or Fiber Channel
RAM	1024 MB
Operating System	Windows 2000/XP Professional/Server 2003

	Standard
Graphic	Card VGA
Ethernet Card	100/1000 MB
Memory	20 MB
Software Setup	Centralized setup from each authorized PC; access via integrated web server
Storage Media	All storage media possible (e.g., HD, RAID), depending on operating system
Storage Mode	Linear mode, ring mode (capacity-based)
Recording Configuration	Camera name assignment, bandwidth limit, frame rate, video quality
Recording Content	Video and/or audio data
Search Parameters	Time, date, event
Playback	Playback via any IP network (LAN/WAN) simultaneous recording, playback, and backup
Network Interface	Ethernet (RJ-45, 10/100M)
Network Protocol	TCP/IP, DHCP, HTTP, UDP
Network Capabilities	Live/Playback/P/T/Z control
Recording Rate	30 ips for 720 x 240 (NTSC)
Password Protection	Menu Setup, Remote Access
Recording Capacity	160 (1 or 2 fixed HDD) 1 CD-RW
Power Interrupt	Auto recovered to recording mode

2.12 WIRES AND CABLES

A. Shall meet or exceed the manufacturers recommendation for power and signal.

B. Will be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.

C. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will be contained in either EMT or RGS conduit.

D. All conduit, pull boxes, and junction boxes shall be clearly marked with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.

E. Conduit fills shall not exceed 50 percent unless otherwise documented.

F. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.

G. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area

H. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security system shall be defined as any cable or sets of cables carrying 30 VDC/VAC or higher.

I. For all equipment that is carrying digital data between the Physical Access Control System and Database Management or at a remote monitoring station, shall not be less than 20 AWG and stranded copper wire for each conductor. The cable or each individual conductor within the cable shall have a shield that provides 100% coverage. Cables with a single overall shield shall have a tinned copper shield drain wire.

J. All cables and conductors, except fiber optic cables, that act as a control, communication, or signal lines shall include surge protection. Surge protection shall be furnished at the equipment end and additional triple electrode gas surge protectors rated for the application on each wire line circuit shall be installed within 1 m. (3 ft.) of the building cable entrance. The inputs and outputs shall be tested in both normal and common mode using the following wave forms:

   1. A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 watts and peak current of 60 amperes.
   2. An 8 microsecond rise time by 20 microsecond pulse width wave form with a peak voltage of 1000 volts and peak current of 500 amperes.

K. The surge suppression device shall not attenuate or reduce the video or sync signal under normal conditions. Fuses and relays shall not be used as a means of surge protection.

L. Coaxial Cables

   1. All video signal cables for the VASS System, with exception to the PoE cameras, shall be a coaxial cable and have a characteristic impedance of 75 ohms plus or minus 3 ohms.
   2. For runs up to 750 feet use of an RG-59/U is required. The RG-59/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 23 AWG,

polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.

3. For runs between 750 feet and 1250 feet, RG-6/U is required. RG-6/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 18 AWG, polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.
4. For runs of 1250 to 2750 feet, RG-11/U is required. RG-11/U shall be shielded which provides a minimum of 95 percent coverage, with a stranded copper center conductor of a minimum 14 AWG, polyethylene insulation, and black non-conductive polyvinylchloride (PVC) jacket.
5. All runs greater than 2750 feet will be substituted with a fiber optic cable. If using fiber optics as a signal carrier then the following equipment will be utilized:
   a. Multimode fiber optic cable a minimum size of 62 microns
   b. Video transmitter, installed at the camera that utilizes 12 VDC or 24 VAC for power.
   c. Video receiver, installed at the switcher.
6. RG-59/U Technical Characteristics

AWG	22
Stranding	7x29
Conductor Diameter	.031 in.
Conductor Material	BCC
Insulation Material	Gas-injected FHDPE
Insulation Diameter	.145 in.
Outer Shield Type	Braid/Braid
Outer Jacket Material	PVC
Overall Nominal Diameter	.242 in.
UL Temperature Rating	75°C
Nom. Characteristic Impedance	75 Ohms
Nom. Inductance	0.094 µH/ft
Nom. Capacitance	Conductor to Shield 17.0 pF/ft
Nom. Velocity of Propagation	80 %
Nom. Delay	1.3 ns/ft

Nom. Conductor DC Resistance @ 20°C	12.2 Ohms/1000 ft
Nom. Outer Shield DC Resistance @ 20°C	2.4 Ohms/1000 ft
Max. Operating Voltage	UL 300 V RMS

7. RG-6/U Technical Characteristics:

AWG	18
Stranding	7x27
Conductor Diameter	.040 in.
Conductor Material	BC
Insulation Material	Gas-injected FHDPE
Insulation Diameter	.180 in.
Outer Shield Material	Trade Name Duofoil
Outer Shield Type	Tape/Braid
Outer Shield %Coverage	100 %
Outer Jacket Material	PVC
Overall Nominal Diameter	.274 in.
Nom. Characteristic Impedance	75 Ohms
Nom. Inductance	0.106 µH/ft
Nom. Capacitance	Conductor to Shield 16.2 pF/ft
Nom. Velocity of Propagation	82 %
Nom. Delay	1.24 ns/ft
Nom. Conductor DC Resistance	6.4 Ohms/1000 ft
Nominal Outer Shield DC Resistance @ 20°C	2.8 Ohms/1000 ft
Max. Operating Voltage	UL 300 V RMS

8. RG-11/U Technical Characteristics:

AWG	15
Stranding	19x27
Conductor Diameter	.064 in.
Conductor Material	BC
Insulation Material	Gas-injected FHDPE

Insulation Diameter	.312 in.
Inner Shield Type	Braid
Inner Shield Material	BC - Bare Copper
Inner Shield %Coverage	95 %
Inner Jacket Material	PE – Polyethylene
Inner Jacket Diameter	.391 in.
Outer Shield Type	Braid
Outer Shield Material	BC - Bare Copper
Outer Shield %Coverage	95 %
Outer Jacket Material	Trade Name Belflex
Outer Jacket Material	PVC Blend
Overall Nominal Diameter	.520 in.
Operating Temperature Range	-35°C To +75°C
Non-UL Temperature Rating	75°C
Nom. Characteristic Impedance	75 Ohms
Nom. Inductance	0.097 µH/ft
Nom. Capacitance	Conductor to Shield 17.3 pF/ft
Nom. Velocity of Propagation	78 %
Nom. Delay	1.30 ns/ft
Nom. Conductor DC Resistance	3.1 Ohms/1000 ft
Nom. Inner Shield DC Resistance	1.8 Ohms/1000 ft
Nom. Outer Shield DC Resistance	1.4 Ohms/1000 ft
Max. Operating Voltage Non-UL	300 V RMS

9. Signal Cables:
   a. Signal wiring for PoE cameras depends on the distance the camera is being installed from either a hub or the server.
   b. If the camera is up to 300 ft from a hub or the server, then use a shielded UTP category 5 (CAT-V) cable a with standard RJ-45 connector at each end. The cable with comply with the Power over Ethernet, IEEE802.3af, Standard.
   c. If the camera is over 300 ft from a hub or server then utilize a multimode fiber optic cable with a minimum size of 62 microns.
   d. Provide a separate cable for power.

e. CAT-5 Technical Characteristics:

Number of Pairs	4
Total Number of Conductors	8
AWG	24
Stranding	Solid
Conductor Material	BC - Bare Copper
Insulation Material	PO – Polyolefin
Overall Nominal Diameter	.230 in.
IEC Specification	11801 Category 5
TIA/EIA Specification	568-B.2 Category 5e
Max. Capacitance Unbalance	(pF/100 m) 150 pF/100 m
Nom. Velocity of Propagation	70 %
Max. Delay	(ns/100 m) 538 @ 100MHz
Max. Delay Skew	(ns/100m) 45 ns/100 m
Max. Conductor DC Resistance	9.38 Ohms/100
Max. DCR Unbalance@ 20°C	3 %
Max. Operating Voltage	UL 300 V RMS

10. Fiber Optic Cables Technical Characteristics:

Fiber Type	62.5 Micron
Number of Fibers	4
Core Diameter 6	2.5 +/- 2.5 microns
Core Non-Circularity	5% Maximum
Clad Diameter	125 +/- 2 microns
Clad Non-Circularity	1% Maximum
Core-clad Offset	1.5 Microns Maximum
Primary Coating Material	Acrylate
Primary Coating Diameter	245 +/- 10 microns
Secondary Coating Material	Engineering Thermoplastic
Secondary Coating Diameter	900 +/- 50 microns
Strength Member Material	Aramid Yarn
Outer Jacket Material	PVC
Outer Jacket Color	Orange
Overall Diameter	.200 in.
Numerical Aperture	.275

Maximum Gigabit Ethernet	300 meters
Maximum Gigabit Ethernet	550 meters

11. Power Cables
    a. Will be sized accordingly and shall comply with the NEC. High voltage power cables will be a minimum of three conductors, 14 AWG, stranded, and coated with a non-conductive polyvinylchloride (PVC) jacket. Low voltage cables will be a minimum of 18 AWG, stranded and non-conductive polyvinylchloride (PVC) jacket.
    b. Will be utilized for all components of the VASS System that require either a 110 VAC 60 Hz or 220 VAC 50 Hz input. Each feed will be connected to a dedicated circuit breaker at a power panel that is primarily for the security system.
    c. All equipment connected to AC power shall be protected from surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used as a means of surge protection.
    d. Shall be rated for either 110 or 220 VAC, 50 or 60 Hz, and shall comply with VA Master Spec 26 05 21 Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
    e. Low Voltage Power Cables
        1) Shall be a minimum of 18 AWG, Stranded and have a polyvinylchloride outer jacket.
        2) Cable size shall be determined using a basic voltage over distance calculation and shall comply with the NEC’s requirements for low voltage cables.

PART 3 - EXECUTION

3.1. GENERAL

A. Installation: The Contractor shall install all system components including Owner furnished equipment, and appurtenances in accordance with the manufacturer’s instructions, ANSI C2 and as shown, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable data transmission system.

B. Identification and Labeling: The Contractor shall supply permanent identification labels for each cable at each end that will appear on the as-built drawings. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation. Each cable shall be identified by type or signal being carried and termination points. The labels shall be printed on letter size label sheets that are self laminated vinyl that can be printed from a computer database or spread sheet. The labels shall be E-Z code WES12112 or equivalent.

1. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing.

C. Transient Voltage Surge Suppressors (TVSS): The Contractor shall mount TVSS within 3 m (118 in) of equipment to be protected inside terminal cabinets or suitable NEMA 1 enclosures. Terminate off-premise conductors on input side of device. Connect the output side of the device to the equipment to be protected. Connect ground lug to a low impedance earth ground (less than 10 ohms) via Number 12 AWG insulated, stranded copper conductor.

D. Contractor’s Field Test: The Contractor shall verify the complete operation of the data transmission system during the Contractor’s Field Testing. Field test shall include a bit error rate test. The Contractor shall perform the test by sending a minimum of 1,000,000 bits of data on each DTM circuit and measuring the bit error rate. The bit error rate shall not be greater than one (1) bit out of each 100,000 bits sent for each dial-up DTM circuit, and one (1) bit out of 1,000,000 bits sent for each leased or private DTM circuit. The Contractor shall submit a report containing results of the field test.

E. Acceptance Test and Endurance Test: The wire line data transmission system shall be tested as a part of the completed IDS and EECS during the Acceptance test and Endurance Test as specified.

F. Identification and Labeling: The Contractor shall supply identification tags or labels for each cable. Cable shall be labeled at both end points and at intermediate hand holes, manholes, and junction boxes. The labeling format shall be identified and a complete record shall be provided to the Owner with the final documentation.

Each cable shall be identified with type of signal being carried and termination points.

3.2 INSTALLATION

A. System installation shall be in accordance with NECA 303, manufacturer and related documents and references, for each type of security subsystem designed, engineered, and installed.
B. Components shall be configured with appropriate "service points" to pinpoint system trouble in less than 30 minutes.
C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.
D. The VASS System will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a complete network.
E. For integration purposes, the VASS System shall be integrated where appropriate with the following associated security subsystems:
   1. PACS:
      a. Provide 24 hour coverage of all entry points to the perimeter and agency buildings, as well as all emergency exits utilizing a fixed color camera.
      b. Record cameras on a 24-hour basis.
      c. Be programmed go into an alarm state when an emergency exit is opened, and notify the Physical Access Control System and Database Management of an alarm event.
   2. IDS:
      a. Provide a recorded alarm event via a color camera that is connected to the IDS system by either direct hardwire or a security system computer network.
      b. Record cameras on a 24-hour basis.
      c. Be programmed to go into an alarm state when an IDS device is put into an alarm state, and notify the PACS.

d. For additional VASS System requirements as they relate to the IDS, refer to Section 28 16 00 "INTRUSION DETECTION".

3. Security Access Detection:
   a. Provide full coverage of all vehicle and lobby entrance screening areas utilizing a fixed color camera.
   b. Record cameras on a 24-hour basis.
   c. The VASS System should have facial recognition software to assist in identifying individuals for current and future purposes.
4. EPPS:
   a. Provide a recorded alarm event via a color camera that is connected to the EPPS system by either direct hardwire or a security system computer network.
   b. Record cameras on a 24-hour basis.
   c. Be programmed to go into an alarm state when an emergency call box or duress alarm/panic device is activated and notify the Physical Access Control System and Database Management of an alarm event.

F. Integration with these security subsystems shall be achieved by computer programming or the direct hardwiring of the systems.

G. For programming purposes refer to the manufacturers' requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.

H. A complete VASS System shall be comprised of, but not limited to, the following components:
   1. Cameras
   2. Lenses
   3. Video Display Equipment
   4. Camera Housings and Mounts
   5. Controlling Equipment
   6. Recording Devices
   7. Wiring and Cables

I. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a

report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

J. Existing Equipment

1. The Contractor shall connect to and utilize existing video equipment, video and control signal transmission lines, and devices as outlined in the design package. Video equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing video equipment and signal lines intended to be incorporated into the VASS System, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or incorrect installation of equipment.
5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

K. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

L. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

M. Interconnection of Console Video Equipment: The Contractor shall connect signal paths between video equipment as specified by the OEM. Cables shall be as short as practicable for each signal path without causing strain at the connectors. Rack mounted equipment on slide mounts shall have cables of sufficient length to allow full extension of the slide rails from the rack.

N. Cameras:

1. Install the cameras with the focal length lens as indicated for each zone.
2. Connect power and signal lines to the camera.
3. Aim camera to give field of view as needed to cover the alarm zone.
4. Aim fixed mounted cameras installed outdoors facing the rising or setting sun sufficiently below the horizon to preclude the camera looking directly at the sun.
5. Focus the lens to give a sharp picture (to include checking for day and night focus and image quality) over the entire field of view
6. Synchronize all cameras so the picture does not roll on the monitor when cameras are selected.
7. PTZ cameras shall have all preset positions and privacy areas defined and programmed.

O. Monitors:

1. Install the monitors as shown and specified in design and construction documents.

2. Connect all signal inputs and outputs as shown and specified.
3. Terminate video input signals as required.
4. Connect the monitor to AC power.

P. Switcher:

1. Install the switcher as shown in the design and construction documents, and according to the OEM.
2. Connect all subassemblies as specified by the manufacturer and as shown.
3. Connect video signal inputs and outputs as shown and specified; terminate video inputs as required.
4. Connect alarm signal inputs and outputs as shown and specified; connect control signal inputs and outputs for ancillary equipment or secondary control/monitoring sites as specified by the manufacturer and as shown.
5. Connect the switcher CPU and switcher subassemblies to AC power.
6. Load all software as specified and required for an operational VASS System configured for the site and building requirements, including databases, operational parameters, and system, command, and application programs.
7. Provide the original and 2 backup copies for all accepted software upon successful completion of the endurance test.
8. Program the video annotation for each camera.

Q. Video Encoder/Decoder

1. Install the Video Encoder/Decoder per design and construction documents, and as specified by the OEM.
2. Connect analog camera inputs to video encoder.
3. Connect network camera to video decoder.
4. Connect video encoder to VASS network.
5. Connect video decoder to video matrix, DVR, monitor etc.
6. Connect unit to AC power (UPS).
7. Configure the video encoder/decoder per manufacturer’s recommendation and project requirements.

R. Video Server:

1. Install the video server per design and construction documents, and as specified by the OEM.
2. Connect video server to AC power (UPS).

3. Connect to VASS network.
4. Install operating system and Video Management Software.
5. Provide Video Management Software programming per VA guidance and the requirements provided by the Owner. Programming shall include:
   a. Camera names
   b. Screen views
   c. Camera recording schedules (continuous and event) driven recording. Events include alarms from other systems (sensors), manual input, and video motion detection.
   d. Video detection zones for each camera requiring video motion detection
   e. Alarm interface
   f. Alarm outputs
   g. GUI maps, views, icons and actions
   h. PTZ controls (presets, time schedules for privacy zones etc.)
   i. Reports

S. Video Workstation:
1. Install the video workstation per design and construction documents, and as specified by the OEM.
2. Connect video workstation to AC power (UPS).
3. Connect to VASS network.
4. Install operating system and application software.
5. Provide application software programming per VA guidance and the requirements provided by the Owner. Programming shall include:
   a. Screen views
   b. Graphical User Interface (GUI) maps, views, icons and actions
   c. Alarm outputs
   d. Reports

T. Network Switch:
1. Install the network switch per design and construction documents, and as specified by the OEM.
2. Connect network switch to AC power (UPS).
3. Connect network cameras to network switch.
4. Configure the network switch per manufacturer’s recommendation and project requirements.

U. Network Recording Equipment

1. Install the NVR or video storage unit as shown in the design and construction documents, and as specified by the OEM.
2. Connect recording device to AC power (UPS).
3. Connect recording device to network switch as shown and specified.
4. Configure network connections
5. Provide recording unit programming per VA guidance and the requirements provided by the Owner. Programming shall include:
   a. Camera names
   b. Screen views
   c. Camera recording schedules (continuous and event) driven recording. Events include alarms from other systems (sensors), manual input, and video motion detection.
   d. Video detection zones for each camera requiring video motion detection
   e. Alarm interface
   f. Alarm outputs
   g. GUI maps, views, icons and actions
   h. PTZ controls (presets, time schedules for privacy zones etc.)
   i. Reports

V. Video Recording Equipment:
1. Install the video recording equipment as shown in the design and construction documents, and as specified by the OEM.
2. Connect video signal inputs and outputs as shown and specified.
3. Connect alarm signal inputs and outputs as shown and specified.
4. Connect video recording equipment to AC power.
5. Program the video recording equipment;
   a. Recording schedules
   b. Camera caption

W. Video Signal Equipment:
1. Install the video signal equipment as shown in the design and construction documents, and as specified by the OEM.
2. Connect video or signal inputs and outputs as shown and specified.
3. Terminate video inputs as required.
4. Connect alarm signal inputs and outputs as required.
5. Connect control signal inputs and outputs as required
6. Connect electrically powered equipment to AC power.

X. Camera Housings, Mounts, and Poles:
   1. Install the camera housings and mounts as specified by the manufacturer and as shown, provide mounting hardware sized appropriately to secure each camera, housing and mount with maximum wind and ice loading encountered at the site.
   2. Provide a foundation for each camera pole as specified and shown.
   3. Provide a ground rod for each camera pole and connect the camera pole to the ground rod as specified in Division 26 of the VA Master Specification and the VA Electrical Manual 730.
   4. Provide electrical and signal transmission cabling to the mount location via a hardened carrier system from the Physical Access Control System and Database Management to the device.
   5. Connect signal lines and AC power to the housing interfaces.
   6. Connect pole wiring harness to camera.

3.3 SYSTEM START-UP

A. The Contractor shall not apply power to the VASS System until the following items have been completed:
   1. VASS System equipment items and have been set up in accordance with manufacturer's instructions.
   2. A visual inspection of the VASS System has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
   3. System wiring has been tested and verified as correctly connected as indicated.
   4. All system grounding and transient protection systems have been verified as installed and connected as indicated.
   5. Power supplies to be connected to the VASS System have been verified as the correct voltage, phasing, and frequency as indicated.

B. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Contracting Officer’s Representative and Commissioning Agent. Provide a minimum of 7 days prior notice.

C. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

3.4 SUPLEMENTAL CONTRACTOR QUIALITY CONTROL

A. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed VASS System; and are approved by the Contracting Officer.

B. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.

C. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.

D. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

3.5 COMMISSIONING (NOT USED)

3.6 DEMONSTRATION AND TRAINING

A. All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, “GENERAL REQUIREMENTS”.

B. Provide services of manufacturer’s technical representative for [four] Fhours to instruct VA personnel in operation and maintenance of units.

C. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – “COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS”.

-----END----

SECTION 28 31 00
FIRE DETECTION AND ALARM

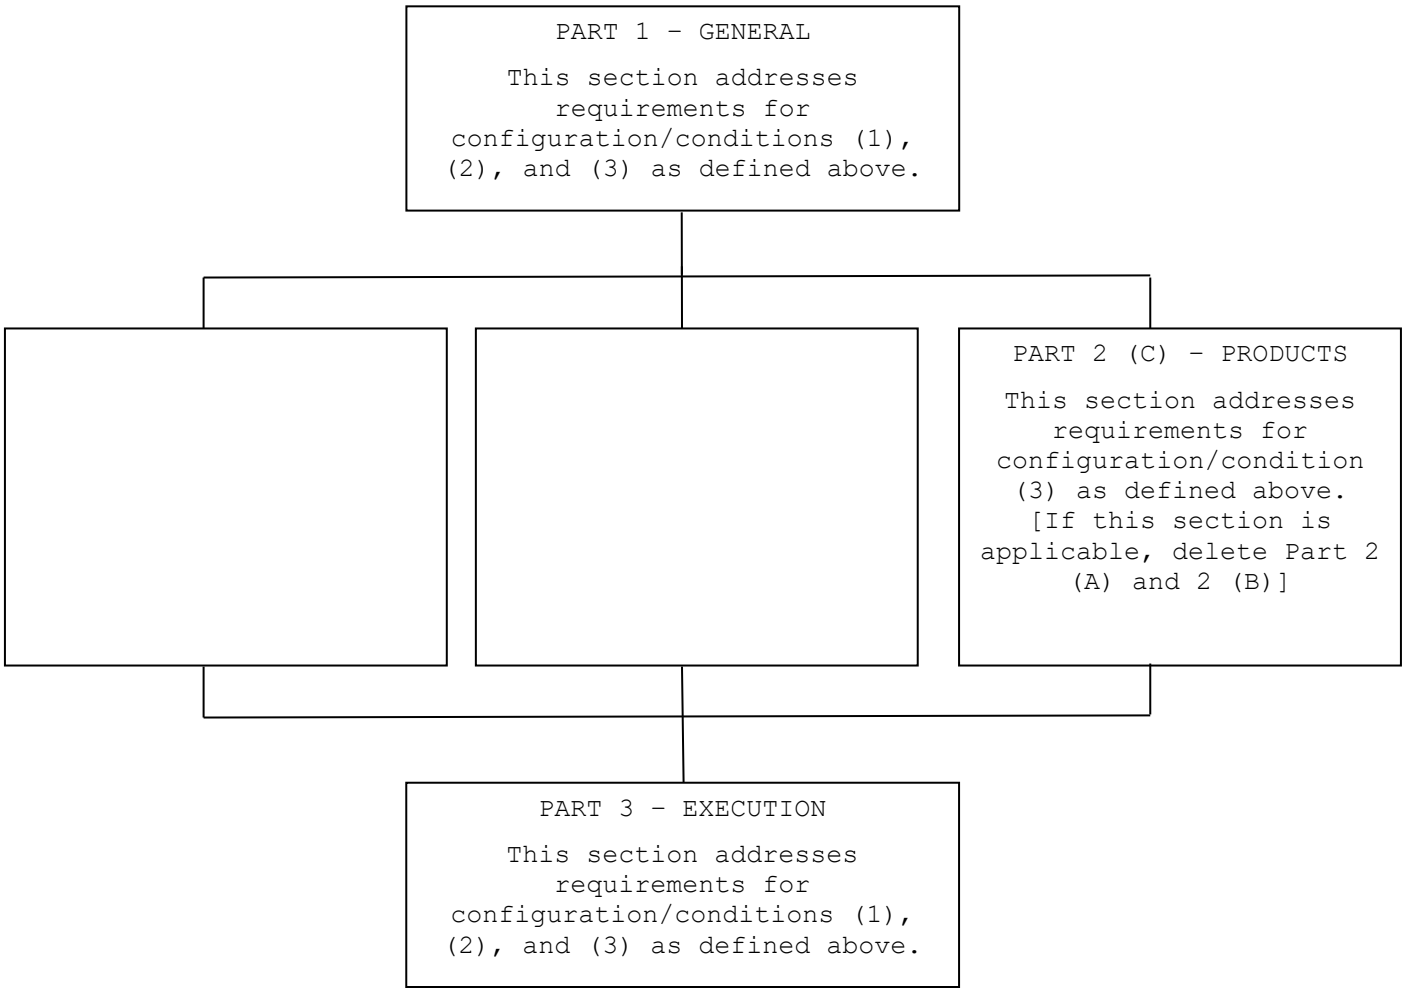

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section of the specifications includes the furnishing, installation, and connection of the fire alarm equipment to form a complete coordinated system ready for operation. It shall include, but not be limited to, alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, and wiring as shown on the drawings and specified. The fire alarm system shall not be combined with other systems such as building automation, energy management, security, etc.

B. Fire alarm systems shall comply with requirements of the most recent VA FIRE PROTECTION DESIGN MANUAL and NFPA 72 unless variations to NFPA 72 are specifically identified within these contract documents by the following notation: "variation". The design, system layout, document submittal preparation, and supervision of installation and testing shall be provided by a technician that is certified NICET level III or a registered fire protection engineer. The NICET certified technician shall be on site for the supervision and testing of the system. Factory engineers from the equipment manufacturer, thoroughly familiar and knowledgeable with all equipment utilized, shall provide additional technical support at the site as required by the Contracting Officer’s Representative or his authorized representative. Installers shall have a minimum of 2 years’ experience installing fire alarm systems.

C. Fire alarm signals:

1. Building(s) shall have an automatic digitized voice fire alarm signal with emergency manual voice override to notify occupants to evacuate (if applicable to match existing). The digitized voice message shall identify the area of the building (smoke zone) from which the alarm was initiated.
2. Building(s) shall have a general evacuation fire alarm signal in accordance with ASA S3.41 to notify all occupants in the respective building to evacuate (if applicable to match existing).

D. Alarm signals (by device), supervisory signals (by device) and system trouble signals (by device not reporting) shall be distinctly transmitted to the main fire alarm system control unit.

E. The main fire alarm control unit shall automatically transmit alarm signals to a listed central station using a digital alarm communicator transmitter in accordance with NFPA 72.

1.2 SCOPE

A. Contractor shall verify fire alarm system is fully operational prior to making any changes and/or connections. Fire alarm work shall interface with new notification device(s) and tie into the existing fire alarm control panel (FACP). Contractor shall include all connections, terminations, programming changes/updates to achieve a fully working system.

   a. The existing fire alarm system manufacturer is Simplex. The existing control panel is model 4010ES.

B. Contractor shall modify fire alarm zoning as required. Refer to Fire Protecting drawings for exact location of zoning. Contractor shall provide any program changes to modify and/or additions to fire alarm zoning.

C. Contractor shall modify graphic annunciator or graphic annunciation package based on the combination of the two smoke compartments. Device location and wiring runs shown on the drawings are for reference only unless specifically dimensioned. Actual locations shall be in accordance with NFPA 72 and this specification.

D. If the existing fire alarm system is maintained by a contractor, that contractor shall be contracted to perform all system updates, additions, and/or extension of the fire alarm system related to this construction project. Said contractor shall perform device terminations and any programming changes to the existing system.

E. All existing fire alarm equipment, wiring, devices and sub-systems that are not shown to be reused shall be removed. All existing fire alarm conduit not reused shall be removed.

F. Existing fire alarm bells, chimes, door holders, 120VAC duct smoke detectors, valve tamper switches and waterflow/pressure switches may be reused only as specifically indicated on the drawings and provided the equipment:

   1. Meets this specification section
   2. Is UL listed or FM approved
   3. Is compatible with new equipment being installed

4. Is verified as operable through contractor testing and inspection
5. Is warranted as new by the contractor.

G. Existing 120 VAC duct smoke detectors, waterflow/pressure switches, and valve tamper switches reused by the Contractor shall be equipped with an addressable interface device compatible with the new equipment being installed.

H. Existing reused equipment shall be covered as new equipment under the Warranty specified herein.

I. Basic Performance – Existing FACP Simplex 4010

1. Alarm and trouble signals from each building fire alarm control panel shall be digitally encoded by UL listed electronic devices onto a multiplexed communication system.
2. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed 5 seconds.
3. The signaling line circuits (SLC) between building fire alarm control units shall be wired Class X in accordance with NFPA 72. Isolation shall be provided so that no more than one building can be lost due to a short circuit fault.
4. Initiating device circuits (IDC) shall be wired Class B in accordance with NFPA 72.
5. Signaling line circuits (SLC) within buildings shall be wired Class B in accordance with NFPA 72. Individual signaling line circuits shall be limited to covering 22,500 square feet (2,090 square meters) of floor space or 3 floors whichever is less.
6. Notification appliance circuits (NAC) shall be wired Class B in accordance with NFPA 72.

1.3 RELATED WORK

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Requirements for procedures for submittals.

B. Section 07 84 00 - FIRESTOPPING. Requirements for fire proofing wall penetrations.

C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

D. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

E. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

F. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

1.4 SUBMITTALS

A. General: Submit 5 copies in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Drawings:

1. Prepare drawings using AutoCAD software and include all contractors information. Layering shall be by VA criteria as provided by the Contracting Officer’s Technical Representative (COR). Bid drawing files on AutoCAD will be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.

2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions.

3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety

interfaces. Show wiring Styles on the riser diagram for all circuits. Provide diagrams both on a per building and campus wide basis.

4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
5. Two weeks prior to final inspection, the Contractor shall deliver to the COR 3 sets of as-built drawings and one set of the as-built drawing computer files (using AutoCAD). As-built drawings (floor plans) shall show all new and/or existing conduit used for the fire alarm system.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
   a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.
   b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
   c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
   d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturer's installation limitations including but not limited to circuit length limitations.
   e. Complete listing of all digitized voice messages.

f. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include magnets for holding the doors open for one minute.
g. Include information indicating who will provide emergency service and perform post contract maintenance.
h. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
i. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall also be provided in the manual. Provide the disk in a pocket within the manual.
j. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.
k. A print out for all devices proposed on each signaling line circuit with spare capacity indicated.

2. Two weeks prior to final inspection, deliver 4 copies of the final updated maintenance and operating manual to the COR.
   a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.
   b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.
   c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
   d. Certificate of Installation as required by NFPA 72 for each building. The certificate shall identify any variations from the National Fire Alarm Code.
   e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

D. Certifications:

1. Together with the shop drawing submittal, submit the technician's NICET level III fire alarm certification as well as certification from the control unit manufacturer that the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name and title of the manufacturer’s representative who makes the certification.
2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.
3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.5 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer.

C. Contractor shall provide all necessary test equipment, parts and labor to perform required inspection, testing, maintenance and repair.

D. All inspection, testing, maintenance and permanent records required by NFPA 72, and recommended by the equipment manufacturer shall be provided by the contractor. Work shall include operation of sprinkler system alarm and supervisory devices as well as all reused existing equipment connected to the fire alarm system. It shall include all interfaced equipment including but not limited to elevators, HVAC shutdown, and extinguishing systems.

E. Maintenance and testing shall be performed in accordance with NFPA 72. A computerized preventive maintenance schedule shall be provided and shall describe the protocol for preventive maintenance of equipment.

The schedule shall include a systematic examination, adjustment and cleaning of all equipment.

F. Non-included Work: Repair service shall not include the performance of any work due to improper use, accidents, or negligence for which the contractor is not responsible.

G. Service and emergency personnel shall report to the Engineering Office or their authorized representative upon arrival at the hospital and again upon the completion of the required work. A copy of the work ticket containing a complete description of the work performed and parts replaced shall be provided to the Contracting Officer's Representative or his authorized representative.

H. Emergency Service:

1. Warranty Period Service: Service other than the preventative maintenance, inspection, and testing required by NFPA 72 shall be considered emergency call-back service and covered under the warranty of the installation during the the warranty period, unless the required service is a result of abuse or misuse by the Government. Written notification shall not be required for emergency warranty period service and the contractor shall respond as outlined in the following sections on Normal and Overtime Emergency Call-Back Service. Warranty period service can be required during normal or overtime emergency call-back service time periods at the discretion of the Contracting Officer's Representative or his authorized representative.
2. Normal and overtime emergency call-back service shall consist of an on-site response within 2 hours of notification of a system trouble.
3. Normal emergency call-back service times are between the hours of 7:30 a.m. and 4:00 p.m., Monday through Friday, exclusive of federal holidays. Service performed during all other times shall be considered to be overtime emergency call-back service. The cost of all normal emergency call-back service for years 2 through 5 shall be included in the cost of this contract.
4. Overtime emergency call-back service shall be provided for the system when requested by the Government. The cost of the first 40 manhours per year of overtime call-back service during years 2 through 5 of this contract shall be provided under this contract.

Payment for overtime emergency call-back service in excess of the 40 man hours per year requirement will be handled through separate purchase orders. The method of calculating overtime emergency call-back hours is based on actual time spent on site and does not include travel time.

I. The contractor shall maintain a log at each fire alarm control unit. The log shall list the date and time of all examinations and trouble calls, condition of the system, and name of the technician. Each trouble call shall be fully described, including the nature of the trouble, necessary correction performed, and parts replaced.

J. In the event that VA modifies the fire alarm system post-Acceptance, but during the warranty period as stated in 1.5 Warranty, Contractor shall be required to verify that the system, as newly modified or added, is consistent with the manufacturer's requirements; any verification performed will be equitably adjusted under the Changes clause. The post-Acceptance modification or addition to the fire alarm system shall not void the continuing requirements under this contract for the fire alarm system as modified or added. The contract will be equitably adjusted under the Changes clause for such additional performance.

1.6 APPLICABLE PUBLICATIONS

A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by the basic designation only and the latest editions of these publications shall be applicable.

B. National Fire Protection Association (NFPA):

NFPA 13 .....Standard for the Installation of Sprinkler Systems, 2022 edition

NFPA 14 ..... Standard for the Installation of Standpipes and Hose Systems, 2019 edition

NFPA 20 ..... Standard for the Installation of Stationary Pumps for Fire Protection, 2022 edition

NFPA 70.....National Electrical Code (NEC), 2023 edition

NFPA 72.....National Fire Alarm Code, 2013 edition

NFPA 90A.....Standard for the Installation of Air Conditioning and Ventilating Systems, 2021 edition

NFPA 101.....Life Safety Code, 2021 edition

C. Underwriters Laboratories, Inc. (UL): Fire Protection Equipment Directory

D. Factory Mutual Research Corp (FM): Approval Guide, 2007-2011

E. American National Standards Institute (ANSI):

S3.41.....Audible Emergency Evacuation Signal, 1990 edition, reaffirmed 2008

F. International Code Council, International Building Code (IBC), 2009 edition

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS, GENERAL

A. Existing equipment may be reused only where indicated on the drawings.

B. Except as indicated in paragraph A above, All equipment and components shall be new and the manufacturer's current model. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturer's requirements and that satisfactory total system operation has been achieved.

2.2 CONDUIT, BOXES, AND WIRE

A. Conduit shall be in accordance with Section 28 05 28.33, CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY and as follows:

1. All new and reused conduit shall be installed in accordance with NFPA 70.
2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
3. All new conduit shall be 3/4 inch (19 mm) minimum.

B. Wire:

1. All existing wiring shall be removed and new wiring installed in a conduit or raceway.
2. Wiring shall be in accordance with NEC article 760, Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, and as

recommended by the manufacturer of the fire alarm system. All wires shall be color coded. Number and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification device circuits.

3. Addressable circuits and wiring used for the multiplex communication loop shall be twisted and shielded unless specifically accepted by the fire alarm equipment manufacturer in writing.
4. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.
5. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All new and reused boxes shall be sized and installed in accordance with NFPA 70.
3. New and existing covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 3/4 inch (19 mm) high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the COR.

2.3 FIRE ALARM CONTROL UNIT (EXISTING)

A. General:

1. Each building/ shall be provided with a fire alarm control unit and shall operate as a supervised zoned fire alarm system.

2. Each power source shall be supervised from the other source for loss of power.
3. All circuits shall be monitored for integrity.
4. Visually and audibly annunciate any trouble condition including, but not limited to main power failure, grounds and system wiring derangement.
5. Transmit digital alarm information to the main fire alarm control unit.

B. Enclosure:
1. The control unit shall be housed in a cabinet suitable for both recessed and surface mounting. Cabinet and front shall be corrosion protected, given a rust-resistant prime coat, and manufacturer's standard finish.
2. Cabinet shall contain all necessary relays, terminals, lamps, and legend plates to provide control for the system.

C. Operator terminal at main control unit:
1. Operator terminal shall consist of the central processing unit, display screen, keyboard and printer.
2. Display screen shall have a minimum 15-inch (380mm) diagonal non-glare screen capable of displaying 24 lines of 80 characters each.
3. Keyboard shall consist of 60 alpha numeric and 12 user/functional control keys.
4. Printer shall be the automatic type, printing the date, time and location for all alarm, supervisory, and trouble conditions.

D. Power Supply:
1. The control unit shall derive its normal power from a 120 volt, 60 Hz dedicated supply connected to the emergency power system. Standby power shall be provided by a 24 volt DC battery as hereinafter specified. The normal power shall be transformed, rectified, coordinated, and interfaced with the standby battery and charger.
2. The door holder power shall be arranged so that momentary or sustained loss of main operating power shall not cause the release of any door.
3. Power supply for smoke detectors shall be taken from the fire alarm control unit.

4. Provide protectors to protect the fire alarm equipment from damage due to lightning or voltage and current transients.
5. Provide new separate and direct ground lines to the outside to protect the equipment from unwanted grounds.

E. Circuit Supervision: Each alarm initiating device circuit, signaling line circuit, and notification appliance circuit, shall be supervised against the occurrence of a break or ground fault condition in the field wiring. These conditions shall cause a trouble signal to sound in the control unit until manually silenced by an off switch.

F. Supervisory Devices: All sprinkler system valves, standpipe control valves, post indicator valves (PIV), and main gate valves shall be supervised for off-normal position. Closing a valve shall sound a supervisory signal at the control unit until silenced by an off switch. The specific location of all closed valves shall be identified at the control unit. Valve operation shall not cause an alarm signal. Low air pressure switches and duct detectors shall be monitored as supervisory signals. The power supply to the elevator shunt trip breaker shall be monitored by the fire alarm system as a supervisory signal.

G. Trouble signals:
1. Arrange the trouble signals for automatic reset (non-latching).
2. System trouble switch off and on lamps shall be visible through the control unit door.

H. Function Switches: Provide the following switches in addition to any other switches required for the system:
1. Remote Alarm Transmission By-pass Switch: Shall prevent transmission of all signals to the main fire alarm control unit when in the "off" position. A system trouble signal shall be energized when switch is in the off position.
2. Alarm Off Switch: Shall disconnect power to alarm notification circuits on the local building alarm system. A system trouble signal shall be activated when switch is in the off position.
3. Trouble Silence Switch: Shall silence the trouble signal whenever the trouble silence switch is operated. This switch shall not reset the trouble signal.

4. Reset Switch: Shall reset the system after an alarm, provided the initiating device has been reset. The system shall lock in alarm until reset.
5. Lamp Test Switch: A test switch or other approved convenient means shall be provided to test the indicator lamps.
6. Drill Switch: Shall activate all notification devices without tripping the remote alarm transmitter. This switch is required only for general evacuation systems specified herein.
7. Door Holder By-Pass Switch: Shall prevent doors from releasing during fire alarm tests. A system trouble alarm shall be energized when switch is in the abnormal position.
8. Elevator recall By-Pass Switch: Shall prevent the elevators from recalling upon operation of any of the devices installed to perform that function. A system trouble alarm shall be energized when the switch is in the abnormal position.
9. HVAC/Smoke Damper By-Pass: Provide a means to disable HVAC fans from shutting down and/or smoke dampers from closing upon operation of an initiating device designed to interconnect with these devices.

I. Remote Transmissions:
1. Provide capability and equipment for transmission of alarm, supervisory and trouble signals to the main fire alarm control unit.
2. Transmitters shall be compatible with the systems and equipment they are connected to such as timing, operation and other required features.

J. Remote Control Capability: Each building fire alarm control unit shall be installed and programmed so that each must be reset locally after an alarm, before the main fire alarm control unit can be reset. After the local building fire alarm control unit has been reset, then the all system acknowledge, reset, silence or disabling functions can be operated by the main fire alarm control unit

K. System Expansion: Design the control units and enclosures so that the system can be expanded in the future (to include the addition of 20 percent more alarm initiating, alarm notification and door holder circuits) without disruption or replacement of the existing control unit and secondary power supply.

2.4 ALARM NOTIFICATION APPLIANCES

A. Strobes:

1. Xenon flash tube type minimum 15 candela in toilet rooms and 75 candela in all other areas with a flash rate of 1 HZ. Strobes shall be synchronized where required by the National Fire Alarm Code (NFPA 72).
2. Backplate shall be red with 1/2 inch (13 mm) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of 20 percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.

B. Fire Alarm Horns:

1. Shall be electric, utilizing solid state electronic technology operating on a nominal 24 VDC.
2. Shall be a minimum nominal rating of 80 dBA at 10 feet (3,000 mm).
3. Mount on removable adapter plates on conduit boxes.
4. Horns located outdoors shall be of weatherproof type with metal housing and protective grille.
5. Each horn circuit shall have a minimum of 20 percent spare capacity.

2.5 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations:

1. Shall be non-breakglass, address reporting type.
2. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.
3. Stations shall be of single action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE".
4. Operating handles shall be constructed of a durable material. On operation, the lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting, or conducting tests and drills.
5. Unless otherwise specified, all exposed parts shall be red in color and have a smooth, hard, durable finish.

6. Stations identified as key operated only shall have a single standardized lock and key separate from the control equipment.

B. Smoke Detectors:

1. Smoke detectors shall be photoelectric type and UL listed for use with the fire alarm control unit being furnished.
2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
4. All spot type and duct type detectors installed shall be of the photoelectric type.
5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.

C. Heat Detectors:

1. Heat detectors shall be of the addressable restorable rate compensated fixed-temperature spot type.
2. Detectors shall have a minimum smooth ceiling rating of 2,500 square feet (230 square meters).
3. Ordinary temperature (135 degrees F (57 degrees C)) heat detectors shall be utilized in elevator shafts and elevator mechanical rooms. Intermediate temperature rated (200 degrees F (93 degrees C)) heat detectors shall be utilized in all other areas.
4. Provide a remote indicator lamp, key test station and identification nameplate (e.g. "Heat Detector - Elevator P-_____) for each

elevator group. Locate key test station in plain view on elevator machine room wall.

D. Water Flow and Pressure Switches:

1. Wet pipe water flow switches and dry pipe alarm pressure switches for sprinkler systems shall be connected to the fire alarm system by way of an address reporting interface device.
2. All new water flow switches shall be of a single manufacturer and series and non-accumulative retard type.
3. All new switches shall have an alarm transmission delay time that is conveniently adjustable from 0 to 60 seconds. Initial settings shall be 30-45 seconds. Timing shall be recorded and documented during testing.

2.6 SUPERVISORY DEVICES

A. Sprinkler and Standpipe System Supervisory Switches:

1. Each sprinkler system water supply control valve, riser valve or zone control valve, and each standpipe system riser control valve shall be equipped with a supervisory switch. Standpipe hose valves, and test and drain valves shall not be equipped with supervisory switches.
2. PIV (post indicator valve) or main gate valve shall be equipped with a supervisory switch.
3. Valve supervisory switches shall be connected to the fire alarm system by way of address reporting interface device.
4. The mechanism shall be contained in a weatherproof die-cast aluminum housing that shall provide a 3/4 inch (19 mm) tapped conduit entrance and incorporate the necessary facilities for attachment to the valves.
5. The entire installed assembly shall be tamper-proof and arranged to cause a switch operation if the housing cover is removed or if the unit is removed from its mounting.
6. Where dry-pipe sprinkler systems are installed, high and low air pressure switches shall be provided and monitored by way of an address reporting interface devices.
7. Fire supervisory signals required by NFPA 20 and monitored by the pump controller shall be provided and monitored by way of address reporting interface devices for the fire pump located.

2.7 SMOKE BARRIER DOOR CONTROL

A. Electromagnetic Door Holders:

1. New Door Holders shall be standard wall mounted electromagnetic type. In locations where doors do not come in contact with the wall when in the full open position, an extension post shall be added to the door bracket.
2. Operation shall be by 24 volt DC supplied from a battery located at the fire alarm control unit. Door holders shall be coordinated as to voltage, ampere drain, and voltage drop with the battery, battery charger, wiring and fire alarm system for operation as specified.

B. A maximum of twelve door holders shall be provided for each circuit. Door holders shall be wired to allow releasing doors by smoke zone.

C. Door holder control circuits shall be electrically supervised.

D. Smoke detectors shall not be incorporated as an integral part of door holders.

2.8 UTILITY LOCKS AND KEYS:

A. All key operated test switches, control units, annunciator panels and lockable cabinets shall be provided with a single standardized utility lock and key.

B. Key-operated manual fire alarm stations shall have a single standardized lock and key separate from the control equipment.

C. All keys shall be delivered to the COR.

2.9 SPARE AND REPLACEMENT PARTS

A. Provide spare and replacement parts as follows (if applicable):

1. Manual pull stations - 2
2. Key operated manual pull stations - 2
3. Heat detectors - 2 of each type
4. Fire alarm strobes - 5
5. Fire alarm bells - 5
6. Smoke detectors - 5
7. Duct smoke detectors with all appurtenances - 1
8. Sprinkler system water flow switch - 1 of each size
9. Sprinkler system water pressure switch - 1 of each type
10. Sprinkler valve tamper switch - 1 of each type
11. Control equipment utility locksets - 5
12. Control equipment keys - 25

14. 2.5 oz containers aerosol smoke - 3
15. Printer paper - 3 boxes
16. Printer replacement ribbons - 3
17. Fire alarm SLC cable (same as installed) – 500 feet (152 m)

B. Spare and replacement parts shall be in original packaging and submitted to the COR.

C. Furnish and install a storage cabinet of sufficient size and suitable for storing spare equipment. Doors shall include a pad locking device. Padlock to be provided by the VA. Location of cabinet to be determined by the COR.

D. Provide to the VA, all hardware, software, programming tools, license and documentation necessary to permanently modify the fire alarm system on site. The minimum level of modification includes addition and deletion of devices, circuits, zones and changes to system description, system operation, and digitized evacuation and instructional messages.

2.10 INSTRUCTION CHART:

A. Provide a typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame with a backplate. Install the frame in a conspicuous location observable from each control unit where operations are performed. The card shall show those steps to be taken by an operator when a signal is received under all conditions, normal, alarm, supervisory, and trouble. Provide an additional copy with the binder for the input output matrix for the sequence of operation. The instructions shall be approved by the COR before being posted.

PART 3 - EXECUTION

3.1 INSTALLATION:

A. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment manufacturer. Fire alarm wiring shall be installed in conduit. All conduit and wire shall be installed in accordance with, Section 28 05 13 CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 26 GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY, and all penetrations of smoke and fire barriers shall be protected as required by Section 07 84 00, FIRESTOPPING.

B. All conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas.

C. All new and reused exposed conduits shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.

D. Existing devices that are reused shall be properly mounted and installed. Where devices are installed on existing shallow backboxes, extension rings of the same material, color and texture of the new fire alarm devices shall be used. Mounting surfaces shall be cut and patched in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Restoration, and be re-painted in accordance with Section 09 91 00, PAINTING as necessary to match existing.

E. All fire detection and alarm system devices, control units and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations are to be approved by the COR.

F. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas.

G. Strobes shall be flush wall mounted with the bottom of the unit located 80 inches (2,000 mm) above the floor or 6 inches (150 mm) below ceiling, whichever is lower. Locate and mount to maintain a minimum 36 inches (900 mm) clearance from side obstructions.

H. Manual pull stations shall be installed not less than 42 inches (1,050 mm) or more than 48 inches (1,200 mm) from finished floor to bottom of device and within 60 inches (1,500 mm) of a stairway or an exit door.

I. Where possible, locate water flow and pressure switches a minimum of 12 inches (300 mm) from a fitting that changes the direction of the flow and a minimum of 36 inches (900 mm) from a valve.

J. Mount valve tamper switches so as not to interfere with the normal operation of the valve and adjust to operate within 2 revolutions toward the closed position of the valve control, or when the stem has moved no more than 1/5 of the distance from its normal position.

K. Connect flow and tamper switches installed under Section 21 13 13, WET-PIPE SPRINKLER SYSTEMS.

3.2 TYPICAL OPERATION

A. Activation of any manual pull station, water flow or pressure switch, heat detector, kitchen hood suppression system, gaseous suppression system, or smoke detector shall cause the following operations to occur:
   1. Operate the emergency voice communication system in Buildings . For sprinkler protected buildings, flash strobes continuously only in the zone of alarm. For buildings without sprinkler protection throughout, flash strobes continuously only on the floor of alarm.
   2. Continuously sound a temporal pattern general alarm and flash all strobes in the building in alarm until reset at the local fire alarm control unit in Buildings.
   3. Release only the magnetic door holders in the smoke zone on the floor from which alarm was initiated after the alert signal.
   4. Transmit a separate alarm signal, via the main fire alarm control unit to the fire department.
   5. Unlock the electrically locked exit doors within the zone of alarm.

B. Heat detectors in elevator machine rooms shall, in addition to the above functions, disconnect all power to all elevators served by that machine room after a time delay. The time delay shall be programmed within the fire alarm system programming and be equal to the time it takes for the car to travel from the highest to the lowest level, plus 10 seconds.

C. Smoke detectors in the primary elevator lobbies of Buildings indicate the buildings where there is Phase I elevator recall shall, in addition to the above functions, return all elevators in the bank to the secondary floor.

D. Smoke detectors in the remaining elevator lobbies, elevator machine room, or top of hoistway shall, in addition to the above functions, return all elevators in the bank to the primary floor.

E. Operation of a smoke detector at a corridor door used for automatic closing shall also release only the magnetic door holders.

F. Operation of duct smoke detectors shall cause a system supervisory condition and shut down the ventilation system and close the associated smoke dampers as appropriate.

G. Operation of any sprinkler or standpipe system valve supervisory switch, high/low air pressure switch, or fire pump alarm switch shall cause a system supervisory condition.

H. Alarm verification shall not be used for smoke detectors installed for the purpose of early warning.

3.3 TESTS

A. Provide the service of a NICET level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the COR.

B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the COR. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract requirements. After the system has passed the initial test and been approved by the COR, the contractor may request a final inspection.

1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
4. Open each alarm initiating and notification circuit to see if trouble signal actuates.
5. Ground each alarm initiation and notification circuit and verify response of trouble signals.

3.4 FINAL INSPECTION AND ACCEPTANCE

A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance

will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.

B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests in Article 3.3 TESTS and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a VA representative.

3.5 INSTRUCTION

A. The manufacturer's authorized representative shall provide instruction and training to the VA as follows:

1. Six 1-hour sessions to engineering staff, security police and central attendant personnel for simple operation of the system. Two sessions at the start of installation, 2 sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
2. Four 2-hour sessions to engineering staff for detailed operation of the system. Two sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
3. Three 8-hour sessions to electrical technicians for maintaining, programming, modifying, and repairing the system at the completion of installation and one 8-hour refresher session 3 months after the completion of installation.

B. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the VA. The sequence of operation will be shown for each input in the system in a matrix format and provided in a loose leaf binder. When reading the sequence of operation, the reader will be able to quickly and easily determine what output will occur upon activation of any input in the system. The INPUT/OUTPUT matrix format shall be as shown in Appendix A to NFPA 72.

C. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

PART 4 - SCHEDULES

4.1 SMOKE ZONE DESCRIPTIONS (NOT USED)

4.2 DIGITIZED VOICE MESSAGES

A. Digitized voice messages shall be provided for each smoke zone of Buildings indicate building and level.

4.3 LOCATION OF VOICE MESSAGES

A. Upon receipt of an alarm signal from the building fire alarm system, the voice communication system shall automatically transmit a 3 second tone alert and a pre-recorded fire alarm message throughout the floor in alarm, the floor above and the floor below the building.

- - END - -

DIVISION 31

SECTION 31 01 01

SITE RESTORATION

PART 1 - GENERAL

1.1 QUALITY ASSURANCE

A. Provide prepackaged seed readily available to the public with quality and purity equal to product of O.M. Scotts and Son, Marysville, OH 43041. On-the-job or made-to-order mixes will not be accepted.

1.2 DELIVERY STORAGE AND HANDLING

A. Deliver fertilizer in manufacturer's standard size bags or cartons showing weight, analysis, and the name of the manufacturer. Store as approved by Owner's Representative.

B. Store all seed at the site in a cool dry place as approved by the Owner's Representative. Replace any seed damaged during storage.

1.3 SCHEDULING

A. Time For Seeding: Optimum period to sow permanent grass seed is generally between April 1st and May 15th or between August 15th and October 1st. Schedule application for when weather conditions permit or as Directed.

1. Provide temporary seed and mulch when final grading is complete while waiting for optimal seeding period.
2. Provide temporary seed and mulch for temporary cover on disturbed ground not to be worked on for more than 7 days.
3. Provide temporary seed and mulch on disturbed earth prior to temporary shutdown of construction.

PART 2 - PRODUCTS

2.1 TOPSOIL

A. Provide topsoil conforming to the following:

1. Original loam topsoil, well drained homogeneous texture and of uniform grade, without the admixture of subsoil material and entirely free of dense material, hardpan, sod, or any other objectionable foreign material.

2. Containing not less than 4 percent nor more than 20 percent organic matter in that portion of a sample passing a 1/4-inch sieve when determined by the wet combustion method on a sample dried at 105 degrees C.
3. Containing a Ph value within the range of 4.5 to 7 on that portion of the sample that passes a 1/4-inch sieve.
4. Containing the following gradations:

SIEVE DESIGNATION	PERCENT PASSING
1 inch	100
1/4 inch	97 - 100
No. 200	20 - 65 (of the 1/4 inch sieve)

2.2 FERTILIZER

A. Fertilizer: Mixed commercial fertilizers shall contain total nitrogen, available phosphoric acid and soluble potash in the ratio of 10-6-4 (50% N/UF). 50% of total nitrogen shall be derived from ureaform furnishing a minimum of 3.5% water insoluble nitrogen (3.5% WIN). The balance of the nitrogen shall be present as methylene urea, water-soluble urea, nitrate and ammoniacal compounds.

B. Other fertilizers meeting DOT Specification Section 713-03 Fertilizer can be used.

2.3 SEED

A. Furnish fresh, clean, new-crop seed mixed in the proportions specified for species and variety, and conforming to Federal and State Standards.

B. Acceptable material in a seed mixture other than pure live seed consists of nonviable seed, chaff, hulls, live seed of crop plants and inert matter. The percentage of weed seed shall not exceed 0.1 percent by weight.

C. All seed will be rejected if the label indicates any noxious weed seeds.

D. Provide seed mixture equal to Scotts Pure Premium Sun and Shade North Grass Seed Mixture, comprised of the following:

SEED MIXTURE			
AMOUNT BY WEIGHT IN MIXTURE	**SPECIES OR VARIETY ***	**PERCENTAGE**	
		PURITY	**GERMINATION**
30 PERCENT	FENWAY RED FESCUE	97 PERCENT	80 PERCENT
30 PERCENT	ABBEY KENTUCKY BLUEGRASS BLEND	95 PERCENT	80 PERCENT
20 PERCENT	DEVINE PERENNIAL RYE	98 PERCENT	85 PERCENT
20 PERCENT	ENCHANTED PERENNIAL RYE	98 PERCENT	85 PERCENT
100 PERCENT			

*Variety may be altered depending on availability of seed from manufacturer.

2.4 MULCH

A. Dry Application, Straw: Stalks of oats, wheat, rye or other approved crops that are free of noxious weed seeds. Weight shall be based on a 15 percent moisture content.

PART 3 - EXECUTION

3.1 GRADING

A. Rough Grading: Trim and grade lawn areas within the Contract Limit to a level of 4 inches below the finish grades indicated unless otherwise specified herein or where greater depths are indicated. Provide smooth uniform transition to adjacent areas.

B. Finish Grading: Finish surfaces free from irregular surface changes, and as follows:

1. Grassed Areas: Finish areas to receive topsoil to within 1 inch above or below the required subgrade surface elevations.

3.2 SPREADING TOPSOIL

A. Perform topsoil spreading operations only during dry weather.

B. To ensure a proper bond with the topsoil, harrow or otherwise loosen the subgrade to a depth of 3 inches before spreading topsoil.

C. Spread topsoil directly upon prepared subgrade to a minimum depth measuring 4 inches after natural settlement in areas to be seeded. Smooth out unsightly variations, bumps, ridges, and depressions that will hold water. Remove stones, litter, or other objectionable material. Finished surfaces shall conform to the contour lines and elevations indicated on the drawings or fixed by the Owner's Representative.

3.3 PREPARATION FOR SEEDING

A. Seed Bed: Scarify soil to a depth of 2 inches in compacted areas. Smooth out unsightly variations, bumps, ridges, and depressions that will hold water. Remove stones, litter, or other objectionable material.

3.4 FERTILIZING

A. Apply 10-6-4 fertilizer evenly at the rate of 40 pounds per 1000 sq ft.

3.5 SEEDING

A. Assume all risks when seed is sowed before approval of seed analysis.

B. Do not seed when the wind velocity exceeds 5 miles per hour.

C. Application Rate: 8 pounds per 1000 sq ft.

D. Dry Application: Sow seed evenly by hand or seed spreader on dry or moderately dry soil.

3.6 MULCHING

A. Dry Application: Within 3 days after seeding, cover the seeded areas with a uniform blanket of straw mulch at the rate of 50 pounds per 1000 sq ft of seeded area.

3.7 LAWN ESTABLISHMENT

A. Maintain the grass at heights between 3 inches and 3-1/2 inches on a weekly basis until the Final Acceptance of the Work.

B. Water and protect all seeded areas until final acceptance of the lawn.

3.8 FINAL ACCEPTANCE

A. Final acceptance of seeded areas will be granted when a uniform stand of acceptable grass is obtained, with a minimum of 95 percent coverage. Portions of the seeded areas may be accepted at various times at the discretion of the Owner's Representative.

B. Unacceptable seeded areas, dry application: Reseed as specified and fertilized at one-half the specified rate.

C. Once accepted, the Town will assume all maintenance responsibilities.

----- E N D -----

SECTION 31 13 00

SELECTIVE TREE REMOVAL AND TRIMMING

PART 1 - GENERAL

1.1 DESCRIPTION

A. Company Qualifications: The Company performing the Work of this section shall be insured and have a minimum of five (5) years of experience in tree removal and trimming. The person supervising the Work shall also have a minimum of five (5) years of experience in tree removal and trimming.

B. The work shall consist of the removal and disposal of selected trees including stumps and roots.

1.2 SUBMITTALS

A. Submit detailed experience and qualifications description of tree trimming and removal. Experience and qualifications package should include a description of the types of equipment and experience that can be provided.

1.3 COORDINATION AND SCHEDULING

A. Coordinate work with the Director’s representative to minimize disruptions and facility operations. The Director’s Representative shall be notified at least three (3) working days prior to performing the work, and should be provided a schedule for the works progression.

1.4 PROJECT CONDITIONS

A. Protect existing trees and plants during performance of the Work unless otherwise indicated. Box trees and plants indicated to remain within the grading limit line with temporary orange construction fencing or solidly constructed wood barricades as required. Protect root systems from smothering. Do not store excavated material or allow vehicular traffic or parking within the canopy drip line. Restrict foot traffic to prevent excessive compaction of soil over root systems.

B. Review NYS DEC quarantine order for the districts and the regulations of the movement of materials.

http://www.dec.ny.gov/docs/lands_forests_pdf/eab2013quarorder.pdf

PART 2 - PRODUCTS (Not Used)

PART 3 - EXECUTION

3.1 PREPARATION

A. Protection:

1. Prevent damage to buildings, pavement, pipes, conduits, poles and other structures above and below ground that are adjoining or included in the contract area. Repair damage resulting from the contractor's negligence.
2. Protect existing trees and shrubs not to be removed. Cut back to point of branching all broken branches and skinned areas.
3. Store materials and equipment in cleared areas away from tree roots. Prevent employees and equipment from trampling over woodland, existing planting, and established lawns.

3.2 TREES ALONG SECURITY PERIMETER

A. Cut all trees within the 35 foot wide clear zone indicated.

B. Top and limb all trees before falling, unless otherwise approved by the Director's Representative.

C. Fall trees away from security perimeter and cut trunks and branches into 6 ft. sections and lay flat on existing ground. Do not stack trunks or branches, spread as a single layer to cover slope.

D. Cut all stumps 6 inches above ground.

E. Prune trees outside the 35 ft. clear zone along the security perimeter of all branches that overhang the zone. All cuts shall be cleanly made with sharp tools, flush with the parent trunk or limb.

3.3 REMOVALS – TREES ENTIRELY

A. Remove trees where indicated.

B. Top and limb all trees before falling, unless otherwise approved by the Director's Representative.

C. Chip out stumps to a depth of not less than 6 inches below finished grade. Backfill stump holes with topsoil, and seed.

3.4 PRUNING – INSIDE FACILITY

A. Prune indicated trees inside facility of undesirable wood with the resulting crown shaped to the natural habit of the tree, to a minimum of 20 feet clear from buildings. Remove all diseased and dead branches, and branches interfering with building exteriors. All cuts shall be cleanly made with sharp tools, flush with the parent trunk or limb.

3.5 CLEAN UP – TREES TRIMMED AND REMOVED

A. Remove and dispose of all logs, tree trimmings, and debris from State property. Leave Work area in a neat, uncluttered condition, where indicated or specified.

3.6 MAINTENANCE AND RESTORATION

A. Restore grades to indicated levels where settlement or damage due to performance of the Work has occurred. Correct conditions contributing to settlement or damage.

B. Restore pavements, walks, curbs, lawns, and other exterior surfaces damaged during performance of the Work to match the appearance and performance of existing corresponding surfaces as closely as practicable.

3.7 WORK AREAS AND PERFORMANCE

A. The Director’s Representative may limit or restrict work areas and scheduling of the tree trimming and/or removal based upon project progress.

----- E N D -----

SECTION 31 20 00
EARTHWORK

PART 1 - GENERAL

1.1 DESCRIPTION OF WORK:

A. This section specifies the requirements for furnishing all equipment, materials, labor, tools, and techniques for earthwork including, but not limited to, the following:
   1. Site preparation.
   2. Excavation.
   3. Underpinning.
   4. Filling and backfilling.
   5. Grading.
   6. Soil Disposal.
   7. Clean Up.

1.2 DEFINITIONS:

A. Unsuitable Materials:
   1. Fills: Topsoil; frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic material, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable and any material with a liquid limit and plasticity index exceeding 40 and 15 respectively. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction, as defined by ASTM D1557.
   2. Existing Subgrade (Except Footing Subgrade): Same materials as 1.2.A.1, that are not capable of direct support of slabs, pavement, and similar items with possible exception of improvement by compaction, proofrolling, or similar methods.
   3. Existing Subgrade (Footings Only): Same as paragraph 1, but no fill or backfill. If materials differ from design requirements, excavate to acceptable strata subject to Resident Engineer's approval.

B. Building Earthwork: Earthwork operations required in area enclosed by a line located 1500 mm (5 feet) outside of principal building perimeter. It also includes earthwork required for auxiliary structures and buildings.
C. Trench Earthwork: Trenchwork required for utility lines.
D. Site Earthwork: Earthwork operations required in area outside of a line located 1500 mm (5 feet) outside of principal building perimeter and within new construction area with exceptions noted above.
E. Degree of compaction: Degree of compaction is expressed as a percentage of maximum density obtained by laboratory test procedure. This percentage of maximum density is obtained through use of data provided from results of field test procedures presented in ASTM D1556, ASTM D2167, and ASTM D6938.
F. Fill: Satisfactory soil materials used to raise existing grades. In the Construction Documents, the term “fill” means fill or backfill as appropriate.
G. Backfill: Soil materials or controlled low strength material used to fill an excavation.
H. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or indicated lines and dimensions without written authorization by the Resident Engineer. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.
I. Authorized additional excavation: Removal of additional material authorized by the Resident Engineer based on the determination by the Government’s soils testing agency that unsuitable bearing materials are encountered at required sub-grade elevations. Removal of unsuitable material and its replacement as directed will be paid on basis of Conditions of the Contract relative to changes in work.
J. Subgrade: The undisturbed earth or the compacted soil layer immediately below granular sub-base, drainage fill, or topsoil materials.

K. Structure: Buildings, foundations, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.

L. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.

M. Drainage course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.

N. Bedding course: Layer placed over the excavated sub-grade in a trench before laying pipe. Bedding course shall extend up to the springline of the pipe.

O. Sub-base Course: Layer placed between the sub-grade and base course for asphalt paving or layer placed between the sub-grade and a concrete pavement or walk.

P. Utilities include on-site underground pipes, conduits, ducts, and cables as well as underground services within buildings.

Q. Debris: Debris includes all materials located within the designated work area not covered in the other definitions and shall include but not be limited to items like vehicles, equipment, appliances, building materials or remains thereof, tires, any solid or liquid chemicals or products stored or found in containers or spilled on the ground.

R. Contaminated soils: Soil that contains contaminates as defined and determined by the Resident Engineer or the Government’s testing agency.

1.3 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Safety requirements: Section 00 72 00, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.

C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.

D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.

E. Erosion Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, and Section 32 90 00, PLANTING.

F. Paving sub-grade requirements: Section 32 12 16, ASPHALT PAVING.

1.4 CLASSIFICATION OF EXCAVATION:

A. Unclassified Excavation: Removal and disposal of pavements and other man-made obstructions visible on surface; utilities, and other items including underground structures indicated to be demolished and removed; together with any type of materials regardless of character of material and obstructions encountered.

B. Classified Excavation: Removal and disposal of all material not defined as Rock.

C. Rock Excavation:

1. Trenches and Pits: Removal and disposal of solid, homogenous, interlocking crystalline material with firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be excavated with a late-model, track-mounted hydraulic excavator; equipped with a 1050 mm (42 inch) wide, short-tip-radius rock bucket; rated at not less than 103 kW (138 hp) flywheel power with bucket-curling force of not less than 125 kN (28,090 lbf) and stick-crowd force of not less than 84.5 kN (19,000 lbf); measured according to SAE J-1179. Trenches in excess of 3000 mm (10 feet) wide and pits in excess of 9000 mm (30 feet) in either length or width are classified as open excavation.

2. Open Excavation: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be dislodged and excavated with a late-model, track-mounted loader; rated at not less than 157 kW (210 hp) flywheel power and developing a minimum of 216 kN (48,510 lbf) breakout force; measured according to SAE J-732.

3. Other types of materials classified as rock are unstratified masses, conglomerated deposits and boulders of rock material exceeding 0.76 m3 (1 cubic yard) for open excavation, or 0.57 m3 (3/4 cubic yard)

for footing and trench excavation that cannot be removed by rock excavating equipment equivalent to the above in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted.

4. Blasting: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be removed with conventional methods may not be performed by blasting.
5. Definitions of rock and guidelines for equipment are presented for general information purposes only. The Contractor is expected to use the information presented in the Geotechnical Engineering Report to evaluate the extent and competency of the rock and to determine both quantity estimations and removal equipment and efforts.

1.5 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Rock Excavation Report:
   1. Certification of rock quantities excavated.
   2. Excavation method.
   3. Labor.
   4. Equipment.
   5. Land Surveyor's or Civil Engineer's name and official registration stamp.
   6. Plot plan showing elevation.

C. Furnish to Resident Engineer:
   1. Contactor shall furnish resumes with all personnel involved in the project including Project Manager, Superintendent, and on-site Engineer. Project Manager and Superintendent should have at least 3 years of experience on projects of similar size.
   2. Soil samples.

a. Classification in accordance with ASTM D2487 for each on-site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
b. Laboratory compaction curve in accordance with ASTM D1557 AASHTO for each on site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
c. Test reports for compliance with ASTM D2940 requirements for subbase material.
d. Pre-excavation photographs and videotape in the vicinity of the existing structures to document existing site features, including surfaces finishes, cracks, or other structural blemishes that might be misconstrued as damage caused by earthwork operations.
e. The Contractor shall submit a scale plan daily that defines the location, limits, and depths of the area excavated.

3. Contractor shall submit procedure and location for disposal of unused satisfactory material. Proposed source of borrow material. Notification of encountering rock in the project. Advance notice on the opening of excavation or borrow areas. Advance notice on shoulder construction for rigid pavements.

1.6 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop

T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb) Rammer and a 457 mm (18 inch) Drop

C. American Society for Testing and Materials (ASTM):

C33-03.....Concrete Aggregate

D448-08.....Standard Classification for Sizes of Aggregate for Road and Bridge Construction

D698-07e1.....Standard Test Method for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft. lbf/ft^3 (600 kN m/m^3))

D1140-00.....Amount of Material in Soils Finer than the No. 200 (75-micrometer) Sieve

D1556-07.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand Cone Method

D1557-09.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft^3 (2700 kN m/m^3))

D2167-08.....Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method

D2487-11.....Standard Classification of Soils for Engineering Purposes (Unified Soil Classification System)

D2940-09.....Standard Specifications for Graded Aggregate Material for Bases or Subbases for Highways or Airports

D6938-10.....Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth

D. Society of Automotive Engineers (SAE):

J732-07.....Specification Definitions - Loaders

J1179-08.....Hydraulic Excavator and Backhoe Digging Forces

PART 2 - PRODUCTS

2.1 MATERIALS:

A. General: Provide borrow soil material when sufficient satisfactory soil materials are not available from excavations.

B. Fills: Material in compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups; free of rock or gravel larger than 75 mm (3 inches) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter. Material approved from on site or off site sources having a minimum dry density of 1760 kg/m3 (110 pcf), a maximum Plasticity Index of 15, and a maximum Liquid Limit of 40.

C. Engineered Fill: Naturally or artificially graded mixture of compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups, or as approved by the Engineer or material with at least 90 percent passing a 37.5-mm (1 1/2-inch) sieve and not more than 12 percent passing a 75-µm (No. 200) sieve, per ASTM D2940;.

D. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 8 percent passing a 75-µm (No. 200) sieve.

E. Drainage Fill: Washed, narrowly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size 57; with 100 percent passing a 37.5 mm (1 1/2-inch) sieve and 0 to 5 percent passing a 2.36 mm (No. 8) sieve.

F. Granular Fill:

1. Under concrete slab, - granular fill shall consist of clean, poorly graded crushed rock, crushed gravel, or uncrushed gravel placed beneath a building slab with or without a vapor barrier to cut off the capillary flow of pore water to the area immediately below. Fine aggregate grading shall conform to ASTM C 33 with a maximum of 3 percent by weight passing ASTM D 1140, 75 micrometers (No. 200)

and no more than 2 percent by weight passing the 4.75 mm (No. 4) size sieve.

2. Bedding for sanitary and storm sewer pipe, crushed stone or gravel graded from 13 mm (1/2 inch) to 4.75 mm (No 4), per ASTM D2940.

G. Requirements for Offsite Soils: Offsite soils brought in for use as backfill shall be tested for TPH, BTEX and full TCLP including ignitability, corrosivity and reactivity. Backfill shall contain less than 100 parts per million (ppm) of total hydrocarbons (TPH) and less than 10 ppm of the sum of Benzene, Toleune, Ethyl Benzene, and Xylene (BTEX) and shall not fail the TCLP test. TPH concentrations shall be determined by using EPA 600/4-79/020 Method 418.1. BTEX concentrations shall be determined by using EPA SW-846.3-3a Method 5030/8020. TCLP shall be performed in accordance with EPA SW-846.3-3a Method 1311. Provide Borrow Site Testing for TPH, BTEX and TCLP from a composite sample of material from the borrow site, with at least one test from each borrow site.

H. Buried Warning and Identification Tape: Polyethylene plastic and metallic core or metallic-faced, acid- and alkali-resistant polyethylene plastic warning tape manufactured specifically for warning and identification of buried utility lines. Provide tape on rolls, 3 inch minimum width, color coded as specific below for the intended utility with warning and identification imprinted in bold black letters continuously over the entire tape length. Warning and identification to read, “CAUTION, BURIED (intended service) LINE BELOW” or similar wording. Color and printing shall be permanent, Unaffected by moisture or soil. Warning tape color codes:

Red: Electric
Yellow: Gas, Oil, Dangerous Materials
Orange: Telephone and Other Communications
Blue: Water Systems
Green: Sewer Systems

I. Warning Tape for Metallic Piping: Acid and alkali-resistant polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of tape shall be 0.076 mm (0.003 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi) lengthwise, and 8.6 MPa (1250 psi) crosswise, with a maximum 350 percent elongation.

J. Detectable Warning Tape for Non-Metallic Piping: Polyethylene plastic tape conforming to the width, color, and printing requirements specified above. Minimum thickness of the tape shall be 0.102 mm (0.004 inch). Tape shall have a minimum strength of 10.3 MPa (1500 psi) lengthwise and 8.6 MPa (1250 psi) crosswise. Tape shall be manufactured with integral wires, foil backing, or other means of enabling detection by a metal detector when tape is buried up to 0.9 m (3 feet) deep. Encase metallic element of the tape in a protective jacket or provide with other means of corrosion protection.

K. Detection Wire For Non-Metallic Piping: Detection wire shall be Insulated single strand, solid copper with a minimum of 12 AWG.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

A. Clearing: Clear within limits of earthwork operations as shown. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash, and other obstructions. Remove materials from Medical Center Property.

B. Grubbing: Remove stumps and roots 75 mm (3 inch) and larger diameter. Undisturbed sound stumps, roots up to 75 mm (3 inch) diameter, and nonperishable solid objects a minimum of 900 mm (3 feet) below subgrade or finished embankment may be left.

C. Trees and Shrubs: Trees and shrubs, not shown for removal, may be removed from areas within 4500 mm (15 feet) of new construction and 2250 mm (7.5 feet) of utility lines when removal is approved in advance by Resident Engineer. Remove materials from Medical Center Property. Box, and otherwise protect from damage, existing trees and shrubs which

are not shown to be removed in construction area. Immediately repair damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Do not store building materials closer to trees and shrubs, that are to remain, than farthest extension of their limbs.

D. Stripping Topsoil: Strip topsoil from within limits of earthwork operations as specified. Topsoil shall be a fertile, friable, natural topsoil of loamy character and characteristic of locality. Topsoil shall be capable of growing healthy horticultural crops of grasses. Stockpile topsoil and protect as directed by Resident Engineer. Eliminate foreign materials, such as weeds, roots, stones, subsoil, frozen clods, and similar foreign materials larger than 0.014 m3 (1/2 cubic foot) in volume, from soil as it is stockpiled. Retain topsoil on station. Remove foreign materials larger than 50 mm (2 inches) in any dimension from topsoil used in final grading. Topsoil work, such as stripping, stockpiling, and similar topsoil work shall not, under any circumstances, be carried out when soil is wet so that the composition of the soil will be destroyed.

E. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of trench excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from Medical Center Property.

F. Lines and Grades: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and grades.

1. Grades shall conform to elevations indicated on plans within the tolerances herein specified. Generally grades shall be established to provide a smooth surface, free from irregular surface changes.

Grading shall comply with compaction requirements and grade cross sections, lines, and elevations indicated. Where spot grades are indicated the grade shall be established based on interpolation of the elevations between the spot grades while maintaining appropriate transition at structures and paving and uninterrupted drainage flow into inlets.

2. Locations of existing and proposed elevations indicated on plans, except spot elevations, are from a site survey that measured spot elevations and subsequently generated existing contours and spot elevations. Proposed spot elevations and contour lines have been developed utilizing the existing conditions survey and developed contour lines and may be approximate. Contractor is responsible to notify Resident Engineer of any differences between existing elevations shown on plans and those encountered on site by Surveyor/Engineer described above. Notify Resident Engineer of any differences between existing or constructed grades, as compared to those shown on the plans.
3. Subsequent to establishment of lines and grades, Contractor will be responsible for any additional cut and/or fill required to ensure that site is graded to conform to elevations indicated on plans.
4. Finish grading is specified in Section 32 90 00, PLANTING.

G. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

A. Shoring, Sheeting and Bracing: Shore, brace, or slope, its angle of repose or to an angle considered acceptable by the Resident Engineer, banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities.
   1. Design of the temporary support of excavation system is the responsibility of the Contractor. The Contractor shall submit a

Shoring and Sheeting plan for approval 15 days prior to starting work. Submit drawings and calculations, certified by a registered professional engineer, describing the methods for shoring and sheeting of excavations. Shoring, including sheet piling, shall be furnished and installed as necessary to protect workmen, banks, adjacent paving, structures, and utilities. Shoring, bracing, and sheeting shall be removed as excavations are backfilled, in a manner to prevent caving.

2. Construction of the support of excavation system shall not interfere with the permanent structure and may begin only after a review by the Resident Engineer.
3. Extend shoring and bracing to a minimum of 1500 mm (5 feet) below the bottom of excavation. Shore excavations that are carried below elevations of adjacent existing foundations.
5. The Contractor is required to hire a Professional Geotechnical Engineer to provide inspection of excavations and soil/groundwater conditions throughout construction. The Geotechnical Engineer shall be responsible for performing pre-construction and periodic site visits throughout construction to assess site conditions. The Geotechnical Engineer shall update the excavation, sheeting and dewatering plans as construction progresses to reflect changing conditions and shall submit an updated plan if necessary. A written report shall be submitted, at least monthly, informing the Contractor and Resident Engineer of the status of the plan and an accounting of the Contractor's adherence to the plan addressing any present or potential problems. The Geotechnical Engineer shall be available to meet with the Resident Engineer at any time throughout the contract duration.

B. Excavation Drainage: Operate pumping equipment, and/or provide other materials, means and equipment as required to keep excavation free of water and subgrade dry, firm, and undisturbed until approval of permanent work has been received from Resident Engineer. Approval by

the Resident Engineer is also required before placement of the permanent work on all subgrades. Groundwater flowing toward or into excavations shall be controlled to prevent sloughing of excavation slopes and walls, boils, uplift and heave in the excavation and to eliminate interference with orderly progress of construction. French drains, sumps, ditches or trenches will not be permitted within 0.9 m (3 feet) of the foundation of any structure, except with specific written approval, and after specific contractual provisions for restoration of the foundation area have been made. Control measures shall be taken by the time the excavation reaches the water level in order to maintain the integrity of the in situ material. While the excavation is open, the water level shall be maintained continuously, at least 1 feet below the working level. Operate dewatering system continuously until construction work below existing water levels is complete. Submit performance records weekly.

C. Subgrade Protection: Protect subgrades from softening, undermining, washout, or damage by rain or water accumulation. Reroute surface water runoff from excavated areas and not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches. When subgrade for foundations has been disturbed by water, remove disturbed material to firm undisturbed material after water is brought under control. Replace disturbed subgrade in trenches with concrete or material approved by the Resident Engineer.

D. Proofrolling:
   1. After rough grade has been established in cut areas and prior to placement of fill in fill areas under building and pavements, proofroll exposed subgrade with a fully loaded dump truck to check for pockets of soft material.
   2. Proof rolling shall be done on an exposed subgrade free of surface water (wet conditions resulting from rainfall) which would promote degradation of an otherwise acceptable subgrade. After stripping, proof roll the existing subgrade with six passes of a dump truck

loaded with 6 cubic meters (4 cubic yards) of soil. Operate the truck in a systematic manner to ensure the number of passes over all areas, and at speeds between 4 to 5.5 km/hour (2 1/2 to 3 1/2 mph). Notify the Resident Engineer a minimum of 3 days prior to proof rolling. Proof rolling shall be performed in the presence of the Resident Engineer. Rutting or pumping of material shall be undercut as directed by the Resident Engineer and replaced with fill and backfill material. Bids shall be based on replacing approximately 20 square yards, with an average depth of 24 inches at various locations. Maintain subgrade until succeeding operation has been accomplished.

F. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.
2. Excavate foundation excavations to solid undisturbed subgrade.
3. Remove loose or soft materials to a solid bottom.
4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete poured separately from the footings.
5. Do not tamp earth for backfilling in footing bottoms, except as specified.
6. Slope grades to direct water away from excavations and to prevent ponding.
7. Capillary water barrier (granular fill) under concrete floor and area-way slabs on grade shall be placed directly on the subgrade and shall be compacted with a minimum of two passes of a hand-operated plate-type vibratory compactor.
8. Ensure that footing subgrades have been inspected and approved by the Resident Engineer prior to concrete placement. Excavate to bottom of pile cap prior to placing or driving piles, unless authorized otherwise by the Resident Engineer. Backfill and compact over excavations and changes in grade due to pile driving operations to 95 percent of ASTM D698 maximum density.

G. Trench Earthwork:

1. Utility trenches (except sanitary and storm sewer):
   a. Excavate to a width as necessary for sheeting and bracing and proper performance of the work.
   b. Grade bottom of trenches with bell holes scooped out to provide a uniform bearing.
   c. Support piping on suitable undisturbed earth unless a mechanical support is shown. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm (6 inches) loose thickness.
   d. Length of open trench in advance of piping laying shall not be greater than is authorized by Resident Engineer.
   e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade
   f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.
   g. Bedding shall be of the type and thickness shown. Initial backfill material shall be placed and compacted with approved tampers to a height of at least one foot above the utility pipe or conduit. The backfill shall be brought up evenly on both

sides of the pipe for the full length of the pipe. Care shall be taken to ensure thorough compaction of the fill under the haunches of the pipe. Except as specified otherwise in the individual piping section, provide bedding for buried piping in accordance with AWWA C600, Type 4, except as specified herein. Backfill to top of pipe shall be compacted to 95 percent of ASTM D 698 maximum density. Plastic piping shall have bedding to spring line of pipe. Provide materials as follows:

1) Class I: Angular, 6 to 40 mm (0.25 to 1.5 inches), graded stone, including a number of fill materials that have regional significance such as coral, slag, cinders, crushed stone, and crushed shells.
2) Class II: Coarse sands and gravels with maximum particle size of 40 mm (1.5 inches), including various graded sands and gravels containing small percentages of fines, generally granular and noncohesive, either wet or dry. Soil Types GW, GP, SW, and SP are included in this class as specified in ASTM D2487.

2. Sanitary and storm sewer trenches:
   a. Trench width below a point 150 mm (6 inches) above top of pipe shall be 600 mm (24 inches) maximum for pipe up to and including 300 mm (12 inches) diameter, and four-thirds diameter of pipe plus 200 mm (8 inches) for pipe larger than 300 mm (12 inches). Width of trench above that level shall be as necessary for sheeting and bracing and proper performance of the work.
      1) Bed bottom quadrant of pipe on suitable undisturbed soil or granular fill. Unstable material removed from the bottom of the trench or excavation shall be replaced with select granular material placed in layers not exceeding 150 mm (6 inches) loose thickness.1) Undisturbed: Bell holes shall be no larger than necessary for jointing. Backfill up to a point 300

mm (12 inches) above top of pipe shall be clean earth placed and tamped by hand.

2) Granular Fill: Depth of fill shall be a minimum of 75 mm (3 inches) plus one sixth of pipe diameter below pipe to 300 mm (12 inches) above top of pipe. Place and tamp fill material by hand.

c. Place and compact as specified remainder of backfill using acceptable excavated materials. Do not use unsuitable materials.

d. Use granular fill for bedding where rock or rocky materials are excavated.

e. Provide buried utility lines with utility identification tape. Bury tape 300 mm (12 inches) below finished grade; under pavements and slabs, bury tape 150 mm (6 inches) below top of subgrade

f. Bury detection wire directly above non-metallic piping at a distance not to exceed 300 mm (12 inches) above the top of pipe. The wire shall extend continuously and unbroken, from manhole to manhole. The ends of the wire shall terminate inside the manholes at each end of the pipe, with a minimum of 0.9 m (3 feet) of wire, coiled, remaining accessible in each manhole. The wire shall remain insulated over it's entire length. The wire shall enter manholes between the top of the corbel and the frame, and extend up through the chimney seal between the frame and the chimney seal. For force mains, the wire shall terminate in the valve pit at the pump station end of the pipe.

H. Site Earthwork: Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation. Excavation shall be accomplished as required by drawings and specifications. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 25 mm (1 inch). Extend excavations a

sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, complying with OSHA requirements, and for inspections. Remove subgrade materials that are determined by Resident Engineer as unsuitable, and replace with acceptable material. If there is a question as to whether material is unsuitable or not, the contractor shall obtain samples of the material, under the direction of the Resident Engineer, and the materials shall be examined by an independent testing laboratory for soil classification to determine whether it is unsuitable or not. Testing of the soil shall be performed by the VA Testing Laboratory. When unsuitable material is encountered and removed, contract price and time will be adjusted in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable. Adjustments to be based on volume in cut section only.

1. Site Grading:
   a. Provide a smooth transition between adjacent existing grades and new grades.
   b. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
   c. Slope grades to direct water away from buildings and to prevent ponds from forming where not designed. Finish subgrades to required elevations within the following tolerances:
      1) Lawn or Unpaved Areas: Plus or minus 25 mm (1 inch).
      2) Walks: Plus or minus 25 mm (1 inch).
      3) Pavements: Plus or minus 13 mm (1 inch).
   d. Grading Inside Building Lines: Finish subgrade to a tolerance of 13 mm (1/2 inch) when tested with a 3000 mm (10 foot) straightedge.

3.3 FILLING AND BACKFILLING:

A. General: Do not fill or backfill until all debris, water, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from excavation. For fill and backfill, use excavated

materials and borrow meeting the criteria specified herein, as applicable. Borrow will be supplied at no additional cost to the Government. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately braced, waterproofing or dampproofing applied, foundation drainage, and pipes coming in contact with backfill have been installed and work inspected and approved by Resident Engineer.

B. Placing: Place materials in horizontal layers not exceeding 200 mm (8 inches) in loose depth for material compacted by heavy compaction equipment, and not more than 100 mm (4 inches) in loose depth for material compacted by hand-operated tampers and then compacted. Place backfill and fill materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure. Place no material on surfaces that are muddy, frozen, or contain frost.

C. Compaction: Compact with approved tamping rollers, sheepsfoot rollers, pneumatic tired rollers, steel wheeled rollers, vibrator compactors, or other approved equipment (hand or mechanized) well suited to soil being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without prior approval of Resident Engineer. Moisten or aerate material as necessary to provide moisture content that will readily facilitate obtaining specified compaction with equipment used. Backfill adjacent to any and all types of structures shall be placed and compacted to at least 90 percent laboratory maximum density for cohesive materials or 95 percent laboratory maximum density for cohesionless materials to prevent wedging action or eccentric loading upon or against the structure. Compact soil to not less than the following percentages of maximum dry density, according to ASTM D698 or ASTM D1557 as specified below:

1. Fills, Embankments, and Backfill

a. Under proposed structures, building slabs, steps, and paved areas, scarify and recompact top 300 mm (12 inches) of existing subgrade and each layer of backfill or fill material in accordance with ASTM D1557 95 percent.
b. Curbs, curbs and gutters, 95 percent.
c. Under Sidewalks, scarify and recompact top 150 mm (6 inches) below subgrade and compact each layer of backfill or fill material in accordance with ASTM D1557 95 percent.
d. Landscaped areas, top 400 mm (16 inches), ASTM D698 D1557 85 percent.
e. Landscaped areas, below 400 mm (16 inches) of finished grade, ASTM D1557 90 percent.

2. Natural Ground (Cut or Existing)
a. Under building slabs, steps and paved areas, top 150 mm (6 inches), ASTM D698 D1557 95 percent.
b. Curbs, curbs and gutters, top 150 mm (6 inches), ASTM D1557 95 percent.
c. Under sidewalks, top 150 mm (6 inches), ASTM D1557 95 percent.

D. Borrow Material: Borrow material shall be selected to meet the requirements and conditions of the particular fill or embankment for which it is to be used. Borrow material shall be obtained from the from approved private sources. Unless otherwise provided in the contract, the Contractor shall obtain from the owners the right to procure material, pay royalties and other charges involved, and bear the expense of developing the sources, including rights-of-way for hauling. Borrow material from approved sources on Government-controlled land may be obtained without payment of royalties. Unless specifically provided, no borrow shall be obtained within the limits of the project site without prior written approval. Necessary clearing, grubbing, and satisfactory drainage of borrow pits and the disposal of debris thereon shall be considered related operations to the borrow excavation.

E. Opening and Drainage of Excavation and Borrow Pits: The Contractor shall notify the Resident Engineer sufficiently in advance of the opening of any excavation or borrow pit to permit elevations and measurements of the undisturbed ground surface to be taken. Except as otherwise permitted, borrow pits and other excavation areas shall be excavated providing adequate drainage. Overburden and other spoil material shall be transported to designated spoil areas or otherwise disposed of as directed. Borrow pits shall be neatly trimmed and drained after the excavation is completed. The Contractor shall ensure that excavation of any area, operation of borrow pits, or dumping of spoil material results in minimum detrimental effects on natural environmental conditions.

3.4 GRADING:

A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.

B. Cut rough or sloping rock to level beds for foundations. In pipe spaces or other unfinished areas, fill low spots and level off with coarse sand or fine gravel.

C. Slope backfill outside building away from building walls for a minimum distance of 1800 mm (6 feet).

D. Finish grade earth floors in pipe basements as shown to a level, uniform slope and leave clean.

E. Finished grade shall be at least 150 mm (6 inches) below bottom line of window or other building wall openings unless greater depth is shown.

F. Place crushed stone or gravel fill under concrete slabs on grade, tamped, and leveled. Thickness of fill shall be 150 mm (6 inches) unless otherwise shown.

G. Finish subgrade in a condition acceptable to Resident Engineer at least one day in advance of paving operations. Maintain finished subgrade in a smooth and compacted condition until succeeding operation has been accomplished. Scarify, compact, and grade subgrade prior to further construction when approved compacted subgrade is disturbed by Contractor's subsequent operations or adverse weather.

H. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.5 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.

B. Place excess excavated materials suitable for fill and/or backfill on site where directed.

C. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.

D. Segregate all excavated contaminated soil designated by the Resident Engineer from all other excavated soils, and stockpile on site on two 0.15 mm (6 mil) polyethylene sheets with a polyethylene cover. A designated area shall be selected for this purpose. Dispose of excavated contaminated material in accordance with State and Local requirements.

3.7 CLEAN UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove all debris, rubbish, and excess material from Medical Center Property.

----- E N D -----

DIVISION 32

Exterior Improvements

SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Subbase for concrete pavements.
   2. Curbs.
   3. Pedestrian Pavement: Walks, grade slabs, pedestrian crossings, wheelchair curb ramps, and steps.
   4. Vehicular Pavement: Parking lots.

1.2 RELATED REQUIREMENTS

A. Field Testing: Section 01 45 29, TESTING LABORATORY SERVICES.
B. Railings: Section 05 50 00, METAL FABRICATIONS.
C. Subgrade Preparation and Subbase Compaction: Section 31 20 00, EARTHWORK.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. American Association of State Highway and Transportation Officials (AASHTO):
   1. M147-65-UL-04 - Materials for Aggregate and Soil-Aggregate Subbase, Base and Surface Courses.
   2. M233-86 - Boiled Linseed Oil Mixture for Treatment of Portland Cement Concrete.
C. American Concrete Institute (ACI):
   1. 305R-10 - Guide to Hot Weather Concreting.
   2. 306R-10 - Guide to Cold Weather Concreting.
D. American National Standards Institute (ANSI):
   1. B101.3 - Wet DOCF of Common Hard Surface Floor Materials (Including Action and Limit Thresholds for the Suitable Assessment of the Measured Values).
E. ASTM International (ASTM):

1. A615/A615M-16 - Deformed and Plain Carbon Steel Bars for Concrete Reinforcement.
2. A996/A996M-15 - Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement.
3. A1064/A1064M-16 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
4. C33/C33M-16 - Concrete Aggregates.
5. C94/C94M-16 - Ready Mixed Concrete.
6. C143/C143M-15a - Slump of Hydraulic Cement Concrete.
7. C150/C150M-16 - Portland Cement.
8. C171-16 - Sheet Materials for Curing Concrete.
9. C260/C260M-10a - Air Entraining Admixtures for Concrete.
10. C309-11 - Liquid Membrane Forming Compounds for Curing Concrete.
11. C494/C494M-15a - Chemical Admixtures for Concrete.
12. C618-15 - Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
13. C979/C979M-16 - Pigments for Integrally Colored Concrete.
14. C989/C989M-14 - Slag Cement for Use in Concrete and Mortars.
15. C1240-15 - Silica Fume Used in Cementitious Mixtures.
16. D1751-04(2013)e1 - Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
17. D5893/D5893M-10 - Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements.
18. D6690-15 - Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
   1. Required Participants:
      a. Contracting Officer's Representative.
      b. Inspection and Testing Agency.

c. Contractor.
d. Installer.
e. Other installers responsible for adjacent and intersecting work, including excavation, plantings, traffic markings.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
   a. Installation schedule.
   b. Installation sequence.
   c. Preparatory work.
   d. Protection before, during, and after installation.
   e. Installation.
   f. Terminations.
   g. Transitions and connections to other work.
   h. Inspecting and testing.
   i. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.
   2. Show reinforcing.
   3. Include jointing plan for concrete pavements and curbs.

C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Installation instructions.

D. Samples:
   1. Exposed Aggregate Concrete Panel: 0.4 sq. m by 50 mm (4 sq. ft. by 2 inches) thick, 2 required, each color and finish.
   2. Colored Concrete Panel: As specified in Section 09 06 00, SCHEDULE FOR FINISHES, with mix data.

E. Test reports: Certify products comply with specifications.
   1. Concrete materials.
   2. Select subbase materials.
   3. Field test reports.
F. Certificates: Certify products comply with specifications.
   1. Expansion joint filler.
   2. Reinforcement.
   3. Curing materials.
   4. Concrete protective coating.
G. Qualifications: Substantiate qualifications comply with specifications.
   1. Installer with project experience list.
   2. Land surveyor.
H. Concrete mix design.
I. Select subbase job-mix design.
J. Proposed hot and cold weather concreting methods.
K. Land surveyor's construction staking notes, before placing concrete.
   1. Identify discrepancies between field conditions and Drawings.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations.
      a. Project Experience List: Provide contact names and addresses for completed projects.
B. Land Surveyor: Professional land surveyor or engineer registered to provide land surveys in jurisdiction where project is located.
C. Preconstruction Testing:
   1. Engage independent testing laboratory to perform tests and submit reports.
      a. Deliver samples to laboratory in number and quantity required for testing.
   2. Concrete mix design.

3. Select subbase job-mix design. Report the following:
   a. Material sources.
   b. Gradation.
   c. Plasticity index.
   d. Liquid limit.
   e. Laboratory compaction curves indicating maximum density at optimum moisture content.

1.7 DELIVERY

A. Deliver steel reinforcement to prevent damage.
B. Before installation, return or dispose of distorted or damaged steel reinforcement.
C. Bulk Products: Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.

1.8 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.
B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

A. Hot Weather Concreting Procedures: ACI 305R.
B. Cold Weather Concreting Procedures: ACI 306R.
   1. Use non-corrosive, non-chloride accelerator admixture.
   2. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions.

1.10 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 CONCRETE MATERIALS

A. Portland Cement: ASTM C150/C150M, Type I or II.

B. Pozzolans:
   1. Fly Ash: ASTM C618, Class C or F including supplementary optional physical requirements.
   2. Slag: ASTM C989/C989M.
   3. Silica Fume: ASTM C1240.
C. Coarse Aggregate: ASTM C33/C33M; size to suit application.
D. Fine Aggregate: ASTM C33/C33M.
E. Mixing Water: Fresh, clean, and potable.
F. Air-Entraining Admixture: ASTM C260/C260M.
G. Chemical Admixtures: ASTM C494/C494M.
H. Reinforcing Steel: ASTM A615 Grade 60.
I. Welded Wire Fabric: ASTM A1064/A1064M sized as indicated.
J. Expansion Joint Filler: ASTM D1751.
K. Sheet Materials for Curing Concrete: ASTM C171.

2.2 SELECT SUBBASE

A. NYSDOT Subbase Type 2.

2.3 FORMS

A. Forms: Wood, plywood, metal, or other materials, approved by Contracting Officer's Representative, of grade or type suitable to obtain type of finish specified.
   1. Plywood: Exterior grade, free of defects and patches on contact surface.
   2. Lumber: Sound, grade-marked, S4S stress graded softwood, minimum 50 mm (2 inches) thick, free from warp, twist, loose knots, splits, or other defects.
   3. Form Coating: As recommended by Architect/Engineer.
B. Provide forms suitable in cross-section, depth, and strength to resist springing during depositing and consolidating concrete.
   1. Do not use forms varying from straight line more than 3 mm in 3000 mm (1/8 inch in 10 feet), horizontally and vertically.
C. Provide flexible or curved forms for forming radii.

2.4 CONCRETE CURING MATERIALS

A. Concrete curing materials, conform to one of the following:
   1. Burlap: Minimum 233 g/sq. m (7 ounces/sq. yd.) dry.
   2. Sheet Materials for Curing Concrete: ASTM C171.
   3. Curing Compound: ASTM C309Type 1-D; liquid membrane forming type, without paraffin or petroleum.

2.5 CONCRETE MIXES

A. Design concrete mixes according to ASTM C94/C94M, Option C.

B. Concrete Type: Air-entrained. See Table I.

TABLE I - CONCRETE TYPES					
Concrete Type	Minimum 28 Day Compressive Strength f'c MPa (psi)	Non-Air-Entrained		Air-Entrained	
		Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio	Min. Cement kg/cu. m (lbs./cu. yd.)	Max. Water Cement Ratio
A	35 (5000)1,3	375 (630)	0.45	385 (650)	0.40
B	30 (4000)1,3	325 (550)	0.55	340 (570)	0.50
C	25 (3000)1,3	280 (470)	0.65	290 (490)	0.55
D	25 (3000)1,2	300 (500)	*	310 (520)	*

Footnotes:
1. If trial mixes are used, achieve compressive strength 8.3 MPa (1,200 psi) in excess of f'c. For concrete strengths greater than 35 MPa (5,000 psi), achieve compressive strength 9.7 MPa (1,400 psi) in excess of f’c.
2. For Concrete Exposed to High Sulfate Content Soils: Maximum water cement ratio is 0.44.
3. Laboratory Determined according to ACI 211.1 for normal weight concrete.

C. Maximum Slump: ASTM C143/C143M. See Table II.

TABLE II - MAXIMUM SLUMP	
APPLICATION	MAXIMUM SLUMP

TABLE II - MAXIMUM SLUMP	
APPLICATION	MAXIMUM SLUMP
Curb	75 mm (3 inches)
Pedestrian Pavement	75 mm (3 inches)
Vehicular Pavement	50 mm (2 inches) Machine Finished 100 mm (4 inches) Hand Finished
Equipment Pad	75 to 100 mm (3 to 4 inches)

2.6 ACCESSORIES

A. Equipment and Tools: Obtain Contracting Officer's Representative's, approval of equipment and tools needed for handling materials and performing work before work begins.

B. Maintain equipment and tools in satisfactory working condition.

C. Sealants:

1. Concrete Paving Expansion Joints: ASTM D5893/D5893M, Type SL, single component, self-leveling, silicone joint sealant.
2. Concrete Paving Joints: ASTM D6690, Type IV, hot-applied, single component joint sealant.

D. Concrete Protective Coating: AASHTO M233 linseed oil mixture.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.

B. Protect existing construction and completed work from damage.

C. Prepare, construct, and finish subgrade. See Section 31 20 00, EARTHWORK.

D. Maintain subgrade in smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE

A. Placing:

1. Place subbase material on prepared subgrade in uniform layer to required contour and grades, and to maximum 200 mm (8 inches) loose depth.
2. When required compacted thickness exceeds 150 mm (6 inches), place subbase material in equal thickness layers.
3. When subbase elevation is 13 mm (1/2 inch) or more below required grade, excavate subbase minimum 75 mm (3 inches) deep. Place and compact subbase to required grade.

B. Compaction:
1. Perform compaction with approved hand or mechanical equipment well suited to the material being compacted.
2. Maintain subbase at optimum moisture content for compaction.
3. Compact each subbase layer to minimum 95 percent or 100 percent of maximum density as specified in Section 31 20 00, EARTHWORK.

C. Subbase Tolerances:
1. Variation from Indicated Grade: Maximum 9 mm (3/8 inch).
2. Variation from Indicated Thickness: Maximum 13 mm (1/2 inch).

D. Protection:
1. Protect subbase from damage until concrete is placed.
2. Reconstruct damaged subbase before placing concrete.

3.3 SETTING FORMS

A. Form Substrate:
1. Compact form substrate to uniformly support forms along entire length.
2. Correct substrate imperfections and variations by cutting, filling, and compacting.

B. Form Setting:
1. Set forms to indicated line and grade with tight joints. Rigidly brace forms preventing movement.
2. Remove forms when removal will not damage concrete and when required for finishing.
3. Clean and oil forms before each use.

4. Correct forms, when required, immediately before placing concrete.

C. Land Surveyor: Establish control, alignment, and grade for forms and slip forming machine operations.
   1. Notify Contracting Officer's Representative immediately when discrepancies exist between field conditions and drawings.
   2. Correct discrepancies greater than 25 mm (1 inch) before placing concrete.

D. Form Tolerances:
   1. Variation from Indicated Line: Maximum 6 mm (1/4 inch).
   2. Variation from Indicated Grade: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).

3.4 PLACING REINFORCEMENT

A. Keep reinforcement clean from contamination preventing concrete bond.

B. Install reinforcement shown on drawings.

C. Support and securely tie reinforcing steel to prevent displacement during concrete placement.

D. Obtain Contracting Officer's Representative's reinforcement placement approval before placing concrete.

3.5 JOINTS - GENERAL

A. Place joints, where shown on approved submittal Drawings.
   1. Conform to details shown.
   2. Install joints perpendicular to finished concrete surface.

B. Make joints straight and continuous from edge to edge of pavement.

3.6 CONSTRUCTION JOINTS

A. Locate construction joints between slabs of vehicular pavement as shown on approved submittal Drawings.

B. Place transverse construction joints of type shown, where indicated, and whenever concrete placement is suspended for more than 30 minutes.

C. Provide butt-type joint with dowels in curb at planned joint locations.

D. Provide keyed joints with tie bars when joint occurs in middle third of planned curb joint interval.

3.7 CONTRACTION JOINTS

A. Tool or cut joints to width, depth, and radius edge shown on drawings using grooving tool, jointer, or saw.

B. Construct joints in curbs by inserting 3 mm (1/8 inch) steel plates conforming to curb cross sections.

   1. Keep plates in place until concrete can hold its shape.

C. Finish joint edges with edging tool.

D. Score pedestrian pavement with grooving tool or jointer.

3.8 EXPANSION JOINTS

A. Form expansion joints with expansion joint filler of thickness shown on drawings.

   1. Locate joints around perimeter of structures and features abutting site work concrete.
   2. Create complete, uniform separation between structure and site work concrete.

B. Extend expansion joint material full depth of concrete with top edge of joint filler below finished concrete surface where sealant is indicated on Drawings.

C. Cut and shape material matching cross section.

D. Anchor with approved devices to prevent displacing during placing and finishing operations.

E. Round joint edges with edging tool.

3.9 PLACING CONCRETE - GENERAL

A. Preparation before Placing Concrete:

   1. Obtain Contracting Officer's Representative approval.
   2. Remove debris and other foreign material.
   3. Uniformly moisten substrate, without standing water.

B. Convey concrete from mixer to final location without segregation or loss of ingredients. Deposit concrete to minimize handling.

C. During placement, consolidate concrete by spading or vibrating to minimize voids, honeycomb, and rock pockets.

1. Vibrate concrete against forms and along joints.
2. Avoid excess vibration and handling causing segregation.

D. Place concrete continuously between joints without bulkheads.

E. Install construction joint in concrete placement suspended for more than 30 minutes.

F. Replace concrete with cracks, chips, bird baths, and other defects to nearest joints, approved by Contracting Officer's Representative.

3.10 PLACING CONCRETE FOR CURB AND PEDESTRIAN PAVEMENT

A. Place concrete in one layer conforming to cross section shown on Drawings after consolidating and finishing.

B. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

C. Strike concrete surface to proper section ready for consolidation.

D. Consolidate concrete by tamping and spading or with approved mechanical finishing equipment.

E. Finish concrete surface with wood or metal float.

F. Construct concrete pads and pavements with sufficient slope to drain, preventing standing water.

3.11 PLACING CONCRETE FOR VEHICULAR PAVEMENT

A. Deposit concrete as close as possible to its final position.

B. Place concrete continuously between construction joints without cold joints.

C. Strike and consolidate concrete with finishing machine, vibrating screed, or by hand-finishing.

D. Finish concrete surface to elevation and crown shown on drawings.

E. Deposit concrete near joints without disturbing joints. Do not place concrete directly onto joint assemblies.

F. Obtain Contracting Officer's Representative's approval before placing adjacent lanes.

G. Curb-Forming Machines: Curb-forming machines for constructing curbs will be approved based on trial use on the project. When equipment

produces unsatisfactory results, discontinue use of the equipment at any time during construction and accomplish work by hand method construction. Remove unsatisfactory work and reconstruct full length between regularly scheduled joints. Dispose of removed portions off the project site.

3.12 FORM REMOVAL

A. Keep forms in place minimum 12 hours after concrete placement. Remove forms without damaging concrete.

B. Do not use bars or heavy tools against concrete to remove forms. Repair damage concrete found after form removal.

3.13 CONCRETE FINISHING - GENERAL

A. Follow operation sequence below, unless otherwise indicated on Drawings:

1. Consolidating, floating, striking, troweling, texturing, and joint edging.

B. Use edging tool with 6 mm (1/4 inch) radius, unless otherwise shown on Drawings.

C. Keep finishing equipment and tools clean and suitable for use.

3.14 CONCRETE FINISHING - PEDESTRIAN PAVEMENT

A. Walks, Grade Slabs, Wheelchair Curb Ramps:

1. Finish concrete surfaces with metal float, troweled smooth, and finished with a broom moistened with clear water.
2. Finish slab edges and formed transverse joints with edger.
3. Broom surfaces transverse to traffic direction.
   a. Use brooming to eliminate flat surface produced by edger.
   b. Produce uniform corrugations, maximum 1.5 mm (1/16 inch) deep profile.
4. Provide surface uniform in color and free of surface blemishes, form marks, and tool marks.
5. Paving Tolerances:

a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).
b. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).

6. Replace paving within joint boundary when paving exceeds specified tolerances.

B. Step Treads, Risers and Sidewalls: Finish as specified for pedestrian pavement, except as follows:
1. Remove riser forms sequentially, starting with top riser.
2. Rub riser face with wood or concrete rubbing block and water. Remove blemishes, form marks, and tool marks. Use outside edger to round nosing; use inside edger to finish bottom of riser.
3. Apply uniform brush finish to treads, risers, and sidewall.
a. Apply stiff brush finish to treads to provide slip resistant surface complying with ANSI B101.3.
4. Step Tolerance:
a. Variation from Indicated Plane: Maximum 5 mm in 3000 mm (3/16 inch in 10 feet).

3.15 CONCRETE FINISHING - VEHICULAR PAVEMENT

A. Align finish surfaces where new and existing pavements abut.
B. Longitudinally float pavement surface to profile and grade indicated on drawings.
C. Straighten surface removing irregularities and maintaining specified tolerances while concrete is plastic.
D. Finish pavement edges and joints with edging tool.
E. Broom finish concrete surface after bleed water dissipates and before concrete hardens.
1. Broom surface transverse to traffic direction.
a. Use brooming to eliminate flat surface produced by edger.
b. Produce uniform corrugations, maximum 3 mm (1/8 inch) deep profile.
F. Pavement Tolerances:

1. Variation from Indicated Plane: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet) tested parallel and perpendicular to traffic direction at maximum 1500 mm (5 feet) intervals.
2. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).

G. Replace paving within joint boundary when paving exceeds specified tolerances.

3.16 CONCRETE FINISHING - CURBS

A. Round edges of top of curb with edging tool.

B. Curb Top:
1. Float surfaces and finish with smooth wood or metal float until true to grade and section and uniform color.
2. Finish surfaces, while still plastic, longitudinally with bristle brush.

C. Curb Face:
1. Remove curb form and immediately rub curb face with wood or concrete rubbing block removing blemishes, form marks, and tool marks and providing uniform color.
2. Brush curb face, while still plastic, matching curb top.

D. Curb Tolerances: Except at grade changes or curves.
1. Variation from Indicated Plane and Grade:
   a. Curb Top and Face: Maximum 6 mm in 3000 mm (1/4 inch in 10 feet).

E. Replace curbs within joint boundary when curbs exceed specified tolerances.

F. Correct depressions causing standing water.

3.17 CONCRETE FINISHING - EQUIPMENT PADS

A. Strike pad surface to elevation shown on Drawings.

B. Provide smooth, dense float finish, free from depressions or irregularities.

C. Finish pad edges with edger.

D. After removing forms, rub pad edge faces with wood or concrete rubbing block, removing blemishes, form marks, and tool marks and providing uniform color.

E. Pad Tolerances:

1. Variation from Indicated Plane: Maximum 3 mm in 3000 mm (1/8 inch in 10 feet).
2. Variation from Indicated Elevation: Maximum 6 mm (1/4 inch).
3. Variation from Indicated Thickness: Maximum 6 mm (1/4 inch).

F. Replace pads when pads exceed specified tolerances.

3.18 CONCRETE CURING

A. Concrete Protection:

1. Protect unhardened concrete from rain and flowing water.
2. Provide sufficient curing and protection materials available and ready for use before concrete placement begins.
3. Protect concrete to prevent pavement cracking from ambient temperature changes during curing period.
   a. Replace pavement damaged by curing method allowing concrete cracking.
   b. Employ another curing method as directed by Contracting Officer's Representative.

B. Cure concrete for minimum 7 days by one of the following methods appropriate to weather conditions preventing moisture loss and rapid temperature change:

1. Burlap Mat: Provide minimum two layers kept saturated with water during curing period. Overlap Mats at least 150 mm (6 inches).
2. Sheet Materials:
   a. Wet exposed concrete surface with fine water spray and cover with sheet materials.
   b. Overlap sheets minimum 300 mm (12 inches).
   c. Securely anchor sheet materials preventing displacement.
3. Curing Compound:

a. Protect joints indicated to receive sealants preventing contamination from curing compound.
b. Insert moistened paper or fiber rope into joint or cover joint with waterproof paper.
c. Apply curing compound before concrete dries.
d. Apply curing compound in two coats at right angles to each other.
e. Application Rate: Maximum 5 sq. m/L (200 sq. ft./gallon), both coats.
f. Immediately reapply curing compound to surfaces damaged during curing period.

3.19 CONCRETE PROTECTIVE COATING

A. Apply protective coating of linseed oil mixture to exposed-to-view concrete surfaces, drainage structures, and features that project through, into, or against concrete exterior improvements to protect the concrete against deicing materials.
B. Complete backfilling and curing operation before applying protective coating.
C. Dry and thoroughly clean concrete before each application.
D. Apply two coats, with maximum coverage of 11 sq. m/L (50 sq. yds./gal.); first coat, and maximum 16 sq. m/L (70 sq. yds./gal.); second coat, except apply commercially prepared mixture according to manufacturer's instructions.
E. Protect coated surfaces from vehicular and pedestrian traffic until dry.
F. Do not heat protective coating, and do not expose protective coating to open flame, sparks, or fire adjacent to open containers or applicators. Do not apply material at temperatures lower than 10 degrees C (50 degrees F).

3.20 FIELD QUALITY CONTROL

A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
   1. Compaction.
      a. Pavement subgrade.
      b. Curb and sidewalk.
   2. Concrete:
      a. Delivery samples.
      b. Field samples.
   3. Slip Resistance: Steps and pedestrian paving.

3.21 CLEANING

A. After completing curing:
   1. Remove burlap and sheet curing materials.
   2. Sweep concrete clean, removing foreign matter from the joints.
   3. Seal joints as specified.

3.22 PROTECTION

A. Protect exterior improvements from traffic and construction operations.
   1. Prohibit traffic on paving for minimum seven days after placement, or longer as directed by Contracting Officer's Representative.
B. Remove protective materials immediately before acceptance.
C. Repair damage.
   1. Replace concrete containing excessive cracking, fractures, spalling, and other defects within joint boundary, when directed by Contracting Officer's Representative, and at no additional cost to the Government.

- - - E N D - - -

SECTION 32 12 16
ASPHALT PAVING

PART 1 - GENERAL

1.1 DESCRIPTION

This work shall cover the composition, mixing, construction upon the prepared subgrade, and the protection of hot asphalt concrete pavement. The hot asphalt concrete pavement shall consist of an aggregate or asphalt base course and asphalt surface course constructed in conformity with the lines, grades, thickness, and cross sections as shown. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course.

1.2 RELATED WORK

A. Laboratory and field testing requirements: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Subgrade Preparation: Paragraph 3.3 and Section 31 20 00, EARTH MOVING.

C. Pavement Markings: Section 32 17 23, PAVEMENT MARKINGS.

1.3 INSPECTION OF PLANT AND EQUIPMENT

The Resident Engineer shall have access at all times to all parts of the material producing plants for checking the mixing operations and materials and the adequacy of the equipment in use.

1.4 ALIGNMENT AND GRADE CONTROL

The Contractor’s Registered Professional Land Surveyor shall establish and control the pavement (aggregate or asphalt base course and asphalt surface course) alignments, grades, elevations, and cross sections as shown on the Drawings.

1.5 SUBMITTALS

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

B. Data and Test Reports:

1. Aggregate Base Course: Sources, gradation, liquid limit, plasticity index, percentage of wear, and other tests required by State Highway Department.
2. Asphalt Base/Surface Course: Aggregate source, gradation, soundness loss, percentage of wear, and other tests required by State Highway Department.
3. Job-mix formula.

C. Certifications:
1. Asphalt prime and tack coat material certificate of conformance to State Highway Department requirements.
2. Asphalt cement certificate of conformance to State Highway Department requirements.
3. Job-mix certification - Submit plant mix certification that mix equals or exceeds the State Highway Specification.

D. One copy of State Highway Department Specifications.

E. Provide MSDS (Material Safety Data Sheets) for all chemicals used on ground.

F. Batch tickets. One copy of every batch ticket (for every load of asphalt delivered and used or rejected) shall be provided within 3 days of asphalt delivery. Failure to produce tickets may result in nonpayment for or rejection of completed work.

PART 2 - PRODUCTS

2.1 GENERAL

A. Asphalt concrete materials shall conform to the requirements of the following and other appropriate sections of the latest version of NYSDOT Highway Material Specifications, including amendments, addenda and errata. Where the term "Engineer" or "Commission" is referenced in the State Highway Specifications, it shall mean the VA Resident Engineer or VA Contracting Officer.

2.2 AGGREGATES

A. Provide aggregates consisting of crushed stone, gravel, sand, or other sound, durable mineral materials processed and blended, and naturally combined.

B. Subbase aggregate (where required) maximum size: 38mm(1-1/2").

C. Base aggregate maximum size:

1. Base course over 152mm(6") thick: 38mm(1-1/2");
2. Other base courses: 19mm(3/4").

D. Asphaltic base course:

1. Maximum particle size not to exceed 25.4mm(1”).
2. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

E. Aggregates for asphaltic concrete paving: Provide a mixture of sand, mineral aggregate, and liquid asphalt mixed in such proportions that the percentage by weight will be within:

Sieve Sizes	Percentage Passing
19mm(3/4")	100
9.5mm(3/8")	67 to 85
6.4mm(1/4")	50 to 65
2.4mm(No. 8 mesh)	37 to 50
600µm(No. 30 mesh)	15 to 25
75µm(No. 200 mesh)	3 to 8

plus 50/60 penetration liquid asphalt at 5 percent to 6-1/2 percent of the combined dry aggregates.

2.3 ASPHALTS

A. Comply with provisions of Asphalt Institute Specification SS2:

1. Asphalt cement: Penetration grade 50/60
2. Prime coat: Cut-back type, grade MC-250
3. Tack coat: Uniformly emulsified, grade SS-1H

2.4 SEALER

A. Provide a sealer consisting of suitable fibrated chemical type asphalt base binders and fillers having a container consistency suitable for troweling after thorough stirring, and containing no clay or other deleterious substance.

B. Where conflicts arise between this specification and the requirements in the latest version of the NYSDOT Specifications, the NYSDOT Specifications shall control.

PART 3 - EXECUTION

3.1 GENERAL

The Asphalt Concrete Paving equipment, weather limitations, job-mix formula, mixing, construction methods, compaction, finishing, tolerance, and protection shall conform to the requirements of the appropriate sections of the State Highway Specifications for the type of material specified.

3.2 MIXING ASPHALTIC CONCRETE MATERIALS

A. Provide hot plant-mixed asphaltic concrete paving materials.
   1. Temperature leaving the plant: 143 degrees C(290 degrees F) minimum, 160 degrees C(320 degrees F) maximum.
   2. Temperature at time of placing: 138 degrees C(280 degrees F) minimum.

3.3 SUBGRADE

A. Shape to line and grade and compact with self-propelled rollers.

B. All depressions that develop under rolling shall be filled with acceptable material and the area re-rolled.

C. Soft areas shall be removed and filled with acceptable materials and the area re-rolled.

D. Should the subgrade become rutted or displaced prior to the placing of the subbase, it shall be reworked to bring to line and grade.

E. Proof-roll the subgrade with maximum 45 tonne (50 ton) gross weight dump truck as directed by VA Resident Engineer or VA Contracting

Officer. If pumping, pushing, or other movement is observed, rework the area to provide a stable and compacted subgrade.

3.4 BASE COURSES

A. Subbase (when required)
   1. Spread and compact to the thickness shown on the drawings.
   2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
   3. After completion of the subbase rolling there shall be no hauling over the subbase other than the delivery of material for the top course.

B. Base
   1. Spread and compact to the thickness shown on the drawings.
   2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
   3. After completion of the base rolling there shall be no hauling over the base other than the delivery of material for the top course.

C. Thickness tolerance: Provide the compacted thicknesses shown on the Drawings within a tolerance of minus 0.0mm (0.0") to plus 12.7mm (0.5").

D. Smoothness tolerance: Provide the lines and grades shown on the Drawings within a tolerance of 5mm in 3m (3/16 inch in ten feet).

E. Moisture content: Use only the amount of moisture needed to achieve the specified compaction.

3.5 PLACEMENT OF ASPHALTIC CONCRETE PAVING

A. Remove all loose materials from the compacted base.

B. Apply the specified prime coat, and tack coat where required, and allow to dry in accordance with the manufacturer’s recommendations as approved by the Architect or Engineer.

C. Receipt of asphaltic concrete materials:
   1. Do not accept material unless it is covered with a tarpaulin until unloaded, and unless the material has a temperature of not less than 130 degrees C(280 degrees F).

2. Do not commence placement of asphaltic concrete materials when the atmospheric temperature is below 10 degrees C (50 degrees F), not during fog, rain, or other unsuitable conditions.

D. Spreading:
1. Spread material in a manner that requires the least handling.
2. Where thickness of finished paving will be 76mm (3") or less, spread in one layer.

E. Rolling:
1. After the material has been spread to the proper depth, roll until the surface is hard, smooth, unyielding, and true to the thickness and elevations shown own the drawings.
2. Roll in at least two directions until no roller marks are visible.
3. Finished paving smoothness tolerance:
   a. No depressions which will retain standing water.
   b. No deviation greater than 3mm in 1.8m (1/8" in six feet).

3.6 APPLICATION OF SEAL COAT

A. Prepare the surfaces, mix the seal coat material, and apply in accordance with the manufacturer’s recommendations as approved by the Architect or Engineer.

B. Achieve a finished surface seal which, when dry and thoroughly set, is smooth, tough, resilient, of uniform black color, and free from coarse textured areas, lap marks, ridges, and other surface irregularities.

C. When sealing new asphalt paving wait an entire year to allow for the expansion and contraction of a year’s cycle of both warm and cool temperatures. This allows for the asphalt’s oils to properly cure and begin oxidation before applying a seal coat.

D. When seal coating in less than a year apply two coats, spray applied. This application method is preferred for less than a year application when there is still plenty of asphalt cement present for the seal coat to bond to.

E. When seal coating existing paving that has new asphalt patches, apply two coats sprayed to the existing asphalt and a single lighter coat on

new patch work, just enough to make the color of the new patches match the rest of the reseal coated paving.

F. When resealing existing paving 5years and older, that is oxidized and is very light in color, squeegee apply the first coat of seal coat and spray on a second coat. Two coats are preferred in older paving when the asphalt cement has oxidized leaving the seal coat with nothing to bond to other than the aggregate that in many cases has polished over time leaving less than a desirable surface to bond to.

3.7 PROTECTION

Protect the asphaltic concrete paved areas from traffic until the sealer is set and cured and does not pick up under foot or wheeled traffic.

3.8 FINAL CLEAN-UP

Remove all debris, rubbish, and excess material from the work area.

- - - E N D - - -

SECTION 32 17 23
PAVEMENT MARKINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Paint on pavement surfaces, in form of traffic lanes, parking bays, areas restricted to handicapped persons, crosswalks, and other detail pavement markings.

1.2 RELATED REQUIREMENTS

A. Paint VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
B. Paint Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. Federal Specifications (Fed. Spec.):
   1. TT-B-1325D - Beads (Glass Spheres) Retro-Reflective.
   2. TT-P-1952F - Paint, Traffic and Airfield Marking, Waterborne.
C. Master Painters Institute (MPI):
   1. No. 97 - Traffic Marking Paint, Latex.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Submittal Drawings:
   1. Show pavement marking configuration and dimensions.
   2. Show international symbol of accessibility at designated parking spaces.
C. Manufacturer's Literature and Data:
   1. Description of each product.
   2. Application instructions.
D. Samples:
   1. Paint: 200 mm (8 inches) square, each type and color.

E. Certificates: Certify products comply with specifications.
F. Qualifications: Substantiate qualifications comply with specifications.
   1. Installer with project experience list.

1.5 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.
B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight conditioned facility.
B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

A. Environment:
   1. Product Temperature: Minimum 13 degrees C (55 degrees F) for minimum 48 hours before installation.
      a. Surface to be painted and ambient temperature: Minimum 10 degrees C (50 degrees F) and maximum 35 degrees C (95 degrees F).
B. Field Measurements: Verify field conditions affecting traffic marking installation. Show field measurements on Submittal Drawings.

1.9 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design paint complying with specified performance:
   1. Application: Fed. Spec. TT-P-1952.

2.2 PRODUCTS - GENERAL

A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
B. Provide each product from one manufacturer and from one production run.
   1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
      a. Paints and coatings.

2.3 SANDBLASTING EQUIPMENT

A. Air compressor, hoses, and nozzles of proper size and capacity as required for cleaning painted surfaces. Compressor to provide minimum 0.08 cu. m/s (150 cfm) of air at pressure of minimum 625 kPa (90 psi) at each nozzle used.

2.4 PAINT APPLICATOR

A. Apply marking paint with approved mechanical equipment. Provide equipment with constant agitation of paint and travel at controlled speeds. Synchronize one or more paint "guns" to automatically begin and cut off paint flow in case of skip lines. Equipment to have manual control to apply continuous lines of varying length and marking widths as indicated on Drawings. Provide pneumatic spray guns for hand application of paint in areas where mobile paint applicator cannot be used.

2.5 PAINT

A. Paint: MPI No. 97. For obliterating existing markings comply with Fed. Spec. TT-P-1952. Provide minimum 18 L (5 gallons) containers.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify substrate suitability for product installation.
   1. Allow new pavement surfaces to cure for period of minimum 14 days before application of marking materials.
B. Protect existing construction and completed work from damage.
C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
   1. Remove dust, dirt, and other granular surface deposits by sweeping, blowing with compressed air, rinsing with water, or combination of these methods.
   2. Completely remove rubber deposits, existing paint markings, and other coatings adhering to pavement with scrapers, wire brushings, sandblasting, mechanical abrasion, or approved chemicals as directed by Contracting Officer's Representative.
   3. As an option, comply with Fed. Spec. TT-P-1952 for removal of existing paint markings on asphalt pavement. Apply black paint in as many coats as necessary to completely obliterate existing markings.
   4. Scrub affected areas with several applications of trisodium phosphate solution or other approved detergent or degreaser, and rinse thoroughly after each application, Where oil or grease are present on old pavements to be marked.
      a. After cleaning, seal oil-soaked areas with cut shellac to prevent bleeding through new paint.
   5. Clean and dry surface before pavement marking.Do not begin any marking until Contracting Officer's Representative inspected surface and gives permission to proceed.

3.2 TEMPORARY PAVEMENT MARKING

A. Apply Temporary Pavement Markings of colors, widths and lengths shown on drawings or directed by Contracting Officer's Representative. After temporary marking has served its purpose and when so ordered by Contracting Officer's Representative, remove temporary marking by carefully controlled sandblasting, approved grinding equipment, or other approved method to prevent damage on applied surface.

B. As an option, provide approved preformed pressure sensitive, adhesive tape type of temporary pavement marking of required colors, widths and lengths in lieu of temporary painted marking. Continuous durability and effectiveness of such marking is required during period for which its use is required. Remove any unsatisfactory tape type marking and replace with painted markings.

3.3 INSTALLATION - GENERAL

A. Install products according to manufacturer's instructions and approved submittal drawings.

1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.4 PAINT APPLICATION

A. Apply uniformly painted pavement marking of required colors, length, and width with true, sharp edges and ends on properly cured, prepared, and dried surfaces.

B. Comply with details as indicated on drawings and established control points.

C. Apply paint at wet film thickness of 0.4 mm (0.015 inch). Apply paint in one coat. When directed by Contracting Officer's Representative, apply additional coats at markings showing light spots. Comply with paint manufacturer's maximum drying time requirements to prevent undue softening of asphalt, and pick-up, displacement, or discoloration by tires of traffic.

D. When deficiency in marking drying occurs, discontinue paint operations until cause of slow drying is determined and corrected.
E. Remove and replace marking applied less than minimum material rates, deviates from true alignment, exceeds stipulated length and width tolerances, or shows light spots, smears, or other deficiencies or irregularities.
F. Remove marking by carefully controlled sandblasting, approved grinding equipment, or other approve method to prevent damage on applied surface.

3.5 DETAIL PAVEMENT MARKING APPLICATION

A. Apply Detail Pavement Markings, exclusive of actual traffic lane marking as follows:
   1. At exit and entrance islands and turnouts.
   2. On curbs.
   3. At crosswalks.
   4. At parking bays.
   5. Other locations as indicated on drawings.
B. Apply International Handicapped Symbol at indicated parking spaces. Color as shown on drawings. Apply paint for symbol using suitable template that will provide pavement marking with true, sharp edges and ends.
C. Install detail pavement markings of colors, widths and lengths, and design pattern at locations indicated on drawings.

3.6 TOLERANCES

A. Length and Width of Lines: Plus or minus 75 mm (3 inches) and plus or minus 3 mm (1/8 inch), respectively, in case of skip markings.
B. Length of intervals exceeding line length tolerance are not acceptable.

3.7 CLEANING

A. Remove excess paint before paint sets.

3.8 PROTECTION

A. Protect pavement markings from traffic and construction operations.

1. Protect newly painted markings from vehicular traffic until paint is dry and track free.
2. Place warning signs at beginning of wet line, and at points well in advance of marking equipment for alerting approaching traffic from both directions.
3. Place small flags or other similarly effective small objects near freshly applied markings at frequent intervals to reduce crossing by traffic.

B. Repair damage.

- - - E N D - - -

SECTION 32 32 23

SEGMENTAL RETAINING WALLS

PART 1 - GENERAL

1.1 RELATED WORK

A. Earthwork: Section 31 20 00.

1.2 DESCRIPTION

A. This work shall consist of providing the Segmental Retaining Wall System in accordance with these specifications and with the design, lines, grades, and dimensions shown on the contract drawings.

B. Segmental Retaining Wall shall be designed and stamped by a professional engineer in the State of New York for this project. Retaining wall block manufacturer shall provide the design in conjunction with the shop drawings of the system.

1.3 QUALITY ASSURANCE

A. Placement of the wall units shall be in accordance with manufacturer’s recommendations.

B. Submit a list of previous projects totaling a minimum of five (5) projects of similar scope where the specific retaining wall system has been constructed successfully. Contact names and telephone numbers shall be listed for each project.

C. If the block type is changed, or any other changes are made to the segmental retaining wall shown on the Contract Drawings the contractor shall submit, for review and approval, a complete set of design calculations, specifications and drawings prepared and sealed by a NYS licensed professional engineer experienced in the design of segmental type retaining walls.

1.4 SUBMITTALS

A. Product Data:

1. Interlocking Concrete Wall Unit Manufacturer’s Catalog Sheets and installation instructions.

B. Design Calculations: Provide design calculations signed and stamped by a professional engineer indicating the block size and reinforcing required to resist the proposed loading conditions.

C. Shop Drawings:

1. Provide drawings showing a plan, elevation and section of the segmental block retaining wall to match the contract drawings and design calculations.

1.5 DELIVERY, STORAGE AND HANDLING

A. Check the materials upon delivery to assure that the specified products have been received.

B. Prevent excessive mud, wet concrete, epoxies, and like materials, which may affix themselves, from coming in contact with the materials.

C. Protect the materials from damage. Damaged material will not be allowed for use.

PART 2 - PRODUCTS

2.1 ACCEPTABLE MANUFACTURERS

A. Keystone Retaining Wall Systems, Inc., 4444 West 78th Street, Minneapolis, MN 55435, 1-800-745-8971, www.keystonewalls.com

B. Redi-Rock International, 05481 South US-31, Charlevoix, MI 49720, 1-866-222-8400, www.redi-rock.com

2.2 SEGMENTAL RETAINING WALL UNITS (SMALL UNITS)

A. Keystone – 18 Inch Long Units:

1. Keystone Standard 18” Unit – Straight Face.
2. Keystone Standard 18” Unit – Series II.
3. Color: Gray.
4. Connection Pins: As recommended by manufacturer.

B. Keystone – 12 Inch Long Units:

1. Keystone Compac 12” Unit – Straight Face.
2. Keystone Compac 12” Unit – Series II.
3. Color: Gray.
4. Connection Pins: As recommended by manufacturer.

2.3 SEGMENTAL RETAINING WALL UNITS (LARGE UNITS)

A. Redi-Rock – 46 Inch Long Units:

1. Redi-Rock - 41 Series Block.
2. Color: Gray.

2.4 LEVELING PAD

A. Material for leveling pad shall consist of one of the following:

1. Subbase Course Type 2.
2. Item B-12.
3. Un-reinforced concrete footing 6 inches in depth.

2.5 DRAINAGE AGGREGATE

A. Drainage aggregate: Pea gravel.

B. Extend the drainage aggregate layer a lateral distance of one (1) foot beyond the wall's back, and extend to a height that is 8 inches below the finished grade.

2.6 REINFORCED BACKFILL

A. Reinforced Backfill Material: Engineered Fill Material.

PART 3 - EXECUTION

3.1 EXCAVATION

A. Prior to the performance of any excavations, the alignment of the wall shall be staked and offset stakes set by a land surveyor.

B. Verify location of existing structures and utilities prior to excavation. Ensure all surrounding structures are protected from the effects of wall excavation.

C. Excavate to the lines and grades shown on the project grading plans. Take precautions to minimize over-excavation.

D. The Director's Representative will inspect the excavation and approve prior to constructing the wall's leveling pad.

E. Over-excavated areas in front of wall face shall be filled with compacted Selected Fill material, unless directed otherwise.

3.2 CONSTRUCTION OF BASE LEVELING PAD

A. Extend the leveling pad laterally at least a distance of 6 inches beyond the perimeter of the lowest wall unit.

B. Place leveling pad to the lines and grades shown on the Contract Drawings.

C. Compact leveling pad in accordance with the 90 percent density specification for Subbase Course Type 2 or Item B-12. If using an un-reinforced concrete leveling pad allow the concrete to fully cure.

D. Prepare leveling pad to ensure full contact with the base surface of the segmental units.

3.3 RETAINING WALL UNIT INSTALLATION

A. Place first course of wall units on the leveling pad, align and level. Level units side-to-side, front-to-rear and with adjacent units. This course is the most important to ensure accurate and acceptable results, and shall be approved by the Director's Representative prior to placement of additional courses.

B. Ensure that units are in full contact with the leveling pad. Take care to develop straight lines on base course as per all layouts.

C. Position vertically adjacent concrete units as recommended by the manufacturer.

D. Clean all excess debris from top of units prior to the installation of the next course.

E. Insert two connection pins for each unit through pin holes of the upper course units. Fully seat pins in the pin slots below. Push units forward to remove any looseness in the unit-to-unit connection and then check alignment. Check level of the units.

F. Repeat procedures to the extent of the wall height, ensuring that pins are engaged in each successive course.

G. Place drainage aggregate and backfill soil after every two courses of wall units are set.

H. Glue cap units to underlying units with an adhesive recommended by the manufacturer.

3.4 PLACEMENT OF BACKFILL

A. Place and compact backfill in lifts not exceeding eight (8) inches. Compact each lift in accordance with the 95 percent density specification.

B. Use only lightweight hand-operated equipment within 3 feet from the backside of the concrete units.

C. At the end of each day's operation, slope the last lift of reinforced backfill away from the wall units to direct runoff away from the constructed portion of the wall.

3.5 CONSTRUCTION MONITORING

A. Construct walls and perform compaction testing only when monitored or witnessed by the Director's Representative.

----- E N D -----

SECTION 32 90 00
PLANTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Plants, soils, edging, turf, and landscape materials.

1.2 RELATED REQUIREMENTS

1.3 DEFINITIONS

A. Pesticide: Any substance or mixture of substances, including biological control agents, that may prevent, destroy, repel, or mitigate pests and is specifically labeled for use by U.S. Environmental Protection Agency (EPA). Also, any substance used as plant regulator, defoliant, disinfectant, or biocide.

B. Planter Bed: An area containing one or combination of following plant types: shrubs, vines, wildflowers, annuals, perennials, ground cover, and mulch topdressing excluding turf. Trees may also be found in planter beds.

C. Stand of Turf: 95 percent of established species.

1.4 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute (ANSI):
   1. Z60.1-2014 - Nursery Stock.

C. American Society for Testing And Materials (ASTM):
   1. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
   2. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
   3. C33/C33M-16-Concrete Aggregates.
   4. C136/C136M-14 - Sieve Analysis of Fine and Coarse Aggregates.
   5. C602-13a - Agricultural Liming Materials.
   6. D977-13e1 - Emulsified Asphalt.

7. D5268-13 - Topsoil Used for Landscaping Purposes.

D. Hortus Third: Concise Dictionary of Plants Cultivated in United States and Canada.

E. Tree Care Industry Association (TCIA):
1. A300P1-2008 - Tree Care Operations - Trees, Shrubs and Other Woody Plant Maintenance Standard Practices (Pruning).
2. Z133.1-2012 - Arboricultural Operations - Safety Requirements.

F. Turfgrass Producers International (TPI):
1. 2006 Guideline Specifications to Turfgrass Sodding.

G. United States Department of Agriculture (USDA):
1. DOA SSIR 42-2014 - Soil Survey Laboratory Methods Manual.
2. Handbook No. 60 - Diagnosis and Improvement of Saline and Alkali Soils.

1.5 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
1. Required Participants:
a. Contracting Officer's Representative.
b. Contractor.
c. Installer.
2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
a. Inspection of planting materials.
b. Installation schedule.
c. Installation sequence.
d. Preparatory work.
e. Protection before, during, and after installation.
f. Installation.
g. Inspecting.
h. Environmental procedures.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.6 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Photographs: Color photographs of each plant species showing actual size and condition of plants to be provided with measuring device included for scale. Where more than 20 plants are required of any species, submit minimum three photographs of average, best, and worst quality plant to be provided. Include on each photograph, plant full scientific name, size, and source nursery.
3. Installation instructions.
4. Warranty.

C. Samples:

1. Trees and Shrubs: Full sized of each variety and size. Deliver samples to project site and maintain samples for duration of construction period.
2. Organic and Compost Mulch: 1 L. (1 quart) sealed plastic bag of each required mulch, including label with percentage weight of each material and source representing material to be provided. Samples to match color, texture, and composition of installed material.
3. Mineral Mulch: 2.5 kg (5 lb.) sealed plastic bag of mulch, including label with source. Samples to match color, texture, and composition of installed material.
4. Filter Fabric: 300 by 300 mm (12 by 12 inches).
5. Edging Materials and Accessories: Manufacturer's standard sizes.
6. Tree Wrap: Width of panel by 300 mm (12 inches).

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
   a. Show type and quantity for each product.

E. Test reports: Certify products comply with specifications.
F. Certificates: Certify products comply with specifications.
   1. Plant Materials: Department of Agriculture certification by State Nursery Inspector declaring material to be free from insects and disease.
   2. Seed and Turf Materials: Notarized certificate of product analysis.
G. Qualifications: Substantiate qualifications comply with specifications.
   1. Installer, including supervisor with project experience list.
H. Operation and Maintenance Data:
   1. Care instructions for each plant material.

1.7 QUALITY ASSURANCE

A. Installer Qualifications:
   1. Regularly installs specified products.
   2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      a. Project Experience List: Provide contact names and addresses for completed projects.
   3. Member in good standing of either Professional Landcare Network or American Nursery and Landscape Association.
   4. Personnel assigned to Work certified in one of following categories from Professional Landcare Network and submit one copy of certificate to Contracting Officer’s Representative:
      a. Certified Landscape Technician (CLT) - Exterior, with installation specialty areas, designated CLT-Exterior.
      b. Certified Landscape Technician (CLT) - Interior, designated CLT-Interior.
      c. Certified Ornamental Landscape Professional, designated COLP.
B. Licensed Arborist required to submit one copy of license to Contracting Officer’s Representative.
C. Independent or university laboratory, recognized by State Department of Agriculture, with experience and capability to conduct testing indicated and that specializes in types of tests to be performed.

D. Measure plants according to ANSI Z60.1. Pruning to obtain required sizes will not be permitted.

E. Contracting Officer's Representative may review plant materials either at place of growth or project site before planting for compliance with requirements. Contracting Officer's Representative retains right to inspect trees and shrubs to determine if any unacceptable conditions exist and to reject any trees or shrubs at any time during Project. All rejected trees and shrubs must be immediately removed from Project site.

1. Submit plant material source information to Contracting Officer's Representative seven days in advance of delivery to Project site.

F. Material Test Reports: For imported or manufactured topsoil.

1. For each unamended soil type, provide soil analysis and written report by qualified soil-testing laboratory stating percentages of organic matter; gradation of sand, silt, and clay content; cation exchange capacity; sodium absorption ratio; deleterious material; pH; and mineral and plant-nutrient content of soil.
2. Comply with USDA's Handbook No. 60 testing methods and written recommendations.
3. Soil-testing laboratory to oversee soil sampling; with depth, location, and number of samples to be taken per instructions from Contracting Officer's Representative. Take minimum 3 representative samples from varied locations for each soil to be used or amended for planting purposes.
4. Report suitability of tested soil for plant growth.
5. Based on test results, state recommendations for soil treatments and soil amendments to be incorporated. State recommendations in weight per 92.9 sq. m (1000 sq. ft.) or volume per 0.76 cu. m (1 cu. yd.) for nitrogen, phosphorus, and potash nutrients and soil amendments to be added to produce satisfactory planting soil suitable for healthy, viable plants.

6. Report presence of problem salts, minerals, or heavy metals, including aluminum, arsenic, barium, cadmium, chromium, cobalt, lead, lithium, and vanadium. If such problem materials are present, provide additional recommendations for corrective action.

1.8 DELIVERY

A. Deliver packaged products in manufacturer's original sealed packaging.

B. Bulk Products:

1. Deliver bulk products away from buildings, utilities, pavement, and existing turf and planted areas. Maintain dry bulk product storage away from contaminants.
2. Install erosion control materials to prevent erosion or displacement of bulk products.

C. Apply antidesiccant to trees and shrubs according to manufacturer's instructions to protect during digging, handling, and transportation.

1. For deciduous trees or shrubs in full leaf, spray with antidesiccant at nursery before transporting and again two weeks after planting.

D. Wrap trees and shrubs with tree wrap according to manufacturer's instructions to protect from wind and other damage during digging, handling, and transportation.

E. Deliver bare-root stock plants freshly dug with root system packed in wet straw, hay, or similar material.

F. Deliver branched plants with branches tied and exposed branches covered with material that allows air circulation. Prevent damage to branches, trunks, root systems, and root balls and desiccation of leaves.

G. Use of equipment such as "tree spades" is permitted provided plant balls are sized according to ANSI Z60.1 and tops are protected from damage.

1.9 STORAGE AND HANDLING

A. Store bulbs, corms, and tubers in dry location at 16 to 18 degrees C (60 to 65 degrees F) until planting.

B. Store seeds and other packaged materials in dry locations away from contaminants.

C. Plant Storage and Protection: Store and protect plants not planted on day of arrival at Project site as follows:

1. Shade and protect plants in outdoor storage areas from wind and direct sunlight until planted.
2. Heel-in bare root plants.
3. Protect balled and burlapped plants from freezing or drying out by covering balls or roots with moist burlap, sawdust, wood chips, shredded bark, peat moss, or other approved material. Provide covering that allows air circulation.
4. Keep plants in moist condition until planted by watering with fine mist spray.
5. Do not store plant materials directly on concrete or bituminous surfaces.

D. Topsoil: Before stockpiling topsoil, eradicate on site undesirable growing vegetation. Clear and grub existing vegetation three to four weeks before stockpiling existing topsoil.

E. Root Control Barrier and Weed Control Fabric: Store materials in site in enclosures or under protective covering in dry location out of direct sunlight. Do not store materials directly on ground.

F. Handling: Do not drop or dump plants from vehicles. Avoid damaging plants being moved from nursery or storage area to planting site. Handle plants carefully to avoid damaging or breaking earth ball or root structure. Do not handle plants by trunk or stem. Puddle bare-root plants after removal from heeling-in bed to protect roots from drying out. Remove damaged plants from Project site.

1.10 FIELD CONDITIONS

A. Environment:

1. Coordinate installation of planting materials during optimal planting seasons for each type of plant material required.
2. Planting Dates:

a. Deciduous Material: Between October 1 and May 15.
b. Evergreen Material: Between August 15 and Setpebmer, or during April or May efore start of new growth.

3. Restrictions: Do not plant when ground is frozen, snow covered, muddy, or when air temperature exceed 32 degrees C (90 degrees F).

B. Weather Limitations: Install plantings only during current and forecasted weather conditions that are comply with plant requirements. Apply associated products in compliance with manufacturers' instructions.

1.11 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant plantings and against material defects.

1. Warranty Period: Two years.
2. Plant and Turf Warranty Periods will begin from date of Government acceptance of project or phase for beneficial use and occupancy.
3. Contracting Officer's Representative will reinspect plants and turf at end of Warranty Period. Replace any dead, missing, or defective plant material and turf immediately. Warranty Period will end on date of this inspection provided Contractor has complied with warranty work required by this specification. Comply with following requirements:
   a. Replace any plants more than 25 percent dead, missing or defective plant material before final inspection.
   b. Only one replacement of each plant will be required except when losses or replacements are due to failure to comply with these requirements.
   c. Complete remedial measures directed by Contracting Officer’s Representative to ensure plant and turf survival.
   d. Repair damage caused while making plant or turf replacements.

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

A. Provide each product from one source or manufacturer.

B. Sustainable Construction Requirements:

1. Select products with recycled content to achieve overall Project recycled content requirement.
   a. Fertilizer.
   b. Weed control fabric.
   c. Root control barrier.
2. Steel Recycled Content: 30 percent total recycled content, minimum.
3. Aluminum Recycled Content: 50percent total recycled content, minimum.
4. Biobased Content:
   a. Organic Mulch: 100 percent.
   b. Peat: 100 percent.

2.2 PLANT MATERIALS

A. Plant Materials: ANSI Z60.1, conforming to varieties specified and be true to scientific name as listed in Hortus Third. Well-branched, well-formed, sound, vigorous, healthy planting stock free from disease, sunscald, windburn, abrasion, and harmful insects or insect eggs and having healthy, normal, and undamaged root system.

1. Trees-Deciduous and Evergreen: Single trunked with single leader, unless otherwise indicated; symmetrically developed deciduous trees and shrubs of uniform habit of growth; straight boles or stems; free from objectionable disfigurements; evergreen trees and shrubs with well-developed symmetrical tops, with typical spread of branches for each particular species or variety. Trees with damaged, crooked, or multiple leaders; tight vertical branches where bark is squeezed between two branches or between branch and trunk; crossing trunks; cut-off limbs more than 19 mm (3/4 inch) in diameter; or with stem girdling roots will be rejected.

2. Ground Cover and Vine Plants: Provide number and length of runners for size specified on drawings, together with proper age for grade of plants specified. Provide vines and ground cover plants well established in removable containers, integral containers, or formed homogeneous soil sections. Provide plants grown under climatic conditions similar to those in locality of project. Spray all plants budding into leaf or having soft growth with an anti-desiccant at nursery before digging.
3. Provide plants of sizes indicated, measured before pruning with branches in normal position. Plants larger in size than specified is acceptable with approval of Contracting Officer’s Representative, with no change in contract price. When larger plants are used, increase ball of earth or spread of roots according to ANSI Z60.1.
4. Provide nursery grown plant material conforming to requirements and recommendations of ANSI Z60.1. Dig and prepare plants for shipment in manner that will not cause damage to branches, shape, and future development after planting.
5. Balled and burlapped (B&B) plant ball sizes and ratios will conform to ANSI Z60.1, consisting of firm, natural balls of soil wrapped firmly with burlap or strong cloth and tied.
6. Bare root (BR) plants to have root system substantially intact, but with earth carefully removed. Cover roots with thick coating of mud by "puddling" after plants are dug.
7. Container grown plants to have sufficient root growth to hold earth intact when removed from containers, but not be root bound.
8. Make substitutions only when plant (or alternates as specified) is not obtainable and Contracting Officer’s Representative authorizes change order providing for use of nearest equivalent obtainable size or variety of plant with same essential characteristics and an equitable adjustment of contract price.
9. Existing plants to be relocated: Ball sizes to conform to requirements for collected plants in ANSI Z60.1, and plants dug,

handled, and replanted according to applicable articles of this Section.

10. Only plants grown in nursery are permitted.

B. Label plants with durable, waterproof labels in weather-resistant ink. Provide labels stating correct botanical and common plant name and variety and size as specified in list of required plants. Groups of plants may be labels by tagging one plant. Labels to be legible for minimum 60 days after delivery to planting site.

2.3 SEED

A. Grass Seed: NY State approved seed of latest season's crop delivered in original sealed packages, bearing producer's guaranteed analysis for percentages of mixtures, purity, germination, weed seed content, and inert material. Label in conformance with AMS Seed Act and applicable state seed laws. Wet, moldy, or otherwise damaged seed will not be acceptable. Field mixes will be acceptable when field mix is performed on site in presence of Contracting Officer's Representative.

B. Seed Mixtures: Proportion seed mixtures by weight.

1. Sun and Partial Shade: Proportioned grass species as follows:
   a. 30 percent Creeping Red Fescue.
   b. 25 percent Kentucky Bluegrass, ‘Baron’.
   c. 25 percent Kentucky Bluegrass, ‘Shamrock’.
   d. 10 percent Annual Ryegrass.
   e. 10 percent Perennial Ryegrass ‘Confetti III (turf type)’.

2.4 PLANTING SOILS

A. Planting Soil: Evaluate soil for use as topsoil according to ASTM D5268. From 5 to 10 percent organic matter as determined by topsoil composition tests of Organic Carbon, 6A, Chemical Analysis Method described in USDA DOA SSIR 42. Maximum particle size, 19 mm (3/4 inch), with maximum 3 percent retained on 6 mm (1/4 inch) screen. Mix topsoil with following soil amendments and fertilizers as recommended by soils analysis.

B. Imported Planting Soil: Imported topsoil or manufactured topsoil from off-site sources are acceptable if sufficient topsoil is not available on site to meet specified depth. At least 10 days before topsoil delivery, notify Contracting Officer's Representative of topsoil sources. Obtain imported topsoil displaced from naturally well-drained construction or mining sites where topsoil is at least 100 mm (4 inches) deep.

2.5 INORGANIC SOIL AMENDMENTS

A. Lime: Commercial grade limestone containing calcium carbonate equivalent (CCE) specified in ASTM C602 of minimum 80 percent.
B. Sulfur: 100 percent elemental.
C. Iron Sulfate: 100 percent elemental.
D. Aluminum Sulfate: Commercial grade.
E. Perlite: Horticultural grade.
F. Agricultural Gypsum: Coarsely ground from recycled scrap gypsum board comprised of calcium sulfate dehydrate 91 percent, calcium 22 percent, sulfur 17 percent, minimum 96 percent passing through 850 micrometers 20 mesh screen, 100 percent passing through 970 micrometers 16 mesh screen.
G. Coarse Sand: ASTM C33/C33M, clean and free of materials harmful to plants.
H. Vermiculite: Horticultural grade for planters.
I. Diatomaceous Earth: Calcined, 90 percent silica, with approximately 140 percent water absorption capacity by weight.
J. Zeolites: Mineral clinoptilolite with at least 60 percent water absorption by weight.

2.6 ORGANIC SOIL AMENDMENTS

A. Organic Matter: Commercially prepared compost. Free of substances toxic to plantings and as follows:
   1. Organic Matter Content: Biobased content 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting

factors, dyed with non-toxic, biodegradable dye to appropriate color to facilitate visual metering of materials application.

2. Feedstock: Agricultural, food, or industrial residuals; biosolids; yard trimmings; or source-separated or compostable mixed solid waste.

B. Composted Derivatives: Ground bark, nitolized sawdust, humus, or other green wood waste material free of stones, sticks, invasive species, including seeds, and soil stabilized with nitrogen and having following properties:

1. Particle Size: Minimum percent by weight passing:
   a. 4.75 mm (No. 4) mesh screen: 95.
   b. 2.36 mm (No. 8) mesh screen: 80.
2. Nitrogen Content: Minimum percent based on dry weight:
   a. Fir sawdust: 0.7.
   b. Fir or pine bark: 1.0.
3. Biobased Content: 100 percent.

C. Manure: Well-rotted, horse or cattle manure containing maximum 25 percent by volume of straw, sawdust, or other bedding materials; free of seeds, stones, sticks, soil, and other invasive species.

2.7 PLANT FERTILIZERS

A. Soil Test: Evaluate existing soil conditions and requirements before fertilizer selection and application to minimize use of all fertilizers and chemical products. Obtain approval of Contracting Officer’s Representative for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable weather and site conditions according to manufacturer's instructions and warranty requirements. Fertilizers to be registered and approved by EPA, acceptable to authorities having jurisdiction, and of type recommended by manufacturer applicable to specific areas as required for Project conditions and application. Provide commercial grade plant

and turf fertilizers, free flowing, uniform in composition and conforms to applicable state and federal regulations.

B. Fertilizer for groundcover, wildflowers, and grasses is not acceptable. Provide fertilizer for trees, plants, and shrubs as recommended by plant supplier, except synthetic chemical fertilizers are not acceptable. Fertilizers containing petrochemical additives or that have been treated with pesticides or herbicides are not acceptable.

C. Granular Fertilizer: Organic, granular controlled release fertilizer containing minimum percentages, by weight, of plant food nutrients.
   1. Composition: Nitrogen, phosphorous, potassium, sulfur, and iron in amounts recommended in soil reports from qualified soil-testing laboratory.

D. Fertilizer Tablets: Organic plant tablets composed of tightly compressed fertilizer chips, insoluble in water, to provide continuous release of nutrients for minimum 24 months and containing following minimum percentages, by weight, of plant food nutrients:
   1. Nutrient Composition: 20 percent available nitrogen, 20 percent available phosphorous, and 5 percent available potassium.

2.8 WEED CONTROL FABRIC

A. Roll Type Polypropylene or Polyester Mats: Woven, needle punched, or non-woven fabric treated for protection against deterioration due to ultraviolet radiation. Minimum 99 percent opaque to prevent photosynthesis and seed germination, fabric allows air, water, and nutrients to pass through to plant roots.
   1. Minimum weight: 0.11 kg per square meter (5 ounces per square yard).
   2. Minimum thickness: 0.50 mm (20 mils).

2.9 MULCH

A. Organic Mulch:
   1. Biobased content minimum 100 percent. Wood cellulose fiber processed to contain no growth or germination-inhibiting factors, dyed with

non-toxic, biodegradable dye to an appropriate color to facilitate visual metering of application.

a. Straw for Lawn Seed Bed Mulch: Stalks from oats, wheat, rye, barley, or rice free of noxious weeds, mold or other objectionable material. Air dried and suitable for placing with blower equipment.

b. Wood cellulose fiber for hydraulic application of grass seed and fertilizer: Specially prepared wood cellulose fiber, processed to contain no growth or germination inhibiting factors, and dyed an appropriate color to facilitate visual metering of application of materials. Maximum 12 percent moisture dry weight, plus or minus 3 percent at time of manufacture. pH range from 3.5 to 5.0. Manufacturer wood cellulose fiber for application as follows:

1) After addition and agitation in slurry tanks with fertilizers, grass seeds, water, and other approved additives, fibers will become uniformly suspended to form a homogeneous slurry.

2) When hydraulically sprayed, material will form blotter-like cover impregnated uniformly with grass seed.

3) Cover will allow absorption of moisture and allow rainfall or applied water to percolate to underlying soil.

2. Color: Natural.

B. Compost Mulch: Decomposed organic matter with low carbon to nitrogen ratio.

C. Mineral Mulch: Coarse, clean stone of following type, size, and color:

1. Type: Pea gravel

2. Size: ASTM C136/C136M, 65 mm (2-1/2 inches) maximum and 25 mm (1 inch) minimum.

3. Color: Acceptable to Contracting Officer’s Representative.

2.10 ANTIDESICCANT

A. Antidesiccant: An emulsion specifically manufactured for agricultural use that will provide protective film over plant surfaces permeable enough to permit transpiration.

2.11 EROSION CONTROL

A. Erosion Control Blankets: 70 percent agricultural straw and 30 percent coconut fiber matrix stitched with degradable nettings, designed to degrade within 18 months.

B. Erosion Control Fabric: Knitted construction of polypropylene yarn with uniform mesh openings 19 to 25 mm (3/4 to 1 inch) square with strips of biodegradable paper. Minimum filler paper strip life of six months.

C. Erosion Control Net: Heavy, twisted jute mesh weighing approximately 605 grams per meter (1.22 pounds per linear yard) and 1200 mm (4 feet) wide with mesh openings approximately 25 mm (1 inch) square.

D. Erosion Control Material Anchors: As recommended by erosion control material manufacturer.

2.12 ROOT CONTROL BARRIER

A. Root Control Barrier: Flexible and permeable geotextile fabric with permanently attached time-release nodules. Pre-formed linear barrier with integral vertical root deflecting ribs constructed of ultraviolet resistant polypropylene material.

2.13 BIOSTIMULANTS

A. Biostimulants: Formulation containing soil conditioners, VAM fungi, and endomycorrhizal and ectomycorrhizal fungi spores and soil bacteria appropriate for existing soil conditions.

2.14 STAKING MATERIALS

A. Staking Material:

1. Tree Support Stakes: Rough sawn hardwood free of knots, rot, cross grain, bark, long slivers, or other defects that impair strength. Minimum 50 mm (2 inches) square by 2.4 m (8 feet) long, pointed at one end.

2. Ground Stakes: 50 mm (2 inches) square by 0.91 m (3 feet) long wood or plastic, pointed at one end.

B. Hose Chafing Guards: New or used 2 ply 19 mm (3/4 inch) reinforced rubber or plastic hose, black or dark green, all of same color.

2.15 TREE WRAP

A. Crinkled Paper Tree Wrap: Two thicknesses of crinkled paper cemented together with layer of bituminous material. Minimum 100 mm (4 inches) wide with stretch factor of 33 1/3 percent. Tie with lightly tarred medium or coarse sisal yarn twine.

B. Tree Shelters: Extruded, translucent, twin walled polypropylene protection board sheets,3 mm (1/8 inch) thick, 1800 mm (6 feet) long, utilized for short trunk trees 75 mm (3 inch) caliper or less.

C. Synthetic Fabric Tree Wrap: White, breathable polypropylene fabric in 75 mm (3 inch) wide rolls.

D. Tape: Bio-degradable tape suitable for nursery use to secure tree wrap which degrades in sunlight maximum 2 years after installation.

2.16 TACKIFIERS AND ADHESIVES

A. Nonasphalt Tackifier: Colloidal liquid fixative recommended by fiber mulch manufacturer for hydroseeding.

B. Asphalt emulsion: ASTM D977, Grade SS-1.

2.17 WATER

A. Water: Source approved by Contracting Officer's Representative and suitable quality for irrigation, containing no elements toxic to plant life, including acids, alkalis, salts, chemical pollutants, and organic matter. Use collected storm water or graywater when available.

2.18 PESTICIDES

A. Consider IPM (Integrated Pest Management) practices to minimize use of all pesticides and chemical products. Obtain Contracting Officer's Representative's approval for allowable products, product alternatives, scheduling and application procedures. Evaluate existing weather and site conditions before application. Apply products during favorable

weather and site conditions according to manufacturer's instructions and warranty requirements.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine areas to receive plants for compliance with requirements and conditions affecting installation and performance.
   1. Verify that no materials that would inhibit plant growth are present in planting area. If such materials are present, remove soil and contaminants ad directed by Contracting Officer's Representative and provide new planting soil.
   2. Do not mix or place soils and soil amendments in frozen, wet, or muddy conditions.
   3. Suspend soil spreading, grading, and tilling operations if soil moisture becomes excessive. Resume soil preparations when moisture content returns to acceptable level.
   4. If soil is excessively dry, not workable, and too dusty, moisten uniformly.
   5. Special conditions may exist that warrant variance in specified planting dates or conditions. Submit written request to Contracting Officer’s Representative stating special conditions and proposed variance.

B. Proceed with planting operations only after unsatisfactory conditions have been corrected.

3.2 PREPARATION

A. Protect existing and proposed landscape features, elements, and site construction and completed work from damage. Protect trees, vegetation, and other designated features by erecting high-visibility, reusable construction fencing. Locate fence no closer to trees than drip line. Plan equipment and vehicle access to minimize and confine soil disturbance and compaction to areas indicated on drawings.

B. Install erosion control materials at all areas inside or outside limits of construction that are disturbed by planting operations. Provide erosion control and seeding with native plant species to protect slopes.

C. Stake out approved plant material locations and planter bed outlines on project site before digging plant pits or beds. Contracting Officer's Representative reserves right to adjust plant material locations to meet field conditions. Do not plant closer than 600 mm (24 inches) to pavement edge or wall edge and other similar structures. Provide on-site locations for excavated rock, soil, and vegetation.

3.3 PLANT BED PREPARATION

A. Verify location of underground utilities before excavation. Protect existing adjacent turf before excavations are made. Do not disturb topsoil and vegetation in areas outside those indicated on Drawings. Where planting beds occur in existing turf areas, remove turf to depth that will ensure removal of entire roof system. Measure depth of plant pits from finished grade. Provide depth of plant pit excavation and relation of top of root ball and finish grade as indicated on drawings. Install plant materials as specified in Article 3.8. Do not plant trees within 3 m (10 feet) of any utility lines or building walls.

B. For newly graded subgrades, loosen subgrade to minimum 100 mm (4 inches) in any dimension and sticks, roots, rubbish, and other extraneous matter and legally dispose of them off Government's property.

1. Apply fertilizer, lime and soil amendments directly to subgrade before loosening, at rates recommended by soils analysis.
2. Spread topsoil, apply soil amendments and fertilizer on surface, and thoroughly blend planting soil.
3. Spread planting soil 100 mm (4 inches) deep but minimum required to meet finish grades after light rolling and natural settlement. Do not spread if planting soil or subgrade is frozen, muddy, or excessively wet.

a. Spread approximately 1/2 thickness of planting soil over loosened subgrade. Mix thoroughly into top 50 mm (2 inches) of subgrade. Spread remainder of planting soil.
b. Reduce elevation of planting soil to allow for soil thickness of sod.

C. Finish grade planting areas to smooth, uniform surface plane with loose, uniformly fine texture. Grade to within plus or minus 13 mm (1/2 inch) of finish elevation. Roll and rake, remove ridges, and fill depressions to meet finish grades. Limit finish grading to areas that can be planted in immediate future.

3.4 GROUND COVER AND PLANT INSTALLATION

A. Place ground cover and plants, not including trees, shrubs, and vines, as indicated on drawings in even rows and with triangular spacing.
B. Use prepared soil mixture for backfill.
C. Place so roots are in natural position.
D. Do not remove plants from flats or containers until immediately before planting. Plat at depth to sufficiently cover all roots. Start watering areas planted as required by temperature and wind conditions. Water plants at sufficient rate to ensure thorough wetting of soil to 150 mm (6 inches) deep without runoff or puddling. Smooth planting areas after planting to provide even, smooth finish.
E. Plant ground cover in areas to receive erosion control materials through material after erosion control materials are in place.

3.5 TREE, SHRUB, AND VINE PLANTING

A. Move plant materials only by supporting root ball or container. Set plants on hand compacted layer of prepared backfill soil mixture 150 mm (6 inches) thick and hold plumb in center of pit until soil has been tamped firmly around root ball.
B. Set plant materials in relation to surrounding finish grade 25 to 50 mm (1 to 2 inches) above depth at which they were grown in nursery,

collecting field, or container. Replace plant material whose root balls are cracked or damaged either before or during planting process.

C. Place backfill soil mixture on previously scarified subsoil to completely surround root balls and bring to smooth and even surface, blending into existing areas.

D. Balled and Burlapped Stock: Backfill with prepared soil mixture to approximately half ball depth then tamp and water. Carefully remove or fold back excess burlap and tying materials from top to minimum 1/3 depth from top of root ball. Tamp and complete backfill, place mulch topdressing, and water. Remove wires and non-biodegradable materials from plant pit before backfilling.

3.6 MECHANIZED TREE SPADE PLANTING

A. At designated locations and with approved equipment, trees may be planted by mechanized tree spade. Tree spade is not acceptable for moving trees that are larger than maximum size of similar field-grown, balled-and-burlapped root-ball diameter recommended by ANSI Z60.1, or that are larger than manufacturer's recommended maximum size for tree spade to be used, whichever is smaller.

B. For tree extraction, center trunk in tree spade and move tree and solid root ball.

C. Cut any exposed roots with sharp instruments.

D. Excavate planting hole with same tree spade used to extract and move tree.

E. If possible, place trees with same orientation as at location from which they were extracted.

3.7 TREE WRAP

A. Wrap deciduous tree trunks immediately after planting. Wrap tree trunks 40 mm (1-1/2 inches) or greater in caliper with specified material beginning at base and extending to lowest branches. Remove tree wrap after one year. Securely tie crinkled paper wrap with twine at top and bottom and at maximum 450 mm (18 inch) intervals.

3.8 TREE AND SHRUB PRUNING

A. Pruning: Performed by trained and experience personnel according to TCIA A300P1.

B. Remove dead and broken branches. Prune only to correct structural defects.

C. Retain typical growth shape of individual plants with as much height and spread as practical. Do not central leader on trees. Make cuts with sharp instruments. Do not flush cut with trunk or adjacent branches. Collars to remain in place.

D. Do not apply tree wound dressing to cuts.

3.9 STAKING

A. Staking: Stake plants with number of stakes indicated on drawings with double strand of guy wire. Attach guy wire at half tree trunk height but maximum 1.5 m (5 feet) high. Drive stakes to depth of 0.80 to 0.91 m (2-1/2 to 3 feet) into the ground outside plant pit. Do not injure root ball. Install hose chafer guards where wire is in contact with tree trunk.

3.10 ROOT CONTROL BARRIER INSTALLATION

A. At trees planted within 1200 mm (48 inches) of paving, walls, curbs, and walkways, install root control barrier, unless otherwise shown on Drawings.

B. Install geotextile fabric in soil for horizontal application with appropriate holding device to ensure fabric position. Provide minimum 50 mm (2 inch) soil cover over top surface. Extend fabric minimum 450 mm (18 inches) beyond structure area to be protected to prevent root growth around fabric edges.

C. Install linear polypropylene barrier minimum 25 mm (1 inch) above finished grade to prevent root growth over barrier. Backfill outside barrier with 19 to 25 mm (3/4 to 1 inch) of gravel for minimum 50 mm (2 inches). For linear application, use device recommended by barrier manufacturer to connect two pieces.

3.11 MULCH INSTALLATION

A. Provide specified mulch over entire planting bed surfaces and individual plant surfaces, including earth mount watering basin around plants, to 75 mm (3 inches) depth after plant installation and before watering. Do not place mulch in crowns of shrubs. Place mulch minimum 50 to 75 mm (2 to 3 inches) away from tree or shrub trunks. Place mulch on all weed control fabric.

3.12 HYDROSEEDING

A. Mix water with wood cellulose fiber, paper fiber, or recycled paper at rate of 11.2 kg per 100 square meters (1,000 lb. per acre) dry weight. Add seed and fertilizer to fiber and water and mix to produce homogeneous slurry.
   1. Broadcast seed mixture at rate of 5 pounds per 1000 square feet.
   2. Hydraulically spray slurry to form uniformly impregnated grass seed cover. Spread with one application with no second application of mulch.

3.13 PLANT MAINTENANCE

A. Frequency: Begin maintenance immediately after plants have been installed. Inspect plants at least once week and perform required maintenance promptly.

B. Promotion of Plant Growth and Vigor: Water, prune, fertilize, mulch, eradicate weeds, and perform other operations necessary to promote plant growth and vigor.

C. Planter Beds: Weed, fertilize, and irrigate planter beds and keep pest free, pruned, and mulch levels maintained. Do not permit planter beds encroach into turf areas. Maintain edging breaks between turf areas and planter beds. Fertilize plant materials to promote healthy growth without encouraging excessive top foliar growth. Remove noxious weeds common to area from planter beds by mechanical means.

D. Shrubs: In addition to planter bed maintenance requirements, selectively prune and shape shrubs for health and safety when following conditions exist:
   1. Remove growth in front of windows, over entrance ways or walks, and any growth which will obstruct vision at street intersections or of security personnel.
   2. Remove dead, damaged, or diseased branches or limbs where shrub growth obstructs pedestrian walkways, where shrub growth is growing against or over structures, and where shrub growth permits concealment of unauthorized persons.
   3. Properly dispose of all pruning debris.

E. Trees: Adjust stakes, ties, guy supports and water, fertilize, control pests, mulch, and prune for health and safety.
   1. Fertilize trees to promote healthy plant growth without encouraging excessive top foliar growth. Inspect and adjust stakes, ties, guy supports to avoid girdling and promote natural development.
   2. Selectively prune all trees within project boundaries, regardless of caliper, for safety and health reasons, including, but not limited to, removal of dead and broken branches and correction of structural defects. Prune trees according to their natural growth characteristics leaving trees well shaped and balanced.
   3. All pruning, including palm tree pruning, must be by or in presence of certified member of International Society of Arboriculture and according to TCIA Z133.1.
   4. Properly dispose of all pruning debris.

3.14 REMOVAL OF DYING OR DEAD PLANTS

A. Remove dead and dying plants and provide new plants immediately upon commencement of specified planting season and replace stakes, guys, mulch, and eroded earth mound water basins. No additional correction period will be required for replacement plants beyond original warranty period. Plants will be considered dead or dying as follows:
   1. Tree: Main leader died back or minimum 20 percent of crown died.

2. Shrub and Ground Cover: Minimum 20 percent of plant died.
3. Determination: Scrape on maximum 2 mm (1/16 inch) square branch area to determine dying plant material cause and provide recommendations for replacement.

3.15 TURF MAINTENANCE

A. Mow turf to uniform finished height measured from soil. Perform mowing in manner that prevents scalping, rutting, bruising, uneven and rough cutting. Before mowing, remove and dispose of all rubbish, debris, trash, leaves, rocks, paper, and limbs or branches on turf areas. Sweep or vacuum clean adjacent paved areas.

B. Apply fertilizer in manner that promotes health, growth, vigor, color and appearance of cultivated turf areas. Determine method of application, fertilizer type and frequencies by results of laboratory soil analysis. Apply fertilizer by approved methods and according to manufacturer's instructions.

C. Watering: Perform irrigation in manner that promotes health, growth, color, and appearance of cultivated vegetation, complying with Federal, State, and local water agency and authority directives. Prevent overwatering, water run-off, erosion, and ponding due to excessive quantities or rate of application.

3.16 CLEANING

A. Remove and legally dispose of all excess soil and planting debris.

3.17 PROTECTION

A. Protect plants from traffic and construction operations.

B. Provide temporary fences or enclosures and signage, at planted areas. Maintain fences and enclosures during maintenance period.

C. Remove protective materials immediately before acceptance.

D. Repair damage.

- - - E N D - - -

DIVISION 33

Utilities

SECTION 33 08 00

COMMISSIONING OF SITE UTILITY SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 31.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned is specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIRMENTS. A Commissioning Agent (CxA) appointed by the VA will manage the commissioning process.

1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

1.3 SUMMARY

A. This Section includes requirements for commissioning the Facility site utilities systems, related subsystems and related equipment. This Section supplements the general requirements specified in Section 01 91 00 General Commissioning Requirements.

B. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more details regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in Division 31 is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance

personnel in accordance with the requirements of Section 01 91 00 and of Division 31, is required in cooperation with the VA and the Commissioning Agent.

B. The Facility site utilities systems commissioning will include the systems listed in Section 01 91 00 General Commissioning Requirements:

1.6 SUBMITTALS

A. The commissioning process requires review of selected Submittals that pertain to the systems to be commissioned. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 CONSTRUCTION INSPECTIONS

A. Commissioning of Site Utility systems will require inspection of individual elements of the site utility systems construction throughout the construction period. The Contractor shall coordinate with the Commissioning Agent in accordance with Section 01 91 00 and the Commissioning plan to schedule site utility systems inspections as required to support the Commissioning Process.

3.2 PRE-FUNCTIONAL CHECKLISTS

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to

the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

3.3 CONTRACTORS TESTS

A. Contractor tests as required by other sections of Division 31 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. All testing shall be incorporated into the project schedule. Contractor shall provide no less than 7 calendar days' notice of testing. The Commissioning Agent will witness selected Contractor tests at the sole discretion of the Commissioning Agent. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

3.4 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required

labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

3.5 TRAINING OF VA PERSONNEL

A. Training of the VA operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. Contractor shall submit training agendas and trainer resumes in accordance with the requirements of Section 01 91 00. The instruction shall be scheduled in coordination with the VA Resident Engineer after submission and approval of formal training plans. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 31 Sections for additional Contractor training requirements.

----- END -----

SECTION 33 10 00
WATER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies materials and procedures for construction of underground water distribution for domestic and/or fire supply systems outside the building that are complete and ready for operation. This includes piping, structures, appurtenances and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. Concrete: Section 03 30 00, CAST IN-PLACE CONCRETE.

C. General plumbing: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

D. Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

E. Definitions

F. Water distribution system: Pipelines and appurtenances which are part of the distribution system outside the building for potable water and fire supply.

G. Water service line: Pipeline from main line to 5 feet outside of building.

1.3 ABBREVIATIONS

A. PVC: Polyvinyl chloride plastic.

B. DI: Ductile iron pipe.

1.4 DELIVERY, STORAGE AND HANDLING

A. Ensure that valves are dry and internally protected against rust and corrosion. Protect valves against damage to threaded ends and flange faces.

B. Use a sling to handle valves and fire hydrants if size requires handling by crane or lift. Rig valves to avoid damage to exposed parts. Do not use handwheels or stems as lifting or rigging points.

C. Deliver piping with factory-applied end caps. Maintain end caps through shipping, storage, and handling to prevent pipe-end damage and to prevent entrance of dirt, debris, and moisture.
D. Protect stored piping from moisture and dirt by elevating above grade. Protect flanges, fittings, and specialties from moisture and dirt.
E. Store plastic piping protected from direct sunlight and support to prevent sagging and bending.
F. Cleanliness of Piping and Equipment Systems:
   1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
   2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.

1.5 COORDINATION

A. Coordinate connection to water main with Public Utility company.
B. Coordinate water service lines with building contractor.

1.6 QUALITY ASSURANCE:

A. Products Criteria:
   1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
   2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.
B. Materials and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least three years. Digital electronic devices, software and systems such as controls, instruments or computer work stations shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years.
C. Regulatory requirements:

1. Comply with the rules and regulations of the public utility company having jurisdiction over the connection to public water lines and the extension and/or modifications to public utility systems.
2. Comply with the rules and regulations of the State and/or Local Health Department having jurisdiction for potable water-service.
3. Comply with rules and regulations of State and/or Local authorities having jurisdiction for fire-suppression water-service piping including materials, hose threads, installation and testing.

D. Provide certification of factory hydrostatic testing of not less than 500 psi (3.5 MPa) in accordance with AWWA C151. Piping materials shall bear the label, stamp or other markings of the specified testing agency.

E. Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
4. All welds shall be stamped according to the provisions of the American Welding Society.

F. Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation.

G. Applicable codes:
1. Plumbing Systems: IPC, International Plumbing Code.
2. Electrical components, devices and accessories shall be listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction and marked for intended use.

3. Fire-service main products shall be listed in the FM Global "Approval Guide" or Underwriters Laboratories (UL) "Fire Protection Equipment Directory".

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI):

MSS SP-60-2004 .....Connecting Flange Joint Between Tapping Sleeves and Tapping Valves

MSS SP-108-2002.....Resilient-Seated Cast Iron, Eccentric Plug Valves

MSS SP-123-1998(R2006)..Non-Ferrous Threaded and Solder-Joint Unions for Use With Copper Water Tube

C. American Society of Mechanical Engineers (ASME):

A112.1.2-2004.....Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors))

A112.6.3-2001.....Floor Drains

B16.1-2010.....Gray Iron Pipe Flanges and Flanged Fittings, Class 25, 125, 250

B16.18-2001.....Cast Copper Alloy Solder Joint Pressure Fittings

B16.22-2001.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings

B16.24-2006.....Cast Copper Alloy Pipe Flanges and Flanged Fittings; Classes 150, 300, 600, 900, 1500 and 2500

B31.....Code for Pressure Piping Standards

D. American Society for Testing and Materials (ASTM):

A36/A36M-08.....Carbon Structural Steel

A48/A48M-08(2008).....Gray Iron Castings

A536-84(2009).....Ductile Iron Castings

A674-10.....Polyethylene Encasement for Ductile Iron Pipe for Water or Other Liquids
B61-08.....Steam or Valve Bronze Castings
B62-09.....Composition Bronze or Ounce Metal Castings
B88/B88M-09.....Seamless Copper Water Tube
C651-05.....Disinfecting Water Mains
C858-10e1.....Underground Precast Utility Structures
D1785-06.....Poly (Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120
D2239-03.....Polyethylene (PE) Plastic Pipe (SIDR-PR) Based on Controlled Inside Diameter
D2464-06.....Threaded Poly (Vinyl Chloride) PVC Pipe Fittings, Schedule 80
D2466-06.....Poly (Vinyl Chloride) (PVC) Pipe Fittings, Schedule 40
D2467-06.....Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80
D2609-02(2008).....Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe
D3350-10a.....Polyethylene Plastics Pipe and Fittings Materials
F714-10.....Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
F1267-07.....Metal, Expanded, Steel

E. American Water Works Association (AWWA):
B300-10.....Hypochlorites
B301-10.....Liquid Chlorine
C104-08.....Cement-Mortar Lining for Ductile Iron Pipe and Fittings
C105/A21.5-10.....Polyethylene Encasement for Ductile Iron Pipe Systems
C110-08.....Ductile Iron and Gray-Iron Fittings

C111/A21.11-07.....Rubber-Gasket Joints for Ductile Iron Pressure Pipe and Fittings
C115/A21.11-11.....Flanged Ductile Iron Pipe with Ductile Iron or Gray-Iron Threaded Flanges
C151/A21.51-09.....Ductile Iron Pipe, Centrifugally Cast
C153/A21.53-11.....Ductile Iron Compact Fittings for Water Service
C502-05.....Dry-Barrel Fire Hydrants
C503-05.....Wet-Barrel Fire Hydrants
C504-10.....Rubber-Seated Butterfly Valves
C508-09.....Swing-Check Valves for Waterworks Service, 2-In. Through 24-In. (50-mm Through 600-mm) NPS
C509-09.....Resilient-Seated Gate Valves for Water Supply Service
C510-07.....Double Check Valve Backflow Prevention Assembly
C511-07.....Reduced-Pressure Principle Backflow Prevention Assembly
C512-07.....Air Release, Air/Vacuum and Combination Air Valves
C550-05.....Protective Interior Coatings for Valves and Hydrants
C600-10.....Installation of Ductile Iron Mains and Their Appurtenances
C605-11.....Underground Installation of Polyvinyl Chloride (PVC) Pressure Pipe and Fittings for Water
C606-11.....Grooved and Shouldered Joints
C651-05.....Disinfecting Water Mains
C700-09.....Cold-Water Meters, “Displacement Type,” Bronze Main Case
C800-05.....Underground Service Line Valves and Fittings
C900-09.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

C906-07.....Polyethylene (PE) Pressure Pipe and Fittings, 4 In. (100 mm) Through 64 In. (1,600 mm), for Water Distribution and Transmission

C907-04.....Injection-Molded PVC Pressure Fittings, 4 Inch through 12 Inch (100 mm through 300 mm), for Water Distribution

M23-2nd Ed.....PVC Pipe, Design and Installation

M44-2nd Ed.....Distribution Valves: Selection, Installation, Field Testing and Maintenance

F. National Fire Protection Association (NFPA):

NFPA 24-2010 Ed.....Installation of Private Fire Service Mains and Their Appurtenances

NFPA 1963-2009 Ed.....Fire Hose Connections

G. NSF International (NSF):

NSF/ANSI 14 (2013).....Plastics Piping System Components and Related Materials

NSF/ANSI 61-2012.....Drinking Water System Components - Health Effects

NSF/ANSI 372-2011.....Drinking Water System Components – Lead Content

H. American Welding Society (AWS):

A5.8/A5.8M-2004 .....Filler Metals for Brazing and Braze Welding

I. American Society of Safety Engineers (ASSE):

1003-2009 .....Water Pressure Reducing Valves

1015-2009.....Double Check Backflow Prevention Assemblies and Double Check Fire Protection Backflow Prevention Assemblies

1020-2004.....Pressure Vacuum Breaker Assembly

1047-2009.....Performance Requirements for Reduced Pressure Detector Fire Protection Backflow Prevention Assemblies

1048-2009.....Performance Requirements for Double Check Detector Fire Protection Backflow Prevention Assemblies

1060-2006.....Performance Requirements for Outdoor Enclosures for Fluid Conveying Components

J. Underwriters' Laboratories (UL):

246.....Hydrants for Fire-Protection Service

262.....Gate Valves for Fire-Protection Service

312.....Check Valves for Fire-Protection Service

405.....Fire Department Connection Devices

753.....Alarm Accessories for Automatic Water-Supply Control Valves for Fire Protection Service

789.....Indicator Posts for Fire-Protection Service

1091.....Butterfly Valves for Fire-Protection Service

1285.....Pipe and Couplings, Polyvinyl Chloride (PVC), and Oriented Polyvinyl Chloride (PVCO) for Underground Fire Service

1.8 WARRANTY

A. The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of two years from final acceptance. Further, the Contractor will furnish all manufacturers’ and supplier's written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Material or equipment containing a weighted average of greater than 0.25 percent lead shall not be used in any potable water system intended for human consumption, and shall be certified in accordance with NSF/ANSI 61 or NSF 372.

2.2 DUCTILE IRON PIPE AND FITTINGS

A. Mechanical-Joint, Ductile-Iron Pipe: AWWA C151, with mechanical-joint bell and plain spigot end unless grooved or flanged ends are indicated, 350 psi (2400 kPa).

1. Mechanical-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.

2. Glands, Gaskets, and Bolts: AWWA C111, ductile- or gray-iron glands, rubber gaskets, and steel bolts.

B. Push-on-Joint, Ductile-Iron Pipe: AWWA C151, with push-on-joint bell and plain spigot end unless grooved or flanged ends are indicated, 350 psi (2400 kPa).

1. Push-on-Joint, Ductile-Iron Fittings: AWWA C110, ductile- or gray-iron standard pattern or AWWA C153, ductile-iron compact pattern.
2. Gaskets: AWWA C111, rubber.

C. Exterior Pipe Coating: The exterior of pipe shall have the standard asphaltic coating.

2.3 DISINFECTION CHLORINE

A. Liquid chlorine: AWWA B301.

B. Sodium Hypochlorite: AWWA B300 with 5 percent to 15 percent available chlorine.

C. Calcium hypochlorite: AWWA B300 supplied in granular form of 5 g. tablets, and shall contain 65 percent chlorine by weight.

2.4 WARNING TAPE

A. Warning tape shall be standard, 4 mil. Polyethylene, 3 inch (76 mm) wide tape, detectable, blue with black letters and imprinted with “CAUTION BURIED WATER LINE BELOW”.

PART 3 - EXECUTION

3.1 PIPING APPLICATIONS

A. Use pipe, fittings, and joining methods for piping systems according to the following applications.

1. Transition couplings and special fittings with pressure ratings at least equal to piping pressure rating may be used, unless otherwise indicated.
2. Do not use flanges or unions for underground piping.
3. Flanges, unions, grooved-end-pipe couplings, and special fittings may be used, instead of joints indicated, on aboveground piping and piping in vaults.

4. Ductile iron, push-on-joint pipe; ductile iron, push-on-joint fittings; and gasketed mechanical-joint pipe; ductile iron, mechanical-joint fittings.

3.2 DUCTILE IRON PIPE

A. Install Ductile Iron, water-service piping according to AWWA C600 and AWWA M41-3rd Edition.
   1. Install PE corrosion-protection encasement according to ASTM A674 or AWWA C105/A21.5.

B. Pipe shall be sound and clean before laying. When laying is not in progress, the open ends of the pipe shall be closed by watertight plug or other approved means.

C. When cutting pipe is required, the cutting shall be done by machine, leaving a smooth cut at right angles to the axis of the pipe. Bevel cut ends of pipe to be used with push-on bell to conform to the manufactured spigot end. Cement lining shall be undamaged.

D. Push on joints shall be made in strict accordance with the manufacturer’s instruction. Pipe shall be laid with bell ends looking ahead.

3.3 ANCHORAGE INSTALLATION

A. Install water-distribution piping with restrained joints. Anchorages and restrained-joint types that may be used include: concrete thrust blocks, locking mechanical joints.

B. Install anchorages for tees, plugs and caps, bends, crosses, valves, and hydrant branches. Include anchorages for the following piping systems:
   1. Gasketed-Joint, Ductile Iron, Water-Service Piping: According to AWWA C600.
   2. Gasketed-Joint, PVC Water-Service Piping: According to AWWA M23.
   3. Fire-Service-Main Piping: According to NFPA 24.

C. Apply full coat of asphalt or other acceptable corrosion-resistant material to surfaces of installed ferrous anchorage devices.

3.4 CONNECTIONS

A. Drawings indicate general arrangement of piping, fittings, and specialties. Install water service lines to a point of connection within approximately 5 feet (1500 mm) outside of building(s) to which service is to be connected and make connections thereto. If building services have not been installed provide temporary caps and mark for future connection.

3.5 FIELD QUALITY CONTROL

A. Conduct piping tests before joints are covered and after concrete thrust blocks have hardened sufficiently. Fill pipeline 24 hours before testing and apply test pressure to stabilize system. Use only potable water.

B. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.

C. Perform hydrostatic tests at not less than one-and-one-half times working pressure for two hours.

1. Increase pressure in 50-psi (350-kPa) increments and inspect each joint between increments. Hold at test pressure for 1 hour; decrease to 0 psi (0 kPa). Slowly increase again to test pressure and hold for 1 more hour. Maximum allowable leakage is 2 quarts (1.89 L) per hour per 100 joints. Remake leaking joints with new materials and repeat test until leakage is within allowed limits.

D. Prepare reports of testing activities.

3.6 IDENTIFICATION

A. Install continuous underground warning tape 12 inches (300 mm) directly over piping.

3.7 CLEANING

A. Purge new water-distribution piping systems and parts of existing systems that have been altered, extended, or repaired before use.

B. Use purging and disinfecting procedure prescribed by local utility provider or other authorities having jurisdiction or, if method is not

prescribed by authorities having jurisdiction, use procedure described in AWWA C651 or do as follows:

1. Fill the water system with a water/chlorine solution containing at least 50 ppm of chlorine; isolate and allow to stand for 24 hours.
2. Drain the system of the previous solution and refill with water/chlorine solution containing at least 200 ppm of chlorine; isolate and allow system to stand for 3 hours.
3. After standing time, flush system with clean, potable water until no chlorine remains in water coming from system.
4. Submit water samples in sterile bottles to authorities having jurisdiction. Repeat procedure if biological examination shows evidence of contamination.

C. Prepare reports of purging and disinfecting activities.

--- E N D ---

SECTION 33 40 00
STORM SEWER UTILITIES

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies materials and procedures for construction of outside, underground storm sewer systems that are complete and ready for operation. This includes piping, structures and all other incidentals.

1.2 RELATED WORK

A. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.

B. Concrete Work, Reinforcing, Placement and Finishing: Section 03 30 00, CAST-IN-PLACE CONCRETE.

C. Materials and Testing Report Submittals: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

D. Erosion and Sediment Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.3 DEFINITIONS

1.4 ABBREVIATIONS

A. HDPE: High-density polyethylene

B. PE: Polyethylene

1.5 DELIVERY, STORAGE, AND HANDLING

A. Do not store plastic manholes, pipe, and fittings in direct sunlight.

B. Handle manholes, catch basins and stormwater inlets according to manufacturer's written rigging instructions.

1.6 COORDINATION

A. Coordinate connection to storm sewer main with the Public Agency providing storm sewer off-site drainage.

B. Coordinate exterior utility lines and connections to building services up to the actual extent of building wall.

1.7 QUALITY ASSURANCE:

A. Products Criteria:

1. When two or more units of the same type or class of materials or equipment are required, these units shall be products of one manufacturer.
2. A nameplate bearing manufacturer's name or trademark, including model number, shall be securely affixed in a conspicuous place on equipment. In addition, the model number shall be either cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.

1.8 SUBMITTALS

A. Manufacturers' Literature and Data shall be submitted, as one package, for pipes, fittings and appurtenances, including jointing materials, hydrants, valves and other miscellaneous items.

1.9 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A185/A185M-07.....Steel Welded Wire Reinforcement, Plain, for Concrete
A242/A242M-04(2009).....High-Strength Low-Alloy Structural Steel
A536-84(2009).....Ductile Iron Castings
A615/A615M-09b.....Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
A760/A760M-10.....Corrugated Steel Pipe, Metallic-Coated for Sewers and Drains
A798/A798M-07.....Installing Factory-Made Corrugated Steel Pipe for Sewers and Other Applications
A849-10.....Post-Applied Coatings, Paving, and Linings for Corrugated Steel Sewer and Drainage Pipe
A929/A929M-01(2007).....Steel Sheet, Metallic-Coated by the Hot-Dip Process for Corrugated Steel Pipe
B745/B745M-97(2005).....Corrugated Aluminum Pipe for Sewers and Drains

B788/B788M-09.....Installing Factory-Made Corrugated Aluminum Culverts and Storm Sewer Pipe
C14-07.....Non-reinforced Concrete Sewer, Storm Drain, and Culvert Pipe
C33/C33M-08.....Concrete Aggregates
C76-11.....Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
C139-10.....Concrete Masonry Units for Construction of Catch Basins and Manholes
C150/C150M-11.....Portland Cement
C443-10.....Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
C478-09.....Precast Reinforced Concrete Manhole Sections
C506-10b.....Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe
C507-10b.....Reinforced Concrete Elliptical Culvert, Storm Drain, and Sewer Pipe
C655-09.....Reinforced Concrete D-Load Culvert, Storm Drain, and Sewer Pipe
C857-07.....Minimum Structural Design Loading for Underground Precast Concrete Utility Structures
C891-09.....Installation of Underground Precast Concrete Utility Structures
C913-08.....Precast Concrete Water and Wastewater Structures
C923-08.....Resilient Connectors Between Reinforced Concrete Manhole Structures, Pipes, and Laterals
C924-02(2009).....Testing Concrete Pipe Sewer Lines by Low-Pressure Air Test Method

C990-09.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants

C1103-03(2009).....Joint Acceptance Testing of Installed Precast Concrete Pipe Sewer Lines

C1173-08.....Flexible Transition Couplings for Underground Piping Systems

C1433-10.....Precast Reinforced Concrete Monolithic Box Sections for Culverts, Storm Drains, and Sewers

C1479-10.....Installation of Precast Concrete Sewer, Storm Drain, and Culvert Pipe Using Standard Installations

D448-08.....Sizes of Aggregate for Road and Bridge Construction

D698-07e1.....Laboratory Compaction Characteristics of Soil Using Standard Effort (12 400 ft-lbf/ft3 (600 kN-m/m3))

D1056-07.....Flexible Cellular Materials—Sponge or Expanded Rubber

D1785-06.....Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120

D2321-11.....Underground Installation of Thermoplastic Pipe for Sewers and Other Gravity-Flow Applications

D2751-05.....Acrylonitrile-Butadiene-Styrene (ABS) Sewer Pipe and Fittings

D2774-08.....Underground Installation of Thermoplastic Pressure Piping

D3034-08.....Type PSM Poly(Vinyl Chloride) (PVC) Sewer Pipe and Fittings

D3350-10.....Polyethylene Plastics Pipe and Fittings Materials

D3753-05e1.....Glass-Fiber-Reinforced Polyester Manholes and Wetwells
D4101-11.....Polypropylene Injection and Extrusion Materials
D5926-09.....Poly (Vinyl Chloride) (PVC) Gaskets for Drain, Waste, and Vent (DWV), Sewer, Sanitary, and Storm Plumbing Systems
F477-10.....Elastomeric Seals (Gaskets) for Joining Plastic Pipe
F679-08.....Poly(Vinyl Chloride) (PVC) Large-Diameter Plastic Gravity Sewer Pipe and Fittings
F714-10.....Polyethylene (PE) Plastic Pipe (SDR-PR) Based on Outside Diameter
F794-03(2009).....Poly(Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe and Fittings Based on Controlled Inside Diameter
F891-10.....Coextruded Poly(Vinyl Chloride) (PVC) Plastic Pipe With a Cellular Core
F894-07.....Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe
F949-10.....Poly(Vinyl Chloride) (PVC) Corrugated Sewer Pipe With a Smooth Interior and Fittings
F1417-11.....Installation Acceptance of Plastic Gravity Sewer Lines Using Low-Pressure Air
F1668-08.....Construction Procedures for Buried Plastic Pipe

C. American Association of State Highway and Transportation Officials (AASHTO):

M190-04.....Bituminous-Coated Corrugated Metal Culvert Pipe and Pipe Arches
M198-10.....Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants
M252-09.....Corrugated Polyethylene Drainage Pipe

M294-10.....Corrugated Polyethylene Pipe, 12 to 60 In. (300 to 1500 mm) Diameter

D. American Water Works Association(AWWA):

C105/A21.5-10.....Polyethylene Encasement for Ductile iron Pipe Systems

C110-08.....Ductile-Iron and Gray-Iron Fittings

C219-11.....Bolted, Sleeve-Type Couplings for Plain-End Pipe

C600-10.....Installation of Ductile iron Mains and Their Appurtenances

C900-07.....Polyvinyl Chloride (PVC) Pressure Pipe and Fabricated Fittings, 4 In. Through 12 In. (100 mm Through 300 mm), for Water Transmission and Distribution

M23-2nd ed.....PVC Pipe "Design And Installation"

E. American Society of Mechanical Engineers (ASME):

A112.6.3-2001.....Floor and Trench Drains

A112.14.1-2003.....Backwater Valves

A112.36.2M-1991.....Cleanouts

F. American Concrete Institute (ACI):

318-05.....Structural Commentary and Commentary

350/350M-06.....Environmental Engineering Concrete Structures and Commentary

G. National Stone, Sand and Gravel Association (NSSGA): Quarried Stone for Erosion and Sediment Control

1.10 WARRANTY

The Contractor shall remedy any defect due to faulty material or workmanship and pay for any damage to other work resulting therefrom within a period of one year from final acceptance. Further, the Contractor will furnish all manufacturers' and suppliers' written guarantees and warranties covering materials and equipment furnished under this Contract.

PART 2 - PRODUCTS

2.1 PE PIPE AND FITTINGS

A. Corrugated PE drainage pipe and fittings, NPS 3 to NPS 10 (DN 80 to DN 250); ASTM F714, SDR 21 with smooth waterway for coupling joints.
   1. Silt-tight Couplings: PE sleeve with ASTM D1056, Type 2, Class A, Grade 2 gasket material that mates with tube and fittings.

B. Corrugated PE pipe and fittings, NPS 12 to NPS 60 (DN 300 to DN 1500); ASTM F714, SDR 21 for pipes 3 to 24 inches (300 to 600 mm) with smooth waterway for coupling joints. Pipe shall be produced from PE certified by the resin producer as meeting the requirements of ASTM D3350, minimum cell class 335434C.
   1. Silt-tight Couplings: PE sleeve with ASTM D1056, Type 2, Class A, Grade 2 gasket material that mates with tube and fittings.
   2. Water tight joints shall be made using a PVC or PE coupling and rubber gaskets as recommended by the pipe manufacturer. Rubber gaskets shall conform to ASTM F477. Soil tight joints shall conform to requirements in AASHTO HB-17, Division II, for soil tightness and shall be as recommended by the manufacturer.

C. PVC Pipe And Fittings
   1. PVC Cellular-Core Pipe And Fittings: ASTM F891, Sewer and Drain Series, PS 50 minimum stiffness, PVC cellular-core pipe with plain ends for solvent-cemented joints.
   2. Fittings: ASTM D3034, SDR 35 , PVC socket-type fittings.

2.2 MANHOLES AND CATCH BASINS

A. Standard Precast Concrete Manholes:
   1. Description: ASTM C478 (ASTM C478M), precast, reinforced concrete, of depth indicated, with provision for sealant joints.
   2. Diameter: 48 inches (1200 mm) minimum unless otherwise indicated.
   3. Ballast: Increase thickness of precast concrete sections or add concrete to base section as required to prevent flotation.

4. Base Section: 6 inch (150 mm) minimum thickness for floor slab and 4-inch (102 mm) minimum thickness for walls and base riser section, and separate base slab or base section with integral floor.
5. Riser Sections: 4 inch (102 mm) minimum thickness, and lengths to provide depth indicated.
6. Top Section: Eccentric-cone type unless concentric-cone or flat-slab-top type is indicated, and top of cone of size that matches grade rings.
7. Joint Sealant: ASTM C990 (ASTM C990M), bitumen or butyl rubber.
8. Resilient Pipe Connectors: ASTM C923 (ASTM C923M), cast or fitted into manhole walls, for each pipe connection.
9. Steps: If total depth from floor of manhole to finished grade is greater than 60 inches (1500 mm). Individual FRP steps or FRP ladder, width of 16 inches (400 mm) minimum, spaced at 12 to 16 inch (300 to 400 mm) intervals.
10. Adjusting Rings: Reinforced-concrete rings, 6 to 9 inch (150 to 225 mm) total thickness, to match diameter of manhole frame and cover, and height as required to adjust manhole frame and cover to indicated elevation and slope.

B. Manhole Frames and Covers:
1. Description: Ferrous; 24 inch (610 mm) ID by 7 to 9 inch (175 to 225 mm) riser with 4 inch (102 mm) minimum width flange and 26-inch (600 mm) diameter cover. Include indented top design with lettering cast into cover, using wording equivalent to "STORM SEWER."
2. Material: ASTM A536, Grade 60-40-18 ductile iron unless otherwise indicated.

2.3 CONCRETE FOR MANHOLES AND CATCH BASINS

A. General: Cast-in-place concrete according to ACI 318, ACI 350/350R, and the following:
1. Cement: ASTM C150, Type II.
2. Fine Aggregate: ASTM C33, sand.
3. Coarse Aggregate: ASTM C33, crushed gravel.

4. Water: Potable.

B. Concrete Design Mix: 4000 psi (27.6 MPa) minimum, compressive strength in 28 days.
   1. Reinforcing Fabric: ASTM A185, steel, welded wire fabric, plain.
   2. Reinforcing Bars: ASTM A615, Grade 60 (420 MPa) deformed steel.

C. Manhole Channels and Benches: Channels shall be the main line pipe material. Include benches in all manholes and catch basins.
   1. Channels: Main line pipe material or concrete invert. Height of vertical sides to three-fourths of pipe diameter. Form curved channels with smooth, uniform radius and slope. Invert Slope: Same slope as the main line pipe. Bench to be concrete, sloped to drain into channel. Minimum of 6 inch slope from main line pipe to wall sides.

2.4 RESILIENT CONNECTORS AND DOWNSPOUT BOOTS FOR BUILDING ROOF DRAINS

A. Resilient connectors and downspout boots: Flexible, watertight connectors used for connecting pipe to manholes and inlets, and shall conform to ASTM C923.

2.5 WARNING TAPE

A. Standard, 4-Mil polyethylene 3 inch (76 mm) wide tape detectable type, green with black letters, and imprinted with “CAUTION BURIED STORM DRAIN LINE BELOW”.

PART 3 - EXECUTION

3.1 PIPE BEDDING

A. The bedding surface of the pipe shall provide a firm foundation of uniform density throughout the entire length of pipe. Concrete pipe requirements are such that when no bedding class is specified, concrete pipe shall be bedded in a soil foundation accurately shaped and rounded to conform with the lowest one-fourth of the outside portion of circular pipe. When necessary, the bedding shall be tamped. Bell holes and depressions for joints shall not be more than the length, depth, and width required for properly making the particular type of joint. Plastic pipe bedding requirements shall meet the requirements of ASTM D2321.

Bedding, haunching and initial backfill shall be either Class IB or Class II material. Corrugated metal pipe bedding requirements shall conform to ASTM A798.

3.2 PIPING INSTALLATION

A. Drawing plans and details indicate general location and arrangement of underground storm drainage piping. Install piping as indicated, to extent practical. Where specific installation is not indicated, follow piping manufacturer's written instructions.

B. Install piping with minimum cover as shown on the Drawings.

C. Install piping beginning at low point, true to grades and alignment indicated with unbroken continuity of invert. Place bell ends of piping facing upstream. Install gaskets, seals, sleeves, and couplings according to manufacturer's written instructions for use of lubricants, cements, and other installation requirements.

1. Do not lay pipe on unstable material, in wet trench or when trench and weather conditions are unsuitable for the work.
2. Support pipe on compacted bedding material. Excavate bell holes only large enough to properly make the joint.
3. Inspect pipes and fittings, for defects before installation. Defective materials shall be plainly marked and removed from the site. Cut pipe shall have smooth regular ends at right angles to axis of pipe.
4. Clean interior of all pipe thoroughly before installation. When work is not in progress, open ends of pipe shall be closed securely to prevent entrance of storm water, dirt or other substances.
5. Lower pipe into trench carefully and bring to proper line, grade, and joint. After jointing, interior of each pipe shall be thoroughly wiped or swabbed to remove any dirt, trash or excess jointing materials.
6. Do not walk on pipe in trenches until covered by layers of shading to a depth of 12 inches (300 mm) over the crown of the pipe.

7. Warning tape shall be continuously placed 12 inches (300 mm) above storm sewer piping.

D. Install manholes for changes in direction unless fittings are indicated. Use fittings for branch connections unless direct tap into existing sewer is indicated.

E. Install proper size increasers, reducers, and couplings where different sizes or materials of pipes and fittings are connected. Reducing size of piping in direction of flow is prohibited.

F. When installing pipe under streets or other obstructions that cannot be disturbed, use pipe-jacking process of microtunneling.

G. Install gravity-flow, nonpressure drainage piping according to the following:

1. Install piping pitched down in direction of flow.
2. Install PE corrugated sewer piping according to ASTM D2321 with gasketed joints

3.3 REGRADING

A. Raise or lower existing manholes and structures frames and covers in regraded areas to finish grade. Carefully remove, clean and salvage cast iron frames and covers. Adjust the elevation of the top of the manhole or structure as detailed on the drawings. Reset cast iron frame and cover, grouting below and around the frame. Install concrete collar around reset frame and cover as specified for new construction.

B. During periods when work is progressing on adjusting manholes or structures cover elevations, the Contractor shall install a temporary cover above the bench of the structure or manhole. The temporary cover shall be installed above the high flow elevation within the structure, and shall prevent debris from entering the wastewater stream.

3.4 CONNECTIONS TO EXISTING VA-OWNED MANHOLES

A. Make pipe connections and alterations to existing manholes so that finished work will conform as nearly as practicable to the applicable requirements specified for new manholes, including concrete and masonry work, cutting, and shaping.

3.5 MANHOLE INSTALLATION

A. Install manholes, complete with appurtenances and accessories indicated. Install precast concrete manhole sections with sealants according to ASTM C891.

B. Set tops of frames and covers flush with finished surface of manholes that occur in pavements. Set tops 3 inches (76 mm) above finished surface elsewhere unless otherwise indicated.

C. Circular Structures:

1. Precast concrete segmental blocks shall lay true and plumb. All horizontal and vertical joints shall be completely filled with mortar. Parge interior and exterior of structure with 1/2 inch (15 mm) or cement mortar applied with a trowel and finished to an even glazed surface.
2. Precast reinforced concrete rings shall be installed true and plumb. The joints between rings and between rings and the base and top shall be sealed with a preform flexible gasket material specifically manufactured for this type of application. Adjust the length of the rings so that the eccentric conical top section will be at the required elevation. Cutting the conical top section is not acceptable.
3. Precast reinforced concrete manhole risers and tops. Install as specified for precast reinforced concrete rings.

D. Rectangular Structures:

1. Precast concrete structures shall be placed on a 8 inch (200 mm) reinforced concrete pad, or be provided with a precast concrete base section. Structures provided with a base section shall be set on an 8 inch (200 mm) thick aggregate base course compacted to a minimum of 95 percent of the maximum density as determined by ASTM D698. Set precast section true and plumb. Seal all joints with preform flexible gasket material.
2. Do not build structures when air temperature is 32 deg F (0 deg C), or below.

3. Invert channels shall be smooth and semicircular in shape conforming to inside of adjacent sewer section. Make changes in direction of flow with a smooth curve of as large a radius as size of structure will permit. Make changes in size and grade of channels gradually and evenly. Construct invert channels by one of the listed methods:
   a. Forming directly in concrete base of structure.
   b. Building up with brick and mortar.
4. Floor of structure outside the channels shall be smooth and slope toward channels not less than 1 to 12 or more than 1 to 6. Bottom slab and benches shall be concrete.
5. The wall that supports access rungs or ladder shall be 90 deg vertical from the floor of structure to manhole cover.
6. Install steps and ladders per the manufacturer’s recommendations. Steps and ladders shall not move or flex when used. All loose steps and ladders shall be replaced by the Contractor.
7. Install manhole frames and covers on a mortar bed, and flush with the finish pavement. Frames and covers shall not move when subject to vehicular traffic. Install a concrete collar around the frame to protect the frame from moving until the adjacent pavement is placed. In unpaved areas, the rim elevation shall be 2 inches (50 mm) above the adjacent finish grade. Install an 8 inch (203 mm) thick, by 12 inch (300 mm) concrete collar around the perimeter of the frame. Slope the top of the collar away from the frame.

3.6 CATCH BASIN INSTALLATION

A. Construct catch basins to sizes and shapes indicated.
B. Set frames and grates to elevations indicated.

3.7 CONNECTIONS

A. Connect nonpressure, gravity-flow drainage piping in building's storm building drains specified in Division 22 Section FACILITY STORM DRAINAGE PIPING.

B. Encase entire connection fitting, plus 6 inch (150 mm) overlap, with not less than 6 inches (150 mm) of concrete with 28-day compressive strength of 3000 psi (20.7 MPa).

C. Make connections to existing piping and underground manholes.
   1. Use commercially manufactured wye fittings for piping branch connections. Remove section of existing pipe; install wye fitting into existing piping.
   2. Make branch connections from side into existing piping, NPS 4 to NPS 20 (DN 100 to DN 500). Remove section of existing pipe, install wye fitting into existing piping.
   3. Make branch connections from side into existing piping, NPS 21 (DN 525) or larger, or to underground manholes and structures by cutting into existing unit and creating an opening large enough to allow 3 inches (76 mm) of concrete to be packed around entering connection. Cut end of connection pipe passing through pipe or structure wall to conform to shape of and be flush with inside wall unless otherwise indicated. On outside of pipe, manhole, or structure wall, use epoxy-bonding compound as interface between new and existing concrete and piping materials.
   4. Protect existing piping, manholes, and structures to prevent concrete or debris from entering while making tap connections. Remove debris or other extraneous material that may accumulate.

D. Pipe couplings, expansion joints, and deflection fittings with pressure ratings at least equal to piping rating may be used in applications below unless otherwise indicated.
   1. Use nonpressure-type flexible couplings where required to join gravity-flow, nonpressure sewer piping unless otherwise indicated.
      a. Unshielded flexible couplings for same or minor difference OD pipes.
      b. Unshielded, increaser/reducer-pattern, flexible couplings for pipes with different OD.

c. Ring-type flexible couplings for piping of different sizes where annular space between smaller piping's OD and larger piping's ID permits installation.

2. Use pressure-type pipe couplings for force-main joints.

3.8 CLOSING ABANDONED STORM DRAINAGE SYSTEMS

A. Abandoned Piping: Close open ends of abandoned underground piping indicated to remain in place. Include closures strong enough to withstand hydrostatic and earth pressures that may result after ends of abandoned piping have been closed. Use either procedure below:

1. Close open ends of piping with at least 8 inch (203 mm) thick, brick masonry bulkheads.
2. Close open ends of piping with threaded metal caps, plastic plugs, or other acceptable methods suitable for size and type of material being closed. Do not use wood plugs.

B. Abandoned Manholes and Structures: Excavate around manholes and structures as required and use one procedure below:

1. Remove manhole or structure and close open ends of remaining piping.

C. Backfill to grade according to Division 31 Section EARTH MOVING.

3.9 IDENTIFICATION

A. Install green warning tape directly over piping and at outside edge of underground structures.

3.10 FIELD QUALITY CONTROL

A. Inspect interior of piping to determine whether line displacement or other damage has occurred. Prior to final acceptance, provide a video record of all piping from the building to the municipal connection to show the lines are free from obstructions, properly sloped and joined.

1. Submit separate reports for each system inspection.
2. Defects requiring correction include the following:
   a. Alignment: Less than full diameter of inside of pipe is visible between structures.

b. Deflection: Flexible piping with deflection that prevents passage of ball or cylinder of size not less than 92.5 percent of piping diameter.
c. Damage: Crushed, broken, cracked, or otherwise damaged piping.
d. Infiltration: Water leakage into piping.
e. Exfiltration: Water leakage from or around piping.

3. Replace defective piping using new materials, and repeat inspections until defects are within allowances specified.
4. Reinspect and repeat procedure until results are satisfactory.

3.11 TESTING OF STORM SEWERS:

A. Submit separate report for each test.
B. Test new piping systems, and parts of existing systems that have been altered, extended, or repaired, for leaks and defects.
1. Do not enclose, cover, or put into service before inspection and approval.
2. Test completed piping systems according to requirements of authorities having jurisdiction.
3. Schedule tests and inspections by authorities having jurisdiction with at least 24 hours advance notice.
4. Submit separate report for each test.
5. Air test gravity sewers. Concrete Pipes conform to ASTM C924, Plastic Pipes conform to ASTM F1417, all other pipe material conform to ASTM C828 or C924, after consulting with pipe manufacturer. Testing of individual joints shall conform to ASTM C1103.
a. Ductile iron Piping: Test according to AWWA C600, "Hydraulic Testing" Section.
b. PVC Piping: Test according to AWWA M23, "Testing and Maintenance" Chapter.
C. Leaks and loss in test pressure constitute defects that must be repaired. Replace leaking piping using new materials, and repeat testing until leakage is within allowances specified.

3.12 CLEANING

A. Clean interior of piping of dirt and superfluous materials. Flush with water.

--- E N D ---

DIVISION 34

SECTION 34 41 13

TRAFFIC SIGNS

PART 1 - GENERAL

1.1 SUBMITTALS

A. Shop Drawings: Show shop drawings, not necessarily to scale, but sufficient enough in detail to show color, wording, lettering size and style, overall sign size, construction details and installation details for each type of sign.

PART 2 - PRODUCTS

2.1 TRAFFIC SIGNS

A. Construction Materials: Comply with the applicable requirements of DOT Section 645.

B. Posts: Galvanized steel.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Erect signs in their designated locations, as indicated and in accordance with the approved shop drawings and the applicable requirements of DOT Section 645.

B. Protect surfaces and finishes from abrasion and other damage during handling and installation.

C. Replace damaged or faulty signs.

----- E N D -----

SECTION 34 71 13
PASSIVE VEHICLE BARRIERS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:
   1. Stationary anti-ram rated vehicle barriers.

1.2 RELATED REQUIREMENTS

A. Concrete Islands, and Curbs: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
B. Pipe Bollards: Section 05 50 00, METAL FABRICATIONS.
C. Asphalt Driveway and Approach Paving: Section 32 12 16, ASPHALT PAVING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.
B. ASTM International (ASTM):
   1. F2656/F2656M-15 - Crash Testing of Vehicle Security Barriers.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Submittal Drawings:
   1. Show size, configuration, and fabrication and installation details.
   2. Show dimensions and clearances between barriers and other adjacent permanent construction.
   3. Include setting drawings and templates for anchors, sleeves, and other items embedded into concrete foundations.

1.5 FIELD CONDITIONS

A. Field Measurements: Verify field conditions affecting vehicle barrier installation. Show field measurements on Submittal Drawings.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

A. Structural Vehicle Barriers:

1. Bollards: Steel pipe, concrete filled. See Section 05 50 00, METAL FABRICATIONS.
2. Foundations: Permanent concrete As indicated on drawings.

PART 3 - EXECUTION

3.1 PREPARATION

A. Examine and verify foundation suitability for product installation.

B. Coordinate delivery and installation of anchors, sleeves, and other items embedded in concrete foundations.

3.2 INSTALLATION

1. Bollard Installation: See Section 05 50 00, METAL FABRICATIONS.

- - - E N D - - -

VA | U.S. Department of Veterans Affairs

Specifications

Buffalo VA Medical Center

3495 Bailey Avenue | Buffalo, NY 14215

Parking Ramp Expansion
Building Number 29

VA Contract No. 36C24222C0022
Station Project No. 528-18-375
Bancroft-AE Project No. 21-113

Issue for Bid

Appendix A
Subsurface Exploration Report

08-09-2024

BANCROFT ARCHITECTS + ENGINEERS
700 Nicholas Blvd. Suite 300 | Elk Grove Village, IL 60007
847.952.9362 | www.bancroft-ae.com

PART 1 - GENERAL

1.1 GENERAL

A. The following report furnished by the Owner describes the results of the subsurface investigation made on the site. It and the tabulated results of the borings are included for the Contractor's information only. The Contractor shall determine soil conditions and shall accept conditions as they exist.

B. The data on indicated subsurface conditions are not intended as representations of warranties of the continuity of such conditions between soil borings. It is expressly understood that the Owner will not be responsible for interpretations or conclusions drawn there from by the Contractor. The data are made available for the convenience of the Contractor.

END OF SECTION 000860

BARRON & ASSOCIATES, P.C.
10440 Main Street
Clarence, New York 14031

Tel: (716) 759-7821 www.barronandassociatespc.com Fax: (716) 759-7823

March 5, 2010 Job No: 10-510

Kideney Architects, P.C.
200 John James Audubon Parkway, Suite 303
Buffalo, New York 14228

ATTN: Mr. Glenn A. Pawloski, AIA

RE: Geotechnical Engineering Report
Proposed VA Hospital
Multi-Story Parking Ramp Structure
3495 Bailey Avenue (US Route 62)
City of Buffalo, Erie County, New York
(KA Job No. 2009040.00))

Gentlemen:

This report presents the findings of the subsurface investigation program and geotechnical engineering recommendations for the above referenced project. The geographic orientation of the project site is illustrated on the U.S. Geologic Survey (USGS) site location map in Figure No. 1. The project site is illustrated in Figure No. 2, entitled "Test Boring Location Plan", which includes: the approximate location of six test borings that were drilled by Buffalo Drilling Company, Inc. (BDC); relative ground surface elevations; and additional site details. As noted in Figure No. 2, the test boring locations were provided by the client. Borings B-1, B-2, B-4, and B-6 were moved slightly, from their original locations, due to the presence of underground utilities.

EXPLORATION METHODS

Sampling Method: A truck-mounted Diedrich D-50 rotary drill rig was used to drill six test borings to depths of approximately 32 to 40 feet below the ground surface by using 2-1/4 inch inside diameter (ID), continuous flight hollow stem augers. Samples were recovered by driving a standard split-spoon sampler (2-foot long by 1-3/8 inch inside diameter) 24 inches with a 140-pound hammer falling 30 inches per blow per the American Society of Testing and Materials (ASTM) Standard D 1586. The number of blows from six to 18 inches of penetration is defined as the Standard Penetration Test (SPT) N-value. Auger refusal, which may infer the top of bedrock, was encountered at four of the borings.

Any encountered groundwater conditions are documented in the field on the BDC driller's logs for each test boring. If indicators of groundwater are observed on the sampling equipment, the depth to

groundwater is also checked and measured through the hollow stem augers at the completion of the sampling efforts.

Classification/Identification: The retrieved soil and fill samples were initially logged in the field by the BDC driller, and a portion of each sample was placed and sealed in a glass jar. The boring logs, which are included in Appendix A, were based upon the field logs and a second visual classification/identification of recovered samples in the laboratory by a geologist. Classification/ identification of samples, as noted on the boring logs, is based on the Unified Soil Classification System (USCS) in ASTM D2487/D2488. Refer to Appendix B entitled, "Geotechnical Reference Standards", for an explanation of the terminology that is used for the soil and rock descriptions.

SITE AND SUBSURFACE CONDITIONS

General: The proposed site for development on the southern side of the existing 11-story Veterans Administration (VA) Hospital that is addressed as 3495 Bailey Avenue (US Route 62) in the City of Buffalo, Erie County, New York. As shown in Figure No. 2, the project site is accessible by Bailey Avenue on the west and LeBrun Road on the east. The site is currently an asphalt paved parking area. The topography generally slopes downward (by approximately four to ten feet) from the north to the south of the proposed development area.

Subsurface Soil/Fill Conditions: In general, subsurface conditions were noted to consist of thin asphalt pavement and subbase gravel veneers on a variably thick stiff to very stiff cohesive fill on a thick very stiff to hard silty clay glacial till over an apparent weathered limestone bedrock surface. The fill and natural soil types have been differentiated to the extent possible in this investigation.

In Figure No. 1, Main Street (NYS Route 5) is to the north and northwest of the project site and roughly defines the top of the Onondaga Escarpment; which was a resisting front to the advancing glaciers. On the top of the escarpment in this area, the depth to bedrock is generally shallow (i.e., five to 15 feet), except B&A is aware of anomalously deep soil conditions to the east of the project site and just south of the intersection of Niagara Falls Boulevard at Main Street (near the west corner of the State University of New York at Buffalo campus) that is west of the project site. The soil deposits, as is the depth to the apparent bedrock surface, are also unusually deep at the project site. It is uncertain if these other anomalously deep soil conditions are continuous, separate or inter-connected geologic features (that is, gouges, mini-glacially eroded valleys, or glacial stream cuts) relative to the project site.

The asphalt pavement ranged from approximately four to six inches thick, while the subbase gravel layer was approximately two inches thick. The topsoil thickness was not investigated and is expected to vary across the boundaries of the project site. Surficial and buried woody vegetation and all organic laden materials (e.g., topsoil layer) are unsuitable for load bearing conditions.

Beneath the asphalt pavement and subbase gravel at boring B-2, an apparent pocket of a granular fill was encountered and extended to approximately two feet below the ground surface. The granular fill consisted of a non-plastic, gravelly fine-sized to coarse-sized sand with lesser amounts of silt. The relative density of this moist gravelly sand was in a low-level medium dense state. Approvable granular fills that are in a loose to medium dense state can be improved with proper sorting of deleterious materials and oversized fractions (if present), properly conditioned (i.e., drying and blending), and thoroughly compacted, but will be dependant upon the silt content of the fill. The density states of silty fine-sized sand soil, if encountered, are sensitive to the moisture content level and are difficult to improve with compaction.

Beneath the asphalt pavement and subbase gravel and the granular fill at boring B-2, a cohesive fill was encountered and extended to approximately two foot (at boring B-4) to ten foot (at borings B-2 and B-3) depth below ground surface. The fill thickness increased from the west (at borings B-1 and B-4) to the east (at borings B-3 and B-6) across the project site. This slightly to moderately plastic silty clay fill generally contained lesser amounts of gravel and fine-sized to coarse-sized sand. Trace amounts of brick, asphalt, slag, and roots were also noted to be present in this fill. Except for the upper two feet of granular fill at boring B-2, the cohesive fill is believed to have originated from the earthwork construction efforts at the hospital. The cohesive fill is the excavated natural silty clay glacial till. The stiffness of the cohesive fill varied with depth and ranged from the stiff (N-values of 8 to 15) to hard (greater than 30) states. In part, the fill likely retained some of its stiffness characteristics from the originally deposited silty clay glacial till, but like many fills are subsequently placed in uncontrolled and uncompacted states. The split spoon sample recoveries at the lowest identified cohesive fill samples were also generally poor. This data, coupled with the construction practices at that time, would suggest that some of the original topsoil layer may not have been stripped at the deeper fill locations.

Beneath the cohesive fill at boring B-1, an approximate two foot thick pocket of naturally deposited cohesive soil was encountered and extended to approximately six feet below the ground surface (relative elevation of 87.6 feet). This cohesive soil is described as a moderately plastic silty clay soil that contains lesser amounts of fine-sized sand. This stiff silty clay soil was in a moist state.

Beneath the cohesive fill and natural silty clay soil (at boring B-1), an approximate 29 to 33 foot thick layer of a naturally deposited cohesive glacial till was present and extended the full depth drilled at all of the boring locations. This slightly to moderately plastic silty clay glacial till contained varying amounts of gravel and lesser amounts of fine-sized to coarse-sized sand. The consistency/stiffness of this moist silty clay glacial till was generally in the very stiff to hard states. The bottom ten feet of the silty clay glacial till was noted to be in a predominately very stiff state. Apparent pockets of a stiff state were present at the four to six foot depth range of boring B-5 and in the lower part of boring B-3. The

stiffnesses/consistencies (N-values) of the lower half of the natural silty clay glacial till are less than the upper half of the unit and are more erratic. Glacially compacted till would have increased or very high stiffness (N-values of 50+ to 100+) throughout its depth, whereas the silty clay till at the project site suggests that the glacial till mass may have been deposited from the glacier and/or was only partially compacted by the glacier. Pockets of even lower relative stiffness may be present. These lower and erratic N-values in the lower silty clay glacial till are susceptible to large differential settlements for heavily loaded (such as, the proposed parking ramp structure) shallow footings.

Within the glacial till, spoon refusal (i.e., N-values of 50+ to 100+) conditions were encountered and may also reflect a boulder/cobble condition. The ability to auger, with the drill rig, to these levels would suggest that the upper cobbles-boulders or weathered bedrock can be removed with conventional excavating equipment (e.g., backhoes, excavators, caisson/drilled pier drill rigs).

Bedrock: Auger refusal, which are generally inferred to be top of the apparent bedrock, was encountered at four of the test borings. The two at 40 foot bores (that is, B-2 and B-3) were not advanced to auger refusal, but this condition would have been expected to be encountered within a nominal depth of advancement. The apparent bedrock surface is approximately 32 to 43 feet below the ground surface (relative elevations of 56.6 to 55.1 feet). The apparent bedrock surface is relatively level, but dips slightly downward from the northwest to the southeast. No confirmatory rock cores were taken.

Based upon the regional geology, the site is immediately southwest of the Onondaga Escarpment and the Onondaga Limestone is the uppermost bedrock unit. However, glacial erosion is likely to have removed the Onondaga Limestone and, possibly, the immediately underlying thin Akron Dolostone, thereby, possibly, leaving the Bertie Limestone formation as the uppermost unit beneath the project site. The upper ten feet of this bedrock type is expected to be of poor quality (i.e., Rock Quality Designation [RQD] assumed to be 40 percent with a range of 30 to 65 percent). This upper Bertie Limestone is estimated to have a uniaxial compressive strength of 15 kips per square inch (ksi) with a range of 10 to 25 ksi. If present, it is assumed that the Onondaga Limestone or, more likely, the Akron Dolostone will have physical properties that are similar to the Bertie Limestone, but should be confirmed.

Groundwater: No appreciable amounts of groundwater were encountered at the test borings during drilling operations. An artesian (i.e., pressurized) groundwater condition from the fractured bedrock is not expected. The static groundwater level is believed more than 45 feet or more below the ground surface and in the upper ten feet of the bedrock unit. The regional topography (see Figure No. 1) suggests that the groundwater flow direction is from the southeast to the northwest, towards the

Onondaga Escarpment. Note also that the surficial granular fills, if present, are conducive to the creation of localized apparent perched groundwater table conditions.

Note that the groundwater readings were taken at completion of drilling efforts and, therefore, an adequate amount of time for the groundwater level to recharge to static conditions was probably not allowed. Fluctuations in the groundwater level may occur due to other factors than those present during field operations.

EARTHQUAKE/SEISMIC CONSIDERATIONS

Site Class Definition: For the given site conditions, the most applicable site definition is Site Class C, as listed in Table 1615.1.1 and Table 1615.1.5 of the Building Code of New York State, © 2007.

Liquefaction Potential: For the project site, the Site Class C design spectral response acceleration parameters S_{DS}, at 0.2 seconds, and S_{D1}, at one second, are 0.23g and 0.067g (g = 32.2 feet/sec^2), respectively, for this part of Erie County, New York. These values have a two percent probability of being exceeded in 50 years. Based upon the above conditions and an approximate magnitude 6.0 earthquake on the Richter Scale, the potential for liquefaction or settlement of the Site Class C soils is considered extremely low.

FOUNDATION DESIGN AND CONSTRUCTION RECOMMENDATIONS

General: This section will present and discuss recommendations on foundation design and construction, retaining walls, placement of controlled fills, and subgrade and base layer requirements for concrete slabs, paved parking and roadway areas.

As shown in Figure No. 2, the proposed development is to consist of a multi-story, slab-on-grade and concrete framed parking ramp structure on/near the southern side of the existing Veterans Administration Hospital. This structure is approximately 96,000 square feet in first floor (footprint) area. The existing ground surface generally slopes slightly downward from the north to the south of the development area.

For the purposes of this report, the proposed top of the parking ramp structure's finish first floor relative elevation is taken as 100 feet ±; which is the same as the immediately measured finish floor elevation of the existing hospital. The below grade floor relative elevation is expected to be variable and may range from 85 to 90 feet. The preliminary maximum exterior and interior column loads are expected to be 575 kips and 950 kips, respectively; which would suggest support by a deep foundation system. At the at grade level, several small and lightly loaded structural elements (with maximum design bearing wall loads of two to three kips/foot and/or column loads of 20 to 30 kips) may be considered in the proposed design and do not need to be founded on a deep foundation system. The maximum live floor loads in

the proposed parking ramp are taken as 50 pounds per square foot (psf) and the maximum wheel load is taken as 3,000 pounds. Certain small and lightly loaded structural elements of the proposed structure may have maximum live floor loads of 100 psf.

Site Preparation and Earthwork: General site preparation will include the demolition and complete removal of any encountered foundations and floor slabs, and removing all unsuitable surficial material (i.e., asphalt pavement, concrete, brick, expansive slag, organic or topsoil layer, and construction and demolition-like fill) to a depth where firm, granular or cohesive fills or naturally occurring soils are encountered. It is recommended, particularly in the location of the proposed structure, that any slag and/or cinder/ash containing material, if encountered, should be tested to determine the expansion and corrosion characteristics (where applicable for direct or potential contact with foundation elements and buried utilities) of these materials prior to their use on-site. Any rubble-like and brick fill, boulders, or wood fill in particular, if encountered, will require undercutting. The proposed structure's area is to be proof rolled with a fully loaded ten-wheel dump truck. All encountered soft and disturbed zones should be undercut and stabilized with granular fill that is placed in compacted lifts prior to placement of additional fill materials above. Refer to Appendix D entitled "General Earthwork Specification" for definition of the fill types and gradations, recommended minimum compaction requirements for various site developments, and placement and compaction methods. The NYS Department of Transportation (NYSDOT) specification numbers for typical aggregate subbase/base course components are Item No. 304.12 (Metric) Subbase Course, Type 2 (< 2 inch maximum size), which is preferred, or Item No. 304.14 (Metric) Subbase Course, Type 4 (< 2 inch maximum size).

As shown in Figure No. 2, the proposed site for development is currently unoccupied by any buildings/structures. Since cavities (from the footings, foundation walls, basements, and tanks, as encountered) would not remain, backfilling in compacted lifts with several feet of controlled select granular fill, such as a number two crusher run stone or with suitable stripped and approved on-site fill material, would not be required.

It is unknown if any former residential/commercial/industrial structures existed on the project site. It is unknown if any former footings and foundation walls may be buried at the proposed site. Septic tank locations and the abandonment conditions or practices are normally unknown. If encountered during site development, it is recommended that any tanks should be properly removed under the applicable local and state regulations. The remaining cavities, from the aforementioned items, should be backfilled with select/approved granular fill that is placed in compacted lifts.

Parking Ramp Structure Foundations and Slab Types: It is assumed that the existing hospital to the immediate north of the project site is either on a deep foundation system (e.g., concrete filled drilled piers) or on a shallow foundation that bears on a thin layer of very high (N-values of 50+) silty clay

glacial till layer overlying shallow bedrock and/or is on shallow bedrock. Due to the presence of the variable thickness of the cohesive fill, varying stiffness/consistency of the naturally deposited silty clay glacial till, potential differential settlement concerns and large proposed column loads, a deep foundation system (i.e., drilled piers) that bears on the weathered limestone bedrock is recommended for the proposed parking ramp structure. For the deep foundation system that bears on this weathered bedrock, a Seismic Site Class C is recommended.

No new fill appears to be required to raise the site grade beneath the proposed structure. Some excavation may be required for the lowest proposed parking ramp level. The compressibility properties of the very stiff cohesive fill and/or natural silty clay glacial till are not design concerns for a rigid pavement/slab-on-grade. If a conventional rigid pavement or concrete slab-on-grade is directly constructed on these conditions for the lowest proposed parking ramp level, differential settlements are expected to be within acceptable limits. Structural slab construction for the lowest proposed parking ramp level is not recommended.

For small (in area) and lightly loaded (2 to 3 kips/foot or 20 to 30 kips) structural elements at grade level, shallow footings that bear on approved deep very stiff or better cohesive fills are an acceptable foundation type. All fill materials beneath footings would, otherwise, be considered for removal to an approvable very stiff or better natural silty clay glacial till. A variable thickness of thin lifts of thoroughly compacted select/approved granular fill that extends to approved very stiff to hard naturally deposited silty clay soil/fill may be required. The shallow footing bearing capacity would be limited to 1,500 psf for the approvable subgrades. Total and differential settlements of less than one inch and 3/4^{ths} of an inch, respectively, are expected.

<u>Drilled Piers - Allowable Load Carrying Capacity</u>: Straight shaft drilled piers that are cast-in-place concrete, with or without grade beams, are recommended for the deep foundation system for the proposed structure. As based upon the subsurface data, the drilled piers are to bear on the weathered limestone unit (approximate relative elevations of 55 to 57 feet). The top of the piers are to be at a four foot minimum depth below final grade for the perimeter piers and two and one-half foot minimum depth below finished floor for the interior piers in heated areas or as recommended by the design structural engineer. A four foot minimum depth (as required by local or New York State code) is required to provide adequate protection from frost. The drilled pier lengths are expected to vary from approximately 28 to 40 feet. Since the site grade will not be raised, there are no negative skin friction effects.

The following capacities are based upon an exterior grade of 89.5 feet (south central side of parking ramp), a top of pier relative elevation of 85.5 feet and a pier bearing relative elevation of 56 feet.

Pier Diameter (feet):	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
Allowable Axial Base/End Load (kips):	280	395	530	685	860	1,050	1,260	1,490
Allowable Soil Pullout Resistance (kips):	91	114	137	160	182	205	228	251
Total Pier Buoyant Dead Weight (kips):	12	19	27	37	48	61	76	92

Two foot diameter is the minimum recommended pier diameter. For drilled piers from six to seven feet in diameter, the equivalent net allowable bearing capacity is recommended not to exceed 60,000 pounds per square foot (psf) of base area for the drilled piers. The allowable pullout/uplift soil resistance/load does not include the buoyant pier weight. For each six-inch increase in pier diameter, the allowable pullout/uplift soil resistance/load can be increased by 23 kips.

For drilled piers at the same bearing elevation as the above, exterior grade of 95.5 feet (northwest side of proposed parking ramp) and a top of pier relative elevation of 91.5 feet, the additional load increases to the above values are listed below. These values are the expected contributions for approximately six feet of the upper very stiff cohesive fill and the associated six feet of drilled pier length.

Pier Diameter (feet):	2.0	2.5	3.0	3.5	4.0	4.5	5.0	5.5
Added Allowable Axial Load (kips):	15	18	22	25	29	32	36	39
Added Allowable Soil Pullout (kips):	11	13	16	19	21	24	27	29
Added Pier Buoyant Dead Weight (kips):	3	4.5	6	8.5	11.5	14.5	17.5	21

Total and differential settlements of less than one inch and 3/4^{ths} of an inch, respectively, are expected for the above drilled piers. Refer to the engineering computations, which are included as Appendix C, for additional foundation design and construction details.

The concrete mix for the pier foundations is recommended to have a minimum 28-day unconfined compressive strength of 3,500 pounds per square inch (psi). Due to the expected low dissolved sulfate concentrations within the bedrock groundwater in this regional area and without actual field data, type I/II Portland cement, at a minimum, is recommended for this below grade construction that is on or within the bedrock. It is recommended that the bedrock groundwater quality should be tested in order to ensure that type II or V Portland cement is not required.

For lateral analysis of drilled piers, the horizontal coefficient/modulus/stiffness parameters are a function of the analytical method employed (i.e., p-y curves, Broms, Terzaghi's, etc.). In order to correlate with the selection of the proper horizontal parameter, the average design values of 2,700 psf for the unconsolidated undrained shearing strength and a density/unit weight of 120 pcf for the very stiff silty clay glacial till are recommended for a top of pier at relative elevation of 85.5 feet. For the p-y curve and Broms methods, the cyclic parameter is usually taken as 0.4 of the initial static parameter,

but this does not produce a multiple for the load-deflection response. The 2007 Building Code of New York State presents the allowable lateral pressures by soil type class in Table No. 1804.2. For the very stiff or better silty clay glacial till/fill, the Class 4 static value of 150 psf/foot depth would be more appropriate, rather than the Class 5 value of 100 psf/foot depth that would apply to these soil/fill types in a upper level medium stiff to stiff states.

The subsurface data suggests that the drilled holes would be constructed in the dry. Past regional and local site experience has shown that some groundwater may not be expected to emanate from the upper fractured bedrock unit, if the cohesive soil/glacial till layers are breeched. Groundwater may be entrapped within the lower, more pervious sand/silt glacial till unit, if encountered. These soil and groundwater conditions would be at the base of the pier and would suggest the use of pumping the excavation to a near dry condition or use of a drilling mud/slurry prior to concrete placement. The concrete would be placed by an approved tremie method in either an open cased hole or through a drilling mud/slurry.

The allowable end bearing capacity and other design capacities of the drilled piers may be modified upon the implementation and evaluation of confirmatory subsurface investigation program, at a minimum. Prior to the construction of the drilled pier foundations, the drilling contractor will take the existing conditions at his own risk or will verify the type, quality, consistency/relative density, and elevation of the soil and/or bedrock and of the groundwater (quality and quantity) conditions.

Additional Foundation Considerations: In addition to the above, the following recommendations will provide additional assurances with regard to proper foundation construction.

a) All fill placed beneath, adjacent, or above foundations must comply with the "General Earthwork Specification", included as Appendix D.
b) Backfill of foundations with approved select granular fill must be completed prior to placement of substantial superstructure loads, except for basement walls or substructure areas that may additionally require superstructure loads and possibly internal bracing.
c) The upper silty materials may rut and "pump" if exposed to excessive surface water and repeated construction traffic. Proper site management and fill placement operations are needed to minimize costly undercuts and subgrade repairs prior to placement of concrete slabs and asphalt pavement. It is noted that construction during wet/rainy and/or Fall and Spring conditions may require added precautions and possibly a thicker base layer to maintain a stable subgrade condition.
d) Step footings, if utilized, should have a rise to run ratio of 1:2, with a two-foot maximum rise and a four-foot minimum run between steps or as recommended by the design structural engineer.

Stabilization of Excavations: The trench/excavation sidewall stability concerns can be addressed with the Occupational Safety and Health Act (OSHA) requirements as set forth in Subpart P of 29 CFR Part 1926, Sections 1926.650 to 1926.652. In lieu of a properly designed shoring system, side slopes of the

trench excavation should be one on one (vertical to horizontal distance) or flatter in cohesive soils or one on one and one-half or flatter in the granular materials, as required by OSHA.

Water must not be allowed to accumulate or pond on exposed foundation bearing grades. Surface water and groundwater from within the excavation must be either pumped, diverted or channelized by gravity flow to effectuate the construction of the proposed foundation.

Retaining Walls: The retaining walls and grade beams are recommended to be supported by the drilled piers. While not unique design concerns, these retaining wall structures or other substructures, if considered, must be adequately designed and constructed to support horizontal soil pressures and surface loads. Refer to Appendix C and the following recommendations which will provide additional assurances with regard to proper design and construction of retaining walls and fixed/restrained walls.

a) At the location of the proposed structure, design the wall foundation based on the previously recommended maximum net allowable bearing capacity and bearing conditions.

b) Cantilever (such as, retaining) walls and fixed/restrained walls must be adequately designed and constructed to support horizontal soil pressures and surface loads.

c) Uniformly distributed surface surcharge loads should be applied at 100 percent of the load times the appropriate lateral earth pressure coefficient to the retaining wall. The lateral design stress on the wall is the sum of the equivalent lateral fluid pressure and other applied surface stresses and subsurface stresses (i.e., footings).

d) The recommended at rest (rigid wall), active, and passive static earth pressure coefficients for unsaturated, select granular sandy gravel fill against an earth retaining structure/wall are 0.76, 0.24, and 2.8 (with an ultimate value of 4.2), respectively. The respective equivalent static lateral fluid pressures are recommended to be 90, 30 and 330 (with an ultimate value of 500) pounds per square foot (psf) per foot depth, which are based upon a moist, compacted unit backfill weight of 120 pounds per cubic foot (pcf). The at rest value would account for the average expected compaction induced stresses and/or the potential influences of hydrostatic pressure. If a moist, compacted granular sandy silt or silty sand fill is used, the recommended active and passive static earth pressure coefficients are 0.33 and 2.0 (with an ultimate value of 3.0) and the equivalent static lateral fluid pressures are 45 and 270 (with an ultimate value of 405) psf per foot depth, which is based upon a unit backfill weight of 135 pcf. The static lateral fluid pressures can be directly proportioned for other unit weights.

e) For a soil/fill that is at or near a saturated/liquefied state, the equivalent static lateral fluid pressure on a wall from earthquake/seismic induced loading is recommended to be at least equal to the unit weight of the backfill. For unsaturated backfill conditions under earthquake/seismic induced loading, it is recommended that an additional (to the static) lateral load per foot of wall length (in pounds/foot) to a non-yielding wall will be located at 0.6 times the earth height behind the wall, as taken from the base of the wall, and will be equal to 6.8 times (for S_{ds} = 0.25g) to 13.5 times (for S_{ds} = 0.50g) the earth height squared behind the wall, in feet (for a soil backfill unit weight of 120 pcf and for Site Class C to E soils). As applied to yielding walls, these multiplying factors may be reduced by 33 percent. The earthquake/seismic lateral pressures or loads can be directly proportioned for other unit weights and S_{ds} values. Use a 1.75 multiplier to the earthquake/seismic lateral pressures or loads for walls bearing on Site Class B/A rock. Since non-yielding/rigid walls may move into the backfill, the equivalent lateral static fluid pressure for the static passive condition would also be a structural engineering design concern.

f) Lateral stresses from surface loading (such as, trucks) would not generally be a design concern if the load is transient and the loading is at a horizontal distance from the subsurface wall that is greater than the depth of the subsurface cavity. The geotechnical engineer should be consulted once the type and magnitude of the surface loading are identified.

g) The ultimate values of the friction factor or coefficient of sliding friction for the concrete footing of a retaining wall or foundation wall are recommended to be 0.35 on a silty sand/non-plastic sandy silt interface, 0.45 on non-plastic sand and gravel mixtures with less than five percent silt or on NYSDOT Item No. 304.12, Type 2 and Item No. 304.14, Type 4 gravel interfaces, and 0.60 if cast against a clean, sound and rough bedrock interface (which has a Factor of Safety = 1.0). Use a value of 0.5 for a smooth surface of either bedrock or if a dental concrete leveling course, without bonding reinforcing bars, is to be placed on the bedrock surface prior to casting the footing/foundation wall. For foundations on very stiff to hard natural cohesive soils, the cohesion/adhesion for sliding resistance is limited to 1,000 psf. The minimum recommended factor of safety against sliding is 1.5.

h) The minimum recommended factors of safety against overturning of a retaining wall are 1.5 for a clean/silt-free compacted granular backfill or for foundations on approved rock and 2.0 for a compacted cohesive backfill.

i) Relieve any hydrostatic or water pressure that develops behind the walls from in-flowing groundwater as is normally provided in practice. The exterior and interior sides of walls are to have a properly designed and installed dewatering system or as determined by the design civil/structural engineer.

Subgrade Soils and Vapor Barrier: For the most part and based on test results for similar soils/fills, the surficial medium stiff to low-level stiff and slightly to moderately plastic natural silty clay soil/fill may be somewhat difficult to compact in a controlled manner considering the natural moisture contents that are estimated to be at to wet of optimum at the time of this investigation. The excavated and approvable soil/fill types are expected to be available in limited quantities. The organic-free soil/fill types may be suitable for re-use as general fill with the implementation of sorting and removal methods for over-sized and deleterious materials, by uniformly applying soil conditioning methods (i.e., drying and blending), and with compaction, if additional volume of soil for wall backfill or for raising site grades is needed.

Excavated and approvable granular (i.e., sand or gravel and non-plastic sandy silt) natural soil/fill are not expected to be available in any reasonable quantities, except for the subbase gravel beneath the existing pavement. The amount of this granular fill is a function of the final grading/excavation plan and proposed floor system that is implemented. For the most part, granular (i.e., sand or gravel) soil/fill is expected to be acceptable for on-site re-use, as general/ordinary fill without substantial reworking and/or modification, while silty fine-sized sand to non-plastic sandy silt may first require drying and blending.

These previously discussed soils or dissimilar excavated materials should not be commingled prior to their use on-site, unless designated for a green area. General fill material is recommended to be placed on prepared and approved subgrade and in accordance with previous recommendations.

At the discretion of the design architect, a vapor barrier may be considered for use in the proposed structure. The use of a thin gravel cushion, as a capillary break, or a thin sand cushion over a vapor barrier that is placed beneath the concrete slabs are at the discretion of the design architect/engineer or as required by local code. Gradations of gravels that are satisfactory capillary breaks include 1 ¼-inch or ¾-inch crushed stone or aggregate per the ASTM D2321 Types IA, IB and II with less than 5 % fines. A number two crusher run stone may also be applicable, but the gradation and material property specifications must qualify.

It is assumed that there will be little change in the existing grade other than some minor excavation. It is reasonably assumed that some stiff/very stiff or better cohesive fill and/or upper natural silty clay glacial till will remain in-place as the top of pavement subgrades. The cohesive fill and silty clay glacial till would generally be expected to be compacted to 92% minimum of ASTM D 1557 and pass a proof roll. Areas of unsuitable material will be undercut and replaced with an approved material that will be compacted and proof rolled. Fills and buried organic layers, if encountered, are not suitable for load bearing purposes.

Parking Ramp Facility Paved Areas: The characteristics of the natural silt and clay soils/fills and the known frost penetration in Western New York requires that specific attention is provided to the design and construction of paved roadway and parking areas. For new pavement sections, isolated pockets of surficial silty/cohesive/fine-grained soil/fill may be encountered and may be too soft and wet in the proposed parking ramp area. These types of soil/fill may be adequately conditioned (i.e., dried and blended) and compacted to support necessary construction equipment and normal pavement section. Otherwise, the removal/undercutting of the silty/cohesive/fine-grained soil/fill to a firm, approved subgrade and subsequent placement and compaction of select or approved granular fill will be required in order to accommodate the recommended paved sections.

It is recommended that the subgrade surface is adequately graded and/or underdrains are installed to prevent water accumulation. Above the approved subgrade surface (i.e., minimum 92 percent compaction of ASTM D1557), a minimum eight-inch thick select granular layer is recommended as the base course for lightly loaded (that is, non-automotive and office type) areas. A geotextile filter and strength fabric (such as, Mirafi 600X or equal) and minimum 12-inch thick base course are recommended for all heavily traveled and parking areas (heavy duty section). The NYS Department of Transportation (NYSDOT) specification numbers for typical aggregate subbase/base course components are Item No. 304.12 (Metric) Subbase Course, Type 2 (< 2 inch maximum size), which is preferred, or Item No. 304.14 (Metric) Subbase Course, Type 4 (< 2 inch maximum size). The granular base layer is to be compacted to at least 95 percent of the ASTM D1557maximum dry density.

Portland cement concrete slabs should have minimum thicknesses of four inches for the lightly loaded areas and six inches for the heavy duty section or as determined by the design structural engineer. For the proposed parking ramp with the approvable cohesive fill in-place (92% min. of ASTM D 1557), the maximum effective modulus of subgrade reaction value at the top of the 12 inch minimum thick compacted select granular base course layer (95% min. of ASTM D 1557) is recommended not to exceed 150 pounds per cubic inch (pci) for concrete slab-on-grade design purposes. Similarly, for a top of subgrade at a relative elevation of 85 feet or slightly lower and consisting of the upper level very stiff to hard natural silty clay glacial till, the maximum effective modulus of subgrade reaction is recommended not to exceed 375 pci. A Poission Ratio of 0.4 is recommended.

Limitations, Field Inspections and Monitoring: This report is based on the preliminary information that is provided by project representatives and the subsurface conditions that were encountered at the test boring locations. Due to the nature of the investigation method, test pit excavation will provide a greater level of delineation of the subsurface soil/fill conditions than can be defined by the test boring data alone. As detailed in Appendix E "Limitations", modification regarding proposed building/structure location and other site developments can result in changes to provided recommendations. It is recommended that the geotechnical engineer be provided the opportunity to generally review the final detailed design and contract specifications. Required earthwork and foundation construction should be done under the supervision of experienced construction personnel and in a manner consistent with proven methods. All site work should be carefully monitored and tested by experienced geotechnical personnel to assure compliance with earthwork and foundation construction specifications.

Thank you for the opportunity to assist on this project. If questions should arise, please call the undersigned at your earliest convenience.

Very truly yours,
BARRON & ASSOCIATES, INC.
and
BUFFALO DRILLING COMPANY, INC.

James S. Barron, P.E.
President/Geotechnical Engineer

STATE OF NEW YORK
JAMES S. BARRON
58612
LICENSED PROFESSIONAL ENGINEER

3.9.10

Carmen M. Panuccio
Geotechnical Engineer

Z:\Reports\Geotech. & Sp. Insp. Reports\Wpp10\10-510.doc

www.barronandassociatespc.com

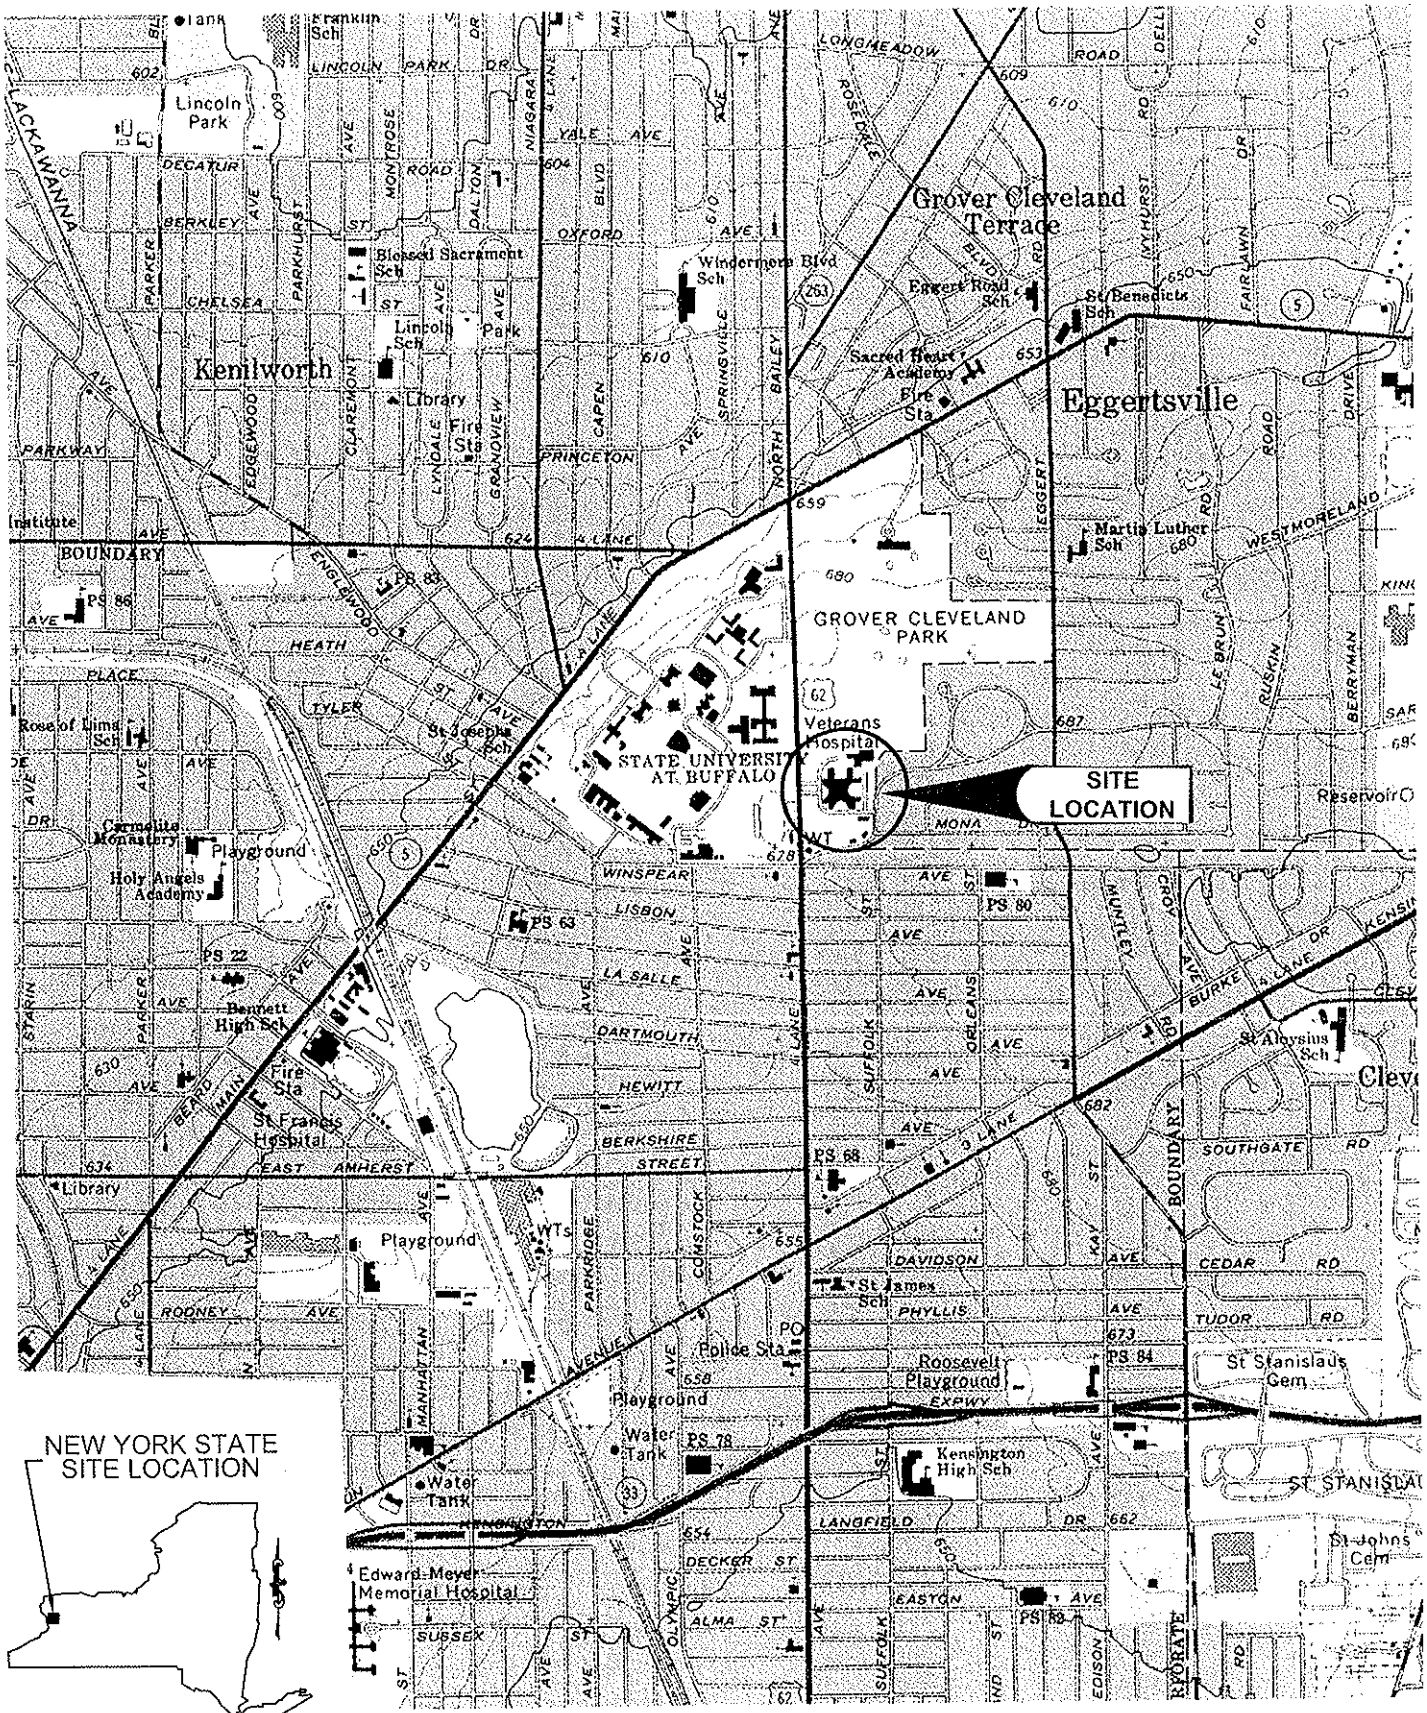

BARRON & ASSOCIATES, P.C. & BUFFALO DRILLING COMPANY
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
INFO@BUFFALODRILLING.COM
INFO@BARRONANDASSOCIATESPC.COM

DRAWN: DAN KASPROWICZ

CLIENT: KIDENEY ARCHITECTS, P.C.
200 JOHN JAMES AUDUBON PARKWAY
BUFFALO, NEW YORK 14228

PROJECT: PROPOSED VA HOSPITAL
MULTI-STORY PARKING RAMP STRUCTURE
3495 BAILEY AVENUE (US ROUTE 62)
BUFFALO, ERIE CO., NEW YORK 14215

USGS SITE LOCATION PLAN
BUFFALO NE, N.Y. QUAD
1965

JOB NO.: 10-510	SCALE: 1" = 2000' ±
DATE: 3/1/2010	FIGURE NO. 1

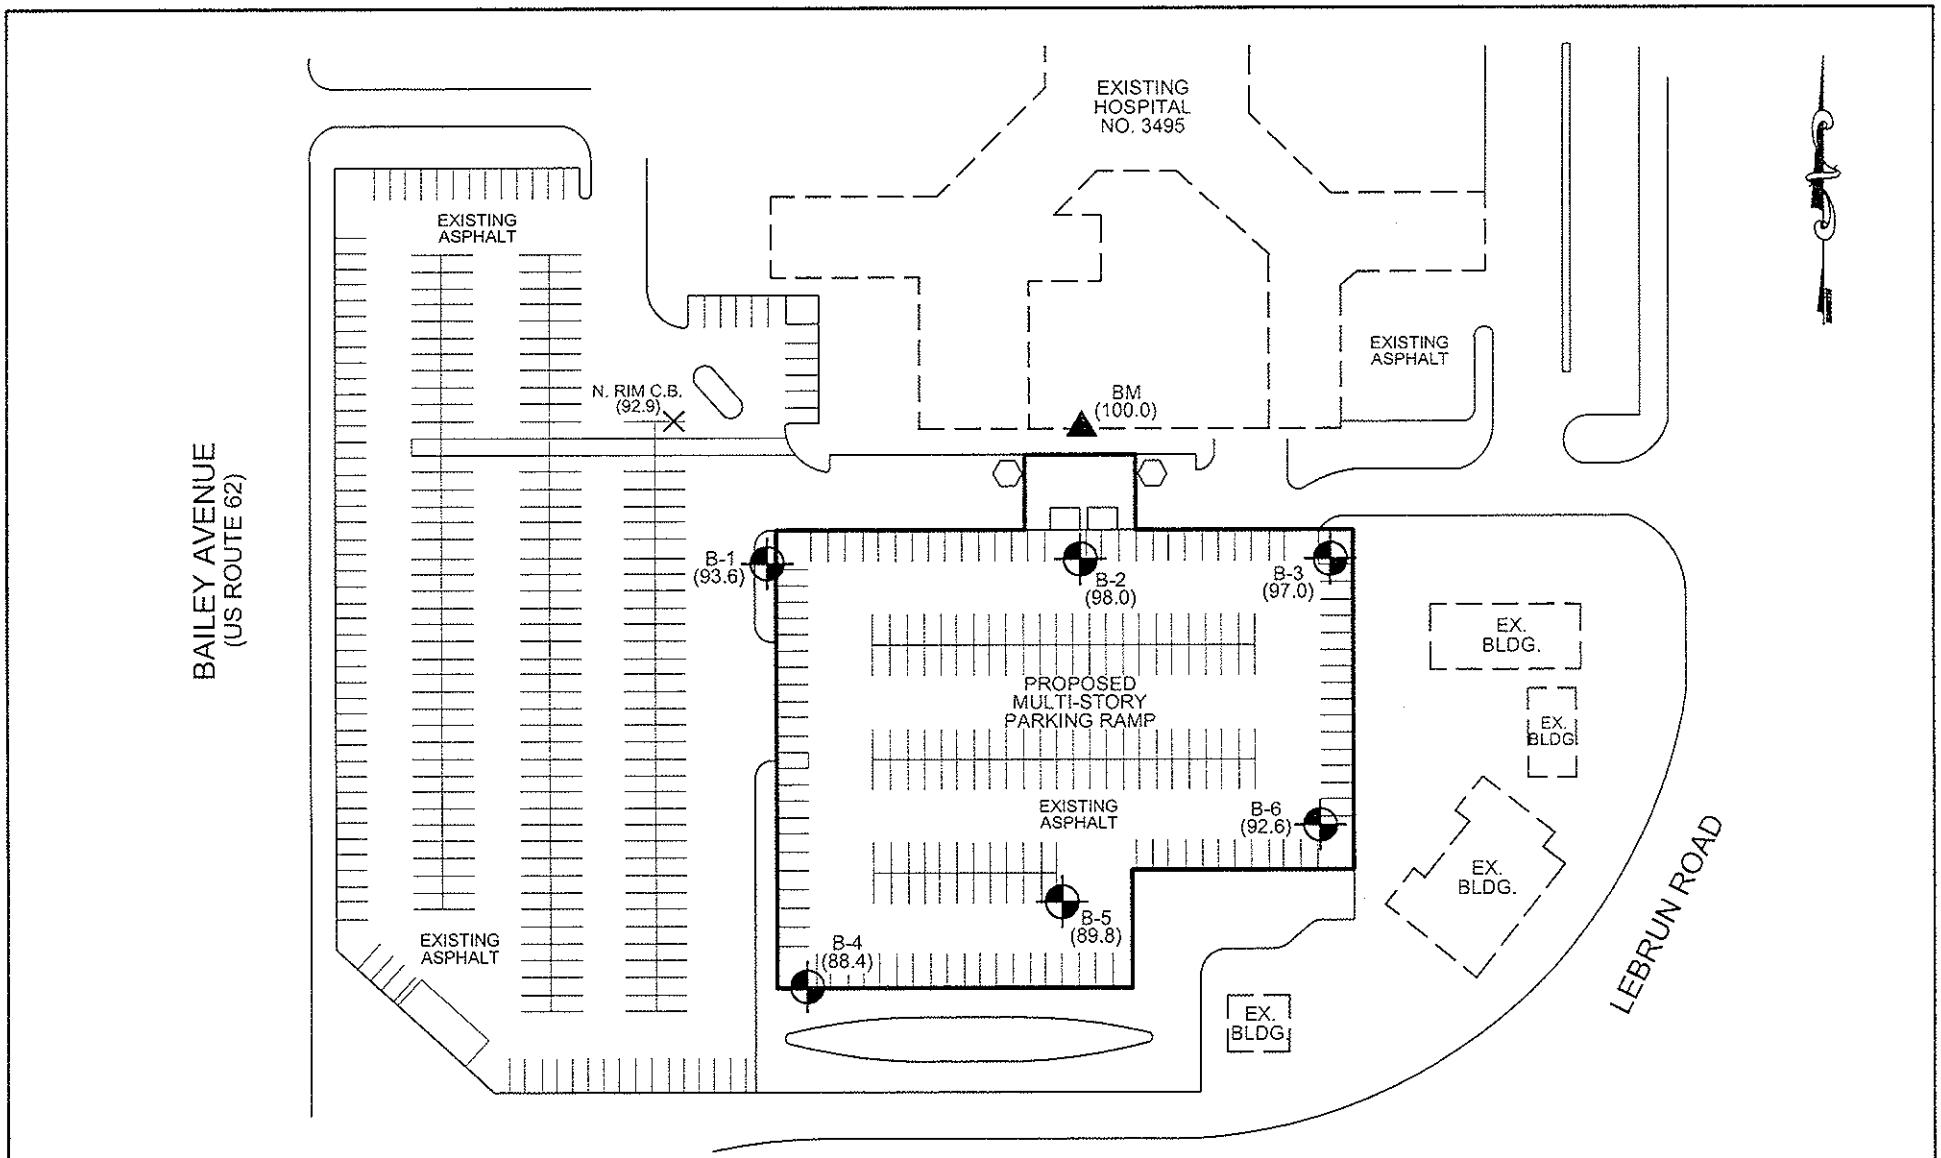

LEGEND		
⌖	B-2	= TEST BORING & NO.
	(98.0)	= RELATIVE GROUND SURFACE ELEVATION (FT.)
×		= SPOT ELEVATION
▲	BM	= BENCH MARK (FINISH FLOOR OF EXISTING BUILDING)

NOTES:

1. BORINGS, BUILDINGS, SITE FEATURES, PROPERTY LINE LOCATIONS, AND SCALE OF DRAWING ARE APPROXIMATE.
2. BASE MAP REFERENCE AND BORING LOCATIONS PROVIDED BY KIDENEY ARCHITECTS, TITLED "TEST BORING PLAN - BUFFALO VA PARKING RAMP DESIGN", B-1, UNDATED.

BARRON & ASSOCIATES, P.C. & BUFFALO DRILLING COMPANY
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
INFO@BUFFALODRILLING.COM
INFO@BARRONANDASSOCIATESPC.COM

DRAWN: DAN KASPROWICZ

CLIENT: KIDENEY ARCHITECTS, P.C.
200 JOHN JAMES AUDUBON PARKWAY
BUFFALO, NEW YORK 14228

PROJECT: PROPOSED VA HOSPITAL
MULTI-STORY PARKING RAMP STRUCTURE
3495 BAILEY AVENUE (US ROUTE 62)
BUFFALO, ERIE CO., NEW YORK 14215

TEST BORING LOCATION PLAN

0 60 120 240

JOB NO.: 10-510	SCALE: 1" = 120' ±
DATE: 3/1/2010	FIGURE NO. 2

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

APPENDIX A

TEST BORING LOGS

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-1

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/15/10	**SURFACE ELEVATION (ft.):**	93.6
DATE COMPLETED:	2/15/10	**GROUNDWATER DEPTH (ft.):** (measured at completion unless indicated below)	None

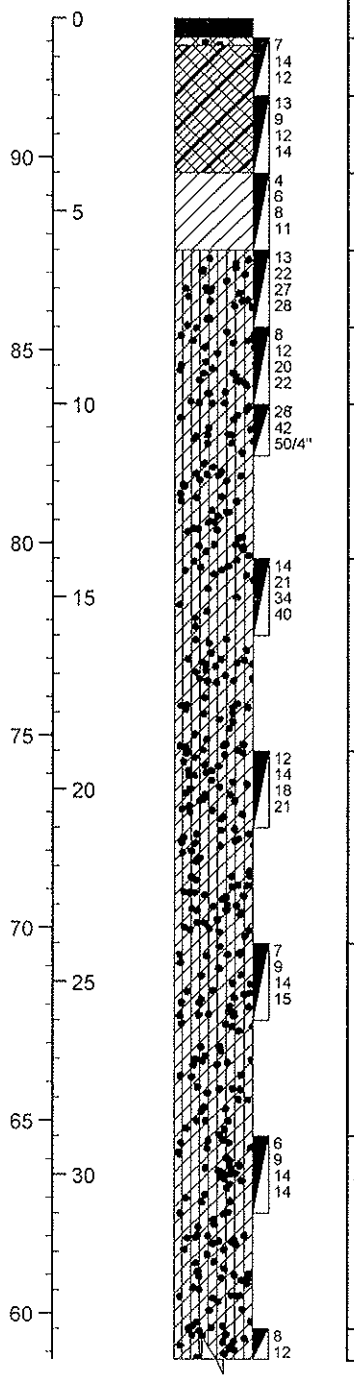

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
					Asphalt (6")
					Base Stone (2")
		S-1 : 0.5'- 2.0'	26	15	Gray/brown, v. stiff Clay, some Silt, little Gravel, little f/c Sand, sl./ mod. plastic, moist (CL-Fill)
		S-2 : 2.0'- 4.0'	21	75	...grade: Dk. brown, tr. Asphalt, tr. Roots
		S-3 : 4.0'- 6.0'	14	75	Brown, stiff CLAY, some Silt, little f. Sand, mod. plastic, moist (CL)
		S-4 : 6.0'- 8.0'	49	90	Gray/brown, hard CLAY, some silt, little Gravel, little f/c Sand, sl./ mod. plastic, moist (CL-Till)
		S-5 : 8.0'- 10.0'	32	100	Same as S-4
		S-6 : 10.0'- 11.3'	92+	75	...grade: some Gravel
		S-7 : 14.0'- 16.0'	55	15	Same as S-6
		S-8 : 19.0'- 21.0'	32	50	...grade: little Gravel
		S-9 : 24.0'- 26.0'	23	100	...grade: v. stiff, tr. f/c Sand
		S-10 : 29.0'- 31.0'	23	90	Same as S-9
					Same as S-9

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG (CONTINUATION)

JOB No.: 10-510 **BORING No.:** B-1

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
35		S-11 : 34.0'- 36.0'	25	100	
55, 40, 50, 45, 45, 50, 40, 55, 35, 60, 30, 65, 25, 70, 20, 75					Depth to Bottom of Hole: 37.0 feet

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-2

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/15/10	**SURFACE ELEVATION (ft.):**	98.0
DATE COMPLETED:	2/15/10	**GROUNDWATER DEPTH (ft.):** (measured at completion unless indicated below)	None

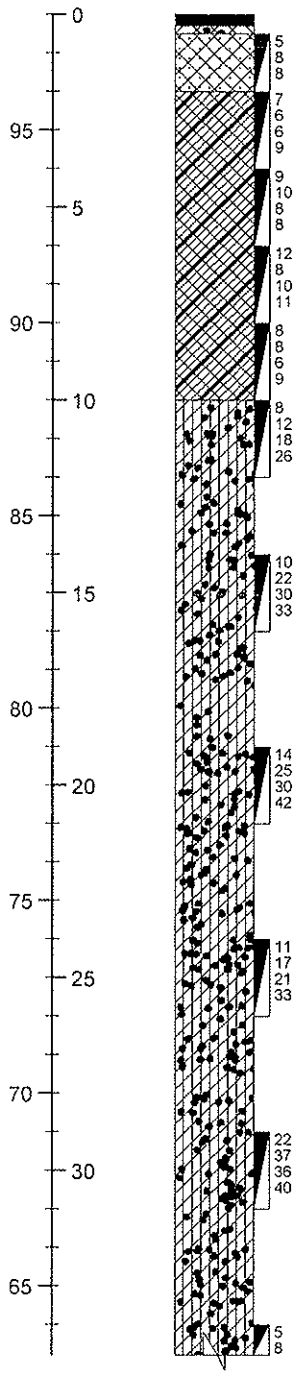

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
					Asphalt (4")
					Base Stone (2")
		S-1 : 0.5'- 2.0'	16	5	Gray/brown, m. dense f/c Sand, some Gravel, little Silt, moist (SW-SM-Fill)
		S-2 : 2.0'- 4.0'	12	15	Gray/brown, stiff Clay, some Silt, little Gravel, little f/c Sand, sl./mod. plastic, moist (CL-Fill)
		S-3 : 4.0'- 6.0'	18	70	...grade: v. stiff
		S-4 : 6.0'- 8.0'	18	75	Same as S-3
		S-5 : 8.0'- 10.0'	14	80	...grade: stiff, little Brick
		S-6 : 10.0'- 12.0'	30	75	Gray/brown, v. stiff CLAY, some Silt, little Gravel, little f/c Sand, sl. / mod. plastic, moist (CL-Till)
		S-7 : 14.0'- 16.0'	52	100	...grade: hard, some Gravel
		S-8 : 19.0'- 21.0'	55	90	Same as S-7
		S-9 : 24.0'- 26.0'	38	80	Same as S-7
		S-10 : 29.0'- 31.0'	73	0	Same as S-7 (No Sample)
					...grade: v. stiff, tr. f/c Sand

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG (CONTINUATION)

JOB No.: 10-510 **BORING No.:** B-2

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
35	14 16	S-11 : 34.0'- 36.0'	22	100	
60	9 12 12 14	S-12 : 38.0'- 40.0'	24	70	Same as S-11
40					Depth to Bottom of Hole: 40.0 feet
55					
45					
50					
50					
45					
55					
40					
60					
35					
65					
30					
70					
25					
75					

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-3

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/15/10	**SURFACE ELEVATION (ft.):**	97.0
DATE COMPLETED:	2/15/10	**GROUNDWATER DEPTH (ft.):** (measured at completion unless indicated below)	None

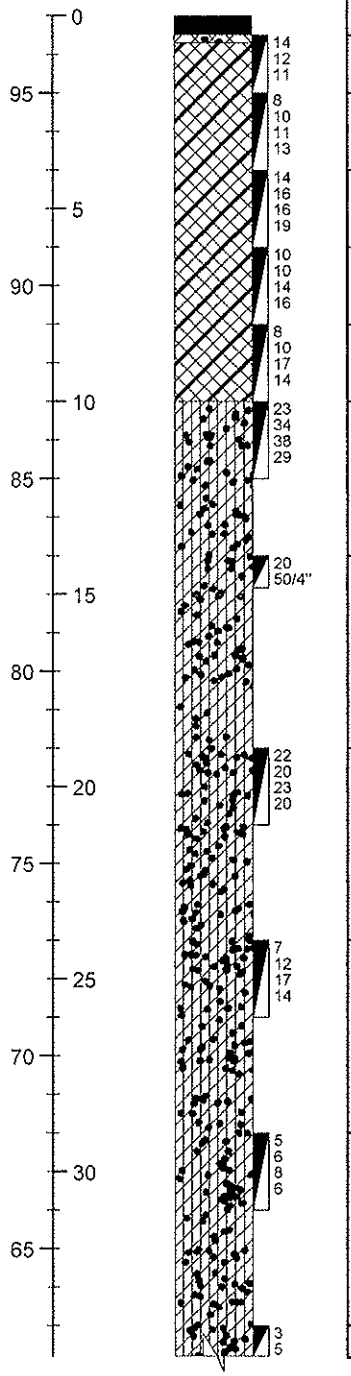

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
					Asphalt (6")
					Base Stone (2")
		S-1 : 0.5'- 2.0'	23	40	Gray/brown, v. stiff Clay, some Silt, little Gravel, little f/c Sand, sl. / mod. plastic, moist (CL-Fill)
		S-2 : 2.0'- 4.0'	21	50	Same as S-1
		S-3 : 4.0'- 6.0'	32	60	...grade: hard
		S-4 : 6.0'- 8.0'	24	75	...grade: Dk. brown, v. stiff, tr. Gravel, tr. Roots
		S-5 : 8.0'- 10.0'	27	20	...grade: Gray/brown, tr. Slag
		S-6 : 10.0'- 12.0'	72	95	Gray/brown, hard CLAY, some Silt, little Gravel, little f/c Sand, sl./ mod. plastic, moist (CL-Till)
		S-7 : 14.0'- 14.8'	50+	0	Same as S-6 (No Sample)
		S-8 : 19.0'- 21.0'	43	90	Same as S-6
		S-9 : 24.0'- 26.0'	29	0	...grade: v. stiff (No Sample)
		S-10 : 29.0'- 31.0'	14	90	...grade: stiff, tr. f/c Sand
					Same as S-10

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG (CONTINUATION)

JOB No.: 10-510 **BORING No.:** B-3

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
35	9 14	S-11 : 34.0'- 36.0'	14	60	
60					
	8 8 14 16	S-12 : 38.0'- 40.0'	22	65	...grade: v. stiff
40					
55					Depth to Bottom of Hole: 40.0 feet
45					
50					
50					
45					
55					
40					
60					
35					
65					
30					
70					
25					
75					
20					

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-4

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/18/10	**SURFACE ELEVATION (ft.):**	88.4
DATE COMPLETED:	2/18/10	**GROUNDWATER DEPTH (ft.):** (measured at completion unless indicated below)	None

Elevation/ Depth (feet) | Soil Symbols Sampler Symbols Field Test Data

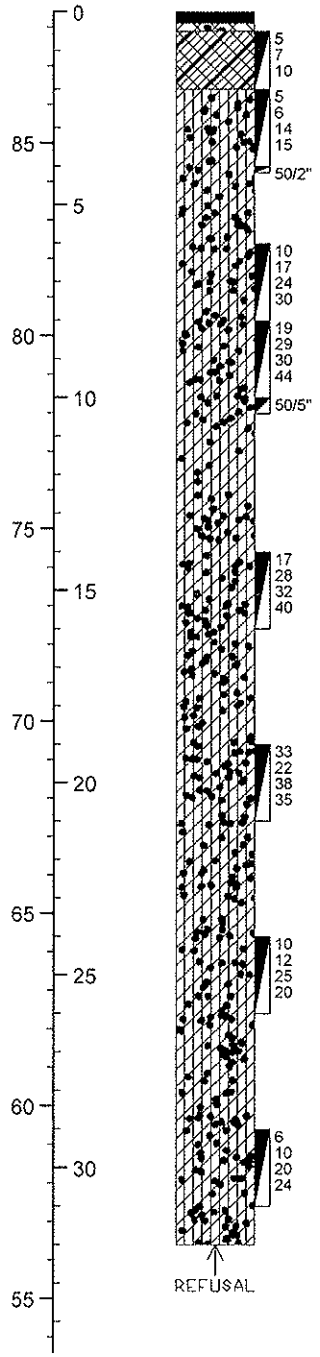

Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
			Asphalt (4")
			Base Stone (2")
S-1 : 0.5'- 2.0'	17	10	Dk. brown, v. stiff Clay, some Silt, little Gravel, little f/c Sand, tr. Asphalt, sl./mod. plastic, moist (CL-Fill)
S-2 : 2.0'- 4.0'	20	40	Brown, v. stiff CLAY, some Silt, little Gravel, little f/c Sand, sl./mod. plastic, moist (CL-Till)
S-3 : 4.0'- 4.2'	50+	0	...grade: hard (No Sample)
S-4 : 6.0'- 8.0'	41	100	Same as S-3
S-5 : 8.0'- 10.0'	59	100	Same as S-3
S-6 : 10.0'- 10.4'	50+	50	Same as S-3
S-7 : 14.0'- 16.0'	60	95	Same as S-3
S-8 : 19.0'- 21.0'	60	75	Same as S-3
S-9 : 24.0'- 26.0'	37	75	...grade: tr. f/c Sand
S-10 : 29.0'- 31.0'	30	100	...grade: v. stiff
			Depth to Bottom of Hole: 32.0 feet

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-5

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/18/10	**SURFACE ELEVATION (FT):**	89.8
DATE COMPLETED:	2/18/10	**GROUNDWATER DEPTH (FT):** (measured at completion unless indicated below)	None

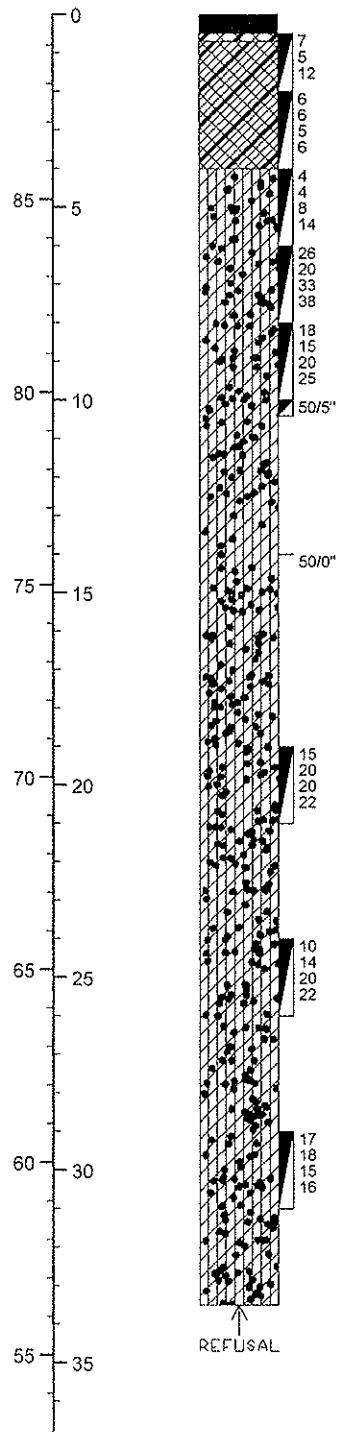

Elevation/ Depth	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
					Asphalt (6")
					Base Stone (2")
		S-1 : 0.5' - 2.0'	17	20	Dk. brown, v. stiff Clay, some Silt, little Gravel, little f/c Sand, tr. Slag, tr. Brick, sl./mod. plastic, moist (CL-Fill)
		S-2 : 2.0' - 4.0'	11	70	...grade: stiff
		S-3 : 4.0' - 6.0'	12	70	Gray/brown, stiff CLAY, some Silt, little Gravel, little f/c Sand, sl./ mod. plastic, moist (CL-Till)
		S-4 : 6.0' - 8.0'	53	75	...grade: hard
		S-5 : 8.0' - 10.0'	35	5	Same as S-4
		S-6 : 10.0' - 10.4'	50+	0	Same as S-4 (No Sample)
		S-7 : 14.0' - 14.0'	50+	0	Same as S-4 (No Sample)
		S-8 : 19.0' - 21.0'	40	60	Same as S-4
		S-9 : 24.0' - 26.0'	34	70	...grade: tr. f/c Sand
		S-10 : 29.0' - 31.0'	33	45	Same as S-9
					Depth to Bottom of Hole: 33.5 feet

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG

JOB No.: 10-510 **BORING No.:** B-6

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

DRILLER:	C. Weaver	**TYPE OF DRILL RIG:**	Diedrich D-50 (Truck)
SAMPLING METHODS:	ASTM D1586	**SIZE AND TYPE OF BIT:**	2 1/4" I.D. H.S.A.
DATE STARTED:	2/16/10	**SURFACE ELEVATION (ft.):**	92.6
DATE COMPLETED:	2/16/10	**GROUNDWATER DEPTH (ft.):** (measured at completion unless indicated below)	None

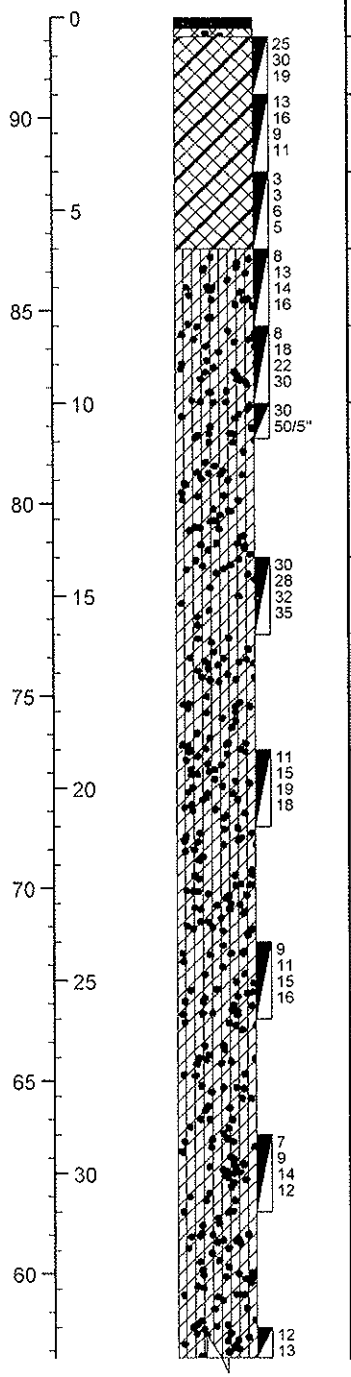

Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
			Asphalt (4")
			Base Stone (2")
S-1 : 0.5'- 2.0'	49	40	Brown, hard Clay, some Silt, little Gravel, little f/c Sand, sl./mod. plastic, moist (CL-Fill)
S-2 : 2.0'- 4.0'	25	60	...grade: v. stiff
S-3 : 4.0'- 6.0'	9	15	...grade: Dk. brown, stiff, tr. Plastic, tr. Roots
S-4 : 6.0'- 8.0'	27	80	Gay/brown, v. stiff CLAY, some Silt, little Gravel, little f/c Sand, sl./ mod. plastic, moist (CL-Till)
S-5 : 8.0'- 10.0'	40	95	...grade: hard
S-6 : 10.0'- 10.9'	50+	80	Same as S-5
S-7 : 14.0'- 16.0'	60	60	Same as S-5
S-8 : 19.0'- 21.0'	34	75	Same as S-5
S-9 : 24.0'- 26.0'	26	90	...grade: v. stiff, tr. f/c Sand
S-10 : 29.0'- 31.0'	23	50	Same as S-9
			...grade: hard (No Sample)

Logged by: B. Smith

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN STREET
CLARENCE, NEW YORK 14031
(716) 759-7821 FAX: (716) 759-7823

TEST BORING LOG (CONTINUATION)

JOB No.: 10-510 **BORING No.:** B-6

PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure
3495 Bailey Avenue, Buffalo, Erie Co., New York 14215

Elevation/ Depth (feet)	Soil Symbols Sampler Symbols Field Test Data	Sample No. : Range	N-Value	% REC (RQD)	Soil and Rock Description / Remarks
35		S-11 : 34.0'- 36.0'	38	0	
55					Depth to Bottom of Hole: 37.5 feet
40					
50					
45					
45					
50					
40					
55					
35					
60					
30					
65					
25					
70					
20					
75					

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

APPENDIX B

GEOTECHNICAL REFERENCE STANDARDS

GEOTECHNICAL REFERENCE STANDARDS
SUMMARY OF LOGGING TECHNIQUES

Depth (feet)	Blows per 0.5 foot	Sample No.	N	% REC (RQD)	SOIL AND ROCK DESCRIPTION	Remarks

DEPTH: This column provides the verticle scale of the boring log in feet below ground surface.

BLOWS: The number of blows obtained from each of the 0.5-foot intervals of sampler penetration.

Note:
WR = static weight of drill rods.
WH = static weight of rods and hammer.

SAMPLE IDENTIFICATION NUMBER:
An "S" preceding the sample number identifies a Disturbed Sample.
A "U" preceding the sample number identifies an Undisturbed Sample (Shelby tube).
A "C" preceding the sample number identifies a Rock Core Sample.

% RECOVERY: The length of sample recovered divided by the total length sampled. The result is a numerically-expressed percentage.

(RQD): "Rock Quality Designation" The total length of pieces > 4 inches divided by the total length of core run.

N-VALUE: The Standard Penetration Test N-Value, as specified by ASTM D1586 is defined as the number of blows required by a 140-pound hammer falling 30 inches per blow to drive a 2-inch outside diameter split spoon sampler 12 inches.

TERMINOLOGY USED FOR SOIL DESCRIPTION

Density Description of Granular Soil

Number of Blows per foot, N	Relative Density
0 - 4	Very Loose
4 - 10	Loose
10 - 30	Medium
30 - 50	Dense
Over 50	Very Dense

Consistency Description of Cohesive Soil

Number of Blows per foot, N	Consistency
Below 2	Very soft
2 - 4	Soft
4 - 8	Medium
8 - 15	Stiff
15 - 30	Very Stiff
Over 30	Hard

Grain Size

Boulder	-	greater than 12-inch diameter
Cobble	-	passing 12-inch, retained on 3-inch.
Gravel	-	passing 3-inch, retained on No. 4 sieve
Sand	- Coarse	passing No. 4 sieve, retained on No. 10 sieve
	- Medium	passing No. 10 sieve, retained on No. 40 sieve
	- Fine	passing No. 40 sieve, retained on No. 200 sieve
Silt	-	0.074 mm to 0.005 mm
Clay	-	smaller than 0.005 mm

Description of Percentage or Proportions Used in Soil Sample Classification

Trace	0 - 10 %
Little	10 - 20 %
Some	20 - 35 %
And	35 - 50 %

Abbreviations Used In Soil Sample Classification

f	- fine	v	- very
m	- medium	gr	- gray
c	- coarse	bn	- brown
f/m	- fine to medium	yel	- yellow
f/c	- fine to coarse	sl	- slight
tr	- trace		

Plasticity

Non-plastic	- A 1/8-inch thread cannot be rolled at any water content.
Slight Plasticity	- The thread can barely be rolled.
Moderate Plasticity	- Thread is easy to roll and little time is required to reach plastic limit.
Plastic	- Considerable time is required to reach plastic limit. Thread can be re-rolled several times after reaching the plastic limit.

Moisture

Dry	- Absence of moisture, dusty, dry to the touch.
Moist	- Small quantity of moisture. Soil usually above groundwater level.
Wet	- Moisture noticeable to the touch. Soil may be below groundwater level.
Saturated	- Visible free water. Usually soil is below groundwater level.

TERMINOLOGY USED FOR ROCK DESCRIPTION

Bedding

Parting	Less than 0.02 ft.
Band	0.02 to 0.2 ft.
Thin Bed	0.2 to 0.5 ft.
Medium Bed	0.5 to 1.0 ft.
Thick Bed	1.0 to 2.0 ft.
Massive	Over 2.0 ft.

Hardness

Very Soft or Plastic	- Can be indented with thumb.
Soft	- Can be scratched with fingernail.
Moderately Hard	- Can be scratched easily with knife. Cannot be scratched with fingernail.
Hard	- Difficult to scratch with knife.
Very Hard	- Cannot be scratched with knife.

Crystallinity or Texture

Dense	- Crystals are so small they cannot be distinguished with the naked eye.
Very Fine Crystalline	- Crystals barely discernible with the naked eye.
Crystalline	- Crystals are medium size; up to 1/8-inch diameter.
Very Coarsely Crystalline	- Crystals larger than 1/8-inch diameter.

Voids

Pourous	- Smaller than a pinhead. Their presence is indicated by the degree of absorbancy.
Pitted	- Pinhead size to 1/4-inch. If only thin walls separate the individual pits, the core may be described as honeycombed.
Vug	- 1/4-inch to the diameter of the core. The upper limit will vary with core size.
Cavity	- Larger than the diameter of the core.

REMARKS: Denotes exact depth of recovery and general documentation of drilling efforts.

Notes: Description and classification are based on visual inspection of samples and boring operations.

The stratum lines shown on the boring logs are based upon interpretation and may not represent precise subsurface conditions.

Water level readings have been made in the drill holes at times and under conditions stated on the boring logs. Fluctuations in the water level may occur due to other factors than those present at the time measurements are taken.

SOIL CLASSIFICATION CHART
(Unified Soil Classification System)

MAJOR DIVISIONS			GRAPH SYMBOL	LETTER SYMBOL	TYPICAL DESCRIPTIONS
COARSE-GRAINED SOILS More than 50% of material larger than No. 200 sieve	GRAVELS More than 50% of coarse fraction larger than No. 4 sieve	Clean Gravels (little or no fines)		GW	Well-graded gravels, gravel-sand mixtures, little or no fines
				GP	Poorly-graded gravels, gravel-sand mixtures, little or no fines
		Gravels with appreciable amounts of fines		GM	Silty gravels, gravel-sand-silt mixtures
				GC	Clayey gravels, gravel-sand-clay mixtures
	SANDS Less than 50% of coarse fraction larger than No. 4 sieve	Clean sands (little or no fines)		SW	Well-graded sands, gravelly sands, little or no fines
				SP	Poorly-graded sands, gravelly sands, little or no fines
		Sands with appreciable amounts of fines		SM	Silty sands, silt-sand mixture
				SC	Clayey sands, sand-clay mixture
FINE-GRAINED SOILS Less than 50% of material larger than No. 200 sieve	SILTS AND CLAYS Low plasticity Liquid Limit less than 50%			ML	Inorganic silts and very fine sands, rock flour, silty or clayey fine sands or clayey silts with slight plasticity
				CL	Inorganic clays of low to medium plasticity, gravely clays, sandy clays, silty clays, lean clays
				OL	Organic silts and organic silty clays of low plasticity
	SILTS AND CLAYS High plasticity Liquid Limit greater than 50%			MH	Inorganic silts, micaceous or diatomaceous fine sand or silt soils
				CH	Inorganic clays of high plasticity, fat clays
				OH	Organic clays of medium to high plasticity, organic silts
	Highly Organic Soils			Pt	Peat, humus, swamp soils with organic contents
	Miscellaneous Fill			FILL	Miscellaneous fill may belong in any division but is identified as FILL

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

APPENDIX C

ENGINEERING COMPUTATIONS AND SCHEMATICS

"PROFILE OF BORINGS"

DESIGN PROFILE

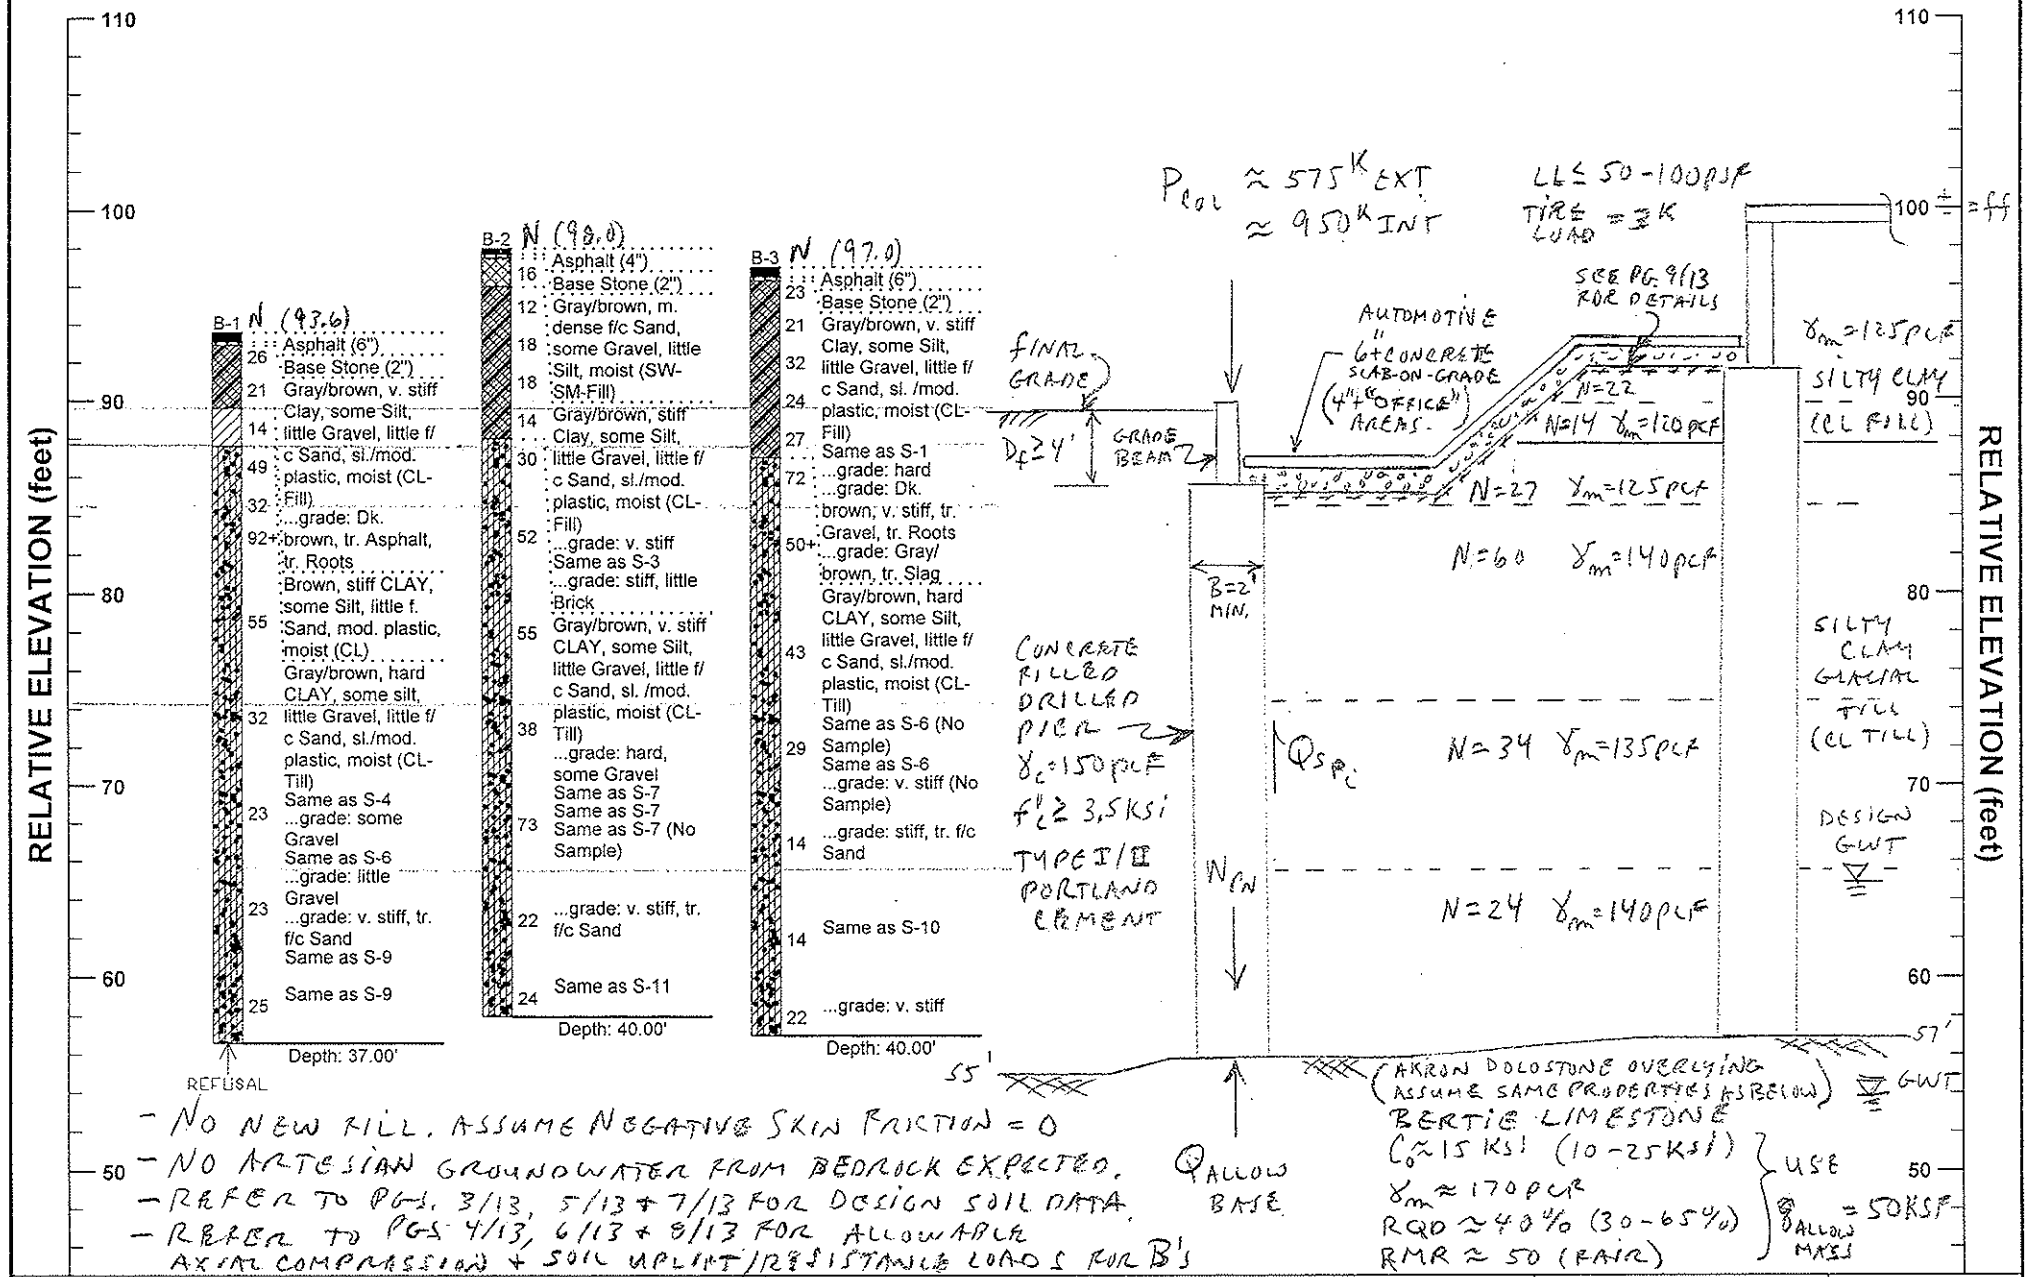

- NO NEW FILL. ASSUME NEGATIVE SKIN FRICTION = 0
- NO ARTESIAN GROUNDWATER FROM BEDROCK EXPECTED.
- REFER TO PGS. 3/13, 5/13 + 7/13 FOR DESIGN SOIL DATA.
- REFER TO PGS 4/13, 6/13 + 8/13 FOR ALLOWABLE AXIAL COMPRESSION + SOIL UPLIFT/RESISTANCE LOADS FOR B's

BARRON & ASSOCIATES, P.C. & BUFFALO DRILLING COMPANY, INC. 10440 MAIN STREET, CLARENCE, NEW YORK 14031	PLOTTED: 2/25/2010 BY: A. Camping	JOB NO.: 10-510
PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure 3495 Bailey Avenue, Buffalo, Erie Co., New York 14215	PAGE NO.: 1 OF 13	FIGURE NO.: P-1

"PROFILE OF BORINGS"

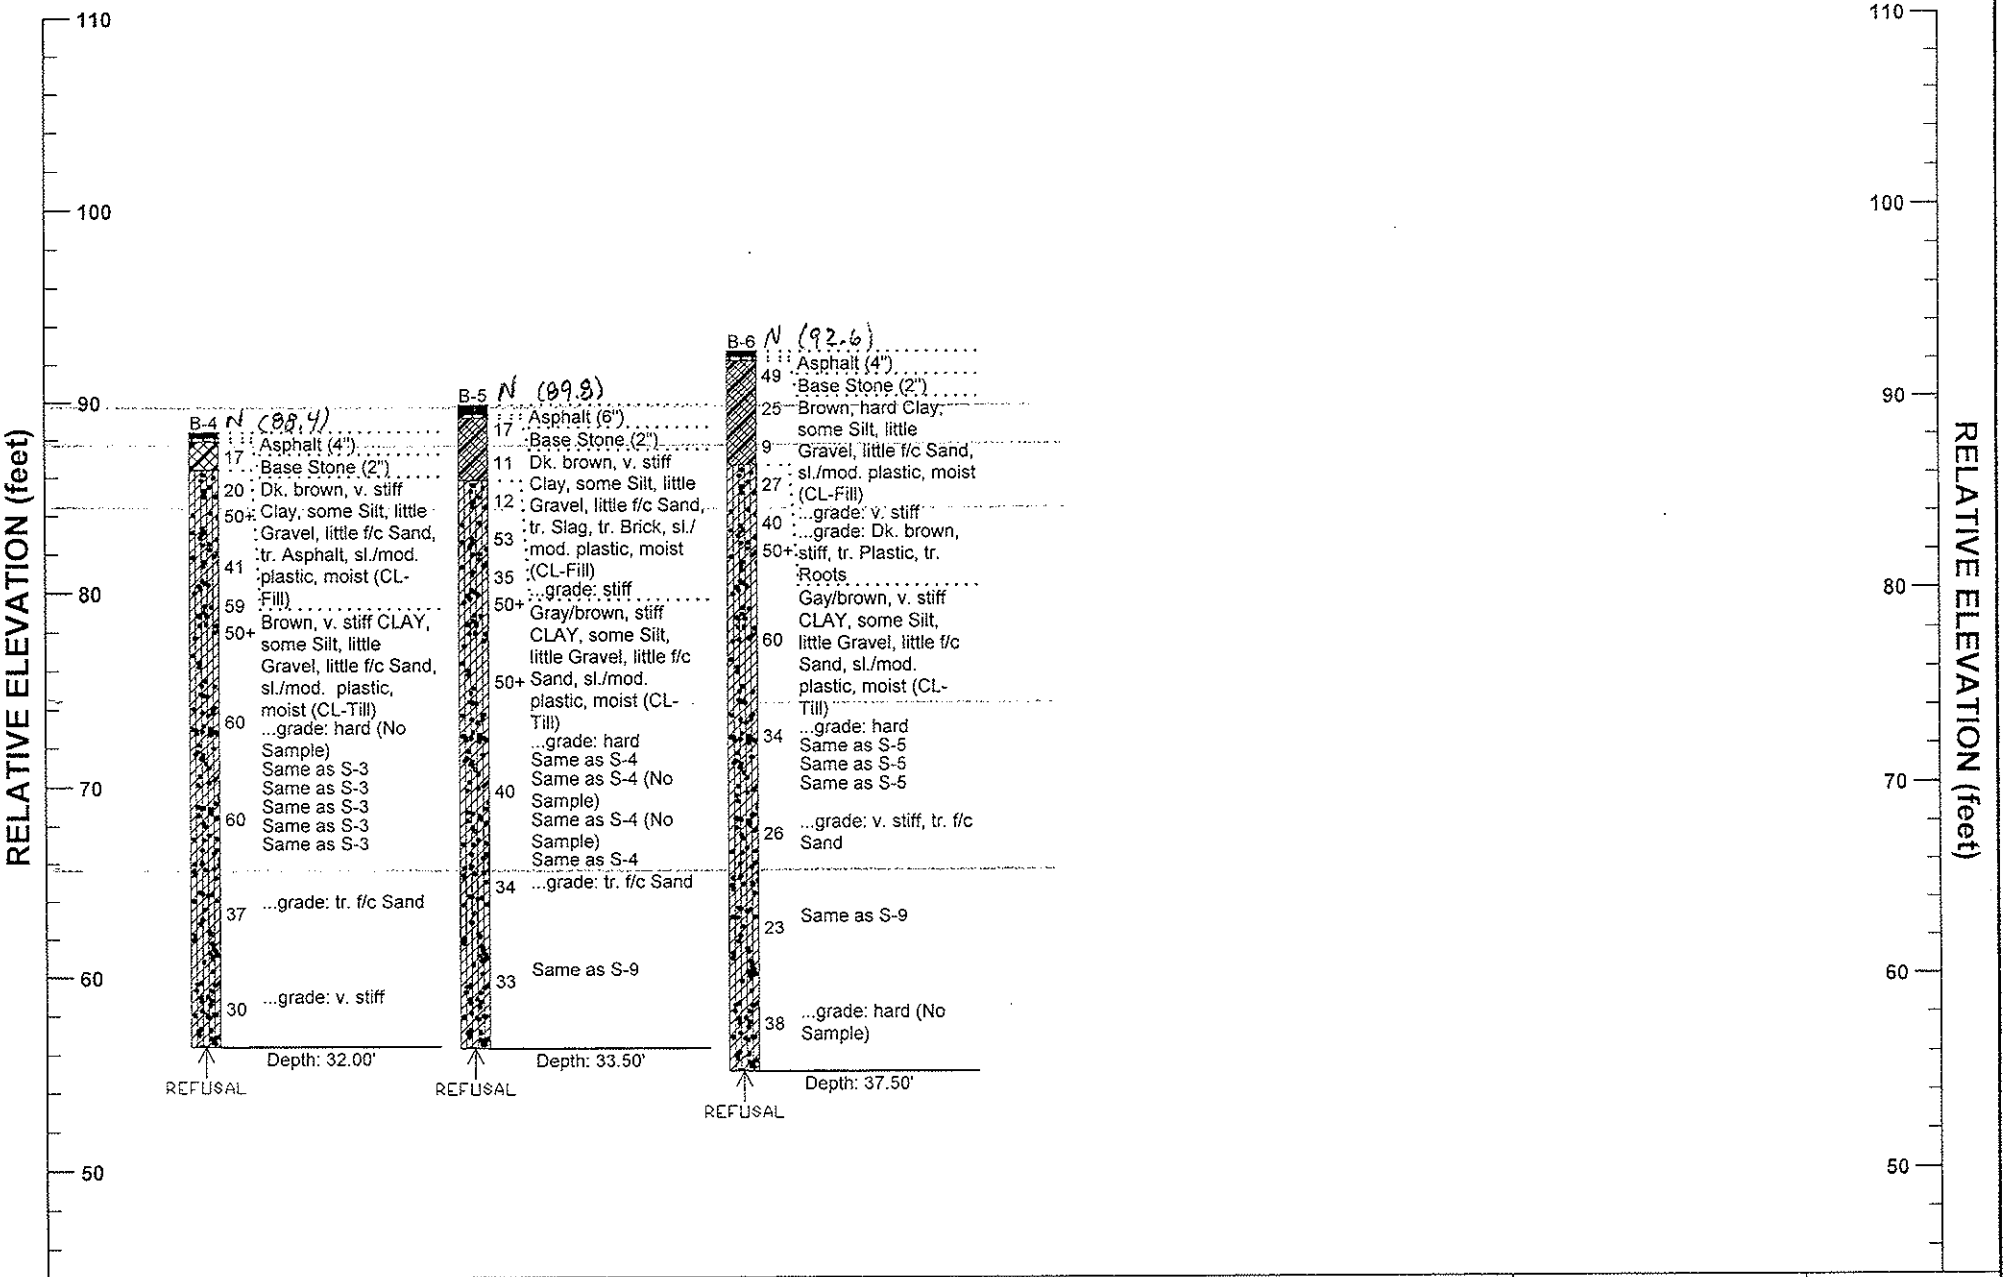

BARRON & ASSOCIATES, P.C. & BUFFALO DRILLING COMPANY, INC. **10440 MAIN STREET, CLARENCE, NEW YORK 14031**	PLOTTED: 3/5/2010 BY: A. Camping	JOB NO.: 10-510
PROJECT: Proposed VA Hospital Multi-Story Parking Ramp Structure 3495 Bailey Avenue, Buffalo, Erie Co., New York 14215	PAGE NO.: 2 of 13	FIGURE NO.: P-2

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Undrained L = 29.5 ft.

Elev. top of pier =	85.5	feet	Pier Length (l) =	29.5	feet
Elev. bottom of pier =	56.0	feet	Avg. Existing Grade =	89.5	feet
Density of concrete (δ_c) =	150	pcf	Ground Water Table =	65.5	feet
Compressive Strength (f'_c) =	3,500	psi	Elev. of Neutral Plane =	89.5	feet

(GWT and NP must be a listed bottom of layer elevation)

Layer (i)	Elev. Layer Bottom (feet)	Layer Thickness (t) (feet)	Mass Density of Soil (pcf)	Eff. Stress Mid-Depth of Layer (psf)	N-Value Design (-)	$(N_1)_{60}$ (-)	Friction Angle (phi) (degrees)	Cohesion (C_{uu}) (psf)	Adhesion (5,500 psf max. soil) (psf)	Available Adhesion Layer Thickness t_{ai} (feet)	Ultimate Adhesion Skin Friction $Q'_{csf\ ult\ i}$ (plf)	Absolute Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $Q'_{\Phi sf\ ult\ i}$ (plf)	Uncounted NSF Top 5': Ultimate Cohesive Skin Friction $Q'_{csf\ ult\ i}$ (plf)
0	89.5	0.0	0	0	0	0	0	0	0	0.0	0	0	0	0	0
1	88.5	1.0	120	60	14.0	28	0.0	1,347	741	0.0	0	0	0	0	0
2	87.5	1.0	120	180	14.0	25	0.0	1,363	750	0.0	0	0	0	0	0
3	84.5	3.0	125	428	27.0	41	0.0	2,648	1,457	0.0	0	0	0	0	0
4	74.5	10.0	140	1,315	60.0	69	0.0	5,923	3,258	10.0	32,579	0	0	0	0
5	65.5	9.0	135	2,623	34.0	31	0.0	3,425	1,884	9.0	16,955	0	0	0	0
6	56.0	9.5	140	3,599	24.0	19	0.0	2,415	1,328	9.5	12,618	0	0	0	0
7	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
8	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
9	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
10	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
11	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
12	56.0	0.0	140	3,967	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
base	56.0		apparent bedrock net allowable bearing capacity (psf) =					50,000	yes						



- *Layer 12 elevation also defines the soil drained/undrained soil bearing conditons for pier base/tip. The underlying soil strength is >/= the soil strength in layer 12.*
- In cohesive soil, any portion of pier less than 5 feet below ground surface has no positive, but can have negative, skin friction.
- Above neutral plane in layered soils, a loose granular layer is considered to contribute to NSF, if its thickness is less than the thickness of the overlying cohesive layer. Treat as a single layer and avoid spilting by groundwater table, if possible.
- Frictional/drained soils have cohesion = 0 psf. To not include either side resistance in a layer, make friction angle = 0 and/or adhesion = 0.

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Undrained L = 29.5 ft.

Granular base adjustment factor for large B, α_3 = 0.036

FS compression skin soil/IGM = 3.0 FS compression base soil/IGM = 3.0 FS uplift/pullout soil/IGM = 3.0

Pier Diameter B (feet)	Total Buoyant Weight of Pier W_{pt} (kips)	Net Weight of Pier W_{pn} (kips)	Ultimate Axial Skin Compression: Negative Skin Friction $Q_{nsf\ ult}$ (kips)	Positive Skin Friction $Q_{psf\ ult}$ (kips)	B Above Base Adjusted Cohesive Positive Skin Friction $Q_{Bpsf\ ult}$ (kips)	On Soil/Intermediate Geomat'l.: Allowable Axial Compression Base on Granular $Q_{allow\ base}$ (kips)	Allowable Axial Compression Base on Cohesive $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	On Bedrock: Allowable Axial Compression Base on Bedrock $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	Allowable Axial Equivalent Base Pressure $q_{allow\ base}$ (ksf)	Soil Uplift/ Pullout (Non-NSF) Upper Granular Skin Friction $Q_{\Phi u/psf\ ult}$ (kips)	Soil Uplift/ Pullout Allowable (Pos+Neg +Non-NSF) Skin Friction $Q_{u/psf\ all}$ (kips)
2.0	12.1	1.3	0.0	390.5	-16.7	0.0	22.8	146.1	157.1	280.4	89.3	0.0	91.1
2.5	19.0	2.0	0.0	488.1	-26.1	0.0	35.6	187.6	245.4	397.4	81.0	0.0	113.9
3.0	27.3	2.9	0.0	585.8	-37.6	0.0	51.2	231.0	353.4	533.3	75.4	0.0	136.7
3.5	37.2	3.9	0.0	683.4	-51.1	0.0	69.7	276.5	481.1	687.9	71.5	0.0	159.5
4.0	48.5	5.1	0.0	781.0	-66.8	0.0	91.0	324.0	628.3	861.3	68.5	0.0	182.2
4.5	61.4	6.5	0.0	878.6	-84.5	0.0	115.2	373.4	795.2	1,053.4	66.2	0.0	205.0
5.0	75.9	8.0	0.0	976.3	-104.3	0.0	142.2	424.8	981.7	1,264.4	64.4	0.0	227.8
5.5	91.8	9.7	0.0	1,073.9	-126.2	0.0	172.1	478.3	1,187.9	1,494.1	62.9	0.0	250.6
6.0	109.2	11.6	0.0	1,171.5	-150.2	0.0	204.8	533.7	1,413.7	1,742.6	61.6	0.0	273.4
6.5	128.2	13.6	0.0	1,269.2	-176.3	0.0	342.2	692.9	1,659.2	2,009.9	60.6	0.0	296.1
7.0	148.7	15.8	0.0	1,366.8	-204.5	0.0	396.7	768.4	1,924.2	2,295.9	59.7	0.0	318.9
7.5	170.7	18.1	0.0	1,464.4	-234.7	0.0	455.2	847.0	2,208.9	2,600.7	58.9	0.0	341.7
8.0	194.2	20.6	0.0	1,562.0	-267.0	0.0	517.7	928.8	2,513.3	2,924.4	58.2	0.0	364.5
										USE ⇑	USE ⇑		USE ⇑

- In compression in cohesive soil, part of pier < 5 feet below ground surface has no positive skin friction, but can have NSF; and part of pier < B feet above the bottom of pier has no skin friction.
- In uplift in cohesive soil, part of pier < 5 feet below ground surface has no resisting skin friction (incl. NSF), but part of pier < B feet above the bottom of pier has resisting (positive & NSF) skin friction.

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Drained L = 29.5 ft. phi' = 30 deg

C.M.Panuccio
page 5 of 13
Job No. 10-510

Elev. top of pier = 85.5 feet
Elev. bottom of pier = 56.0 feet
Density of concrete (δ_c) = 150 pcf
Compressive Strength (f'_c) = 3,500 psi

Pier Length (l) = 29.5 feet
Avg. Existing Grade = 89.5 feet
Ground Water Table = 65.5 feet
Elev. of Neutral Plane = 89.5 feet
(GWT and NP must be a listed bottom of layer elevation)

Layer (i)	Elev. Layer Bottom (feet)	Layer Thickness (t) (feet)	Mass Density of Soil (pcf)	Eff. Stress Mid-Depth of Layer (psf)	N-Value Design (-)	$(N_1)_{60}$ (-)	Friction Angle (phi) (degrees)	Cohesion (C_{uu}) (psf)	Adhesion (5,500 psf max. soil) (psf)	Available Adhesion Layer Thickness t_{ai} (feet)	Ultimate Adhesion Skin Friction $Q'_{csf\ ult\ i}$ (plf)	Absolute Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $Q'_{\Phi sf\ ult\ i}$ (plf)	Uncounted NSF Top 5': Ultimate Cohesive Skin Friction $Q'_{csf\ ult\ i}$ (plf)
0	89.5	0.0	0	0	0	0	0	0	0	0.0	0	0	0	0	0
1	88.5	1.0	120	60	10.0	10	30.1	0	0	0.0	0	0	0	0	0
2	87.5	1.0	120	180	10.0	10	30.1	0	0	0.0	0	0	0	0	0
3	84.5	3.0	125	428	10.0	10	30.1	0	0	0.0	0	513	513	1,539	0
4	74.5	10.0	140	1,315	10.0	10	30.1	0	0	0.0	0	1,411	1,411	14,111	0
5	65.5	9.0	135	2,623	10.0	10	30.1	0	0	0.0	0	2,370	2,370	21,333	0
6	56.0	9.5	140	3,599	10.0	10	30.1	0	0	0.0	0	2,793	2,793	26,534	0
7	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
8	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
9	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
10	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
11	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
12	56.0	0.0	140	3,967	10.0	10	30.1	0	0	0.0	0	2,851	2,851	0	0
base	56.0														

apparent bedrock net allowable bearing capacity (psf) = 50,000 yes

- *Layer 12 elevation also defines the soil drained/undrained soil bearing conditons for pier base/tip. The underlying soil strength is >/= the soil strength in layer 12.*
- In cohesive soil, any portion of pier less than 5 feet below ground surface has no positive, but can have negative, skin friction.
- Above neutral plane in layered soils, a loose granular layer is considered to contribute to NSF, if its thickness is less than the thickness of the overlying cohesive layer. Treat as a single layer and avoid spilting by groundwater table, if possible.
- Frictional/drained soils have cohesion = 0 psf. To not include either side resistance in a layer, make friction angle = 0 and/or adhesion = 0.

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Drained L = 29.5 ft. phi' = 30 deg

C.M.Panuccio
page 6 of 12
Job No. 10-510

Granular base adjustment factor for large B, α_3 = 0.036

FS compression skin soil/IGM = 3.0 FS compression base soil/IGM = 3.0 FS uplift/pullout soil/IGM = 3.0

Pier Diameter B (feet)	Total Buoyant Weight of Pier W_{pt} (kips)	Net Weight of Pier W_{pn} (kips)	Ultimate Axial Skin Compression: Negative Skin Friction $Q_{nsf\ ult}$ (kips)	Positive Skin Friction $Q_{psf\ ult}$ (kips)	B Above Base Adjusted Cohesive Positive Skin Friction $Q_{Bpsf\ ult}$ (kips)	On Soil/Intermediate Geomat'l.: Allowable Axial Compression Base on Granular $Q_{allow\ base}$ (kips)	Allowable Axial Compression Base on Cohesive $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	On Bedrock: Allowable Axial Compression Base on Bedrock $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	Allowable Axial Equivalent Base Pressure $q_{allow\ base}$ (ksf)	Soil Uplift/ Pullout (Non-NSF) Upper Granular Skin Friction $Q_{\Phi u/psf\ ult}$ (kips)	Soil Uplift/ Pullout Allowable (Pos+Neg +Non-NSF) Skin Friction $Q_{u/psf\ all}$ (kips)
2.0	12.1	1.3	0.0	399.1	0.0	12.6	0.0	144.3	157.1	288.8	91.9	0.0	93.1
2.5	19.0	2.0	0.0	498.9	0.0	19.6	0.0	183.9	245.4	409.7	83.5	0.0	116.4
3.0	27.3	2.9	0.0	598.6	0.0	28.3	0.0	224.9	353.4	550.1	77.8	0.0	139.7
3.5	37.2	3.9	0.0	698.4	0.0	38.5	0.0	267.3	481.1	709.9	73.8	0.0	163.0
4.0	48.5	5.1	0.0	798.2	0.0	50.3	0.0	311.2	628.3	889.2	70.8	0.0	186.2
4.5	61.4	6.5	0.0	898.0	0.0	63.6	0.0	356.4	795.2	1,088.0	68.4	0.0	209.5
5.0	75.9	8.0	0.0	997.7	0.0	78.5	0.0	403.1	981.7	1,306.3	66.5	0.0	232.8
5.5	91.8	9.7	0.0	1,097.5	0.0	95.0	0.0	451.1	1,187.9	1,544.0	65.0	0.0	256.1
6.0	109.2	11.6	0.0	1,197.3	0.0	113.1	0.0	500.6	1,413.7	1,801.2	63.7	0.0	279.4
6.5	128.2	13.6	0.0	1,297.0	0.0	132.7	0.0	551.5	1,659.2	2,077.9	62.6	0.0	302.6
7.0	148.7	15.8	0.0	1,396.8	0.0	152.7	0.0	602.6	1,924.2	2,374.1	61.7	0.0	325.9
7.5	170.7	18.1	0.0	1,496.6	0.0	163.6	0.0	644.4	2,208.9	2,689.7	60.9	0.0	349.2
8.0	194.2	20.6	0.0	1,596.4	0.0	174.5	0.0	686.1	2,513.3	3,024.8	60.2	0.0	372.5
										USE ⇑	USE ⇑		USE ⇑

- In compression in cohesive soil, part of pier < 5 feet below ground surface has no positive skin friction, but can have NSF; and part of pier < B feet above the bottom of pier has no skin friction.
- In uplift in cohesive soil, part of pier < 5 feet below ground surface has no resisting skin friction (incl. NSF), but part of pier < B feet above the bottom of pier has resisting (positive & NSF) skin friction.

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Undrained L = 35.5 ft.

Elev. top of pier = 91.5 feet
Elev. bottom of pier = 56.0 feet
Density of concrete (δ_c) = 150 pcf
Compressive Strength (f'_c) = 3,500 psi

Pier Length (l) = 35.5 feet
Avg. Existing Grade = 95.5 feet
Ground Water Table = 65.5 feet
Elev. of Neutral Plane = 95.5 feet
(GWT and NP must be a listed bottom of layer elevation)

Layer (i)	Elev. Layer Bottom (feet)	Layer Thickness (t) (feet)	Mass Density of Soil (pcf)	Eff. Stress Mid-Depth of Layer (psf)	N-Value Design (-)	$(N_1)_{60}$ (-)	Friction Angle (phi) (degrees)	Cohesion (C_{uu}) (psf)	Adhesion (5,500 psf max. soil) (psf)	Available Adhesion Layer Thickness t_{ai} (feet)	Ultimate Adhesion Skin Friction $Q'_{csf\ ult\ i}$ (plf)	Absolute Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $q_{\Phi sf\ ult\ i}$ (psf)	4 ksf Max. Stress & Neutral Plane Adjusted: Ultimate Granular Skin Friction $Q'_{\Phi sf\ ult\ i}$ (plf)	Uncounted NSF Top 5' Ultimate Cohesive Skin Friction $Q'_{csf\ ult\ i}$ (plf)
0	95.5	0.0	0	0	0	0	0	0	0	0.0	0	0	0	0	0
1	89.5	6.0	125	375	22.0	34	0.0	2,162	1,189	1.0	1,189	0	0	0	0
2	88.5	1.0	120	810	14.0	18	0.0	1,385	762	1.0	762	0	0	0	0
3	87.5	1.0	120	930	14.0	18	0.0	1,405	773	1.0	773	0	0	0	0
4	84.5	3.0	125	1,178	27.0	32	0.0	2,678	1,473	3.0	4,418	0	0	0	0
5	74.5	10.0	140	2,065	60.0	59	0.0	5,970	3,284	10.0	32,836	0	0	0	0
6	65.5	9.0	135	3,373	34.0	28	0.0	3,424	1,883	9.0	16,951	0	0	0	0
7	56.0	9.5	140	4,349	24.0	18	0.0	2,396	1,318	9.5	12,520	0	0	0	0
8	56.0	0.0	140	4,717	24.0	17	0.0	2,414	1,328	0.0	0	0	0	0	0
9	56.0	0.0	140	4,717	24.0	17	0.0	2,414	1,328	0.0	0	0	0	0	0
10	56.0	0.0	140	4,717	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
11	56.0	0.0	140	4,717	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
12	56.0	0.0	140	4,717	24.0	19	0.0	2,414	1,328	0.0	0	0	0	0	0
base	56.0														

apparent bedrock net allowable bearing capacity (psf) = 50,000 yes

- *Layer 12 elevation also defines the soil drained/undrained soil bearing conditons for pier base/tip. The underlying soil strength is >/= the soil strength in layer 12.*
- In cohesive soil, any portion of pier less than 5 feet below ground surface has no positive, but can have negative, skin friction.
- Above neutral plane in layered soils, a loose granular layer is considered to contribute to NSF, if its thickness is less than the thickness of the overlying cohesive layer. Treat as a single layer and avoid spilting by groundwater table, if possible.
- Frictional/drained soils have cohesion = 0 psf. To not include either side resistance in a layer, make friction angle = 0 and/or adhesion = 0.

GEOTECHNICAL ENGINEERING CAPACITIES OF STRAIGHT DRILLED PIERS

Total Settlement ≤ 1 inch (Reese and O'Neill method for l / B ≥ 3, B ≤ 8 ft., α_3 = 0.036)

RAMP: Cohesive Undrained L = 35.5 ft.

Granular base adjustment factor for large B, α_3 = 0.036

FS compression skin soil/IGM = 3.0 FS compression base soil/IGM = 3.0 FS uplift/pullout soil/IGM = 3.0

Pier Diameter B (feet)	Total Buoyant Weight of Pier W_{pt} (kips)	Net Weight of Pier W_{pn} (kips)	Ultimate Axial Skin Compression: Negative Skin Friction $Q_{nsf\ ult}$ (kips)	Positive Skin Friction $Q_{psf\ ult}$ (kips)	B Above Base Adjusted Cohesive Positive Skin Friction $Q_{Bpsf\ ult}$ (kips)	On Soil/Intermediate Geomat'l.: Allowable Axial Compression Base on Granular $Q_{allow\ base}$ (kips)	Allowable Axial Compression Base on Cohesive $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	On Bedrock: Allowable Axial Compression Base on Bedrock $Q_{allow\ base}$ (kips)	Allowable Axial Compression Total $Q_{allow\ total}$ (kips)	Allowable Axial Equivalent Base Pressure $q_{allow\ base}$ (ksf)	Soil Uplift/ Pullout (Non-NSF) Upper Granular Skin Friction $Q_{\Phi u/psf\ ult}$ (kips)	Soil Uplift/ Pullout Allowable (Pos+Neg +Non-NSF) Skin Friction $Q_{u/psf\ all}$ (kips)
2.0	15.0	1.7	0.0	436.4	-16.6	0.0	22.8	160.9	157.1	295.3	94.0	0.0	101.8
2.5	23.4	2.7	0.0	545.4	-25.9	0.0	35.5	206.0	245.4	415.9	84.7	0.0	127.3
3.0	33.7	3.9	0.0	654.5	-37.3	0.0	51.2	253.0	353.4	555.3	78.6	0.0	152.7
3.5	45.8	5.3	0.0	763.6	-50.7	0.0	69.7	302.0	481.1	713.4	74.1	0.0	178.2
4.0	59.9	6.9	0.0	872.7	-66.2	0.0	91.0	352.9	628.3	890.2	70.8	0.0	203.6
4.5	75.8	8.8	0.0	981.8	-83.8	0.0	115.2	405.7	795.2	1,085.7	68.3	0.0	229.1
5.0	93.5	10.9	0.0	1,090.9	-103.5	0.0	142.2	460.5	981.7	1,300.0	66.2	0.0	254.5
5.5	113.2	13.1	0.0	1,200.0	-125.2	0.0	172.1	517.2	1,187.9	1,533.0	64.5	0.0	280.0
6.0	134.7	15.6	0.0	1,309.1	-149.0	0.0	204.8	575.8	1,413.7	1,784.8	63.1	0.0	305.4
6.5	158.1	18.3	0.0	1,418.1	-174.9	0.0	342.1	738.2	1,659.2	2,055.2	61.9	0.0	330.9
7.0	183.3	21.3	0.0	1,527.2	-202.9	0.0	396.6	816.8	1,924.2	2,344.4	60.9	0.0	356.4
7.5	210.4	24.4	0.0	1,636.3	-232.9	0.0	455.2	898.6	2,208.9	2,652.3	60.0	0.0	381.8
8.0	239.4	27.8	0.0	1,745.4	-265.0	0.0	517.7	983.4	2,513.3	2,979.0	59.3	0.0	407.3
										USE ⇑	USE ⇑		USE ⇑

- In compression in cohesive soil, part of pier < 5 feet below ground surface has no positive skin friction, but can have NSF; and part of pier < B feet above the bottom of pier has no skin friction.
- In uplift in cohesive soil, part of pier < 5 feet below ground surface has no resisting skin friction (incl. NSF), but part of pier < B feet above the bottom of pier has resisting (positive & NSF) skin friction.

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

B&A JOB NO.: 10-510

DATE: 02/17/10

TYPICAL SCHEMATICS OF RECOMMENDED SHALLOW WALL AND COLUMN FOOTINGS ON APPROVED FILL MEDIA AND SLAB SYSTEMS

[NOTE: FOR NARROW BUILDING SPANS, INTERIOR FOOTINGS MAY NOT BE REQUIRED.]

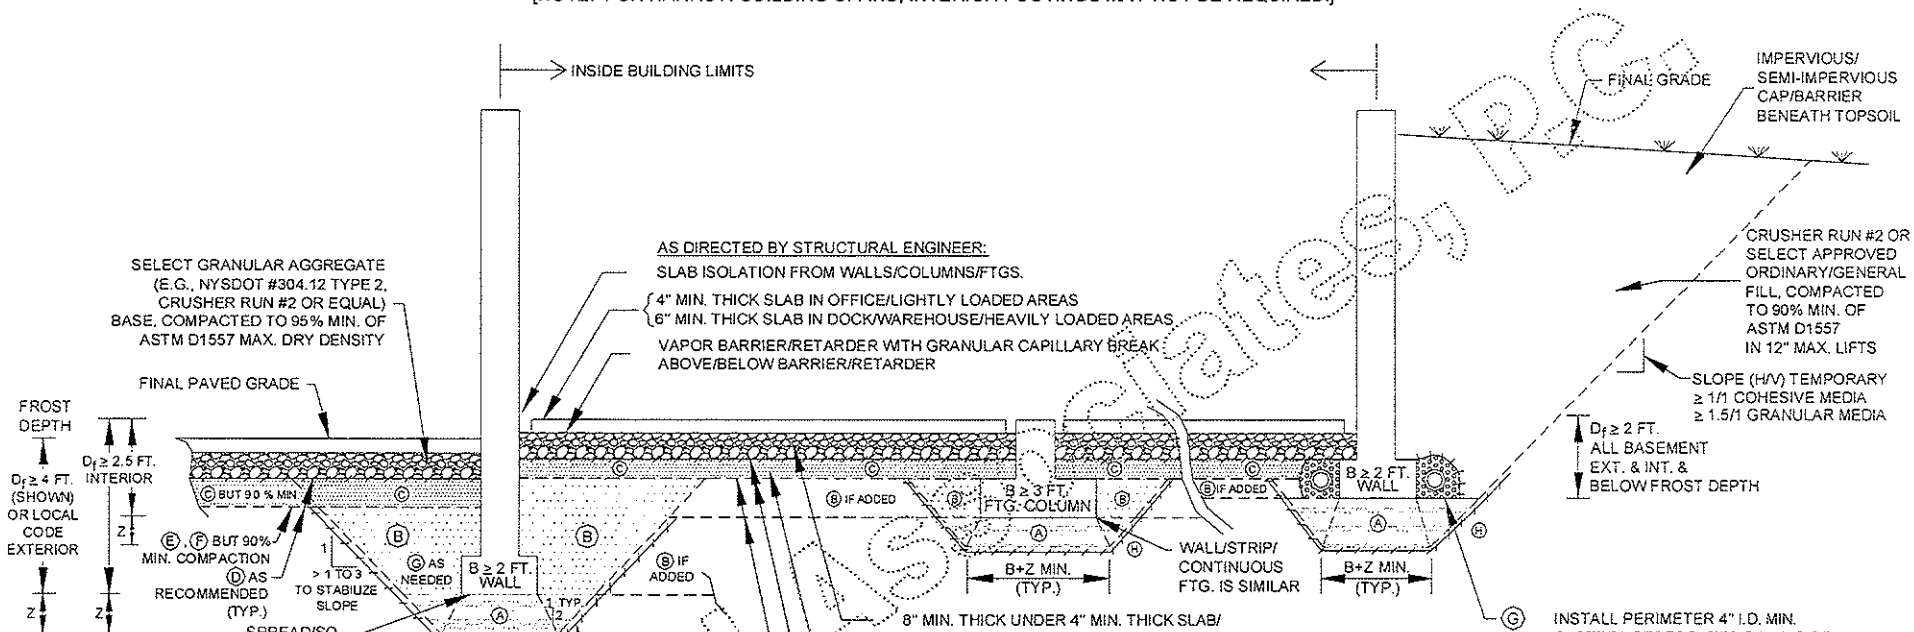

- MATCH FTG. DEPTH OF LATERAL ADDITION WHERE IT ABUTS EXISTING STRUCTURE FTG.
- FOR FTGS. ON BEDROCK, SEE GENERAL NOTES PAGE
- FTG. AT RECOMMENDED MIN. DEPTH BELOW EXISTING GRADE, UNLESS EXISTING SOIL/FILL WITHIN THIS DEPTH RANGE IS RECOMMENDED TO BE PROPERLY DRIED, BLENDED, COMPACTED TO 95% MIN. OF ASTM D1557 MAX. DRY DENSITY AND APPROVED
- Z IS MIN. DEPTH: AS RECOMMENDED IN THE REPORT, EXCAVATE/UNDERCUT TO APPROVED NATURAL SOIL/BEDROCK UNLESS APPROVABLE STATES ARE ENCOUNTERED, DOCUMENTED & CONFIRMED AT SHALLOWER DEPTHS; TO BACKFILL TO GRADE OF OPENINGS/CAVITIES/BASEMENT AREAS; TO RAISE GRADES; OR IN UNACCEPTABLE CONDITIONS UP TO THE GREATER DEPTH OF 4 FT. OR FOOTING WIDTH (B) BELOW FTG. TO AN APPROVABLE STATE

CONTACT SURFACES (TYP.): APPROVED UNDISTURBED NAT'L SOIL/BEDROCK SUBGRADE AT BEARING GRADE [NO OVER EXCAVATION; FOR MINOR DISTURBANCE OF CONTACT SURFACES UNDER FTG., COMPACT SOIL COMPACTED TO 92% MIN. OF ASTM D1557 MAX. DRY DENSITY/USE CONCRETE TO LEVEL BEDROCK, AS NEEDED]. APPROVABLE FILL CONDITIONS SHALL BE AS RECOMMENDED IN REPORT OR AS DIRECTED IN THE FIELD BY GEOTECHNICAL ENGINEER/ AUTHORIZED BY CLIENT

8" MIN. THICK UNDER 4" MIN. THICK SLAB/ 12" MIN. THICK UNDER 6" MIN. THICK SLAB SELECT GRANULAR AGGREGATE BASE (E.G., NYSDOT #304.12 TYPE 2, CRUSHER RUN #2 OR EQUAL) COMPACTED TO 95% MIN. OF ASTM D1557 MAX. DRY DENSITY

Ⓒ GRANULAR AGGREGATE SUBBASE, IF RECOMMENDED IN REPORT, COMPACTED TO 92% MIN. OF ASTM D1557 MAX. DRY DENSITY/ Ⓑ, IF ADDED

Ⓓ GEOTEXTILE STRENGTH & FILTER FABRIC (E.G., MIRAFI 600X OR EQUAL) UNDER LOWER OF GRANULAR BASE OR SUBBASE, IF USED, ON COHESIVE/SILTY SOIL SUBGRADES

Ⓔ STRIP TOPSOIL, ORGANICS & UNSUITABLE/UNAPPROVABLE NATURAL SOIL/FILL; GRADE TO LEVEL ELEV.; COMPACT, PROOFROLL & APPROVE

Ⓕ AS NEEDED, UNDERCUT & BACKFILL Ⓑ, EXCEPT COMPACT TO 95 % MIN. OF ASTM D1557 MAX. DRY DENSITY BELOW FTG. BEARING GRADE

Ⓑ	THIN LIFTS OF SELECT/APPROVED ORDINARY/GENERAL FILL COMPACTED TO 92 % MIN. OF ASTM D1557 MAX. DRY DENSITY IN 12" MAX. LIFTS ABOVE FTG. BEARING GRADE & FOUNDATION BACKFILL AREA/ZONE
Ⓐ	SELECT/APPROVED GRANULAR AGGREGATE (E.G., NYSDOT #304.12 TYPE 2, CRUSHER RUN # 2 OR EQUAL) COMPACTED TO 95% MIN. OF ASTM D1557 MAX. DRY DENSITY IN 12 IN. MAX LIFTS, OR ALTERNATIVELY, AS RECOMMENDED IN REPORT, CONTROLLED LOW STRENGTH MATERIAL (CLSM) WITH VERIFIED 200 PSI MIN. 28 DAY COMPRESSIVE STRENGTH THAT IS POURED IN MAX. 3 FT. SET LIFTS, OR LEAN CONCRETE WITH VERIFIED 28 DAY COMPRESSIVE STRENGTH OF 1,000 PSI MIN. ON SOIL OR EQUAL/BETTER THAN FOOTING CONCRETE STRENGTH ON BEDROCK

NOT TO SCALE

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

GENERAL NOTES

a) Bottom of exterior foundations are to bear at a minimum depth below the final exterior grade that is greater than the frost depth as defined by local or State building codes.

b) Bottom of foundation trench excavation is to be inspected by experienced geotechnical personnel and, especially, prior to any placement and compaction of crusher run stone, select granular fill, approved general granular fill, or other approved fill.

c) All areas of the foundation trench bottom which are concluded to be unacceptable must be over excavated from the bottom of footing/foundation elevation or, if recommended, from the bottom of the minimum depth of the undercut for the compacted select granular fill layer, upon which the bottom of footing/foundation will bear, to the top of the approved fill or natural soil, for less than a four foot depth or the footing width (whichever is greater), and backfilled with approved compacted granular fill.

d) Over-excavated/undercut areas must extend laterally beyond each vertically projected edge of the foundation by a minimum distance that is equal to one-half the total depth of the undercut or equating to a slope of two vertical to one horizontal. Side slopes of the trench excavation should be one on one (vertical to horizontal distance) or flatter in cohesive soils or one on one and one-half or flatter in the granular materials, as required by OSHA.

e) Where recommended, a geotextile strength and filter fabric will line the bottom and side slopes, up to the foundation bearing elevation at a minimum, of the excavation/undercut. Overlap unsewn seams as per the manufacturer's recommendations.

f) All foundations shall bear on approved dense/very stiff natural soil/weathered rock, if supported by the calculations, or thoroughly compacted select/approved granular fill, with a minimum thickness as determined by the calculations [see c) also], unless very stiff-hard/dense-very dense natural soil/fill/rock conditions are encountered and approved at a shallower depth.

g) Water must not be allowed to accumulate or pond in foundation trench bottom. Adequate drainage is to be provided.

h) During winter construction, foundations are to be protected from freezing during the curing period and, thereafter, properly backfilled to the required compaction specifications, as specified by the architect/design engineer.

i) In the event that any shallow drilled piers, tanks, foundation walls, strip or spread footings, and/or concrete slabs-on-grade from any existing, former or previously unknown on-site structures are encountered during excavation, the following demolition conditions will apply, unless indicated otherwise in the schematics of the foundation system:
   - complete removal in and near the proposed building/structure foundation area (except if the foundations and slab-on-grade are to be tied into any existing buildings/structures which are to remain),
   - removal down to three feet below final grade in the parking lot & driveways, {unless the slab-on-grade is in structurally sound condition & is approved for use as a part of the pavement system}. (Note that complete removal is optional.) and
   - removal down to three feet below final grade in green/grassed areas. (Note: complete removal is optional.)

j) If tree, shrub, or other vegetative root systems or organic deposits are encountered, the removal conditions in h) above apply.

k) Any slag, cinder and/or ash fill shall be verified to have very low potential for expansion and/or corrosion characteristics, where applicable for direct or potential (via leachate) contact with foundation elements and buried utilities or as directed by the design engineer/architect.

l) In the event that boulders and/or bedrock are encountered during excavation, the following conditions will apply:
   - remove boulders that are one-quarter (1/3 in drumlins) or greater of the min. footing width, at the exposed footing subgrade.
   - remove boulders that are one foot or greater in size/max. dimension, at the exposed pad subgrade.
   - as/if indicated/directed by engineer in schematics of the foundation system:
     - apparent top of bedrock and/or boulders that are one-half or greater of the min. footing width will not be located within a depth equal to the footing width, at a min., from the bottom of the footing.
     - apparent top of bedrock and/or boulders that are two feet or greater in size/max. dimension will not be located within a depth of four feet, at a min., from the bottom of the building/tank/other structure pad.
     - subgrade is to be adequately probed/tested, at spaced intervals, along the footing line or building/tank/other structure pad in order to confirm the absence of boulders and/or bedrock within these depths.
     - remove any suspected subsurface boulder and/or bedrock obstructions, that meet the preceding depth criteria.

m) At the locations of the demolished structures in i), vegetative/organic deposits in j), slag, cinder and/or ash fil in k) or bedrock and/or boulders in l) above, place and compact the select/approved fill, if needed, to the elevation of the bottom of the pavement base/subbase stone layer or as required in c) above for the proposed building/structure foundation.

n) To the extent practical, the entire site is to be proof rolled and stabilized, as needed, prior to placement of base/subbase stone layer beneath the floor slab and asphalt/concrete paved areas.

o) Geotextile strength and filter fabric is recommended beneath the base/subbase layer and atop the subgrade under the building/structure floor slab and in the heavily traveled asphalt paved areas at a minimum, if cohesive/silty/non-plastic fine sandy soils/fills & during wet weather/seasons.

p) The top and/or walls/sides of shallow depth subsurface structures (such as, basement, tank, vault, basin, pool, pipe, culvert, conduit, etc.), which would contain voids at times, or a trench/excavation, or retaining structure, is considered to be subject to loads from a shallow foundation, if it is within a horizontal distance of two times the narrowest dimension/width of the foundation, and must be properly evaluated and designed.

q) Cohesive natural soils/fills will be pre-approved by geotechnical engineer prior to any on-site use in load bearing areas.

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

GENERAL NOTES: FOOTINGS ON TOP OF APPROVED SLIGHTLY WEATHERED/SOUND/COMPETENT BEDROCK

a) The net allowable bearing capacity is generally = 10,000 psf, if used for all building foundations. However, differential settlement is a concern for footings of the same building that bear on media (i.e., soil and rock) with different strength/settlement properties. The net allowable bearing capacity of the weaker strata will generally need to be reduced to limit the allowable differential settlement.

b) In order to bear at the min. frost depth, some rock excavation may be required. Alternatively, for footings that bear atop an approved limestone, dolomite or hard shale rock that is less than the frost depth, hooked #4 or #5 rebars/dowels may be grouted to a 48 inch min. depth into approved rock at a four foot center to center spacing or within each massive block of fractured rock. The structural requirements for the rebars/dowels shall be as specified by the design engineer.

FOOTING SETTLEMENT

a) If a compacted select/approved granular fill layer is placed in an undercut area (under wall footings and/or interior footings), the settlement occurs immediately and is proportioned by the thickness of the layer (if < 2 x B for wall footings and if < B for square/rectangular footings) and the $q_{allow\ 1}$, of settlement. The magnitude of this settlement is generally less than 0.5 inch.

b) The approved granular (non-plastic silt, silty sand and sandy gravel) natural soils/fills that exist on-site and are beneath a recommended undercut depth, where applicable, below the footings should be properly compacted and inspected prior to placement and compaction of the select/approved granular fill and the footing construction. Most of the settlement will occur immediately and the magnitude of the settlement, which is evaluated in concert with the soil conditions in a) above, is estimated to be less than approximately 1.0 inch.

c) The approved cohesive natural soils/fills that exist on-site and are beneath the undercut depth, where applicable, below the footings should be properly compacted, as needed, and inspected prior to placement and compaction of the select/approved granular fill and footing construction. The magnitude of settlement is evaluated in concert with the conditions in d) below.

d) For the upper cohesive fills/natural soils and lower natural cohesive soil layers that exist, the N values of these layers indicate a slightly to highly overconsolidated state or effective preconsolidation pressure (p'_c). [Also refer to ASCE/USACE No. 9, Design Guide "Settlement Analysis," pg. 5 for p'_c estimation.]

The deeper hard glacial till and bedrock layers are assumed to be incompressible relative to applied loads. Unless stated or calculated otherwise, consolidation settlement of the underlying cohesive fill and natural soil layers are also not considered to be a concern for the foundation loads, due to the slightly to highly over-consolidated state of these fills/natural soils. Based upon the allowable load per footing width, total and differential settlements are expected to be within acceptable limits and are generally not likely to exceed 1.0 and 0.5 to 0.75 inches, respectively (per P,H&T, page 309), if all compacted granular fills and/or natural cohesive soils (per P,H&T, page 273).

e) For foundations on the potentially high bedrock condition, limit total settlement and differential settlement < 3/4 inch.

f) If bearing capacity differences exist for approved natural soils/fills at the building center/core and the wings, add control joints, at a min., between the building center/core and the start of each building wing.

Barron and Associates

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

LATERAL EARTH PRESSURE ON GENERIC BLOCK FOUNDATIONS FOR SIGNS, FREE-STANDING RETAINING WALLS, OR BELOW GRADE/BASEMENT/TANK/POOL RETAINING WALLS (Less Than 20 Feet High)

a) Porous filter media, in contact with the basement/below grade foundation wall or retaining walls, protects and is in contact with a minimum 4 inch diameter perforated drainage pipes at the footing/base of the foundation/structural wall (exterior backfill side and interior basement side) and/or weep pipes through the wall, as needed and as applicable.

b) Where recommended, a geotextile filter fabric will protect the gravel filter media from the earth backfill. Overlap unsewn seams as per the manufacturer's recommendations.

c) Waterproof earth side of wall, as is customarily provided in practice.

d) Drainage pipes are connected to an appropriately designed collector pipe, conveyance, and/or sump pump system as is applicable for the intended purpose of the wall and as customarily provided/installed in practice.

e) For potential groundwater table conditions above the top of the basement slab-on-grade condition, install continuous waterstops (with no joints in stop) at wall and floor construction joints, as is customarily provided in practice. Interior intermediate drainage pipes beneath the slab, that are spaced on-center and in both directions, do appear to be needed.

f) Assume a uniformly graded, clean coarse sand or sandy gravel backfills:

* equivalent N-value in a dense state: $(N_1)_{60}$ = 40 blows/foot
* friction angle: ϕ' = 38 degrees {Teng, pg. 12}
* average in-place densities: moist - γ_m = 120 pcf
  saturated - γ_{sat} = 132 pcf submerged - $\gamma' = (\gamma_{sat} - \gamma_w)$ = 70 pcf

g) Assume at base of wall/footing, coefficient of friction against sliding (f_s) at base of wall (Refer to Teng, pg. 320-1):

$f_s = \tan(0.58 \times \phi') = 0.40$ (AREA silty soil to silty coarse-grained soil)

h) Use equivalent fluid pressure design approach {Hough, pg. 249 and NAVFAC pg. 7-10-9}:

* at rest pressure coefficient - $K_0 = 1 - \sin(\phi') = 0.38$
* effective lateral pressure of soil - $\gamma'_l = K_o \times \gamma' = 26.6$ pcf
* hydrostatic pressure - γ_w = 62.4 pcf
* equivalent fluid pressure with water level - at the top of the grade at the wall $\gamma_{eo} = \gamma'_l + \gamma_w = 89$ pcf (say 90 pcf)
* equivalent fluid pressure with compaction induced lateral stress increase (W&F, pg 409) $\gamma_{eo} = 2 \times K_o \times \gamma_m = 91$ pcf (say 90 pcf)
* active pressure case - $K_a = [1 - \sin(\phi')] / [1 + \sin(\phi')] = 0.24$
  $\gamma_{ea} = K_a \times \gamma_m = 29$ pcf (say 30 pcf)
* passive pressure case - $K_p = [1 + \sin(\phi')] / [1 - \sin(\phi')] = 4.2$
  $\gamma_{ep} = K_p \times \gamma_m = 504$ pcf (say 330 pcf with a F.S. = 1.5)

		Thoroughly Compacted ⇒⇒		Uniformly Graded & Clean Coarse Sand or Sandy Gravel Fill	Non-Plastic Silty Sand or Sandy Silt Fill	
USE:	Earth Pressure Coefficient	Static Active	=	0.24	0.33	
		Static At-Rest	=	0.76	1.00	
		Static Passive	=	2.80	2.00	(with F.S. = 1.5)
		Static Passive	=	4.20	3.00	(with F.S. = 1.0)
USE:	Equivalent Fluid Pressure	Static Active	=	30 pcf		
		Static At-Rest	=	90 pcf (for rigid walls)		
		Static Passive	=	330 pcf (with F.S. = 1.5)	[500 pcf with (with F.S. = 1.0)]	

[For earthquakes, structural engineer may elect to use the above Static Passive case instead of the below Earthquake Lateral Load for Non-Yielding Wall movement into the soil backfill.]

USE: Simplified Model for Earthquake Lateral Load/Ft. Wall Length @ 0.6 H_{bw} above base. Loads for Non-Yielding Wall.

H_{bw} = Earth Height Behind Wall (feet)

Reduce load by 33% for Yielding Wall (active case) = (6.8 psf / foot) x H_{bw}^2 (NYS, S_{ds} = 0.25 g)

(γ_m = 120 pcf for S_{ds} value. Add to Static At Rest/ Active Pressure/Load for unsaturated backfill case) = (13.5 psf / foot) x H_{bw}^2 (NYS, S_{ds} = 0.50 g)

= (17.5 psf / foot) x H_{bw}^2 (NEern NYS, $S_{ds} \leq 0.65$ g)

[Above for Site Class C to E soils. Interpolate for other S_{ds} values.

Use 1.75 x values for walls on Class B/A rock or on rigid foundation base. (FEMA NEHRP Guidelines)]

Saturated/Liquified Soil During Earthquake = 132 pcf

(Equivalent Fluid Pressure. Add to inertial hydrodynamic pressure, not presented here.)

(For looser/denser backfills, adjust above pressures by the ratio = new density / 120 pcf or / 132 pcf (for saturated case))

USE:	Coefficient of Friction Against Sliding (f_s)	=	0.45	(on compacted NYSDOT Item #304.12 or #304.14 gravels)
	(use lowest f_s with no underlying weaker layers)	=	0.35	(on compacted granular soil & non-plastic silt)
		=	0.20	(slab-on-grade on polyethylene on granular fill)
	[with a F.S. = 1.0]	=	0.60/0.50	(on clean, rough, & sound bedrock/smooth bedrock)
	Min. Factor of Safety Against Sliding	=	1.5	

[Rev.9-30-09]

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY, INC.
10440 MAIN ST.
CLARENCE, NY 14031
(716)759-7821
FAX (716)759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

DATA INPUT BY: Carmen M. Panuccio
B&A JOB NO.: 10-510
CLIENT: Kideney Architects, PC
PROJECT: Proposed VA Hospital
Multi-Story Parking Ramp Structure
3495 Bailey Avenue (US Route 62)
City of Buffalo, Erie County, New York

BUILDING CODE OF NEW YORK STATE © - 2007: USGS 2002 ACCELERATIONS at 2% IN 50 YEARS CALCULATED BY LATITUDE AND LONGITUDE

Site Latitude (o) = +42.9506

Site Longitude (o) = -78.8122

Seismic Site Class = C

Building/Structure with Deep Foundation

S_s = 0.2 sec acceleration value for Class B (in g's)

Acceleration Values Below are S_s * 100

LAT. =	LONG. = -78.8500	-78.8122	-78.8000
42.9500	28.210		28.351
+42.9506	28.216	28.322	28.357
43.0000	28.717		28.839

S_1 = 1.0 sec acceleration value for Class B (in g's)

Acceleration Values Below are S_1 * 100

LAT. =	LONG. = -78.8500	-78.8122	-78.8000
42.9500	5.8449		5.8694
+42.9506	5.8454	5.864	5.8699
43.0000	5.8863		5.9101

SEISMIC SITE CLASS	Site Coefficient and Design Spectral Response Acceleration Values			
	0.2 Second		1.0 Second	
	F_a	$S_{ds} = 0.6667 * F_a * S_s$	F_v	$S_{d1} = 0.6667 * F_v * S_1$
A	0.8000	0.1511 g	0.8000	0.0313 g
B	1.0000	0.1888 g	1.0000	0.0391 g
C	1.2000	0.2266 g	1.7000	0.0665 g
D	1.5734	0.2971 g	2.4000	0.0938 g
E	2.3937	0.4520 g	3.5000	0.1368 g
F	2.3937	0.4520 g	3.5000	0.1368 g

<<------- USE THESE VALUES FOR DEEP FOUNDATIONS

Only residential buildings in Town of Amherst, Erie Co., N.Y.

Sds = 0.227 g Seismic Design Category = B

NOTE: F_a and F_v values are linearly interpolated, for the above S_s and S_s values, respectively, within the appropriate range of the mapped spectral response accelerations. (Gridded data at 0.05 degree increments from: http://earthquake.usgs.gov/research/hazmaps/products_data/2002/data/)

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

APPENDIX D

GENERAL EARTHWORK SPECIFICATION

Barron & Associates, P.C.
GENERAL EARTHWORK SPECIFICATION

PART I GENERAL

1.1 SITE AND SUBSURFACE CONDITIONS

1.1.1 Overview

This specification is included as a courtesy to the clients of Barron & Associates, P.C, and addresses earthwork site preparation. Additions and modifications are necessary to create a job-specific specification. This specification may serve as a basis for the development for a technical specification under Division 2, *Site Work*.

1.1.2 Site Conditions

The site-specific conditions are described under separate cover or may be available from the OWNER.

1.1.3 Subsurface Conditions

The site-specific subsurface conditions are described under separate cover or may be available from the OWNER.

1.2 REFERENCES

American Standard for Testing and Measurement (ASTM):

ASTM C136	Method for Sieve Analysis of Fine and Coarse Aggregates
ASTM C2922	Density for Soil and Soil-Aggregate in Place by Nuclear Methods
ASTM D422	Test Method for Particle-Size Analysis of Soils
ASTM D1140	Amount of Material in Soils Finer Than the No. 200 Sieve
ASTM D1557	Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lb/ft^3)
ASTM D2216	Test Method for Laboratory Determination of Water (Moisture) Content of Soil and Rock
ASTM D2487	1990 Classification of Soils for Engineering Purposes
ASTM D4318	Test Method for Liquid Limit, Plastic Limit, and Plasticity Index of Soils.

1.3 DEFINITIONS

1.3.1 Unacceptable Material

Soil material containing debris, wood, scrap material, vegetation, refuse, soft unsound particles, and other organic, frozen, deleterious, or objectionable materials. Contaminated soils shall be properly documented and removed or remediated on site. If necessary, remediation procedure will be defined by the OWNER.

1.3.2 Unsuitable Material

Brown, organic topsoil and underlying soft pockets of organic silt or wet, reworked silty clay.

1.3.3 Ordinary Fill

Friable soil containing no stone greater than two-thirds loose lift thickness and no unacceptable or unsuitable materials. In general, existing random fill is expected to be acceptable for reuse as ordinary fill given proper sorting, blending, drying, and controlled placement methods.

1.3.4 Granular Fill

Ordinary fill meeting the designation of ASTM D2487 classification of GW with a maximum of 10 percent by weight passing ASTM D1140, No. 200 sieve.

1.3.5 Select Granular Fill

Clean, uncoated soil which contains no unacceptable materials and conforms to the gradation requirements defined in Table A: Select Granular Fill.

Table A: Select Granular Fill	
Sieve Size	Percent Finer by Weight
2/3 of the loose lift thickness	100
No. 10	30 - 95
No. 40	10 - 70
No. 200	0 - 15

1.3.6 Sand and Gravel

Clean, hard, durable, uncoated particle of sand and gravel, free from lumps of clay, containing no unacceptable matter, and conforming to gradation requirements of *Table B : Sand and Gravel*

Table B: Sand and Gravel	
Sieve	Percent Finer by Weight
*	100
No. 4	50 - 85
No. 10	--
No. 40	10 - 35
No. 100	--
No. 200	0 - 8

* Job-Specific. To be determined by the ENGINEER

1.3.7 Crushed Stone

Clean, durable, sharp-angled fragments of rock or crushed gravel stone of uniform quality, containing no unacceptable matter, free from coatings, and conforming to gradation requirements of *Table C: Crushed Stone*

Table C: Crushed Stone		
	Percent Passing	
Sieve Size	¾-inch Stone	1 ¼-inch Stone
1 ½-inch	—	100
1 ¼-inch	—	85-100
1- inch	100	—
¾-inch	90-100	10-40
5/8-inch	—	—
½-inch	10-50	0-8
3/8-inch	0-20	—
#4	0-5	—

1.3.8 Flowable Fill

Also known as Controlled Low Strength Material – Controlled Density Fill (CLSM-CDF), this material is available under a variety of producer names (e.g., K-Krete©, M-Crete, Flash Fill©, Flowable Mortar, Unshrinkable Fill, etc.). This non-settling backfill mixture is most commonly used for its flowable characteristics, its support strength under traffic loads, and its removability at a later date. The material may be produced on-site or off-site. In either case, the producer of such materials and the product must meet certain certification criteria. Such information is beyond the scope of this specification and will be considered on a site-specific basis.

Flowable fill may be acceptable for use as a backfill for utility trenches of other low-lying areas which require a compacted granular fill. Its use and warranty of performance is left to the CONTRACTOR in such applications.

The use of flowable fill under load-bearing structural components in place of properly placed and compacted granular fill is NOT common and is questionable. The localized use of such material may have profound affects on the performance of a foundation system. Site-specific conditions and the extent of anticipated use of flowable fill must be examined by geotechnical engineer. Cost of such consultation shall be borne by the CONTRACTOR unless specifically directed by the OWNER to seek such consultation. Without such consultation, warranty of performance for such use is left to the CONTRACTOR.

1.4 SUBMITTALS

The following submittals shall be provided in accordance with approved submittals procedures.

1. Fill Source: Provide name and source locations of fill material.

2. Field Test Reports: Field tests will be performed by OWNER's Representative as needed. CONTRACTOR may be required to perform such tests on proposed off-site fill materials.
   a. Fill material grain size analyses per ASTM C136, D422, D1140, D2487
   b. Moisture/Density test results per ASTM D2216
   c. Liquid limit, plastic limit, and plasticity index per ASTM D4318
   d. Compaction/Density test results per ASTM C2922 and D1557

3. Sample: Geotextile fabric

PART 2 PRODUCTS

Geotextile Fabric: Mirafi 600X or equal. (Also referred to as synthetic fabric).

PART 3 EXECUTION

3.1 PROTECTION

3.1.1 General

Manner of excavation shall minimize disturbance of underlying natural ground. If deemed necessary by the Engineer, alter construction procedures to reduce subgrade disturbance. Excavate areas which have been excessively disturbed to firm ground and backfill with properly compacted granular fill.

3.1.2 Roads and Walks

Keep roads and walks free of dirt and debris at all times.

3.1.3 Trees, Shrubs, and Existing Facilities

Protect from any damage all vegetation and facilities identified to remain.

3.1.4 Utility Lines

Locate all utilities within the area of disturbance prior to the start of work. Show locations on initial plans. Protect utility lines from damage. Notify the ENGINEER immediately of damage to or an encounter with an unknown utility. Damage to utility lines are to be repaired by the CONTRACTOR at no additional cost. The CONTRACTOR shall have underground utility owners stake out utility locations prior to the start of clearing and excavation operations.

3.2 VERIFICATION OF CONDITIONS/PROOF-ROLLING

Prior to placement of the initial layer of fill over the natural ground, proof-roll the exposed natural ground above the groundwater table elevation by making two passes with a fully-loaded ten-wheel truck. Excavate unstable areas detected by this process and replace with compacted granular fill.

3.3 PREPARATION

3.3.1 Surface Preparation

Within the site limits indicated on the drawings, excavate all unsuitable material to firm natural ground in the manner specified herein. Follow a construction procedure which permits visual identification of firm natural ground. In the even that groundwater is encountered, the ENGINEER may require that the size of the open excavation be limited to that which can be handled by open pumping to allow visual inspection of the excavation bottom and the performance of backfill operations to be conducted in a dry state.

Excavation of unsuitable material shall be limited to the greater of the following:

- A distance of 5 feet beyond building lines or
- The area defined by a one-horizontal to one-vertical line sloping down from the outside bottom edge of exterior footings to firm natural ground.

3.4 PLACEMENT AND COMPACTION

3.4.1 General

Place fill in accordance with *Table D: Compaction Alternatives.* These alternatives are provided as minimum compaction
standards only and in no way relieve the CONTRACTOR of his obligation to achieve any specified degree of compaction by whatever means may be necessary.

Grade to provide positive drainage and a smooth surface which will readily shed water. To the extent practicable, compact each layer to the specified density on the same day placed. Place fill in horizontal layers. Where horizontal layers meet a natural slope, key layer into slope by cutting a bench.

Fill that is too wet for proper compaction: Disc, harrow, or otherwise dry to proper moisture content for compaction to the required density.

Fill that is too dry for proper compaction: Uniformly apply water over the surface of the loose layer in sufficient quantity to allow compaction to the required density.

Table D: Compaction Alternatives					
Compaction Method	Max. Stone Size	Maximum Loose Lift Thickness (inches)		Maximum Number of Passes	
		Below Structure and Pavements	Less Critical Areas	Below Structure and Pavements	Less Critical Areas
Hand operated vibratory plate of light roller in confined areas	3	4	4	4	4
Hand operated vibratory drum rollers weighing at least 1,000 pounds in confined areas	4	6	8	4	4
Loaded 10-wheel truck or D-8 crawler	6	10	12	4	2
Light vibratory drum roller; Min. weight at drum 8,000lbs; Min. dynamic force 10,000lbs.	8	12	12	6	2
Minimum vibratory drum; Min. weight at drum 10,000lbs; Min. dynamic force 20,000lbs.	8	18	18	6	4

3.4.2 Dewatering

Provide adequate pumping and drainage facilities to keep excavated areas sufficiently dry of groundwater and surface run-off. Dewatering shall avoid adversely affection construction procedures or causing excessive disturbance of underlying natural ground. Drain all pumped water in such a manner as to avoid damage to adjacent property.

If requested by the ENGINEER, place a 6-inch to 12-inch layer of sand and gravel or crushed stone over the natural underlying soil to stabilize area which have been disturbed due to groundwater seepage pressures and to expedite dewatering operations. Particular attention shall be given areas under proposed foundations.

3.5 FIELD QUALITY CONTROL

3.5.1 Compaction Requirements

Allow the ENGINEER sufficient time to make necessary observations and tests. Base the degree of compaction on maximum dry density as determined by ASTM D1557. The minimum degree of compaction for placed fill shall be as indicated *in Table E: Compaction Requirements.*

Table E: Compaction Requirements	
Area	Minimum Degree of Compaction (%)
Below foundation	95
Pavement and building subbase and base courses	95
Below building slab base course and above bottom of foundation	92
Below pavement subbase and base courses	90
Trench backfill outside of building	90
Trench backfill inside of building	Refer to one of the above-listed categories
Ordinary fill within 5 feet of grade	90
Vegetated areas below 5 feet of grade	85

3.5.2 Testing

Site work should be monitored and tested by geotechnical ENGINEER or his representative and in accordance with requirements of the design team to assure compliance with earthwork and foundation construction specifications.

The owner will retain a geotechnical ENGINEER or his representative to perform on-site observations and testing during this phase of construction operations. The geotechnical ENGINEER or his representative will:

- Observe excavation and dewatering of building and controlled fill areas;
- Observe backfill and compaction within building and controlled fill areas;
- Laboratory test and analyze fill material; and
- Observe construction – and performing water content, gradation, and compaction tests.

On a timely basis, the CONTRACTOR will receive copies of test results submitted to the OWNER. In addition, during construction the geotechnical ENGINEER will advise the OWNER and CONTRACTOR in writing of conditions which fail to conform to the Contract Documents. The CONTRACTOR shall take immediate action to remedy indicated deficiencies.

The geotechnical ENGINEER or his representative will not supervise or direct the actual work of the CONTRACTOR or employees and representatives of the CONTRACTOR. The presence of, observations by, and testing performed by the geotechnical ENGINEER or his representatives shall not excuse the CONTRACTOR from defects discovered in the work.

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

APPENDIX E

LIMITATIONS

BARRON & ASSOCIATES, P.C. &
BUFFALO DRILLING COMPANY. INC.
10440 MAIN STREET
CLARENCE, N.Y. 14031
(716) 759-7821
FAX (716) 759-7823
e-mail: info@buffalodrilling.com
info@barronandassociatespc.com

LIMITATIONS

1. This report is based on the data that was obtained from the subsurface explorations and on the design of the proposed structure as submitted to the geotechnical engineer. A geotechnical engineer, who is experienced in foundation construction and earthwork, should be engaged to review the final design and specifications in order to determine whether any change in concept may have any effect on the validity of the conclusions presented herein, and whether these conclusions have, in fact, been implemented in the design and specifications.

2. The subsurface conditions, including thicknesses, between the exploration locations are approximate and simplified representations of the strata and transitions. There is the possibility that variations in soil and rock conditions and boundaries will be encountered during construction. In order to permit correlation between the exploratory soil data and the actual soil conditions encountered during construction and so as to assess conformance with the plans and specifications as originally contemplated, it is recommended that a geotechnical engineer, who is experienced in foundation construction and earthwork monitoring, should be retained to perform continuous construction review during the site preparation and foundation construction operations.

3. The subsurface exploration logs and subsurface conditions may aid in estimating material quality and quantities, such as topsoil/organic matter, fills, natural soils, and rock, but are not to be relied upon as the exclusive means for bid preparation purposes. It is the responsibility of the contractor to perform any additional site examinations and explorations and to prepare an accurate bid.

4. Disclaimers:

   a. In the event that any changes in the nature, design or location of the proposed structure is planned, the conclusions that are contained in this report shall not be considered valid unless the changes are reviewed and the conclusions of this report are modified or verified in writing.

   b. The geotechnical engineering report has been prepared for this project by Barron & Associates, P.C. This report is for assistance in design only and is not a sufficient basis on which to prepare an accurate bid.

   c. This report has been prepared for the exclusive use of Kideney Architects, P.C. of Buffalo, New York, their client, and their designated design representatives for specific application to the development of the proposed multi-story, slab-on-grade and concrete framed parking ramp structure, with approximately 96,000 square feet in total footprint area on/near the southern side of the existing Veterans Administration (VA) Hospital that is addressed as 3495 Bailey Avenue (US Route 62) in the City of Buffalo, Erie County, New York and in accordance with generally accepted geotechnical engineering practice. No other warranty, expressed or implied, is made.