ISSUED FOR CONSTRUCTION SPECIFICATIONS

Repair Fire Suppression System, Maint Hangar B2280

Architect-Engineering Services for 100% Design

Project Number: WWYK190068
Work Order: 20435 - Amend

Tinker Air Force Base, Oklahoma
April 3, 2025

Prepared By:

HDR Engineering, Inc.
613 NW Loop 410, Suite 700
San Antonio, TX 78216

This page intentionally left blank.

SEALS AND SIGNATURES

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and that I am a duly registered Professional Engineer under the laws of the State of Oklahoma.

Lucas Mendoza
INSERT NAME 04/02/2025

Pages or sheets covered by this seal: 02 41 00, 05 40 00

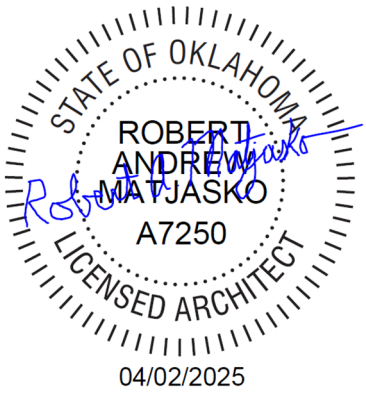

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and that I am a duly registered Professional Architect under the laws of the State of Oklahoma.

Robert Andrew Matjasko
INSERT NAME 04/02/2025

Pages or sheets covered by this seal: 02 41 00, 06 10 00, 07 21 16, 07 92 00, 08 11 13, 08 71 00, 09 22 00, 09 29 00, 09 65 00, 09 90 00, 10 14 00.20, 10 26 00, 10 44 16

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and that I am a duly registered Professional Engineer under the laws of the State of Oklahoma.

Andrew Orton
INSERT NAME 04/02/2025

Pages or sheets covered by this seal: 23 09 00, 23 09 13, 23 09 23.02, 23 81 00

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and that I am a duly registered Professional Engineer under the laws of the State of Oklahoma.

Krystal Le
INSERT NAME 04/02/2025

Pages or sheets covered by this seal: 02 41 00, 26 05 73, 26 20 00

I hereby certify that the portion of this technical submission described below was prepared by me or under my direct supervision and that I am a duly registered Professional Engineer under the laws of the State of Oklahoma.

Douglas Emanus
INSERT NAME 04/02/2025

Pages or sheets covered by this seal: 07 84 00, 21 13 13, 28 31 76

END OF SECTION

PROJECT TABLE OF CONTENTS

DIVISION 02 - EXISTING CONDITIONS

02 41 00	05/10, CHG 2: 02/19	DEMOLITION

DIVISION 05 - METALS

05 40 00	05/15, CHG 1: 08/18	COLD-FORMED METAL FRAMING

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES

06 10 00	08/16, CHG 2: 11/18	ROUGH CARPENTRY

DIVISION 07 - THERMAL AND MOISTURE PROTECTION

07 21 16	08/23	MINERAL FIBER BLANKET INSULATION
07 84 00	05/10, CHG 1: 08/13	FIRESTOPPING
07 92 00	08/23	JOINT SEALANTS

DIVISION 08 - OPENINGS

08 11 13	08/20	STEEL DOORS AND FRAMES
08 71 00	02/16, CHG 4: 02/22	DOOR HARDWARE

DIVISION 09 - FINISHES

09 22 00	08/24	SUPPORTS FOR PLASTER AND GYPSUM BOARD
09 29 00	08/24	GYPSUM BOARD
09 65 00	11/24	RESILIENT FLOORING
09 90 00	02/21	PAINTS AND COATINGS

DIVISION 10 - SPECIALTIES

10 14 00.20	08/20	INTERIOR SIGNAGE
10 26 00	08/20	WALL AND DOOR PROTECTION
10 44 16	11/19	FIRE EXTINGUISHERS

DIVISION 21 - FIRE SUPPRESSION

21 13 13	08/20	WET PIPE SPRINKLER SYSTEMS, FIRE PROTECTION

DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)

23 09 00	11/15	INSTRUMENTATION AND CONTROL FOR HVAC
23 09 13	11/15	INSTRUMENTATION AND CONTROL DEVICES FOR HVAC
23 09 23.02	11/15	BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS
23 81 00	05/18, CHG 1: 02/21	DECENTRALIZED UNITARY HVAC EQUIPMENT

DIVISION 26 - ELECTRICAL

26 05 73	08/23	POWER SYSTEM STUDIES
26 20 00	08/23	INTERIOR DISTRIBUTION SYSTEM

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY

28 31 76 08/20 INTERIOR FIRE ALARM AND MASS NOTIFICATION SYSTEM, ADDRESSABLE

-- End of Project Table of Contents --

SECTION 02 41 00

DEMOLITION
05/10, CHG 2: 02/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN ASSOCIATION OF STATE HIGHWAY AND TRANSPORTATION OFFICIALS (AASHTO)

AASHTO M 145	(1991; R 2012) Standard Specification for Classification of Soils and Soil-Aggregate Mixtures for Highway Construction Purposes
AASHTO T 180	(2017) Standard Method of Test for Moisture-Density Relations of Soils Using a 4.54-kg (10-lb) Rammer and a 457-mm (18-in.) Drop

AMERICAN SOCIETY OF SAFETY PROFESSIONALS (ASSP)

ASSP A10.6	(2006) Safety & Health Program Requirements for Demolition Operations - American National Standard for Construction and Demolition Operations

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2014) Safety -- Safety and Health Requirements Manual

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

40 CFR 61	National Emission Standards for Hazardous Air Pollutants

1.2 PROJECT DESCRIPTION

1.2.1 Definitions

1.2.1.1 Demolition

Demolition is the process of wrecking or taking out any load-supporting structural member of a facility together with any related handling and disposal operations.

1.2.1.2 Demolition Plan

Demolition Plan is the planned steps and processes for managing demolition activities and identifying the required sequencing activities and disposal mechanisms.

1.2.2 Demolition Plan

Prepare a Demolition Plan and submit proposed demolition, and removal procedures for approval before work is started. Include in the plan procedures for careful removal and disposition of materials specified to be salvaged, coordination with other work in progress, a disconnection schedule of utility services, a detailed description of methods and equipment to be used for each operation and of the sequence of operations. Identify components and materials to be salvaged for reuse or recycling with reference to paragraph Existing Facilities to be Removed. Append tracking forms for all removed materials indicating type, quantities, condition, destination, and end use. Coordinate with Waste Management Plan in accordance with Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL. Include statements affirming Contractor inspection of the existing roof deck and its suitability to perform as a safe working platform or if inspection reveals a safety hazard to workers, state provisions for securing the safety of the workers throughout the performance of the work. Provide procedures for safe conduct of the work in accordance with EM 385-1-1. Plan shall be approved by Contracting Officer or Construction Inspector prior to work beginning.

1.2.3 General Requirements

Do not begin demolition or deconstruction until authorization is received from the Contracting Officer. The work of this section is to be performed in a manner that maximizes the value derived from the salvage and recycling of materials. Remove rubbish and debris from the project site; do not allow accumulations inside or outside the building . The work includes demolition, , salvage of identified items and materials, and removal of resulting rubbish and debris. Remove rubbish and debris from Government property daily, unless otherwise directed. Store materials that cannot be removed daily in areas specified by the Contracting Officer. In the interest of occupational safety and health, perform the work in accordance with EM 385-1-1, Section 23, Demolition, and other applicable Sections.

1.3 ITEMS TO REMAIN IN PLACE

Take necessary precautions to avoid damage to existing items to remain in place, to be reused, or to remain the property of the Government. Repair or replace damaged items as approved by the Contracting Officer. Coordinate the work of this section with all other work indicated. Construct and maintain shoring, bracing, and supports as required. Ensure that structural elements are not overloaded. Increase structural supports or add new supports as may be required as a result of any cutting, removal, deconstruction, or demolition work performed under this contract. Do not overload pavements to remain. Provide new supports and reinforcement for existing construction weakened by demolition, deconstruction, or removal work. Repairs, reinforcement, or structural replacement require approval by the Contracting Officer prior to performing such work.

1.3.1 Existing Construction Limits and Protection

Do not disturb existing construction beyond the extent indicated or necessary for installation of new construction. Provide temporary shoring and bracing for support of building components to prevent settlement or other movement. Provide protective measures to control accumulation and migration of dust and dirt in all work areas. Remove snow, dust, dirt, and debris from work areas daily.

1.3.2 Utility Service

Maintain existing utilities indicated to stay in service and protect against damage during demolition and deconstruction operations. Prior to start of work, utilities serving each area of alteration or removal will be shut off by the Government and disconnected and sealed by the Contractor .

1.3.3 Facilities

Protect electrical and mechanical services and utilities. Where removal of existing utilities and pavement is specified or indicated, provide approved barricades, temporary covering of exposed areas, and temporary services or connections for electrical and mechanical utilities. Floors, roofs, walls, columns, pilasters, and other structural components that are designed and constructed to stand without lateral support or shoring, and are determined to be in stable condition, must remain standing without additional bracing, shoring, or lateral support until demolished or deconstructed, unless directed otherwise by the Contracting Officer. Ensure that no elements determined to be unstable are left unsupported and place and secure bracing, shoring, or lateral supports as may be required as a result of any cutting, removal, deconstruction, or demolition work performed under this contract.

1.4 BURNING

The use of burning at the project site for the disposal of refuse and debris will not be permitted . Where burning is permitted, adhere to federal, state, and local regulations.

1.5 AVAILABILITY OF WORK AREAS

Areas in which the work is to be accomplished will be available as determined by the Contracting Officer and/or Project Manager

1.6 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Demolition Plan; G
Existing Conditions

SD-07 Certificates

Notification; G

1.7 QUALITY ASSURANCE

Submit timely notification of demolition projects to Federal, State, regional, and local authorities in accordance with 40 CFR 61, Subpart M. Notify the Regional Office of the United States Environmental Protection Agency (USEPA) and the Contracting Officer in writing 10 working days prior to the commencement of work in accordance with 40 CFR 61, Subpart M. Comply with federal, state, and local hauling and disposal regulations. In addition to the requirements of the "Contract Clauses," conform to the

safety requirements contained in ASSP A10.6. Comply with the Environmental Protection Agency requirements specified. Use of explosives will not be permitted.

1.7.1 Dust and Debris Control

Prevent the spread of dust and debris to occupied portions of the building and avoid the creation of a nuisance or hazard in the surrounding area. Do not use water if it results in hazardous or objectionable conditions such as, but not limited to, ice, flooding, or pollution. Sweep pavements as often as necessary to control the spread of debris that may result in foreign object damage potential to aircraft.

1.8 PROTECTION

1.8.1 Traffic Control Signs

a. Where pedestrian and driver safety is endangered in the area of removal work, use traffic barricades with flashing lights. Notify the Contracting Officer prior to beginning such work.

1.8.2 Protection of Personnel

Before, during and after the demolition work continuously evaluate the condition of the structure being demolished and take immediate action to protect all personnel working in and around the project site. No area, section, or component of floors, roofs, walls, columns, pilasters, or other structural element will be allowed to be left standing without sufficient bracing, shoring, or lateral support to prevent collapse or failure while workmen remove debris or perform other work in the immediate area.

1.9 EXISTING CONDITIONS

Before beginning any demolition or deconstruction work, survey the site and examine the drawings and specifications to determine the extent of the work. Record existing conditions in the presence of the Contracting Officer showing the condition of structures and other facilities adjacent to areas of alteration or removal. Photographs sized 4 inch will be acceptable as a record of existing conditions. Include in the record the elevation of the top of foundation walls, finish floor elevations, possible conflicting electrical conduits, plumbing lines, alarms systems, the location and extent of existing cracks and other damage and description of surface conditions that exist prior to before starting work. It is the Contractor's responsibility to verify and document all required outages which will be required during the course of work, and to note these outages on the record document. Submit survey results.

PART 2 PRODUCTS

2.1 FILL MATERIAL

a. Comply with excavating, backfilling, and compacting procedures for soils used as backfill material to fill basements, voids, depressions or excavations resulting from demolition or deconstruction of structures. Fill material shall be waste products from demolition or deconstruction until all waste appropriate for this purpose is consumed.

b. Fill material shall conform to the definition of satisfactory soil material as defined in AASHTO M 145, Soil Classification Groups A-1,

A-2-4, A-2-5 and A-3. In addition, fill material shall be free from roots and other organic matter, trash, debris, frozen materials, and stones larger than 2 inches in any dimension.

c. Proposed fill material must be sampled and tested by an approved soil testing laboratory, as follows:

Soil classification	AASHTO M 145
Moisture-density relations	AASHTO T 180, Method B or D

PART 3 EXECUTION

3.1 EXISTING FACILITIES TO BE REMOVED

3.1.1 Utilities and Related Equipment

3.1.1.1 General Requirements

Do not interrupt existing utilities serving occupied or used facilities, except when authorized in writing by the Contracting Officer. Do not interrupt existing utilities serving facilities occupied and used by the Government except when approved in writing and then only after temporary utility services have been approved and provided. Do not begin demolition or deconstruction work until all utility disconnections have been made. Shut off and cap utilities for future use, as indicated.

3.1.1.2 Disconnecting Existing Utilities

Remove existing utilities , as indicated and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Contracting Officer. When utility lines are encountered but are not indicated on the drawings, notify the Contracting Officer prior to further work in that area. Remove meters and related equipment and deliver to a location in accordance with instructions of the Contracting Officer.

3.1.2 Paving and Slabs

Remove ground concrete and asphaltic concrete paving and slabs including aggregate base as indicated. Provide neat sawcuts at limits of pavement removal as indicated. Pavement and slabs not to be used in this project shall be removed from the Installation at Contractor's expense.

3.1.3 Concrete

Saw concrete along straight lines to a depth of a minimum 2 inch. Make each cut in walls perpendicular to the face and in alignment with the cut in the opposite face. Break out the remainder of the concrete provided that the broken area is concealed in the finished work, and the remaining concrete is sound. At locations where the broken face cannot be concealed, grind smooth or saw cut entirely through the concrete.

3.1.4 Patching

Where removals leave holes and damaged surfaces exposed in the finished work, patch and repair these holes and damaged surfaces to match adjacent

finished surfaces, using on-site materials when available. Where new work is to be applied to existing surfaces, perform removals and patching in a manner to produce surfaces suitable for receiving new work. Finished surfaces of patched area shall be flush with the adjacent existing surface and shall match the existing adjacent surface as closely as possible as to texture and finish. Patching shall be as specified and indicated, and shall include:

a. Concrete and Masonry: Completely fill holes and depressions, caused by previous physical damage or left as a result of removals in existing masonry walls to remain, with an approved masonry patching material, applied in accordance with the manufacturer's printed instructions.

3.1.5 Mechanical Equipment and Fixtures

3.1.5.1 Piping

Disconnect piping at unions, flanges and valves, and fittings as required to reduce the pipe into straight lengths for practical storage. Store salvaged piping according to size and type. If the piping that remains can become pressurized due to upstream valve failure, end caps, blind flanges, or other types of plugs or fittings with a pressure gage and bleed valve shall be attached to the open end of the pipe to ensure positive leak control. Carefully dismantle piping that previously contained gas, gasoline, oil, or other dangerous fluids, with precautions taken to prevent injury to persons and property. Store piping outdoors until all fumes and residues are removed. Box prefabricated supports, hangers, plates, valves, and specialty items according to size and type. Wrap sprinkler heads individually in plastic bags before boxing. Classify piping not designated for salvage, or not reusable, as scrap metal.

3.1.6 Electrical Equipment and Fixtures

Disconnect and remove motors, motor controllers, and operating and control equipment that are attached to the driven equipment as indicated on the drawings.

3.1.6.1 Fixtures

Disconnect and remove electrical fixtures as indicated on the drawings.

3.1.6.2 Electrical Devices

Disconnect and remove switches, as indicated on the drawings, and conductors including wire.

3.1.6.3 Conduit and Miscellaneous Items

Disconnect and remove conduit except where embedded in concrete or masonry, conduit except where embedded in concrete or masonry walls and underground may be abandoned in place with 72ABW/CENMP approval. Consider corroded, bent, or damaged conduit as scrap metal. Sort straight and undamaged lengths of conduit according to size and type. Classify supports, knobs, tubes, cleats, and straps as debris to be removed and disposed.

3.2 CONCURRENT EARTH-MOVING OPERATIONS

Do not begin excavation, filling, and other earth-moving operations that are sequential to demolition or deconstruction work in areas occupied by

structures to be demolished or deconstructed until all demolition and deconstruction in the area has been completed and debris removed. Fill holes, open basements and other hazardous openings.

3.3 DISPOSITION OF MATERIAL

3.3.1 Title to Materials

Except for salvaged items specified in related Sections, and for materials or equipment scheduled for salvage, all materials and equipment removed and not reused or salvaged, shall become the property of the Contractor and shall be removed from Government property. Title to materials resulting from demolition and deconstruction, and materials and equipment to be removed, is vested in the Contractor upon approval by the Contracting Officer of the Contractor's demolition, deconstruction, and removal procedures, and authorization by the Contracting Officer to begin demolition and deconstruction. The Government will not be responsible for the condition or loss of, or damage to, such property after contract award. Showing for sale or selling materials and equipment on site is prohibited.

3.4 CLEANUP

Remove debris and rubbish from basement and similar excavations. Remove and transport the debris in a manner that prevents spillage on streets or adjacent areas. Apply local regulations regarding hauling and disposal.

3.5 DISPOSAL OF REMOVED MATERIALS

3.5.1 Regulation of Removed Materials

Dispose of debris, rubbish, scrap, and other nonsalvageable materials resulting from removal operations with all applicable federal, state and local regulations. Storage of removed materials on the project site is prohibited.

3.5.2 Removal to Spoil Areas on Government Property

Transport noncombustible materials removed from demolition and deconstruction structures to designated spoil areas on Government property.

3.5.3 Removal from Government Property

Transport waste materials removed from demolished and deconstructed structures, except waste soil, from Government property for legal disposal. Dispose of waste soil as directed.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 05 40 00

COLD-FORMED METAL FRAMING
05/15, CHG 1: 08/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONCRETE INSTITUTE (ACI)

ACI 318	(2014; Errata 1-2 2014; Errata 3-5 2015; Errata 6 2016; Errata 7-9 2017) Building Code Requirements for Structural Concrete (ACI 318-14) and Commentary (ACI 318R-14)

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI S100	(2012) North American Specification for the Design of Cold-Formed Steel Structural Members
AISI S200	(2007) North American Standard for Cold-Formed Steel Framing - General Provision
AISI S201	(2007) North American Standard for Cold-Formed Steel Framing - Product Data
AISI S202	(2011) Code of Standard Practice for Cold-formed Steel Structural Framing
AISI S211	(2007) North American Standard for Cold-Formed Steel Framing - Wall Stud Design
AISI S212	(2007) North American Standard for Cold-Formed Steel Framing - Header Design
AISI S213	(2007; Suppl 1 2009) North American Standard for Cold-Formed Steel Framing - Lateral Design
AISI S214	(2012) North American Standard for Cold-Formed Steel Framing – Truss Design

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2020; Errata 1 2021) Structural Welding Code - Steel
AWS D1.3/D1.3M	(2018) Structural Welding Code - Sheet Steel

ASTM INTERNATIONAL (ASTM)

ASTM A123/A123M	(2017) Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
ASTM A153/A153M	(2016a) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2021) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM A370	(2021) Standard Test Methods and Definitions for Mechanical Testing of Steel Products
ASTM A653/A653M	(2020) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A1003/A1003M	(2015) Standard Specification for Steel Sheet, Carbon, Metallic- and Nonmetallic-Coated for Cold-Formed Framing Members
ASTM C955	(2017) Standard Specification for Cold-Formed Steel Structural Framing Members
ASTM C1007	(2020) Standard Specification for Installation of Load Bearing (Transverse and Axial) Steel Studs and Related Accessories
ASTM C1513	(2018) Standard Specification for Steel Tapping Screws for Cold-Formed Steel Framing Connections
ASTM E119	(2020) Standard Test Methods for Fire Tests of Building Construction and Materials
ASTM E329	(2021) Standard Specification for Agencies Engaged in Construction Inspection, Testing, or Special Inspection
ASTM E488/E488M	(2015) Standard Test Methods for Strength of Anchors in Concrete and Masonry Elements
ASTM F1941	(2010) Standard Specification for Electrodeposited Coatings on Threaded Fasteners (Unified Inch Screw Threads (UN/UNR))
ASTM F2329/F2329M	(2015) Standard Specification for Zinc Coating, Hot-Dip, Requirements for

Application to Carbon and Alloy Steel Bolts, Screws, Washers, Nuts, and Special Threaded Fasteners

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Framing Components; G

SD-03 Product Data

Steel Studs, Joists, Tracks, Bracing, Bridging and Accessories

Recycled Content of Steel Products

SD-07 Certificates

Load-Bearing Cold-Formed Metal Framing

1.3 DELIVERY, STORAGE, AND HANDLING

Steel framing and related accessories shall be stored and handled in accordance with the AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing".

1.4 LOAD-BEARING COLD-FORMED METAL FRAMING

Include top and bottom tracks, bracing, fastenings, and other accessories necessary for complete installation. Framing members shall have the structural properties indicated. Where physical structural properties are not indicated, they shall be as necessary to withstand all imposed loads. Non-load-bearing metal framing, furring, and ceiling suspension systems are specified in Section 09 22 00 SUPPORTS FOR PLASTER AND GYPSUM BOARD.

Submit mill certificates or test reports from independent testing agency, qualified in accordance with ASTM E329, showing that the steel sheet used in the manufacture of each cold-formed component complies with the minimum yield strengths and uncoated steel thickness specified. Test reports shall be based on the results of three coupon tests in accordance with ASTM A370.

1.5 QUALITY ASSURANCE

a. Testing Agency Qualifications: An independent testing agency, acceptable to authorities having jurisdiction, qualified according to ASTM E329 for testing indicated.

b. Product Tests: Mill certificates or data from a qualified independent testing agency, or in-house testing with calibrated test equipment indicating steel sheet complies with requirements, including base-metal thickness, yield strength, tensile strength, total elongation, chemical requirements, and metallic-coating thickness.

c. Welding Qualifications: Qualify procedures and personnel according to

the following:

(1) AWS D1.1/D1.1M, "Structural Welding Code - Steel".

(2) AWS D1.3/D1.3M, "Structural Welding Code - Sheet Steel".

f. Fire-Test-Response Characteristics: Where indicated, provide cold-formed metal framing identical to that of assemblies tested for fire resistance per ASTM E119 by, and displaying a classification label from, a testing and inspecting agency acceptable to authorities having jurisdiction.

g. AISI Specifications and Standards: Comply with:

(1) AISI S100, "North American Specification for the Design of Cold-Formed Steel Structural Members".

(2) AISI S201, "North American Standard for Cold-Formed Steel Framing - Product Data".

(3) AISI S202, "Code of Standard Practice for Cold-Formed Steel Structural Framing".

(4) AISI S211, "North American Standard for Cold-Formed Steel Framing - Wall Stud Design".

(5) AISI S212, "North American Standard for Cold-Formed Steel Framing - Header Design".

(6) AISI S213, "North American Standard for Cold-Formed Steel Framing - Lateral Design".

(7) AISI S214, "North American Standard for Cold-Formed Steel Framing - Truss Design".

1.5.1 Drawing Requirements

Submit framing components to show sizes, thicknesses, layout, material designations, methods of installation, and accessories including the following:

a. Cross sections, plans, and/or elevations showing component types and locations for each framing application; including shop coatings and material thicknesses for each framing component.

b. Connection details showing fastener type, quantity, location, and other information to assure proper installation.

c. Drawings depicting panel configuration, dimensions, components, locations, and construction sequence if the Contractor elects to install prefabricated/prefinished frames.

PART 2 PRODUCTS

2.1 STEEL STUDS, JOISTS, TRACKS, BRACING, BRIDGING AND ACCESSORIES

Framing components shall comply with ASTM C955 and the following.

a. Provide products with an average recycled content of steel products so

postconsumer recycled content plus one half of preconsumer recycled content not less than 25 percent.

b. Steel Sheet: ASTM A1003/A1003M, Structural Grade, Type H, metallic coated, of grade and coating weight as follows:

(1) Grade: ST33H (ST230H).

(2) Coating: G60 (Z180), A60 (ZF180), AZ50 (AZ150), or GF30 (ZGF90).

c. Steel Studs: Manufacturer's standard C-shaped steel studs, of web depths indicated, punched, with stiffened flanges, and as follows:

(1) Minimum Base-Metal Thickness: as indicated on the drawings.

(2) Flange Width: as indicated on the drawings.

d. Steel Track: Manufacturer's standard U-shaped steel track, of web depths indicated, unpunched, with straight flanges, and as follows:

(1) Minimum Base-Metal Thickness: Matching steel studs.

(2) Flange Width: 1-1/4 inches .

2.1.1 Studs and Joists of 54 mils (0.054 Inch) and Heavier

Galvanized steel, ASTM A653/A653M and ASTM A1003/A1003M, SS Grade 50, G60 .

2.1.2 Studs and Joists of 43 mils (0.043 Inch) and Lighter

Studs and Joists of 43 mils (0.043 Inch) and Lighter, Track, and Accessories (All thicknesses): Galvanized steel, ASTM A653/A653M and ASTM A1003/A1003M, SS, Grade 33 33,000 psi G60.

2.1.3 Sizes, Thickness, Section Modulus, and Other Structural Properties

Size and thickness as indicated.

2.2 MARKINGS

Studs and track shall have product markings stamped on the web of the section. The markings shall be repeated throughout the length of the member at a maximum spacing of 4 feet on center and shall be legible and easily read. The product marking shall include the following:

a. An ICC number.

b. Manufacturer's identification.

c. Minimum delivered uncoated steel thickness.

d. Protective coating designator.

e. Minimum yield strength.

2.3 CONNECTIONS

2.3.1 Steel-To-Concrete/Concrete Masonry Connections

a. Post-Installed Concrete Anchors: Adhesive or expansion anchors fabricated from corrosion-resistant materials with allowable load capacities in accordance with ICC-ES AC193 and ACI 318 greater than or equal to the design load as determined by testing per ASTM E488/E488M conducted by a qualified testing agency.

b. Power-Actuated Fasteners: Fabricated from corrosion-resistant materials with allowable load capacities in accordance with ICC-ES AC 70 greater than or equal to the design load as determined by testing per ASTM E1190 conducted by a qualified testing agency.

2.3.2 Steel-To-Steel Connections

a. Screws: ASTM C1513, corrosion-resistant-coated, self-drilling, self-tapping steel screws of the type and size indicated. Provide low-profile head beneath sheathing and manufacturer's standard elsewhere. Electroplated to a minimum of 5 micron zinc coating per ASTM F1941 or hot-dipped galvanized per ASTM A123/A123M or ASTM A153/A153M.

b. Bolts: ASTM A307 coated by hot-dip process per ASTM F2329/F2329M or zinc-coated by mechanical-deposition process per ASTM B695, Class 55.

c. Welding Electrodes: Comply with AWS standards.

2.4 PLASTIC GROMMETS

Supply plastic grommets for stud webs as recommended by stud manufacturer, to protect electrical wires and plumbing piping. Prevent metal-to-metal contact between wiring/piping and studs.

2.5 SEALER GASKET

Closed-cell neoprene foam, 1/4-inch thick, selected from manufacturer's standard widths to match width of bottom track on concrete slab or foundation.

PART 3 EXECUTION

3.1 FASTENING

Fasten framing members together by welding or by using self-drilling, self-tapping screws. Electrodes and screw connections shall be as required and indicated in the design calculations.

3.1.1 Screws

Screws shall be of the self-drilling self-tapping type, size, and location as indicated. Screw penetration through joined materials shall not be less than three exposed threads. Minimum spacings and edge distances for screws shall be as specified in AISI S100. Screws covered by sheathing materials shall have low profile heads.

3.1.2 Anchors

Anchors shall be of the type, size, and location as indicated.

3.1.3 Powder-Actuated Fasteners

Powder-actuated fasteners shall be of the type, size, and location as indicated.

3.2 INSTALLATION

Install cold-formed framing in accordance with ASTM C1007 and AISI S200.

Install cold-formed steel framing according to AISI S202 and to manufacturer's written instructions unless more stringent requirements are indicated.

3.2.1 Tracks

Provide accurately aligned runners at top and bottom of studs. Install sealer gasket under bottom of track on concrete slab or foundation. Anchor tracks as indicated in design calculations. Butt weld joints in tracks or splice with stud inserts. Fasteners shall be at least 3 inches from the edge of concrete slabs.

3.2.2 Studs

Cut studs square and set with firm bearing against webs of top and bottom tracks. Position studs vertically in tracks and space as indicated in design. Do not splice studs. Provide at least two studs at jambs of doors and other openings 2 feet wide or larger. Provide jack studs over openings, as necessary, to maintain indicated stud spacing. Provide tripled studs at corners, positioned to receive interior and exterior finishes. Fasten studs to top and bottom tracks by welding or screwing both flanges to the tracks. Framed wall openings shall include headers and supporting components as shown on the drawings. Headers shall be installed in all openings that are larger than the stud spacing in a wall.

3.2.3 Joists

a. Provide a stud directly under each joist. The maximum spacing of studs as indicated shall be maintained.

b. Install temporary bracing and supports. Maintain braces and supports in place, undisturbed, until entire integrated supporting structure has been completed and permanent connections to framing are secured.

c. Do not alter, cut, or remove framing members or connections of trusses.

3.2.4 Erection Tolerances

a. Framing members which will be covered by finishes such as wallboard, plaster, or ceramic tile set in a mortar setting bed, shall be within the following limits:

(1) Layout of walls and partitions: 1/4 inch from intended position;

(2) Plates and runners: 1/4 inch in 8 feet from a straight line;

(3) Studs: 1/4 inch in 8 feet out of plumb, not cumulative; and

(4) Face of framing members: 1/4 inch in 8 feet from a true plane.

-- End of Section --

SECTION 06 10 00

ROUGH CARPENTRY
08/16, CHG 2: 11/18

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN LUMBER STANDARDS COMMITTEE (ALSC)

ALSC PS 20	(2021) American Softwood Lumber Standard

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B18.2.1	(2012; R 2021) Square, Hex, Heavy Hex, and Askew Head Bolts and Hex, Heavy Hex, Hex Flange, Lobed Head, and Lag Screws (Inch Series)
ASME B18.2.2	(2022) Nuts for General Applications: Machine Screw Nuts, and Hex, Square, Hex Flange, and Coupling Nuts (Inch Series)
ASME B18.5.2.1M	(2006; R 2011) Metric Round Head Short Square Neck Bolts
ASME B18.5.2.2M	(1982; R 2010) Metric Round Head Square Neck Bolts

AMERICAN WOOD PROTECTION ASSOCIATION (AWPA)

AWPA BOOK	(2015) AWPA Book of Standards
AWPA M2	(2019) Standard for the Inspection of Preservative Treated Wood Products for Industrial Use
AWPA M6	(2024) Brands Used on Preservative Treated Materials
AWPA P5	(2015) Standard for Waterborne Preservatives
AWPA P18	(2014) Nonpressure Preservatives
AWPA P49	(2015; R 2021) Standard for Fire Retardant FR-1
AWPA T1	(2024) Use Category System: Processing and Treatment Standard
AWPA U1	(2024) Use Category System: User Specification for Treated Wood

APA - THE ENGINEERED WOOD ASSOCIATION (APA)

APA L870	(2010) Voluntary Product Standard, PS 1-09, Structural Plywood

ASTM INTERNATIONAL (ASTM)

ASTM A153/A153M	(2023) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A307	(2021) Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60 000 PSI Tensile Strength
ASTM D2898	(2010; R 2017) Standard Practice for Accelerated Weathering of Fire-Retardant-Treated Wood for Fire Testing

SOUTHERN PINE INSPECTION BUREAU (SPIB)

SPIB 1003	(2021) Standard Grading Rules for Southern Pine Lumber

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Structural Concrete Panel Layout including fastener patterns

SD-03 Product Data

Structural Concrete Panel Fasteners

Fire-retardant Treatment

1.3 DELIVERY AND STORAGE

Deliver materials to the site in an undamaged condition. Store, protect, handle, and install prefabricated structural elements in accordance with manufacturer's instructions and as specified. Store materials off the ground to provide proper ventilation, with drainage to avoid standing water, and protection against ground moisture and dampness. Store materials with a moisture barrier at both the ground level and as a cover forming a well ventilated enclosure. Store wood I-beams and glue-laminated beams and joists on edge. Adhere to requirements for stacking, lifting, bracing, cutting, notching, and special fastening requirements. Do not use materials that have visible moisture or biological growth. Remove defective and damaged materials and provide new materials. Store separated

reusable wood waste convenient to cutting station and area of work.

1.4 GRADING AND MARKING

1.4.1 Lumber

Mark each piece of framing and board lumber or each bundle of small pieces of lumber with the grade mark of a recognized association or independent inspection agency. Such association or agency must be certified by the Board of Review, American Lumber Standards Committee, to grade the species used. Surfaces that are to be exposed to view must not bear grademarks, stamps, or any type of identifying mark. Hammer marking will be permitted on timbers when all surfaces will be exposed to view.

1.4.2 Plywood

Mark each sheet with the mark of a recognized association or independent inspection agency that maintains continuing control over the quality of the plywood. The mark must identify the plywood by species group or span rating, exposure durability classification, grade, and compliance with APA L870. Surfaces that are to be exposed to view must not bear grademarks or other types of identifying marks.

1.4.3 Preservative-Treated Lumber

The Contractor is responsible for the quality of treated wood products. Each treated piece must be inspected in accordance with AWPA M2 and permanently marked or branded, by the producer, in accordance with AWPA M6. The Contractor must provide Contracting Officer's Representative (COR) with the inspection report of an approved independent inspection agency that offered products comply with applicable AWPA Standards. The appropriate Quality Mark on each piece will be accepted, in lieu of inspection reports, as evidence of compliance with applicable AWPA treatment standards.

1.4.4 Fire-Retardant Treated Lumber

Mark each piece in accordance with AWPA M6, except pieces that are to be natural or transparent finished. In addition, exterior fire-retardant lumber must be distinguished by a permanent penetrating blue stain. Labels of a nationally recognized independent testing agency will be accepted as evidence of conformance to the fire-retardant requirements of AWPA M6.

1.5 SIZES AND SURFACING

ALSC PS 20 for dressed sizes of yard and structural lumber. Lumber must be surfaced four sides. Size references, unless otherwise specified, are nominal sizes, and actual sizes must be within manufacturing tolerances allowed by the standard under which the product is produced. Other measurements are IP or SI standard.

1.6 MOISTURE CONTENT

Air-dry or kiln-dry lumber. Kiln-dry treated lumber after treatment. Maximum moisture content of wood products must be as follows at the time of delivery to the job site:

a. Framing lumber and board, 19 percent maximum
b. Roof planking, 15 percent maximum

c. Materials other than lumber; moisture content must be in accordance with standard under which the product is produced

1.7 PRESERVATIVE TREATMENT

Treat wood products with waterborne wood preservatives conforming to AWPA P5. Pressure treatment of wood products must conform to the requirements of AWPA BOOK Use Category System Standards U1 and T1. Pressure-treated wood products must not contain arsenic, chromium, or other agents classified as carcinogenic, probably carcinogenic, or possibly carcinogenic to humans (compounds in Groups 1, 2A, or 2B) by the International Agency for Research on Cancer (IARC), Lyon, France. Pressure-treated wood products must not exceed the limits of the U.S. EPA's Toxic Characteristic Leaching Procedure (TCLP), and must not be classified as hazardous waste. Submit certification from treating plant stating chemicals and process used and net amount of preservatives retained are in conformance with specified standards. In accordance with AWPA U1 provide non-copper preservative treatment such as EL2, PTI or SBX,DOT for products in direct contact with sheet metal.

a. 0.25 pcf intended for above ground use.

b. 0.40 pcf intended for ground contact and fresh water use. 0.60 pcf intended for Ammoniacal Copper Quaternary Compound (ACQ)-treated foundations. 0.80 to 1.00 pcf intended for ACQ-treated pilings. All wood must be air or kiln dried after treatment. Specific treatments must be verified by the report of an approved independent inspection agency, or the AWPA Quality Mark on each piece. Minimize cutting and avoid breathing sawdust. Brush coat areas that are cut or drilled after treatment with either the same preservative used in the treatment or with a 2 percent copper naphthenate solution. All lumber and woodwork must be preservative treated. The following items must be preservative treated:

(1) Wood blocking.

1.7.1 New Construction

Use a boron-based preservative conforming to AWPA P18, sodium silicate wood mineralization process, or Ammoniacal Copper Quaternary Compound to treat wood. Use boron-based preservatives for above-ground applications only.

1.8 FIRE-RETARDANT TREATMENT

Fire-retardant treated wood must be pressure treated with fire retardants conforming to AWPA P49. Fire retardant treatment of wood products must conform to the requirements of AWPA U1, Commodity Specification H and AWPA T1, Section H. Treatment and performance inspection must be by an independent and qualified testing agency that establishes performance ratings. Each piece or bundle of treated material must bear identification of the testing agency to indicate performance in accordance with such rating. Treated materials to be exposed to rain wetting must be subjected to an accelerated weathering technique in accordance with ASTM D2898 prior to being tested. Such items which will not be inside a building, and such items which will be exposed to heat or high humidity, must receive exterior fire-retardant treatment. Fire-retardant-treated wood products must be free of halogens, sulfates, ammonium phosphate, and formaldehyde. Items to be treated include the following:

a. Blocking, as applicable.

PART 2 PRODUCTS

2.1 MATERIALS

2.2 LUMBER

2.2.1 Framing Lumber

Framing lumber such as blocking must be one of the species listed in the table below. Minimum grade of species must be as listed.

Table of Grades for Framing and Board Lumber			
Grading Rules	Species	Framing	Board Lumber

Table of Grades for Framing and Board Lumber			
Grading Rules	Species	Framing	Board Lumber
SPIB 1003 standard grading rules	Southern Pine	All Species: Standard Light Framing or No. 3 Structural Light Framing (Stud Grade for 2x4 nominal size, 10 feet and shorter)	No. 2 Boards

Table of Grades for Framing and Board Lumber			
Grading Rules	Species	Framing	Board Lumber

2.3 STRUCTURAL CONCRETE PANELS

2.3.1 Subflooring

2.3.1.1 Structural Concrete Panels

Structural Concrete Panel: Basis-of-Design product - USG Structo-Crete Panels.

A. Structural Concrete Panel:

1. Noncombustible structural subfloor panel manufactured in accordance with Acceptance Criteria AC318.

    a. Panel Dimensions:
        i. Thickness: 3/4"
        ii. Width: 4'
        iii. Lengths: 8'
        iv. Long Edges: Tongue and Groove

    b. Panel Properties:
        i. Density: 75 lb/ft3 tested in accordance with ASTM C1185
        ii. Weight: 5.0 lbs/ft2 tested in accordance with ASTM D1037 at a thickness of 3/4”
        iii. Non-combustibility: Pass tested in accordance with ASTM E136
        iv. Surface Burning Characteristics: 0 Flame Spread / 0 Smoke Developed tested in accordance with ASTM E84
        v. Mold Resistance: 10 tested in accordance with ASTM D3273 0 tested in accordance with G21

2.3.2 Combination Subfloor-Underlayment

2.4 OTHER MATERIALS

2.4.1 Miscellaneous Wood Members

2.4.1.1 Blocking

Blocking must be standard or number 2 grade.

2.5 ROUGH HARDWARE

Unless otherwise indicated or specified, rough hardware must be of the type and size necessary for the project requirements. Sizes, types, and spacing of fastenings of manufactured building materials must be as recommended by the product manufacturer unless otherwise indicated or specified. Rough hardware exposed to the weather or embedded in or in contact with preservative treated wood, exterior masonry, or concrete walls or slabs must be hot-dip zinc-coated in accordance with ASTM A153/A153M. Fastenings for fire-retardant treated lumber and woodwork must be stainless-steel fasteners as recommended by the treated wood manufacturer.

2.5.1 Bolts, Nuts, Studs, and Rivets

ASME B18.2.1, ASME B18.5.2.1M, ASME B18.5.2.2M and ASME B18.2.2.

2.5.2 Anchor Bolts

ASTM A307, size as indicated, complete with nuts and washers.

2.5.3 3/4" Structural Concrete Panels Recommended Fasteners

a. Use only fasteners recommended by the structural concrete panel manufacturer.

b. Install using the recommended spacing and distance from the ends (square cut) and edges (tongue & groove) of the panel.

c. Any length of the manufacturer's recommended fasteners may be used but do not use a larger size fastener unless specified by the structural engineer.

2.5.4 Lag Screws and Lag Bolts

ASME B18.2.1.

PART 3 EXECUTION

3.1 INSTALLATION

Do not install building construction materials that show visual evidence of biological growth.

3.1.1 Structural Concrete Panels

1. Concrete products may contain respirable crystalline silica. Refer to

OSHA Rule 29 CFR 1926.1153 for specific details about limiting worker exposure to respirable silica.

2. The panels shall be cut to size with a circular saw equipped with carbide-tipped cutting blade and a dry dust industrial HEPA vacuum collection device for control of dust and silica. Wear safety glasses and a NIOSH-approved dust mask when cutting the panel. Collected dust shall be disposed in a safe manner and in compliance with local, state, and federal ordinances.

3. Structural concrete panels shall be installed with long edges (tongue & groove) perpendicular to the framing. If primary framing direction changes, removal of the tongue from the first row of panels oriented in the new direction will be necessary for proper fastening. Care should be taken to ensure sufficient framing flange is available for fastening the panels in the new orientation.

4. Begin panel installation by snapping a line across the joists parallel to the rim joist at a distance equal to the width of the first panel being placed. Given that panel width is 48", plan the layout so the first and last panel row width is a minimum of 24" wide. In the case where the row width is less than 24" wide, panels shall be blocked on all edges by framing (strapping is not sufficient).

5. Ensure that all supporting members are free of debris before placing panels. Place the cut edge or tongue along the rim joist. Place each panel across three or more supports minimum two-span condition. Less than full length panels at the end of a row may span a single framing opening. Cut panels to length as needed to ensure that the butt end of the panel is centered on the framing member. Install panels in a direction that ensures that the butt end falls over the open side of the joist. This will help keep adjacent ends in the same place.

6. Structural concrete panels shall be fastened following the fastening schedule listed in the contract documents. Begin fastening at one end and fan out across the panel. Do not fasten all the corners first. After the installation of one complete row, begin the next row. Slide panels together so that the tongue of the panel being installed fits into the groove of the installed panel. If there is construction debris lodged inside the groove, do not force the tongue into the clogged groove. Clean the plugged groove with a stiff bristle brush to dislodge the trapped debris. Do not gap the panels. Panels are to be butted together at all ends and edges with no gaps at T&G joints. If any unacceptable gapping occurs due to site specific conditions, reference structural concrete panel manufacturer's repair manual. Install the second panel and all subsequent panels in a similar manner to complete the row. Install all rows in a running bond pattern so that end joints fall over the center of the framing members and are staggered by at least two supports from where the end joints fall in the adjacent rows. Less than full length panels at the end of a row may be staggered by a single support.

7. Penetrations in the panels should be made before installing the panel whenever possible. If penetration is required after the panel is installed, set the depth of the saw blade to ensure that the framing is not damaged. Support the ends and edges of any penetrations with framing if they are greater than 6" in any direction. Refer to structural concrete panel manufacturer's installation guide for additional information.

8. Ensure panel is flush with supporting member, drive fasteners so the heads are flush with the surface of the board.

3.1.2 Building Paper

Provide building paper, as necessary, to separate dissimilar materials.

3.2 MISCELLANEOUS

3.2.1 Wood Blocking

Provide proper sizes and shapes at proper locations for the installation and attachment of wood and other finish materials, fixtures, equipment, and items indicated or specified.

-- End of Section --

SECTION 07 21 16

MINERAL FIBER BLANKET INSULATION
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C665	(2024) Standard Specification for Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing
ASTM C930	(2019) Standard Classification of Potential Health and Safety Concerns Associated with Thermal Insulation Materials and Accessories
ASTM D5359	(1998; R 2021) Standard Specification for Glass Cullet Recovered from Waste for Use in Manufacture of Glass Fiber
ASTM E84	(2023) Standard Test Method for Surface Burning Characteristics of Building Materials

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.134	Respiratory Protection

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Blanket Insulation; G

SD-08 Manufacturer's Instructions

Insulation

1.3 DELIVERY, STORAGE, AND HANDLING

1.3.1 Delivery

Deliver materials to site in original sealed wrapping bearing manufacturer's name and brand designation, specification number, type, grade, R-value, and class. Store and handle to protect from damage. Do not allow insulation materials to become wet, soiled, crushed, or covered with ice or snow. Comply with manufacturer's recommendations for handling, storing, and protecting of materials before and during installation.

1.3.2 Storage

Inspect materials delivered to the site for damage; unload and store out of weather in manufacturer's original packaging. Store only in dry locations, not subject to open flames or sparks, and easily accessible for inspection and handling.

1.4 SAFETY PRECAUTIONS

1.4.1 Respirators

Provide installers with dust/mist respirators, training in their use, and protective clothing, all approved by National Institute for Occupational Safety and Health (NIOSH)/Mine Safety and Health Administration (MSHA) in accordance with 29 CFR 1910.134.

1.4.2 Other Safety Concerns

Consider other safety concerns and measures as outlined in ASTM C930.

PART 2 PRODUCTS

2.1 BLANKET INSULATION

ASTM C665, Type I, blankets without membrane coverings ; a flame spread rating of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E84.

Provide insulation with R-Value as indicated on drawings

2.1.1 Recycled Materials

Provide insulation materials containing the following minimum percentage of recycled material content by weight:

a. Fiberglass: 20 percent glass cullet complying with ASTM D5359

2.1.2 Prohibited Materials

Do not provide asbestos-containing materials.

PART 3 EXECUTION

3.1 EXISTING CONDITIONS

Before installing insulation, ensure that surfaces that will be in contact with the insulation are dry and free of projections which could cause voids, compressed insulation.

3.2 INSTALLATION

3.2.1 Insulation

Install and handle insulation in accordance with manufacturer's instructions. Keep material dry and free of extraneous materials. Any materials that show visual evidence of biological growth due to presence of moisture must not be installed on the building project. Ensure personal protective clothing and respiratory equipment is used as required. Observe safe work practices.

3.2.1.1 Electrical wiring

Do not install insulation in a manner that would sandwich electrical conductors, that are not installed in conduit, between two layers of insulation.

3.2.1.2 Continuity of Insulation

Install blanket insulation to butt tightly against adjoining blankets and to studs, rafters, joists, sill plates, headers and any obstructions. Provide continuity and integrity of insulation at corners, wall to ceiling joints, roof, and floor.

3.2.1.3 Installation at Bridging and Cross Bracing

Insulate at bridging and cross bracing by splitting blanket vertically at center and packing one half into each opening. Butt insulation at bridging and cross bracing; fill in bridged area with loose or scrap insulation.

3.2.1.4 Insulation without Affixed Vapor Retarder

Provide snug friction fit to hold insulation in place. Stuff pieces of insulation into cracks between joists, studs and other framing, such as at door heads, and jambs.

3.2.1.5 Sizing of Blankets

Provide only full width blankets when insulating between joists, or studs. Size width of blankets for a snug fit where joists or studs are irregularly spaced.

3.2.1.6 Special Requirements for Ceilings

Place insulation under electrical wiring occurring across joists. Pack insulation into narrowly spaced framing.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 84 00

FIRESTOPPING
05/10, CHG 1: 08/13

PART 1 GENERAL

1.1 SUMMARY

Furnish and install tested and listed firestopping systems, combination of materials, or devices to form an effective barrier against the spread of flame, smoke and gases, and maintain the integrity of fire resistance rated walls, partitions, floors, and ceiling-floor assemblies, including through-penetrations and construction joints and gaps. Design and installation must comply with UFC 3-600-01 and TAFB Fire Protection standard (TAFB FPS).

a. Through-penetrations include the annular space around pipes, tubes, conduit, wires, cables and vents.

b. Construction joints include those used to accommodate expansion, contraction, wind, or seismic movement; firestopping material shall not interfere with the required movement of the joint.

Gaps requiring firestopping include gaps between the curtain wall and the floor slab and between the top of the fire-rated walls and the roof or floor deck above and at the intersection of shaft assemblies and adjoining fire resistance rated assemblies.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E84	(2020) Standard Test Method for Surface Burning Characteristics of Building Materials
ASTM E119	(2020) Standard Test Methods for Fire Tests of Building Construction and Materials
ASTM E699	(2009) Standard Practice for Evaluation of Agencies Involved in Testing, Quality Assurance, and Evaluating of Building Components
ASTM E814	(2013a; R 2017) Standard Test Method for Fire Tests of Penetration Firestop Systems
ASTM E1399/E1399M	(1997; R 2017) Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems

ASTM E1966	(2015; R 2019) Standard Test Method for Fire-Resistive Joint Systems
ASTM E2174	(2020a) Standard Practice for On-Site Inspection of Installed Firestop Systems
ASTM E2307	(2020) Standard Test Method for Determining Fire Resistance of Perimeter Fire Barrier Systems Using Intermediate-Scale, Multi-story Test Apparatus
ASTM E2393	(2020a) Standard Practice for On-Site Inspection of Installed Fire Resistive Joint Systems and Perimeter Fire Barriers

FM GLOBAL (FM)

FM 4991	(2013) Approval of Firestop Contractors
FM APP GUIDE	(updated on-line) Approval Guide http://www.approvalguide.com/

TINKER AIR FORCE BASE (TAFB)

TAFB FPS	(2022) Tinker Air Force Base Fire Protection Standard

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-600-01	(2016; with Change 6, 2021) Fire Protection Engineering for Facilities

UNDERWRITERS LABORATORIES (UL)

UL 723	(2018) UL Standard for Safety Test for Surface Burning Characteristics of Building Materials
UL 1479	(2015; Reprint May 2021) Fire Tests of Through-Penetration Firestops
UL 2079	(2015; Reprint Jul 2020) Tests for Fire Resistance of Building Joint Systems
UL Fire Resistance	(2014) Fire Resistance Directory

1.3 SEQUENCING

Coordinate the specified work with other trades. Apply firestopping materials, at penetrations of pipes and ducts, prior to insulating, unless insulation meets requirements specified for firestopping. Apply firestopping materials. at building joints and construction gaps, prior to completion of enclosing walls or assemblies. Cast-in-place firestop devices shall be located and installed in place before concrete placement. Pipe, conduit or cable bundles shall be installed through cast-in-place device after concrete placement but before area is concealed or made inaccessible. Firestop material shall be inspected and approved prior to

final completion and enclosing of any assemblies that may conceal installed firestop.

1.4 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Firestopping System; G

SD-03 Product Data

Firestopping Materials; G

SD-06 Test Reports

Inspection; G

SD-07 Certificates

Inspector Qualifications; G
Firestopping Materials; G
Installer Qualifications; G

1.5 QUALITY ASSURANCE

1.5.1 Installer

Engage an experienced Installer who is:

a. Contractors installing firestopping systems shall be FM Research approved in accordance with FM 4991, operating as a UL Certified Firestop Contractor. The Installer shall have been trained by a direct representative of the manufacturer (not distributor or agent) in the proper selection and installation procedures. The installer shall obtain from the manufacturer and submit written certification of training, and retain proof of certification for duration of firestop installation. A manufacturer's willingness to sell its firestopping products to the Contractor or to an installer engaged by the Contractor does not in itself confer installer qualifications on the buyer.

b. Fire stopping installer shall be independent from all other project construction disciplines.

c. All firestopping scope to be installed by a single certified firestopping subcontractor.

1.5.2 Inspector Qualifications

The inspector shall meet the criteria contained in ASTM E699 for agencies involved in quality assurance and shall have a minimum of two years experience in construction field inspections of firestopping systems, products, and assemblies. The inspector shall be approved by FM Global

according to FM Global 4991, "Approval of Firestop Contractors," or been evaluated by UL and found to comply with its "Qualified Firestop Contractor Program Requirements." must also be a Designated Responsible Individual (DRI). The inspector shall be completely independent of, and divested from, the installer, the manufacturer, and the supplier of any material or item being inspected. The inspector shall not be a competitor of the installer, the contractor, the manufacturer, or supplier of any material or item being inspected. Include in the qualifications submittal a notarized statement assuring compliance with the requirements stated herein.

1.6 DELIVERY, STORAGE, AND HANDLING

Deliver materials in the original unopened packages or containers showing name of the manufacturer and the brand name. Store materials off the ground, protected from damage and exposure to elements and temperatures in accordance with manufacturer requirements. Remove damaged or deteriorated materials from the site. Use materials within their indicated shelf life.

PART 2 PRODUCTS

2.1 FIRESTOPPING SYSTEM

A. Shop Drawings:
1. Product technical data, including:
    a. UL listed design number
    b. Manufacturer’s listed design number.
    c. Manufacturer's installation instructions.
    d. Manufacturer’s specification and technical data for each material including the composition and limitations.
    e. Data sheet for all products and accessories used.
    f. Detailed drawings of special conditions.

2. Provide drawing(s) denoting location of each firestopping assembly.
3. When UL listing is not available, provide a written Engineering Judgment in accordance with International Fire Stopping Council (IFC) Recommended Guidelines.
    a. Engineering Judgments shall be sealed by a Fire Protection Engineer.

Also, submit a written report indicating locations of and types of penetrations and types of firestopping used at each location; record type by UL list printed numbers.

2.2 FIRESTOPPING MATERIALS

Provide firestopping materials, supplied from a single domestic manufacturer, consisting of commercially manufactured, asbestos-free, nontoxic products FM APP GUIDE approved, or UL listed, for use with applicable construction and penetrating items, complying with the following minimum requirements:

2.2.1 Fire Hazard Classification

Material shall have a flame spread of 25 or less, and a smoke developed rating of 50 or less, when tested in accordance with ASTM E84 or UL 723. Material shall be an approved firestopping material as listed in UL Fire Resistance or by a nationally recognized testing laboratory.

2.2.2 Toxicity

Material shall be nontoxic and carcinogen free to humans at all stages of application or during fire conditions and shall not contain hazardous chemicals or require harmful chemicals to clean material or equipment.

2.2.3 Fire Resistance Rating

Firestop systems shall be UL Fire Resistance listed or FM APP GUIDE approved with "F" rating at least equal to fire-rating of fire wall or floor in which penetrated openings are to be protected. Where required, firestop systems shall also have "T" rating at least equal to the fire-rated floor in which the openings are to be protected.

2.2.3.1 Through-Penetrations

Firestopping materials for through-penetrations, as described in paragraph SUMMARY, shall provide "F", "T" and "L" fire resistance ratings in accordance with ASTM E814 or UL 1479. Fire resistance ratings shall be as follows:

2.2.3.1.1 Penetrations of Fire Resistance Rated Walls and Partitions

F Rating = Rating of wall or partition being penetrated.

2.2.3.1.2 Penetrations of Fire and Smoke Resistance Rated Walls, Floors, Floor-Ceiling Assemblies, and the ceiling membrane of Roof-Ceiling Assemblies

F Rating = 2 hour, T Rating = 2 hour and L Rating = <10 cfm/sf Where L rating is required.

2.2.3.2 Construction Joints and Gaps

Fire resistance ratings of construction joints, as described in paragraph SUMMARY, and gaps such as those between floor slabs and curtain walls shall be the same as the construction in which they occur. Construction joints and gaps shall be provided with firestopping materials and systems that have been tested in accordance with ASTM E119, ASTM E1966 or UL 2079 to meet the required fire resistance rating. Curtain wall joints shall be provided with firestopping materials and systems that have been tested in accordance with ASTM E2307 to meet the required fire resistance rating. Systems installed at construction joints shall meet the cycling requirements of ASTM E1399/E1399M or UL 2079. All joints at the intersection of the top of a fire resistance rated wall and the underside of a fire-rated floor, floor ceiling, or roof ceiling assembly shall provide a minimum class II movement capability.

2.2.4 Material Certification

Submit certificates attesting that firestopping material complies with the specified requirements. For all intumescent firestop materials used in through penetration systems, manufacturer shall provide certification of compliance with UL 1479.

PART 3 EXECUTION

3.1 PREPARATION

Areas to receive firestopping must be free of dirt, grease, oil, or loose

materials which may affect the fitting or fire resistance of the firestopping system.

3.2 INSTALLATION

Completely fill void spaces with firestopping material regardless of geometric configuration, subject to tolerance established by the manufacturer. Firestopping systems for filling floor voids 4 inches or more in any direction must be capable of supporting the same load as the floor is designed to support or be protected by a permanent barrier to prevent loading or traffic in the firestopped area. Install firestopping in accordance with manufacturer's written instructions. Provide tested and listed firestop systems in the following locations, except in floor slabs on grade:

a. Penetrations of duct, conduit, tubing, cable and pipe through floors and through fire-resistance rated walls, partitions, and ceiling-floor assemblies.

b. Penetrations of vertical shafts such as pipe chases, elevator shafts, and utility chutes.

c. Gaps at the intersection of floor slabs and curtain walls, including inside of hollow curtain walls at the floor slab.

d. Gaps at perimeter of fire-resistance rated walls and partitions, such as between the top of the walls and the bottom of roof decks.

e. Construction joints in floors and fire rated walls and partitions.

f. Other locations where required to maintain fire resistance rating of the construction.

Provide masking and temporary covering to prevent soiling of adjacent surfaces by firestopping materials during installation. All firestopping systems shall be labeled with a permanent label containing, at minimum, the following information:

1. Firestopping material manufacturer

2. Firestopping system UL number or engineering judgement number/title

3. Date of firestopping system installation

3.2.1 Insulated Pipes and Ducts

Thermal insulation shall be cut and removed where pipes or ducts pass through firestopping, unless insulation meets requirements specified for firestopping. Replace thermal insulation with a material having equal thermal insulating and firestopping characteristics.

3.2.2 Data and Communication Cabling

Cabling for data and communication applications shall be sealed with re-enterable firestopping products and devices as indicated.

3.2.2.1 Re-Enterable Devices

Firestopping devices shall be pre-manufactured modular devices, containing

built-in self-sealing intumescent inserts. Firestopping devices shall allow for cable moves, additions or changes without the need to remove or replace any firestop materials. Devices must be capable of maintaining the fire resistance rating of the penetrated membrane at 0 percent to 100 percent visual fill of penetrants; while maintaining "L" rating of <10 cfm/sf measured at ambient temperature and 400 degrees F at 0 percent to 100 percent visual fill.

3.2.2.2 Re-Sealable Products

Provide firestopping pre-manufactured modular products, containing self-sealing intumescent inserts. Firestopping products shall allow for cable moves, additions or changes. Devices shall be capable of maintaining the fire resistance rating of the penetrated membrane at 0 percent to 100 percent visual fill of penetrants.

3.3 INSPECTION

For all projects, the firestopped areas shall not be covered or enclosed until inspection is complete and approved by the Contracting Officer, Tinker Air Force Base Fire Department, and Tinker Air Force Fire Protection Engineer. Submit request for inspection at least 7 calendar days prior to the requested inspection date.. The inspector must inspect the applications initially to ensure adequate preparations (clean surfaces suitable for application, etc.) and periodically during the work to assure that the completed work has been accomplished according to the manufacturer's written instructions and the specified requirements. Submit written reports indicating locations of and types of penetrations and types of firestopping used at each location; type shall be recorded by UL listed printed numbers.

3.3.1 Inspection Standards

Inspect all firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results to be submitted.

3.3.2 Inspection Reports

Submit inspection report stating that firestopping work has been inspected and found to be applied according to the manufacturer's recommendations and the specified requirements.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 92 00

JOINT SEALANTS
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM C509	(2006; R 2021) Standard Specification for Elastomeric Cellular Preformed Gasket and Sealing Material
ASTM C920	(2018; R 2024) Standard Specification for Elastomeric Joint Sealants
ASTM D1056	(2020) Standard Specification for Flexible Cellular Materials - Sponge or Expanded Rubber

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Sealants; G

Backstops; G,

Cleaning Solvents; G,

1.3 PRODUCT DATA

Include storage requirements, shelf life, curing time, instructions for

mixing and application, and accessories. Provide manufacturer's Safety Data Sheets (SDS) for each solvent, primer and sealant material proposed.

1.4 ENVIRONMENTAL CONDITIONS

Apply sealant when the ambient temperature is between 40 and 90 degrees F.

1.5 DELIVERY AND STORAGE

Deliver materials to the jobsite in unopened manufacturers' sealed shipping containers, with brand name, date of manufacture, color, and material designation clearly marked thereon. Label elastomeric sealant containers to identify type, class, grade, and use. Handle and store materials in accordance with manufacturer's printed instructions. Prevent exposure to foreign materials or subjection to sustained temperatures exceeding 90 degrees F or lower than 0 degrees F. Keep materials and containers closed and separated from absorptive materials such as wood and insulation.

1.6 QUALITY ASSURANCE

1.6.1 Compatibility with Substrate

Verify that each sealant is compatible for use with each joint substrate in accordance with sealant manufacturer's printed recommendations for each application.

1.6.2 Joint Tolerance

Provide joint tolerances in accordance with manufacturer's printed instructions.

PART 2 PRODUCTS

2.1 SEALANTS

Provide sealant products that have been tested, found suitable, and documented as such by the manufacturer for the particular substrates to which they will be applied.

2.1.1 Interior Sealants

Provide ASTM C920, Type S or M, Grade NS, Class 12.5, Use NT. Provide sealant products used on the interior of the building (defined as inside of the weatherproofing system) meeting either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168. Location(s) and color(s) of sealant for the following (Note, color "as selected" refers to manufacturer's full range of color options):

LOCATION	COLOR
a. Small voids between walls or partitions and adjacent lockers, casework, shelving, door frames, built-in or surface mounted equipment and fixtures, and similar items.	White

LOCATION	COLOR
b. Perimeter of frames at doors and access panels which adjoin exposed interior surfaces.	White
b. Interior locations, not otherwise indicated or specified, where small voids exist between materials specified to be painted.	White

2.1.2 Exterior Sealants

For joints in vertical surfaces, provide ASTM C920, Type S or M, Grade NS, Class 25, Use NT. For joints in horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T. Provide location(s) and color(s) of sealant as follows (Note, color "as selected" refers to manufacturer's full range of color options):

LOCATION	COLOR
a. Joints and recesses formed where frames of doors adjoin metal frames. Use sealant at both exterior and interior surfaces of exterior wall penetrations.	Match adjacent surface color

LOCATION	COLOR
b. Expansion and control joints.	To be selected to coordinate with adjacent surface color(s).
i. Metal-to-metal joints where sealant is indicated or specified.	To be selected to coordinate with metal color.

2.2 PRIMERS

Non-staining, quick drying type and consistency as recommended by the sealant manufacturer for the particular application. Provide primers for interior applications that meet the indoor air quality requirements of the paragraph INTERIOR SEALANTS above.

2.3 BACKSTOPS

Provide neoprene, polyurethane, or polyethylene foams free from oil or other staining elements as recommended by sealant manufacturer. Provide 25 to 33 percent oversized backing for closed cell and 40 to 50 percent oversized backing for open cell material, unless otherwise indicated. Provide backstop material that is compatible with sealant. Do not use oakum or other types of absorptive materials as backstops.

2.3.1 Rubber

Provide in accordance with ASTM D1056, Type 2, closed cell, Class A, Grade , round cross section for cellular rubber sponge backing.

2.3.2 Synthetic Rubber

Provide in accordance with ASTM C509, Option I, Type I preformed rods for synthetic rubber backing.

2.3.3 Neoprene

Provide in accordance with ASTM D1056, closed cell expanded neoprene cord Type 2, Class C, Grade 2C2.

2.4 CLEANING SOLVENTS

Provide type(s) recommended by the sealant manufacturer and in accordance with environmental requirements herein. Protect adjacent aluminum and bronze surfaces from solvents. Provide solvents for interior applications that meet the indoor air quality requirements of the paragraph INTERIOR SEALANTS above.

PART 3 EXECUTION

3.1 SURFACE PREPARATION

Prepare surfaces according to manufacturer's printed installation instructions. Clean surfaces from dirt, frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter that would destroy or impair adhesion. Remove oil and grease with solvent; thoroughly remove solvents prior to sealant installation. Wipe surfaces dry with clean cloths. When resealing an existing joint, remove existing caulk or sealant prior to applying new sealant. For surface types not listed below, provide in accordance with sealant manufacturer's printed instructions for each specific surface.

3.1.1 Steel Surfaces

Remove loose mill scale by sandblasting or, if sandblasting is impractical or would damage finished work, scraping and wire brushing. Remove protective coatings by sandblasting or using a residue free solvent. Remove resulting debris and solvent residue prior to sealant installation.

3.1.2 Aluminum Surfaces

Remove temporary protective coatings from surfaces that will be in contact with sealant. When masking tape is used as a protective coating, remove tape and residual adhesive prior to sealant application. For removing protective coatings and final cleaning, use non-staining solvents recommended by the manufacturer of the item(s) containing aluminum or bronze surfaces.

3.1.3 Concrete Surfaces

Where surfaces have been treated with curing compounds, oil, or other such materials, remove materials by sandblasting or wire brushing. Remove laitance, efflorescence and loose mortar from the joint cavity. Remove resulting debris prior to sealant installation.

3.2 SEALANT PREPARATION

Do not add liquids, solvents, or powders to sealants. Mix multicomponent elastomeric sealants in accordance with manufacturer's printed instructions.

3.3 APPLICATION

3.3.1 Joint Width-To-Depth Ratios

Acceptable Ratios:

JOINT WIDTH	JOINT DEPTH	
	Minimum	Maximum
For metal or other nonporous surfaces:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch	1/2 of width	Equal to width
For concrete:		
1/4 inch (minimum)	1/4 inch	1/4 inch
over 1/4 inch to 1/2 inch	1/4 inch	Equal to width
over 1/2 inch to 1 inch	1/2 inch	5/8 inch
Over 1 inch	prohibited	

Unacceptable Ratios: Where joints of acceptable width-to-depth ratios have not been provided, clean out joints to acceptable depths and grind or cut to acceptable widths without damage to the adjoining work. Grinding is prohibited at metal surfaces.

3.3.2 Unacceptable Sealant Use

Do not install sealants in lieu of other required building enclosure weatherproofing components such as flashing, drainage components, and joint closure accessories, or to close gaps between walls, floors, roofs, windows, and doors, that exceed acceptable installation tolerances. Remove sealants that have been used in an unacceptable manner and correct building enclosure deficiencies to comply with contract documents requirements.

3.3.3 Masking Tape

Place masking tape on the finished surface on one or both sides of joint cavities to protect adjacent finished surfaces from primer or sealant smears. Remove masking tape within 10 minutes of joint filling and tooling.

3.3.4 Backstops

Provide backstops dry and free of tears or holes. Tightly pack the back or bottom of joint cavities with backstop material to provide joints in specified depths. Provide backstops where indicated and where backstops are not indicated but joint cavities exceed the acceptable maximum depths specified in JOINT WIDTH-TO-DEPTH RATIOS Table.

3.3.5 Sealants

Provide sealants compatible with the material(s) to which they are applied.

Do not use a sealant that has exceeded its shelf life or has jelled and cannot be discharged in a continuous flow from the sealant gun. Apply sealants in accordance with the manufacturer's printed instructions with a gun having a nozzle that fits the joint width. Work sealant into joints so as to fill the joints solidly without air pockets. Tool sealant after application to ensure adhesion. Apply sealant uniformly smooth and free of wrinkles. Upon completion of sealant application, roughen partially filled or unfilled joints, apply additional sealant, and tool smooth as specified. Apply sealer over sealants in accordance with the sealant manufacturer's printed instructions.

3.4 PROTECTION AND CLEANING

3.4.1 Protection

Protect areas adjacent to joints from sealant smears. Masking tape may be used for this purpose if removed 5 to 10 minutes after the joint is filled and no residual tape marks remain.

3.4.2 Final Cleaning

Upon completion of sealant application, remove remaining smears and stains and leave the work in a clean and neat condition.

a. Metal and Other Non-Porous Surfaces: Remove excess sealant with a solvent moistened cloth. Remove solvent residue in accordance with solvent manufacturer's printed instructions.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 11 13

STEEL DOORS AND FRAMES
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN WELDING SOCIETY (AWS)

AWS D1.1/D1.1M	(2020; Errata 1 2021) Structural Welding Code - Steel

ASTM INTERNATIONAL (ASTM)

ASTM A653/A653M	(2020) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM A879/A879M	(2012; R 2017) Standard Specification for Steel Sheet, zinc Coated by the Electrolytic Process for Applications Requiring Designation of the Coating Mass on Each Surface
ASTM A924/A924M	(2020) Standard Specification for General Requirements for Steel Sheet, Metallic-Coated by the Hot-Dip Process
ASTM C1363	(2019) Standard Test Method for Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

ANSI/BHMA A156.115	(2016) Hardware Preparation in Steel Doors and Steel Frames

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 80	(2022) Standard for Fire Doors and Other Opening Protectives
NFPA 252	(2022) Standard Methods of Fire Tests of Door Assemblies

STEEL DOOR INSTITUTE (SDI/DOOR)

SDI/DOOR 111	(2009) Recommended Details for Standard Steel Doors, Frames, and Accessories and Related Components

SDI/DOOR 113	(2013; R2018) Standard Practice for Determining the Steady-State Thermal Transmittance of Steel Door and Frame Assemblies
SDI/DOOR A250.6	(2015) Recommended Practice for Hardware Reinforcing on Standard Steel Doors and Frames
SDI/DOOR A250.8	(2017) Specifications for Standard Steel Doors and Frames
SDI/DOOR A250.11	(2012) Recommended Erection Instructions for Steel Frames

UNDERWRITERS LABORATORIES (UL)

UL 10C	(2016; Reprint May 2021) UL Standard for Safety Positive Pressure Fire Tests of Door Assemblies

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Doors; G

Frames; G

Accessories

Schedule of Doors; G

Schedule of Frames; G

SD-03 Product Data

Doors; G

Frames; G

Accessories

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver doors, frames, and accessories undamaged and with protective wrappings or packaging. Provide temporary steel spreaders securely fastened to the bottom of each welded frame. Store doors and frames on platforms under cover in clean, dry, ventilated, and accessible locations, with 1/4 inch airspace between doors. Remove damp or wet packaging immediately and wipe affected surfaces dry. Replace damaged materials with new.

PART 2 PRODUCTS

2.1 STANDARD STEEL DOORS

SDI/DOOR A250.8, except as specified otherwise. Prepare doors to receive door hardware as specified in Section 08 71 00 DOOR HARDWARE. Undercut where indicated. Provide exterior doors with top edge closed flush and sealed to prevent water intrusion. Provide doors at 1-3/4 inch thick, unless otherwise indicated. Provide door material that uses a minimum of 25 percent recycled content. Provide data indicating percentage of recycled content for steel door product.

2.1.1 Classification - Level, Performance, Model

2.1.1.1 Extra Heavy Duty Doors

SDI/DOOR A250.8, Level 3, physical performance Level A, Model 1 with core construction as required by the manufacturer , of size(s) and design(s) indicated.

2.2 INSULATION CORES

Provide insulating cores at all exterior doors, and provide an apparent U-factor of 0.091 in accordance with SDI/DOOR 113 and conforming to:

a. Foamed-in-place polyurethane (ASTM C1363) core chemically bonded to all interior surfaces. Density of foam to exceed 1.8 pcf with a crush strength not less than 3600 psf OR Basis-of-Design Product: Ceco Door Products "Imperial".

2.3 STANDARD STEEL FRAMES

SDI/DOOR A250.8, Level 4, except as otherwise specified. Form frames to sizes and shapes indicated, with fully welded corners. Provide steel frames for doors, unless otherwise indicated. Provide frame product that uses a minimum of 25 percent recycled content.

2.3.1 Welded Frames

Continuously weld frame faces at corner joints. Mechanically interlock or continuously weld stops and rabbets. Grind welds smooth.

Weld frames in accordance with the recommended practice of the Structural Welding Code Sections 1 through 6, AWS D1.1/D1.1M and in accordance with the practice specified by the producer of the metal being welded.

2.3.2 Anchors

Provide anchors to secure the frame to adjoining construction. Provide steel anchors, zinc-coated not lighter than 18 gage.

2.3.2.1 Wall Anchors

Provide at least three anchors for each jamb. For frames which are more than 7.5 feet in height, provide one additional anchor for each jamb for each additional 2.5 feet or fraction thereof.

b. Stud partitions: Weld or otherwise securely fasten anchors to

backs of frames. Design anchors to be fastened to closed steel studs with sheet metal screws, and to open steel studs by wiring or welding;

c. Completed openings: Secure frames to previously placed concrete or masonry with expansion bolts in accordance with SDI/DOOR 111; and

2.4 FIRE DOORS AND FRAMES

Provide fire doors and frames in accordance with NFPA 80 and this specification. Include insulated core materials in fire doors where indicated in the door schedule.

2.4.1 Labels

Provide fire doors and frames bearing the label of Underwriters Laboratories (UL), Factory Mutual Engineering and Research (FM), or Warnock Hersey International (WHI) attesting to the rating required. Testing must be in accordance with NFPA 252 or UL 10C. Provide labels that are metal with raised letters, bearing the name or file number of the door and frame manufacturer. Labels must be permanently affixed at the factory to frames and to the hinge edge of the door. Do not paint door and labels.

2.4.2 Astragal on Fire Doors

On pairs of labeled fire doors, conform to NFPA 80 and UL requirements.

2.5 EXTERIOR FRAMES

Provide thermal insulation in all exterior frames. Provide frames of a minimum Level 4, with frames of a minimum thickness of 0.067 inch, 14 gage.

2.6 HARDWARE PREPARATION

Drill and tap doors and frames to receive finish hardware. Prepare doors and frames for hardware in accordance with the applicable requirements of SDI/DOOR A250.8 and SDI/DOOR A250.6. For additional requirements refer to ANSI/BHMA A156.115. Drill and tap for surface-applied hardware at the project site. Build additional reinforcing for surface-applied hardware into the door at the factory.

2.7 FINISHES

2.7.1 Hot-Dip Zinc-Coated and Factory-Primed Finish

Fabricate scheduled doors and frames from hot dipped zinc coated steel, alloyed type, that complies with ASTM A924/A924M and ASTM A653/A653M. The coating weight must meet or exceed the minimum requirements for coatings having 0.4 ounces per square foot, total both sides, i.e., A40. Repair damaged zinc-coated surfaces by the application of zinc dust paint. Thoroughly clean and chemically treat to insure maximum paint adhesion. Factory prime as specified in SDI/DOOR A250.8..

2.7.2 Electrolytic Zinc-Coated Anchors and Accessories

Provide electrolytically deposited zinc-coated steel in accordance with ASTM A879/A879M, Commercial Quality, Coating Class A. Phosphate treat and factory prime zinc-coated surfaces as specified in SDI/DOOR A250.8.

2.8 FABRICATION AND WORKMANSHIP

Provide finished doors and frames that are strong and rigid, neat in appearance, and free from defects, waves, scratches, cuts, dents, ridges, holes, warp, and buckle. Provide molded members that are clean cut, straight, and true, with joints coped or mitered, well formed, and in true alignment. Dress exposed welded and soldered joints smooth. Design door frame sections for use with the wall construction indicated. Corner joints must be well formed and in true alignment. Conceal fastenings where practicable. Design frames in exposed masonry walls or partitions to allow sufficient space between the inside back of trim and masonry to receive caulking compound.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Frames

Set frames in accordance with SDI/DOOR A250.11. Plumb, align, and brace securely until permanent anchors are set. Anchor bottoms of frames with expansion bolts or powder-actuated fasteners. Build in or secure wall anchors to adjoining construction.

3.1.2 Doors

Hang doors in accordance with clearances specified in SDI/DOOR A250.8. After erection and glazing, clean and adjust hardware.

3.1.3 Fire Doors and Frames

Install fire doors and frames, including hardware, in accordance with NFPA 80.

3.2 PROTECTION

Protect doors and frames from damage. Repair damaged doors and frames prior to completion and acceptance of the project or replace with new, as directed. Wire brush rusted frames until rust is removed. Clean thoroughly. Apply an all-over coat of rust-inhibitive paint of the same type used for shop coat.

3.3 CLEANING

Upon completion, clean exposed surfaces of doors and frames thoroughly. Remove mastic smears and other unsightly marks.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 08 71 00

DOOR HARDWARE
02/16, CHG 4: 02/22

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E283	(2019) Standard Test Method for Determining the Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen

BUILDERS HARDWARE MANUFACTURERS ASSOCIATION (BHMA)

ANSI/BHMA A156.1	(2021) Butts and Hinges
ANSI/BHMA A156.3	(2020) Exit Devices
ANSI/BHMA A156.4	(2013) Door Controls - Closers
ANSI/BHMA A156.6	(2021) Architectural Door Trim
ANSI/BHMA A156.7	(2016) Template Hinge Dimensions
ANSI/BHMA A156.13	(2017) Mortise Locks & Latches Series 1000
ANSI/BHMA A156.16	(2018) Auxiliary Hardware
ANSI/BHMA A156.18	(2020) Materials and Finishes
ANSI/BHMA A156.22	(2021) Gasketing
ANSI/BHMA A156.30	(2014) High Security Cylinders

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 72	(2022) National Fire Alarm and Signaling Code
NFPA 80	(2022) Standard for Fire Doors and Other Opening Protectives
NFPA 101	(2021) Life Safety Code
NFPA 252	(2022) Standard Methods of Fire Tests of Door Assemblies

STEEL DOOR INSTITUTE (SDI/DOOR)

SDI/DOOR A250.8	(2017) Specifications for Standard Steel Doors and Frames

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines

UNDERWRITERS LABORATORIES (UL)

UL Bld Mat Dir	(updated continuously online) Building Materials Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Manufacturer's Detail Drawings; G

Verification of Existing Conditions; G

Hardware Schedule; G

Keying System; G

SD-03 Product Data

Hardware Items; G

SD-08 Manufacturer's Instructions

Installation

SD-10 Operation and Maintenance Data

Hardware Schedule Items, Data Package 1; G

1.3 SHOP DRAWINGS

Submit manufacturer's detail drawings indicating all hardware assembly components and interface with adjacent construction. Base shop drawings on verified field measurements and include verification of existing conditions.

1.4 PRODUCT DATA

Provide documentation of ABA/ADA accessibility compliance of applicable components, as required by 36 CFR 1191 Appendix D - Technical.

1.5 HARDWARE SCHEDULE

Provide Hardware Item List and Hardware Schedule containing the following information, and additional information as needed to identify the complete make up of each hardware set and its application to each opening:

1.5.1 Hardware Item List:

a. Hardware Type

b. Item Number

c. Quantity

d. Size(s)

e. Reference Publication / Type Number

f. Manufacturer's Name / Catalog Number

g. Key Control Symbols

h. UL Mark (If fire rated and listed)

i. BHMA Finish(es)

j. Remarks

1.5.2 Hardware Schedule

a. Hardware Set Number

b. Opening Number(s)

c. Opening Description (single/double leaf, hand, size, door/frame material)

d. Fire Rating

e. Hardware Items

f. Quantity

g. Size

h. BHMA Finish

i. Remarks

In addition, submit hardware schedule data package 1 in accordance with Section 01 78 23 OPERATION AND MAINTENANCE DATA.

1.6 QUALITY ASSURANCE

1.6.1 Hardware Manufacturers and Modifications

Provide, as far as feasible, locks, hinges, and closers of one lock, hinge, or closer manufacturer's make. Modify hardware as necessary to provide

features indicated or specified.

1.6.2 Key Shop Drawings Coordination Meeting

Prior to the submission of the key shop drawing, the Contracting Officer, Contractor, Door Hardware Subcontractor, using Activity and Base Locksmith must meet to discuss and coordinate key requirements for the facility.

1.7 DELIVERY, STORAGE, AND HANDLING

Deliver hardware in original individual containers, complete with necessary appurtenances including fasteners and instructions. Mark each individual container with item number as shown on hardware schedule.

PART 2 PRODUCTS

2.1 TEMPLATE HARDWARE

Hardware applied to metal doors must be manufactured using a template. Provide templates to door and frame manufacturers in accordance with ANSI/BHMA A156.7 for template hinges. Coordinate hardware items to prevent interference with other hardware.

2.2 HARDWARE FOR FIRE DOORS AND EXIT DOORS

Provide all hardware necessary to meet the requirements of NFPA 72 for door alarms, NFPA 80 for fire doors, NFPA 101 for exit doors, NFPA 252 for fire tests of door assemblies, ABA/ADA accessibility requirements, and all other requirements indicated, even if such hardware is not specifically mentioned in paragraph HARDWARE SCHEDULE. Provide Underwriters Laboratories, Inc. labels for such hardware in accordance with UL Bld Mat Dir or equivalent labels in accordance with another testing laboratory approved in writing by the Contracting Officer.

2.3 HARDWARE ITEMS

Clearly and permanently mark with the manufacturer's name or trademark, hinges, locks, latches, exit devices, bolts and closers where the identifying mark is visible after the item is installed. For closers with covers, the name or trademark may be beneath the cover.

2.3.1 Hinges

Provide in accordance with ANSI/BHMA A156.1. Provide hinges that are 4-1/2 by 4-1/2 inch unless otherwise indicated. Construct loose pin hinges for interior doors and reverse-bevel exterior doors so that pins are non-removable when door is closed. Other anti-friction bearing hinges may be provided in lieu of ball bearing hinges.

2.3.2 Locks and Latches

a. At exterior locations provide locksets of full stainless steel type 302 or 304 construction including fronts, strike, escutcheons, knobs, bolts and all interior working parts. Marine Grade I, fully non-ferrous.

b. In non-air-conditioned interior environments or humid interior environments, provide interior locksets on the same Marine Grade I, fully non-ferrous as exterior locksets.

2.3.2.1 Mortise Locks and Latches

Provide in accordance with ANSI/BHMA A156.13, Series 1000, Operational Grade 1, Security Grade 2. Provide mortise locks with escutcheons not less than 7 by 2-1/4 inch with a bushing at least 1/4 inch long. Cut escutcheons to fit cylinders and provide trim items with straight, beveled, or smoothly rounded sides, corners, and edges. Provide knobs and roses of mortise locks with screwless shanks and no exposed screws.

2.3.3 Exit Devices

Provide in accordance with ANSI/BHMA A156.3, Grade 1. Provide adjustable strikes for rim type and vertical rod devices. Provide open back strikes for pairs of doors with mortise and vertical rod devices. Provide touch bars in lieu of conventional crossbars and arms. Provide escutcheons not less than 7 by 2-1/4 inch.

Use stainless steel or bronze base metal with plated finishes. Also include stainless steel fasteners and screws.

2.3.4 Cylinders and Cores

Provide cylinders and cores for new locks, including locks provided under other sections of this specification. Provide cylinders and cores with seven pin tumblers. Provide cylinders from the products of one manufacturer, and provide cores from the products of one manufacturer. Rim cylinders, mortise cylinders, and knobs of bored locksets have interchangeable cores which are removable by special control keys. Stamp each interchangeable core with a key control symbol in a concealed place on the core.

2.3.4.1 High Security Cylinders

Provide in accordance with ANSI/BHMA A156.30, security level A for all high security cylinder components.

2.3.5 Keying System

Provide an extension of the existing keying system. Existing locks were manufactured by Best and have interchangeable cores.

2.3.6 Lock Trim

Provide cast, forged, or heavy wrought construction and commercial plain design for lock trim.

2.3.6.1 Lever Handles

Provide lever handles . Provide in accordance with ANSI/BHMA A156.3 for mortise locks of lever handles for exit devices. Provide lever handle locks with a breakaway feature (such as a weakened spindle or a shear key) to prevent irreparable damage to the lock when force in excess of that specified in ANSI/BHMA A156.13 is applied to the lever handle. Provide lever handles return to within 1/2 inch of the door face.

2.3.7 Keys

One file key, one duplicate key, and one working key for each key change .

2.3.8 Door Bolts

Provide in accordance with ANSI/BHMA A156.16. Provide automatic latching flush bolts in accordance with ANSI/BHMA A156.3, Type 25.

2.3.9 Closers

Provide in accordance with ANSI/BHMA A156.4, Series C02000, Grade 1, with PT 4C. Provide with brackets, arms, mounting devices, fasteners, full size covers and other features necessary for the particular application. Size closers in accordance with manufacturer's printed recommendations, or provide multi-size closers, Sizes 1 through 6, and list sizes in the Hardware Schedule. Provide manufacturer's 10 year warranty.

Use stainless steel inside bracketed or door mounted closers on exterior doors. Non-ferrous closers, such as aluminum or cast bronze, are permissible where door utilization is minimal. On interior doors use closers of 302 or 304 stainless steel or non-ferrous materials. On surface-mounted closers use or apply rust inhibiting finish on all ferrous parts. Also apply this finish on concealed closers.

2.3.9.1 Identification Marking

Engrave each closer with manufacturer's name or trademark, date of manufacture, and manufacturer's size designation in locations that will be visible after installation.

2.3.10 Door Protection Plates

Provide in accordance with ANSI/BHMA A156.6.

2.3.10.1 Sizes of Kick Plates

2 inch less than door width for single doors; 1 inch less than door width for pairs of doors. Provide 10 inch kick plates for flush doors .

2.3.11 Door Stops and Silencers

Provide in accordance with ANSI/BHMA A156.16.

2.3.12 Weatherstripping Gasketing

Provide in accordance with ANSI/BHMA A156.22. Provide the type and function designation where specified in paragraph HARDWARE SCHEDULE. Provide a set to include head and jamb seals . Air leakage of weatherstripped doors not to exceed 0.5 cubic feet per minute of air per square foot of door area when tested in accordance with ASTM E283. Provide weatherstripping per the following:

2.3.12.1 Extruded Aluminum Retainers

Extruded aluminum retainers not less than 0.050 inch wall thickness with vinyl, neoprene, silicone rubber, or polyurethane inserts. Provide clear (natural) anodized aluminum.

2.4 FASTENERS

Provide fasteners of type, quality, size, and quantity appropriate to the specific application. Fastener finish to match hardware. Provide stainless steel or nonferrous metal fasteners in locations exposed to weather. Verify metals in contact with one another are compatible and will avoid galvanic corrosion when exposed to weather.

2.5 FINISHES

Provide in accordance with ANSI/BHMA A156.18. Provide hardware in BHMA 630 finish (satin stainless steel), unless specified otherwise. Provide items not manufactured in stainless steel in BHMA 626 finish (satin chromium plated) over brass or bronze, except aluminum paint finish for surface door closers. Provide hinges for exterior doors in stainless steel with BHMA 630 finish. Furnish exit devices in BHMA 626 finish in lieu of BHMA 630 finish . Match exposed parts of concealed closers to lock and door trim.

PART 3 EXECUTION

3.1 INSTALLATION

Provide hardware in accordance with manufacturers' printed installation instructions. Fasten hardware to wood surfaces with full-threaded wood screws or sheet metal screws. Provide machine screws set in expansion shields for fastening hardware to solid concrete and masonry surfaces. Provide toggle bolts where required for fastening to hollow core construction. Provide through bolts where necessary for satisfactory installation.

3.1.1 Weatherstripping Installation

Provide full contact, weathertight seals that allow operation of doors without binding the weatherstripping.

3.1.1.1 Stop Applied Weatherstripping

Fasten in place with color matched sheet metal screws not more than 9 inch on center after doors and frames have been finish painted.

3.2 FIRE DOORS AND EXIT DOORS

Provide hardware in accordance with NFPA 72 for door alarms, NFPA 80 for fire doors, NFPA 101 for exit doors, and NFPA 252 for fire tests of door assemblies. .

3.3 HARDWARE LOCATIONS

Provide in accordance with SDI/DOOR A250.8, unless indicated or specified otherwise.

a. Kick: Push side of single-acting doors.

3.4 FIELD QUALITY CONTROL

After installation, protect hardware from paint, stains, blemishes, and other damage until acceptance of work. Submit notice of testing 15 days before scheduled, so that testing can be witnessed by the Contracting Officer. Adjust hinges, locks, latches, bolts, holders, closers, and other

items to operate properly. Demonstrate that permanent keys operate respective locks, and give keys to the Contracting Officer. Correct, repair, and finish, errors in cutting and fitting and damage to adjoining work.

3.5 HARDWARE SETS

The hardware sets represent the design intent and direction of the owner and architect. They are a guideline only and should not be considered a detailed hardware schedule. Discrepancies, conflicting hardware and missing items should be brought to the attention of the architect with corrections made prior to the bidding process. Omitted items not included in a hardware set should be scheduled with the appropriate additional hardware required for proper application and functionality.

1. Quantities listed are for each pair of doors, or for each single door.

2. The supplier is responsible for handing and sizing all products.

3. Where multiple options for a piece of hardware are given in a single line item, the supplier shall provide the appropriate application for the opening.

4. At existing openings with new hardware the supplier shall field inspect existing conditions prior to the submittal stage to verify the specified hardware will work as required. Provide alternate solutions and proposals as needed.

Manufacturer's Abbreviations:

1. MK - McKinney
2. RO - Rockwood
3. SA - SARGENT
4. PE - Pemko

Hardware Sets

Set 1.0

Doors: 102
Description: RATED PR - MEP

6 Hinge, Full Mortise	TA2714 4-1/2" x 4-1/2"	US26D	MK
1 Dust Proof Strike	570	US26D	RO
1 Flush Bolt (Selt-latching)	2845 / 2945 (as required)	US26D	RO
1 Storeroom/Closet Lock	64 8204 LNP	US26D	SA
1 Surface Vert Rod Exit	64 NB8706 ETP	US32D	SA
1 Core	Match Facility Standard	US15	SA
1 Coordinator (W/mtg plates)	2672 x Mtg Brkts	Black	RO
2 Door Closer	281 Reg / PA	EN	SA

2 Kick Plate	K1050 10" X 2" LDW	US32D	RO
2 Door Stop	409 / 446 as required	US26	RO
1 Gasketing	S88D		PE
1 Astragal	357SP X S88D		PE

Set 2.0

Doors: 101
Description: PR EXT SVR Panics

6 Hinge (heavy weight)	T4A3386 NRP 4-1/2" x 4-1/2"	US32D	MK
1 Surface Vert Rod Exit	64 NB8706 ETP	US32D	SA
1 Surface Vert Rod Exit	NB8710 ETP	US32D	SA
1 Core	Match Facility Standard	US15	SA
2 Door Closer	281 CPS	EN	SA
2 Armor Plate	K1050 36" X 2" LDW	US32D	RO
1 Threshold	2005AT MSES25SS		PE
1 Gasketing	303AS		PE
1 Rain Guard	346C x LAR		PE
2 Sweep	3452AV		PE
1 Astragal Set (2)	303AS		PE

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 22 00

SUPPORTS FOR PLASTER AND GYPSUM BOARD
08/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN IRON AND STEEL INSTITUTE (AISI)

AISI S220	(2020) North American Standard for Cold-Formed Steel Nonstructural Framing

ASTM INTERNATIONAL (ASTM)

ASTM C754	(2020) Standard Specification for Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Metal Support Systems

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the job site and store in ventilated dry locations permitting easy access for inspection and handling. If materials are stored outdoors, stack materials off the ground, supported on a level platform, and fully protected from the weather. Handle materials carefully to prevent damage. Remove damaged items and provide new items.

PART 2 PRODUCTS

2.1 MATERIALS

Provide steel materials for metal support systems with either a EQ (Equivalent Coating) coating or a galvanized coating AISI S220 G-90 or equivalent; aluminum coating T1-25; or a 55-percent aluminum-zinc coating AZ50.

Provide metal support systems containing a minimum of 20 percent recycled content.

2.1.1 Non-load Bearing Wall Framing

AISI S220.

2.1.2 Materials for Attachment of Gypsum Wallboard

2.1.2.1 Suspended and Furred Ceiling Systems

AISI S220.

2.1.2.2 Non-load Bearing Wall Framing and Furring

a. Framing Members, General: Comply with AISI S220 for conditions indicated.

(1) Steel Sheet Components: Comply with AISI S220 requirements for metal unless otherwise indicated.

(2) Protective Coating: AISI S220, provide EQ (Equivalent Coating) coating, galvanized coating G-90 or equivalent.

b. Studs and Runners: AISI S220. Use either steel studs and runners or embossed steel studs and runners.

c. AISI S220, but not thinner than 0.0179 inch thickness, with 0.0329 inch minimum thickness supporting wall hung items such as cabinetwork, equipment and fixtures.

d. Slip-Type Head Joints: Provide one of the following:

(1) Slotted Deflection Track: Steel sheet top runner manufactured to prevent cracking of finishes applied to interior partition framing resulting from deflection of structure above; in thickness not less than indicated for studs and in width to accommodate depth of studs.

(2) Clip System: Clips designed for use in head-of-wall deflection conditions that provide a positive attachment of studs to tracks while allowing 1-1/2 inch minimum vertical movement.

(3) Single Long-Leg Track System: Top track with 2 inch deep flanges in thickness not less than indicated for studs, installed with studs friction fit into top track and with continuous bridging and spacer bar located within 12 inches of the top of studs to provide lateral bracing.

e. Firestop Tracks: Top runner manufactured to allow partition heads to expand and contract with movement of the structure while maintaining continuity of fire-resistance-rated assembly indicated; in thickness not less than indicated for studs and in width to accommodate depth of studs.

f. Sound Isolation Clips: Used with 18 mil, (25 gauge), drywall furring channels to provide acoustical separation.

g. Framed Openings: Galvanized-steel, one-piece header and jamb studs in lieu of built-up members.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 Non-load Bearing Wall Framing

ASTM C754, Installation Standard.

3.1.2 Systems for Attachment of Gypsum Wallboard

3.1.2.1 Non-load Bearing Wall Framing and Furring

ASTM C754, except as indicated otherwise. Provide a sealer gasket under bottom of track on concrete slab or foundation.

3.1.2.2 Bracing

Bracing design to be provided by an engineer employed by the metal framing manufacturer. Engineer to be registered in the state where the project is located.

3.1.2.3 Backing Plates

In accordance with manufacturer's installation instructions.

3.1.2.4 Framed Openings

In accordance with manufacturer's installation instructions and approved design.

3.2 ERECTION TOLERANCES

Provide framing members which will be covered by finish materials such as wallboard within the following limits:

a. Layout of walls and partitions: 1/4 inch from intended position;

b. Plates and runners: 1/4 inch in 8 feet from a straight line;

c. Studs: 1/4 inch in 8 feet out of plumb, not cumulative; and

d. Face of framing members: 1/4 inch in 8 feet from a true plane.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 29 00

GYPSUM BOARD
08/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A653/A653M	(2023) Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
ASTM C475/C475M	(2017; R 2022) Standard Specification for Joint Compound and Joint Tape for Finishing Gypsum Board
ASTM C840	(2024) Standard Specification for Application and Finishing of Gypsum Board
ASTM C954	(2022) Standard Specification for Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
ASTM C1002	(2022) Standard Specification for Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
ASTM C1047	(2019) Standard Specification for Accessories for Gypsum Wallboard and Gypsum Veneer Base
ASTM C1396/C1396M	(2024) Standard Specification for Gypsum Board

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide https://www.approvalguide.com/

GYPSUM ASSOCIATION (GA)

GA 214	(2010) Recommended Levels of Gypsum Board Finish
GA 216	(2016) Application and Finishing of Gypsum Panel Products

UL SOLUTIONS (UL)

UL Fire Resistance	(2014) Fire Resistance Directory

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for Contractor Quality Control approval. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Control Joint Shop Drawings

SD-03 Product Data

Gypsum Board

Trim

Accessories

SD-06 Test Reports

ASTM E90 Factory Test Report; G,

SD-08 Manufacturer's Instructions

Safety Data Sheets

SD-10 Operation and Maintenance Data

Manufacturer Maintenance Instructions

1.3 DELIVERY, STORAGE, AND HANDLING

1.3.1 Delivery

Deliver materials in the original packages, containers, or bundles with each bearing the brand name, applicable standard designation, and name of manufacturer, or supplier.

1.3.2 Storage

Keep materials dry by storing inside a sheltered building. Where necessary to store gypsum board, and cementitious backer units outside, store flat and off the ground, properly supported on a level platform, and protected

from direct exposure to rain, snow, sunlight, and other extreme weather conditions. Provide adequate ventilation to prevent condensation. Remove plastic wrapping that may inhibit ventilation. Store per manufacturer's recommendations for allowable temperature and humidity range. Do not store panels where temperatures may exceed 125 deg F. Do not store gypsum wallboard with materials which have high emissions of volatile organic compounds (VOCs) or other contaminants. Do not store panels near materials that may offgas or emit harmful fumes, such as kerosene heaters, fresh paint, or adhesives. Do not use materials that have visible moisture or biological growth. Do not stack panels higher than manufacturer's recommendations, and no higher than 17 feet.

1.3.3 Handling

Neatly stack gypsum board, glass mat faced gypsum board, and cementitious backer units flat to prevent sagging or damage to the edges, ends, and surfaces. Handle per manufacturer's recommendations.

1.4 QUALIFICATIONS

Furnish type of gypsum board work specialized by the installer with a minimum of 5 years of documented successful experience.

1.5 ENVIRONMENTAL REQUIREMENTS

Do not expose the gypsum board to excessive sunlight prior to gypsum board application. Maintain a continuous uniform temperature of not less than 50 degrees F and not more than 80 degrees F for at least one week prior to the application of gypsum board work, while the gypsum board application is being done, and for at least one week after the gypsum board is set. Shield air supply and distribution devices to prevent any uneven flow of air across the plastered surfaces. Provide ventilation to exhaust moist air to the outside during gypsum board application, set, and until gypsum board jointing is dry. In glazed areas, keep windows open top and bottom or side to side 3 to 4 inches. Reduce openings in cold weather to prevent freezing of joint compound when applied. For enclosed areas lacking natural ventilation, provide temporary mechanical means for ventilation. In unglazed areas subjected to hot, dry winds or temperature differentials from day to night of 20 degrees F or more, screen openings with cheesecloth or similar materials. Avoid rapid drying. During periods of low indoor humidity, provide minimum air circulation following gypsum boarding and until gypsum board jointing complete and is dry.

1.6 FIRE RESISTIVE CONSTRUCTION

Comply with specified fire-rated assemblies for design numbers indicated per UL Fire Resistance or FM APP GUIDE.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to specifications, standards and requirements specified. Provide gypsum board types, gypsum backing board types, and joint treating materials manufactured from asbestos free materials only. Submit Safety Data Sheets and manufacturer maintenance instructions for gypsum materials.

2.1.1 Gypsum Board

ASTM C1396/C1396M. Gypsum board must contain a minimum of 10 percent post-consumer recycled content, or a minimum of 40 percent post-industrial recycled content. Provide data identifying percentage of recycled content for gypsum board. Gypsum Board must not contain asbestos. Provide gypsum wall board and panels meeting the emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type). Provide certification or validation of indoor air quality for gypsum board.

2.1.1.1 Type X (Special Fire-Resistant) Mold Resistant / Anit-Microbial Gypsum

48 inch wide, 5/8 inch thick, tapered edges.

2.1.2 Joint Treatment Materials

ASTM C475/C475M. Product must be low emitting VOC types with VOC limits not exceeding 50 g/L. Joint materials must not contain asbestos. Use all purpose joint and texturing compound containing inert fillers and natural binders, including lime compound. Pre-mixed compounds must be free of antifreeze, vinyl adhesives, preservatives, biocides and other slow releasing compounds.

2.1.2.1 Finishing or Topping Compound

Specifically formulated and manufactured for use as a finishing compound.

2.1.2.2 All-Purpose Compound

Specifically formulated and manufactured to serve as both a taping and a finishing compound and compatible with tape, substrate, and fasteners.

2.1.2.3 Joint Tape

Use cross-laminated, tapered edge, reinforced paper, or fiber glass mesh tape recommended by the manufacturer.

2.1.3 Fasteners

2.1.3.1 Screws

ASTM C1002, Type "G", Type "S", or Type "W" steel drill screws for fastening gypsum board to gypsum board, and steel framing members less than 0.033 inch thick. ASTM C954 steel drill screws for fastening gypsum board to steel framing members 0.033 to 0.112 inch thick.

2.1.4 Accessories

ASTM C1047. Fabricate from corrosion protected steel designed for intended use. Accessories manufactured with paper flanges are not acceptable. Flanges must be free of dirt, grease, and other materials that may adversely affect bond of joint treatment. Provide prefinished or job decorated materials.

2.1.4.1 Trim

Provide trim including, as required:

a. Cornerbeads.

b. Control Joints.

c. Trim required to complete the work.

2.1.4.2 Materials

Steel: ASTM A653/A653M Galvanized steel assemblies and fasteners.

2.1.5 Water

Provide clean, fresh, and potable water.

PART 3 EXECUTION

3.1 EXAMINATION

3.1.1 Framing and Furring

Verify that framing and furring are securely attached and of sizes and spacing to provide a suitable substrate to receive gypsum board and cementitious backer units. Verify that all blocking, headers and supports are in place to support plumbing fixtures and to receive soap dishes, grab bars, towel racks, and similar items. Do not proceed with work until framing and furring are acceptable for application of gypsum board and cementitious backer units.

3.1.2 Building Construction Materials

Do not install building construction materials that show visual evidence of biological growth.

3.2 APPLICATION OF GYPSUM BOARD

Apply gypsum board to framing and furring members in accordance with ASTM C840 or GA 216 and the requirements specified. Apply gypsum board with separate panels in moderate contact; do not force in place. Stagger end joints of adjoining panels. Neatly fit abutting end and edge joints. Use gypsum board of maximum practical length; select panel sizes to minimize waste. Cut out gypsum board to make neat, close, and tight joints around openings. In vertical application of gypsum board, provide panels in lengths required to reach full height of vertical surfaces in one continuous piece. Lay out panels to minimize waste; reuse cutoffs whenever feasible. Treat edges of cutouts for plumbing pipes, screwheads, and joints with moisture-resistant compound as recommended by the gypsum board manufacturer. Minimize framing by floating corners with single studs and drywall clips. Install 5/8 inch gypsum ceiling board over framing at 24 inch on center. Provide type of gypsum board for use in each system specified herein as indicated.

3.2.1 Application of Gypsum Board to Steel Framing and Furring

Apply in accordance with ASTM C840, System VIII or GA 216.

3.2.2 Control Joints

Install expansion and contraction joints in ceilings and walls in

accordance with ASTM C840, System XIII or GA 216. Joints in fire-rated and sound-rated ceiling and walls to maintain the fire and sound rating. Fill control joints between studs in fire-rated construction with firestopping insulation to match the fire-rating of construction.

3.3 FINISHING OF GYPSUM BOARD

Tape and finish gypsum board in accordance with ASTM C840, GA 214, and GA 216. Finish all gypsum board walls, partitions, and ceilings to Level 4 in accordance with GA 214. Provide joint, fastener depression, and corner treatment. Tool joints as smoothly as possible to minimize sanding and dust. Do not use self-adhering fiber glass mesh tape with conventional drying type joint compounds; use setting or hardening type compounds only. Provide treatment for moisture-resistant gypsum board as recommended by the gypsum board manufacturer. Protect workers, building occupants, and HVAC systems from gypsum dust.

3.3.1 Uniform Surface

Wherever gypsum board is to receive eggshell, semigloss, or gloss paint finish, or where severe, up or down lighting conditions occur, finish gypsum wall surface in accordance to GA 214 Level 5. In accordance with GA 214 Level 5, apply a thin skim coat of joint compound to the entire gypsum board surface, after the two-coat joint and fastener treatment is complete and dry.

3.4 SEALING

Seal openings around pipes, fixtures, and other items projecting through gypsum board and cementitious backer units as specified in Section 07 84 00 FIRESTOPPING and Section 07 92 00 JOINT SEALANTS. Apply material with exposed surface flush with gypsum board or cementitious backer units.

3.5 FIRE-RESISTANT ASSEMBLIES

Wherever fire-rated construction is indicated, provide materials and application methods, including types and spacing of fasteners, wall and ceiling framing in accordance with the specifications contained in UL Fire Resistance for the Design Number(s) indicated. Joints of fire-rated gypsum board enclosures must be closed and sealed in accordance with UL test requirements or GA requirements. Seal penetrations through rated partitions and ceilings tight in accordance with tested systems.

3.6 PATCHING

Patch surface defects in gypsum board to a smooth, uniform appearance, ready to receive finishes. Remove predecorated gypsum board which cannot be restored to like-new condition. Provide new predecorated gypsum board.

-- End of Section --

SECTION 09 65 00

RESILIENT FLOORING
11/24

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM E648	(2023) Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
ASTM F1861	(2021) Standard Specification for Resilient Wall Base

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2017; Version 1.2) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 253	(2011) Standard Method of Test for Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2022) Adhesive and Sealant Applications

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Adhesives

Wall Base

SD-04 Samples

Resilient Flooring and Accessories; G

SD-08 Manufacturer's Instructions

Surface Preparation; G

Installation; G

SD-10 Operation and Maintenance Data

Resilient Flooring and Accessories; G

1.3 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the building site in original unopened containers bearing the manufacturer's name, style name, pattern color name and number, production run, project identification, and handling instructions. Store materials in a clean, dry, secure, and well-ventilated area free from strong contaminant sources and residues with ambient air temperature maintained above 68 degrees F and below 85 degrees F, stacked according to manufacturer's recommendations. Remove resilient flooring products from packaging to allow ventilation prior to installation. Protect materials from the direct flow of heat from hot-air registers, radiators and other heating fixtures and appliances. Observe ventilation and safety procedures specified in the MSDS. Do not store rubber surface products with materials that have a high capacity to adsorb volatile organic compound (VOC) emissions. Do not store exposed rubber surface materials in occupied spaces.

1.4 ENVIRONMENTAL REQUIREMENTS

Maintain areas to receive resilient flooring at a temperature above 70 degrees F and below 85 degrees F for 3 days before application, during application and 2 days after application, unless otherwise directed by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 55 degrees F thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.

1.5 WARRANTY

Provide manufacturer's standard performance guarantees or warranties that extend beyond a one year period.

PART 2 PRODUCTS

2.1 WALL BASE

Conform to ASTM F1861, Type TS (vulcanized thermoset rubber) , Style B (coved - installed with resilient flooring) . Provide 4 inch high and a minimum 1/8 inch thick wall base. Provide preformed corners in matching height, shape, and color.

2.2 ADHESIVES

Provide asbestos-free adhesives for flooring, base and accessories as recommended by the manufacturer and comply with local indoor air quality standards. Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

Provide non-aerosol adhesive products used on the interior of the building (defined as inside of the weatherproofing system) that meet either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) or VOC content requirements of SCAQMD Rule 1168.

2.3 MANUFACTURER'S COLOR, PATTERN, AND TEXTURE

Provide color, pattern and texture for resilient flooring and accessories selected from manufacturer's standard colors . Color listed is not intended to limit the selection of equal colors from other manufacturers. Submit manufacturer's descriptive data and three samples of each indicated type base.

2.4 FIRE RESISTANCE TESTING REQUIREMENTS

Provide a minimum average critical radiant flux of 0.45 watts per square centimeter for flooring in corridors and exits when tested in accordance with ASTM E648 or NFPA 253.

PART 3 EXECUTION

3.1 EXAMINATION

Examine and verify that site conditions are in agreement with the design package. Report all conditions that will prevent a proper installation. Do not take any corrective action without written permission from the Government. Work will proceed only when conditions have been corrected and accepted by the installer. Submit manufacturer's printed installation instructions for all flooring materials and accessories, including preparation of substrate, seaming techniques, and recommended adhesives.

3.2 GENERAL INSTALLATION

Do not install building construction materials that show visual evidence of biological growth.

Comply with manufacturer's written instructions for installing resilient sheet flooring and for unrolling and stabilizing flooring materials prior to installation. Minimize the number of seams in sheet flooring, especially in high traffic or conspicuous locations. Avoid cross seams.

3.3 PLACING WALL BASE

Install wall base in accordance with manufacturer's printed installation instructions. Prepare and apply adhesives in accordance with manufacturer's printed installation instructions. Tighten base joints and make even with adjacent resilient flooring. Fill voids along the top edge of base at masonry walls with caulk. Roll entire vertical surface of base with hand roller, and press toe of base with a straight piece of wood to ensure proper alignment. Avoid excess adhesive in corners.

3.4 CLEANING

Immediately upon completion of installation of flooring in a room or an area, dry and clean the flooring and adjacent surfaces to remove all surplus adhesive. Clean flooring as recommended in accordance with manufacturer's printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the recommended number

of coats and type of polish and finish in accordance with manufacturer's printed instructions.

3.5 PROTECTION

From the time of installation until acceptance, protect flooring from damage as recommended by the flooring manufacturer. Remove and replace flooring which becomes damaged, loose, broken, or curled and wall base which is not tight to wall or securely adhered.

-- End of Section --

SECTION 09 90 00

PAINTS AND COATINGS
02/21

PART 1 GENERAL

1.1 RELATED REQUIREMENTS

1.1.1 Painting Included

Where a space or surface is indicated to be painted, include the following unless indicated otherwise.

a. Surfaces behind portable objects and surface mounted articles readily detachable by removal of fasteners, such as screws and bolts.

b. New factory finished surfaces that require identification or color coding and factory finished surfaces that are damaged during performance of the work.

c. Existing coated surfaces that are damaged during performance of the work.

1.1.1.1 Interior Painting

Includes new surfacesexisting coated surfaces of the building and appurtenances as indicated and existing coated surfaces made bare by cleaning operations.

1.1.2 Painting Excluded

Do not paint the following unless indicated otherwise.

a. Surfaces concealed and made inaccessible by panelboards, fixed ductwork, machinery, and equipment fixed in place.

b. Surfaces in concealed spaces. Concealed spaces are defined as enclosed spaces above suspended ceilings, furred spaces, attic spaces, crawl spaces, elevator shafts and chases.

c. Steel to be embedded in concrete.

d. Copper, stainless steel, aluminum, anodized aluminum, brass, and lead except existing coated surfaces.

e. Hardware, fittings, and other factory finished items.

1.1.3 Mechanical and Electrical Painting

Includes field coating of interior new surfaces.

a. Where a space or surface is indicated to be painted, include the following items unless indicated otherwise.

(1) Exposed piping, conduit;

(2) Supports, hangers,;

(3) Miscellaneous metalwork and insulation coverings.

1.1.3.1 Fire Extinguishing Sprinkler Systems

Clean, pretreat, prime, and paint new fire extinguishing sprinkler systems including valves, piping, conduit, hangers, supports, miscellaneous metalwork, and accessories. Apply coatings to clean, dry surfaces, using clean brushes.

1.1.4 Exterior Painting of Site Work Items

Field coat the following items:

	New Surfaces	Existing Surfaces
a. Fire Sprinkler System	X	
b.		
c.		

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN CONFERENCE OF GOVERNMENTAL INDUSTRIAL HYGIENISTS (ACGIH)

ACGIH 0100 (2017; Suppl 2020) Documentation of the Threshold Limit Values and Biological Exposure Indices

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME A13.1 (2020) Scheme for the Identification of Piping Systems

ASTM INTERNATIONAL (ASTM)

ASTM D523 (2014; R 2018) Standard Test Method for Specular Gloss

ASTM D4444 (2013; R 2018) Standard Test Method for Laboratory Standardization and Calibration of Hand-Held Moisture Meters

ASTM D6386 (2016a) Standard Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel Product and Hardware Surfaces for Painting

CENTERS FOR DISEASE CONTROL AND PREVENTION (CDC)

Intelligence Bulletin 65 (2013) Occupational Exposure to Carbon Nanotubes and Nanofibers

MASTER PAINTERS INSTITUTE (MPI)

MPI 9	(2016) Alkyd, Exterior Gloss (MPI Gloss Level 6)
MPI 50	(2015) Primer Sealer, Latex, Interior
MPI 79	(2016) Primer, Alkyd, Anti-Corrosive for Metal
MPI 101	(2016) Primer, Epoxy, Anti-Corrosive, for Metal
MPI 153	(2016) Light Industrial Coating, Interior, Water Based, Semi-Gloss (MPI Gloss Level 5)
MPI 163	(2016) Light Industrial Coating, Exterior, Water Based, Semi-Gloss (MPI Gloss Level 5)
MPI ASM	(2019) Architectural Painting Specification Manual
MPI GPS-1-14	(2014) Green Performance Standard GPS-1-14
MPI GPS-2-14	(2014) Green Performance Standard GPS-2-14
MPI MRM	(2015) Maintenance Repainting Manual

SOCIETY FOR PROTECTIVE COATINGS (SSPC)

SSPC Glossary	(2011) SSPC Protective Coatings Glossary
SSPC PA 1	(2016) Shop, Field, and Maintenance Coating of Metals
SSPC SP 1	(2015) Solvent Cleaning
SSPC SP 2	(2018) Hand Tool Cleaning
SSPC SP 3	(2018) Power Tool Cleaning
SSPC VIS 3	(2004) Guide and Reference Photographs for Steel Surfaces Prepared by Hand and Power Tool Cleaning
SSPC-SP WJ-3/NACE WJ-3	(2012) Thorough Cleaning, Waterjet Cleaning of Metals

U.S. ARMY CORPS OF ENGINEERS (USACE)

EM 385-1-1	(2014) Safety -- Safety and Health Requirements Manual

U.S. ENVIRONMENTAL PROTECTION AGENCY (EPA)

EPA Method 24	(2000) Determination of Volatile Matter Content, Water Content, Density, Volume Solids, and Weight Solids of Surface Coatings

U.S. GENERAL SERVICES ADMINISTRATION (GSA)

FED-STD-313	(2018) Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.1000	Air Contaminants

1.3 DEFINITIONS

1.3.1 Coating

SSPC Glossary; (1) A liquid, liquefiable, or mastic composition that is converted to a solid protective, decorative, or functional adherent film after application as a thin layer; (2) Generic term for paint, lacquer, enamel.

1.3.2 DFT or dft

Dry film thickness, the film thickness of the fully cured, dry paint or coating.

1.3.3 DSD

Degree of Surface Degradation, the MPI system of defining degree of surface degradation. Five levels are generically defined under the Assessment sections in the MPI MRM, MPI Maintenance Repainting Manual.

1.3.4 EXT

MPI short term designation for an exterior coating system.

1.3.5 INT

MPI short term designation for an interior coating system.

1.3.6 Loose Paint

Paint or coating that can be removed with a dull putty knife.

1.3.7 mil / mils

The English measurement for 0.001 in or one one-thousandth of an inch.

1.3.8 MPI Gloss Levels

MPI system of defining gloss. Seven gloss levels (G1 to G7) are generically defined under the Evaluation sections of the MPI Manuals. Traditionally, Flat refers to G1/G2, Eggshell refers to G3, Semigloss refers to G5, and Gloss refers to G6.

Gloss levels are defined by MPI as follows:

Gloss Level	Description	Units at 60 degree angle	Units at 80 degree angle
G1	Matte or Flat	0 to 5	10 max
G2	Velvet	0 to 10	10 to 35
G3	Eggshell	10 to 25	10 to 35
G4	Satin	20 to 35	35 min
G5	Semi-Gloss	35 to 70	
G6	Gloss	70 to 85	
G7	High Gloss		

Gloss is tested in accordance with ASTM D523. Historically, the Government has used Flat (G1 / G2), Eggshell (G3), Semi-Gloss (G5), and Gloss (G6).

1.3.9 MPI System Number

The MPI coating system number in each MPI Division found in either the MPI Architectural Painting Specification Manual or the Maintenance Repainting Manual and defined as an exterior (EXT/REX) or interior system (INT/RIN).

1.3.10 Paint

SSPC Glossary; (1) Any pigmented liquid, liquefiable, or mastic composition designed for application to a substrate in a thin layer that is converted to an opaque solid film after application. Used for protection, decoration, identification, or to serve some other functional purposes; (2) Application of a coating material.

1.3.11 REX

MPI short term designation for an exterior coating system used in repainting projects or over existing coating systems.

1.3.12 RIN

MPI short term designation for an interior coating system used in repainting projects or over existing coating systems.

1.4 SCHEDULING

Allow paint, installations to cure prior to the installation of materials that adsorb VOCs, including unprimed gypsum wallboard,.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

Samples of specified materials may be taken and tested for compliance with specification requirements.

SD-03 Product Data

Coating; G

Product Data SheetsSD-04 Samples

Color; G

SD-08 Manufacturer's Instructions

Mixing

Manufacturer's Safety Data Sheets

SD-10 Operation and Maintenance Data

Coatings, Data Package 1; G

1.6 QUALITY ASSURANCE

1.6.1 Regulatory Requirements

1.6.1.1 Environmental Protection

In addition to requirements specified elsewhere for environmental protection, provide coating materials that conform to the restrictions of the local Air Pollution Control District and regional jurisdiction. Notify Contracting Officer of any paint specified herein which fails to conform.

1.6.1.2 Lead Content

Do not use coatings having a lead content over 0.06 percent by weight of nonvolatile content.

1.6.1.3 Chromate Content

Do not use coatings containing zinc-chromate or strontium-chromate.

1.6.1.4 Asbestos Content

Provide asbestos-free materials.

1.6.1.5 Mercury Content

Provide materials free of mercury or mercury compounds.

1.6.1.6 Silica

Provide abrasive blast media containing no free crystalline silica.

1.6.1.7 Human Carcinogens

Provide materials that do not contain ACGIH 0100 confirmed human carcinogens (A1) or suspected human carcinogens (A2).

1.6.1.8 Carbon Based Fibers / Tubes

Materials must not contain carbon based fibers such as carbon nanotubes or

carbon nanofibers. Intelligence Bulletin 65 ranks toxicity of carbon nanotubes on a par with asbestos.

1.6.2 Coating Contractor's Qualification

Submit the name, address, telephone number, and e-mail address of the Contractor that will be performing all surface preparation and coating application. Submit evidence that key personnel have successfully performed surface preparation and application of coatings on similar substrates on a minimum of three similar projects within the past three years. List information by individual and include the following:

a. Name of individual and proposed position for this work.

b. Information about each previous assignment including:

Position or responsibility

Employer (if other than the Contractor)

Name of facility owner

Mailing address and telephone number of facility owner

Name of individual in facility owner's organization who can be contacted as a reference

Location, size and description of structure

Dates work was carried out

Description of work carried out on structure

1.6.3 Approved Products List

The current MPI, "Approved Product List" which lists paint by brand, label, product name and product code as of the date of Contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use a subsequent MPI "Approved Product List", however, only one list may be used for the entire Contract and each coating system is to be from a single manufacturer. Provide all coats on a particular substrate from a single manufacturer. No variation from the MPI Approved Products List is acceptable.

1.6.4 Paints and Coatings Indoor Air Quality Certifications

Provide paint and coating products certified to meet indoor air quality requirements by MPI GPS-1-14, MPI GPS-2-14 or provide certification by other third-party programs. Provide current product certification documentation from certification body.

1.7 PACKAGING, LABELING, AND STORAGE

Provide paints in sealed containers that legibly show the Contract specification number, designation name, formula or specification number, batch number, color, quantity, date of manufacture, manufacturer's formulation number, manufacturer's directions including any warnings and special precautions, and name and address of manufacturer. Furnish

pigmented paints in containers not larger than 5 gallons. Store paints and thinners in accordance with the manufacturer's written directions, and as a minimum, stored off the ground, under cover, with sufficient ventilation to prevent the buildup of flammable vapors, and at temperatures between 40 to 95 degrees F. Do not store paint, polyurethane, or wood stain products with materials that have a high capacity to absorb VOC emissions. Do not store paint, polyurethane, or wood stain products in occupied spaces.

1.8 SAFETY AND HEALTH

Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis as specified in Section 01 35 26 GOVERNMENTAL SAFETY REQUIREMENTS and in Appendix A of EM 385-1-1. Include in the Activity Hazard Analysis the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.

1.8.1 Toxic Materials

To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:

a. The applicable manufacturer's Safety Data Sheets (SDS) or local regulation.

b. 29 CFR 1910.1000.

c. ACGIH 0100, threshold limit values.

Submit manufacturer's Safety Data Sheets for coatings, solvents, and other potentially hazardous materials, as defined in FED-STD-313.

1.9 ENVIRONMENTAL REQUIREMENTS

Comply, at minimum, with manufacturer recommendations for space ventilation during and after installation. Isolate area of application from rest of building when applying high-emission paints or coatings.

1.9.1 Coatings

Do not apply coating when air or substrate conditions are:

a. Less than 5 degrees F above dew point;

b. Below 50 degrees F or over 95 degrees F, unless specifically pre-approved by the Contracting Officer and the product manufacturer. Do not, under any circumstances, violate the manufacturer's application recommendations.

PART 2 PRODUCTS

2.1 MATERIALS

Conform to the coating specifications and standards referenced in PART 3. Submit Product Data Sheets for specified coatings and solvents. Provide preprinted cleaning and maintenance instructions for all coating systems. Submit Manufacturer's Instructions on Mixing: Detailed mixing instructions, minimum and maximum application temperature and humidity, pot life, and

curing and drying times between coats.

2.2 COLOR SELECTION OF FINISH COATS

Provide colors of finish coats as indicated or specified. Allow Contracting Officer to select colors not indicated or specified. Manufacturers' names and color identification are used for the purpose of color identification only. Named products are acceptable for use only if they conform to specified requirements. Products of other manufacturers are acceptable if the colors are approximately the colors indicated and the product conforms to specified requirements.

Provide color, texture, and pattern of wall coating systems selected by User. Submit manufacturer's samples of paint colors. Cross reference color samples to color scheme as indicated. Tint each coat progressively darker to enable confirmation of the number of coats.

PART 3 EXECUTION

3.1 PROTECTION OF AREAS AND SPACES NOT TO BE PAINTED

Prior to surface preparation and coating applications, remove, mask, or otherwise protect hardware, hardware accessories, machined surfaces, radiator covers, plates, lighting fixtures, public and private property, and other such items not to be coated that are in contact with surfaces to be coated. Following completion of painting, reinstall removed items by workmen skilled in the trades. Restore surfaces contaminated by coating materials, to original condition and repair damaged items.

3.2 SURFACE PREPARATION

Remove dirt, splinters, loose particles, grease, oil, and other foreign matter and substances deleterious to coating performance as specified for each substrate before application of paint or surface treatments. Remove oil and grease prior to mechanical cleaning. Schedule cleaning so that dust and other contaminants will not fall on wet, newly painted surfaces. Spot-prime exposed ferrous metals such as nail heads on or in contact with surfaces to be painted with water-thinned paints, with a suitable corrosion-inhibitive primer capable of preventing flash rusting and compatible with the coating specified for the adjacent areas. Refer to MPI ASM and MPI MRM for additional more specific substrate preparation requirements.

3.2.1 Substrate Repair

a. Repair substrate surface damaged during coating removal;

b. Sand edges of adjacent soundly-adhered existing coatings so they are tapered as smooth as practical to areas involved with coating removal; and

c. Clean and prime the substrate as specified.

3.3 PREPARATION OF METAL SURFACES

3.3.1 New Ferrous Surfaces

a. Ferrous Surfaces including Shop-coated Surfaces and Small Areas That Contain Rust, Mill Scale and Other Foreign Substances: Solvent clean

or detergent wash in accordance with SSPC SP 1 to remove oil and grease. Where shop coat is missing or damaged, clean according to SSPC SP 2, SSPC SP 3, . Use inhibitor as recommended by coating manufacturer to prevent premature rusting. Protect shop-coated ferrous surfaces from corrosion by treating and touching up corroded areas immediately upon detection.3.3.2 Final Ferrous Surface Condition:

3.3.2.1 Tool Cleaned Surfaces

Comply with SSPC SP 2 and SSPC SP 3. Use as a visual reference, photographs in SSPC VIS 3 for the appearance of cleaned surfaces.

3.3.3 Galvanized Surfaces

a. New or Existing Galvanized Surfaces With Only Dirt and Zinc Oxidation Products: Clean with solvent, or non-alkaline detergent solution in accordance with SSPC SP 1. Completely remove coating by brush-off abrasive blast if the galvanized metal has been passivated or stabilized. Do not "passivate" or "stabilize" new galvanized steel to be coated. If the absence of hexavalent stain inhibitors is not documented, test as described in ASTM D6386, Appendix X2, and remove by one of the methods described therein.

b. Galvanized with Slight Coating Deterioration or with Little or No Rusting: Water jetting to SSPC-SP WJ-3/NACE WJ-3 to remove loose coating from surfaces with less than 20 percent coating deterioration and no blistering, peeling, or cracking. Use inhibitor as recommended by the coating manufacturer to prevent rusting.

3.4 PREPARATION OF CONCRETE AND CEMENTITIOUS SURFACE

3.4.1 Gypsum Board

3.4.1.1 Surface Cleaning

Verify that gypsum board surfaces are free from loose matter and that gypsum board is dry. Remove loose dirt and dust by brushing with a soft brush, rubbing with a dry cloth, or vacuum-cleaning prior to application of the first coat material. A damp cloth or sponge may be used if paint is water-based.

3.4.1.2 Repair of Minor Defects

Prior to painting, repair joints, cracks, holes, surface irregularities, and other minor defects with patching plaster or spackling compound and sand smooth.

3.4.1.3 Allowable Moisture Content

Latex coatings may be applied to damp surfaces, but not surfaces with droplets of water.

3.5 PREPARATION OF CEMENT-BONDED PARTICLE BOARD PANEL SURFACES

3.5.1 New Wood Surfaces, Except Floors:

a. Surface Cleaning: Clean wood surfaces of foreign matter. Verify that surfaces are free from dust and other deleterious substances and in a condition approved by the Contracting Officer prior to receiving. Do

not use water to clean uncoated wood.

c. Do not exceed 12 percent moisture content of the wood as measured by a moisture meter in accordance with ASTM D4444, Method A, unless otherwise authorized.

d. Prime or touch up wood surfaces adjacent to surfaces to receive water-thinned paints before applying water-thinned paints.

g. Prime Coat For New CBPB Panelfaces: Prime coat panels before wood becomes dirty.

3.6 APPLICATION

3.6.1 Coating Application

a. Comply with applicable federal, state and local laws enacted to ensure compliance with Federal Clean Air Standards. Apply coating materials in accordance with SSPC PA 1. SSPC PA 1 methods are applicable to all substrates, except as modified herein.

b. At the time of application, paint must show no signs of deterioration. Maintain uniform suspension of pigments during application.

c. Unless otherwise specified or recommended by the paint manufacturer, paint may be applied by brush, roller. Use trigger operated spray nozzles for water hoses. Use rollers for applying paints and enamels of a type designed for the coating to be applied and the surface to be coated.

d. Only apply paints, except water-thinned types, to surfaces that are completely free of moisture as determined by sight or touch.

e. Thoroughly work coating materials into joints, crevices, and open spaces. Pay special attention to ensure that all edges, corners, crevices, welds, and rivets receive a film thickness equal to that of adjacent painted surfaces.

f. Apply each coat of paint so that dry film is of uniform thickness and free from runs, drops, ridges, waves, pinholes or other voids, laps, brush marks, and variations in color, texture, and finish. Completely hide all blemishes.

g. Touch up damaged coatings before applying subsequent coats.

h. Apply paint to new fire extinguishing sprinkler systems including valves, piping, conduit, hangers, supports, miscellaneous metal work, and accessories. Shield sprinkler heads with protective coverings while painting is in progress. Remove sprinkler heads which have been painted and replace with new sprinkler heads. Unfinished spaces include attic spaces, spaces above suspended ceilings,pipe chases, mechanical equipment room, and space where walls or ceiling are not painted or not constructed of a prefinished material. Upon completion of painting, remove protective covering from sprinkler heads.

i. Piping in Unfinished Areas: Provide primed surfaces with one coat of red alkyd gloss enamel (MPI 9) applied to a minimum dry film thickness of 1.0 mil in attic spaces, spaces above suspended ceilings, pipe chases, mechanical equipment room, and spaces where walls or ceiling

are not painted or not constructed of a prefinished material.

j. Piping in Finished Areas: Provide primed surfaces with two coats of paint to match adjacent surfaces, except provide valves and operating accessories with one coat of red alkyd gloss enamel (MPI 9) applied to a minimum dry film thickness of 1.0 mil.

l. All fire suppression system valves must be marked with permanent tags indicating normally open or normally closed.

m. Drying Time: Allow time between coats, as recommended by the coating manufacturer, to permit thorough drying, but not to present topcoat adhesion problems. Provide each coat in specified condition to receive next coat.

n. Primers, and Intermediate Coats: Do not allow primers or intermediate coats to dry more than 30 days, or longer than recommended by manufacturer, before applying subsequent coats. Follow manufacturer's recommendations for surface preparation if primers or intermediate coats are allowed to dry longer than recommended by manufacturers of subsequent coatings. Cover each preceding coat or surface completely by ensuring visually perceptible difference in shades of successive coats.

o. Finished Surfaces: Provide finished surfaces free from runs, drops, ridges, waves, laps, brush marks, and variations in colors.

3.6.2 Mixing and Thinning of Paints

Reduce paints to proper consistency by adding fresh paint, except when thinning is mandatory to suit surface, temperature, weather conditions, application methods, or for the type of paint being used. Obtain written permission from the Contracting Officer to use thinners. Verify that the written permission includes quantities and types of thinners to use.

When thinning is allowed, thin paints immediately prior to application with not more than one pint of suitable thinner per gallon. The use of thinner does not relieve the Contractor from obtaining complete hiding, full film thickness, or required gloss. Thinning cannot cause the paint to exceed limits on volatile organic compounds. Do not mix paints of different manufacturers.

3.6.3 Coating Systems

a. Systems by Substrates: Apply coatings that conform to the respective specifications listed in the following Tables:

Table for Exterior Applications	
MPI Division	Substrate Application

Table for Exterior Applications	
MPI Division 5	Galvanized Metal, Metal, Ferrous and Non-Ferrous Paint Table
Table for Interior Applications	
MPI Division	Substrate Application
MPI Division 6	Interior Wood Paint Table
MPI Division 9	Interior, Gypsum Board, Paint Table

b. Minimum Dry Film Thickness (DFT): Apply paints, primers, varnishes, enamels, undercoats, and other coatings to a minimum dry film thickness of 1.5 mil each coat unless specified otherwise in the Tables. Coating thickness, where specified, refers to the minimum dry film thickness.

c. Coatings for Surfaces Not Specified Otherwise: Coat unspecified surfaces the same as surfaces having similar conditions of exposure.

d. Existing Surfaces Damaged During Performance of the Work, Including New Patches In Existing Surfaces: Coat surfaces with the following:

(1) One coat of primer.

(2) One coat of undercoat or intermediate coat.

(3) One topcoat to match adjacent surfaces.

e. Existing Coated Surfaces To Be Painted: Apply coatings conforming to the respective specifications listed in the Tables herein, except that pretreatments, sealers and fillers need not be provided on surfaces where existing coatings are soundly adhered and in good condition. Do not omit undercoats or primers.

3.7 COATING SYSTEMS FOR METAL

Apply coatings of Tables in MPI Division 5 Exterior.

a. Apply specified ferrous metal primer to steel surfaces on the same day that surface is cleaned, to surfaces that meet all specified surface

preparation requirements at time of application.

b. Inaccessible Surfaces: Prior to erection, use one coat of specified primer on metal surfaces that will be inaccessible after erection.

c. Shop-primed Surfaces: Touch up exposed substrates and damaged coatings to protect from rusting prior to applying field primer.

e. Pipes and Tubing: The semitransparent film applied to some pipes and tubing at the mill is not to be considered a shop coat. Overcoat these items with the specified ferrous-metal primer prior to application of finish coats.

3.8 COATING SYSTEM FOR CBPB PANELS

Apply coating of Tables in MPI Division 3, 4 and 9 for Interior.

3.9 COATING SYSTEMS FOR WOOD AND PLYWOOD

a. Apply coatings of Tables in MPI Division 6 for Exterior and Interior.

b. Prior to erection, apply two coats of specified primer to treat and prime panel surfaces which will be inaccessible after erection.

3.10 PIPING IDENTIFICATION

Piping Identification, Including Surfaces In Concealed Spaces: Provide in accordance with ASME A13.1. Place stenciling in clearly visible locations. On piping not covered by ASME A13.1, stencil approved names or code letters, in letters a minimum of 1/2 inch high for piping and a minimum of 2 inches high elsewhere. Stencil arrow-shaped markings on piping to indicate direction of flow using black stencil paint.

3.11 INSPECTION AND ACCEPTANCE

In addition to meeting previously specified requirements, demonstrate mobility of moving components, including swinging and sliding doors, cabinets, and windows with operable sash, for inspection by the Contracting Officer. Perform this demonstration after appropriate curing and drying times of coatings have elapsed and prior to invoicing for final payment.

3.12 WASTE MANAGEMENT

As specified in the Waste Management Plan and as follows. Do not use kerosene or any such organic solvents to clean up water based paints. Properly dispose of paints or solvents in designated containers. Close and seal partially used containers of paint to maintain quality as necessary for reuse. Store in protected, well-ventilated, fire-safe area at moderate temperature. Place materials defined as hazardous or toxic waste in designated containers.

3.13 PAINT TABLES

All DFT's are minimum values. Use only materials with a MPI GPS-1-14 green check mark having a minimum MPI "Environmentally Friendly" E2 rating based on VOC (EPA Method 24) content levels. Acceptable products are listed in the MPI Green Approved Products List, available at http://www.specifygreen.com/APL/ProductIdxByMPInum.asp.

3.13.1 Exterior Paint Tables

3.13.1.1 MPI Division 5: Galvanized Metal, Ferrous Paint Table

B. Galvanized Surfaces

(1) New Galvanized surfaces

Epoxy Primer / Waterborne Light Industrial Coating				
New Galvanized Surfaces	Primer	Intermediate	Topcoat	System DFT
MPI EXT 5.3K-G5 (Semigloss)	MPI 101	MPI 163	MPI 163	5 mils
Topcoat: Coating to match adjacent surfaces.				

C. Exterior Surfaces, Other Metals (Non-Ferrous)

(3) Surfaces adjacent to painted surfaces; Mechanical, Electrical, Fire extinguishing sprinkler systems including valves, conduit, hangers, supports,exposed copper piping, and miscellaneous metal items not otherwise specified except floors, hot metal surfaces, and new prefinished equipment

Alkyd				
New	Primer	Intermediate	Topcoat	System DFT

MPI EXT 5.1D-G6 (Gloss)	MPI 79	MPI 9	MPI 9	5.25 mils
Topcoat: Coating to match adjacent surfaces.				

3.13.2 Interior Paint Tables

3.13.2.1 MPI Division 6: Interior Wood Paint Table

E. Interior New wood surfaces.

3.13.2.2 MPI Division 9: Interior, Gypsum Board, Paint Table

A. Interior New Wallboard not otherwise specified

B. Interior New Wallboard not otherwise specified

Waterborne Light Industrial Coating					
New, uncoated Existing	Existing, previously painted	Primer	Intermediate	Topcoat	System DFT
MPI INT 9.2L-G5(Semigloss	MPI RIN 9.2L-G5 (Semigloss)	MPI 50	MPI 153	MPI 153	4 mils
Topcoat: Coating to match adjacent surfaces.					

-- End of Section --

SECTION 10 14 00.20

INTERIOR SIGNAGE
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI Z97.1	(2015) Safety Glazing Materials Used in Buildings - Safety Performance Specifications and Methods of Test

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

36 CFR 1191	Americans with Disabilities Act (ADA) Accessibility Guidelines for Buildings and Facilities; Architectural Barriers Act (ABA) Accessibility Guidelines

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Detail Drawings; G

SD-03 Product Data

Room Identification Signage System; G

SD-04 Samples

Interior Signage; G

Room Identification Signage System; G

SD-10 Operation and Maintenance Data

Approved Manufacturer's Instructions; G

Protection and Cleaning; G

1.3 QUALITY ASSURANCE

1.3.1 Samples

Submit interior signage samples of each of the following sign types showing typical quality, workmanship and color: all sign types included in project , , , , , , Approved samples may be installed in the work, provided each sample is identified and location recorded.

1.3.2 Detail Drawings

Submit detail drawings showing elevations of each type of sign, dimensions, details and methods of mounting or anchoring, mounting height, shape and thickness of materials, and details of construction. Include a schedule showing the location, each sign type, and message.

1.3.3 Sign Fabricator

Sign Fabricator to follow room number strategies created by designer. The room numbering system to be reviewed and approved by the Contracting Officer and command end users during the shop drawing phase, and prior to fabrication.

1.4 DELIVERY, STORAGE, AND HANDLING

Package materials to prevent damage and deterioration during shipment, handling, storage and installation. Deliver products to the jobsite in manufacturer's original packaging and store in a clean, dry area in accordance with manufacturer's instructions.

1.5 WARRANTY

Provide manufacturer's warranty to repair or replace defective interior signage materials and workmanship for a period of 2 years from date of final acceptance of the work.

PART 2 PRODUCTS

2.1 ROOM IDENTIFICATION SIGNAGE SYSTEM

Provide signs that are standard products of manufacturers regularly engaged in the manufacture of such products that essentially duplicate signs that have been in satisfactory use at least 2 years prior to bid opening. Obtain signage from a single manufacturer with edges and corners of finished letter forms and graphics true and clean.

2.1.1 Panel Sign Systems

Provide direct print acrylic with applied tactile second surface graphics, sign is fabricated of 0.375 inch acrylic in two layers with smooth edge conforming to ANSI Z97.1 .

2.1.2 Standard Room Signs

Provide signs that include tactile letters, symbols and Braille for interior rooms or spaces where the sign is not likely to change over time. Tactile text descriptions are required for pictograms that are provided to identify a permanent room. Examples include interior signs that label restrooms, stairs, room numbers or letters, and room names. These

permanent room signs can include paper inserts for updatable information.

2.1.2.1 Tactile Letters, Symbols and Braille

Provide ADA compliant material per 36 CFR 1191 which is raised 1/32 inch from the first surface, has a minimum 5/8 inch in height and is an ADA acceptable font. The color of the tactile letters is required to contrast with the sign face color per ADA standards. The ADA required Braille has a minimum durometer reading of 90. All raised letters, numbers and symbols are to comply.

2.1.3 Type of Mounting for Signs

Provide surface mounted signs mounted with concealed mechanical fastening through the holders .

2.1.4 Character Proportions and Heights

Letters and numbers on signs conform to 36 CFR 1191.

2.2 COLOR, FINISH, AND CONTRAST

Provide color , as selected, from manufacturer's full range of selections. Finish of eggshell, matte, or other non-glare finish for all signs as required in handicapped-accessible buildings.

PART 3 EXECUTION

3.1 INSTALLATION

Install signs plumb and true and in accordance with approved manufacturer's instructions at locations shown on the drawings provided by the signage vendor . Mounting height and mounting location complies with 36 CFR 1191. Install required blocking. Do not install signs on doors or other surfaces until finishes on such surfaces have been installed.

Do not install items that show visual evidence of biological growth.

3.1.1 Anchorage

Provide anchorage in accordance with approved manufacturer's instructions. Anchorage not otherwise specified or shown includes slotted inserts, expansion shields; lag bolts and screws for wood.

a. Signs mounted to painted gypsum board surfaces must be removable for painting maintenance.

3.1.2 Protection and Cleaning

Protect the work against damage during construction. Adjust hardware and electrical equipment for proper operation. Clean glass, frames, and other sign surfaces at completion of signage installation in accordance with the manufacturer's written instructions.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 26 00

WALL AND DOOR PROTECTION
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM A167	(2011) Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

CALIFORNIA DEPARTMENT OF PUBLIC HEALTH (CDPH)

CDPH SECTION 01350	(2010; Version 1.1) Standard Method for the Testing and Evaluation of Volatile Organic Chemical Emissions from Indoor Sources using Environmental Chambers

GREEN SEAL (GS)

GS-36	(2013) Adhesives for Commercial Use

SCIENTIFIC CERTIFICATION SYSTEMS (SCS)

SCS	SCS Global Services (SCS) Indoor Advantage

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT (SCAQMD)

SCAQMD Rule 1168	(2017) Adhesive and Sealant Applications

UNDERWRITERS LABORATORIES (UL)

UL 2818	(2013) GREENGUARD Certification Program For Chemical Emissions For Building Materials, Finishes And Furnishings

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Corner Guards; G

SD-03 Product Data

Corner Guards; G

Recycled content for steel component of corner guards; S

SD-07 Certificates

Indoor air quality for adhesives; S

1.3 CERTIFICATIONS

1.3.1 Indoor Air Quality

1.3.1.1 Adhesives and Sealants

Provide products certified to meet indoor air quality requirements by UL 2818 (Greenguard) Gold, SCS Global Services Indoor Advantage Gold or provide certification or validation by other third-party program that products meet the requirements of this section. Provide current product certification documentation from certification body. When product does not have certification, provide validation that product meets the indoor air quality product requirements cited herein.

1.4 DELIVERY, STORAGE, AND HANDLING

Deliver materials to the project site in manufacturer's original unopened containers with seals unbroken and labels and trademarks intact. Keep materials dry, protected from weather and damage, and stored under cover. Store materials at approximately 70 degrees F for at least 48 hours prior to installation.

1.5 WARRANTY

Provide manufacturer's warranty to repair or replace defective materials and workmanship for a 1 year period of 2 years from date of final acceptance of the work.

PART 2 PRODUCTS

2.1 STANDARD PRODUCTS

To the maximum extent possible, provide wall and door protection items that are standard products of a single manufacturer and furnished as detailed. Drawings show general configuration of products required.

Submit detailed shop drawings of each wall and door protection item indicated. Include elevations, dimensions, clearances, details of construction and anchorage, and details of joints and connections.

Submit manufacturers' descriptive product data for each wall and door protection item indicated. Include manufacturers' literature, finishes, profiles and thicknesses of materials.

Submit manufacturers' operations and maintenance data for each wall and door protection item indicated in accordance with Section 01 78 23 OPERATIONS AND MAINTENANCE DATA.

2.2 CORNER GUARDS

2.2.1 Stainless Steel Corner Guards

Provide stainless steel base material that contains a minimum of 60 percent recycled content. Provide data identifying percentage of recycled content for steel component of corner guards. Fabricate stainless steel base material of 16 gauge thick material conforming to ASTM A167, type 430 or 304. Provide corner guards that are 8 feet high. Form corner guard with 3-inch wing/flanges.

2.3 FINISH

Submit samples indicating color and texture of materials requiring color and finish.

2.3.1 Stainless Steel Finish

Provide stainless steel finish in accordance with ASTM A167, Type 302 or 304, finish number 4.

2.4 ADHESIVES

Provide sealants and non-aerosol adhesive products used on the interior of the building (defined as inside of the weatherproofing system) that meet either emissions requirements of CDPH SECTION 01350 (limit requirements for either office or classroom spaces regardless of space type) the VOC content requirements of SCAQMD Rule 1168, or VOC content requirements of GS-36. Provide certification of indoor air quality for adhesives.

PART 3 EXECUTION

3.1 INSTALLATION

Do not install items that show visual evidence of biological growth. Install items on surfaces that are clean, smooth, and free of obstructions.

3.1.1 Corner Guards and Wall Guards

a. Mount guards on external corners of interior walls, partitions and columns and in accordance with manufacturer's written installation instructions.

3.1.1.1 Stainless Steel Guards

a. Mount guards on external corners of interior walls, partitions and columns and in accordance with manufacturer's recommendations.

d. Where corner guards are installed on gypsum board, clean surfaces and anchor guards with a neoprene solvent-type contact adhesive specifically manufactured for use on gypsum board construction. Remove excess adhesive from the guard edges and allow to cure undisturbed for 24 hours.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 10 44 16

FIRE EXTINGUISHERS
11/19

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 1	(2021) Fire Code
NFPA 10	(2022; ERTA 1 2021) Standard for Portable Fire Extinguishers
NFPA 101	(2021) Life Safety Code

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.106	Flammable Liquids
29 CFR 1910.157	(2003) Portable Fire Extinguishers

UNDERWRITERS LABORATORIES (UL)

UL 299	(2012; May 2021) Dry Chemical Fire Extinguishers

1.2 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Fire Extinguishers; G

Accessories; G

Wall Brackets; G

Schedule; G

SD-03 Product Data

Fire Extinguishers; G

Accessories; G

Wall Brackets; G

Replacement Parts List; G

SD-07 Certificates

Fire Extinguishers Certifications; G

Manufacturer's Warranty with Inspection Tag; G

1.3 DELIVERY, STORAGE, AND HANDLING

Protect materials from weather, soil, and damage during delivery, storage, and construction.

Deliver materials in their original packages, containers, or bundles bearing the brand name and the name and type of the material.

1.4 WARRANTY

Guarantee that Fire Extinguishers are free of defects in materials, fabrication, finish, and installation and that they will remain so for a period of not less than 10 years after completion.

Submit the manufacturer's warranty with inspection tag.

1.5 PROJECT SCHEDULE

For fire extinguishers. Coordinate final fire extinguisher schedule with fire protection cabinet schedule to ensure proper fit and function. Use same designations indicated on Drawings.

PART 2 PRODUCTS

Submit fabrication drawings consisting of fabrication and assembly details performed in the factory and product data for the following items: Fire Extinguishers; Accessories, Wall Brackets.

2.1 SYSTEM DESCRIPTION

2.1.1 Types

Submit fire extinguishers certifications showing compliance with local codes and regulations.

Provide fire extinguishers conforming to NFPA 10. Provide quantity and placement in compliance with the applicable sections of NFPA 1, NFPA 101, , , , , , , 29 CFR 1910.106 and 29 CFR 1910.157.

Provide dry chemical type fire extinguishers compliant with UL 299.

2.1.2 Material

Provide enameled steel extinguisher shell.

2.1.3 Size

5 pounds extinguishers.

2.1.4 Accessories

Forged brass valve

Safety release

Pressure gage

2.2 EQUIPMENT

2.2.1 Wall Brackets

Provide spring-clip fire extinguisher wall brackets.

Provide wall bracket and accessories as approved.

2.2.1.1 Identification

Provide lettering complying with authorities having jurisdiction for letter style, size, spacing, and location. Locate as indicated by the drawings.

Identify bracket-mounted fire extinguishers with the words "FIRE EXTINGUISHER" in red letter decals applied to mounting surface.

Orientation: Vertical.

PART 3 EXECUTION

3.1 INSTALLATION

Install Fire Extinguishers where indicated on the drawings. Verify exact locations prior to installation.

Provide extinguishers which are fully charged and ready for operation upon installation. Provide extinguishers complete with Manufacturer's Warranty with Inspection Tag attached.

Install fire extinguishers in locations indicated and in compliance with requirements of authorities having jurisdiction.

Comply with the manufacturer's recommendations for all installations.

3.2 PROTECTION

3.2.1 Repairing

Remove and replace damaged and unacceptable portions of completed work with new work at no additional cost to the Government.

Submit replacement parts list indicating specified items replacement part, replacement cost, and name, address and contact for replacement parts distributor.

3.2.2 Cleaning

Clean all surfaces of the work, and adjacent surfaces which are soiled as a result of the work. Remove from the site all construction equipment, tools, surplus materials and rubbish resulting from the work.

-- End of Section --

SECTION 21 13 13

WET PIPE SPRINKLER SYSTEMS, FIRE PROTECTION
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.1	(2020) Gray Iron Pipe Flanges and Flanged Fittings Classes 25, 125, and 250
ASME B16.3	(2016) Malleable Iron Threaded Fittings, Classes 150 and 300
ASME B16.4	(2016) Standard for Gray Iron Threaded Fittings; Classes 125 and 250
ASME B16.21	(2016) Nonmetallic Flat Gaskets for Pipe Flanges

ASTM INTERNATIONAL (ASTM)

ASTM A47/A47M	(1999; R 2018; E 2018) Standard Specification for Ferritic Malleable Iron Castings
ASTM A53/A53M	(2020) Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
ASTM A135/A135M	(2021) Standard Specification for Electric-Resistance-Welded Steel Pipe
ASTM A153/A153M	(2016a) Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware
ASTM A183	(2014; R 2020) Standard Specification for Carbon Steel Track Bolts and Nuts
ASTM A536	(1984; R 2019; E 2019) Standard Specification for Ductile Iron Castings

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide http://www.approvalguide.com/

INTELLIGENCE COMMUNITY STANDARD (ICS)

ICS 705-1	(2010) Physical and Technical Security Standard for Sensitive Compartmented Information Facilities

MANUFACTURERS STANDARDIZATION SOCIETY OF THE VALVE AND FITTINGS INDUSTRY (MSS)

MSS SP-71	(2018) Gray Iron Swing Check Valves, Flanged and Threaded Ends

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 13	(2025) Standard for the Installation of Sprinkler Systems
NFPA 24	(2025) Standard for the Installation of Private Fire Service Mains and Their Appurtenances

NATIONAL INSTITUTE FOR CERTIFICATION IN ENGINEERING TECHNOLOGIES (NICET)

NICET 1014-7	(2012) Program Detail Manual for Certification in the Field of Fire Protection Engineering Technology (Field Code 003) Subfield of Automatic Sprinkler System Layout

TINKER AIR FORCE BASE (TAFB)

TAFB FPS	(2023) Tinker Air Force Base Fire Protection Standard

U.S. DEPARTMENT OF DEFENSE (DOD)

Sundown Policy	(16 November 2021, with Change 2, 29 December 2022) Sundown Policy for Foam Fire Suppression Systems
UFC 3-600-01	(2016; with Change 6, 2021) Fire Protection Engineering for Facilities
UFC 3-601-02	(2021) Fire Protection Systems Inspection, Testing, and Maintenance
UFC 4-211-01	(13 Apr 2017 Change 3, Apr 20, 2021) Aircraft Maintenance Hangars
UFC 4-211-02	Aircraft Corrosion Control and Paint Facilities (1 Dec 2012)

UNDERWRITERS LABORATORIES (UL)

UL 193	(2016) UL Standard for Safety Alarm Valves for Fire-Protection Service
UL 199	(2020) UL Standard for Safety Automatic

	Sprinklers for Fire-Protection Service
UL 312	(2010; Reprint Mar 2018) UL Standard for Safety Check Valves for Fire-Protection Service
UL 405	(2013; Bul. 2020) UL Standard for Safety Fire Department Connection Devices
UL 668	(2004; Reprint Oct 2021) UL Standard for Safety Hose Valves for Fire-Protection Service
UL Fire Prot Dir	(2012) Fire Protection Equipment Directory

1.2 SYSTEM DESCRIPTION

Provide wet pipe sprinkler system(s) in areas indicated on the drawings . Except as modified herein, the system must meet the requirements of NFPA 13 and Sundown Policy. Pipe sizes which are not indicated on the Contract drawings must be determined by hydraulic calculations.Design and installation must comply with UFC 3-600-01, UFC 3-601-02, UFC 4-211-01, UFC 4-211-02, TAFB standards (TAFB FPS), and Sundown Policy.

1.2.1 Hydraulic Design

1.2.1.1 Basis for Calculations

The design of the system shall be based upon the existing water supply (existing water storage tank and diesel fire pumps). Four (4) diesel fire pumps arranged in parallel, one fire pump as the primary and the other three as back-up. The fire pumps are located within Building 2123. Two fire pumps are rated for 1500 GMP at 120 PSI and the other two fire pumps are rated for 1500 GMP at 100 PSI. Hydraulic calculations shall be based upon the Hazen-Williams formula with a "C" value of 120 for steel piping, 140 for new cement-lined ductile-iron piping, and 100 for existing underground piping.

1.2.1.2 Hydraulic Calculations

Submit hydraulic calculations, including a drawing showing hydraulic reference points and pipe segments and as outlined in NFPA 13, except that calculations shall be performed by computer using software intended specifically for fire protection system design using the design data shown on the drawings. Software that uses k-factors for typical branch lines is not acceptable. Calculations shall be based on the water supply data shown on the drawings to substantiate that the design area used in the calculations is the most demanding hydraulically. Water supply curves and system requirements shall be plotted on semi-logarithmic graph paper so as to present a summary of the complete hydraulic calculation. Provide a summary sheet listing sprinklers in the design area and their respective hydraulic reference points, elevations, actual discharge pressures and actual flows. Elevations of hydraulic reference points (nodes) shall be indicated. Documentation shall identify each pipe individually and the nodes connected thereto. Indicate the diameter, length, flow, velocity, friction loss, number and type fittings, total friction loss in the pipe, equivalent pipe length and Hazen-Williams coefficient for each pipe. For gridded systems, calculations shall show peaking of demand area friction loss to verify that the hydraulically most demanding area is being used.

Also for gridded systems, a flow diagram indicating the quantity and direction of flows shall be included. A drawing showing hydraulic reference points (nodes) and pipe designations used in the calculations shall be included and shall be independent of shop drawings.

1.2.1.3 Design Criteria

Hydraulically design the system to discharge a minimum density as indicated on the drawings. Hydraulic calculations must be in accordance with the Area/Density Method of NFPA 13 and high-piled storage requirements of NFPA 13 at the point of connection to the existing water system.

1.2.2 Sprinkler Coverage

Sprinklers must be uniformly spaced on branch lines. Provide coverage throughout 100 percent of the area noted on the Contract drawings. This includes, but is not limited to, telephone rooms, electrical equipment rooms (regardless of the fire resistance rating of the enclosure), boiler rooms, switchgear rooms, transformer rooms, attached electrical vaults and other electrical and mechanical spaces. Coverage per sprinkler must be in accordance with NFPA 13 but shall not exceed 100 square feet for high hazard occupancies. Provide sprinklers below all obstructions in accordance with NFPA 13.

1.2.3 Qualified Fire Protection Engineer (QFPE)

An individual who is a licensed professional engineer (P.E.) who has passed the fire protection engineering written examination administered by the National Council of Examiners for Engineering and Surveying (NCEES) and has relevant fire protection engineering experience. Services of the QFPE must include:

a. Reviewing SD-02, SD-03, and SD-05 submittal packages for completeness and compliance with the provisions of this specification. Working (shop) drawings and calculations must be prepared by, or prepared under the immediate supervision of, the QFPE. The QFPE must affix their professional engineering stamp with signature to the shop drawings, calculations, and material data sheets, indicating approval prior to submitting the shop drawings to the DFPE.

b. Provide a letter documenting that the SD-02, SD-03, and SD-05 submittal package has been reviewed and noting all outstanding comments.

c. Performing in-progress construction surveillance prior to installation of ceilings (rough-in inspection).

d. Witnessing pre-Government and final Government functional performance testing and performing a final installation review.

e. Signing applicable certificates under SD-07.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" or "S" classification are for information only. When used, a code following the "G" classification identifies the office that will review the submittal for the Government. Partial submittals and submittals not fully complying with NFPA 13 and this specification section must be returned disapproved without review. SD-02,

SD-03 and SD-05 must be submitted simultaneously.

Shop drawings (SD-02), product data (SD-03) and calculations (SD-05) must be prepared by the designer and combined and submitted as one complete package. The QFPE must review the SD-02/SD-03/SD-05 submittal package for completeness and compliance with the Contract provisions prior to submission to the Government. The QFPE must provide a Letter of Confirmation that they have reviewed the submittal package for compliance with the contract provisions. This letter must include their professional engineer stamp and signature. Partial submittals and submittals not reviewed by the QFPE must be returned disapproved without review.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualified Fire Protection Engineer (QFPE); G

Sprinkler System Designer; G

Sprinkler System Installer; G

SD-02 Shop Drawings

Shop Drawing; G

SD-03 Product Data

Pipe; G

Fittings; G

Valves, including gate, check, butterfly, and globe; G

Alarm Valves; G

Relief Valves; G

Sprinklers; G

Pipe Hangers and Supports; G

Sprinkler Alarm Switch; G

Valve Supervisory (Tamper) Switch; G

Fire Department Connection; G

Air Vent; G

Hose Valve; G

Nameplates; G

SD-05 Design Data

Hydraulic Calculations; G

SD-06 Test Reports

Test Procedures; G

SD-07 Certificates

Verification of Compliant Installation; G

Request for Government Final Test; G

SD-10 Operation and Maintenance Data

Operating and Maintenance (O&M) Instructions; G

Spare Parts Data; G

SD-11 Closeout Submittals

As-built drawings

Coordinated Submittal

1.3.1 Coordinated Submittal

The general contractor shall provide the shop drawings, hydraulic calculations, and data sheets of sprinkler submittal in the same package for review.

1.4 QUALITY ASSURANCE

1.4.1 Preconstruction Submittals

Within 36 days of contract award but no less than 14 days prior to commencing work on site, the prime Contractor must submit the following for review and approval. SD-02, SD-03 and SD-05 submittals received prior to the review and approval of the qualifications will be returned Disapproved Without Review.

1.4.1.1 Shop Drawing

Two (2) hard copies and one PDF version on electronic media copy of the shop drawings, no later than 28 days prior to the start of system installation. Working drawings conforming to the requirements prescribed in NFPA 13 and must be no smaller than the Contract Drawings. Each set of drawings must include the following:

a. A descriptive index with drawings listed in sequence by number. A legend sheet identifying device symbols, nomenclature, and conventions used in the package.

b. Floor plans drawn to a scale not less than 1/8-inch equals 1-foot clearly showing locations of devices, equipment, risers, and other details required to clearly describe the proposed arrangement.

c. Actual center-to-center dimensions between sprinklers on branch lines and between branch lines; from end sprinklers to adjacent walls; from walls to branch lines; from sprinkler feed mains, cross mains and branch lines to finished floor and roof or ceiling. A detail must show the dimension from the sprinkler and sprinkler deflector to the ceiling

in finished areas.

d. Longitudinal and transverse building sections showing typical branch line and cross main pipe routing, elevation of each typical sprinkler above finished floor and elevation of "cloud" or false ceilings in relation to the building ceilings.

e. Plan and elevation views which establish that the equipment will fit the allotted spaces with clearance for installation and maintenance.

f. Riser layout drawings drawn to a scale of not less than 1/2-inch equals 1-foot to show details of each system component, clearances between each other and from other equipment and construction in the room.

g. Details of each type of riser assembly, pipe hanger, and restraint of underground water main at point-of-entry into the building, and electrical devices and interconnecting wiring. The dimension from the edge of vertical piping to the nearest adjacent wall(s) must be indicated on the drawings when vertical piping is located in stairs or other portions of the means of egress.

h. Details of each type of pipe hanger and related components.

i. Perform a fire pump test and include fire pump curve with shop drawings and hydraulic calculations.

1.4.1.2 Product Data

Two (2) hard copies and one PDF version on electronic media copy of annotated catalog data to show the specific model, type, and size of each item. Catalog cuts must also indicate the NRTL listing. The data must be highlighted to show model, size, options, and other pertinent information, that are intended for consideration. Data must be adequate to demonstrate compliance with all contract requirements. Product data for all equipment must be combined into a single submittal.

1.4.1.3 Hydraulic Calculations

Calculations must be as outlined in NFPA 13 except that calculations must be performed by computer using software intended specifically for fire protection system design using the design data shown on the drawings. Calculations must include isometric diagram indicating hydraulic nodes and pipe segments. Include fire pump curve from new fire pump test with submittal.

1.4.1.4 Operating and Maintenance (O&M) Instructions

Submit in accordance with OPERATION AND MAINTENANCE DATA as supplemented and modified by this specification section.

Provide six manuals and one pdf version on electronic media. The manuals must include the manufacturer's name, model number, parts list, list of parts and tools that should be kept in stock by the owner for routine maintenance, troubleshooting guide, and recommended service organization (including address and telephone number) for each item of equipment. Each service organization submitted must be capable of providing 4-hour on-site response to a service call on an emergency basis.

Submit spare parts data for each different item of material and equipment

specified. The data must include a complete list of parts and supplies, and a list of parts recommended by the manufacturer to be replaced after 1-year and 3 years of service. Include a list of special tools and test equipment required for maintenance and testing of the products supplied.

1.4.2 Qualifications

1.4.2.1 Sprinkler System Designer

The sprinkler system designer must be certified as a Level III Technician by National Institute for Certification in Engineering Technologies (NICET) in the Water-Based Systems Layout subfield of Fire Protection Engineering Technology in accordance with NICET 1014-7.

1.4.2.2 Sprinkler System Installer

The sprinkler system installer must be regularly engaged in the installation of the type and complexity of system specified in the contract documents, and must have served in a similar capacity for at least three systems that have performed int he manner intended for a period of not less than 6 months.

1.4.3 Regulatory Requirements

Equipment and material must be listed or approved. Listed or approved, as used in this Section, means listed, labeled or approved by a Nationally Recognized Testing Laboratory (NRTL) such as UL Fire Prot Dir or FM APP GUIDE. The omission of these terms under the description of an item or equipment described must not be construed as waiving this requirement. All listings or approvals by testing laboratories must be from an existing ANSI or UL published standard. The recommended practices stated in the manufacturer's literature or documentation are mandatory requirements.

1.5 DELIVERY, STORAGE, AND HANDLING

Protect all equipment delivered and placed in storage from the weather, excessive humidity and temperature variations, dirt and dust, or other contaminants. All pipes must be either capped or plugged until installed.

1.6 EXTRA MATERIALS

Spare sprinklers and wrench(es) must be provided as spare parts in accordance with NFPA 13.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

2.1.1 Standard Products

Provide materials, equipment, and devices listed for fire protection service when so required by NFPA 13 or this specification. Select material from one manufacturer, where possible, and not a combination of manufacturers, for a classification of material. Material and equipment must be standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid.

2.1.2 Nameplates

Major components of equipment must have the manufacturer's name, address, type or style, model or serial number, catalog number, date of installation, installing Contractor's name and address, and the contract number provided on a new name plate permanently affixed to the item or equipment. Nameplates must be etched metal or plastic, permanently attached by screws to control units, panels or adjacent walls.

2.1.3 Identification and Marking

Pipe and fitting markings must include name or identifying symbol of manufacturer and nominal size. Pipe must be marked with ASTM designation. Valves and equipment markings must have name or identifying symbol of manufacturer, specific model number, nominal size, name of device, arrow indicating direction of flow, and position of installation (horizontal or vertical), except if valve can be installed in either position. Markings must be included on the body casting or on an etched or stamped metal nameplate permanently on the valve or cover plate.

2.1.4 Pressure Ratings

Valves, fittings, couplings, alarm switches, and similar devices must be rated for the maximum working pressures that can be experienced in the system, but in no case less than 175 psi.

2.2 ABOVEGROUND PIPING COMPONENTS

2.2.1 Steel Piping Components

2.2.1.1 Steel Pipe

Except as modified herein, steel pipe must be black as permitted by NFPA 13 and conform to the applicable provisions of ASTM A53/A53M, ASTM A135/A135M or ASTM A153/A153M.

Steel pipe must be Schedule 40 only. Grooved pipe must be cut-grooved.

2.2.1.2 Fittings

Fittings must be welded, threaded, or grooved-end type. Threaded fittings must be cast-iron conforming to ASME B16.4, malleable-iron conforming to ASME B16.3 or ductile-iron conforming to ASTM A536. Plain-end fittings with mechanical couplings, fittings that use steel gripping devices to bite into the pipe, steel press fittings and field welded fittings are not permitted. Fittings, mechanical couplings, and rubber gaskets must be supplied by the same manufacturer. Threaded fittings must use Teflon tape or manufacturer's approved joint compound. Reducing couplings are not permitted except as allowed by NFPA 13.

2.2.1.3 Grooved Mechanical Joints and Fittings

Joints and fittings must be designed for not less than 175 psi service and the product of the same manufacturer. Field welded fittings must not be used. Fitting and coupling housing must be malleable-iron conforming to ASTM A47/A47M, Grade 32510; ductile-iron conforming to ASTM A536, Grade 65-45-12. Rubber gasketed grooved-end pipe and fittings with mechanical couplings are permitted in pipe sizes 2 inches and larger. Gasket must be the flush type that fills the entire cavity between the fitting and the

pipe. Nuts and bolts must be heat-treated steel conforming to ASTM A183 and must be cadmium-plated or zinc-electroplated.

2.2.1.4 Flanges

Flanges must conform to NFPA 13 and ASME B16.1. Gaskets must be non-asbestos compressed material in accordance with ASME B16.21, 1/16-inch thick, and full face or self-centering flat ring type.

2.2.2 Flexible Sprinkler Hose

The use of flexible hose is not permitted.

2.2.3 Pipe Hangers and Supports

Provide galvanized pipe hangers and supports in accordance with NFPA 13.

2.2.4 Valves

Provide valves of types approved for fire service. Valves must open by counterclockwise rotation.

2.2.4.1 Control Valve

Manually operated sprinkler control/gate valve must be butterfly type and must be listed.

2.2.4.2 Check Valves

Check valves must comply with UL 312. Check valves 4 inches and larger must be of the swing type, have a clear waterway and meet the requirements of MSS SP-71, for Type 3 or 4. Inspection plate must be provided on valves larger than 6 inches.

2.2.4.3 Hose Valve

Valve must comply with UL 668.

2.2.5 Alarm Valves

Provide variable pressure type alarm check valve, standard trim piping, pressure gauges, bypass, retarding chamber, testing valves, and main drain, and other components as required for a fully operational system. Alarm valves must comply with UL 193.

2.3 ALARM INITIATING AND SUPERVISORY DEVICES

2.3.1 Sprinkler Alarm Switch

Vane or pressure-type flow switch(es). Connection of switch must be by the fire alarm installer. Vane type alarm actuating devices must have mechanical diaphragm controlled retard device adjustable from 10 to 60 seconds and must instantly recycle.

2.3.2 Valve Supervisory (Tamper) Switch

Switch must be integral to the control valve or suitable for mounting to the type of control valve to be supervised open. The switch must be tamper resistant and contain SPDT (Form C) contacts arranged to transfer upon

removal of the housing cover or closure of the valve of more than two rotations of the valve stem.

2.4 FIRE DEPARTMENT CONNECTION

Fire department connection must be projecting type with cast-brass body, matching wall escutcheon lettered "Auto Spkr" with a polished-brass finish. The connection must have individual self-closing clappers, caps with drip drains and chains. FDCs shall be provided with 4" Storz x 4" Female NPT with 30 degree bend. Comply with UL 405. FDC location and finish shall be approved by the 72d CE Fire & Emergency Services Fire Prevention Branch.

2.5 SPRINKLERS

Sprinklers must comply with UL 199 and NFPA 13. Sprinklers with internal O-rings are not acceptable. Sprinklers in high heat areas including attic spaces or in close proximity to unit heaters must have temperature classification in accordance with NFPA 13. Extended coverage sprinklers are permitted for loading docks, residential occupancies and high-piled storage applications only.

2.5.1 Pendent Sprinkler

Pendent sprinkler shall be of the fusible strut or glass bulb type, recessed quick-response type with nominal 1/2 inch or 17/32 inch orifice. Pendent sprinklers shall have a polished chrome finish.

2.5.2 Upright Sprinkler

Upright sprinkler shall be brass quick-response type and shall have a nominal 1/2 inch or 17/32 inch orifice.

2.6 ACCESSORIES

2.6.1 Sprinkler Cabinet

Provide spare sprinklers in accordance with NFPA 13 and must be placed in a suitable metal or plastic cabinet of sufficient size to accommodate all the spare sprinklers and wrenches in designated locations. Spare sprinklers must be representative of, and in proportion to, the number of each type and temperature rating of the sprinklers installed as required by NFPA 13. At least one wrench of each type required must be provided.

2.6.2 Pendent Sprinkler Escutcheon

Escutcheon must be one-piece metallic type with a depth of less than 3/4-inch and suitable for installation on pendent sprinklers. The escutcheon must have a factory finish that matches the pendent sprinkler.

2.6.3 Pipe Escutcheon

Provide split hinge metal plates for piping entering walls, floors, and ceilings in exposed spaces. Provide polished stainless steel plates or chromium-plated finish on copper alloy plates in finished spaces. Provide paint finish on metal plates in unfinished spaces.

2.6.4 Sprinkler Guard

Listed guard must be a steel wire cage designed to encase the sprinkler and protect it from mechanical damage. Guards must be provided on sprinklers located within 7 feet of the floor.

2.6.5 Relief Valve

Relief valves must be listed and installed at the riser in accordance with NFPA 13.

2.6.6 Air Vent

Air vents must be of the automatic type and piped to drain to the building exterior.

2.6.7 Identification Sign

Valve identification sign must be minimum 6 inches wide by 2 inches high with enamel baked finish on minimum 18 gage steel or 0.024-inch aluminum with red letters on a white background or white letters on red background. Wording of sign must include, but not be limited to "main drain", "auxiliary drain", "inspector's test", "alarm test", "alarm line", and similar wording as required to identify operational components. Where there is more than one sprinkler system, signage must include specific details as to the respective system.

PART 3 EXECUTION

3.1 VERIFYING ACTUAL FIELD CONDITIONS

Before commencing work, examine all adjoining work on which the contractor's work that is dependent for perfect workmanship according to the intent of this specification section, and report to the Contracting Officer's Representative a condition that prevents performance of first class work. No "waiver of responsibility" for incomplete, inadequate or defective adjoining work will be considered unless notice has been filed before submittal of a proposal.

3.2 INSTALLATION

The installation must be in accordance with the applicable provisions of NFPA 13, NFPA 24 and publications referenced therein. Locate sprinklers in a consistent pattern with ceiling grid, lights, and air supply diffusers. Install sprinkler system over and under ducts, piping and platforms when such equipment can negatively affect or disrupt the sprinkler discharge pattern and coverage.

a. Piping offsets, fittings, and other accessories required must be furnished to provide a complete installation and to eliminate interference with other construction.

b. Wherever the contractor's work interconnects with work of other trades the Contractor must coordinate with other Contractors to insure all Contractors have the information necessary so that they may properly install all necessary connections and equipment. Identify all work items needing access (dampers and similar equipment) that are concealed above hung ceilings by permanent color coded pins/tabs in the ceiling directly below the item.

c. Provide required supports and hangers for piping, conduit, and equipment so that loading will not exceed allowable loadings of structure. Submittal of a bid must be a deemed representation that the contractor submitting such bid has ascertained allowable loadings and has included in his estimates the costs associated in furnishing required supports.

3.2.1 Waste Removal

At the conclusion of each day's work, clean up and stockpile on site all waste, debris, and trash which may have accumulated during the day as a result of work by the contractor and of his presence on the job. Sidewalks and streets adjoining the property must be kept broom clean and free of waste, debris, trash and obstructions caused by work of the contractor, which will affect the condition and safety of streets, walks, utilities, and property.

3.3 ABOVEGROUND PIPING INSTALLATION

The methods of fabrication and installation of the aboveground piping must fully comply with the requirements and recommended practices of NFPA 13 and this specification section.

3.3.1 Protection of Piping Against Earthquake Damage

Seismic restraint is required.

3.3.2 Piping in Exposed Areas

Install exposed piping without diminishing exit access widths, corridors or equipment access. Exposed horizontal piping, including drain piping, must be installed to provide maximum headroom.

3.3.3 Piping in Finished Areas

In areas with suspended or dropped ceilings and in areas with concealed spaces above the ceiling, piping must be concealed above ceilings. Piping must be inspected, hydrostatically tested and approved before being concealed. Risers and similar vertical runs of piping in finished areas must be concealed.

3.3.4 Pendent Sprinklers

a. Drop nipples to pendent sprinklers must consist of minimum 1-inch pipe with a reducing coupling into which the sprinkler must be threaded.

b. Where sprinklers are installed below suspended or dropped ceilings, drop nipples must be cut such that sprinkler ceiling plates or escutcheons are of a uniform depth throughout the finished space. The outlet of the reducing coupling must not extend below the underside of the ceiling.

c. Recessed pendent sprinklers must be installed such that the distance from the sprinkler deflector to the underside of the ceiling must not exceed the manufacturer's listed range and must be of uniform depth throughout the finished area.

d. Pendent sprinklers in suspended ceilings must be located in the center

of the tile (plus or minus 2 inches).

e. Where the maximum static or flowing pressure, whichever is greater at the sprinkler, applied other than through the fire department connection, exceeds 100 psi and a branch line above the ceiling supplies sprinklers in a pendent position below the ceiling, the cumulative horizontal length of an unsupported armover to a sprinkler or sprinkler drop must not exceed 12 inches for steel pipe.

3.3.5 Upright Sprinklers

Riser nipples or "sprigs" to upright sprinklers must contain no fittings between the branch line tee and the reducing coupling at the sprinkler.

3.3.6 Pipe Joints

Pipe joints must conform to NFPA 13, except as modified herein. Not more than four threads must show after joint is made up. Welded joints will be permitted, only if welding operations are performed as required by NFPA 13 at the Contractor's fabrication shop, not at the project construction site. Flanged joints must be provided where indicated or required by NFPA 13. Grooved pipe and fittings must be prepared in accordance with the manufacturer's latest published specification according to pipe material, wall thickness and size. Grooved couplings, fittings and grooving tools must be products of the same manufacturer. For copper tubing, pipe and groove dimensions must comply with the tolerances specified by the coupling manufacturer. The diameter of grooves made in the field must be measured using a "go/no-go" gauge, vernier or dial caliper, narrow-land micrometer, or other method specifically approved by the coupling manufacturer for the intended application. Groove width and dimension of groove from end of pipe must be measured and recorded for each change in grooving tool setup to verify compliance with coupling manufacturer's tolerances.

3.3.7 Reducers

Reductions in pipe sizes must be made with one-piece tapered reducing fittings. When standard fittings of the required size are not manufactured, single bushings of the face or hex type will be permitted. Where used, face bushings must be installed with the outer face flush with the face of the fitting opening being reduced. Bushings cannot be used in elbow fittings, in more than one outlet of a tee, in more than two outlets of a cross, or where the reduction in size is less than 1/2-inch.

3.3.8 Pipe Penetrations

a. Cutting structural members for passage of pipes or for pipe-hanger fastenings will not be permitted. Pipes that must penetrate concrete or masonry walls or concrete floors must be core-drilled and provided with pipe sleeves. Each sleeve must be Schedule 40 galvanized steel, ductile-iron or cast-iron pipe and extend through its respective wall or floor and be cut flush with each wall surface. Sleeves must provide required clearance between the pipe and the sleeve per NFPA 13. The space between the sleeve and the pipe must be firmly packed with mineral wool insulation.

b. Where pipes and sleeves penetrate fire walls, fire partitions, or floors, pipes/sleeves must be firestopped in accordance with Section 07 84 00 FIRESTOPPING.

c. In penetrations that are not fire-rated or not a floor penetration, the space between the sleeve and the pipe must be sealed at both ends with plastic waterproof cement that will dry to a firm but pliable mass or with a mechanically adjustable segmented elastomer seal.

d. All penetrations through the boundary of rooms/areas identified as secure space area must meet ICS 705-1.

3.3.9 Escutcheons

Escutcheons must be provided for pipe penetration in finished areas of ceilings, floors and walls. Escutcheons must be securely fastened to the pipe at surfaces through which piping passes.

3.3.10 Inspector's Test Connection

Unless otherwise indicated, the test connection must consist of 1-inch pipe connected to the remote branch line; a test valve located approximately 7 feet above the floor; a smooth bore brass outlet equivalent to the smallest orifice sprinkler used in the system; and a painted metal identification sign affixed to the valve with the words "Inspector's Test". All test connection piping must be inside of the building and penetrate the exterior wall at the location of the discharge orifice only. The discharge orifice must be located outside the building wall no more than 2 feet above finished grade, directed so as not to cause damage to adjacent construction or landscaping during full flow discharge, or to the sanitary sewer. Discharge to the exterior must not interfere with exiting from the facility. Water discharge or runoff must not cross the path of egress from the building. Do not discharge to the roof. Discharge to floor drains, janitor sinks or similar fixtures is not permitted.

Provide concrete splash blocks at all drain and inspector's test connection discharge locations if not discharging to a concrete surface. Splash blocks must be large enough to mitigate erosion and not become dislodged during a full flow of the drain. Ensure all discharged water drains away from the facility and does not cause property damage.

3.3.11 Drains

a. Main drain piping must be provided to discharge to existing Hangar floor drain. Provide a concrete splash block at drain outlet. Discharge to the exterior must not interfere with exiting from the facility. Water discharge or runoff must not cross the path of egress from the building.

b. Auxiliary drains must be provided as required by NFPA 13. Auxiliary drains are permitted to discharge to a floor drain if the drain is sized to accommodate full flow (min 40 gpm). Discharge to service sinks or similar plumbing fixtures is not permitted.

3.3.12 Installation of Fire Department Connection

Connection must be mounted on the exterior wall approximately 3 feet above finished grade. The piping between the connection and the check valve must be provided with an automatic drip in accordance with NFPA 13 and piped to drain to the outside or a floor drain within the same room.

3.3.13 Identification Signs

Signs must be affixed to each control valve, inspector test valve, main drain, auxiliary drain, test valve, and similar valves as appropriate or as required by NFPA 13. Main drain test results must be etched into main drain identification sign. Hydraulic design data must be etched into the nameplates and permanently affixed to each sprinkler riser as specified in NFPA 13. Provide labeling on the surfaces of all feed and cross mains to show the pipe function (e.g., "Sprinkler System", "Fire Department Connection", "Standpipe") and normal valve position (e.g. "Normally Open", "Normally Closed"). For pipe sizes 4-inch and larger provide white painted stenciled letters and arrows, a minimum of 2 inches in height and visible from at least two sides when viewed from the floor. For pipe sizes less than 4-inch, provide white painted stenciled letters and arrows, a minimum of 0.75-inch in height and visible from the floor.

3.4 ELECTRICAL

Except as modified herein, electric equipment and wiring must be in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Alarm signal wiring connected to the building fire alarm control system must be by the fire alarm installer.

3.5 PAINTING

Color code mark piping as specified in Tinker AFB Fire Protection Standard. All aboveground sprinkler piping shall be painted using two coats of RED No. 1110.

3.6 FIELD QUALITY CONTROL

3.6.1 Test Procedures

Submit detailed test procedures, prepared and signed by the NICET Level IV Fire Sprinkler Technician, and the representative of the installing company, and reviewed by the QFPE 60 days prior to performing system tests. Detailed test procedures must list all components of the installed system. Test procedures must include sequence of testing, time estimate for each test, and sample test data forms. The test data forms must be in a check-off format (pass/fail with space to add applicable test data; similar to the forms in NFPA 13). The test procedures and accompanying test data forms must be used for the pre-Government testing and the Government final testing.

a. Provide space to identify the date and time of each test. Provide space to identify the names and signatures of the individuals conducting and witnessing each test.

3.6.2 Pre-Government Testing

3.6.2.1 Verification of Compliant Installation

Conduct inspections and tests to ensure that equipment is functioning properly. Tests must meet the requirements of paragraph entitled "Minimum System Tests" and "System Acceptance" as noted in NFPA 13. The Contractor and QFPE must be in attendance at the pre-Government testing to make necessary adjustments. After inspection and testing is complete, provide a signed Verification of Compliant Installation letter by the QFPE that the installation is complete, compliant with the specification and fully

operable. The letter must include the names and titles of the witnesses to the pre-Government tests. Provide all completion documentation as required by NFPA 13 and the test reports noted below.

a. NFPA 13 Aboveground Material and Test Certificate

b. NFPA 13 Underground Material and Test Certificate

3.6.2.2 Request for Government Final Test

When the verification of compliant installation has been completed, submit a formal request for Government final test to the Contracting Officers Designated Representative (COR). Government final testing will not be scheduled until the DFPE has received copies of the request for Government final testing and Verification of Compliant Installation letter with all required reports. Government final testing will not be performed until after the connections to the building fire alarm system have been completed and tested to confirm communications are fully functional. Submit request for test at least 15 calendar days prior to the requested test date.

3.6.3 Correction of Deficiencies

If equipment was found to be defective or non-compliant with contract requirements, perform corrective actions and repeat the tests. Tests must be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.

3.6.4 Government Final Tests

The tests must be performed in accordance with the approved test procedures in the presence of the Tinker Air Force Base Fire Department and Tinker Air Force Base Fire Protection Engineer. Furnish instruments and personnel required for the tests. The following must be provided at the job site for Government Final Testing:

a. The manufacturer's technical representative.

c. Marked-up red line drawings of the system as actually installed.

Government Final Tests will be witnessed by the Tinker Air Force Base Fire Department and Tinker Air Force Base Fire Protection Engineer, Contracting Officer, Qualified Fire Protection Engineer (QFPE). At this time, all required tests noted in the paragraph "Minimum System Tests" must be repeated at their discretion.

3.7 MINIMUM SYSTEM TESTS

The system, including the underground water mains, and the aboveground piping and system components, must be tested to ensure that equipment and components function as intended. The underground and aboveground interior piping systems and attached appurtenances subjected to system working pressure must be tested in accordance with NFPA 13 and NFPA 24.

3.7.1 Underground Piping

3.7.1.1 Flushing

Underground piping must be flushed at a minimum of 10 fps in accordance with NFPA 24.

3.7.2 Aboveground Piping

3.7.2.1 Hydrostatic Test

Aboveground piping must be hydrostatically tested in accordance with NFPA 13. There must be no drop in gauge pressure or visible leakage when the system is subjected to the hydrostatic test. The test pressure must be read from a gauge located at the low elevation point of the system or portion being tested.

3.7.3 Main Drain Flow Test

Following flushing of the underground piping, a main drain test must be made to verify the adequacy of the water supply. Static and residual pressures must be recorded on the certificate specified in paragraph SUBMITTALS.

3.8 SYSTEM ACCEPTANCE

Following acceptance of the system, as-built drawings and O&M manuals must be delivered to the Contracting Officer for review and acceptance. Submit six sets of detailed as-built drawings. The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final acceptance test of the system. At least one set of as-built (marked-up) drawings must be provided at the time of, or prior to the final acceptance test.

a. Provide one set of full size paper as-built drawings and schematics. The drawings must be prepared electronically and sized no less than the contract drawings. Furnish one set of CDs or DVDs containing software back-up and CAD based drawings in latest version of AutoCAD, DXF and portable document formats of as-built drawings and schematics.

b. Provide operating and maintenance (O&M) instructions.

3.9 ONSITE TRAINING

Conduct a training course for the responding fire department and operating and maintenance personnel as designated by the Contracting Officer. Training must be performed on three separate days (to accommodate different shifts of Fire Department personnel) for a period of 8 hours of normal working time and must start after the system is functionally complete and after the final acceptance test. The on-site training must cover all of the items contained in the approved Operating and Maintenance Instructions.

-- End of Section --

SECTION 23 09 00

INSTRUMENTATION AND CONTROL FOR HVAC
11/15

PART 1 GENERAL

1.1 SUMMARY

Provide a complete Direct Digital Control (DDC) system, suitable for the control of the heating, ventilating and air conditioning (HVAC) and other building-level systems as indicated and shown and in accordance with Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS and other referenced Sections.

All new installed control systems shall be connected to the existing base wide Civil Engineering Community of Interest Network Enclave (CE COINCE). The new installed control systems shall be programmed into the base wide Honeywell Enterprise Building Integrator (EBI). The contractor shall contact and coordinate both connections with the CE IAM.

All new and replacement building level controllers shall be Honeywell Comfort Point Open CPO-PC-6A.

1.1.1 System Requirements

Provide systems meeting the requirements this Section and other Sections referenced by this Section, and which have the following characteristics:

a. The system implements the control sequences of operation shown in the Contract Drawings using DDC hardware to control mechanical and electrical equipment

b. The system meet the requirements of this specification as a stand-alone system and does not require connection to any other system.

c. Control sequences reside in DDC hardware in the building. The building control network is not dependent upon connection to a Utility Monitoring and Control System (UMCS) Front End or to any other system for performance of control sequences. To the greatest extent practical, the hardware performs control sequences without reliance on the building network, unless otherwise pre-approved by the Contracting Officer.

d. The hardware is installed such that individual control equipment can be replaced by similar control equipment from other equipment manufacturers with no loss of system functionality.

e. All necessary documentation, configuration information, programming tools, programs, drivers, and other software are licensed to and otherwise remain with the Government such that the Government or their agents are able to perform repair, replacement, upgrades, and expansions of the system without subsequent or future dependence on the Contractor, Vendor or Manufacturer.

f. Sufficient documentation and data, including rights to documentation and data, are provided such that the Government or their agents can

execute work to perform repair, replacement, upgrades, and expansions of the system without subsequent or future dependence on the Contractor, Vendor or Manufacturer.

g. Hardware is installed and configured such that the Government or their agents are able to perform repair, replacement, and upgrades of individual hardware without further interaction with the Contractor, Vendor or Manufacturer.

1.1.2 End to End Accuracy

Select products, install and configure the system such that the maximum error of a measured value as read from the DDC Hardware over the network is less than the maximum allowable error specified for the sensor or instrumentation.

1.1.3 Verification of Dimensions

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.1.4 Drawings

The Government will not indicate all offsets, fittings, and accessories that may be required on the drawings. Carefully investigate the mechanical, electrical, and finish conditions that could affect the work to be performed, arrange such work accordingly, and provide all work necessary to meet such conditions.

1.2 RELATED SECTIONS

Related work specified elsewhere:

a. Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS

b. Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 135	(2016; INT 1 2016; ERTA 1 2016) BACnet—A Data Communication Protocol for Building Automation and Control Networks
ASHRAE FUN IP	(2017) Fundamentals Handbook, I-P Edition

CONSUMER ELECTRONICS ASSOCIATION (CEA)

CEA-709.1-D	(2014) Control Network Protocol Specification

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41	(1991; R 1995) Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2020; ERTA 20-1 2020; ERTA 20-2 2020; TIA 20-1; TIA 20-2; TIA 20-3; TIA 20-4) National Electrical Code
NFPA 90A	(2021) Standard for the Installation of Air Conditioning and Ventilating Systems

UNDERWRITERS LABORATORIES (UL)

UL 5085-3	(2006; Reprint Nov 20121) Low Voltage Transformers - Part 3: Class 2 and Class 3 Transformers

1.4 DEFINITIONS

The following list of definitions includes terms used in Sections referenced by this Section and are included here for completeness.

The definitions contained in this Section may disagree with how terms are defined or used in other documents, including documents referenced by this Section. The definitions included here are the authoritative definitions for this Section and all Sections referenced by this Section.

1.4.1 Alarm Generation

Alarm Generation is the monitoring of a value, comparison of the value to alarm conditions and the creation of an alarm when the conditions set for the alarm are met.

In BACnet, Alarm Generation is the creation of alarm events using Event Reporting as defined in ASHRAE 135 in one of three ways:

a. Intrinsic Alarm Generation using Intrinsic Reporting

b. Local Algorithmic Alarm Generation using Algorithmic Reporting where the referenced property is in the same device as the Event Enrollment Object

c. Remote Algorithmic Alarm Generation using Algorithmic Alarming where the referenced property is in a different device than the Event Enrollment Object.

1.4.2 Building Automation and Control Network (BACnet)

The term BACnet is used in two ways. First meaning the BACnet Protocol Standard - the communication requirements as defined by ASHRAE 135

including all annexes and addenda. The second to refer to the overall technology related to the ASHRAE 135 protocol.

1.4.3 BACnet Advanced Application Controller (B-AAC)

A hardware device BTL Listed as a B-AAC, which is required to support BACnet Interoperability Building Blocks (BIBBs) for scheduling and alarming, but is not required to support as many BIBBs as a B-BC.

1.4.4 BACnet Application Specific Controller (B-ASC)

A hardware device BTL Listed as a B-ASC, with fewer BIBB requirements than a B-AAC. It is intended for use in a specific application.

1.4.5 BACnet Building Controller (B-BC)

A hardware device BTL Listed as a B-BC. A general-purpose, field-programmable device capable of carrying out a variety of building automation and control tasks including control and monitoring via direct digital control (DDC) of specific systems and data storage for trend information, time schedules, and alarm data. Like the other BTL Listed controller types (B-AAC, B-ASC etc.) a B-BC device is required to support the server ("B") side of the ReadProperty and WriteProperty services, but unlike the other controller types it is also required to support the client ("A") side of these services. Communication between controllers requires that one of them support the client side and the other support the server side, so a B-BC is often used when communication between controllers is needed.

1.4.6 BACnet Broadcast Management Device (BBMD)

A communications device, typically combined with a BACnet router. A BBMD forwards BACnet broadcast messages to BACnet/IP devices and other BBMDs connected to the same BACnet/IP network. Each IP subnet that is part of a BACnet/IP network must have at least one BBMD. Note there are additional restrictions when multiple BBMDs share an IP subnet.

1.4.7 BACnet/IP

An extension of BACnet, Annex J, defines the use of a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP subnets that share the same BACnet network number. See also paragraph BACNET BROADCAST MANAGEMENT DEVICE.

1.4.8 BACnet Internetwork

Two or more BACnet networks, connected with BACnet routers. In a BACnet internetwork, there exists only one message path between devices.

1.4.9 BACnet Interoperability Building Blocks (BIBBs)

A BIBB is a collection of one or more ASHRAE 135 Services intended to define a higher level of interoperability. BIBBs are combined to build the BACnet functional requirements for a device in a specification. Some BIBBs define additional requirements (beyond requiring support for specific services) in order to achieve a level of interoperability. For example, the BIBB DS-V-A (Data Sharing-View-A), which would typically be used by a front-end, not only requires the client to support the ReadProperty Service, but also provides a list of data types (Object / Properties) which

the client must be able to interpret and display for the user.

In the BIBB shorthand notation, -A is the client side and -B is the server side.

The following is a list of some BIBBs used by this or referenced Sections:	
DS-COV-A	Data Sharing-Change of Value (A side)
DS-COV-B	Data Sharing-Change of Value (B side)
NM-RC-B	Network Management-Router Configuration (B side)
DS-RP-A	Data Sharing-Read Property (A side)
DS-RP-B	Data Sharing-Read Property (B side)
DS-RPM-A	Data Sharing-Read Property Multiple (A Side)
DS-RPM-B	Data Sharing-Read Property Multiple (B Side)
DS-WP-A	Data Sharing-Write Property (A Side)
DM-TS-B	Device Management-Time Synchronization (B Side)
DM-UTC-B	Device Management-UTC Time Synchronization (B Side)
DS-WP-B	Data Sharing-Write Property (B side)
SCHED-E-B	Scheduling-External (B side)
DM-OCD-B	Device Management-Object Creation and Deletion (B side)
AE-N-I-B	Alarm and Event-Notification Internal (B Side)
AE-N-E-B	Alarm and Event-Notification External (B Side)
T-VMT-I-B	Trending-Viewing and Modifying Trends Internal (B Side)
T-VMT-E-B	Trending-Viewing and Modifying Trends External (B Side)

1.4.10 BACnet Network

In BACnet, a portion of the control internetwork consisting of one or more segments connected by repeaters. Networks are separated by routers.

1.4.11 BACnet Operator Display (B-OD)

A basic operator interface with limited capabilities relative to a B-OWS. It is not intended to perform direct digital control. A B-OD profile could be used for LCD devices, displays affixed to BACnet devices, handheld terminals or other very simple user interfaces.

1.4.12 BACnet Segment

One or more physical segments interconnected by repeaters (ASHRAE 135).

1.4.13 BACnet Smart Actuator (B-SA)

A simple actuator device with limited resources intended for specific applications.

1.4.14 BACnet Smart Sensor (B-SS)

A simple sensing device with limited resources.

1.4.15 BACnet Testing Laboratories (BTL)

Established by BACnet International to support compliance testing and interoperability testing activities and consists of BTL Manager and the BTL Working Group (BTL-WG). BTL also publishes Implementation Guidelines.

1.4.16 BACnet Testing Laboratories (BTL) Listed

A device that has been listed by BACnet Testing Laboratory. Devices may be certified to a specific device profile, in which case the listing indicates that the device supports the required capabilities for that profile, or may be listed as "other".

1.4.17 Binary

A two-state system where an "ON" condition is represented by a high signal level and an "OFF" condition is represented by a low signal level. 'Digital' is sometimes used interchangeably with 'binary'.

1.4.18 Binding

The act of establishing communications between CEA-709.1-D devices by associating the output of a device to the input of another so that information is automatically (and regularly) sent.

1.4.19 Broadcast

Unlike most messages, which are intended for a specific recipient device, a broadcast message is intended for all devices on the network.

1.4.20 Building Control Network (BCN)

The network connecting all DDC Hardware within a building (or specific group of buildings).

1.4.21 Building Point of Connection (BPOC)

A FPOC for a Building Control System. (This term is being phased out of use in preference for FPOC but is still used in some specifications and criteria. When it was used, it typically referred to a piece of control hardware. The current FPOC definition typically refers instead to IT hardware.)

1.4.22 Commandable

See Overridable.

1.4.23 Commandable Objects

Commandable Objects have a Commandable Property, Priority_Array, and Relinquish_Default Property as defined in ASHRAE 135, Clause 19.2, Command Prioritization.

1.4.24 Configurable

A property, setting, or value is configurable if it can be changed via hardware settings on the device, via the use of engineering software or over the control network from the front end, and is retained through (after) loss of power.

In a BACnet system, a property, setting, or value is configurable if it can be changed via one or more of:

1) via BACnet services (including proprietary BACnet services)

2) via hardware settings on the device.

Note this is more stringent than the ASHRAE 135 definition.

1.4.25 Control Logic Diagram

A graphical representation of control logic for multiple processes that make up a system.

1.4.26 Device

A Digital Controller that contains a BACnet Device Object and uses BACnet to communicate with other devices.

1.4.27 Device Object

Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance or device ID.

1.4.28 Device Profile

A collection of BIBBs determining minimum BACnet capabilities of a device, defined in ASHRAE 135. Standard device profiles include BACnet Advanced Workstations (B-AWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS).

1.4.29 Digital Controller

An electronic controller, usually with internal programming logic and digital and analog input/output capability, which performs control functions.

1.4.30 Direct Digital Control (DDC)

Digital controllers performing control logic. Usually the controller directly senses physical values, makes control decisions with internal programs, and outputs control signals to directly operate switches,

dampers, and motor controllers.

1.4.31 Field Point of Connection (FPOC)

The FPOC is the point of connection between the UMCS IP Network and the field control network (either an IP network, a non-IP network, or a combination of both). The hardware at this location which provides the connection is generally an IT device such as a switch, IP router, or firewall.

In general, the term "FPOC Location" means the place where this connection occurs, and "FPOC Hardware" means the device that provides the connection. Sometimes the term "FPOC" is used to mean either and its actual meaning (i.e. location or hardware) is determined by the context in which it is used.

1.4.32 Gateway

A device that translates from one protocol application data format to another. Devices that change only the transport mechanism of the protocol - "translating" from TP/FT-10 to Ethernet/IP or from BACnet MS/TP to BACnet over IP for example - are not gateways as the underlying data format does not change. Gateways are also called Communications Bridges or Protocol Translators.

1.4.33 IEEE 802.3 Ethernet

A family of local-area-network technologies providing high-speed networking features over various media, typically Cat 5, 5e or Cat 6 twisted pair copper or fiber optic cable.

1.4.34 Internet Protocol (IP, TCP/IP, UDP/IP)

A communication method, the most common use is the World Wide Web. At the lowest level, it is based on Internet Protocol (IP), a method for conveying and routing packets of information over various LAN media. Two common protocols using IP are User Datagram Protocol (UDP) and Transmission Control Protocol (TCP). UDP conveys information to well-known "sockets" without confirmation of receipt. TCP establishes connections, also known as "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.

1.4.35 Input/Output (I/O)

Physical inputs and outputs to and from a device, although the term sometimes describes network or "virtual" inputs or outputs. See also "Points".

1.4.36 I/O Expansion Unit

An I/O expansion unit provides additional point capacity to a digital controller

1.4.37 IP subnet

A group of devices which share a defined range IP addresses. Devices on a common IP subnet can share data (including broadcasts) directly without the need for the traffic to traverse an IP router.

1.4.38 Local-Area Network (LAN)

A communication network that spans a limited geographic area and uses the same basic communication technology throughout.

1.4.39 Local Display Panels (LDPs)

A DDC Hardware with a display and navigation buttons, and must provide display and adjustment of points as shown on the Points Schedule and as indicated.

1.4.40 MAC Address

Media Access Control address. The physical device address that identifies a device on a Local Area Network.

1.4.41 Master-Slave/Token-Passing (MS/TP)

Data link protocol as defined by the BACnet standard. Multiple speeds (data rates) are permitted by the BACnet MS/TP standard.

1.4.42 Monitoring and Control (M&C) Software

The UMCS 'front end' software which performs supervisory functions such as alarm handling, scheduling and data logging and provides a user interface for monitoring the system and configuring these functions.

1.4.43 Network Number

A site-specific number assigned to each network. This network number must be unique throughout the BACnet internetwork.

1.4.44 Object

An ASHRAE 135 Object. The concept of organizing BACnet information into standard components with various associated Properties. Examples include Analog Input objects and Binary Output objects.

1.4.45 Object Identifier

A grouping of two Object properties: Object Type (e.g. Analog Value, Schedule, etc.) and Object Instance (in this case, a number). Object Identifiers must be unique within a device.

1.4.46 Object Instance

See paragraph OBJECT IDENTIFIER

1.4.47 Object Properties

Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.

1.4.48 Operator Configurable

For BACnet systems, a property, setting, or value in a device is Operator Configurable when it is Configurable and is either:

a. a Writeable Property of a Standard BACnet Object; or

b. a Property of a Standard BACnet Object that is Writeable when Out_Of_Service is TRUE and Out_Of_Service is Writeable.

1.4.49 Override

Changing the value of a point outside of the normal sequence of operation where the change has priority over the sequence and where there is a mechanism for releasing the change such that the point returns to the normal value. Overrides persist until released or overridden at the same or higher priority but are not required to persist through a loss of power. Overrides are often used by operators to change values, and generally originate at a user interface (workstation or local display panel).

1.4.50 Performance Verification Test (PVT)

The procedure for determining if the installed BAS meets design criteria prior to final acceptance. The PVT is performed after installation, testing, and balancing of mechanical systems. Typically the PVT is performed by the Contractor in the presence of the Government.

1.4.51 Physical Segment

A single contiguous medium to which BACnet devices are attached (ASHRAE 135).

1.4.52 Polling

A device periodically requesting data from another device.

1.4.53 Points

Physical and virtual inputs and outputs. See also paragraph INPUT/OUTPUT (I/O).

1.4.54 Proportional, Integral, and Derivative (PID) Control Loop

Three parameters used to control modulating equipment to maintain a setpoint. Derivative control is often not required for HVAC systems (leaving "PI" control).

1.4.55 Proprietary

Within the context of BACnet, any extension of or addition to object types, properties, PrivateTransfer services, or enumerations specified in ASHRAE 135. Objects with Object_Type values of 128 and above are Proprietary Objects. Properties with Property_Identifier of 512 and above are proprietary Properties.

1.4.56 Protocol Implementation Conformance Statement (PICS)

A document, created by the manufacturer of a device, which describes which portions of the BACnet standard may be implemented by a given device. ASHRAE 135 requires that all ASHRAE 135 devices have a PICS, and also defines a minimum set of information that must be in it. A device as installed for a specific project may not implement everything in its PICS.

1.4.57 Repeater

A device that connects two control network segments and retransmits all information received on one side onto the other.

1.4.58 Router

A device that connects two ASHRAE 135 networks and controls traffic between the two by retransmitting signals received from one side onto the other based on the signal destination. Routers are used to subdivide a control network and to limit network traffic.

1.4.59 Segment

A 'single' section of a control network that contains no repeaters or routers. There is generally a limit on the number of devices on a segment, and this limit is dependent on the topology/media and device type.

1.4.60 Standard BACnet Objects

Objects with Object_Type values below 128 and specifically enumerated in Clause 21 of ASHRAE 135. Objects which are not proprietary. See paragraph PROPRIETARY.

1.4.61 Standard BACnet Properties

Properties with Property_Identifier values below 512 and specifically enumerated in Clause 21 of ASHRAE 135. Properties which are not proprietary. See Proprietary.

1.4.62 Standard BACnet Services

ASHRAE 135 services other than ConfirmedPrivateTransfer or UnconfirmedPrivateTransfer. See paragraph PROPRIETARY.

1.4.63 UMCS

UMCS stands for Utility Monitoring and Control System. The term refers to all components by which a project site monitors, manages, and controls real-time operation of HVAC and other building systems. These components include the UMCS "front-end" and all field building control systems connected to the front-end. The front-end consists of Monitoring and Control Software (user interface software), browser-based user interfaces and network infrastructure.

The network infrastructure (the "UMCS Network"), is an IP network connecting multiple building or facility control networks to the Monitoring and Control Software.

1.4.64 UMCS Network

The UMCS Network connects multiple building or facility control networks to the Monitoring and Control Software.

1.4.65 Writeable Property

A Property is Writeable when it can be changed through the use of one or more of the WriteProperty services defined in ASHRAE 135, Clause 15 regardless of the value of any other Property. Note that in the ASHRAE 135

standard, some Properties may be writeable when the Out of Service Property is TRUE; for purposes of this Section, Properties that are only writeable when the Out of Service Property is TRUE are not considered to be Writeable.

1.5 PROJECT SEQUENCING

TABLE I: PROJECT SEQUENCING lists the sequencing of submittals as specified in paragraph SUBMITTALS (denoted by an 'S' in the 'TYPE' column) and activities as specified in PART 3 EXECUTION (denoted by an 'E' in the 'TYPE' column). TABLE I does not specify overall project milestone and completion dates.

a. Sequencing for Submittals: The sequencing specified for submittals is the deadline by which the submittal must be initially submitted to the Government. Following submission there will be a Government review period as specified in Section 01 33 00 SUBMITTAL PROCEDURES. If the submittal is not accepted by the Government, revise the submittal and resubmit it to the Government within 14 days of notification that the submittal has been rejected. Upon resubmittal there will be an additional Government review period. If the submittal is not accepted the process repeats until the submittal is accepted by the Government.

b. Sequencing for Activities: The sequencing specified for activities indicates the earliest the activity may begin.

c. Abbreviations: In TABLE I the abbreviation AAO is used for 'after approval of' and 'ACO' is used for 'after completion of'.

TABLE I. PROJECT SEQUENCING

ITEM #	TYPE	DESCRIPTION	SEQUENCING (START OF ACTIVITY OR DEADLINE
1	S	Existing Conditions Report	
2	S	DDC Contractor Design Drawings	
3	S	Manufacturer's Product Data	
4	S	Pre-construction QC Checklist	
5	E	Install Building Control System	AAO #1 thru #4
6	E	Start-Up and Start-Up Testing	ACO #5
7	S	Post-Construction QC Checklist	7 days ACO #6

TABLE I. PROJECT SEQUENCING			
ITEM #	TYPE	DESCRIPTION	SEQUENCING (START OF ACTIVITY OR DEADLINE
8	S	Programming Software Configuration Software	7 days ACO #6
9	S	Draft As-Built Drawings	7 days ACO #6
10	S	Start-Up Testing Report	7 days ACO #6
11	S	PVT Procedures	7 days before schedule start of #12 and AAO #10
12	E	Execute PVT	AAO #9 and #11
13	S	PVT Report	7 days ACO #12
14	S	Controller Application Programs Controller Configuration Settings	7 days AAO #13
15	S	Final As-Built Drawings	7 days AAO #13
16	S	O&M Instructions	AAO #15
17	S	Training Documentation	AAO #10 and 7 days before scheduled start of #18
18	E	Training	AAO #16 and #17
19	S	Closeout QC Checklist	ACO #18

1.6 SUBMITTALS

Government approval is required for submittals with a "G" designation; submittals not having a "G" designation are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

DDC Contractor Design Drawings; G

DDC Contractor Design Drawings as a single complete package: 6 hard copies and 6 copies on CD-ROM. Submit hardcopy drawings on A3 17 by 11 inches sheets, and electronic drawings in PDF and in AutoCAD format. In addition, submit electronic drawings in editable Excel format for all drawings that are tabular, including but not limited to the Point Schedule and Equipment Schedule.

Draft As-Built Drawings; G

Draft As-Built Drawings as a single complete package: 6 hard copies and 6 copies on CD-ROM. Submit hardcopy drawings on A3 17 by 11 inches sheets, and electronic drawings in PDF and in AutoCAD format. In addition, submit electronic drawings in editable Excel format for all drawings that are tabular, including but not limited to the Point Schedule and Equipment Schedule.

Final As-Built Drawings; G

Final As-Built Drawings as a single complete package: 6 hard copies and 6 copies on CD-ROM. Submit hardcopy drawings on A3 17 by 11 inches sheets, and electronic drawings in PDF and in AutoCAD format. In addition, submit electronic drawings in editable Excel format for all drawings that are tabular, including but not limited to the Point Schedule and Equipment Schedule.

SD-03 Product Data

Programming Software; G

Submit Programming Software on CD-ROM as a Technical Data Package. Submit 6 hard copies of the software user manual for each piece of software.

Controller Application Programs; G

Submit Controller Application Programs on CD-ROM as a Technical Data Package. Include on the CD-ROM a list or table of contents clearly indicating which application program is associated with each device. Submit 6 copies of the Controller Application Programs CD-ROM.

Configuration Software; G

Submit Configuration Software on CD-ROM as a Technical Data Package. Submit 6 hard copies of the software user manual for each piece of software.

Controller Configuration Settings; G

Submit Controller Configuration Settings on CD-ROM as a Technical Data Package. Include on the CD-ROM a list or table of contents clearly indicating which files are associated with each device. Submit 2 copies of the Controller Configuration Settings CD-ROM.

Manufacturer's Product Data; G

Submit Manufacturer's Product Data on CD-ROM.

SD-06 Test Reports

Existing Conditions Report; G

Four copies of the Existing Conditions Report.

Start-Up Testing Report; G

PVT Procedures; G

PVT Report; G

Four copies of the PVT Report. The PVT Report may be submitted as a Technical Data Package.

Pre-Construction Quality Control (QC) Checklist; G

Four copies of the Pre-Construction QC Checklist.

Post-Construction Quality Control (QC) Checklist; G

Four copies of the Post-Construction QC Checklist.

SD-10 Operation and Maintenance Data

Operation and Maintenance (O&M) Instructions; G

Submit 2 copies of the Operation and Maintenance Instructions, indexed and in booklet form. The Operation and Maintenance Instructions may be submitted as a Technical Data Package.

Training Documentation; G

Submit hardcopy training manuals and all training materials on CD-ROM. Provide one hardcopy manual for each trainee on the Course Attendee List and 2 additional copies for archive at the project site. Provide 2 copies of the Course Attendee List with the archival copies. Training Documentation may be submitted as a Technical Data Package.

SD-11 Closeout Submittals

Enclosure Keys; G

Password Summary Report; G

Provide Two hardcopies of the Password Summary Report, each copy in its own sealed envelope.

Closeout Quality Control (QC) Checklist; G

Four copies of the Closeout QC Checklist.

1.7 DATA PACKAGE AND SUBMITTAL REQUIREMENTS

Technical data packages consisting of technical data and computer software (meaning technical data which relates to computer software) which are specifically identified in this project and which may be defined/required in other specifications must be delivered strictly in accordance with the CONTRACT CLAUSES and in accordance with the Contract Data Requirements List, DD Form 1423. Data delivered must be identified by reference to the

particular specification paragraph against which it is furnished. All submittals not specified as technical data packages are considered 'shop drawings' under the Federal Acquisition Regulation Supplement (FARS) and must contain no proprietary information and be delivered with unrestricted rights.

1.8 SOFTWARE FOR DDC HARDWARE AND GATEWAYS

Provide all software related to the programming and configuration of DDC Hardware and Gateways as indicated. License all Software to the project site. The term "controller" as used in these requirements means both DDC Hardware and Gateways.

1.8.1 Configuration Software

For type of controller, provide the configuration tool software in accordance with Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS. Submit hard copies of the software user manuals for each software with the software submittal.

1.8.2 Controller Configuration Settings

For each controller, provide copies of the installed configuration settings as source code compatible with the configuration tool software for that controller in accordance with Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

1.8.3 Programming Software

For each type of programmable controller, provide the programming software in accordance with Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS. Submit hard copies of software user manuals for each software with the software submittal.

1.8.4 Controller Application Programs

For each programmable controller, provide copies of the application program as source code compatible with the programming software for that controller in accordance with Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

1.9 QUALITY CONTROL CHECKLISTS

The QC Checklist for BACnet Systems in APPENDIX A of this Section must be completed by the Contractor's Chief Quality Control (QC) Representative and submitted as indicated. The QC Representative must verify each item indicated and initial in the space provided to indicate that the requirement has been met. The QC Representative must sign and date the Checklist prior to submission to the Government.

1.9.1 Pre-Construction Quality Control (QC) Checklist

Complete items indicated as Pre-Construction QC Checklist items in the QC Checklist.

1.9.2 Post-Construction Quality Control (QC) Checklist

Complete items indicated as Post-Construction QC Checklist items in the QC Checklist.

1.9.3 Closeout Quality Control (QC) Checklist

Complete items indicated as Closeout QC Checklist items in the QC Checklist.

PART 2 PRODUCTS

Provide products meeting the requirements of Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS, and this Section.

2.1 GENERAL PRODUCT REQUIREMENTS

Units of the same type of equipment must be products of a single manufacturer. Each major component of equipment must have the manufacturer's name and address, and the model and serial number in a conspicuous place. Materials and equipment must be standard products of a manufacturer regularly engaged in the manufacturing of these and similar products. The standard products must have been in a satisfactory commercial or industrial use for two years prior to use on this project. The two year use must include applications of equipment and materials under similar circumstances and of similar size. DDC Hardware not meeting the two-year field service requirement is acceptable provided it has been successfully used by the Contractor in a minimum of two previous projects. The equipment items must be supported by a service organization. Items of the same type and purpose must be identical, including equipment, assemblies, parts and components.

2.2 PRODUCT DATA

Provide manufacturer's product data sheets documenting compliance with product specifications for each product provided under Section 23 09 13 INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS, or this Section. Provide product data for all products in a single indexed compendium, organized by product type. For each manufacturer, model and version (revision) of DDC Hardware indicate the type or types of DDC Hardware provide the Protocol Implementation Conformance Statement (PICS) in accordance with Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

2.3 OPERATION ENVIRONMENT

Unless otherwise specified, provide products rated for continuous operation under the following conditions:

a. Pressure: Pressure conditions normally encountered in the installed location.

b. Vibration: Vibration conditions normally encountered in the installed location.

c. Temperature:

(1) Products installed indoors: Ambient temperatures in the range of 32 to 112 degrees F and temperature conditions outside this range normally encountered at the installed location.

(2) Products installed outdoors or in unconditioned indoor spaces: Ambient temperatures in the range of -35 to +151 degrees F and temperature conditions outside this range normally encountered at the installed location.

d. Humidity: 10 to 95 percent relative humidity, noncondensing and humidity conditions outside this range normally encountered at the installed location.

2.4 Wireless Capability

For products incorporating any wireless capability (including but not limited to radio frequency (RF), infrared and optical), provide products for which wireless capability can be permanently disabled at the device. Optical and infrared capabilities may be disabled via a permanently affixed opaque cover plate.

2.5 ENCLOSURES

Enclosures supplied as an integral (pre-packaged) part of another product are acceptable. Provide two Enclosure Keys for each lockable enclosure on a single ring per enclosure with a tag identifying the enclosure the keys operate. Provide enclosures meeting the following minimum requirements:

2.5.1 Outdoors

For enclosures located outdoors, provide enclosures meeting NEMA 250 Type 4 requirements.

2.5.2 Mechanical and Electrical Rooms

For enclosures located in mechanical or electrical rooms, provide enclosures meeting NEMA 250 Type 2 requirements.

2.5.3 Other Locations

For enclosures in other locations including but not limited to occupied spaces, above ceilings, and in plenum returns, provide enclosures meeting NEMA 250 Type 1 requirements.

2.6 WIRE AND CABLE

Provide wire and cable meeting the requirements of NFPA 70 and NFPA 90A in addition to the requirements of this specification and referenced specifications.

2.6.1 Terminal Blocks

For terminal blocks which are not integral to other equipment, provide terminal blocks which are insulated, modular, feed-through, clamp style with recessed captive screw-type clamping mechanism, suitable for DIN rail mounting, and which have enclosed sides or end plates and partition plates for separation.

2.6.2 Control Wiring for Binary Signals

For Control Wiring for Binary Signals, provide 18 AWG copper or thicker wire rated for 300-volt service.

2.6.3 Control Wiring for Analog Signals

For Control Wiring for Analog Signals, provide 18 AWG or thicker, copper, single- or multiple-twisted wire meeting the following requirements:

a. minimum 2 inch lay of twist

b. 100 percent shielded pairs

c. at least 300-volt insulation

d. each pair has a 20 AWG tinned-copper drain wire and individual overall pair insulation

e. cables have an overall aluminum-polyester or tinned-copper cable-shield tape, overall 20 AWG tinned-copper cable drain wire, and overall cable insulation.

2.6.4 Power Wiring for Control Devices

For 24-volt circuits, provide insulated copper 18 AWG or thicker wire rated for 300 VAC service. For 120-volt circuits, provide 14 AWG or thicker stranded copper wire rated for 600-volt service.

2.6.5 Transformers

Provide UL 5085-3 approved transformers. Select transformers sized so that the connected load is no greater than 80 percent of the transformer rated capacity.

PART 3 EXECUTION

3.1 EXISTING CONDITIONS

3.1.1 Existing Conditions Survey

Perform a field survey, including testing and inspection of the equipment to be controlled and submit an Existing Conditions Report documenting the current status and its impact on the Contractor's ability to meet this specification. For those items considered nonfunctional, document the deficiency in the report including explanation of the deficiencies and estimated costs to correct the deficiencies. As part of the report, define the scheduled need date for connection to existing equipment. Make written requests and obtain Government approval prior to disconnecting any controls and obtaining equipment downtime.

3.1.2 Existing Equipment Downtime

Make written requests and obtain Government approval prior to disconnecting any controls and obtaining equipment downtime.

3.1.3 Existing Control System Devices

Inspect, calibrate, and adjust as necessary to place in proper working order all existing devices which are to be reused.

3.2 INSTALLATION

Fully install and test the control system in accordance Section 23 09 13

INSTRUMENTATION AND CONTROL DEVICES FOR HVAC, Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS, and this Section.

3.2.1 Dielectric Isolation

Provide dielectric isolation where dissimilar metals are used for connection and support. Install control system in a matter that provides clearance for control system maintenance by maintaining access space required to calibrate, remove, repair, or replace control system devices. Install control system such that it does not interfere with the clearance requirements for mechanical and electrical system maintenance.

3.2.2 Penetrations in Building Exterior

Make all penetrations through and mounting holes in the building exterior watertight.

3.2.3 Device Mounting Criteria

Install devices in accordance with the manufacturer's recommendations and as indicated and shown. Provide a weathershield for all devices installed outdoors. Provide clearance for control system maintenance by maintaining access space required to calibrate, remove, repair, or replace control system devices. Provide clearance for mechanical and electrical system maintenance; do not not interfere with the clearance requirements for mechanical and electrical system maintenance.

3.2.4 Labels and Tags

Key all labels and tags to the unique identifiers shown on the As-Built drawings. For labels exterior to protective enclosures provide engraved plastic labels mechanically attached to the enclosure or DDC Hardware. Labels inside protective enclosures may be attached using adhesive, but must not be hand written. For tags, provide plastic or metal tags mechanically attached directly to each device or attached by a metal chain or wire.

a. Label all Enclosures and DDC Hardware.

b. Tag Airflow measurement arrays (AFMA) with flow rate range for signal output range, duct size, and pitot tube AFMA flow coefficient.

c. Tag duct static pressure taps at the location of the pressure tap

3.2.5 SURGE PROTECTION

3.2.5.1 Power-Line Surge Protection

Protect equipment connected to AC circuits to withstand power-line surges in accordance with IEEE C62.41. Do not use fuses for surge protection.

3.2.5.2 Surge Protection for Transmitter and Control Wiring

Protect DDC hardware against or provided DDC hardware capable of withstanding surges induced on control and transmitter wiring installed outdoors and as shown. Protect equipment against the following two waveforms:

a. A waveform with a 10-microsecond rise time, a 1000-microsecond decay time and a peak current of 60 amps.

b. A waveform with an 8-microsecond rise time, a 20-microsecond decay time and a peak current of 500 amperes.

3.2.6 Basic Cybersecurity Requirements

3.2.6.1 Passwords

For all devices with a password, change the password from the default password. Coordinate selection of passwords with the COR and Tinker building controls shop. Provide a Password Summary Report documenting the password for each device and describing the procedure to change the password for each device.

3.2.6.2 Wireless Capability

Unless otherwise indicated, disable wireless capability (including but not limited to radio frequency (RF), infrared and optical) for all devices with wireless capability. Optical and infrared capabilities may be disabled via a permanently affixed opaque cover plate. Password protecting a wireless connections does not meet this requirement; the wireless capability must be disabled.

3.2.6.3 IP Network Physical Security

Install all IP Network media in conduit. Install all IP devices including but not limited to IP-enabled DDC hardware and IP Network Hardware in lockable enclosures.

3.3 DRAWINGS AND CALCULATIONS

Provide drawings in the form and arrangement indicated and shown. Use the same abbreviations, symbols, nomenclature and identifiers shown. Assign a unique identifier as shown to each control system element on a drawing. When packaging drawings, group schedules by system. When space allows, it is permissible to include multiple schedules for the same system on a single sheet. Except for drawings covering all systems, do not put information for different systems on the same sheet.

a. Submit DDC Contractor Design Drawings consisting of each drawing indicated with pre-construction information depicting the intended control system design and plans.

b. Submit Draft As-Built Drawings consisting of each drawing indicated updated with as-built data for the system prior to PVT.

c. Submit Final As-Built Drawings consisting of each drawing indicated updated with all final as-built data.

3.3.1 Sample Drawings

Sample drawings in electronic format are available via a link in the "Graphical Table of Contents" online at: http://www.wbdg.org/FFC/NAVGRAPH/graphtoc.pdf. These drawings may prove useful in demonstrating expected drawing formatting and example content and are provided for illustrative purposes only. Note that these drawings do not meet the content requirements of this Section and must be completed

to meet project requirements.

3.3.2 Drawing Index and Legend

Provide an HVAC Control System Drawing Index showing the name and number of the building, military site, State or other similar designation, and Country. In the Drawing Index, list all Contractor Design Drawings, including the drawing number, sheet number, drawing title, and computer filename when used. In the Design Drawing Legend, show and describe all symbols, abbreviations and acronyms used on the Design Drawings. Provide a single Index and Legend for the entire drawing package.

3.3.3 Thermostat and Occupancy Sensor Schedule

Provide a thermostat and occupancy sensor schedule containing each thermostat's unique identifier, room identifier and control features and functions as shown. Provide a single thermostat and occupancy sensor schedule for the entire project.

3.3.4 Damper Schedule

Provide a damper schedule containing each damper's unique identifier, type (opposed or parallel blade), nominal and actual sizes, orientation of axis and frame, direction of blade rotation, actuator size and spring ranges, operation rate, positive positioner range, location of actuators and damper end switches, arrangement of sections in multi-section dampers, and methods of connecting dampers, actuators, and linkages. Include the AMCA 511 maximum leakage rate at the operating static-pressure differential for each damper in the Damper Schedule. Provide a single damper schedule for the entire project.

3.3.5 Project Summary Equipment Schedule

Provide a project summary equipment schedule containing the manufacturer, model number, part number and descriptive name for each control device, hardware and component provided under this specification. Provide a single project equipment schedule for the entire project.

3.3.6 Equipment Schedule

Provide system equipment schedules containing the unique identifier, manufacturer, model number, part number and descriptive name for each control device, hardware and component provided under this specification. Provide a separate equipment schedule for each HVAC system.

3.3.7 Occupancy Schedule

Provide an occupancy schedule drawing containing the same fields as the occupancy schedule Contract Drawing with Contractor updated information. Provide a single occupancy schedule for the entire project.

3.3.8 DDC Hardware Schedule

Provide a single DDC Hardware Schedule for the entire project and including following information for each device.

3.3.8.1 DDC Hardware Identifier

The Unique DDC Hardware Identifier for the device.

3.3.8.2 HVAC System

The system "name" used to identify a specific system (the name used on the system schematic drawing for that system).

3.3.8.3 Device Object Identifier

The Device Object Identifier: The Object_Identifier of the Device Object

3.3.8.4 Network Number

The Network Number for the device.

3.3.8.5 MAC Address

The MAC Address for the device

3.3.8.6 BTL Listing

The BTL Listing of the device. If the device is listed under multiple BTL Profiles, indicate the profile that matches the use and configuration of the device as installed.

3.3.8.7 Proprietary Services Information

If the device uses non-standard ASHRAE 135 services as defined and permitted in Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS, indicate that the device uses non-standard services and include a description of all non-standard services used. Describe usage and content such that a device from another vendor can interoperate with the device using the non-standard service. Provide descriptions with sufficient detail to allow a device from a different manufacturer to be programmed to both read and write the non-standard service request:

a. read: interpret the data contained in the non-standard service and;

b. write: given similar data, generate the appropriate non-standard service request.

3.3.8.8 Alarming Information

Indicate whether the device is used for alarm generation, and which types of alarm generation the device implements: intrinsic, local algorithmic, remote algorithmic.

3.3.8.9 Scheduling Information

Indicate whether the device is used for scheduling.

3.3.8.10 Trending Information

Indicate whether the device is used for trending, and indicate if the device is used to trend local values, remote values, or both.

3.3.9 Points Schedule

Provide a Points Schedule in tabular form for each HVAC system, with the indicated columns and with each row representing a hardware point, network point or configuration point in the system.

a. When a Points Schedule was included in the Contract Drawing package, use the same fields as the Contract Drawing with updated information in addition to the indicated fields.

b. When Point Schedules are included in the contract package, items requiring contractor verification or input have been shown in angle brackets ("<" and ">"), such as <___> for a required entry or <value> for a value requiring confirmation. Complete all items in brackets as well as any blank cells. Do not modify values which are not in brackets without approval.

Points Schedule Columns must include:

3.3.9.1 Point Name

The abbreviated name for the point using the indicated naming convention.

3.3.9.2 Description

A brief functional description of the point such as "Supply Air Temperature".

3.3.9.3 DDC Hardware Identifier

The Unique DDC Hardware Identifier shown on the DDC Hardware Schedule and used across all drawings for the DDC Hardware containing the point.

3.3.9.4 Settings

The value and units of any setpoints, configured setpoints, configuration parameters, and settings related to each point.

3.3.9.5 Range

The range of values, including units, associated with the point, including but not limited to a zone temperature setpoint adjustment range, a sensor measurement range, occupancy values for an occupancy input, or the status of a safety.

3.3.9.6 Input or Output (I/O) Type

The type of input or output signal associated with the point. Use the following abbreviations for entrees in this column:

a. AI: The value comes from a hardware (physical) Analog Input

b. AO: The value is output as a hardware (physical) Analog Output

c. BI: The value comes from a hardware (physical) Binary Input

d. BO: The value is output as a hardware (physical) Binary Output

e. PULSE: The value comes from a hardware (physical) Pulse Accumulator

Input

f. NET-IN: The value is provided from the network (generally from another device). Use this entry only when the value is received from another device as part of scheduling or as part of a sequence of operation, not when the value is received on the network for supervisory functions such as trending, alarming, override or display at a user interface.

g. NET-OUT: The value is provided to another controller over the network. Use this entry only when the value is transmitted to another device as part of scheduling or as part of a sequence of operation, not when the value is transmitted on the network for supervisory functions such as trending, alarming, override or display at a user interface.

3.3.9.7 Object and Property Information

The Object Type and Instance Number for the Object associated with the point. If the value of the point is not in the Present_Value Property, then also provide the Property ID for the Property containing the value of the point. Any point that is displayed at the front end or on an LDP, is trended, is used by another device on the network, or has an alarm condition must be documented here.

3.3.9.8 Network Data Exchange Information (Gets Data From, Sends Data To)

Provide the DDC Hardware Identifier of other DDC Hardware the point is shared with.

3.3.9.9 Override Information (Object Type and Instance Number)

For each point requiring an Override, indicate if the Object for the point is Commandable or, if the use of a separate Object was specifically approved by the Contracting Officer, provide the Object Type and Instance Number of the Object to be used in overriding the point.

3.3.9.10 Trend Object Information

For each point requiring a trend, indicate if the trend is Local or Remote, the trend Object type and the trend Object instance number. For remote trends provide the DDC Hardware Identifier for the device containing the trend Object in the Points Schedule notes.

3.3.9.11 Alarm Information

Indicate the Alarm Generation Type, Event Enrollment Object Instance Number, and Notification Class Object Instance Number for each point requiring an alarm. (Note that not all alarms will have a Notification Class Object Event Enrollment Objects.

3.3.9.12 Configuration Information

Indicate the means of configuration associated with each point.

a. For Operator Configurable Points indicate BACnet Object and Property information (Name, Type, Identifiers) containing the configurable value. Indicate whether the property is writeable always, or only when Out_Of_Service is TRUE.

b. For Configurable Points indicate the BACnet Object and Property

information as for Operator Configurable points, or identification of the configurable settings from within the engineering software for the device or identification of the hardware settings on the device.

3.3.10 Riser Diagram

The Riser Diagram of the Building Control Network may be in tabular form, and must show all DDC Hardware and all Network Hardware, including network terminators. For each item, provide the unique identifier, common descriptive name, physical sequential order (previous and next device on the network), room identifier and location within room. A single riser diagram must be submitted for the entire system.

3.3.11 Control System Schematics

Provide control system schematics in the same form as the control system schematic Contract Drawing with Contractor updated information. Provide a control system schematic for each HVAC system.

3.3.12 Sequences of Operation

Provide HVAC control system sequence of operation and in the same format as the Contract Drawings. Within these drawings, refer to devices by their unique identifiers. Submit sequences of operation for each HVAC system.

3.3.13 Controller, Motor Starter and Relay Wiring Diagram

Provide controller wiring diagrams as functional wiring diagrams which show the interconnection of conductors and cables to each controller and to the identified terminals of input and output devices, starters and package equipment. Show necessary jumpers and ground connections and the labels of all conductors. Identify sources of power required for control systems and for packaged equipment control systems back to the panel board circuit breaker number, controller enclosures, magnetic starter, or packaged equipment control circuit. Show each power supply and transformer not integral to a controller, starter, or packaged equipment. Show the connected volt-ampere load and the power supply volt-ampere rating. Provide wiring diagrams for each HVAC system.

3.4 CONTROLLER TUNING

Tune each controller in a manner consistent with that described in the ASHRAE FUN IP and in the manufacturer's instruction manual. Tuning must consist of adjustment of the proportional, integral, and where applicable, the derivative (PID) settings to provide stable closed-loop control. Each loop must be tuned while the system or plant is operating at a high gain (worst case) condition, where high gain can generally be defined as a low-flow or low-load condition. Upon final adjustment of the PID settings, in response to a change in controller setpoint, the controlled variable must settle out at the new setpoint with no more than two (2) oscillations above and below setpoint. Upon settling out at the new setpoint the controller output must be steady. With the exception of naturally slow processes such as zone temperature control, the controller must settle out at the new setpoint within five (5) minutes. Set the controller to its correct setpoint and record and submit the final PID configuration settings with the O&M Instructions and on the associated Points Schedule.

3.5 START-UP

3.5.1 Start-Up Test

Perform the following startup tests for each control system to ensure that the described control system components are installed and functioning per this specification.

Adjust, calibrate, measure, program, configure, set the time schedules, and otherwise perform all necessary actions to ensure that the systems function as indicated and shown in the sequence of operation and other contract documents.

3.5.1.1 Systems Check

An item-by-item check must be performed for each HVAC system

3.5.1.1.1 Step 1 - System Inspection

With the system in unoccupied mode and with fan hand-off-auto switches in the OFF position, verify that power and main air are available where required and that all output devices are in their failsafe and normal positions. Inspect each local display panel and each M&C Client to verify that all displays indicate shutdown conditions.

3.5.1.1.2 Step 2 - Calibration Accuracy Check

Perform a two-point accuracy check of the calibration of each HVAC control system sensing element and transmitter by comparing the value from the test instrument to the network value provided by the DDC Hardware. Use digital indicating test instruments, such as digital thermometers, motor-driven psychrometers, and tachometers. Use test instruments with accuracy at least twice as accurate as the specified sensor accuracy and with calibration traceable to National Institute of Standards and Technology standards. Check one the first check point in the bottom one-third of the sensor range, and the second in the top one-third of the sensor range. Verify that the sensing element-to-DDC readout accuracies at two points are within the specified product accuracy tolerances, and if not recalibrate or replace the device and repeat the calibration check.

3.5.1.1.3 Step 3 - Actuator Range Check

With the system running, apply a signal to each actuator through the DDC Hardware controller. Verify proper operation of the actuators and positioners for all actuated devices and record the signal levels for the extreme positions of each device. Vary the signal over its full range, and verify that the actuators travel from zero stroke to full stroke within the signal range. Where applicable, verify that all sequenced actuators move from zero stroke to full stroke in the proper direction, and move the connected device in the proper direction from one extreme position to the other. For damper actuators, perform the actuator range check under normal system pressures.

3.5.1.2 Weather Dependent Test

Perform weather dependent test procedures in the appropriate climatic season.

3.5.2 Start-Up Testing Report

Submit 4 copies of the Start-Up Testing Report. The report may be submitted as a Technical Data Package documenting the results of the tests performed and certifying that the system is installed and functioning per this specification, and is ready for the Performance Verification Test (PVT).

3.6 PERFORMANCE VERIFICATION TEST (PVT)

3.6.1 PVT Procedures

Prepare PVT Procedures explaining step-by-step, the actions and expected results that will demonstrate that the control system performs in accordance with the sequences of operation, and other contract documents. Submit 4 copies of the PVT Procedures. The PVT Procedures may be submitted as a Technical Data Package.

3.6.1.1 Sensor Accuracy Checks

Include a one-point accuracy check of each sensor in the PVT procedures.

3.6.1.2 Endurance Test

Include a a one-week endurance test as part of the PVT during which the system is operated continuously. Use the building control system, BACnet Trend Log, or Trend Log Multiple Objects to trend all points shown as requiring a trend on the Point Schedule for the entire endurance test. If insufficient buffer capacity exists to trend the entire endurance test, upload trend logs during the course of the endurance test to ensure that no trend data is lost. Use the existing trending capabilities or the Temporary Trending Hardware as indicated to trend all points shown as requiring a trend on the Point Schedule for the entire endurance test. The PVT must include a methodology to measure and record the network bandwidth usage on each TP/FT-10 channel during the endurance test.

3.6.1.3 PVT Equipment List

Include in the PVT procedures a control system performance verification test equipment list that lists the equipment to be used during performance verification testing. For each piece of equipment, include manufacturer name, model number, equipment function, the date of the latest calibration, and the results of the latest calibration

3.6.2 PVT Execution

Demonstrate compliance of the control system with the contract documents. Using test plans and procedures approved by the Government, software capable of reading and writing COV Notification Subscriptions, Notification Class Recipient List Properties, event enrollments, demonstrate all physical and functional requirements of the project. Show, step-by-step, the actions and results demonstrating that the control systems perform in accordance with the sequences of operation. Do not start the performance verification test until after receipt of written permission by the Government, based on Government approval of the PVT Plan and Draft As-Builts and completion of balancing. UNLESS GOVERNMENT WITNESSING OF A TEST IS SPECIFICALLY WAIVED BY THE GOVERNMENT, PERFORM ALL TESTS WITH A GOVERNMENT WITNESS. Do not conduct tests during scheduled seasonal off periods of base heating and cooling systems. If the system experiences any

failures during the endurance test portion of the PVT, repair the system repeat the endurance test portion of the PVT until the system operates continuously and without failure for the specified endurance test period.

3.6.3 PVT Report

Prepare and submit a PVT report documenting all tests performed during the PVT and their results. Include all tests in the PVT procedures and any additional tests performed during PVT. Document test failures and repairs conducted with the test results.

3.7 OPERATION AND MAINTENANCE (O&M) INSTRUCTIONS

Provide HVAC control System Operation and Maintenance Instructions which include:

a. HVAC control system sequences of operation formatted as indicated.

b. Procedures for the HVAC system start-up, operation and shut-down including the manufacturer's supplied procedures for each piece of equipment, and procedures for the overall HVAC system.

c. As-built HVAC control system detail drawings formatted as indicated.

d. Routine maintenance checklist. Provide the routine maintenance checklist arranged in a columnar format, where the first column lists all installed devices, the second column states the maintenance activity or that no maintenance required, the third column states the frequency of the maintenance activity, and the fourth column is used for additional comments or reference.

e. Qualified service organization list, including at a minimum company name, contact name and phone number.

f. Start-Up Testing Report.

g. Performance Verification Test (PVT) Procedures and Report.

3.8 MAINTENANCE AND SERVICE

Provide services, materials and equipment as necessary to maintain the entire system in an operational state as indicated for a period of one year after successful completion and acceptance of the Performance Verification Test. Minimize impacts on facility operations.

a. The integration of the system specified in this section into a Utility Monitoring and Control System must not, of itself, void the warranty or otherwise alter the requirement for the one year maintenance and service period. Integration into a UMCS includes but is not limited to establishing communication between devices in the control system and the front end or devices in another system.

b. The changing of configuration properties must not, of itself, void the warranty or otherwise alter the requirement for the one year maintenance and service period.

3.8.1 Description of Work

Provide adjustment and repair of the system including the manufacturer's

required sensor and actuator (including transducer) calibration, span and range adjustment.

3.8.2 Personnel

Use only service personnel qualified to accomplish work promptly and satisfactorily. Advise the Government in writing of the name of the designated service representative, and of any changes in personnel.

3.8.3 Scheduled Inspections

Perform two inspections at six-month intervals and provide work required. Perform inspections in June and December. During each inspection perform the indicated tasks:

a. Perform visual checks and operational tests of equipment.

b. Clean control system equipment including interior and exterior surfaces.

c. Check and calibrate each field device. Check and calibrate 50 percent of the total analog inputs and outputs during the first inspection. Check and calibrate the remaining 50 percent of the analog inputs and outputs during the second major inspection. Certify analog test instrumentation accuracy to be twice the specified accuracy of the device being calibrated. Randomly check at least 25 percent of all binary inputs and outputs for proper operation during the first inspection. Randomly check at least 25 percent of the remaining binary inputs and outputs during the second inspection. If more than 20 percent of checked inputs or outputs failed the calibration check during any inspection, check and recalibrate all inputs and outputs during that inspection.

d. Run system software diagnostics and correct diagnosed problems.

e. Resolve any previous outstanding problems.

3.8.4 Scheduled Work

This work must be performed during non-working hours, Monday through Friday, including Federal holidays.

3.8.5 Emergency Service

The Government will initiate service calls when the system is not functioning properly. Qualified personnel must be available to provide service to the system. A telephone number where the service supervisor can be reached at all times must be provided. Service personnel must be at the site within 24 hours after receiving a request for service.

3.8.6 Operation

After performing scheduled adjustments and repairs, verify control system operation as demonstrated by the applicable tests of the performance verification test.

3.8.7 Records and Logs

Keep dated records and logs of each task, with cumulative records for each major component, and for the complete system chronologically. Maintain a

continuous log for all devices, including initial analog span and zero calibration values and digital points. Keep complete logs and provide logs for inspection onsite, demonstrating that planned and systematic adjustments and repairs have been accomplished for the control system.

3.8.8 Work Requests

Record each service call request as received and include its location, date and time the call was received, nature of trouble, names of the service personnel assigned to the task, instructions describing what has to be done, the amount and nature of the materials to be used, the time and date work started, and the time and date of completion. Submit a record of the work performed within 5 days after work is accomplished.

3.8.9 System Modifications

Submit recommendations for system modification in writing. Do not make system modifications, including operating parameters and control settings, without prior approval of the Government.

3.9 TRAINING

Conduct a training course for eight (8) operating staff members designated by the Government in the maintenance and operation of the system, including specified hardware and software. Conduct 40 hours of training at the project site within 30 days after successful completion of the performance verification test. The Government reserves the right to make audio and visual recordings (using Government supplied equipment)of the training sessions for later use. Provide audiovisual equipment and other training materials and supplies required to conduct training. A training day is defined as 8 hours of classroom instruction, including two 15 minute breaks and excluding lunchtime, Monday through Friday, during the daytime shift in effect at the training facility.

3.9.1 Training Documentation

Prepare training documentation consisting of:

a. Course Attendee List: Develop the list of course attendees in coordination with and signed by the Controls, HVAC, Electrical and shop supervisor.

b. Training Manuals: Provide training manuals which include an agenda, defined objectives for each lesson, and a detailed description of the subject matter for each lesson. When presenting portions of the course material by audiovisuals, deliver copies of those audiovisuals as a part of the printed training manuals.

3.9.2 Training Course Content

For guidance in planning the required instruction, assume that attendees will have a high school education, and are familiar with HVAC systems. During the training course, cover all of the material contained in the Operating and Maintenance Instructions, the layout and location of each controller enclosure, the layout of one of each type of equipment and the locations of each, the location of each control device external to the panels, the location of the compressed air station, preventive maintenance, troubleshooting, diagnostics, calibration, adjustment, commissioning, tuning, and repair procedures. Typical systems and similar systems may be

treated as a group, with instruction on the physical layout of one such system. Present the results of the performance verification test and the Start-Up Testing Report as benchmarks of HVAC control system performance by which to measure operation and maintenance effectiveness.

APPENDIX A

QC CHECKLIST FOR BACNET SYSTEMS

This checklist is not all-inclusive of the requirements of this specification and should not be interpreted as such.

Instructions: Initial each item in the space provided (|____|) verifying that the requirement has been met.

This checklist is for (circle one:)

Pre-Construction QC Checklist Submittal

Post-Construction QC Checklist Submittal

Close-out QC Checklist Submittal

Items verified for Pre-Construction, Post-Construction and Closeout QC Checklist Submittals:

1	All DDC Hardware is numbered on Control System Schematic Drawings.	|____|
2	Signal lines on Control System Schematic are labeled with the signal type.	|____|
3	Local Display Panel (LDP) Locations are shown on Control System Schematic drawings.	|____|
4	Controls added are working properly within the Honeywell EBI Front End.	|____|

Items verified for Post-Construction and Closeout QC Checklist Submittals:

4	All sequences are performed as specified using DDC Hardware.	|____|
5	Training schedule and course attendee list has been developed and coordinated with shops and submitted.	|____|

Items verified for Closeout QC Checklist Submittal:

6	Final As-built Drawings, including all Points Schedule drawings, accurately represent the final installed system.	|____|
7	Programming software has been submitted for all programmable controllers.	|____|
8	All software has been licensed to the Government.	
9	O&M Instructions have been completed and submitted.	|____|

	QC CHECKLIST FOR BACNET SYSTEMS	
10	Training course has been completed.	|____|
11	All DDC Hardware is installed on a BACnet ASHRAE 135 network using either MS/TP in accordance with Clause 9 or IP in accordance with Annex J.	|____|
12	All DDC Hardware is BTL listed.	|____|
13	Communication between DDC Hardware is only via BACnet using standard services, except as specifically permitted by the specification. Non-standard services have been fully documented in the DDC Hardware Schedule.	|____|
14	Scheduling, Alarming, and Trending have been implemented using the standard BACnet Objects for these functions.	|____|
15	All Properties indicated as required to be Writeable are Writeable and Overrides have been provided as indicated	|____|
	_____ _____	
	(QC Representative Signature) (Date)	

-- End of Section --

SECTION 23 09 13

INSTRUMENTATION AND CONTROL DEVICES FOR HVAC
11/15

PART 1 GENERAL

1.1 SUMMARY

This section provides for the instrumentation control system components excluding direct digital controllers, network controllers, gateways etc. that are necessary for a completely functional automatic control system. When combined with a Direct Digital Control (DDC) system, the Instrumentation and Control Devices covered under this section must be a complete system suitable for the control of the heating, ventilating and air conditioning (HVAC) and other building-level systems as specified and indicated.

a. Install hardware to perform the control sequences as specified and indicated and to provide control of the equipment as specified and indicated.

b. Install hardware such that individual control equipment can be replaced by similar control equipment from other equipment manufacturers with no loss of system functionality.

c. Install and configure hardware such that the Government or their agents are able to perform repair, replacement, and upgrades of individual hardware without further interaction with the installing Contractor.

1.1.1 Verification of Dimensions

After becoming familiar with all details of the work, verify all dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

1.1.2 Drawings

The Government will not indicate all offsets, fittings, and accessories that may be required on the drawings. Carefully investigate the mechanical, electrical, and finish conditions that could affect the work to be performed, arrange such work accordingly, and provide all work necessary to meet such conditions.

1.2 RELATED SECTIONS

Related work specified elsewhere.

Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC

Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM

1.3 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 142	(2007; Errata 2014) Recommended Practice for Grounding of Industrial and Commercial Power Systems - IEEE Green Book

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2020; ERTA 20-1 2020; ERTA 20-2 2020; TIA 20-1; TIA 20-2; TIA 20-3; TIA 20-4) National Electrical Code
NFPA 90A	(2021) Standard for the Installation of Air Conditioning and Ventilating Systems

UNDERWRITERS LABORATORIES (UL)

UL 5085-3	(2006; Reprint Nov 20121) Low Voltage Transformers - Part 3: Class 2 and Class 3 Transformers

1.4 SUBMITTALS

Submittal requirements are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

1.5 DELIVERY AND STORAGE

Store and protect products from the weather, humidity, and temperature variations, dirt and dust, and other contaminants, within the storage condition limits published by the equipment manufacturer.

1.6 INPUT MEASUREMENT ACCURACY

Select, install and configure sensors, transmitters and DDC Hardware such that the maximum error of the measured value at the input of the DDC hardware is less than the maximum allowable error specified for the sensor or instrumentation.

All new installed control systems shall be connected to the existing base wide Civil Engineering Community of Interest Network Enclave (CE COINCE). The new installed control systems shall be programmed into the base wide Honeywell Enterprise Building Integrator (EBI). The contractor shall contact and coordinate both connections with the CE IAM.

All new and replacement building level controllers shall be Honeywell Comfort Point Open CPO-PC-6A.

PART 2 PRODUCTS

2.1 EQUIPMENT

2.1.1 General Requirements

All products used to meet this specification must meet the indicated requirements, but not all products specified here will be required by every project. All products must meet the requirements both Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and this Section.

2.1.2 Operation Environment Requirements

Unless otherwise specified, provide products rated for continuous operation under the following conditions:

2.1.2.1 Pressure

Pressure conditions normally encountered in the installed location.

2.1.2.2 Vibration

Vibration conditions normally encountered in the installed location.

2.1.2.3 Temperature

a. Products installed indoors: Ambient temperatures in the range of 32 to 112 degrees F and temperature conditions outside this range normally encountered at the installed location.

b. Products installed outdoors or in unconditioned indoor spaces: Ambient temperatures in the range of -35 to +151 degrees F and temperature conditions outside this range normally encountered at the installed location.

2.1.2.4 Humidity

10 to 95 percent relative humidity, noncondensing and also humidity conditions outside this range normally encountered at the installed location.

2.2 WIRE AND CABLE

Provide wire and cable meeting the requirements of NFPA 70 and NFPA 90A in addition to the requirements of this specification and referenced specifications.

2.2.1 Terminal Blocks

For terminal blocks which are not integral to other equipment, provide terminal blocks which are insulated, modular, feed-through, clamp style with recessed captive screw-type clamping mechanism, suitable for DIN rail mounting, and which have enclosed sides or end plates and partition plates for separation.

2.2.2 Control Wiring for Binary Signals

For Control Wiring for Binary Signals, provide 18 AWG copper or thicker wire rated for 300-volt service.

2.2.3 Control Wiring for Analog Signals

For Control Wiring for Analog Signals, provide 18 AWG or thicker, copper, single- or multiple-twisted wire meeting the following requirements:

a. minimum 2 inch lay of twist

b. 100 percent shielded pairs

c. at least 300-volt insulation

d. each pair has a 20 AWG tinned-copper drain wire and individual overall pair insulation

e. cables have an overall aluminum-polyester or tinned-copper cable-shield tape, overall 20 AWG tinned-copper cable drain wire, and overall cable insulation.

2.2.4 Power Wiring for Control Devices

For 24-volt circuits, provide insulated copper 18 AWG or thicker wire rated for 300 VAC service. For 120-volt circuits, provide 14 AWG or thicker stranded copper wire rated for 600-volt service.

2.2.5 Transformers

Provide UL 5085-3 approved transformers. Select transformers sized so that the connected load is no greater than 80 percent of the transformer rated capacity.

2.3 SENSORS AND INSTRUMENTATION

Unless otherwise specified, provide sensors and instrumentation which incorporate an integral transmitter. Sensors and instrumentation, including their transmitters, must meet the specified accuracy and drift requirements at the input of the connected DDC Hardware's analog-to-digital conversion.

2.3.1 Analog and Binary Transmitters

Provide transmitters which match the characteristics of the sensor. Transmitters providing analog values must produce a linear 4-20 mAdc, 0-10 Vdc signal corresponding to the required operating range and must have zero and span adjustment. Transmitters providing binary values must have dry contacts rated at 1A at 24 Volts AC.

2.3.2 Network Transmitters

Sensors and Instrumentation incorporating an integral network connection are considered DDC Hardware and must meet the DDC Hardware requirements of Section 23 09 23.02 BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS.

2.3.3 Temperature Sensors

Provide the same sensor type throughout the project. Temperature sensors may be provided without transmitters. Where transmitters are used, the range must be the smallest available from the manufacturer and suitable for the application such that the range encompasses the expected range of temperatures to be measured. The end to end accuracy includes the combined effect of sensitivity, hysterisis, linearity and repeatability between the measured variable and the end user interface (graphic presentation) including transmitters if used.

2.3.3.1 Sensor Accuracy and Stability of Control

2.3.3.1.1 Conditioned Space Temperature

Plus or minus 0.5 degree F over the operating range.

2.3.3.2 Temperature Sensor Details

2.3.3.2.1 Room Type

Provide the sensing element components within a decorative protective cover suitable for surrounding decor.

PART 3 EXECUTION

3.1 INSTALLATION

3.1.1 General Installation Requirements

Perform the installation under the supervision of competent technicians regularly employed in the installation of DDC systems.

3.1.1.1 Device Mounting Criteria

All devices must be installed in accordance with manufacturer's recommendations and as specified and indicated.

3.1.2 Temperature Sensors

Install temperature sensors in locations that are accessible and provide a good representation of sensed media. Installations in dead spaces are not acceptable. Calibrate and install sensors according to manufacturer’s instructions. Select sensors only for intended application as designated or recommended by manufacturer.

3.1.2.1 Room Temperature Sensors

Mount the sensors on interior walls to sense the average room temperature at the locations indicated. Avoid locations near heat sources such as copy machines or locations by supply air outlet drafts. Mount the center of all user-adjustable sensors 54 inches above the floor to meet ADA requirements. Non user-adjustable sensors can be mounted as indicated in paragraph ROOM INSTRUMENT MOUNTING.

3.1.3 Wire and Cable

Provide complete electrical wiring for the Control System, including wiring to transformer primaries. Wire and Cable must be installed without splices between control devices and in accordance with NFPA 70 and NFPA 90A. Instrumentation grounding must be installed per the device manufacturer's instructions and as necessary to prevent ground loops, noise, and surges from adversely affecting operation of the system. Test installed ground rods as specified in IEEE 142. Cables and conductor wires must be tagged at both ends, with the identifier indicated on the shop drawings. Electrical work must be as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM and as indicated. Wiring external to enclosures must be run in raceways, except low-voltage control and low-voltage network wiring may be installed as follows:

a. plenum rated cable in suspended ceilings over occupied spaces may be run without raceways

b. nonmetallic-sheathed cables or metallic-armored cables may be installed as permitted by NFPA 70.

Install control circuit wiring not in raceways in a neat and safe manner. Wiring must not use the suspended ceiling system (including tiles, frames or hangers) for support. Where conduit or raceways are required, control circuit wiring must not run in the same conduit/raceway as power wiring over 50 volts. Run all circuits over 50 volts in conduit, metallic tubing, covered metal raceways, or armored cable.

-- End of Section --

SECTION 23 09 23.02

BACNET DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDING CONTROL SYSTEMS
11/15

PART 1 GENERAL

1.1 SUMMARY

Provide a complete Direct Digital Control (DDC) system, suitable for the control of the heating, ventilating and air conditioning (HVAC) and other building-level systems as specified and shown and in accordance with Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

The new DDC system shall be Honeywell or approved equal to allow seamless connection into the existing Honeywell base front end. The Temperature Control Contractor shall verify exact base front end with the COR before starting any work. Before the start of construction, the Temperature Control Contractor shall meet with the Base EMCs Supervisor to discuss recovery of existing working controls that are removed from the building.

All installed control systems shall be connected to the existing base wide Civil Engineering Community Of Interest Network Enclave (CE COINE). The control systems shall be programmed into the base wide Honeywell Enterprise Building Integrator (EBI). Contractor shall contact and coordinate connections with the CE IAM. All new and replacement building level controllers shall be Honeywell Comfort Point Open CPO-PC-6A.

1.1.1 System Requirements

Provide a system meeting the requirements of both Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and this Section and with the following characteristics:

a. Except for Gateways, the control system must be an open implementation of BACnet technology using ASHRAE 135 and Fox as the communications protocols. The system must use standard ASHRAE 135 Objects and Properties. The system must use standard ASHRAE 135 Services exclusively for communication over the network. Gateways to packaged units must communicate with other DDC hardware using ASHRAE 135 or the Fox protocol exclusively and may communicate with packaged equipment using other protocols. The control system must be installed such that any two ASHRAE 135 devices on the internetwork can communicate using standard ASHRAE 135 Services.

b. Install and configure control hardware to provide ASHRAE 135 Objects and Properties as indicated and as needed to meet the requirements of this specification.

c. Use standard BACnet hardware and software exclusively for scheduling, trending, and communication with a front end (UMCS). Use standard BACnet Objects and services for alarming. Use the ASHRAE 135 protocol for all other building communication.

1.1.2 Verification of Specification Requirements

Review all specifications related to the control system installation and advise the Contracting Officer of any discrepancies before performing any

work. If Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC or any other Section referenced in this specification is not included in the project specifications advise the Contracting Officer and either obtain the missing Section or obtain Contracting Officer approval before performing any work.

1.2 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 135	(2016; INT 1 2016; ERTA 1 2016) BACnet—A Data Communication Protocol for Building Automation and Control Networks

BACNET INTERNATIONAL (BTL)

BTL Guide	(v.46; 2015) BACnet Testing Laboratory Implementation Guidelines

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 802.3	(2015; CORR 2017) Ethernet

TELECOMMUNICATIONS INDUSTRY ASSOCIATION (TIA)

TIA-485	(1998a; R 2012) Electrical Characteristics of Generators and Receivers for Use in Balanced Digital Multipoint Systems

U.S. FEDERAL COMMUNICATIONS COMMISSION (FCC)

FCC Part 15	Radio Frequency Devices (47 CFR 15)

UNDERWRITERS LABORATORIES (UL)

UL 916	(2015) Standard for Energy Management Equipment

1.3 DEFINITIONS

For definitions related to this section, see Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

1.4 SUBMITTALS

Submittal requirements related to this Section are specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

PART 2 PRODUCTS

All products used to meet this specification must meet the indicated requirements, but not all products specified here will be required by every project. All products must meet the requirements both Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC and this Section.

2.1 NETWORK HARDWARE

2.1.1 BACnet Router

All BACnet Routers must be BACnet/IP Routers and must perform layer 3 routing of ASHRAE 135 packets over an IP network in accordance with ASHRAE 135 Annex J and Clause 6. The router must provide the appropriate connection to the IP network and connections to one or more ASHRAE 135 MS/TP networks. Devices used as BACnet Routers must meet the requirements for DDC Hardware, devices used as BACnet routers must support the NM-RC-B BIBB.

2.1.2 BACnet Gateways

In addition to the requirements for DDC Hardware, the BACnet Gateway must meet the following requirements:

a. It must perform bi-directional protocol translation from one non-ASHRAE 135 protocol to ASHRAE 135. BACnet Gateways must incorporate a network connection to an ASHRAE 135 network (either BACnet over IP in accordance with Annex J or MS/TP) and a separate connection appropriate for the non-ASHRAE 135 protocol and media.

b. It must retain its configuration after a power loss of an indefinite time, and must automatically return to their pre-power loss state once power is restored.

c. It must allow bi-directional mapping of data between the non-ASHRAE 135 protocol and Standard Objects as defined in ASHRAE 135. It must support the DS-RP-B BIBB for Objects requiring read access and the DS-WP-B BIBB for Objects requiring write access.

d. It must support the DS-COV-B BIBB.

Although Gateways must meet DDC Hardware requirements, they are not DDC Hardware and must not be used when DDC Hardware is required.

2.1.3 Ethernet Switch

Ethernet Switches must be managed switches and must autoconfigure between 10,100 and 1000 megabits per second (MBPS).

2.2 CONTROL NETWORK WIRING

a. BACnet MS/TP communications wiring must be in accordance with ASHRAE 135. The wiring must use shielded, three wire (twisted-pair with reference) cable with characteristic impedance between 100 and 120 ohms. Distributed capacitance between conductors must be less than 30 pF per foot.

b. Building Control Network Backbone IP Network must use Ethernet media. Ethernet cables must be CAT-5e at a minimum and meet all requirements of IEEE 802.3.

2.3 DIRECT DIGITAL CONTROL (DDC) HARDWARE

2.3.1 General Requirements

All DDC Hardware must meet the following requirements:

a. It must be locally powered and must incorporate a light to indicate the device is receiving power.

b. It must conform to the BTL Guide

c. It must be BACnet Testing Laboratory (BTL) Listed.

d. The Manufacturer's Product Data submittal for each piece of DDC Hardware must include the Protocol Implementation Conformance Statement (PICS) for that hardware as specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

e. It must communicate and be interoperable in accordance with ASHRAE 135 and have connections for BACnet IP or MS/TP control network wiring.

f. Other than devices controlling terminal units or functioning solely as a BACnet Router, it must support DS-COV-B, DS-RPM-A and DS-RPM-B BIBBs.

g. Devices supporting the DS-RP-A BIBB must also support the DS-COV-A BIBB.

h. Application programs, configuration settings and communication information must be stored in a manner such that they persist through loss of power:

   (1) Application programs must persist regardless of the length of time power is lost.

   (2) Configured settings must persist for any loss of power less than 2,500 hours.

   (3) Communication information, including but not limited to COV subscriptions, event reporting destinations, Notification Class Object settings, and internal communication settings, must persist for any loss of power less than 2,500 hours.

i. Internal Clocks:

   (1) Clocks in DDC Hardware incorporating a Clock must continue to function for 120 hours upon loss of power to the DDC Hardware.

   (2) DDC Hardware incorporating a Clock must support the DM-TS-B or DM-UTC-B BIBB.

j. It must have all functionality indicated and required to support the application (Sequence of Operation or portion thereof) in which it is used, including but not limited to providing Objects as specified and as indicated on the Points Schedule.

k. In addition to these general requirements and the DDC Hardware Input-Output (I/O) Function requirements, all DDC Hardware must also meet any additional requirements for the application in which it is used (e.g. scheduling, alarming, trending, etc.).

l. It must meet FCC Part 15 requirements and have UL 916 or equivalent safety listing.

m. Device must support Commandable Objects to support Override requirements as detailed in PART 3 EXECUTION.

n. User interfaces which allow for modification of Properties or settings must be password-protected.

o. Devices communicating BACnet MS/TP must meet the following requirements:

(1) Must have a configurable Max_Master Property.

(2) DDC Hardware other than hardware controlling a single terminal unit must have a configurable Max_Info_Frames Property.

(3) Must respond to any valid request within 50 msec with either the appropriate response or with a response of "Reply Postponed".

(4) Must use twisted pair with reference and shield (3-wire media) wiring, or twisted pair with shield (2-wire media) wiring and use half-wave rectification.

p. Devices communicating BACnet/IP must use UDP Port 0xBAC0. Devices with configurable UDP Ports must default to 0xBAC0.

q. All Device IDs, Network Numbers, and BACnet MAC addresses of devices must be fully configurable without limitation, except MS/TP MAC addresses may be limited by ASHRAE 135 requirements.

r. For programmable DDC Hardware, provide and license to the project site all programming software required to program the Hardware in accordance with Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

s. For programmable DDC Hardware, provide copies of the installed application programs (all software that is not common to every controller of the same manufacturer and model) as source code compatible with the supplied programming software in accordance with Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC. The submitted application program must be the complete application necessary for controller to function as installed and be sufficient to allow replacement of the installed controller with another controller of the same type.

2.3.2 Hardware Input-Output (I/O) Functions

DDC Hardware incorporating hardware input-output (I/O) functions must meet the following requirements:

2.3.2.1 Analog Inputs

DC Hardware analog inputs (AIs) must be implemented using ASHRAE 135 Analog Input Objects and perform analog to digital (A-to-D) conversion with a minimum resolution of 8 bits plus sign or better as needed to meet the accuracy requirements specified in Section 23 09 00. Signal conditioning including transient rejection must be provided for each analog input. Analog inputs must be capable of being individually calibrated for zero and span. Calibration via software scaling performed as part of point configuration is acceptable. The AI must incorporate common mode noise

rejection of at least 50 dB from 0 to 100 Hz for differential inputs, and normal mode noise rejection of at least 20 dB at 60 Hz from a source impedance of 10,000 ohms.

2.3.2.2 Analog Outputs

DDC Hardware analog outputs (AOs) must be implemented using ASHRAE 135 Analog Output Objects and perform digital to analog (D-to-A) conversion with a minimum resolution of 8 bits plus sign, and output a signal with a range of 4-20 mAdc or 0-10 Vdc. Analog outputs must be capable of being individually calibrated for zero and span. Calibration via software scaling performed as part of point configuration is acceptable. DDC Hardware with Hand-Off-Auto (H-O-A) switches for analog outputs must provide for overriding the output to 0 percent and to 100 percent.

2.3.2.3 Binary Inputs

DDC Hardware binary inputs (BIs) must be implemented using ASHRAE 135 Binary Input Objects and accept contact closures and must ignore transients of less than 5 milli-second duration. Protection against a transient 50VAC must be provided.

2.3.2.4 Binary Outputs

DDC Hardware binary outputs (BOs) must be implemented using ASHRAE 135 Binary Output Objects and provide relay contact closures or triac outputs for momentary and maintained operation of output devices. DDC Hardware with H-O-A switches for binary outputs must provide for overriding the output open or closed.

2.3.2.4.1 Relay Contact Closures

Closures must have a minimum duration of 0.1 second. Relays must provide at least 180V of isolation. Electromagnetic interference suppression must be provided on all output lines to limit transients to 50 Vac. Minimum contact rating must be 0.5 amperes at 24 Vac.

2.3.2.4.2 Triac Outputs

Triac outputs must provide at least 180 V of isolation. Minimum contact rating must be 0.5 amperes at 24 Vac.

2.3.2.5 Pulse Accumulator

DDC Hardware pulse accumulators must be implemented using either an ASHRAE 135 Accumulator Object or an ASHRAE 135 Analog Value Object where the Present_Value is the totalized pulse count. Pulse accumulators must accept contact closures, ignore transients less than 5 msec duration, protect against
transients of 50 VAC, and accept rates of at least 20 pulses per second.

2.3.2.6 ASHRAE 135 Objects for Hardware Inputs and Outputs

The requirements for use of ASHRAE 135 objects for hardware input and outputs includes devices where the hardware sensor or actuator is integral to the controller (e.g. a VAV box with integral damper actuator, a smart sensor, a VFD, etc.)

2.3.2.7 Integrated H-O-A Switches

Where integrated H-O-A switches are provided on hardware outputs, controller must provide means of monitoring position or status of H-O-A switch. This feedback may be provided via any valid BACnet method, including the use of proprietary Objects, Properties, or Services.

2.3.3 Local Display Panel (LDP)

The Local Display Panels (LDPs) must be DDC Hardware with a display and navigation buttons or a touch screen display, and must provide display and adjustment of ASHRAE 135 Properties as indicated on the Points Schedule and as specified. LDPs must be either BTL Listed as a B-OD, B-OWS, B-AWS, or be an integral part of another piece of DDC Hardware listed as a B-BC. For LDPs listed as B-OWS or B-AWS, the hardware must be BTL listed and the product must come factory installed with all applications necessary for the device to function as an LDP.

The adjustment of values using display and navigation buttons must be password protected.

2.3.4 Expansion Modules and Tethered Hardware

A single piece of DDC Hardware may consist of a base unit and also:

a. An unlimited number of hardware expansion modules, where the individual hardware expansion modules are designed to directly connect, both mechanically and electrically, to the base unit hardware. The expansion modules must be commercially available as an optional add-on to the base unit.

b. A single piece of hardware connected (tethered) to a base unit by a single cable where the cable carries a proprietary protocol between the base unit and tethered hardware. The tethered hardware must not contain control logic and be commercially available as an optional add-on to the base unit as a single package.

   Note that this restriction on tethered hardware does not apply to sensors or actuators using standard binary or analog signals (not a communications protocol); sensors or actuators using standard binary or analog signals are not considered part of the DDC Hardware.

Hardware capable of being installed stand-alone, or without a separate base unit, is DDC Hardware and must not be used as expansion modules or tethered hardware.

2.3.5 Supervisory Control Requirements

2.3.5.1 Alarm Generation Hardware

DDC Hardware used for alarm generation must meet the following requirements:

a. Device must support the AE-N-I-B BIBB.

b. The Recipient_List Property must be Writeable for all Notification Class Objects used for alarm generation.

c. It is preferred, but not required, that devices support the DM-OCD-B BIBB on all Notification Class Objects and Event Enrollment Objects,

such that a front end BTL listed as a B-AWS may create or delete Notification Class Objects and Event Enrollment Objects. It is also preferred, but not required that devices supporting the DM-OCD-B BIBB accept any valid value as an initial value for properties of Notification Class Objects and Event Enrollment Objects. Note that there are additional requirements in the EXECUTION Part of this Section for devices which do not support the DM-OCD-B BIBB as specified.

d. Devices provided to meet the the requirements indicated under "Support for Future Alarm Generation" in the EXECUTION part of this specification must support the AE-N-E-B BIBB.

2.3.5.2 Trending Hardware

DDC Hardware used for collecting trend data must meet the following requirements:

a. Device must support Trend Log or Trend Log Multiple Objects.

b. Device must support the T-VMT-I-B BIBB.

c. Devices provided to meet the EXECUTION requirement for support of Future Trending must support the T-VMT-E-B BIBB.

d. The following properties of all Trend Log or Trend Log Multiple Objects must be present and Writeable:

Start_Time
Stop_Time
Log_DeviceObjectProperty
Log Interval Log interval must support an interval of at least 60 minutes duration.

e. Trend Log Objects must support using Intrinsic Reporting to send a BUFFER_FULL event.

f. The device must have a Notification Class Object for the BUFFER_FULL event. The Recipient_List Property must be Writeable.

g. Devices must support values of at least 1,000 for Buffer_Size Properties.

h. It is preferred, but not required, that devices support the DM-OCD-B BIBB on all Trend Log Objects, such that a front end BTL listed as a A-AWS may create or delete Trend Log Objects. It is also preferred, but not required that devices supporting the DM-OCD-B BIBB accept any valid value as an initial value for properties of Trend Log Objects. Note that there are additional EXECUTION requirements for devices which do not support the DM-OCD-B BIBB as specified.

PART 3 EXECUTION

3.1 CONTROL SYSTEM INSTALLATION

3.1.1 Building Control Network (BCN)

Install the Building Control Network (BCN) as a single BACnet internetwork consisting of a single IP network as the BCN Backbone and zero or more BACnet MS/TP networks. Note that in some cases there may only be a single

device on the BCN Backbone.

Except for the IP Network and as permitted for the non-BACnet side of Gateways, use exclusively ASHRAE 135 networks.

3.1.1.1 Building Control Network IP Backbone

Install IP Network Cabling in conduit. Install Ethernet Switches in lockable enclosures. Install the Building Control Network (BCN) IP Backbone such that it is available at the Facility Point of Connection (FPOC) location. Coordinate the exact location with the COR. When the FPOC location is a room number, provide sufficient additional media to ensure that the Building Control Network (BCN) IP Backbone can be extended to any location in the room.

Use UDP port 0xBAC0 for all BACnet traffic on the IP network.

3.1.1.2 BACnet MS/TP Networks

When using MS/TP, provide MS/TP networks in accordance with ASHRAE 135 and in accordance with the ASHRAE 135 figure "Mixed Devices on 3-Conductor Cable with Shield" (Figure 9-1.4 in the 2012 version of ASHRAE 135). Ground the shield at the BACnet Router and at no other point. Ground the reference wire at the BACnet Router through a 100 ohm resistor and do not ground it at any other point. In addition:

a. Provide each segment in a doubly terminated bus topology in accordance with TIA-485.

b. Provide each segment with 2 sets of network bias resistors in accordance with ASHRAE 135, with one set of resistors at each end of the MS/TP network.

c. Use 3 wire (twisted pair and reference) with shield media for all MS/TP media installed inside. Use fiber optic isolation in accordance with ASHRAE 135 for all MS/TP media installed outside buildings, or between multiple buildings.

d. For 18 AWG cable, use segments with a maximum length of 4000 ft. When using greater distances or different wire gauges comply with the electrical specifications of TIA-485.

e. For each controller that does not use the reference wire provide transient suppression at the network connection of the controller if the controller itself does not incorporate transient suppression.

f. Install no more than 32 devices on each MS/TP segment. Do not use MS/TP to MS/TP routers.

g. For BACnet Routers, configure the MS/TP MAC address to 0. Assign MAC Addresses to other devices consecutively beginning at 1, with no gaps.

h. Configure the Max_Master Property of all devices to be 31.

3.1.1.3 Building Control Network (BCN) Installation

Provide a building control network meeting the following requirements:

a. Install all DDC Hardware connected to the Building Control Network.

b. Where multiple pieces of DDC Hardware are used to execute one sequence, install all DDC Hardware executing that sequence on a single MS/TP network dedicated to that sequence.

c. Traffic between BACnet networks must be exclusively via BACnet routers.

3.1.2 DDC Hardware

Install all DDC Hardware that connects to an IP network in lockable enclosure. Install other DDC Hardware that is not in suspended ceilings in lockable enclosures. For all DDC hardware with a user interface, coordinate with site to determine proper passwords and configure passwords into device.

a. Except for zone sensors (thermostats), install all Tethered Hardware within 6 feet of its base unit.

b. Install and configure all BTL-Listed devices in a manner consistent with their BTL Listing such that the device as provided still meets all requirements necessary for its BTL Listing.

c. Install and configure all BTL-Listed devices in a manner consistent with the BTL Device Implementation Guidelines such that the device as provided meets all those Guidelines.

3.1.2.1 Device Identifiers, Network Addresses, and IP addresses

a. Do not use any Device Identifier or Network Number already used by another BACnet system at the project site. Coordinate Device IDs and Network Numbers with the installation. The installation POC is the Honeywell.

b. Coordinate device IP addresses with installation. The installation POC is the 72 ABW/SC.

3.1.2.2 ASHRAE 135 Object Name Property and Object Description Property

Configure the Object_Names and Object_Descriptions properties of all ASHRAE 135 Objects (including Device Objects) as indicated on the Points Schedule (Point Name and Point Description) and as specified. At a minimum:

a. Except for DDC Hardware controlling a single terminal unit, configure the Object_Name and Object_Description properties of all Objects (including Device Objects) as indicated on the Points Schedule and as specified.

b. In DDC Hardware controlling a single terminal unit, configure the Device Object_Name and Device Object_Description as indicated on the Points Schedule and as specified.

When Points Schedule entries exceed the length limitations in the device, notify the COR and provide recommended alternatives for approval.

3.1.2.3 Hand-Off-Auto (H-O-A) Switches

Provide Hand-Off-Auto (H-O-A) switches as specified and as indicated on the Points Schedule. Provide H-O-A switches that are integral to the controller hardware, an external device co-located with (in the same enclosure as) the controller, integral to the controlled equipment, or an external device

co-located with (in the same enclosure as) the controlled equipment.

a. For H-O-A switches integral to DDC Hardware, meet the requirements specified in paragraph DIRECT DIGITAL CONTROL (DDC) HARDWARE.

b. For external H-O-A switches used for binary outputs, provide for overriding the output open or closed.

c. For eternal H-O-A switches used for analog outputs, provide for overriding through the range of 0 percent to 100 percent.

3.1.2.4 Local Display Panels

Provide LDPs to display and override values of points in ASHRAE 135 Object Properties as indicated on the Points Schedule. Install LDPs displaying points for anything other than a terminal unit in the same room as the equipment. Install LDPs displaying points for only terminal units in a mechanical room central to the group of terminal units it serves. For LDPs using WriteProperty to commandable objects to implement an override, write values with priority 10.

3.1.2.5 MS/TP Slave Devices

Configure all MS/TP devices as Master devices. Do not configure any devices to act as slave devices.

3.1.2.6 Change of Value (COV) and Read Property

a. To the greatest extent possible, configure all devices to support the SubscribeCOV service (the DS-COV-B BIBB). At a minimum, all devices supporting the DS-RP-B BIBB, other than devices controlling only a single terminal unit, must be configured to support the DS-COV-B BIBB.

b. Whenever supported by the server side, configure client devices to use the DS-COV-A BIBB.

3.1.2.7 Engineering Units

Configure devices to use English (Inch-Pound) engineering units as follows:

a. Temperature in degrees F

b. Air or natural gas flows in cubic feet per minute (CFM)

c. Water in gallons per minute (GPM)

d. Steam flow in pounds per hour (pph)

e. Differential Air pressures in inches of water column (IWC)

f. Water, steam, and natural gas pressures in PSI

g. Enthalpy in BTU/lb

h. Heating and cooling energy in MBTU (1MBTU = 1,000,000 BTU))

i. Cooling load in tons (1 ton = 12,000 BTU/hour)

j. Heating load in MBTU/hour (1MBTU = 1,000,000 BTU)

k. Electrical Power: kilowatts (kW)

l. Electrical Energy: kilowatt-hours (kWh)

3.1.2.8 Occupancy Modes

Use the following correspondence between value and occupancy mode whenever an occupancy state or value is required:

a. OCCUPIED mode: a value of one

b. UNOCCUPIED mode: a value of two

c. WARM-UP/COOL-DOWN (PRE-OCCUPANCY) mode: a value of three

Note that elsewhere in this Section the Schedule Object is required to also support a value of four, which is reserved for future use. Also note that the behavior of a system in each of these occupancy modes is indicated in the sequence of operation for the system.

3.1.2.9 Use of BACnet Objects

Use only standard non-proprietary ASHRAE 135 Objects and services to accomplish the project scope of work as follows:

a. Use Analog Input or Analog Output Objects for all analog hardware I/O. Do not use Analog Value Object for analog hardware I/O) .

b. Use Binary Input or Binary Output Objects for all binary hardware I/O. Do not use Binary Value Objects for binary hardware I/O.

c. Use Analog Value Objects for analog setpoints.

d. Use Accumulator Objects or Analog Value Objects for pulse inputs.

e. For occupancy modes, use Multistate Value Objects and the correspondence between value and occupancy mode specified in paragraph OCCUPANCY MODES.

f. Use Trend Log Objects or Trend Log Multiple Objects for all trending and Notification Class Objects for trend log upload. Use a combination of Event Enrollment Objects. Intrinsic Alarming, and Notification Class Objects for alarm generation.

g. For all other points shown on the Points Schedule as requiring an ASHRAE 135 Object, use the Object type shown on the Points Schedule or, if no Object Type is shown, use a standard Object appropriate to the point.

3.1.2.10 Use of Standard BACnet Services

Except as noted in this paragraph, for all DDC Hardware use Standard BACnet Services as defined in this specification (which excludes some ASHRAE 135 services) exclusively for application control functionality and communication.

DDC Hardware that cannot meet this requirement may use non-standard services provided they can provide identical functionality using Standard

BACnet Services when communicating with BACnet devices from a different vendor. When implementing non-standard services, document all non-standard services in the DDC Hardware Schedule as specified and as specified in Section 23 09 00 INSTRUMENTATION AND CONTROL FOR HVAC.

3.1.2.11 Device Application Configuration

a. For every property, setting or value shown on the Points Schedule or otherwise indicated as Configurable, provide a value that is retained through loss of power and can be changed via one or more of:

(1) BACnet services (including proprietary services)

(2) Hardware settings on the device

b. For every property, setting or value shown on the Points Schedule or otherwise indicated as Operator Configurable, provide a value that is retained through loss of power and can be changed via one or more of:

(1) A Writeable Property of a standard BACnet Object

(2) A Property of a standard BACnet Object that is Writeable when Out_Of_Service is TRUE and Out_Of_Service is Writeable.

3.1.3 Scheduling, Alarming, Trending, and Overrides

3.1.3.1 Scheduling

Configure schedules in BACnet Scheduling Objects to schedule systems as indicated on the Points Schedule and as specified using the indicated correspondence between value and occupancy mode. If no devices supports both the SCHED-E-B and DM-OCD-B BIBBS for Schedule Objects, provide 5 blank Schedule Objects in DDC Hardware BTL listed as B-BCs and supporting the SCHED-E-B BIBB for later use by the site.

Provide a separate schedule for each AHU including it's associated Terminal Units and for each stand-alone Terminal Unit (those not dependent upon AHU service) or group of stand-alone Terminal Units acting according to a common schedule.

3.1.3.2 Configuration Alarm Generation

Configure alarm generation as indicated on the Points Schedule and as specified using Intrinsic Alarming in accordance with ASHRAE 135 or Algorithmic Alarming in accordance with ASHRAE 135. Alarm generation must meet the following requirements:

a. Send alarm events as Alarms (not Events).

b. Use the ConfirmedNotification Service for alarm events.

c. For alarm generation, support two priority levels for alarms: critical and non-critical. Configure the Priority of Notification Class Objects to use Priority 112 for critical and 224 for non-critical alarms.

d. Number of Notification Class Objects for Alarm Generation:

(1) If the device implements non-critical alarms, or if any Object in the device supports Intrinsic Alarms, then provide a single

Notification Class Object specifically for (shared by) all non-critical alarms.

(2) If the device implements critical alarms, provide a single Notification Class Object specifically for (shared by) all critical alarms.

(3) If the device implements both critical and non-critical alarms, provide both Notification Class Objects (one for critical, one for non-critical).

(4) If the device controls equipment other than a single terminal unit, provide both Notification Class Objects (one for critical, one for non-critical) even if no alarm generation is required at time of installation.

e. For all intrinsic alarms configure the Limit_Enable Property to set both HighLimitEnable and LowLimitEnable to TRUE. If the specified alarm conditions are for a single-sided alarm (only High_Limit used or only Low_Limit used) assign a value to the unused limit such that the unused alarm condition will not occur.

f. For all objects supporting intrinsic alarming, even if no alarm generation is required during installation, configure the following Properties as follows:

(1) Notification_Class to point to the non-Critical Notification Class Object in that device.

(2) Limit_Enable to enable both the HighLimitEnable and LowLimitEnable

(3) Notify_Type to Alarm

g. Use of alarm generation types:

(1) Only use algorithmic alarm generation when intrinsic alarm generation is not supported by the device or object, or when the specific alarm conditions cannot be implemented using intrinsic alarm generation.

(2) Only use remote alarm generation when the alarm cannot be generated using intrinsic or local algorithmic alarm generation on the device containing the referenced property. If remote alarm generation is used, use the same DDC Hardware for all remote alarm generation within a single sequence.

3.1.3.3 Support for Future Alarm Generation

For every piece of DDC Hardware, support future alarm generation capabilities by supporting either intrinsic or additional algorithmic alarming. Provide one of the following:

a. Support intrinsic alarming for every Object used by the application in that device.

b. Support additional Event_Enrollment Objects. For DDC hardware controlling a single terminal unit, support at least one additional object. Otherwise, support at least 4 additional Objects. Support additional Event_Enrollment Objects via one of the following:

(1) Provide unused Event_Enrollment Objects on that device.

(2) Support the DM-OCD-B BIBB and the creation of sufficient Event_Enrollment Objects on that device.

(3) Provide one or more devices in the IP network that support the AE-N-E-B BIBB and have unused Event_Enrollment Objects.

(4) Provide one or more devices on the IP network that support the AE-N-E-B BIBB, the DM-OCD-B BIBB, and the creation of sufficient Event_Enrollment Objects.

The total number of Event_Enrollment Objects required by the project is the sum of the individual device requirements, and the distribution of Event_ Enrollment Objects among devices is not further restricted. (Note this allows a single device to contain many Event_Enrollment Objects satisfying the requirements for multiple devices.)

3.1.3.4 Trend Log Configuration

a. Configure trends in Trend Log or Trend Log Multiple Objects as indicated on the Points Schedule and as specified.

b. Configure all trend logs (including any provided to support future trends) to save data on regular intervals using the BUFFER_FULL event to request trend upload from the front end.

c. Configure Trend Log Objects with a minimum Buffer_Size property value of 1,000 and Trend Log Multiple Objects with a minimum Buffer_Size property value of 1,000 per point trended (for example, a Trend Log Multiple Object used to trend 3 points must have a Buffer_Size Property value of at least 3,000).

d. Configure a Notification Class Object in devices doing trending (including devices supporting future trends) to handle the BUFFER_FULL event.

e. When possible, trend each point using an Object in the device containing the point. When it is necessary to trend using a an Object in another device, all trends not on the same Device as the Object being trended must be on a singe device (i.e. all Trend Log and Trend Log Multiple Objects used for remote trending within a sequence must be on the same device).

f. For each trend log, including any trend logs provided to support future trending, configure the following properties as specified:

(1) Logging_Type: Set to Polling

(2) Stop_When_Full: Set to Wrap Around

(3) Buffer_Size: Set to 400 or greater.

(4) Notification_Threshold: Set to 90 percent of full

(5) Notification_Class: Set to the Notification Class Object in that device

(6) Event_Enable: Set to TRUE

(7) Log_Interval: Set to 15 minutes.

g. Future Trending support. Provide support for future trending:

(1) Provide one or more devices on the Building Control Network Backbone IP network which support both the T-VMT-E-B and DM-OCD-B BIBBs for Trend Log Objects. Provide sufficient devices to support the creation of at least one additional Trend Log Object for every terminal unit plus 4 additional Trend Log Objects for every non-terminal unit.

(2) Provide one additional Trend Log Object for every terminal unit plus 4 additional Trend Log Objects for every non-terminal unit in one or more devices on the Building Control Network Backbone IP network that support the T-VMT-E-B BIBB for later use by the site.

(3) A combination of these two methods is permitted provided the total required number of Trend Log Objects is met.

3.1.3.5 Overrides

Provide an override for each point shown on the Points Schedule as requiring an override.

Unless otherwise approved, provide Commandable Objects to support all Overrides in Framework Supervisory Gateway DDC Hardware. With specific approval from the contracting officer, Overrides for points which are not hardware outputs and which are in DDC hardware controlling a single terminal unit may support overrides via an additional Object provided for the override. No other means of implementing Overrides may be used.

a. Where Commandable Objects are used, ensure that WriteProperty service requests with a Priority of 10 or less take precedence over the SEQUENCE VALUE and that WriteProperty service request with a priority of 11 or more have a lower precedence than the SEQUENCE VALUE.

b. For devices implementing overrides via additional Objects, provide Objects which are NOT Written to as part of the normal Sequence of Operations and are Writeable when Out_Of_Service is TRUE and Out_Of_Service is Writeable. Use this point as an Override of the normal value when Out_Of_Service is TRUE and the normal value otherwise. Note these Objects may be modified as part of the sequence via local processes, but must not be modified by local processes when Out_Of_Service is TRUE.

3.1.4 BACnet Gateways

The requirements in this paragraph do not permit the installation of hardware not meeting the other requirements of this section. All control hardware installed under this project must meet the requirements of this specification, including control hardware provided as part of a package unit or as part of equipment specified under another section. Only use gateways to connect to pre-existing control devices.

Provide BACnet Gateways to non-BACnet control hardware as required to connect existing non-BACnet packaged units and in accordance with the following:

a. Each gateway must communicate with and perform protocol translation for non-BACnet control hardware controlling one and only one package unit.

b. Connect one network port on the gateway to the Building Control Backbone IP Network or to a BACnet MS/TP network and the other port to the single piece of controlled equipment.

c. Configure gateways to map writeable data points in the controlled equipment to Writeable Properties of Standard Objects as indicated in the Points Schedule and as specified.

d. Configure gateway to map readable data points in the controlled equipment to Readable Properties of Standard Objects as indicated in the Points Schedule and as specified.

e. Configure gateway to support the DS-COV-B BIBB for all points mapped to BACnet Objects.

f. Do not use non-BACnet control hardware for controlling built-up units or any other equipment that was not furnished with factory-installed controls.

g. Do not use non-BACnet control hardware for system scheduling functions.

h. Non-BACnet network wiring connecting the gateway to the package unit must not exceed 10 feet in length and must connect to exactly two devices: the controlled equipment (packaged unit) and the gateway.

-- End of Section -- -- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 23 81 00

DECENTRALIZED UNITARY HVAC EQUIPMENT
05/18, CHG 1: 02/21

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

AIR-CONDITIONING, HEATING AND REFRIGERATION INSTITUTE (AHRI)

AHRI 340/360 I-P	(2015) Performance Rating of Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment

AMERICAN SOCIETY OF HEATING, REFRIGERATING AND AIR-CONDITIONING ENGINEERS (ASHRAE)

ASHRAE 15 & 34	(2013) ASHRAE Standard 34-2016 Safety Standard for Refrigeration Systems/ASHRAE Standard 34-2016 Designation and Safety Classification of Refrigerants-ASHRAE Standard 34-2016
ASHRAE 52.2	(2017) Method of Testing General Ventilation Air-Cleaning Devices for Removal Efficiency by Particle Size
ASHRAE 55	(2010) Thermal Environmental Conditions for Human Occupancy
ASHRAE 62.1	(2016) Ventilation for Acceptable Indoor Air Quality
ASHRAE 90.1 - IP	(2013) Energy Standard for Buildings Except Low-Rise Residential Buildings

AMERICAN SOCIETY OF CIVIL ENGINEERS (ASCE)

ASCE 7	(2017) Minimum Design Loads for Buildings and Other Structures

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

ASME B16.22	(2021) Wrought Copper and Copper Alloy Solder Joint Pressure Fittings
ASME B16.26	(2018) Standard for Cast Copper Alloy Fittings for Flared Copper Tubes
ASME B16.29	(2017) Wrought Copper and Wrought Copper

	Alloy Solder-Joint Drainage Fittings - DWV
ASME BPVC SEC IX	(2017; Errata 2018) BPVC Section IX-Welding, Brazing and Fusing Qualifications
ASME BPVC SEC VIII D1	(2019) BPVC Section VIII-Rules for Construction of Pressure Vessels Division 1

AMERICAN WELDING SOCIETY (AWS)

AWS Z49.1	(2012) Safety in Welding and Cutting and Allied Processes

ASTM INTERNATIONAL (ASTM)

ASTM B62	(2017) Standard Specification for Composition Bronze or Ounce Metal Castings
ASTM B75/B75M	(2020) Standard Specification for Seamless Copper Tube
ASTM B117	(2019) Standard Practice for Operating Salt Spray (Fog) Apparatus
ASTM B209	(2014) Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
ASTM B280	(2020) Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service
ASTM B306	(2020) Standard Specification for Copper Drainage Tube (DWV)
ASTM C534/C534M	(2020a) Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form
ASTM D520	(2000; R 2011) Zinc Dust Pigment
ASTM D3451	(2006; R 2017) Standard Guide for Testing Coating Powders and Powder Coatings
ASTM E84	(2020) Standard Test Method for Surface Burning Characteristics of Building Materials

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA MG 1	(2018) Motors and Generators
NEMA MG 2	(2014) Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators

U.S. DEPARTMENT OF DEFENSE (DOD)

MIL-DTL-5541	(2006; Rev F) Chemical Conversion Coatings on Aluminum and Aluminum Alloys

UNDERWRITERS LABORATORIES (UL)

UL 1995	(2015) UL Standard for Safety Heating and Cooling Equipment

1.2 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-03 Product Data

Spare Parts

Posted Instructions

Coil Corrosion Protection

System Performance Tests

Training; G

Inventory

Supplied Products

Manufacturer's Standard Catalog Data; G

Refrigerant Piping & Insulation; G

Condensate Drain Piping & Insulation; G

SD-06 Test Reports

Refrigerant Tests, Charging, and Start-Up; G

System Performance Tests; G

SD-07 Certificates

Service Organizations

SD-10 Operation and Maintenance Data

Operation and Maintenance Manuals; G

SD-11 Closeout Submittals

Ozone Depleting Substances; S

1.3 QUALITY ASSURANCE

Carefully investigate the plumbing, fire protection, electrical, structural and finish conditions that would affect the work to be performed and arrange such work accordingly, furnishing required offsets, fittings, and accessories to meet such conditions. Submit drawings consisting of:

a. Equipment layouts which identify assembly and installation details.

b. Plans and elevations which identify clearances required for maintenance and operation.

c. Wiring diagrams which identify each component individually and interconnected or interlocked relationships between components.

d. Foundation drawings, bolt-setting information, and foundation bolts prior to concrete foundation construction for equipment indicated or required to have concrete foundations.

e. Details, if piping and equipment are to be supported other than as indicated, which include loadings and type of frames, brackets, stanchions, or other supports.

f. Automatic temperature control diagrams and control sequences.

g. Installation details which includes the amount of factory set superheat and corresponding refrigerant pressure/temperature.

h. Equipment schedules

1.4 DELIVERY, STORAGE, AND HANDLING

Protect stored items from the weather, humidity and temperature variations, dirt and dust, or other contaminants. Properly protect and care for all material both before and during installation. Submit an inventory of all the stored items. Replace any materials found to be damaged, at no additional cost to the Government. During installation, cap piping and similar openings capped to keep out dirt and other foreign matter.

1.5 ENVIRONMENTAL REQUIREMENTS

For proper Indoor Environmental Quality, maintain pressure within the building as indicated. Ventilation must meet or exceed ASHRAE 62.1 and all published addenda. Meet or exceed filter media efficiency as tested in accordance with ASHRAE 52.2. Thermal comfort must meet or exceed ASHRAE 55.

1.6 WARRANTY

Provide equipment with the 5 year manufacturer's warranty.

PART 2 PRODUCTS

2.1 ENERGY EFFICIENCY REQUIREMENTS

42 USC 8259b requires the procurement of energy efficient products in product categories covered by the Energy Star program or the Federal Energy Management Program for designated products. A list of covered product categories is available from the Federal Energy Management Web site at http://energy.gov/eere/femp/covered-product-categories. A list of

qualified light commercial products is available at http://www.energystar.gov/productfinder/product/certified-light-commercial-hvac/results.

Submit Material, Equipment, and Fixtures List of all supplied products within a covered product category, including manufacturer's catalog numbers, specification and drawing reference number, warranty information, fabrication site, and energy performance data. For product categories covered by the Energy Star program, submit documentation that the product is Energy Star-qualified. For product categories covered by the Federal Energy Management Program, submit documentation that the product meets or exceeds FEMP-designated efficiency requirements.

2.1.1 Air-Source Heat Pumps

Selected air-source heat pumps are required to meet applicable performance requirements specified by Energy Star. Information on the requirements can be found for residential models (single-phase units of 65,000 BTU/h or less)at http://www.energystar.gov/products/specs/system/files/Central_ASHP_and_CAC_Program_Requi v4_1.pdf and for light commercial models (three-phase units of less than 240,000 BTU/h) at http://www.energystar.gov/products/specs/system/files/lchvac_prog_req_v2_2_0.pdf.

2.2 MATERIALS

Provide Manufacturer's standard catalog data, at least 5 weeks prior to the purchase or installation of a particular component, highlighted to show material, size, options, performance charts and curves, etc. in adequate detail to demonstrate compliance with contract requirements. Data includes manufacturer's recommended installation instructions and procedures. If vibration isolation is specified for a unit, include vibration isolator literature containing catalog cuts and certification that the isolation characteristics of the isolators provided meet the manufacturer's recommendations. Submit data for each specified component. Minimum efficiency requirements must be in accordance with ASHRAE 90.1 - IP.

2.2.1 Standard Products

Provide materials and equipment that are standard products of a manufacturer regularly engaged in the manufacturing of such products, which are of a similar material, design and workmanship. The standard products must have been in satisfactory commercial or industrial use for 2 years prior to request for proposal. The 2 year use includes applications of equipment and materials under similar circumstances and of similar size. The 2 years' experience must be satisfactorily completed by a product which has been sold or is offered for sale on the commercial market through advertisements, manufacturer's catalogs, or brochures. Products having less than a 2 year field service record will be acceptable if a certified record of satisfactory field operation, for not less than 6000 hours exclusive of the manufacturer's factory tests, can be shown. Products must be supported by a service organization. Ensure system components are environmentally suitable for the indicated geographic locations.

2.2.2 Product Sustainability Criteria

2.2.2.1 Energy Efficient Equipment

Provide only energy-using products that are Energy Star rated or

haveFederal Energy Management Program (FEMP) recommended efficiency. Where Energy Star or FEMP recommendations have not been established, providemost efficient products that are life-cycle cost-effective. Provide onlyenergy using products that meet FEMP requirements for low standby powerconsumption. Energy efficient products can be found at:https://www.energy.gov/eere/femp/federal-energy-management-program andhttp://www.energystar.gov/.For construction submittal documentation, provide proof that product is labeled energy efficient and complies with the cited requirements.

2.2.2.2 Electrical Equipment / Motors

Provide electrical equipment, motors, motor efficiencies, and wiring which are in accordance with Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM. Electrical motor driven equipment specified must be provided complete with motors, motor starters, and controls. Electrical characteristics must be as shown, and unless otherwise indicated, all motors of 1 horsepower and above with open, dripproof, totally enclosed, or explosion proof fan cooled enclosures, must be the premium efficiency type in accordance with NEMA MG 1. Field wiring must be in accordance with manufacturer's instructions. Each motor must conform to NEMA MG 1 and NEMA MG 2 and be of sufficient size to drive the equipment at the specified capacity without exceeding the nameplate rating of the motor. Motors must be continuous duty with the enclosure specified. Motor starters must be provided complete with thermal overload protection and other appurtenances necessary for the motor control indicated. Motors must be furnished with a magnetic across-the-line or reduced voltage type starter as required by the manufacturer. Motor duty requirements must allow for maximum frequency start-stop operation and minimum encountered interval between start and stop. Motors must be sized for the applicable loads. Motor torque must be capable of accelerating the connected load within 20 seconds with 80 percent of the rated voltage maintained at motor terminals during one starting period. Motor bearings must be fitted with grease supply fittings and grease relief to outside of enclosure. Manual or automatic control and protective or signal devices required for the operation specified and any control wiring required for controls and devices specified, but not shown, must be provided.

2.2.2.3 Ozone Depleting Substances

Unitary air conditioning equipment must not use CFC-based refrigerants. Refrigerant may be an approved alternative refrigerant in accordance with EPA's Significant New Alternative Policy (SNAP) listing.

2.2.3 Nameplates

Major equipment including compressors, condensers, receivers, heat exchanges, fans, and motors must have the manufacturer's name, address, type or style, model or serial number, and catalog number on a plate secured to the item of equipment. Plates must be durable and legible throughout equipment life and made of anodized aluminum or stainless steel. Fix plates in prominent locations with nonferrous screws or bolts.

2.2.4 Safety Devices

Exposed moving parts, parts that produce high operating temperature, parts which may be electrically energized, and parts that may be a hazard to operating personnel must be insulated, fully enclosed, guarded, or fitted with other types of safety devices. Safety devices must be installed so that proper operation of equipment is not impaired. Welding and cutting

safety requirements must be in accordance with AWS Z49.1.

2.3 EQUIPMENT

2.3.1 Mini-Split-System Heat Pumps

2.3.1.1 Small-Capacity Split-System Heat Pumps (Not Exceeding 65,000 Btu/hr)

Provide an air-cooled, split system which employs a remote condensing unit, a separate wall mounted indoor unit, and interconnecting refrigerant piping. Provide the heat pump type unit conforming to applicable Underwriters Laboratories (UL) standards including UL 1995. Unit must be rated in accordance with AHRI 340/360 I-P. Provide indoor unit with necessary fans, air filters, and cabinet. The remote unit must be as specified in paragraph CONDENSING UNIT.

2.3.1.1.1 Energy Efficiency

Provide unit with an Energy Star label. Heat pumps must have an energy efficiency ratio as indicated on plans.

2.3.1.1.2 Condensing Unit (Outdoor Unit)

The outdoor units shall be specifically designed to work with the selected indoor units. The connected indoor unit shall be of the same capacity as the outdoor unit. The outdoor units must have a thermally fused powder coated finish. The outdoor unit shall be completely factory assembled, piped and wired. Each unit shall be run tested at the factory.

Outdoor unit shall have a sound rating no higher than 53 dB(A). If an alternate manufacturer is selected, any additional material, cost, and labor to meet published sound levels shall be incurred by the contractor.

Refrigerant lines from the outdoor unit to the indoor units shall be insulated in accordance with the installation manual.

The outdoor unit shall meet performance requirements per schedule and be within piping limitations and acceptable ambient temperature ranges as described in respective manufacturers' published product catalogs. Non-published product capabilities or performance data are not acceptable.

Four-legged outdoor unit mounting systems shall be provided by manufacturer. Stand shall be made from 7 gauge plate steel with thermally fused polyester powder coat finish that meets ASTM D3451-06 standards. Stands shall be provided with galvanized mounting hardware and meets all ASCE 7 overturning safety requirement.

The outdoor unit shall be provided with a manufacturer supplied 20 gauge hot dipped galvanized wind baffle. The wind baffle shall allow for continuous cooling to 0FDB without any additional modifications to the unit.

2.3.1.1.2.1 Casing

The casing shall be fabricated of galvanized steel, bonderized, finished with an electrostatically applied, thermally fused acrylic or polyester powder coating for corrosion protection. Assembly hardware shall be cadmium plated for weather resistance.

Easy access shall be afforded to all serviceable parts by means of removable panel sections.

Two (2) mild steel mounting feet, traverse mounted across the cabinet base pan, welded mount, providing four (4) slotted mounting holes shall be furnished. Assembly shall withstand lateral wind gust up to 155 MPH to meet applicable weather codes.

The casing(s) shall be fabricated of galvanized steel, bonderized and finished. Outdoor unit components shall be coated per the requirements of the Coil Corrosion Protection paragraph.

2.3.1.1.2.2 Fan

Units shall be furnished with a single direct drive propeller type fan.The outdoor unit fan motor(s) shall be a direct current (DC) motor and have permanently lubricated bearings.The fan motor shall be mounted for quiet operation.

The fan shall be provided with a raised guard to prevent contact with moving parts.The outdoor unit shall have horizontal discharge airflow.

2.3.1.1.2.3 Refrigerant and Refrigerant Piping

R410A refrigerant shall be required for systems.Polyolester (POE) oil—widely available and used in conventional domestic systems—shall be required. Prior to bidding, manufacturers using alternate oil types shall submit material safety data sheets (MSDS) and comparison of hygroscopic properties for alternate oil with list of local suppliers stocking alternate oil for approval at least two weeks prior to bidding.

Refrigerant piping shall be in accordance with this specification section.

Refrigerant line sizing shall be in accordance with manufacturer specifications.

2.3.1.1.2.4 Condenser Coil

The outdoor unit coil shall be of nonferrous construction with lanced or corrugated plate fins on copper tubing.

The coil shall be protected with an integral metal guard.Refrigerant flow from the outdoor unit shall be regulated by means of an electronically controlled, precision, linear expansion valve.

All refrigerant connections between outdoor and indoor units shall be flare type.

2.3.1.1.2.5 Compressor

The compressor shall be a high performance, hermetic, inverter driven, variable speed, dual rotary type.

The compressor motor shall be direct current (DC) type equipped with a factory supplied and installed inverter drive package.

The compressor will be equipped with internal thermal overload protection.

To prevent liquid from accumulating in the compressor during the off cycle,

a minimal amount of current shall be automatically, intermittently applied to the compressor motor windings to maintain sufficient heat to vaporize any refrigerant. No crankcase heater is to be used.

Filters, sight glasses, and traps shall not be used, and no additional refrigerant oil shall be required.The compressor shall be mounted so as to avoid the transmission of vibration. The outdoor unit shall have an accumulator and high pressure safety switch.

2.3.1.1.3 Wall Mounted Indoor Unit

The wall-mounted indoor unit shall be factory assembled, wired and run tested. Contained within the unit shall be all factory wiring, piping, electronic modulating linear expansion device, control circuit board and fan motor. The unit shall have a self-diagnostic function, 3-minute time delay mechanism, an auto restart function, and a test run switch. Indoor unit and refrigerant pipes shall be charged with dehydrated air before shipment from the factory.

2.3.1.1.3.1 Unit Cabinet

Casing shall have a white finish.Provide a separate back plate which secures the unit firmly to the wall.

2.3.1.1.3.2 Fan

The indoor fan shall be statically and dynamically balanced to run on a single motor with permanently lubricated bearings.

A manual adjustable guide vane shall be provided with the ability to change the airflow from side to side (left to right).

An integral, motorized, multi-position, horizontal air sweep vane shall provide for uniform air distribution, up and down. Vane shall have 5 selectable positions plus AUTO (Controls position based upon mode, microprocessor shall automatically determine the vane angle to provide the optimum room temperature distribution) and SWING (Continuously moves up and down). In OFF mode the horizontal vane shall return to the closed position. The indoor unit shall include an AUTO fan setting capable of maximizing energy efficiency by adjusting the fan speed based on the difference between controller set-point and space temperature. The indoor fan shall be capable of five (5) speed settings, Low, Mid1, Mid2, High and Auto.

2.3.1.1.3.3 Filter

Return air shall be filtered by means of an easily removable, washable filter.

2.3.1.1.3.4 Coil

The indoor unit coil shall be of nonferrous construction with smooth plate fins on copper tubing.

The tubing shall have inner groves for high efficiency heat exchange.

All tube joints shall be brazed with silver alloy.

The coils shall be pressure tested at the factory.

A sloped, corrosion resistant condensate pan with drain shall be provided under the coil.

A drain pan level switch, designed to connect to the control board, shall be provided and installed in the condensate pan to prevent condensate from overflowing.

2.3.1.1.3.5 Electrical

The unit electrical power shall be 208-230 volts, 1-phase, 60 hertz.

The system shall be configured such that the indoor unit be powered directly from the outdoor unit using a 3-wire, 14 gauge AWG connections plus ground.

The indoor unit shall not have any supplemental electrical heat elements.

2.3.1.1.4 Unit Controls

Provide unit internally prewired with a 24 volt control circuit powered by an internal transformer. Provide terminal blocks for power wiring and external control wiring. Internally protect unit by fuses or a circuit breaker in accordance with UL 1995. Equip units with three-phase power with phase monitoring protection to protect against problems caused by phase loss, phase imbalance and phase reversal. Provide unit with microprocessor controls to provide all 24V control functions. Control unit by a programmable electronic thermostat with heating setback and cooling setup with 7-day programming capability.

2.4 COMPONENTS

2.4.1 Refrigerant Piping & Insulation

Provide copper tubing conforming to ASTM B280 annealed or hard drawn as required. Copper tubing must bear the product identification markings in accordance with ASTM B280A, "ACR" must be present on copper tubing. Copper tubing must be soft annealed where bending is required and hard drawn where no bending is required. Soft annealed copper tubing must not be used in sizes larger 1-3/8 inches. Joints must be brazed except that joints on lines 7/8 inch and smaller may be flared. Cast copper alloy fittings for flared copper tube must conform to ASME B16.26 and ASTM B62. Wrought copper and bronze solder-joint pressure fittings must conform to ASME B16.22 and ASTM B75/B75M. Joints and fittings for brazed joint must be wrought-copper or forged-brass sweat fittings. Cast sweat-type joints and fittings are not allowed for brazed joints. Brass or bronze adapters for brazed tubing may be used for connecting tubing to flanges and to threaded ends of valves and equipment.Provide 1-inch thick flexible elastomeric piping insulation insulation consisting of closed-cell, foam- or expanded-rubber materials containing anti-microbial additive, complying with ASTM C534/C534M, Type 1, Grade 1. Insulation shall have vapor retarder/vapor barrier skin on one or both sides of the insulation. Both suction and liquid refrigerant piping shall be insulated.Provide aluminum jacketing for insulated piping that is exposed to weather or is located outdoors. Aluminum jackets shall be corrugated, embossed or smooth sheet, 0.016 inch nominal thickness; ASTM B209, Temper H14, Temper H16, Alloy 3003, 5005, or 3105. Corrugated aluminum jacket shall not be used outdoors. Aluminum jacket securing bands shall be Type 304 stainless steel, 0.015 inch thick, 1/2 inch wide. Aluminum jacket circumferential seam bands shall be 2 by 0.016 inch aluminum matching jacket material. The jacket may, at the option of the

Contractor, be provided with a factory fabricated Pittsburgh or "Z" type longitudinal joint. When the "Z" joint is used, the bands at the circumferential joints shall be designed by the manufacturer to seal the joints and hold the jacket in place.

2.4.2 Condensate Drain Piping & Insulation

Provide condensate piping consisting of Type L or K seamless copper drainage tubing in accordance with ASTM B306 and soldered DWV pattern fittings in accordance with ASME B16.29.Provide 1-inch thick flexible elastomeric piping insulation insulation consisting of closed-cell, foam- or expanded-rubber materials containing anti-microbial additive, complying with ASTM C534/C534M, Type 1, Grade 1. Insulation shall have vapor retarder/vapor barrier skin on one or both sides of the insulation.

2.4.3 Temperature Controls

Temperature controls shall be Section 23 09 23.02 BACnet DIRECT DIGITAL CONTROL FOR HVAC AND OTHER BUILDNG CONTROL SYSTEMS.

2.5 FINISHES

2.5.1 Coil Corrosion Protection

Provide coil with a uniformly applied epoxy electrodeposition, phenolic, or vinyl type coating to all coil surface areas without material bridging between fins. Submit product data on the type coating selected, the coating thickness, the application process used, the estimated heat transfer loss of the coil, and verification of conformance with the salt spray test requirement. Coating must be applied at either the coil or coating manufacturer's factory. Coating process must ensure complete coil encapsulation. Coating must be capable of withstanding a minimum 1,000 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution.

2.5.2 Equipment and Components Factory Coating

Unless otherwise specified, equipment and component items, when fabricated from ferrous metal, must be factory finished with the manufacturer's standard finish, except that items located outside of buildings must have weather resistant finishes that will withstand 500 hours exposure to the salt spray test specified in ASTM B117 using a 5 percent sodium chloride solution. Immediately after completion of the test, the specimen must show no signs of blistering, wrinkling, cracking, or loss of adhesion and no sign of rust creepage beyond 1/8 inch on either side of the scratch mark. Cut edges of galvanized surfaces where hot-dip galvanized sheet steel is used must be coated with a zinc-rich coating conforming to ASTM D520, Type I.

Where stipulated in equipment specifications of this section, coat finned tube coils of the affected equipment as specified below. Apply coating at the premises of a company specializing in such work. Degrease and prepare for coating in accordance with the coating applicator's procedures for the type of metals involved. Completed coating must show no evidence of softening, blistering, cracking, crazing, flaking, loss of adhesion, or "bridging" between the fins.

2.5.2.1 Phenolic Coating

Provide a resin base thermosetting phenolic coating. Apply coating by immersion dipping of the entire coil. Provide a minimum of two coats. Bake or heat dry coils following immersions. After final immersion and prior to final baking, spray entire coil with particular emphasis given to building up coating on sheared edges. Total dry film thickness must be 2.5 to 3.0 mils.

2.5.2.2 Chemical Conversion Coating with Polyelastomer Finish Coat

Dip coils in a chemical conversion solution to molecularly deposit a corrosion resistant coating by electrolysis action. Chemical conversion coatings must conform to MIL-DTL-5541, Class 1A. Cure conversion coating at a temperature of 110 to 140 degrees F for a minimum of 3 hours. Coat coil surfaces with a complex polymer primer with a dry film thickness of 1 mil. Cure primer coat for a minimum of 1 hour. Using dip tank method, provide three coats of a complex polyelastomer finish coat. After each of the first two finish coats, cure the coils for 1 hour. Following the third coat, spray a fog coat of an inert sealer on the coil surfaces. Total dry film thickness must be 2.5 to 3.0 mils. Cure finish coat for a minimum of 3 hours. Coating materials must have 300 percent flexibility, operate in temperatures of minus 50 to plus 220 degrees F, and protect against atmospheres of a pH range of 1 to 14.

2.5.2.3 Vinyl Coating

Apply coating using an airless fog nozzle. For each coat, make at least two passes with the nozzle. Materials to be applied are as follows:

a. Total dry film thickness, 6.5 mils maximum

b. Vinyl Primer, 24 percent solids by volume: One coat 2 mils thick

c. Vinyl Copolymer, 30 percent solids by volume: One coat 4.5 mils thick

2.5.3 Factory Applied Insulation

Refrigeration equipment must be provided with factory installed insulation on surfaces subject to sweating including the suction line piping. Where motors are the gas-cooled type, factory installed insulation must be provided on the cold-gas inlet connection to the motor in accordance with manufacturer's standard practice. Factory insulated items installed outdoors are not required to be fire-rated. As a minimum, factory insulated items installed indoors must have a flame spread index no higher than 75 and a smoke developed index no higher than 150. Factory insulated items (no jacket) installed indoors and which are located in air plenums, in ceiling spaces, and in attic spaces must have a flame spread index no higher than 25 and a smoke developed index no higher than 50. Flame spread and smoke developed indexes must be determined by ASTM E84. Insulation must be tested in the same density and installed thickness as the material to be used in the actual construction. Material supplied by a manufacturer with a jacket must be tested as a composite material. Jackets, facings, and adhesives must have a flame spread index no higher than 25 and a smoke developed index no higher than 50 when tested in accordance with ASTM E84.

2.6 TESTS, INSPECTIONS, AND VERIFICATIONS

All manufactured units must be inspected and tested, and documentation

provided to demonstrate that each unit is in compliance with ANSI/AHRI and UL requirements and that the minimum efficiency requirements of ASHRAE 90.1 - IP have been met.

PART 3 EXECUTION

3.1 EXAMINATION

After becoming familiar with all details of the work, perform Verification of Dimensions in the field, and advise the Contracting Officer of any discrepancy before performing any work.

3.2 INSTALLATION

Perform work in accordance with the manufacturer's published diagrams, recommendations, and equipment warranty requirements. Where equipment is specified to conform to the requirements of ASME BPVC SEC VIII D1and ASME BPVC SEC IX, the design, fabrication, and installation of the system must conform to ASME BPVC SEC VIII D1 and ASME BPVC SEC IX.

3.2.1 Equipment

Provide refrigeration equipment conforming to ASHRAE 15 & 34. Provide necessary supports for all equipment, appurtenances, and pipe as required. Equipment must be properly leveled, aligned, and secured in place in accordance with manufacturer's instructions.

3.2.2 Field Applied Insulation

Apply field applied insulation and jacketing per manufacturer's installation instructions..

3.3 CLEANING AND ADJUSTING

Equipment must be wiped clean, with all traces of oil, dust, dirt, or paint spots removed. Temporary filters must be provided for all fans that are operated during construction, and new filters must be installed after all construction dirt has been removed from the building. System must be maintained in this clean condition until final acceptance. Bearings must be properly lubricated with oil or grease as recommended by the manufacturer. Other miscellaneous equipment requiring adjustment must be adjusted to setting indicated or directed. Fans must be adjusted to the speed indicated by the manufacturer to meet specified conditions.

3.4 TRAINING

Conduct a training course for the operating staff as designated by the Contracting Officer. The training period must consist of a total 2 hours of normal working time and start after the system is functionally completed but prior to final acceptance tests.

a. Submit a schedule, at least 2 weeks prior to the date of the proposed training course, which identifies the date, time, and location for the training.

b. Submit the field posted instructions, at least 2 weeks prior to construction completion, including equipment layout, wiring and control diagrams, piping, valves and control sequences, and typed condensed operation instructions. The condensed operation instructions must

include preventative maintenance procedures, methods of checking the system for normal and safe operation, and procedures for safely starting and stopping the system. The posted instructions must be framed under glass or laminated plastic and be posted where indicated by the Contracting Officer.

c. The posted instructions must cover all of the items contained in the approved operation and maintenance manuals as well as demonstrations of routine maintenance operations. Submit 2 complete copies of an operation manual in bound 8-1/2 by 11 inch booklets listing step-by-step procedures required for system startup, operation, abnormal shutdown, emergency shutdown, and normal shutdown at least 4 weeks prior to the first training course. The booklets must include the manufacturer's name, model number, and parts list. The manuals must include the manufacturer's name, model number, service manual, and a brief description of all equipment and their basic operating features.

d. Submit 2 complete copies of maintenance manual in bound 8-1/2 by 11 inch booklets listing routine maintenance procedures, possible breakdowns and repairs, and a trouble shooting guide. The manuals must include piping and equipment layouts and simplified wiring and control diagrams of the system as installed.

3.5 REFRIGERANT TESTS, CHARGING, AND START-UP

Split-system refrigerant piping systems must be tested and charged in accordance with the manufacturer's installation instructions. Packaged refrigerant systems which are factory charged must be checked for refrigerant and oil capacity to verify proper refrigerant levels in accordance with manufacturer's recommendations. Following charging, packaged systems must be tested for leaks with a halide torch or an electronic leak detector.

a. The date the tests were performed.
b. A list of equipment used, with calibration certifications.
c. Initial test summaries.
d. Repairs/adjustments performed.
e. Final test results.

3.5.1 Refrigerant Leakage

If a refrigerant leak is discovered after the system has been charged, the leaking portion of the system must immediately be isolated from the remainder of the system and the refrigerant pumped into the system receiver or other suitable container. Under no circumstances must the refrigerant be discharged into the atmosphere.

3.5.2 Contractor's Responsibility

Take steps, at all times during the installation and testing of the refrigeration system, to prevent the release of refrigerants into the atmosphere. The steps must include, but not be limited to, procedures which will minimize the release of refrigerants to the atmosphere and the use of refrigerant recovery devices to remove refrigerant from the system and store the refrigerant for reuse or reclaim. At no time must more than 3 ounces of refrigerant be released to the atmosphere in any one occurrence. Any system leaks within the first year must be repaired in accordance with the requirements herein at no cost to the Government including material, labor, and refrigerant if the leak is the result of

defective equipment, material, or installation.

3.6 SYSTEM PERFORMANCE TESTS

Before each refrigeration system is accepted, conduct tests to demonstrate the general operating characteristics of all equipment by a registered professional engineer or an approved manufacturer's start-up representative experienced in system start-up and testing, at such times as directed. Two copies of the report provided in bound 8-1/2 by 11 inch booklets. The report must document compliance with the specified performance criteria upon completion and testing of the system. The report must indicate the number of days covered by the tests and any conclusions as to the adequacy of the system.

For equipment providing heating and cooling the system performance tests must be performed during the heating and cooling seasons.

a. Submit a schedule, at least 2 weeks prior to the start of related testing, for the system performance tests. The schedules must identify the proposed date, time, and location for each test. Tests must cover a period of not less than 48 hours for each system and must demonstrate that the entire system is functioning in accordance with the drawings and specifications.

b. Make corrections and adjustments, as necessary, tests must be re-conducted to demonstrate that the entire system is functioning as specified. Prior to acceptance, install and tighten service valve seal caps and blanks over gauge points. Replace any refrigerant lost during the system startup.

c. If tests do not demonstrate satisfactory system performance, correct deficiencies and retest the system. Conduct tests in the presence of the Contracting Officer. Water and electricity required for the tests will be furnished by the Government. Provide all material, equipment, instruments, and personnel required for the test.

3.7 MAINTENANCE

3.7.1 EXTRA MATERIALS

Submit spare parts data for each different item of equipment specified, after approval of detail drawings and not later than 2 months prior to the date of beneficial occupancy. Include in the data a complete list of parts and supplies, with current unit prices and source of supply, a recommended spare parts list for 1 year of operation, and a list of the parts recommended by the manufacturer to be replaced on a routine basis.

3.7.2 Maintenance Service

Submit a certified list of qualified permanent service organizations, which includes their addresses and qualifications, for support of the equipment. The service organizations must be reasonably convenient to the equipment installation and be able to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 05 73

POWER SYSTEM STUDIES
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE 1584	(2018; E 2019) Guide for Performing Arc-Flash Hazard Calculations
IEEE 1584.1	(2022) Guide for the Specification of Scope and Deliverable Requirements for an Arc-Flash Hazard Calculation Study
IEEE 3002.2	(2018) Recommended Practice for Conducting Load-Flow Studies and Analysis of Industrial and Commercial Power Systems
IEEE 3002.3	(2018) Recommended Practice for Conducting Short-Circuit Studies and Analysis of Industrial and Commercial Power Systems
IEEE C2	(2023) National Electrical Safety Code

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70E	(2024) Standard for Electrical Safety in the Workplace

TINKER AIR FORCE BASE (TAFB)

TAFB ES	(2025)Tinker Air Force Base Electrical Standards

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-560-01	(2017; with Change 3, 2023) Operation and Maintenance: Electrical Safety

1.2 SYSTEM DESCRIPTION

The power system covered by this specification consists of: Contractor to furnish short-circuit, protective device coordination and arc flash hazard analysis studies which reflect the as-built conditions of the installation. The studies must be done in EasyPower®. Contractor shall request for existing electrical system's record file in EasyPower and complete study in accordance with Tinker Air Force Base Electrical Standards (January 2025).The coordination study must begin with the switchboard's main protective device to all new protective devices from downstream equipment within the project scope. The study shall take into

consideration, the preliminary study model performed by the designer of record and the specific equipment selected by the electrical equipment manufacturer(s) which allows proper coordination of breakers, fuses, and current transformers..

1.3 SUBMITTALS

Government approval is required for submittals with a "G" or "S" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Field Examination Plan; G

Arc Flash Label Formats; G

SD-06 Test Reports

Field Examination

SD-07 Certificates

System Analyzer; G

SD-11 Closeout Submittals

Model Files; G

Load Flow Study; G

Fault Current Study; G

System Coordination Study; G

Arc Flash Hazard Study; G

1.4 QUALITY ASSURANCE

1.4.1 System Analyzer

The System Analyzer must perform the power system studies. The System Analyzer must be a registered professional electrical engineer with a minimum of 3 years of experience with power system studies. Include a list of three comparable jobs performed by the System Analyzer with specific names and telephone numbers for reference. Include the license number and state of the registered Professional Engineer.

1.4.2 System Verifier

The System Verifier may inspect and record settings, markings, and otherwise document the existing equipment. The System Verifier may also place appropriate hazard labels on equipment. The System Verifier must not make any calibrations or adjustments or place equipment into service. When working with energized equipment, the system verifier must be a Qualified Person per NFPA 70E or working under the direct supervision of a Qualified Person.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

3.1 FIELD EXAMINATION

For each pre- and post-study inspection, submit a field examination plan identifying which facilities must be examined to complete the required work. Include a complete information verification procedure, where Qualified Personnel will be required, PPE requirements for "live" equipment examinations, and equipment to be used within the limited approach boundary of the equipment.

3.1.1 General

Perform field inspections of the site and equipment before the first study and after the last study to determine the state and settings of the equipment and to verify the final settings agree with the studies. Perform the post-study inspection(s) after changing settings, after performing acceptance tests, and before placing equipment in service.

Schedule the field examination by the System Verifier with the Contracting Officer at least 10 business days before conducting examination. Furnish all materials, labor, and equipment necessary to conduct the examination. Maintain a written record of the all equipment examined, equipment location, equipment ratings, settings, personnel involved, and the date the examination was performed. Submit the written record of each field examination.

3.1.2 Safety

Where examination of the equipment requires energized equipment to be opened, provide a Qualified Person to directly supervising any non-Qualified Person within the hazard area. Use PPE, protective barriers, danger signs and other safety devices to protect and warn personnel in the vicinity of "live" equipment being examined.

3.1.3 Application of Arc Flash Labels

Install arc flash warning labels using Qualified Personnel as necessary after the setting and inspection is complete. For new or modified equipment, install labels before the equipment is energized for the first time after installation/modification or setting changes. Schedule the label placement with the Contracting Officer at least 5 business days before label placement. Furnish all materials, labor, and equipment necessary to place the labels. Maintain a written record of the all equipment that received labels, personnel involved, and the date labels were placed.

3.2 POWER SYSTEM STUDIES

Perform power system studies to demonstrate that the equipment selected and system constructed meet the contract requirements for fault current and interrupt ratings, coordination, protection, and Arc Flash Hazard. Submit reports of the studies along with protective device equipment submittals. Apply Arc Flash Hazard labels to equipment after the studies are approved. Update and resubmit the studies after any changes to the equipment or

systems which may affect the study results, and re-apply Arc Flash Hazard labels to equipment after the resubmitted studies are approved. The Government is not responsible for any changes to equipment, device ratings, settings, or additional labor for installation of equipment or devices or labels ordered and/or procured before approval of the study.

Perform power system studies to demonstrate the system operation with regard to ratings, coordination, protection, and Arc Flash Hazard.

3.2.1 Scope of Studies

The scope of the studies must begin at the source bus and extend down to system buses where fault current availability is 10,000 amperes or less (symmetrical) and at most 600 volts for facility-level distribution buses within the project scope of work.

The "source bus" is the source of energy for system being analyzed include the energy feed from a utility, the first bus upstream of the work or any other source capable of contributing significant energy into the system being analyzed.

In the systems model for the studies, incorporate all new equipment within the scope of the studies. Incorporate any additional sources or load equipment necessary to accurately model the system's performance.

Contractor to furnish short-circuit, protective device coordination and arc flash hazard analysis studies which reflect the as-built conditions of the installation. The studies must be done in EasyPower®. Contractor shall request maximum available short fault with OG&E and shall be able to use the preliminary Power Study in EasyPower file and complete study in accordance with Tinker Air Force Base Electrical Standards (January 2024) TAFB ES.

3.2.2 Determination of Facts

Determine and document the time-current characteristics, features, ratings, ampacities, and nameplate data for each existing protective device, electrical equipment, and feeder cables. Obtain the available fault current from the OG&E.

3.2.3 Single Line Diagram

Provide a single line diagram showing the electrical system buses, devices, transformation points, and all sources of load current and fault current, including generator and motor contributions. Provide a diagram from the system model. Each bus, device or transformation point must have a unique identifier. Show the location of switches, breakers, and circuit interrupting devices on the diagram together with available fault data, and the device interrupting rating.

The naming of existing components within the system model and single line diagram must match existing installed equipment names. The naming of new components within the system model and single line diagram must use unique identifiers and be coordinated with the Government.

3.2.4 Load Flow Study

Perform the load flow study in accordance with IEEE 3002.2 to identify initital steady-state conditions for the fault current study. For each

operating scenario, provide load flow results on the diagram or in the report. Show or describe the loading factors and assumptions used in each operating mode.

3.2.5 Fault Current Study

Use the results of the load flow study to perform the fault current study in accordance with IEEE 3002.3. Provide balanced three-phase fault, bolted line-to-line fault, and single line-to-ground fault current values at each voltage transformation point and at each power distribution bus. For each location, show in tabular form on the diagram or in the report the maximum and minimum available fault currents of all modes of operation for that location.

Where the available fault current at the source bus is not available, describe how the fault contribution from the source bus was determined and why this method is reasonable for the study.

3.2.6 System Coordination Study

Use the results of the load flow study and fault current study. For normal modes of operation, demonstrate that selectivity has been obtained between the devices within the scope of the project. Demonstrate the equipment, machines, and conductors are protected from damage from overloads and fault conditions. Include a description of the coordination of the protective devices in this project. Provide a written narrative describing which devices may operate in the event of a fault at each bus; the logic used to arrive at device ratings and settings; situations where system coordination is not achievable due to device limitations; coordination between upstream and downstream devices; and relay settings. Provide recommendations to improve or enhance system reliability, and detail where such changes would involve additions or modifications to the contract and cost damages (addition or reduction). Provide composite coordination plots on a log-log scale. Where recommendations are provided to improve or enhance system reliability, provide separate coordination plots on log-log scale showing the system coordination before and after the implementation of the recommendations. Where coordination has been adjusted to lower arc flash values, include a discussion of the change and the impact on the system within the report.

3.2.7 Arc Flash Hazard Study

Perform the arc flash hazard study in accordance with IEEE 1584.1. Utilize the data from the fault current study to determine the worst case incident energy per IEEE 1584, IEEE C2, and OSHA 29 CFR 1910.269 Appendix E. Use identified modes of operation to determine the worst case arc flash energy. If not included in another study, include a description of the devices and device settings for the operating modes that provided the highest arc flash energy. The use of a "maintenance switch" to temporarily reduce the Arc Flash incident energy for maintenance work is acceptable. Where the adjusting the coordination of devices to obtain lower arc flash values, include a discussion of the change and the impact on the system within the report. .

Where the AC system voltage is 208 volts or less with an available short-circuit current less than 2000 A, an arc flash hazard study is not required.

3.2.8 Study report(s)

a. Include a narrative describing the studies performed; the bases and methods used; and the desired method of coordinated protection of the power system.

b. Include descriptive and technical data for existing devices and new protective devices proposed. Include manufacturers published data, nameplate data, and definition of the fixed or adjustable features of the existing or new protective devices. For existing devices, included statements on the condition of the equipment based upon field inspections and owner's statements and reports.

c. Document utility company data including system voltages, fault MVA, system X/R ratio, time-current characteristic curves, current transformer ratios, and relay device numbers and settings; . Identify all assumptions about the protection devices, equipment, and system where data was not available.

d. For each bus in the system, provide fully coordinated composite time-current characteristics (TCC) curves as required to ensure coordinated power system protection between protective devices and equipment. In a tabular format, provide recommended ratings and settings of all protective devices.

e. Provide an arc flash study report in accordance with IEEE 1584.1.

f. Provide the calculations performed for the studies, including computer programs utilized. Provide the name of the software package, developer, and version number.

f. The System Analyzer must stamp the study reports.

3.2.9 Arc Flash Labels

Provide arc flash warning labels on electrical equipment likely to require examination, servicing, or maintenance while energized. Typical types of equipment include pad-mounted transformers, switchgear, switchboards, panelboards, disconnect switches, industrial control panels, meter socket enclosures, and motor control centers that are in other than dwelling occupancies. The arc flash label naming must match the naming used in the system modeling and the single line diagram.

Comply with the label requirements specified in UFC 3-560-01NFPA 70E. Obtain approval of arc flash label formats before printing.

a. Provide a thermal transfer type label of high adhesion polyester for each location device analyzed. The label must remain in place and be legible for at least 5 years in the installed environment.

b. Labels must be machine printed with no field markings. Provide arc flash labels in the following manner. All labels must be based on implemented overcurrent devices and settings.

1. Provide at least one arc flash label for each 480 volt and 208 volt panelboards.

2. Provide at least one arc flash label for each low voltage (less than 1000 V) switchboard.

3. Where the equipment construction has different hazards levels in different areas, provide a label for each compartment, cubicle, or section separated by barriersa single label representing the worst case hazard for all branch circuits and a separate unique label for the compartment containing the main protective device. On the worst case label, indicate which branch circuit compartments have the worst case hazard.

c. Use the worst case hazard of all operating scenarios unless mitigation procedures are used. If mitigation procedures are used, explain the procedures on the label.

3.3 MODELING

Develop a software model of the electrical system identified in the scope of the studies. Use the latest version of EasyPower(TM). Develop the model with accurate, verified information. Model existing electrical equipment, machines, devices, and conductors directly connected to, altered by, or otherwise affected by the work. This includes, but is not limited to generators, transformers, switchgear, switchboards, panelboards, motor control centers, motors, voltage regulators, tap changers, protective relays, circuit breakers, switches, fuses, conductors, capacitors, reactors, grounding system, and control equipment.

Provide the final model files in their native editable formats for future use by the Government. Include device information for devices not in the software vendor's standard distribution.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 26 20 00

INTERIOR DISTRIBUTION SYSTEM
08/23

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM INTERNATIONAL (ASTM)

ASTM B1	(2013) Standard Specification for Hard-Drawn Copper Wire
ASTM B8	(2023) Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM D709	(2017) Standard Specification for Laminated Thermosetting Materials

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C2	(2023) National Electrical Safety Code
IEEE Stds Dictionary	(2009) IEEE Standards Dictionary: Glossary of Terms & Definitions

INTERNATIONAL ELECTRICAL TESTING ASSOCIATION (NETA)

NETA ATS	(2021) Standard for Acceptance Testing Specifications for Electrical Power Equipment and Systems

NATIONAL ELECTRICAL CONTRACTORS ASSOCIATION (NECA)

NECA NEIS 1	(2015) Standard for Good Workmanship in Electrical Construction

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

ANSI C80.1	(2020) American National Standard for Electrical Rigid Steel Conduit (ERSC)
ANSI C80.3	(2020) American National Standard for Electrical Metallic Tubing (EMT)
ANSI C80.5	(2020) American National Standard for Electrical Rigid Aluminum Conduit
NEMA 250	(2020) Enclosures for Electrical Equipment (1000 Volts Maximum)
NEMA ICS 1	(2022) Standard for Industrial Control and

	Systems: General Requirements
NEMA ICS 2	(2000; R 2020) Industrial Control and Systems Controllers, Contactors, and Overload Relays Rated 600 V
NEMA ICS 6	(1993; R 2016) Industrial Control and Systems: Enclosures
NEMA KS 1	(2013) Enclosed and Miscellaneous Distribution Equipment Switches (600 V Maximum)
NEMA RN 1	(2005; R 2013) Polyvinyl-Chloride (PVC) Externally Coated Galvanized Rigid Steel Conduit and Intermediate Metal Conduit
NEMA WD 1	(1999; R 2020) Standard for General Color Requirements for Wiring Devices
NEMA WD 6	(2021) Wiring Devices Dimensions Specifications
NEMA Z535.4	(2023) Product Safety Signs and Labels

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 70	(2023) National Electrical Code
NFPA 70E	(2024) Standard for Electrical Safety in the Workplace

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

29 CFR 1910.147	The Control of Hazardous Energy (Lock Out/Tag Out)
29 CFR 1910.303	Electrical, General

TINKER AIR FORCE BASE (TAFB)

TAFB ES	(2025)Tinker Air Force Base Electrical Standards

UNDERWRITERS LABORATORIES (UL)

UL 1	(2005; Reprint Jan 2022) UL Standard for Safety Flexible Metal Conduit
UL 6	(2022) UL Standard for Safety Electrical Rigid Metal Conduit-Steel
UL 6A	(2008; Reprint Mar 2021) UL Standard for Safety Electrical Rigid Metal Conduit - Aluminum, Red Brass, and Stainless Steel
UL 20	(2018; Reprint May 2023) UL Standard for Safety General-Use Snap Switches

UL 44	(2018; Reprint May 2021) UL Standard for Safety Thermoset-Insulated Wires and Cables
UL 50	(2024) UL Standard for Safety Enclosures for Electrical Equipment, Non-Environmental Considerations
UL 67	(2018; Reprint Aug 2023) UL Standard for Safety Panelboards
UL 83	(2017; Reprint Mar 2020) UL Standard for Safety Thermoplastic-Insulated Wires and Cables
UL 360	(2013; Reprint Jan 2024) UL Standard for Safety Liquid-Tight Flexible Metal Conduit
UL 486A-486B	(2018; Reprint Jul 2023) UL Standard for Safety Wire Connectors
UL 486C	(2018; Reprint May 2021) UL Standard for Safety Splicing Wire Connectors
UL 489	(2016; Rev 2019) UL Standard for Safety Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures
UL 498	(2017; Reprint Jun 2024) UL Standard for Safety Attachment Plugs and Receptacles
UL 510	(2020; Dec 2022) UL Standard for Safety Polyvinyl Chloride, Polyethylene and Rubber Insulating Tape
UL 514A	(2013; Reprint Jun 2022) UL Standard for Safety Metallic Outlet Boxes
UL 514B	(2012; Reprint Mar 2024) UL Standard for Safety Conduit, Tubing and Cable Fittings
UL 514C	(2014; Reprint Apr 2024) UL Standard for Safety Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers
UL 797	(2007; Reprint Apr 2023) UL Standard for Safety Electrical Metallic Tubing -- Steel
UL 869A	(2006; Reprint Jun 2020) Reference Standard for Service Equipment
UL 943	(2016; Reprint Sep 2023) UL Standard for Safety Ground-Fault Circuit-Interrupters
UL 1242	(2006; Reprint Apr 2022) UL Standard for Safety Electrical Intermediate Metal Conduit -- Steel
UL 1449	(2021; Reprint Dec 2022) UL Standard for Safety Surge Protective Devices

1.2 DEFINITIONS

Unless otherwise specified or indicated, electrical and electronics terms used in these specifications, and on the drawings, are as defined in IEEE Stds Dictionary.

1.3 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval. Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-02 Shop Drawings

Panelboards; G

SD-03 Product Data

Receptacles; G

Circuit Breakers; G

Switches; G

Surge Protective Devices; G

SD-06 Test Reports

600-volt Wiring Test; G

Ground-fault Receptacle Test; G

SD-10 Operation and Maintenance Data

Electrical Systems, Data Package 5; G

1.4 QUALITY ASSURANCE

1.4.1 Regulatory Requirements

In each of the publications referred to herein, consider the advisory provisions to be mandatory, as though the word, "must" had been substituted for "should" wherever it appears. Interpret references in these publications to the "authority having jurisdiction," or words of similar meaning, to mean the Contracting Officer. Provide equipment, materials, installation, and workmanship in accordance with NFPA 70 and unless more stringent requirements are specified or indicated. NECA NEIS 1 shall be considered the minimum standard for workmanship.

1.4.2 Standard Products

Provide materials and equipment that are products of manufacturers regularly engaged in the production of such products which are of equal material, design and workmanship and:

a. Have been in satisfactory commercial or industrial use for 2 years prior to bid opening including applications of equipment and materials

under similar circumstances and of similar size.

b. Have been on sale on the commercial market through advertisements, manufacturers' catalogs, or brochures during the 2-year period.

c. Where two or more items of the same class of equipment are required, provide products of a single manufacturer; however, the component parts of the item need not be the products of the same manufacturer unless stated in this section.

1.4.2.1 Alternative Qualifications

Products having less than a 2-year field service record will be acceptable if a certified record of satisfactory field operation for not less than 6000 hours, exclusive of the manufacturers' factory or laboratory tests, is furnished.

1.4.2.2 Material and Equipment Manufacturing Date

Products manufactured more than 3 years prior to date of delivery to site are not acceptable.

1.5 MAINTENANCE

1.5.1 Electrical Systems

Submit operation and maintenance data in accordance with Section 01 78 23, OPERATION AND MAINTENANCE DATA and as specified herein. Submit operation and maintenance manuals for electrical systems that provide basic data relating to the design, operation, and maintenance of the electrical distribution system for the building. Include the following:

a. Single line diagram of the "as-built" building electrical system.

b. Schematic diagram of electrical control system (other than HVAC, covered elsewhere).

c. Manufacturers' operating and maintenance manuals on active electrical equipment.

1.6 WARRANTY

Provide equipment items supported by service organizations that are reasonably convenient to the equipment installation in order to render satisfactory service to the equipment on a regular and emergency basis during the warranty period of the contract.

PART 2 PRODUCTS

2.1 MATERIALS AND EQUIPMENT

As a minimum, meet requirements of UL, where UL standards are established for those items, and requirements of NFPA 70 and TAFB ES for all materials, equipment, and devices.

2.2 CONDUIT AND FITTINGS

Conform to the following:

2.2.1 Rigid Metallic Conduit

2.2.1.1 Rigid, Threaded Zinc-Coated Steel Conduit

ANSI C80.1, UL 6.

2.2.1.2 Rigid Aluminum Conduit

ANSI C80.5, UL 6A.

2.2.2 Intermediate Metal Conduit (IMC)

UL 1242, zinc-coated steel only.

2.2.3 Electrical, Zinc-Coated Steel Metallic Tubing (EMT)

UL 797, ANSI C80.3.

2.2.4 Plastic-Coated Rigid Steel and IMC Conduit

NEMA RN 1, Type 40(40 mils thick).

2.2.5 Flexible Metal Conduit

UL 1, limited to 6 feet.

2.2.5.1 Liquid-Tight Flexible Metal Conduit, Steel

UL 360, limited to 6 feet.

2.2.6 Fittings for Metal Conduit, EMT, and Flexible Metal Conduit

UL 514B. Ferrous fittings: cadmium- or zinc-coated in accordance with UL 514B.

2.2.6.1 Fittings for Rigid Metal Conduit and IMC

Threaded-type. Split couplings unacceptable.

2.2.6.2 Fittings for EMT

Steel compression type.

2.3 OUTLET BOXES AND COVERS

UL 514A, cadmium- or zinc-coated, if ferrous metal. UL 514C, if nonmetallic.

2.4 CABINETS, JUNCTION BOXES, AND PULL BOXES

UL 50; volume greater than 100 cubic inches, NEMA Type 1 enclosure; sheet steel, hot-dip, zinc-coated. Where exposed to wet, damp, or corrosive environments, NEMA Type 3R.

2.5 WIRES AND CABLES

Provide wires and cables in accordance applicable requirements of NFPA 70 and UL for type of insulation, jacket, and conductor specified or indicated. Do not use wires and cables manufactured more than 24 months

prior to date of delivery to site.

2.5.1 Conductors

Provide the following:

a. Conductor sizes and capacities shown are based on copper, unless indicated otherwise.

b. Conductors shall be stranded for all sizes. Exception: Branch circuit feeders for general purpose wiring #12 may be solid for ease of wiring device termination; however, #12 stranded may be used for ease of installation only if the approved crimp termination is used at the wiring device.

b. Conductors for remote control, alarm, and signal circuits, classes 1, 2, and 3: stranded unless specifically indicated otherwise.

c. All conductors: copper.

d. All unused conductors in renovated areas shall be removed to the source.

2.5.1.1 Equipment Manufacturer Requirements

When manufacturer's equipment requires copper conductors at the terminations or requires copper conductors to be provided between components of equipment, provide copper conductors or splices, splice boxes, and other work required to satisfy manufacturer's requirements.

2.5.1.2 Minimum Conductor Sizes

Provide minimum conductor size in accordance with the following:

a. Branch circuits: No. 12 AWG.

b. Class 1 remote-control and signal circuits: No. 14 AWG.

c. Class 2 low-energy, remote-control and signal circuits: No. 16 AWG.

d. Class 3 low-energy, remote-control, alarm and signal circuits: No. 22 AWG.

2.5.2 Color Coding

Provide color coding for service, feeder, branch, control, and signaling circuit conductors.

2.5.2.1 Ground and Neutral Conductors

Provide color coding of ground and neutral conductors as follows:

a. Grounding conductors: Green.

b. Neutral conductors: White.

c. Exception, where neutrals of more than one system are installed in same raceway or box, other neutrals color coding: white with a different colored (not green) stripe for each.

2.5.2.2 Ungrounded Conductors

Provide color coding of ungrounded conductors in different voltage systems as follows:

a. 208/120 volt, three-phase

(1) Phase A - black

(2) Phase B - red

(3) Phase C - blue

b. 120/240 volt, single phase: Black and red

2.5.3 Insulation

Unless specified or indicated otherwise or required by NFPA 70, provide power and lighting wires rated for 600-volts, Type THWN/THHN conforming to UL 83 or Type XHHW or RHW conforming to UL 44, except that grounding wire may be type TW conforming to UL 83; remote-control and signal circuits: Type TW or TF, conforming to UL 83. Where equipment or devices require 90-degree Centigrade (C) conductors, provide only conductors with 90-degree C insulation or better.

2.5.4 Bonding Conductors

ASTM B1, solid bare copper wire for sizes No. 8 AWG and smaller diameter; ASTM B8, Class B, stranded bare copper wire for sizes No. 6 AWG and larger diameter.

2.6 SPLICES AND TERMINATION COMPONENTS

UL 486A-486B for wire connectors and UL 510 for insulating tapes. Connectors for No. 10 AWG and smaller diameter wires: insulated, pressure-type in accordance with UL 486A-486B or UL 486C (twist-on splicing connector). Provide solderless terminal lugs on stranded conductors.

2.7 DEVICE PLATES

Provide the following:

a. UL listed, one-piece device plates for outlets to suit the devices installed.

b. For metal outlet boxes, plates on unfinished walls: zinc-coated sheet steel or cast metal having round or beveled edges.

c. For nonmetallic boxes and fittings, other suitable plates may be provided.

d. Plates on finished walls: nylon or lexan, minimum 0.03 inch wall thickness and same color as receptacle or toggle switch with which they are mounted.

e. Plates on finished walls: satin finish stainless steel or brushed-finish aluminum, minimum 0.03 inch thick.

f. Screws: machine-type with countersunk heads in color to match finish

of plate.

g. Sectional type device plates are not be permitted.

h. Plates installed in wet locations: gasketed and UL listed for "wet locations."

2.8 SWITCHES

2.8.1 Toggle Switches

NEMA WD 1, UL 20, single pole, double pole, three-way, and four-way, totally enclosed with bodies of thermoplastic or thermoset plastic and mounting strap with grounding screw. Include the following:

a. Handles: white thermoplastic.

b. Wiring terminals: screw-type, side-wired.

c. Contacts: silver-cadmium and contact arm - one-piece copper alloy.

d. Switches: rated quiet-type ac only, 120/277 volts, with current rating and number of poles indicated.

2.8.2 Switch with Red Pilot Handle

NEMA WD 1. Provide the following:

a. Pilot lights that are integrally constructed as a part of the switch's handle.

b. Pilot light color: red and illuminate whenever the switch is closed or "on".

c. Pilot lighted switch: rated 20 amps and 120 volts.

d. The circuit's neutral conductor to each switch with a pilot light.

2.8.3 Breakers Used as Switches

For 120, mark breakers "SWD" in accordance with UL 489.

2.8.4 Disconnect Switches

NEMA KS 1. Provide heavy duty-type switches where indicated, where switches are rated higher than 240 volts, and for double-throw switches. Utilize Class R fuseholders and fuses for fused switches, unless indicated otherwise. Provide horsepower rated for switches serving as the motor-disconnect means. Provide switches in NEMA 1 for indoor or NEMA 3R for outdoor, enclosure or as indicated per NEMA ICS 6.

2.9 RECEPTACLES

Provide the following:

a. UL 498, general purpose specification grade, grounding-type. Residential grade receptacles are not acceptable.

b. Ratings and configurations: as indicated.

c. Bodies: white as per NEMA WD 1.

d. Face and body: thermoplastic supported on a metal mounting strap.

e. Dimensional requirements: per NEMA WD 6.

f. Screw-type, side-wired wiring terminals or of the solderless pressure type having suitable conductor-release arrangement.

g. Grounding pole connected to mounting strap.

h. The receptacle: containing triple-wipe power contacts and double or triple-wipe ground contacts.

2.9.1 Weatherproof Receptacles

Provide receptacles, UL listed for use in "wet locations" with integral GFCI protection. Include cast metal box with gasketed, hinged, lockable and weatherproof while-in-use, polycarbonate, UV resistant/stabilized extra-duty rated hood.

2.9.2 Ground-Fault Circuit Interrupter Receptacles

UL 943, duplex type for mounting in standard outlet box. Provide device capable of detecting current leak when the current to ground is 6 milliamperes or higher, and tripping per requirements of UL 943 for Class A ground-fault circuit interrupter devices. Provide screw-type, side-wired wiring terminals or pre-wired (pigtail) leads.

2.10 PANELBOARDS

Provide panelboards in accordance with the following:

a. UL 67 and UL 50 having a minimum short-circuit current rating of 10,000 amperes symmetrical minimum for voltages 240 V and below or as indicated on drawings.

b. Panelboards for use as service disconnecting means: additionally conform to UL 869A.

c. Panelboards: circuit breaker-equipped.

d. Designed such that individual breakers can be removed without disturbing adjacent units or without loosening or removing supplemental insulation supplied as means of obtaining clearances as required by UL.

e. "Specific breaker placement" is required in panelboards to match the breaker placement indicated in the panelboard schedule on the design drawings. If it is not possible to match "specific breaker placement" during construction, obtain Government approval prior to device installation.

f. Use of "Subfeed Breakers" is not acceptable.

g. Main breaker: "separately" mounted "above" branch breakers.

h. Where "space only" is indicated, make provisions for future installation of breakers.

i. Directories: indicate load served by each circuit in panelboard.

j. Directories: indicate panel identifier, UID Identification Name (provided by 72ABW/CENMP), the date of installation, "Fed from" information (e.g., Panel PA UID # served from Panel MDP).

k. Provide new directories for existing panels modified by this project as indicated. A new typewritten panel schedule shall be supplied for any additions or modifications to the circuitry. Handwritten changes to the panel schedule are not acceptable.

l. Type directories and mount in holder behind transparent protective covering.

m. Panelboard nameplates: provided in accordance with paragraph FIELD FABRICATED NAMEPLATES.

2.10.1 Enclosure

Provide panelboard enclosure in accordance with the following:

a. UL 50.

b. Cabinets: painted in accordance with paragraph FIELD APPLIED PAINTING.

c. Front edges of cabinets: form-flanged or fitted with structural shapes welded or riveted to the sheet steel, for supporting the panelboard front.

d. All cabinets: fabricated such that no part of any surface on the finished cabinet deviates from a true plane by more than 1/8 inch.

e. Holes: provided in the back of indoor surface-mounted cabinets, with outside spacers and inside stiffeners, for mounting the cabinets with a 1/2 inch clear space between the back of the cabinet and the wall surface.

f. Door-in-door Construction: mounted on hinges that expose only the hinge roll to view when the door is closed.

g. Each door: equipped with lockable lever/handle, fitted with a combined catch and lock latch.

j. Keys: two provided with each lock, with all locks keyed alike.

k. Finished-head cap screws: provided for mounting the panelboard fronts on the cabinets.

2.10.2 Panelboard Buses

Support bus bars on bases independent of circuit breakers. Bus shall be copper. Design main buses and back pans so that breakers may be changed without machining, drilling, or tapping. Provide isolated neutral bus in each panel for connection of circuit neutral conductors. Provide separate ground bus identified as equipment grounding bus per UL 67 for connecting grounding conductors; bond to steel cabinet.

2.10.3 Circuit Breakers

UL 489, thermal magnetic-type having a minimum short-circuit current rating equal to the short-circuit current rating of the panelboard in which the circuit breaker will be mounted. Breaker terminals: UL listed as suitable for type of conductor provided. Where indicated on the drawings, provide circuit breakers with shunt trip devices. Series rated circuit breakers and plug-in circuit breakers are unacceptable.

2.10.3.1 Multipole Breakers

Provide common trip-type with single operating handle. Design breaker such that overload in one pole automatically causes all poles to open. Maintain phase sequence throughout each panel so that any three adjacent breaker poles are connected to Phases A, B, and C, respectively.

2.10.3.2 Circuit Breaker With Ground-Fault Circuit Interrupter

UL 943 and NFPA 70. Provide with auto-monitoring (self-test) and lockout features, "push-to-test" button, visible indication of tripped condition, and ability to detect and trip when current imbalance is 6 milliamperes or higher per requirements of UL 943 for Class A ground-fault circuit interrupter devices.

2.11 MANUAL MOTOR STARTERS (MOTOR RATED SWITCHES)

Single pole designed for flush mounting with overload protection and pilot lights.

2.11.1 Pilot Lights

Provide yoke-mounted, seven element LED cluster light module. Color: red in accordance with NEMA ICS 2.

2.12 LOCKOUT REQUIREMENTS

Provide circuit breakers, disconnecting means, and other devices that are electrical energy-isolating capable of being locked out for machines and other equipment to prevent unexpected startup or release of stored energy in accordance with 29 CFR 1910.147, NFPA 70E and 29 CFR 1910.303. Comply with requirements of Division 23, "Heating, Ventilating, and Air Conditioning (HVAC)" for mechanical isolation of machines and other equipment.

2.13 MANUFACTURER'S NAMEPLATE

Provide on each item of equipment a nameplate bearing the manufacturer's name, address, model number, and serial number securely affixed in a conspicuous place; the nameplate of the distributing agent will not be acceptable.

2.14 FIELD FABRICATED NAMEPLATES

Provide field fabricated nameplates in accordance with the following:

a. ASTM D709.

b. Provide laminated plastic nameplates for each equipment enclosure, relay, switch, and device, in accordance with the latest version of

Tinker Electrical Standards.

c. Each nameplate inscription: identify the function and, when applicable, the position.

d. Equipment Nameplates: shall be 0.125 inch thick x 2 inches tall x 5 inches wide, custom engraved tile, Laminated Plastic, black nameplate with white letters, to include the following information:

i. Equipment Name in 3/8 inch Minimum Height Lettering.
ii. UID Identification Name in 1/8 inch Minimum Height Lettering.
iii. Voltage, Ampacity Rating and Type in 1/8 inch Minimum Height Lettering.
iv. Equipment AIC Rating in 1/8 inch Minimum Height Lettering.
v. Feeder Source of Supply description and location in 1/8 inch Minimum Height Lettering.
vi. Installation Date MM/DD/YYYY in 1/8 inch Minimum Height Lettering.

e. Provide red laminated plastic label with white center core for Emergency Power and Fire Alarm/Fire Protection Equipment.

f. Surface: matte finish. Corners: square. Accurately align lettering and engrave into the core.

g. Minimum size of nameplates: one by 2.5 inches.

h. Lettering size and style: a minimum of 0.25 inch high normal block style.

2.15 WARNING SIGNS

Provide warning signs for flash protection in accordance with NFPA 70E and NEMA Z535.4 for switchboards, panelboards, industrial control panels, and motor control centers that are in other than dwelling occupancies and are likely to require examination, adjustment, servicing, or maintenance while energized. Provide field installed signs to warn qualified persons of potential electric arc flash hazards when warning signs are not provided by the manufacturer. Provide marking that is clearly visible to qualified persons before examination, adjustment, servicing, or maintenance of the equipment.

2.16 FIRESTOPPING MATERIALS

Provide firestopping around electrical penetrations in accordance with Section 07 84 00 FIRESTOPPING.

2.17 SURGE PROTECTIVE DEVICES

Provide parallel type surge protective devices (SPD) which comply with UL 1449 panelboards. Provide surge protectors in a NEMA 1 enclosure per NEMA ICS 6. Do not install SPD inside a panelboard or switchboard enclosure. However, SPD may be installed in a separate compartment of a switchgear provided that it is supplied by a dedicated circuit breaker. SPD must have the same short-circuit current rating as the protected equipment and must not be installed at a point of system where the available fault current is in excess of that rating. Use Type 1 or Type 2 SPD and connect on the load side of a dedicated circuit breaker. Submit performance and characteristic curves.

Provide the following modes of protection:

FOR SINGLE PHASE AND THREE PHASE WYE CONNECTED SYSTEMS-
Phase to phase (L-L)
Each phase to neutral (L-N)
Neutral to ground (N-G)
Phase to ground (L-G)

Protection Mode: Provide the following six modes (additional modes are permitted):
Line-to-line
Line-to-ground or
Line-to-neutral

SPDs: provide with a minimum surge current rating of 40,000 amperes for L-L mode minimum and 20,000 amperes for other modes (L-N, L-G, and N-G).

Provide SPDs.

Maximum L-N, L-G, and N-G Voltage Protection Rating:

700V for 120V, single phase system
700V for 120/240V, single phase system
700V for 208Y/120V, three phase system

Maximum L-L Voltage Protection Rating:

1,200V for 120V, single phase system
1,200V for 120/240V, single phase system
1,200V for 208Y/120V, three phase system

The minimum MCOV (Maximum Continuous Operating Voltage) rating for L-N and L-G modes of operation: 120 percent of nominal voltage for 240 volts and below; 115 percent of nominal voltage above 240 volts.

Surge Life: Greater than 5000 surges of repetitive sequential IEEE C62.41 Category B3 waveforms with less than 10% degradation of measured limiting voltage.

Warranty: Not less than a 10-year warranty and include unlimited free replacements of the unit if destroyed by lightning or other transients during the warranty period.

2.18 FACTORY APPLIED FINISH

Provide factory-applied finish on electrical equipment in accordance with the following:

a. NEMA 250 corrosion-resistance test and the additional requirements as specified herein.

b. Interior and exterior steel surfaces of equipment enclosures: thoroughly cleaned followed by a rust-inhibitive phosphatizing or equivalent treatment prior to painting.

c. Exterior surfaces: free from holes, seams, dents, weld marks, loose scale or other imperfections.

d. Interior surfaces: receive not less than one coat of

corrosion-resisting paint in accordance with the manufacturer's standard practice.

e. Exterior surfaces: primed, filled where necessary, and given not less than two coats baked enamel with semigloss finish.

f. Equipment located indoors: ANSI Light Gray.

g. Provide manufacturer's coatings for touch-up work and as specified in paragraph FIELD APPLIED PAINTING.

2.19 COORDINATED POWER SYSTEM PROTECTION

Prepare analyses as specified in Section 26 05 73 POWER SYSTEM STUDIES.

PART 3 EXECUTION

3.1 INSTALLATION

Electrical installations, including weatherproof and hazardous locations and ducts, plenums and other air-handling spaces: conform to requirements of NFPA 70 and IEEE C2 and to requirements specified herein.

3.1.1 Hazardous Locations

Perform work in hazardous locations, as defined by NFPA 70, in strict accordance with NFPA 70 for particular "Class," "Division," and "Group" of hazardous locations involved. Provide conduit and cable seals where required by NFPA 70. Provide conduit with tapered threads.

3.1.2 Labels

Wherever work results in service entrance disconnect devices in more than one enclosure, as permitted by NFPA 70, label each enclosure, new and existing, as one of several enclosures containing service entrance disconnect devices. Label, at minimum: indicate number of service disconnect devices housed by enclosure and indicate total number of enclosures that contain service disconnect devices. Provide laminated plastic labels conforming to paragraph FIELD FABRICATED NAMEPLATES. Use lettering of at least 0.25 inch in height, and engrave on black-on-white matte finish. Service entrance disconnect devices in more than one enclosure: provided only as permitted by NFPA 70.

3.1.3 Wiring Methods

Provide insulated conductors installed in rigid steel conduit, IMC, rigid nonmetallic conduit, or EMT, except where specifically indicated or specified otherwise or required by NFPA 70 to be installed otherwise. Grounding conductor: separate from electrical system neutral conductor. Provide insulated green equipment grounding conductor for circuit(s) installed in conduit and raceways. Minimum conduit size: 1/2 inch in diameter for low voltage lighting and power circuits. Vertical distribution in multiple story buildings: made with metal conduit in fire-rated shafts, with metal conduit extending through shafts for minimum distance of 6 inches. Firestop conduit which penetrates fire-rated walls, fire-rated partitions, or fire-rated floors in accordance with Section 07 84 00 FIRESTOPPING.

3.1.3.1 Pull Wire

Install pull wires in empty conduits. Pull wire: plastic having minimum 200-pound force tensile strength. Leave minimum 36 inches of slack at each end of pull wire.

3.1.4 Conduit Installation

Unless indicated otherwise, conceal conduit under floor slabs and within finished walls above ceilings, and under floors. No exposed raceways shall be permitted on exterior building surfaces withouta Written Waiver of these requirements by 72ABW/CENMP. Where possible, raceways to roof mounted equipment shall be routed beneath the roof structure to a penetration immediately adjacent to the equipment. Exposed conduit on exterior of buildings, where approved, and on roofs shall be galvanized rigid conduit or rigid aluminum conduit. Exposed conduit on exterior walls shall be painted to match the building colors. All conduits penetrations through established fire barriers shall be sealed with an approved fire stopping material. All unused conduit in renovated areas shall be removed to the source. Exception: Conduit installed in concrete or masonry walls and underground may be abandoned in place with 72ABW/CENMP approval. Keep conduit minimum 6 inches away from parallel runs of flues and steam or hot water pipes. Install conduit parallel with or at right angles to ceilings, walls, and structural members where located above accessible ceilings and where conduit will be visible after completion of project. A minimum of two spare 3/4 inch conduits shall be stubbed and capped off from each new flush mounted branch circuit panel to above ceiling and below accessible floor.

3.1.4.1 Restrictions Applicable to Aluminum Conduit

a. Do not install underground or encase in concrete or masonry.

b. Do not use brass or bronze fittings.

c. Do not use when the enclosed conductors must be shielded from the effects of High-altitude Electromagnetic Pulse (HEMP).

3.1.4.2 Restrictions Applicable to EMT

a. Do not install underground.

b. Do not encase in concrete, mortar, grout, or other cementitious materials.

c. Do not use in areas subject to physical damage including but not limited to equipment rooms where moving or replacing equipment could physically damage the EMT.

d. Do not use in hazardous areas.

e. Do not use outdoors.

f. Do not use in fire pump rooms.

g. Do not use when the enclosed conductors must be shielded from the effects of High-altitude Electromagnetic Pulse (HEMP).

3.1.4.3 Restrictions Applicable to Flexible Conduit

Use only as specified in paragraph FLEXIBLE CONNECTIONS. Do not use when the enclosed conductors must be shielded from the effects of High-altitude Electromagnetic Pulse (HEMP).

3.1.4.4 Stub-Ups

Provide conduits stubbed up through concrete floor for connection to free-standing equipment with adjustable top or coupling threaded inside for plugs, set flush with finished floor. Extend conductors to equipment in rigid steel conduit, except that flexible metal conduit may be used 6 inches above floor. Where no equipment connections are made, install screwdriver-operated threaded flush plugs in conduit end.

3.1.4.5 Conduit Support

Support conduit by pipe straps, wall brackets, threaded rod conduit hangers, or ceiling trapeze. Plastic cable ties are not acceptable. Fasten by wood screws to wood; by toggle bolts on hollow masonry units; by concrete inserts or expansion bolts on concrete or brick; and by machine screws, welded threaded studs, or spring-tension clamps on steel work. Threaded C-clamps may be used on rigid steel conduit only. Do not weld conduits or pipe straps to steel structures. Do not exceed one-fourth proof test load for load applied to fasteners. Provide vibration resistant and shock-resistant fasteners attached to concrete ceiling. Do not cut main reinforcing bars for any holes cut to depth of more than 1 1/2 inches in reinforced concrete beams or to depth of more than 3/4 inch in concrete joints. Fill unused holes. In partitions of light steel construction, use sheet metal screws. In suspended-ceiling construction, run conduit above ceiling. Do not support conduit by ceiling support system. Conduit and box systems: supported independently of both (a) tie wires supporting ceiling grid system, and (b) ceiling grid system into which ceiling panels are placed. Do not share supporting means between electrical raceways and mechanical piping or ducts. Identify independent conduit support in both fire and non-fire rated assemblies per NFPA 70. Coordinate installation with above-ceiling mechanical systems to assure maximum accessibility to all systems. Spring-steel fasteners may be used for lighting branch circuit conduit supports in suspended ceilings in dry locations. Where conduit crosses building expansion joints, provide suitable expansion fitting that maintains conduit electrical continuity by bonding jumpers or other means. For conduits greater than 2 1/2 inches inside diameter, provide supports to resist forces of 0.5 times the equipment weight in any direction and 1.5 times the equipment weight in the downward direction.

3.1.4.6 Directional Changes in Conduit Runs

Make changes in direction of runs with symmetrical bends or cast-metal fittings. Make field-made bends and offsets with hickey or conduit-bending machine. Do not install crushed or deformed conduits. Avoid trapped conduits. Prevent plaster, dirt, or trash from lodging in conduits, boxes, fittings, and equipment during construction. Free clogged conduits of obstructions.

3.1.4.7 Locknuts and Bushings

Fasten conduits to sheet metal boxes and cabinets with two locknuts where required by NFPA 70, where insulated bushings are used, and where bushings cannot be brought into firm contact with the box; otherwise, use at least

minimum single locknut and bushing. Provide locknuts with sharp edges for digging into wall of metal enclosures. Install bushings on ends of conduits, and provide insulating type where required by NFPA 70.

3.1.4.8 Flexible Connections

Provide flexible steel conduit between 3 and 6 feet in length for recessed and semirecessed lighting fixtures; for equipment subject to vibration, noise transmission, or movement; and for motors. Install flexible conduit to allow 20 percent slack. Minimum flexible steel conduit size: 1/2 inch diameter. Provide liquid tight flexible conduit in wet and damp locations and in fire pump rooms for equipment subject to vibration, noise transmission, movement or motors. Provide separate ground conductor across flexible connections. Plastic cable ties are not acceptable as a support method.

3.1.5 Boxes, Outlets, and Supports

Provide boxes in wiring and raceway systems wherever required for pulling of wires, making connections, and mounting of devices or fixtures. Boxes for metallic raceways: cast-metal, hub-type when located in wet locations, when surface mounted on outside of exterior surfaces, when surface mounted on interior walls exposed up to 7 feet above floors and walkways, and when specifically indicated. Boxes in other locations: sheet steel, except that aluminum boxes may be used with aluminum conduit, and nonmetallic boxes may be used with nonmetallic conduit system. Provide each box with volume required by NFPA 70 for number of conductors enclosed in box. Boxes for mounting lighting fixtures: minimum 4 inches square, or octagonal, except that smaller boxes may be installed as required by fixture configurations, as approved. Boxes for use in masonry-block or tile walls: square-cornered, tile-type, or standard boxes having square-cornered, tile-type covers. Provide gaskets for cast-metal boxes installed in wet locations and boxes installed flush with outside of exterior surfaces. Provide separate boxes for flush or recessed fixtures when required by fixture terminal operating temperature; provide readily removable fixtures for access to boxes unless ceiling access panels are provided. Support boxes and pendants for surface-mounted fixtures on suspended ceilings independently of ceiling supports. Fasten boxes and supports with wood screws on wood, with bolts and expansion shields on concrete or brick, with toggle bolts on hollow masonry units, and with machine screws or welded studs on steel. In open overhead spaces, cast boxes threaded to raceways need not be separately supported except where used for fixture support; support sheet metal boxes directly from building structure or by bar hangers. Where bar hangers are used, attach bar to raceways on opposite sides of box, and support raceway with approved-type fastener maximum 24 inches from box. When penetrating reinforced concrete members, avoid cutting reinforcing steel.

3.1.5.1 Boxes

Boxes for use with raceway systems: minimum 1 1/2 inches deep, except where shallower boxes required by structural conditions are approved. Boxes for other than lighting fixture outlets: minimum 4 inches square, except that 4 by 2 inch boxes may be used where only one raceway enters outlet. Mount outlet boxes flush in finished walls.

3.1.5.2 Pull Boxes

Construct of at least minimum size required by NFPA 70 of code-gauge

aluminum or galvanized sheet steel, except where cast-metal boxes are required in locations specified herein. Provide boxes with screw-fastened covers. Where several feeders pass through common pull box, tag feeders to indicate clearly electrical characteristics, circuit number, and panel designation.

3.1.5.3 Extension Rings

Extension rings are not permitted for new construction. Use only on existing boxes in concealed conduit systems where wall is furred out for new finish.

3.1.6 Mounting Heights

Mount panelboards, enclosed circuit breakers, and disconnecting switches so height of center of grip of the operating handle of the switch or circuit breaker at its highest position is maximum 79 inches above floor or working platform or as allowed in Section 404.8 per NFPA 70. Mount lighting switches 48 inches above finished floor. Mount receptacles 18 inches above finished floor, unless otherwise indicated. Mount other devices as indicated. Measure mounting heights of wiring devices and outletsto center of device or outlet.

3.1.7 Conductor Identification

Provide conductor identification within each enclosure where tap, splice, or termination is made. For conductors No. 6 AWG and smaller diameter, provide color coding by factory-applied, color-impregnated insulation. For conductors No. 4 AWG and larger diameter, provide color coding by plastic-coated, self-sticking markers; colored nylon cable ties and plates; or heat shrink-type sleeves.

3.1.7.1 Marking Strips

Provide marking strips for identification of power distribution, control, data, and communications cables in accordance with the following:

a. Provide white or other light-colored plastic marking strips, fastened by screws to each terminal block, for wire designations.

b. Use permanent ink for the wire numbers

c. Provide reversible marking strips to permit marking both sides, or provide two marking strips with each block.

d. Size marking strips to accommodate the two sets of wire numbers.

e. Assign a device designation in accordance with NEMA ICS 1 to each device to which a connection is made. Mark each device terminal to which a connection is made with a distinct terminal marking corresponding to the wire designation used on the Contractor's schematic and connection diagrams.

f. The wire (terminal point) designations used on the Contractor's wiring diagrams and printed on terminal block marking strips may be according to the Contractor's standard practice; however, provide additional wire and cable designations for identification of remote (external) circuits for the Government's wire designations.

g. Prints of the marking strips drawings and will be so marked and returned to the Contractor for addition of the designations to the terminal strips and tracings, along with any rearrangement of points required.

3.1.8 Splices

Splices shall not be permitted. Exception: Splicing of feeder conductors may be performed on a case by case basis with prior written approval at the design phase of the project by 72 ABW/CENMP for real property electrical systems or 76 MXSG/MXDEJ for non-real property electrical systems.

3.1.9 Covers and Device Plates

Install with edges in continuous contact with finished wall surfaces without use of mats or similar devices. Plaster fillings are not permitted. Install plates with alignment tolerance of 1/16 inch. Use of sectional-type device plates are not permitted. Provide gasket for plates installed in wet locations.

3.1.10 Electrical Penetrations

Seal openings around electrical penetrations through fire resistance-rated walls, partitions, floors, or ceilings in accordance with Section 07 84 00 FIRESTOPPING.

3.1.11 Grounding and Bonding

Provide in accordance with NFPA 70. Ground exposed, non-current-carrying metallic parts of electrical equipment, metallic raceway systems, grounding conductor in metallic and nonmetallic raceways, telecommunications system grounds. Where ground fault protection is employed, ensure that connection of ground and neutral does not interfere with correct operation of fault protection.

3.1.12 Equipment Connections

Provide power wiring for the connection of motors and control equipment under this section of the specification. Except as otherwise specifically noted or specified, automatic control wiring, control devices, and protective devices within the control circuitry are not included in this section of the specifications and are provided under the section specifying the associated equipment.

3.1.13 Repair of Existing Work

Perform repair of existing work, demolition, and modification of existing electrical distribution systems as follows:

3.1.13.1 Workmanship

Lay out work in advance. Exercise care where cutting, channeling, chasing, or drilling of floors, walls, partitions, ceilings, or other surfaces is necessary for proper installation, support, or anchorage of conduit, raceways, or other electrical work. Repair damage to buildings, piping, and equipment using skilled craftsmen of trades involved.

3.1.13.2 Existing Concealed Wiring to be Removed

Disconnect existing concealed wiring to be removed from its source. Remove conductors; cut conduit flush with floor, underside of floor, and through walls; and seal openings.

3.1.13.3 Continuation of Service

Maintain continuity of existing circuits of equipment to remain. Maintain existing circuits of equipment energized. Restore circuits wiring and power which are to remain but were disturbed during demolition back to original condition.

3.1.14 Surge Protective Devices

Connect the surge protective devices in parallel to the power source, keeping the conductors as short and straight as practically possible. Maximum allowed lead length is 3 feet avoiding 90 degree bends. Do not locate surge protective devices inside a panelboard or switchboard enclosure.

3.2 FIELD FABRICATED NAMEPLATE MOUNTING

Provide number, location, and letter designation of nameplates as indicated. Fasten nameplates to the device with a minimum of two sheet-metal screws or two rivets. Provide nameplate on all equipment in access controlled spaces and areas.

3.3 WARNING SIGN MOUNTING

Provide the number of signs required to be readable from each accessible side. Space the signs in accordance with NFPA 70E.

3.4 FIELD APPLIED PAINTING

Paint electrical equipment as required to match finish of adjacent surfaces or to meet the indicated or specified safety criteria. Where field painting of enclosures for panelboards, load centers or the like is specified to match adjacent surfaces, to correct damage to the manufacturer's factory applied coatings, or to meet the indicated or specified safety criteria, provide manufacturer's recommended coatings and apply in accordance to manufacturer's instructions.

3.5 FIELD QUALITY CONTROL

Furnish test equipment and personnel and submit written copies of test results. Give Contracting Officer 5 working days notice prior to each test. Where applicable, test electrical equipment in accordance with NETA ATS.

3.5.1 Devices Subject to Manual Operation

Operate each device subject to manual operation at least five times, demonstrating satisfactory operation each time.

3.5.2 600-Volt Wiring Test

Test wiring rated 600 volt and less to verify that no short circuits or accidental grounds exist. Perform insulation resistance tests on wiring No. 6 AWG and larger diameter using instrument which applies voltage of

1,000 volts DC for 600 volt rated wiring and 500 volts DC for 300 volt rated wiring per NETA ATS to provide direct reading of resistance. All existing wiring to be reused must also be tested.

3.5.3 Ground-Fault Receptacle Test

Test ground-fault receptacles with a "load" (such as a plug in light) to verify that the "line" and "load" leads are not reversed. Press the TEST button and then the RESET button to verify by LED status that the device is a self-test model as specified in UL 943.

3.5.4 Phase Rotation Test

Perform phase rotation test to ensure proper rotation of service power prior to operation of new or reinstalled equipment using a phase rotation meter. Follow the meter manual directions performing the test.

-- End of Section --

SECTION 28 31 76

INTERIOR FIRE ALARM AND MASS NOTIFICATION SYSTEM, ADDRESSABLE
08/20

PART 1 GENERAL

1.1 REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ACOUSTICAL SOCIETY OF AMERICA (ASA)

ASA S3.2	(2020) American National Standard Method for Measuring the Intelligibility of Speech Over Communication Systems (ASA 85)

FM GLOBAL (FM)

FM APP GUIDE	(updated on-line) Approval Guide http://www.approvalguide.com/

INSTITUTE OF ELECTRICAL AND ELECTRONICS ENGINEERS (IEEE)

IEEE C62.41.1	(2002; R 2008) Guide on the Surges Environment in Low-Voltage (1000 V and Less) AC Power Circuits
IEEE C62.41.2	(2002) Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA 4	(2024) Standard for Integrated Fire Protection and Life Safety System Testing
NFPA 70	(2023) National Electrical Code
NFPA 72	(2025) National Fire Alarm and Signaling Code
NFPA 90A	(2024) Standard for the Installation of Air Conditioning and Ventilating Systems
NFPA 170	(2024; ERTA 1 2023) Standard for Fire Safety and Emergency Symbols

U.S. ARMY CORPS OF ENGINEERS (USACE)

ECB 2018-17	(2018; R 2022) New Requirements For Visual Notification For Mass Notification Systems - Category: Directive And Policy

U.S. DEPARTMENT OF DEFENSE (DOD)

UFC 3-600-01	(2016; with Change 6, 2021) Fire Protection Engineering for Facilities
UFC 3-601-02	(2021) Fire Protection Systems Inspection, Testing, and Maintenance
UFC 4-010-01	(2018; with Change 1, 2020) DoD Minimum Antiterrorism Standards for Buildings
UFC 4-010-06	(2016; with Change 1, 2017) Cybersecurity of Facility-Related Control Systems
UFC 4-021-01	(2008; with Change 1) Design and O&M: Mass Notification Systems
UFC 4-211-01	(13 Apr 2017 Change 3, Apr 20, 2021) Aircraft Maintenance Hangars
UFC 4-211-02	Aircraft Corrosion Control and Paint Facilities (1 Dec 2012)
Sundown Policy	(16 November 2021, with Change 2 December 29, 2022) Sundown Policy for Foam Fire Suppression Systems

U.S. NATIONAL ARCHIVES AND RECORDS ADMINISTRATION (NARA)

47 CFR 15	Radio Frequency Devices
47 CFR 90	Private Land Mobile Radio Services

UNDERWRITERS LABORATORIES (UL)

UL 268	(2016; Reprint Nov 2021) UL Standard for Safety Smoke Detectors for Fire Alarm Systems
UL 268A	(2008; Reprint Oct 2014) Smoke Detectors for Duct Application
UL 464	(2016; Reprint Sep 2017) UL Standard for Safety Audible Signaling Devices for Fire Alarm and Signaling Systems, Including Accessories
UL 497B	(2004; Reprint Dec 2012) Protectors for Data Communication Circuits
UL 521	(1999; Reprint Mar 2021) UL Standard for Safety Heat Detectors for Fire Protective Signaling Systems
UL 864	(2014; Reprint May 2020) UL Standard for Safety Control Units and Accessories for Fire Alarm Systems
UL 1283	(2017) UL Standard for Safety

	Electromagnetic Interference Filters
UL 1449	(2021) UL Standard for Safety Surge Protective Devices
UL 1480	(2016; Reprint Sep 2017) UL Standard for Safety Speakers for Fire Alarm and Signaling Systems, Including Accessories
UL 1638	(2016; Reprint Sep 2017) UL Standard for Safety Visible Signaling Devices for Fire Alarm and Signaling Systems, Including Accessories
UL 1971	(2002; Reprint Oct 2008) Signaling Devices for the Hearing Impaired
UL 2017	(2008; Reprint Dec 2018) UL Standard for Safety General-Purpose Signaling Devices and Systems
UL 2572	(2016; Bul. 2018) UL Standard for Safety Mass Notification Systems
UL Fire Prot Dir	(2012) Fire Protection Equipment Directory

TINKER AIR FORCE BASE (TAFB)

TAFB FPS	(2023) Tinker Air Force Base Fire Protection Standard

1.2 RELATED SECTIONS

In addition, refer to the following sections for related work and coordination:

Section 21 13 13 WET PIPE SPRINKLER SYSTEM, FIRE PROTECTION
Section 07 84 00 FIRESTOPPING for additional work related to firestopping.

1.3 SUMMARY

1.3.1 Scope

a. This work includes designing and providing a new, complete, fire alarm and mass notification (MNS) system as described herein and on the contract drawings. Include system wiring, raceways, pull boxes, terminal cabinets, outlet and mounting boxes, control equipment, initiating devices, notification appliances, supervising station fire alarm transmitters/mass notification transceiver, and other accessories and miscellaneous items required for a complete operational system even though each item is not specifically mentioned or described. Provide systems complete and ready for operation. Design and installation must comply with UFC 4-010-06, UFC 3-600-01, UFC 4-021-01, UFC 4-211-01, UFC 4-211-02, TAFB standards (TAFB FPS), Sundown Policy and AFGM 2019-320-02.

The existing fire alarm systems and foam releasing systems shall be removed in their entirety. A new Monaco system is to be installed in

parallel with the existing fire alarm system. The existing system shall remain fully operational until the new system is certified, commissioned, and placed in service, at which time the existing system will be powered down and demolished.

b. Provide equipment, materials, installation, workmanship, inspection, and testing in strict accordance with NFPA 72, UFC 3-600-01, UFC 4-021-01, UFC 4-211-01, ECB 2018-17, Sundown Policy and TAFB standards, except as modified herein. The system layout on the drawings shows the intent of coverage and suggested locations. Final quantity, system layout, and coordination are the responsibility of the Contractor.

f. The fire alarm and mass notification system must be independent of the building security, building management, and energy/utility monitoring systems other than for control functions.

1.3.2 Qualified Fire Protection Engineer (QFPE)

Services of the QFPE must include:

a. Reviewing SD-02 and SD-03 submittal packages for completeness and compliance with the provisions of this specification. Construction (shop) drawings and calculations must be prepared by, or prepared under the immediate supervision of, the QFPE. The QFPE must affix a review stamp with signature to the shop drawings, calculations, voice intelligibility modeling, and material data sheets, indicating approval prior to submitting the shop drawings to the DFPE, Tinker Air Force Base Fire Protection Engineer and Tinker Air Force Base Fire Department.

b. Providing a letter documenting that the SD-02 and SD-03 submittal package has been reviewed and noting any outstanding comments.

c. Performing in-progress construction surveillance prior to installation of ceilings (rough-in inspection).

d. Witnessing pre-Government and final Government functional performance testing and performing a final installation review.

e. Signing applicable certificates under SD-07.

1.4 DEFINITIONS

Wherever mentioned in this specification or on the drawings, the equipment, devices, and functions must be defined as follows:

1.4.1 Interface Device

An addressable device that interconnects hard wired systems or devices to an analog/addressable system.

1.4.2 Fire Alarm and Mass Notification Control Unit (FMCU)

A master control unit having the features of a fire alarm control unit (FACU) and an autonomous control unit (ACU) where these units are interconnected to function as a combined fire alarm/mass notification system. The FACU and ACU functions may be contained in a single cabinet or in independent, interconnected, and co-located cabinets.

1.4.3 Local Operating Console (LOC)

A unit designed to allow emergency responders and/or building occupants to operate the MNS including delivery of recorded messages and/or live voice announcements, initiate visual, textual visual, and audible appliance operation and other relayed functions.

1.4.4 Terminal Cabinet

A steel cabinet with locking, hinge-mounted door where terminal strips are securely mounted inside the cabinet.

1.4.5 Control Module and Relay Module

Terms utilized to describe emergency control function interface devices as defined by NFPA 72.

1.4.6 Designated Fire Protection Engineer (DFPE)

The DoD fire protection engineer that oversees that Area of Responsibility for that project. This is sometimes referred to as the "cognizant" fire protection engineer. Interpret reference to "authority having jurisdiction" and/or AHJ in referenced standards to mean the Designated Fire Protection Engineer (DFPE). The DFPE may be responsible for review of the contractor submittals having a "G" designation, and for witnessing final inspection and testing.

1.4.7 Qualified Fire Protection Engineer (QFPE)

A QFPE is an individual who is a licensed professional engineer (P.E.), who has passed the fire protection engineering written examination administered by the National Council of Examiners for Engineering and Surveying (NCEES) and has relevant fire protection engineering experience.

1.5 SUBMITTALS

Government approval is required for submittals with a "G" classification. Submittals not having a "G" classification are for Contractor Quality Control approval.

Shop drawings (SD-02) and product data (SD-03) must be prepared by the fire alarm designer and combined and submitted as one complete package. The QFPE must review the SD-02/SD-03 submittal package for completeness and compliance with the Contract provisions prior to submission to the Government. The QFPE must provide a Letter of Confirmation that they have reviewed the submittal package for compliance with the contract provisions. This letter must include their registered professional engineer stamp and signature. Partial submittals and submittals not reviewed by the QFPE will be returned by the Government disapproved without review.

Submit the following in accordance with Section 01 33 00 SUBMITTAL PROCEDURES:

SD-01 Preconstruction Submittals

Qualified Fire Protection Engineer (QFPE); G

Fire alarm system designer; G

Supervisor; G

Technician; G

Installer; G

Test Technician; G

Fire Alarm System Site-Specific Software Acknowledgement; G

SD-02 Shop Drawings

Nameplates; G

Instructions; G

Wiring Diagrams; G

System Layout; G

Notification Appliances; G

Initiating devices; G

Amplifiers; G

Battery Power; G

Voltage Drop Calculations; G

SD-03 Product Data

Fire Alarm and Mass Notification Control Unit (FMCU); G

Fire Alarm Control Unit for Releasing (RSFACU); G

Local Operating Console (LOC); G

Amplifiers; G

Tone Generators; G

Digitalized voice generators; G

Manual Stations; G

Smoke Detectors; G

Duct Smoke Detectors; G

Heat Detectors; G

Flame Detectors; G

Addressable Interface Devices; G

Addressable Control Modules; G

Isolation Modules; G

Notification Appliances; G

Textual Display Signs; G

Batteries; G

Battery Chargers; G

Supplemental Notification Appliance Circuit Panels; G

Auxiliary Power Supply Panels; G

Surge Protective Devices; G

Alarm Wiring; G

Back Boxes and Conduit; G

Ceiling Bridges for Ceiling-Mounted Appliances; G

Terminal Cabinets; G

Automatic Fire Alarm Transmitters (including housing); G

Radio Transmitter and Interface Panels; G

Environmental Enclosures or Guards; G
Document Storage Cabinet; G

SD-06 Test Reports

Test Procedures; G

SD-07 Certificates

Verification of Compliant Installation; G

Request for Government Final Test; G

SD-10 Operation and Maintenance Data

Operation and Maintenance (O&M) Instructions; G

Instruction of Government Employees; G

SD-11 Closeout Submittals

As-Built Drawings

Spare Parts

Coordinated Submittal

1.5.1 Coordinated Submittal

The general contractor shall provide the shop drawings, calculations, and data sheets for the fire alarm and mass notification system in the same

submittal package for review. Partial submittal will not be reviewed and will be rejected upon receipt.

1.6 FMCU SYSTEM OPERATION

Fire alarm system/mass notification system including textual display sign control panel(s), components requiring power, except for the FMCU(s) power supply, must operate on 24 volts DC unless noted otherwise in this section.

The interior fire alarm and mass notification system must be a complete, supervised, noncoded, analog/addressable fire alarm and mass notification system conforming to NFPA 72, UFC 3-600-01, UFC 4-021-01, TAFB FPS, UL 864, and UL 2572. Systems meeting UL 2017 only are not acceptable. The system must be activated into the alarm mode by actuation of an alarm initiating device. The system must remain in the alarm mode until the initiating device is reset and the control unit is reset and restored to normal. The system may be placed in the alarm mode by local microphones, LOC, FMCU, or remotely from authorized locations/users.

The FMCU radio (transceiver) system shall report alarms to the existing Monaco-D21 fire alarm monitoring base station. The system shall be completely supervised radio type fire alarm reporting system. The system shall indicate the exact area and device of alarm. The radio communications link shall be narrow band-compliant, supervised and operated in accordance with NFPA 72. Fire alarm signals to base D-21 shall be point-to-point.

1.6.1 Alarm Initiating Devices and Notification Appliances (Visual, Voice, Textual)

a. Connect alarm initiating devices to initiating device circuits (IDC) Class "B", or to signaling line circuits (SLC) Class "B" and installed in accordance with NFPA 72 and UFC 3-600-01.

b. Connect notification appliances to notification appliance circuits (NAC) Class "B".

1.6.2 Functions and Operating Features

The system must provide the following functions and operating features:

a. Power, annunciation, supervision, and control for the system. Addressable systems must be microcomputer (microprocessor or microcontroller) based with a minimum word size of eight bits with sufficient memory to perform as specified.

b. Visual alarm notification appliances must be synchronized as required by NFPA 72.

c. Electrical supervision of the primary power (AC) supply, presence of the battery, battery voltage, and placement of system modules within the control unit.

d. An audible and visual trouble signal to activate upon a single break or open condition, or ground fault. The trouble signal must also operate upon loss of primary power (AC) supply, absence of a battery supply, low battery voltage, or removal of alarm or supervisory control unit modules. After the system returns to normal operating conditions, the trouble signal must again sound until the trouble is acknowledged. A

smoke detector in the process of being verified for the actual presence of smoke must not initiate a trouble condition.

e. A trouble signal silence feature that must silence the audible trouble signal, without affecting the visual indicator.

f. Program capability via switches in a locked portion of the FMCU to bypass the automatic notification appliance circuits, fire reporting systemair handler shutdownelevator recall features. Operation of this programmed action must indicate on the FMCU display as a supervisory or trouble condition.

g. Alarm functions must override trouble or supervisory functions. Supervisory functions must override trouble functions.

h. The system must be capable of being programmed from the control unit keyboard. Programmed information must be stored in non-volatile memory.

i. The system must be capable of operating, supervising, and/or monitoring non-addressable alarm and supervisory devices.

j. There must be no limit, other than maximum system capacity, as to the number of addressable devices that may be in alarm simultaneously.

k. Where the fire alarm/mass notification system is responsible for initiating an action in another emergency control device or system, such as HVAC, elevator recall, the addressable fire alarm relay must be located within 3 feet of the component controlling the emergency function.

l. An alarm signal must automatically initiate the following functions:

(1) Transmission of an alarm point-to-point signal to the fire department.

(2) Visual indication of the device operated on the FMCU, and on the remote annunciator.

(4) Actuation of alarm notification appliances.

(5) Recording of the event electronically in the history log of the FMCU.

m. A supervisory signal must automatically initiate the following functions:

(1) Visual indication of the device operated on the FMCU, and on the remote annunciator.

(2) Record the event on the system printer.

(3) Transmission of a supervisory point-to-point signal to the Monaco D21 Base-Wide Monitoring System.

(4) Operation of a duct smoke detector must shut down the appropriate air handler in accordance with NFPA 90A and UFC 3-600-01 in addition to other requirements of this paragraph and as allowed by NFPA 72.

(5) Recording of the event electronically in the history log of the FMCU.

n. A trouble condition must automatically initiate the following functions:

(1) Visual indication of the device operated on the FMCU, and on the remote annunciator.

(2) Record the event on the system printer.

(3) Transmission of a trouble point-to-point signal to the Monaco D21 Base-Wide Monitoring System.

(4) Recording of the event electronically in the history log of the FMCU.

o. System control equipment must be programmed to provide a 60-minute to 180-minute delay in transmission of trouble signals resulting from primary power failure.

p. Activation of a LOC pushbutton must activate the audible and visual alarms in the facility. The audible message must be the one associated with the pushbutton activated.

1.7 TECHNICAL DATA AND SITE-SPECIFIC SOFTWARE

Technical data and site-specific software (meaning technical data that relates to computer software) that are specifically identified in this project, and may be required in other specifications, must be delivered, strictly in accordance with the CONTRACT CLAUSES. The fire alarm system manufacturer must submit written confirmation of this contract provision as "Fire Alarm System Site-Specific Software Acknowledgement". Identify data delivered by reference to the specification paragraph against which it is furnished. Data to be submitted must include complete system, equipment, and software descriptions. Descriptions must show how the equipment will operate as a system to meet the performance requirements of this contract. The site-specific software data package must also include the following:

a. Items identified in NFPA 72, titled "Site-Specific Software".

b. Identification of programmable portions of the system equipment and capabilities.

c. Description of system revision and expansion capabilities and methods of implementation detailing both equipment and software requirements.

d. Provision of operational software data on all modes of programmable portions for fire alarm and mass notification.

e. Description of Fire Alarm and Mass Notification Control Unit equipment operation.

f. Description of auxiliary and remote equipment operations.

g. Library of application software.

h. Operation and maintenance manuals.

1.8 QUALITY ASSURANCE

1.8.1 Submittal Documents

1.8.1.1 Preconstruction Submittals

Within 36 days of contract award but not less than 14 days prior to commencing any work on site, the Contractor must submit the following for review and approval. SD-02 and SD-03 submittals received prior to the review and approval of the qualifications of the fire alarm subcontractor and QFPE must be returned disapproved without review. All resultant delays must be the sole responsibility of the Contractor.

1.8.1.2 Shop Drawings

Shop drawings must not be smaller than the Contract Drawings. Drawings must comply with the requirements of NFPA 72 and NFPA 170. Minimum scale for floor plans must be 1/8"=1'.

1.8.1.3 Nameplates

Nameplate illustrations and data to obtain approval by the Contracting Officer before installation.

1.8.1.4 Wiring Diagrams

Two (2) hard copies and one pdf version on electronic media copy of point-to-point wiring diagrams showing the points of connection and terminals used for electrical field connections in the system, including interconnections between the equipment or systems that are supervised or controlled by the system. Diagrams must show connections from field devices to the FMCU and remote FMCU, initiating circuits, switches, relays and terminals, including pathway diagrams between the control unit and shared communications equipment within the protected premises. Point-to-point wiring diagrams must be job specific and must not indicate connections or circuits not being utilized. Provide complete riser diagrams indicating the wiring sequence of all devices and their connections to the control equipment. Include a color-code schedule for the wiring.

1.8.1.5 System Layout

Two (2) hard copies and one pdf version on electronic media copy of plan view drawing showing device locations, terminal cabinet locations, junction boxes, other related equipment, conduit routing, conduit sizes, wire counts, conduit fill calculations, wire color-coding, circuit identification in each conduit, and circuit layouts for all floors. Indicate candela rating of each visual notification appliance. Indicate the wattage of each speaker. Clearly identify the locations of isolation modules. Indicate the addresses of all devices, modules, relays, and similar. Show/identify all acoustically similar spaces. Indicate if the environment for the FMCU is within its environmental listing (e.g. temperature/humidity).

Provide a complete description of the system operation in matrix format similar to the "Typical Input/Output Matrix" included in the Annex of NFPA 72.

1.8.1.6 Notification Appliances

Calculations and supporting data on each circuit to indicate that there is at least 25 percent spare capacity for notification appliances. Annotate data for each circuit on the drawings.

1.8.1.7 Initiating Devices

Calculations and supporting data on each circuit to indicate that there is at least 25 percent spare capacity for initiating devices. Annotate data for each circuit on the drawings.

1.8.1.8 Amplifiers

Calculations and supporting data to indicate that amplifiers have sufficient capacity to simultaneously drive all notification speakers at tapped settings plus 25 percent spare capacity. Annotate data for each circuit on the drawings.

1.8.1.9 Battery Power

Calculations and supporting data as required in paragraph Battery Power Calculations for alarm, alert, and supervisory power requirements. Calculations including ampere-hour requirements for each system component and each control unit component, and the battery recharging period, must be included on the drawings.

1.8.1.10 Voltage Drop Calculations

Voltage drop calculations for each notification circuit indicating that sufficient voltage is available for proper operation of the system and all components, at a minimum rated voltage of the system operating on batteries. Include the calculations on the system layout drawings.

1.8.1.11 Product Data

Two (2) hard copies and one pdf version on electronic media copy of annotated descriptive data to show the specific model, type, and size of each item. Catalog cuts must also indicate the NRTL listing. The data must be highlighted to show model, size, and options that are intended for consideration. Data must be adequate to demonstrate compliance with all contract requirements. Product data for all equipment must be combined into a single submittal.

Provide an equipment list identifying the type, quantity, make, and model number of each piece of equipment to be provided under this submittal. The equipment list must include the type, quantity, make and model of spare equipment. Types and quantities of equipment submitted must coincide with the types and quantities of equipment used in the battery calculations and those shown on the shop drawings.

1.8.1.12 Operation and Maintenance (O&M) Instructions

Two (2) hard copies and one pdf version on electronic media copy of the Operation and Maintenance Instructions. The O&M Instructions must be prepared in a single volume or in multiple volumes, with each volume indexed, and may be submitted as a Technical Data Package. Manuals must be approved prior to training. The Interior Fire Alarm And Mass Notification System Operation and Maintenance Instructions must include the following:

a. "Manufacturer Data Package five" as specified in Section 01 78 23 OPERATION AND MAINTENANCE DATA.

b. Operating manual outlining step-by-step procedures required for system startup, operation, and shutdown. The manual must include the manufacturer's name, model number, service manual, parts list, and preliminary equipment list complete with description of equipment and their basic operating features.

c. Maintenance manual listing routine maintenance procedures, possible breakdowns and repairs, and troubleshooting guide. The manuals must include conduit layout, equipment layout and simplified wiring, and control diagrams of the system as installed.

d. Complete procedures for system revision and expansion, detailing both equipment and software requirements.

e. Software submitted for this project on CD/DVD media utilized.

f. Printouts of configuration settings for all devices.

g. Routine maintenance checklist. The routine maintenance checklist must be arranged in a columnar format. The first column must list all installed devices, the second column must state the maintenance activity or state no maintenance required, the third column must state the frequency of the maintenance activity, and the fourth column provided for additional comments or reference. All data (devices, testing frequencies, and similar) must comply with UFC 3-601-02.

h. A final Equipment List must be submitted with the Operating and Maintenance (O&M) manual.

1.8.1.13 As-Built Drawings

The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final Government test of the system. At least one set of the as-built (marked-up) drawings must be provided at the time of, or prior to the final Government test.

1.8.2 Qualifications

1.8.2.1 Fire Alarm System Designer

The fire alarm system designer must be certified as a Level III (minimum) Technician by National Institute for Certification in Engineering Technologies (NICET) in the Fire Alarm Systems subfield of Fire Protection Engineering Technology or meet the qualifications for a QFPE.

1.8.2.2 Supervisor

A NICET Level III fire alarm technician must supervise the installation of the fire alarm/mass notification system. The fire alarm technicians supervising the installation of equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.8.2.3 Technician

Fire alarm technicians with a minimum of NICET Level III certification to install and terminate fire alarm/mass notification system circuits, cabinets and control units. The fire alarm technicians installing the equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.8.2.4 Installer

NICET Level II technician to assist in the installation of fire alarm/mass notification devices, cabinets and control units. A licensed electrician must be allowed to install wire, cable, conduit and backboxes for the fire alarm system/mass notification system. The fire alarm installer must be factory trained in the installation, adjustment, testing, and operation of the equipment specified herein and on the drawings.

1.8.2.5 Test Technician

Fire alarm technicians with a minimum of eight years of experience and NICET Level III utilized in testing and certification of the installation of the fire alarm/mass notification devices, cabinets and control units. The fire alarm technicians testing the equipment must be factory trained in the installation, adjustment, testing, and operation of the equipment installed as part of this project.

1.8.2.6 Manufacturer

Components must be of current design and must be in regular and recurrent production at the time of installation. Provide design, materials, and devices for a protected premises fire alarm system, complete, conforming to NFPA 72and UFC 4-211-01, except as specified herein.

1.8.3 Regulatory Requirements

Equipment and material must be listed or approved. Listed or approved, as used in this section, means listed, labeled or approved by a Nationally Recognized Testing Laboratory (NRTL) such as UL Fire Prot Dir or FM APP GUIDE. The omission of these terms under the description of any item of equipment described must not be construed as waiving this requirement. All listings or approvals by testing laboratories must be from an existing ANSI or UL published standard. The recommended practices stated in the manufacturer's literature or documentation must be considered as mandatory requirements.

1.9 DELIVERY, STORAGE, AND HANDLING

Protect equipment delivered and placed in storage from the weather, humidity, and temperature variation, dirt and dust, and other contaminants.

1.10 MAINTENANCE

1.10.1 Spare Parts

Furnish the following spare parts in the manufacturers original unopened containers:

a. Five complete sets of system keys.

b. Two of each type of fuse required by the system.

c. One manual stations.

d. Two of each type of detector installed.

e. Two of each type of detector base and head installed.

i. Two of each type of audible and visual alarm device installed.

j. One textual visual notification appliance.

k. Two of each type of addressable monitor module installed.

l. Two of each type of addressable control module installed.

1.10.2 Special Tools

Software, connecting cables and proprietary equipment, necessary for the maintenance, testing, and reprogramming of the equipment must be furnished to the Contracting Officer, prior to the instruction of Government employees.

PART 2 PRODUCTS

2.1 GENERAL PRODUCT REQUIREMENT

All fire alarm and mass notification equipment must be listed for use under the applicable reference standards. Interfacing of UL 864 or similar approved industry listing with Mass Notification equipment listed to UL 2572 must be done in a laboratory listed configuration, if the software programming features cannot provide a listed interface control.

2.2 MATERIALS AND EQUIPMENT

2.2.1 Standard Products

Provide materials, equipment, and devices that have been tested by a nationally recognized testing laboratory and listed for fire protection service when so required by NFPA 72, UFC 3-600-01, UFC 4-211-01, UFC 4-021-01, or this specification. Select material from one manufacturer, where possible, and not a combination of manufacturers, for any particular classification of materials. Material and equipment must be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 2 years prior to bid opening.

2.2.2 Nameplates

Major components of equipment must have the manufacturer's name, address, type or style, model or serial number, catalog number, date of installation, installing Contractor's name and address, and the contract number provided on a new name plate permanently affixed to the item or equipment. Major components include, but are not limited to, the following:

a. FMCU

b. Automatic transmitter/transceiver. Terminal Cabinet

Nameplates must be etched metal or plastic, permanently attached by screws

to control units or adjacent walls.

2.2.3 Keys

Keys and locks for equipment, control units and devices must be identical. Master all keys and locks to a single key as required by the Installation Fire Department. All keys/locks should be identical to fire alarm/mass notification panel/FMCU key.

2.2.4 Instructions

Provide a typeset printed or typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame. Install the frame in a conspicuous location observable from the FMCU. The card must show those steps to be taken by an operator when a signal is received as well as the functional operation of the system under all conditions, normal, alarm, supervisory, and trouble. The instructions must also include procedures for operating live voice microphones. The instructions and their mounting location must be approved by the Contracting Officer before being posted.

2.3 FIRE ALARM AND MASS NOTIFICATION CONTROL UNIT

Provide a complete fire alarm and mass notification control unit (FMCU) fully enclosed in a lockable steel cabinet as specified herein. The combined Fire alarm and Mass Notification Control Panel shall be equal to Monaco MAAP X or approved equal, and shall be 100 percent compatible with and function as an extension of the base central fire alarm system: Monaco D21 Supervising Station Receiving Equipment. Operations required for testing or for normal care, maintenance, and use of the system must be performed from the front of the enclosure. If more than a single unit is required at a location to form a complete control unit, the unit cabinets must match exactly. The system must be capable of defining any module as an alarm module and report alarm trouble, loss of polling, or as a supervisory module, and reporting supervisory short, supervisory open or loss of polling such as waterflow switches, valve supervisory switches, fire pump monitoring, independent smoke detection systems, relays for output function actuation.

a. Each control unit must provide power, supervision, control, and logic for the entire system, utilizing solid state, modular components, internally mounted and arranged for easy access. Each control unit must be suitable for operation on a 120 volt, 60 hertz, normal building power supply. Provide each control unit with supervisory functions for power failure, internal component placement, and operation.

b. Visual indication of alarm, supervisory, or trouble initiation on the FMCU must be by liquid crystal display or similar means with a minimum of 80 characters. The mass notification control unit must have the capability of temporarily deactivate the fire alarm audible notification appliances while delivering voice messages.

c. Provide secure operator console for initiating recorded messages, strobes and displays; and for delivering live voice messages. Provide capacity for at least eight prerecorded messages. Provide the ability to automatically repeat prerecorded messages. Provide a secure microphone for delivering live messages. Provide adequate discrete outputs to temporarily deactivate fire alarm audible notification, initiate/synchronize strobes and initiate textual visual notification

appliances. Provide a complete set of self-diagnostics for controller and appliance network. Provide local diagnostic information display and local diagnostic information and system event log file.

2.3.1 Cabinet

Install control unit components in cabinets large enough to accommodate all components and also to allow ample gutter space for interconnection of control units as well as field wiring. The cabinet must be a sturdy steel housing, complete with back box, hinged steel door with cylinder lock, and surface mounting provisions. The enclosure must be identified by an engraved phenolic resin nameplate. Lettering on the nameplate must say "Fire Alarm and Mass Notification control unit" and must not be less than 1-inch high. Provide prominent rigid plastic or metal identification plates for lamps, circuits, meters, fuses, and switches.

2.3.2 Silencing Switches

2.3.2.1 Alarm Silencing Switch

Provide an alarm silencing switch at the FMCU that must silence the audible and visual notification appliances. Subsequent activation of initiating devices must cause the notification appliances to re-activate.

2.3.2.2 Supervisory/Trouble Silencing Switch

Provide supervisory and trouble silencing switch(es) that must silence the audible trouble and supervisory signal(s), but not extinguish the visual indicator. This switch must be overridden upon activation of a subsequent supervisory or trouble condition. Audible trouble indication must resound automatically every 24 hours after the silencing feature has been operated if the supervisory or trouble condition still exists.

2.3.3 Non-Interfering

Power and supervise each circuit such that a signal from one device does not prevent the receipt of signals from any other device. Initiating devices must be manually reset by switch from the FMCU after the initiating device or devices have been restored to normal.

2.3.4 Audible Notification System

The Audible Notification System must comply with the requirements of NFPA 72 for Emergency Voice/Alarm Communications System requirements, except as specified herein. The system must be a one-way, multi-channel voice notification system incorporating user selectability of a minimum eight distinct sounds for tone signaling, and the incorporation of a voice module for delivery of recorded messages. Audible appliances must produce a three-pulse temporal pattern for three cycles followed by a voice message that is repeated until the control unit is reset or silenced.

a. When using the microphone, live messages must be broadcast throughout a selected floor or floors, or all call. The system must be capable of operating all speakers at the same time.

b. The microprocessor must actively interrogate circuitry, field wiring, and digital coding necessary for the immediate and accurate rebroadcasting of the stored voice data into the appropriate amplifier input. Loss of operating power, supervisory power, or any other

malfunction that could render the digitalized voice module inoperative must automatically cause the three-pulse temporal pattern to take over all functions assigned to the failed unit in the event an alarm is activated.

2.3.4.1 Outputs and Operational Modules

All outputs and operational modules must be fully supervised with on-board diagnostics and trouble reporting circuits. Provide form "C" contacts for system alarm and trouble conditions. Provide circuits for operation of auxiliary appliance during trouble conditions. During a Mass Notification event, the control unit must not generate nor cause any trouble alarms to be generated with the Fire Alarm system.

2.3.4.2 Mass Notification

a. The system must have the capability of utilizing an LOC with redundant controls of the FMCU. Notification Appliance Circuits (NAC) must be provided for the activation of strobe appliances. Audio output must be selectable for line level. A hand-held microphone must be provided and, upon activation, must take priority over any tone signal, recorded message, while maintaining the strobe NAC circuit activation. Provide push buttons on LOC and FMCU to activate pre-recorded mass notification Message 1 through Message 6 as shown below.

b. The Mass Notification functions must override the manual or automatic fire alarm notification,. Other fire alarm functions including transmission of a signal(s) to the fire department must remain operational. When a mass notification announcement is disengaged and a fire alarm condition still exists, the audible and visual notification appliances must resume activation for alarm conditions. The fire alarm message must be of lower priority that all other messages (except any "test" messages) and must not override any other messages.

c. Messages must be recorded professionally utilizing standard industry methods, in a professional female voice. Message and tone volumes must both be at the same decibel level. Messages recorded from the system microphone must not be accepted. A 1000 Hz tone (as required by NFPA 72) must precede messages and be similar to the following unless Installation or Facility specific messages are required. Provide messages as detailed in Tinker Fire Protection Standard, 2023, paragraph 1.9.6.10.

d. Auxiliary Input Module must be designed to be an outboard expansion module to either expand the number of optional LOC's, or allow a telephone interface.

2.3.5 Memory

Provide each control unit with non-volatile memory and logic for all functions. The use of long life batteries, capacitors, or other age-dependent devices must not be considered as equal to non-volatile processors, PROMS, or EPROMS.

2.3.6 Field Programmability

Provide control units and control units that are fully field programmable for both input and output of control, initiation, notification, supervisory, and trouble functions. The system program configuration must

be menu driven. System changes must be password protected. Any proprietary equipment and proprietary software needed by qualified technicians to implement future changes to the fire alarm system must be provided as part of this contract.

2.3.7 Input/Output Modifications

The FMCU must contain features that allow the bypassing of input devices from the system or the modification of system outputs. These control features must consist of a control unit mounted keypad. Any bypass or modification to the system must indicate a trouble condition on the FMCU.

2.3.8 Resetting

Provide the necessary controls to prevent the resetting of any alarm, supervisory, or trouble signal while the alarm, supervisory or trouble condition on the system still exists.

2.3.9 Walk Test

The FMCU must have a walk test feature. When using this feature, operation of initiating devices must result in limited system outputs, so that the notification appliances operate for only a few seconds and the event is indicated in the history log, but no other outputs occur.

2.3.10 History Logging

The control unit must have the ability to store a minimum of 400 events in a log. These events must be stored in a battery-protected memory and must remain in the memory until the memory is downloaded or cleared manually. Resetting of the control unit must not clear the memory.

2.3.11 Manual Access

An operator at the control unit, having a proper access level, must have the capability to manually access the following information for each initiating device.

a. Primary status.

b. Device type.

c. Present average value.

d. Present sensitivity selected.

e. Detector range (normal, dirty).

2.4 LOCAL OPERATING CONSOLES (LOC)

2.4.1 General

The LOC must consist of a remote microphone station incorporating a push-to-talk (PTT) hand-held microphone and system status indicators. The LOC must have the capability of being utilized to activate prerecorded messages. The unit must incorporate microphone override of any tone generation or recorded messages. The unit must be fully supervised from the FMCU. The housing for the LOC must not be lockable. Provide a single switch or operating mechanism capable of shutting down all HVAC

equipment in the facility in accordance with the requirements of UFC 4-010-01.

Local Operating Consoles shall be labeled "MASS NOTIFICATION SYSTEM LOC" affixed permanently to the front of the cabinet. Local Operating Consoles shall not be provided with push buttons to initiate the "Carbon Monoxide Emergency" or "Fire Emergency" messages.

2.4.2 Multiple LOCs

When an installation has more than one LOC, the LOCs must be programmed to allow only one LOC to be available for paging or messaging at a time. Once one LOC becomes active, all other LOC's will have an indication that the system is busy (Amber Busy Light) and cannot be used at that time. This is to avoid two messages being given at the same time. It must be possible to override or lockout the LOC's from the FMCU.

2.5 AMPLIFIERS, PREAMPLIFIERS, TONE GENERATORS

Any amplifiers, preamplifiers, tone generators, digitalized voice generators, and other hardware necessary for a complete, operational, textual audible circuit conforming to NFPA 72 must be housed in a remote FMCU, terminal cabinet, or in the FMCU. Individual amplifiers must be 100 watts maximum.

2.5.1 Operation

The system must automatically operate and control all building speakers.

2.5.2 Construction

Amplifiers must utilize computer grade solid state components and must be provided with output protection devices sufficient to protect the amplifier against any transient up to 10 times the highest rated voltage in the system.

2.5.3 Inputs

Equip each system with separate inputs for the tone generator, digitalized voice driver and control unit mounted microphone . Microphone inputs must be of the low impedance, balanced line type. Both microphone and tone generator input must be operational on any amplifier.

2.5.4 Tone Generator

The tone generator must produce a three-pulse temporal pattern and must be constantly repeated until interrupted by either the digitalized voice message, the microphone input, or the alarm silence mode as specified. The tone generator must be single channel with an automatic backup generator per channel such that failure of the primary tone generator causes the backup generator to automatically take over the functions of the failed unit and also causes transfer of the common trouble relay. The tone generator must be provided with securely attached labels to identify the component as a tone generator and to identify the specific tone it produces.

2.5.5 Protection Circuits

Each amplifier must be constantly supervised for any condition that could render the amplifier inoperable at its maximum output. Failure of any component must cause illumination of a visual "amplifier trouble"

indicator on the control unit, appropriate logging of the condition in the history log, and other actions for trouble conditions as specified.

2.6 REMOTE ANNUNCIATOR

2.6.1 LCD Annunciator

Provide a semi-recessed mounted annunciator that includes an LCD display. The display must indicate the device in trouble/alarm or any supervisory device. Display the device name, address. The remote annunciator must duplicate functions of the FMCU for message display, fire alarm, supervisory alarm, and trouble conditions, visual and audible notification, and system reset functions. Remote annunciator must require the use of a key for accessing the reset, control and other functions.

A building floor plan must be provided and mounted (behind Plexiglass or similar protective material) at the annunciator location. The floor plan must indicate all rooms by name and number including the locations of stairs and elevators. The floor plan must show all devices and their programmed address to facilitate identification of their physical location from the LCD display information.

2.7 OPTICAL FLAME DETECTOR

New optical flame detection will be provided at the request of the Tinker AFB DFPE, consistent with the pending release of UFC 4-211-01, Change 4. New optical flame detection will be the X3301 Multi-spectrum IR Flame Detector manufactured by UTC Fire & Security, Detector Electronics Corporation, 6901 W 10th St, Minneapolis, M 55438. The project will require an individual Sole Source Justification and Approval (J&A) document as required by the Federal Acquisition Regulations (FAR) (Subpart 6.3) that justifies and obtains approval for contact solicitations that use other than Full and open Competition.

The Optical flame detection system will use triple infrared (IR) flame detectors listed/approved for the expected fuel hazards in the hangar bay. The detectors must be immune to radar and radio frequency emissions from handheld equipment or equipment on-board the aircraft. Provide shielding for the detectors and their circuits from radio frequency interference. All circuiting from the FMCU to the detectors will be shielded, and shielding will be grounded at one (1) end. Optical flame detector signals shall be non-latching to the FMCU.

Detectors must be mounted in accordance with their listing at approximately 8 FT above the finished floor of the hangar. Provide a sufficient number of optical flame detector around the perimeter of the hangar bay, such that all portions of the hangar bay are within the range and cone-of-vision of at least three detectors. Exception: The area of the hangar bay within 5 ft. of the perimeter wall is not required to be within the cone-of-vision of an optical flame detector. No aircraft silhouette will be solely visible from optical flame detectors located on one (1) side of the fuselage. A minimum of two optical flame detectors covering the aircraft silhouette are required on each side of the fuselage.

Angle the detectors and provide blinds (field of view inhibitors) so the cone-of-vision is contained within its designated suppression zone and does not extend more than 5 FT (1.5 m) outside the hangar bay, into another fire area (e.g., through normally open roll-up fire doors), or is within the view of hot sources such as radiant heaters. Locate optical flame detectors

at a sufficient distance per the manufacturer's recommendations from sources that may cause false alarms (e.g., welding, solar glare, radiant heaters, aircraft engine exhaust, strobes, hot surfaces, and other relevant sources.)

Calibrate optical flame detectors to operate upon viewing the flame signature of the expected fuel(s) to be present in the hangar bay. Use a 2 ft. b 2 ft. pool fire as the basis to set the sensitivity of the optical flame detectors. Upon the 2 ft. by 2f. pool fire reaching full development, all detectors within the cone-of-vision are required to activate with 30 seconds.

Provide a two (2) position non-key operated switch located at the FMCU that when activated, inhibits optical detection of all optical flame detectors in the hangar bay through programming at the FMCU. Monitor the inhibit switch at the FMCU. Provide a supervisory signal to the receiving station indicating the optical flame detectors are inhibited. Label the switch "INHIBIT OPTICAL FLAME DETECTION." Provide engraved labels on the inhibit switch indicating when the optical flame detectors are in "NORMAL" or "INHIBIT" mode.

2.8 MANUAL STATIONS

Provide metal or plastic, flush within finished area and surface within non-finished area and mounted, double-action, addressable manual stations, that are not subject to operation by jarring or vibration. Stations must be equipped with screw terminals for each conductor. Stations that require the replacement of any portion of the device after activation are not permitted. Stations must be finished in red with molded raised lettering operating instructions of contrasting color. The use of a key must be required to reset the station.

2.9 SMOKE DETECTORS

2.9.1 Spot Type Detectors

Provide addressable photoelectric smoke detectors as follows:

a. Provide analog/addressable photoelectric smoke detectors utilizing the photoelectric light scattering principle for operation in accordance with UL 268. Smoke detectors must be listed for use with the FMCU.

b. Provide self-restoring type detectors that do not require any readjustment after actuation at the FMCU to restore them to normal operation. The detector must have a visual indicator to show actuation.

c. Vibration must have no effect on the detector's operation. Protect the detection chamber with a fine mesh metallic screen that prevents the entrance of insects or airborne materials. The screen must not inhibit the movement of smoke particles into the chamber.

d. Provide twist lock bases with screw terminals for each conductor. The detectors must maintain contact with their bases without the use of springs.

e. The detector address must identify the particular unit, its location within the system. Detectors must be of the low voltage type rated for use on a 24 VDC system.

f. Laser smoke detector must be listed for use with the FMCU. Detector must be able to achieve sensitivities from 0.02 percent-per-foot to 2 percent-per-foot obscuration.

g. Laser smoke detector must provide point identification of the fire location through addressability, must experience no delay in response time due to smoke dilution or smoke transportation time, and must offer complete supervision of wiring and detector.

2.9.2 Duct Smoke Detectors

Duct-mounted addressable photoelectric smoke detectors must consist of a smoke detector, as specified in paragraph Spot Type Detectors, mounted in a special housing fitted with duct sampling tubes. Detector circuitry must be mounted in a metallic or plastic enclosure exterior to the duct. Detectors must be listed for operation over the complete range of air velocities, temperature and humidity expected at the detector when the air-handling system is operating. Detectors must be powered from the FMCU.

a. Sampling tubes must run the full width of the duct. The duct detector package must conform to the requirements of NFPA 90A, UL 268A, and must be listed for use in air-handling systems. The control functions, operation, reset, and bypass must be controlled from the FMCU.

b. Lights to indicate the operation and alarm condition must be visible and accessible with the unit installed and the cover in place. Remote indicators must be provided where required by NFPA 72. Remote indicators as well as the affected fan units must be properly identified in etched plastic placards.

c. Detectors must provide for control of auxiliary contacts that provide control, interlock, and shutdown functions specified in Section 23 09 00 to INSTRUMENTATION AND CONTROL FOR HVAC. Auxiliary contacts provide for this function must be located within 3 feet of the controlled circuit or appliance. The auxiliary contacts must be supplied by the fire alarm system manufacturer to ensure complete system compatibility.

Fire alarm and mass notification contractor must coordinate the locations of each auxiliary contact with the Control Contractor. Control Contractor must land the wired on HVAC shutdown board.

2.10 HEAT DETECTORS

2.10.1 Heat Detectors

Heat detectors must be analog/addressable and designed for detection of fire by combination fixed temperature and rate-of-rise principle in accordance with UL 521. The alarm condition must be determined by comparing detector value with the stored values.. Detectors located in areas subject to moisture, exterior atmospheric conditions, or hazardous locations as defined by NFPA 70, must be types approved for such locations.

2.10.1.1 Combination Fixed-Temperature and Rate-of-Rise Detectors

Detectors must be surface mounted in the horizontal orientation and supported independently of wiring connections. Detectors must be self-resetting. Detector must operate at 135 degrees F. Detector must feature rate compensation. . The detector assembly must be weatherproof.

2.11 ADDRESSABLE INTERFACE DEVICES

The initiating device being monitored must be configured as a Class "B" initiating device circuits. The module must be listed as compatible with the control unit. The module must provide address setting means compatible with the control unit's SLC supervision and store an internal identifying code. Monitor module must contain an integral LED that flashes each time the monitor module is polled and is visible through the device cover plate. Pull stations with a monitor module in a common backbox are not required to have an LED. Modules must be listed for the environmental conditions in which they will be installed.

2.12 ADDRESSABLE CONTROL MODULES

The control module must be capable of operating as a relay (dry contact form C) for interfacing the control unit with other systems, and to control door holders or initiate elevator fire service. The module must be listed as compatible with the control unit. The indicating device or the external load being controlled must be configured as Class B notification appliance circuits. The system must be capable of supervising, audible, visual and dry contact circuits. The control module must have both an input and output address. The supervision must detect a short on the supervised circuit and must prevent power from being applied to the circuit. The control module must provide address setting means compatible with the control unit's SLC supervision and store an internal identifying code. The control module must contain an integral LED that flashes each time the control module is polled and is visible through the device cover plate. Control Modules must be listed for the environmental conditions in which they will be installed.

2.13 ISOLATION MODULES

a. Provide isolation modules to subdivide each signaling line circuit in accordance with NFPA 72 between adjacent isolation modules.

b. Isolation modules must provide short circuit isolation for signaling line circuit wiring.

c. Power and communications must be supplied by the SLC and must report faults to the FMCU.

d. After the wiring fault is repaired, the fault isolation modules must test the lines and automatically restore the connection.

2.14 NOTIFICATION APPLIANCES

2.14.1 Audible Notification Appliances

Audible appliances must conform to the applicable requirements of UL 464. Appliances must be connected into notification appliance circuits. Surface mounted audible appliances must be painted white. Recessed audible appliances must be installed with a grill that is painted white.

2.14.1.1 Speakers

a. Speakers must conform to the applicable requirements of UL 1480. Speakers must have six different sound output levels and operate with audio line input levels of 70.7 VRMs and 25 VRMs, by means of selectable tap settings. Interior speaker tap settings must include

taps of 1/4, 1/2, 1, and 2 watt, at a minimum. Exterior speakers must also be multi-tapped with no more than 15 watt maximum setting. Speakers must incorporate a high efficiency speaker for maximum output at minimum power across a frequency range of 400 Hz to 4,000 Hz, and must have a sealed back construction. Speakers must be capable of installation on standard 4-inch square electrical boxes. Where speakers and strobes are provided in the same location, they may be combined into a single unit. All inputs must be polarized for compatibility with standard reverse polarity supervision of circuit wiring via the FMCU.

b. Provide speaker mounting plates constructed of cold rolled steel having a minimum thickness of 16 gage or molded high impact plastic and equipped with mounting holes and other openings as needed for a complete installation. Fabrication marks and holes must be ground and finished to provide a smooth and neat appearance for each plate. Each plate must be primed and painted.

c. Speakers must utilize screw terminals for termination of all field wiring.

d. Medium power speaker array shall conform to the applicable requirements of UL 1480. Speakers shall have three different sound output levels and operate with audio line input levels of 70.7 VRMs, by means of selectable tap settings. Tap settings shall include taps of 50, 100, and 200 watt. Speakers shall incorporate a high efficiency speaker for maximum output at minimum power across a frequency range of 500 Hz to 5,000 Hz. Speakers shall be capable of installation being ceiling mounted and be seismically braced to the structure. Speaker shall be powered directly from the FMCP. All inputs shall be polarized for compatibility with standard reverse polarity supervision of circuit wiring via the FMCP. Devices shall be suitable for use in hazardous applications requiring NEMA Type 4 installations

2.14.2 Visual Notification Appliances

Visual notification appliances must conform to the applicable requirements of UL 1638, UL 1971 and conform to the Architectural Barriers Act (ABA). Visual Notification Appliances must have clear high intensity optic lens, xenon flash tubes, or light emitting diode (LED) and be marked "Alert" in letters of contrasting color. The light pattern must be dispersed so that it is visible above and below the strobe and from a 90 degree angle on both sides of the strobe. Strobe flash rate must be 1 flash per second and a minimum of 15 candela based on the UL 1971 test. Strobe must be surface mounted. Visual notification appliances in hazard areas (eg. Hangar bays, solvent storage rooms, paint storage rooms) shall be explosionproof, signaling devices suitable for use in hazardous applications requiring NEMA Type 4 installations. the housing shall have corrosion resistance coat and included dome guard.

2.14.3 Textual Display Signs

LED text displays (textural visible appliances) for hearing impaired occupants. The textual displays shall be two line programmable. The top line shall display stationary alert message "Evacuate" (red text) or "Announcement" (green text). The second line shall scroll the currently activated message (white text). This display shall be rated for the environmental conditions installed.The system shall interface with the Programmable sign controller to activate the proper message. Non dot

matrix displays having two fixed independent text messages, "Announcement" and "Evacuate" visible, when not illuminated and one over the other shall not be acceptable.

2.15 ELECTRIC POWER

2.15.1 Primary Power

Power must be 120 VAC 60 Hz service for the FMCU from the AC service to the building in accordance with NFPA 72.

2.16 SECONDARY POWER SUPPLY

Provide for system operation in the event of primary power source failure. Transfer from normal to auxiliary (secondary) power or restoration from auxiliary to normal power must be automatic and must not cause transmission of a false alarm.

2.16.1 Batteries

Provide sealed, maintenance-free, sealed lead acid batteries as the source for emergency power to the FMCU. Batteries must contain suspended electrolyte. The battery system must be maintained in a fully charged condition by means of a solid state battery charger. Provide an automatic transfer switch to transfer the load to the batteries in the event of the failure of primary power.

2.16.1.1 Capacity

Battery size must include the following two capacities. This capacity applies to every control unit associated with this system, including supplemental notification appliance circuit panels, auxiliary power supply panels, fire alarm transmitters, and Base-wide mass notification transceivers. When determining the required capacity under alarm condition, visual notification appliances must include both textual and non-textual type appliances.

a. Sufficient capacity to operate the fire alarm system under supervisory and trouble conditions, including audible trouble signal devices for 48 hours and audible and visual signal devices under alarm conditions for an additional 15 minutes.

b. Sufficient capacity to operate the mass notification for 60 minutes after loss of AC power.

2.16.1.2 Battery Power Calculations

a. Verify that battery capacity exceeds supervisory and alarm power requirements for the criteria noted in the paragraph "Capacity" above.

(1) Substantiate the battery calculations for alarm and supervisory power requirements. Include ampere-hour requirements for each system component and each control unit component, and compliance with UL 864.

(2) Provide complete battery calculations for both the alarm and supervisory power requirements. Submit ampere-hour requirements for each system component with the calculations.

(3) Provide voltage drop calculations to indicate that sufficient voltage is available for proper operation of the system and all components. Calculations must be performed using the minimum rated voltage of each component.

b. For battery calculations assume a starting voltage of 24 VDC for starting the calculations to size the batteries. Calculate the required Amp-Hours for the specified standby time, and then calculate the required Amp-Hours for the specified alarm time. Using 20.4 VDC as starting voltage, perform a voltage drop calculation for circuits containing device and/or appliances remote from the power sources.

2.16.2 Battery Chargers

Provide a solid state, fully automatic, variable charging rate battery charger. The charger must be capable of providing 120 percent of the connected system load and must maintain the batteries at full charge. In the event the batteries are fully discharged (20.4 Volts dc), the charger must recharge the batteries back to 95 percent of full charge within 48 hours after a single discharge cycle as described in paragraph CAPACITY above. Provide pilot light to indicate when batteries are manually placed on a high rate of charge as part of the unit assembly if a high rate switch is provided.

2.17 SURGE PROTECTIVE DEVICES

Surge protective devices must be provided to suppress all voltage transients which might damage fire alarm control unit components. Systems having circuits located outdoors, communications equipment must be protected against surges induced on any signaling line circuit. Cables and conductors, that serve as communications links, must have surge protection circuits installed at each end. The surge protective device must wire in series to the power supply of the protected equipment with screw terminations. Line voltage surge arrestor must be installed directly adjacent to the power panel where the FMCU breaker is located.

Provide surge protective device on all 120 Vac circuits to control panels, sub-panels, transmitters, amplifier panels, and booster panels. Surge protective device must have both UL 1449 and UL 1283 listing and must be located in an adjacent hinged terminal box (UFC 3-600-01, 9-18.11.2).

a. Surge protective devices for nominal 120 VAC must be UL 1449 listed with a maximum 500 volt suppression level and have a maximum response time of 5 nanoseconds. The surge protective device must also meet IEEE C62.41.1 and IEEE C62.41.2 category B tests for surge capacity. The surge protective device must feature multi-stage construction and be provided with a long-life indicator lamp (either light emitting diode or neon) which extinguishes upon failure of protected components. Any unit fusing must be externally accessible.

b. Surge protective devices for nominal 24 VAC, fire alarm telephone dialer, or ethernet connection must be UL 497B listed, meet IEEE C62.41.1 and have a maximum response time of 1-nanosecond. The surge protective device must feature multi-stage construction and be self-resetting. The surge protective device must be a base and plug style. The base assembly must have screw terminals for fire alarm wiring. The base assembly must accept "plug-in" surge protective module.

c. All surge protective devices (SPD) must be the standard product of a single manufacturer and be equal or better than the following:

(1) For 120 VAC nominal line voltage: UL 1449 and UL 1283 listed, series connected 120 VAC, 20A rated, surge protective device in a NEMA 4x enclosure. Minimum 50,000 amp surge current rating with EMI/RFI filtering and a dry contact circuit for remote monitoring of surge protection status.

(2) For 24-volt nominal line voltage: UL 497B listed, series connected low voltage, 24-volt, 5A rated, loop circuit protector, base and replaceable module.

2.18 WIRING

Provide wiring materials under this section as specified in Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM with the additions and modifications specified herein.

2.18.1 Alarm Wiring

IDC and SLC wiring must be solid copper cable in accordance with the manufacturers requirements. Copper signaling line circuits and initiating device circuit field wiring must be No. 16 AWG size conductors at a minimum. Visual notification appliance circuit conductors, that contain audible alarm appliances, must be copper No. 14 AWG size conductors at a minimum. Speaker circuits must be copper No. 16 AWG size twisted and shielded conductors at a minimum. Wire size must be sufficient to prevent voltage drop problems. Circuits operating at 24 VDC must not operate at less than the listed voltages for the detectors and/or appliances. Power wiring, operating at 120 VAC minimum, must be a minimum No. 12 AWG solid copper having similar insulation. Acceptable power-limited cables are FPL, FPLR or FPLP as appropriate with red colored covering. Nonpower-limited cables must comply with NFPA 70.

2.19 INTERFACE TO THE BASE-WIDE MASS NOTIFICATION NETWORK

2.19.1 Radio

The mass notification transceiver must be bi-direction and meet all the requirements of paragraph, RADIO TRANSMITTER AND INTERFACE PANELS as specified in this specification section. The transceiver utilized in the mass notification system must be capable of the following:

a. Communication with the central control/monitoring system to provide supervision of communication link and status changes are reported by automatic and manual poll/reply/acknowledge routines.

b. All monitored points/status changes are transmitted immediately and at programmed intervals until acknowledged by the central control/monitoring system.

c. Each transceiver must transmits a unique identity code as part of all messages; the code is set by the user at the transceiver.

2.19.2 Secure Radio System

2.19.2.1 Communications Network

The communications network provides two-way signals between central control units and autonomous control units (in individual building systems), and should include redundant (primary and backup) communication links. The system must incorporate technology to prevent easy interruption of the radio traffic for MNS alerting.

2.19.2.2 Radio Frequency Communications

Use of radio frequency-type communications systems must comply with National Telecommunications and Information Administration (NTIA) requirements. The systems must be designed to minimize the potential for interference, jamming, eavesdropping, and spoofing.

2.19.2.3 Licensed Radio Frequency Systems

An approved DD Form 1494 for the system is required prior to operation.

2.20 AUTOMATIC FIRE ALARM TRANSMITTERS

2.20.1 Radio Transmitter and Interface Panels

Transmitters must be compatible with proprietary supervising station receiving equipment. Each radio alarm transmitter must be the manufacturer's recognized commercial product, completely assembled, wired, factory tested, and delivered ready for installation and operation. Transmitters must be provided in accordance with applicable portions of NFPA 72, Federal Communications Commission (FCC) 47 CFR 90 and Federal Communications Commission (FCC) 47 CFR 15. Transmitter electronics module must be contained within the physical housing as an integral, removable assembly. The proprietary supervising station receiving equipment is Monaco Radio Fire Alarm Receiving System and the transmitter must be fully compatible with this equipment. At the contractors option, and if listed, the transmitter may be housed in the same control unit as the FMCU. The transmitter must be narrowband radio, with FCC certification for narrowband operation and meets the requirements of the NTIA (National Telecommunications and Information Administration) Manual of Regulations and Procedures for Federal Frequency Management. Contractor shall program the D-21 Receiving station to accept the signals from the building.

2.20.1.1 Operation

Operate each transmitter from 120-volt ac power. In the event of 120-volt ac power loss, the transmitter must automatically switch to battery operation. Switchover must be accomplished with no interruption of protective service, and must automatically transmit a trouble message. Upon restoration of ac power, transfer back to normal ac power supply must also be automatic.

2.20.1.2 Battery Power

Transmitter standby battery capacity must provide sufficient power to operate the transmitter in a normal standby status for a minimum of 72 hours and be capable of transmitting alarms during that period.

2.20.1.3 Transmitter Housing

Use NEMA Type 1 for housing. The housing must contain a lock that is keyed identical to the fire alarm system for the building. Radio alarm transmitter housing must be factory painted with a suitable priming coat and not less than two coats of a hard, durable weatherproof enamel.

2.20.1.4 Antenna

Antenna must be omnidirectional, coaxial, halfwave dipole antennas for radio alarm transmitters with a driving point impedance to match transmitter output. The antenna and antenna mounts must be corrosion resistant and designed to withstand wind velocities of 100 mph. Do not mount antennas to any portion of the building roofing system. Protect the antenna from physical damage.

2.20.2 Signals to Be Transmitted to the Base Receiving Station

The following signals must be sent to the base receiving station:

a. Point to Point

2.21 SYSTEM MONITORING

2.21.1 Valves

Each valve affecting the proper operation of a fire protection system, including automatic sprinkler control valves, sprinkler service entrance valve, isolating valves for pressure type waterflow or supervision switches, and valves at backflow preventers, whether supplied under this contract or existing, must be electrically monitored to ensure its proper position. Provide each tamper switch with a separate address.

2.22 ENVIRONMENTAL ENCLOSURES OR GUARDS

Environmental enclosures must be provided to permit fire alarm/mass notification components to be used in areas that exceed the environmental limits of the listing. The enclosure must be listed for the device or appliance as either a manufactured part number or as a listed compatible accessory for the component is currently listed. Guards required to deter mechanical damage must be either a listed manufactured part or a listed accessory for the category of the initiating device or notification appliance.

PART 3 EXECUTION

3.1 VERIFYING ACTUAL FIELD CONDITIONS

Before commencing work, examine all adjoining work on which the contractor's work is in any way dependent for perfect workmanship according to the intent of this specification section, and report to the Contracting Officer's Representative any condition which prevents performance of first class work. No "waiver of responsibility" for incomplete, inadequate or defective adjoining work will be considered unless notice has been filed before submittal of a proposal.

3.2 INSTALLATION

3.2.1 Fire Alarm and Mass Notification Control Unit (FMCU)

Locate the FMCU where indicated on the drawings. Surface mount the enclosure with the top of the cabinet 6 feet above the finished floor or center the cabinet at 5 feet, whichever is lower. Conductor terminations must be labeled and a drawing containing conductors, their labels, their circuits, and their interconnection must be permanently mounted in the FMCU. Locate the document storage cabinet adjacent to the FMCU unless the Contracting Officer directs otherwise.

3.2.2 Battery Cabinets

When batteries will not fit in the FMCU, locate battery cabinets below or adjacent to the FMCU. Battery cabinets must be installed at an accessible location when standing at floor level. Battery cabinets must not be installed lower than 12 inches above finished floor, measured to the bottom of the cabinet, nor higher than 36 inches above the floor, measured to the top of the cabinet. Installing batteries above drop ceilings or in inaccessible locations is prohibited. Battery cabinets must be large enough to accommodate batteries and also to allow ample gutter space for interconnection of control units as well as field wiring. The cabinet must be provided in a sturdy steel housing, complete with back box, hinged steel door with cylinder lock, and surface mounting provisions.The cabinet must be identified by an engraved phenolic resin nameplate. Lettering on the nameplate must indicate the control unit(s) the batteries power and must not be less than 1-inch high.

3.2.3 Manual Stations

Locate manual stations as required by NFPA 72 and as indicated on the drawings. Mount stations so they are located no farther than 5 feet from the exit door they serve, measured horizontally. Manual stations must be mounted at 44 inches measured to the operating handle.

3.2.4 Notification Appliances

a. Locate notification appliance devices as required by NFPA 72 and to meet the intelligibility requirements as defined in UFC 4-021-01 and on contract drawings.. Where two or more visual notification appliances are located in the same room or corridor or field of view, provide synchronized operation. Devices must use screw terminals for all field wiring. Audible and visual notification appliances mounted in acoustical ceiling tiles must be centered in the tiles plus or minus 2 inches.

b. Audible and visual notification appliances mounted on the exterior of the building, within unconditioned spaces, or in the vicinity of showers must be listed weatherproof appliances installed on weatherproof backboxes.

c. Speakers must not be located in close proximity to the FMCU or LOC so as to cause feedback when the microphone is in use.

3.2.5 Smoke and Heat Detectors

Locate detectors as required by NFPA 72 and their listing on a 4-inch mounting box. Install heat detectors not less than 4 inches from a side

wall to the near edge. Heat detectors located on the wall must have the top of the detector at least 4 inches below the ceiling, but not more than 12 inches below the ceiling. Smoke detectors are permitted to be on the wall no lower than 12 inches from the ceiling with no minimum distance from the ceiling. Install smoke detectors no closer than 3 feet from air handling supply diffusers. Detectors installed in acoustical ceiling tiles must be centered in the tiles plus or minus 2 inches. Duct smoke detector to be provided by fire alarm contractor and installed by mechanical contractor.

3.2.6 LCD REMOTE Annunciator

Locate the LCD annunciator as shown on the drawings. Mount the annunciator, with the top 6 feet above the finished floor or center the annunciator at 5 feet, whichever is lower.

3.2.7 Local Operating Console (LOC)

Locate the LOC(s) as required by UFC 4-021-01 and as indicated. Mount the console so that the top message button and microphone is no higher than 4 feet above the floor and the bottom (lowest) message button and microphone is at least 3 feet above the finished floor.

3.2.8 Ceiling Bridges

Provide ceiling bridges for ceiling-mounted appliances. Ceiling bridges must be as recommended/required by the manufacturer of the ceiling-mounted notification appliance.

3.3 SYSTEM FIELD WIRING

3.3.1 Wiring within Cabinets, Enclosures, and Boxes

Provide wiring installed in a neat and workmanlike manner and installed parallel with or at right angles to the sides and back of any box, enclosure, or cabinet. Conductors that are terminated, spliced, or otherwise interrupted in any enclosure, cabinet, mounting, or junction box must be connected to screw-type terminal blocks. Mark each terminal in accordance with the wiring diagrams of the system. The use of wire nuts or similar devices is prohibited. Wiring to conform with NFPA 70.

Indicate the following in the wiring diagrams:

a. Point-to-point wiring diagrams showing the points of connection and terminals used for electrical field connections in the system, including interconnections between the equipment or systems that are supervised or controlled by the system. Diagrams must show connections from field devices to the FMCU and remote fire alarm/mass notification control units, initiating circuits, switches, relays and terminals.

b. Complete riser diagrams indicating the wiring sequence of devices and their connections to the control equipment. Include a color code schedule for the wiring. Include floor plans showing the locations of devices and equipment.

3.3.2 Terminal Cabinets

Provide a terminal cabinet at the base of any circuit riser, on each floor at each riser, and where indicated on the drawings. Terminal size must be

appropriate for the size of the wiring to be connected. Conductor terminations must be labeled and a drawing containing conductors, their labels, their circuits, and their interconnection must be permanently mounted in the terminal cabinet. Minimum size is 8 inches by 8 inches. Only screw-type terminals are permitted. Provide an identification label, that displays "FIRE ALARM TERMINAL CABINET" with 2-inch lettering, on the front of the terminal cabinet.

3.3.3 Alarm Wiring

a. Voltages must not be mixed in any junction box, housing or device, except those containing power supplies and control relays.

b. Utilize shielded wiring where recommended by the manufacturer. For shielded wiring, ground the shield at only one point, in or adjacent to the FMCU.

c. Pigtail or T-tap connections to signal line circuits, initiating device circuits, supervisory alarm circuits, and notification appliance circuits are prohibited.

d. Color coding is required for circuits and must be maintained throughout the circuit. Conductors used for the same functions must be similarly color coded. Conform wiring to NFPA 70.

e. Pull all conductors splice free. The use of wire nuts, crimped connectors, or twisting of conductors is prohibited. Where splices are unavoidable, the location of the junction box or pull box where they occur must be identified on the as-built drawings.

3.3.4 Back Boxes and Conduit

In addition to the requirements of Section 26 20 00 INTERIOR DISTRIBUTION SYSTEM, provide all wiring in rigid metal conduit or intermediate metal conduit unless specifically indicated otherwise. Minimum conduit size must be 3/4-inch in diameter. Do not use electrical non-metallic tubing (ENT) or flexible non-metallic tubing and associated fittings.

a. Galvanized rigid steel (GRS) conduit must be utilized where exposed to weather, where subject to physical damage, and where exposed on exterior of buildings. Intermediate metal conduit (IMC) may be used in lieu of GRS as allowed by NFPA 70.

b. Electrical metallic tubing (EMT) is permitted above suspended ceilings or exposed where not subject to physical damage. Do not use EMT underground, encased in concrete, mortar, or grout, in hazardous locations, where exposed to physical damage, outdoors or in fire pump rooms. Use die-cast compression connectors.

c. For rigid metallic conduit (RMC), only threaded type fitting are permitted for wet or damp locations.

d. Flexible metal conduit is permitted for initiating device circuits 6 feet in length or less. Flexible metal conduit is prohibited for notification appliance circuits and signaling line circuits. Use liquid tight flexible metal conduit in damp and wet locations.

e. Schedule 40 (minimum) polyvinyl chloride (PVC) is permitted where conduit is routed underground or underground below floor slabs.

Convert non-metallic conduit, other than PVC Schedule 40 or 80, to plastic-coated rigid, or IMC, steel conduit before turning up through floor slab.

f. Exterior wall penetrations must be weathertight. Conduit must be sealed to prevent the infiltration of moisture.

g. All fire alarm/mass notification system conduits, back boxes, and covers shall be painted red for ease of identification".

3.3.5 Conductor Terminations

Labeling of conductors at terminal blocks in terminal cabinets, FMCU and the LOC must be provided at each conductor connection. Each conductor or cable must have a shrink-wrap label to provide a unique and specific designation. Each terminal cabinet, FMCU, and remote FMCU must contain a laminated drawing that indicates each conductor, its label, circuit, and terminal. The laminated drawing must be neat, using 12 point lettering minimum size, and mounted within each cabinet, control unit, or unit so that it does not interfere with the wiring or terminals. Maintain existing color code scheme where connecting to existing equipment.

3.4 DISCONNECTION AND REMOVAL OF EXISTING SYSTEM

The contractor shall establish an impairment plan to address system impairments during construction. The impairment plan shall comply with UFC 3-601-02. System Out of Service Signage shall be posted at all building entrances. Additionally, the contractor shall prepare an impairment schedule for the building that details the duration of construction and the duration of the fire alarm system impairments. Phased demolition and re-installation is required. Refer to contract drawings phasing plan. Prior to final proposal submission, the contractor shall meet with the COR, Tinker DFPE, and Tinker Fire Department to tour the building to become thoroughly familiar with the building, its occupancy, building's work schedule and hazardous operations that may need to be curtailed during fire alarm system impairments. During this walk through the contractor shall meet with the Building Manager and exchange contact information. The contractor shall coordinate with the Building Manager to obtain access to secured areas of the building. The contractor's work schedule shall be established in a manner that results in minimal system impairments and minimal disturbance of the building's occupants. The impairment schedule shall be updated weekly and reviewed with the COR, Tinker QFPE, and Tinker Fire Department during weekly progress meetings.

3.5 DISPOSITION OF EXISTING EQUIPMENT

Prior to the start of building's demolition, the contractor shall prepare a list detailing the make and model number of control equipment, power supplies and field devices to be removed from the building. This list shall be submitted to the COR for review. The COR shall notify the contractor of any equipment the Government wishes to retain. No materials shall be removed from the site until the Government reviews the list and determines what, if any equipment will be retained by the Government. Fire alarm and mass notification contractor shall coordinate fire alarm system installation with the firestopping contractor to ensure firestopping systems are provided in accordance with specification section 07 84 00 FIRESTOPPING. Contractor shall be responsible for disconnecting and removing all equipment including items turned over to the Government. Contractor's disposal costs shall assume no equipment will be retained by

the Government.

3.6 CONNECTION OF NEW SYSTEM

The following new system connections must be made during the last phase of construction, at the beginning of the pre-Government tests. New system connections must include:

a. Connection of new relays to existing magnetic door hold-open devices.

b. Connection of new elevator recall relays to existing wiring and conduit.

c. Connection of new system transmitter to existing installation fire reporting system.

Once these connections are made, system must be left energized. Report immediately to the Contracting Officer, coordination and field problems resulting from the connection of the above components.

3.7 FIRESTOPPING

Fire alarm and mass notification contractor shall coordinate fire alarm system installation with the firestopping contractor to ensure firestopping systems are provided in accordance with specification Ssection 07 84 00 FIRESTOPPING.

3.8 PAINTING

a. In unfinished areas (including areas above drop ceilings), paint all exposed electrical conduit (serving fire alarm equipment), fire alarm conduit, surface metal raceway, junction boxes and covers red. In lieu of painting conduit, the contractor may utilize red conduit with a factory applied finish.

b. In finished areas, paint exposed electrical conduit (serving fire alarm equipment), fire alarm conduit, surface metal raceways, junction boxes, and electrical boxes to match adjacent finishes. The inside cover of the junction box must be identified as "Fire Alarm" and the conduit must have painted red bands 3/4-inch wide at 10-foot centers and at each side of a floor, wall, or ceiling penetration.

3.9 FIELD QUALITY CONTROL

3.9.1 Test Procedures

Submit detailed test procedures, prepared and signed by the NICET Level III Fire Alarm Technician, and the representative of the installing company, and reviewed by the QFPE 60 days prior to performing system tests. Detailed test procedures must list all components of the installed system such as initiating devices and circuits, notification appliances and circuits, signaling line devices and circuits, control devices/equipment, batteries, transmitting and receiving equipment, power sources/supply, annunciators, special hazard equipment, emergency communication equipment, interface equipment, and surge protective devices. Test procedures must include sequence of testing, time estimate for each test, and sample test data forms. The test data forms must be in a check-off format (pass/fail with space to add applicable test data; similar to the forms in NFPA 72 and NFPA 4.) The test procedures and accompanying test data forms must be used for the pre-Government testing and the Government testing. The test data

forms must record the test results and must:

a. Identify the NFPA Class of all Initiating Device Circuits (IDC), and Notification Appliance Circuits (NAC), Voice Notification System Circuits (NAC Audio), and Signaling Line Circuits (SLC).

b. Identify each test required by NFPA 72 Test Methods and required test herein to be performed on each component, and describe how these tests must be performed.

c. Identify each component and circuit as to type, location within the facility, and unique identity within the installed system. Provide necessary floor plan sheets showing each component location, test location, and alphanumeric identity.

d. Identify all test equipment and personnel required to perform each test (including equipment necessary for smoke detector testing. The use of magnets is not permitted.

e. Provide space to identify the date and time of each test. Provide space to identify the names and signatures of the individuals conducting and witnessing each test.

3.9.2 Pre-Government Testing

3.9.2.1 Verification of Compliant Installation

Conduct inspections and tests to ensure that devices and circuits are functioning properly. Tests must meet the requirements of paragraph entitled "Minimum System Tests" as required by NFPA 72. The contractor and an authorized representative from each supplier of equipment must be in attendance at the pre-Government testing to make necessary adjustments. After inspection and testing is complete, provide a signed Verification of Compliant Installation letter by the QFPE that the installation is complete, compliant with the specification and fully operable. The letter must include the names and titles of the witnesses to the pre-Government tests. Provide all completion documentation as required by NFPA 72 including all referenced annex sections and the test reports noted below.

a. NFPA 72 Record of Completion.

b. NFPA 72 Record of Inspection and Testing.

c. Fire Alarm and Emergency Communication System Inspection and Testing Form.

d. Audibility test results with marked-up test floor plans.

e. Intelligibility test results with marked-up floor plans.

f. Documentation that all tests identified in the paragraph "Minimum System Tests" are complete.

3.9.2.2 Request for Government Final Test

When the verification of compliant installation has been completed, submit a formal request for Government final test to the Contracting Officer's Representative (COR), Tinker Air Force Base Fire Protection Engineer and Tinker Air Force Base Fire Department. Government final testing will not

be scheduled until the Tinker Air Force Base Fire Protection Engineer and Tinker Air Force Base Fire Department has received copies of the request for Government final testing and Verification of Compliant Installation letter with all required reports. Government final testing will not be performed until after the connections to the installation-wide fire reporting system been completed and tested to confirm communications are fully functional. Submit request for test at least 15 calendar days prior to the requested test date.

3.9.3 Correction of Deficiencies

If equipment was found to be defective or non-compliant with contract requirements, perform corrective actions and repeat the tests. Tests must be conducted and repeated if necessary until the system has been demonstrated to comply with all contract requirements.

3.9.4 Government Final Tests

The tests must be performed in accordance with the approved test procedures in the presence of the Tinker Air Force Base Fire Protection Engineer and Tinker Air Force Base Fire Department. Furnish instruments and personnel required for the tests. The following must be provided at the job site for Government Final Testing:

a. The manufacturer's technical representative.

c. Marked-up red line drawings of the system as actually installed.

d. Loop resistance test results.

e. Complete program printout including input/output addresses.

f. Copy of pre-Government Test Certificate, test procedures and completed test data forms.

g. Audibility test results with marked-up floor plans.

h. Intelligibility test results with marked-up floor plans.

Government Final Tests will be witnessed by the , Contracting Officer's Representative (COR), Tinker Air Force Base Fire Protection Engineer, and Tinker Air Force Base Fire Department.. At this time, any and all required tests noted in the paragraph "Minimum System Tests" must be repeated at their discretion.

3.10 MINIMUM SYSTEM TESTS

3.10.1 System Tests

Test the system in accordance with the procedures outlined in NFPA 72. The required tests are as follows:

a. Loop Resistance Tests: Measure and record the resistance of each circuit with each pair of conductors in the circuit short-circuited at the farthest point from the circuit origin. The tests must be witnessed by the Contracting Officer and test results recorded for use at the final Government test.

b. Verify the absence of unwanted voltages between circuit conductors and

ground. The tests must be accomplished at the pre-Government test with results available at the final system test.

c. Verify that the control unit is in the normal condition as detailed in the manufacturer's O&M manual.

d. Test each initiating device and notification appliance and circuit for proper operation and response at the control unit. Smoke detectors must be tested in accordance with manufacturer's recommended calibrated test method. Use of magnets is prohibited. Testing of duct smoke detectors must comply with the requirements of NFPA 72 except disconnect at least 20 percent of devices. If there is a failure at these devices, then supervision must be tested at each device.

e. Test the system for specified functions in accordance with the contract drawings and specifications and the manufacturer's O&M manual.

f. Test both primary power and secondary power. Verify, by test, the secondary power system is capable of operating the system for the time period and in the manner specified.

g. Determine that the system is operable under trouble conditions as specified.

h. Visually inspect wiring.

i. Test the battery charger and batteries.

j. Verify that software control and data files have been entered or programmed into the FMCU. Hard copy records of the software must be provided to the Contracting Officer.

k. Verify that red-line drawings are accurate.

l. Measure the current in circuits to ensure there is the calculated spare capacity for the circuits.

m. Measure voltage readings for circuits to ensure that voltage drop is not excessive.

n. Disconnect the verification feature for smoke detectors during tests to minimize the amount of smoke needed to activate the sensor. Testing of smoke detectors must be conducted using real smoke or the use of canned smoke which is permitted.

o. Measure the voltage drop at the most remote appliance (based on wire length) on each notification appliance circuit.

p. Verify the documentation cabinet is installed and contains all as-built shop drawings, product data sheets, design calculations, site-specific software data package, and all documentation required by paragraph titled "Test Reports".

3.10.2 Audibility Tests

Sound pressure levels from audible notification appliances must be a minimum of 15 dBa over ambient with a maximum of 110 dBa in any occupiable area. The provisions for audible notification (audibility and intelligibility) must be met with doors, fire shutters, movable partitions,

and similar devices closed.

3.10.3 Intelligibility Tests

Intelligibility testing of the System must be accomplished in accordance with NFPA 72 and UFC 4-021-01 for Voice Evacuation Systems, and ASA S3.2. Following are the specific requirements for intelligibility tests:

a. Intelligibility Requirements: Verify intelligibility by measurement after installation.

b. Ensure that a CIS value greater than the required minimum value is provided in each area where building occupants typically could be found. The minimum required value for CIS is .8. Rounding of values is permitted.

c. Areas of the building provided with hard wall and ceiling surfaces (such as metal or concrete) that are found to cause excessive sound reflections may be permitted to have a CIS score less than the minimum required value if approved by the DFPE, and if building occupants in these areas can determine that a voice signal is being broadcast and they must walk no more than 33 feet to find a location with at least the minimum required CIS value within the same area.

d. Areas of the building where occupants are not expected to be normally present are permitted to have a CIS score less than the minimum required value if personnel can determine that a voice signal is being broadcast and they must walk no more than 50 feet to a location with at least the minimum required CIS value within the same area.

e. Take measurements near the head level applicable for most personnel in the space under normal conditions (e.g., standing, sitting, sleeping, as appropriate).

f. The distance the occupant must walk to the location meeting the minimum required CIS value must be measured on the floor or other walking surface as follows:

    (1) Along the centerline of the natural path of travel, starting from any point subject to occupancy with less than the minimum required CIS value.

    (2) Curving around any corners or obstructions, with a 12 inches clearance there from.

    (3) Terminating directly below the location where the minimum required CIS value has been obtained.

Use commercially available test instrumentation to measure intelligibility as specified by NFPA 72 as applicable. Use the mean value of at least three readings to compute the intelligibility score at each test location.

3.11 SYSTEM ACCEPTANCE

Following acceptance of the system, as-built drawings and O&M manuals must be delivered to the Contracting Officer for review and acceptance. The drawings must show the system as installed, including deviations from both the project drawings and the approved shop drawings. These drawings must be submitted within two weeks after the final Government test of the

system. At least one set of as-built (marked-up) drawings must be provided at the time of, or prior to the Final Government Test.

a. The drawings must be prepared electronically and sized no less than the contract drawings. Furnish one set of CDs or DVDs containing software back-up and CAD based drawings in latest version of AutoCAD, DXF and portable document formats of as-built drawings and schematics.

b. Include complete wiring diagrams showing connections between devices and equipment, both factory and field wired.

c. Include a riser diagram and drawings showing the as-built location of devices and equipment.

d. Provide Operation and Maintenance (O&M) Instructions.

3.12 INSTRUCTION OF GOVERNMENT EMPLOYEES

3.12.1 Instructor

Provide the services of an instructor, who has received specific training from the manufacturer for the training of other persons regarding the operation, inspection, testing, and maintenance of the system provided. The instructor must train the Government employees designated by the Contracting Officer, in the care, adjustment, maintenance, and operation of the fire alarm system. The instructor must be thoroughly familiar with all parts of this installation. The instructor must be trained in operating theory as well as in practical O&M work. Submit the instructors information and qualifications including the training history.

3.12.2 Required Instruction Time

Provide 8 hours of instruction after final acceptance of the system. The instruction must be given during regular working hours on such dates and times selected by the Contracting Officer. The instruction may be divided into two or more periods at the discretion of the Contracting Officer. The training must allow for rescheduling for unforeseen maintenance and/or fire department responses.

3.12.2.1 Technical Training

Equipment manufacturer or a factory representative must provide 3 days of on site and 5 days of technical training to the Government at the manufacturing facility. Training must allow for classroom instruction as well as individual hands on programming, troubleshooting and diagnostics exercises.

3.12.3 Technical Training Manual

Provide, in manual format, lesson plans, operating instructions, maintenance procedures, and training data for the training courses. The operations training must familiarize designated government personnel with proper operation of the installed system. The maintenance training course must provide the designated government personnel adequate knowledge required to diagnose, repair, maintain, and expand functions inherent to the system.

3.13 EXTRA MATERIALS

3.13.1 Repair Service/Replacement Parts

Repair services and replacement parts for the system must be available for a period of 10 years after the date of final acceptance of this work by the Contracting Officer. During the warranty period, the service technician must be on-site within 24 hours after notification. All repairs must be completed within 24 hours of arrival on-site.

During the warranty period, the installing fire alarm contractor is responsible for conducting all required testing and maintenance in accordance with the requirements and recommended practices of NFPA 72 and the system manufacturer. Installing fire alarm contractor is NOT responsible for any damage resulting from abuse, misuse, or neglect of equipment by the end user.

3.13.2 Spare Parts

Spare parts furnished must be directly interchangeable with the corresponding components of the installed system. Spare parts must be suitably packaged and identified by nameplate, tagging, or stamping. Spare parts must be delivered to the Contracting Officer at the time of the Government testing and must be accompanied by an inventory list.

3.13.3 Document Storage Cabinet

Upon completion of the project, but prior to project close-out, place in the document storage cabinet copies of the following record documentation:

a. As-built shop drawings

b. Product data sheets

c. Design calculations

d. Site-specific software data package

e. All documentation required by SD-06.

-- End of Section --

THIS PAGE INTENTIONALLY LEFT BLANK